



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

No. 1 Workshop, M-10, Middle section, Science & Technology Park,  
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM170100060101  
Page: 1 of 88

## **TEST REPORT**

**Application No.:** SZEM1701000601CR  
**Applicant:** HUAWEI TECHNOLOGIES CO.,LTD.  
**Address of Applicant:** Administration Building, Huawei Technologies Co., Ltd. Bantian, Longgang District, Shenzhen, P. R. China  
**Manufacturer:** HUAWEI TECHNOLOGIES CO.,LTD.  
**Address of Manufacturer:** Administration Building, Huawei Technologies Co., Ltd. Bantian, Longgang District, Shenzhen, P. R. China  
**Factory:** Winners'Sun Plastic & Electronic (Shenzhen) Co.,Ltd  
**Address of Factory:** Zone E, Ying Tai Industrial Park, Dalang, Longhua Town, Bao An District, Shenzhen, Guangdong Province, China  
**Equipment Under Test (EUT):**  
**EUT Name:** Tripod Selfie Stick  
**Model No.:** AF15  
**Trade mark:** HUAWEI honor  
**FCC ID:** QISAF15  
**Standards:** 47 CFR Part 15, Subpart C 15.247  
**Date of Receipt:** 2017-01-25  
**Date of Test:** 2017-02-13 to 2017-02-17  
**Date of Issue:** 2017-02-21

|                      |              |
|----------------------|--------------|
| <b>Test Result :</b> | <b>Pass*</b> |
|----------------------|--------------|

\* In the configuration tested, the EUT complied with the standards specified above.



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM170100060101

Page: 2 of 88

| Revision Record |         |            |          |          |
|-----------------|---------|------------|----------|----------|
| Version         | Chapter | Date       | Modifier | Remark   |
| 01              |         | 2017-02-21 |          | Original |
|                 |         |            |          |          |
|                 |         |            |          |          |

|                          |  |                                                                                     |      |
|--------------------------|--|-------------------------------------------------------------------------------------|------|
| Authorized for issue by: |  |                                                                                     |      |
| Tested By                |  |   |      |
|                          |  | 2017-02-21                                                                          |      |
|                          |  | Bill Chen /Project Engineer                                                         | Date |
| Checked By               |  |  |      |
|                          |  | 2017-02-21                                                                          |      |
|                          |  | Eric Fu /Reviewer                                                                   | Date |



## 2 Test Summary

| Radio Spectrum Technical Requirement |                                  |                    |                                              |        |
|--------------------------------------|----------------------------------|--------------------|----------------------------------------------|--------|
| Item                                 | Standard                         | Method             | Requirement                                  | Result |
| Antenna Requirement                  | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) | 47 CFR Part 15, Subpart C 15.203 & 15.247(c) | Pass   |

| Radio Spectrum Matter Part                            |                                  |                                        |                                           |        |
|-------------------------------------------------------|----------------------------------|----------------------------------------|-------------------------------------------|--------|
| Item                                                  | Standard                         | Method                                 | Requirement                               | Result |
| 20dB Bandwidth                                        | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.7       | 47 CFR Part 15, Subpart C 15.247(a)(1)    | Pass   |
| Conducted Peak Output Power                           | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.5       | 47 CFR Part 15, Subpart C 15.247(b)(1)    | Pass   |
| Carrier Frequencies Separation                        | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.2       | 47 CFR Part 15, Subpart C 15.247a(1)      | Pass   |
| Hopping Channel Number                                | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.3       | 47 CFR Part 15, Subpart C 15.247a(1)(iii) | Pass   |
| Dwell Time                                            | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.4       | 47 CFR Part 15, Subpart C 15.247a(1)(iii) | Pass   |
| Conducted Spurious Emissions                          | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.8       | 47 CFR Part 15, Subpart C 15.247(d)       | Pass   |
| Radiated Spurious Emissions                           | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.4,6.5,6.6 | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |
| Radiated Emissions which fall in the restricted bands | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.10.5      | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |
| Conducted Band Edges Measurement                      | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.6       | 47 CFR Part 15, Subpart C 15.247(d)       | Pass   |



### 3 Contents

|                                                                                        | Page      |
|----------------------------------------------------------------------------------------|-----------|
| <b>1 COVER PAGE .....</b>                                                              | <b>1</b>  |
| <b>2 TEST SUMMARY .....</b>                                                            | <b>3</b>  |
| <b>3 CONTENTS .....</b>                                                                | <b>4</b>  |
| <b>4 GENERAL INFORMATION .....</b>                                                     | <b>6</b>  |
| 4.1 DETAILS OF E.U.T. ....                                                             | 6         |
| 4.2 DESCRIPTION OF SUPPORT UNITS .....                                                 | 6         |
| 4.3 MEASUREMENT UNCERTAINTY .....                                                      | 7         |
| 4.4 STANDARDS APPLICABLE FOR TESTING .....                                             | 8         |
| 4.5 TEST LOCATION .....                                                                | 9         |
| 4.6 TEST FACILITY .....                                                                | 9         |
| 4.7 DEVIATION FROM STANDARDS .....                                                     | 9         |
| 4.8 ABNORMALITIES FROM STANDARD CONDITIONS .....                                       | 9         |
| <b>5 EQUIPMENT LIST .....</b>                                                          | <b>10</b> |
| <b>6 RADIO SPECTRUM TECHNICAL REQUIREMENT .....</b>                                    | <b>12</b> |
| 6.1 ANTENNA REQUIREMENT .....                                                          | 12        |
| 6.1.1 Test Requirement: .....                                                          | 12        |
| 6.1.2 Conclusion .....                                                                 | 12        |
| 6.2 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM HOPPING SEQUENCE ..... | 14        |
| 6.2.1 Test Requirement: .....                                                          | 14        |
| 6.2.2 Conclusion .....                                                                 | 14        |
| <b>7 RADIO SPECTRUM MATTER TEST RESULTS .....</b>                                      | <b>16</b> |
| 7.1 20dB BANDWIDTH .....                                                               | 16        |
| 7.1.1 E.U.T. Operation .....                                                           | 16        |
| 7.1.2 Test Setup Diagram .....                                                         | 16        |
| 7.1.3 Measurement Data .....                                                           | 16        |
| 7.2 CONDUCTED PEAK OUTPUT POWER .....                                                  | 17        |
| 7.2.1 E.U.T. Operation .....                                                           | 17        |
| 7.2.2 Test Setup Diagram .....                                                         | 17        |
| 7.2.3 Measurement Data .....                                                           | 17        |
| 7.3 CARRIER FREQUENCIES SEPARATION .....                                               | 18        |
| 7.3.1 E.U.T. Operation .....                                                           | 18        |
| 7.3.2 Test Setup Diagram .....                                                         | 18        |
| 7.3.3 Measurement Data .....                                                           | 18        |
| 7.4 HOPPING CHANNEL NUMBER .....                                                       | 19        |
| 7.4.1 E.U.T. Operation .....                                                           | 20        |
| 7.4.2 Test Setup Diagram .....                                                         | 20        |
| 7.4.3 Measurement Data .....                                                           | 20        |
| 7.5 DWELL TIME .....                                                                   | 21        |
| 7.5.1 E.U.T. Operation .....                                                           | 22        |
| 7.5.2 Test Setup Diagram .....                                                         | 22        |
| 7.5.3 Measurement Data .....                                                           | 22        |
| 7.6 CONDUCTED SPURIOUS EMISSIONS .....                                                 | 23        |
| 7.6.1 E.U.T. Operation .....                                                           | 23        |
| 7.6.2 Test Setup Diagram .....                                                         | 23        |
| 7.6.3 Measurement Data .....                                                           | 23        |
| 7.7 RADIATED SPURIOUS EMISSIONS .....                                                  | 24        |



|       |                                                            |       |
|-------|------------------------------------------------------------|-------|
| 7.7.1 | E.U.T. Operation.....                                      | 25    |
| 7.7.2 | Test Setup Diagram.....                                    | 25    |
| 7.7.3 | Measurement Data.....                                      | 26    |
| 7.8   | RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS..... | 31    |
| 7.8.1 | E.U.T. Operation.....                                      | 31    |
| 7.8.2 | Test Setup Diagram.....                                    | 32    |
| 7.8.3 | Measurement Data.....                                      | 32    |
| 7.9   | CONDUCTED BAND EDGES MEASUREMENT.....                      | 37    |
| 7.9.1 | E.U.T. Operation.....                                      | 37    |
| 7.9.2 | Test Setup Diagram.....                                    | 37    |
| 7.9.3 | Measurement Data.....                                      | 37    |
| 8     | APPENDIX.....                                              | 38    |
| 8.1   | APPENDIX 15.247.....                                       | 38-88 |



## 4 General Information

### 4.1 Details of E.U.T.

|                     |                                          |
|---------------------|------------------------------------------|
| Product Name:       | Tripod Selfie Stick                      |
| Model No.:          | AF15                                     |
| Trade Mark:         | HUAWEI honor                             |
| Frequency Range:    | 2402MHz to 2480MHz                       |
| Channel Separation: | 1MHz                                     |
| Bluetooth Version:  | V3.0 with EDR                            |
| Modulation Type:    | GFSK ; Pi/4DQPSK ; 8DPSK                 |
| Number of Channels: | 79                                       |
| Sample Type:        | Portable production                      |
| Antenna Type:       | ON BOARD                                 |
| Antenna Gain:       | 0dBi                                     |
| Power Supply:       | 3.0V DC (1 x 3.0V "CR2025" Size Battery) |

### 4.2 Description of Support Units

The EUT has been tested with associated equipment below.

| Description | Manufacturer  | Model No. |
|-------------|---------------|-----------|
| Laptop      | Lenovo        | T430u     |
| Test board  | Supply to SGS | FT232     |



#### 4.3 Measurement Uncertainty

| No. | Item                            | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1   | Radio Frequency                 | 7.25 x 10 <sup>-8</sup> |
| 2   | Timeout                         | 2s                      |
| 3   | Duty cycle                      | 0.37%                   |
| 4   | Occupied Bandwidth              | 3%                      |
| 5   | RF conducted power              | 0.75dB                  |
| 6   | RF power density                | 2.84dB                  |
| 7   | Conducted Spurious emissions    | 0.75dB                  |
| 8   | RF Radiated power               | 4.5dB (below 1GHz)      |
|     |                                 | 4.8dB (above 1GHz)      |
| 9   | Radiated Spurious emission test | 4.5dB (30MHz-1GHz)      |
|     |                                 | 4.8dB (1GHz-18GHz)      |
| 10  | Temperature test                | 1 °C                    |
| 11  | Humidity test                   | 3%                      |
| 12  | Supply voltages                 | 1.5%                    |
| 13  | Time                            | 3%                      |



#### 4.4 Standards Applicable for Testing

Table 1 : Tests Carried Out Under 47 CFR Part 15, Subpart C 15.247

| Item                                                                         | Status |
|------------------------------------------------------------------------------|--------|
| Conducted Disturbance at AC Power Line(150kHz-30MHz)                         | ×      |
| 20dB Bandwidth                                                               | √      |
| Conducted Peak Output Power                                                  | √      |
| Carrier Frequencies Separation                                               | √      |
| Hopping Channel Number                                                       | √      |
| Dwell Time                                                                   | √      |
| Minimum 6dB Bandwidth                                                        | ×      |
| Power Spectrum Density                                                       | ×      |
| Conducted Spurious Emissions                                                 | √      |
| Radiated Spurious Emissions                                                  | √      |
| Radiated Emissions which fall in the restricted bands                        | √      |
| Conducted Band Edges Measurement                                             | √      |
| Antenna Requirement                                                          | √      |
| Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence | ×      |

× Indicates that the test is not applicable  
√ Indicates that the test is applicable



#### **4.5 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053      Fax: +86 755 2671 0594

No tests were sub-contracted.

#### **4.6 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

#### **4.7 Deviation from Standards**

None

#### **4.8 Abnormalities from Standard Conditions**

None



## 5 Equipment List

| 20dB Bandwidth    |                 |          |              |            |              |
|-------------------|-----------------|----------|--------------|------------|--------------|
| Equipment         | Manufacturer    | Model No | Inventory No | Cal Date   | Cal Due Date |
| DC Power Supply   | ZhaoXin         | RXN-305D | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Spectrum Analyzer | Rohde & Schwarz | FSP      | SEM004-06    | 2016-10-09 | 2017-10-09   |
| Signal Generator  | Rohde & Schwarz | SML03    | SEM006-02    | 2016-04-25 | 2017-04-25   |
| Power Meter       | Rohde & Schwarz | NRVS     | SEM014-02    | 2016-10-09 | 2017-10-09   |

| Conducted Peak Output Power |                 |          |              |            |              |
|-----------------------------|-----------------|----------|--------------|------------|--------------|
| Equipment                   | Manufacturer    | Model No | Inventory No | Cal Date   | Cal Due Date |
| DC Power Supply             | ZhaoXin         | RXN-305D | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Spectrum Analyzer           | Rohde & Schwarz | FSP      | SEM004-06    | 2016-10-09 | 2017-10-09   |
| Signal Generator            | Rohde & Schwarz | SML03    | SEM006-02    | 2016-04-25 | 2017-04-25   |
| Power Meter                 | Rohde & Schwarz | NRVS     | SEM014-02    | 2016-10-09 | 2017-10-09   |

| Carrier Frequencies Separation |                 |          |              |            |              |
|--------------------------------|-----------------|----------|--------------|------------|--------------|
| Equipment                      | Manufacturer    | Model No | Inventory No | Cal Date   | Cal Due Date |
| DC Power Supply                | ZhaoXin         | RXN-305D | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Spectrum Analyzer              | Rohde & Schwarz | FSP      | SEM004-06    | 2016-10-09 | 2017-10-09   |
| Signal Generator               | Rohde & Schwarz | SML03    | SEM006-02    | 2016-04-25 | 2017-04-25   |
| Power Meter                    | Rohde & Schwarz | NRVS     | SEM014-02    | 2016-10-09 | 2017-10-09   |

| Hopping Channel Number |                 |          |              |            |              |
|------------------------|-----------------|----------|--------------|------------|--------------|
| Equipment              | Manufacturer    | Model No | Inventory No | Cal Date   | Cal Due Date |
| DC Power Supply        | ZhaoXin         | RXN-305D | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Spectrum Analyzer      | Rohde & Schwarz | FSP      | SEM004-06    | 2016-10-09 | 2017-10-09   |
| Signal Generator       | Rohde & Schwarz | SML03    | SEM006-02    | 2016-04-25 | 2017-04-25   |
| Power Meter            | Rohde & Schwarz | NRVS     | SEM014-02    | 2016-10-09 | 2017-10-09   |

| Dwell Time        |                 |          |              |            |              |
|-------------------|-----------------|----------|--------------|------------|--------------|
| Equipment         | Manufacturer    | Model No | Inventory No | Cal Date   | Cal Due Date |
| DC Power Supply   | ZhaoXin         | RXN-305D | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Spectrum Analyzer | Rohde & Schwarz | FSP      | SEM004-06    | 2016-10-09 | 2017-10-09   |
| Signal Generator  | Rohde & Schwarz | SML03    | SEM006-02    | 2016-04-25 | 2017-04-25   |
| Power Meter       | Rohde & Schwarz | NRVS     | SEM014-02    | 2016-10-09 | 2017-10-09   |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170100060101

Page: 11 of 88

| Conducted Spurious Emissions |                 |          |              |            |              |
|------------------------------|-----------------|----------|--------------|------------|--------------|
| Equipment                    | Manufacturer    | Model No | Inventory No | Cal Date   | Cal Due Date |
| DC Power Supply              | ZhaoXin         | RXN-305D | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Spectrum Analyzer            | Rohde & Schwarz | FSP      | SEM004-06    | 2016-10-09 | 2017-10-09   |
| Signal Generator             | Rohde & Schwarz | SML03    | SEM006-02    | 2016-04-25 | 2017-04-25   |
| Power Meter                  | Rohde & Schwarz | NRVS     | SEM014-02    | 2016-10-09 | 2017-10-09   |

| Conducted Band Edges Measurement |                 |          |              |            |              |
|----------------------------------|-----------------|----------|--------------|------------|--------------|
| Equipment                        | Manufacturer    | Model No | Inventory No | Cal Date   | Cal Due Date |
| DC Power Supply                  | ZhaoXin         | RXN-305D | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Spectrum Analyzer                | Rohde & Schwarz | FSP      | SEM004-06    | 2016-10-09 | 2017-10-09   |
| Signal Generator                 | Rohde & Schwarz | SML03    | SEM006-02    | 2016-04-25 | 2017-04-25   |
| Power Meter                      | Rohde & Schwarz | NRVS     | SEM014-02    | 2016-10-09 | 2017-10-09   |

| General used equipment          |                                           |          |              |            |              |
|---------------------------------|-------------------------------------------|----------|--------------|------------|--------------|
| Equipment                       | Manufacturer                              | Model No | Inventory No | Cal Date   | Cal Due Date |
| Humidity/ Temperature Indicator | Shanghai Meteorological Industry Factory  | ZJ1-2B   | SEM002-03    | 2016-10-12 | 2017-10-12   |
| Humidity/ Temperature Indicator | Shanghai Meteorological Industry Factory  | ZJ1-2B   | SEM002-04    | 2016-10-12 | 2017-10-12   |
| Humidity/ Temperature Indicator | Mingle                                    | N/A      | SEM002-08    | 2016-10-12 | 2017-10-12   |
| Barometer                       | Changchun Meteorological Industry Factory | DYM3     | SEM002-01    | 2016-05-18 | 2017-05-18   |



## **6 Radio Spectrum Technical Requirement**

### **6.1 Antenna Requirement**

#### **6.1.1 Test Requirement:**

47 CFR Part 15, Subpart C 15.247

#### **6.1.2 Conclusion**


Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

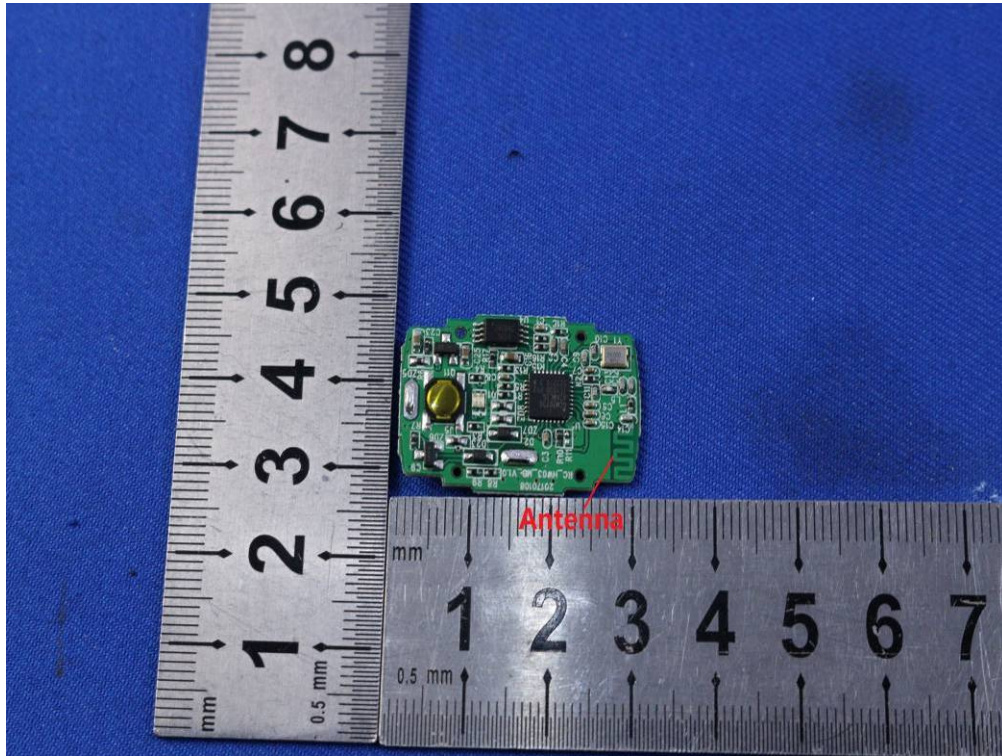

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

## 6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

### 6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247

### 6.2.2 Conclusion

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.


Number of shift register stages: 9

- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

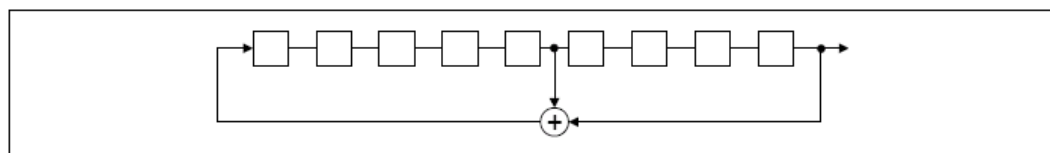

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of Pseudorandom Frequency Hopping Sequence as follow:

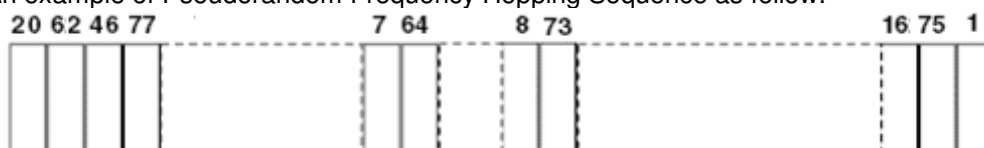

Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift



**SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch**

Report No.: SZEM170100060101

Page: 15 of 88

frequencies in synchronization with the transmitted signals.

## 7 Radio Spectrum Matter Test Results

### 7.1 20dB Bandwidth

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 7.8.7

#### 7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Non-hopping transmitting with all kind of modulation and all kind of data type.

Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.

#### 7.1.2 Test Setup Diagram

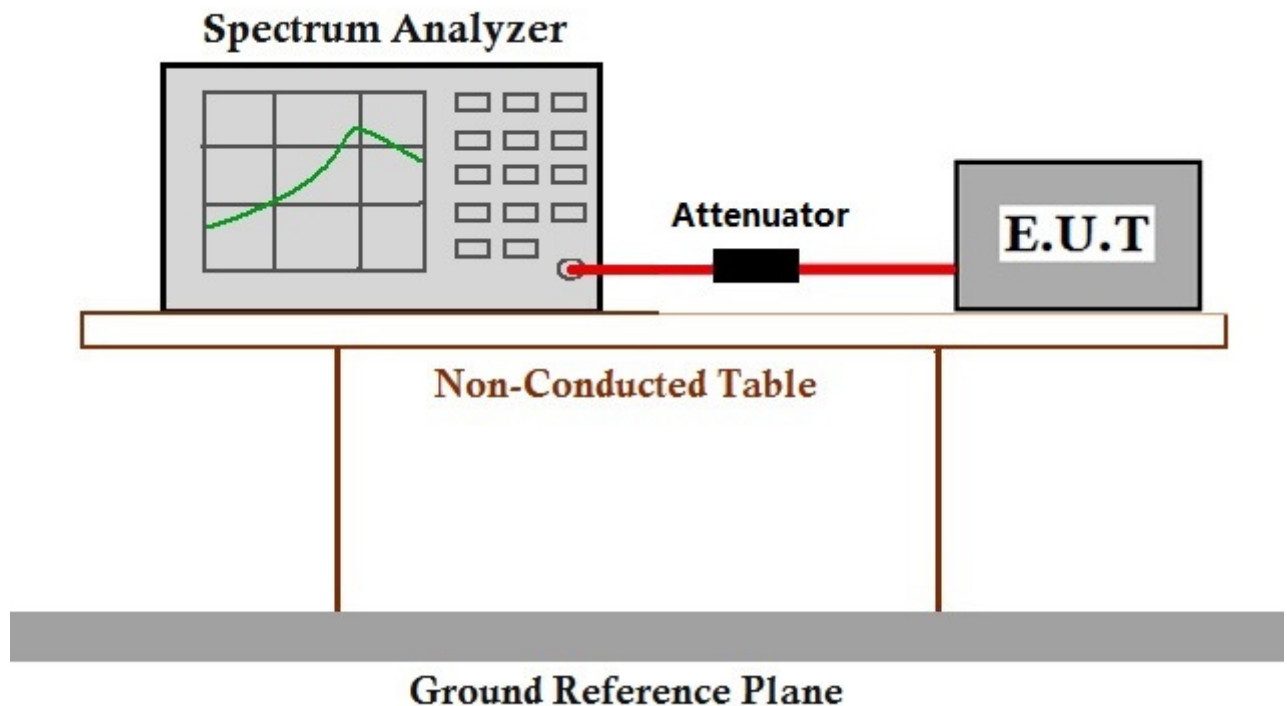

#### 7.1.3 Measurement Data

The detailed test data see: Appendix 15.247

## 7.2 Conducted Peak Output Power

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 7.8.5  
Limit: 20.97dBm

### 7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Non-hopping transmitting with all kind of modulation and all kind of data type.

Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.

### 7.2.2 Test Setup Diagram

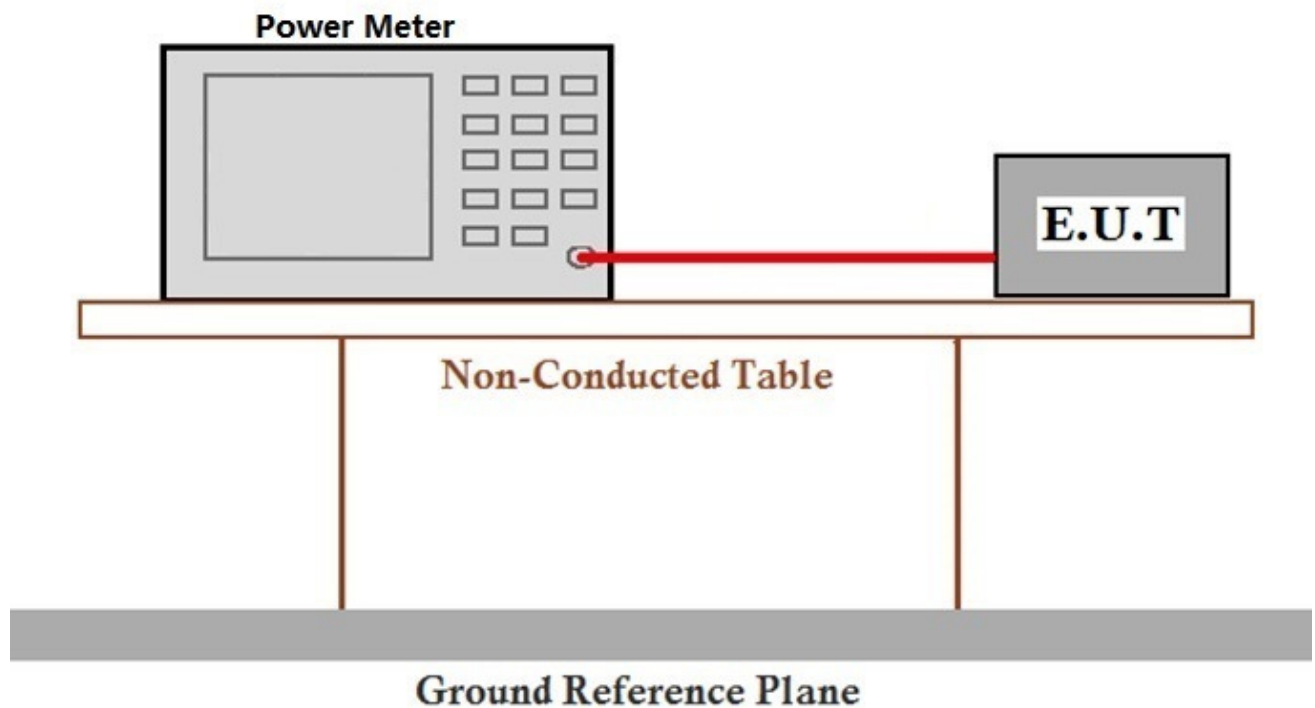

### 7.2.3 Measurement Data

The detailed test data see: Appendix 15.247


### 7.3 Carrier Frequencies Separation

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 7.8.2  
Limit: 2/3 of the 20dB bandwidth  
Remark: the transmission power is less than 0.125W.

#### 7.3.1 E.U.T. Operation

Operating Environment:  
Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar  
Exploratory Test Mode: Non-hopping transmitting with all kind of modulation and all kind of data type.  
Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.

#### 7.3.2 Test Setup Diagram

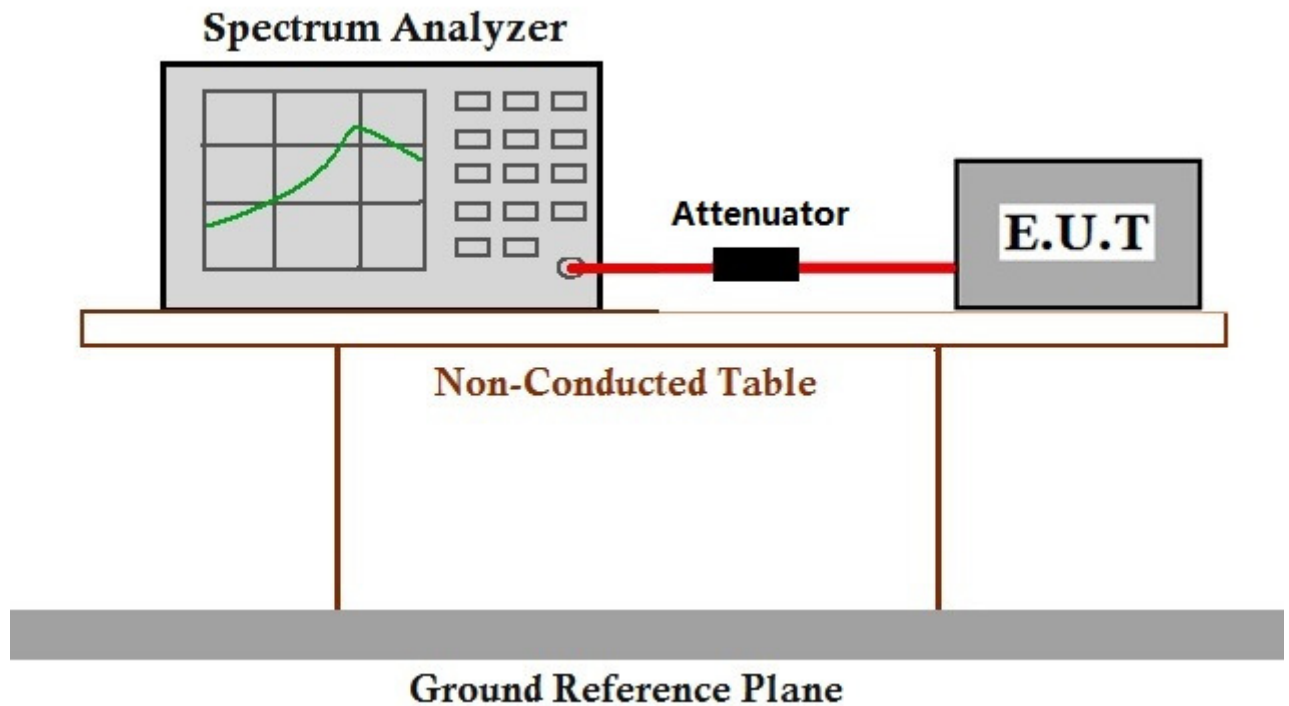

#### 7.3.3 Measurement Data

The detailed test data see: Appendix 15.247



#### **7.4 Hopping Channel Number**

Test Requirement: 47 CFR Part 15, Subpart C 15.247

Test Method: ANSI C63.10 (2013) Section 7.8.3

Limit:

| Frequency range(MHz) | Channel Number(minimum) |
|----------------------|-------------------------|
| 2400-2483.5          | 15                      |


#### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar

Test mode      Hopping transmitting with all kind of modulation

#### 7.4.2 Test Setup Diagram

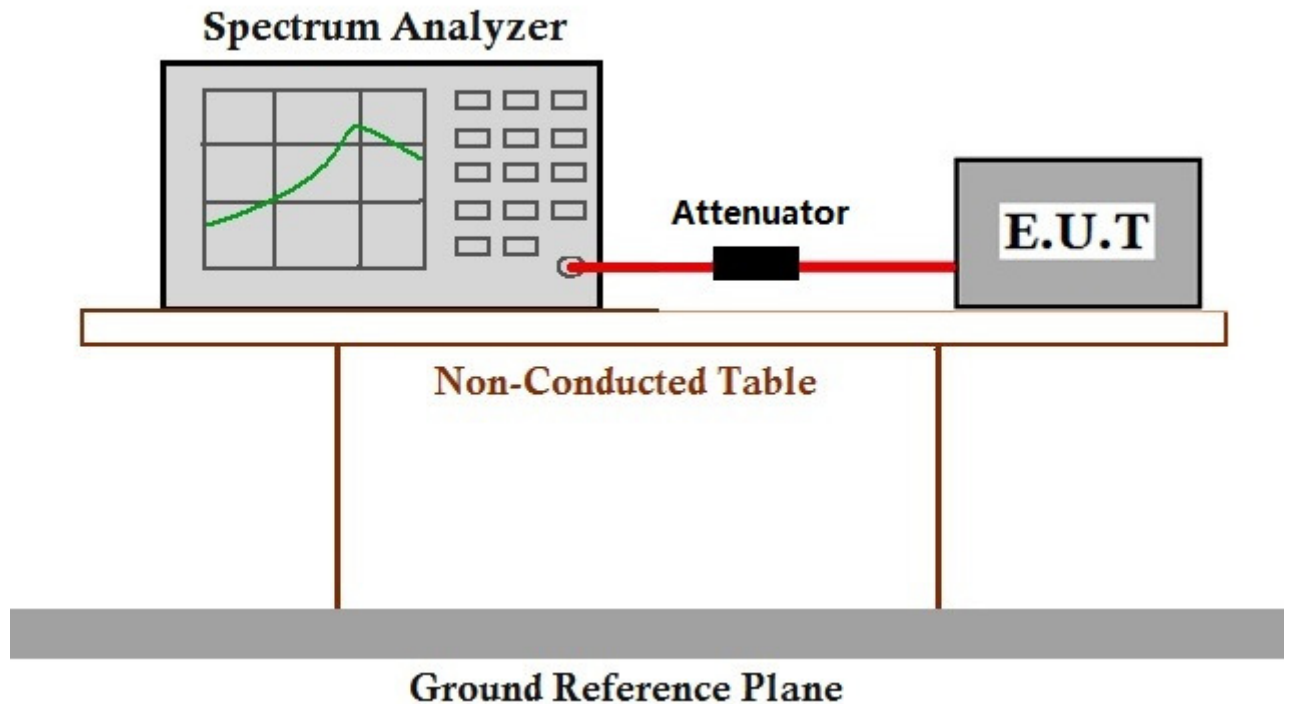

#### 7.4.3 Measurement Data

The detailed test data see: Appendix 15.247



## 7.5 Dwell Time

Test Requirement: 47 CFR Part 15, Subpart C 15.247

Test Method: ANSI C63.10 (2013) Section 7.8.4

Limit:

| Frequency(MHz) | Limit                        |
|----------------|------------------------------|
| 2400-2483.5    | 0.4S within a period of 0.4S |


### 7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar

Test mode      Hopping transmitting with all kind of modulation and all kind of data type.

### 7.5.2 Test Setup Diagram

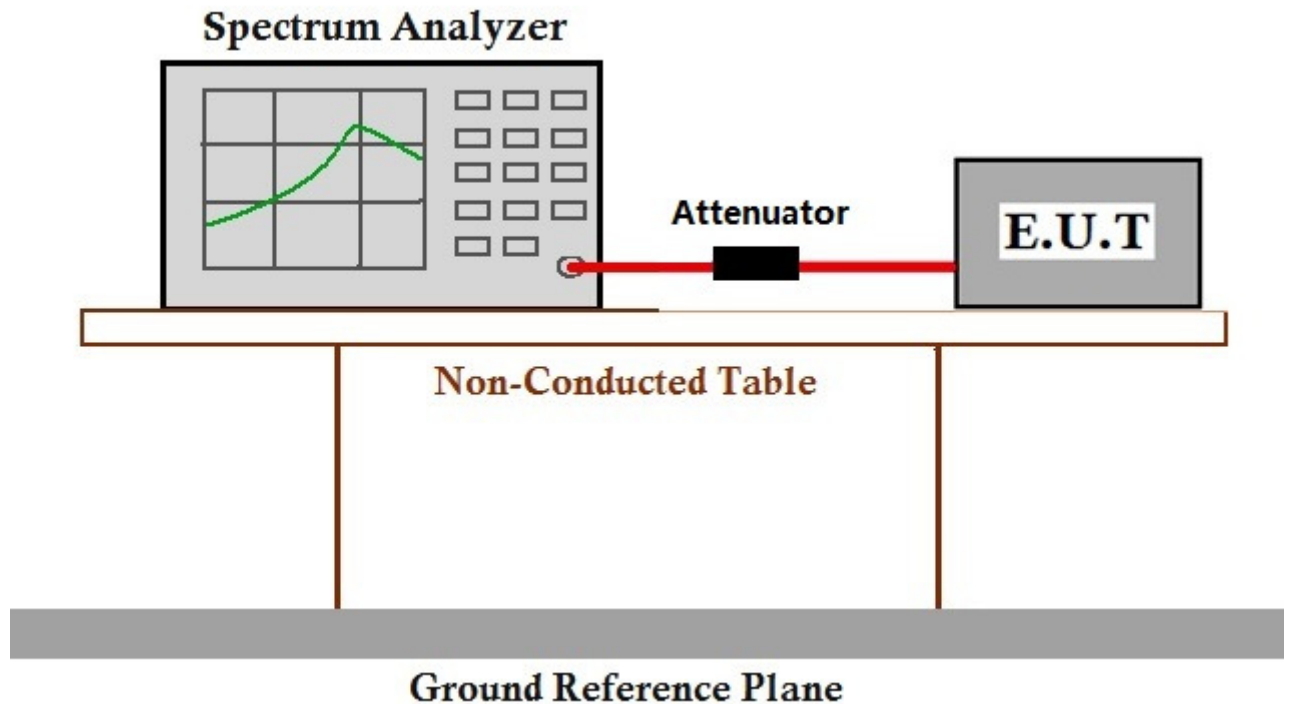

### 7.5.3 Measurement Data

The detailed test data see: Appendix 15.247


## 7.6 Conducted Spurious Emissions

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 7.8.8  
Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 7.6.1 E.U.T. Operation

Operating Environment:  
Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar  
Exploratory Test Mode: Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type  
Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.

### 7.6.2 Test Setup Diagram

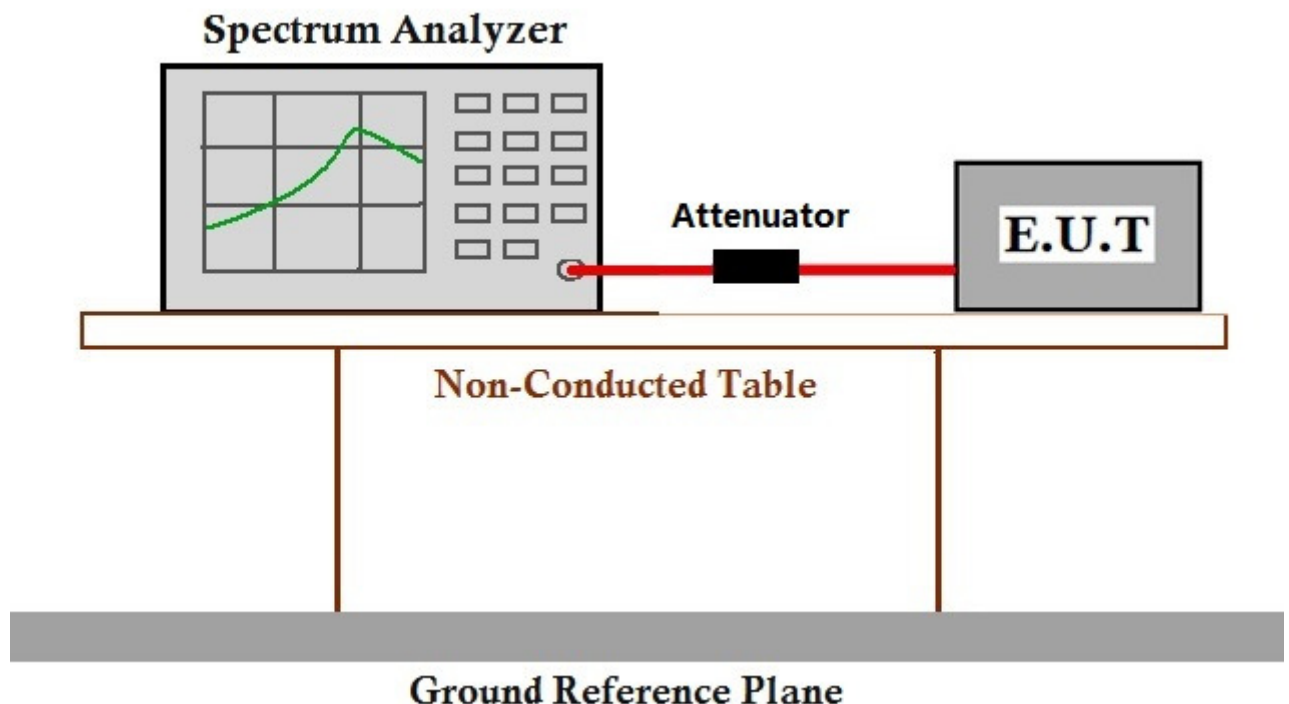

### 7.6.3 Measurement Data

The detailed test data see: Appendix 15.247



## 7.7 Radiated Spurious Emissions

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6  
Measurement Distance: 3m  
Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490    | 2400/F(kHz)                      | 300                          |
| 0.490-1.705    | 24000/F(kHz)                     | 30                           |
| 1.705-30.0     | 30                               | 30                           |
| 30-88          | 100                              | 3                            |
| 88-216         | 150                              | 3                            |
| 216-960        | 200                              | 3                            |
| Above 960      | 500                              | 3                            |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar




Exploratory Test Mode: Non-hopping transmitting mode with all kind of modulation and all kind of data type

Transmitting mode

Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type. For below 1GHz part, through pre-scan, the worst case is the lowest channel.

Only the worst case is recorded in the report.

### 7.7.2 Test Setup Diagram

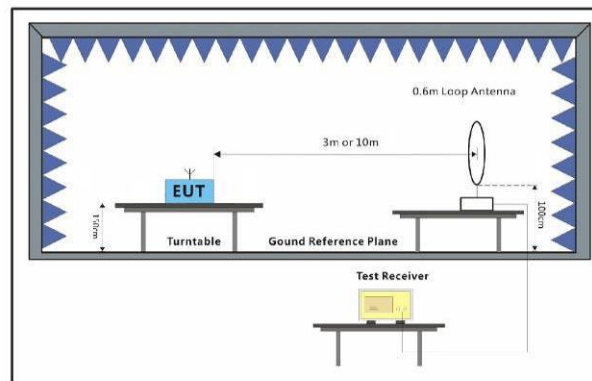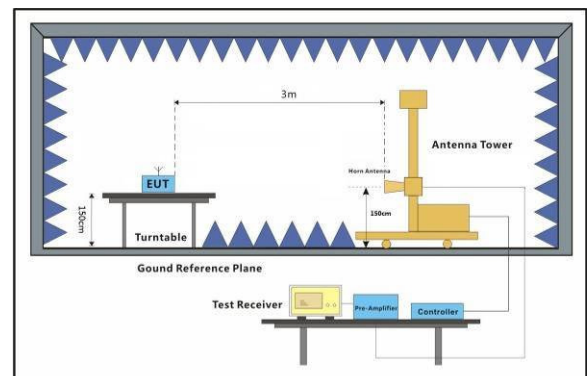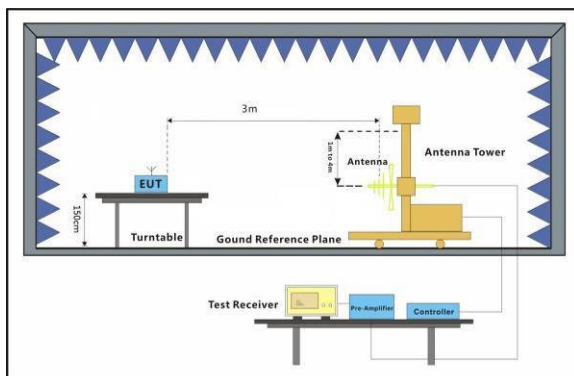




### **7.7.3 Measurement Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz)
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.



Radiated Emission below 1GHz


|                 |              |          |
|-----------------|--------------|----------|
| 30MHz~1GHz (QP) |              |          |
| Test mode:      | Transmitting | Vertical |

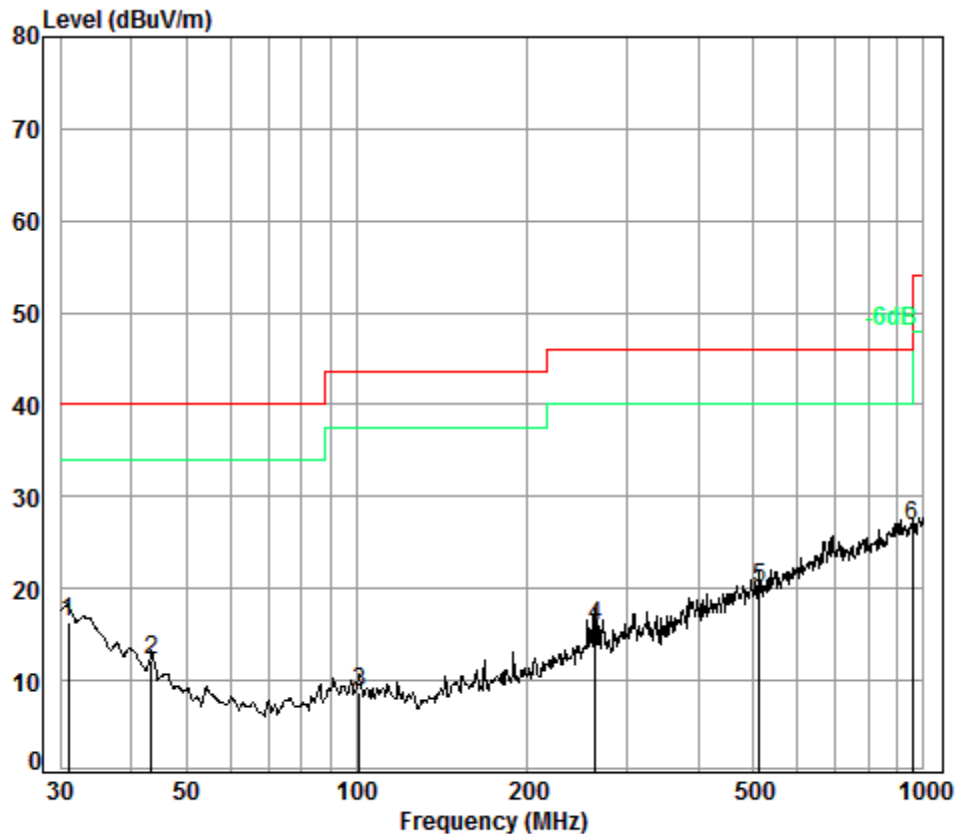

Condition: 3m VERTICAL  
Job No. : 0601CR  
Test mode: TX

|      | Freq   | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Limit Level | Limit Line | Over Limit |
|------|--------|------------|------------|---------------------|------------|-------------|------------|------------|
|      | MHz    | dB         | dB/m       | dB                  | dBuV       | dBuV/m      | dBuV/m     | dB         |
| 1    | 30.96  | 0.60       | 18.16      | 27.35               | 24.93      | 16.34       | 40.00      | -23.66     |
| 2    | 43.51  | 0.68       | 11.56      | 27.31               | 27.28      | 12.21       | 40.00      | -27.79     |
| 3    | 100.93 | 1.20       | 9.05       | 27.19               | 25.63      | 8.69        | 43.50      | -34.81     |
| 4    | 263.82 | 1.74       | 12.58      | 26.50               | 27.99      | 15.81       | 46.00      | -30.19     |
| 5    | 513.63 | 2.62       | 18.18      | 27.67               | 26.84      | 19.97       | 46.00      | -26.03     |
| 6 pp | 955.44 | 3.66       | 23.30      | 26.51               | 26.26      | 26.71       | 46.00      | -19.29     |

|            |              |            |
|------------|--------------|------------|
| Test mode: | Transmitting | Horizontal |
|------------|--------------|------------|

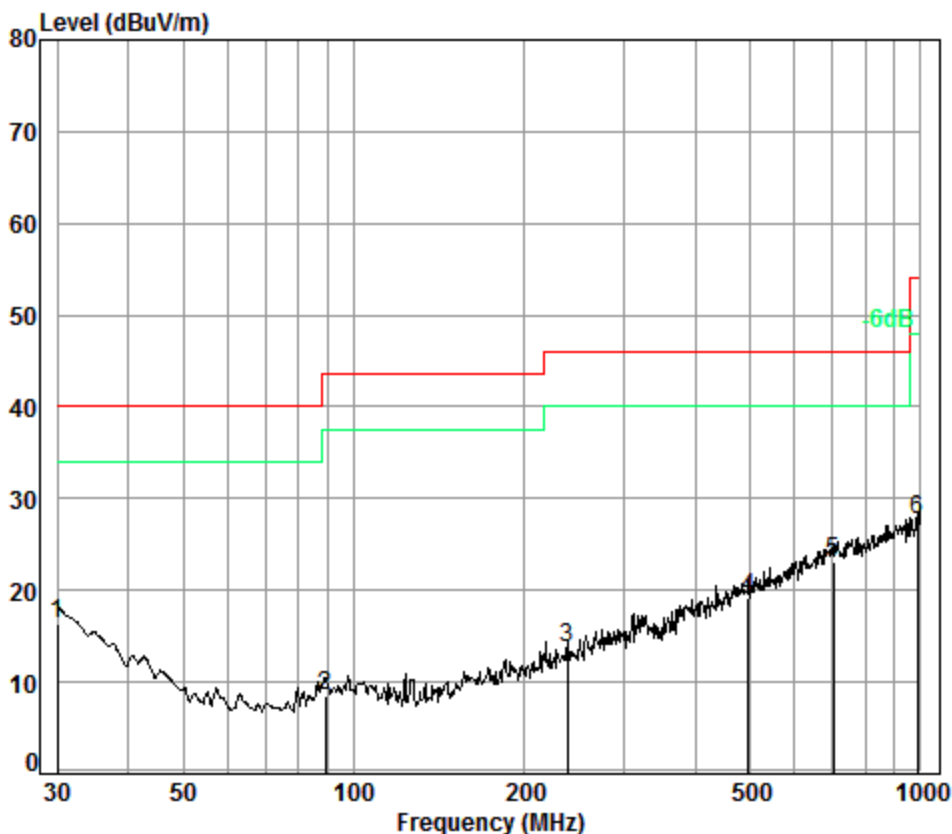

Condition: 3m HORIZONTAL

Job No. : 0601CR

Test mode: TX

|      | Freq   | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Level  | Limit Line | Over Limit |
|------|--------|------------|------------|---------------------|------------|--------|------------|------------|
|      | MHz    | dB         | dB/m       | dB                  | dBuV       | dBuV/m | dBuV/m     | dB         |
| 1    | 30.00  | 0.60       | 18.70      | 27.36               | 24.49      | 16.43  | 40.00      | -23.57     |
| 2    | 89.28  | 1.10       | 8.63       | 27.22               | 26.04      | 8.55   | 43.50      | -34.95     |
| 3    | 238.31 | 1.62       | 11.93      | 26.57               | 26.67      | 13.65  | 46.00      | -32.35     |
| 4    | 497.68 | 2.59       | 17.80      | 27.70               | 26.45      | 19.14  | 46.00      | -26.86     |
| 5 pp | 701.76 | 2.91       | 21.60      | 27.41               | 25.95      | 23.05  | 46.00      | -22.95     |
| 6    | 986.07 | 3.69       | 23.74      | 26.37               | 26.55      | 27.61  | 54.00      | -26.39     |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170100060101

Page: 29 of 88

**Transmitter Emission above 1GHz**

| Test mode:      |                        | GFSK(DH1)       |                    | Test channel:     |                | Lowest              |                 | Remark:      | Peak |
|-----------------|------------------------|-----------------|--------------------|-------------------|----------------|---------------------|-----------------|--------------|------|
| Frequency (MHz) | Antenna factors (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |      |
| 3563.687        | 32.39                  | 7.65            | 37.96              | 45.21             | 47.29          | 74                  | -26.71          | Vertical     |      |
| 4804.000        | 34.16                  | 8.87            | 38.40              | 43.31             | 47.94          | 74                  | -26.06          | Vertical     |      |
| 5786.418        | 34.58                  | 9.96            | 38.34              | 44.64             | 50.84          | 74                  | -23.16          | Vertical     |      |
| 7206.000        | 36.42                  | 10.68           | 37.11              | 41.36             | 51.35          | 74                  | -22.65          | Vertical     |      |
| 9608.000        | 37.52                  | 12.50           | 35.10              | 37.80             | 52.72          | 74                  | -21.28          | Vertical     |      |
| 12137.940       | 38.68                  | 14.45           | 35.93              | 35.92             | 53.12          | 74                  | -20.88          | Vertical     |      |
| 3732.570        | 32.87                  | 7.72            | 37.97              | 45.37             | 47.99          | 74                  | -26.01          | Horizontal   |      |
| 4804.000        | 34.16                  | 8.87            | 38.40              | 44.34             | 48.97          | 74                  | -25.03          | Horizontal   |      |
| 5836.872        | 34.60                  | 10.10           | 38.33              | 43.67             | 50.04          | 74                  | -23.96          | Horizontal   |      |
| 7206.000        | 36.42                  | 10.68           | 37.11              | 42.01             | 52.00          | 74                  | -22.00          | Horizontal   |      |
| 9608.000        | 37.52                  | 12.50           | 35.10              | 37.35             | 52.27          | 74                  | -21.73          | Horizontal   |      |
| 12137.940       | 38.68                  | 14.45           | 35.93              | 36.66             | 53.86          | 74                  | -20.14          | Horizontal   |      |

| Test mode:      |                        | GFSK(DH1)       |                    | Test channel:        |                         | Middle         |                 | Remark:      | Peak |
|-----------------|------------------------|-----------------|--------------------|----------------------|-------------------------|----------------|-----------------|--------------|------|
| Frequency (MHz) | Antenna factors (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Reading Level (dBμV) | Emission Level (dBμV/m) | Limit (dBμV/m) | Over limit (dB) | Polarization |      |
| 3831.060        | 33.15                  | 7.75            | 37.98              | 44.84                | 47.76                   | 74             | -26.24          | Vertical     |      |
| 4882.000        | 34.30                  | 8.98            | 38.44              | 43.20                | 48.04                   | 74             | -25.96          | Vertical     |      |
| 5947.702        | 34.67                  | 10.42           | 38.31              | 43.94                | 50.72                   | 74             | -23.28          | Vertical     |      |
| 7323.000        | 36.37                  | 10.72           | 37.01              | 41.60                | 51.68                   | 74             | -22.32          | Vertical     |      |
| 9764.000        | 37.55                  | 12.58           | 35.02              | 37.17                | 52.28                   | 74             | -21.72          | Vertical     |      |
| 12190.740       | 38.72                  | 14.40           | 36.06              | 36.00                | 53.06                   | 74             | -20.94          | Vertical     |      |
| 3842.163        | 33.18                  | 7.76            | 37.98              | 45.20                | 48.16                   | 74             | -25.84          | Horizontal   |      |
| 4882.000        | 34.30                  | 8.98            | 38.44              | 43.83                | 48.67                   | 74             | -25.33          | Horizontal   |      |
| 5956.314        | 34.67                  | 10.44           | 38.31              | 43.42                | 50.22                   | 74             | -23.78          | Horizontal   |      |
| 7323.000        | 36.37                  | 10.72           | 37.01              | 41.41                | 51.49                   | 74             | -22.51          | Horizontal   |      |
| 9764.000        | 37.55                  | 12.58           | 35.02              | 37.76                | 52.87                   | 74             | -21.13          | Horizontal   |      |
| 12243.770       | 38.75                  | 14.36           | 36.19              | 36.29                | 53.21                   | 74             | -20.79          | Horizontal   |      |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170100060101

Page: 30 of 88

| Test mode:         |                              | GFSK(DH1)             |                          | Test channel:              |                               | Highest           |                       | Remark:      | Peak |
|--------------------|------------------------------|-----------------------|--------------------------|----------------------------|-------------------------------|-------------------|-----------------------|--------------|------|
| Frequency<br>(MHz) | Antenna<br>factors<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>factor<br>(dB) | Reading<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Over<br>limit<br>(dB) | Polarization |      |
| 3754.236           | 32.94                        | 7.72                  | 37.98                    | 44.89                      | 47.57                         | 74                | -26.43                | Vertical     |      |
| 4960.000           | 34.43                        | 9.09                  | 38.48                    | 43.21                      | 48.25                         | 74                | -25.75                | Vertical     |      |
| 6051.874           | 34.74                        | 10.49                 | 38.25                    | 43.42                      | 50.40                         | 74                | -23.60                | Vertical     |      |
| 7440.000           | 36.32                        | 10.77                 | 36.90                    | 41.53                      | 51.72                         | 74                | -22.28                | Vertical     |      |
| 9920.000           | 37.58                        | 12.67                 | 34.94                    | 36.95                      | 52.26                         | 74                | -21.74                | Vertical     |      |
| 12368.410          | 38.82                        | 14.26                 | 36.48                    | 36.61                      | 53.21                         | 74                | -20.79                | Vertical     |      |
| 3853.298           | 33.21                        | 7.76                  | 37.99                    | 45.29                      | 48.27                         | 74                | -25.73                | Horizontal   |      |
| 4960.000           | 34.43                        | 9.09                  | 38.48                    | 44.67                      | 49.71                         | 74                | -24.29                | Horizontal   |      |
| 6016.949           | 34.71                        | 10.54                 | 38.28                    | 44.79                      | 51.76                         | 74                | -22.24                | Horizontal   |      |
| 7440.000           | 36.32                        | 10.77                 | 36.90                    | 40.73                      | 50.92                         | 74                | -23.08                | Horizontal   |      |
| 9920.000           | 37.58                        | 12.67                 | 34.94                    | 36.74                      | 52.05                         | 74                | -21.95                | Horizontal   |      |
| 12386.320          | 38.83                        | 14.24                 | 36.53                    | 36.56                      | 53.10                         | 74                | -20.90                | Horizontal   |      |

**Remark:**

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.



## 7.8 Radiated Emissions which fall in the restricted bands

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 6.10.5  
Measurement Distance: 3m

### 7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C Humidity: 55 % RH Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Non-hopping transmitting mode with all kind of modulation and all kind of data type  
Transmitting mode.

Final Test Mode: Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case.


Only the worst case is recorded in the report.

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490    | 2400/F(kHz)                      | 300                          |
| 0.490-1.705    | 24000/F(kHz)                     | 30                           |
| 1.705-30.0     | 30                               | 30                           |
| 30-88          | 100                              | 3                            |
| 88-216         | 150                              | 3                            |
| 216-960        | 200                              | 3                            |
| Above 960      | 500                              | 3                            |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.8.2 Test Setup Diagram

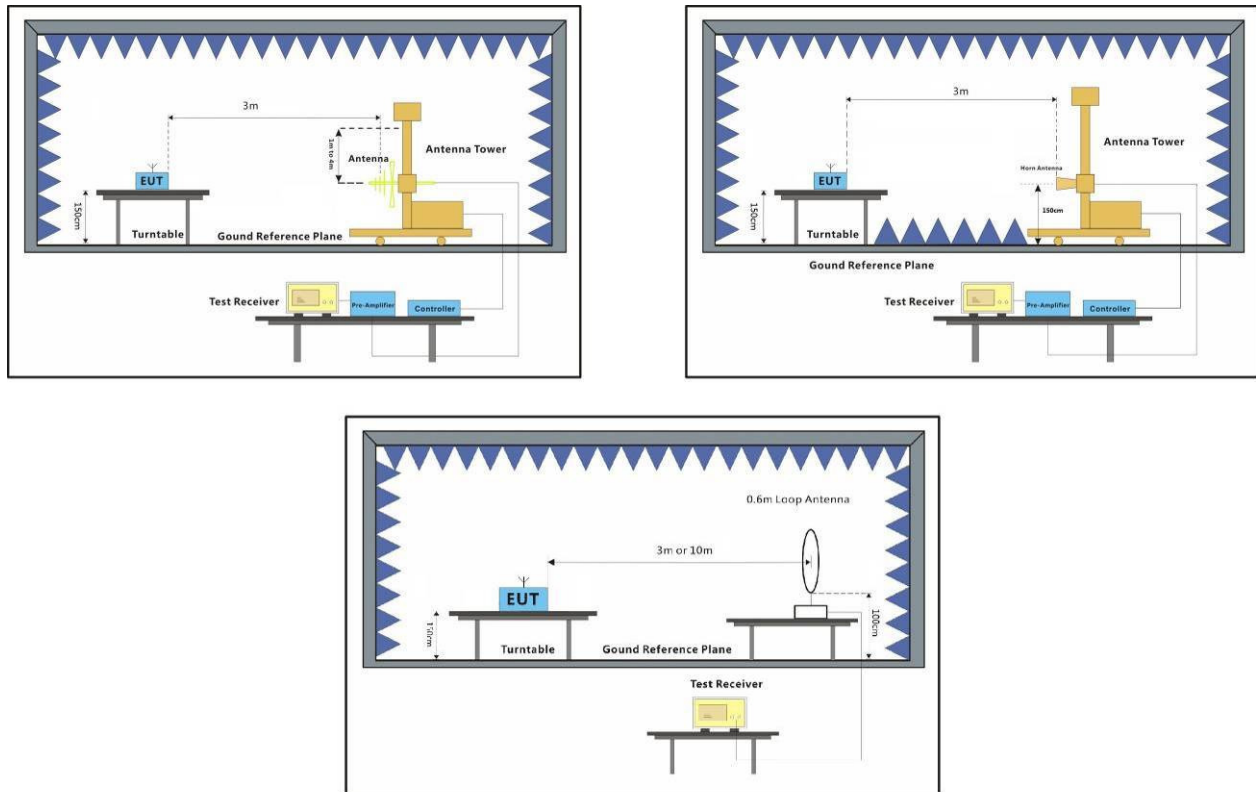

### 7.8.3 Measurement Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz)
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM170100060101

Page: 33 of 88

|                  |            |               |        |         |      |          |
|------------------|------------|---------------|--------|---------|------|----------|
| Worse case mode: | GFSK (DH5) | Test channel: | Lowest | Remark: | Peak | Vertical |
|------------------|------------|---------------|--------|---------|------|----------|

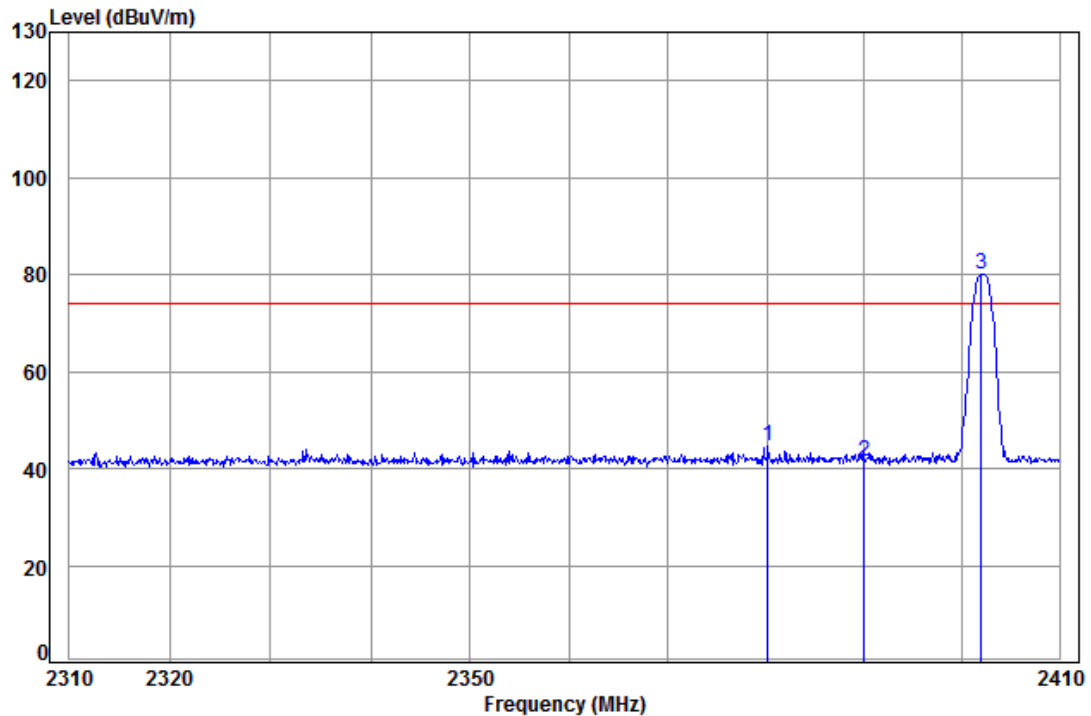

Condition: 3m VERTICAL

Job No: : 00601CR

Mode: : 2402 Bandedge

: BT

|      | Freq     | Cable | Ant    | Preamp | Read  | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|
|      | MHz      | Loss  | Factor | Factor | Level | Line   | Limit  | Remark |
|      |          | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |
| 1    | 2380.159 | 5.33  | 29.05  | 37.96  | 48.19 | 44.61  | 74.00  | -29.39 |
| 2    | 2390.000 | 5.34  | 29.08  | 37.96  | 45.15 | 41.61  | 74.00  | -32.39 |
| 3 pp | 2401.945 | 5.35  | 29.11  | 37.96  | 83.53 | 80.03  | 74.00  | 6.03   |




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM170100060101

Page: 34 of 88

|                  |            |               |        |         |      |            |
|------------------|------------|---------------|--------|---------|------|------------|
| Worse case mode: | GFSK (DH5) | Test channel: | Lowest | Remark: | Peak | Horizontal |
|------------------|------------|---------------|--------|---------|------|------------|

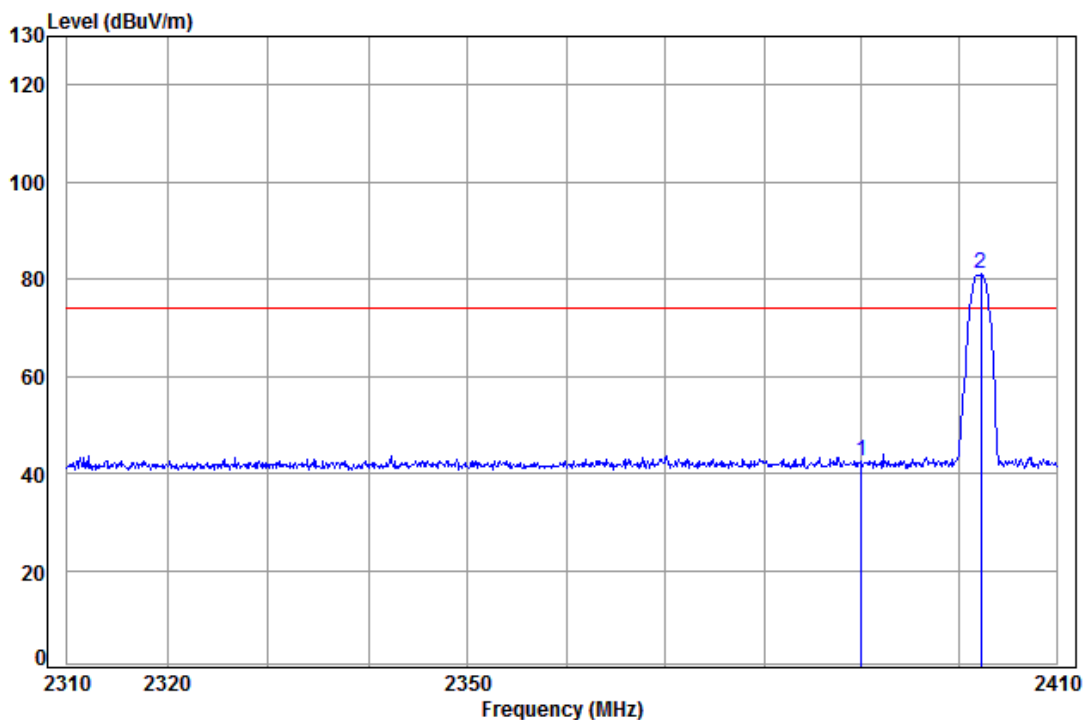

Condition: 3m HORIZONTAL

Job No: : 00601CR

Mode: : 2402 Bandedge

: BT

|      | Freq     | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
|      |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 2390.000 | 5.34  | 29.08  | 37.96  | 46.00 | 42.46  | 74.00  | -31.54 |        |
| 2 pp | 2402.250 | 5.35  | 29.11  | 37.96  | 84.49 | 80.99  | 74.00  | 6.99   |        |




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM170100060101

Page: 35 of 88

|                  |            |               |         |         |      |          |
|------------------|------------|---------------|---------|---------|------|----------|
| Worse case mode: | GFSK (DH5) | Test channel: | Highest | Remark: | Peak | Vertical |
|------------------|------------|---------------|---------|---------|------|----------|

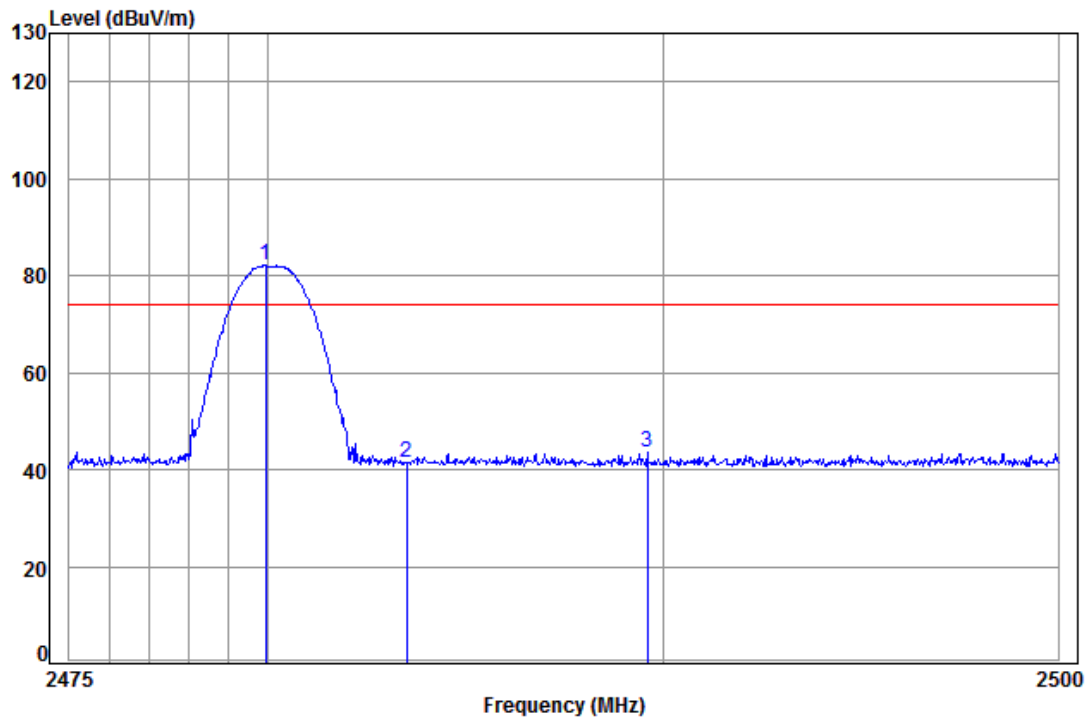


Condition: 3m VERTICAL  
Job No: : 00601CR  
Mode: : 2480 Bandedge  
: BT

|      | Freq     | Cable Loss | Ant Factor | Preamp Factor | Read Level | Limit Level | Limit Line | Over Limit | Remark |
|------|----------|------------|------------|---------------|------------|-------------|------------|------------|--------|
|      | MHz      | dB         | dB/m       | dB            | dBuV       | dBuV/m      | dBuV/m     | dB         |        |
| 1 pp | 2479.955 | 5.41       | 29.34      | 37.95         | 85.24      | 82.04       | 74.00      | 8.04       |        |
| 2    | 2483.500 | 5.41       | 29.35      | 37.95         | 44.77      | 41.58       | 74.00      | -32.42     |        |
| 3    | 2489.594 | 5.41       | 29.37      | 37.95         | 46.61      | 43.44       | 74.00      | -30.56     |        |



|                  |           |               |         |         |      |            |
|------------------|-----------|---------------|---------|---------|------|------------|
| Worse case mode: | GFSK(DH5) | Test channel: | Highest | Remark: | Peak | Horizontal |
|------------------|-----------|---------------|---------|---------|------|------------|

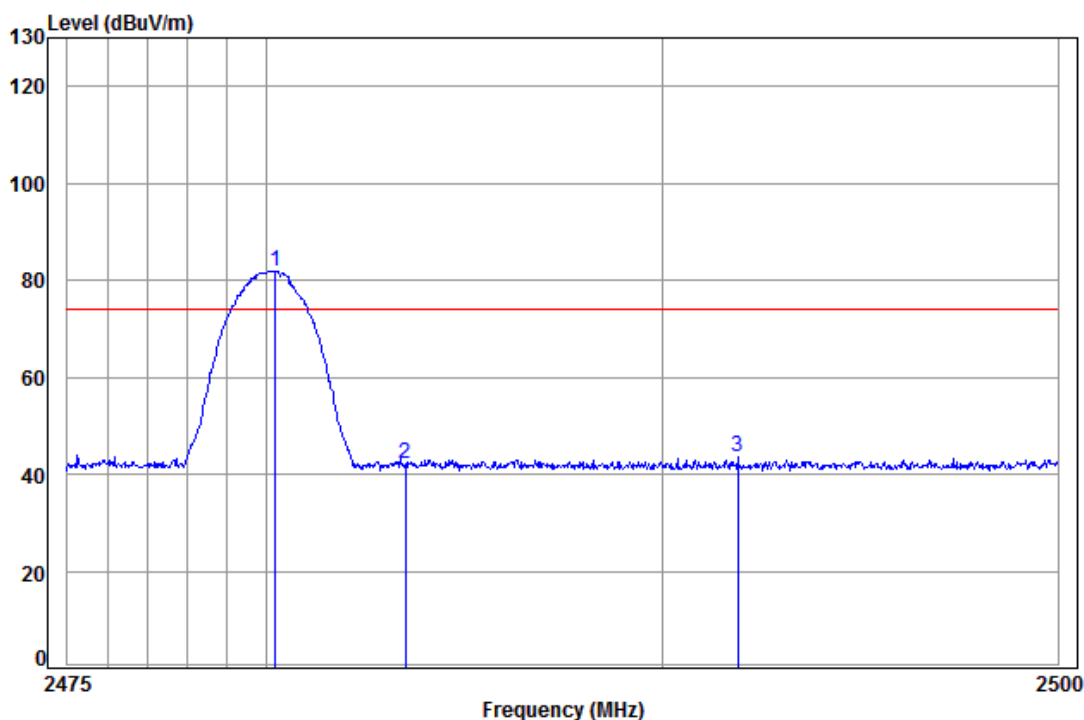

Condition: 3m HORIZONTAL  
Job No: : 00601CR  
Mode: : 2480 Bandedge  
: BT

|      | Freq     | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|------|----------|------------|------------|---------------|------------|--------|------------|------------|--------|
|      | MHz      | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 pp | 2480.229 | 5.41       | 29.34      | 37.95         | 84.91      | 81.71  | 74.00      | 7.71       |        |
| 2    | 2483.500 | 5.41       | 29.35      | 37.95         | 45.21      | 42.02  | 74.00      | -31.98     |        |
| 3    | 2491.897 | 5.41       | 29.38      | 37.95         | 46.68      | 43.52  | 74.00      | -30.48     |        |

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$

## 7.9 Conducted Band Edges Measurement

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 7.8.6

### 7.9.1 E.U.T. Operation


Operating Environment:

Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type

Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.

### 7.9.2 Test Setup Diagram

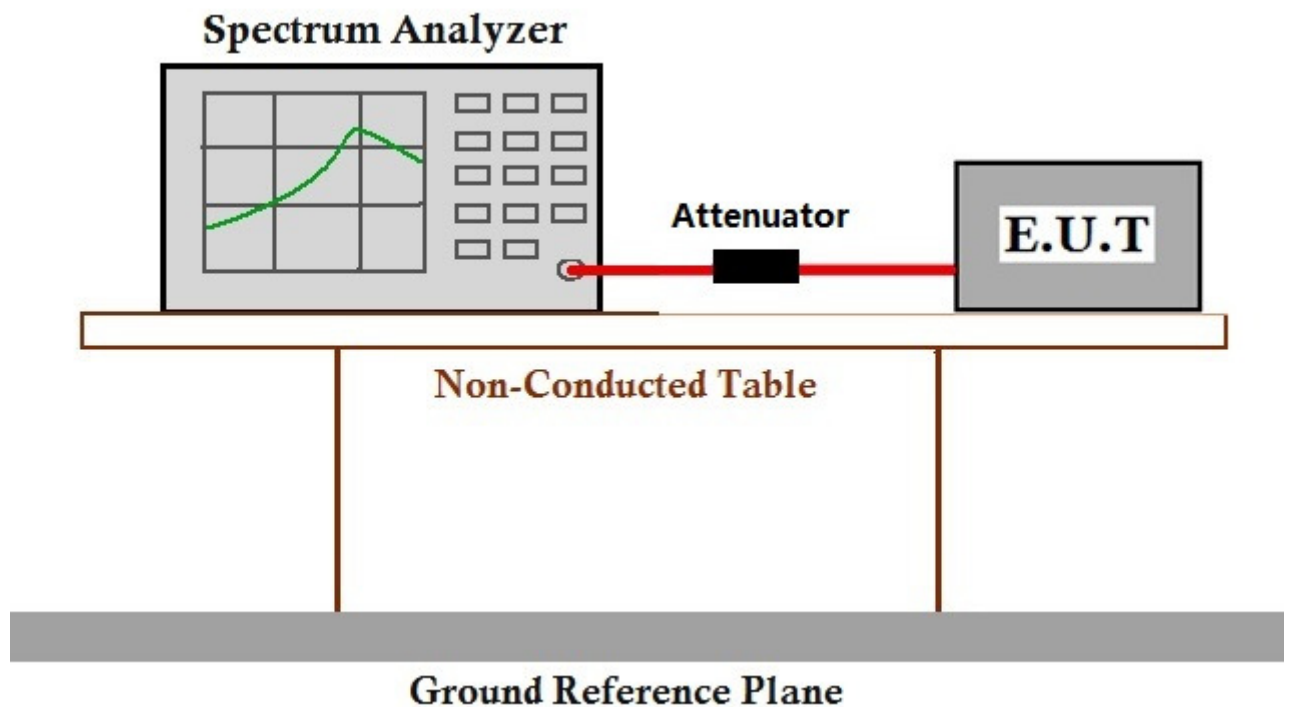

### 7.9.3 Measurement Data

The detailed test data see: Appendix 15.247



## 8 Appendix

### 8.1 Appendix 15.247


#### 1.20 dB Bandwidth

| Test Mode | Test Channel | EBW[MHz] | Limit[MHz] | Verdict |
|-----------|--------------|----------|------------|---------|
| DH5       | 2402         | 1.128    | ---        | PASS    |
| DH5       | 2441         | 1.138    | ---        | PASS    |
| DH5       | 2480         | 1.134    | ---        | PASS    |
| 2DH5      | 2402         | 1.132    | ---        | PASS    |
| 2DH5      | 2441         | 1.136    | ---        | PASS    |
| 2DH5      | 2480         | 1.140    | ---        | PASS    |
| 3DH5      | 2402         | 1.136    | ---        | PASS    |
| 3DH5      | 2441         | 1.132    | ---        | PASS    |
| 3DH5      | 2480         | 1.124    | ---        | PASS    |





TEST PLOT

20 dB Bandwidth\_DH5\_2402

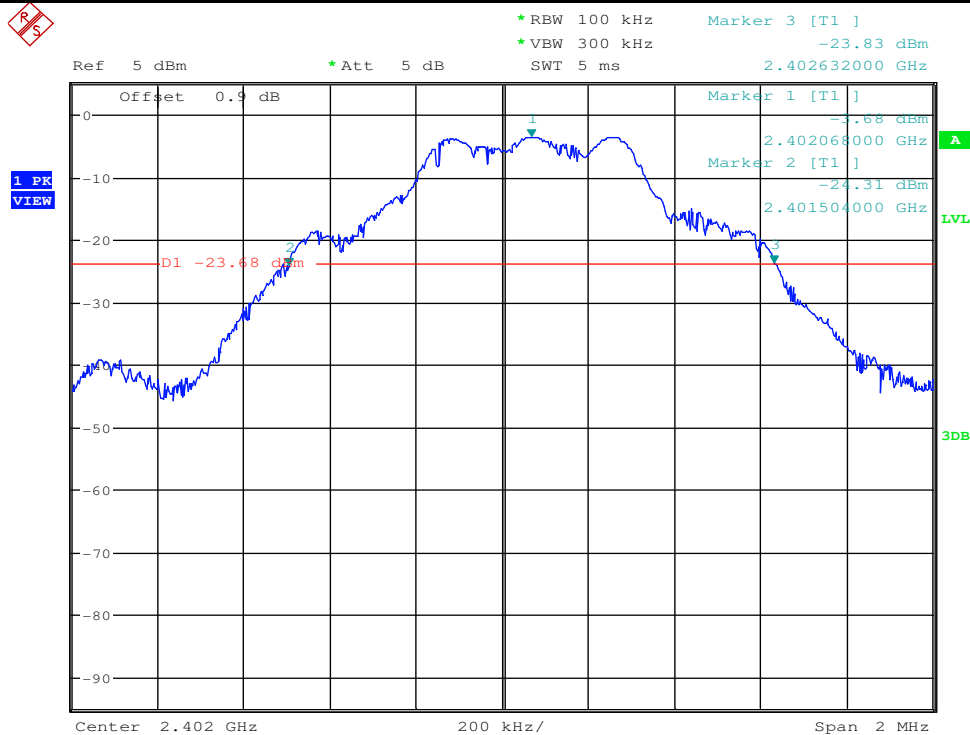


20 dB Bandwidth\_DH5\_2441

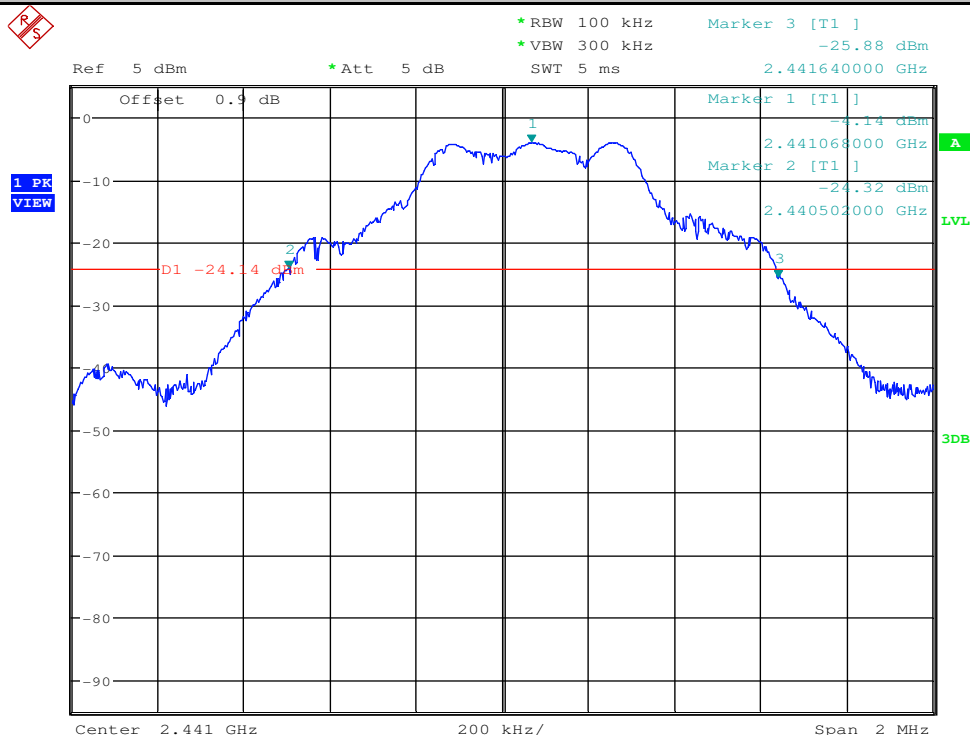

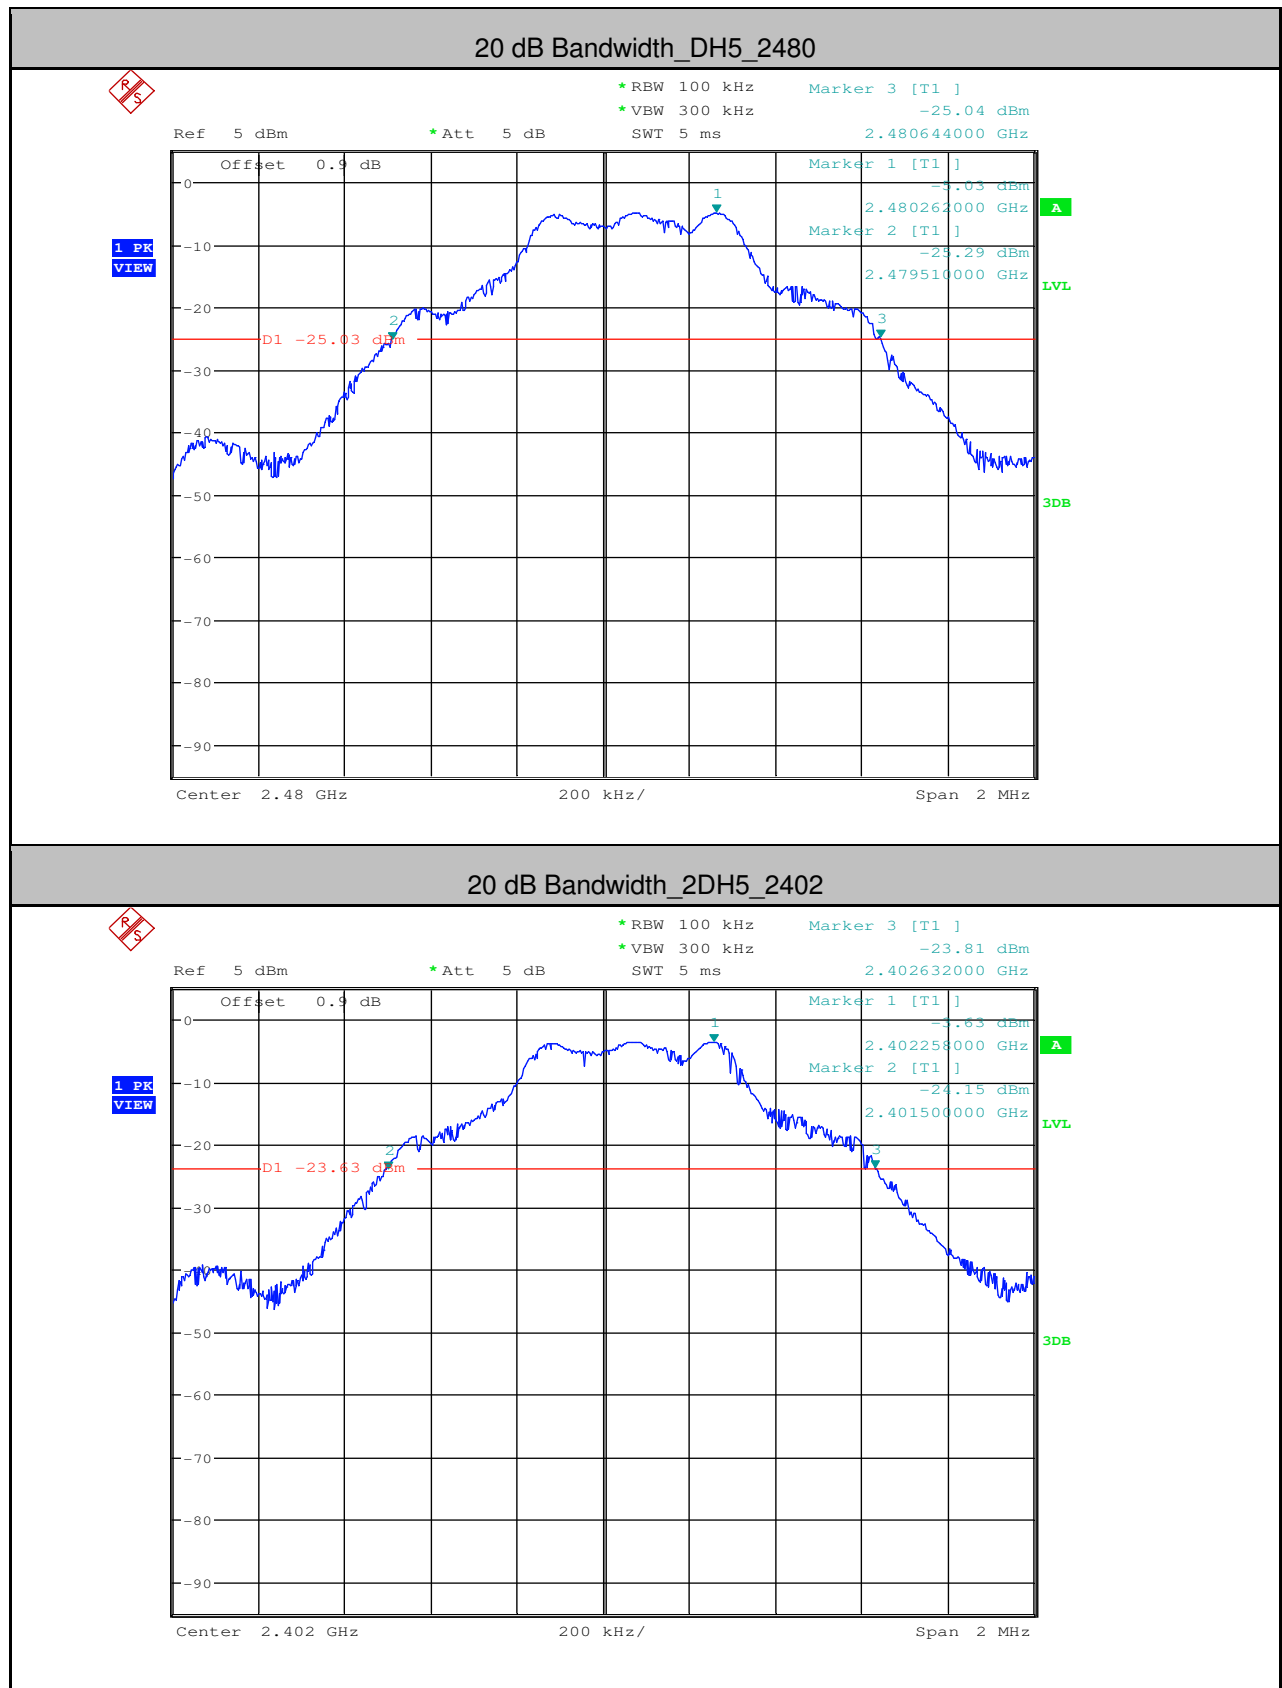




20 dB Bandwidth\_2DH5\_2441

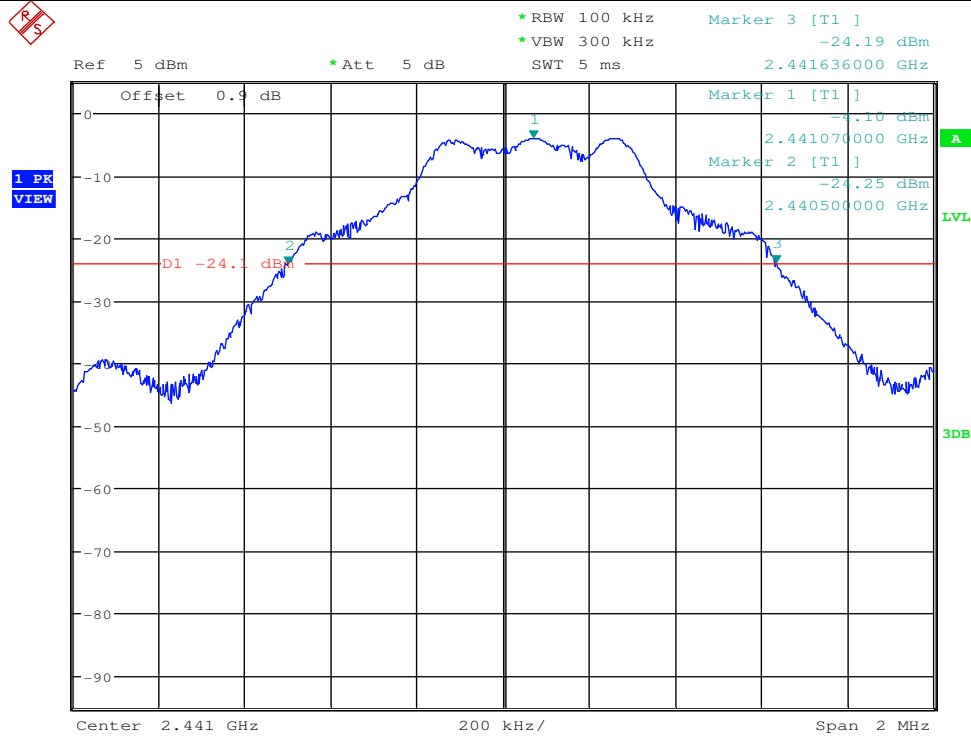


20 dB Bandwidth\_2DH5\_2480

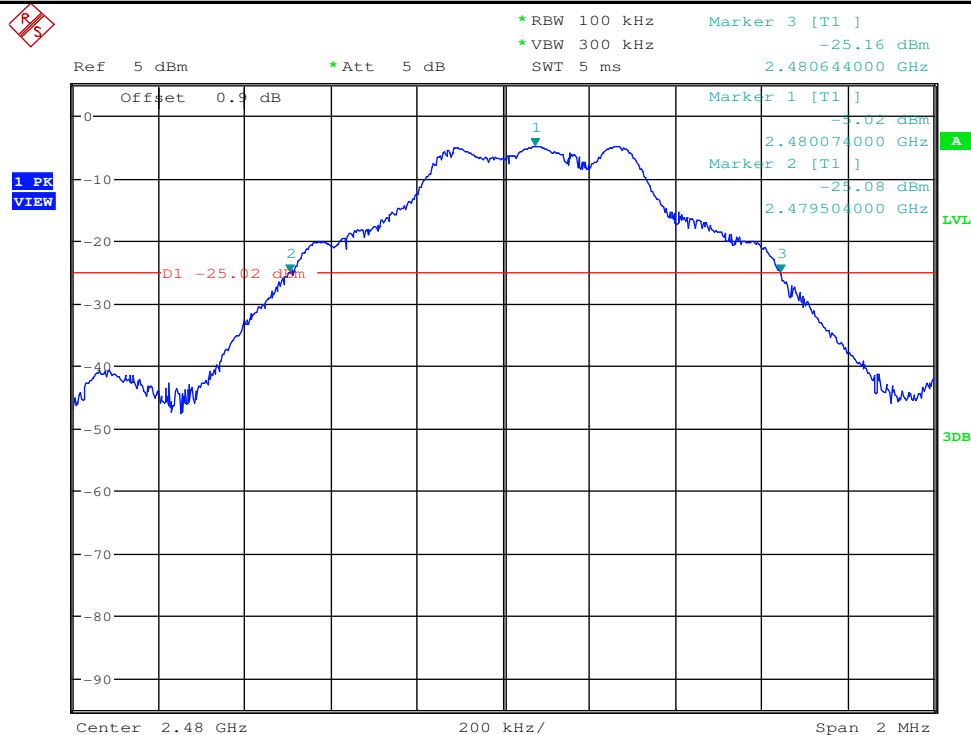





20 dB Bandwidth\_3DH5\_2402

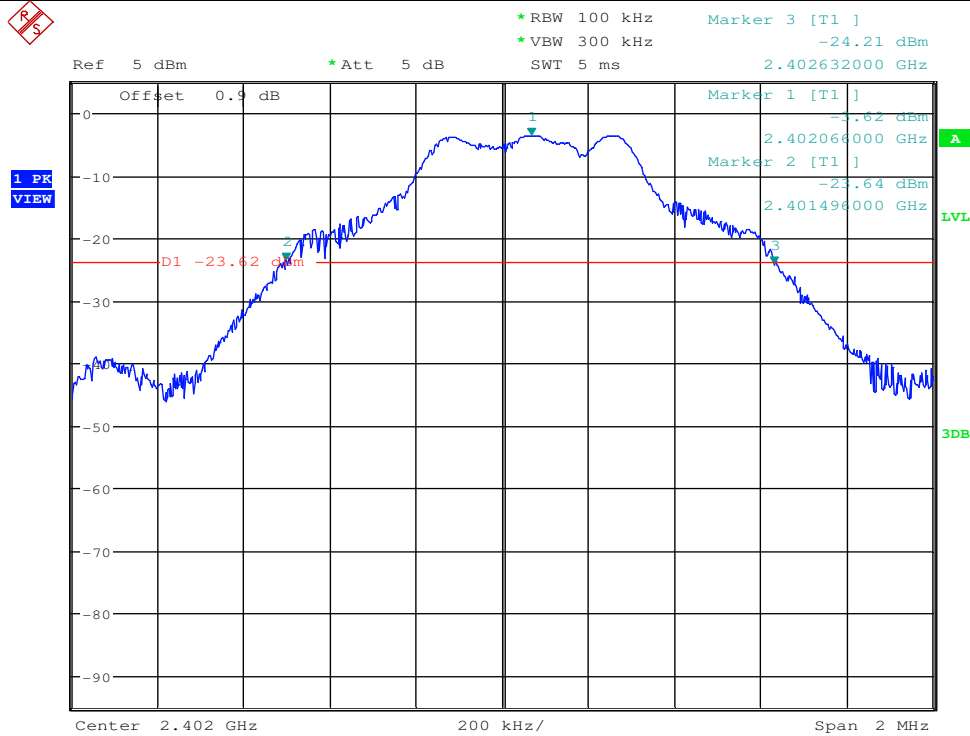

20 dB Bandwidth\_3DH5\_2441

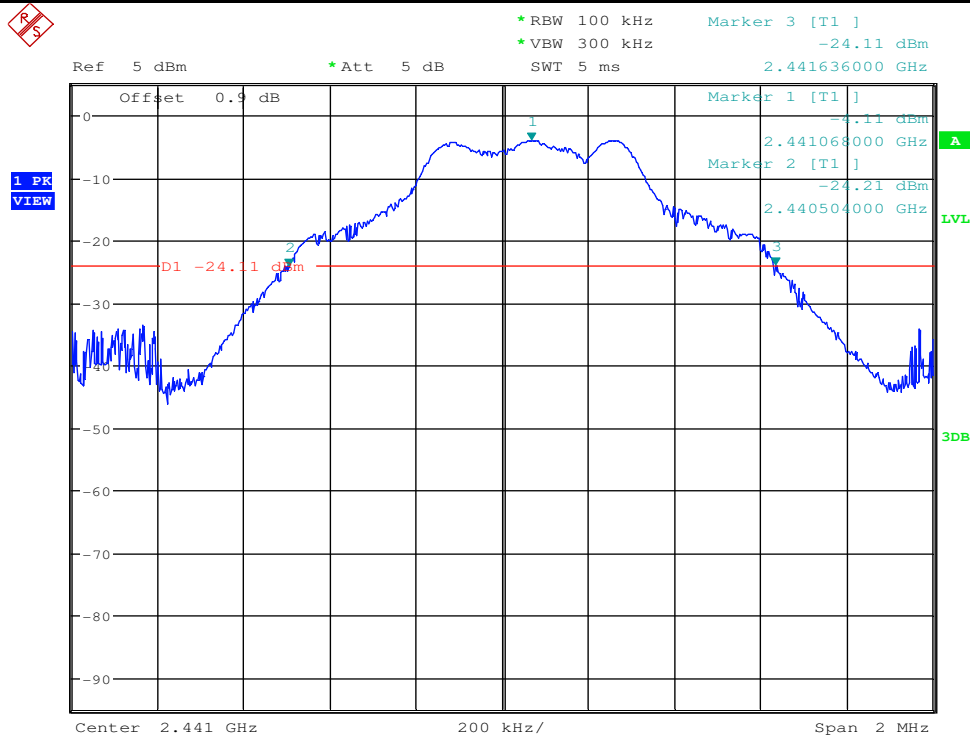


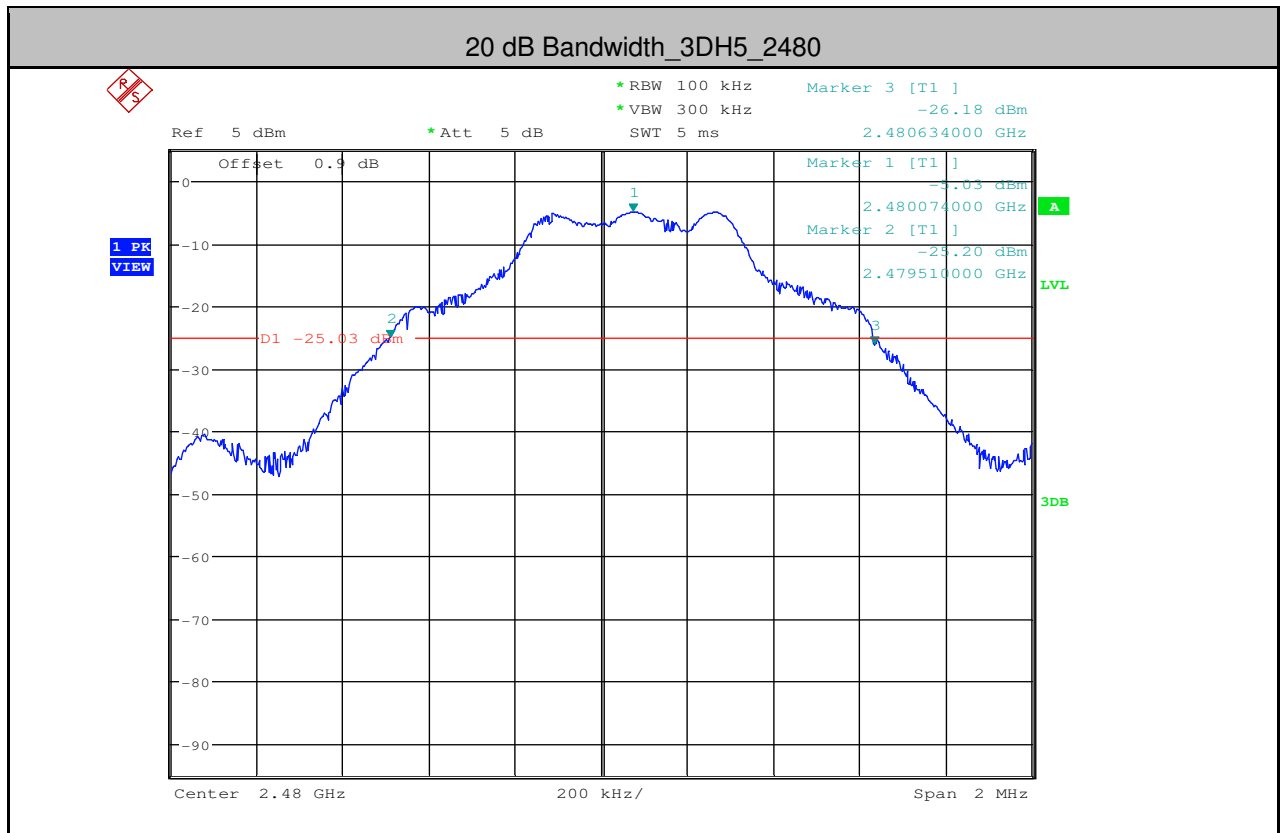




## 2. Conducted Peak Output Power


| Test Mode | Test Channel | Power[dBm] | Limit[dBm] | Verdict |
|-----------|--------------|------------|------------|---------|
| DH5       | 2402         | -3.44      | <20.97     | PASS    |
| DH5       | 2441         | -3.9       | <20.97     | PASS    |
| DH5       | 2480         | -4.8       | <20.97     | PASS    |
| 2DH5      | 2402         | -3.42      | <20.97     | PASS    |
| 2DH5      | 2441         | -3.88      | <20.97     | PASS    |
| 2DH5      | 2480         | -4.78      | <20.97     | PASS    |
| 3DH5      | 2402         | -3.41      | <20.97     | PASS    |
| 3DH5      | 2441         | -3.67      | <20.97     | PASS    |
| 3DH5      | 2480         | -4.8       | <20.97     | PASS    |

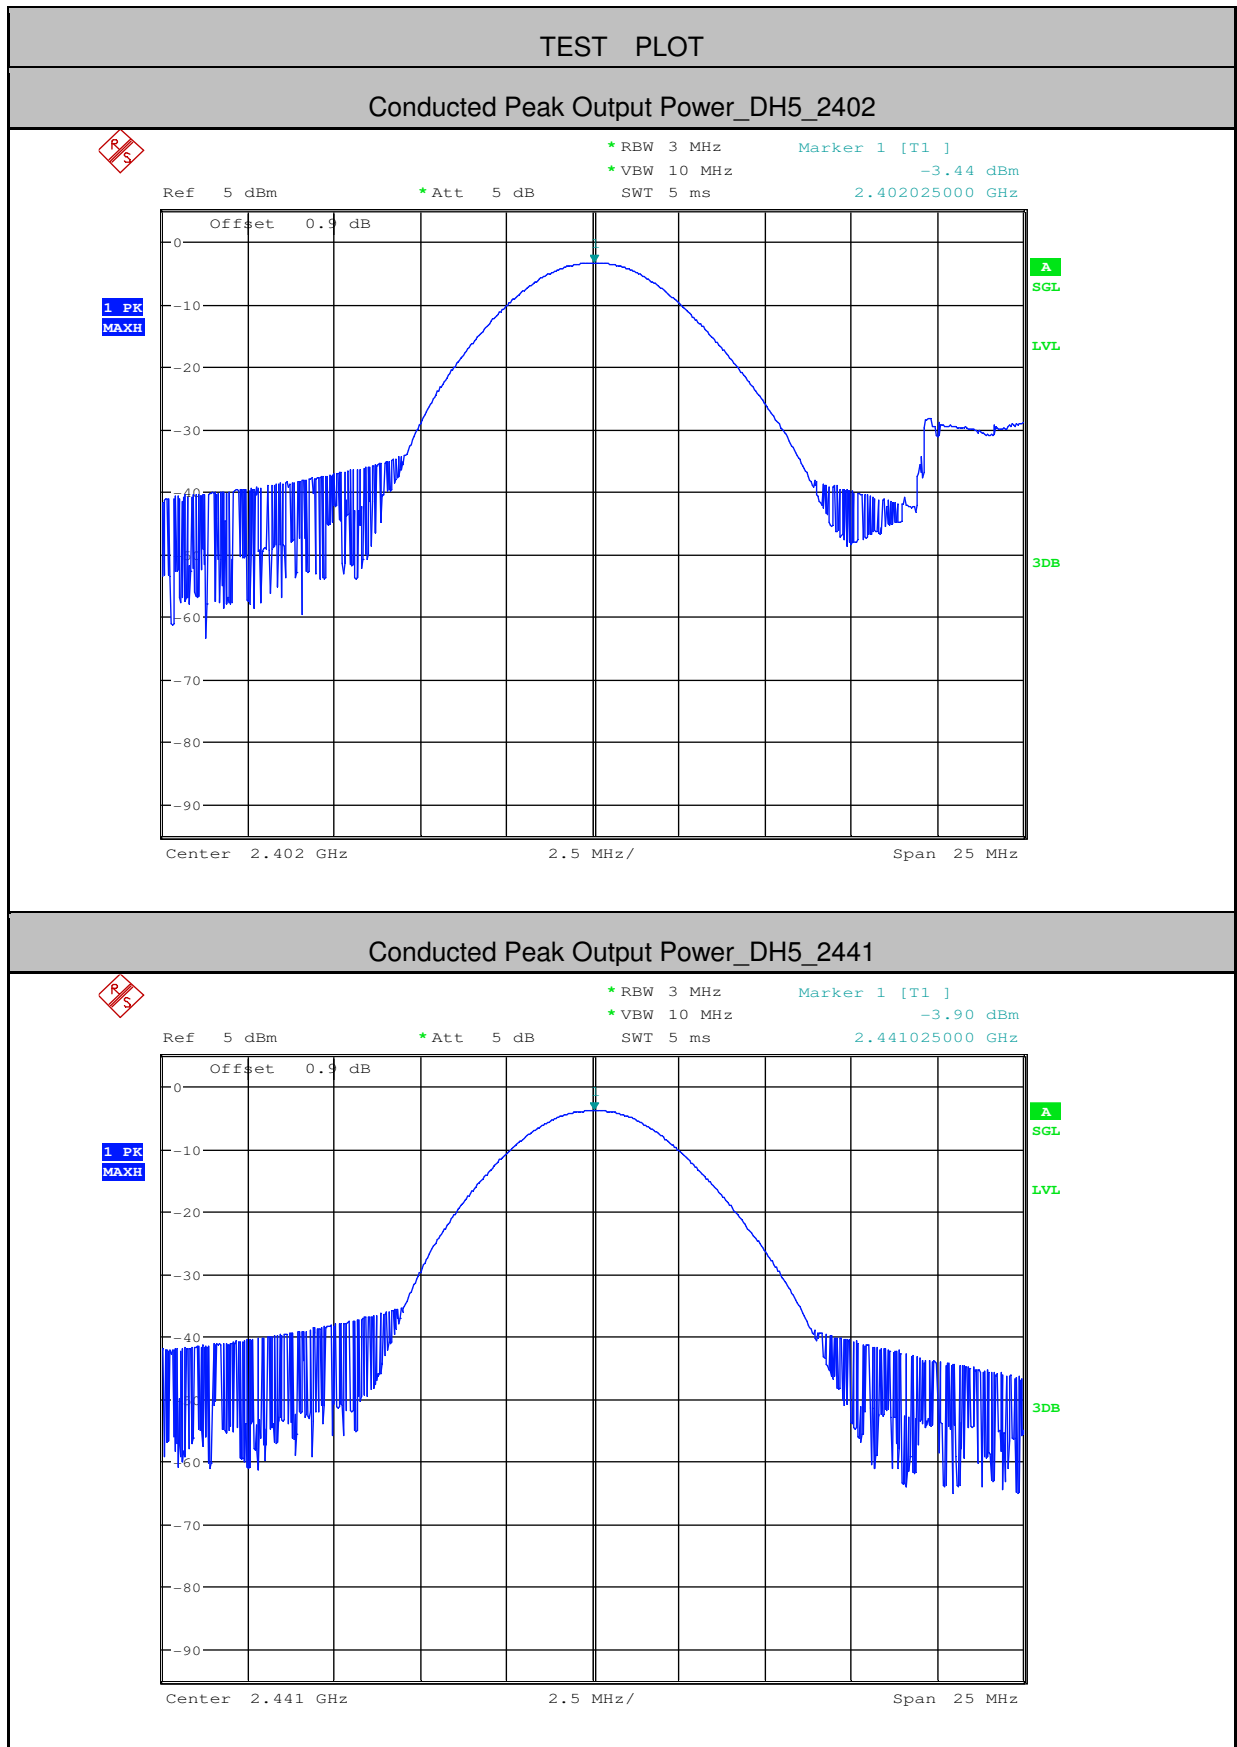


**Conducted Peak Output Power\_DH5\_2480**

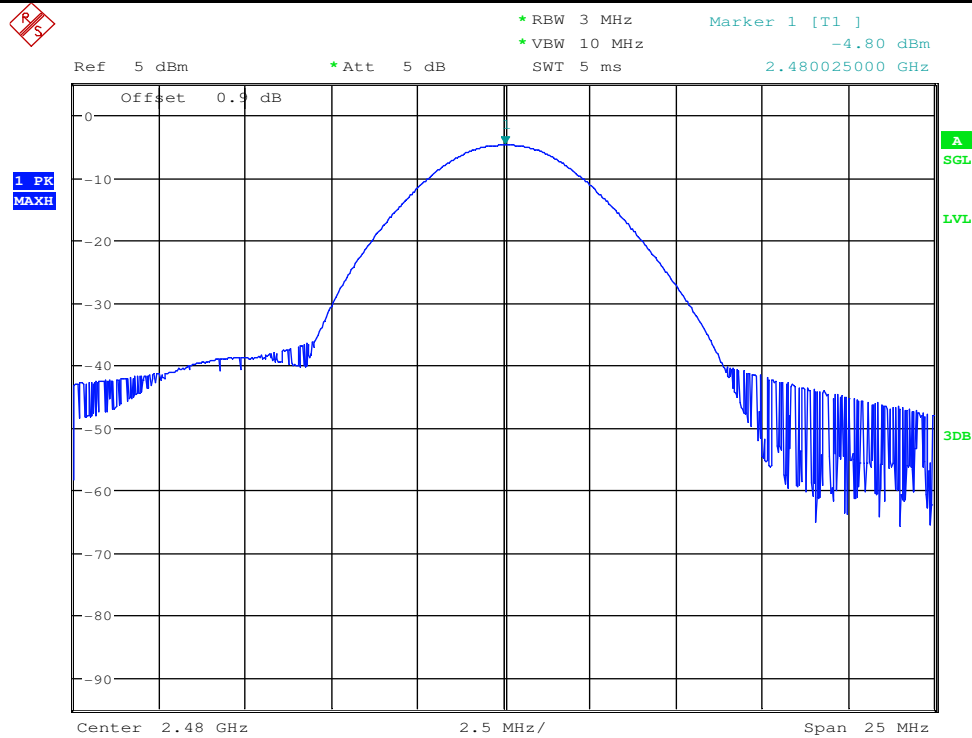


**Conducted Peak Output Power\_2DH5\_2402**

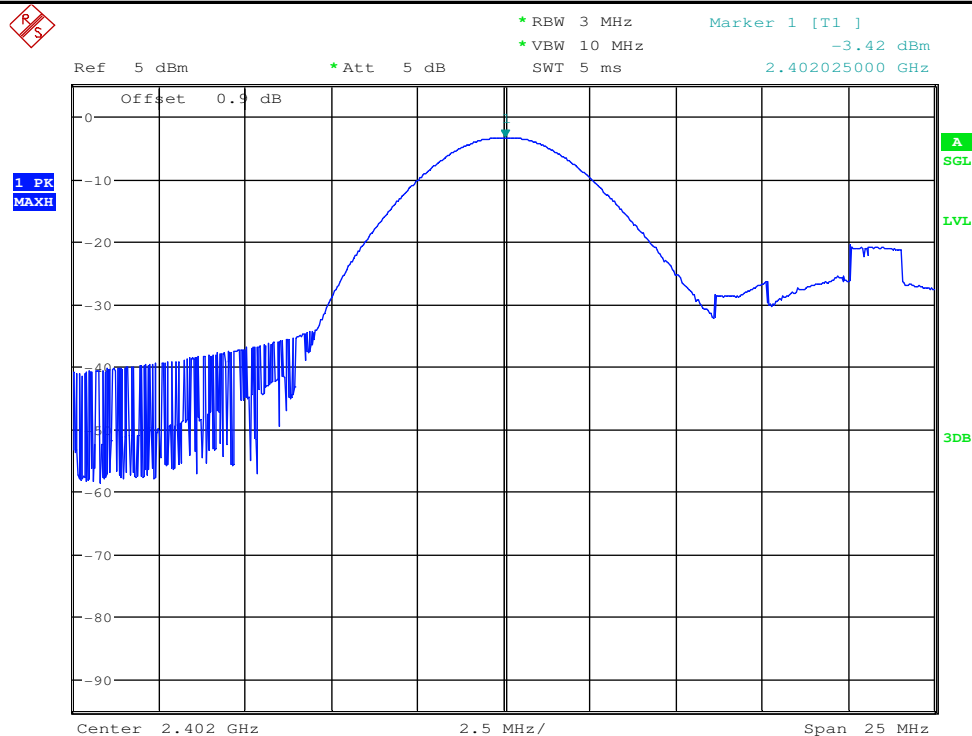

**Conducted Peak Output Power\_2DH5\_2441**

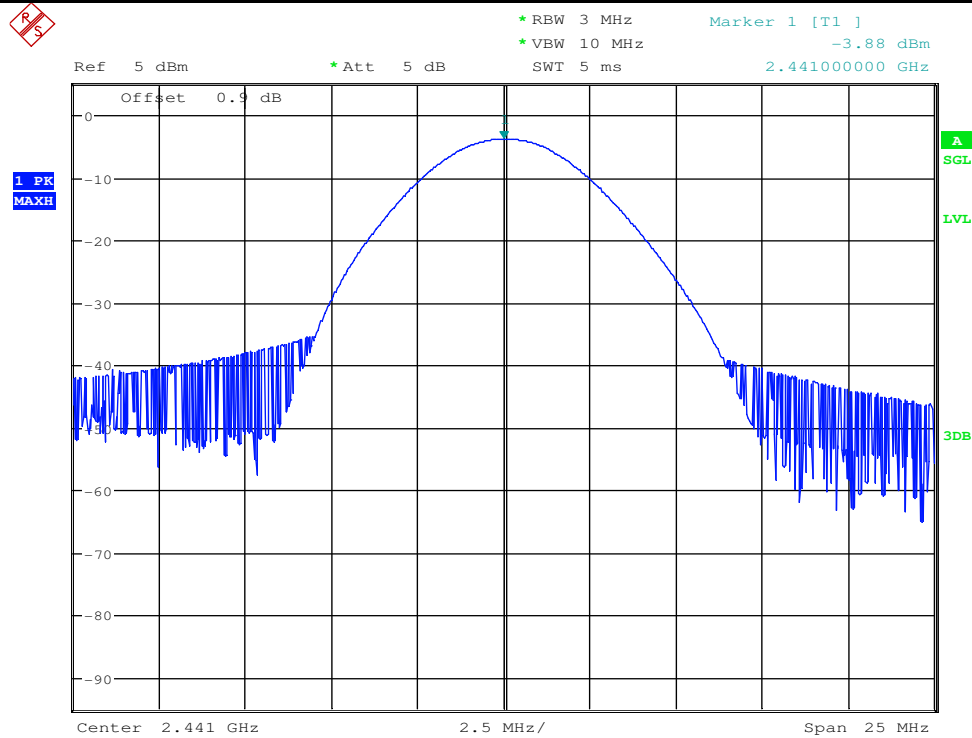


**Conducted Peak Output Power\_2DH5\_2480**

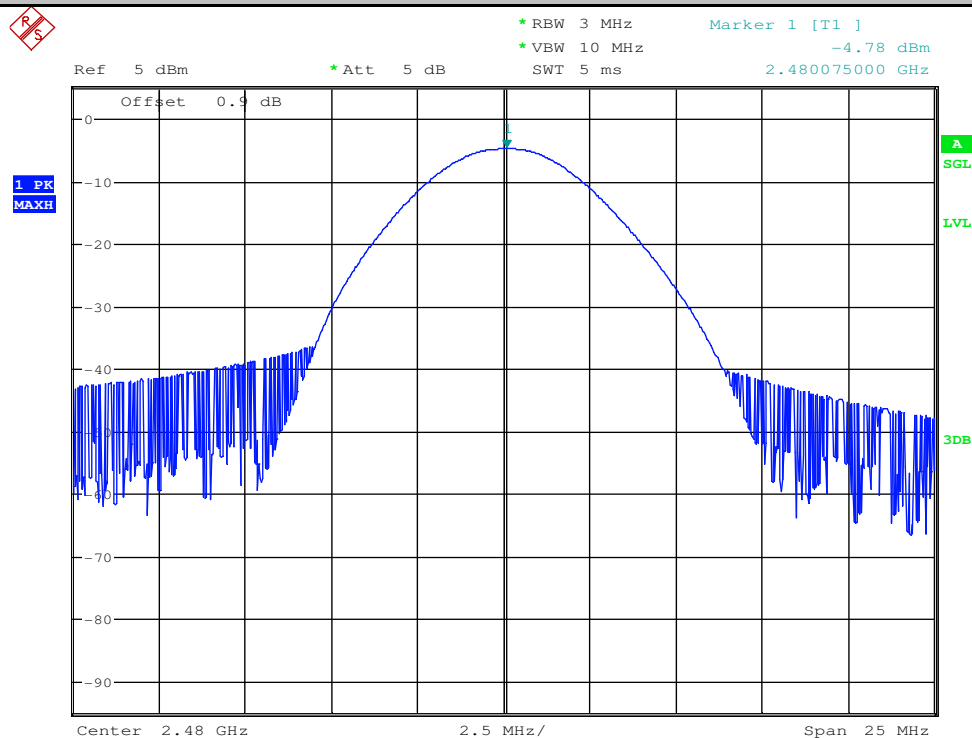





Conducted Peak Output Power\_3DH5\_2402

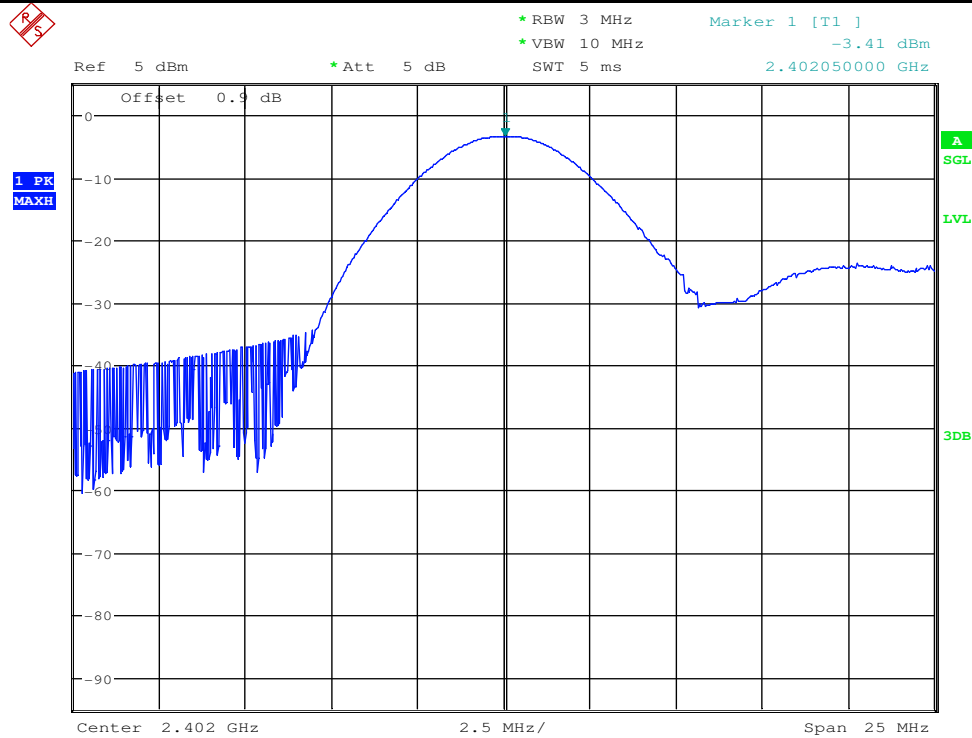

Conducted Peak Output Power\_3DH5\_2441

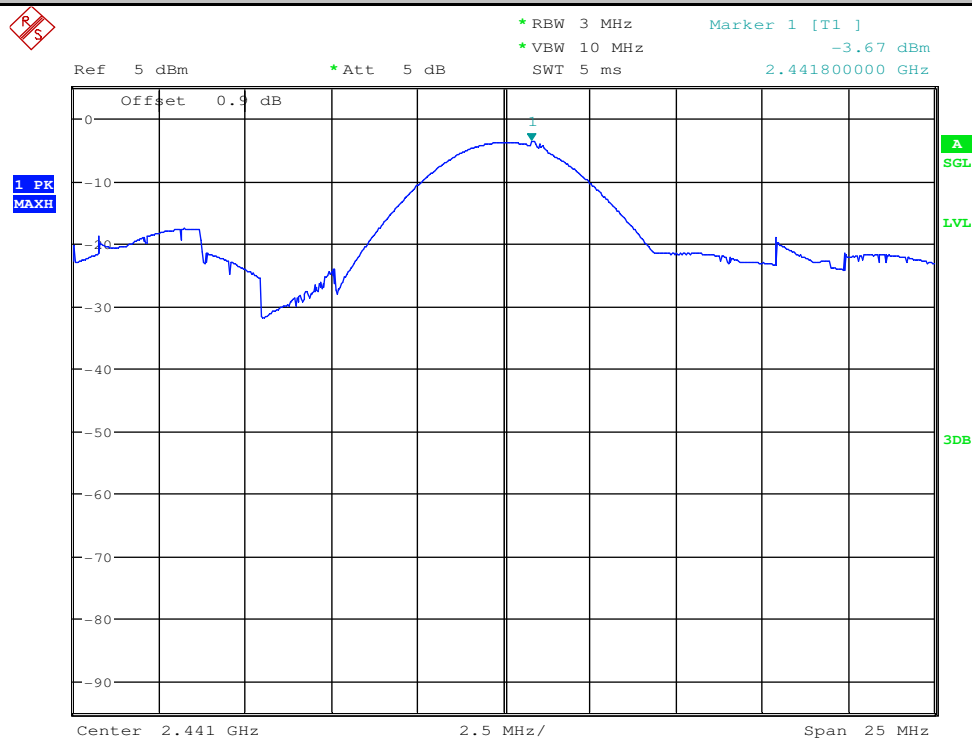


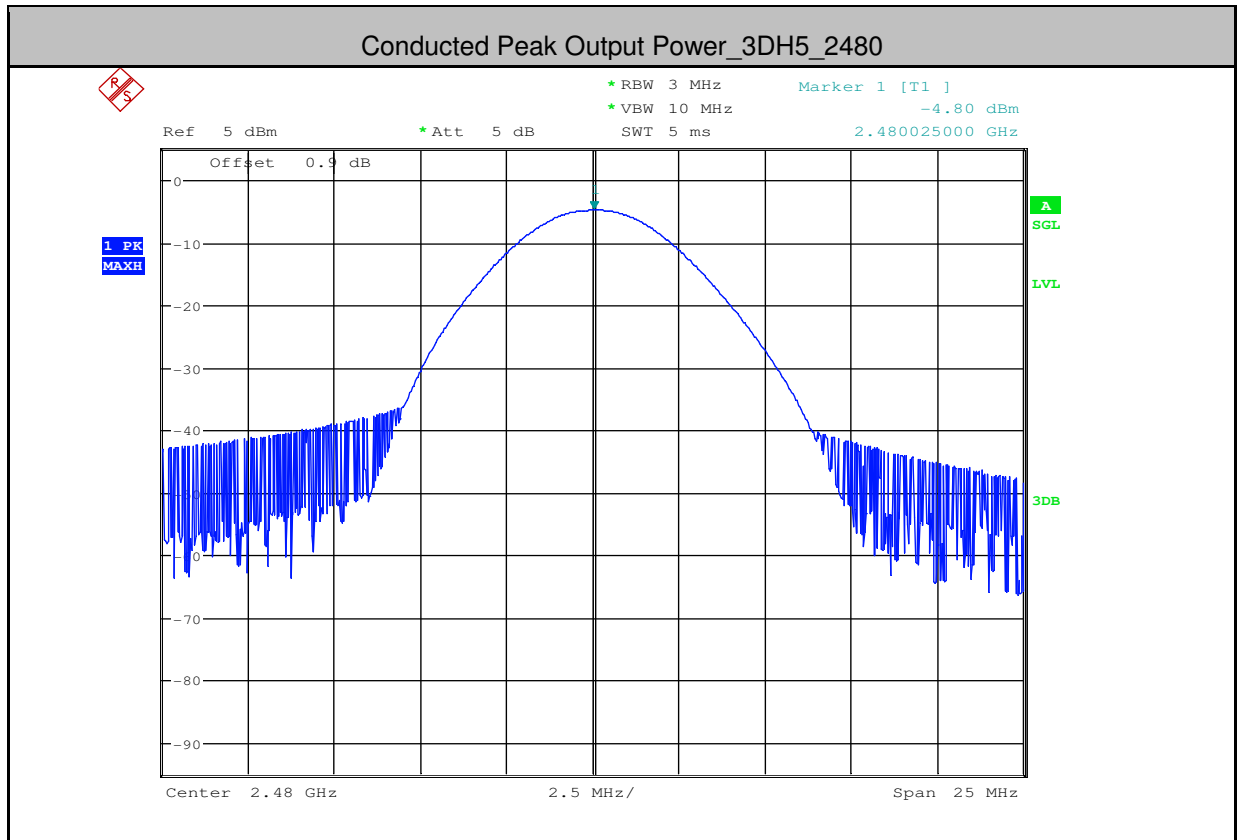





### 3.Carrier Frequency Separation

| Test Mode | Test Channel | Result[MHz] | Limit[MHz]   | Verdict |
|-----------|--------------|-------------|--------------|---------|
| DH5       | 2441         | 1.002       | $\geq 0.759$ | PASS    |
| 2DH5      | 2441         | 1.005       | $\geq 0.760$ | PASS    |
| 3DH5      | 2441         | 0.996       | $\geq 0.757$ | PASS    |

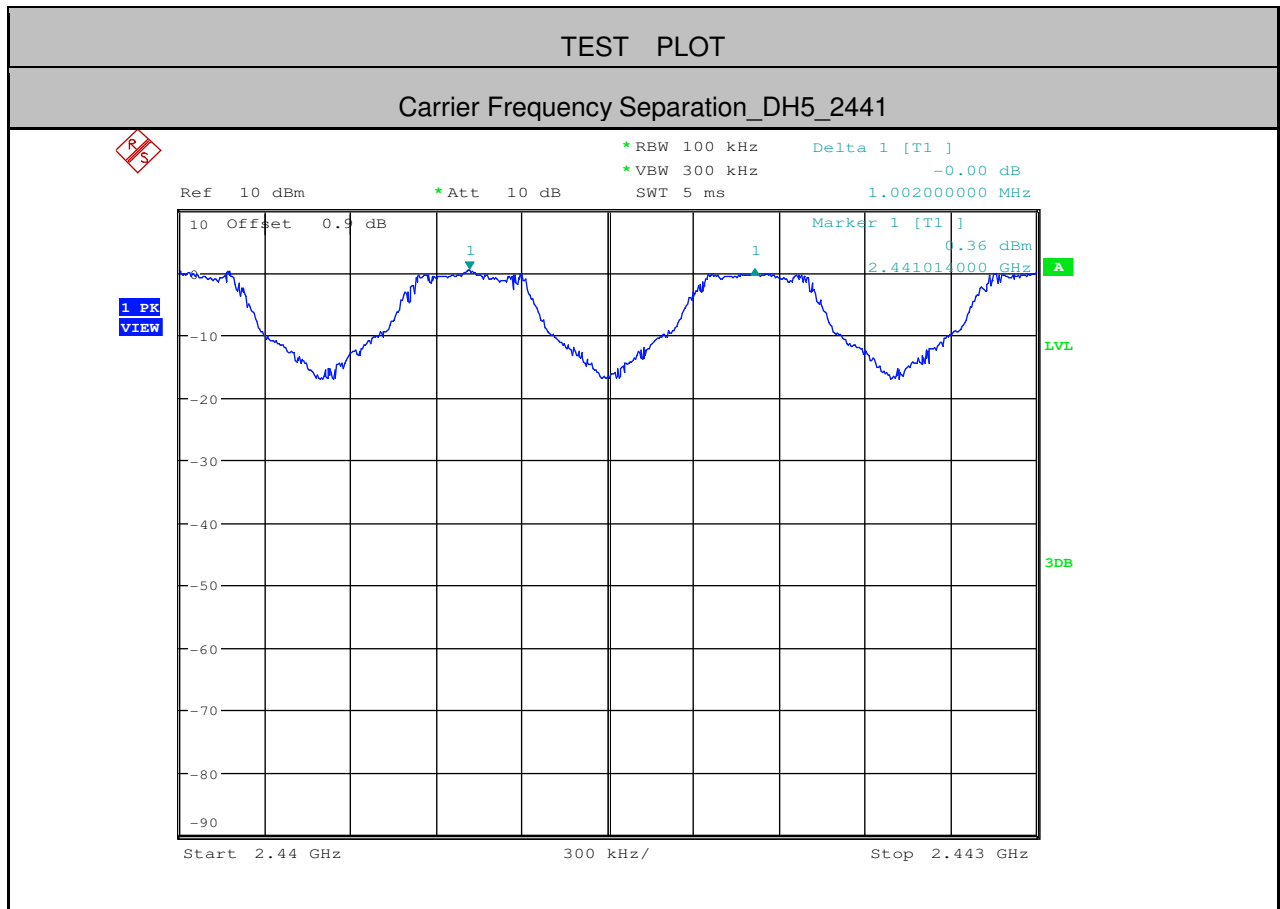

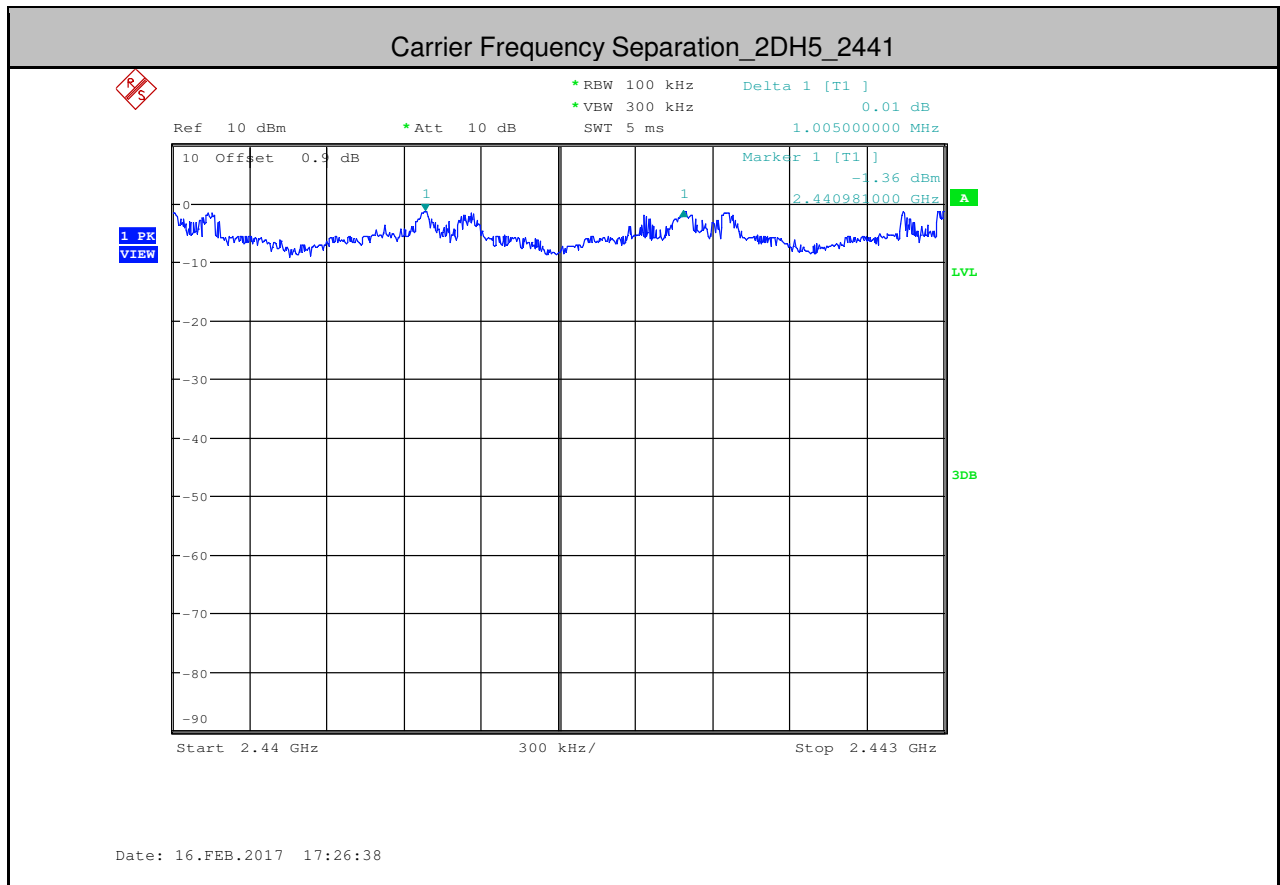

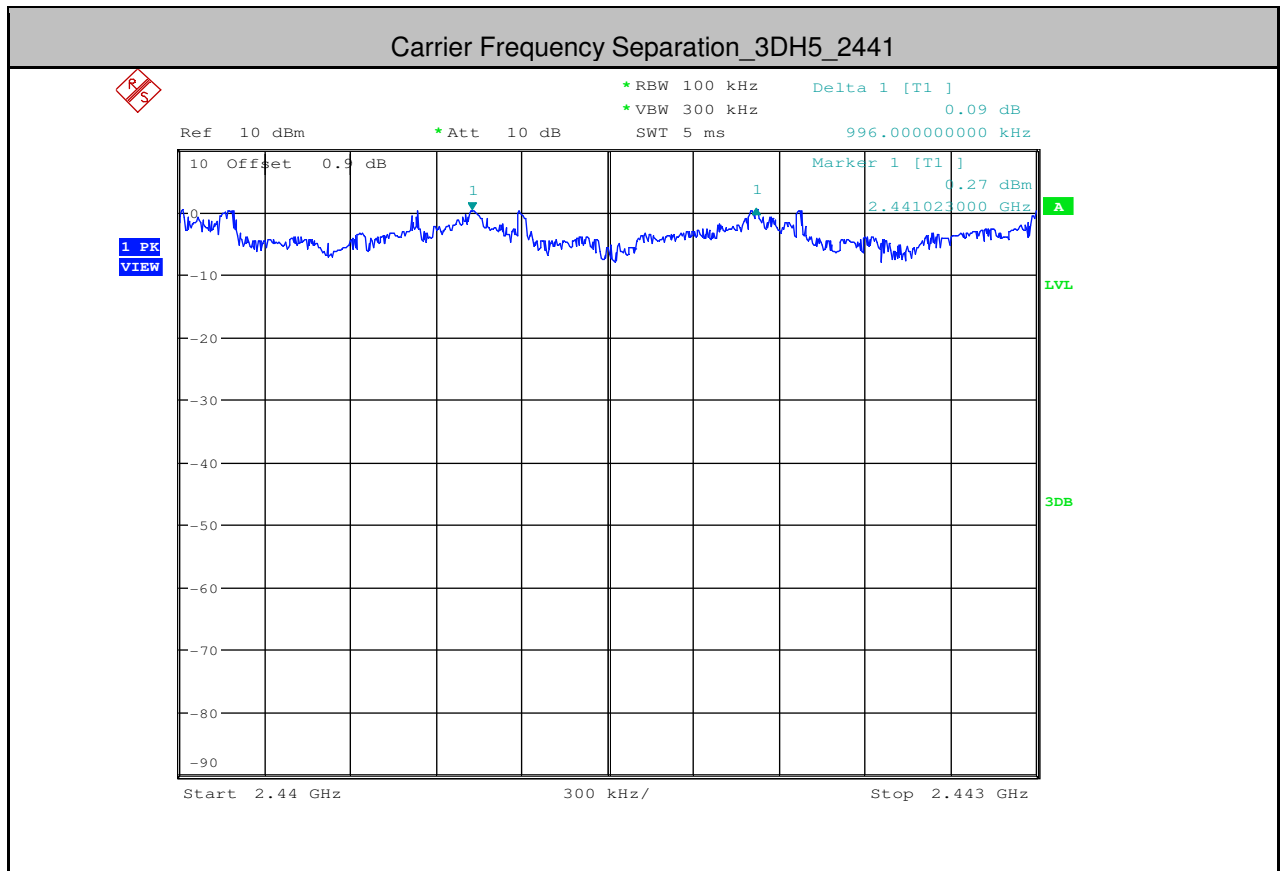





#### 4.Dwell Time


| Test Mode | Test Channel | Burst Width[ms/hop/ch] | Total | Dwell Time[s] | Limit[s] | Verdict |
|-----------|--------------|------------------------|-------|---------------|----------|---------|
| DH1       | 2402         | 0.23                   | 100   | 0.023         | <0.4     | PASS    |
| DH3       | 2402         | 0.24                   | 70    | 0.017         | <0.4     | PASS    |
| DH5       | 2402         | 0.34                   | 90    | 0.031         | <0.4     | PASS    |
| 2DH1      | 2402         | 0.27                   | 140   | 0.038         | <0.4     | PASS    |
| 2DH3      | 2402         | 0.28                   | 110   | 0.031         | <0.4     | PASS    |
| 2DH5      | 2402         | 0.29                   | 160   | 0.046         | <0.4     | PASS    |
| 3DH1      | 2402         | 0.28                   | 40    | 0.011         | <0.4     | PASS    |
| 3DH3      | 2402         | 0.28                   | 130   | 0.036         | <0.4     | PASS    |
| 3DH5      | 2402         | 0.28                   | 120   | 0.034         | <0.4     | PASS    |



TEST PLOT



Dwell Time\_DH1\_2402

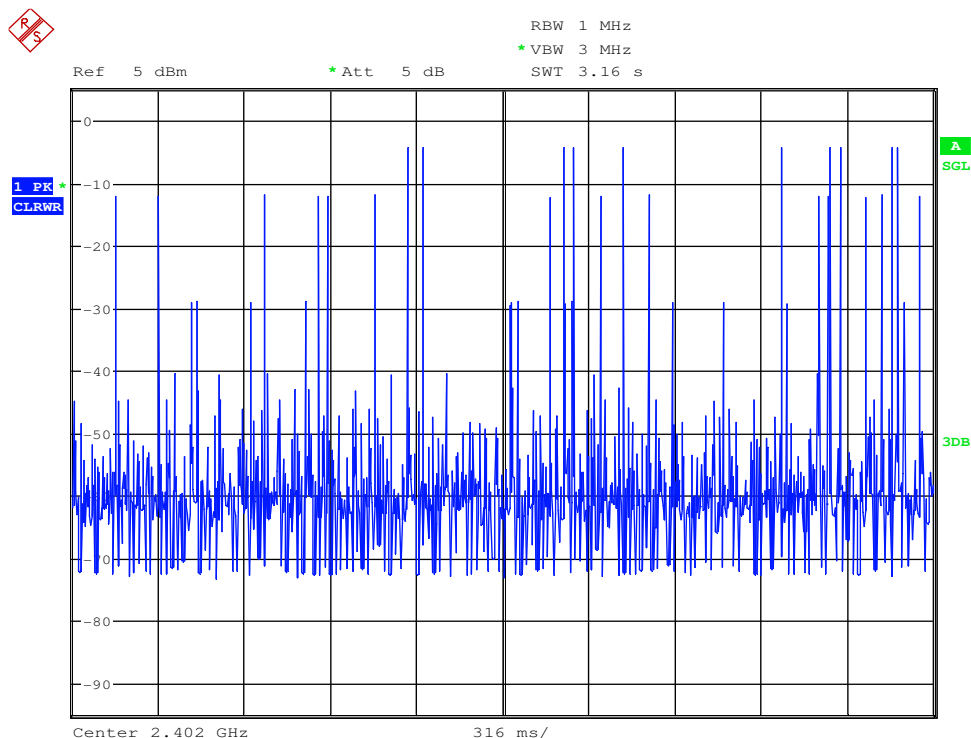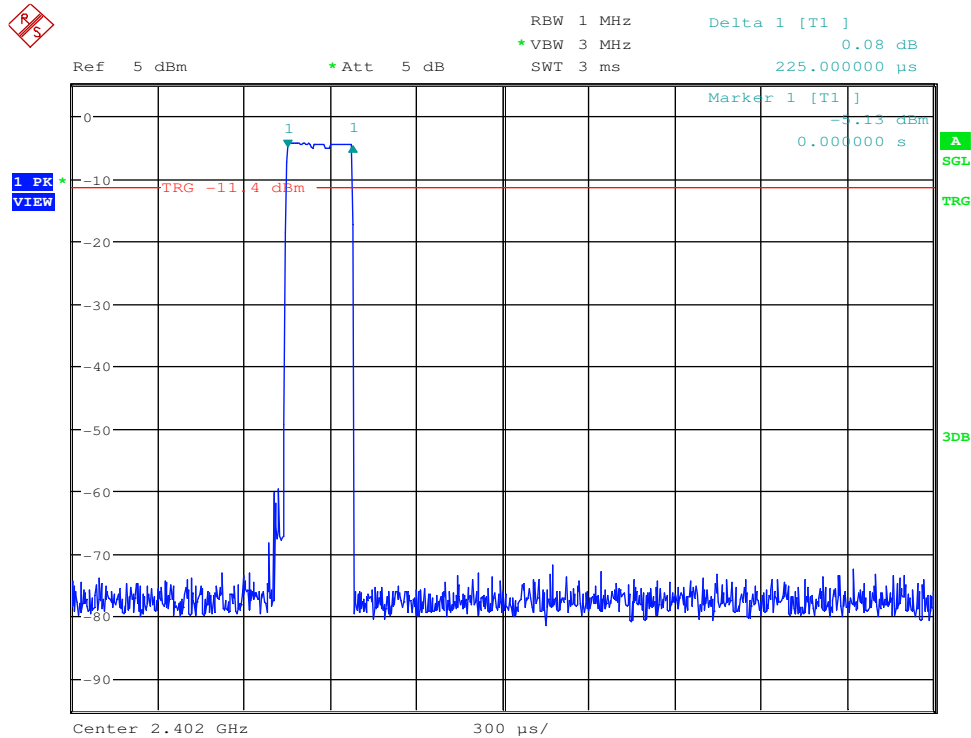


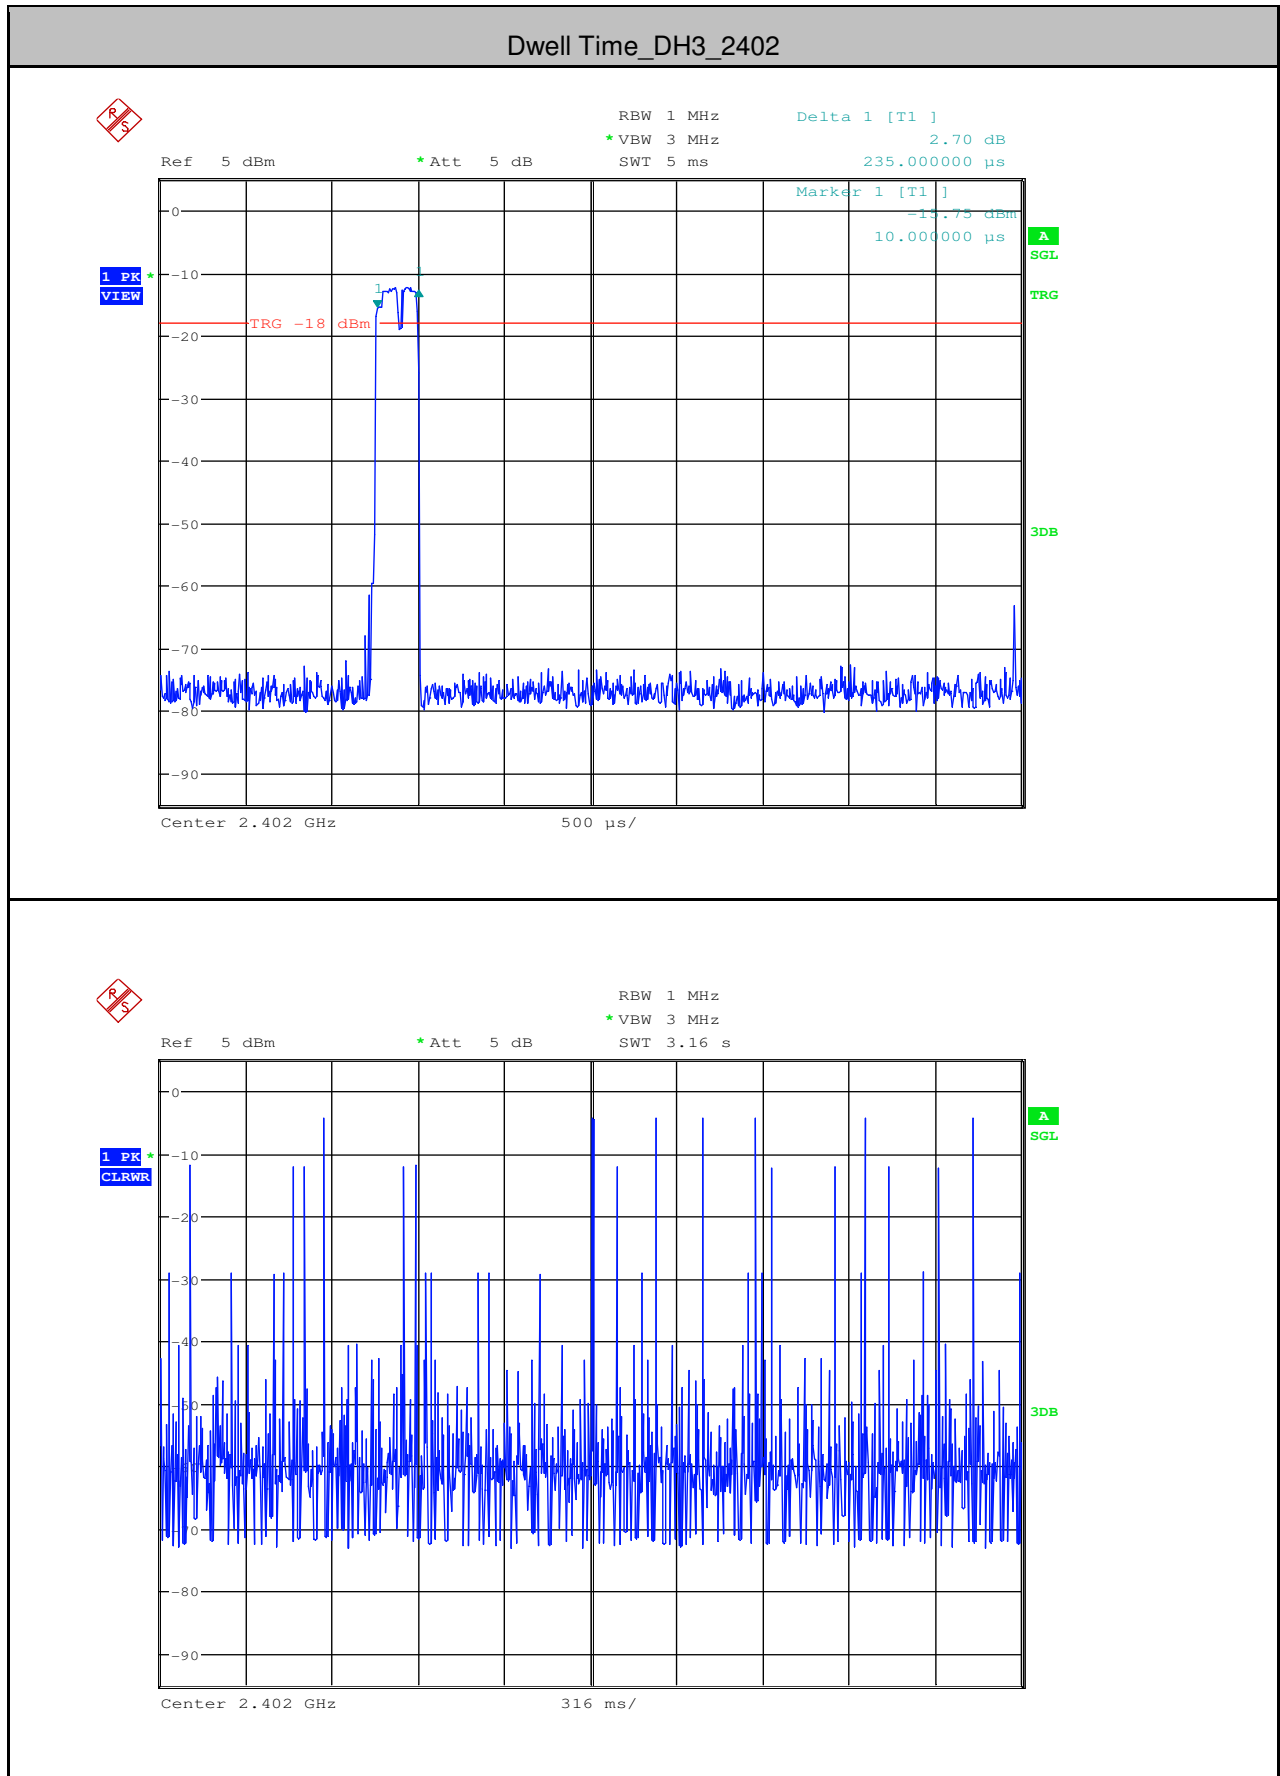






Dwell Time\_DH5\_2402

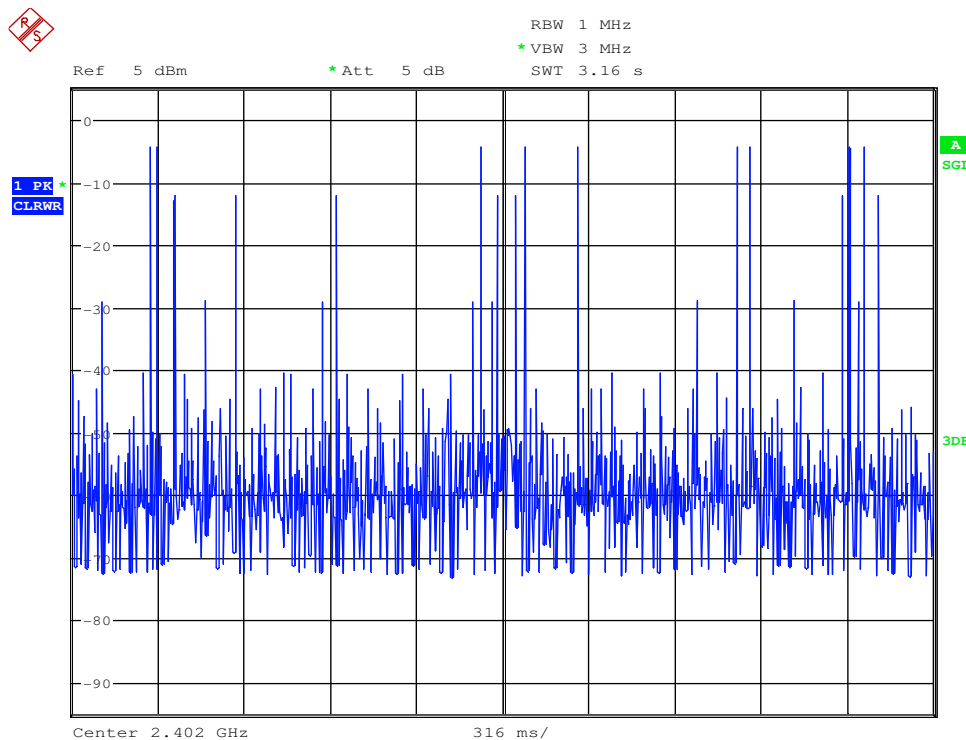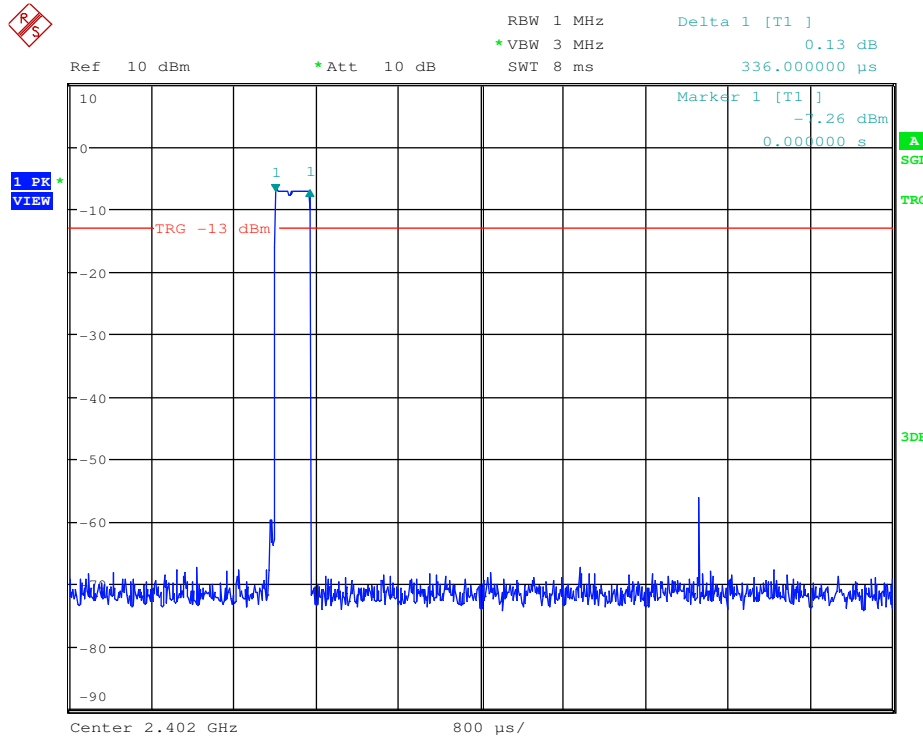


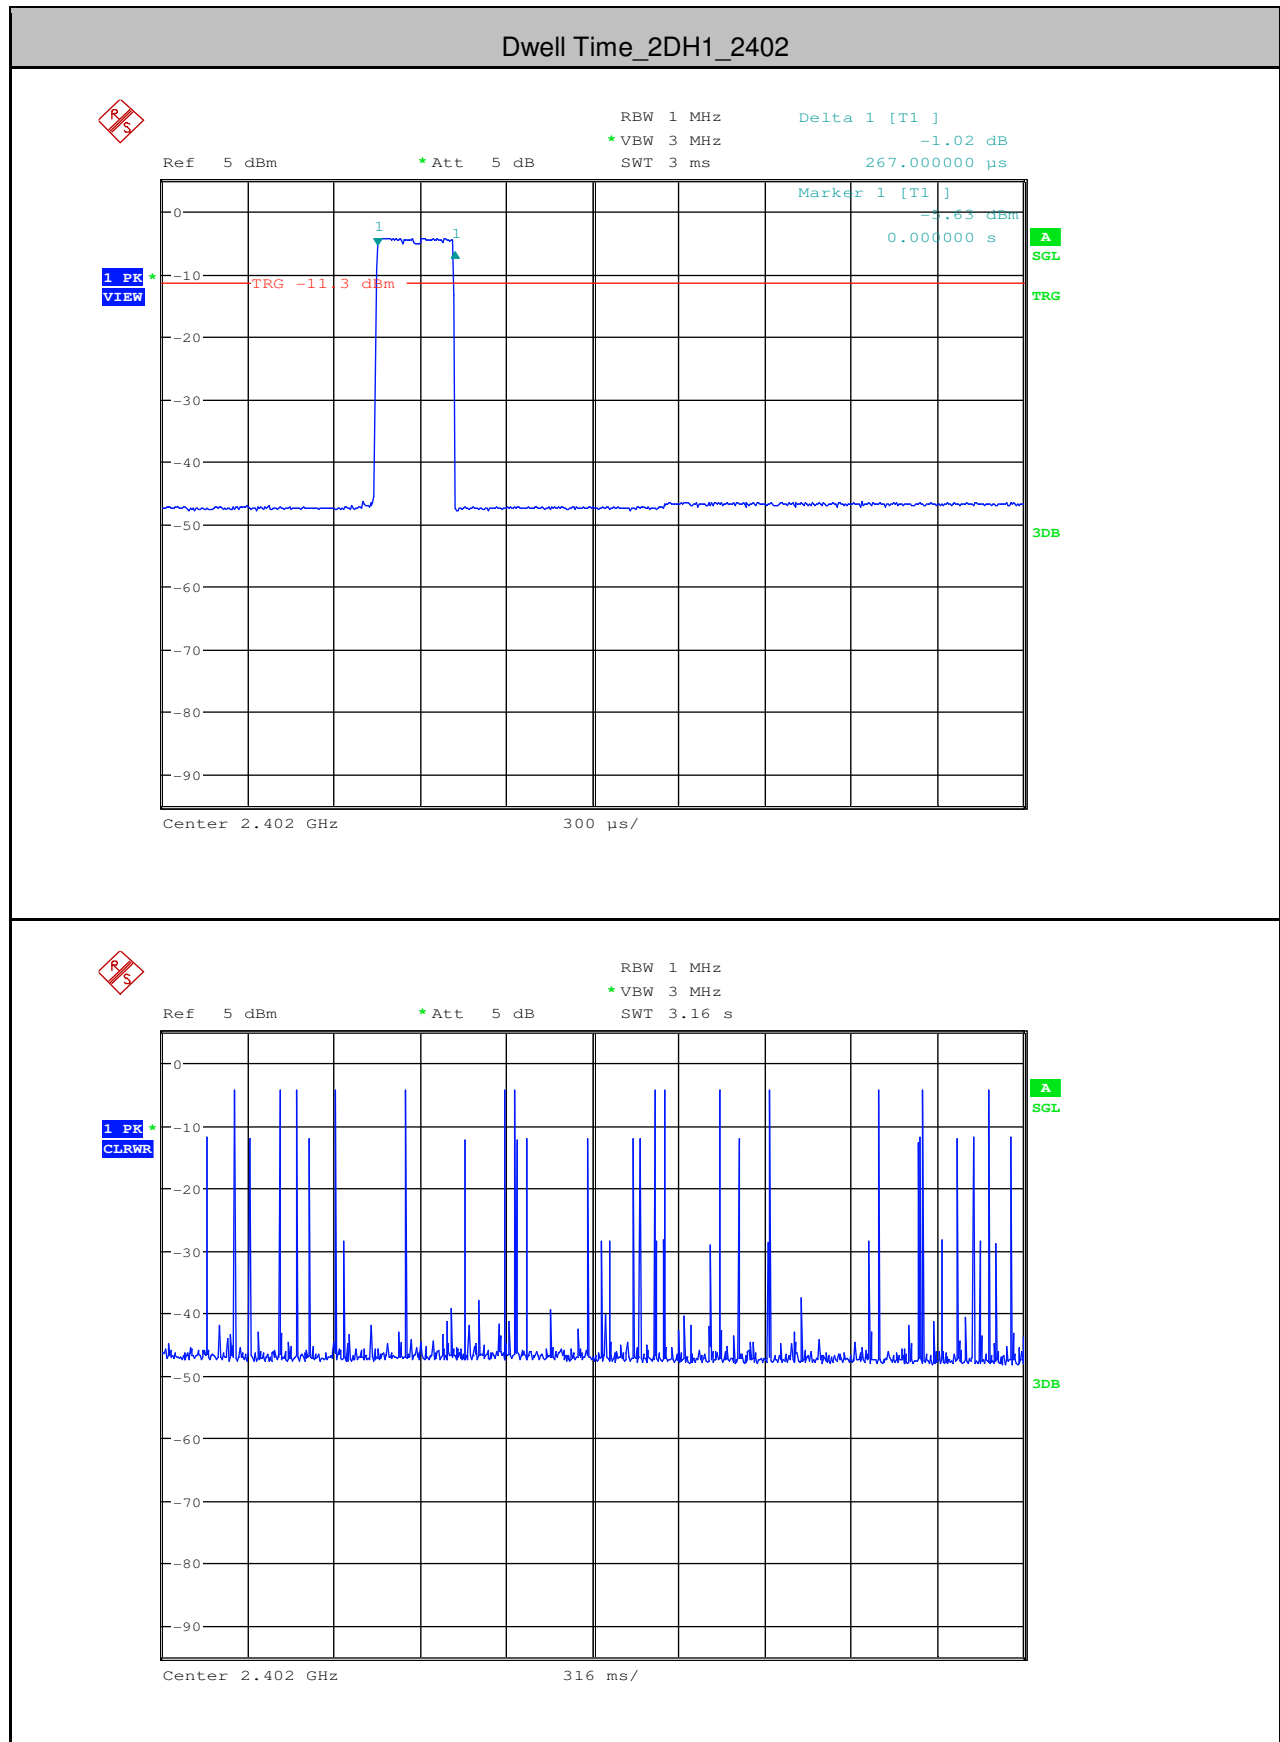


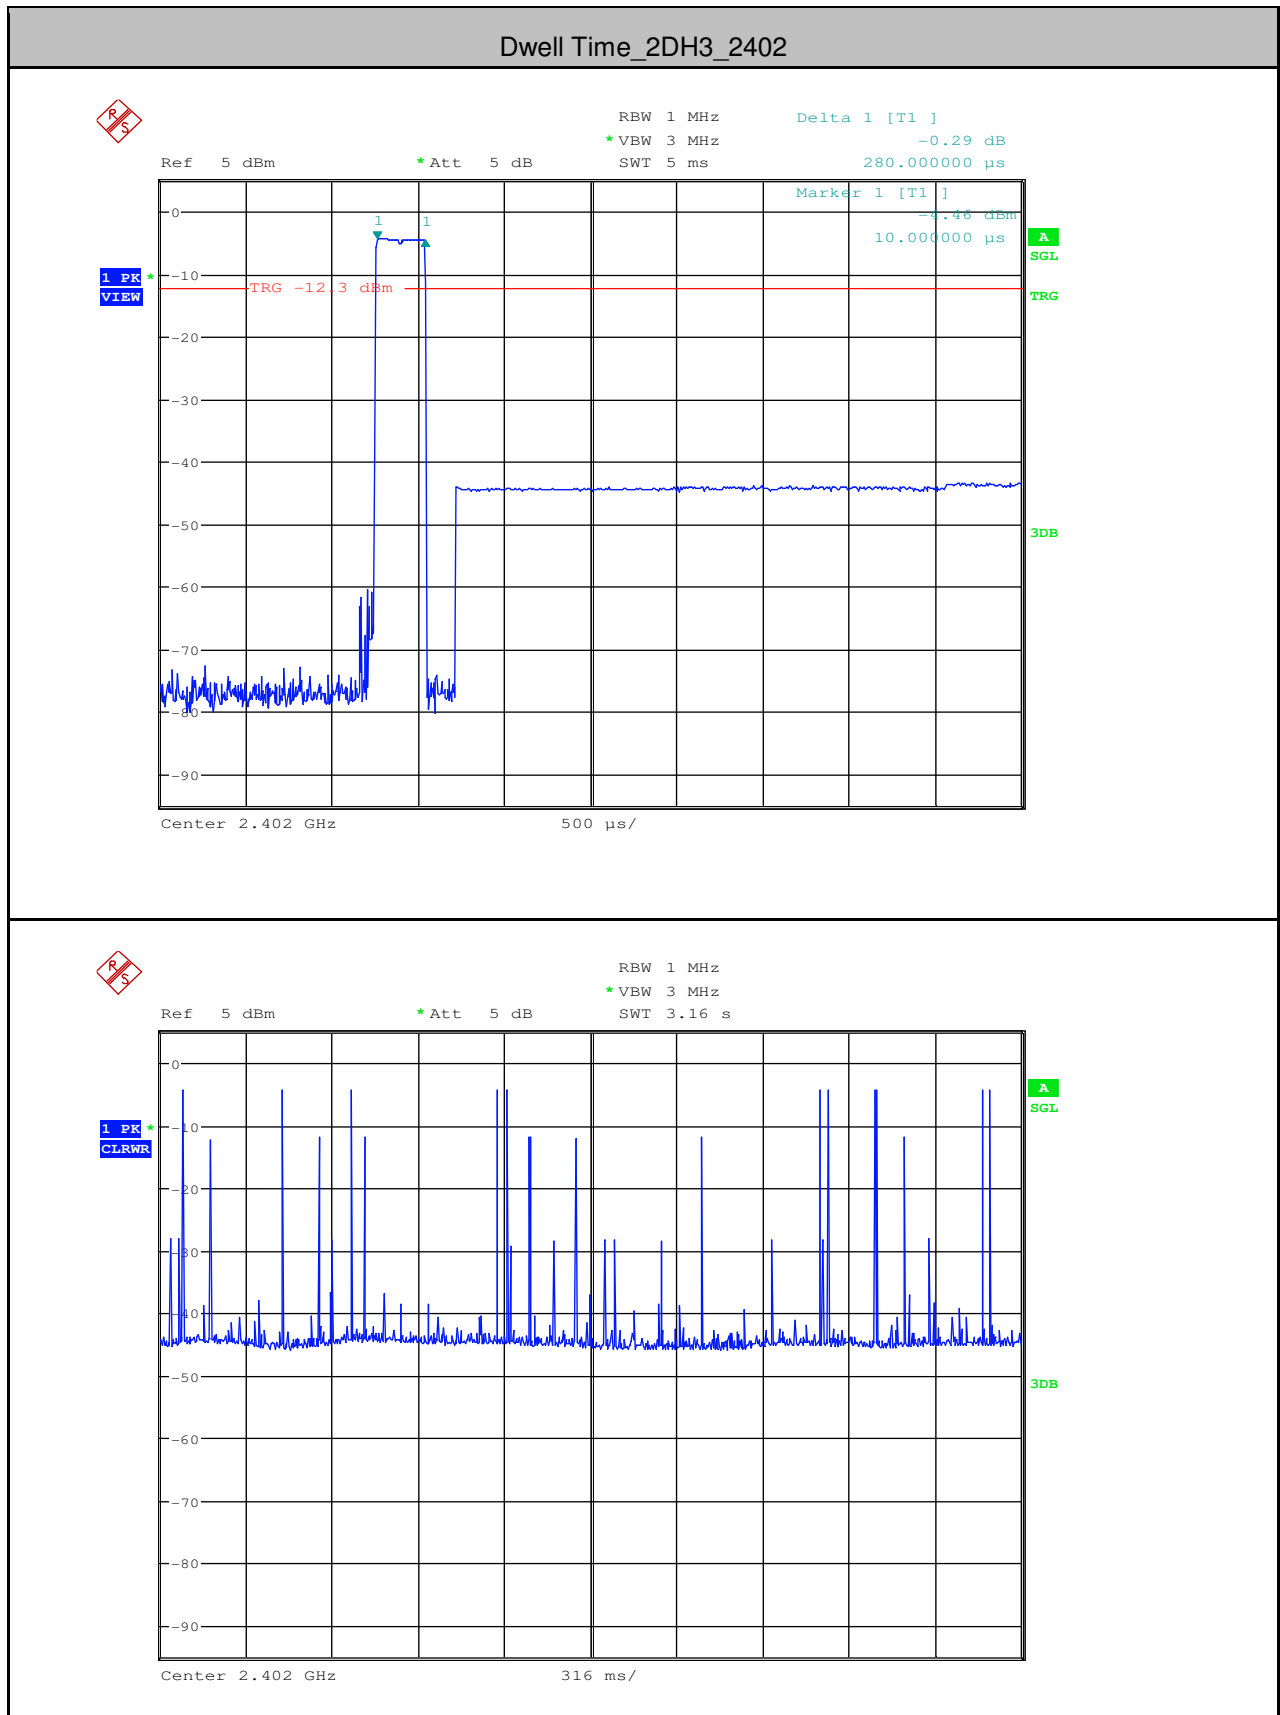

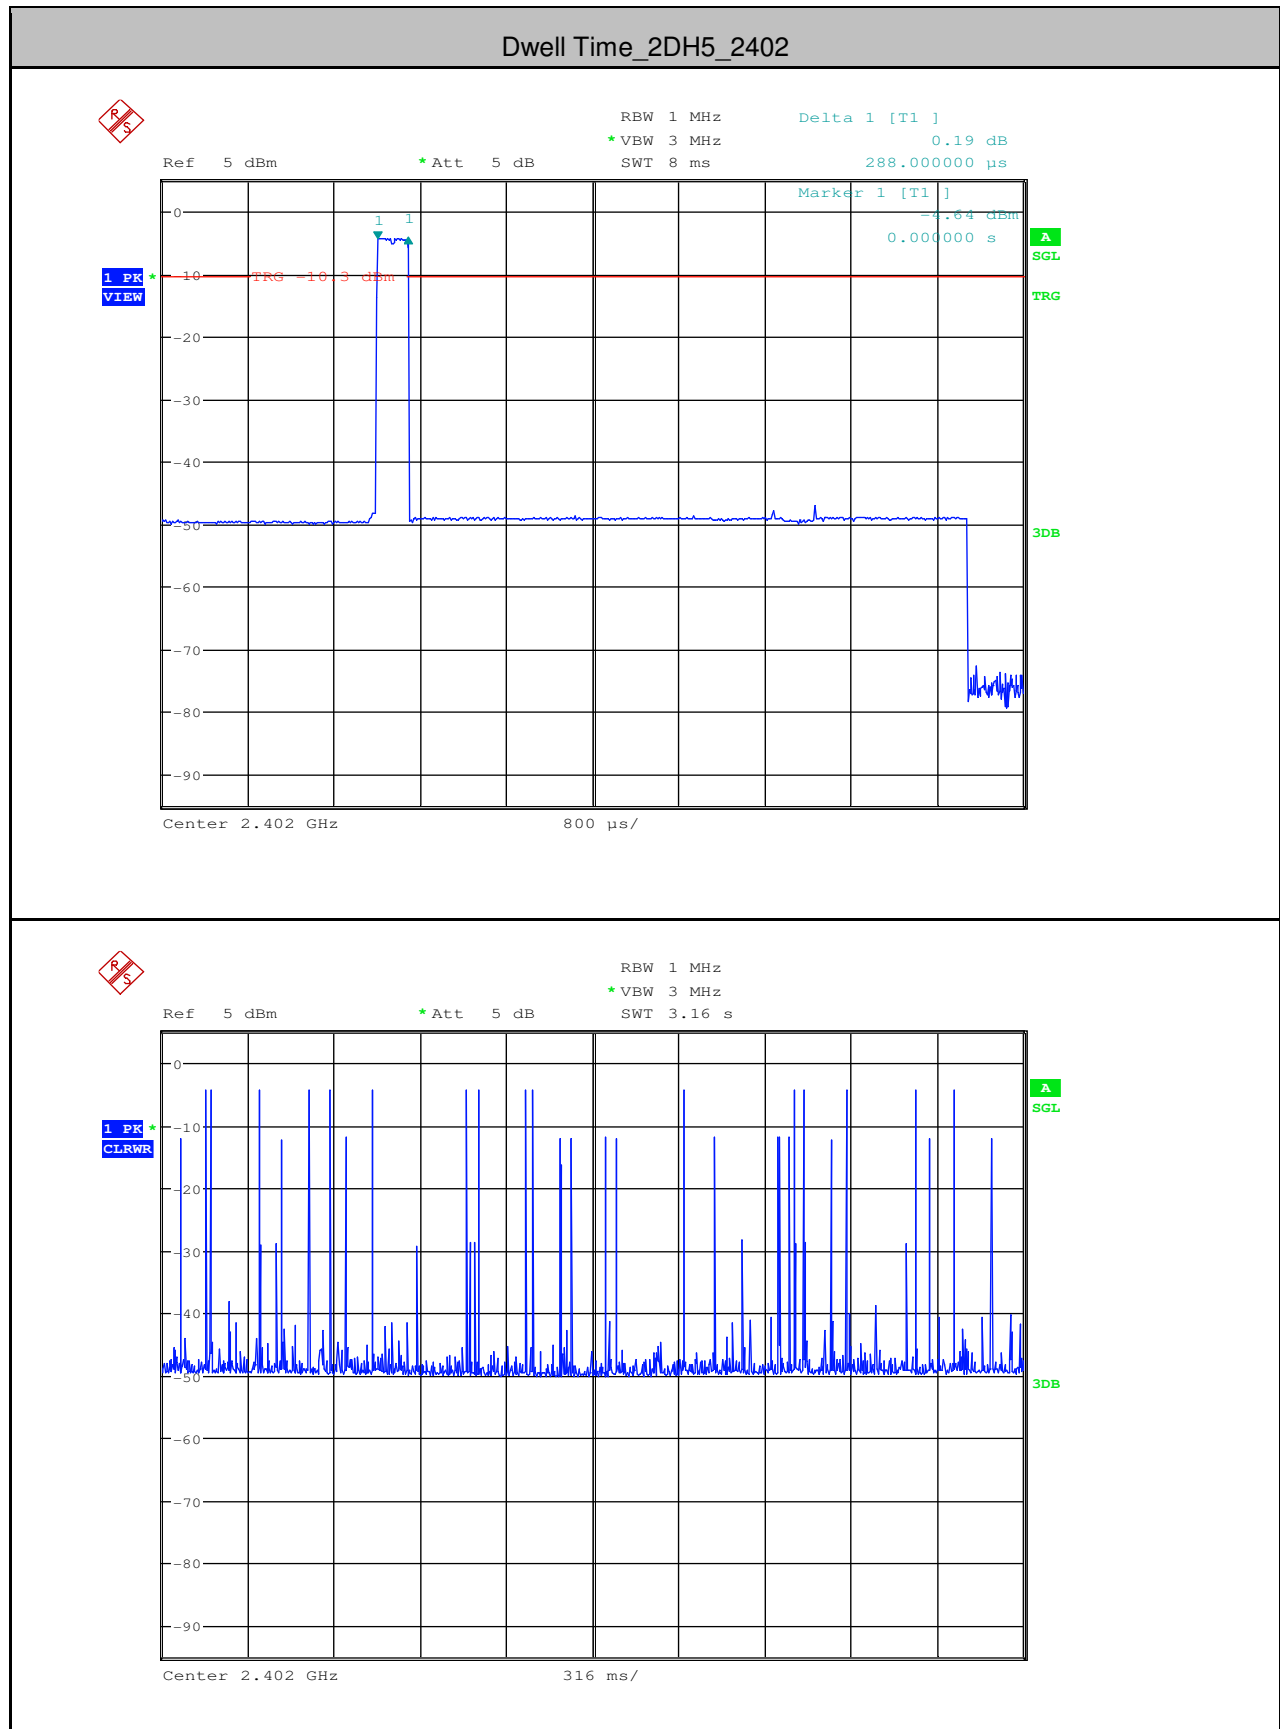

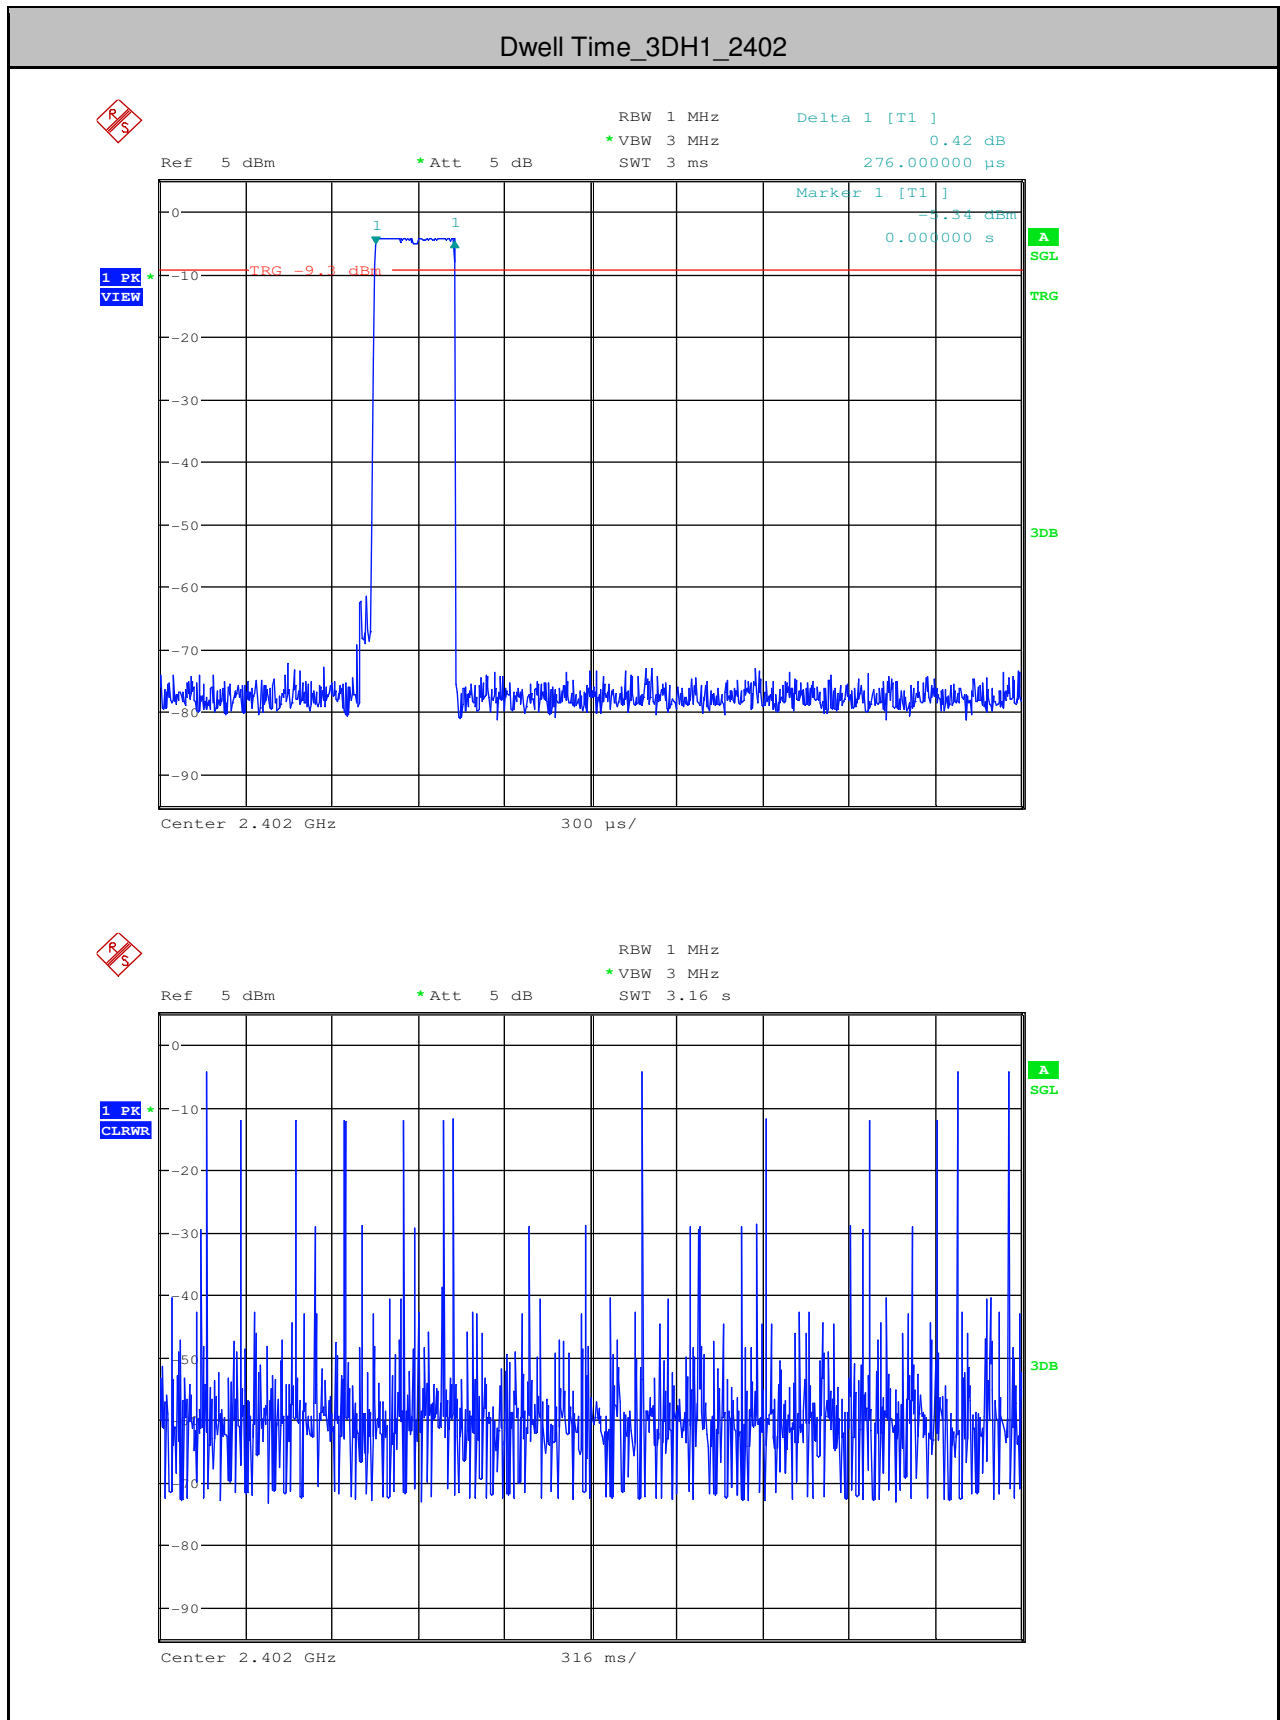

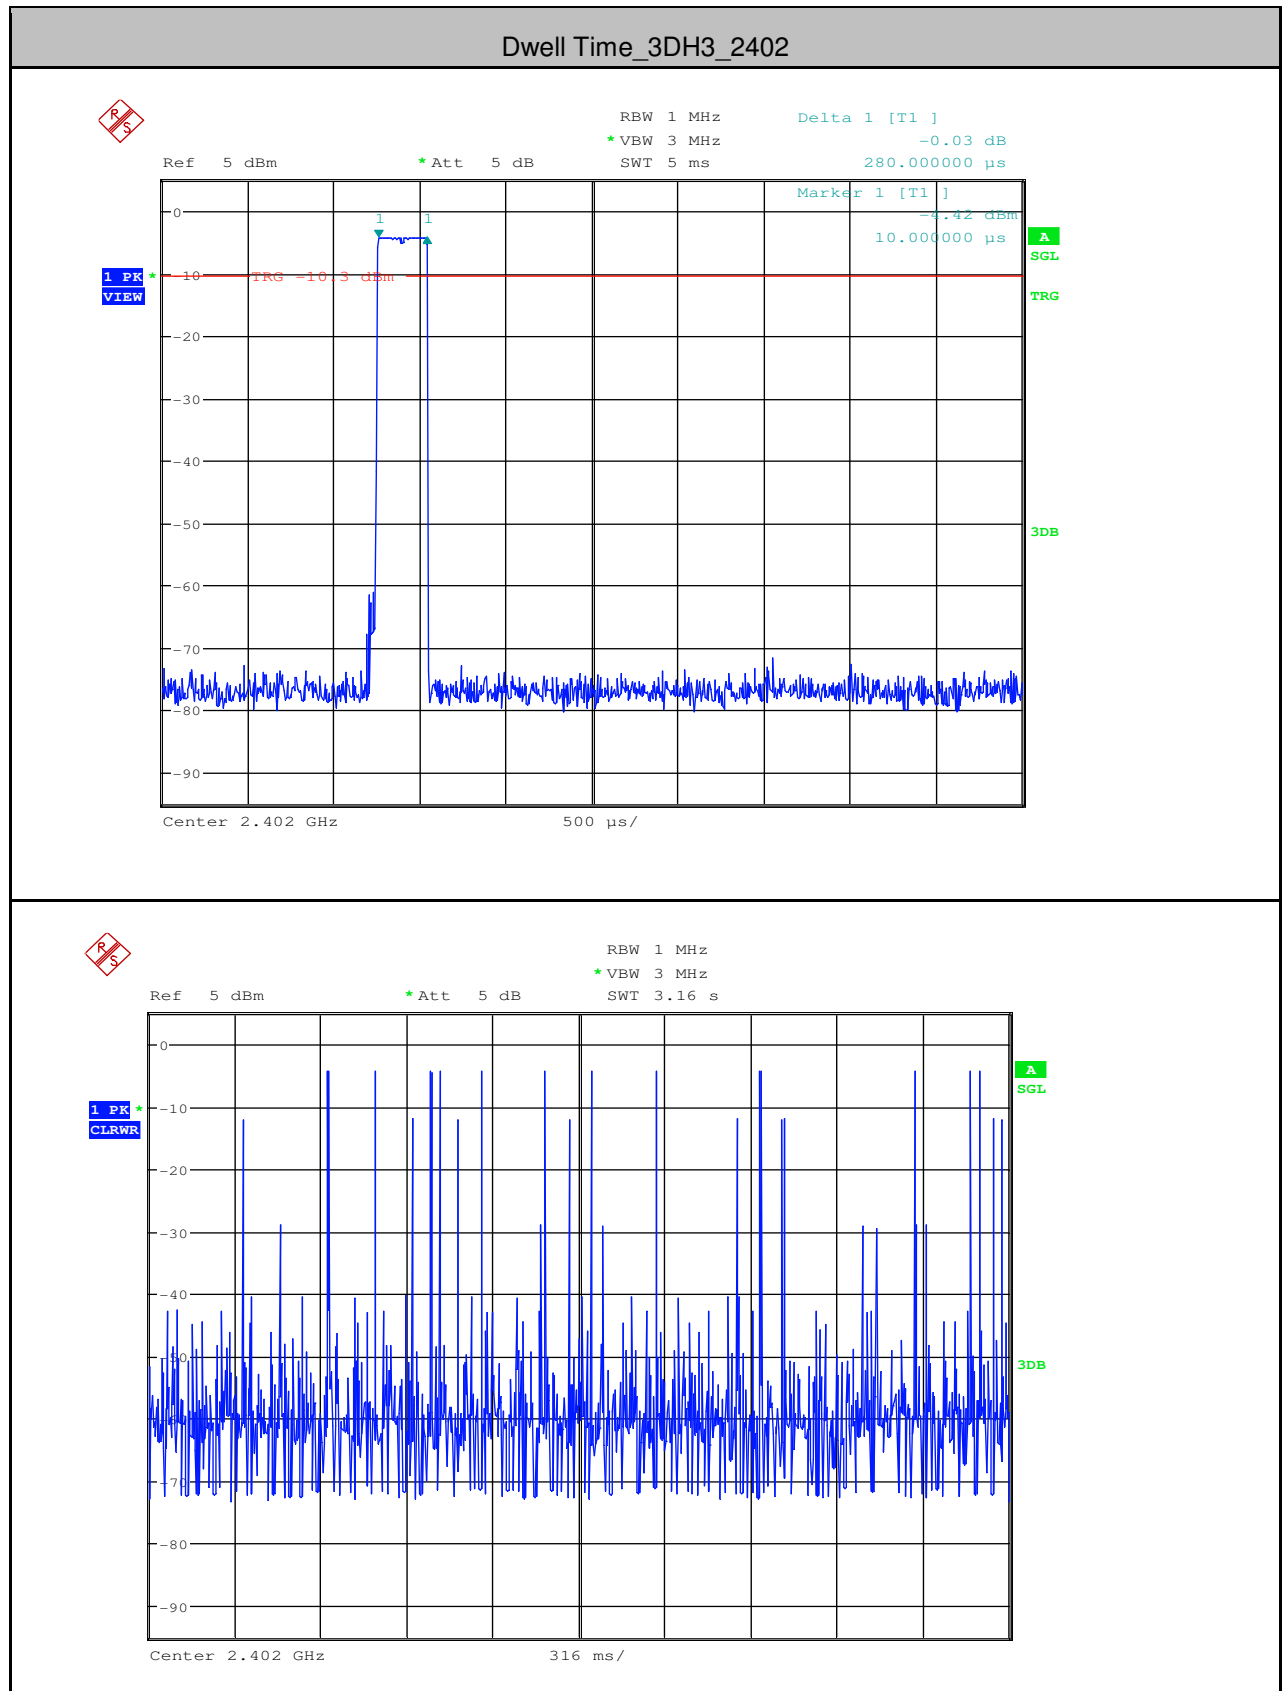


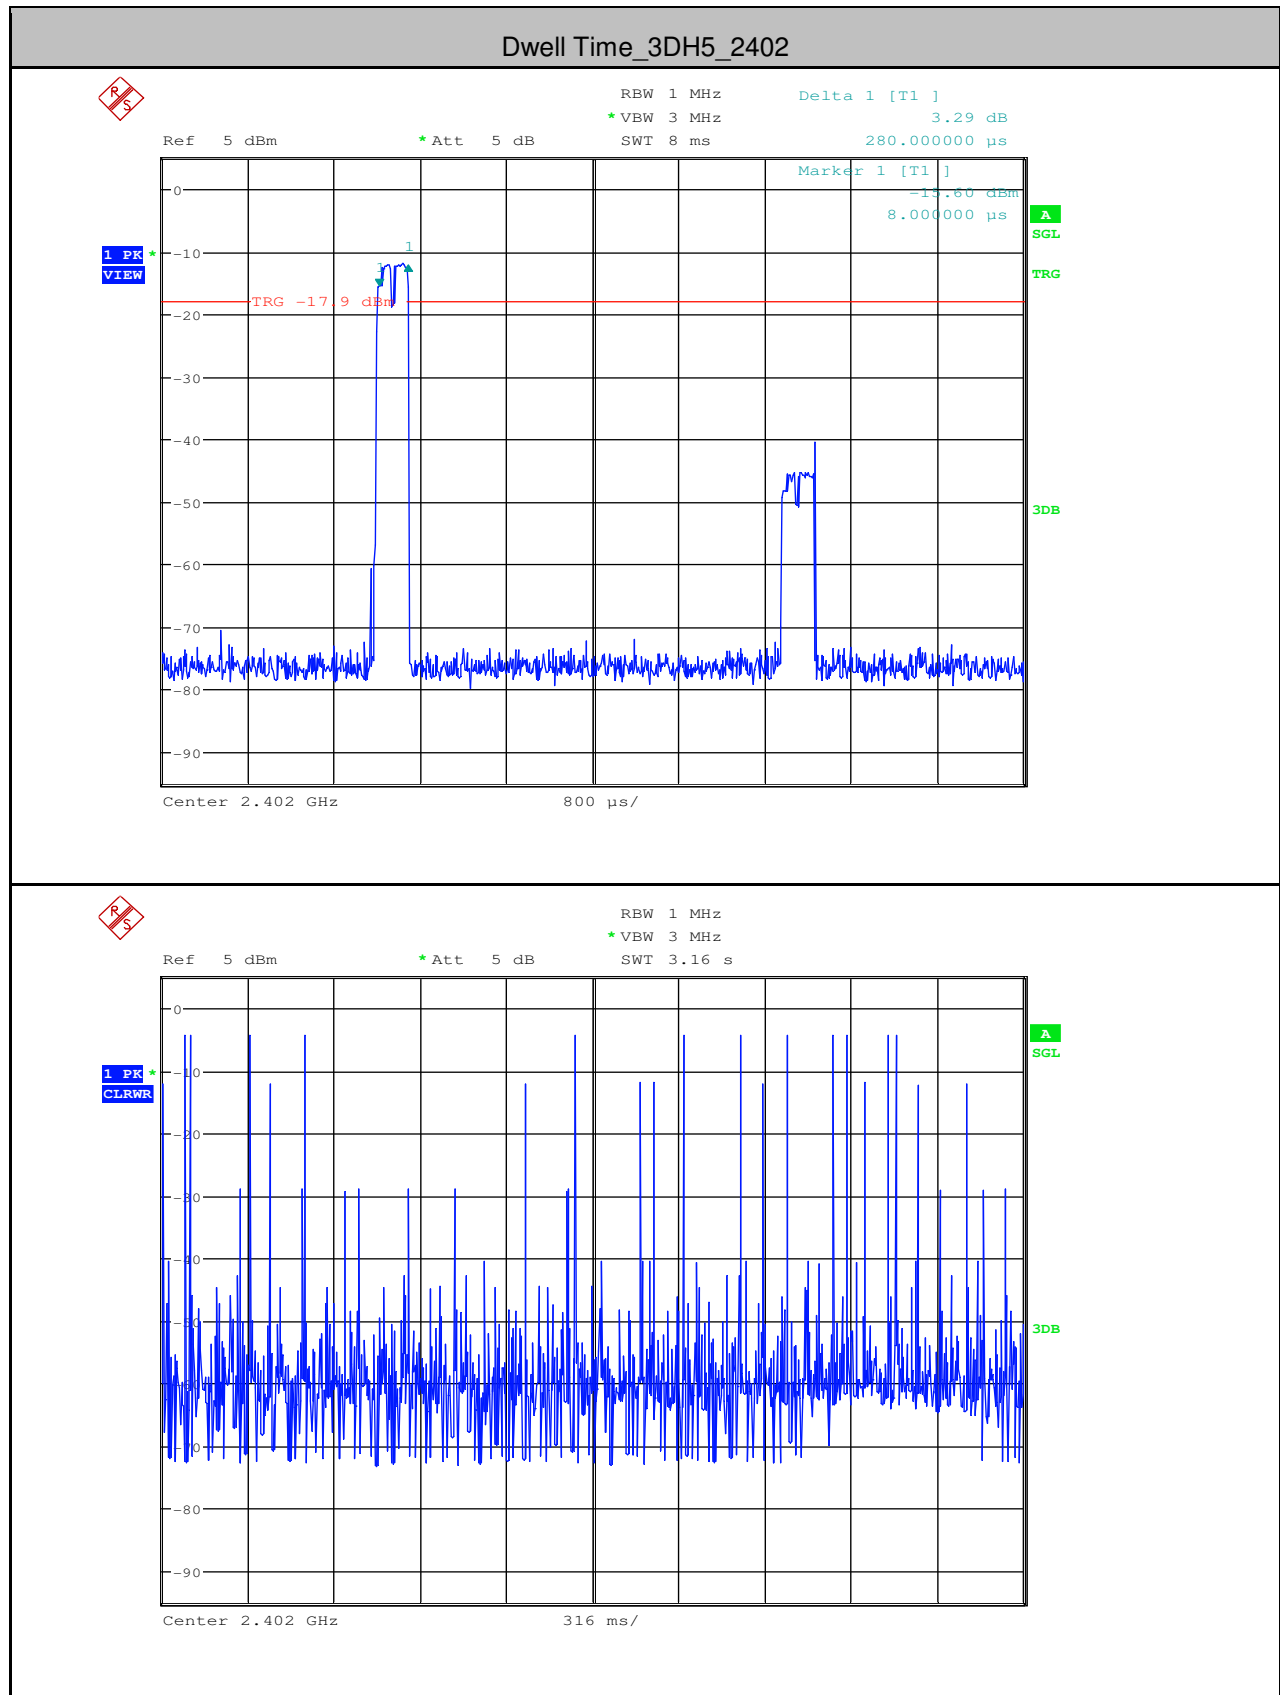




#### 5.Hopping Channel Number

| Test Mode | Test Channel | Number of Hopping Channel[N] | Limit[N]  | Verdict |
|-----------|--------------|------------------------------|-----------|---------|
| DH5       | 2402         | 79                           | $\geq 15$ | PASS    |
| 2DH5      | 2402         | 79                           | $\geq 15$ | PASS    |
| 3DH5      | 2402         | 79                           | $\geq 15$ | PASS    |

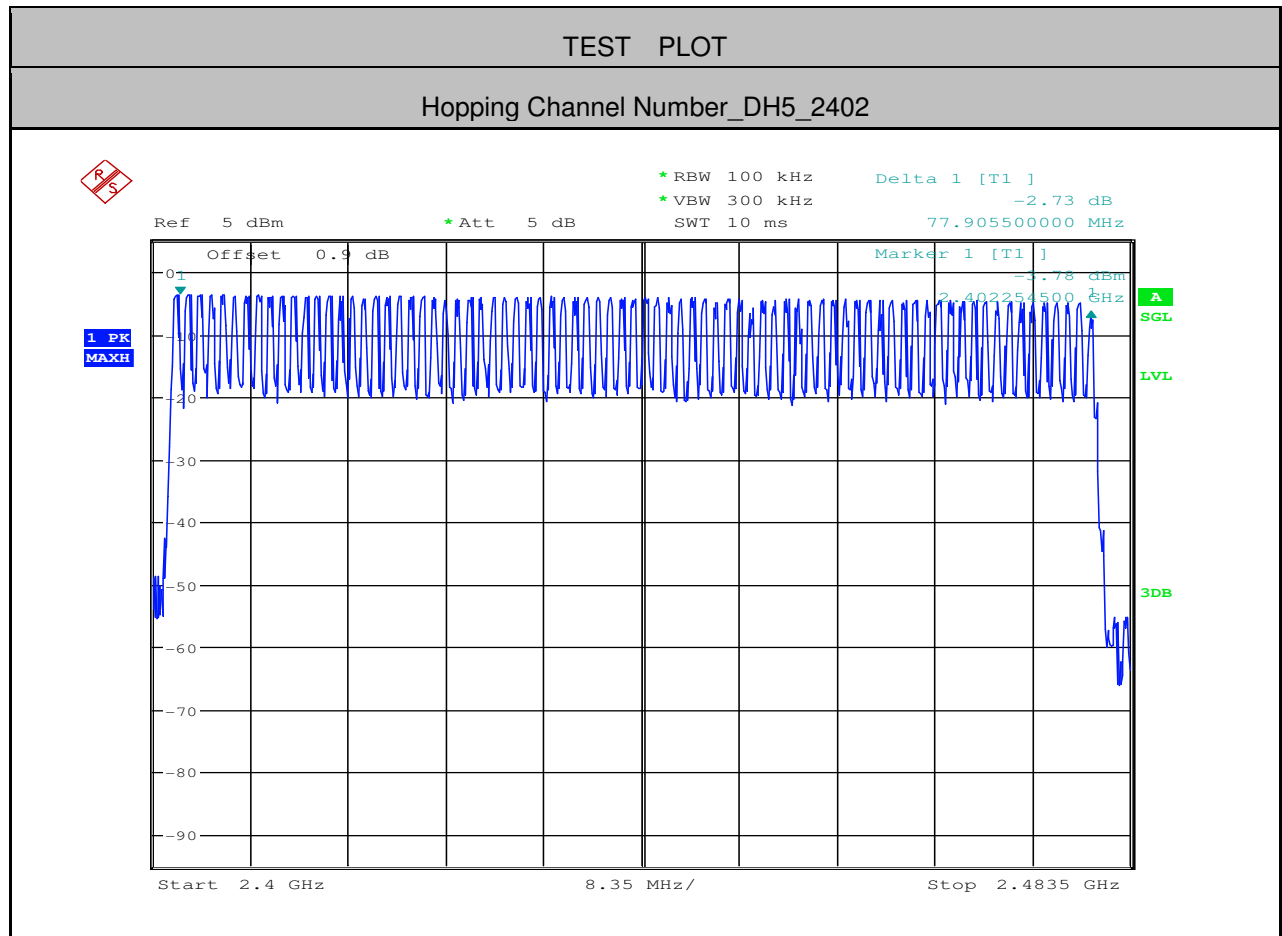




Hopping Channel Number\_2DH5\_2402

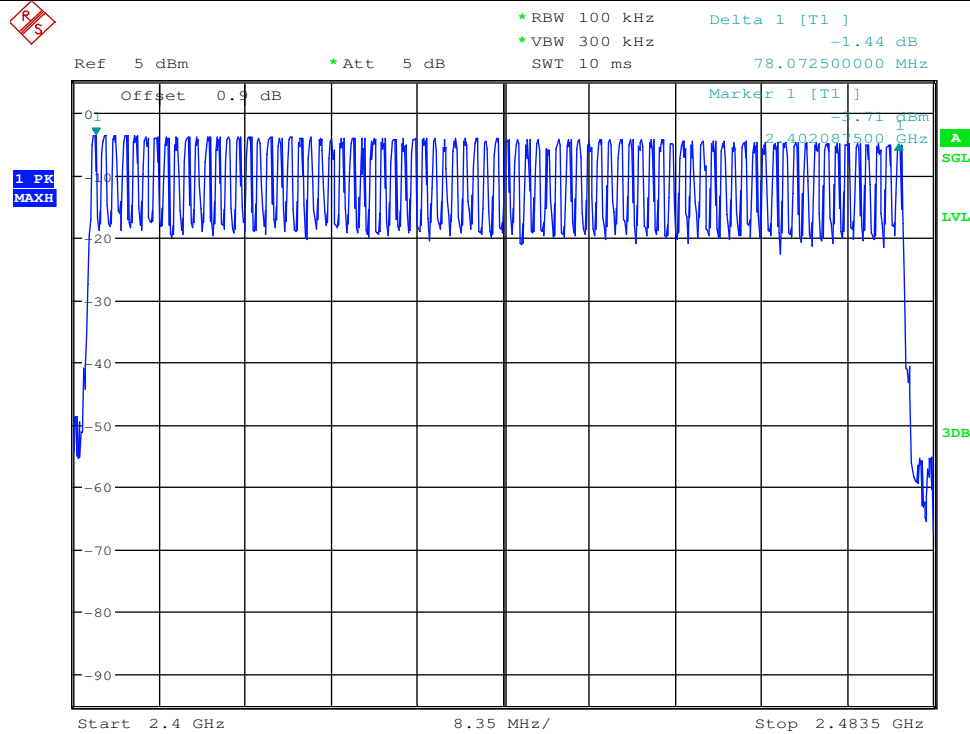

Hopping Channel Number\_3DH5\_2402

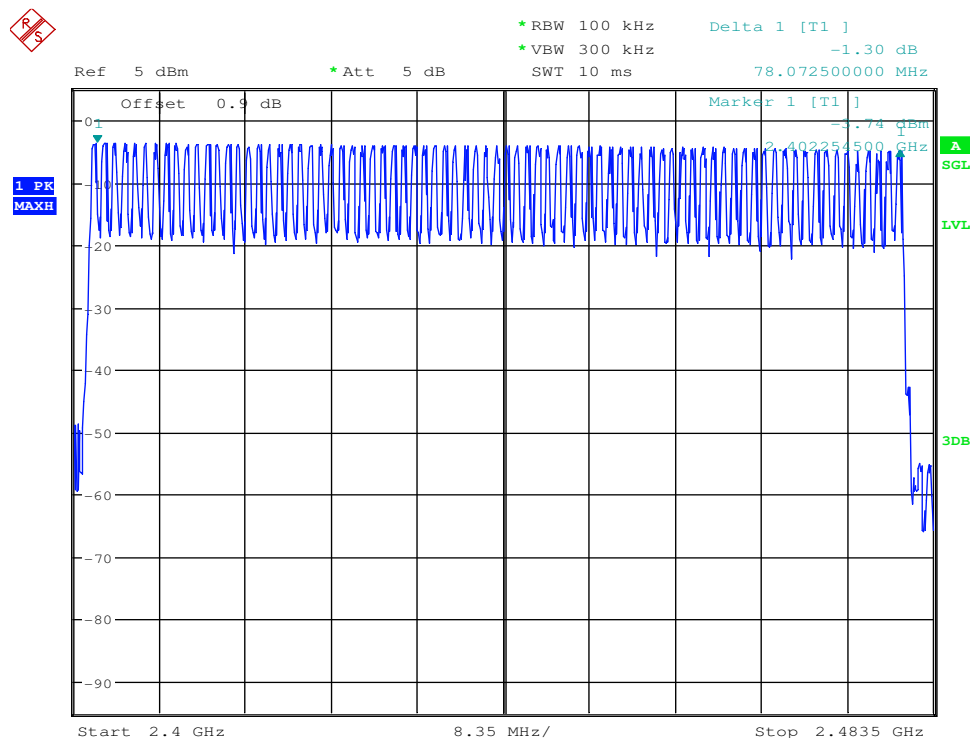




## 6. Band-edge for RF Conducted Emissions

| Test Mode | Test Channel | Hopping | Carrier Power[dBm] | Max. Spurious Level [dBm] | Limit[dBm] | Verdict |
|-----------|--------------|---------|--------------------|---------------------------|------------|---------|
| DH5       | 2402         | Off     | -3.950             | -53.366                   | <-23.95    | PASS    |
| DH5       | 2480         | Off     | -5.060             | -63.874                   | <-25.06    | PASS    |
| 2DH5      | 2402         | Off     | -3.650             | -53.966                   | <-23.65    | PASS    |
| 2DH5      | 2480         | Off     | -5.080             | -64.473                   | <-25.08    | PASS    |
| 3DH5      | 2402         | Off     | -3.890             | -63.607                   | <-23.89    | PASS    |
| 3DH5      | 2480         | Off     | -5.070             | -64.283                   | <-25.07    | PASS    |
| DH5       | 2402         | On      | -3.570             | -52.862                   | <-23.57    | PASS    |
| DH5       | 2480         | On      | -4.930             | -54.874                   | <-24.93    | PASS    |
| 2DH5      | 2402         | On      | -3.640             | -52.934                   | <-23.64    | PASS    |
| 2DH5      | 2480         | On      | -4.960             | -55.166                   | <-24.96    | PASS    |
| 3DH5      | 2402         | On      | -3.520             | -52.662                   | <-23.52    | PASS    |
| 3DH5      | 2480         | On      | -4.800             | -54.962                   | <-24.8     | PASS    |




TEST PLOT


Band-edge for RF Conducted Emissions\_DH5\_2402\_Hopping Off

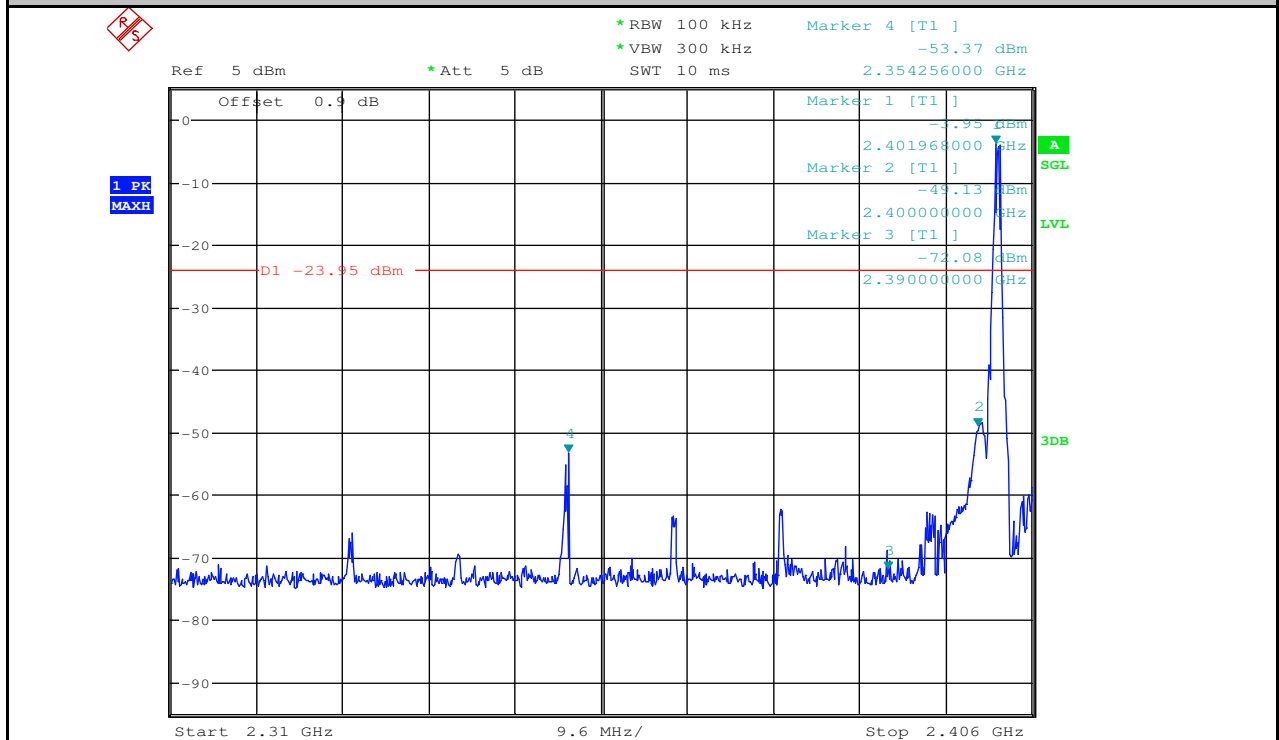


Band-edge for RF Conducted Emissions\_DH5\_2480\_Hopping Off

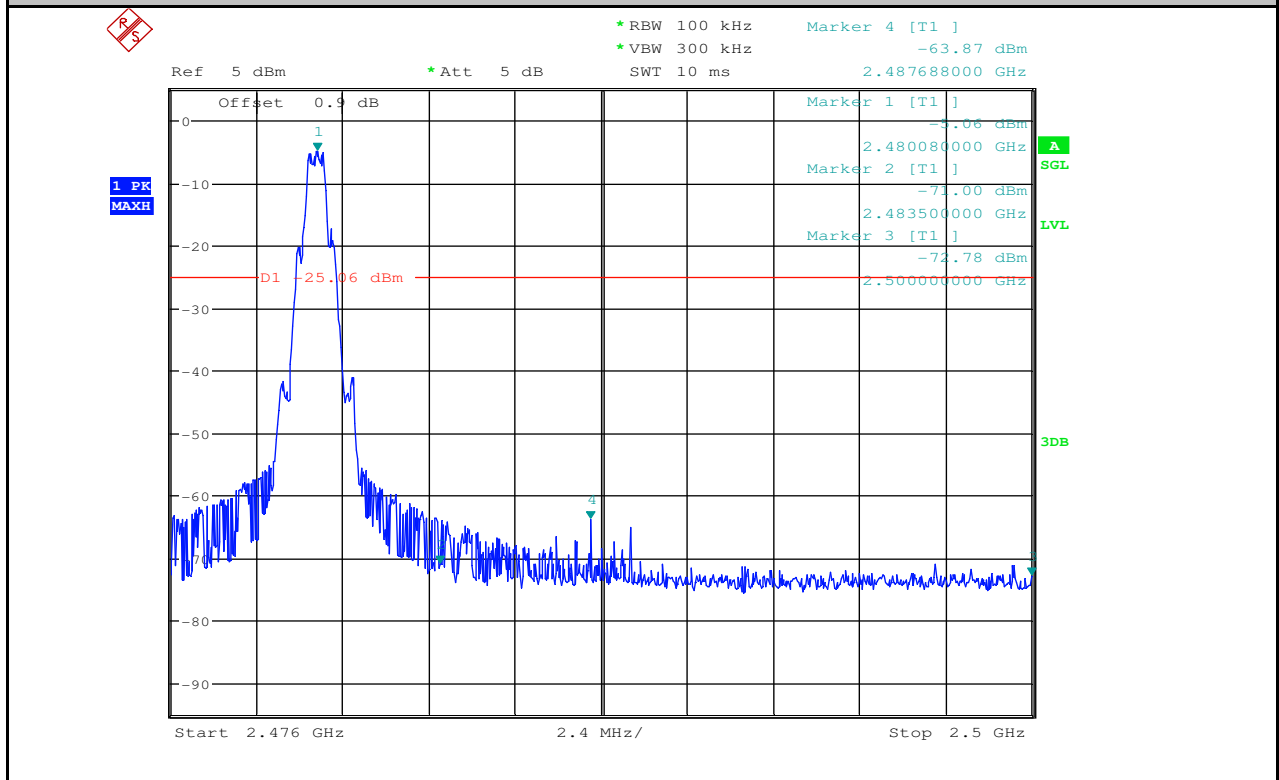

**Band-edge for RF Conducted Emissions\_2DH5\_2402\_Hopping Off**

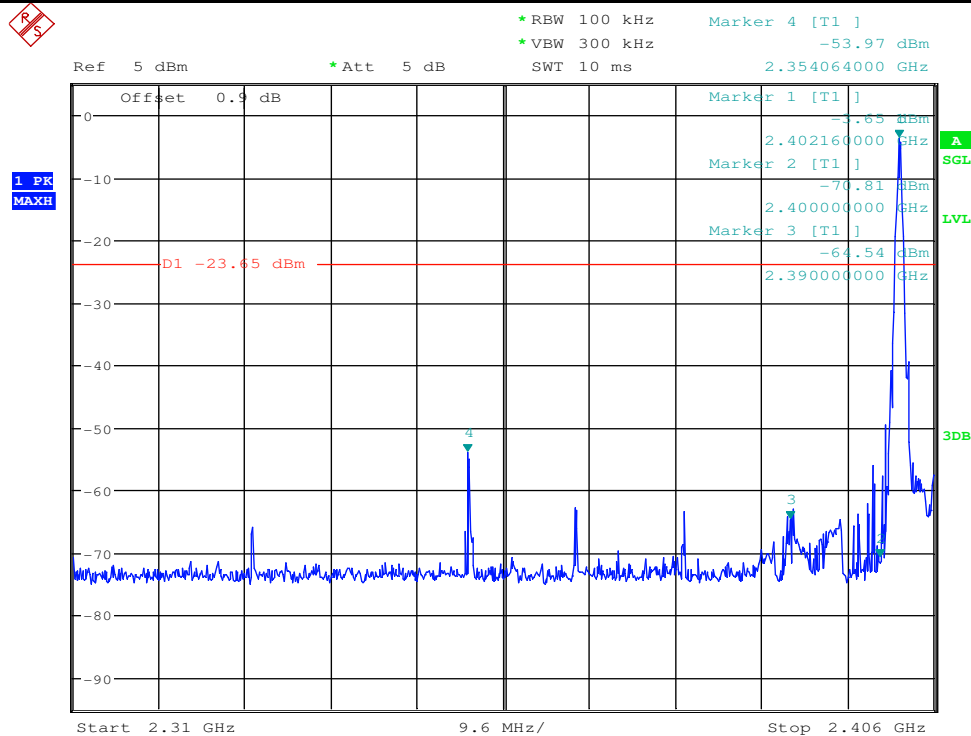


**Band-edge for RF Conducted Emissions\_2DH5\_2480\_Hopping Off**

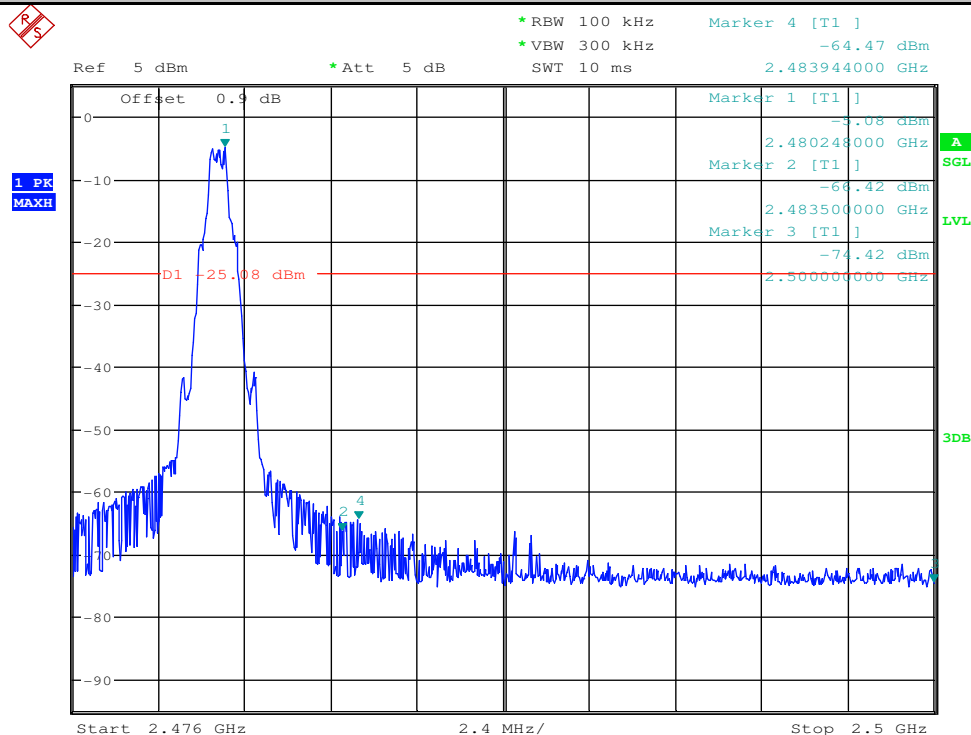




Band-edge for RF Conducted Emissions\_3DH5\_2402\_Hopping Off

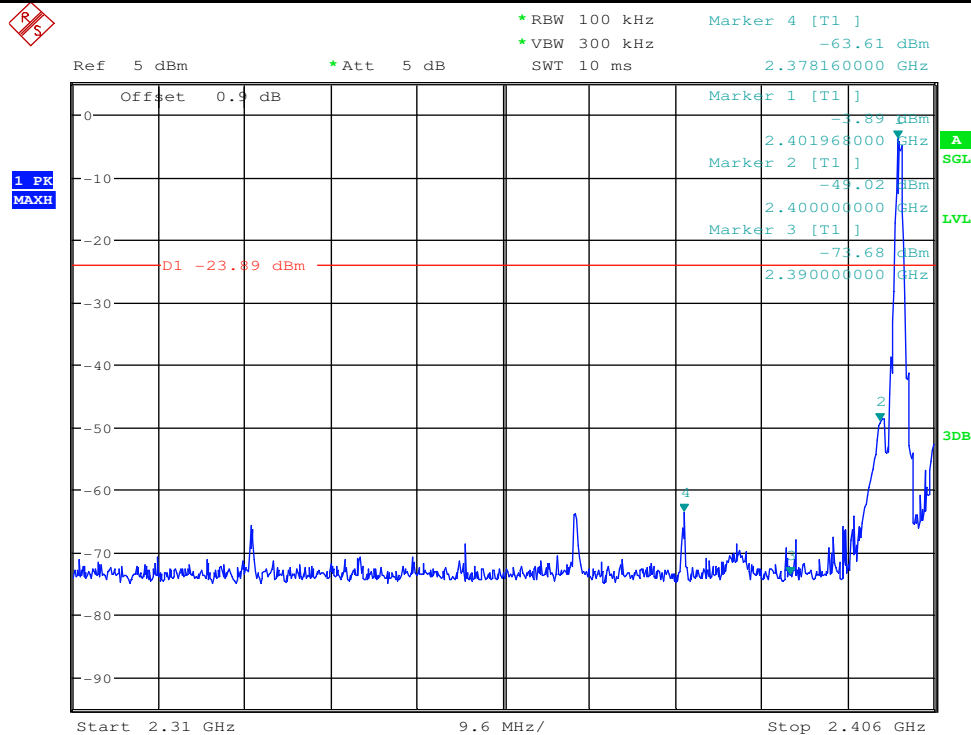


Band-edge for RF Conducted Emissions\_3DH5\_2480\_Hopping Off

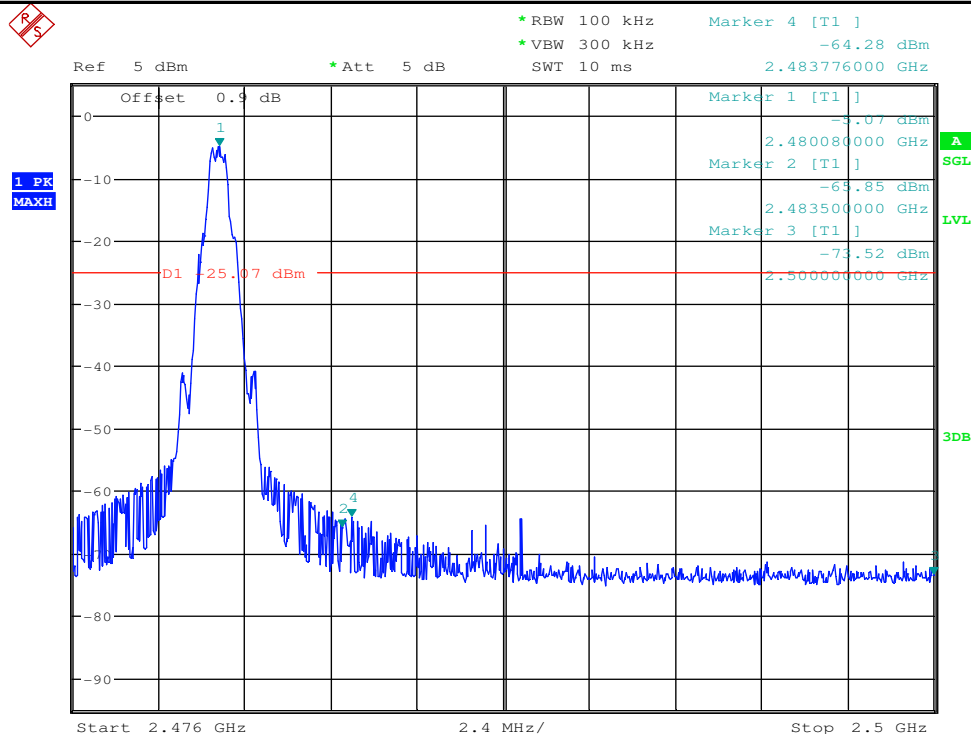




Band-edge for RF Conducted Emissions\_DH5\_2402\_Hopping On

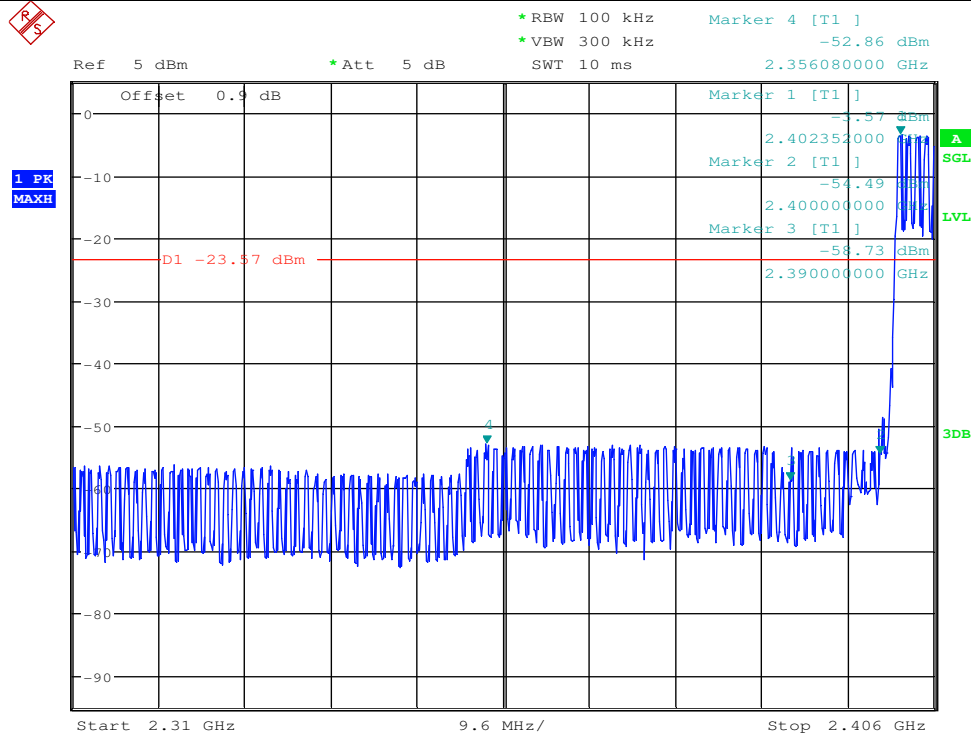


Band-edge for RF Conducted Emissions\_DH5\_2480\_Hopping On

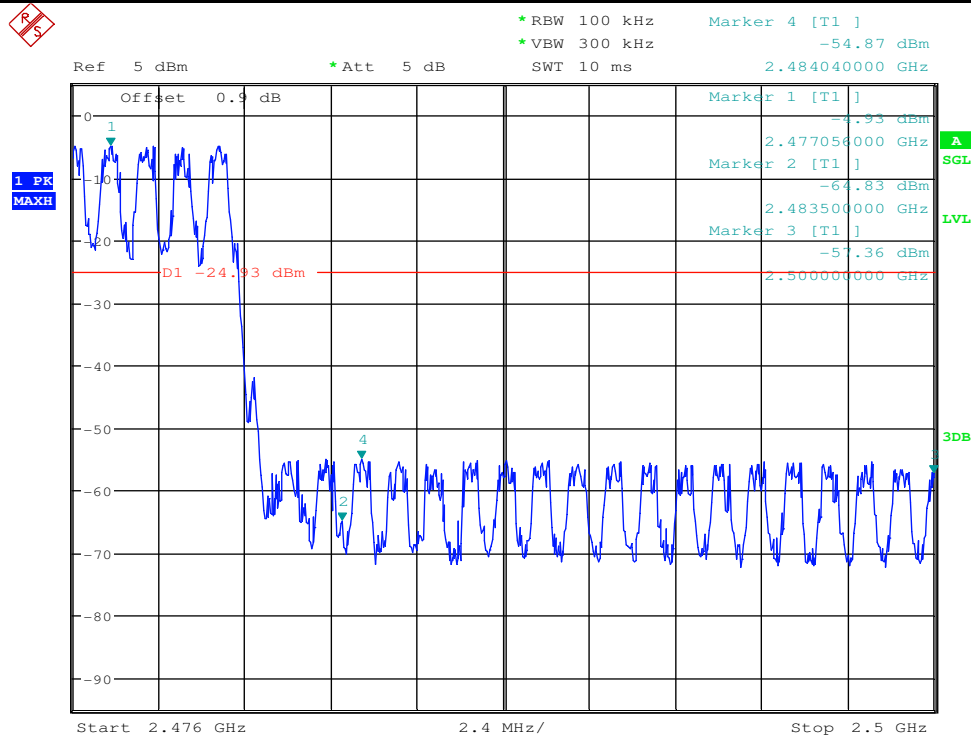




Band-edge for RF Conducted Emissions\_2DH5\_2402\_Hopping On

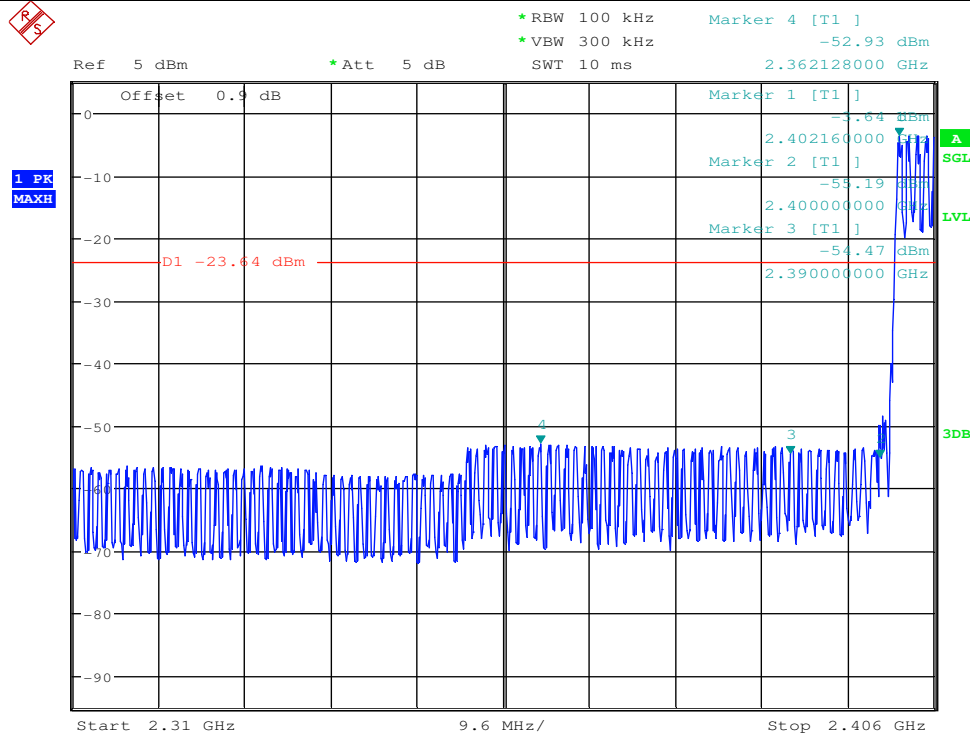


Band-edge for RF Conducted Emissions\_2DH5\_2480\_Hopping On

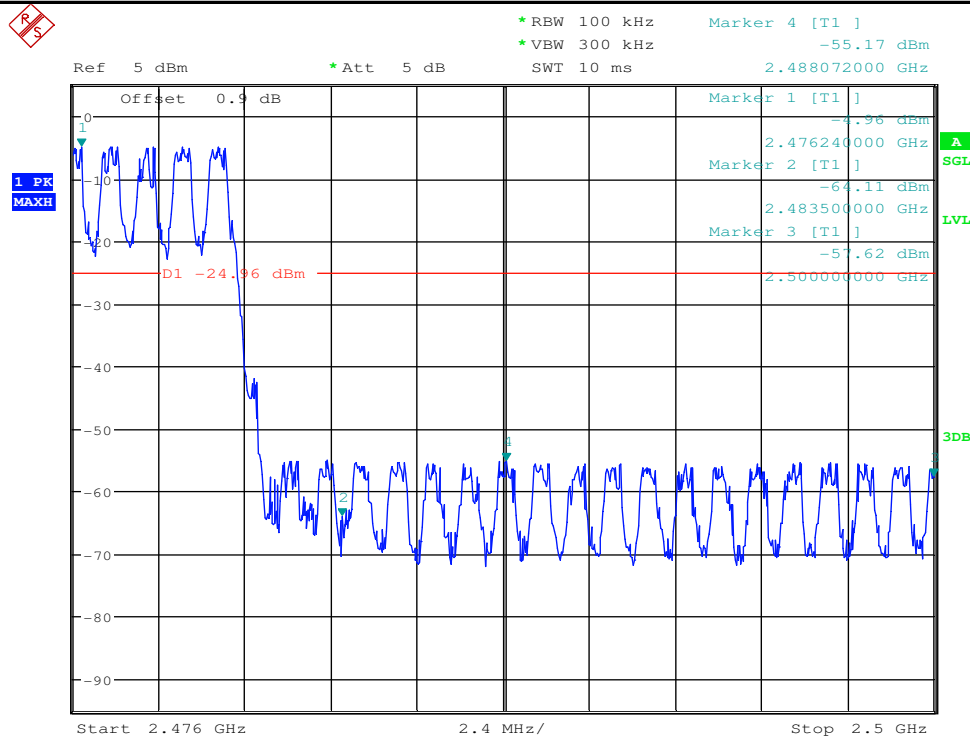




Band-edge for RF Conducted Emissions\_3DH5\_2402\_Hopping On

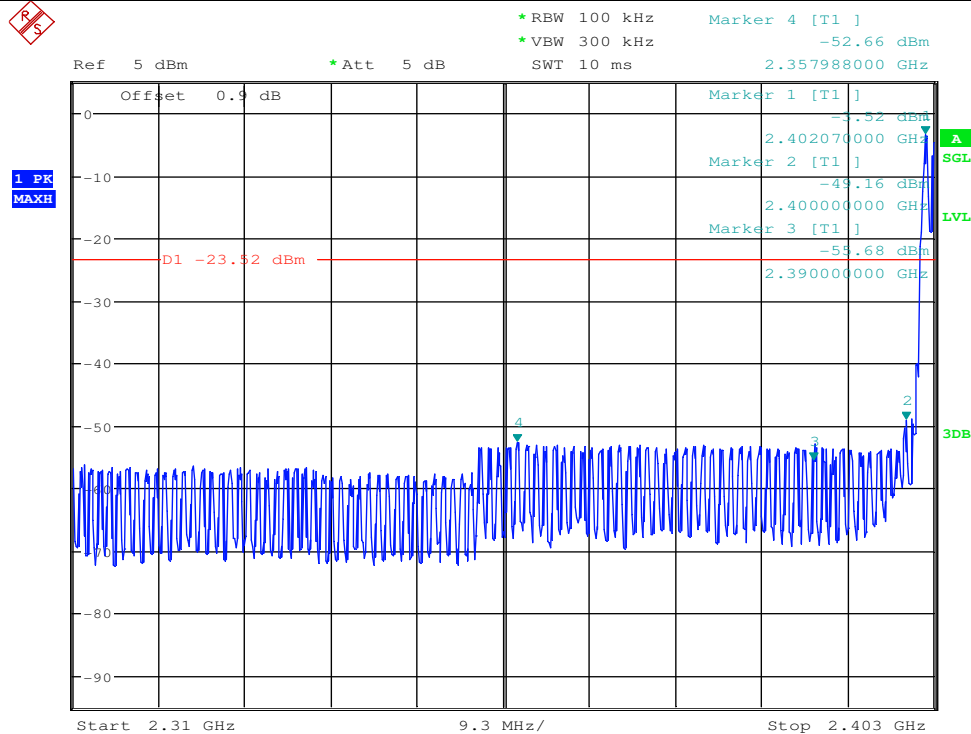


Band-edge for RF Conducted Emissions\_3DH5\_2480\_Hopping On

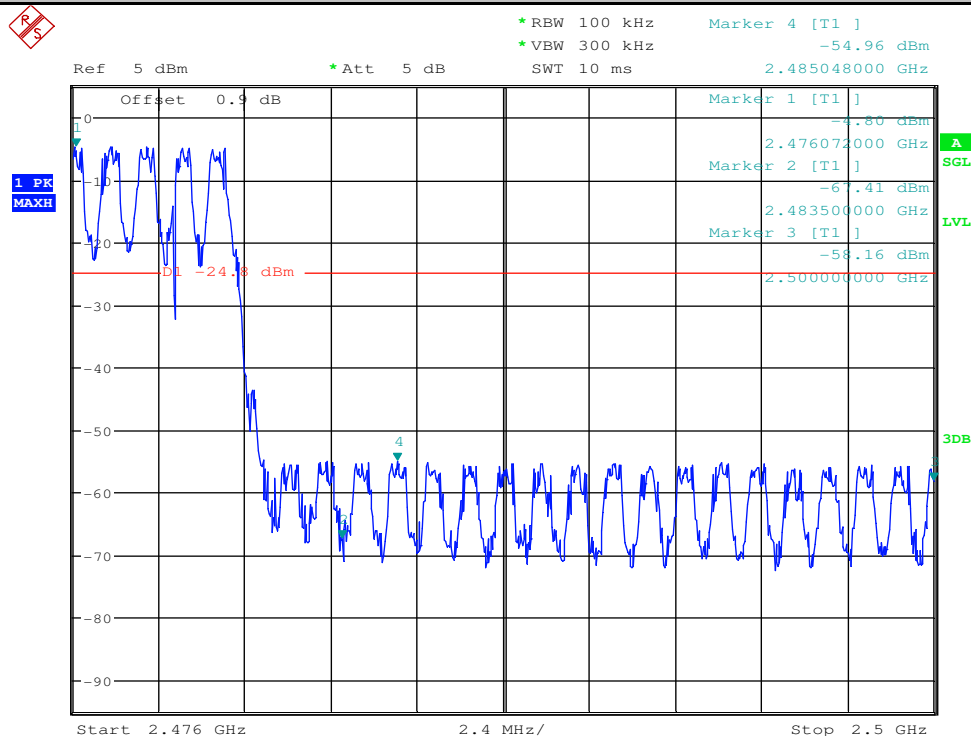






## 7.RF Conducted Spurious Emissions


| Test Mode | Test Channel | StartFre [MHz] | StopFre [MHz] | RBW [kHz] | VBW [kHz] | Pref[dBm] | Max. Level [dBm] | Limit [dBm] | Verdict |
|-----------|--------------|----------------|---------------|-----------|-----------|-----------|------------------|-------------|---------|
| DH5       | 2402         | 30             | 10000         | 1000      | 3000      | -3.69     | -44.170          | <-23.69     | PASS    |
| DH5       | 2402         | 10000          | 25000         | 1000      | 3000      | -3.69     | -54.730          | <-23.69     | PASS    |
| DH5       | 2441         | 30             | 10000         | 1000      | 3000      | -4.13     | -44.690          | <-24.13     | PASS    |
| DH5       | 2441         | 10000          | 25000         | 1000      | 3000      | -4.13     | -57.250          | <-24.13     | PASS    |
| DH5       | 2480         | 30             | 10000         | 1000      | 3000      | -4.97     | -53.590          | <-24.97     | PASS    |
| DH5       | 2480         | 10000          | 25000         | 1000      | 3000      | -4.97     | -55.250          | <-24.97     | PASS    |
| 2DH5      | 2402         | 30             | 10000         | 1000      | 3000      | -3.67     | -44.050          | <-23.67     | PASS    |
| 2DH5      | 2402         | 10000          | 25000         | 1000      | 3000      | -3.67     | -55.030          | <-23.67     | PASS    |
| 2DH5      | 2441         | 30             | 10000         | 1000      | 3000      | -4.09     | -38.900          | <-24.09     | PASS    |
| 2DH5      | 2441         | 10000          | 25000         | 1000      | 3000      | -4.09     | -57.160          | <-24.09     | PASS    |
| 2DH5      | 2480         | 30             | 10000         | 1000      | 3000      | -5.06     | -48.340          | <-25.06     | PASS    |
| 2DH5      | 2480         | 10000          | 25000         | 1000      | 3000      | -5.06     | -54.980          | <-25.06     | PASS    |
| 3DH5      | 2402         | 30             | 10000         | 1000      | 3000      | -3.71     | -44.050          | <-23.71     | PASS    |
| 3DH5      | 2402         | 10000          | 25000         | 1000      | 3000      | -3.71     | -54.970          | <-23.71     | PASS    |
| 3DH5      | 2441         | 30             | 10000         | 1000      | 3000      | -3.97     | -44.890          | <-23.97     | PASS    |
| 3DH5      | 2441         | 10000          | 25000         | 1000      | 3000      | -3.97     | -56.930          | <-23.97     | PASS    |
| 3DH5      | 2480         | 30             | 10000         | 1000      | 3000      | -4.97     | -30.610          | <-24.97     | PASS    |
| 3DH5      | 2480         | 10000          | 25000         | 1000      | 3000      | -4.97     | -55.550          | <-24.97     | PASS    |

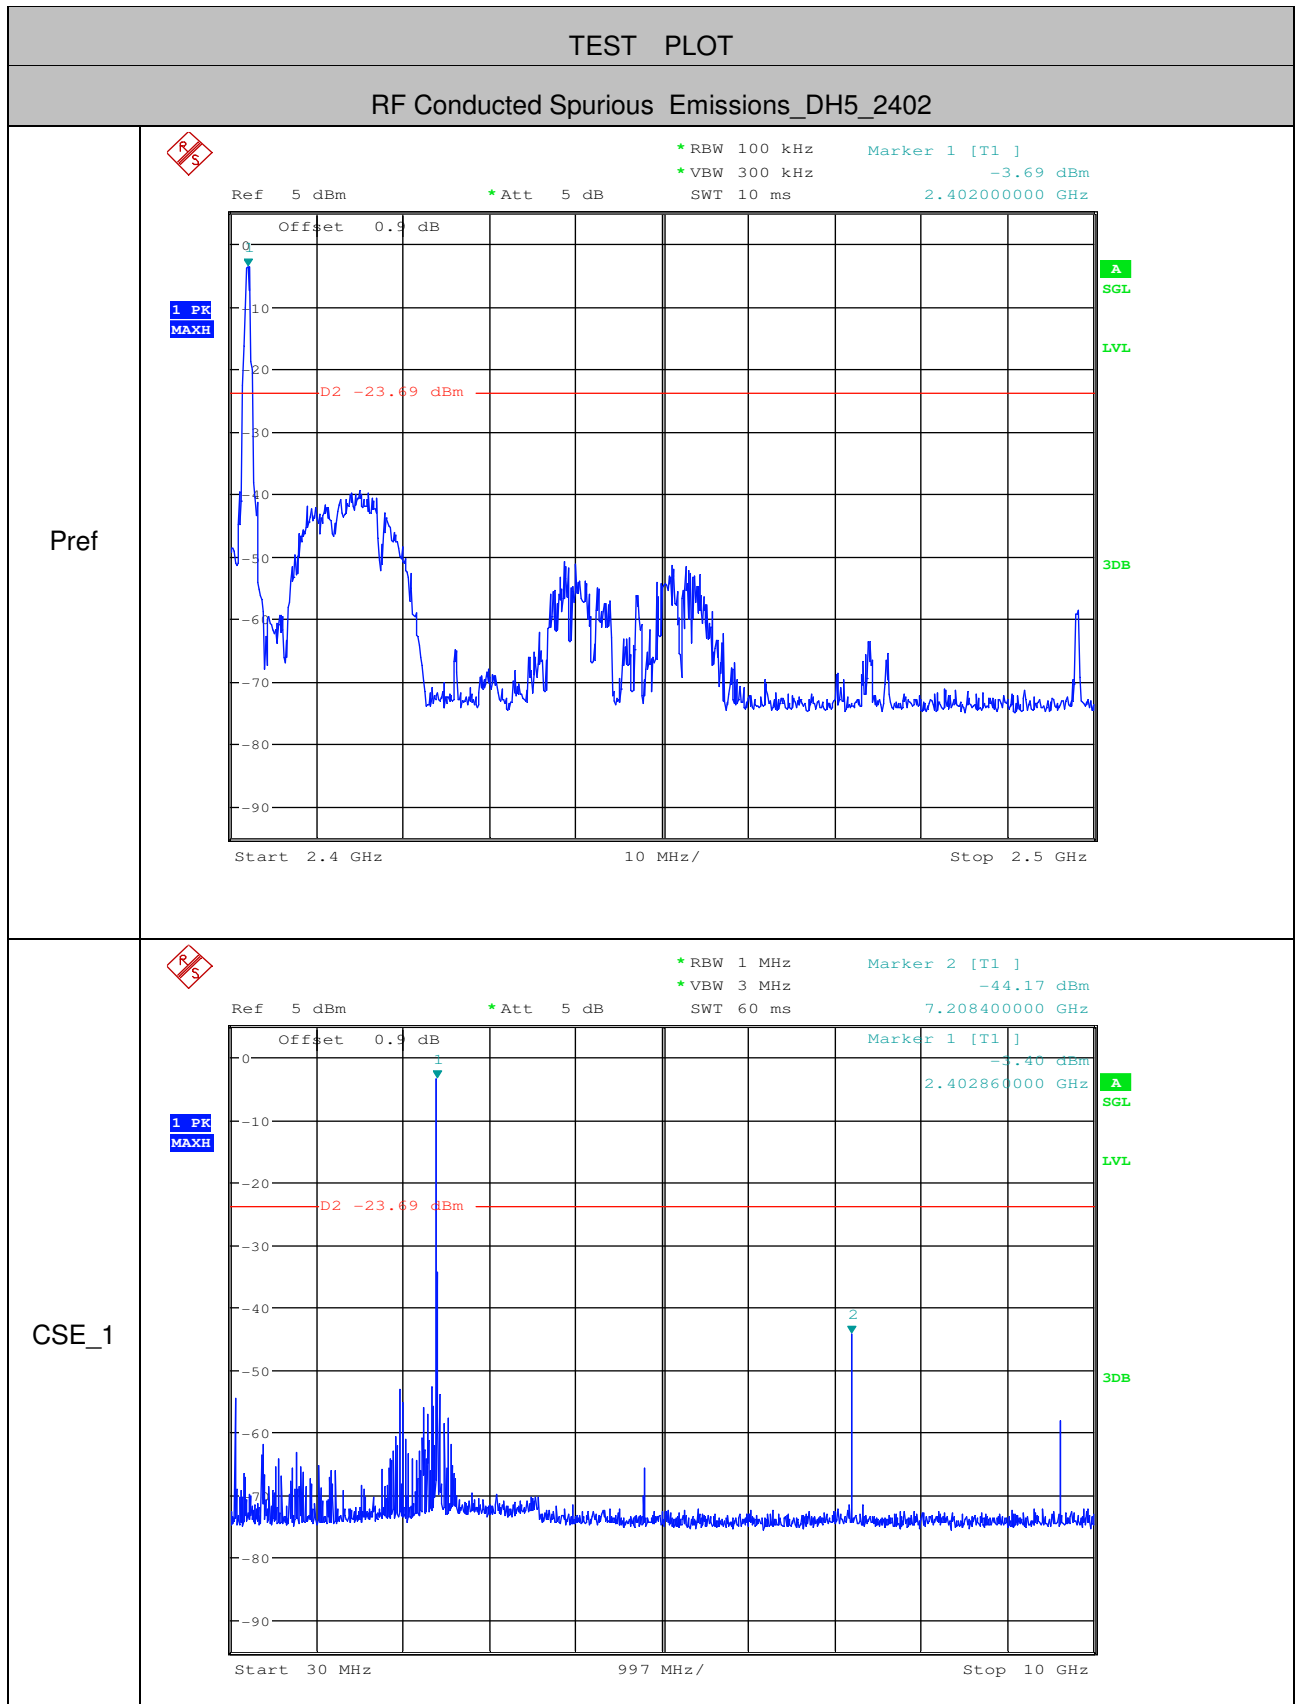


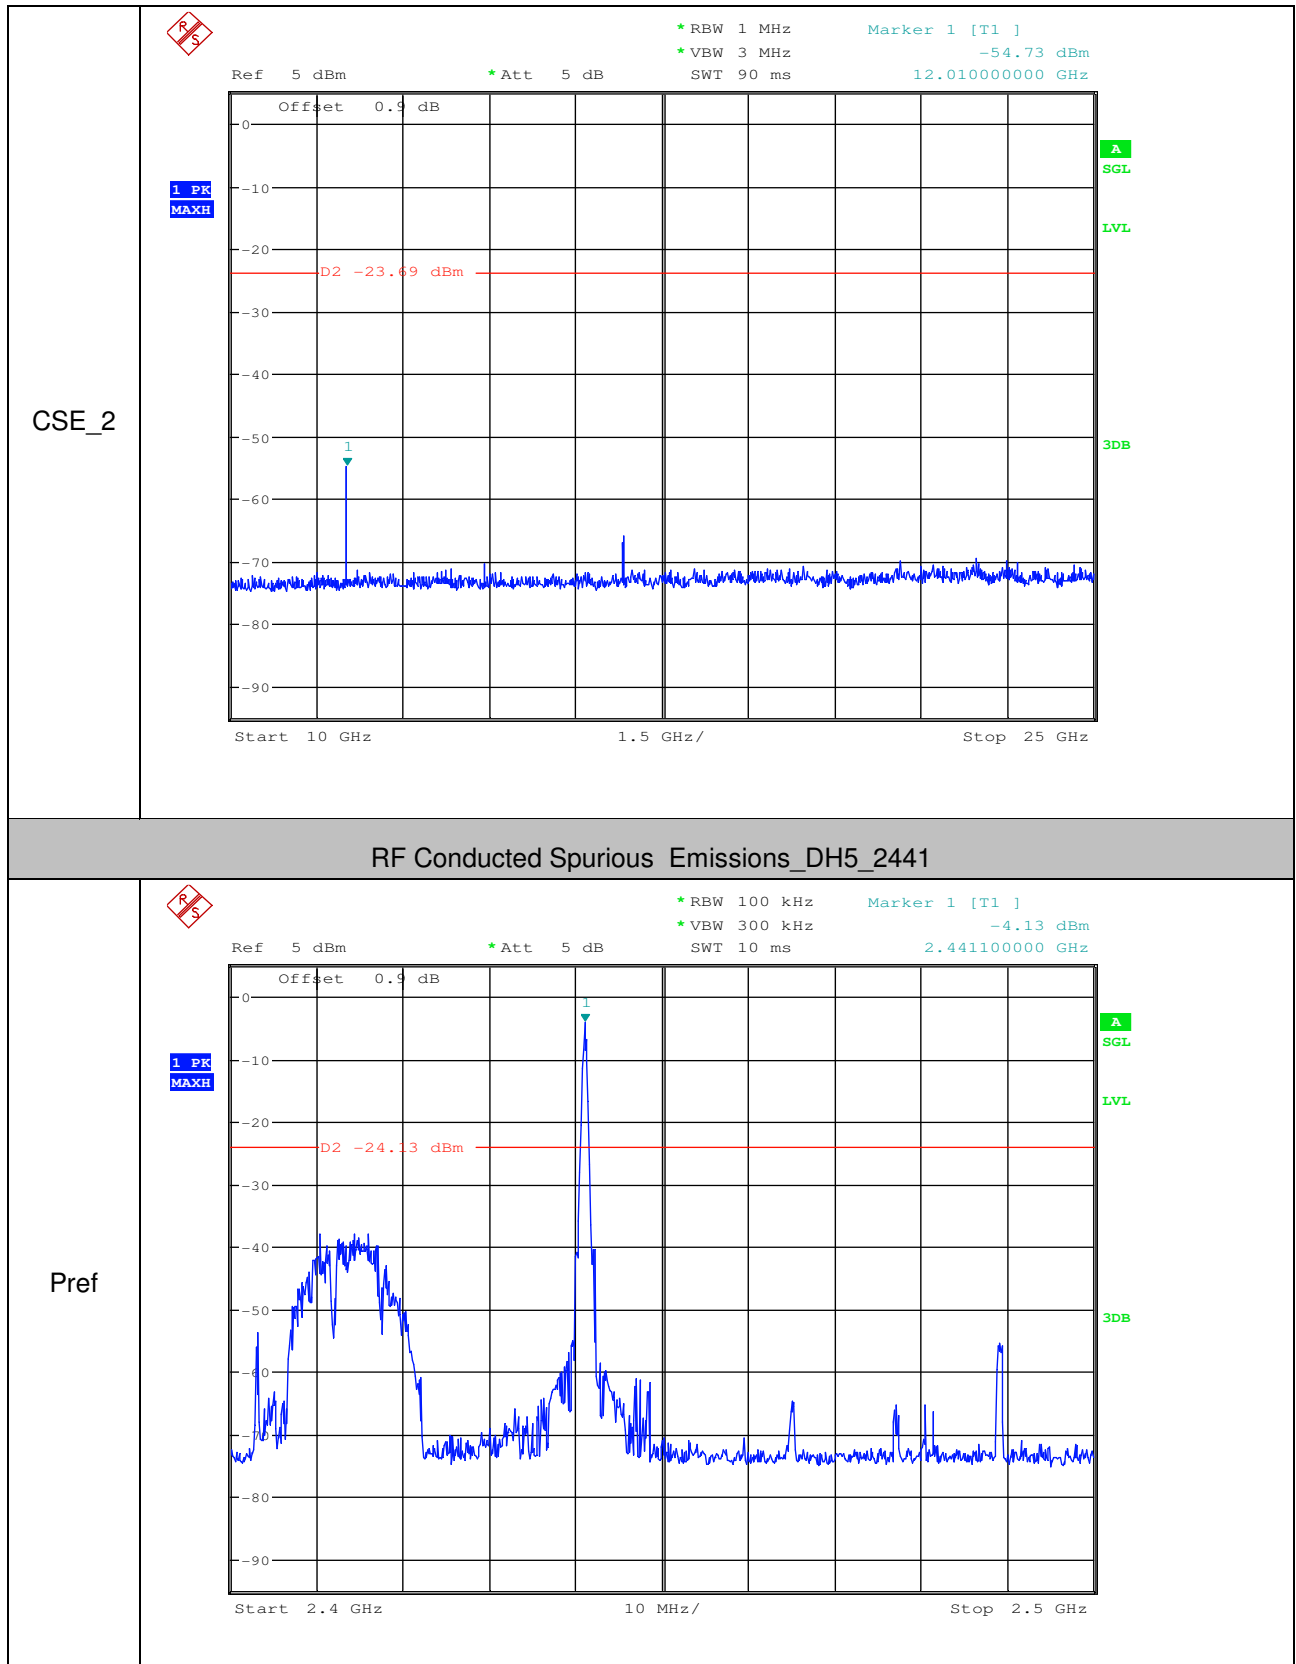


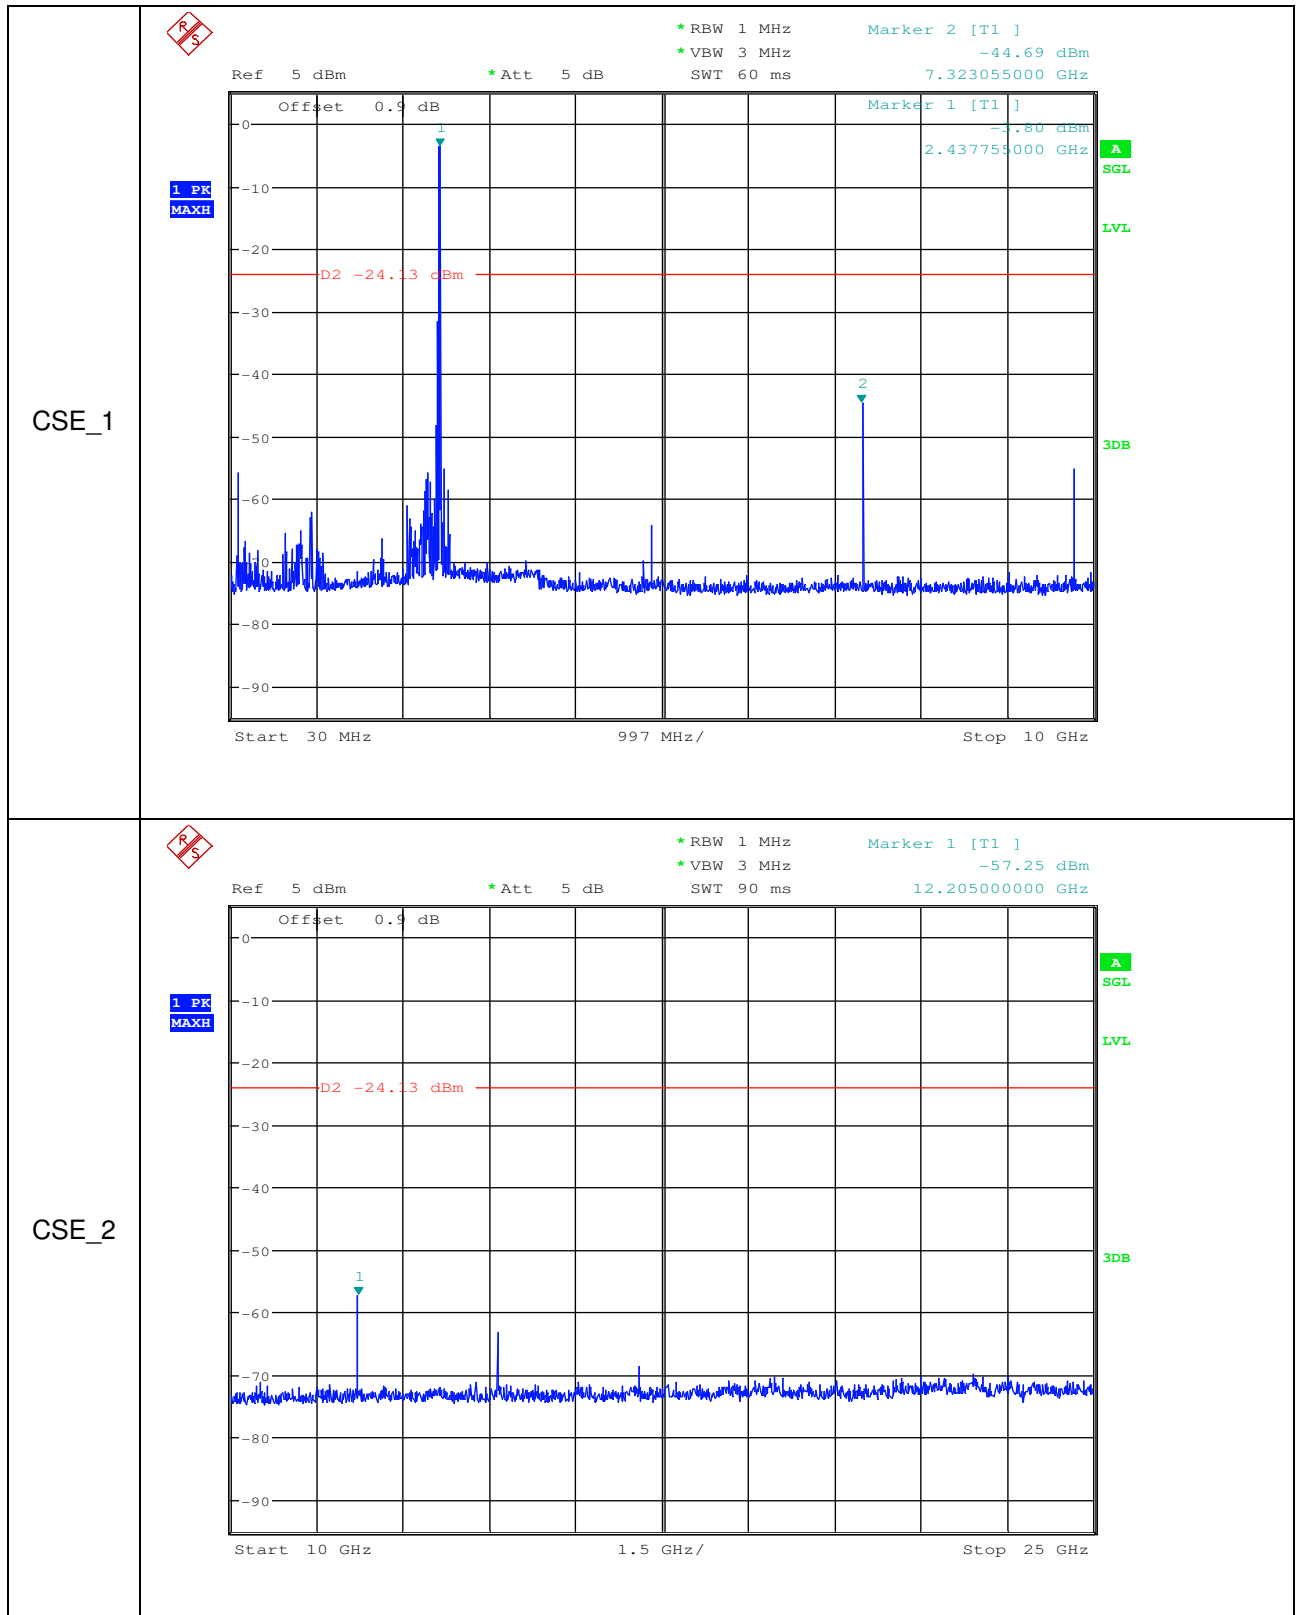


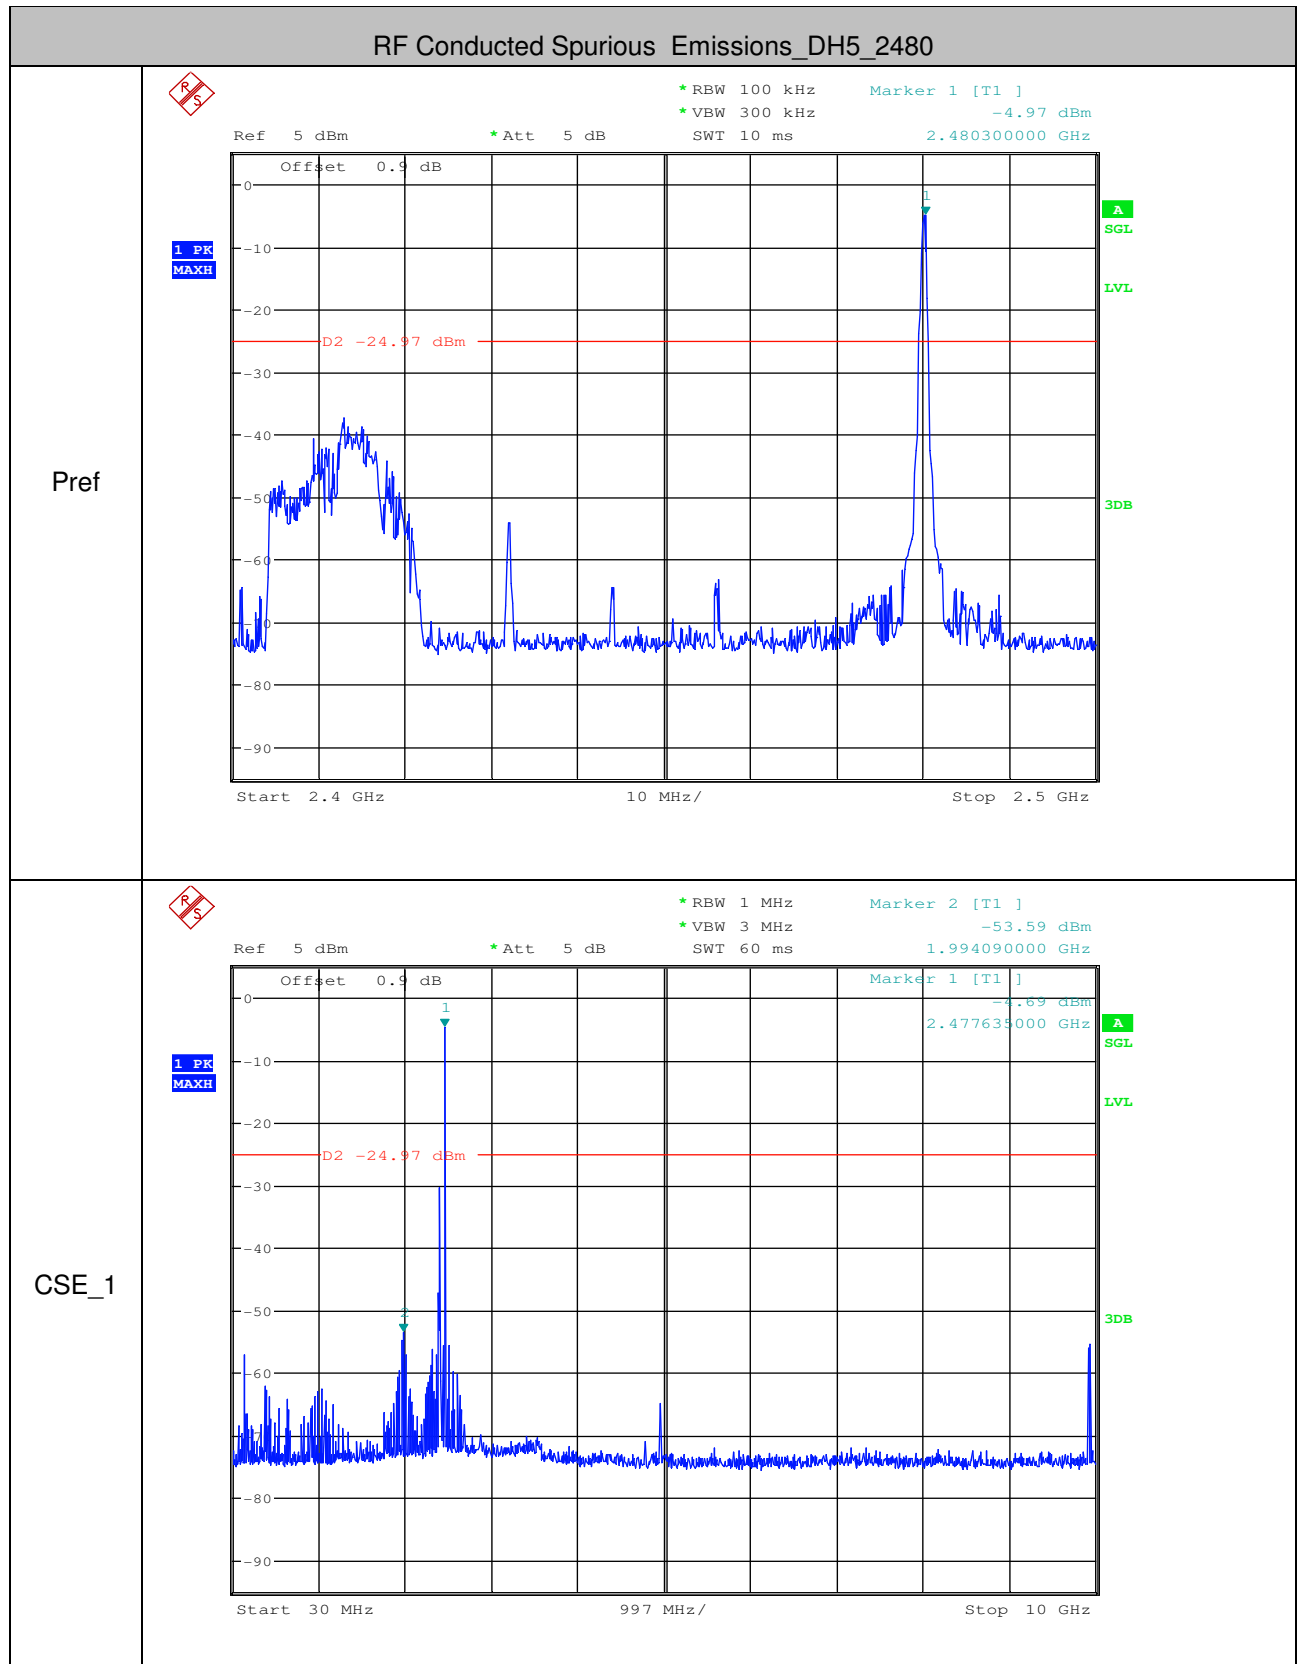


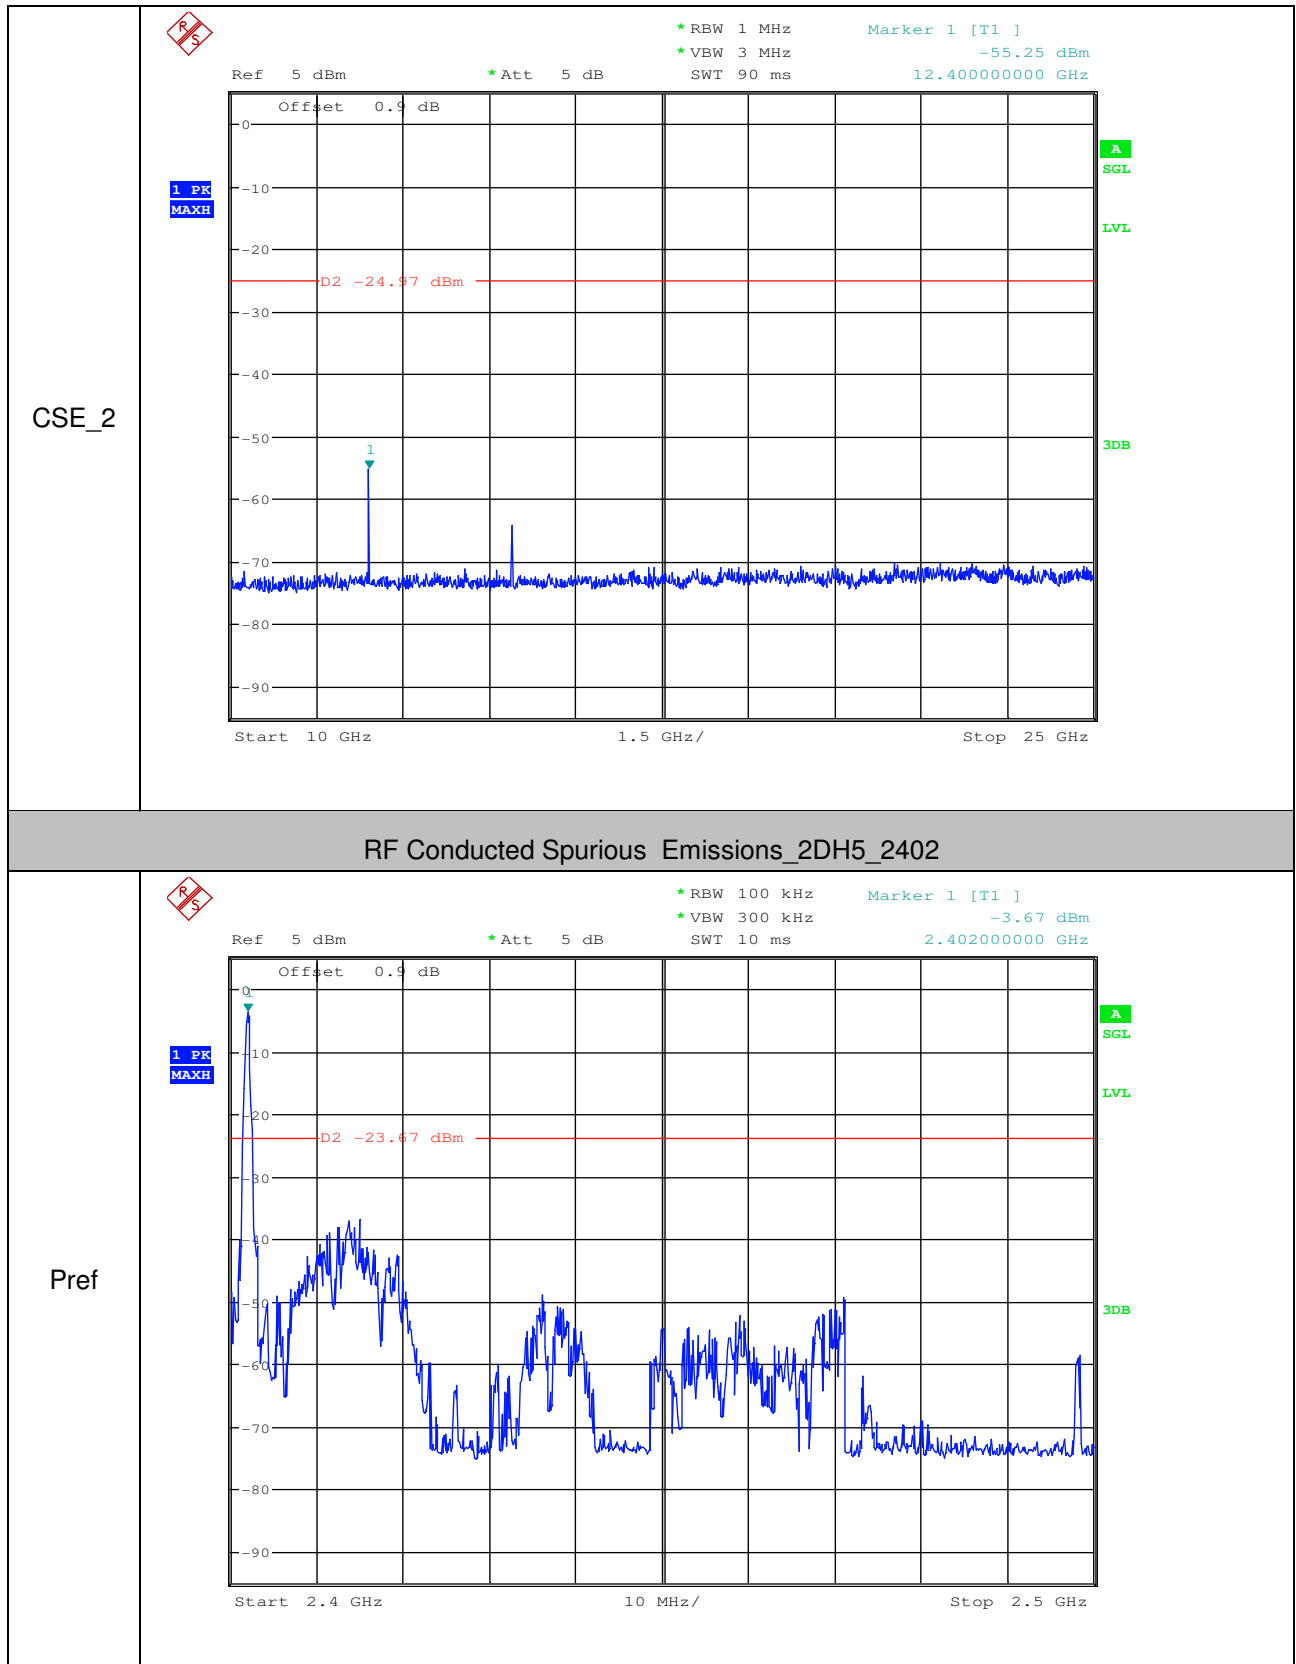


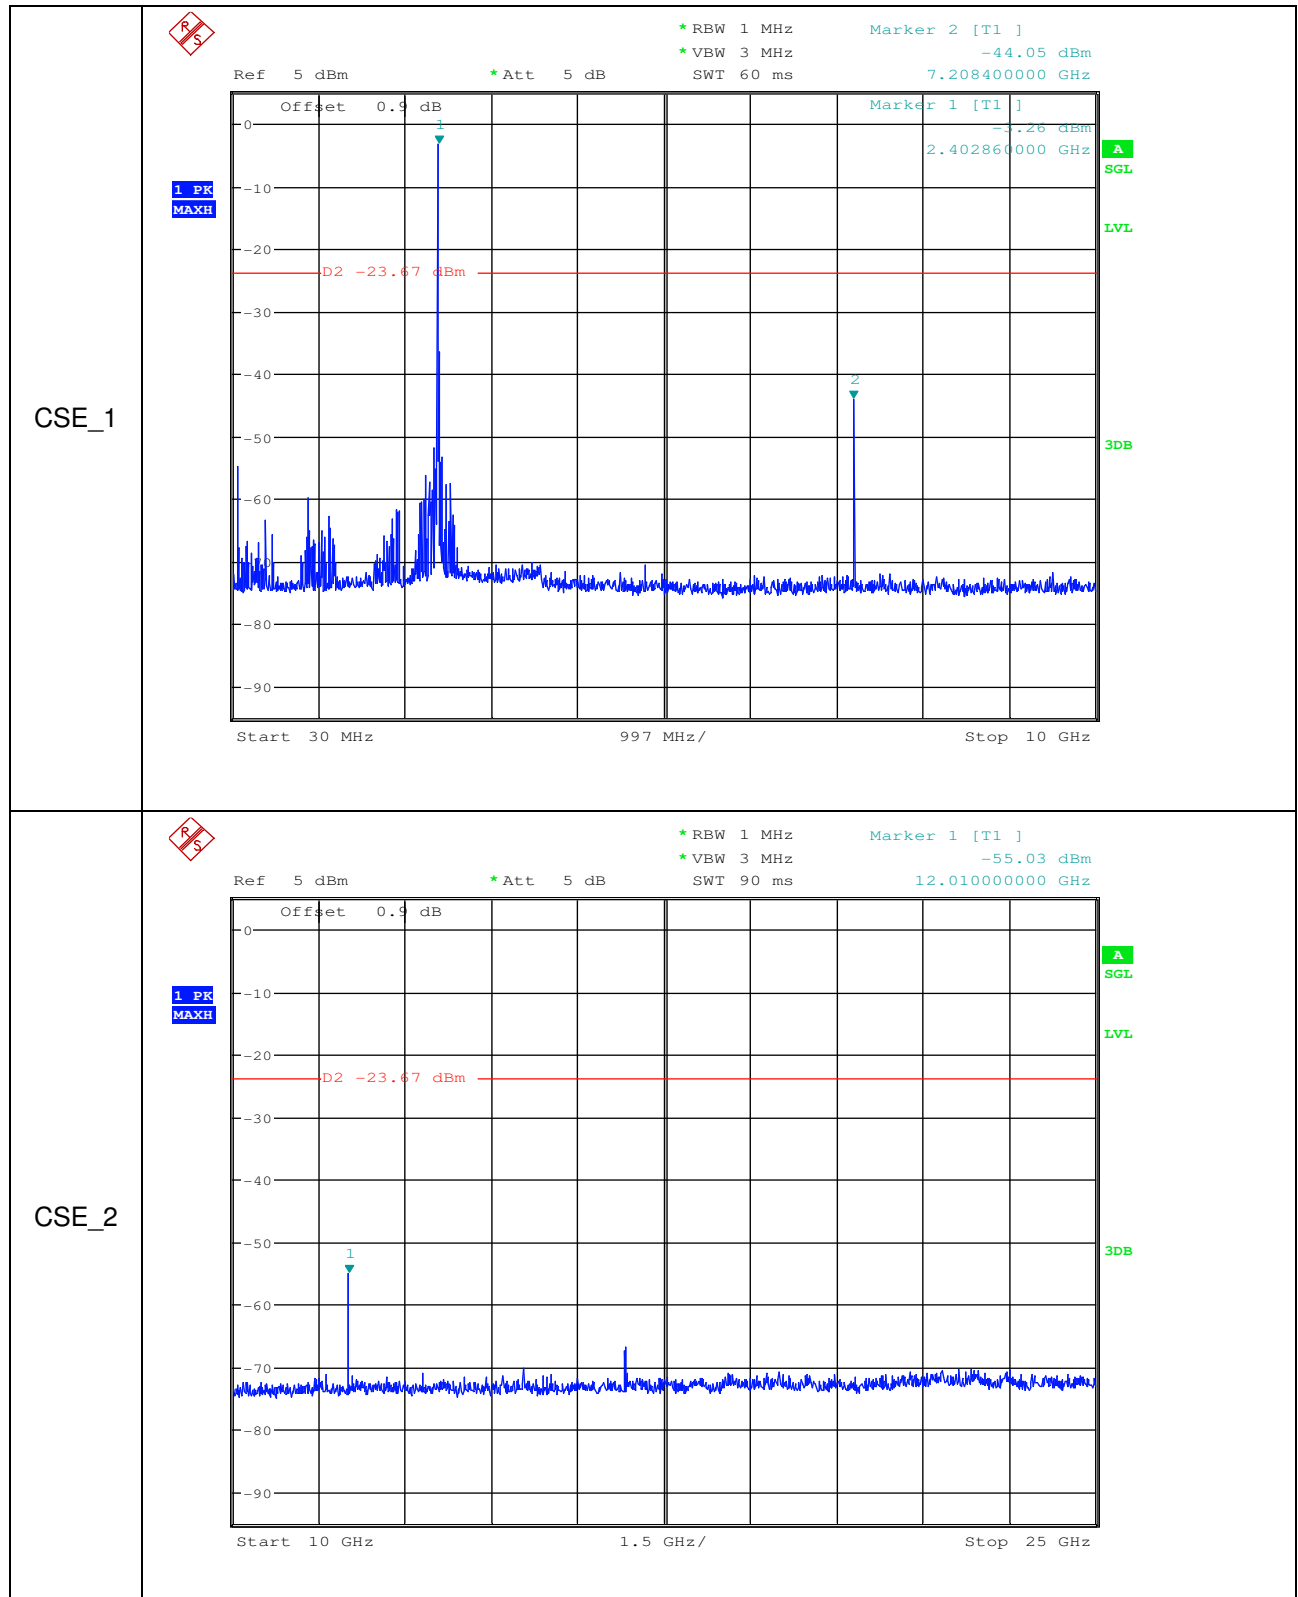


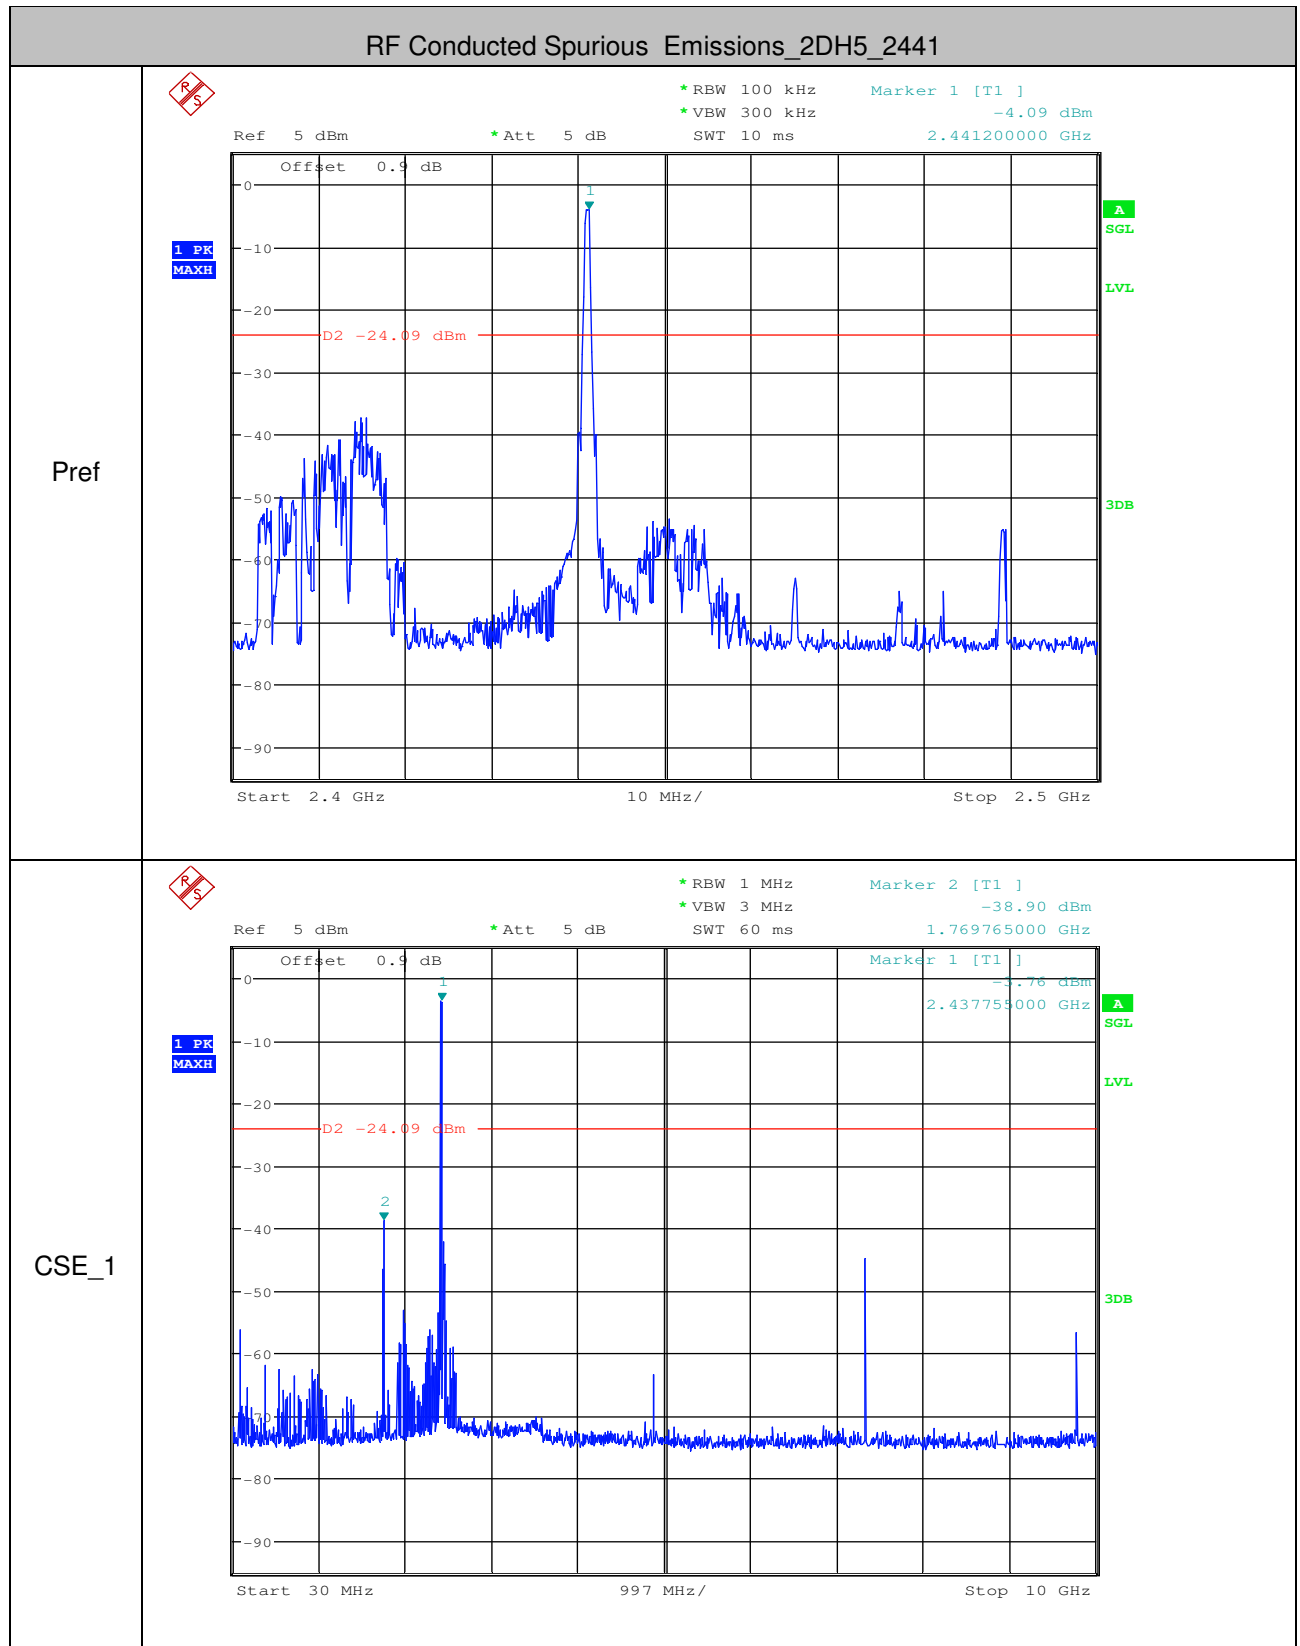


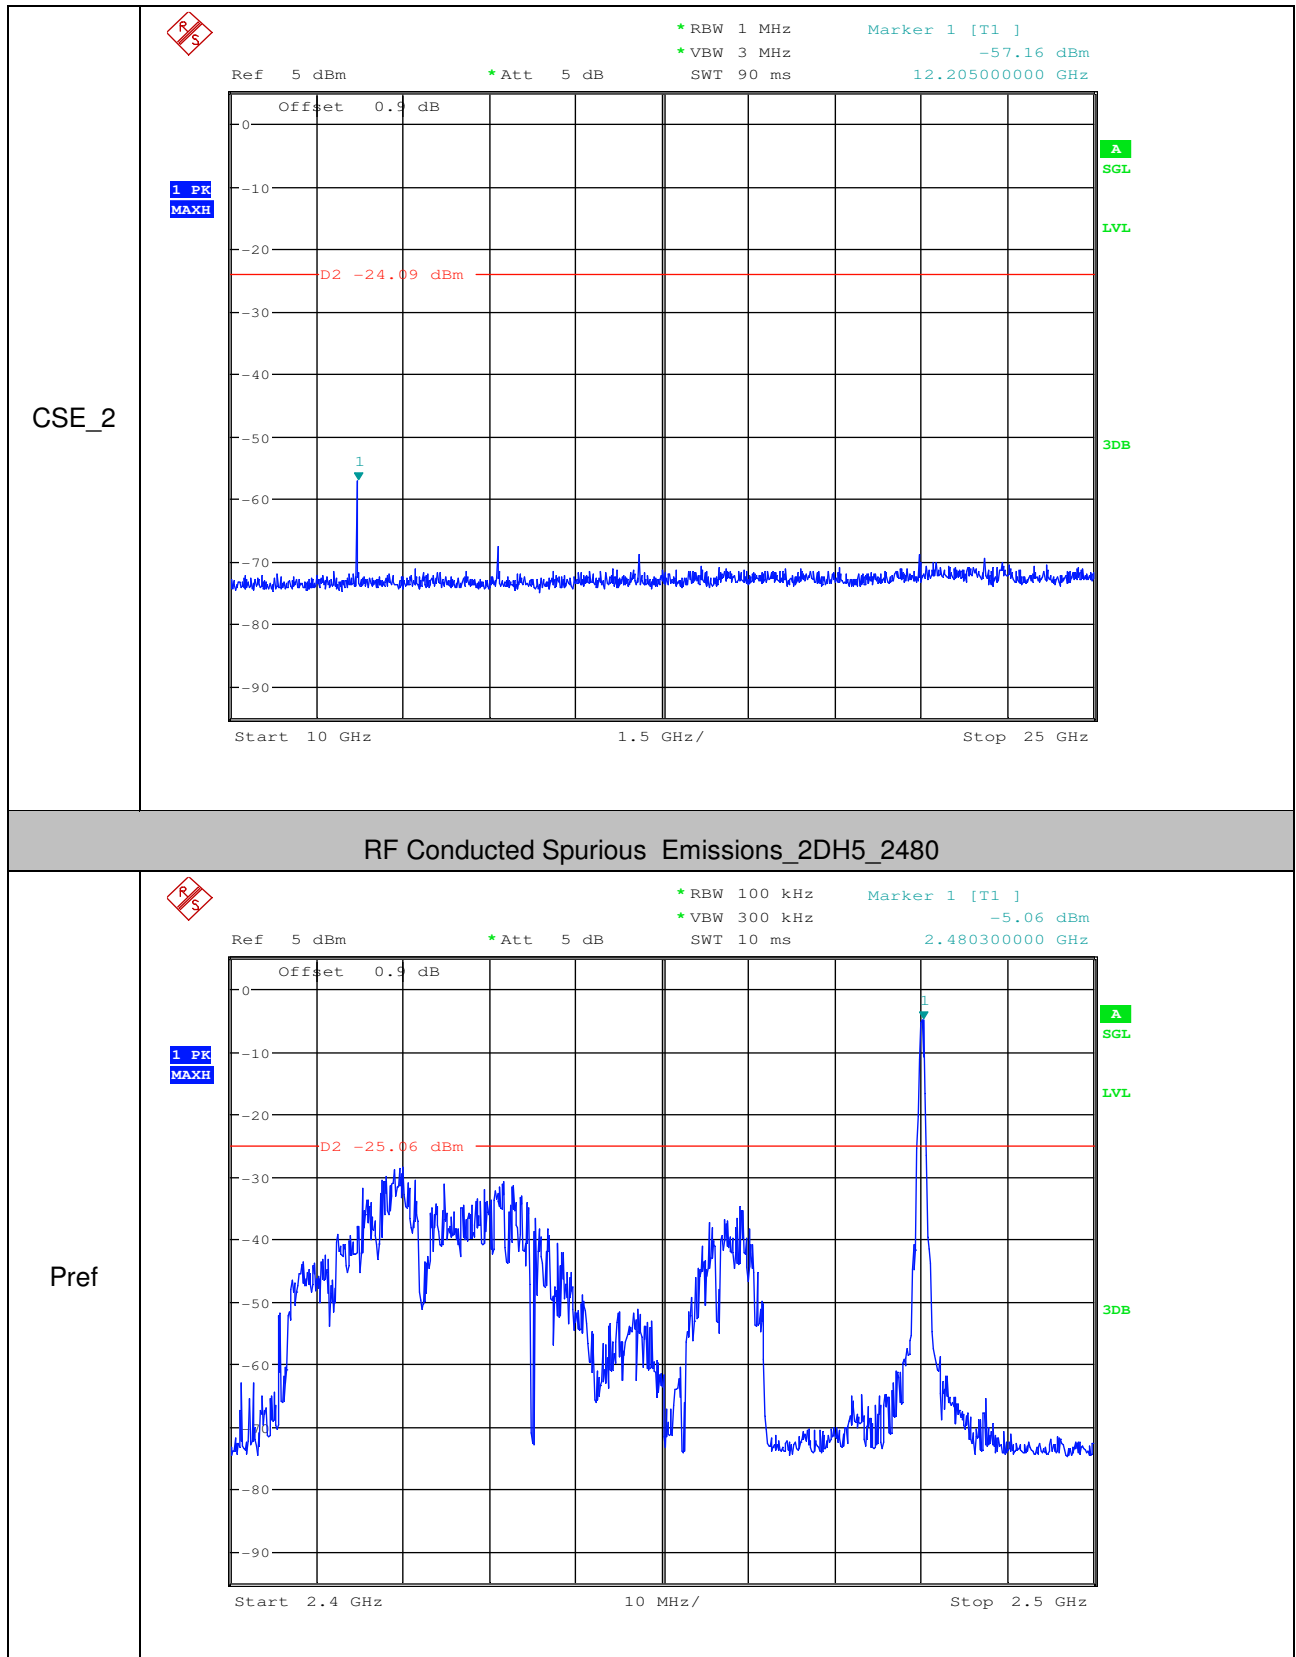


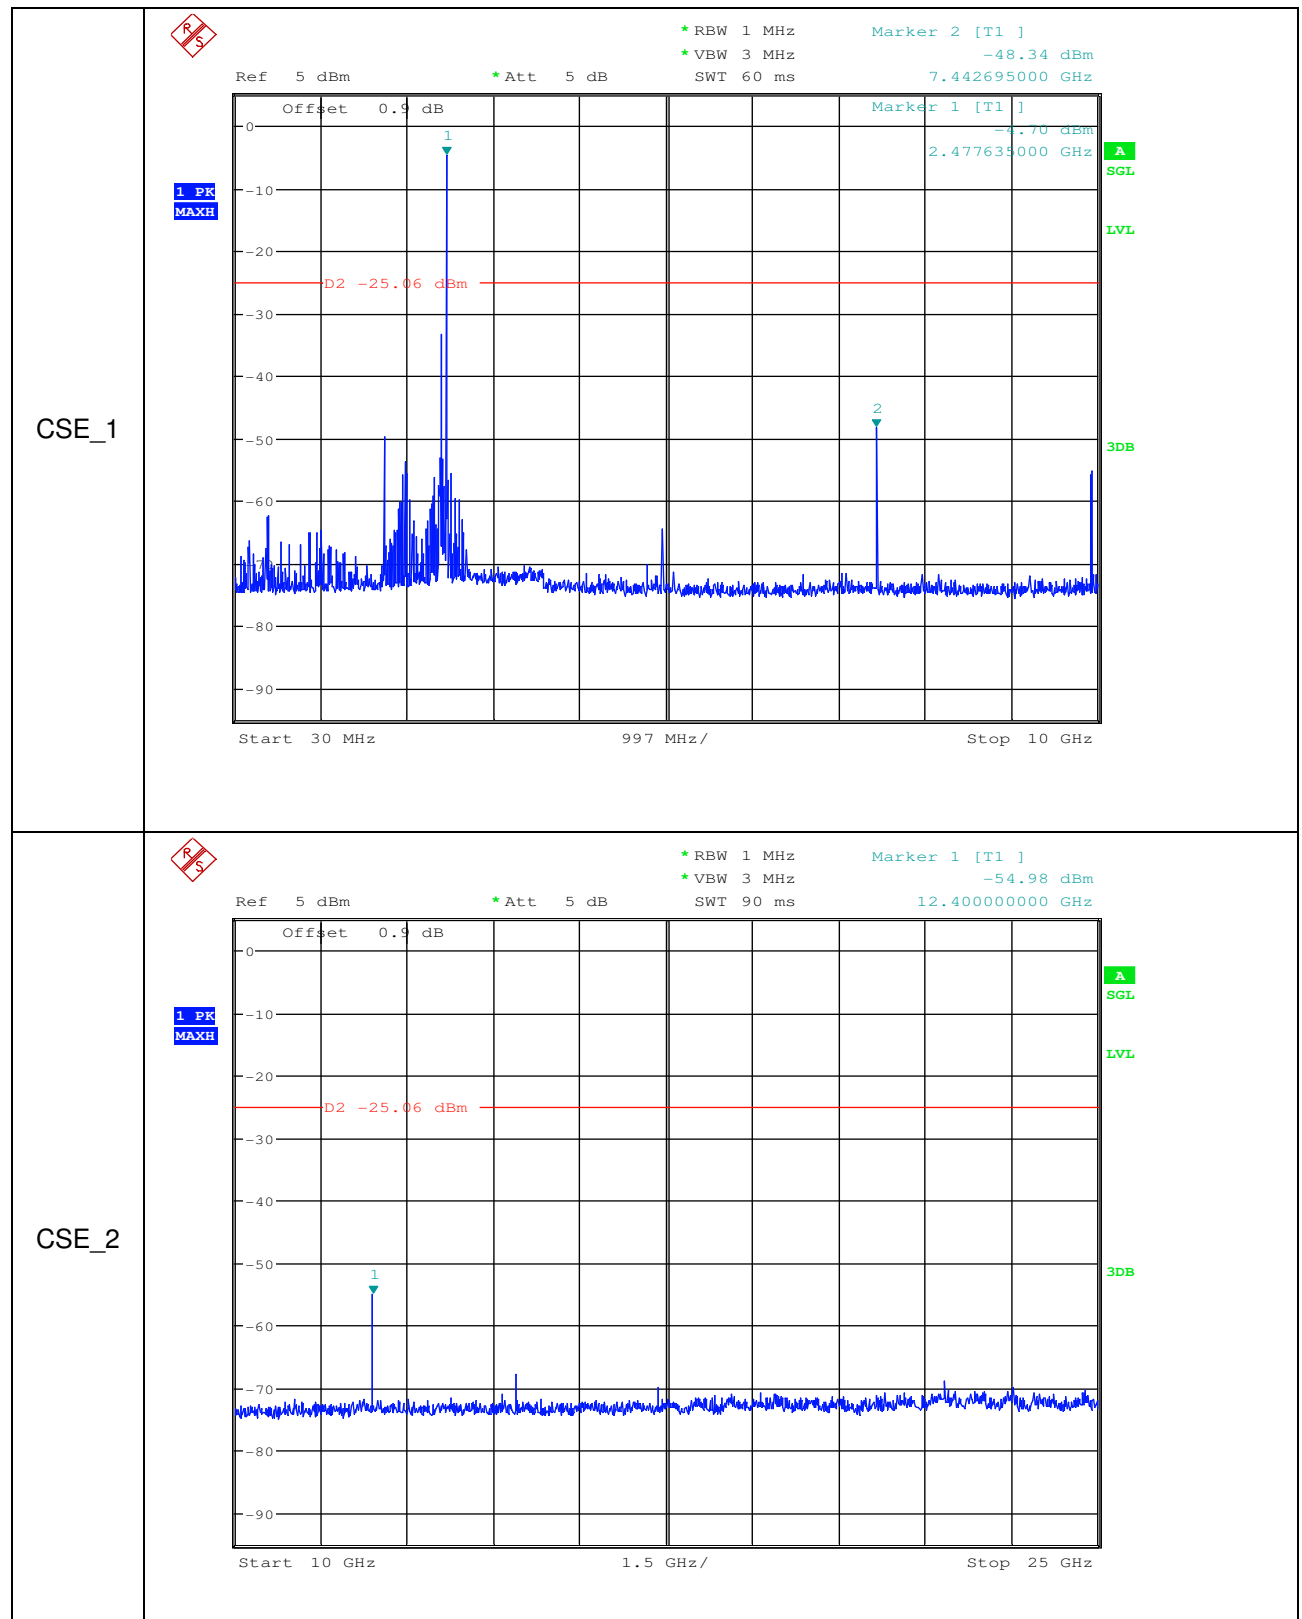

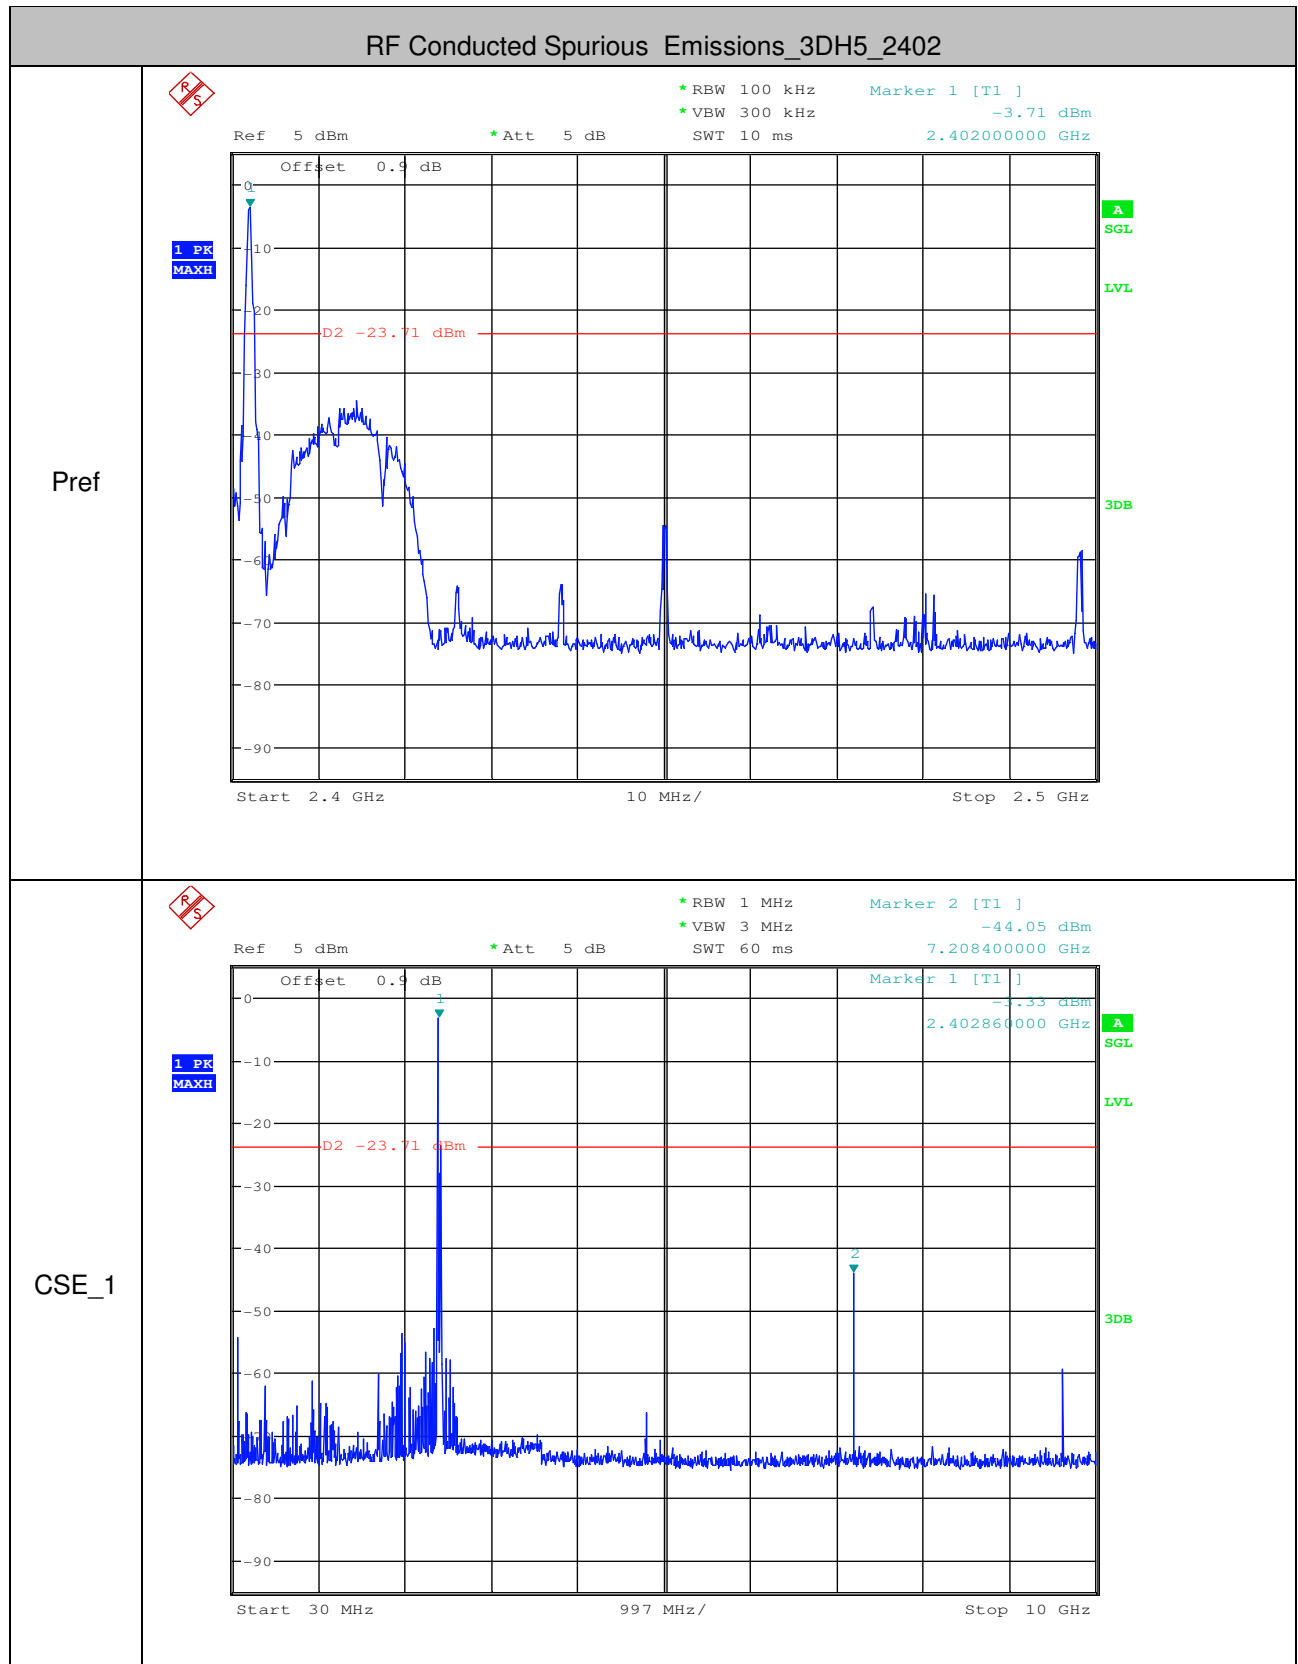

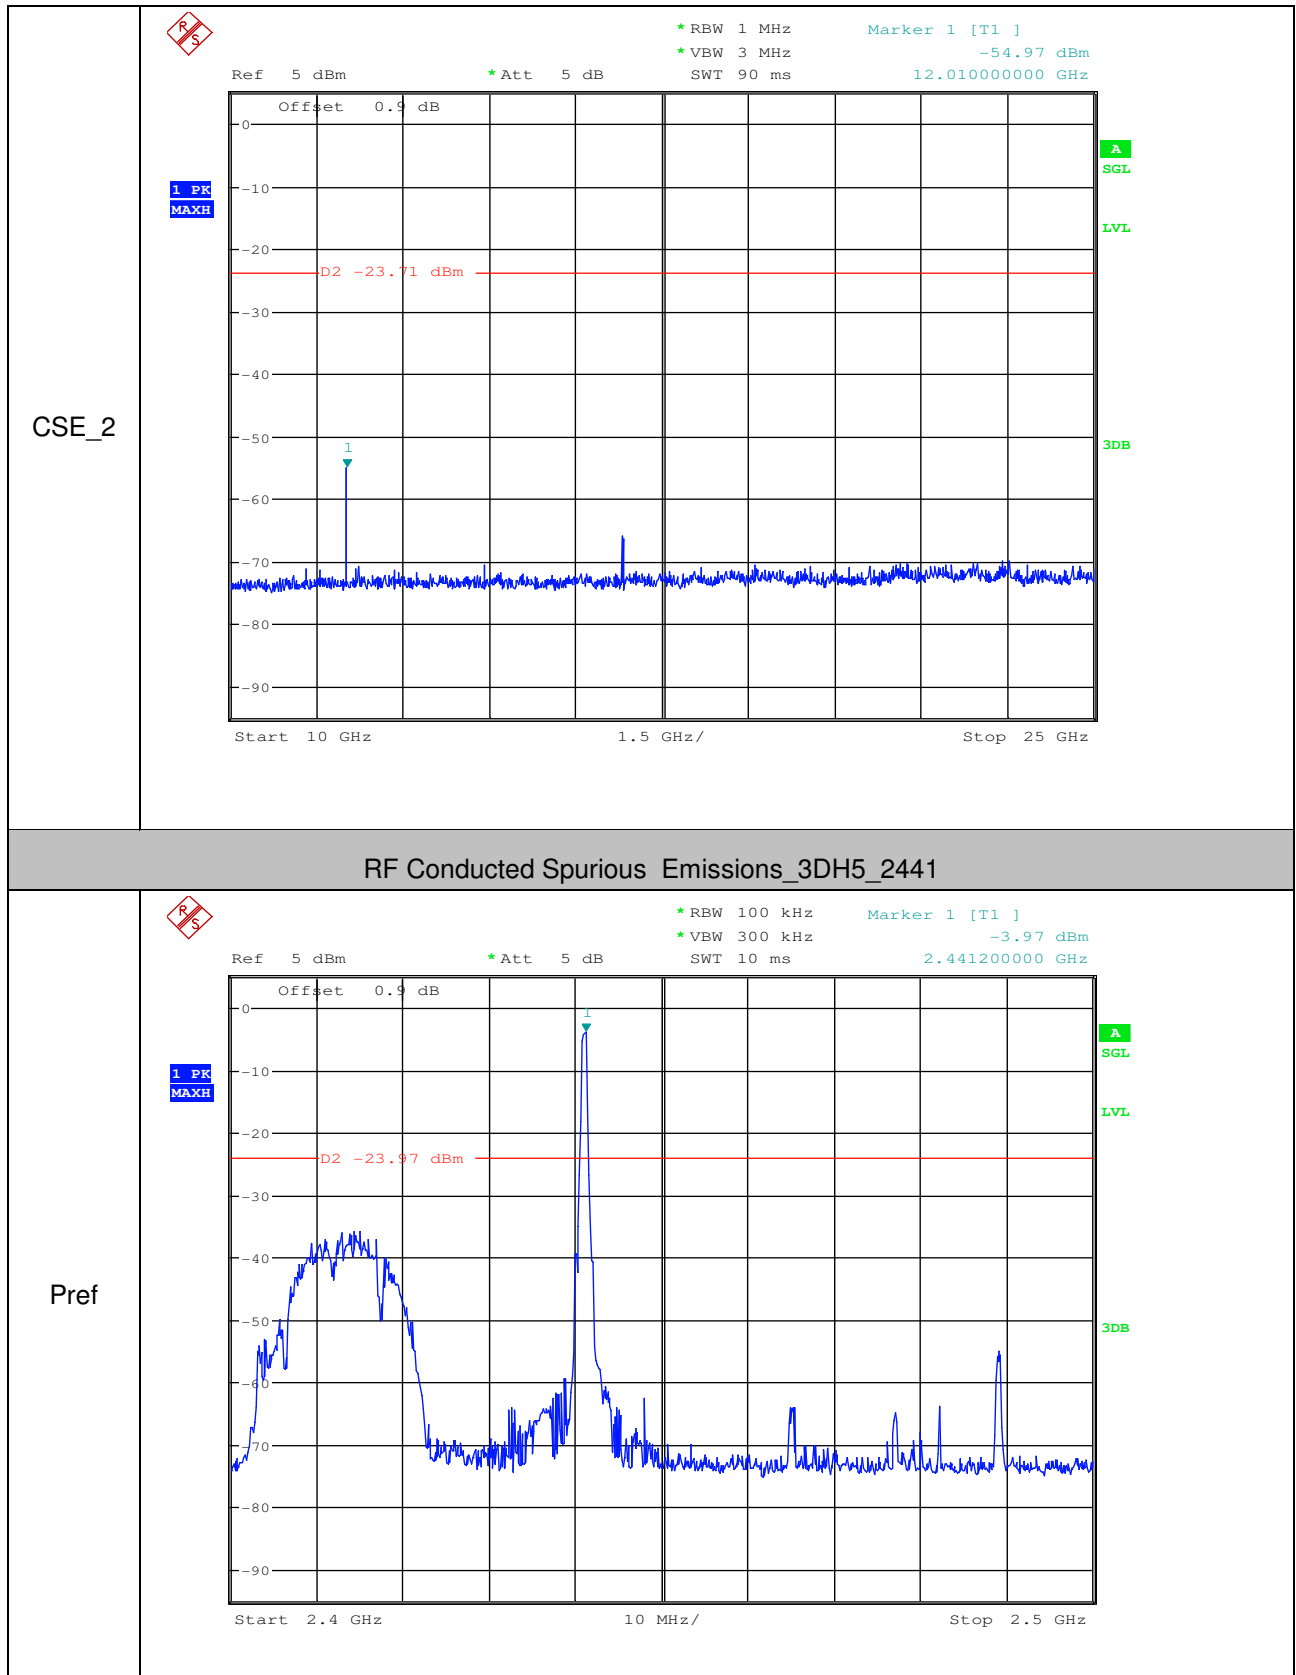

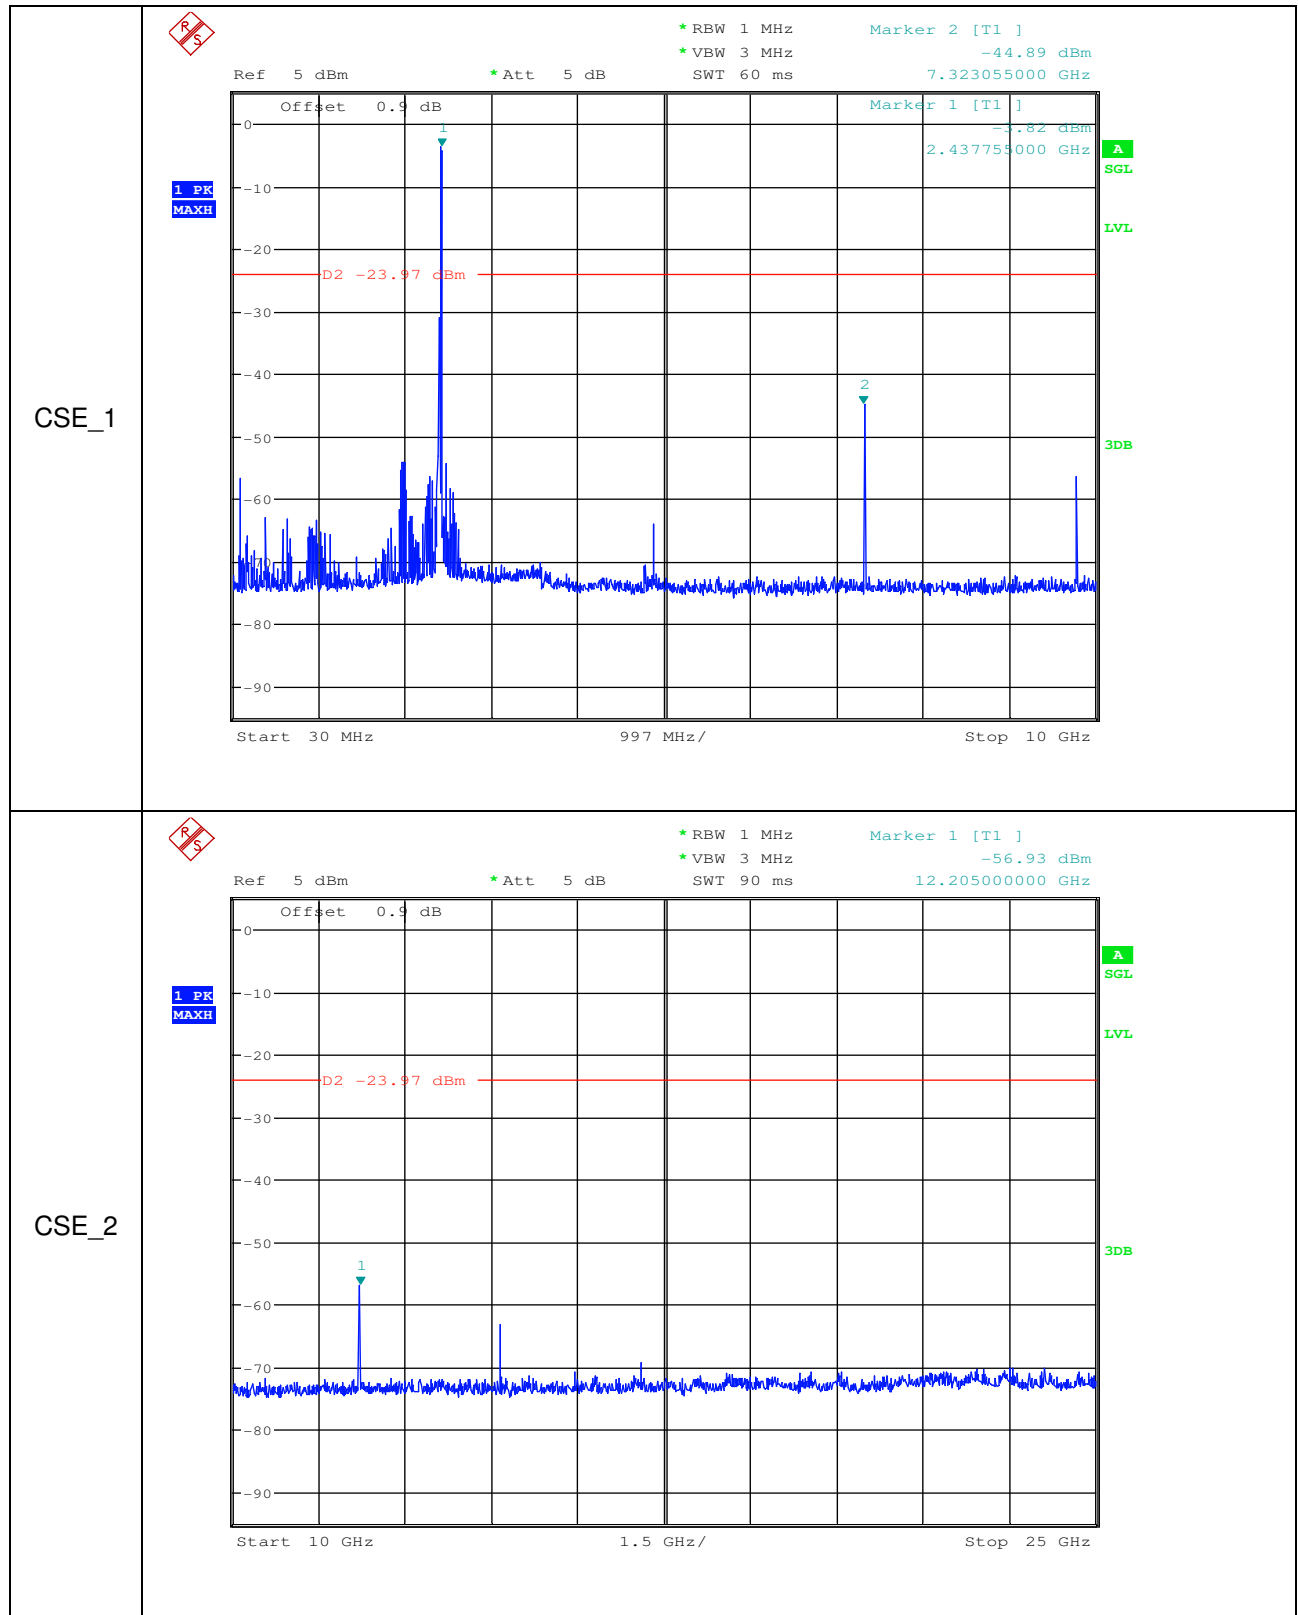

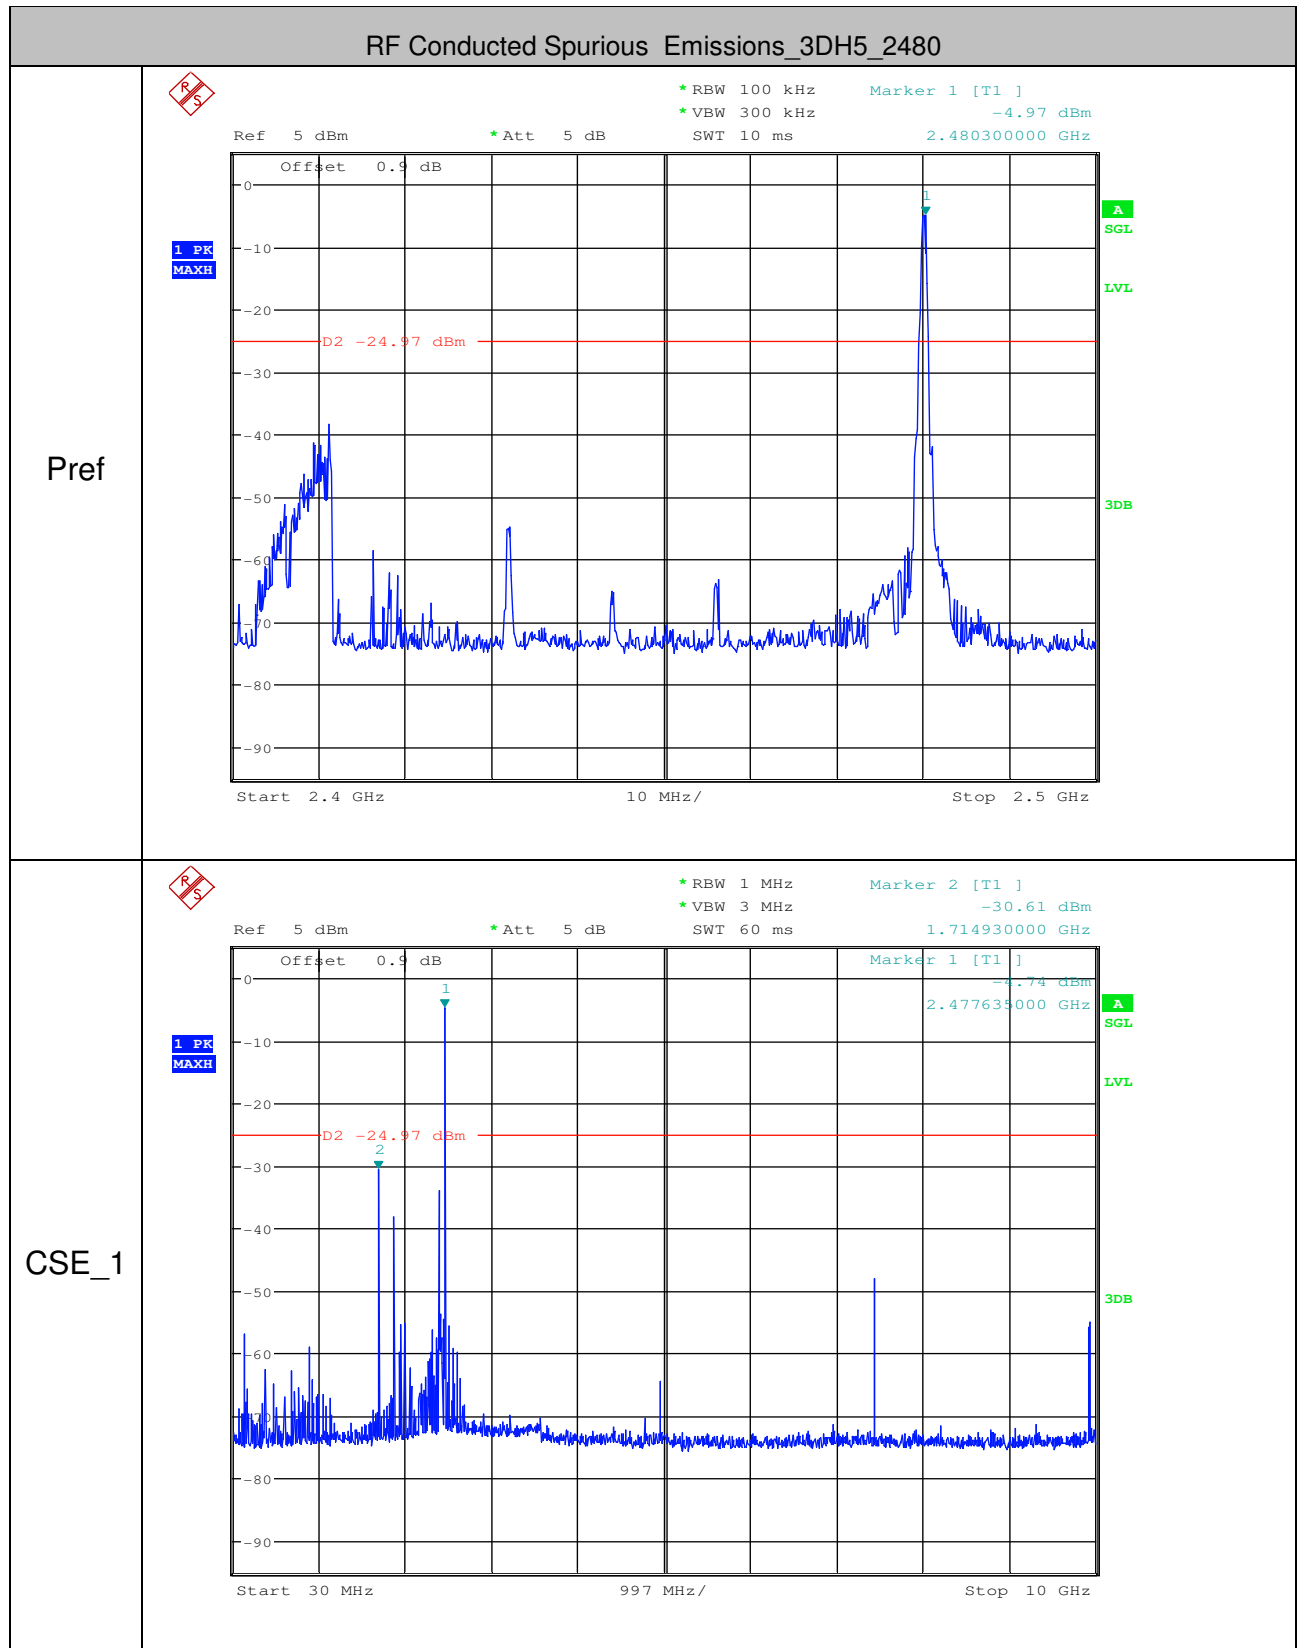



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM170100060101

Page: 88 of 88

