

Date/Time: 04/13/2015 19:38:56

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 50%RB Body Front

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711 \text{ MHz}$; $\sigma = 0.953 \text{ S/m}$; $\epsilon_r = 55.408$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Front Side 15mm/ALE-L04/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0803 W/kg


Front Side 15mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.664 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.0868 W/kg

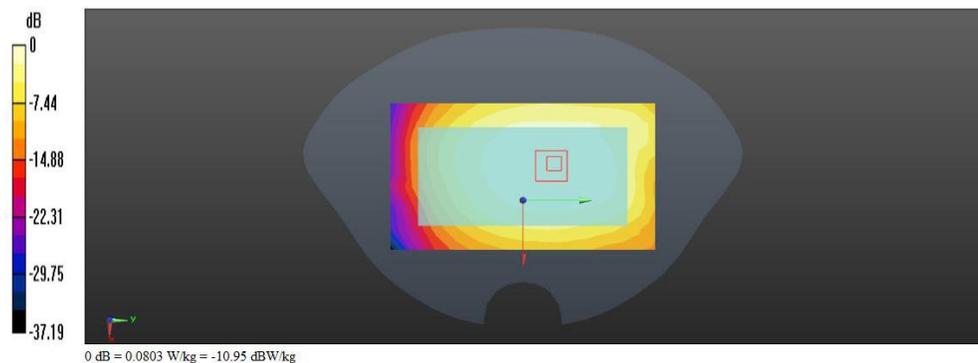

Date/Time: 04/13/2015 20:08:41

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 50%RB Body Back**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 55.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Back Side 15mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.114 W/kg


Back Side 15mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.627 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

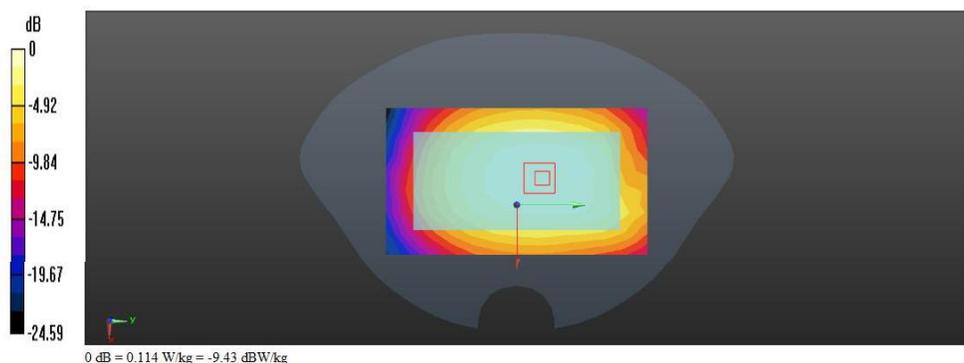

Date/Time: 04/13/2015 20:40:12

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 1RB Body Back SIM 2**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 55.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Back Side 15mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.145 W/kg


Back Side 15mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.956 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.176 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

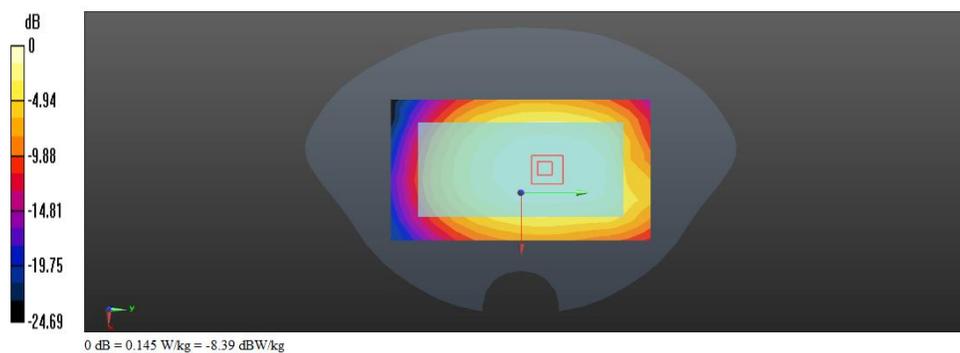

Date/Time: 04/13/2015 21:11:23

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 1RB Body Back Battery 2#**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 55.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Back Side 15mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.144 W/kg


Back Side 15mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.423 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.163 W/kg

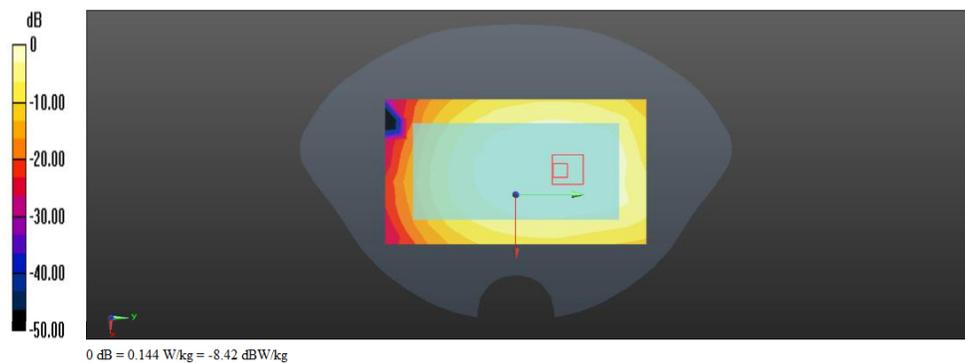

Date/Time: 04/15/2015 19:04:53

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 1RB Body Front**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Front Side 10mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.129 W/kg


Front Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.083 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.141 W/kg

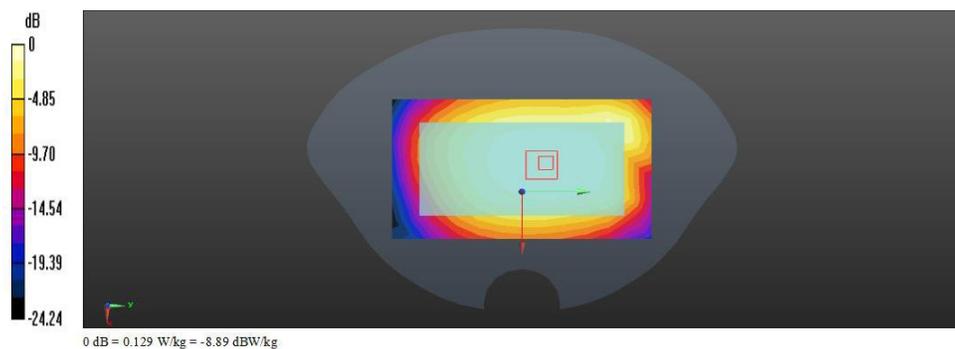

Date/Time: 04/15/2015 19:35:08

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 1RB Body Back

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Back Side 10mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.223 W/kg


Back Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.707 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.248 W/kg

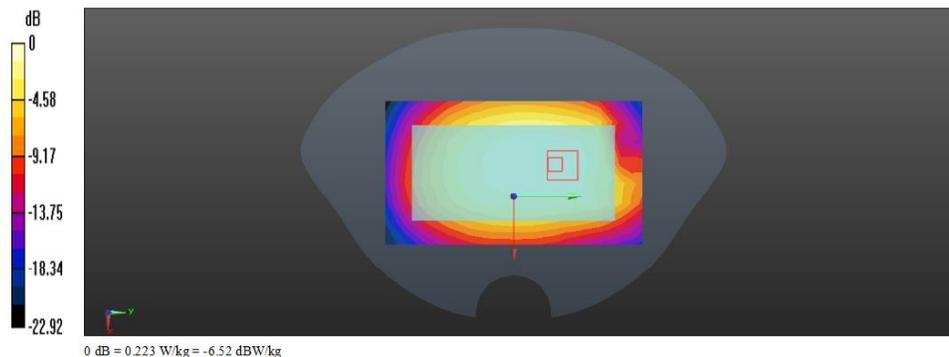

Date/Time: 04/15/2015 20:08:23

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 1RB Body Left

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left Side 10mm/ALE-L04/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.112 W/kg


Left Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.384 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.125 W/kg

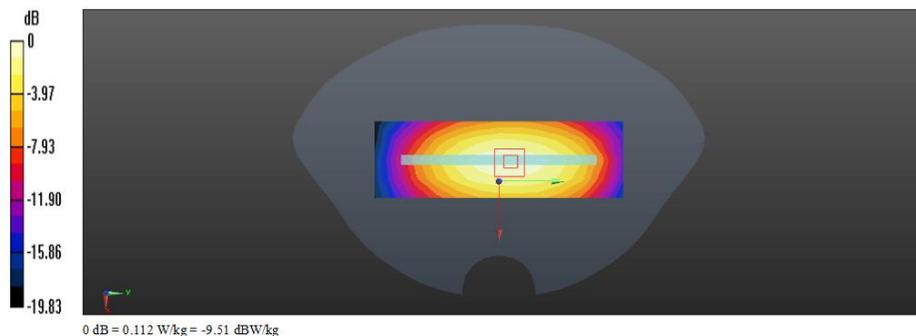

Date/Time: 04/15/2015 20:40:02

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 1RB Body Right**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right Side 10mm/ALE-L04/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.123 W/kg


Right Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.774 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.132 W/kg

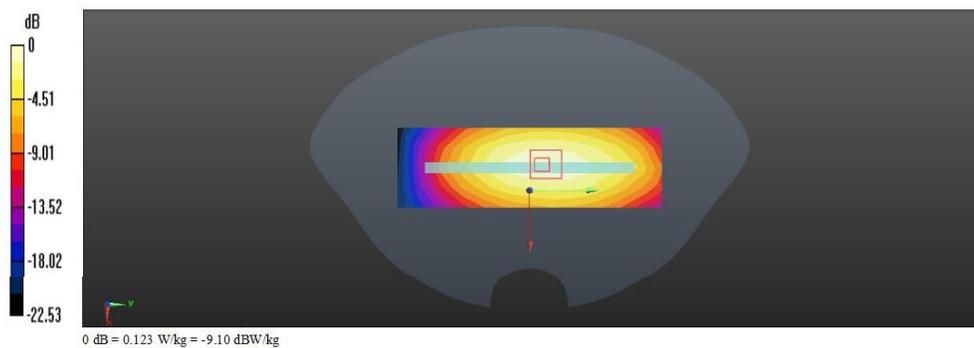

Date/Time: 04/15/2015 22:04:23

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 1RB Body Bottom

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Bottom Side 10mm/ALE-L04/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0618 W/kg


Bottom Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.414 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0990 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0782 W/kg

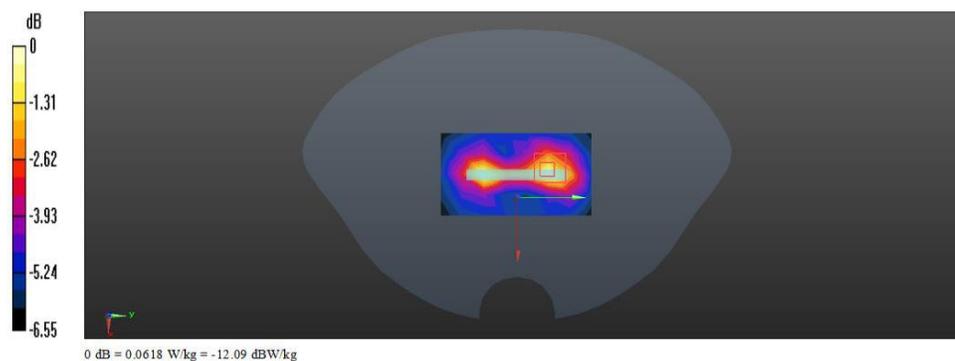

Date/Time: 04/15/2015 22:45:37

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 50%RB Body Front**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Front Side 10mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0982 W/kg


Front Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.607 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.106 W/kg

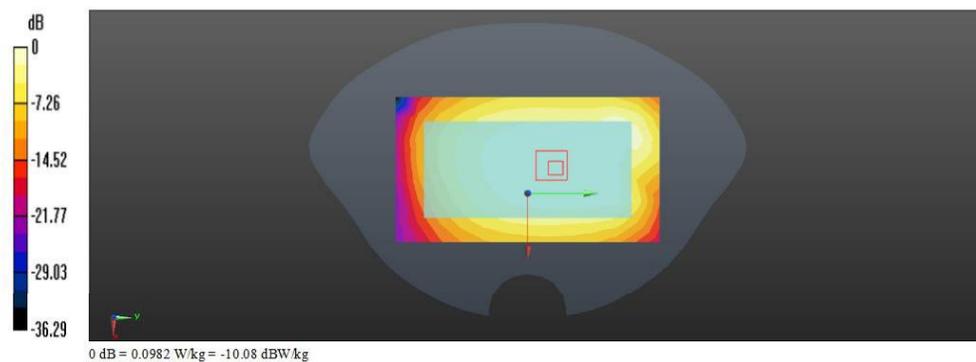

Date/Time: 04/15/2015 23:16:35

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 50%RB Body Back

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Back Side 10mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.163 W/kg


Back Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.394 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.201 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.177 W/kg

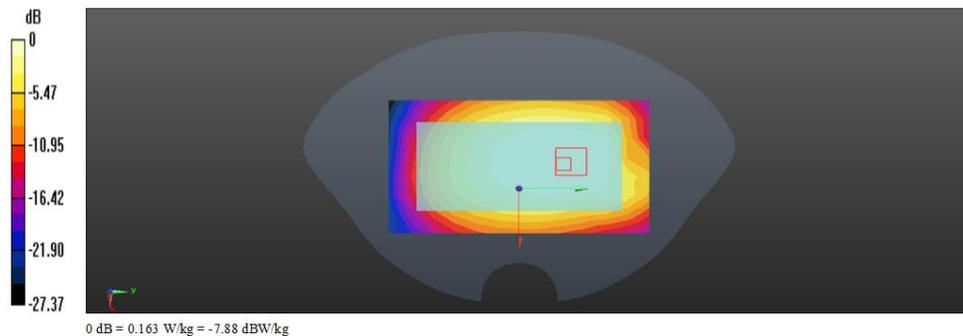

Date/Time: 04/15/2015 23:46:48

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 50%RB Body Left

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711 \text{ MHz}$; $\sigma = 0.964 \text{ S/m}$; $\epsilon_r = 55.414$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left Side 10mm/ALE-L04/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0628 W/kg


Left Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.980 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0820 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0724 W/kg

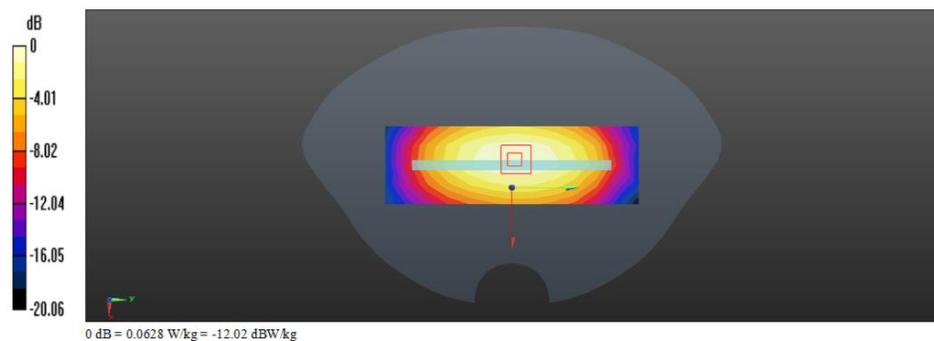

Date/Time: 04/16/2015 00:13:18

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 50%RB Body Right

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right Side 10mm/ALE-L04/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0674 W/kg


Right Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.118 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0900 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.0794 W/kg

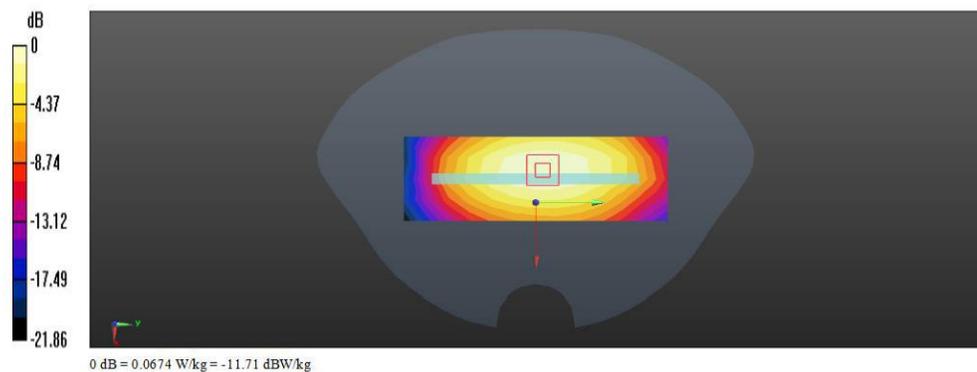

Date/Time: 04/15/2015 21:40:01

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 50%RB Body Bottom

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Bottom Side 10mm/ALE-L04/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0488 W/kg


Bottom Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.741 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0612 W/kg

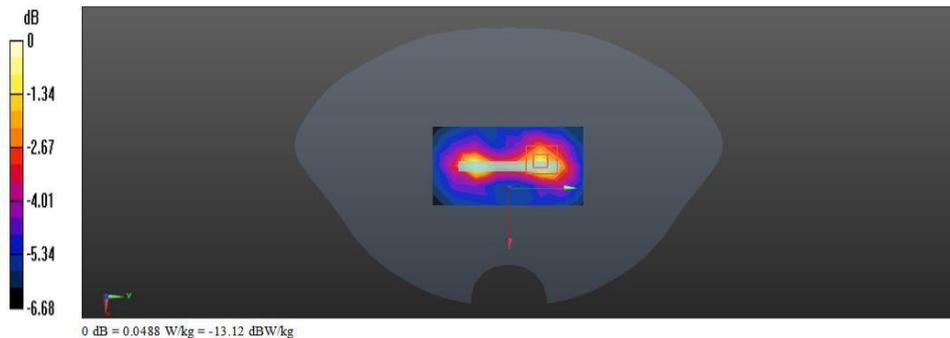

Date/Time: 04/16/2015 00:41:58

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 1RB Body Back SIM 2

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Back Side 10mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.217 W/kg


Back Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.152 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

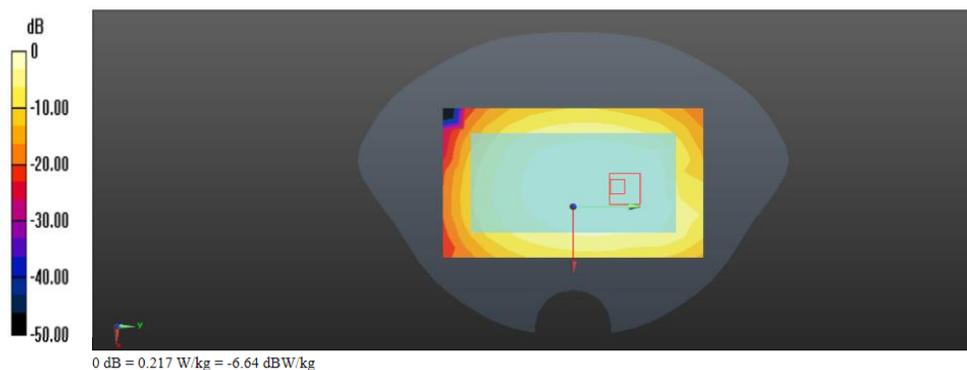

Date/Time: 04/16/2015 01:11:17

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 12 1RB Body Battery 2#

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711 \text{ MHz}$; $\sigma = 0.964 \text{ S/m}$; $\epsilon_r = 55.414$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Back Side 10mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.180 W/kg


Back Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.473 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.197 W/kg

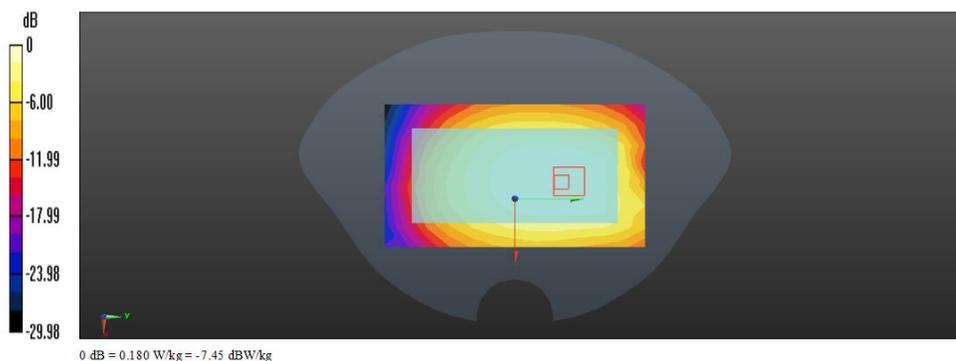

Date/Time: 04/10/2015 15:14:47

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Right Head touch cheek**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.422$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.38, 10.38, 10.38); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right hand touch cheek/ALE-L04/Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.105 W/kg


Right hand touch cheek/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.323 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.0949 W/kg

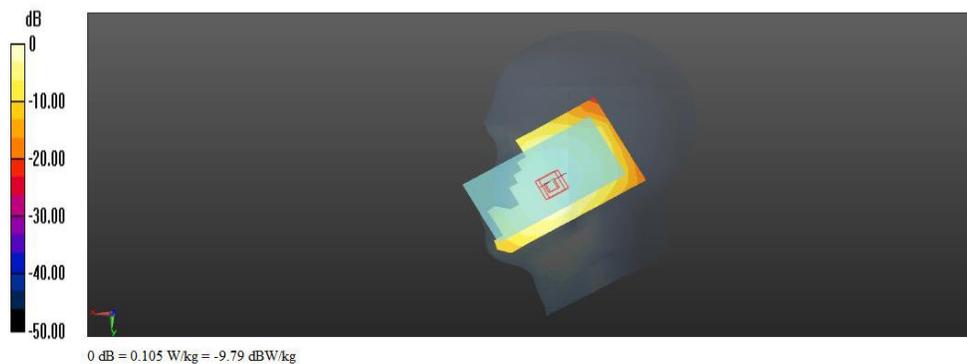

Date/Time: 04/10/2015 15:49:56

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Right Head Tilted**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.422$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.38, 10.38, 10.38); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right hand Tilted/ALE-L04/Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0971 W/kg


Right hand Tilted/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.853 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.104 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.0885 W/kg

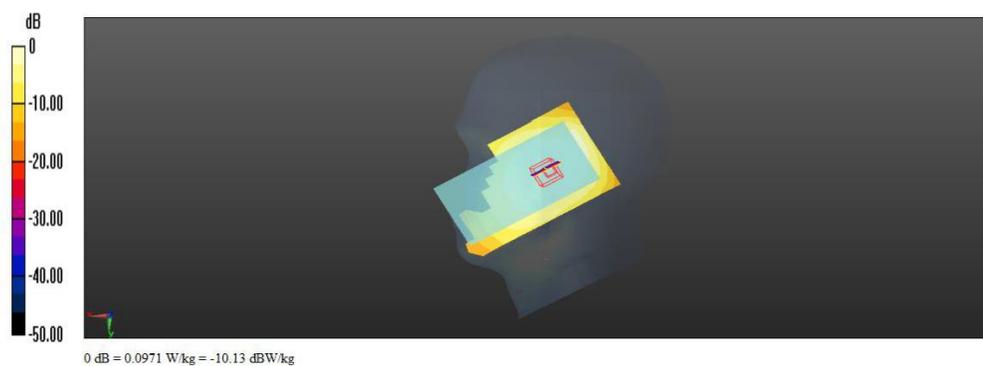

Date/Time: 04/10/2015 13:13:08

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Left Head touch cheek

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.422$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.38, 10.38, 10.38); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left Hand touch cheek/ALE-L04/Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.116 W/kg


Left Hand touch cheek/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.469 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

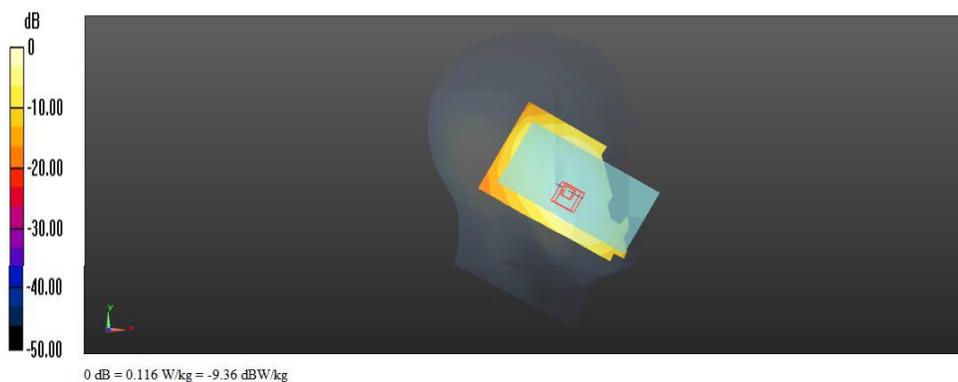

Date/Time: 04/10/2015 13:35:18

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Left Head touch cheek SIM2

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.422$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.38, 10.38, 10.38); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left Hand touch cheek/ALE-L04/Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.108 W/kg


Left Hand touch cheek/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.358 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

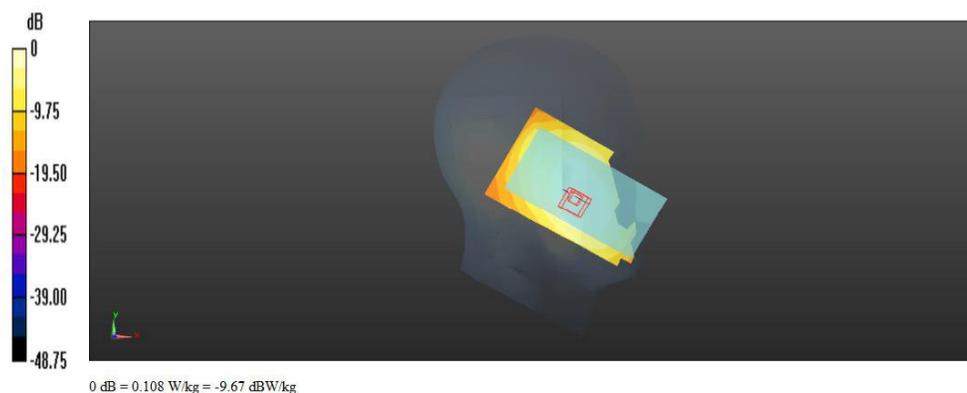

Date/Time: 04/10/2015 14:29:37

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Left Head Tilted**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.422$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.38, 10.38, 10.38); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left Hand Tilted/ALE-L04/Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0967 W/kg


Left Hand Tilted/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.705 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.104 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.0884 W/kg

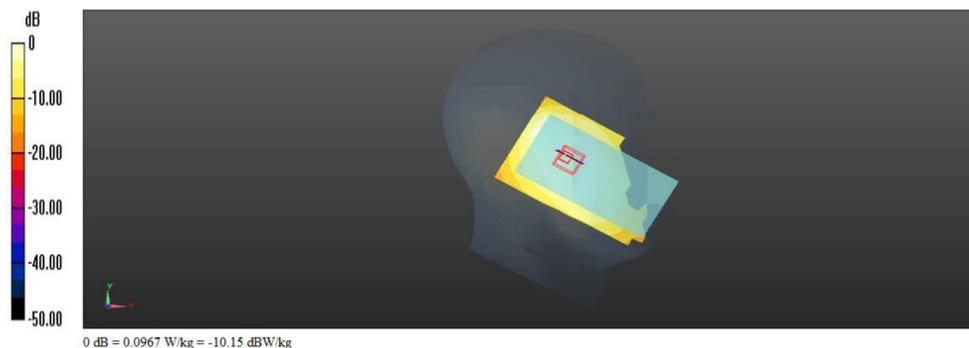

Date/Time: 04/10/2015 16:26:18

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 50%RB Right Head touch cheek

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711 \text{ MHz}$; $\sigma = 0.873 \text{ S/m}$; $\epsilon_r = 42.422$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.38, 10.38, 10.38); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right hand touch cheek/ALE-L04/Area Scan (11x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0903 W/kg


Right hand touch cheek/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.772 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.0855 W/kg

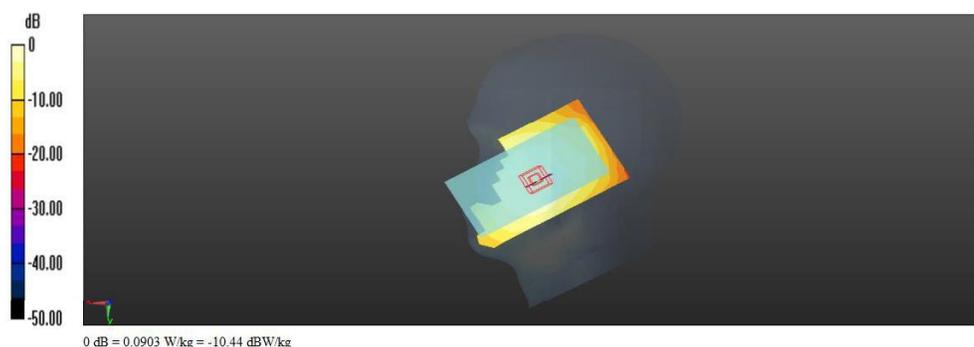

Date/Time: 04/10/2015 17:04:07

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 50%RB Right Head Tilted**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.422$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.38, 10.38, 10.38); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right hand Tilted/ALE-L04/Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0779 W/kg


Right hand Tilted/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.075 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0830 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.0712 W/kg

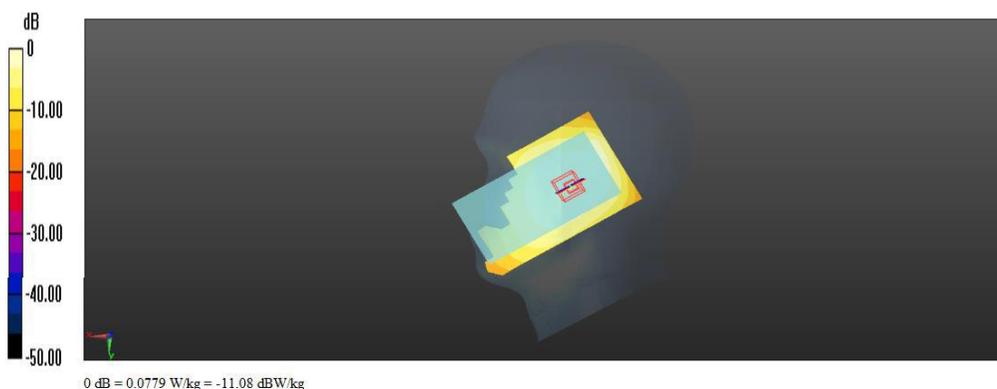

Date/Time: 04/10/2015 17:40:41

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 50%RB Left Head touch cheek

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz
 Medium parameters used (interpolated): $f = 711 \text{ MHz}$; $\sigma = 0.873 \text{ S/m}$; $\epsilon_r = 42.422$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.38, 10.38, 10.38); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left Hand touch cheek/ALE-L04/Area Scan (11x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0988 W/kg


Left Hand touch cheek/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.704 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.0899 W/kg

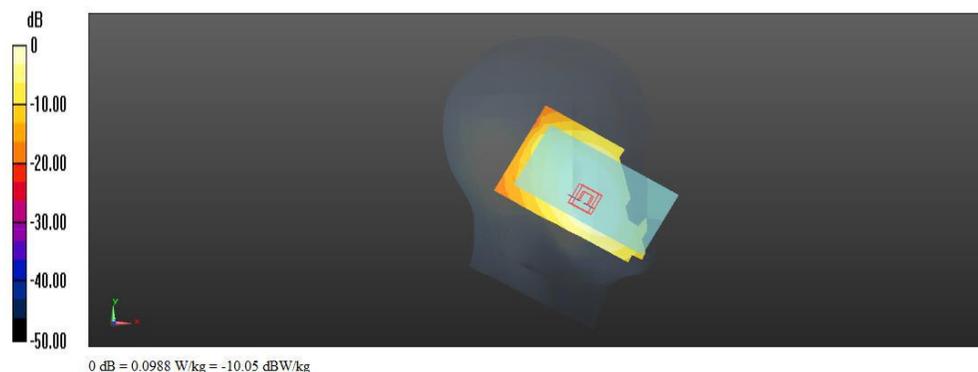

Date/Time: 04/10/2015 18:56:30

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 50%RB Left Head Tilted

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz
 Medium parameters used (interpolated): $f = 711 \text{ MHz}$; $\sigma = 0.873 \text{ S/m}$; $\epsilon_r = 42.422$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.38, 10.38, 10.38); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left Hand Tilted/ALE-L04/Area Scan (11x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0814 W/kg


Left Hand Tilted/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.304 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.0767 W/kg

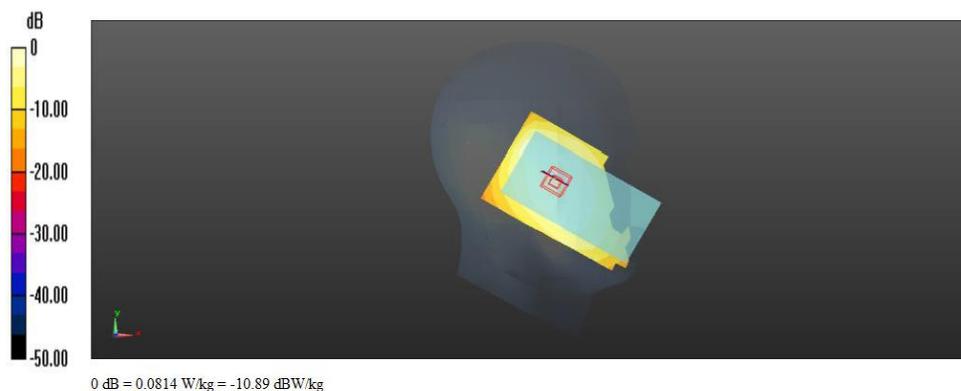

Date/Time: 04/10/2015 19:35:11

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Left Hand touch cheek Battery 2#

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.422$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.38, 10.38, 10.38); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left Hand touch cheek/ALE-L04/Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.128 W/kg


Left Hand touch cheek/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.515 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.116 W/kg

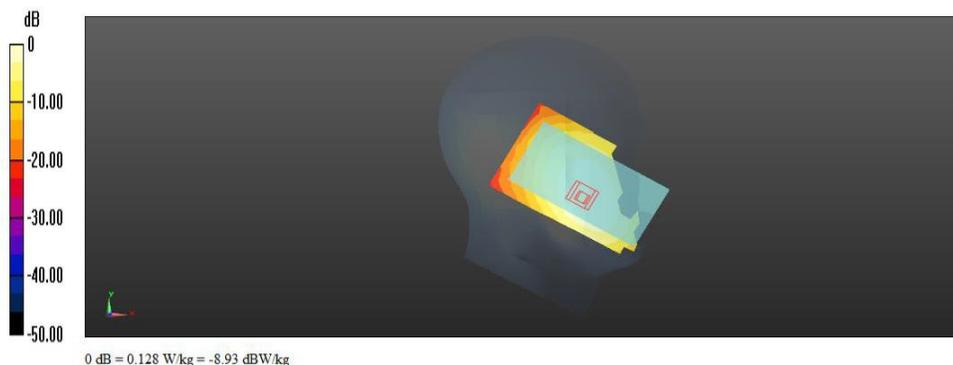

Date/Time: 04/13/2015 21:44:27

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Body Front**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Front Side 15mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.112 W/kg


Front Side 15mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.550 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.122 W/kg

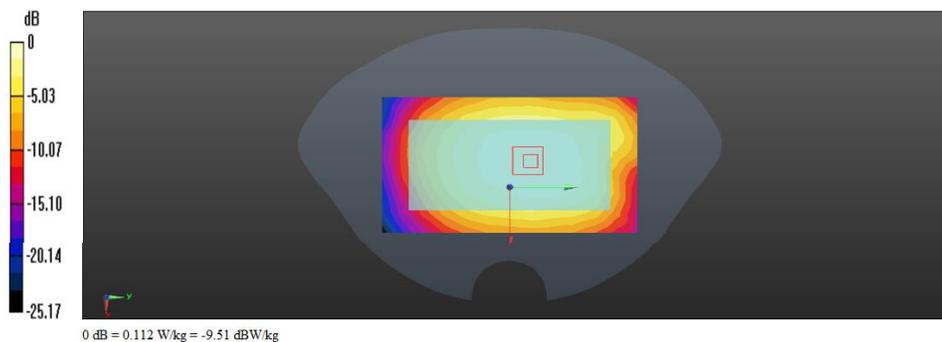

Date/Time: 04/13/2015 22:13:58

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Body Back

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Back Side 15mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.165 W/kg


Back Side 15mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.415 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

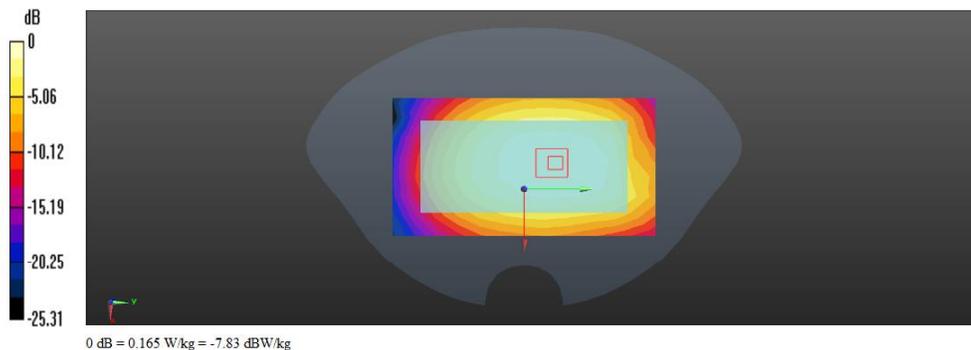

Date/Time: 04/13/2015 22:43:55

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 50%RB Body Front

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz
 Medium parameters used (interpolated): $f = 711 \text{ MHz}$; $\sigma = 0.873 \text{ S/m}$; $\epsilon_r = 42.408$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Front Side 15mm/ALE-L04/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0827 W/kg


Front Side 15mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.927 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.0876 W/kg

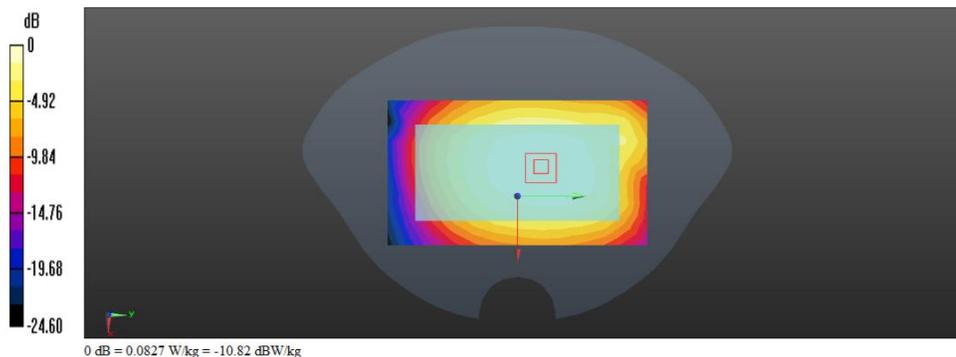

Date/Time: 04/13/2015 23:17:17

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 50%RB Body Back**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Back Side 15mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.118 W/kg


Back Side 15mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.268 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.130 W/kg

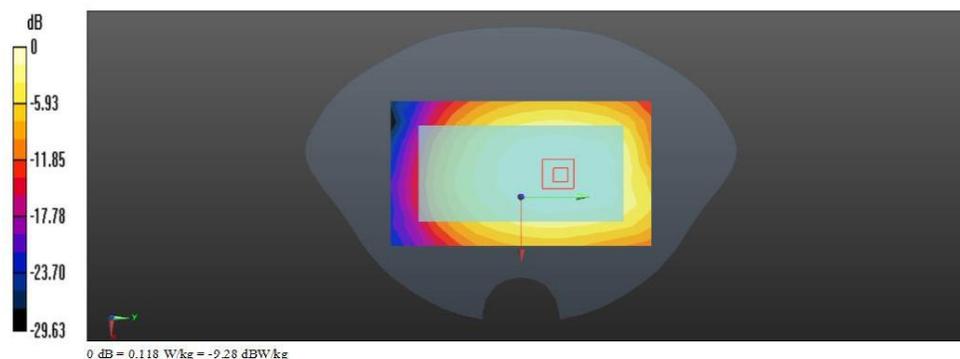

Date/Time: 04/13/2015 23:47:41

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Body Back SIM 2**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Back Side 15mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.167 W/kg


Back Side 15mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.908 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.186 W/kg

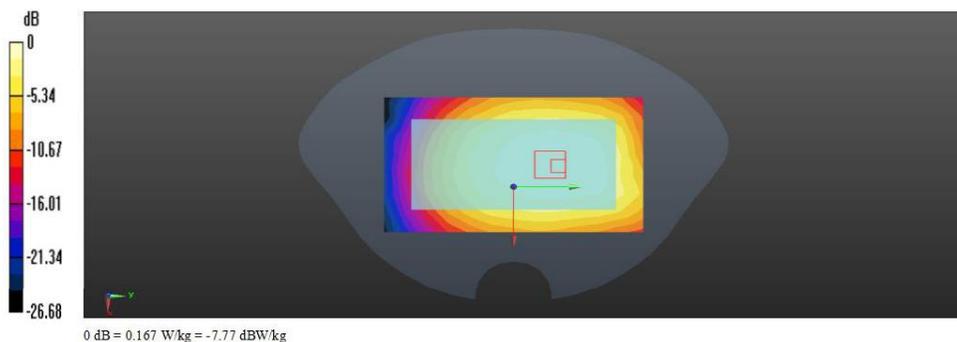

Date/Time: 04/14/2015 00:18:56

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Body Back Battery 2#

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Back Side 15mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.167 W/kg


Back Side 15mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.401 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

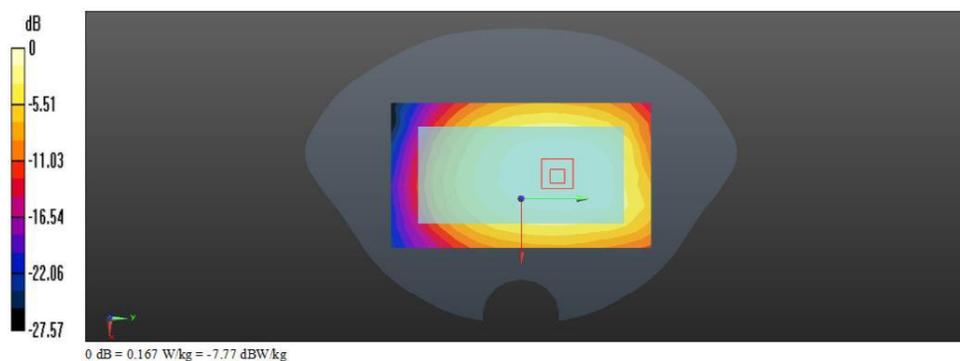

Date/Time: 04/16/2015 01:50:00

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Body Front**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Front Side 10mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.131 W/kg


Front Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.887 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.142 W/kg

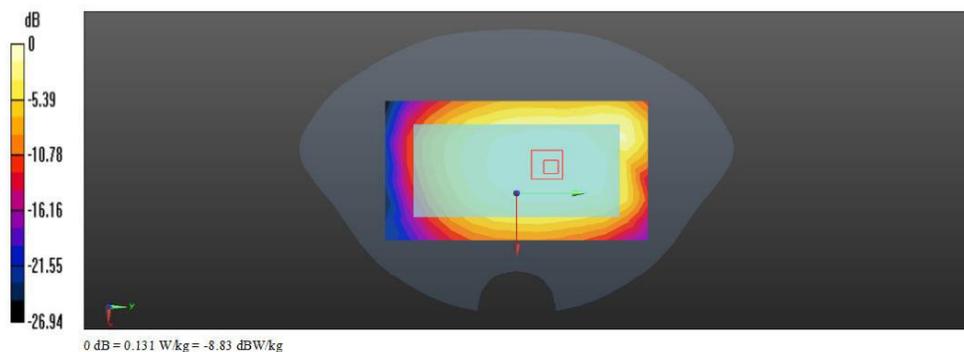

Date/Time: 04/16/2015 02:18:55

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Body Back

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Back Side 10mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.217 W/kg


Back Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.079 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.233 W/kg

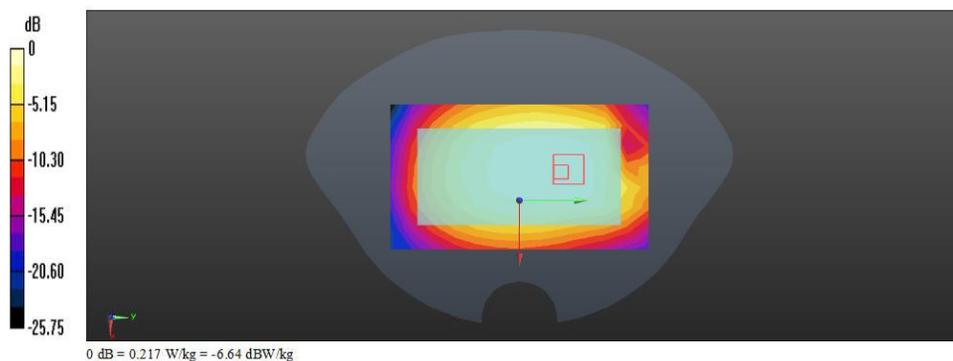

Date/Time: 04/16/2015 02:49:04

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Body Left

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left Side 10mm/ALE-L04/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0833 W/kg


Left Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.032 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0941 W/kg

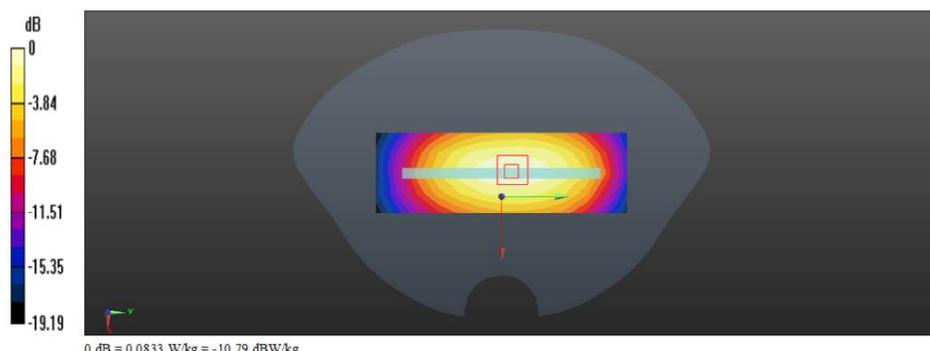

Date/Time: 04/16/2015 03:15:56

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Body Right**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right Side 10mm/ALE-L04/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0905 W/kg


Right Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.556 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.105 W/kg

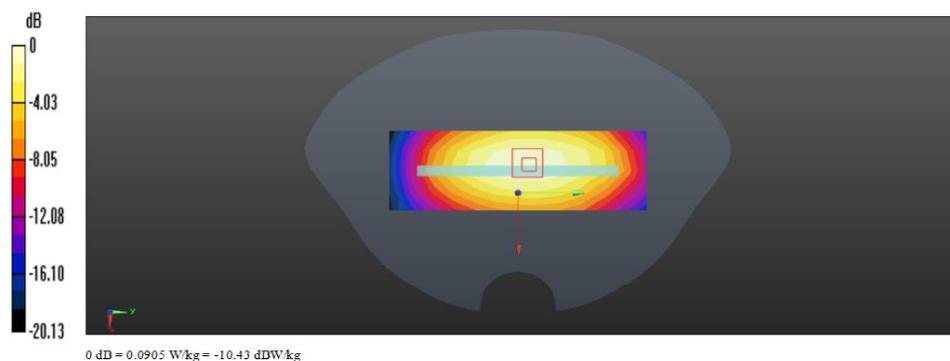

Date/Time: 04/16/2015 03:43:49

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Body Bottom

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Bottom Side 10mm/ALE-L04/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0490 W/kg


Bottom Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.796 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0760 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0604 W/kg

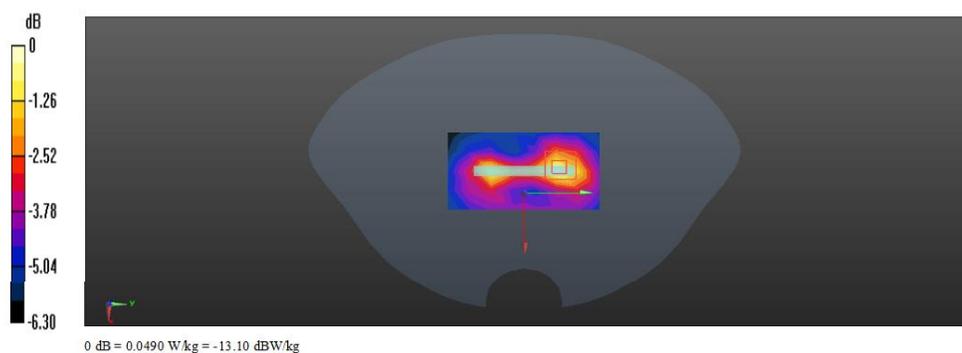

Date/Time: 04/16/2015 04:33:32

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 50%RB Body Front

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz
 Medium parameters used (interpolated): $f = 711 \text{ MHz}$; $\sigma = 0.964 \text{ S/m}$; $\epsilon_r = 55.414$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Front Side 10mm/ALE-L04/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0923 W/kg


Front Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.159 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

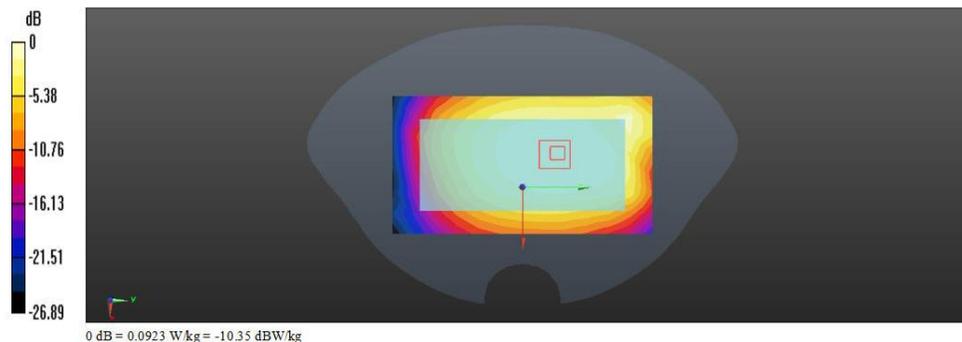

Date/Time: 04/16/2015 05:03:59

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 50%RB Body Back**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Back Side 10mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.161 W/kg


Back Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.025 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.201 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.172 W/kg

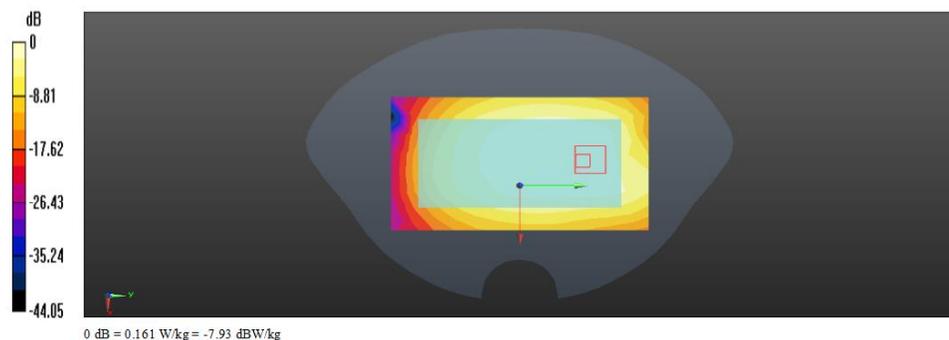

Date/Time: 04/16/2015 05:34:38

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 50%RB Body Left

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711 \text{ MHz}$; $\sigma = 0.964 \text{ S/m}$; $\epsilon_r = 55.414$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left Side 10mm/ALE-L04/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0840 W/kg


Left Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.086 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.0932 W/kg

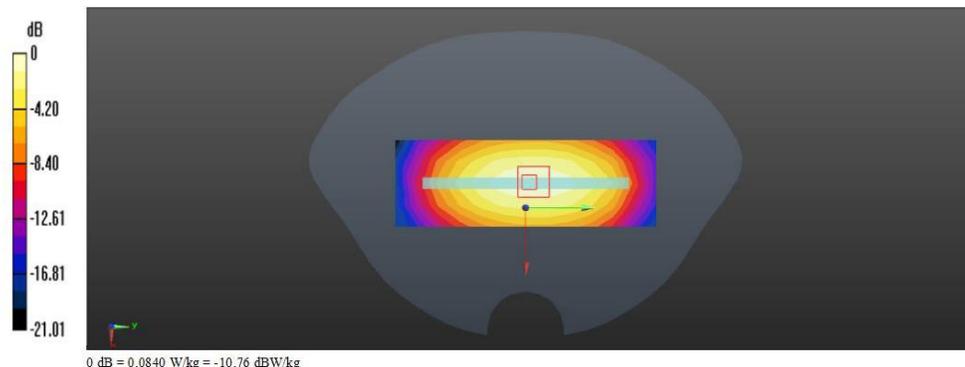

Date/Time: 04/16/2015 06:00:12

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 50%RB Body Right

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz
 Medium parameters used (interpolated): $f = 711 \text{ MHz}$; $\sigma = 0.964 \text{ S/m}$; $\epsilon_r = 55.414$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Right Side 10mm/ALE-L04/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0937 W/kg


Right Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.525 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

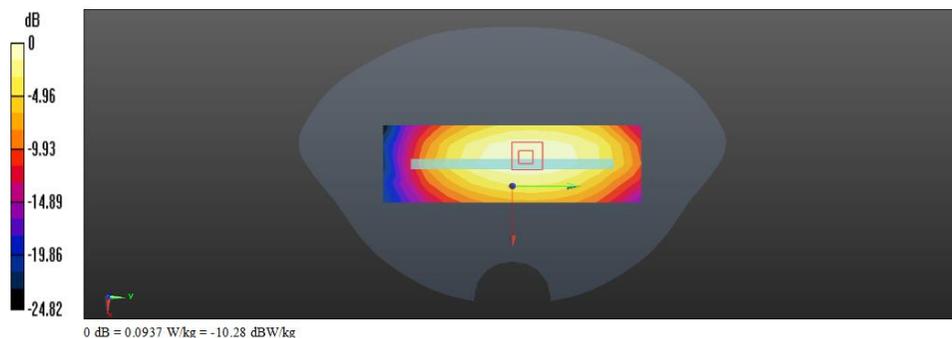

Date/Time: 04/16/2015 04:07:20

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 50%RB Body Bottom**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Bottom Side 10mm/ALE-L04/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0371 W/kg


Bottom Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.181 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0463 W/kg

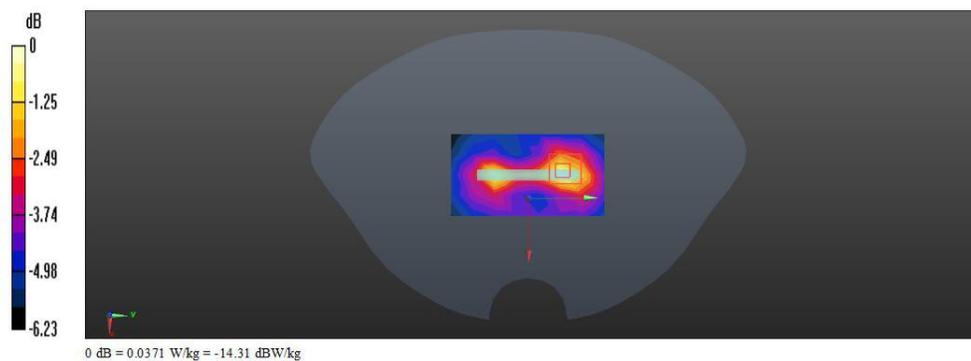

Date/Time: 04/16/2015 06:27:19

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Body Back SIM 2

DUT: Smart phone ; Type: ALE-L04; Serial: NA

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Back Side 10mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.234 W/kg


Back Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.223 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.255 W/kg

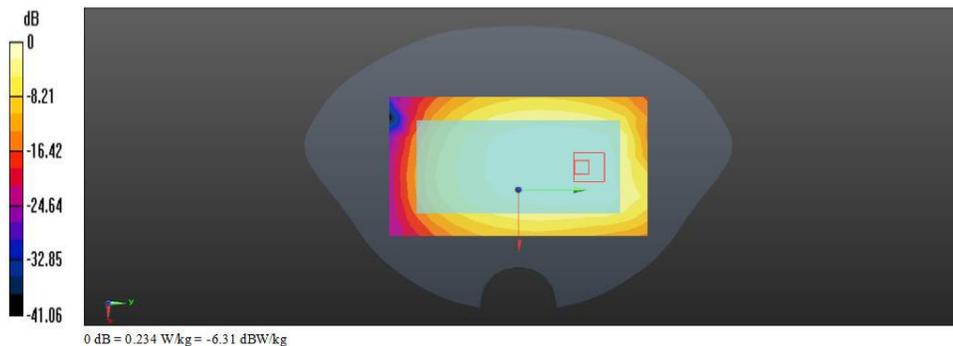

Date/Time: 04/16/2015 06:56:31

Test Laboratory: BTL Inc.

Smart phone Huawei ALE-L04 LTE Band 17 1RB Body Back Battery 2#**DUT: Smart phone ; Type: ALE-L04; Serial: NA**

Communication System: UID 0, LTE-FDD(1RB, 10MHz, QPSK) (0); Frequency: 711 MHz

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.25, 10.25, 10.25); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/15/2014
- Phantom: SAM 1; Type: SAM; Serial: 1784
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Back Side 10mm/ALE-L04/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.182 W/kg


Back Side 10mm/ALE-L04/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.542 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.207 W/kg

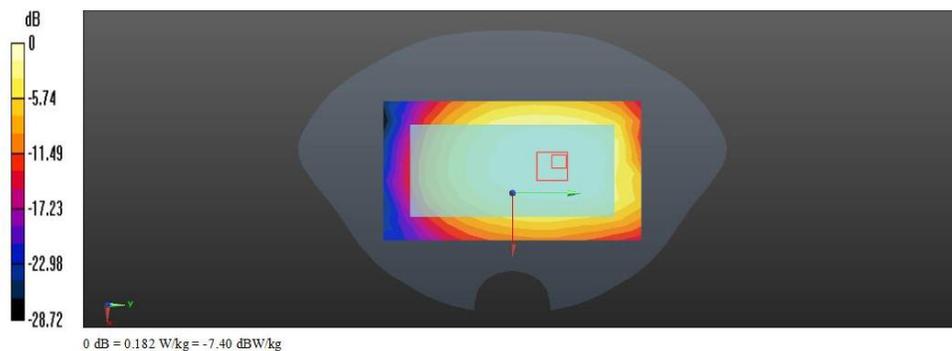

Appendix C

Calibration Certificate:

Please reference next page.