

**Appendix B. SAR Measurement Plots**

Table of contents
GSM850 Head
GSM850 Body
GSM1900 Head
GSM1900 Body
UMTS Band II Head
UMTS Band II Body
UMTS Band IV Head
UMTS Band IV Body
UMTS Band V Head
UMTS Band V Body
LTE Band II Head
LTE Band II Body
LTE Band IV Head
LTE Band IV Body
LTE Band V Head
LTE Band V Body
LTE Band XII Head
LTE Band XII Body
WiFi 2.4G Head
WiFi 2.4G Body

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 GSM850 251CH Right touch

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 40.146$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(10.26, 10.26, 10.26); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.288 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.249 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.278 W/kg

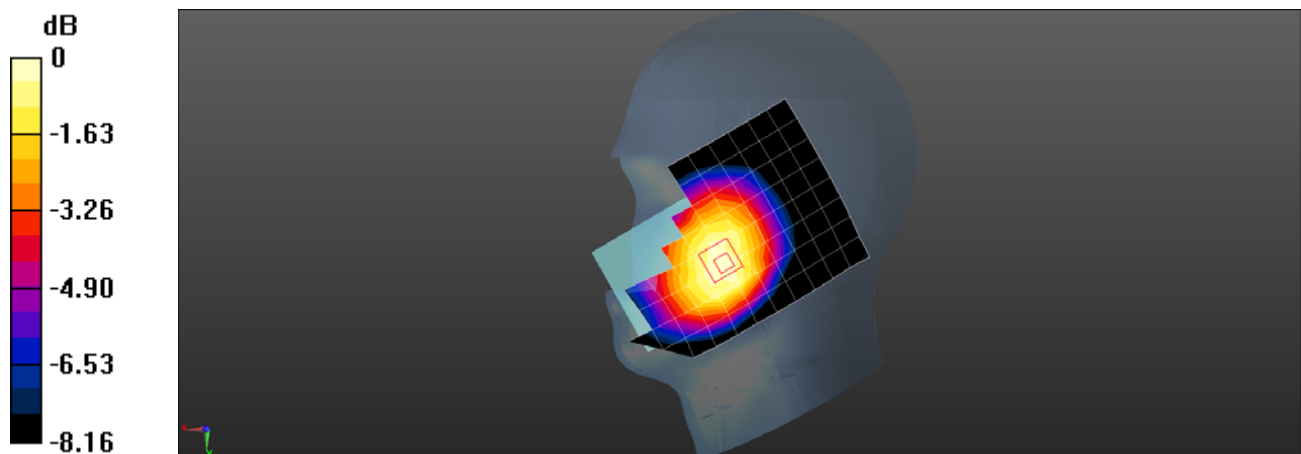

0 dB = 0.278 W/kg = -5.56 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 GSM850 190CH Back side 15mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.989 \text{ S/m}$; $\epsilon_r = 54.975$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(9.87, 9.87, 9.87); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.405 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.15 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.407 W/kg

SAR(1 g) = 0.335 W/kg ; SAR(10 g) = 0.263 W/kg

Maximum value of SAR (measured) = 0.387 W/kg

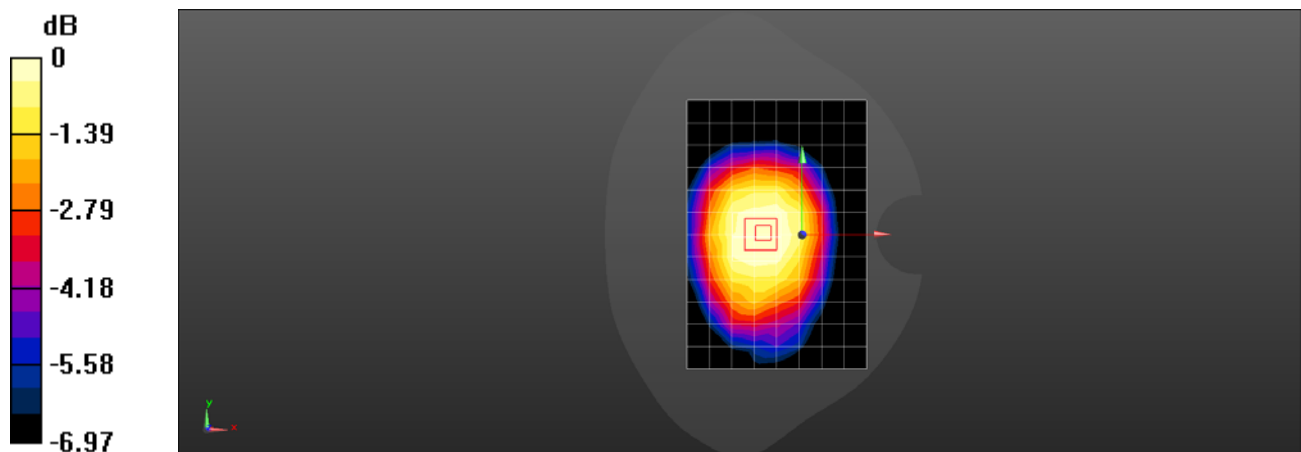

0 dB = 0.387 W/kg = -4.12 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 GSM850 GPRS 2TS 190CH Right side 10mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.975$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(9.87, 9.87, 9.87); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.561 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.36 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.647 W/kg

SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.339 W/kg

Maximum value of SAR (measured) = 0.599 W/kg

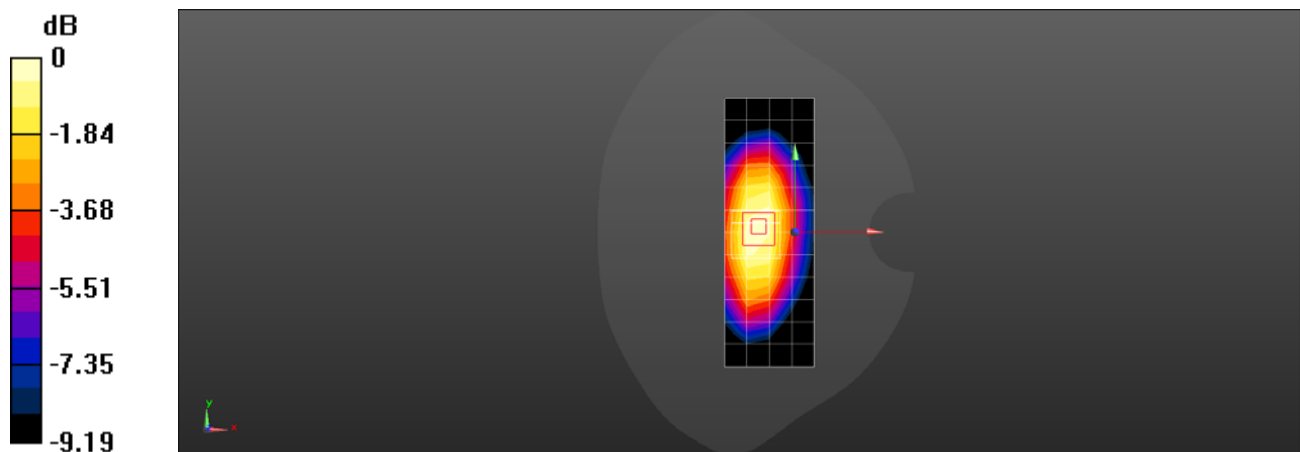

0 dB = 0.599 W/kg = -2.23 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 GSM1900 661CH Left touch

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.378 \text{ S/m}$; $\epsilon_r = 40.11$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(8.17, 8.17, 8.17); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.257 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.581 V/m ; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.205 W/kg ; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.265 W/kg

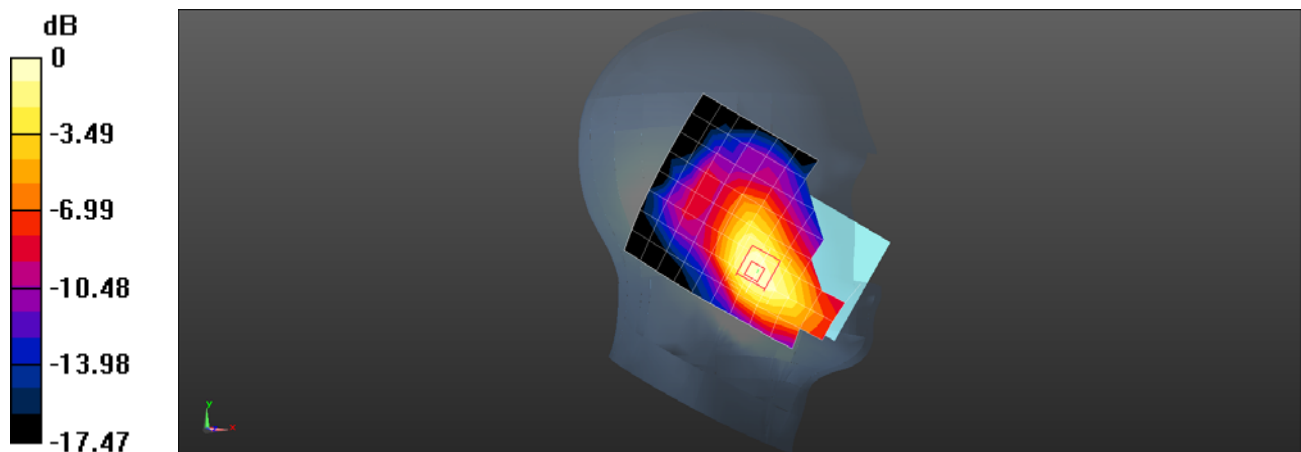

$0 \text{ dB} = 0.265 \text{ W/kg} = -5.76 \text{ dBW/kg}$

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 GSM1900 661CH Back side 15mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.565 \text{ S/m}$; $\epsilon_r = 51.921$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.92, 7.92, 7.92); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.487 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.317 V/m ; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.547 W/kg

SAR(1 g) = 0.334 W/kg ; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 0.479 W/kg

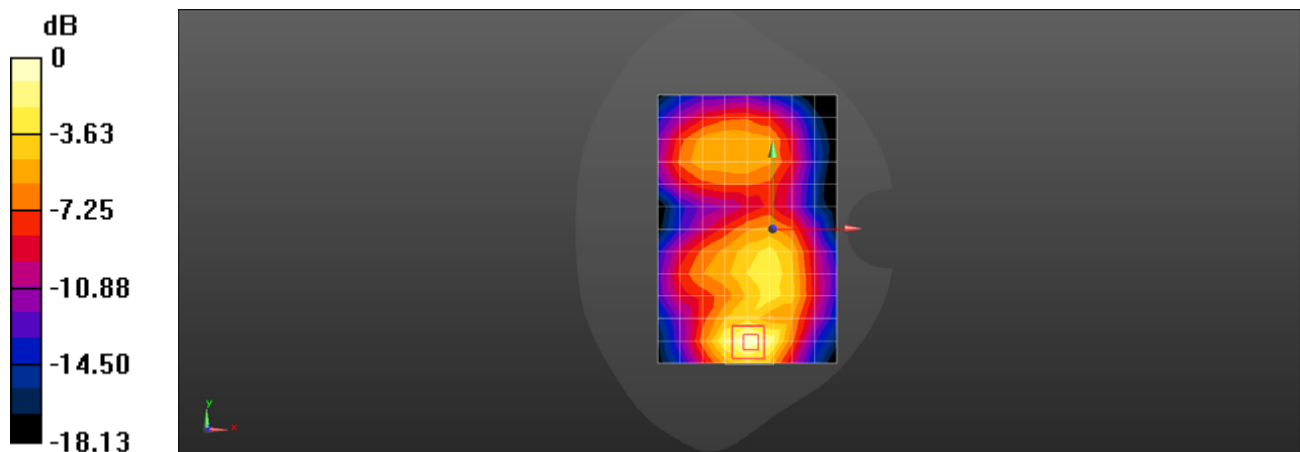

0 dB = $0.479 \text{ W/kg} = -3.19 \text{ dBW/kg}$

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 GSM1900 GPRS 2TS 661CH Bottom side 10mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.565 \text{ S/m}$; $\epsilon_r = 51.921$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.92, 7.92, 7.92); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.543 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.61 V/m ; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.764 W/kg

SAR(1 g) = 0.465 W/kg ; SAR(10 g) = 0.248 W/kg

Maximum value of SAR (measured) = 0.672 W/kg

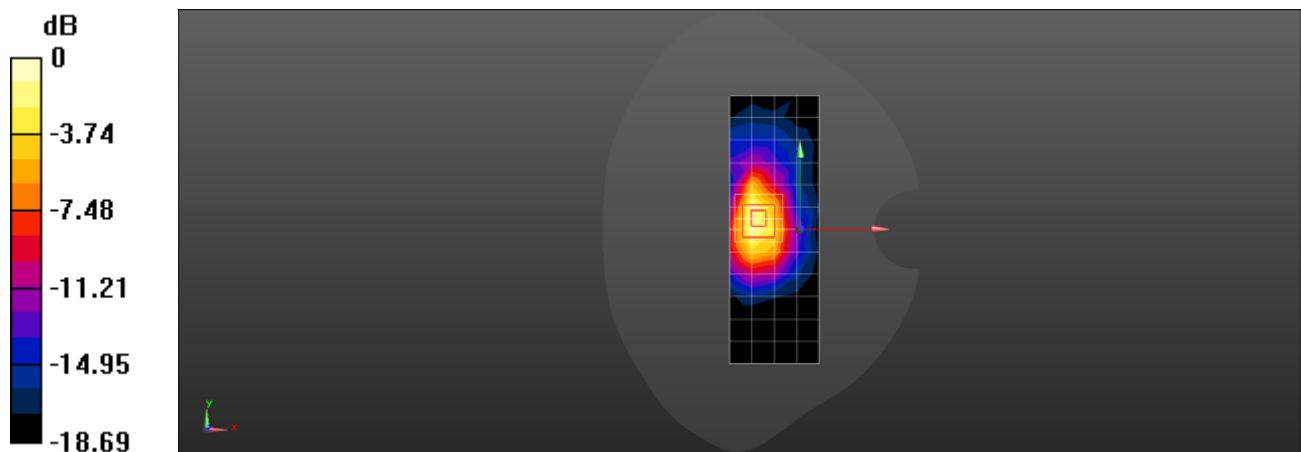

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 GSM1900 GPRS 2TS 661CH Bottom side 0mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.565 \text{ S/m}$; $\epsilon_r = 51.921$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.92, 7.92, 7.92); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.69 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.73 V/m ; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 5.11 W/kg

SAR(1 g) = 2.15 W/kg ; SAR(10 g) = 0.850 W/kg

Maximum value of SAR (measured) = 4.13 W/kg

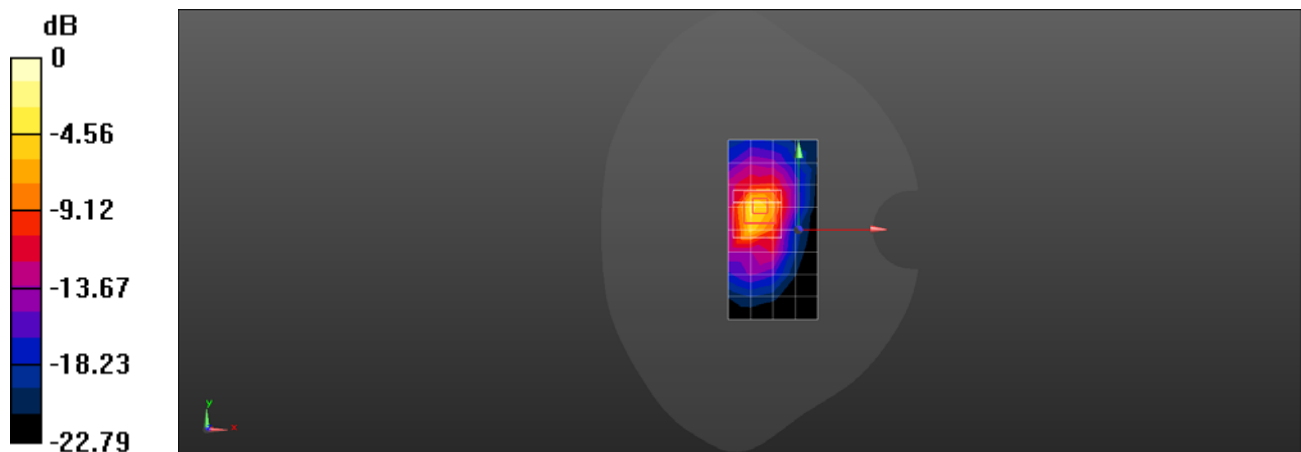

0 dB = 4.13 W/kg = 6.16 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 UMTS Band II 9400CH Left touch

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.378 \text{ S/m}$; $\epsilon_r = 40.11$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(8.17, 8.17, 8.17); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.470 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.292 V/m ; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.366 W/kg ; SAR(10 g) = 0.233 W/kg

Maximum value of SAR (measured) = 0.478 W/kg

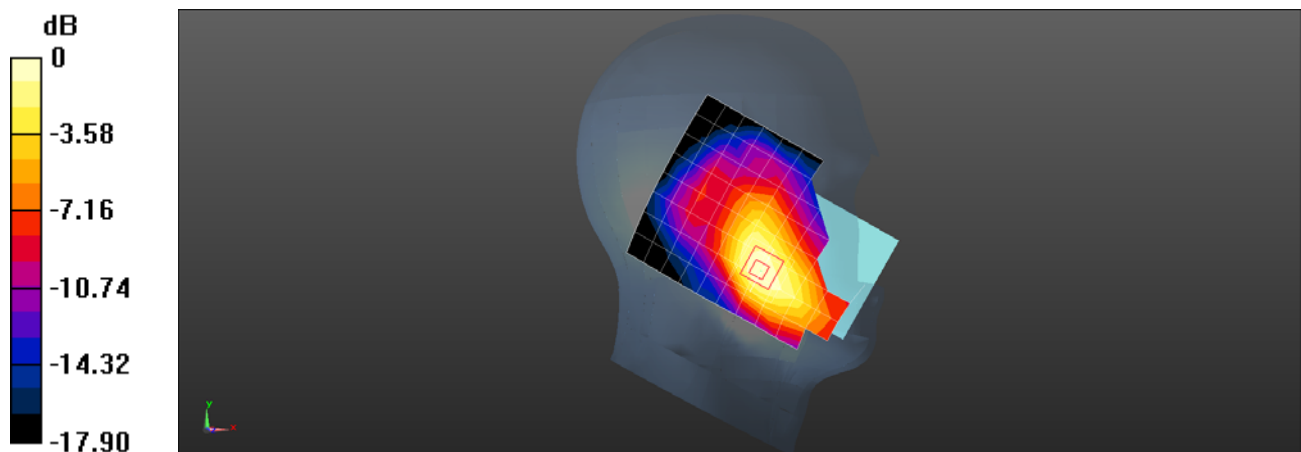

$0 \text{ dB} = 0.478 \text{ W/kg} = -3.20 \text{ dBW/kg}$

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 UMTS Band II 9400CH Back side 15mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.565$ S/m; $\epsilon_r = 51.921$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.92, 7.92, 7.92); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.518 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.051 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.538 W/kg

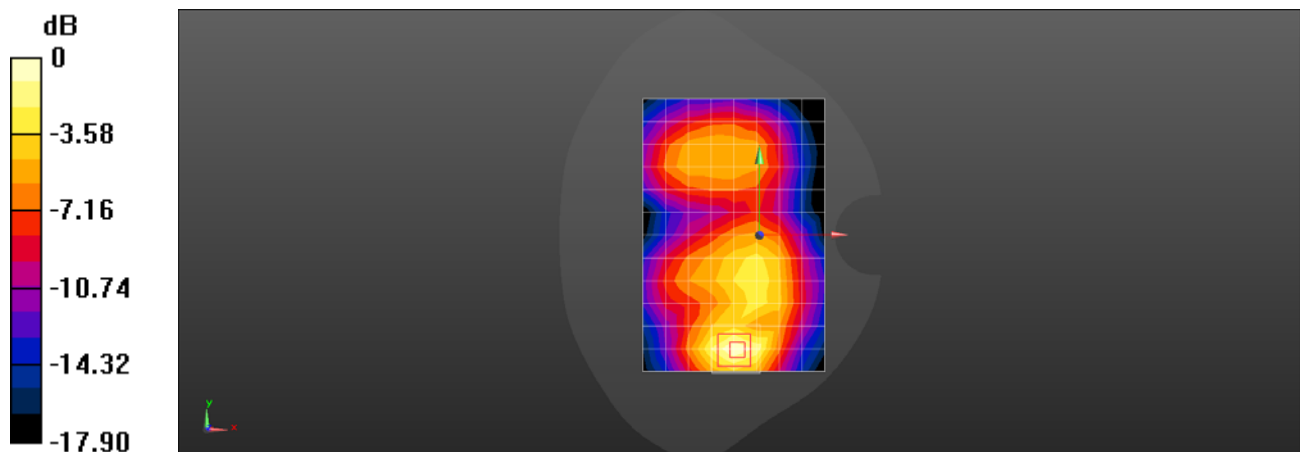

0 dB = 0.538 W/kg = -2.69 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 UMTS Band II 9400CH Bottom side 10mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.565 \text{ S/m}$; $\epsilon_r = 51.921$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.92, 7.92, 7.92); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.614 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.09 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.894 W/kg

SAR(1 g) = 0.543 W/kg ; SAR(10 g) = 0.288 W/kg

Maximum value of SAR (measured) = 0.786 W/kg

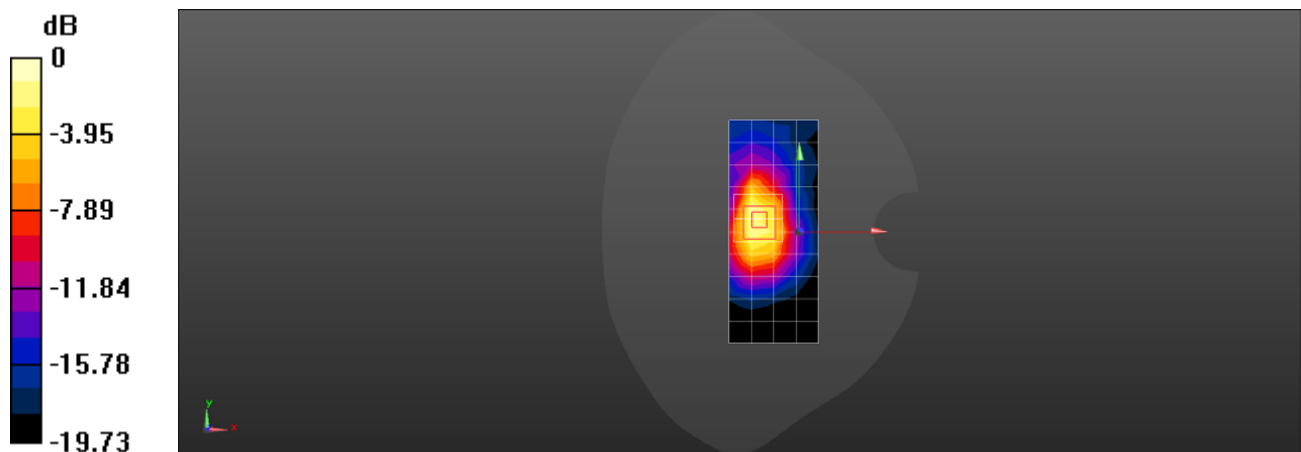

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 UMTS Band II 9400CH Front side 0mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.565$ S/m; $\epsilon_r = 51.921$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.92, 7.92, 7.92); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 8.05 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.485 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 15.5 W/kg

SAR(1 g) = 5.86 W/kg; SAR(10 g) = 2.44 W/kg

Maximum value of SAR (measured) = 12.5 W/kg

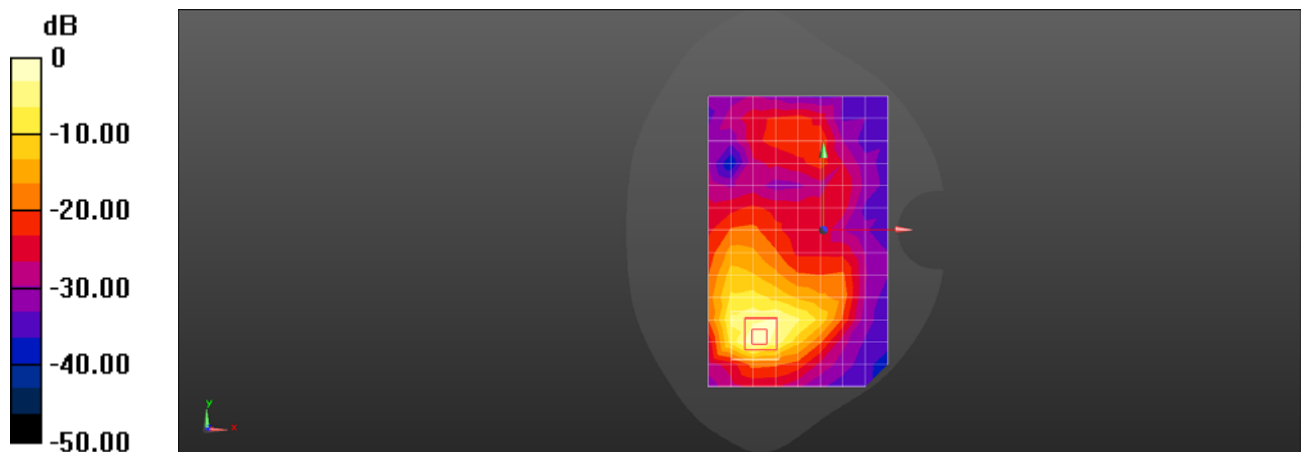

0 dB = 8.05 W/kg = 9.06 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 UMTS Band IV 1513CH Left touch

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1753 \text{ MHz}$; $\sigma = 1.395 \text{ S/m}$; $\epsilon_r = 40.956$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(8.53, 8.53, 8.53); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.541 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.612 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.659 W/kg

SAR(1 g) = 0.458 W/kg ; SAR(10 g) = 0.300 W/kg

Maximum value of SAR (measured) = 0.590 W/kg

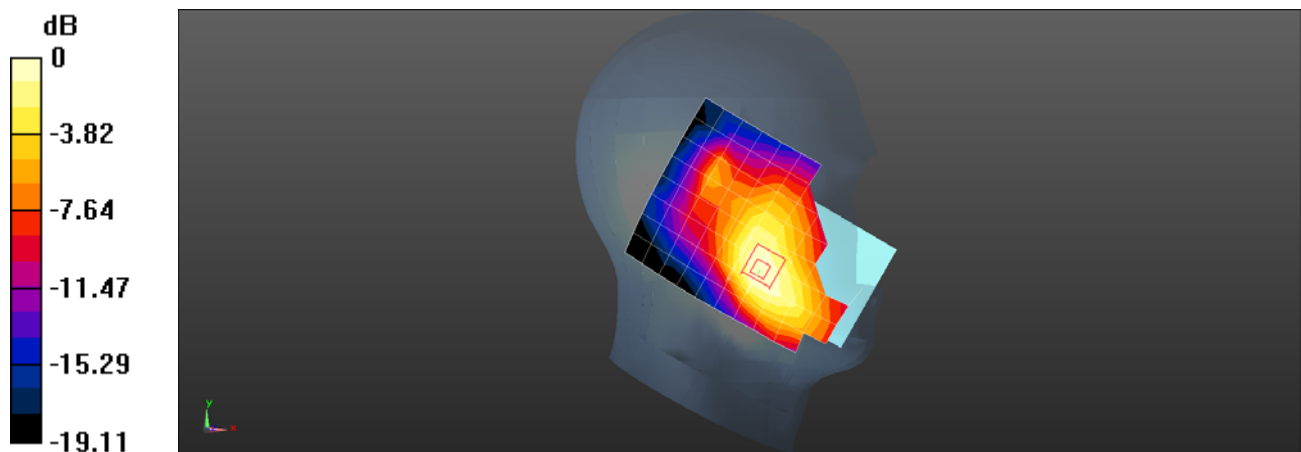

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 UMTS Band IV 1413CH Back side 15mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.465 \text{ S/m}$; $\epsilon_r = 52.83$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(8.22, 8.22, 8.22); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.412 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.331 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.330 W/kg ; SAR(10 g) = 0.227 W/kg

Maximum value of SAR (measured) = 0.410 W/kg

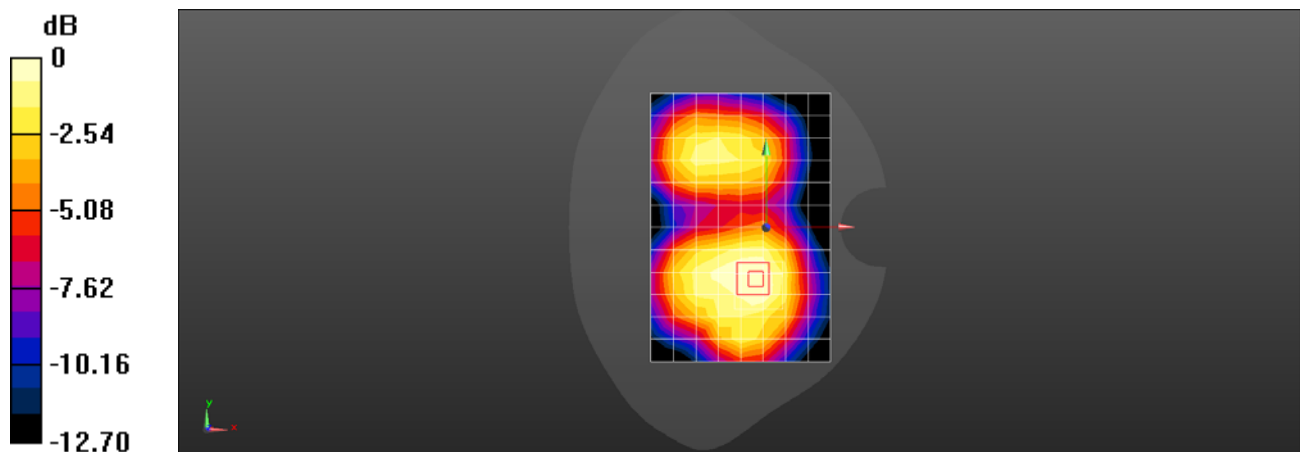

$0 \text{ dB} = 0.410 \text{ W/kg} = -3.88 \text{ dBW/kg}$

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 UMTS Band IV 1413CH Back side 10mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.465$ S/m; $\epsilon_r = 52.83$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(8.22, 8.22, 8.22); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.549 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.176 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.581 W/kg

SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.512 W/kg

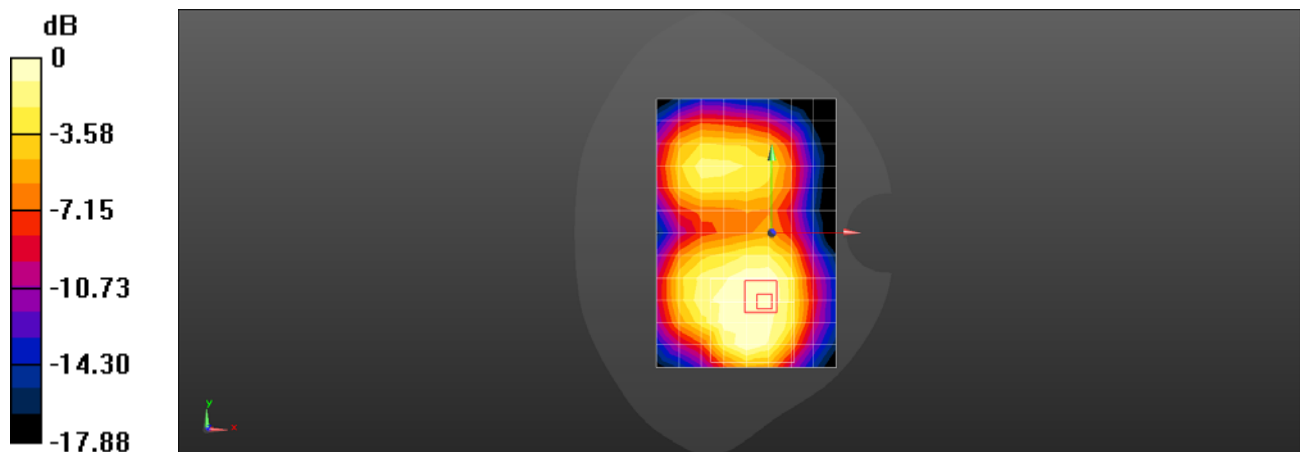

0 dB = 0.512 W/kg = -2.91 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 UMTS Band V 4182CH Right touch

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 40.29$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(10.26, 10.26, 10.26); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.238 W/kg

Configuration/Head/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 9.426 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.253 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.167 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.239 W/kg

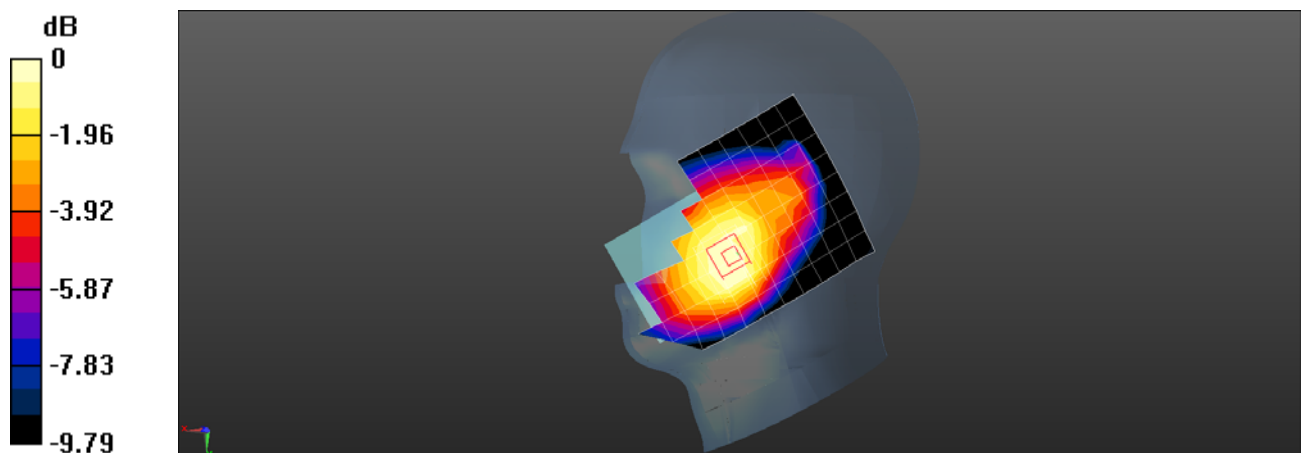

0 dB = 0.239 W/kg = -6.21 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 UMTS Band V 4182CH Back side 15mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.988$ S/m; $\epsilon_r = 54.979$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(9.87, 9.87, 9.87); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.432 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 18.37 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.279 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.411 W/kg

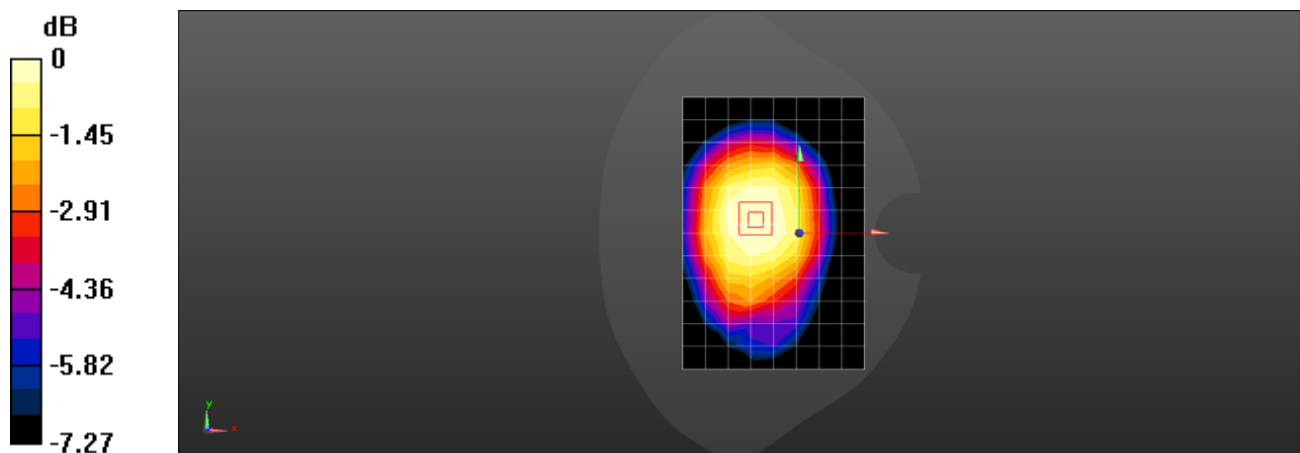

0 dB = 0.411 W/kg = -3.86 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 UMTS Band V 4182CH Right side 10mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.988$ S/m; $\epsilon_r = 54.979$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(9.87, 9.87, 9.87); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.536 W/kg

Configuration/Body/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 18.99 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.591 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.308 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.546 W/kg

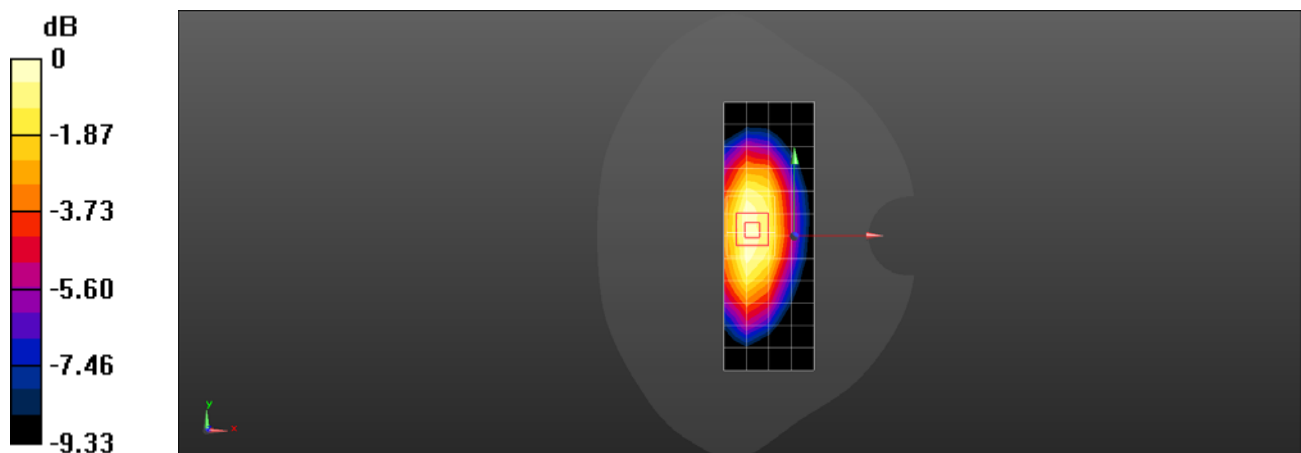

0 dB = 0.546 W/kg = -2.63 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 LTE Band II 20M QPSK 1RB 50 offset 18900CH Left touch

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.378 \text{ S/m}$; $\epsilon_r = 40.11$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(8.17, 8.17, 8.17); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.475 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.287 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.571 W/kg

SAR(1 g) = 0.376 W/kg ; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 0.492 W/kg

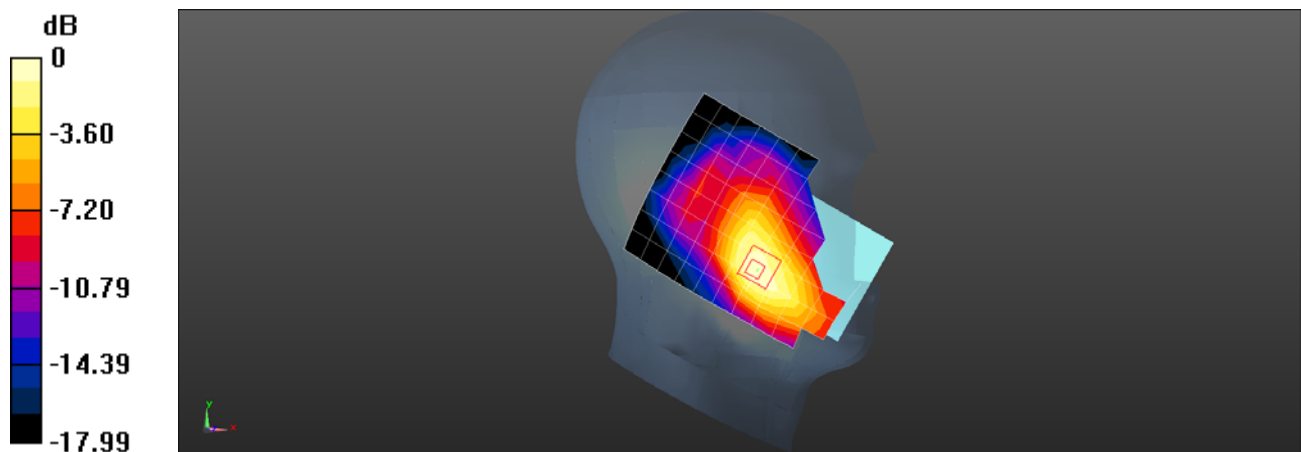

0 dB = $0.492 \text{ W/kg} = -3.08 \text{ dBW/kg}$

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 LTE Band II 20M QPSK 1RB 50 offset 19100CH Back side 15mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.577$ S/m; $\epsilon_r = 51.902$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.92, 7.92, 7.92); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.288 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.405 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.311 W/kg

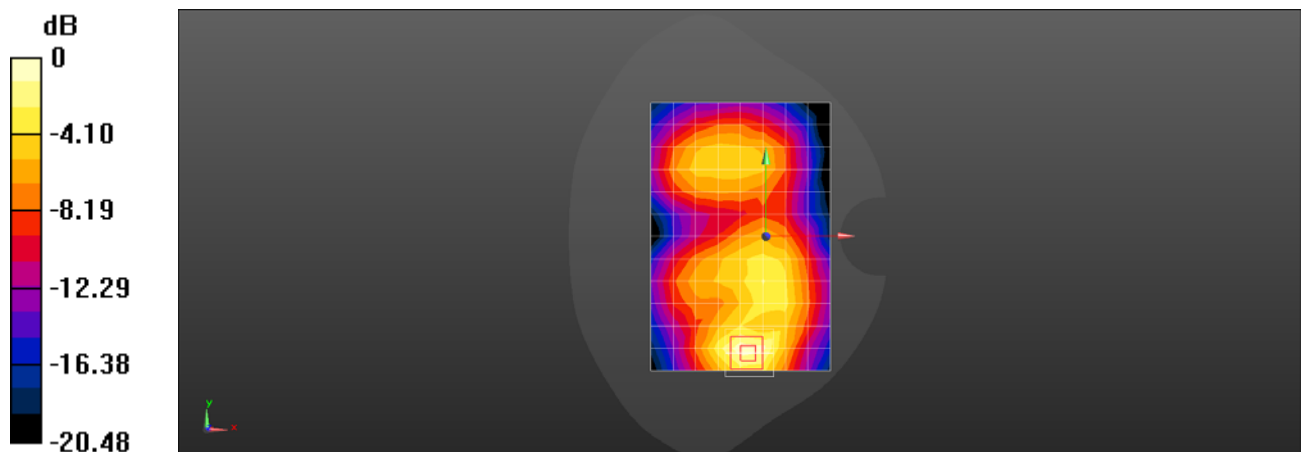

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 LTE Band II 20M QPSK 1RB 50 offset 18900CH Bottom side 10mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.565$ S/m; $\epsilon_r = 51.921$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.92, 7.92, 7.92); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.511 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.67 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.673 W/kg

SAR(1 g) = 0.400 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.584 W/kg

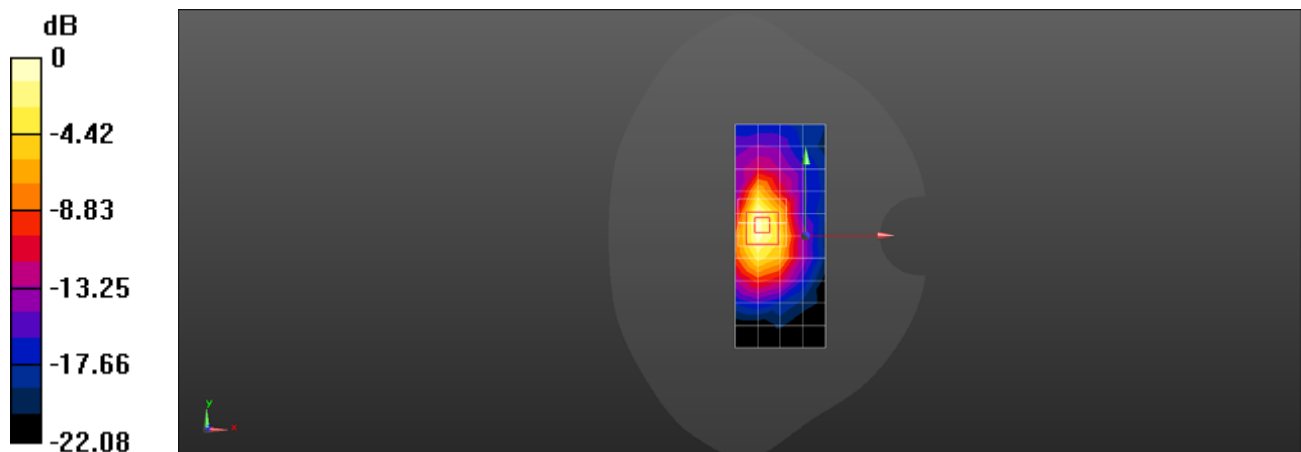

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 LTE Band II 20M QPSK 1RB 50 offset 19100CH Bottom side 0mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.577$ S/m; $\epsilon_r = 51.902$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.92, 7.92, 7.92); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (6x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 2.53 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.22 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 5.29 W/kg

SAR(1 g) = 2.23 W/kg; SAR(10 g) = 0.866 W/kg

Maximum value of SAR (measured) = 4.74 W/kg

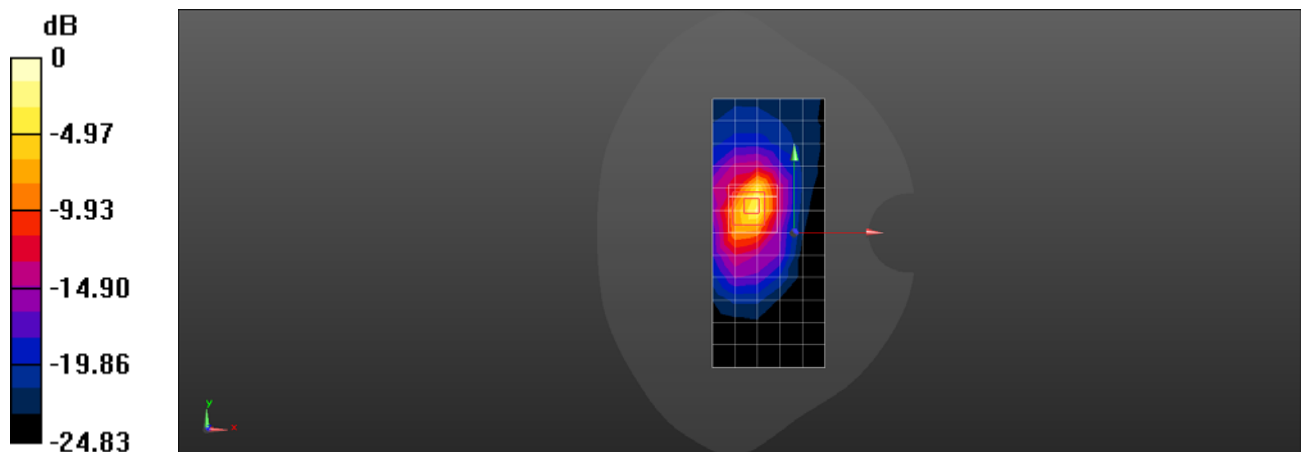

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 LTE Band IV 20M QPSK 1RB 50 offset 20175CH Left touch

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 40.973$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ⌘ Probe: EX3DV4 - SN7346; ConvF(8.53, 8.53, 8.53); Calibrated: 2016/6/23;
- ⌘ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌘ Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ⌘ Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ⌘ DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.471 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 5.892 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.583 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.266 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.521 W/kg

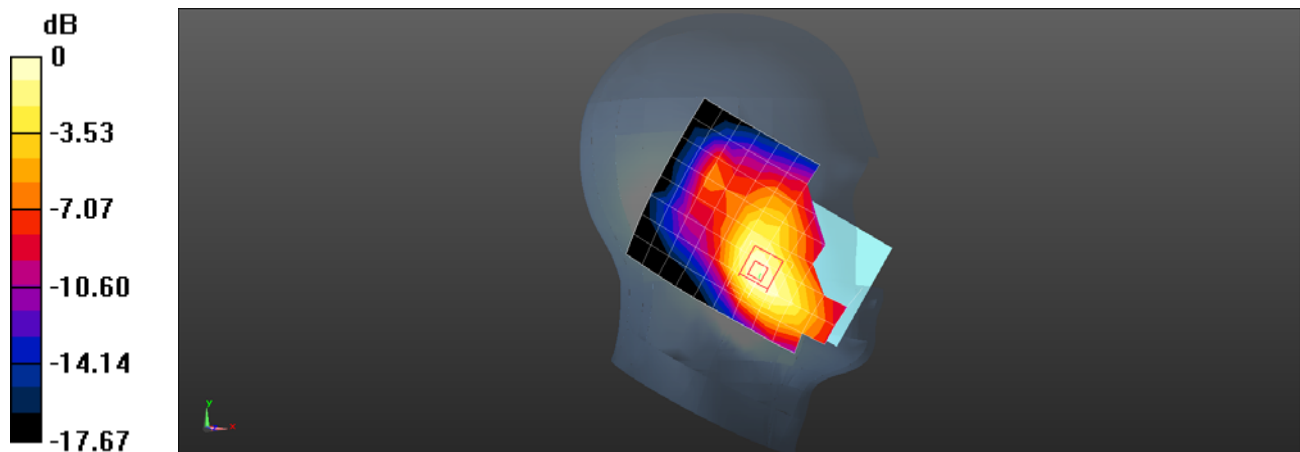

0 dB = 0.521 W/kg = -2.83 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 LTE Band IV 20M QPSK 1RB 50 offset 20050CH Back side 15mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720 \text{ MHz}$; $\sigma = 1.458 \text{ S/m}$; $\epsilon_r = 52.848$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(8.22, 8.22, 8.22); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.432 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.731 V/m ; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.461 W/kg

SAR(1 g) = 0.337 W/kg ; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.421 W/kg

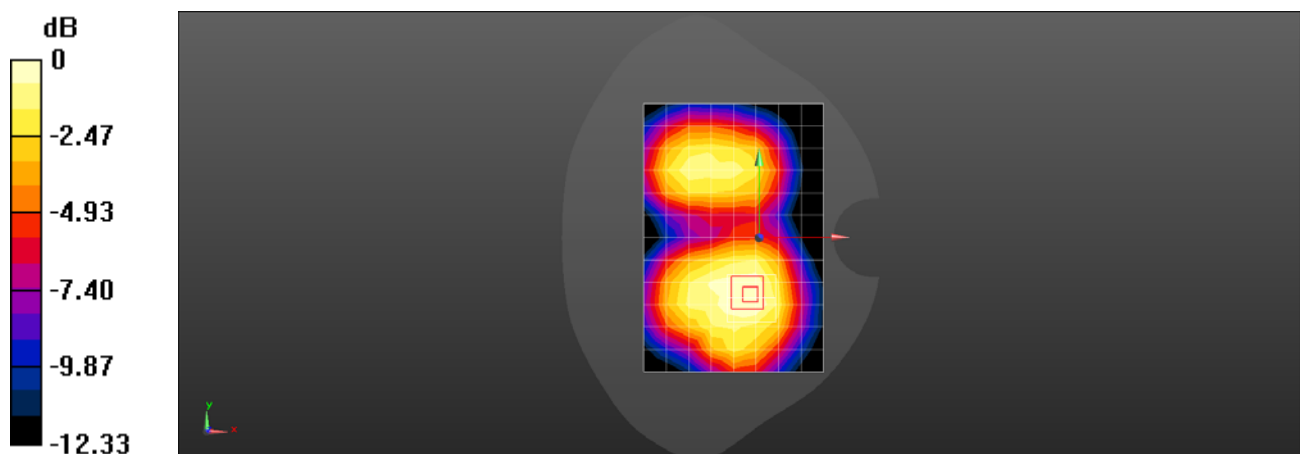

0 dB = 0.421 W/kg = -3.76 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 LTE Band IV 20M QPSK 1RB 50 offset 20050CH Back side 10mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.458$ S/m; $\epsilon_r = 52.848$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(8.22, 8.22, 8.22); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.711 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.703 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.720 W/kg

SAR(1 g) = 0.535 W/kg; SAR(10 g) = 0.367 W/kg

Maximum value of SAR (measured) = 0.662 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.703 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.710 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.284 W/kg

Maximum value of SAR (measured) = 0.627 W/kg

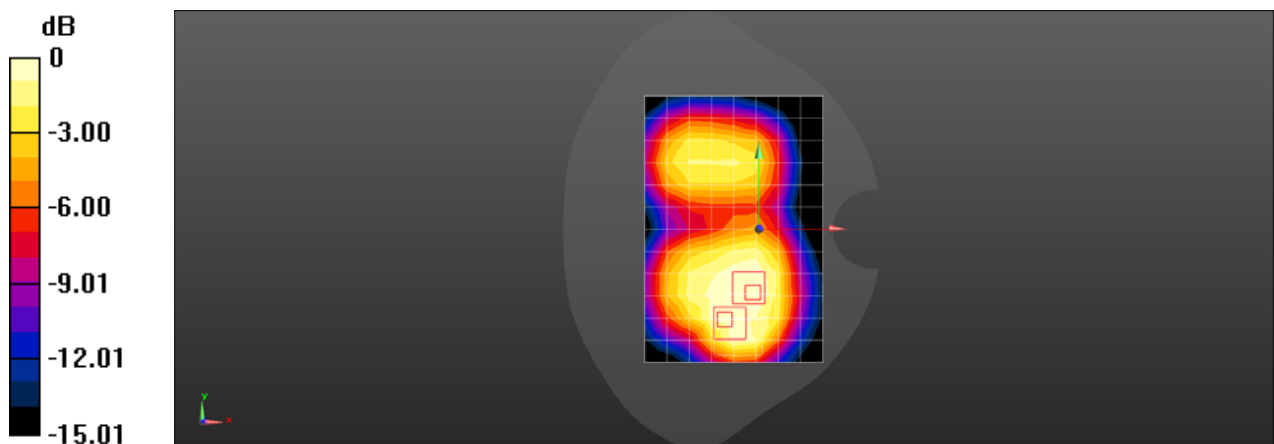

0 dB = 0.627 W/kg = -2.03 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 LTE Band V 10M QPSK 1RB 25 offset 20525CH Right touch

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 40.289$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(10.26, 10.26, 10.26); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.208 W/kg

Configuration/Head/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 8.735 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.143 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.204 W/kg

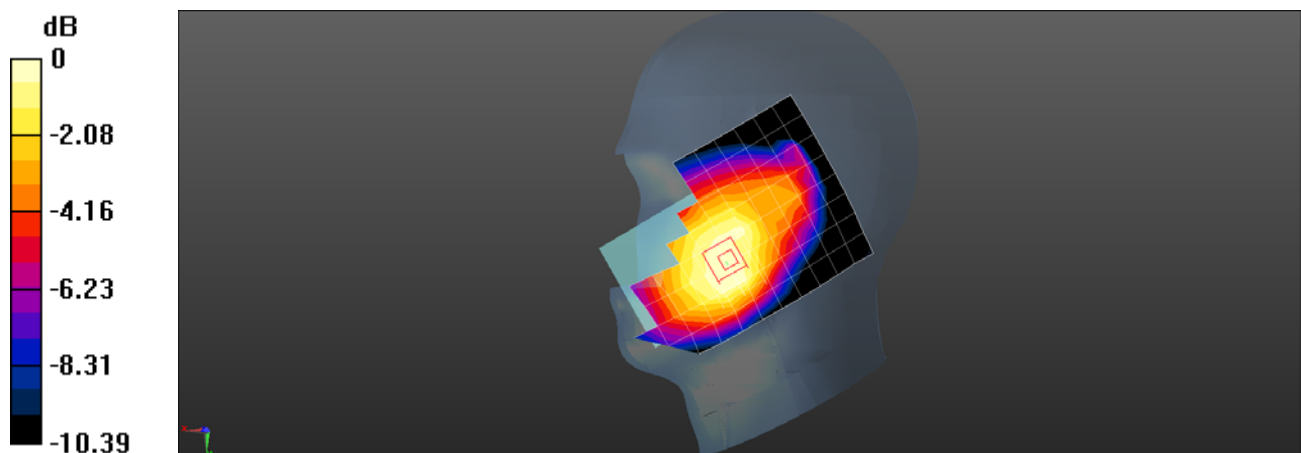

0 dB = 0.204 W/kg = -6.90 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 LTE Band V 10M QPSK 1RB 25 offset 20450CH Back side 15mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829 \text{ MHz}$; $\sigma = 0.985 \text{ S/m}$; $\epsilon_r = 54.996$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(9.87, 9.87, 9.87); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.327 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.91 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.272 W/kg ; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.314 W/kg

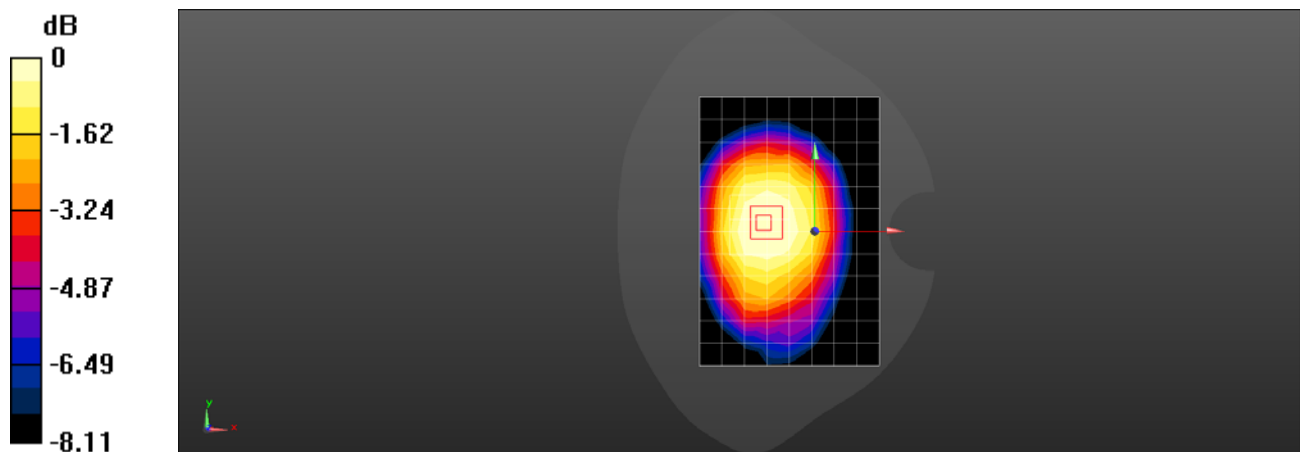

0 dB = $0.314 \text{ W/kg} = -5.03 \text{ dBW/kg}$

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 LTE Band V 10M QPSK 1RB 25 offset 20450CH Back side 10mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829 \text{ MHz}$; $\sigma = 0.985 \text{ S/m}$; $\epsilon_r = 54.996$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(9.87, 9.87, 9.87); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.355 W/kg


Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.48 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.363 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.343 W/kg

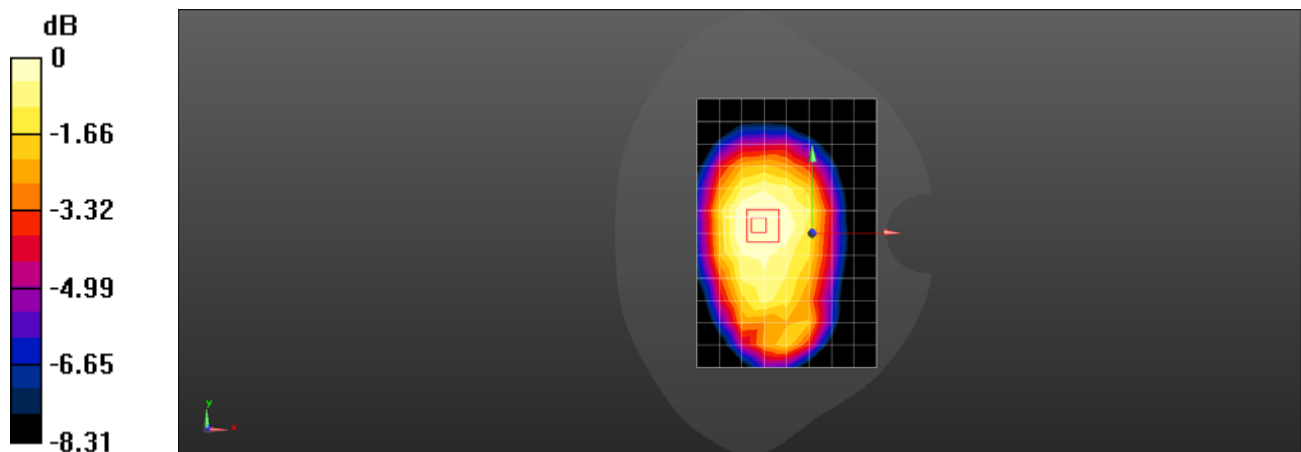

0 dB = 0.343 W/kg = -4.64 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 LTE Band XII 10M QPSK 1RB 25 offset 23130CH Left touch

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.886 \text{ S/m}$; $\epsilon_r = 43.388$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(10.48, 10.48, 10.48); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.182 W/kg


Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.121 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.190 W/kg

SAR(1 g) = 0.159 W/kg ; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

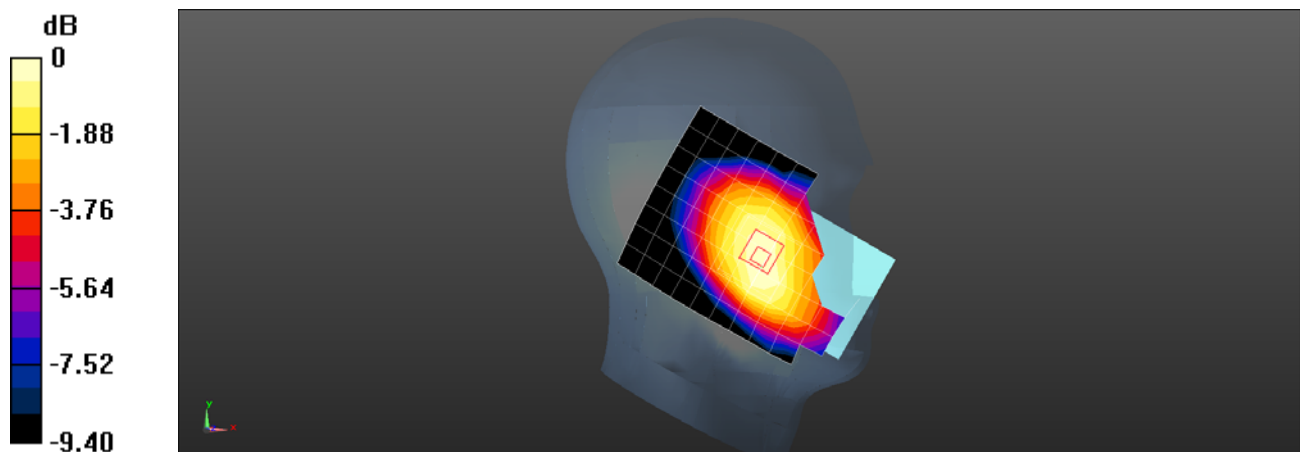

0 dB = 0.181 W/kg = -7.43 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 LTE Band XII 10M QPSK 1RB 25 offset 23130CH Back side 15mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.966 \text{ S/m}$; $\epsilon_r = 54.791$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(10.06, 10.06, 10.06); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.292 W/kg


Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.44 V/m ; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.243 W/kg ; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.275 W/kg

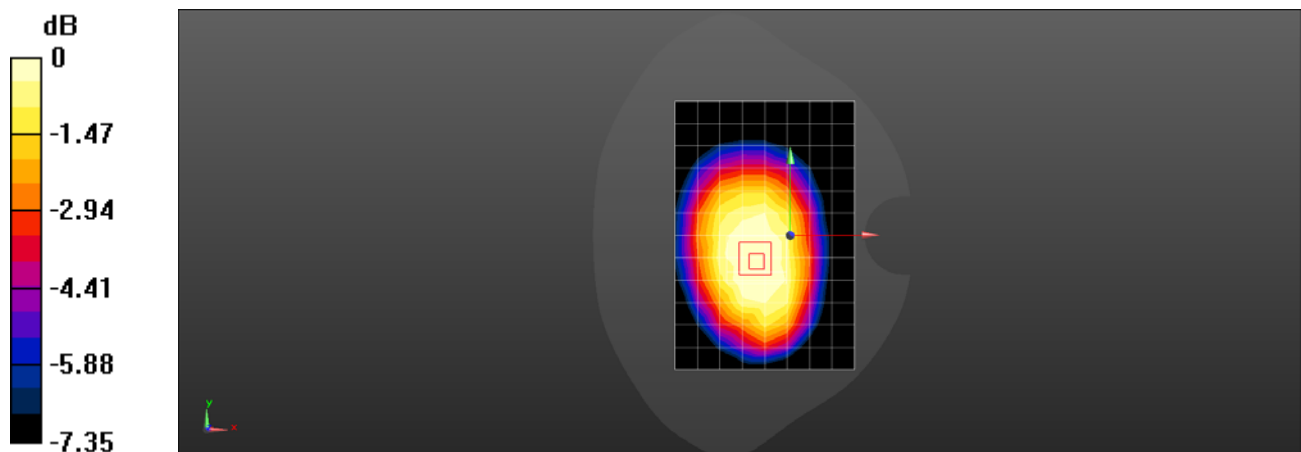

$0 \text{ dB} = 0.275 \text{ W/kg} = -5.61 \text{ dBW/kg}$

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 LTE Band XII 10M QPSK 1RB 25 offset 23130CH Right side 10mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.966 \text{ S/m}$; $\epsilon_r = 54.791$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(10.06, 10.06, 10.06); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (6x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.330 W/kg


Configuration/Body/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.27 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.263 W/kg ; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.328 W/kg

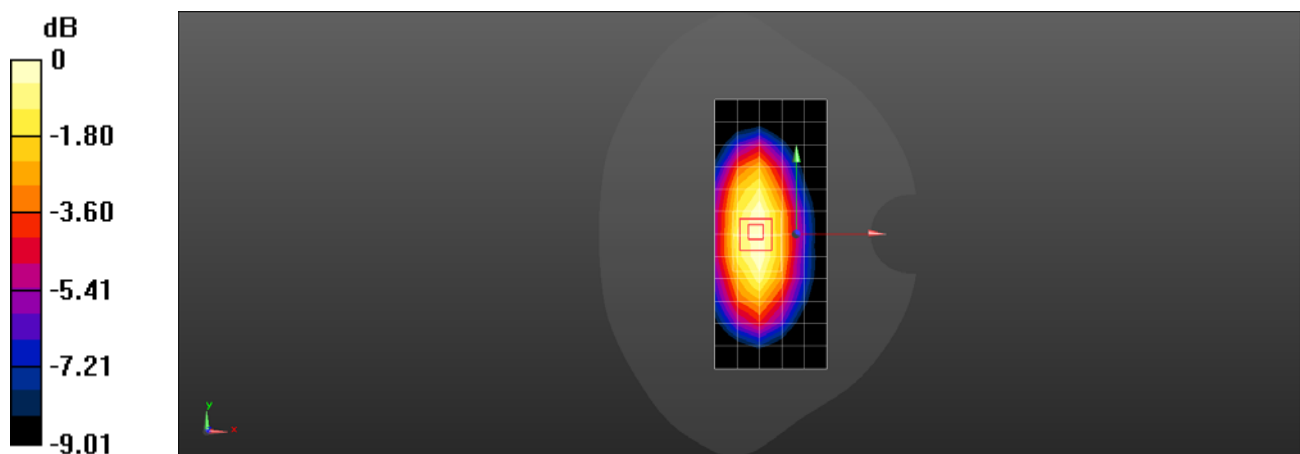

0 dB = 0.328 W/kg = -4.84 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 2.4G WiFi 802.11b 1CH Left touch

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.786$ S/m; $\epsilon_r = 40.008$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.36, 7.36, 7.36); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.10 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.253 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.248 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

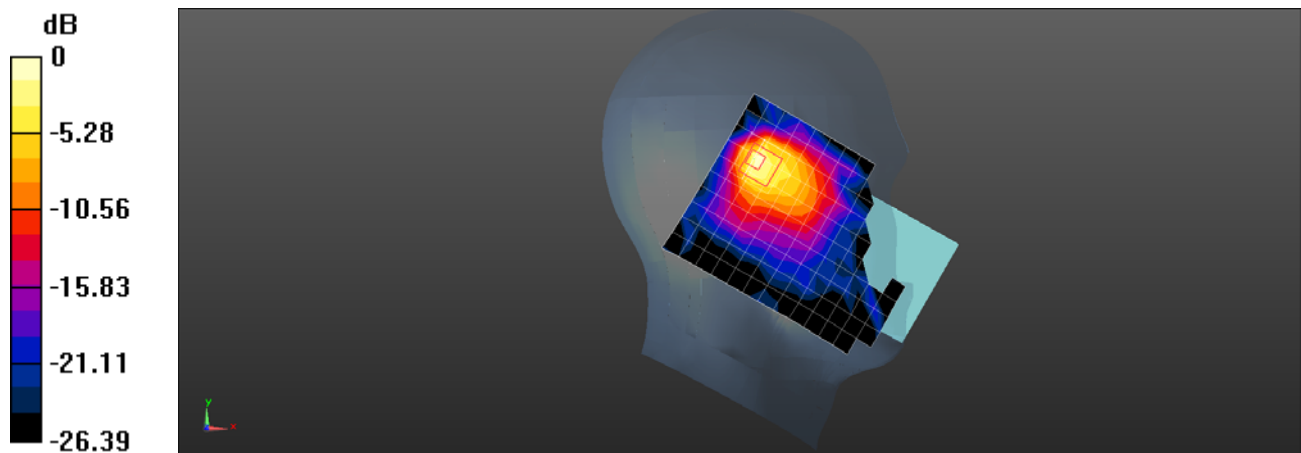

0 dB = 1.15 W/kg = 0.62 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 2.4G WiFi 802.11b 6CH Front side 15mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 53.989$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.55, 7.55, 7.55); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0528 W/kg


Configuration/Body/Zoom Scan (7x9x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.267 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0630 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0519 W/kg

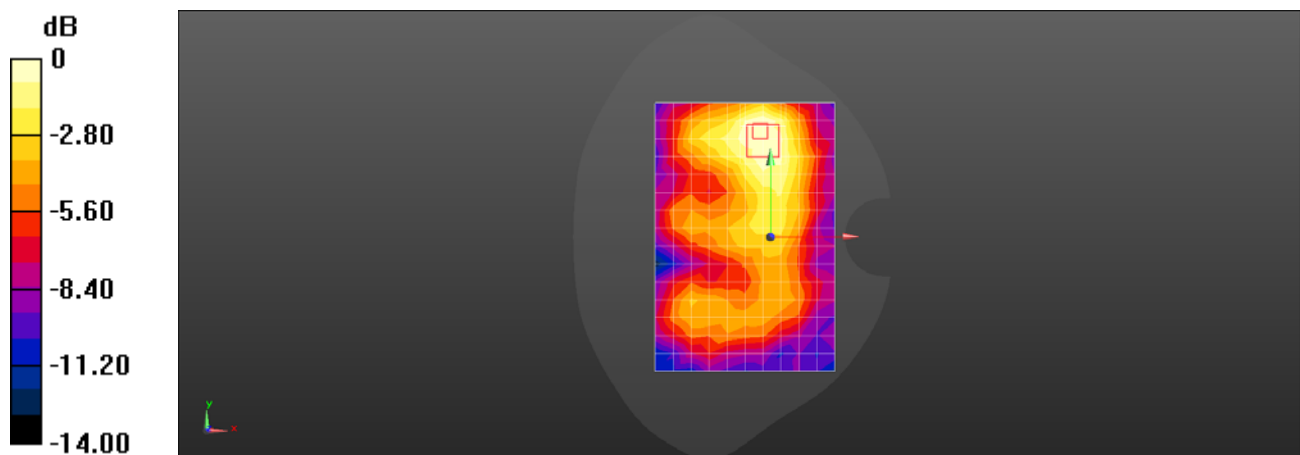

Test Laboratory: HUAWEI SAR/HAC Lab

BLN-L24 2.4G WiFi 802.11b 6CH Front side 10mm

DUT: BLN-L24; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 53.989$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.55, 7.55, 7.55); Calibrated: 2016/6/23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.123 W/kg


Configuration/Body/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.627 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.131 W/kg

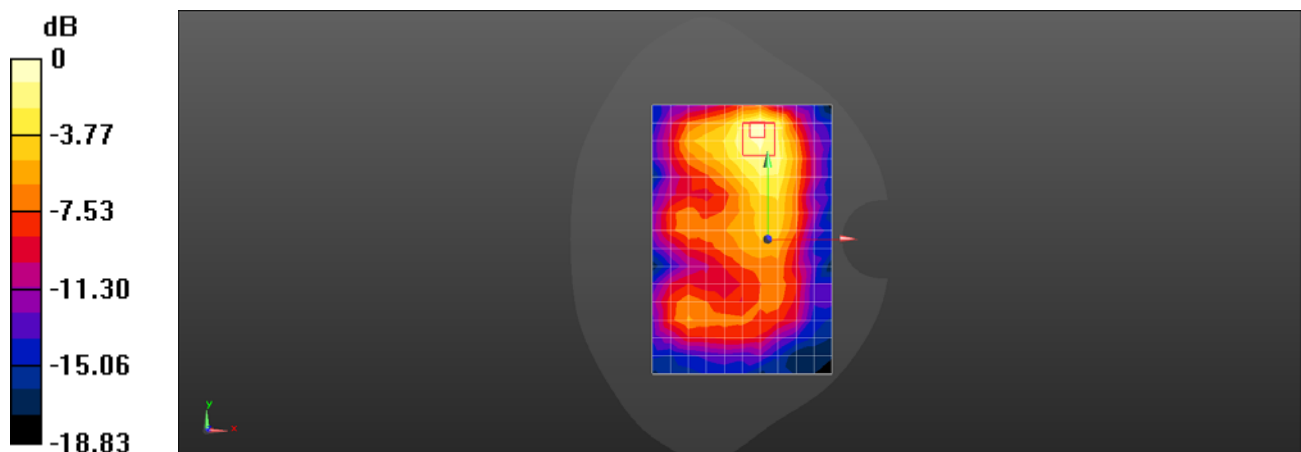

0 dB = 0.131 W/kg = -8.84 dBW/kg