

# FCC Radio Test Report

## FCC ID: QISCRO-LX2

This report concerns (check one): Original Grant Class II Change

**Project No.** : 1701C155B  
**Equipment** : Smart Phone  
**Model Name** : CRO-L22, CRO-L02  
**Applicant** : Huawei Technologies Co.,Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

**Date of Receipt** : Jan. 18, 2017(CRO-L03)  
Mar. 28, 2017(CRO-L22, CRO-L02)  
**Date of Test** : Jan. 18, 2017 ~ Feb. 27, 2017(CRO-L03)  
Mar. 28, 2017 ~ Apr. 12, 2017(CRO-L22, CRO-L02)  
**Issued Date** : Apr. 13, 2017  
**Tested by** : BTL Inc.

**Technical Engineer** : Shawn Xiao  
(Shawn Xiao)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

# **B T L I N C .**

No.3,Jinshagang 1st Road, Shixia,Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>REPORT ISSUED HISTORY</b>	<b>5</b>
<b>1 . CERTIFICATION</b>	<b>6</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
<b>3 . GENERAL INFORMATION</b>	<b>9</b>
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION	10
3.3 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED FOR RADIATED	11
3.4 DESCRIPTION OF SUPPORT UNITS	11
<b>4 . TEST RESULT</b>	<b>12</b>
4.1 OUTPUT POWER MEASUREMENT	12
4.1.1 LIMIT	12
4.1.2 TEST PROCEDURE	12
4.1.3 TESTSETUP LAYOUT	12
4.1.4 TEST DEVIATION	12
4.1.5 TEST RESULTS	12
4.2 OCCUPIED BANDWIDTH MEASUREMENT	13
4.2.1 TEST PROCEDURE	13
4.2.2 TEST SETUP LAYOUT	13
4.2.3 TEST DEVIATION	13
4.2.4 TEST RESULTS	13
4.3 CONDUCTED EMISSIONS MEASUREMENT	14
4.3.1 LIMIT	14
4.3.2 TEST PROCEDURES	14
4.3.3 TESTSETUP LAYOUT	14
4.3.4 TESTDEVIATION	14
4.3.5 TEST RESULTS	14
4.4 RADIATED EMISSIONS MEASUREMENT	15
4.4.1 LIMIT	15
4.4.2 TEST PROCEDURES	15
4.4.3 TESTSETUP LAYOUT	15
4.4.4 TESTDEVIATION	15
4.4.5 TEST RESULTS	15
4.5 BAND EDGE MEASUREMENT	16
4.5.1 LIMIT	16

<b>Table of Contents</b>	<b>Page</b>
4.5.2 TEST PROCEDURES	16
4.5.3 TESTSETUP LAYOUT	16
4.5.4 TESTDEVIATION	16
4.5.5 TEST RESULTS	16
4.6 PEAK TO AVERAGE RATIO MEASUREMENT	17
4.6.1 LIMIT	17
4.6.2 TEST PROCEDURES	17
4.6.3 TESTSETUP LAYOUT	17
4.6.4 TESTDEVIATION	17
4.6.5 TEST RESULTS	17
4.7 FREQUENCY STABILITY MEASUREMENT	18
4.7.1 LIMIT	18
4.7.2 TEST PROCEDURES	18
4.7.3 TESTSETUP LAYOUT	18
4.7.4 TESTDEVIATION	18
4.7.5 TEST RESULTS	18
5. LIST OF MEASUREMENT EQUIPMENTS	19
ATTACHMENT A - OUTPUT POWER	21
ATTACHMENT B - OCCUPIED BANDWIDTH	24
ATTACHMENT C - CONDUCTED EMISSIONS	30
ATTACHMENT D - RADIATED EMISSION	35
ATTACHMENT E - BAND EDGE	103
ATTACHMENT F - PEAK TO AVERAGE RATIO	106
ATTACHMENT G - FREQUENCY STABILITY	111

### REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-5-1701C155	Original Report.	Feb. 28, 2017
BTL-FCCP-5-1701C155B	Compared with the original report (BTL-FCCP-5-1701C155), the differences please see the below table. According to the differences description below table, CRO-L22 and CRO-L02 shares the same test data of CRO-L03 of the same bands. The Radiated Spurious Emissions in DCS1900 band of SIM 1 & SIM 2 add evaluated and recorded in the test report, the rest are the same.	Apr. 13, 2017

Project ID	1701C155	1701C155B	
Model	CRO-L03	CRO-L22	CRO-L02
Brand	HUAWEI	HUAWEI	HUAWEI
2G Frequency	850/1900	850/1900	850/1900
3G Frequency	B2/B5	B2/B5	B2/B5
4G Frequency	B2/B4/B5/B7	B5/B7	B5/B7
Hardware version	The same	The same	The same
Software version	The difference	The difference	The difference
SIM Card	Single	Dual	Single
Dimensions	The same	The same	The same
Appearance	The same	The same	The same
main antenna	The same	The same	The same
BT/Wi-Fi antenna	The same	The same	The same
GPS antenna	The same	The same	The same
PA(GSM)	The same	The same	The same
PA(WCDMA/FDD)	The same	The same	The same

## 1. CERTIFICATION

Equipment : Smart Phone  
Brand Name : HUAWEI  
Model Name : CRO-L22, CRO-L02  
Applicant : Huawei Technologies Co.,Ltd.  
Manufacturer : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Factory : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Date of Test : Jan. 18, 2017 ~ Feb. 27, 2017(CRO-L03)  
Mar. 28, 2017 ~ Apr. 12, 2017(CRO-L22, CRO-L02)  
Test Sample : Engineering Sample  
Standard(s) : 47 CFR FCC Part 24 Subpart E  
47 CFR FCC Part 2  
ANSI/TIA-603-D-2010  
KDB 971168 D01 Power Meas License Digital Systems v02r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-5-1701C155B) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

**Test results included in this report is only for the DCS1900, WCDMA Band 2 part.**

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 22 Subpart H& Part 2			
Standard(s) Section	Test Item	Judgment	Tested By
2.1046 24.232(c)	Radiated power	PASS	Paul Li
2.1046 24.232(c)	Conducted Output Power	PASS	Paul Li
2.1049 24.238(a)	Occupied Bandwidth	PASS	Paul Li
2.1051 24.238(a)	Conducted Spurious Emissions	PASS	Paul Li
2.1053 24.238(a)	Radiated Spurious Emissions	PASS	Biao Chen
24.238(a)	Band Edge Measurements	PASS	Paul Li
24.232(d)	Peak To Average Ratio	PASS	Paul Li
2.1055 24.235	Frequency Stability	PASS	Paul Li

NOTE:

(1) "N/A" denotes test is not applicable to this device.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U$ ,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U$ ,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U$ ,(dB)
DG-CB03 (1m)	CISPR	18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone		
Brand Name	HUAWEI		
Model Name	CRO-L22, CRO-L02		
Model Difference	Please refer to page 5.		
Modulation Type	GSM/GPRS	GMSK	
	EDGE	GMSK, 8PSK	
	WCDMA	Uplink: BPSK Downlink: QPSK	
	WCDMA(HSDPA/HSUPA/HSPA+/DC-HSDPA/DC-HSUPA)	16QAM	
	LTE	QPSK, 16QAM	
Operation Frequency	GSM /EDGE/GPRS	1850.2 ~ 1909.8 MHz	
	WCDMA Band 2	1852.4 ~ 1907.6 MHz	
Max. EIRP Power	GSM/GPRS	GMSK	27.14 dBm
	EDGE	8PSK	23.45 dBm
	WCDMA	BPSK	20.32 dBm
	WCDMA_HSDPA	16QAM	19.34 dBm
	WCDMA_HSUPA	16QAM	18.85 dBm

Antenna Type	Internal Antenna		
Antenna Gain	2.29 dBi for GSM, 2.29 dBi for WCDMA, 2.29 dBi for LTE		
Hardware Version	HL1CROM		
Software Version	CRO-L22:Cairo-L22C636B015 CRO-L02:Cairo-L02C636B022		
IMEI No.	CRO-L22	Radiated	SIM 1:862556030020380
			SIM 2:862556030520389
	CRO-L02	Radiated	862553030005446
		Conducted	862553030005446
Power Source	#1 DC Voltage supplied from AC/DC adapter. #2 Battery Supplied.		
Power Rating	#1:AC 100–240V 50/60Hz DC 5V 1A #2:DC 3.82V 2200mAh		

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

### 3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION

Following channel(s) was (were) selected for the final test as listed below:

GSM MODE			
Test Item	Available Channel	Tested Channel	Mode
EIRP	512 to 810	512, 661, 810	GSM, EDGE
Conducted Output Power	512 to 810	512, 661, 810	GSM, EDGE
Occupied Bandwidth	512 to 810	512, 661, 810	GSM, EDGE
Condcudeted Emission	512 to 810	661	GSM, EDGE
Radiated Emission	512 to 810	661	GSM, EDGE
Band Edge	512 to 810	512, 810	GSM, EDGE
Peak to Average Ratio	512 to 810	512, 661, 810	GSM, EDGE
Frequency Stability	512 to 810	661	GSM, EDGE


WCDMA MODE			
Test Item	Available Channel	Tested Channel	Mode
EIRP	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA, HSUPA
Conducted Output Power	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA, HSUPA
Condcudeted Emission	9262 to 9538	9400	WCDMA, HSDPA, HSUPA
Radiated Emission	9262 to 9538	9400	WCDMA, HSDPA, HSUPA
Band Edge	9262 to 9538	9262, 9538	WCDMA, HSDPA, HSUPA
Peak to Average Ratio	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA, HSUPA
Frequency Stability	9262 to 9538	9262	WCDMA, HSDPA, HSUPA

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in **QPSK** modulation.

**EUT TEST CONDITIONS:**

Test Item	Environmental Conditions	Test Voltage
EIRP	25°C, 60%RH	DC 3.82V
Conducted Output Power	25°C, 65%RH	DC 3.82V
Occupied Bandwidth	25°C, 65%RH	DC 3.82V
Conducted Emission	25°C, 65%RH	DC 3.82V
Radiated Emission	25°C, 60%RH	AC 120V/60Hz
Band Edge	25°C, 65%RH	DC 3.82V
Peak to Average Ratio	25°C, 65%RH	DC 3.82V
Frequency Stability	25°C, 65%RH	DC 3.82V

**3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED FOR RADIATED**

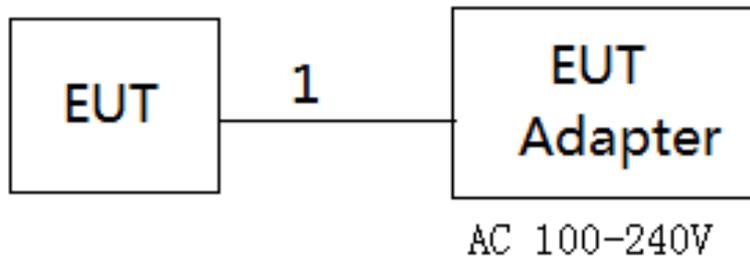

**3.4 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.2m	USB Cable

## 4. TEST RESULT

### 4.1 OUTPUT POWER MEASUREMENT

#### 4.1.1 LIMIT

Mobile / Portable station are limited to 2 watts e.i.r.p.

#### 4.1.2 TEST PROCEDURE

##### EIRP/ERP:

EIRP= Conducted Power +Antenan gain


ERP power=EIPR power-2.15dBi.

##### Conducted Power:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

#### 4.1.3 TESTSETUP LAYOUT

##### Conducted Power Measurement



#### 4.1.4 TEST DEVIATION

No deviation

#### 4.1.5 TEST RESULTS


Please refer to the Attachment A.

## 4.2 OCCUPIED BANDWIDTH MEASUREMENT

### 4.2.1 TEST PROCEDURE

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth and 26dB bandwidth.

### 4.2.2 TEST SETUP LAYOUT

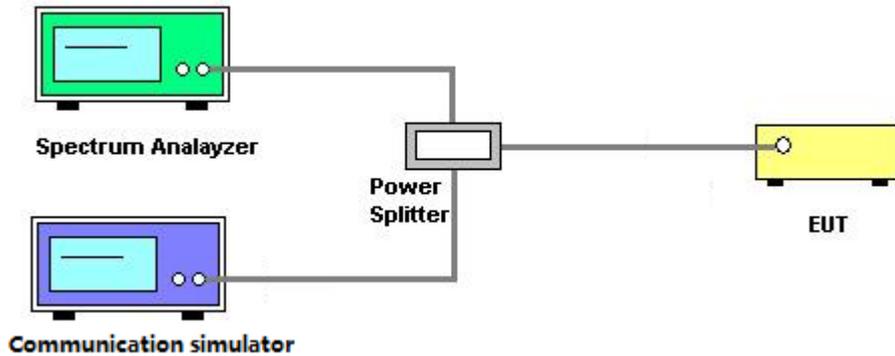

### 4.2.3 TEST DEVIATION

No deviation

### 4.2.4 TEST RESULTS

Please refer to the Attachment B.

### 4.3 CONDUCTED EMISSIONS MEASUREMENT


#### 4.3.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 4.3.2 TEST PROCEDURES

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set  $\text{RBW} \geq 1\%$  EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43+10\log(P)\text{dB}$  below the transmitter power P(Watts)  
 $=P(W)-[43+10\log(P)](\text{dB})$   
 $=[30+10\log(P)](\text{dBm})-[43+10\log(P)](\text{dB})$   
 $=-13\text{dBm}$

#### 4.3.3 TESTSETUP LAYOUT

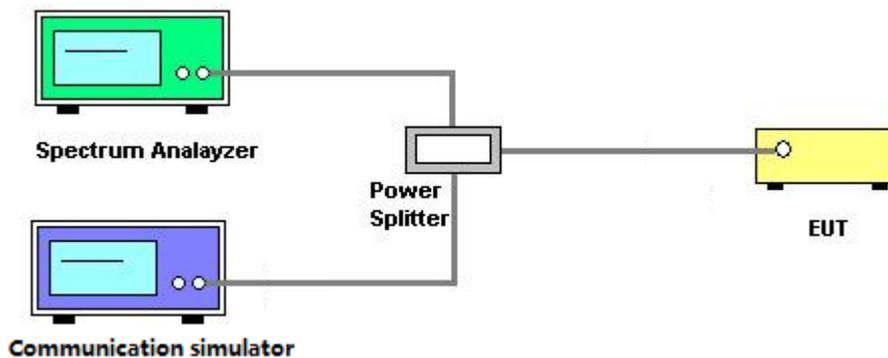

#### 4.3.4 TESTDEVIATION

No deviation

#### 4.3.5 TEST RESULTS

Please refer to the Attachment C.

## 4.4 RADIATED EMISSIONS MEASUREMENT

### 4.4.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13dBm.

### 4.4.2 TEST PROCEDURES

1. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
2. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
3. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
4. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power - 2.15dBi.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

### 4.4.3 TESTSETUP LAYOUT

This test setup layout is the same as that shown in **section 4.1.3**.

### 4.4.4 TESTDEVIATION

No deviation

### 4.4.5 TEST RESULTS

Please refer to the Attachment D.

## 4.5 BAND EDGE MEASUREMENT


### 4.5.1 LIMIT

A Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

### 4.5.2 TEST PROCEDURES

1. All measurements were done at low and high operational frequency range.
2. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/GPRS/EDGE).
3. The center frequency of spectrum is the band edge frequency and span is 5MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
4. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 13kHz and VB of the spectrum is 51kHz (LTE Bandwidth 1.4MHz).
5. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz (LTE Bandwidth 3MHz).
6. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (LTE Bandwidth 5MHz/10MHz).
7. Record the max trace plot into the test report.

### 4.5.3 TESTSETUP LAYOUT

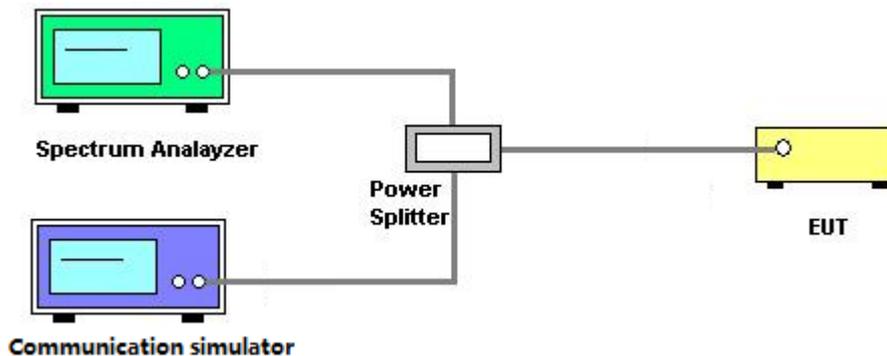

### 4.5.4 TESTDEVIATION

No deviation

### 4.5.5 TEST RESULTS

Please refer to the Attachment E.

## 4.6 PEAK TO AVERAGE RATIO MEASUREMENT


### 4.6.1 LIMIT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 4.6.2 TEST PROCEDURES

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

### 4.6.3 TESTSETUP LAYOUT

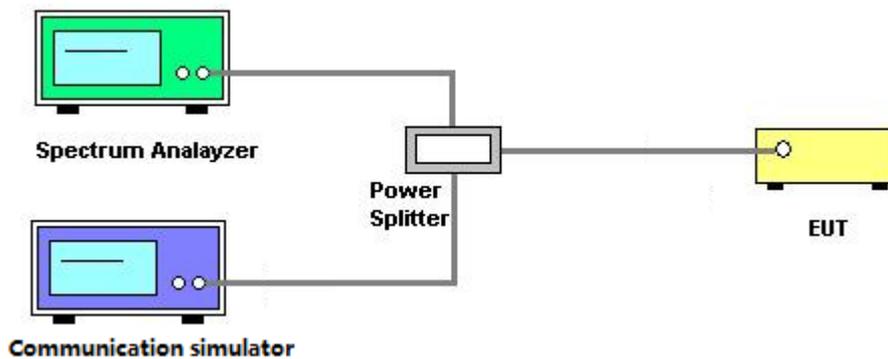

### 4.6.4 TESTDEVIATION

No deviation

### 4.6.5 TEST RESULTS

Please refer to the Attachment F.

## 4.7 FREQUENCY STABILITY MEASUREMENT


### 4.7.1 LIMIT

1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

### 4.7.2 TEST PROCEDURES

1. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
2. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
3. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. The frequency error was recorded frequency error from the communication simulator.

### 4.7.3 TESTSETUP LAYOUT

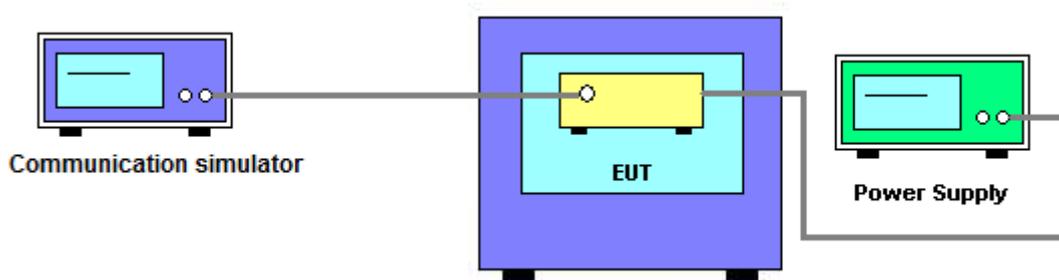

### 4.7.4 TESTDEVIATION

No deviation

### 4.7.5 TEST RESULTS

Please refer to the Attachment G.

## 5. LIST OF MEASUREMENT EQUIPMENTS

Radiated Emission & ERP or EIRP Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018
2	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 26, 2018
3	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 23, 2017
4	Amplifier	Agilent	8449B	3008A02274	Mar. 09, 2018
5	Amplifier	HP	8447D	2944A09673	Oct. 20, 2017
6	HighPass Filter	Wairwright Instruments Gmbh	WHK 1.5/15G-10ST	11	Mar. 09, 2018
7	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 1710/1785-1690/180 5-60/12SS	38	Feb. 22, 2018
8	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 824/849-810/863-60/ 9SS	7	Feb. 22, 2018
9	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 880/915-860/935-60/ 9SS	14	Feb. 22, 2018
10	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 1850/1910-1830/193 0-60/10SS	17	Feb. 22, 2018
11	HighPass Filter	Wairwright Instruments Gmbh	WHK3.1/18G-10SS	24	Mar. 09, 2018
12	Wireless Communication Test SET	Agilent	E5515C	MY48364183	Mar. 26, 2018
13	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 26, 2018
14	Receiver	Agilent	N9038A	MY52130039	Sep. 04, 2017
15	wideband radio communication tester	R&S	CMW500	152372	Mar. 26, 2018
16	High pass filter	ZHPF-M1000-4000-1	ZHPF-M3-12.75G-3869	B2015073763	Aug. 04, 2017
17	High pass filter	ZHPF-M3-12.75G-3869	ZHPF-M1000-4000-1	B2015073762	Aug. 04, 2017
18	High pass filter	ZHPF-M6-18G-1727	ZHPF-M6-186-1727	B2015073764	Aug. 04, 2017
19	Cable	emci	LMR-400(30MHz-1GHz)(8m+5m)	N/A	Jun. 27, 2017
20	Cable	emci	EMC104-SM-SM-12000(12m)	N/A	Jul. 06, 2017
21	Controller	ETS-Lindgren	2090	N/A	N/A
22	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Conducted Emission & Band Edge & Occupied Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Wireless Communication Test SET	Agilent	E5515C	MY48364183	Mar. 26, 2018
2	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 26, 2018
3	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	Feb. 25, 2018
4	wideband radio communication tester	R&S	CMW500	152372	Mar. 26, 2018
5	Cable	N/A	RG316(0.3m)	N/A	Jul. 06, 2017
6	Cable	N/A	RG316(0.3m)	N/A	Jul. 06, 2017

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Wireless Communication Test SET	Agilent	E5515C	MY48364183	Mar. 26, 2018
2	DC power supply	GW Instek	GPC-3030DN	EK880675	Oct. 12, 2018
3	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	Feb. 25, 2018
4	wideband radio communication tester	R&S	CMW500	152372	Mar. 26, 2018
5	Const Temp, & Humidity Chamber	Giant?Force	ITH-225-20-S	IAB0309-001	Sep. 04, 2017
6	Cable	N/A	RG316(0.3m)	N/A	Jul. 06, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

## ATTACHMENT A - OUTPUT POWER

**Conducted Power:**

DCS1900 (Capsensor Off)	Burst Conducted Power (dBm)		
	512CH	661CH	810CH
	1850.2MHz	1880MHz	1909.8MHz
GSM (CS)	29.25	29.29	29.03
GPRS/EDGE (GMSK)	29.25	29.29	29.03
	28.27	28.30	28.05
	26.29	26.34	26.08
	25.22	25.26	24.97
EDGE (8PSK)	25.17	25.60	25.00
	24.01	24.42	23.92
	21.94	22.25	21.71
	20.82	21.13	20.80

Modulation	Band	WCDMA Band 2(Capsensor Off)		
	Tx Channel	9262CH	9400CH	9538CH
	Rx Channel	9662CH	9800CH	9938CH
	Frequency	1852.4MHz	1880MHz	1907.6MHz
BPSK	RMC 12.2K	21.98	22.34	22.47
	RMC 64K	21.93	22.37	22.47
	RMC 144K	21.98	22.37	22.46
	RMC 384K	21.99	22.36	22.42
16QAM	HSDPA Subtest-1	20.95	21.30	21.46
	HSDPA Subtest-2	20.94	21.32	21.49
	HSDPA Subtest-3	20.45	20.80	21.01
	HSDPA Subtest-4	20.39	20.77	21.02
16QAM	HSUPA Subtest-1	19.04	19.38	19.51
	HSUPA Subtest-2	19.03	19.35	19.47
	HSUPA Subtest-3	20.18	20.55	20.56
	HSUPA Subtest-4	19.58	19.14	19.07
	HSUPA Subtest-5	20.60	20.86	21.00

**EIRP Power**


DCS1900 (Capsensor Off)	EIRP Power (dBm)		
	512CH	661CH	810CH
	1850.2MHz	1880MHz	1909.8MHz
GSM (CS)	27.10	27.14	26.88
GPRS/EDGE (GMSK)	27.10	<b>27.14</b>	26.88
	26.12	26.15	25.90
	24.14	24.19	23.93
	23.07	23.11	22.82
EDGE (8PSK)	23.02	<b>23.45</b>	22.85
	21.86	22.27	21.77
	19.79	20.10	19.56
	18.67	18.98	18.65

Modulation	Band	WCDMA Band 2(Capsensor Off)		
	Tx Channel	9262CH	9400CH	9538CH
	Rx Channel	9662CH	9800CH	9938CH
	Frequency	1852.4MHz	1880MHz	1907.6MHz
BPSK	RMC 12.2K	19.83	20.19	<b>20.32</b>
	RMC 64K	19.78	20.22	20.32
	RMC 144K	19.83	20.22	20.31
	RMC 384K	19.84	20.21	20.27
16QAM	HSDPA Subtest-1	18.80	19.15	19.31
	HSDPA Subtest-2	18.79	19.17	<b>19.34</b>
	HSDPA Subtest-3	18.30	18.65	18.86
	HSDPA Subtest-4	18.24	18.62	18.87
16QAM	HSUPA Subtest-1	16.89	17.23	17.36
	HSUPA Subtest-2	16.88	17.20	17.32
	HSUPA Subtest-3	18.03	18.40	18.41
	HSUPA Subtest-4	17.43	16.99	16.92
	HSUPA Subtest-5	18.45	18.71	<b>18.85</b>

## ATTACHMENT B - OCCUPIED BANDWIDTH

DCS1900					
GSM			EDGE		
CS			8PSK		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
512	1850.2	0.250	512	1850.2	0.247
661	1880	0.248	661	1880	0.248
810	1909.8	0.246	810	1909.8	0.246
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
512	1850.2	0.327	512	1850.2	0.315
661	1880	0.319	661	1880	0.316
810	1909.8	0.320	810	1909.8	0.312

### Spectrum Plot

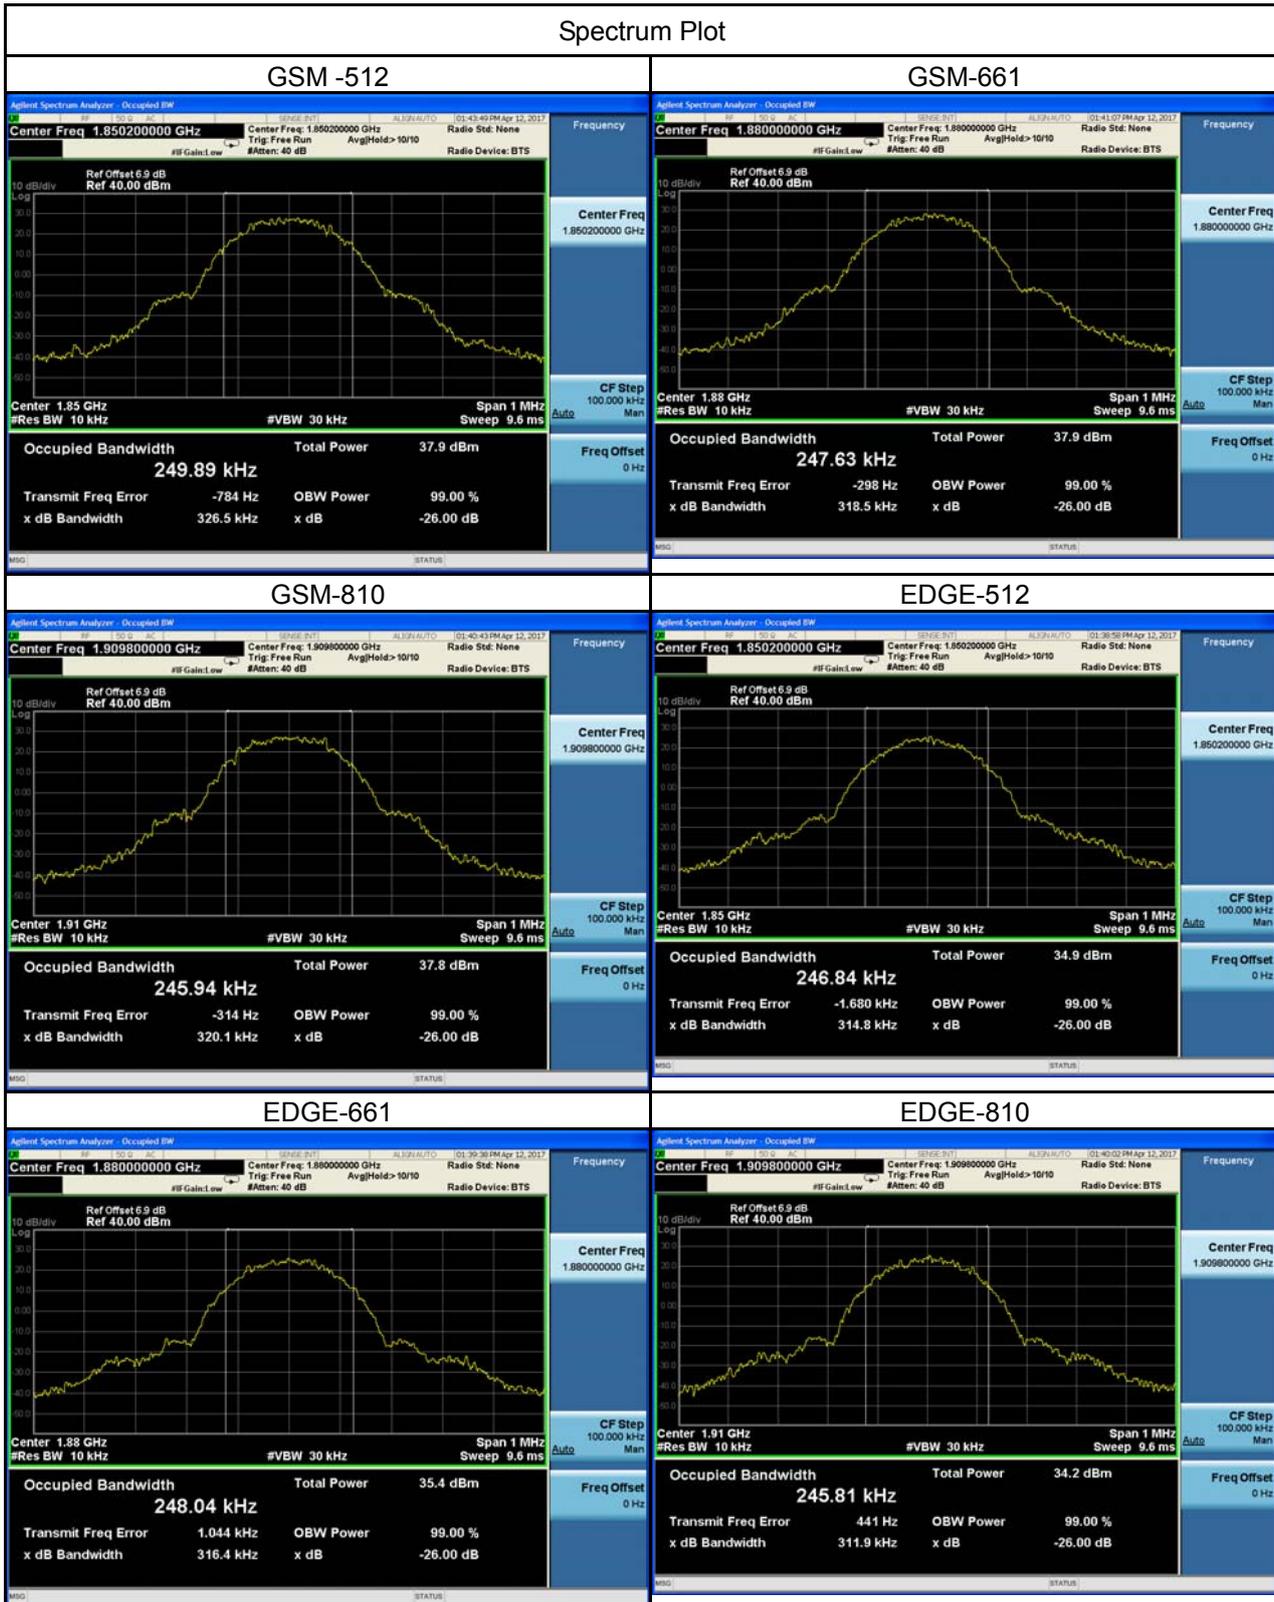


WCDMA Band 2

BPSK

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
9262	1852.4	4.2182	9262	1852.4	4.860
9400	1880	4.2040	9400	1880	4.868
9538	1907.6	4.2035	9538	1907.6	4.895

Spectrum Plot

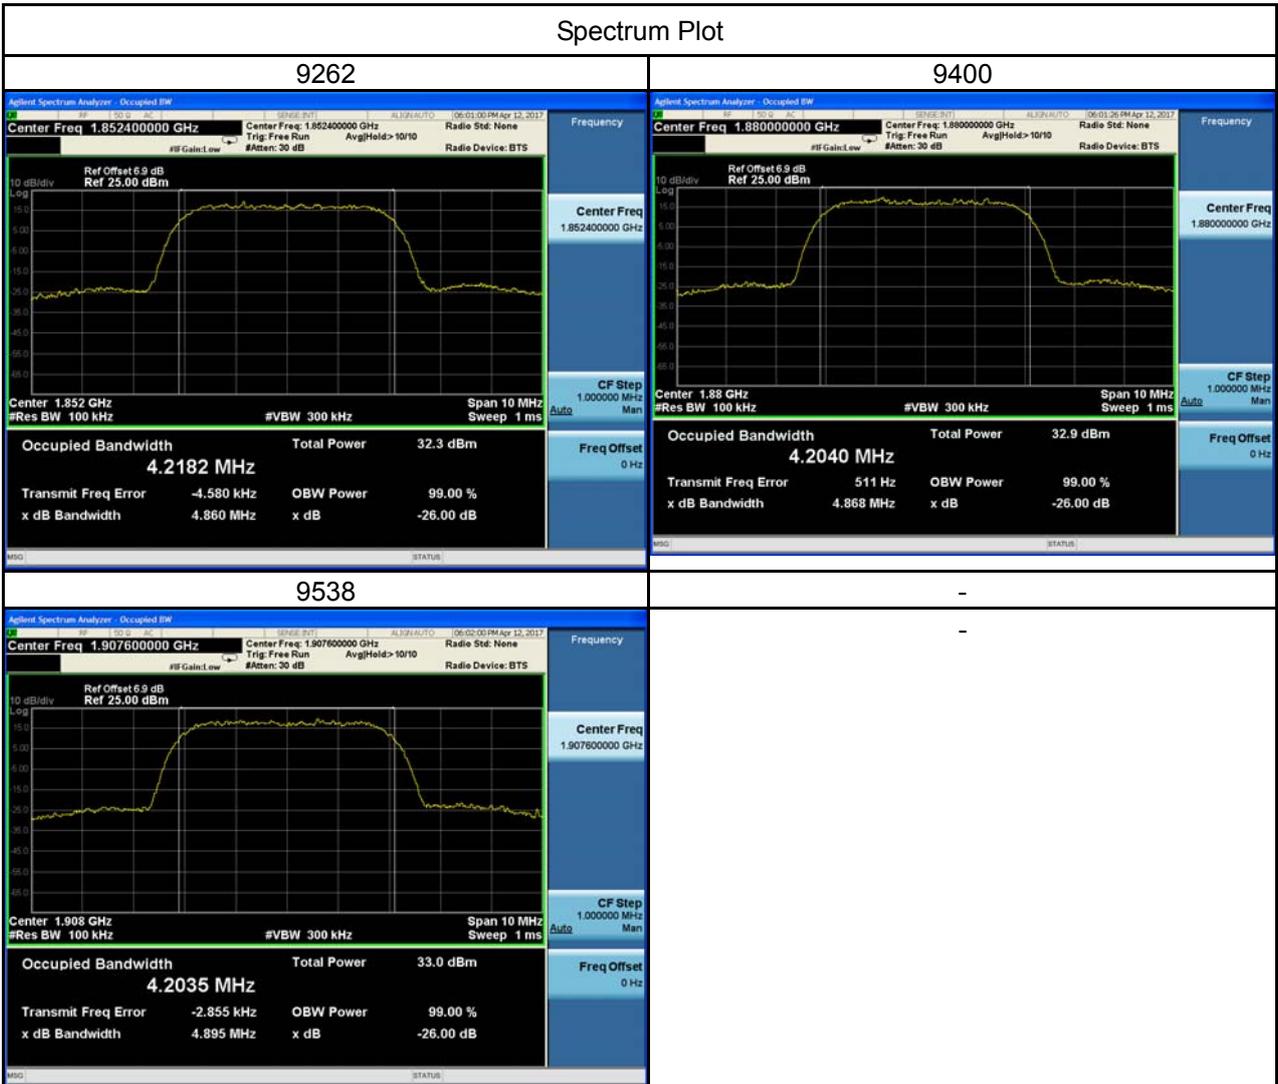

WCDMA_HSDPA Band 2					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
9262	1852.4	4.2136	9262	1852.4	4.888
9400	1880	4.2281	9400	1880	4.873
9538	1907.6	4.2174	9538	1907.6	4.889



WCDMA_HSUPA Band 2					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
9262	1852.4	4.2198	9262	1852.4	4.903
9400	1880	4.2235	9400	1880	4.879
9538	1907.6	4.2142	9538	1907.6	4.874



## ATTACHMENT C - CONDUCTED EMISSIONS

DCS1900			
GSM		GSM	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
661	1880	661	1880
GSM		EDGE	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
661	1880	661	1880
EDGE		EDGE	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
661	1880	661	1880

WCDMA Band 2

Channel	Frequency(MHz)	Channel	Frequency(MHz)
9400	1880	9400	1880
Channel	Frequency(MHz)	-	-
9400	1880	-	-
		-	

### WCDMA\_HSDPA Band 2

Channel	Frequency(MHz)	Channel	Frequency(MHz)
9400	1880	9400	1880
Channel	Frequency(MHz)	-	-
9400	1880	-	-
		-	


### WCDMA\_HSUPA Band 2

Channel	Frequency(MHz)	Channel	Frequency(MHz)
9400	1880	9400	1880
Channel	Frequency(MHz)	-	-
9400	1880	-	-
		-	

## ATTACHMENT D - RADIATED EMISSION

Test Mode: TX Mode\_Adapter: BYD


Ant 0°

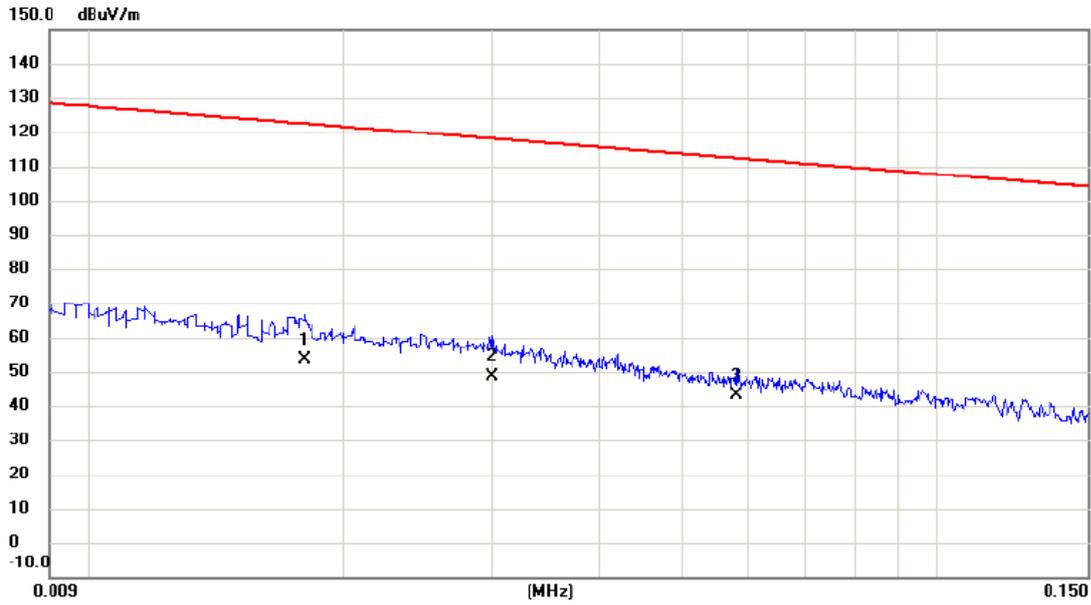

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.018	29.90	23.64	53.54	122.50	-68.96	AVG	
2		0.030	26.41	22.29	48.70	118.06	-69.36	AVG	
3		0.058	23.34	19.73	43.07	112.34	-69.27	AVG	

Test Mode: TX Mode\_Adapter: BYD


Ant 0°

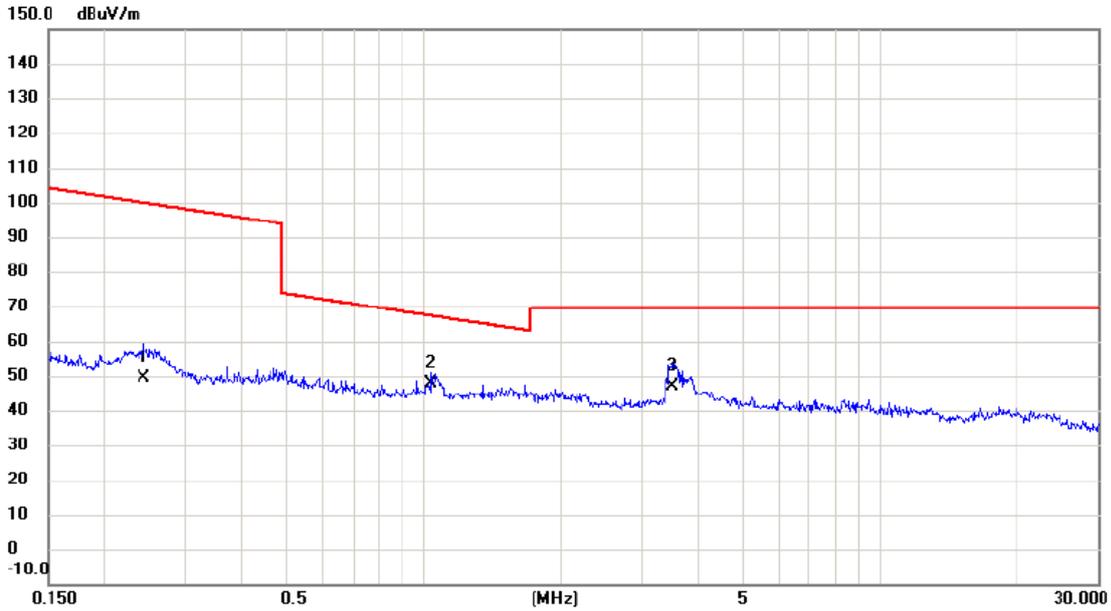

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.243	30.77	18.66	49.43	99.89	-50.46	AVG	
2	*	1.037	30.27	17.69	47.96	67.29	-19.33	QP	
3		3.509	29.14	17.71	46.85	69.54	-22.69	QP	

Test Mode: TX Mode\_Adapter: BYD


Ant 90°

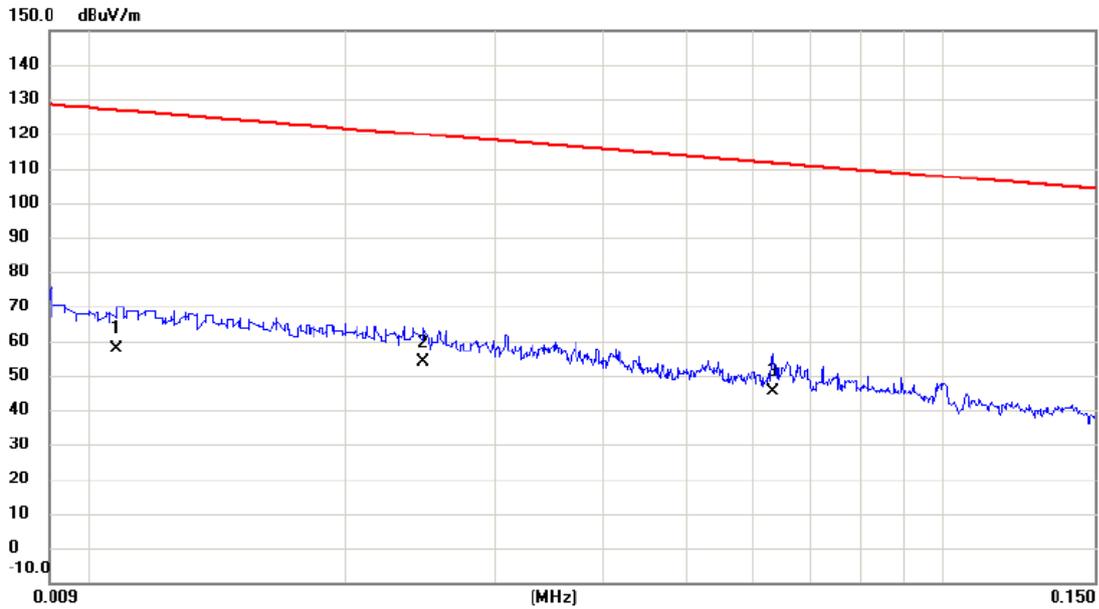

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.011	33.78	24.07	57.85	126.94	-69.09	AVG	
2	*	0.025	30.83	22.95	53.78	119.79	-66.01	AVG	
3		0.063	25.70	19.67	45.37	111.60	-66.23	AVG	

Test Mode: TX Mode\_Adapter: BYD


Ant 90°

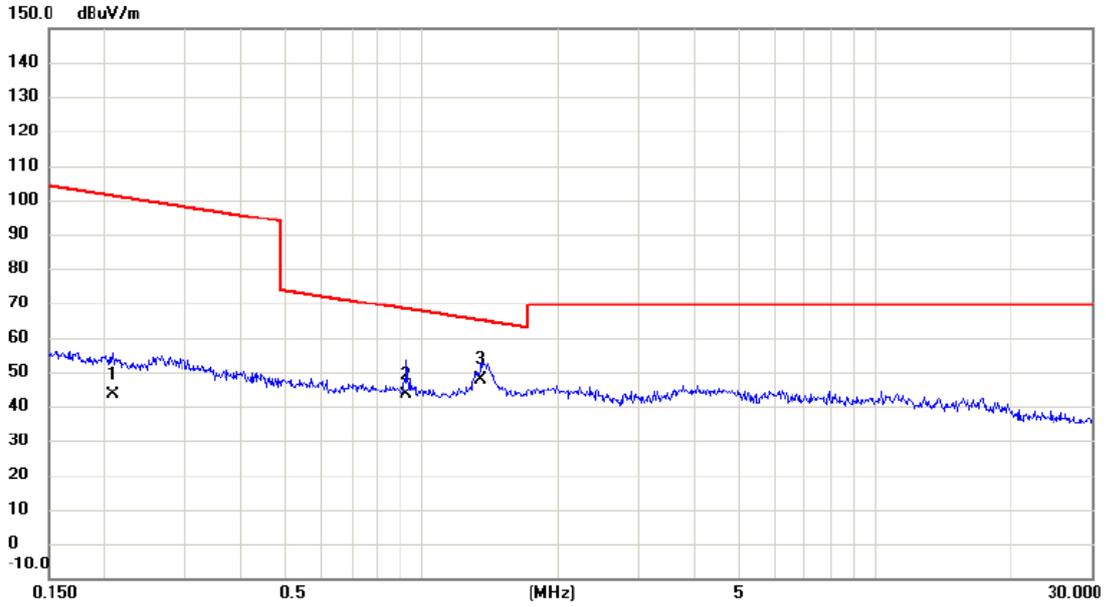

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.208	24.90	18.68	43.58	101.23	-57.65	AVG	
2		0.928	25.65	17.91	43.56	68.25	-24.69	QP	
3	*	1.345	30.01	17.76	47.77	65.03	-17.26	QP	

Test Mode: TX Mode\_Adapter: PHITEK


Ant 0°

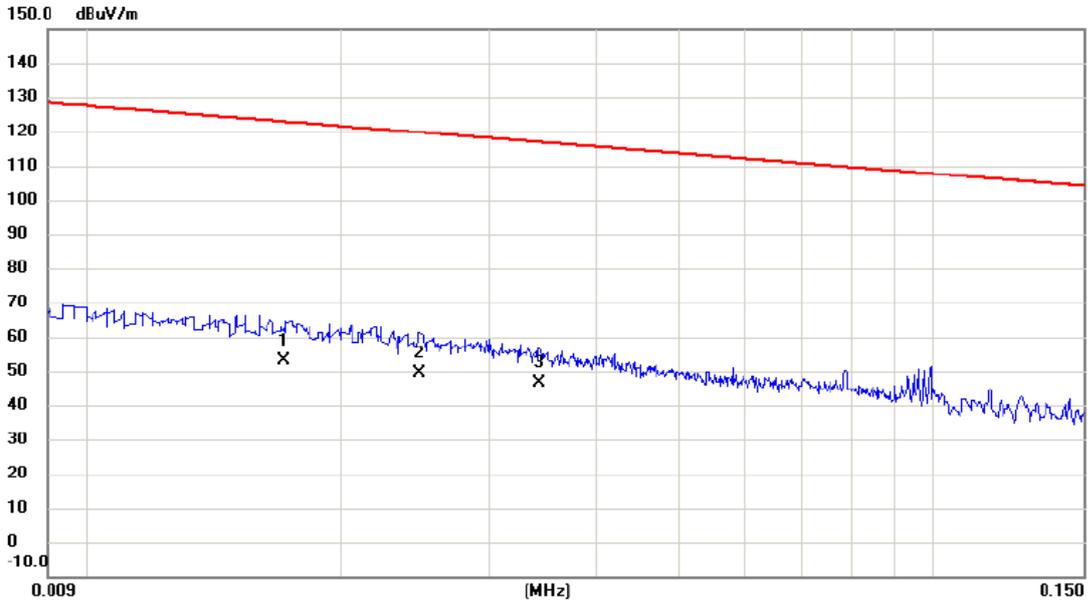

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.017	29.35	23.69	53.04	122.94	-69.90	AVG	
2		0.025	26.59	22.94	49.53	119.75	-70.22	AVG	
3		0.034	24.87	21.76	46.63	116.90	-70.27	AVG	

Test Mode: TX Mode\_Adapter: PHITEK


Ant 0°

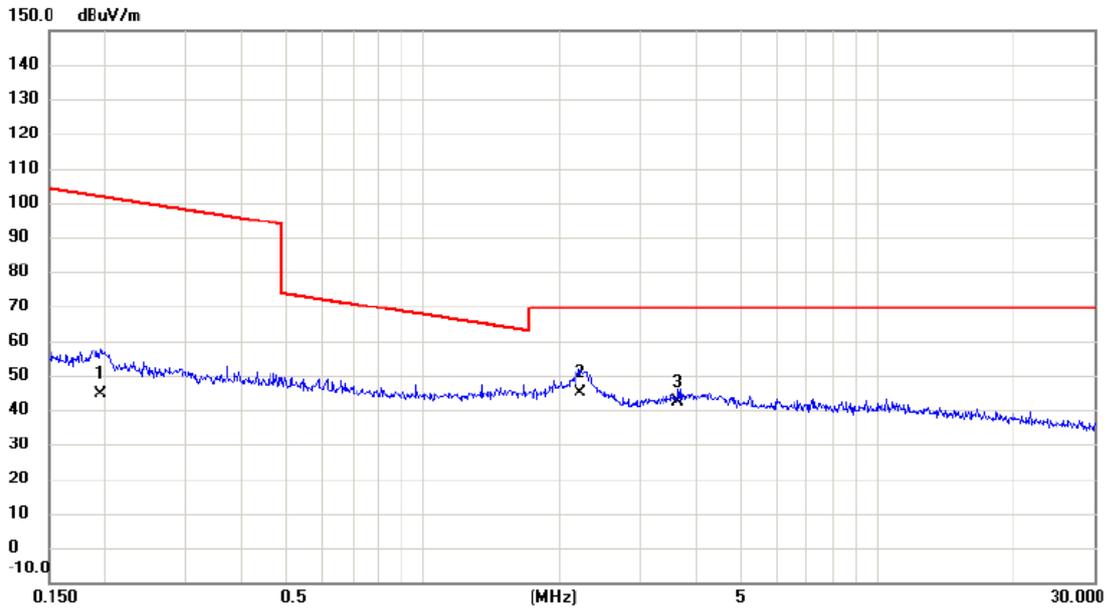

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.196	26.05	18.69	44.74	101.78	-57.04	AVG	
2	*	2.213	27.18	17.63	44.81	69.54	-24.73	QP	
3		3.642	24.33	18.00	42.33	69.54	-27.21	QP	

Test Mode: TX Mode\_Adapter: PHITEK


Ant 90°

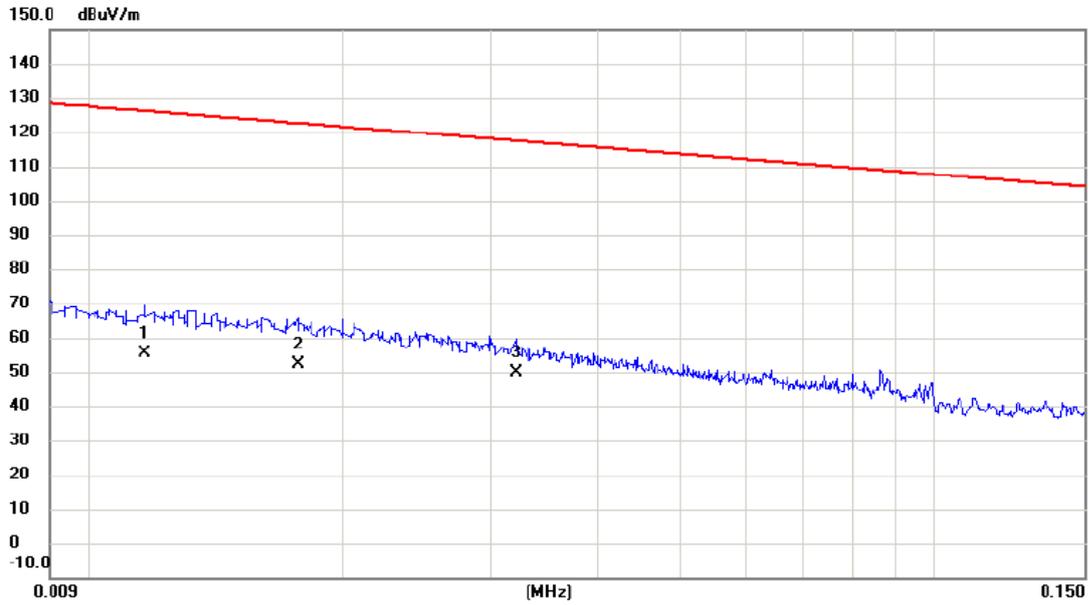

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.012	31.52	24.02	55.54	126.24	-70.70	AVG	
2		0.018	28.68	23.66	52.34	122.65	-70.31	AVG	
3	*	0.032	27.85	22.04	49.89	117.50	-67.61	AVG	

Test Mode: TX Mode\_Adapter: PHITEK


Ant 90°

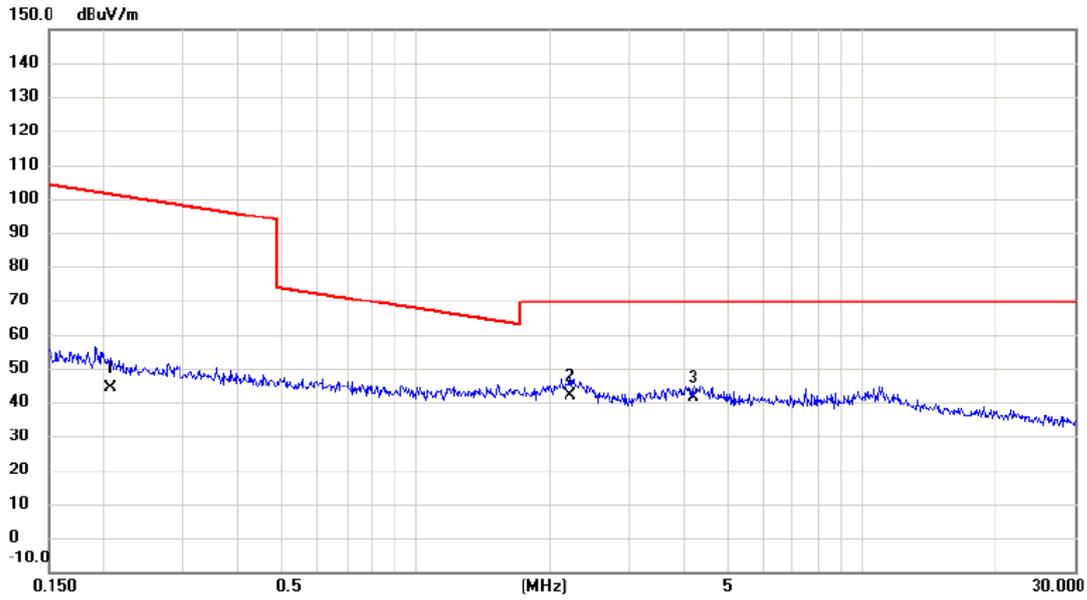

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.207	25.68	18.68	44.36	101.28	-56.92	AVG	
2	*	2.225	24.35	17.62	41.97	69.54	-27.57	QP	
3		4.202	22.91	18.34	41.25	69.54	-28.29	QP	

Test Mode: TX Mode\_Adapter: Huntkey


Ant 0°

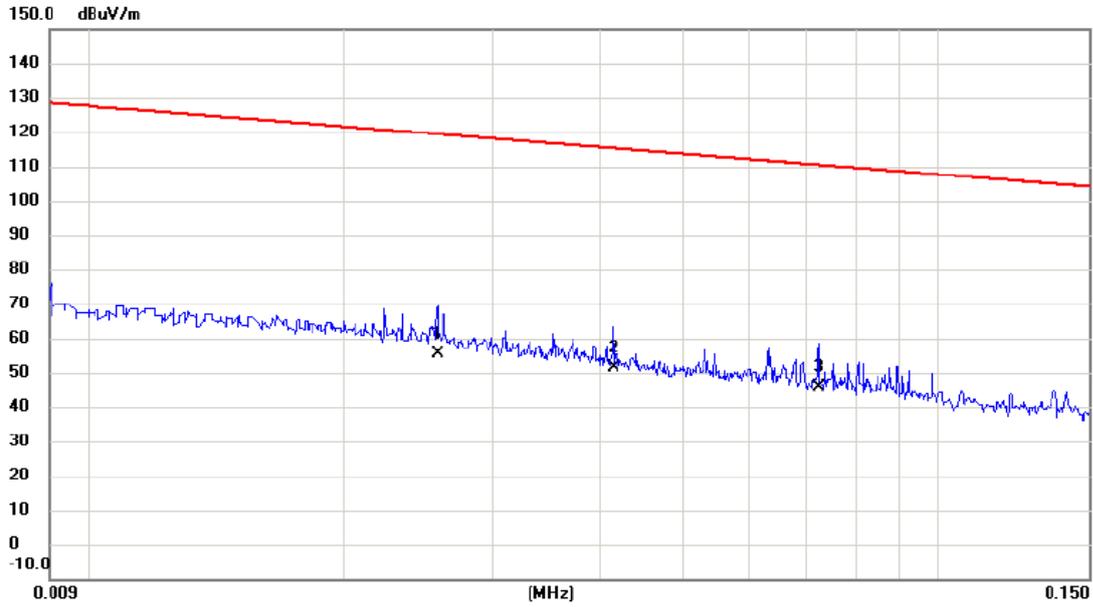

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.026	32.65	22.80	55.45	119.37	-63.92	AVG	
2		0.042	30.41	20.87	51.28	115.24	-63.96	AVG	
3		0.072	26.17	19.56	45.73	110.41	-64.68	AVG	

Test Mode: TX Mode\_Adapter: Huntkey


Ant 0°

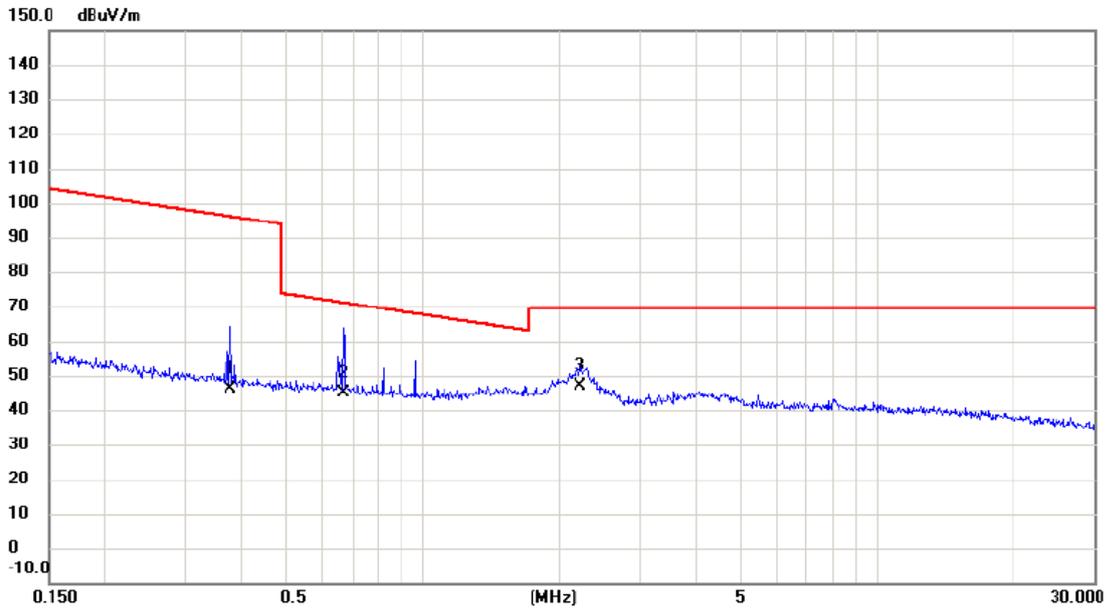

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.377	27.82	18.51	46.33	96.08	-49.75	AVG	
2		0.668	26.39	18.44	44.83	71.10	-26.27	QP	
3	*	2.225	29.44	17.62	47.06	69.54	-22.48	QP	

Test Mode: TX Mode\_Adapter: Huntkey

Ant 90°

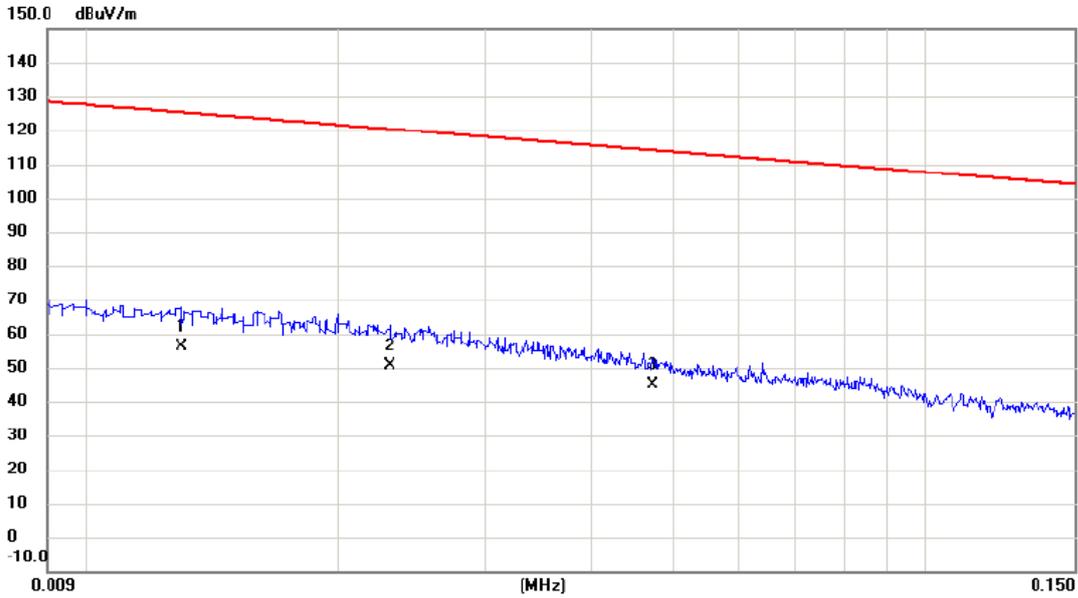


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.013	32.21	23.94	56.15	125.33	-69.18	AVG	
2		0.023	27.30	23.15	50.45	120.37	-69.92	AVG	
3	*	0.047	24.86	20.15	45.01	114.11	-69.10	AVG	

### SIM Card 1

Test Mode: DCS1900\_TX CH661\_GSM

#### Vertical

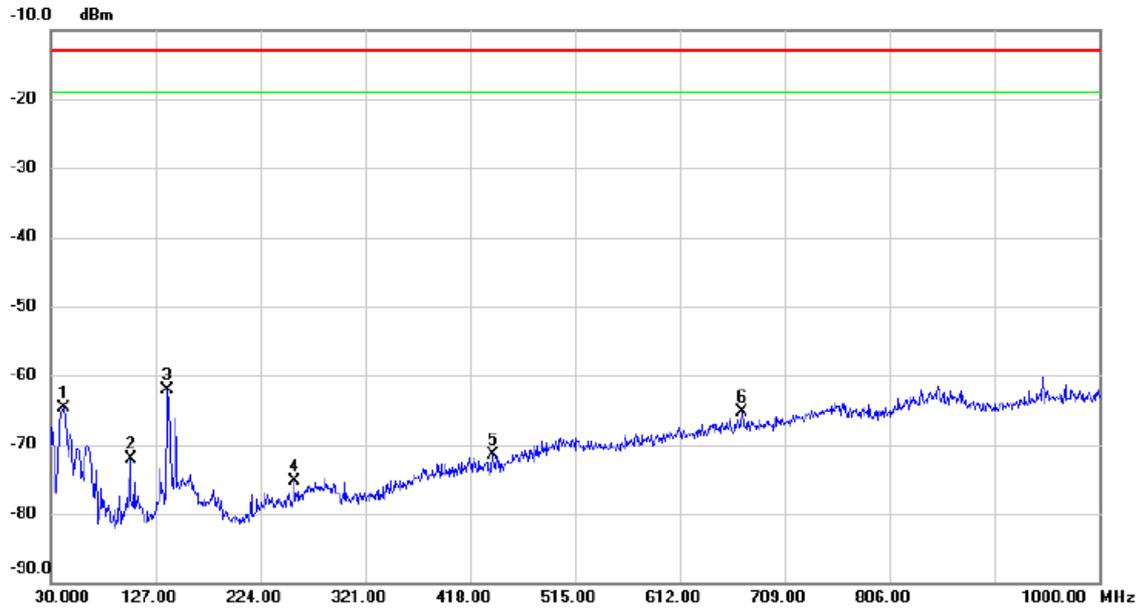

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		42.610	-66.70	2.03	-64.67	-13.00	-51.67	peak	
2		103.720	-70.93	-1.24	-72.17	-13.00	-59.17	peak	
3	*	138.640	-63.94	1.77	-62.17	-13.00	-49.17	peak	
4		256.010	-75.79	0.50	-75.29	-13.00	-62.29	peak	
5		439.340	-75.90	4.37	-71.53	-13.00	-58.53	peak	
6		669.230	-75.65	10.26	-65.39	-13.00	-52.39	peak	


Test Mode: DCS1900\_TX CH661\_GSM



No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		42.610	-76.87	2.59	-74.28	-13.00	-61.28	peak	
2		67.830	-72.91	-2.78	-75.69	-13.00	-62.69	peak	
3		150.280	-78.09	4.20	-73.89	-13.00	-60.89	peak	
4		256.010	-75.66	1.91	-73.75	-13.00	-60.75	peak	
5		382.110	-76.89	6.08	-70.81	-13.00	-57.81	peak	
6	*	698.330	-75.77	13.87	-61.90	-13.00	-48.90	peak	

Test Mode: DCS1900\_TX CH661\_GSM


Vertical

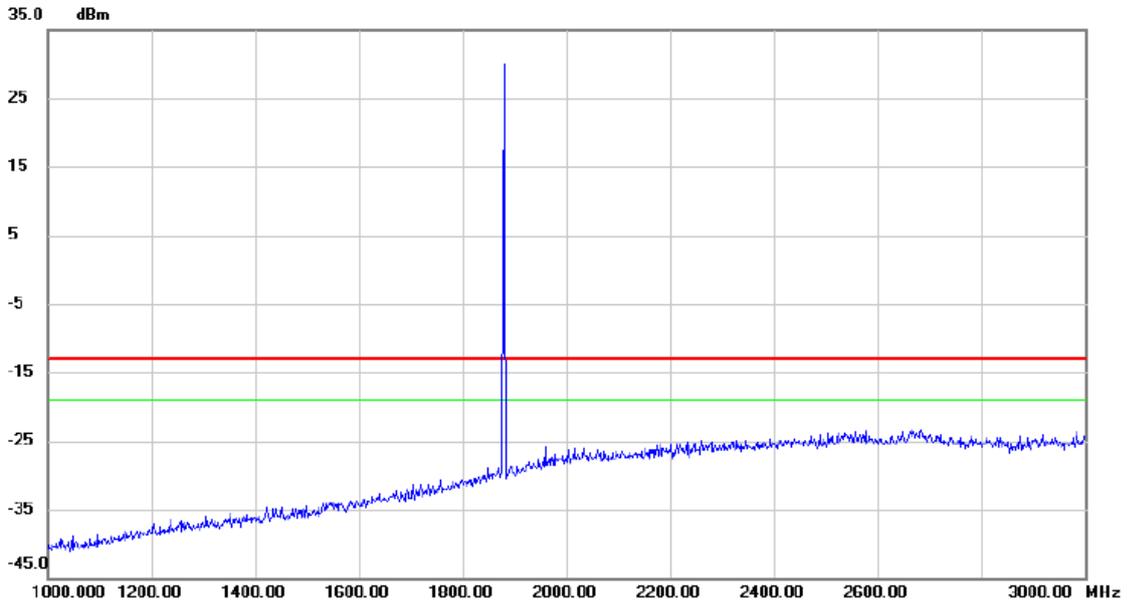

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
		1850.00	28.00	0.00	28.00	-15.00	43.00		

Test Mode: DCS1900\_TX CH661\_GSM


Horizontal

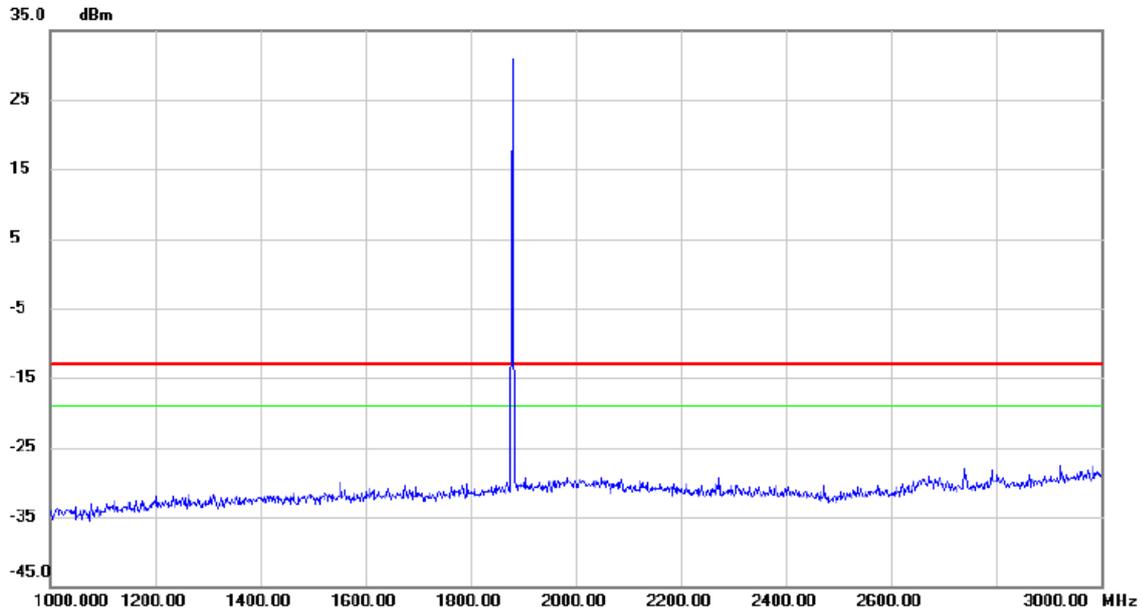

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
		1930.00	30.00	0.00	30.00	-15.00	15.00		

Test Mode: DCS1900\_TX CH661\_GSM


Vertical

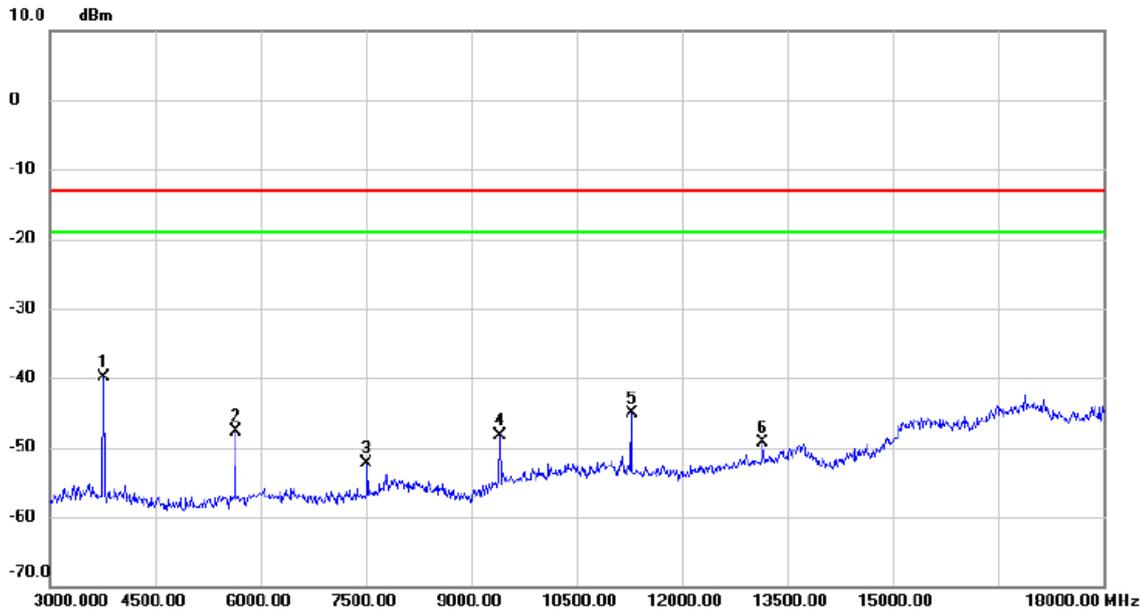

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3765.000	-54.42	14.51	-39.91	-13.00	-26.91	peak	
2		5640.000	-64.09	16.31	-47.78	-13.00	-34.78	peak	
3		7515.000	-70.25	17.92	-52.33	-13.00	-39.33	peak	
4		9405.000	-68.16	19.81	-48.35	-13.00	-35.35	peak	
5		11280.000	-68.06	23.02	-45.04	-13.00	-32.04	peak	
6		13155.000	-75.04	25.67	-49.37	-13.00	-36.37	peak	

Test Mode: DCS1900\_TX CH661\_GSM


Horizontal

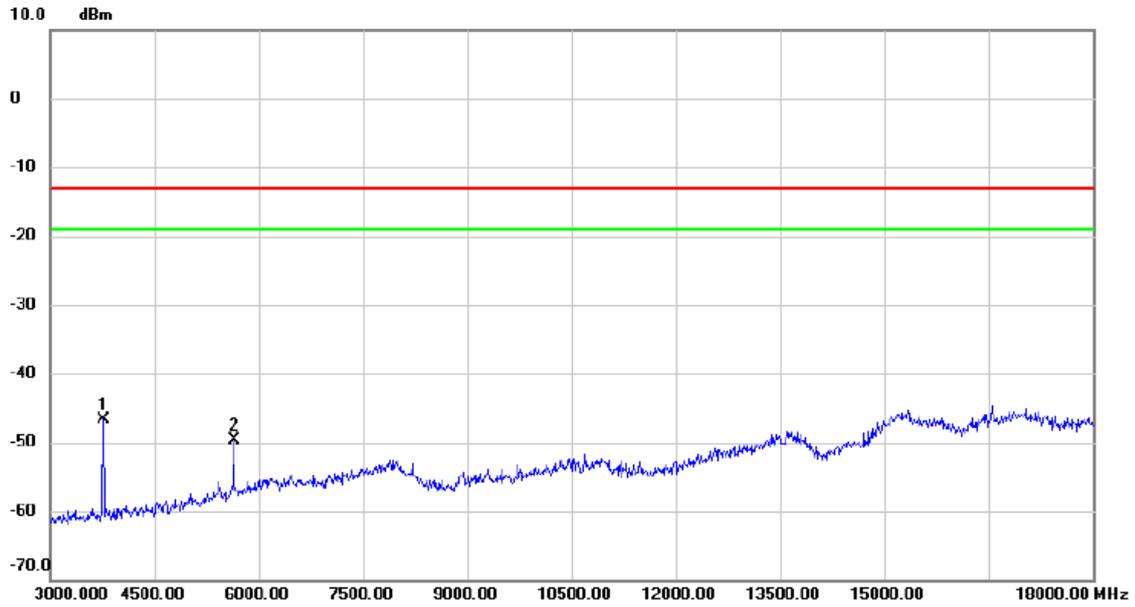

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3765.000	-58.04	11.36	-46.68	-13.00	-33.68	peak	
2		5640.000	-66.66	17.04	-49.62	-13.00	-36.62	peak	

Test Mode: DCS1900\_TX CH661\_GSM


Vertical

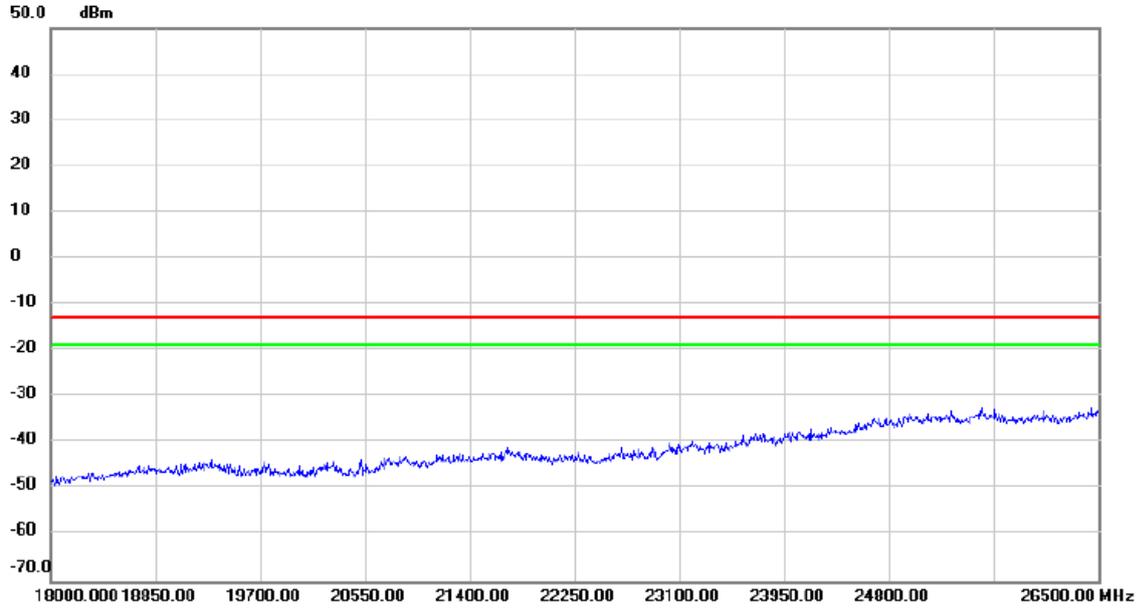

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
---------	--------------	-------------------------	-------------------------	-------------------------	--------------	--------------	----------	---------


Test Mode: DCS1900\_TX CH661\_GSM

Horizontal

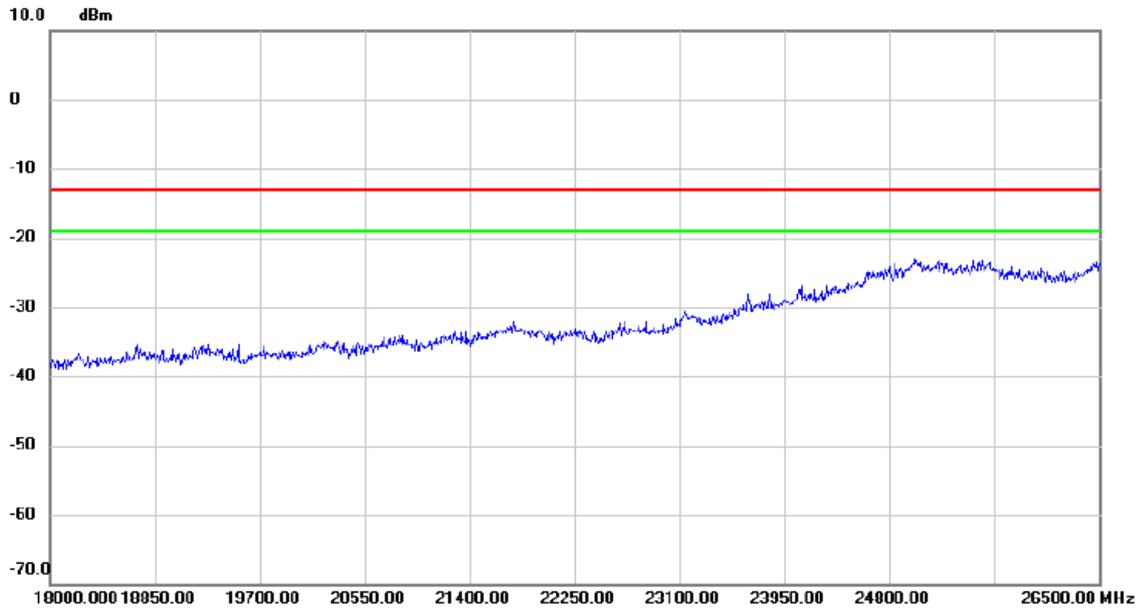

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment


Test Mode: DCS1900\_TX CH661\_EDGE

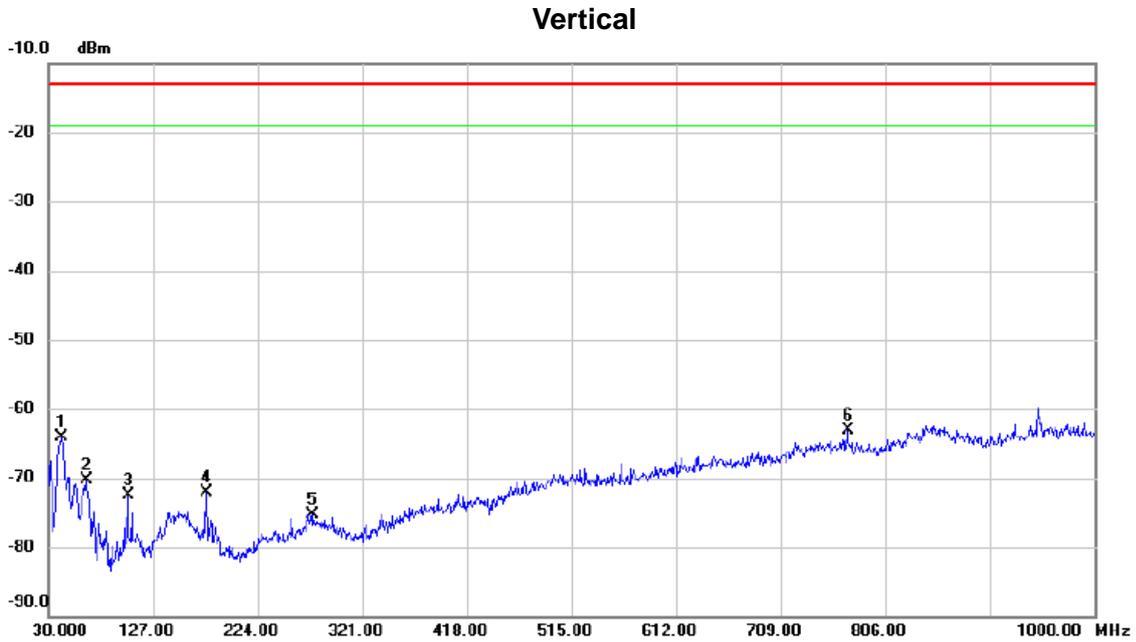

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		42.610	-66.22	2.03	-64.19	-13.00	-51.19	peak	
2		64.920	-71.46	1.10	-70.36	-13.00	-57.36	peak	
3		103.720	-71.26	-1.24	-72.50	-13.00	-59.50	peak	
4		176.470	-72.58	0.46	-72.12	-13.00	-59.12	peak	
5		275.410	-77.67	2.44	-75.23	-13.00	-62.23	peak	
6	*	771.080	-75.23	12.23	-63.00	-13.00	-50.00	peak	

Test Mode: DCS1900\_TX CH661\_EDGE


### Horizontal

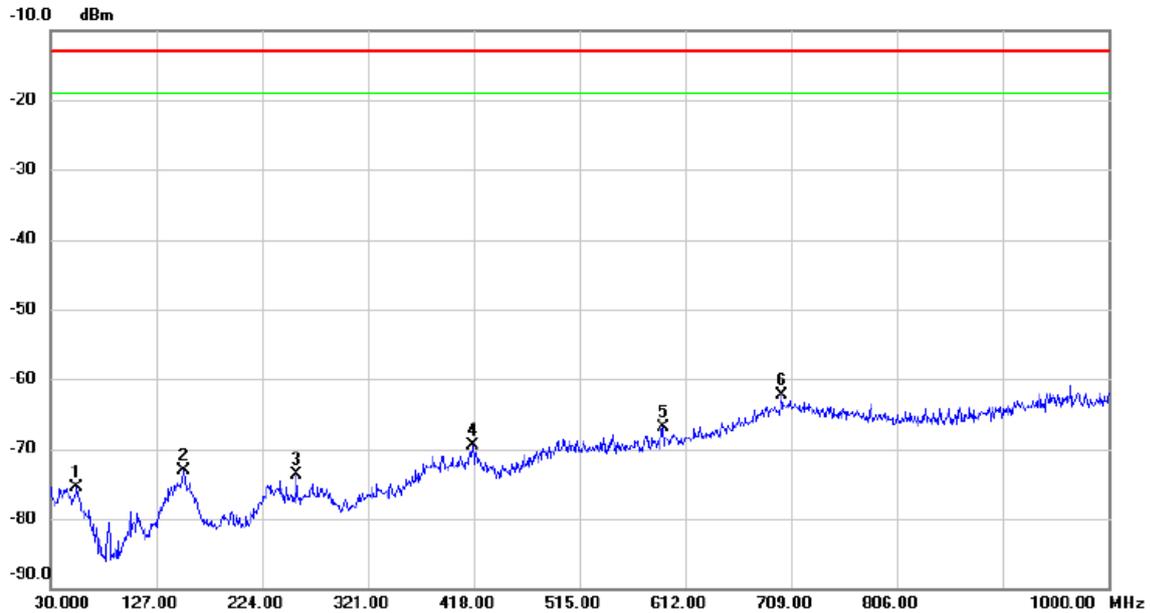

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	54.250	-78.07	2.47	-75.60	-13.00	-62.60	peak	
2	152.220	-76.94	3.91	-73.03	-13.00	-60.03	peak	
3	256.010	-75.56	1.91	-73.65	-13.00	-60.65	peak	
4	417.030	-76.22	6.73	-69.49	-13.00	-56.49	peak	
5	591.630	-75.80	8.96	-66.84	-13.00	-53.84	peak	
6 *	700.270	-76.21	13.97	-62.24	-13.00	-49.24	peak	

Test Mode: DCS1900\_TX CH661\_EDGE


Vertical

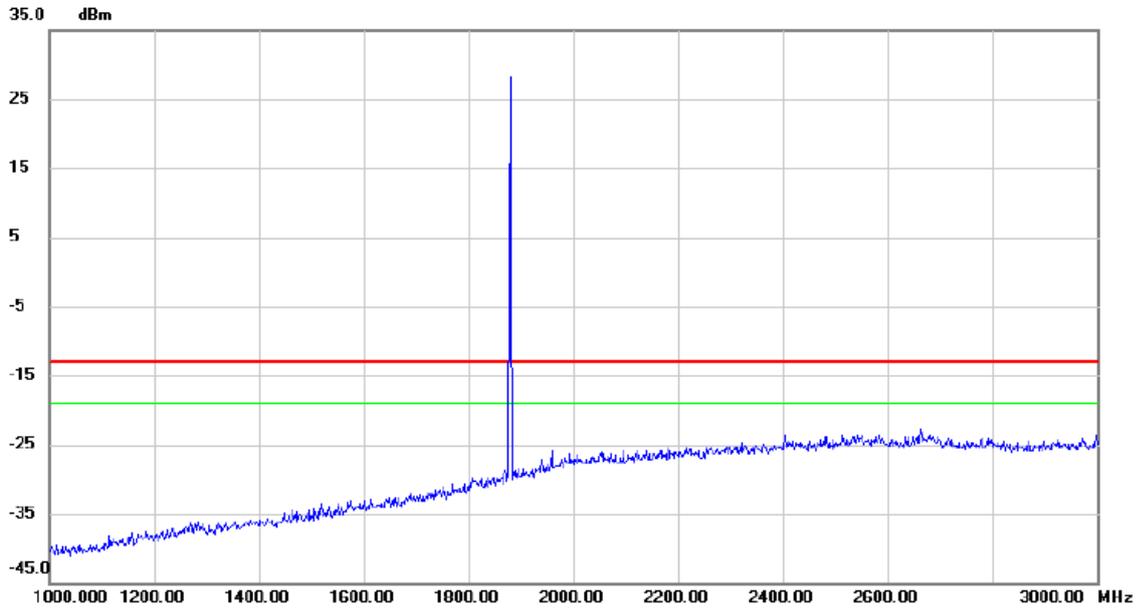

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
		1950.00	28.0	0.0	28.0	-15.0	13.0		

Test Mode: DCS1900\_TX CH661\_EDGE


Horizontal

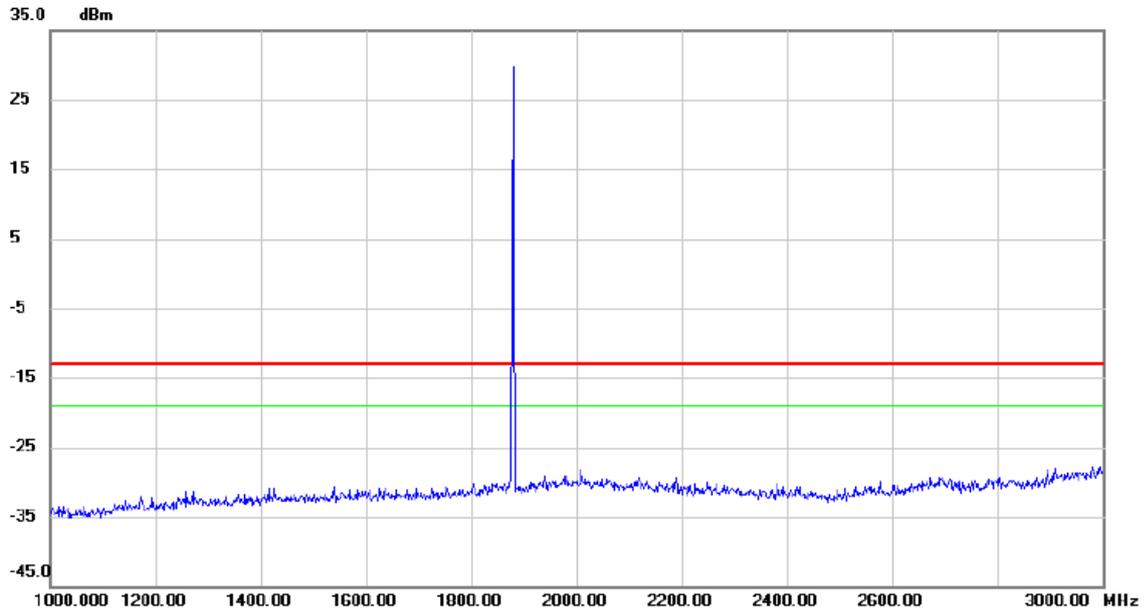

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment

Test Mode: DCS1900\_TX CH661\_EDGE


Vertical

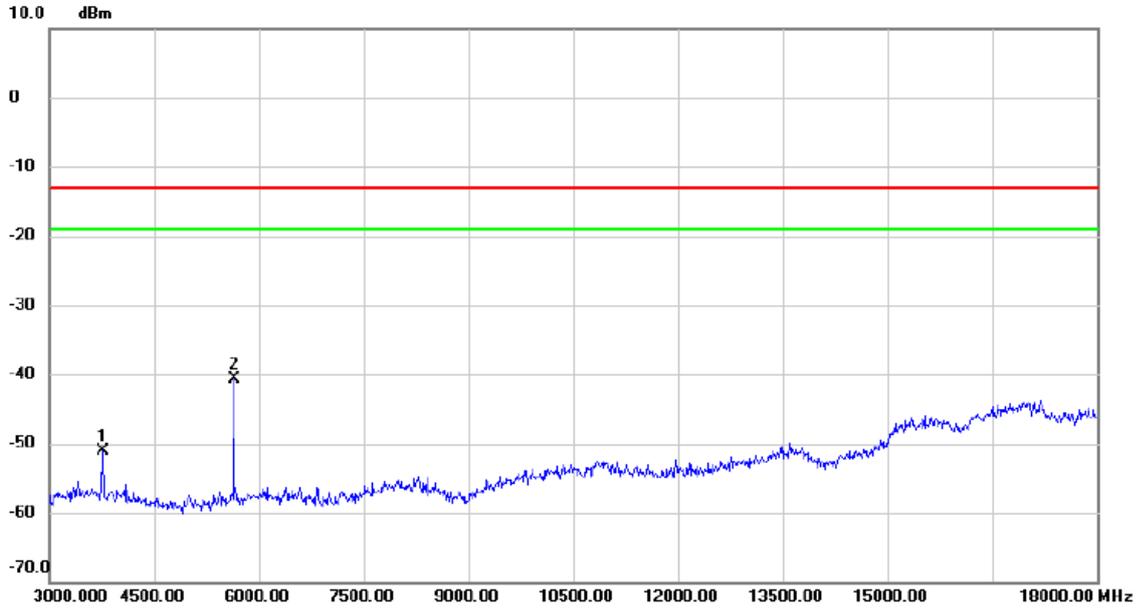

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		3765.000	-65.65	14.51	-51.14	-13.00	-38.14	peak	
2	*	5640.000	-56.98	16.31	-40.67	-13.00	-27.67	peak	

Test Mode: DCS1900\_TX CH661\_EDGE


Horizontal

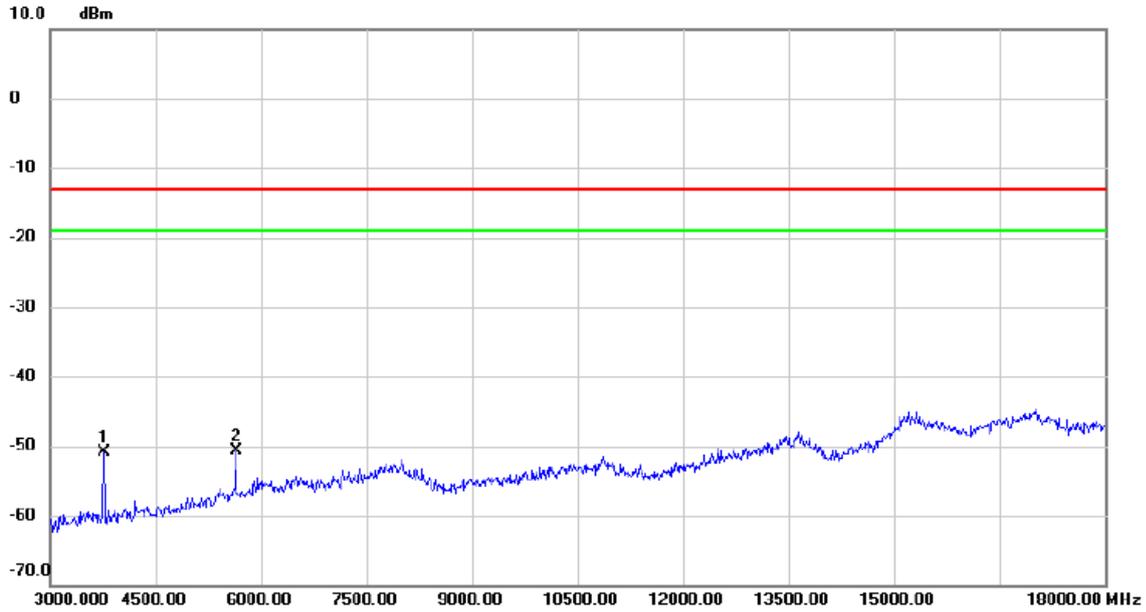

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		3765.000	-62.30	11.36	-50.94	-13.00	-37.94	peak	
2	*	5640.000	-67.69	17.04	-50.65	-13.00	-37.65	peak	

Test Mode: DCS1900\_TX CH661\_EDGE


**Vertical**

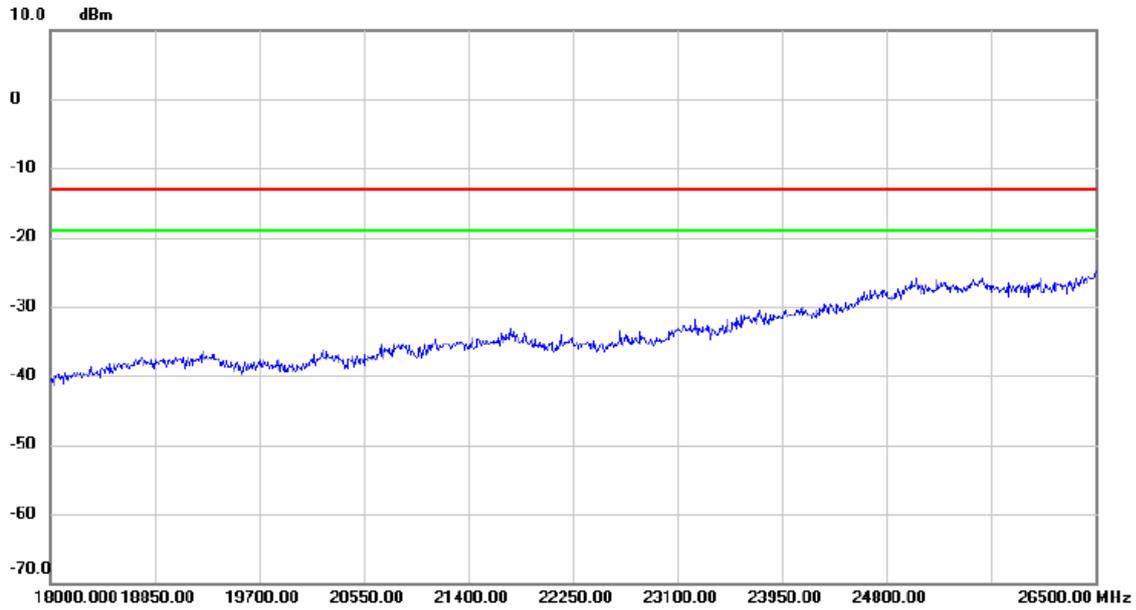

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		

Test Mode: DCS1900\_TX CH661\_EDGE

Horizontal

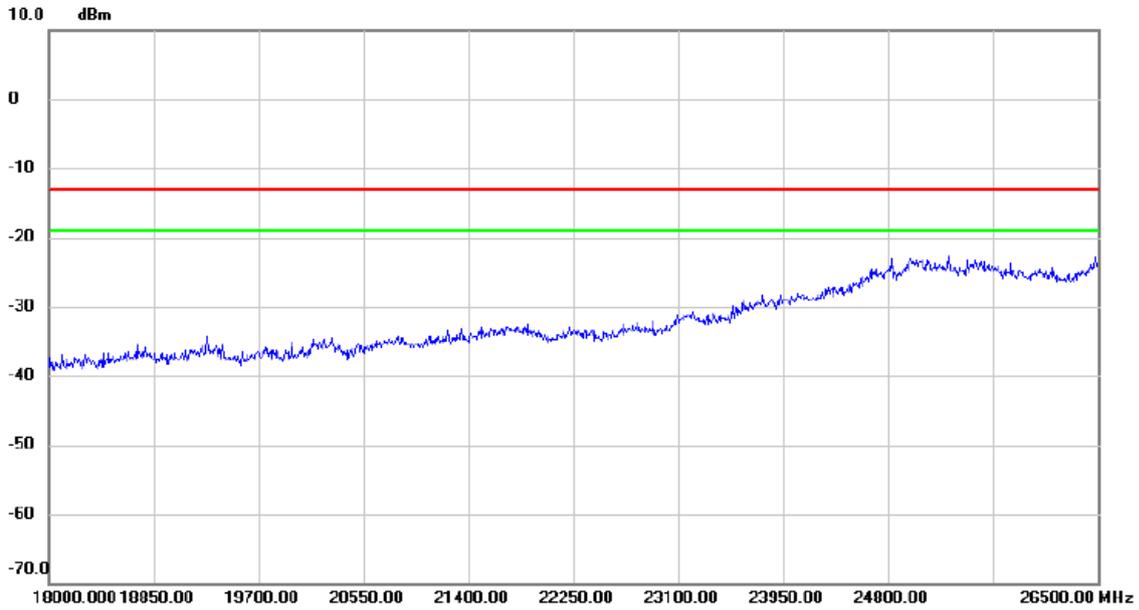


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		

### SIM Card 2


Test Mode: DCS1900\_TX CH661\_GSM

#### Vertical

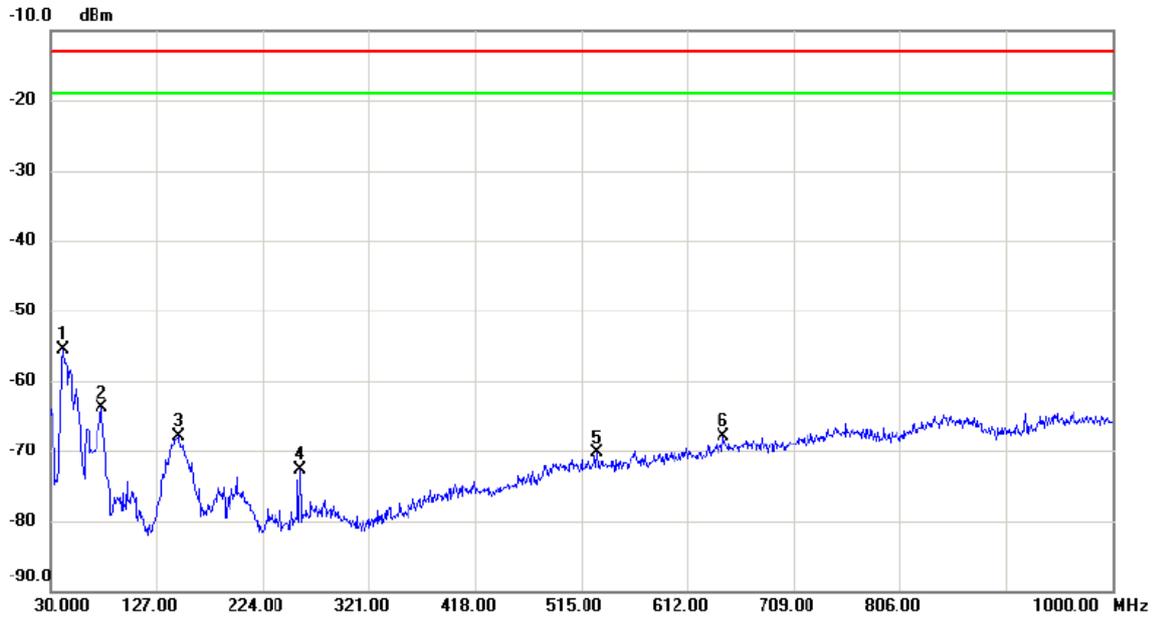

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	41.640	-57.65	2.06	-55.59	-13.00	-42.59	peak	
2		76.560	-58.29	-5.53	-63.82	-13.00	-50.82	peak	
3		146.400	-70.72	2.79	-67.93	-13.00	-54.93	peak	
4		257.950	-73.36	0.62	-72.74	-13.00	-59.74	peak	
5		529.550	-77.79	7.49	-70.30	-13.00	-57.30	peak	
6		644.980	-77.83	9.98	-67.85	-13.00	-54.85	peak	


Test Mode: DCS1900\_TX CH661\_GSM

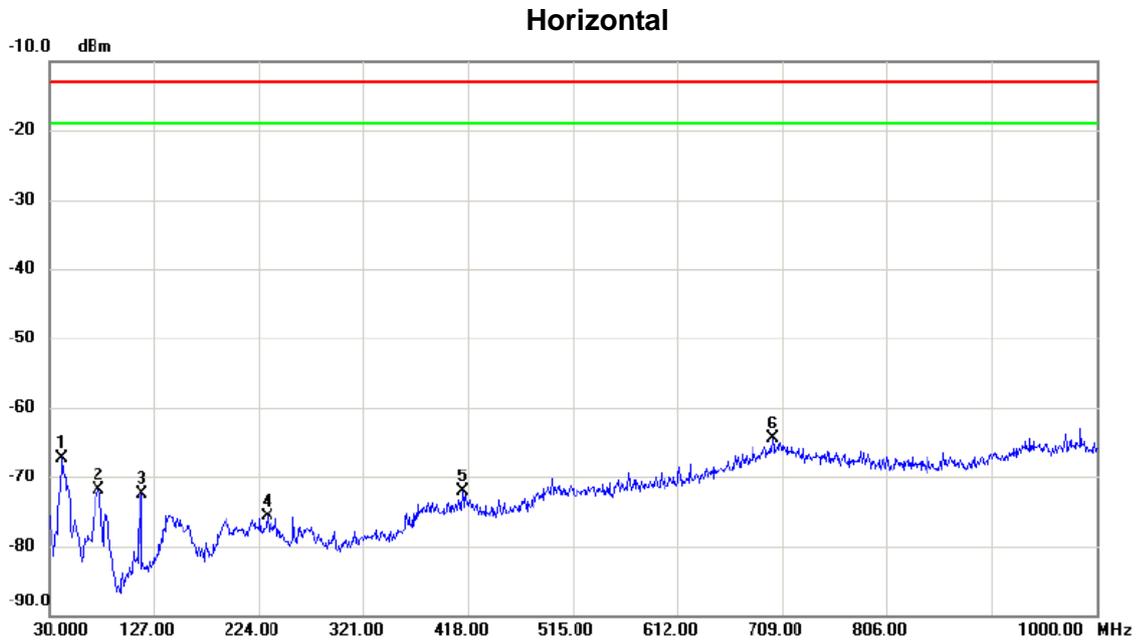

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		42.610	-69.85	2.59	-67.26	-13.00	-54.26	peak	
2		75.590	-64.71	-7.14	-71.85	-13.00	-58.85	peak	
3		115.360	-69.49	-2.99	-72.48	-13.00	-59.48	peak	
4		232.730	-78.67	3.02	-75.65	-13.00	-62.65	peak	
5		413.150	-78.61	6.54	-72.07	-13.00	-59.07	peak	
6	*	700.270	-78.42	13.97	-64.45	-13.00	-51.45	peak	

Test Mode: DCS1900\_TX CH661\_GSM


Vertical

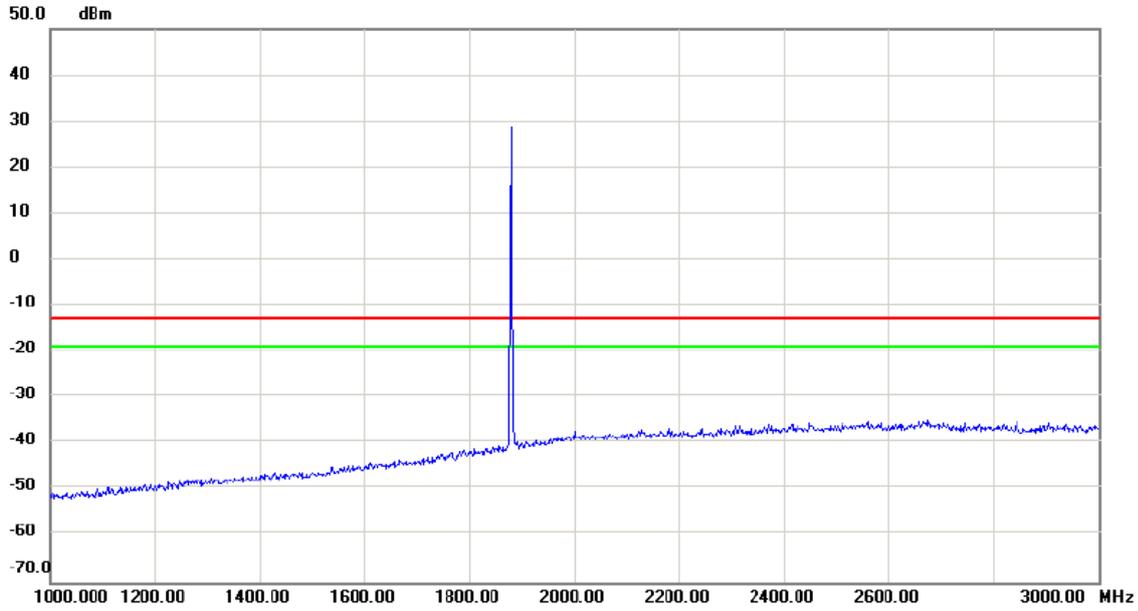

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
		1900.00	30.00		30.00	-15.00	45.00		

Test Mode: DCS1900\_TX CH661\_GSM


Horizontal

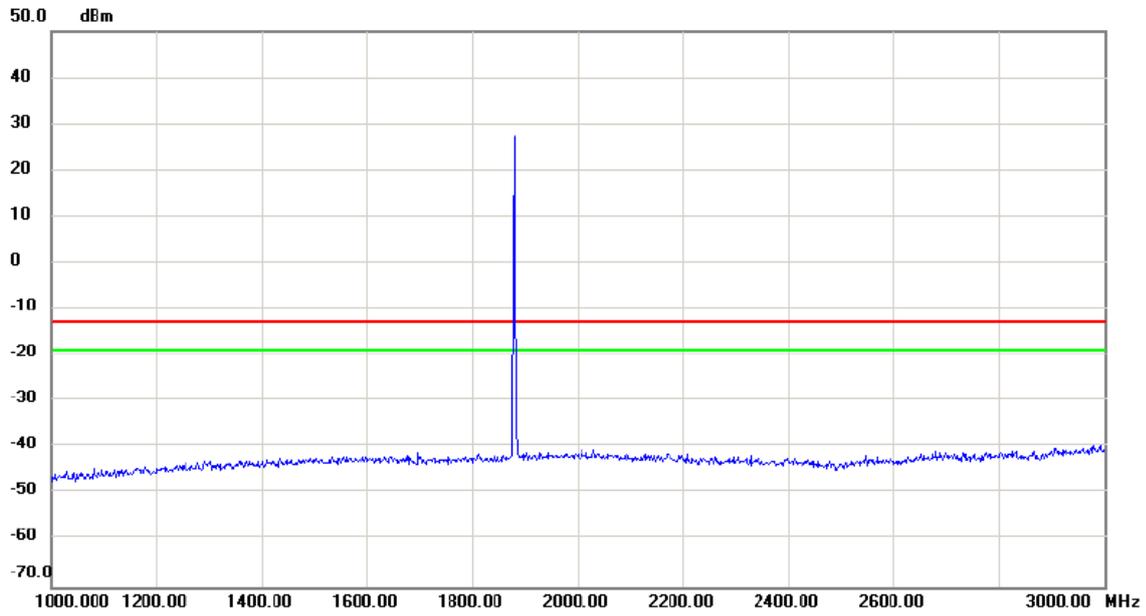

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
		1900.000	28.00	0.00	28.00	-15.00	43.00		

Test Mode: DCS1900\_TX CH661\_GSM


Vertical

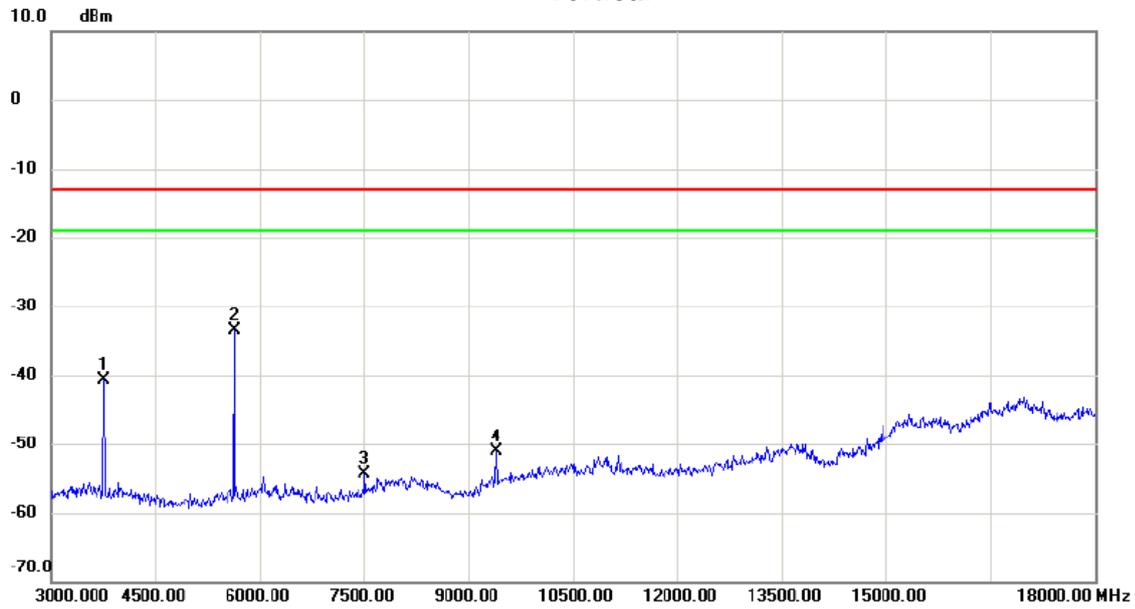

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		3765.000	-55.25	14.51	-40.74	-13.00	-27.74	peak	
2	*	5640.000	-49.90	16.31	-33.59	-13.00	-20.59	peak	
3		7515.000	-72.14	17.92	-54.22	-13.00	-41.22	peak	
4		9405.000	-70.86	19.81	-51.05	-13.00	-38.05	peak	

Test Mode: DCS1900\_TX CH661\_GSM


Horizontal

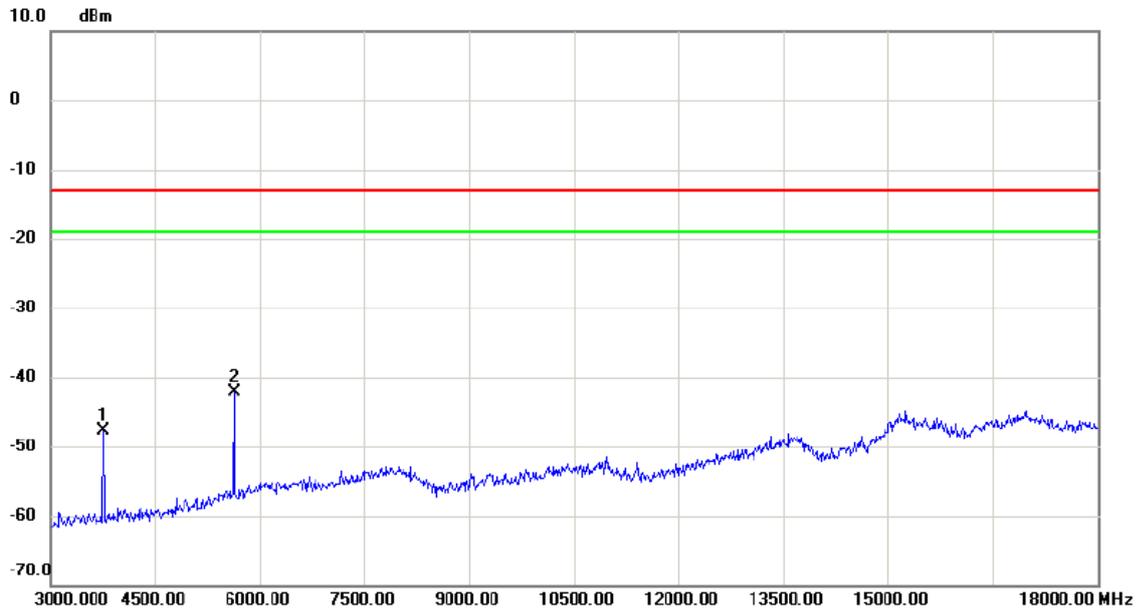

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		3765.000	-59.04	11.36	-47.68	-13.00	-34.68	peak	
2	*	5640.000	-59.14	17.04	-42.10	-13.00	-29.10	peak	

Test Mode: DCS1900\_TX CH661\_GSM


Vertical

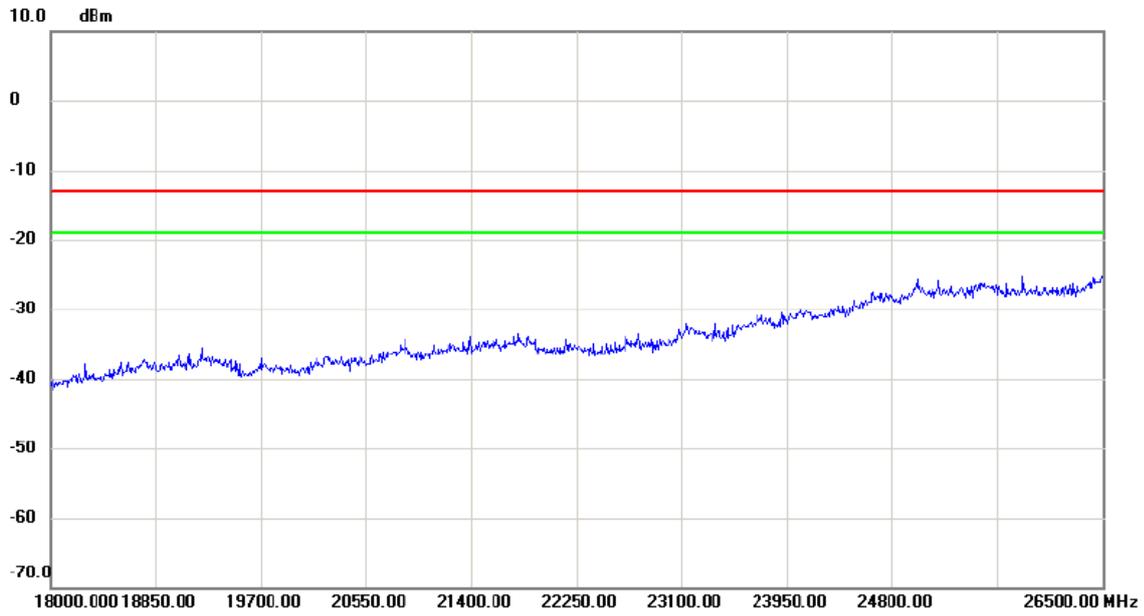

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		


Test Mode: DCS1900\_TX CH661\_GSM

Horizontal

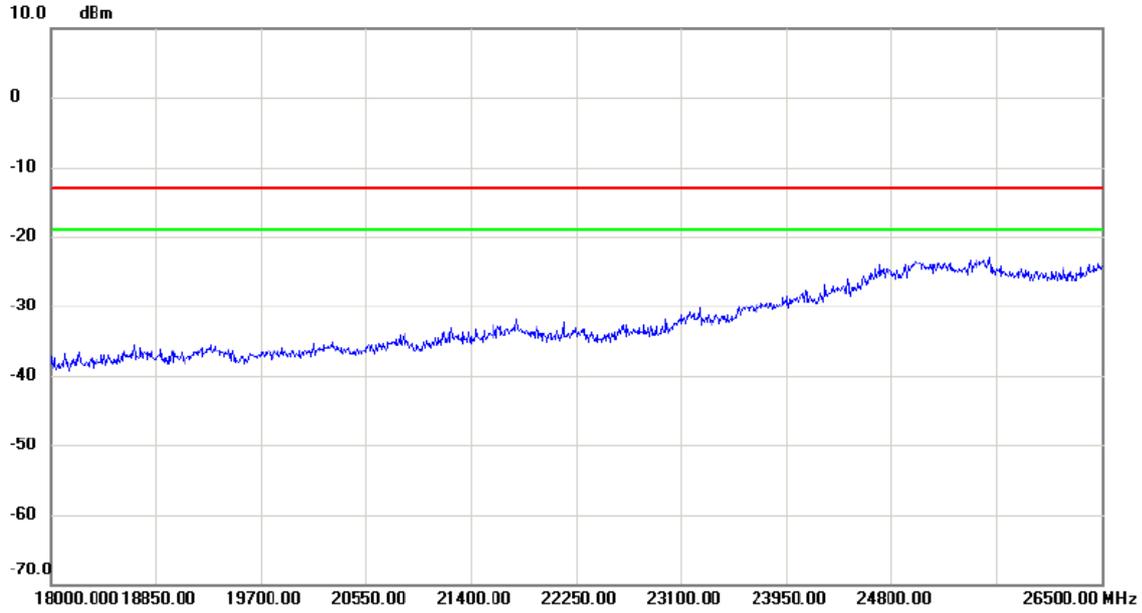

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		


Test Mode: DCS1900\_TX CH661\_EDGE

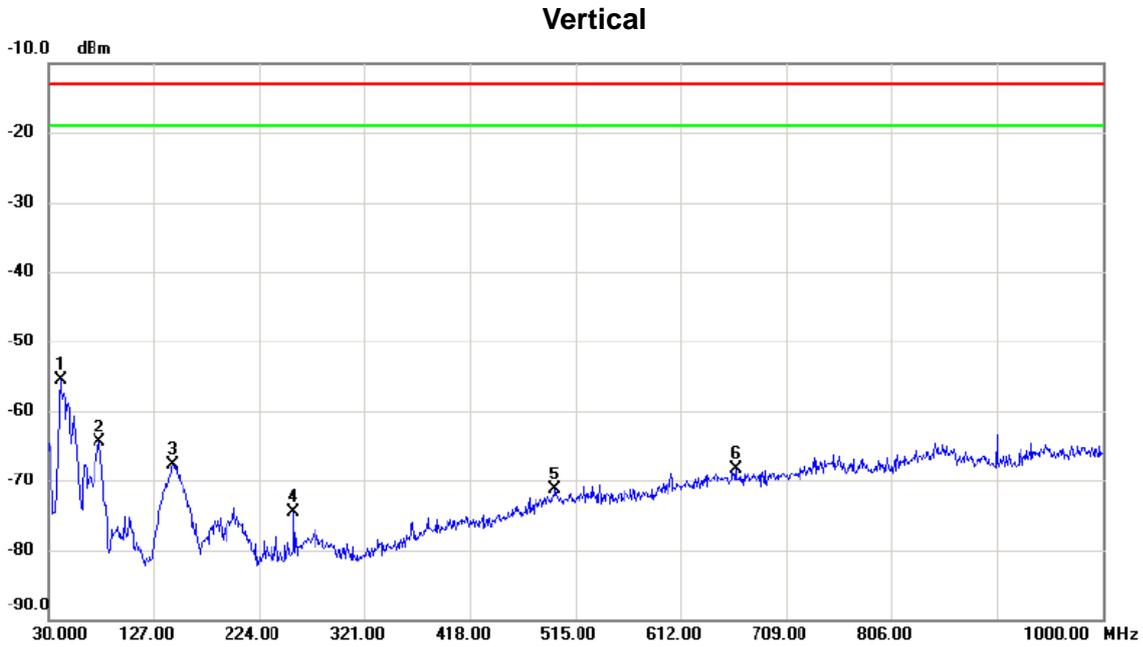

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	41.640	-57.56	2.06	-55.50	-13.00	-42.50	peak	
2		76.560	-59.01	-5.53	-64.54	-13.00	-51.54	peak	
3		144.460	-70.39	2.60	-67.79	-13.00	-54.79	peak	
4		256.010	-74.92	0.50	-74.42	-13.00	-61.42	peak	
5		496.570	-78.69	7.35	-71.34	-13.00	-58.34	peak	
6		662.440	-78.55	10.21	-68.34	-13.00	-55.34	peak	

Test Mode: DCS1900\_TX CH661\_EDGE


Horizontal

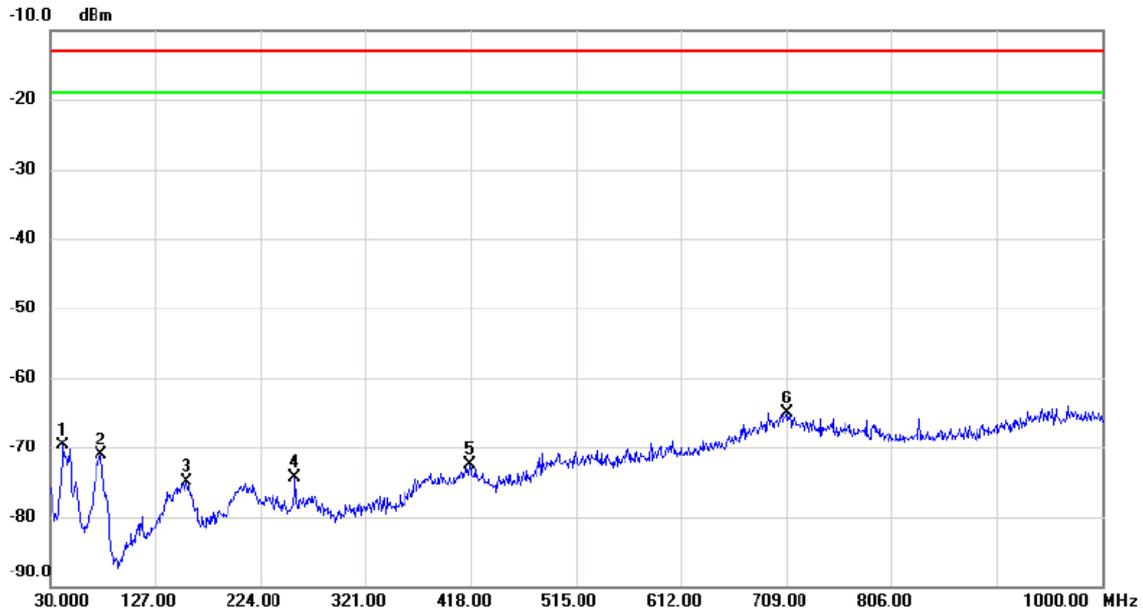

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		42.610	-72.28	2.59	-69.69	-13.00	-56.69	peak	
2		76.560	-63.98	-7.19	-71.17	-13.00	-58.17	peak	
3		156.100	-78.20	3.33	-74.87	-13.00	-61.87	peak	
4		256.010	-76.25	1.91	-74.34	-13.00	-61.34	peak	
5		417.030	-79.31	6.73	-72.58	-13.00	-59.58	peak	
6	*	709.000	-78.81	13.76	-65.05	-13.00	-52.05	peak	

Test Mode: DCS1900\_TX CH661\_EDGE


Vertical

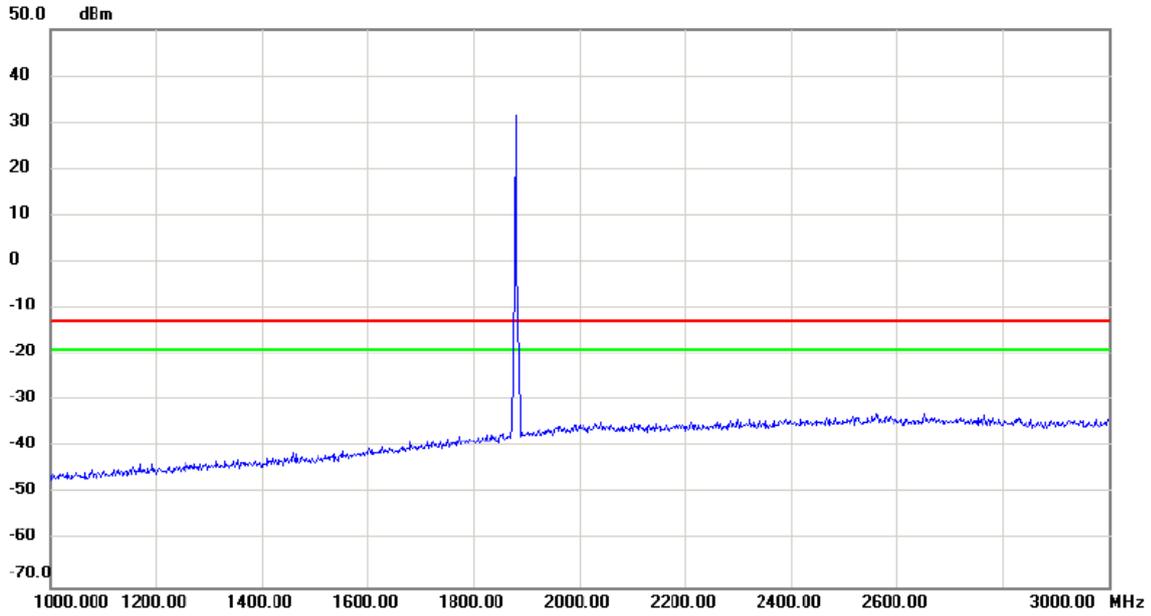

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment

Test Mode: DCS1900\_TX CH661\_EDGE


Horizontal

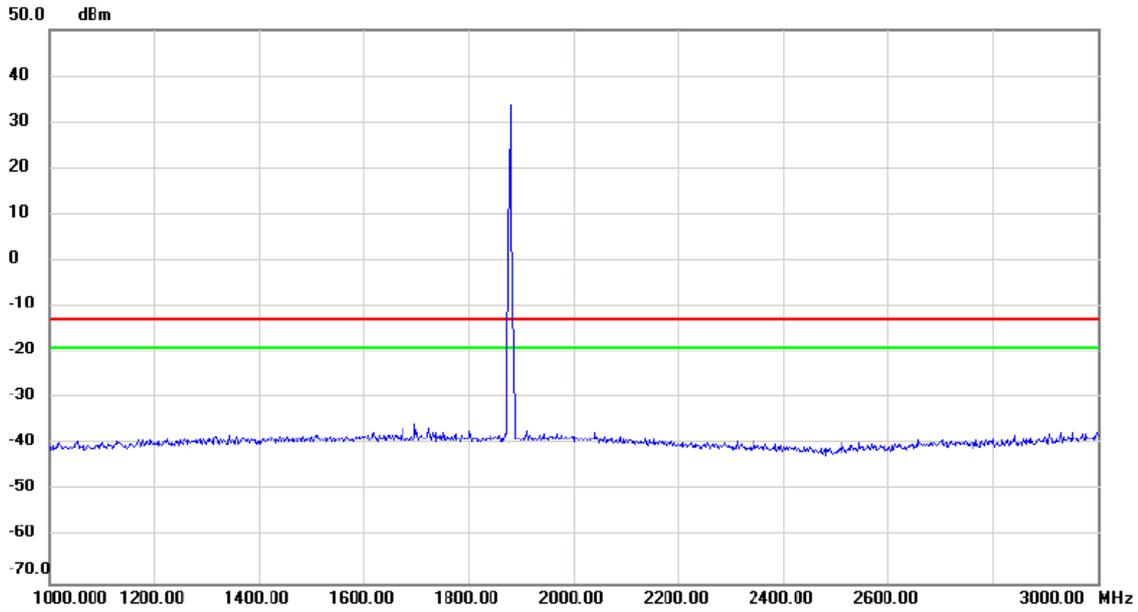

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
-----	-----	--------------	-------------------------	-------------------------	-------------------------	--------------	--------------	----------	---------

Test Mode: DCS1900\_TX CH661\_EDGE


Vertical

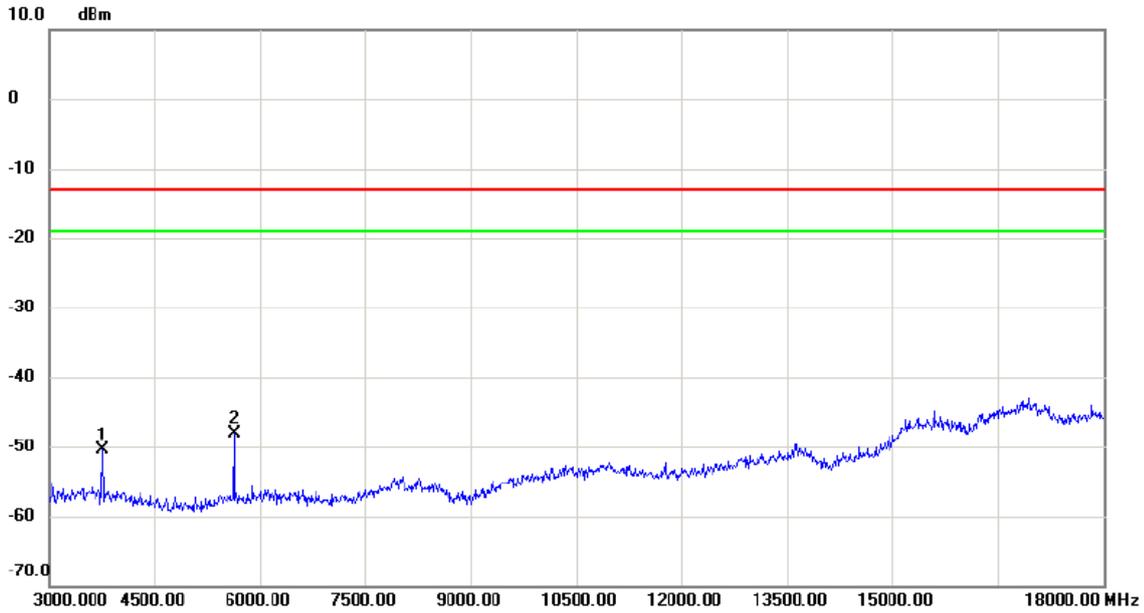

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	3765.000	-65.07	14.51	-50.56	-13.00	-37.56	peak	
2 *	5640.000	-64.36	16.31	-48.05	-13.00	-35.05	peak	

Test Mode: DCS1900\_TX CH661\_EDGE


Horizontal

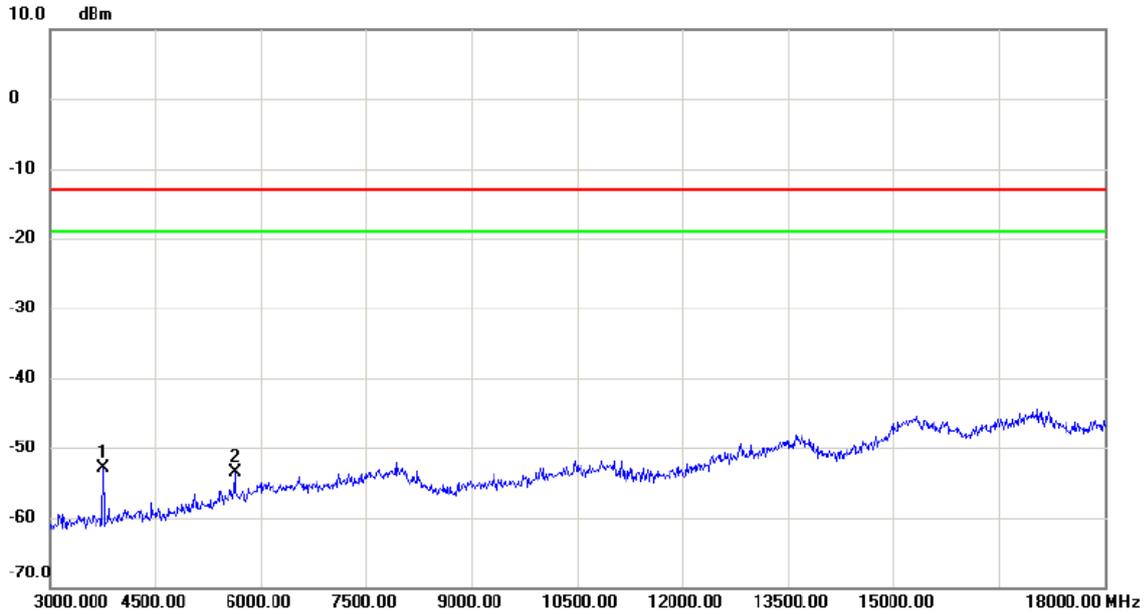

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3765.000	-64.24	11.36	-52.88	-13.00	-39.88	peak	
2		5640.000	-70.55	17.04	-53.51	-13.00	-40.51	peak	

Test Mode: DCS1900\_TX CH661\_EDGE


Vertical

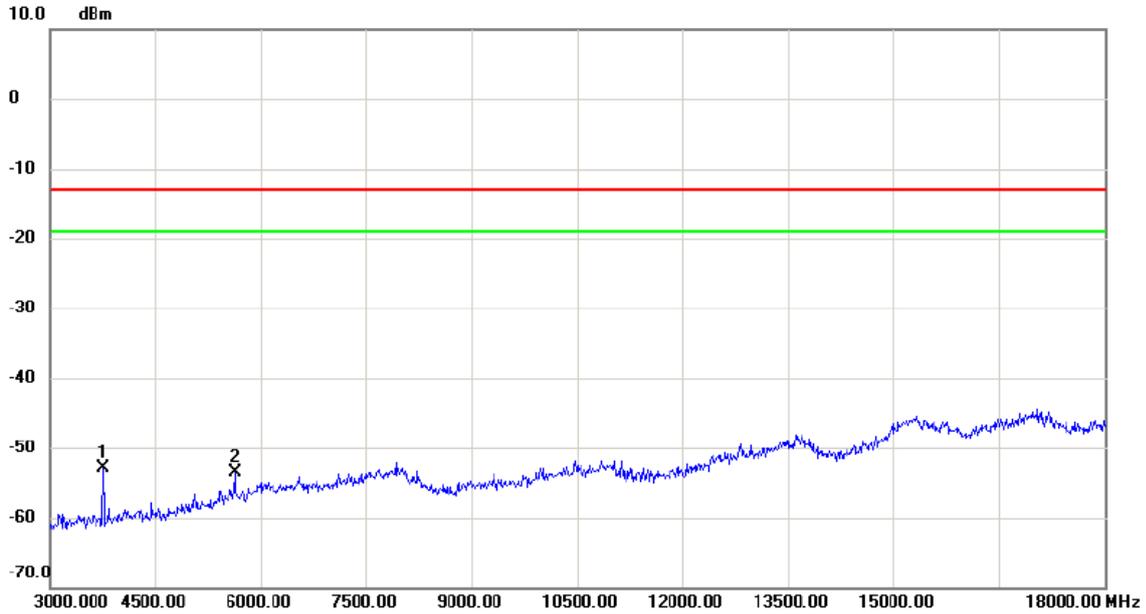

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3765.000	-64.24	11.36	-52.88	-13.00	-39.88	peak	
2		5640.000	-70.55	17.04	-53.51	-13.00	-40.51	peak	

Test Mode: DCS1900\_TX CH661\_EDGE


Horizontal

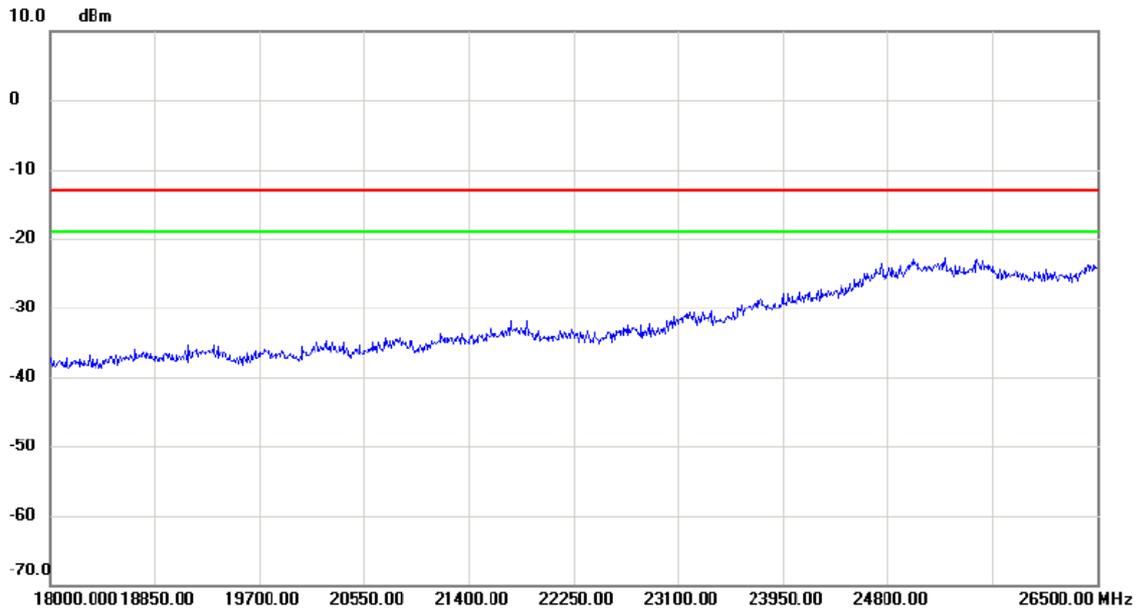

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		

Test Mode: WCDMA Band 2\_TX CH9400

Vertical

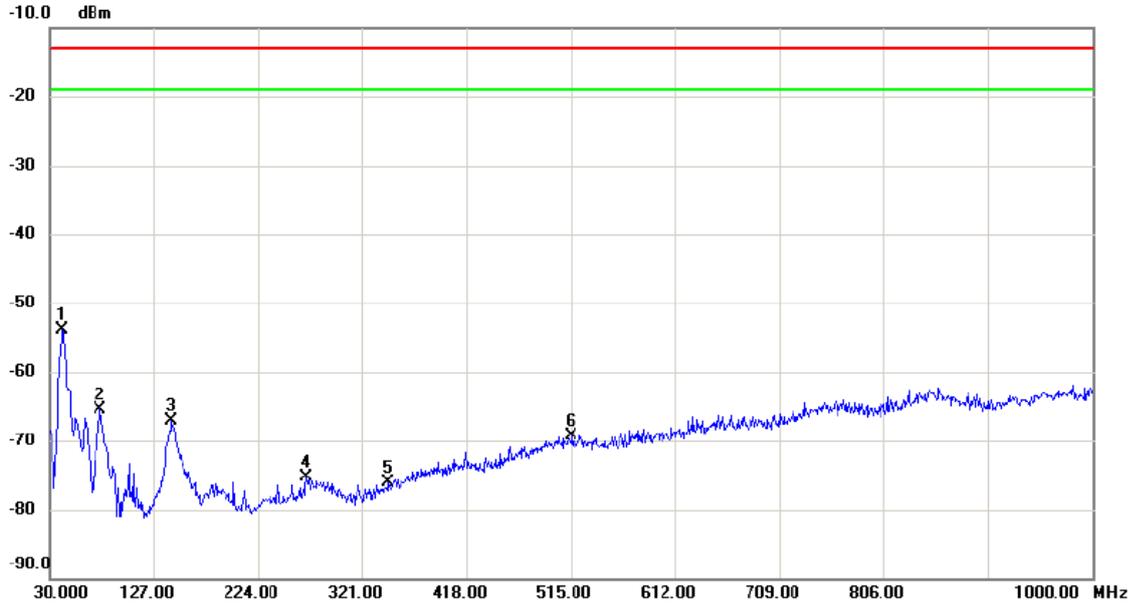

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	42.610	-55.92	2.03	-53.89	-13.00	-40.89	peak	
2		77.530	-59.80	-5.60	-65.40	-13.00	-52.40	peak	
3		143.490	-69.63	2.50	-67.13	-13.00	-54.13	peak	
4		268.620	-77.38	1.99	-75.39	-13.00	-62.39	peak	
5		345.250	-78.02	1.98	-76.04	-13.00	-63.04	peak	
6		515.970	-76.73	7.52	-69.21	-13.00	-56.21	peak	


Test Mode: WCDMA Band 2\_TX CH9400

### Horizontal



No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	41.640	-74.24	2.40	-71.84	-13.00	-58.84	peak	
2	76.560	-65.82	-7.19	-73.01	-13.00	-60.01	peak	
3	154.160	-76.88	3.62	-73.26	-13.00	-60.26	peak	
4	212.360	-71.15	-1.35	-72.50	-13.00	-59.50	peak	
5	382.110	-77.19	6.08	-71.11	-13.00	-58.11	peak	
6 *	707.060	-76.81	13.81	-63.00	-13.00	-50.00	peak	


Test Mode: WCDMA Band 2\_TX CH9400

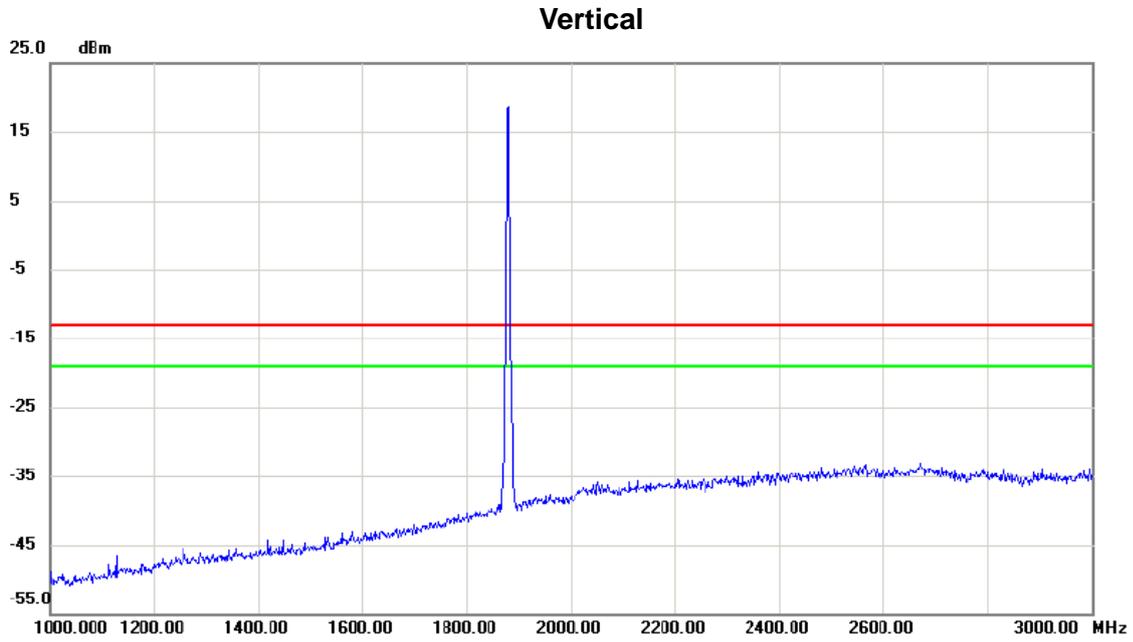

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
		1920.00	18.00	0.00	18.00	-15.00	3.00		

Test Mode: WCDMA Band 2\_TX CH9400


Horizontal

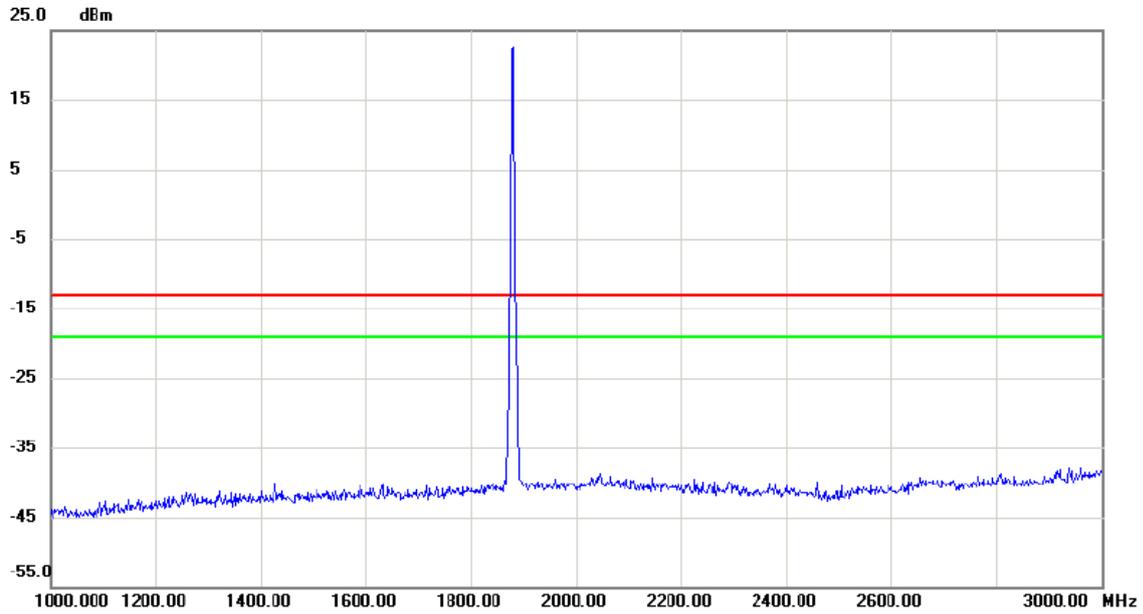

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
		1920.00	20.00	0.00	20.00	-15.00	5.00		

Test Mode: WCDMA Band 2\_TX CH9400


**Vertical**

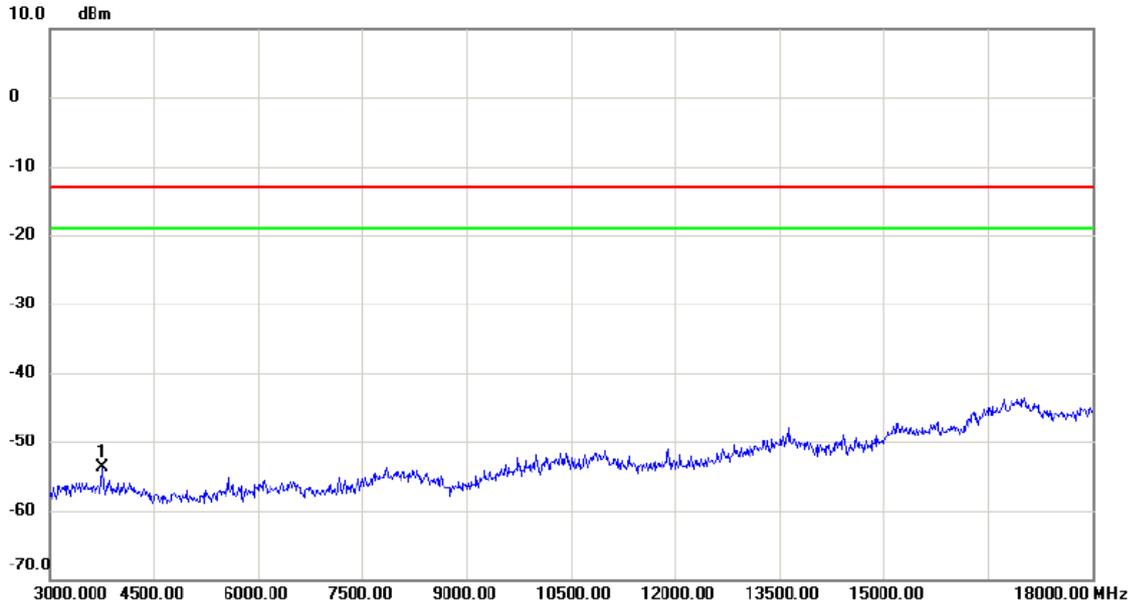

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3765.000	-68.24	14.51	-53.73	-13.00	-40.73	peak	

Test Mode: WCDMA Band 2\_TX CH9400


Horizontal

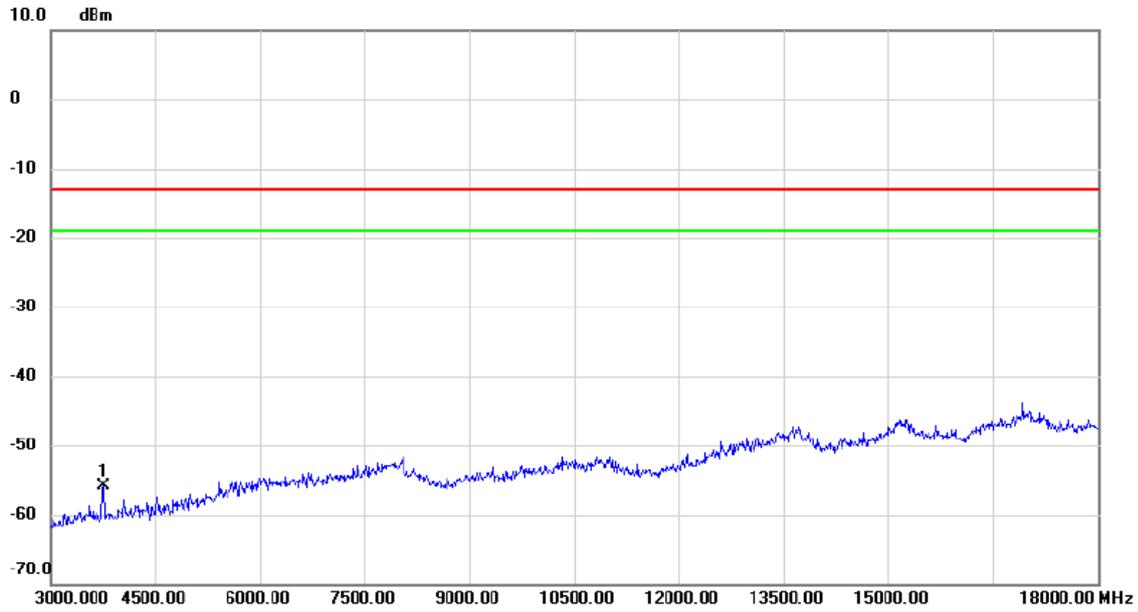

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3765.000	-67.22	11.36	-55.86	-13.00	-42.86	peak	

Test Mode: WCDMA Band 2\_TX CH9400


Vertical

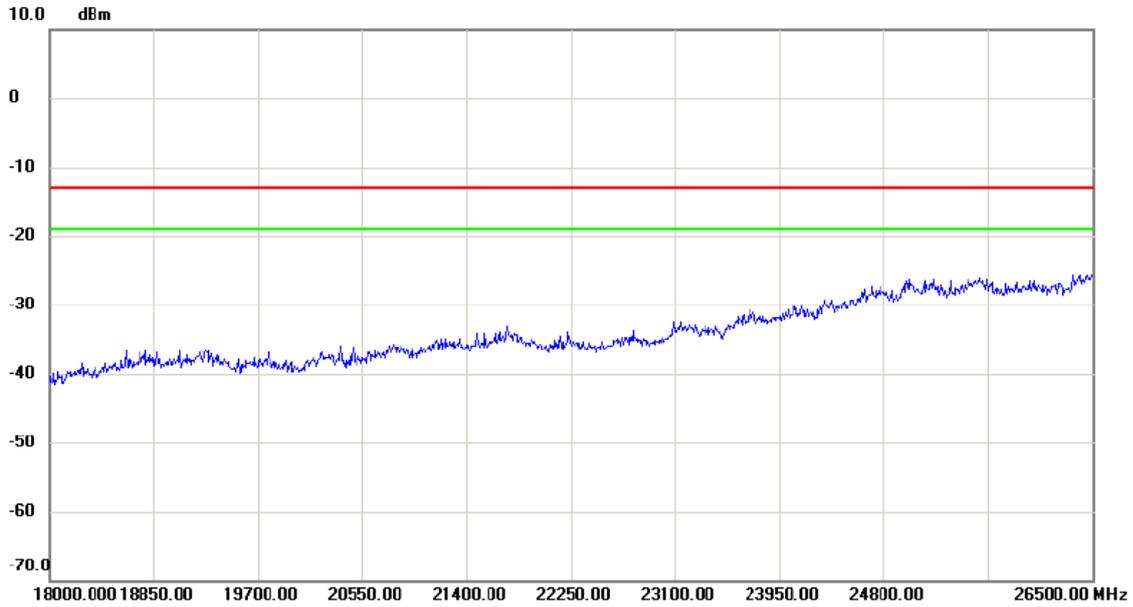

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
-----	-----	--------------	-------------------------	-------------------------	-------------------------	--------------	--------------	----------	---------


Test Mode: WCDMA Band 2\_TX CH9400

Horizontal

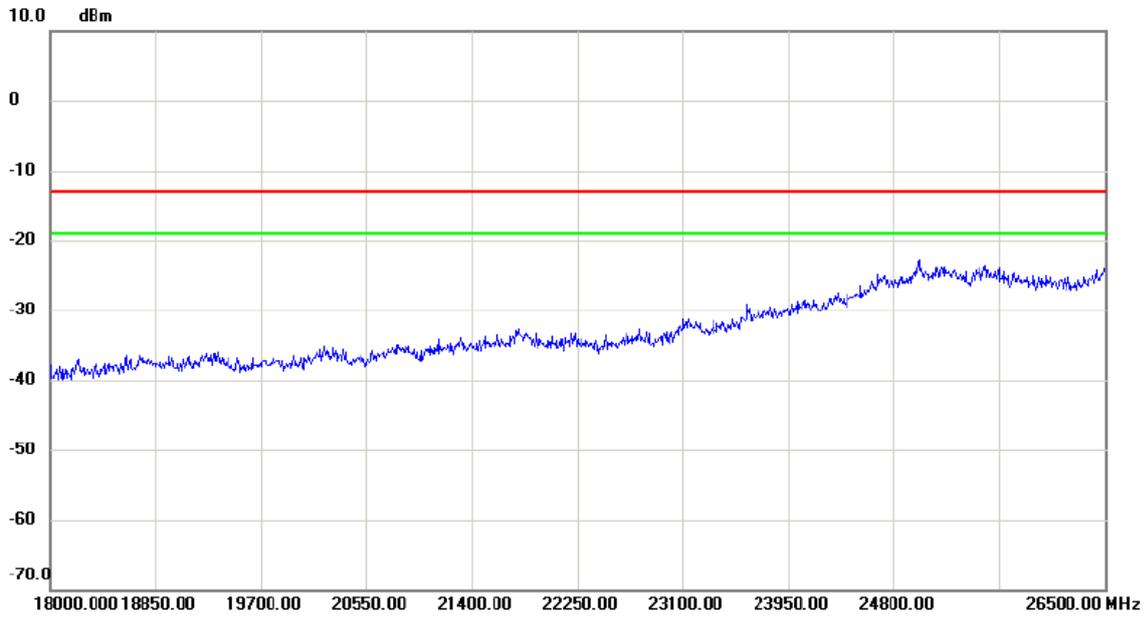

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		

Test Mode: WCDMA Band 2\_HSDPA\_TX CH9400

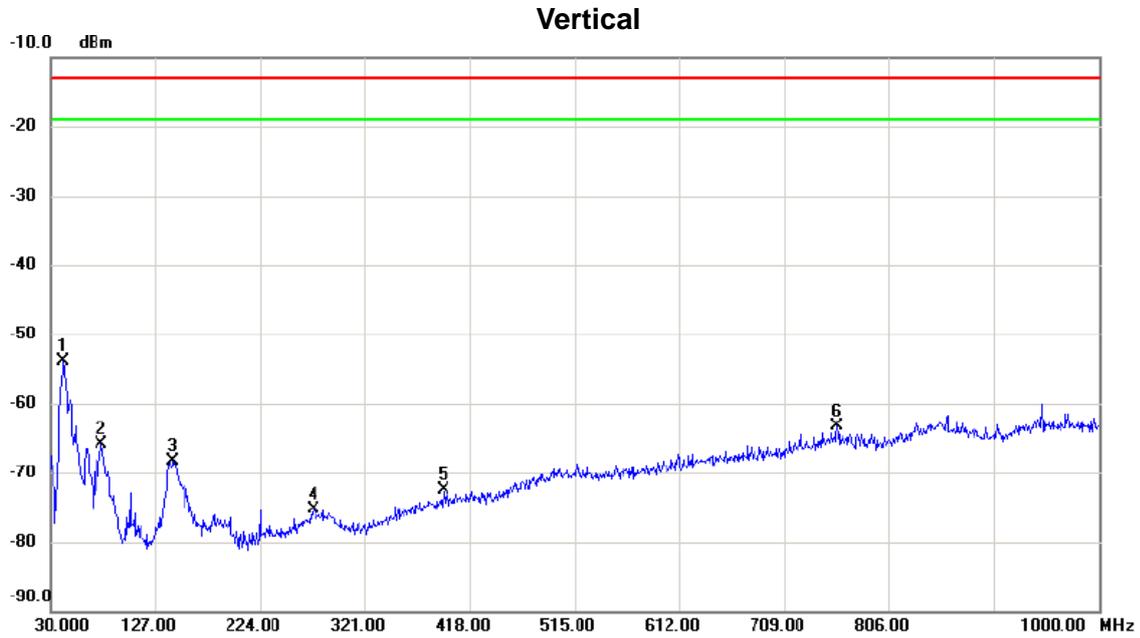

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	42.610	-55.95	2.03	-53.92	-13.00	-40.92	peak	
2		77.530	-60.28	-5.60	-65.88	-13.00	-52.88	peak	
3		143.490	-70.75	2.50	-68.25	-13.00	-55.25	peak	
4		273.470	-77.65	2.35	-75.30	-13.00	-62.30	peak	
5		393.750	-76.62	4.02	-72.60	-13.00	-59.60	peak	
6		757.500	-75.62	12.39	-63.23	-13.00	-50.23	peak	

Test Mode: WCDMA Band 2\_HSDPA\_TX CH9400


### Horizontal



No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		43.580	-71.62	2.78	-68.84	-13.00	-55.84	peak	
2		77.530	-65.62	-7.24	-72.86	-13.00	-59.86	peak	
3		150.280	-77.34	4.20	-73.14	-13.00	-60.14	peak	
4		222.060	-72.04	1.10	-70.94	-13.00	-57.94	peak	
5		419.940	-76.97	6.88	-70.09	-13.00	-57.09	peak	
6	*	704.150	-76.22	13.88	-62.34	-13.00	-49.34	peak	

Test Mode: WCDMA Band 2\_HSDPA\_TX CH9400


Vertical

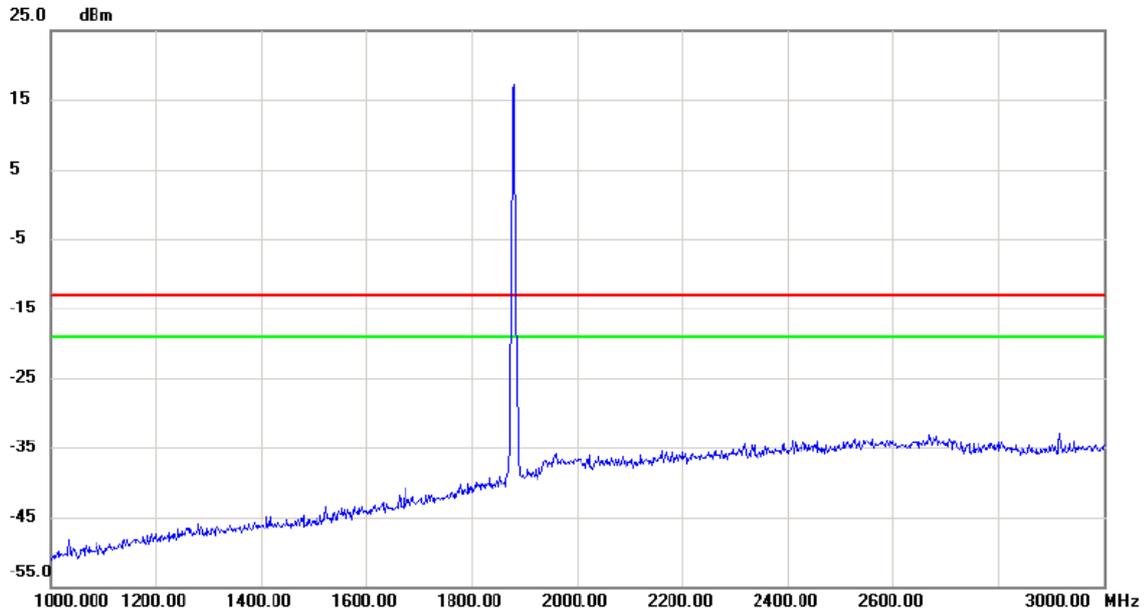

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
		1920.00	15.00	0.00	15.00	-15.00	30.00		


Test Mode: WCDMA Band 2\_HSDPA\_TX CH9400

Horizontal

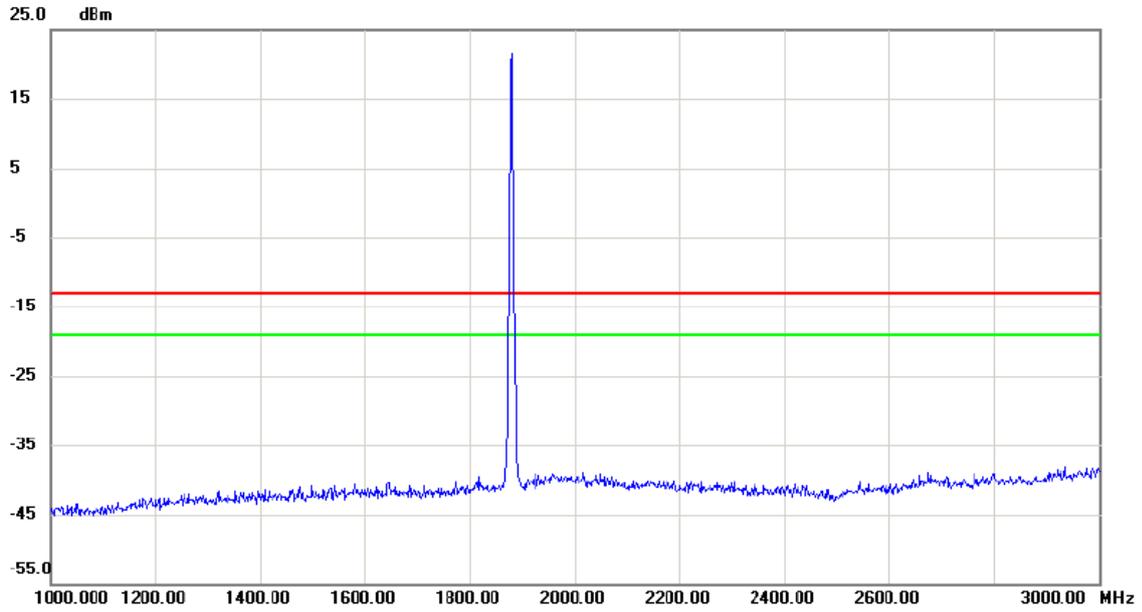

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
		1930.00	20.00	0.00	20.00	-15.00	5.00		

Test Mode: WCDMA Band 2\_HSDPA\_TX CH9400

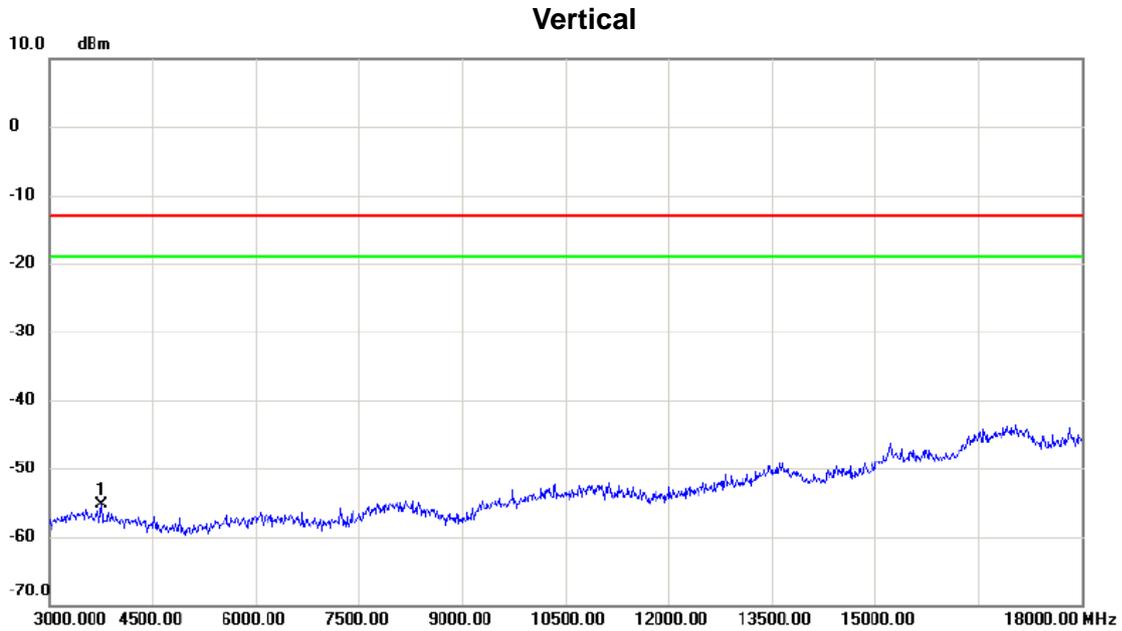

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3765.000	-69.90	14.51	-55.39	-13.00	-42.39	peak	

Test Mode: WCDMA Band 2\_HSDPA\_TX CH9400


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3765.000	-68.00	11.36	-56.64	-13.00	-43.64	peak	

Test Mode: WCDMA Band 2\_HSDPA\_TX CH9400


Vertical

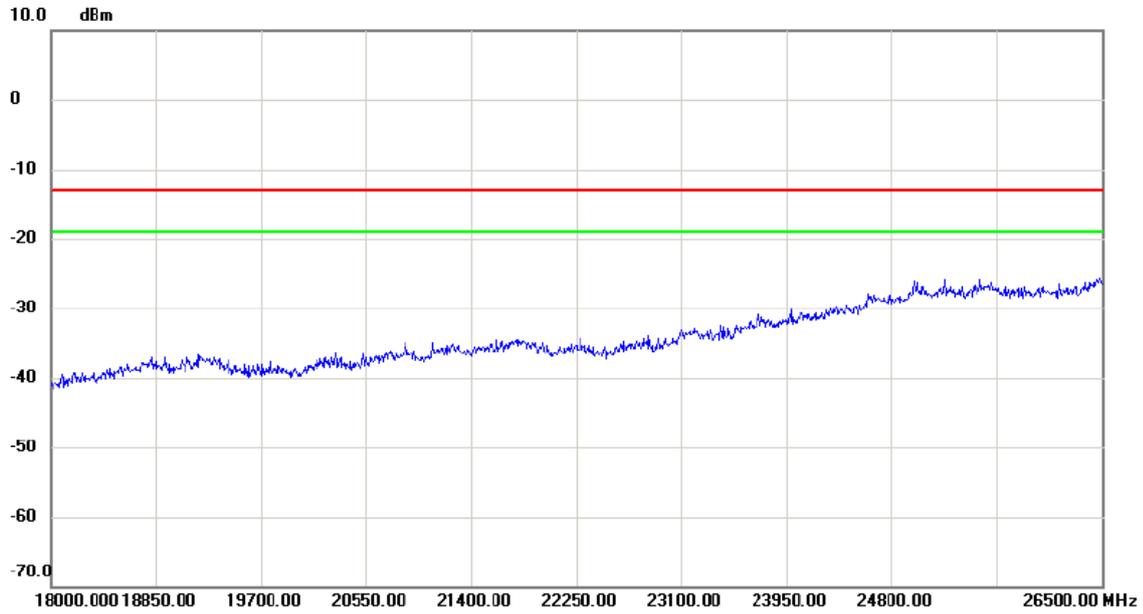

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment


Test Mode: WCDMA Band 2\_HSDPA\_TX CH9400

Horizontal

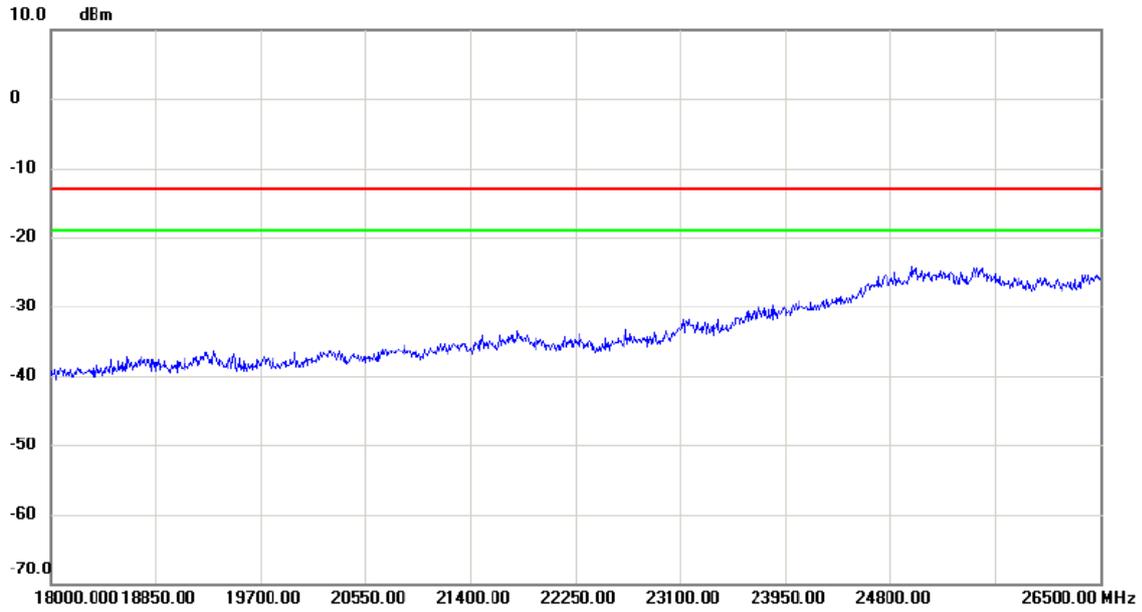

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
-----	-----	--------------	-------------------------	-------------------------	-------------------------	--------------	--------------	----------	---------


Test Mode: WCDMA Band 2\_HSUPA\_TX CH9400

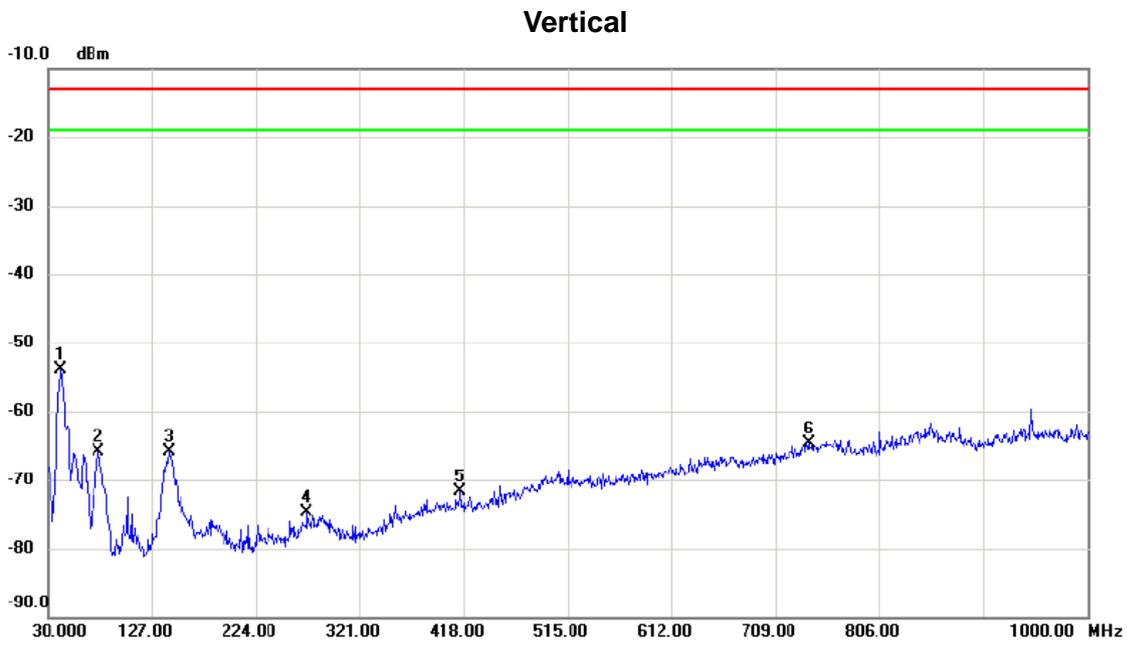

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	42.610	-55.94	2.03	-53.91	-13.00	-40.91	peak	
2		77.530	-60.29	-5.60	-65.89	-13.00	-52.89	peak	
3		142.520	-68.26	2.40	-65.86	-13.00	-52.86	peak	
4		271.530	-76.91	2.26	-74.65	-13.00	-61.65	peak	
5		415.090	-76.21	4.52	-71.69	-13.00	-58.69	peak	
6		740.040	-76.79	12.08	-64.71	-13.00	-51.71	peak	

Test Mode: WCDMA Band 2\_HSUPA\_TX CH9400


### Horizontal

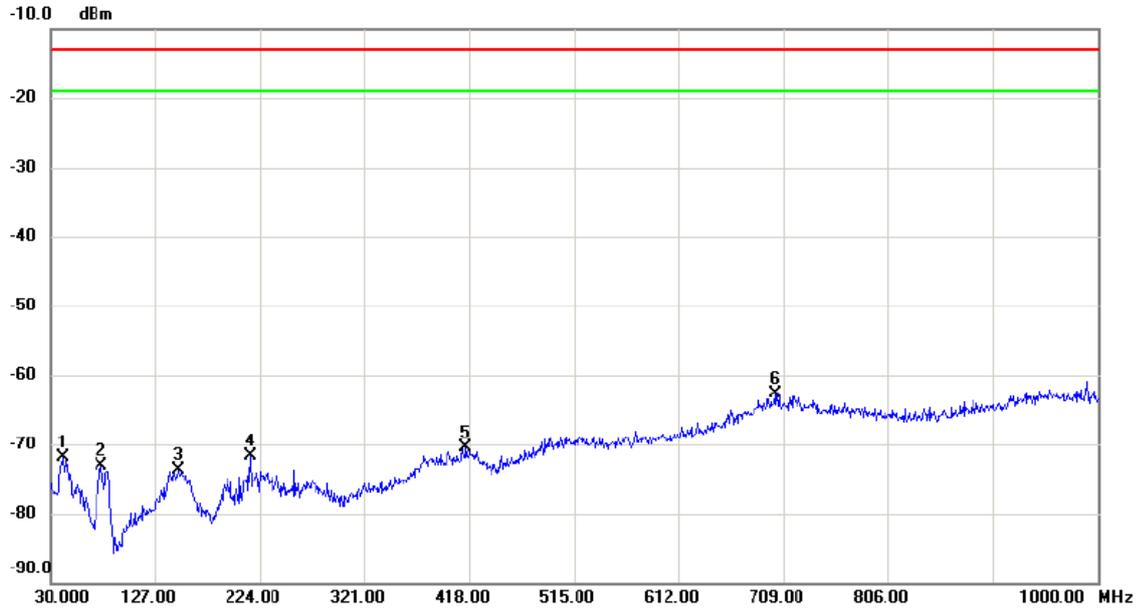

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		42.610	-74.42	2.59	-71.83	-13.00	-58.83	peak	
2		76.560	-65.83	-7.19	-73.02	-13.00	-60.02	peak	
3		148.340	-77.83	4.06	-73.77	-13.00	-60.77	peak	
4		215.270	-71.15	-0.63	-71.78	-13.00	-58.78	peak	
5		415.090	-77.19	6.63	-70.56	-13.00	-57.56	peak	
6	*	701.240	-76.61	13.95	-62.66	-13.00	-49.66	peak	

Test Mode: WCDMA Band 2\_HSUPA\_TX CH9400


Vertical

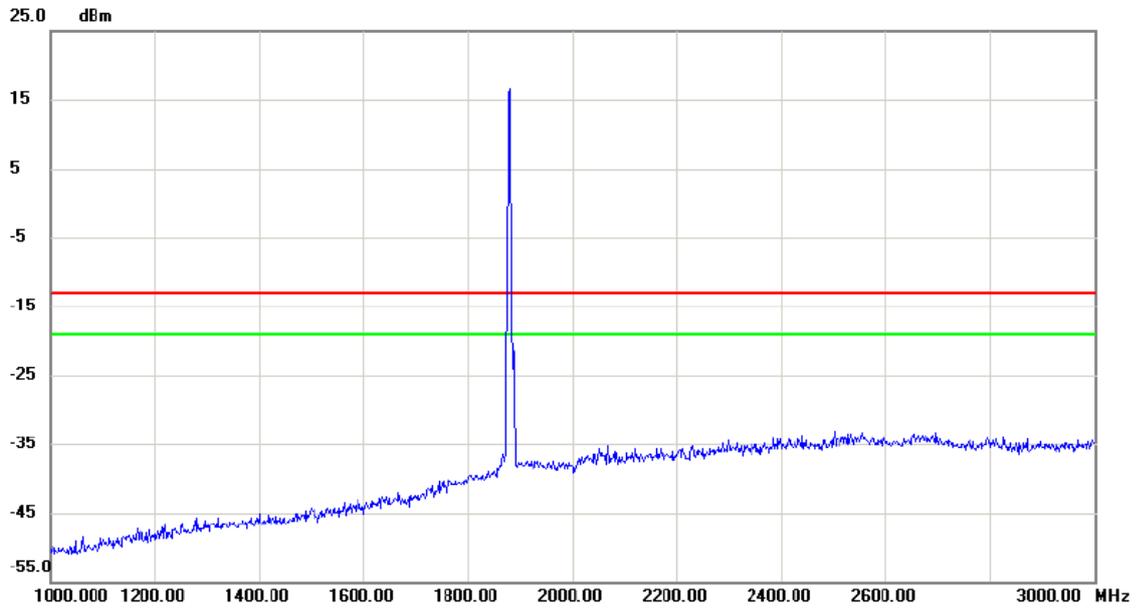

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment

Test Mode: WCDMA Band 2\_HSUPA\_TX CH9400


Horizontal

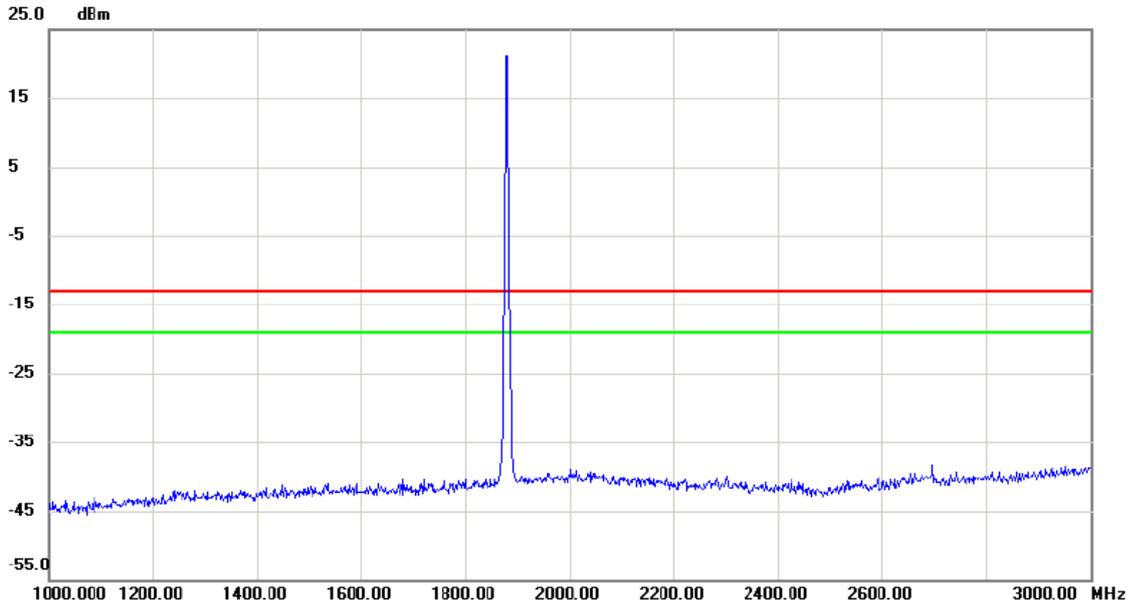

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
		1920.00	20.00	0.00	20.00	-15.00	5.00		

Test Mode: WCDMA Band 2\_HSUPA\_TX CH9400


**Vertical**

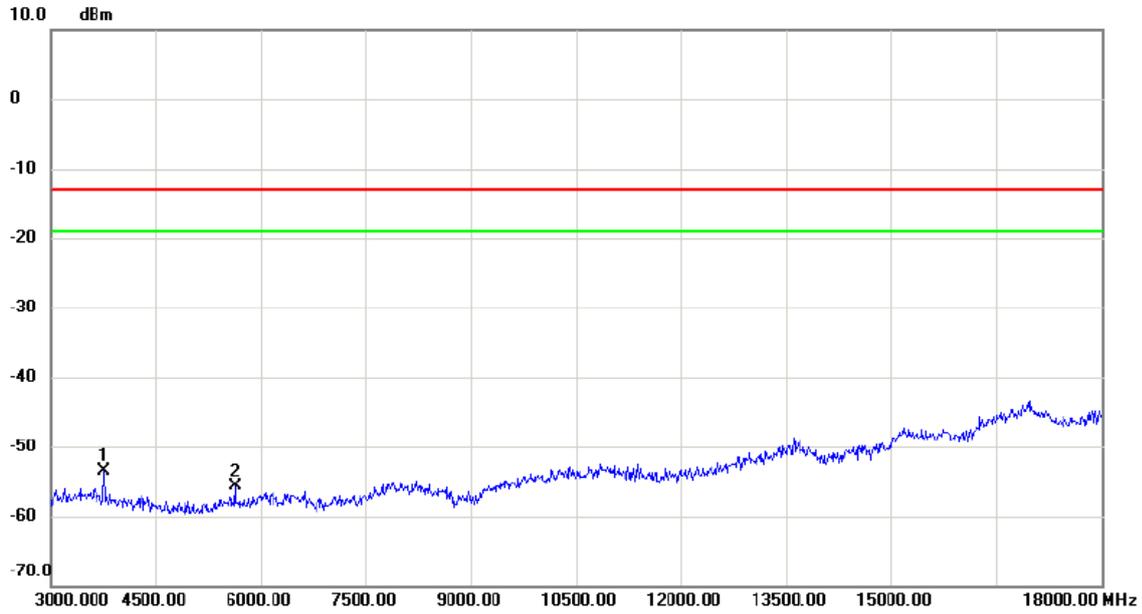

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3765.000	-68.00	14.51	-53.49	-13.00	-40.49	peak	
2		5640.000	-71.94	16.31	-55.63	-13.00	-42.63	peak	

Test Mode: WCDMA Band 2\_HSUPA\_TX CH9400


Horizontal

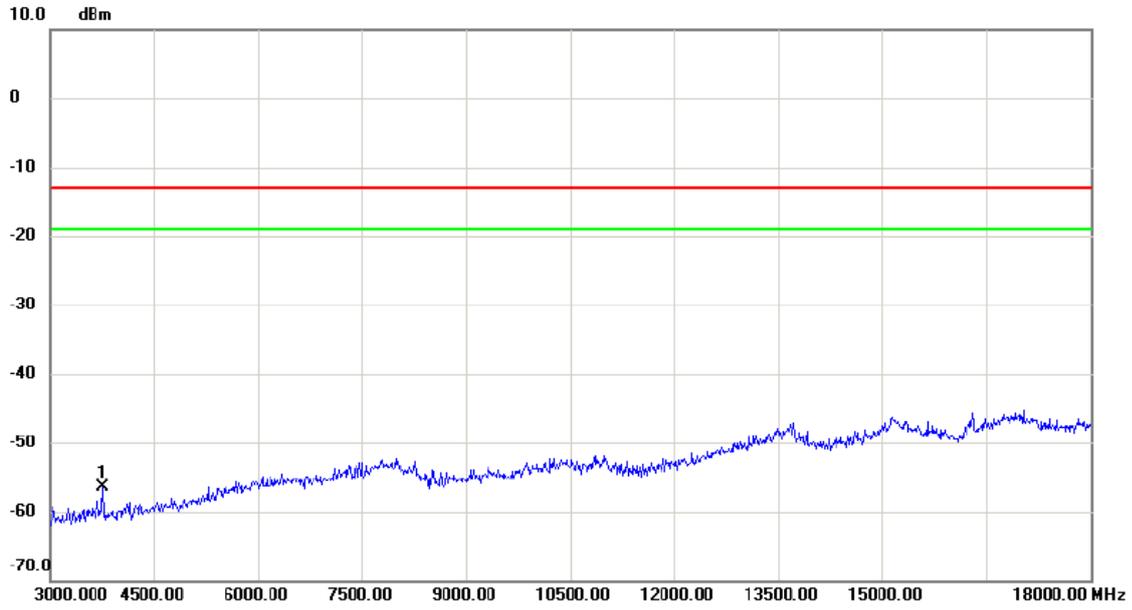

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3765.000	-67.80	11.36	-56.44	-13.00	-43.44	peak	

Test Mode: WCDMA Band 2\_HSUPA\_TX CH9400


Vertical

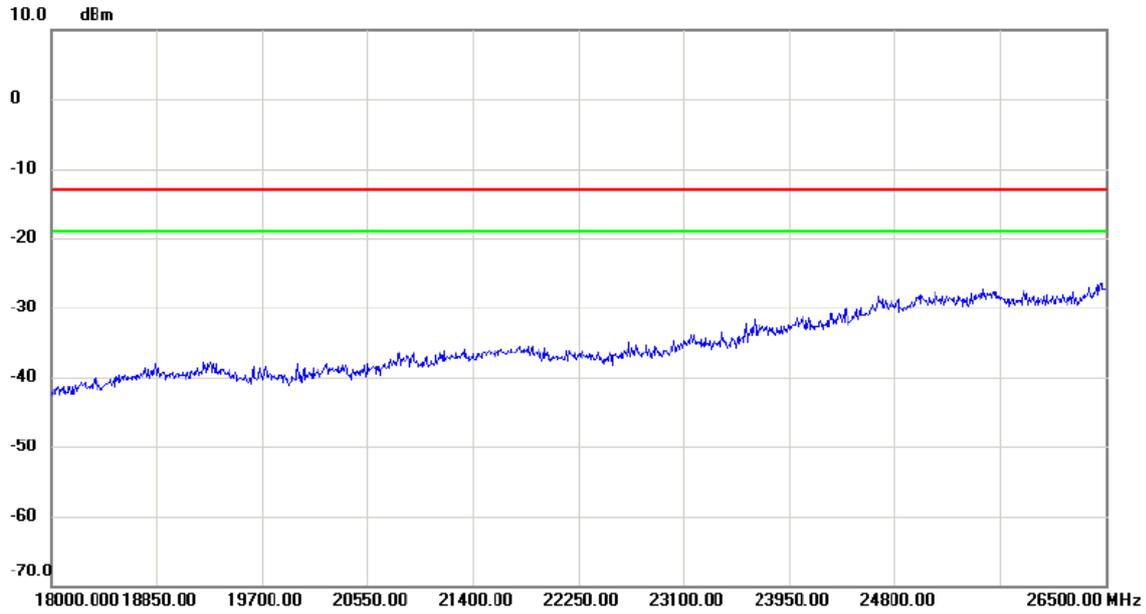

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		

Test Mode: WCDMA Band 2\_HSUPA\_TX CH9400

Horizontal

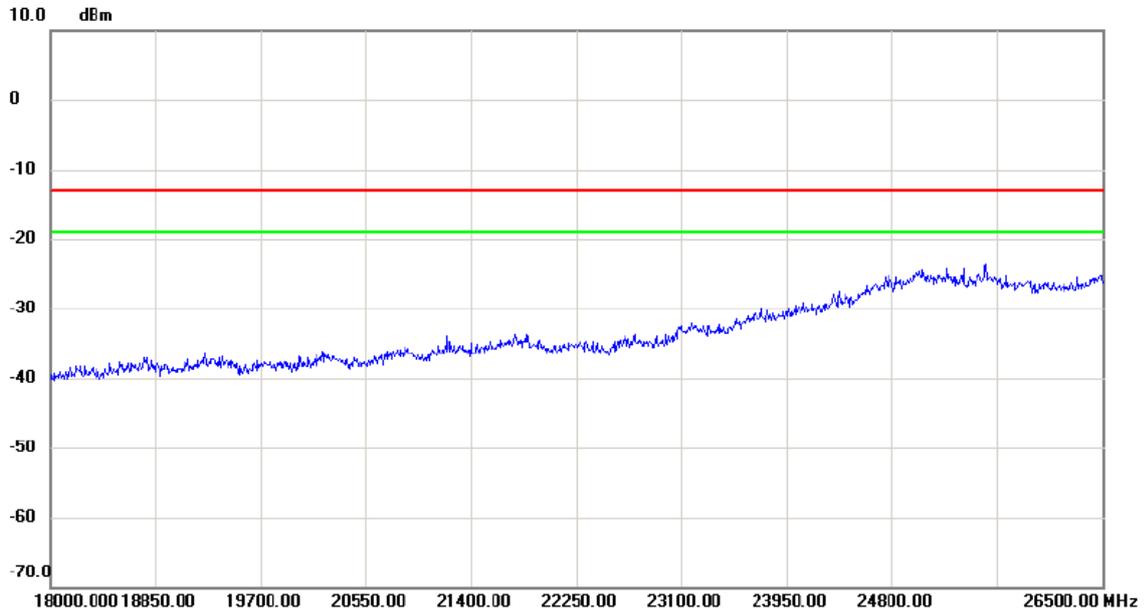

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		

## ATTACHMENT E - BAND EDGE

DCS1900



GSM

Channel

512

Channel

810

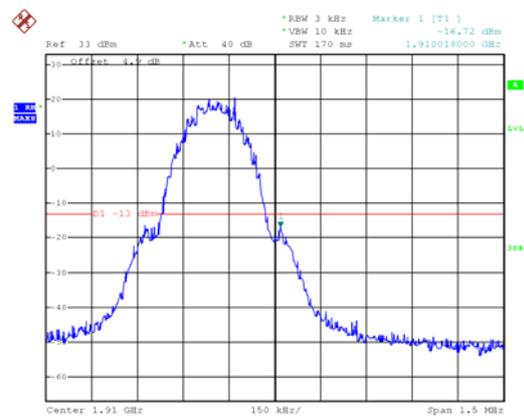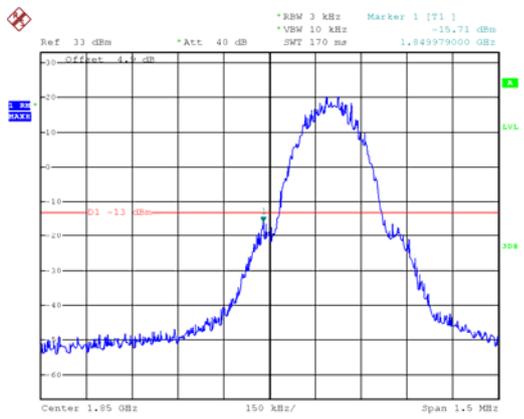



EDGE

Channel


512

Channel


810

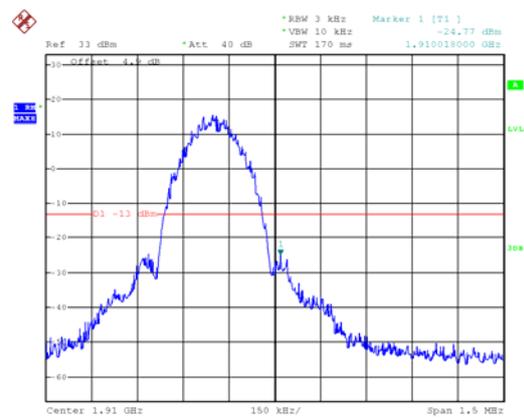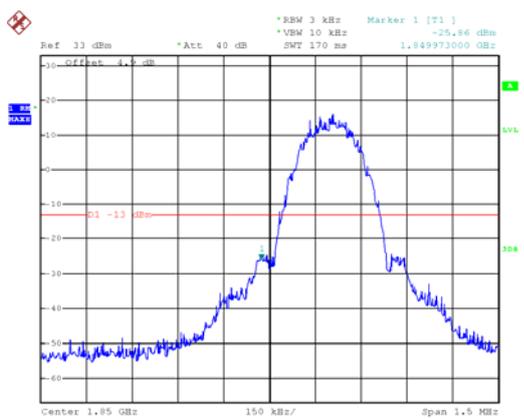


### WCDMA Band 2

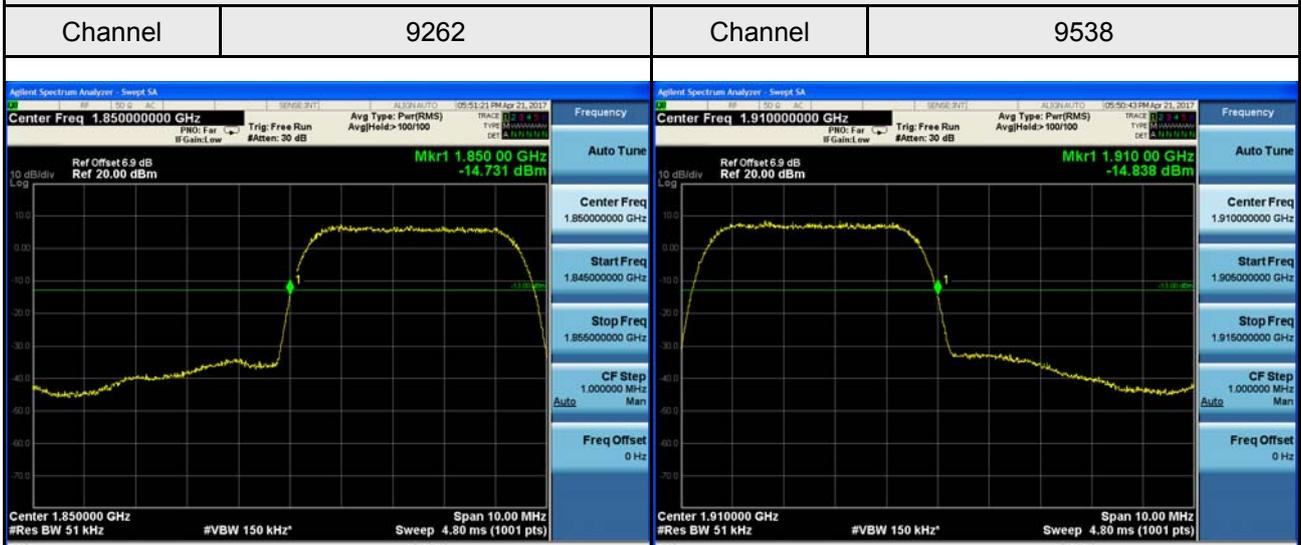

### WCDMA\_HSDPA Band 2

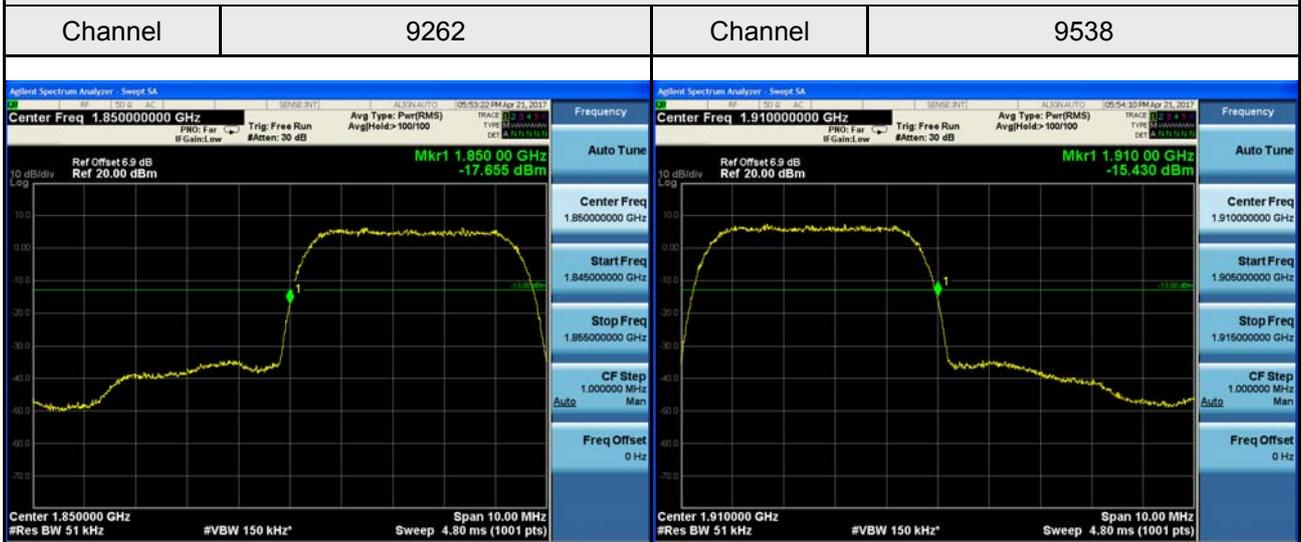


### WCDMA\_HSUPA Band 2

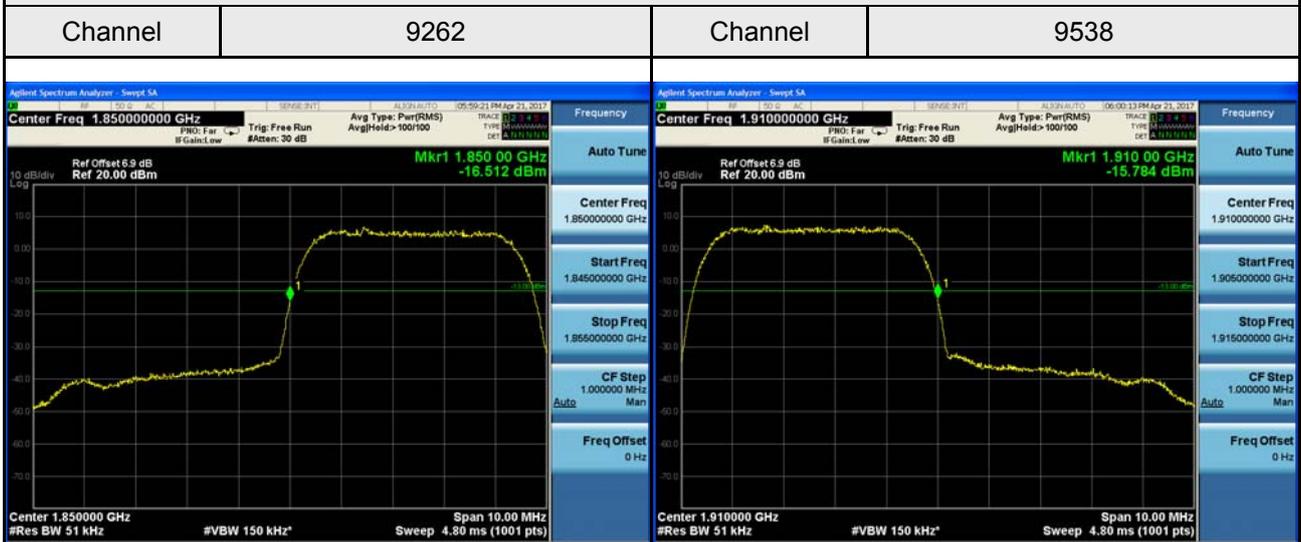


## ATTACHMENT F - PEAK TO AVERAGE RATIO

### DCS1900 Spectrum Plot

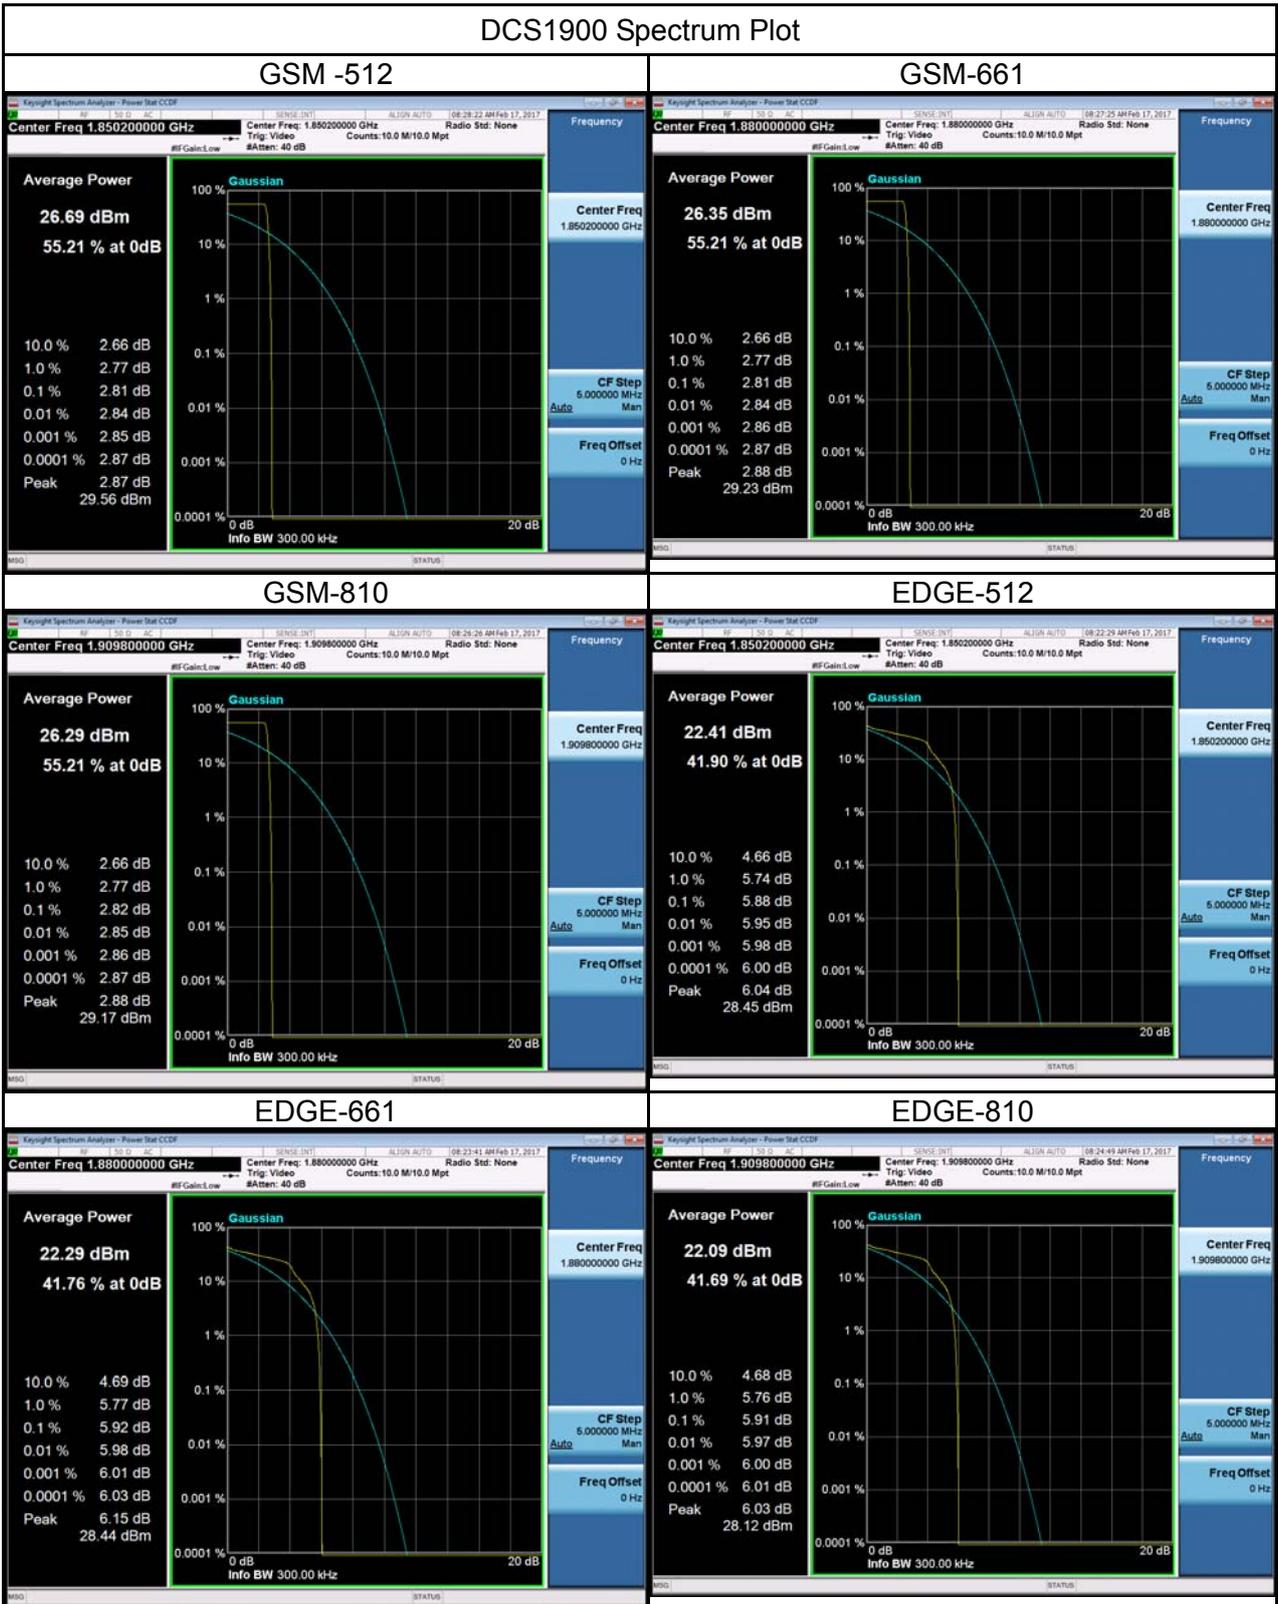



### WCDMA Band 2 Spectrum Plot

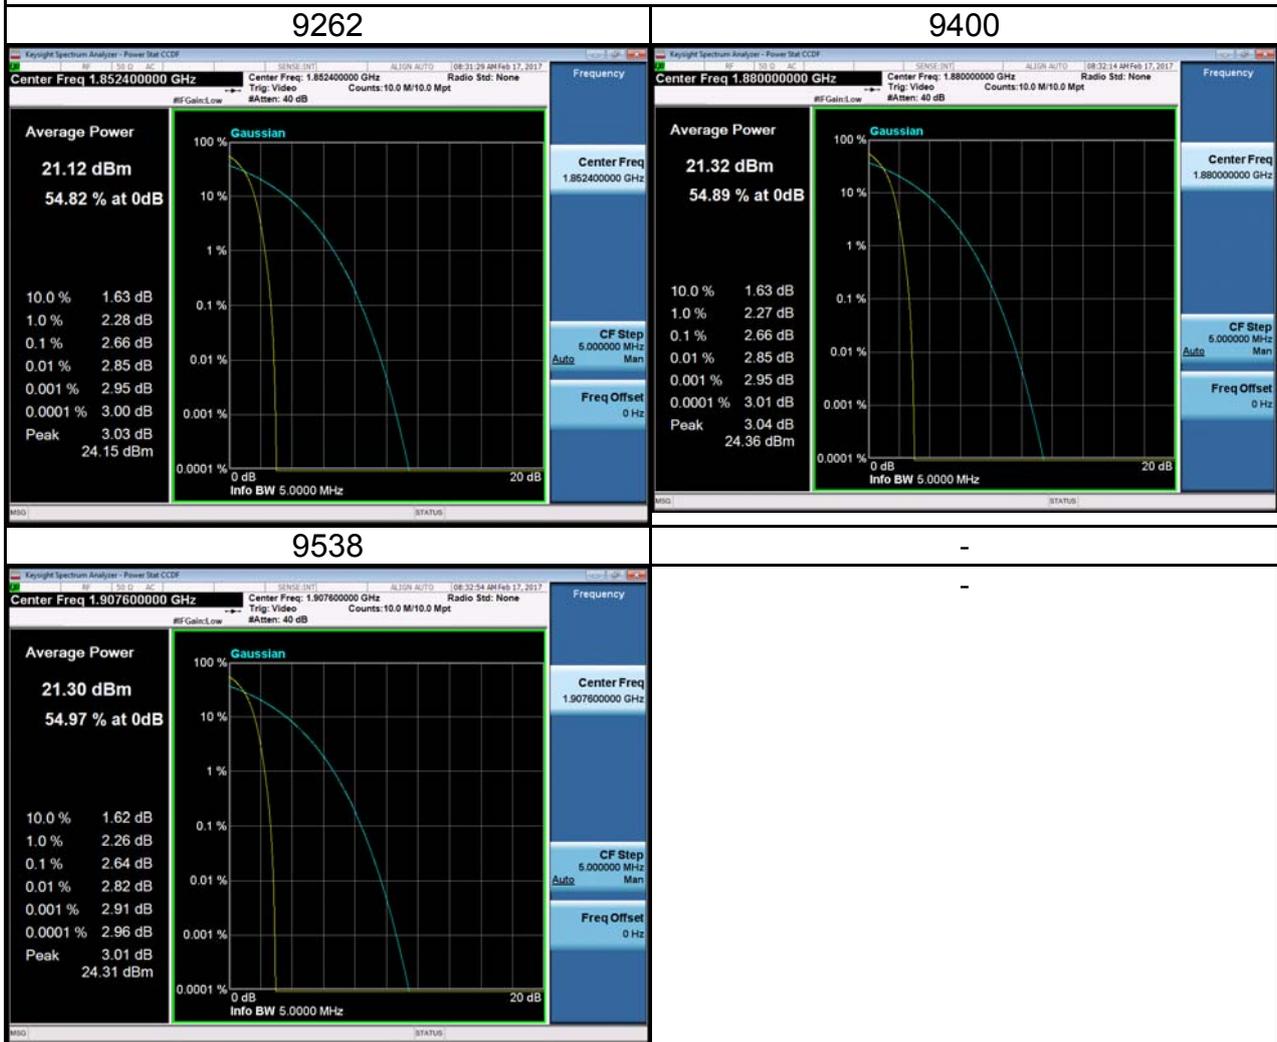

### WCDMA\_HSDPA Band 2 Spectrum Plot



9262

9400

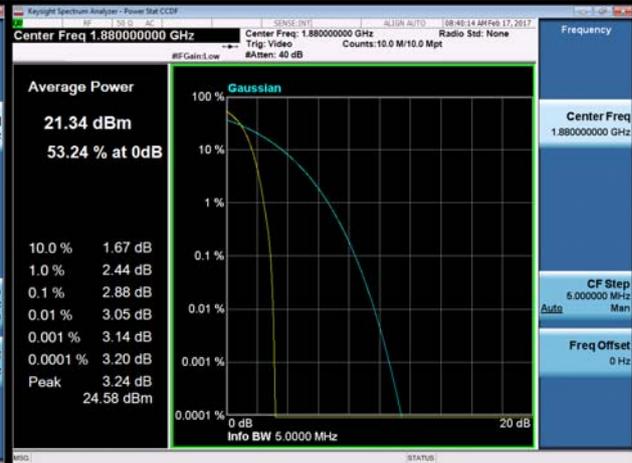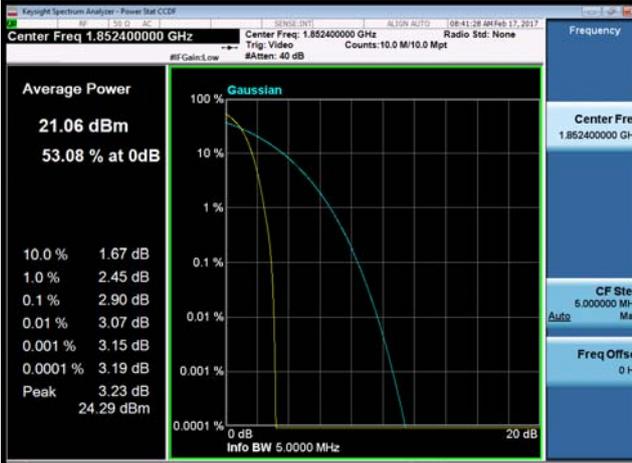


9538

-

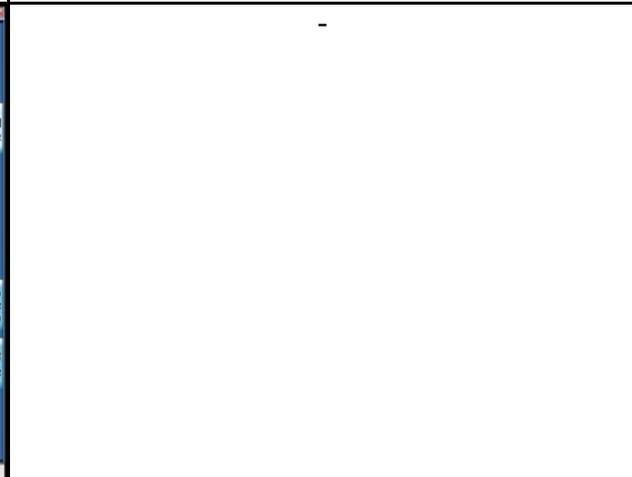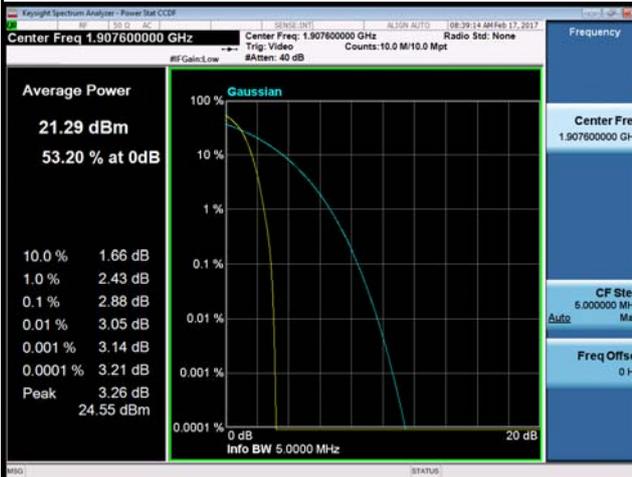

### WCDMA\_HSUPA Band 2 Spectrum Plot

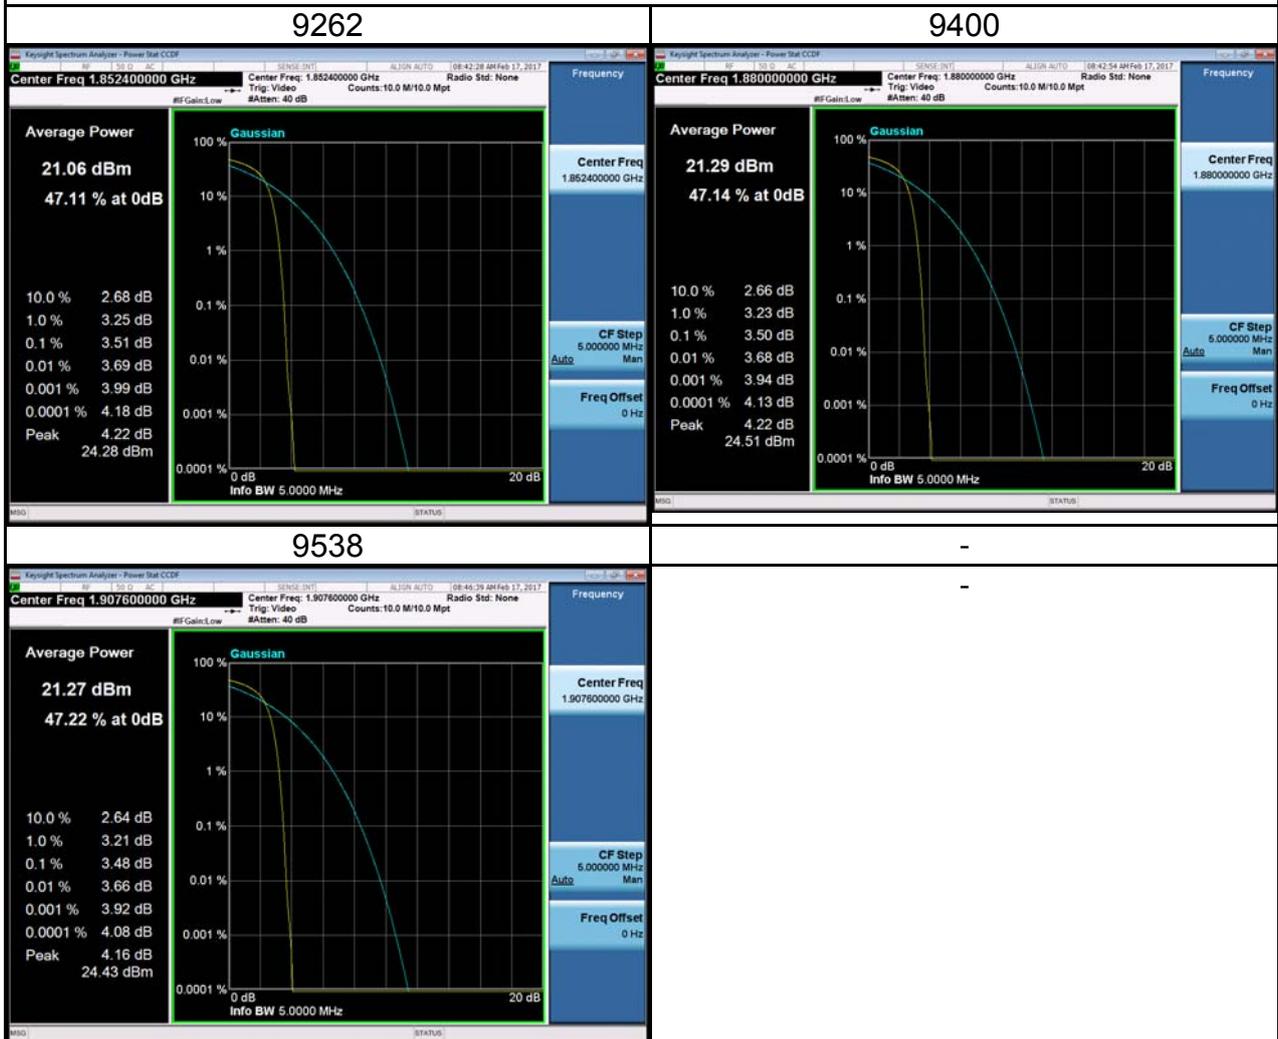

## ATTACHMENT G - FREQUENCY STABILITY

Test Mode:	DCS1900_CH661
------------	---------------

### Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
0	6.37	0.003442871	2.5
5	8.45	0.004567074	2.5
10	9.02	0.004875149	2.5
15	8.67	0.00468598	2.5
20	6.54	0.003534753	2.5
25	6.53	0.003529348	2.5
30	7.29	0.003940115	2.5
35	6.21	0.003356394	2.5
Max. Deviation (ppm)	<b>9.02</b>	<b>0.004875149</b>	2.5

### Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.6	6.34	0.003426657	2.5
3.8	6.81	0.003680683	2.5
4.2	7.25	0.003918495	2.5
Max. Deviation (ppm)	<b>7.25</b>	<b>0.003918495</b>	2.5

Test Mode:	WCDMA Band 2_CH9400
------------	---------------------

### Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
0	9.32	0.004957447	2.5
5	5.67	0.003015957	2.5
10	8.21	0.004367021	2.5
15	6.64	0.003531915	2.5
20	5.21	0.002771277	2.5
25	4.89	0.002601064	2.5
30	6.59	0.003505319	2.5
35	6.63	0.003526596	2.5
Max. Deviation (ppm)	<b>9.32</b>	<b>0.004957447</b>	2.5

### Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.6	5.99	0.00318617	2.5
3.8	6.08	0.003234043	2.5
4.2	7.56	0.004021277	2.5
Max. Deviation (ppm)	<b>7.56</b>	<b>0.004021277</b>	2.5