



Appendix B. SAR Measurement Plots

Table of contents
GSM850 Head
GSM850 Body
GSM1900 Head
GSM1900 Body
UMTS Band II Head
UMTS Band II Body
UMTS Band VI Head
UMTS Band VI Body
UMTS Band V Head
UMTS Band V Body
LTE Band II Head
LTE Band II Body
LTE Band VI Head
LTE Band VI Body
LTE Band V Head
LTE Band V Body
LTE Band VII Head
LTE Band VII Body
WiFi 2.4G Head
WiFi 2.4G Body

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 GSM850 251CH Left Touch with Battery 2

DUT: HUAWEI CUN-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 40.718$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ⌘ Probe: ES3DV3 - SN3168; ConvF(6.32, 6.32, 6.32); Calibrated: 2015-9-28;
- ⌘ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ⌘ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ⌘ Phantom: SAM1; Type: SAM; Serial: TP-1475
- ⌘ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.565 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.977 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.683 W/kg

SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.402 W/kg

Maximum value of SAR (measured) = 0.590 W/kg

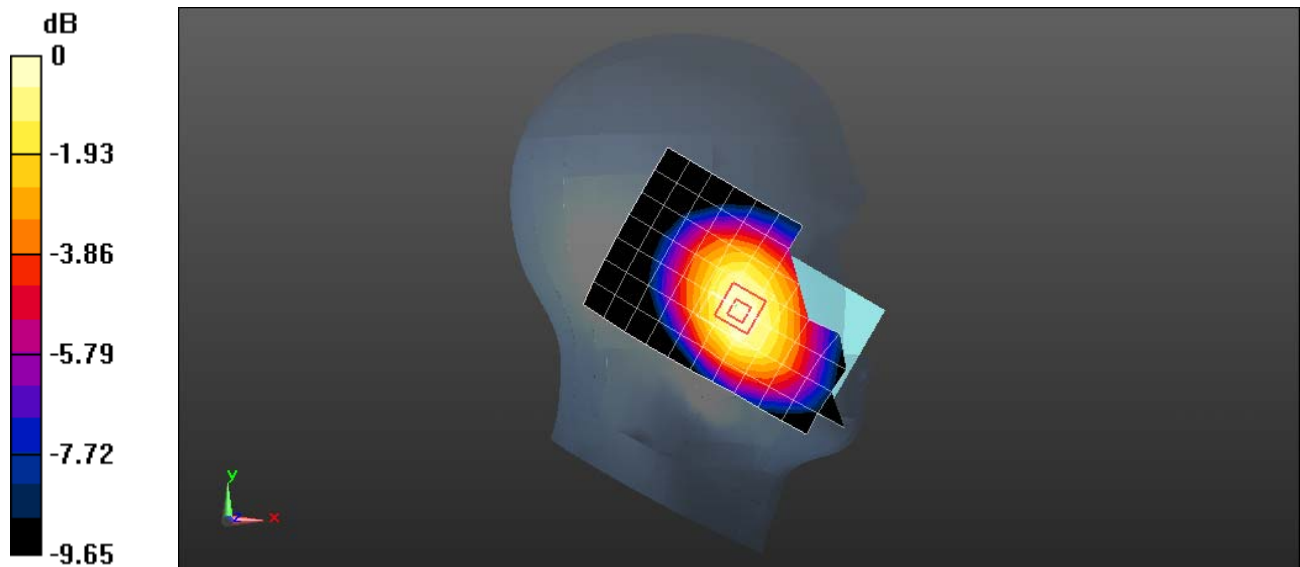

0 dB = 0.590 W/kg = -2.29 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 GSM850 190CH Back Side 15mm**DUT: HUAWEI CUN-L01 CUN-L01; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 1.004$ S/m; $\epsilon_r = 53.814$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ⌵ Probe: EX3DV4 - SN3744; ConvF(8.82, 8.82, 8.82); Calibrated: 2015-7-24;
- ⌵ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌵ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ⌵ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ⌵ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.739 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 26.07 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.845 W/kg

SAR(1 g) = 0.671 W/kg; SAR(10 g) = 0.512 W/kg

Maximum value of SAR (measured) = 0.740 W/kg

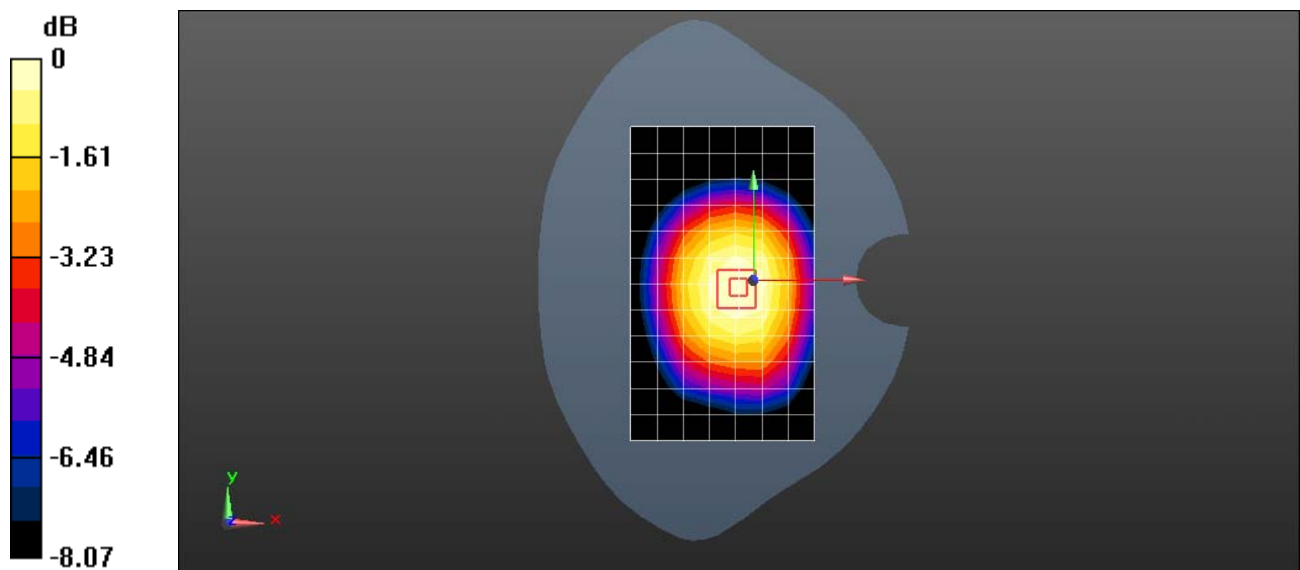

0 dB = 0.740 W/kg = -1.31 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 GSM850 GPRS 2TS 190CH Back Side 10mm**DUT: HUAWEI CUN-L01 CUN-L01; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-GSM/GPRS/EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 1.004$ S/m; $\epsilon_r = 53.814$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ⌵ Probe: EX3DV4 - SN3744; ConvF(8.82, 8.82, 8.82); Calibrated: 2015-7-24;
- ⌵ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌵ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ⌵ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ⌵ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.34 W/kg


Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 35.24 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.942 W/kg

Maximum value of SAR (measured) = 1.33 W/kg

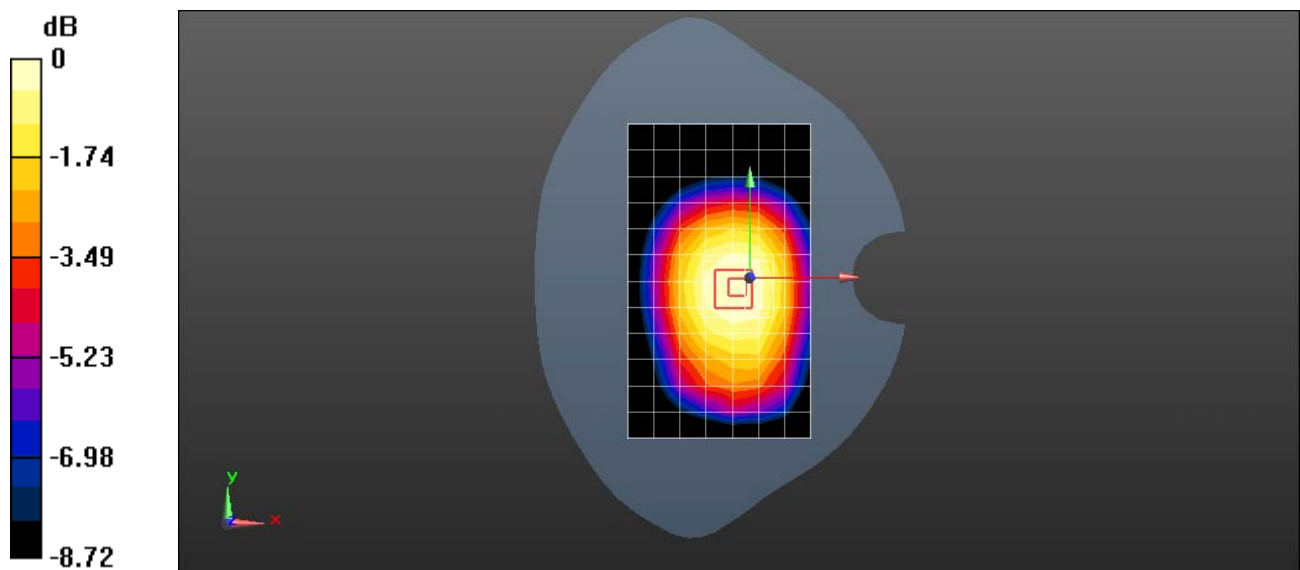

0 dB = 1.33 W/kg = 1.24 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 GSM1900 512CH Right hand touch cheek

DUT: HUAWEI CUN-L03; Type: Smart Phone; Serial: SARI

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 1850 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1850$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.762$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.31, 7.31, 7.31); Calibrated: 2015-4-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn914; Calibrated: 2014-12-15
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.301 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.678 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.411 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.320 W/kg

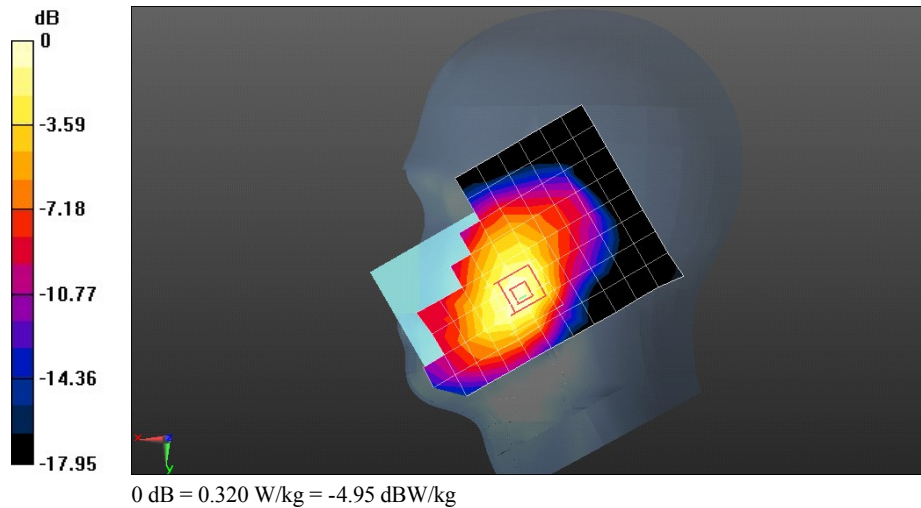

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 GSM1900 661CH Back side 15mm with battery 2#

DUT: HUAWEI CUN-L03; Type: Smart Phone; Serial: SARI

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.493$ S/m; $\epsilon_r = 51.888$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.1, 7.1, 7.1); Calibrated: 2015-4-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.238 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.624 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.285 W/kg

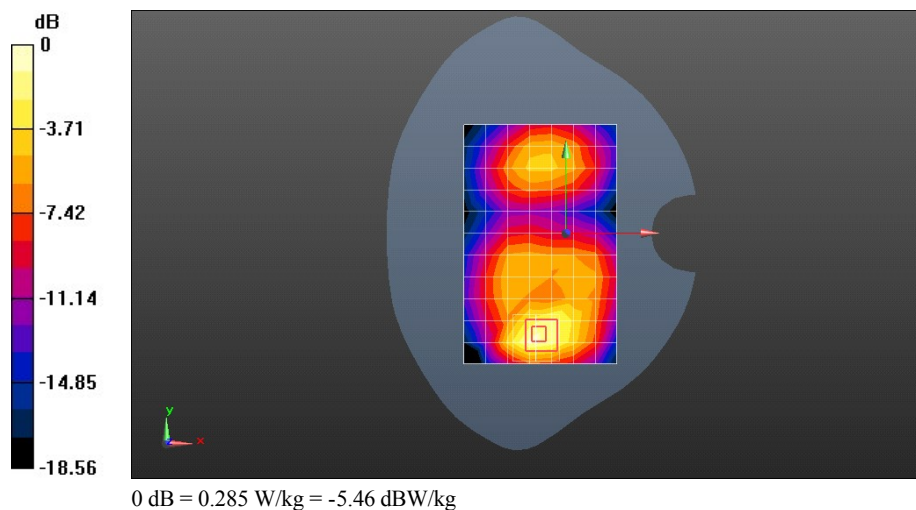

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 GSM1900 GPRS 2TS 810CH Back side 10mm with Battery 2#

DUT: HUAWEI CUN-L03; Type: Smart Phone; Serial: SARI

Communication System: UID 0, HW-GSM/GPRS/EGPRS-2TS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.522$ S/m; $\epsilon_r = 51.851$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.1, 7.1, 7.1); Calibrated: 2015-4-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.15 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.592 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.969 W/kg; SAR(10 g) = 0.474 W/kg

Maximum value of SAR (measured) = 1.24 W/kg

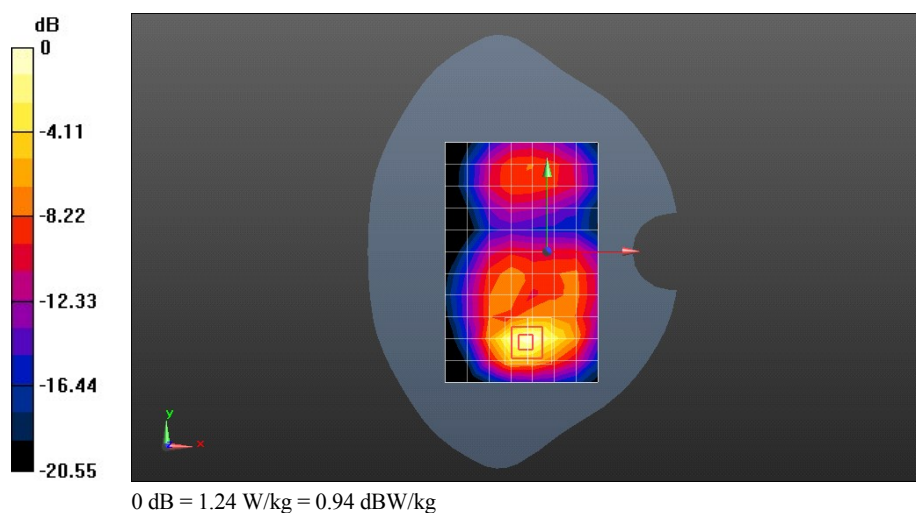

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 UMTS Band II 9262CH Right touch

DUT: HUAWEI CUN-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.365$ S/m; $\epsilon_r = 39.275$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY Configuration:

- ⌘ Probe: ES3DV3 - SN3168; ConvF(5.13, 5.13, 5.13); Calibrated: 2015-9-28;
- ⌘ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ⌘ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ⌘ Phantom: SAM1; Type: SAM; Serial: TP-1475
- ⌘ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.585 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 5.865 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.753 W/kg

SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.323 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.575 W/kg

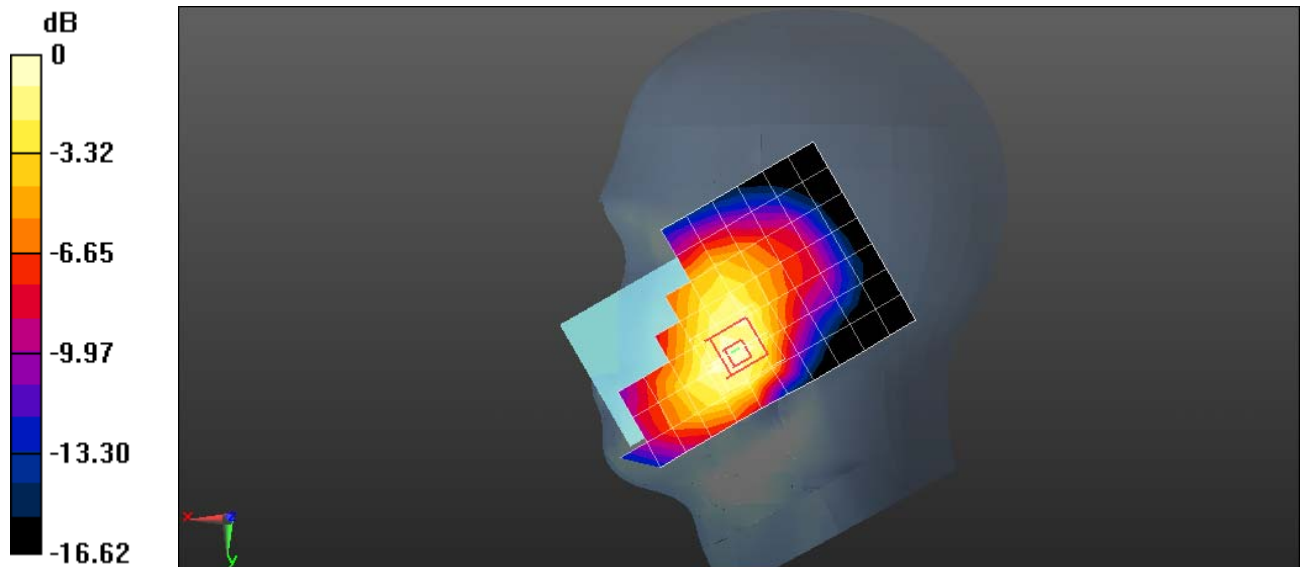

0 dB = 0.575 W/kg = -2.41 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 UMTS Band II 9400CH Back side 15mm

DUT: HUAWEI CUN-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.493$ S/m; $\epsilon_r = 51.888$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.1, 7.1, 7.1); Calibrated: 2015-4-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.343 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.584 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.589 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.402 W/kg

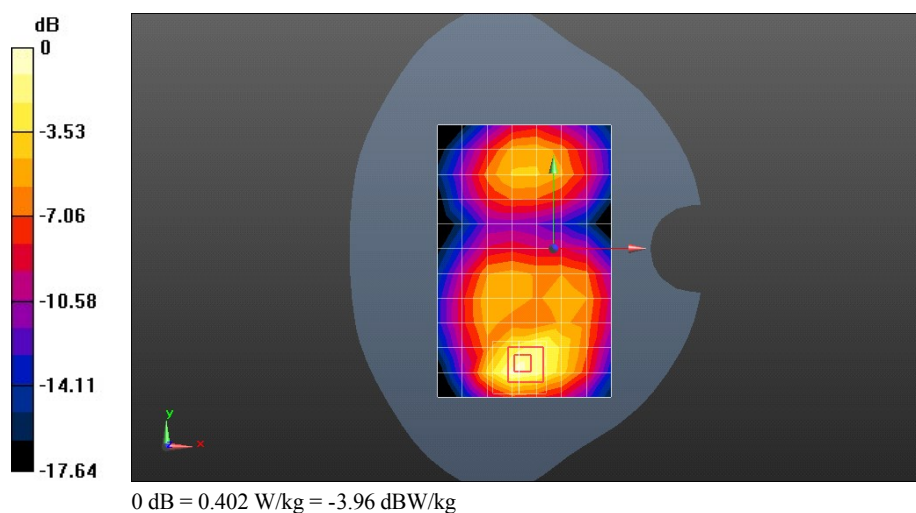

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 UMTS Band II 9538CH Back side 10mm with battery 2#-Repeated

DUT: HUAWEI CUN-L03; Type: Smart Phone; Serial: SARI

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 51.854$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.1, 7.1, 7.1); Calibrated: 2015-4-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.748 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.097 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.425 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

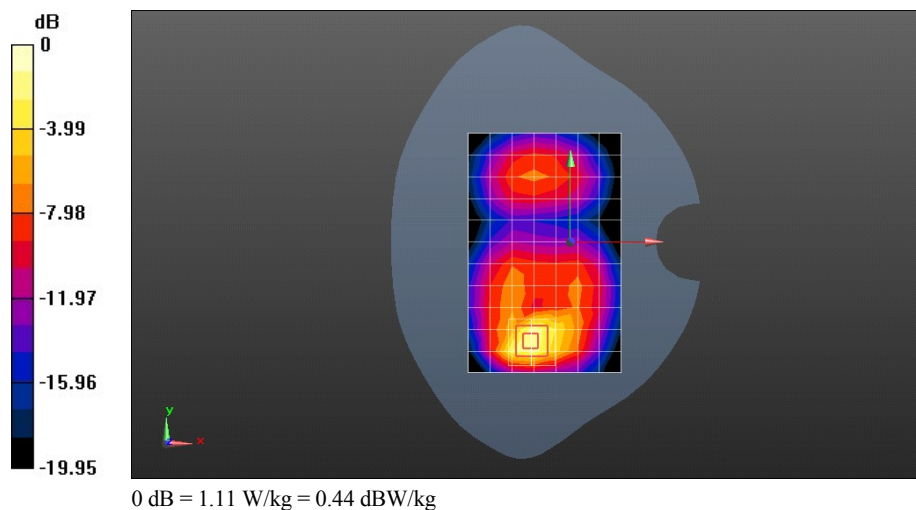

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 UMTS Band IV 1312CH Right hand touch check

DUT: HUAWEI CUN-L03; Type: Smart Phone; Serial: SARI

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.319$ S/m; $\epsilon_r = 39.299$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.32, 5.32, 5.32); Calibrated: 2015-9-28;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (7x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.333 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 5.101 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.464 W/kg

SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.209 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.368 W/kg

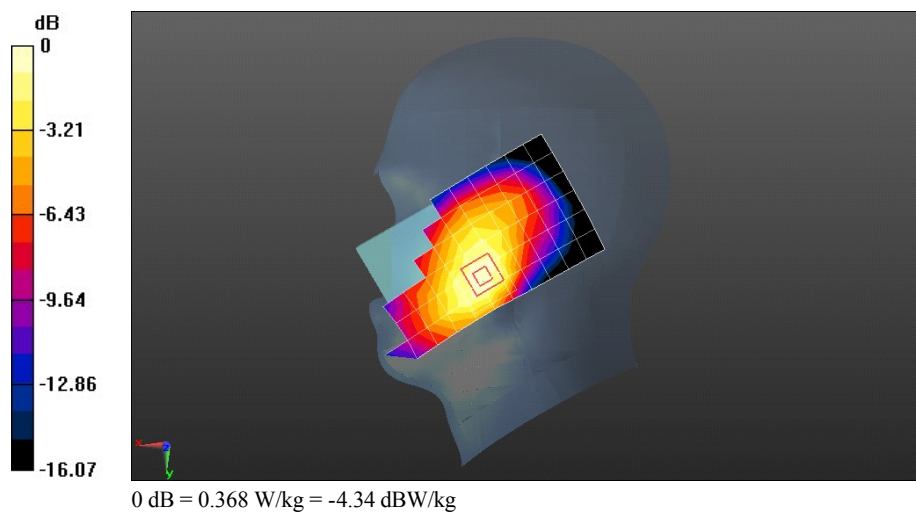

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 UMTS Band IV 1413CH Front Side 15mm**DUT: HUAWEI CUN-L03 CUN-L03; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.496$ S/m; $\epsilon_r = 52.315$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: ES3DV3 - SN3168; ConvF(4.95, 4.95, 4.95); Calibrated: 2015-9-28;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.314 W/kg

Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.579 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.402 W/kg

SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 0.315 W/kg


Configuration/Body/Zoom Scan (6x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.579 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.311 W/kg

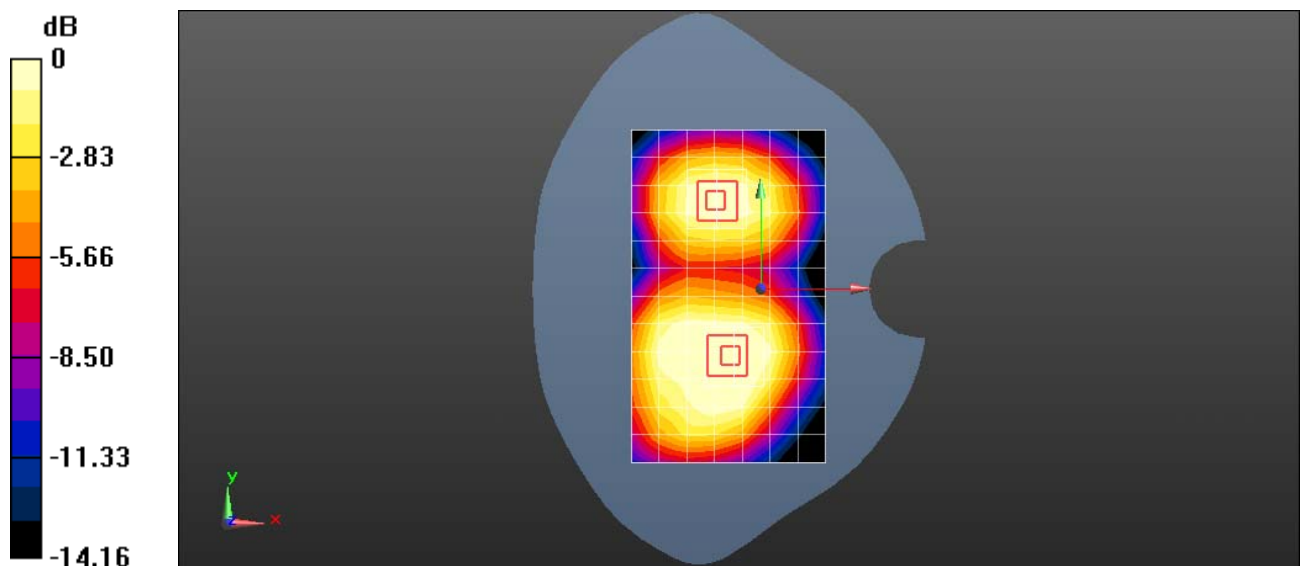

0 dB = 0.311 W/kg = -5.07 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 UMTS Band IV 1413CH Back Side 10mm**DUT: HUAWEI CUN-L03 CUN-L03; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.496$ S/m; $\epsilon_r = 52.315$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: ES3DV3 - SN3168; ConvF(4.95, 4.95, 4.95); Calibrated: 2015-9-28;
- ⌘ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ⌘ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ⌘ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ⌘ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.573 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.439 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.983 W/kg

SAR(1 g) = 0.569 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 0.691 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.439 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.811 W/kg

SAR(1 g) = 0.433 W/kg; SAR(10 g) = 0.259 W/kg

Maximum value of SAR (measured) = 0.551 W/kg

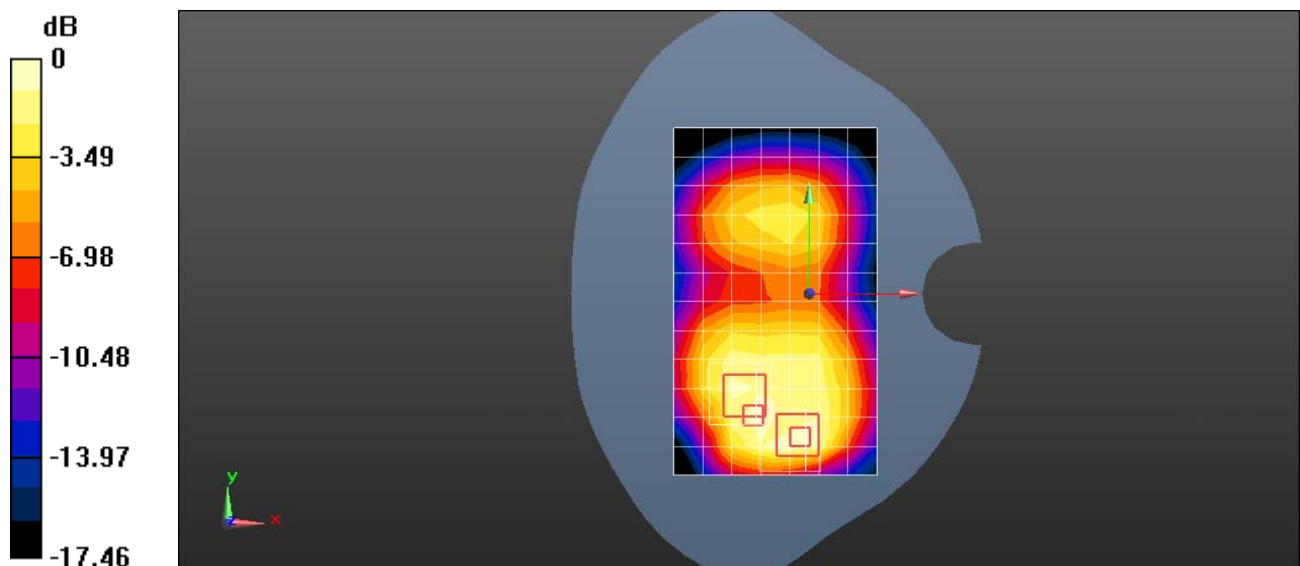

0 dB = 0.551 W/kg = -2.59 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 UMTS Band V 4233CH Left Touch**DUT: HUAWEI CUN-L03; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 40.824$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ⌘ Probe: ES3DV3 - SN3168; ConvF(6.32, 6.32, 6.32); Calibrated: 2015-9-28;
- ⌘ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ⌘ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ⌘ Phantom: SAM1; Type: SAM; Serial: TP-1475
- ⌘ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.422 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.358 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = 0.400 W/kg; SAR(10 g) = 0.300 W/kg

Maximum value of SAR (measured) = 0.440 W/kg

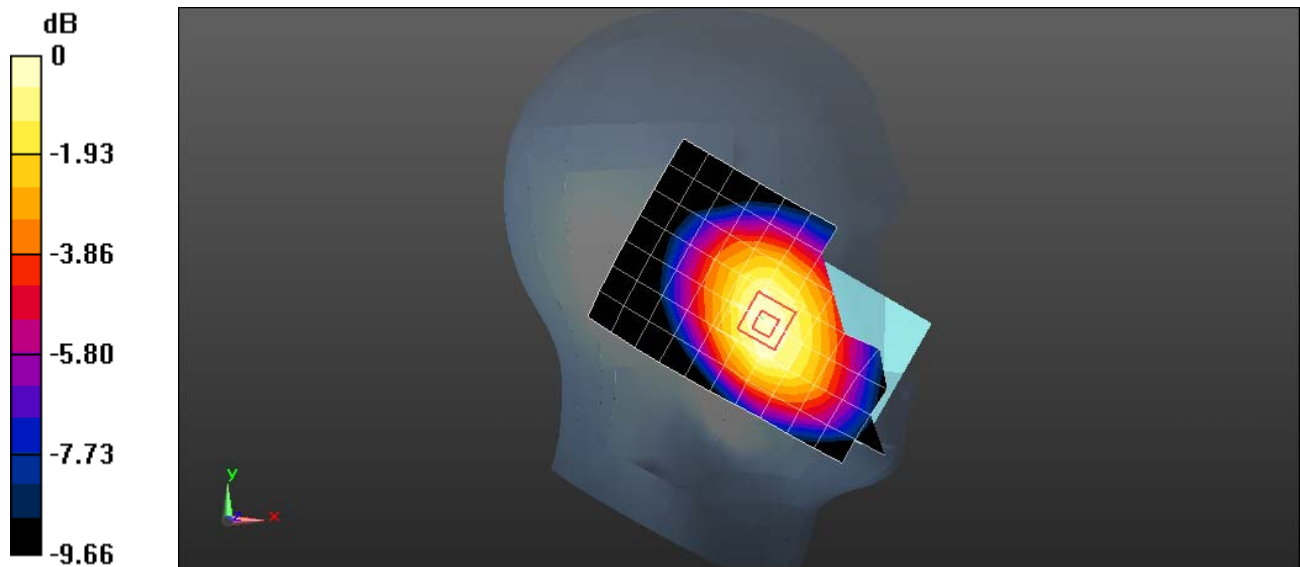

0 dB = 0.440 W/kg = -3.56 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 UMTS Band V 4182CH Back Side 15mm with Battery 2**DUT: HUAWEI CUN-L01 CUN-L01; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.004$ S/m; $\epsilon_r = 53.847$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.82, 8.82, 8.82); Calibrated: 2015-7-24;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.561 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.79 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.648 W/kg

SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.395 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.568 W/kg

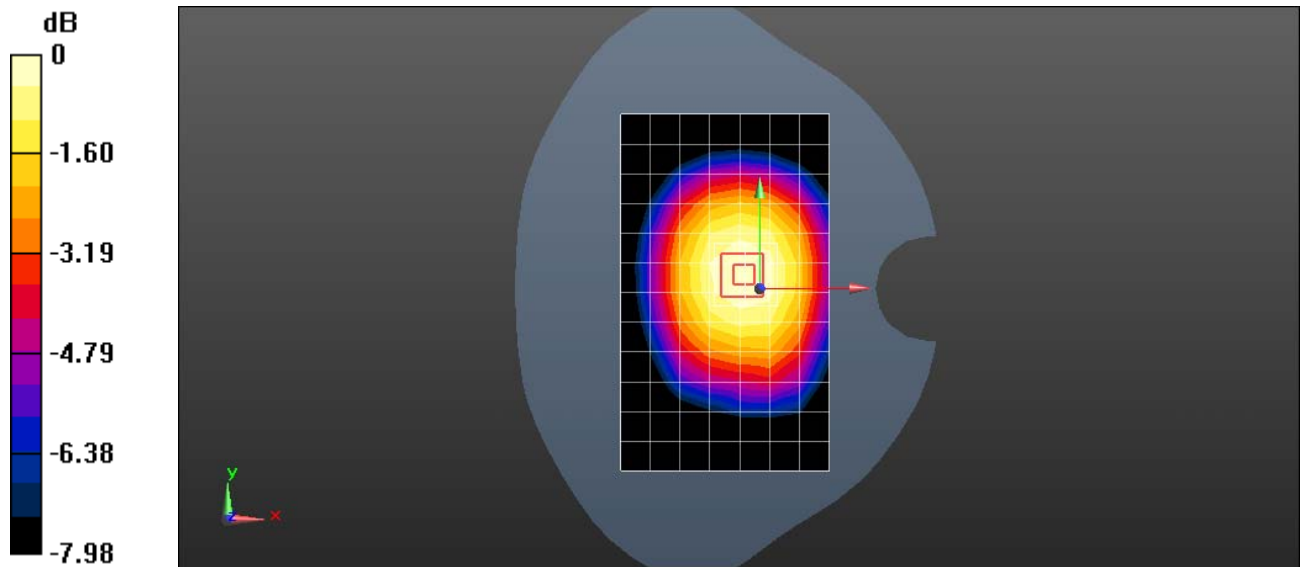

0 dB = 0.568 W/kg = -2.46 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 UMTS Band V 4182CH Back Side 10mm**DUT: HUAWEI CUN-L01 CUN-L01; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.004$ S/m; $\epsilon_r = 53.847$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: EX3DV4 - SN3744; ConvF(8.82, 8.82, 8.82); Calibrated: 2015-7-24;
- ⌘ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌘ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ⌘ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ⌘ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.638 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.56 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.730 W/kg

SAR(1 g) = 0.584 W/kg; SAR(10 g) = 0.449 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

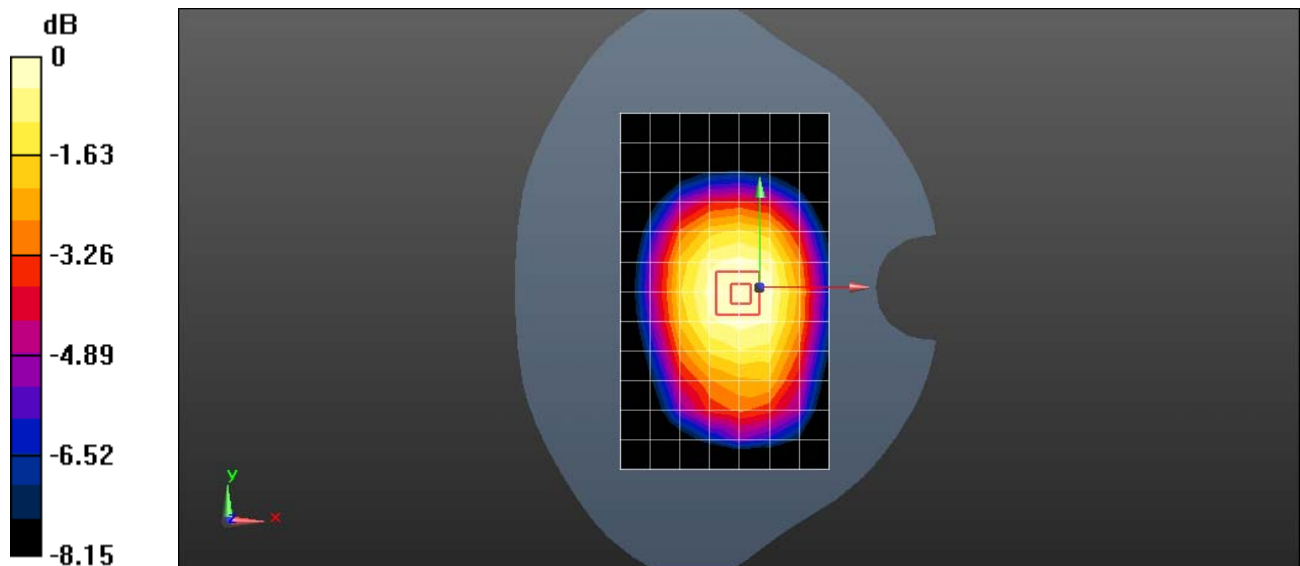

0 dB = 0.638 W/kg = -1.95 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 LTE Band II 20M QPSK 1RB 50 offset 19100CH Right Touch with Battery 2

DUT: HUAWEI CUN-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.089$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.13, 5.13, 5.13); Calibrated: 2015-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.684 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.714 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.890 W/kg

SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.371 W/kg

Maximum value of SAR (measured) = 0.676 W/kg

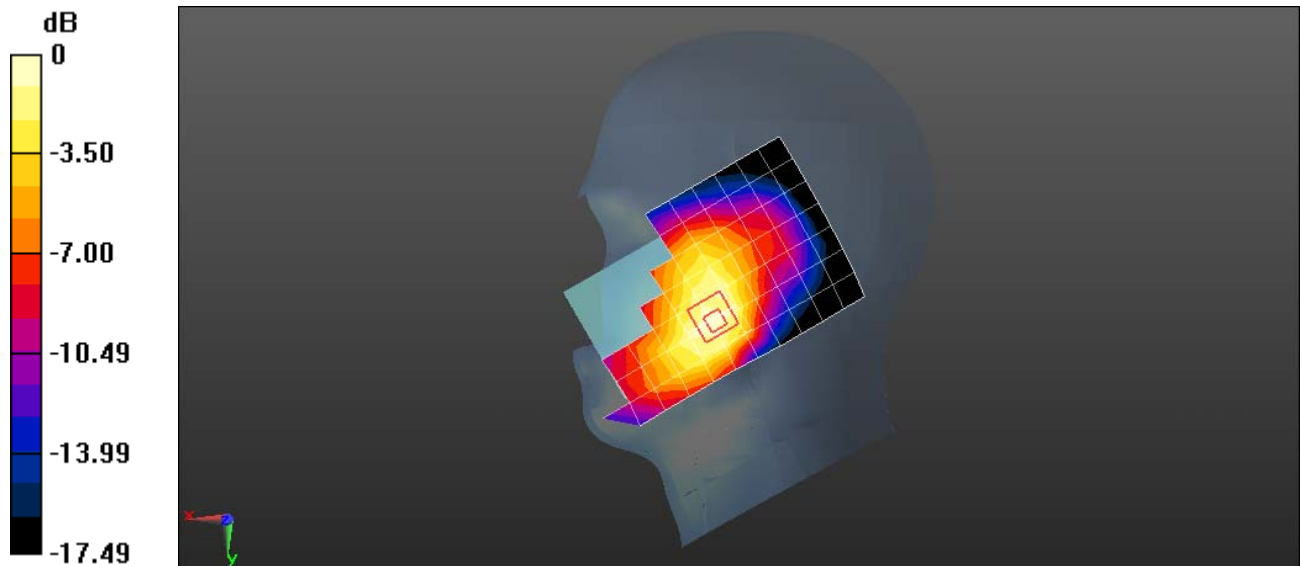

0 dB = 0.676 W/kg = -1.70 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 LTE Band II 20M 1RB 0 offset 18700CH Front Side 15mm**DUT: HUAWEI CUN-L01 CUN-L01; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 51.439$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ζ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.426 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.13 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.380 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 0.443 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.13 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.507 W/kg

SAR(1 g) = 0.344 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.399 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 2: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.13 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.485 W/kg

SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.210 W/kg

Maximum value of SAR (measured) = 0.382 W/kg

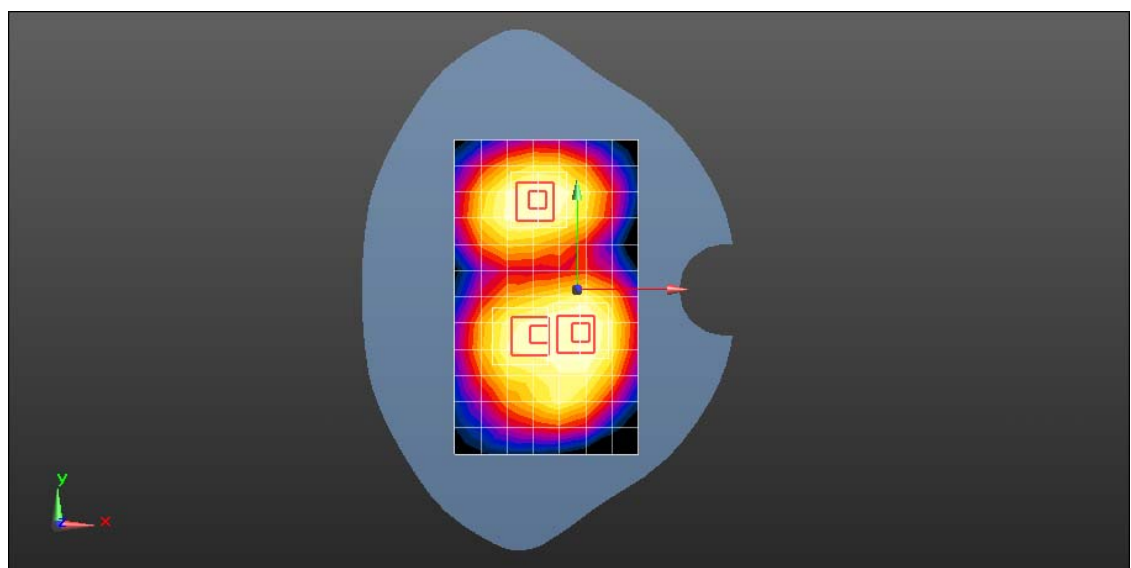

0 dB = 0.382 W/kg = -4.18 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 LTE Band II 20M 1RB 50 offset 19100CH Back Side 10mm**DUT: HUAWEI CUN-L01 CUN-L01; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ⌵ Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;
- ⌵ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌵ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ⌵ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ⌵ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.16 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.545 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.969 W/kg; SAR(10 g) = 0.471 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

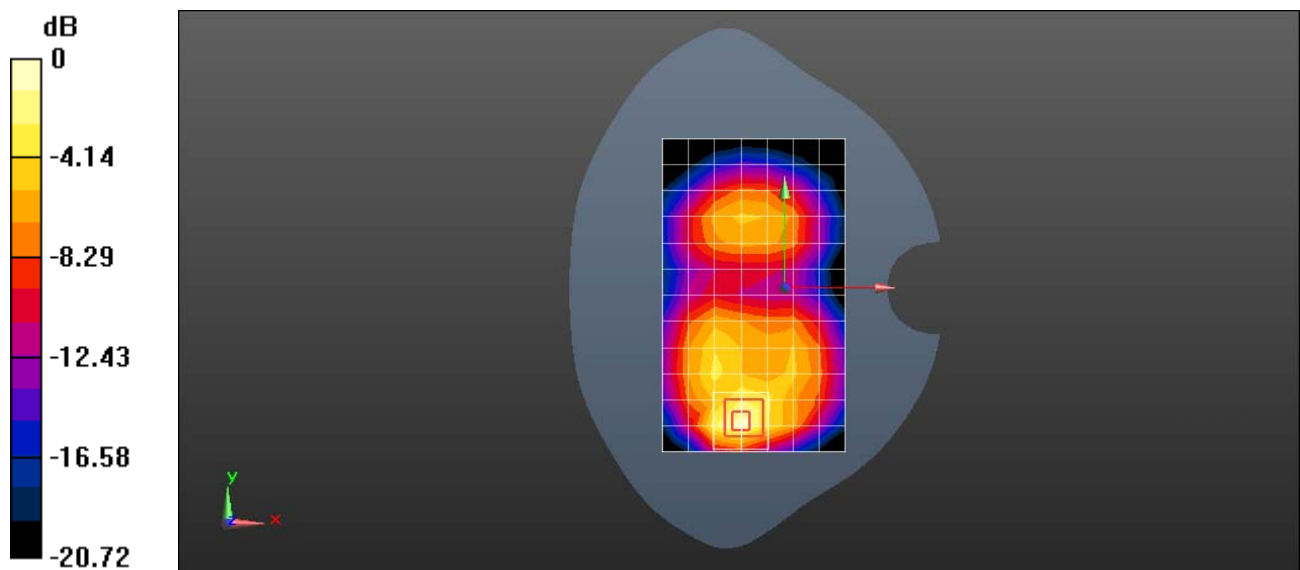

0 dB = 1.29 W/kg = 1.11 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 LTE Band IV 20M QPSK 1RB 0 offset 20300CH Left touch**DUT: HUAWEI CUN-L03; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 41.498$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ⌘ Probe: ES3DV3 - SN3168; ConvF(5.32, 5.32, 5.32); Calibrated: 2015-9-28;
- ⌘ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ⌘ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ⌘ Phantom: SAM1; Type: SAM; Serial: TP-1475
- ⌘ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.526 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.217 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.680 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.300 W/kg

Maximum value of SAR (measured) = 0.542 W/kg

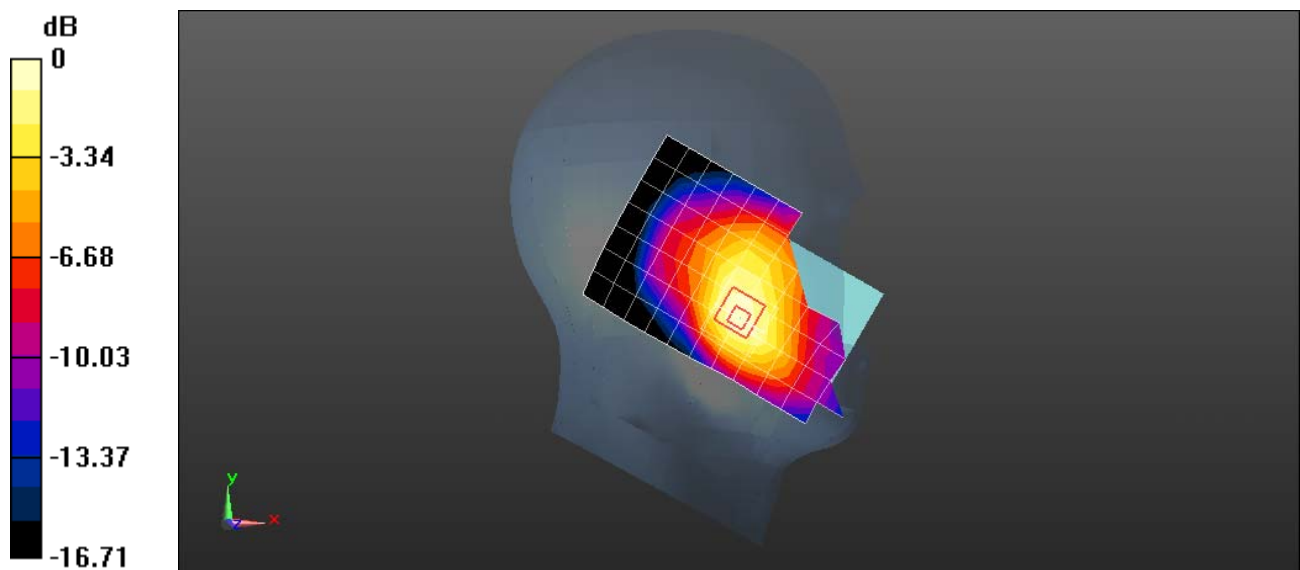

0 dB = 0.542 W/kg = -2.66 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 LTE Band IV 20M QPSK 1RB 0 offset 20050CH Back Side 15mm

DUT: HUAWEI CUN-L03 CUN-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.486$ S/m; $\epsilon_r = 52.313$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.95, 4.95, 4.95); Calibrated: 2015-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.476 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.201 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.757 W/kg

SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.266 W/kg

Maximum value of SAR (measured) = 0.555 W/kg

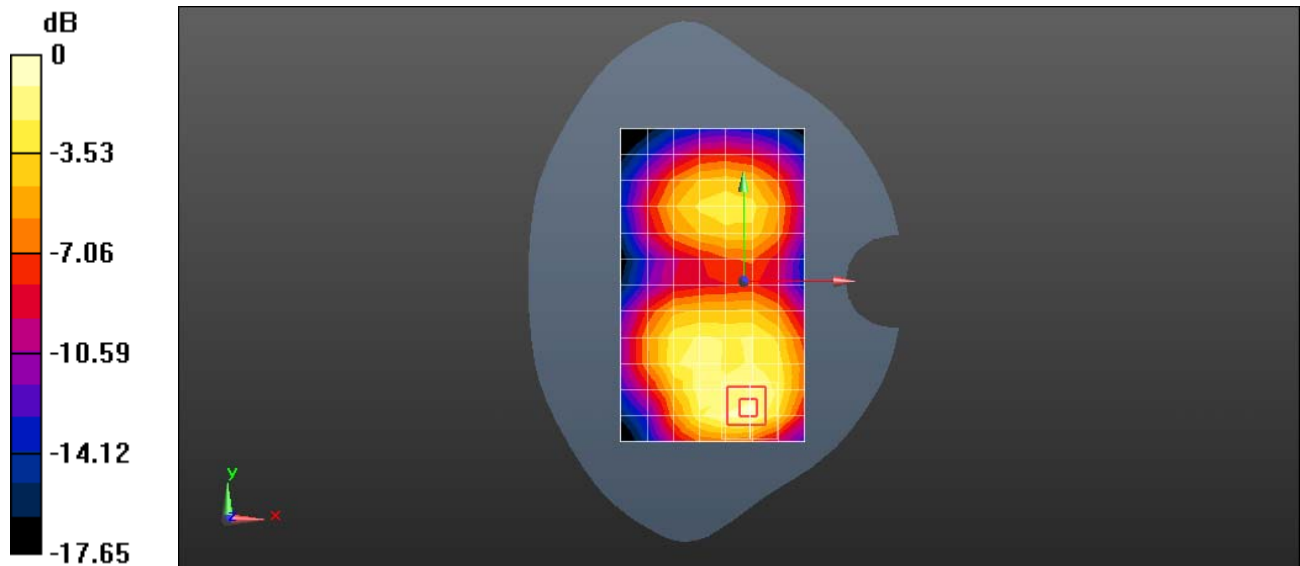

0 dB = 0.555 W/kg = -2.56 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 LTE Band IV 20M QPSK 1RB 0 offset 20050CH Back Side 10mm

DUT: HUAWEI CUN-L03 CUN-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.486$ S/m; $\epsilon_r = 52.313$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.95, 4.95, 4.95); Calibrated: 2015-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.859 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.859 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.447 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

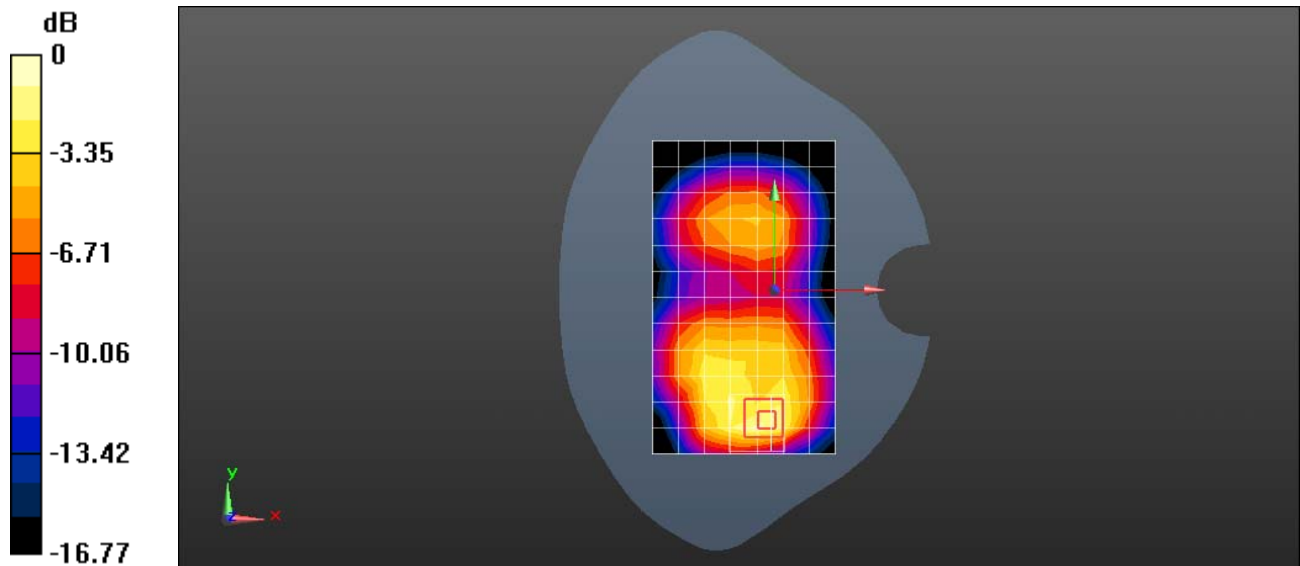

0 dB = 1.02 W/kg = 0.09 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 LTE Band V 10M QPSK 1RB 0 offset 20450CH Left Touch with Battery 2

DUT: HUAWEI CUN-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 40.996$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.32, 6.32, 6.32); Calibrated: 2015-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.402 W/kg


Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.784 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.471 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.284 W/kg

Maximum value of SAR (measured) = 0.410 W/kg

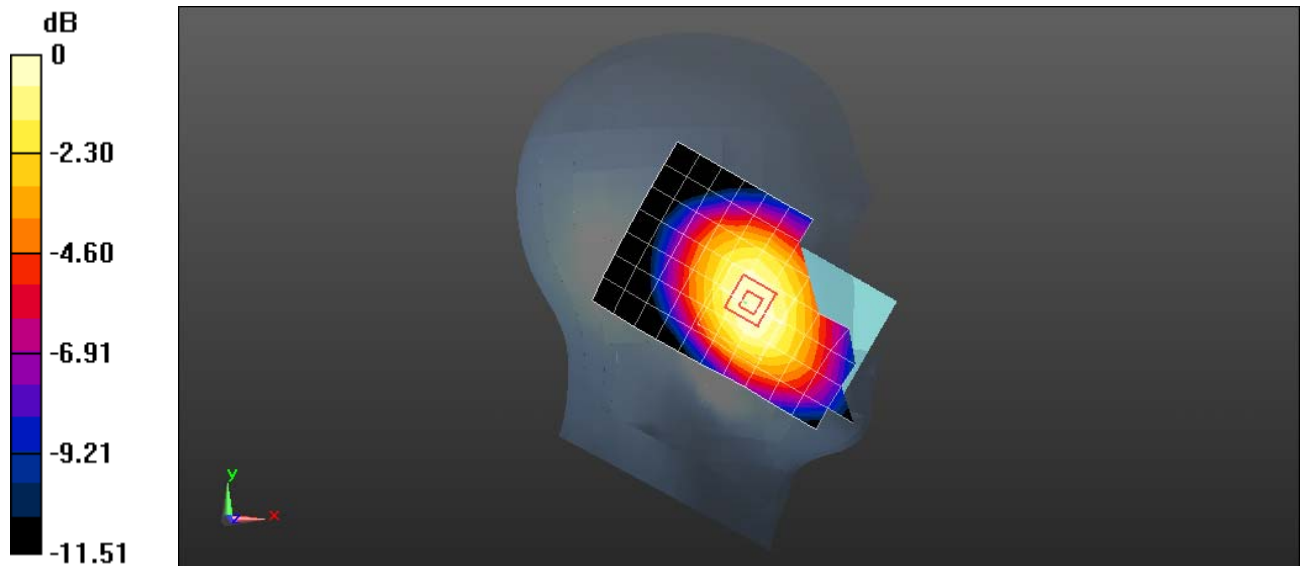

0 dB = 0.410 W/kg = -3.87 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 LTE Band V 10M 1RB 0 offset 20450CH Back Side 15mm with Battery 2

DUT: HUAWEI CUN-L01 CUN-L01; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.998$ S/m; $\epsilon_r = 53.968$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.82, 8.82, 8.82); Calibrated: 2015-7-24;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.777 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 27.30 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.898 W/kg

SAR(1 g) = 0.720 W/kg; SAR(10 g) = 0.551 W/kg

Maximum value of SAR (measured) = 0.789 W/kg

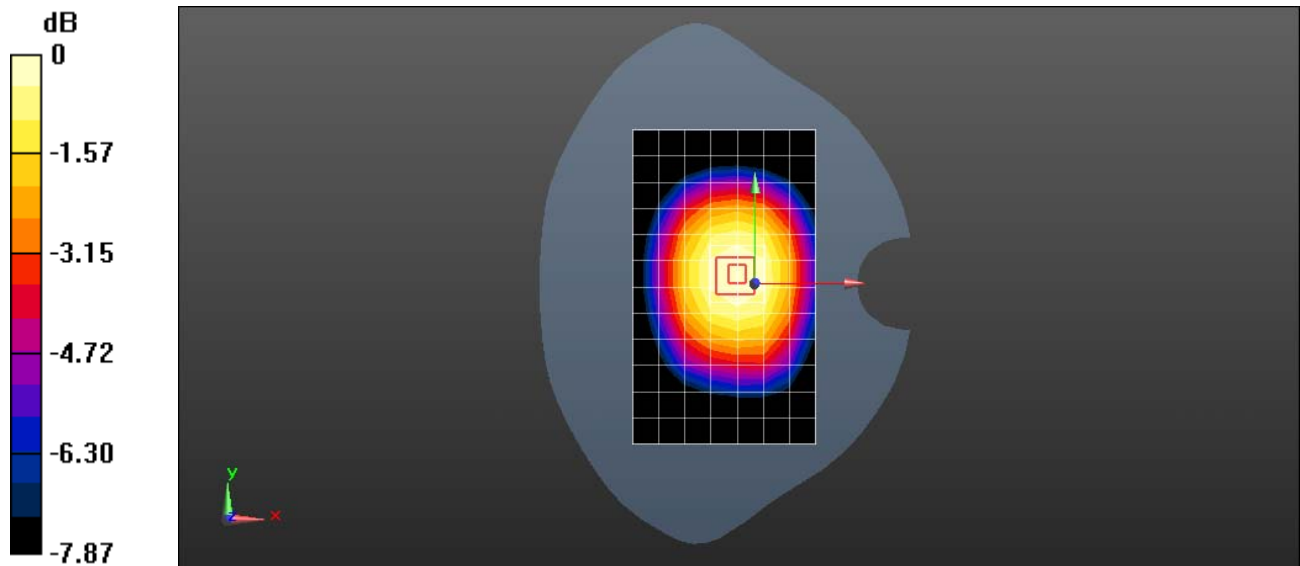

0 dB = 0.789 W/kg = -1.03 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 LTE Band V 10M 1RB 0 offset 20450CH Back Side 10mm**DUT: HUAWEI CUN-L01 CUN-L01; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.998$ S/m; $\epsilon_r = 53.968$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: EX3DV4 - SN3744; ConvF(8.82, 8.82, 8.82); Calibrated: 2015-7-24;
- ⌘ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌘ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ⌘ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ⌘ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.850 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 28.62 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.957 W/kg

SAR(1 g) = 0.780 W/kg; SAR(10 g) = 0.604 W/kg

Maximum value of SAR (measured) = 0.848 W/kg

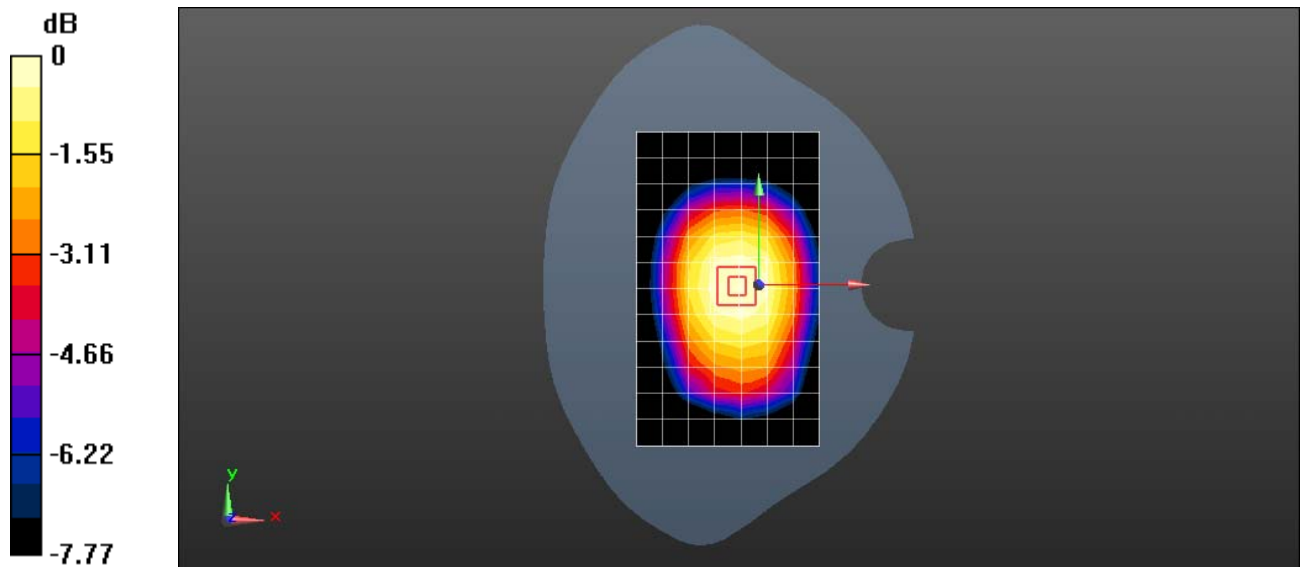

0 dB = 0.848 W/kg = -0.71 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 LTE Band VII 20M 1RB 0 offset 21100CH Right touch**DUT: HUAWEI CUN-L03 CUN-L03; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.926$ S/m; $\epsilon_r = 40.465$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(6.68, 6.68, 6.68); Calibrated: 2015-7-24;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.297 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.244 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.339 W/kg

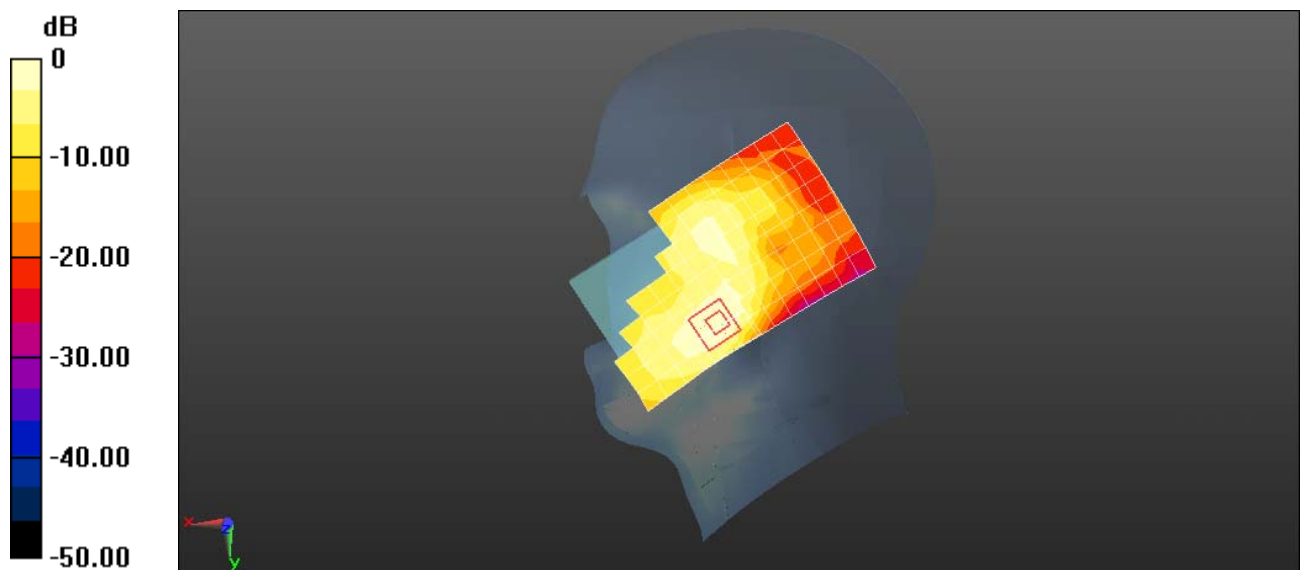

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 LTE Band VII 20M 1RB 99 offset 21350CH Back Side 15mm**DUT: HUAWEI CUN-L03 CUN-L03; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.141$ S/m; $\epsilon_r = 54.128$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: EX3DV4 - SN3744; ConvF(6.65, 6.65, 6.65); Calibrated: 2015-7-24;
- ⌘ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌘ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌘ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ⌘ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.302 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.162 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.507 W/kg

SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.350 W/kg

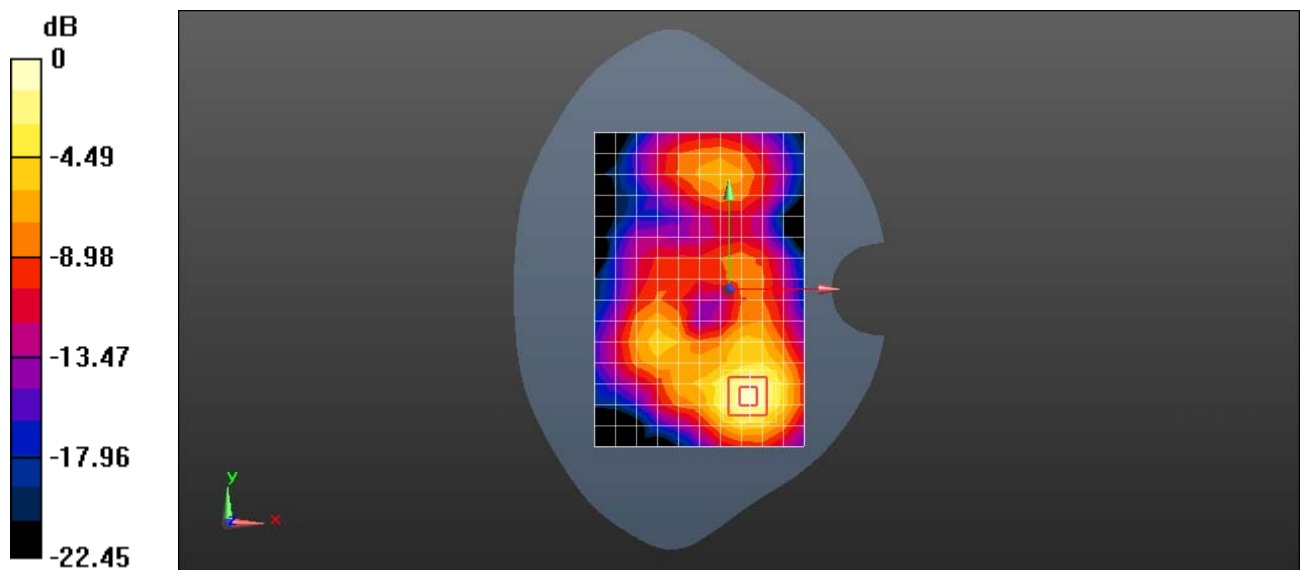

0 dB = 0.350 W/kg = -4.56 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 LTE Band VII 20M 1RB 0 offset 20850CH Bottom Side 10mm with Battery 2-Repeated

DUT: HUAWEI CUN-L03 CUN-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 2.073$ S/m; $\epsilon_r = 54.32$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(6.65, 6.65, 6.65); Calibrated: 2015-7-24;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (6x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.49 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.65 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.14 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.549 W/kg

Maximum value of SAR (measured) = 1.50 W/kg

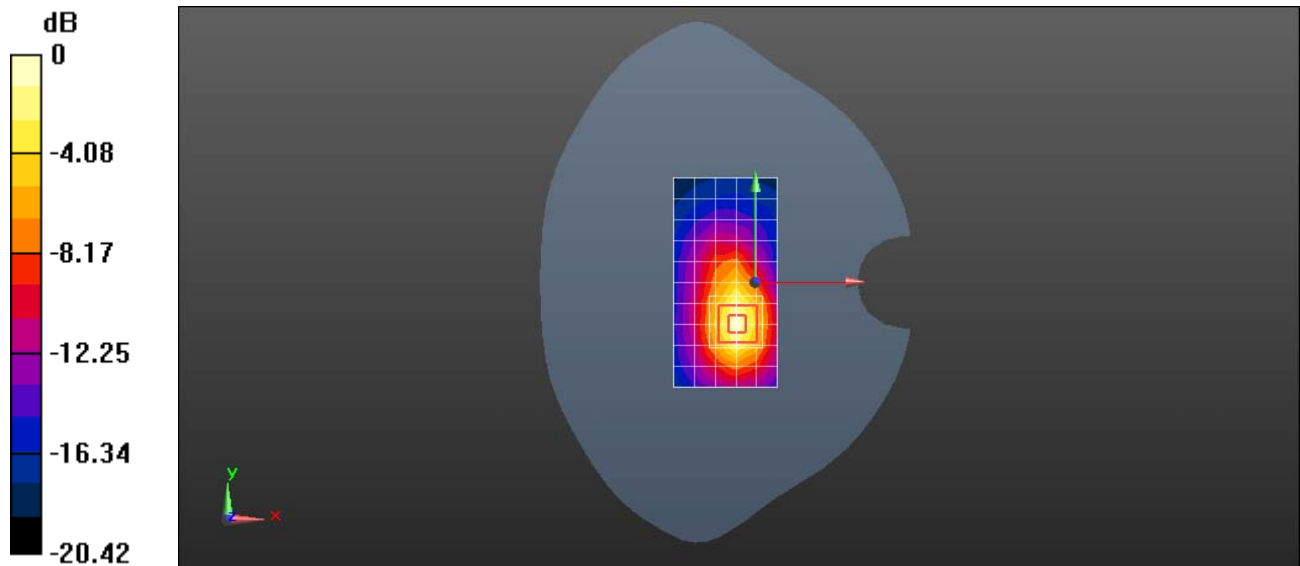

0 dB = 1.50 W/kg = 1.75 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 wifi 2.4G 802.11b 11CH Right hand touch cheek

DUT: HUAWEI CUN-L03; Type: Smart Phone; Serial: SARI

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.876$ S/m; $\epsilon_r = 38.86$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.55, 4.55, 4.55); Calibrated: 2015-9-28;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.01 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.72 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 0.968 W/kg; SAR(10 g) = 0.410 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

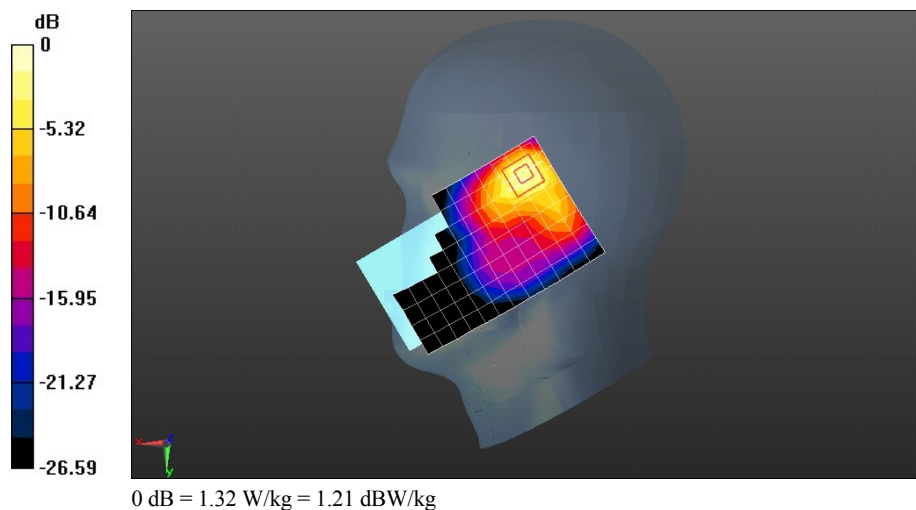

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 wifi 2.4G 802.11b 6CH Back side 15mm

DUT: HUAWEI CUN-L03; Type: Smart Phone; Serial: SARI

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.939$ S/m; $\epsilon_r = 51.537$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.35, 4.35, 4.35); Calibrated: 2015-9-28;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.103 W/kg


Configuration/Body/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.733 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.171 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.107 W/kg

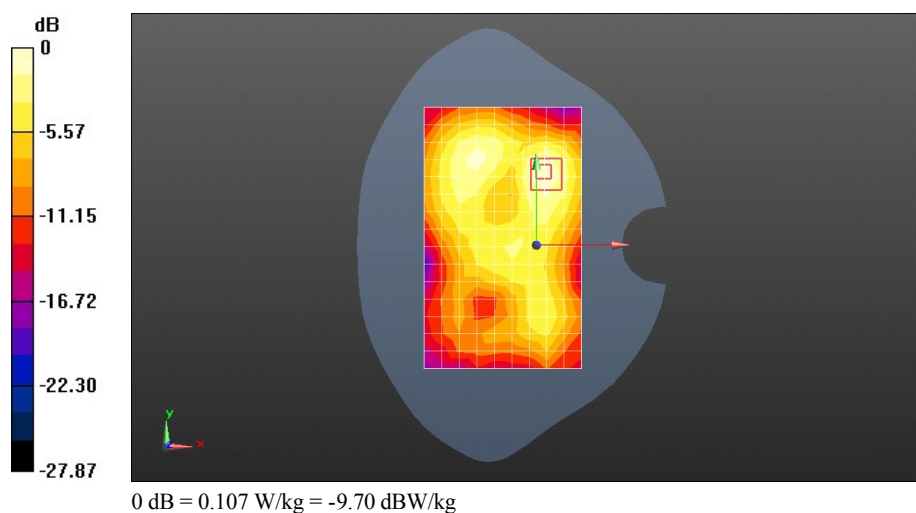

Test Laboratory: HUAWEI SAR/HAC Lab

HUAWEI CUN-L03 wifi 2.4G 802.11b 6CH Back side 10mm

DUT: HUAWEI CUN-L03; Type: Smart Phone; Serial: SARI

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.939$ S/m; $\epsilon_r = 51.537$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.35, 4.35, 4.35); Calibrated: 2015-9-28;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.231 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.981 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.260 W/kg

