



Appendix B. SAR Measurement Plots

Table of contents
GSM850 Body
GSM1900 Body
UMTS Band II Body
WiFi 802.11b Body

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 GSM850 GPRS 2TS 251CH Front Side 10mm with battery 1#

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 848.8 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 849$ MHz; $\sigma = 0.949$ S/m; $\epsilon_r = 52.693$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.620 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.475 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.863 W/kg

SAR(1 g) = 0.639 W/kg; SAR(10 g) = 0.435 W/kg

Maximum value of SAR (measured) = 0.690 W/kg

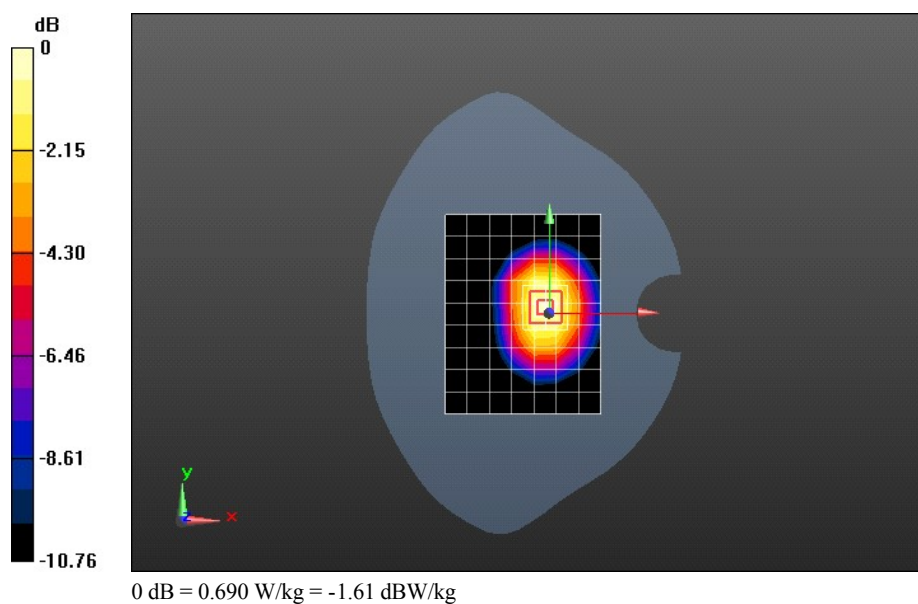

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 GSM850 GPRS 2TS 190CH Front Side 10mm with battery 1#

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 52.705$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.693 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 24.026 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.959 W/kg

SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.479 W/kg

Maximum value of SAR (measured) = 0.759 W/kg

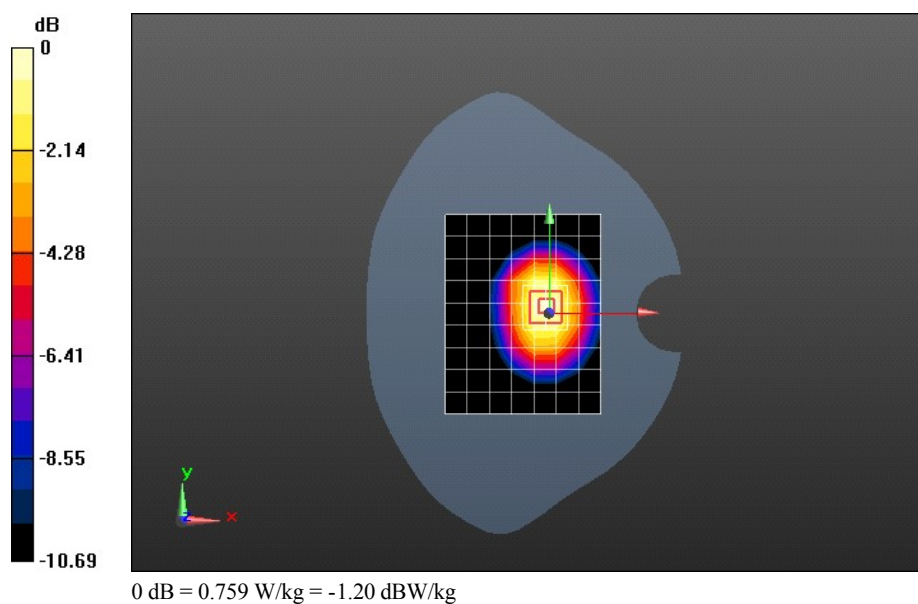

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 GSM850 GPRS 2TS 128CH Front Side 10mm with battery 1#

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 824.4 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated): $f = 824.4$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 52.798$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.809 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 25.474 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.825 W/kg; SAR(10 g) = 0.560 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.889 W/kg

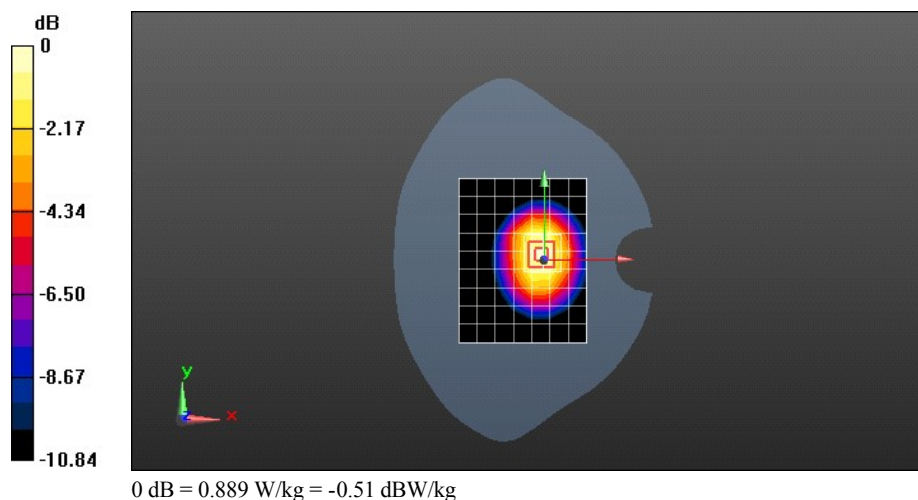

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 GSM850 GPRS 2TS 190CH Rear Side 10mm with battery 1#

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 52.705$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.585 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 25.019 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.770 W/kg

SAR(1 g) = 0.566 W/kg; SAR(10 g) = 0.390 W/kg

Maximum value of SAR (measured) = 0.603 W/kg

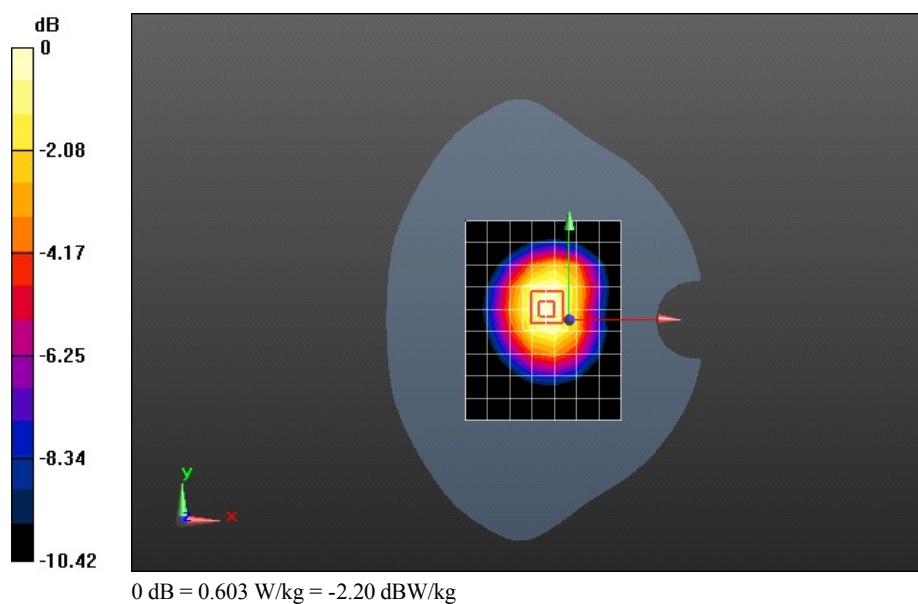

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 GSM850 GPRS 2TS 190CH Right Side 10mm with battery 1#

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 52.705$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0942 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.391 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.103 W/kg

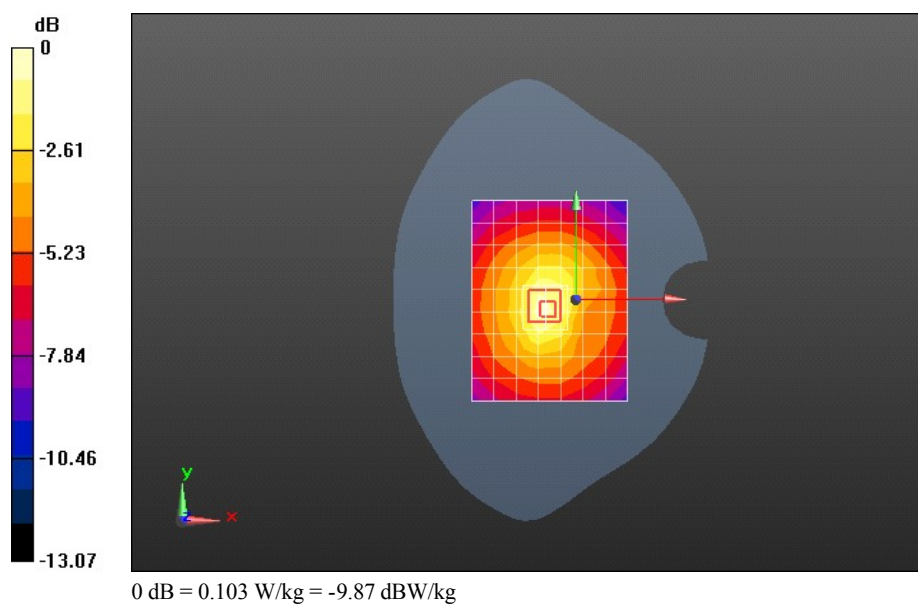

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 GSM850 GPRS 2TS 190CH Top Side 10mm with battery 1#

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 52.705$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.207 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.417 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.213 W/kg

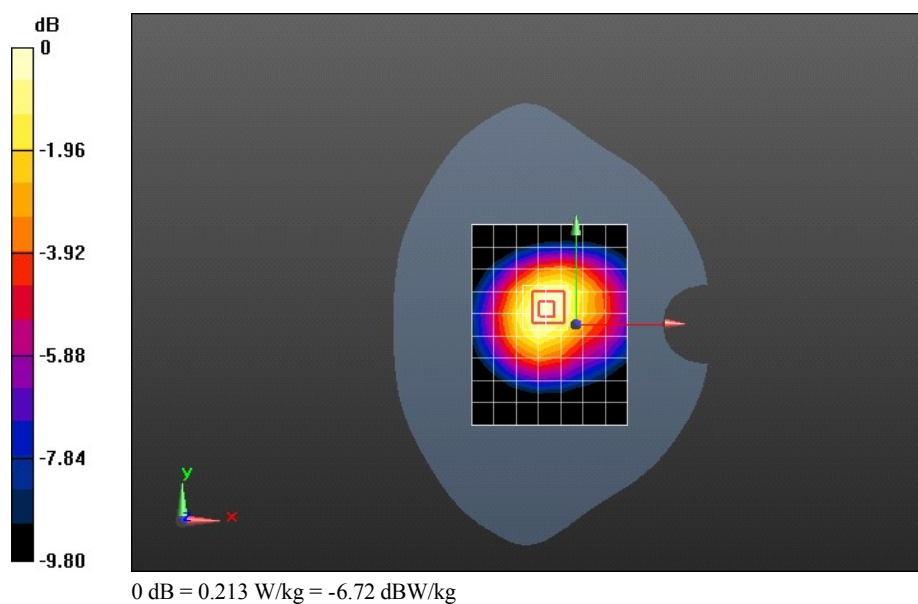

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 GSM850 GPRS 2TS 190CH Bottom Side 10mm with battery 1#

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 52.705$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.266 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.402 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.365 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.284 W/kg

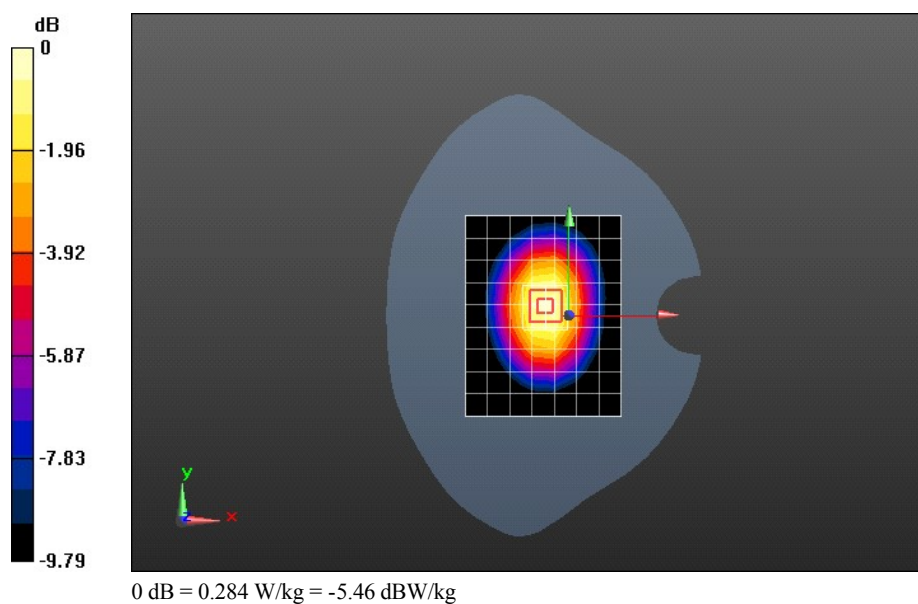

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 GSM850 GPRS 2TS 128CH Front Side 10mm with battery 2#

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 824.4 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated): $f = 824.4$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 52.798$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.824 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 25.879 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.564 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.895 W/kg

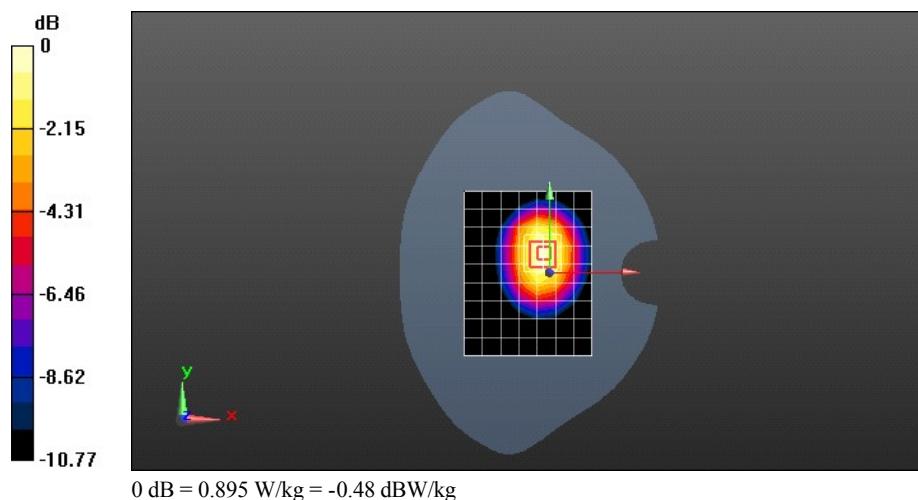

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 GSM850 GPRS 2TS 128CH Front Side 10mm with battery 2#-repeated**DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1**

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 824.4 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated): $f = 824.4$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 52.798$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.820 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 25.850 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.830 W/kg; SAR(10 g) = 0.563 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.884 W/kg

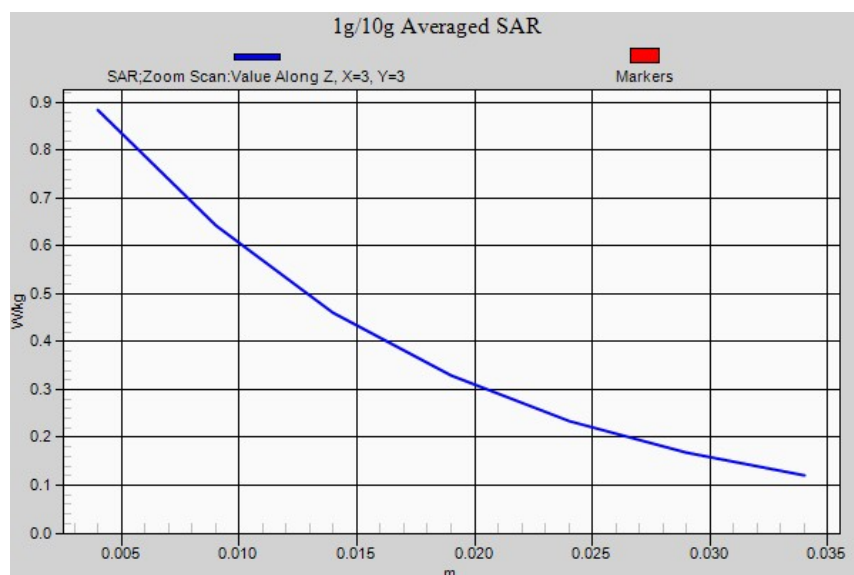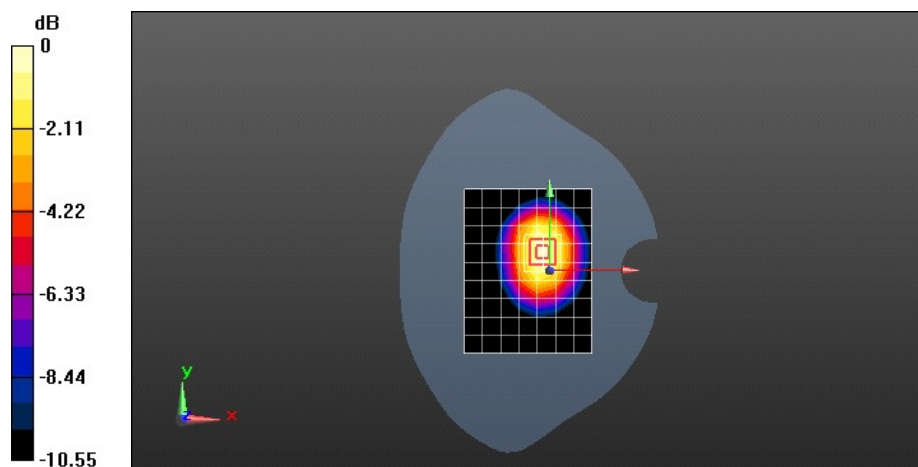

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 GSM1900 GPRS 2TS 661CH Front Side 10mm**DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1**

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 51.019$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.784 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.857 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.716 W/kg; SAR(10 g) = 0.441 W/kg

Maximum value of SAR (measured) = 0.771 W/kg

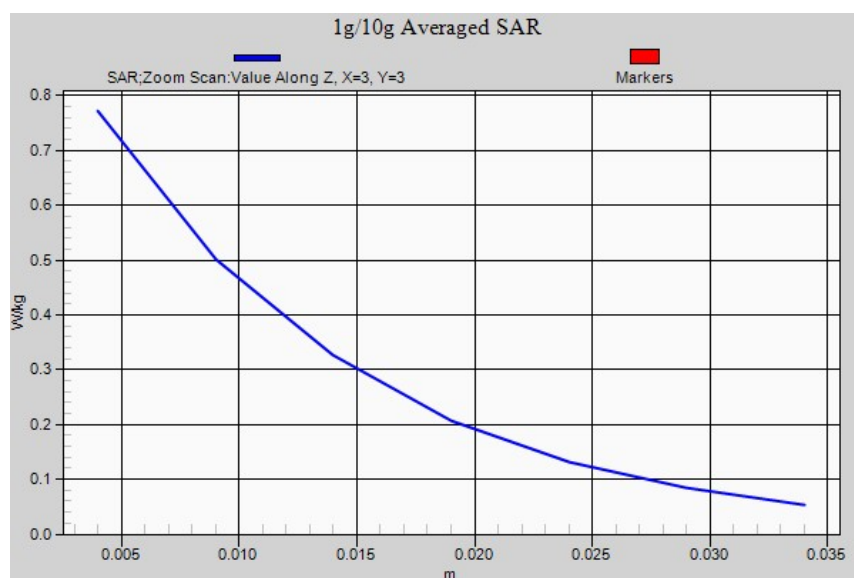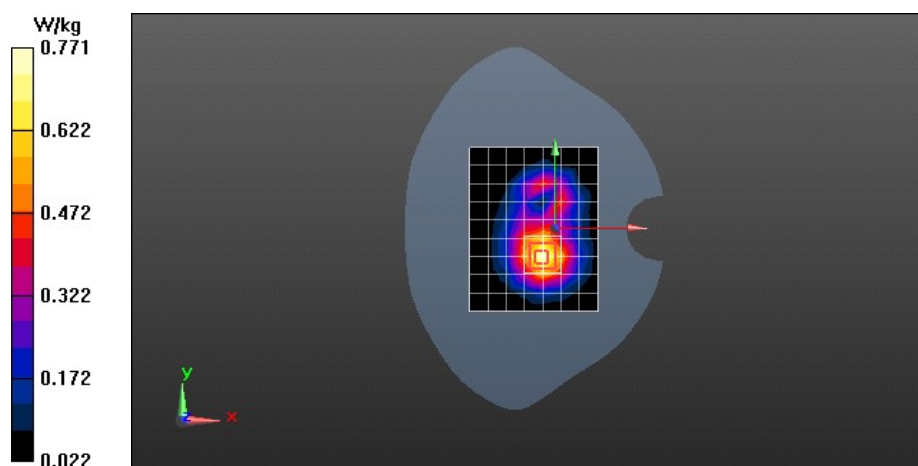

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 GSM1900 GPRS 2TS 661CH Rear Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 51.019$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.566 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.087 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.859 W/kg

SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.368 W/kg

Maximum value of SAR (measured) = 0.633 W/kg

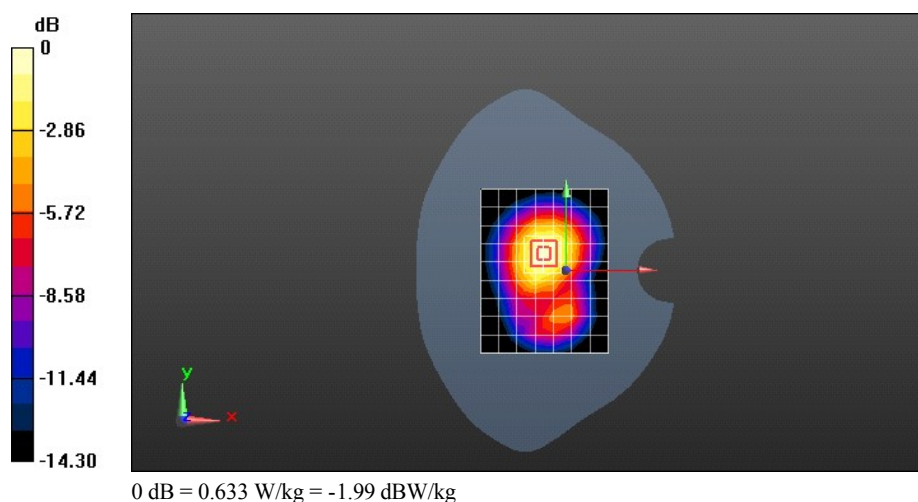

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 GSM1900 GPRS 2TS 661CH Right Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 51.019$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.240 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.211 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.364 W/kg

SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

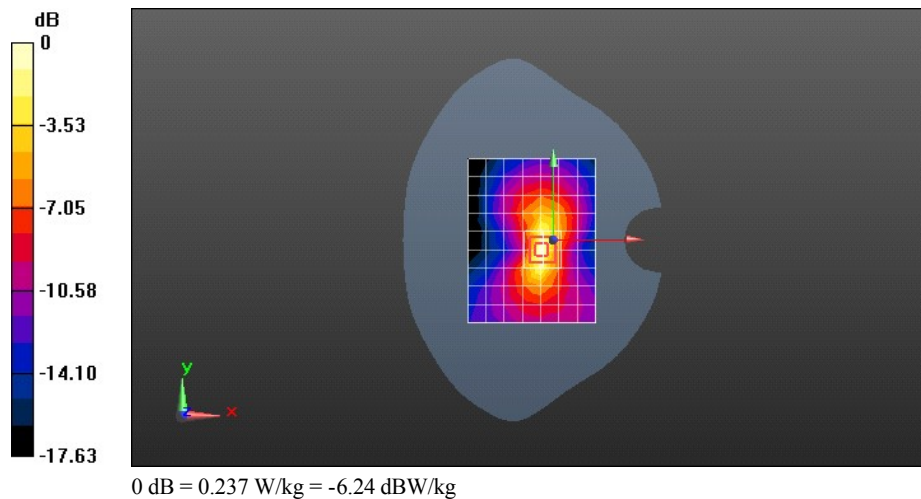

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 GSM1900 GPRS 2TS 661CH Top Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 51.019$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.343 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.414 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.485 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.350 W/kg

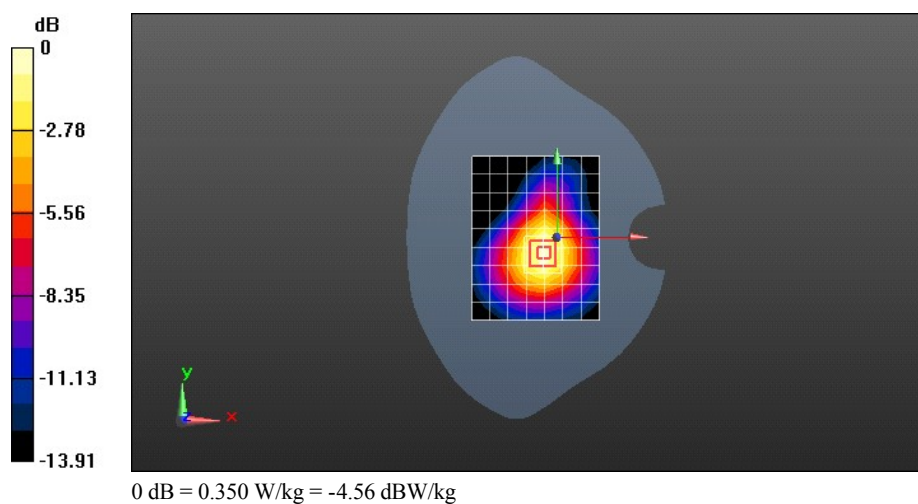

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 GSM1900 GPRS 2TS 661CH Bottom Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 51.019$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.104 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.405 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.118 W/kg

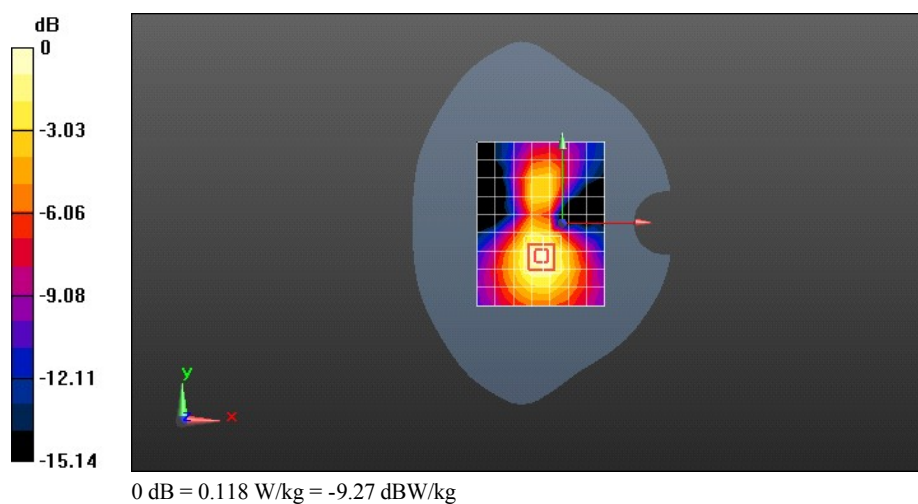

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 GSM1900 GPRS 2TS 661CH Front Side 10mm with battery 2#

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 51.019$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.614 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.068 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.929 W/kg

SAR(1 g) = 0.622 W/kg; SAR(10 g) = 0.393 W/kg

Maximum value of SAR (measured) = 0.673 W/kg

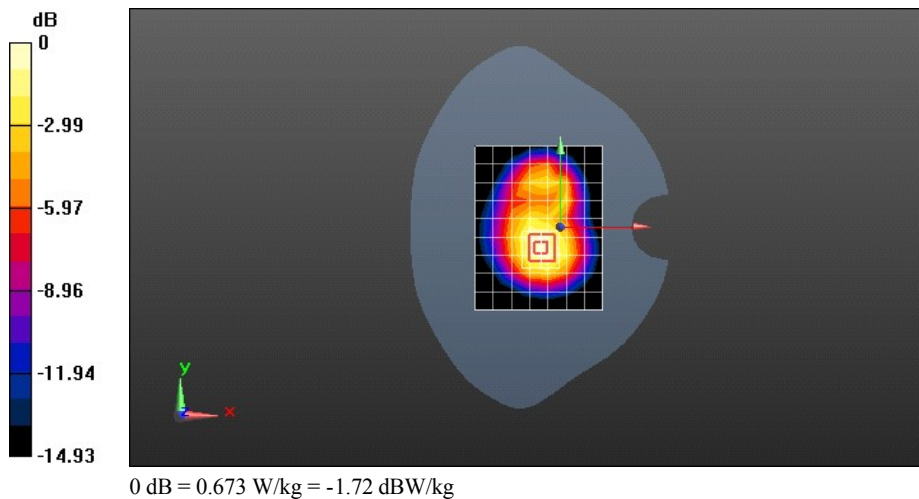

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 UMTS Band II 9262CH Front Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 51.003$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.765 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 19.536 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.747 W/kg; SAR(10 g) = 0.479 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.808 W/kg

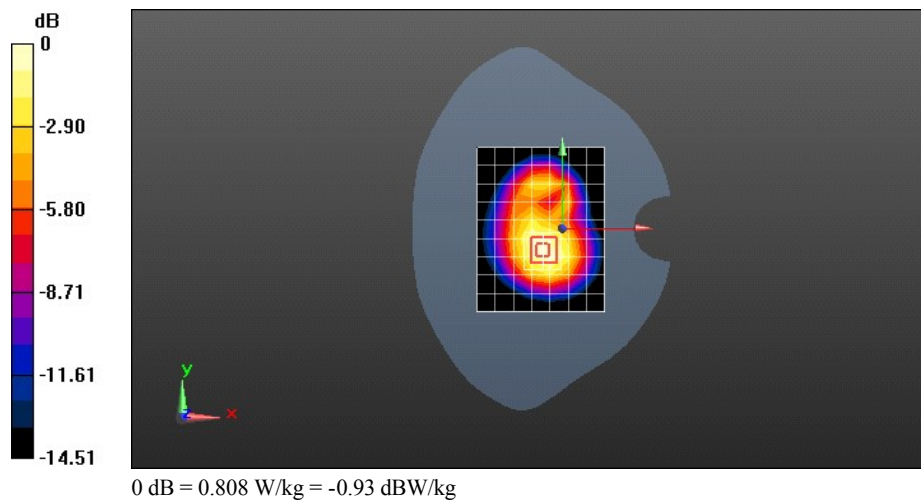

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 UMTS Band II 9400CH Front Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 51.019$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.772 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.979 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.766 W/kg; SAR(10 g) = 0.487 W/kg

Maximum value of SAR (measured) = 0.827 W/kg

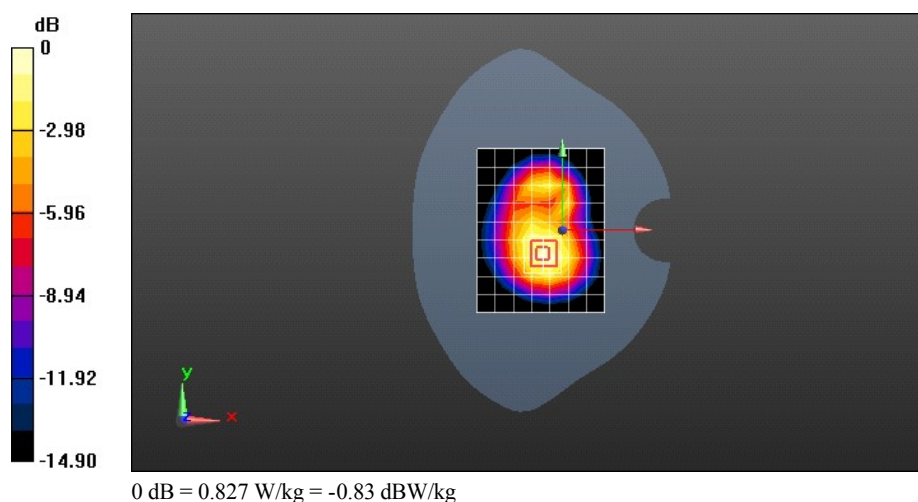

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 UMTS Band II 9538CH Front Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.538$ S/m; $\epsilon_r = 50.952$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.795 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.725 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.779 W/kg; SAR(10 g) = 0.501 W/kg

Maximum value of SAR (measured) = 0.839 W/kg

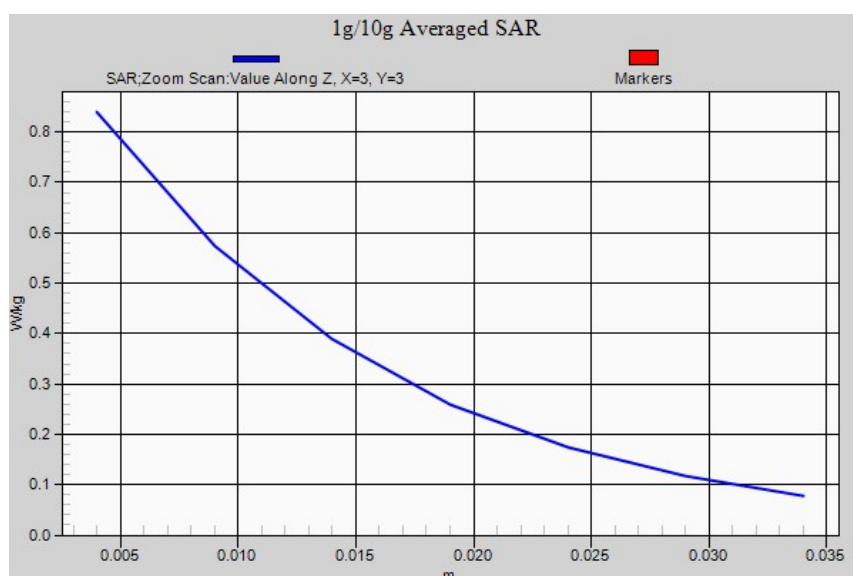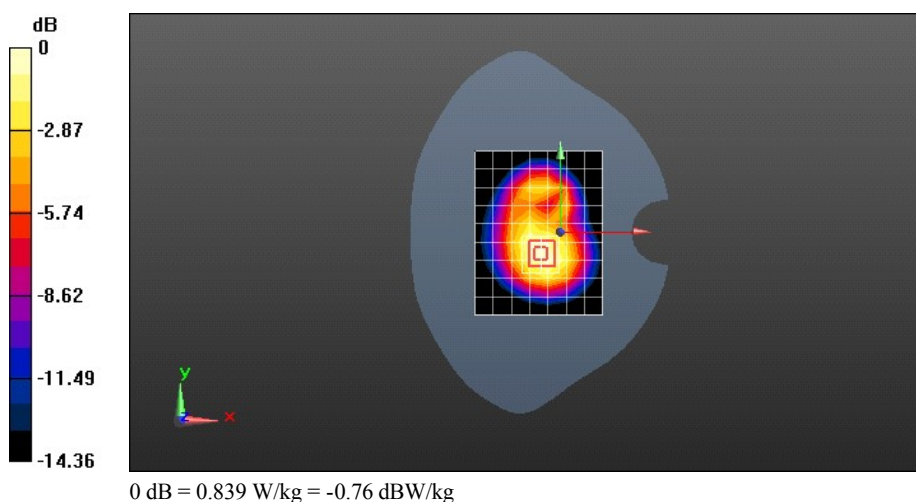

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 UMTS Band II 9262CH Rear Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 51.003$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.828 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 14.598 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.766 W/kg; SAR(10 g) = 0.488 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.825 W/kg

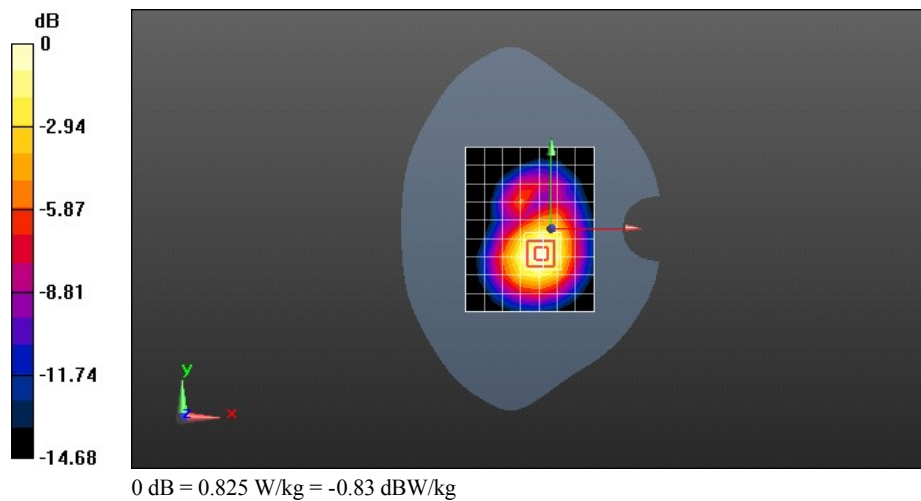

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 UMTS Band II 9400CH Rear Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 51.019$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.784 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.472 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.746 W/kg; SAR(10 g) = 0.469 W/kg

Maximum value of SAR (measured) = 0.804 W/kg

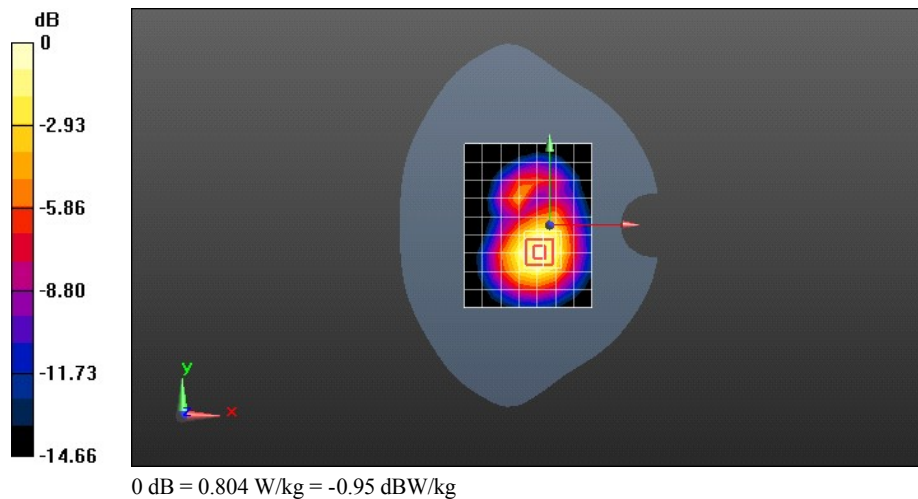

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 UMTS Band II 9538CH Rear Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.538$ S/m; $\epsilon_r = 50.952$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.716 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.008 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.990 W/kg

SAR(1 g) = 0.670 W/kg; SAR(10 g) = 0.420 W/kg

Maximum value of SAR (measured) = 0.722 W/kg

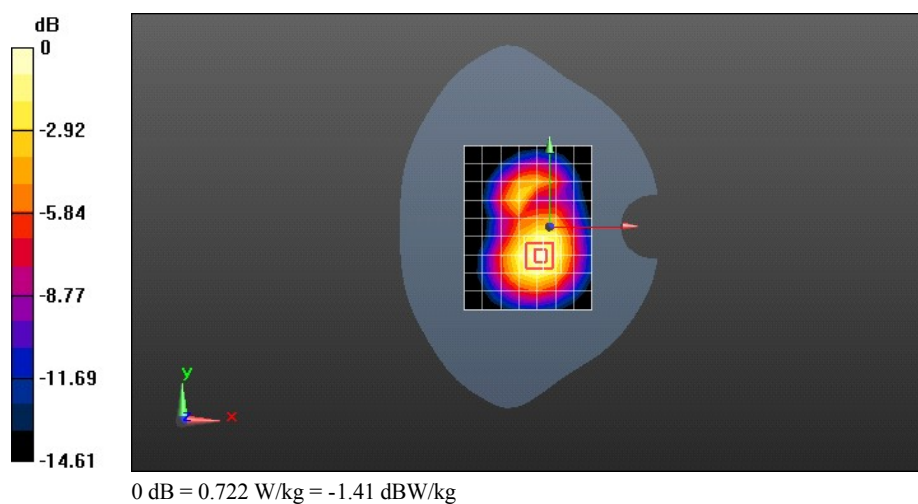

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 UMTS Band II 9400CH Right Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 51.019$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.272 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.858 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.289 W/kg

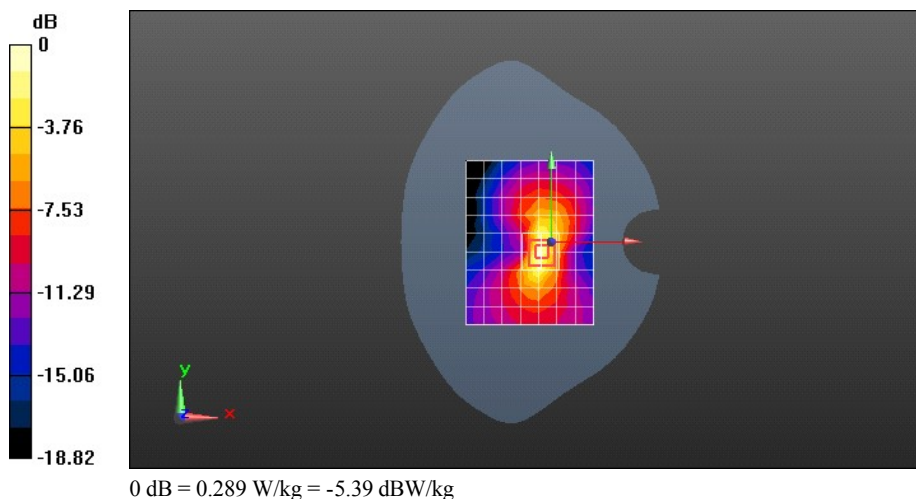

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 UMTS Band II 9400CH Top Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 51.019$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.398 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.146 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.547 W/kg

SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.234 W/kg

Maximum value of SAR (measured) = 0.397 W/kg

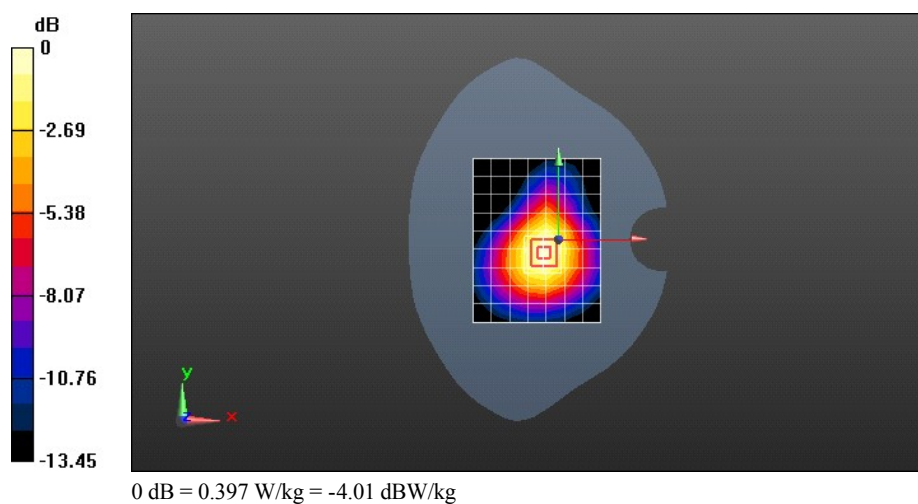

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 UMTS Band II 9400CH Bottom Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 51.019$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.137 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.004 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.155 W/kg

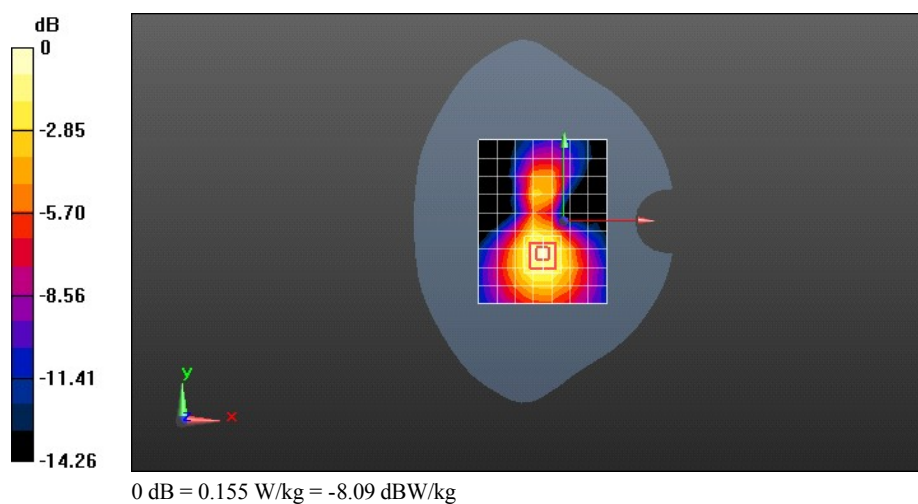

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 UMTS Band II 9538CH Front Side 10mm with battery 2#

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.538$ S/m; $\epsilon_r = 50.952$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.817 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 21.362 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.480 W/kg

Maximum value of SAR (measured) = 0.828 W/kg

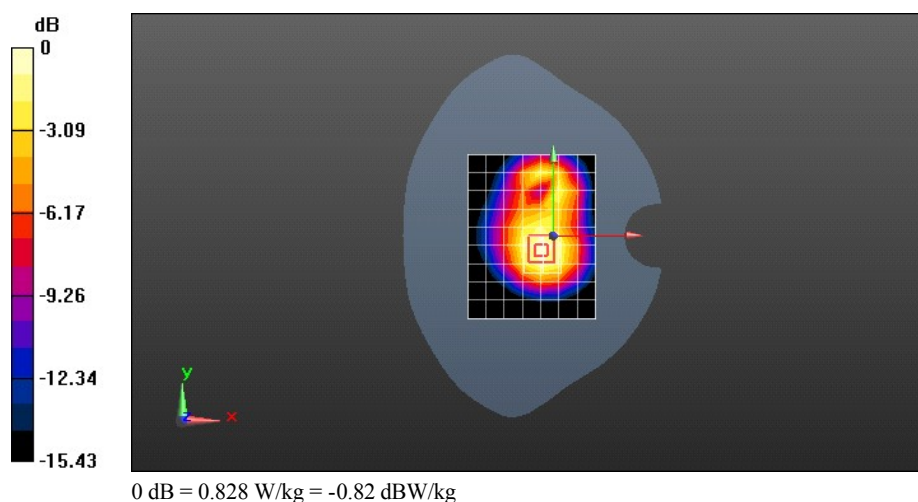

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 WiFi 802.11b 1CH Front Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 52.831$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.141 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.225 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.168 W/kg

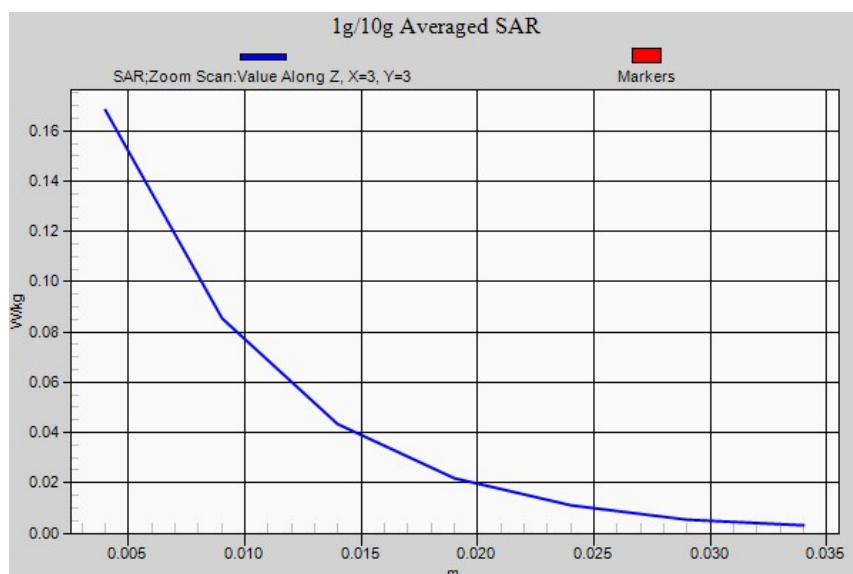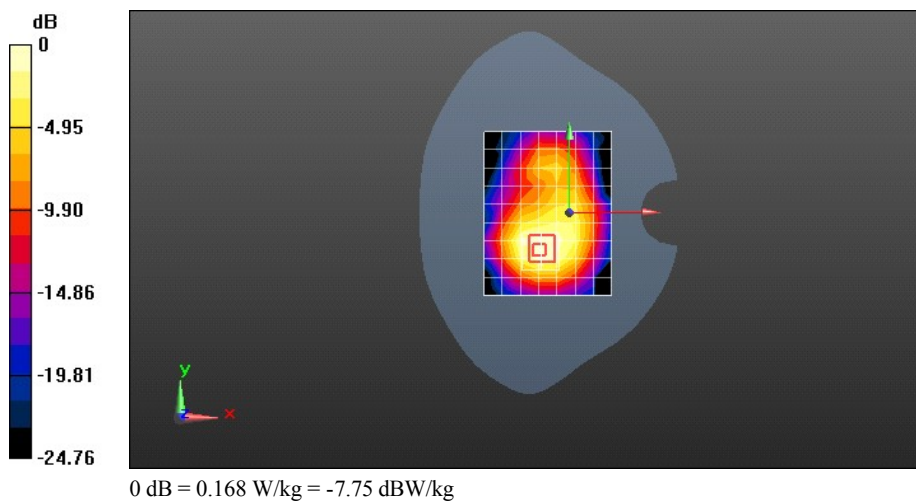

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 WiFi 802.11b 1CH Rear Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 52.831$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x12x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0944 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.007 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.0931 W/kg

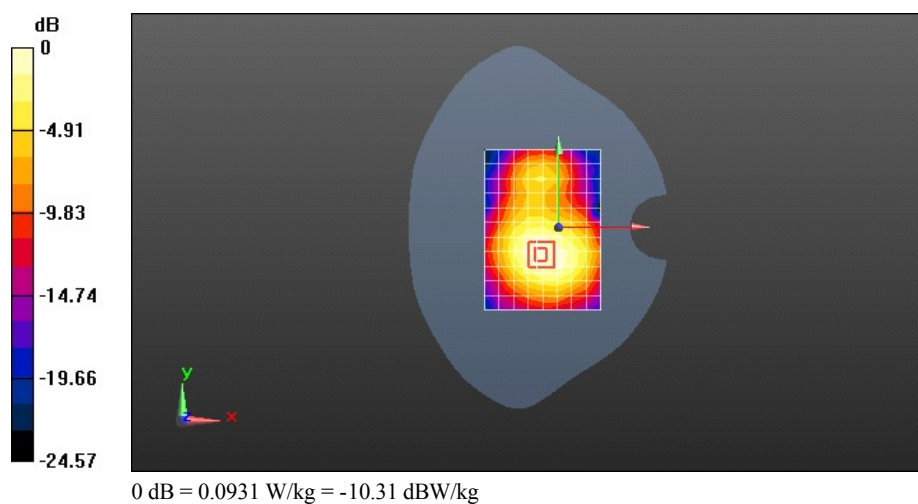

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 WiFi 802.11b 1CH Left Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 52.831$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x12x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0572 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.325 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.104 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0592 W/kg

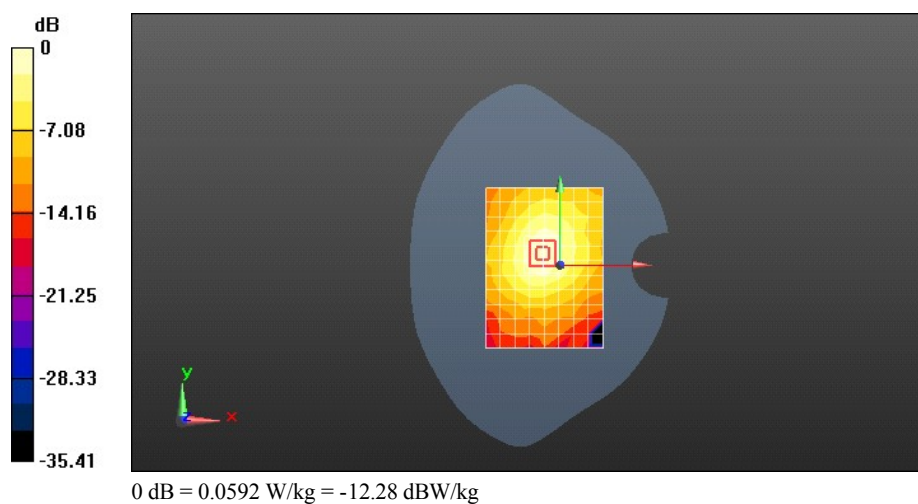

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 WiFi 802.11b 1CH Top Side 10mm

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 52.831$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (9x12x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0888 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.958 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.0907 W/kg

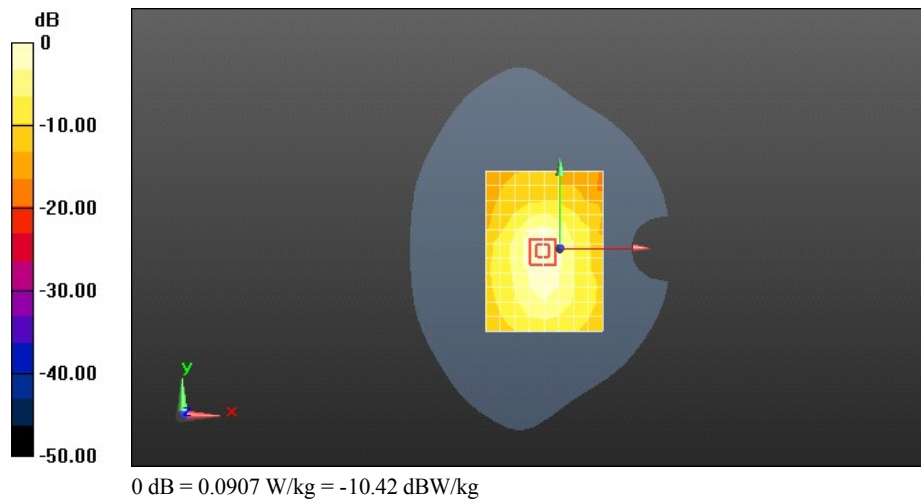

Test Laboratory: HUAWEI SAR/HAC Lab

E5220s-81 WiFi 802.11b 1CH Front Side 10mm with battery 2#

DUT: E5220s-81; Type: Mobile WiFi; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 52.831$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2012-11-23
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.160 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.731 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.319 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.167 W/kg

