

FCC PART 90

TEST REPORT

For

Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

FCC ID: QISEA260-135

Report Type: Original Report	Product Type: LTE CPE
Test Engineer: Allen Qiao	<i>Allen Qiao</i>
Report Number: RDG150403001-00A	
Report Date: 2015-04-30	
Reviewed By: Jerry Zhang EMC Manager	<i>Jerry Zhang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	4
DESCRIPTION OF TEST CONFIGURATION	4
EQUIPMENT MODIFICATIONS	4
SUPPORT EQUIPMENT LIST AND DETAILS	4
EXTERNAL I/O CABLE.....	4
BLOCK DIAGRAM OF TEST SETUP	4
SUMMARY OF TEST RESULTS	5
FCC§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	6
FCC §2.1046, §90.1321(a) - RF OUTPUT POWER	7
APPLICABLE STANDARD	7
TEST PROCEDURE	7
TEST EQUIPMENT LIST AND DETAILS.....	7
TEST DATA	7
FCC §90.1321 (a) - PEAK POWER SPECTRAL DENSITY	9
APPLICABLE STANDARD	9
TEST PROCEDURE	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST DATA	10
FCC §2.1049 & §90.209 – OCCUPIED BANDWIDTH	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST DATA	23
FCC §2.1051 & §90.1323(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	29
FCC §2.1053 - RADIATED SPURIOUS EMISSIONS	46
APPLICABLE STANDARD	46
TEST PROCEDURE	46
TEST EQUIPMENT LIST AND DETAILS.....	46
TEST DATA	47
FCC §2.1055 & §90.213- FREQUENCY STABILITY.....	50
APPLICABLE STANDARD	50
TEST PROCEDURE	50
TEST EQUIPMENT LIST AND DETAILS.....	50
TEST DATA	50

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Huawei Technologies Co., Ltd.*'s product, model number: *eA260-135* (FCC ID: *QISEA260-135*) or the "EUT" in this report was a *LTE CPE*, which was measured approximately: 19.0 cm (L) x 3.5 cm (W) x 17.6 cm (H), rated input voltage: DC 12V from adapter.

Adapter information:

Model: HW-120200U6W

Input: AC 100-240V, 50/60Hz, 0.8A

Output: DC 12V, 2.0A

** All measurement and test data in this report was gathered from production sample serial number: 150403001 (Assigned by BACL, Dongguan). The EUT was received on 2015-04-07*

Objective

This test report is prepared on behalf of *Huawei Technologies Co., Ltd.* in accordance with Part 2, and Part 90 of the Federal Communications Commission's rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: QISEA260-135.

FCC Part 15B JBP submissions with FCC ID: QISEA260-135.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part Z as well as the following individual parts:

Part 90 – Wireless Broadband Services in the 3650-3700 MHz Band

Applicable Standards: TIA 603-D and ANSI 63.4-2009.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R & S	Wideband Radio Communication Tester	CMW500	114772

External I/O Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RF Cable	Yes	No	2	CMW500	EUT

Block Diagram of Test Setup

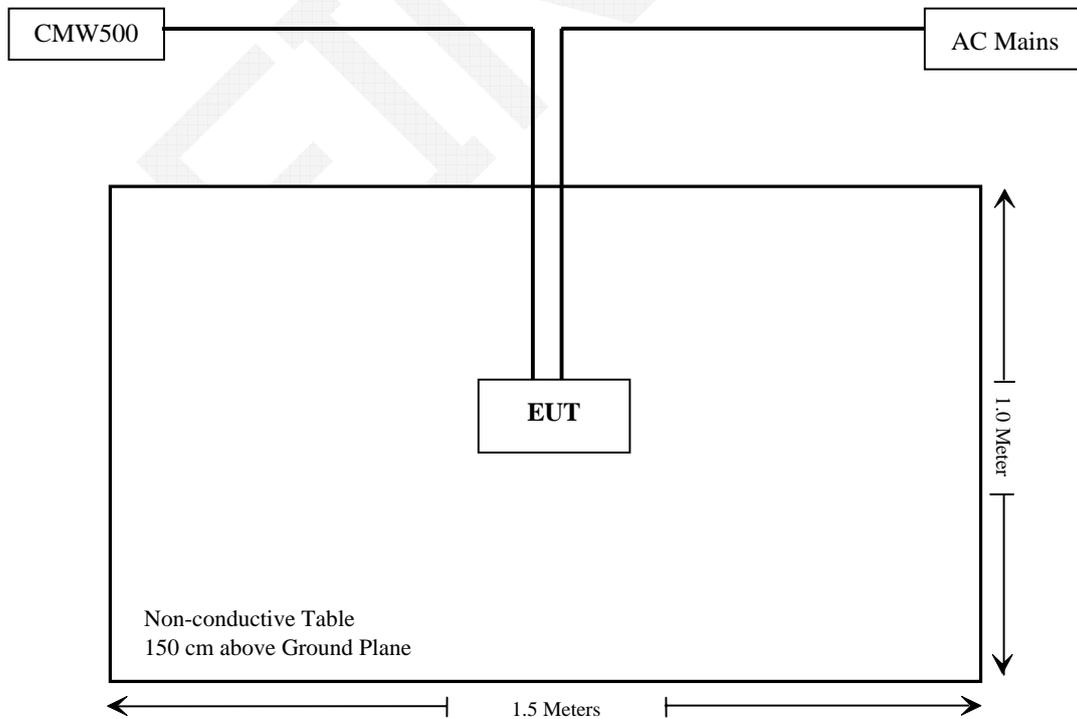

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§1.1307 (b)(1), §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§2.1046; §90.1321(a)	RF Output Power	Compliance
§90.1321(a); §90.1321(a)	Peak Power Spectral Density	Compliance
§2.1049; §90.209	Occupied Bandwidth	Compliance
§2.1051; §90.1323(a)	Spurious Emission at Antenna Terminal	Compliance
§2.1053	Spurious Radiated Emissions	Compliance
§2.1055; §90.213	Frequency Stability	Compliance

FCC§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

According to subpart 1.1307 (b)(1)and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

S = PG/4πR² = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Wi-Fi	2412-2462	-3.00	0.50	23.41	219.28	20.00	0.02	1.0
LTE	3650-3700	5.50	3.55	17.66	58.34	20.00	0.04	1.0

Wi-Fi (2.4 G) and LTE can transmit simultaneously, MPE evaluation is as below formula:

PD1/Limit1+PD2/Limit2+..... < 1, PD (Power Density)

= 0.02/1+0.04/1=0.06 < 1

Result: MPE evaluation of single and simultaneous transmission meet the requirement of standard.

FCC §2.1046, §90.1321(a) - RF OUTPUT POWER


Applicable Standard

According to FCC §90.1321:

(c) Mobile and portable stations are limited to 1 watt/25 MHz EIRP. In any event, the peak EIRP density shall not exceed 40 milliwatts in any one-megahertz slice of spectrum.

Test Procedure

The EUT was connected to a CMW500 through a attenuator, the EUT power was adjusted to produce maximum output power as specified in the owner's manual, measurements were performed at the low, mid and high channels for each of the EUT's bandwidths and modulations.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R & S	Wideband Radio Communication Tester	CMW500	106891	2014-11-23	2015-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.4 °C
Relative Humidity:	54 %
ATM Pressure:	101.2 kPa

The testing was performed by Allen Qiao on 2015-04-25.

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table.

LTE Band: 3650-3700MHz

Bandwidth	Modulation	Frequency (MHz)	Output Power (dBm/25MHz)	Antenna Gain (dBi)	EIRP (dBm/25MHz)	Limit (dBm/25MHz)
5MHz	QPSK	3652.5	17.43	5.5	22.93	30
		3675	17.58	5.5	23.08	
		3697.5	17.50	5.5	23.00	
	16QAM	3652.5	17.17	5.5	22.67	
		3675	17.51	5.5	23.01	
		3697.5	17.63	5.5	23.13	
10MHz	QPSK	3655	17.41	5.5	22.91	30
		3675	17.57	5.5	23.07	
		3695	17.61	5.5	23.11	
	16QAM	3655	17.36	5.5	22.86	
		3675	17.56	5.5	23.06	
		3695	17.66	5.5	23.16	
15MHz	QPSK	3657.5	17.47	5.5	22.97	30
		3675	17.56	5.5	23.06	
		3692.5	17.66	5.5	23.16	
	16QAM	3657.5	17.36	5.5	22.86	
		3675	17.61	5.5	23.11	
		3692.5	17.60	5.5	23.10	
20MHz	QPSK	3660	17.51	5.5	23.01	30
		3675	17.60	5.5	23.10	
		3690	17.59	5.5	23.09	
	16QAM	3660	17.34	5.5	22.84	
		3675	17.47	5.5	22.97	
		3690	17.54	5.5	23.04	

FCC §90.1321 (a) - PEAK POWER SPECTRAL DENSITY

Applicable Standard


According to FCC §90.1321:

(c) Mobile and portable stations are limited to 1 watt/25 MHz EIRP. In any event, the peak EIRP density shall not exceed 40 milliwatts in any one-megahertz slice of spectrum.

Test Procedure

The EUT was connected to a CMW500 & spectrum analyzer through a splitter, the EUT power was adjusted to produce maximum output power as specified in the owner's manual, measurements were performed at the low, mid and high channels for each of the EUT's bandwidths and modulations.

The resolution bandwidth of the spectrum analyzer was set at 1MHz.

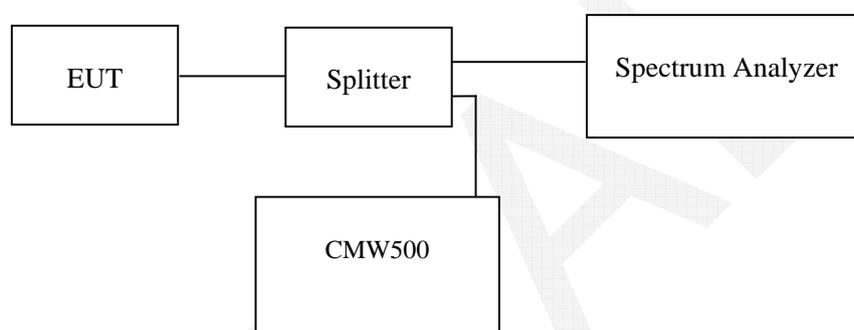

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R & S	Wideband Radio Communication Tester	CMW500	106891	2014-11-23	2015-11-23
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.4 °C
Relative Humidity:	54 %
ATM Pressure:	101.2 kPa

The testing was performed by Allen Qiao on 2015-04-24.

Test Mode: Transmitting


Result: Compliance.

LTE Band: 3650-3700MHz

Bandwidth	Modulation	Frequency (MHz)	Conducted Power Density (dBm/MHz)	Antenna Gain (dBi)	EIRP Power Density (dBm/MHz)	Limit (dBm/MHz)
5MHz	QPSK	3652.5	10.25	5.5	15.75	16
		3675	10.19	5.5	15.69	
		3697.5	9.93	5.5	15.43	
	16QAM	3652.5	10.22	5.5	15.72	
		3675	10.36	5.5	15.86	
		3697.5	9.87	5.5	15.37	
10MHz	QPSK	3655	7.31	5.5	12.81	
		3675	7.68	5.5	13.18	
		3695	7.52	5.5	13.02	
	16QAM	3655	7.35	5.5	12.85	
		3675	7.70	5.5	13.20	
		3695	7.55	5.5	13.05	
15MHz	QPSK	3657.5	5.63	5.5	11.13	
		3675	5.72	5.5	11.22	
		3692.5	6.47	5.5	11.97	
	16QAM	3657.5	5.48	5.5	10.98	
		3675	6.23	5.5	11.73	
		3692.5	6.37	5.5	11.87	
20MHz	QPSK	3660	4.63	5.5	10.13	
		3675	4.83	5.5	10.33	
		3690	4.98	5.5	10.48	
	16QAM	3660	4.66	5.5	10.16	
		3675	4.48	5.5	9.98	
		3690	4.97	5.5	10.47	


Please refer to the following plots

16QAM, 5MHz, Low Channel

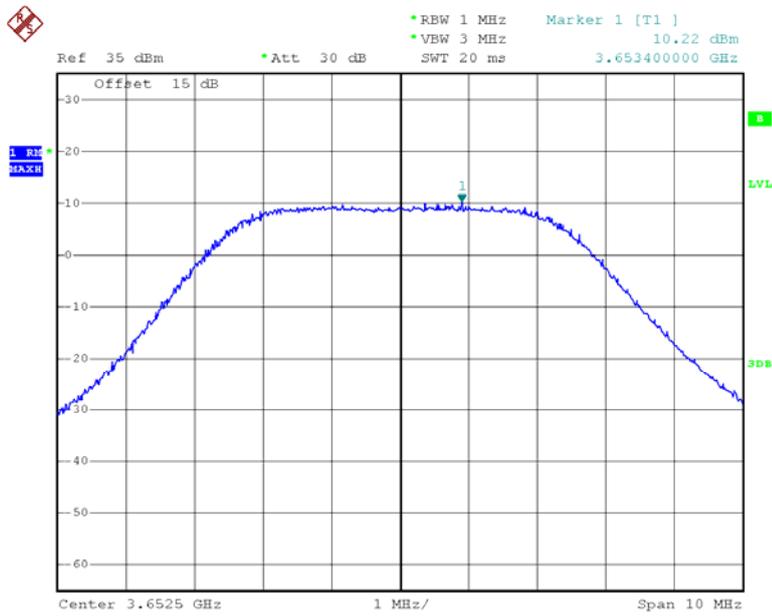


Date: 24.APR.2015 16:56:11

16QAM, 5MHz, Middle Channel

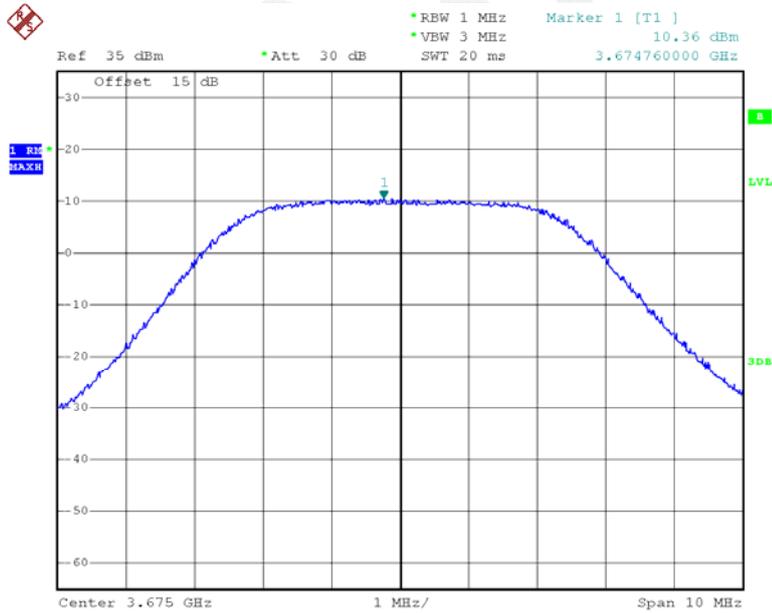


Date: 24.APR.2015 16:07:06

16QAM, 5MHz, High Channel

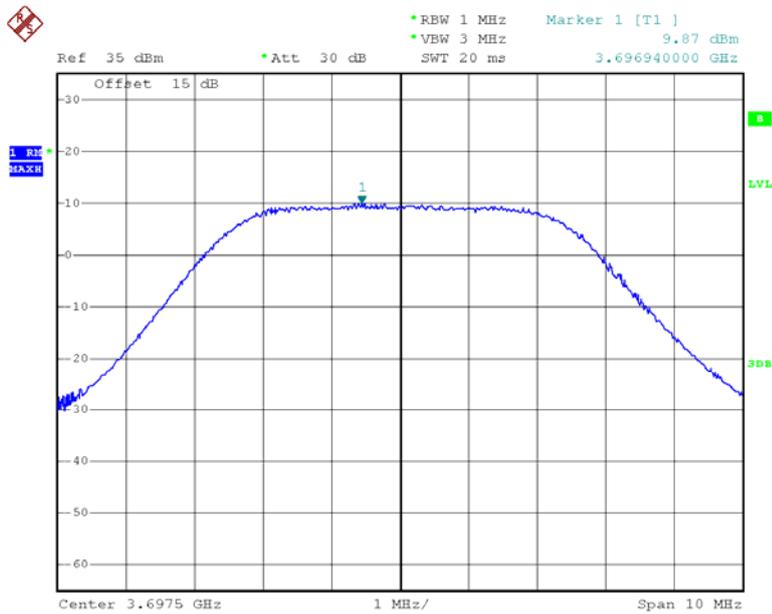


Date: 24.APR.2015 16:58:03

QPSK, 5MHz, Low Channel

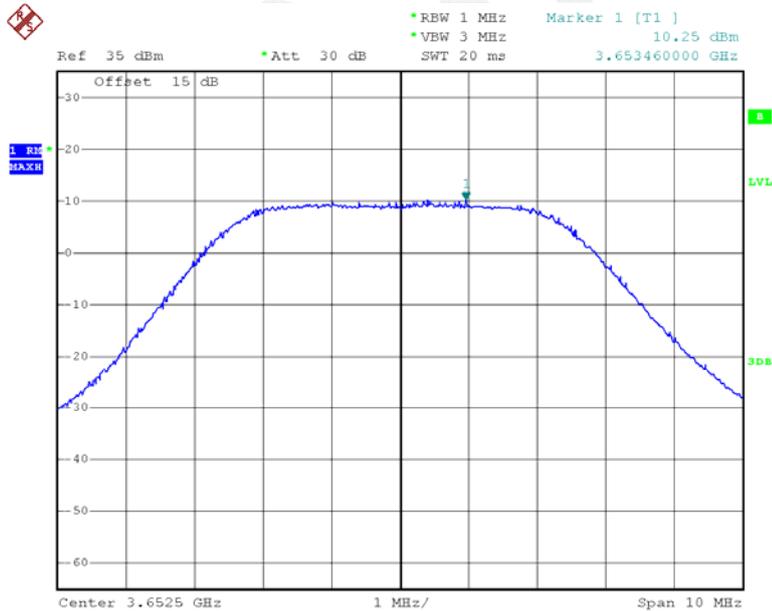


Date: 24.APR.2015 16:55:59

QPSK, 5MHz, Middle Channel

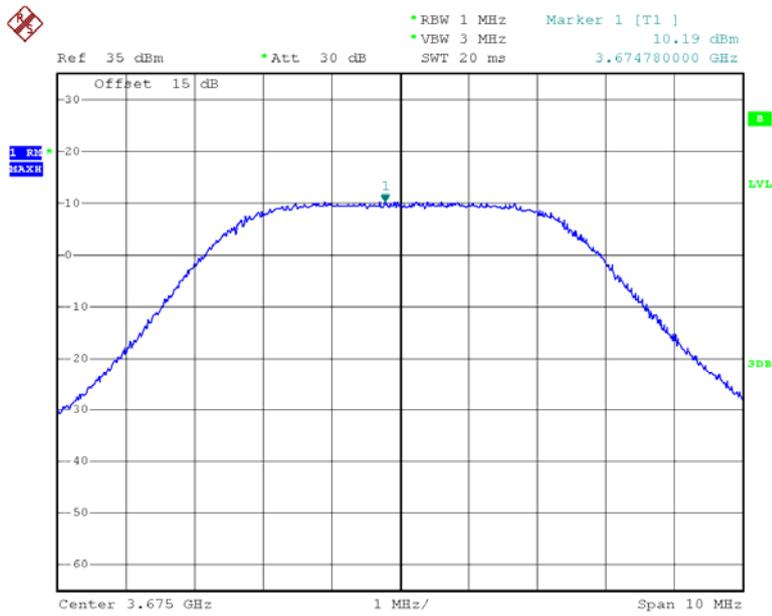


Date: 24.APR.2015 16:07:22

QPSK, 5MHz, High Channel

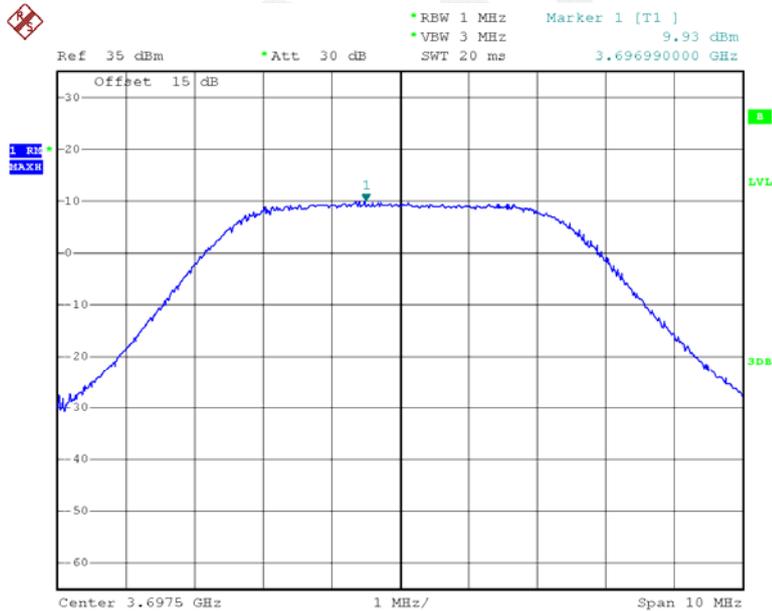


Date: 24.APR.2015 16:58:23

16QAM, 10MHz, Low Channel

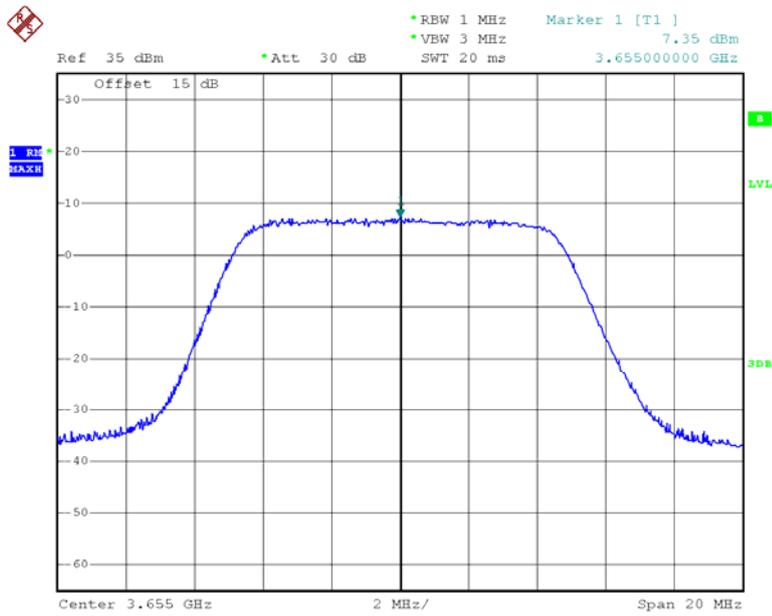


Date: 24.APR.2015 17:24:50

16QAM, 10MHz, Middle Channel

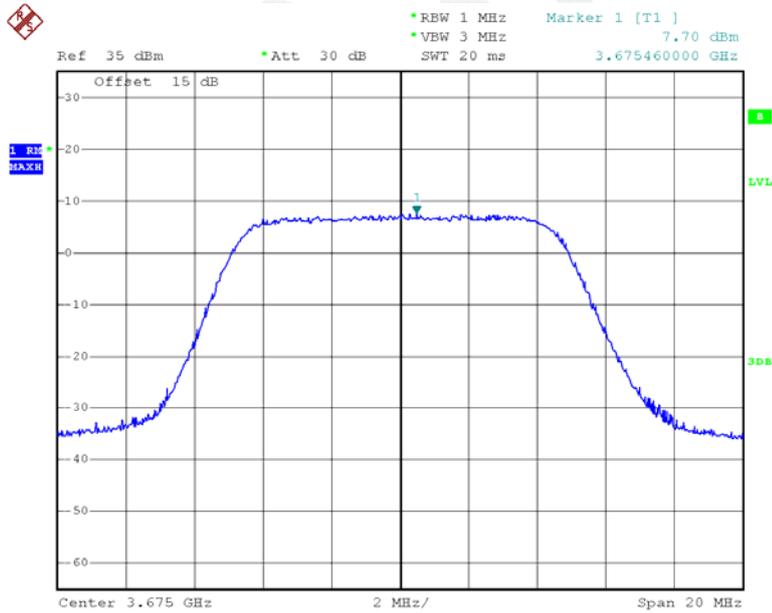


Date: 24.APR.2015 16:11:57

16QAM, 10MHz, High Channel

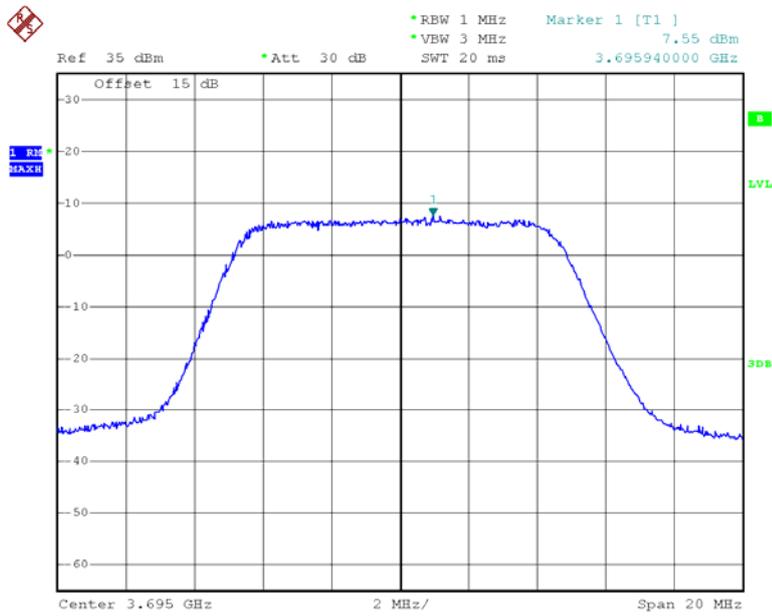


Date: 24.APR.2015 17:16:51

QPSK, 10MHz, Low Channel

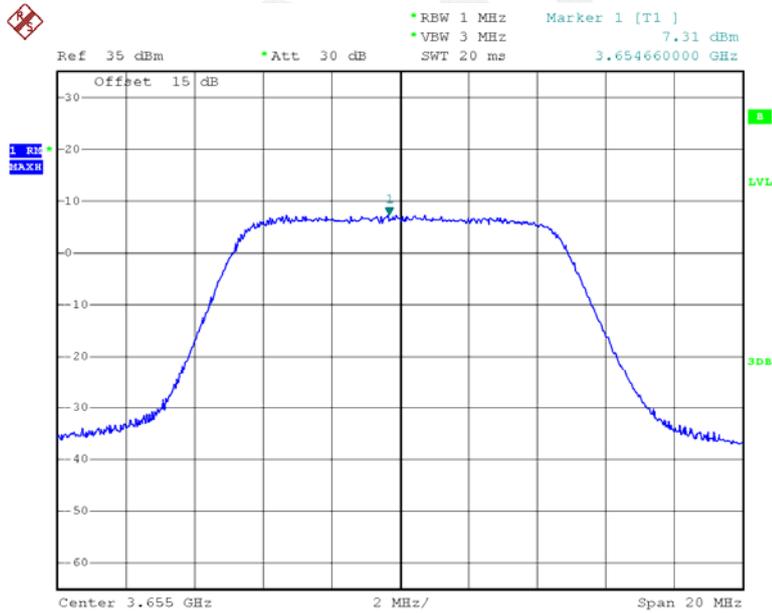


Date: 24.APR.2015 17:24:26

QPSK, 10MHz, Middle Channel

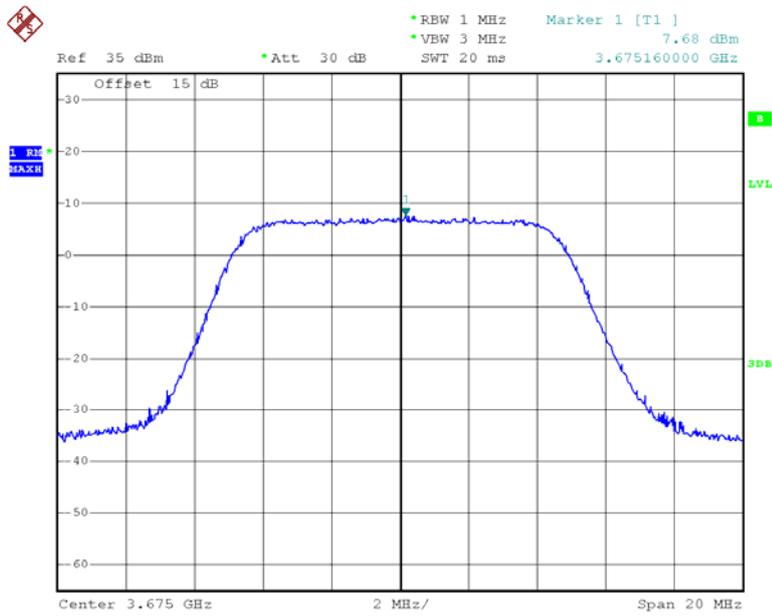


Date: 24.APR.2015 16:12:59

QPSK, 10MHz, High Channel

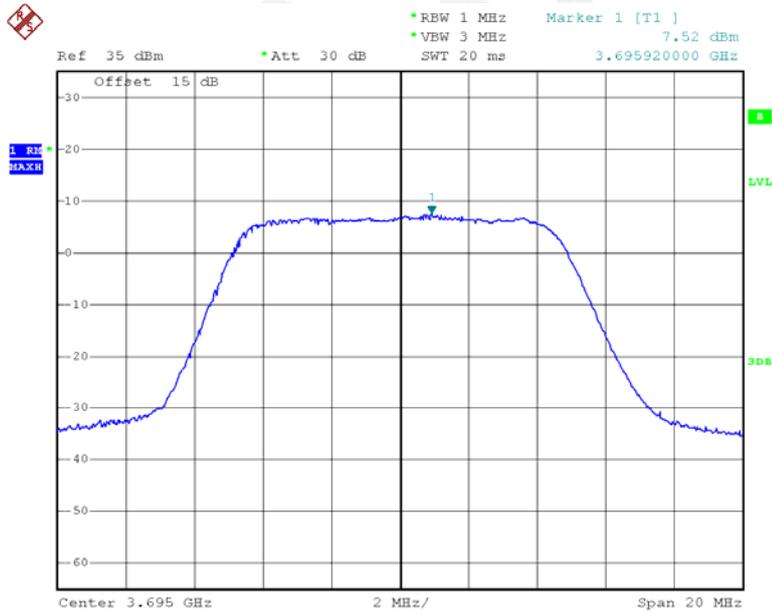


Date: 24.APR.2015 17:15:40

16QAM, 15MHz, Low Channel

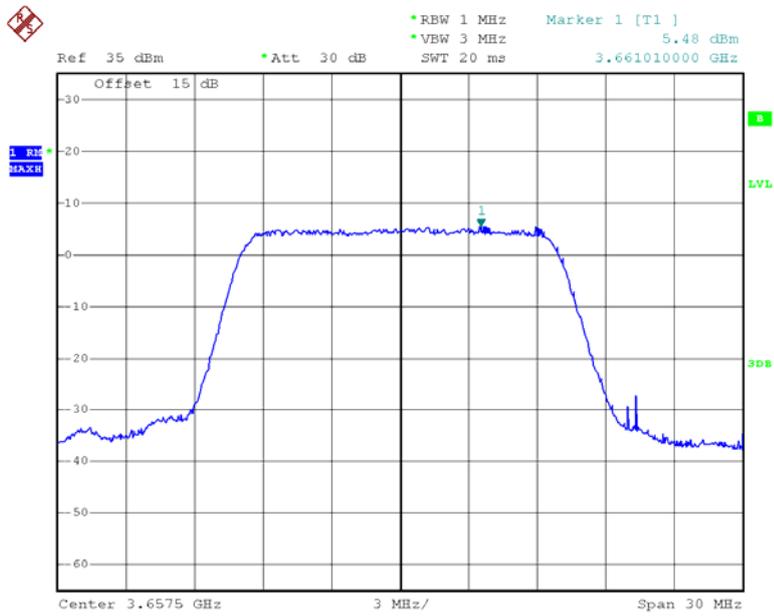


Date: 24.APR.2015 16:31:51

16QAM, 15MHz, Middle Channel

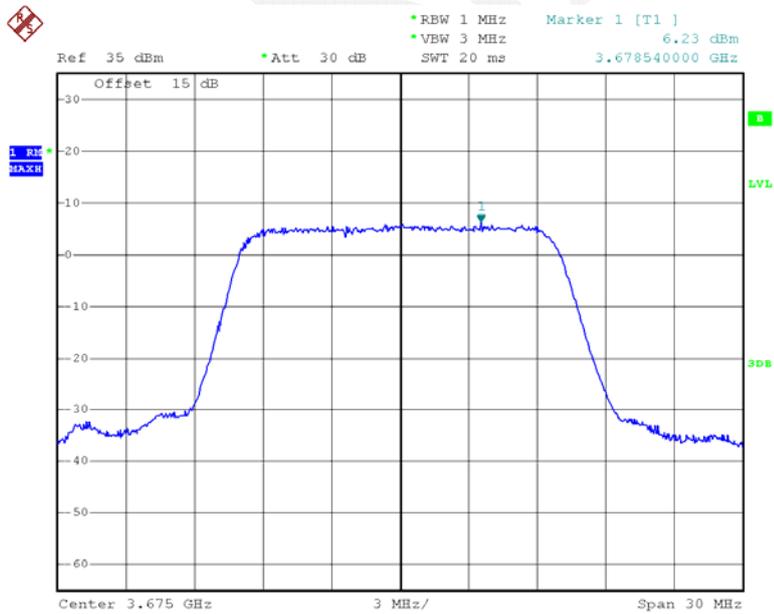


Date: 24.APR.2015 16:16:02

16QAM, 15MHz, High Channel

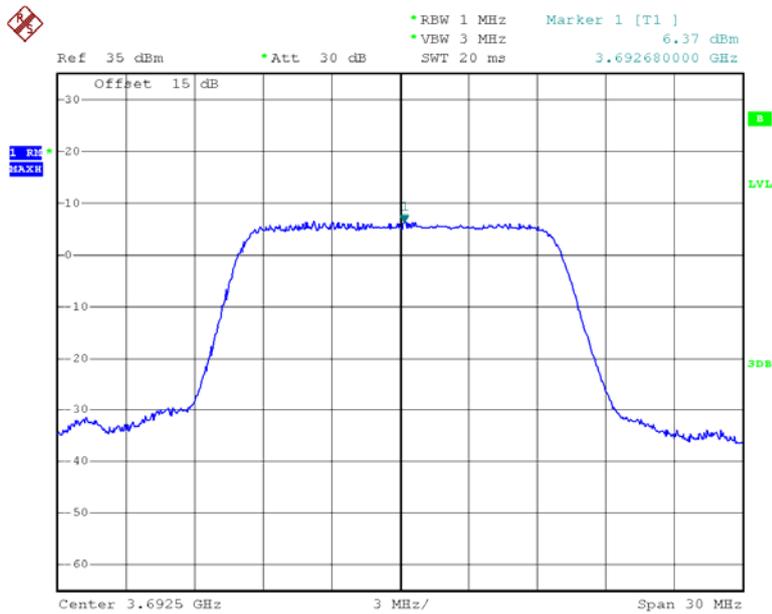


Date: 24.APR.2015 16:29:53

QPSK, 15MHz, Low Channel

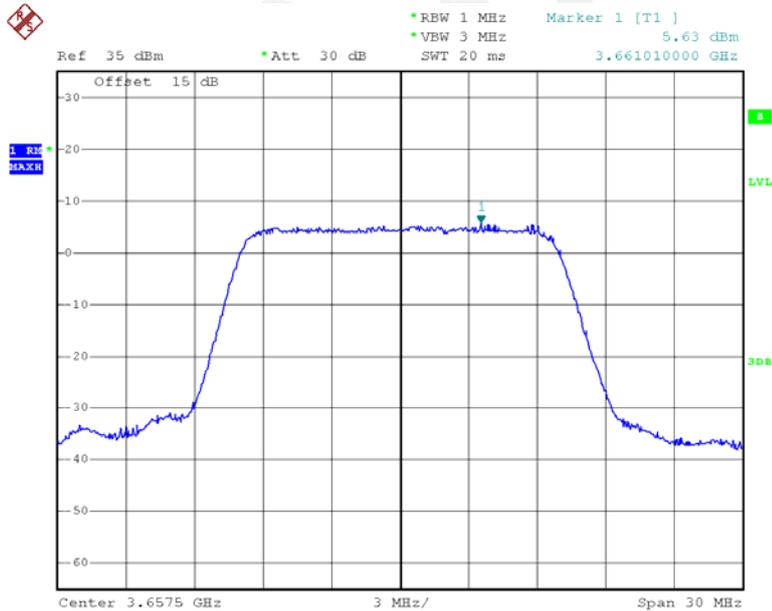


Date: 24.APR.2015 16:32:28

QPSK, 15MHz, Middle Channel

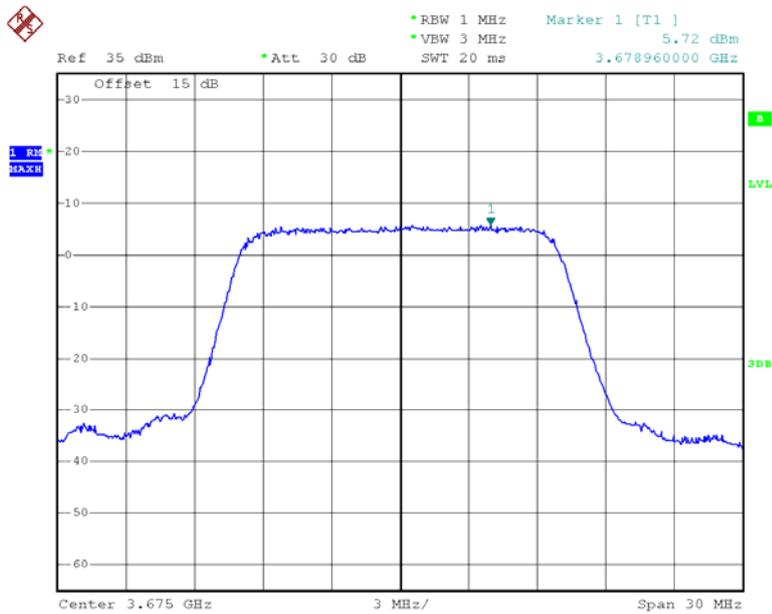


Date: 24.APR.2015 16:13:51

QPSK, 15MHz, High Channel

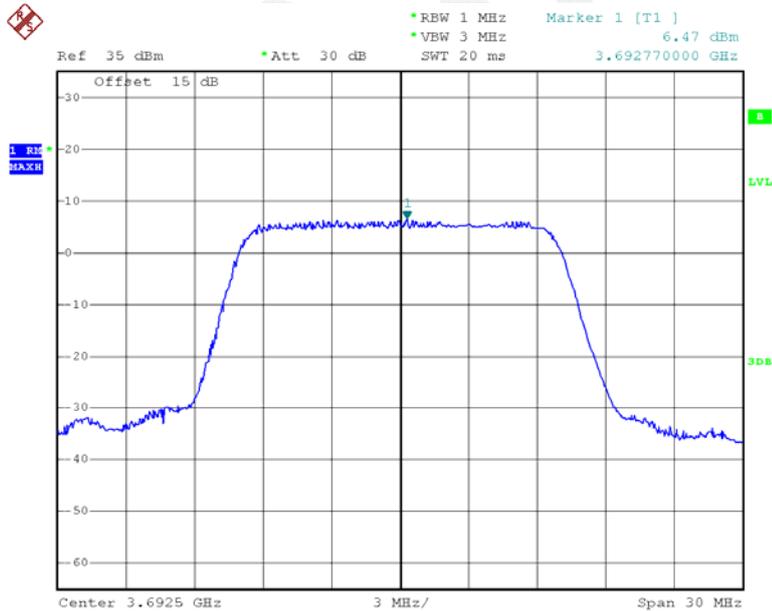


Date: 24.APR.2015 16:30:13

16QAM, 20MHz, Low Channel

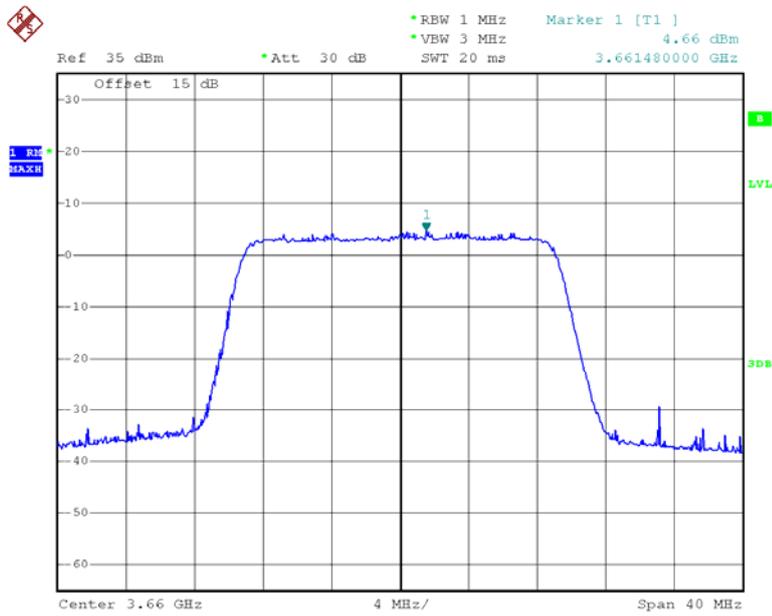


Date: 24.APR.2015 16:25:35

16QAM, 20MHz, Middle Channel

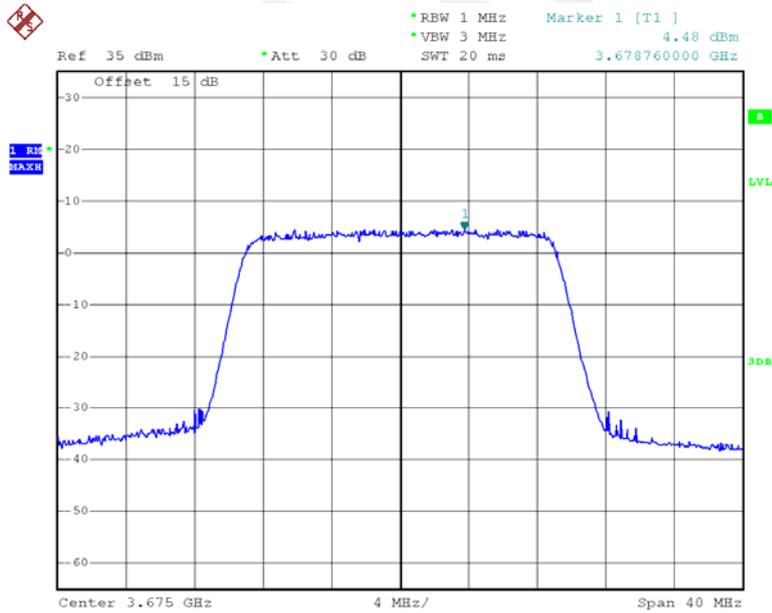


Date: 24.APR.2015 16:18:28

16QAM, 20MHz, High Channel

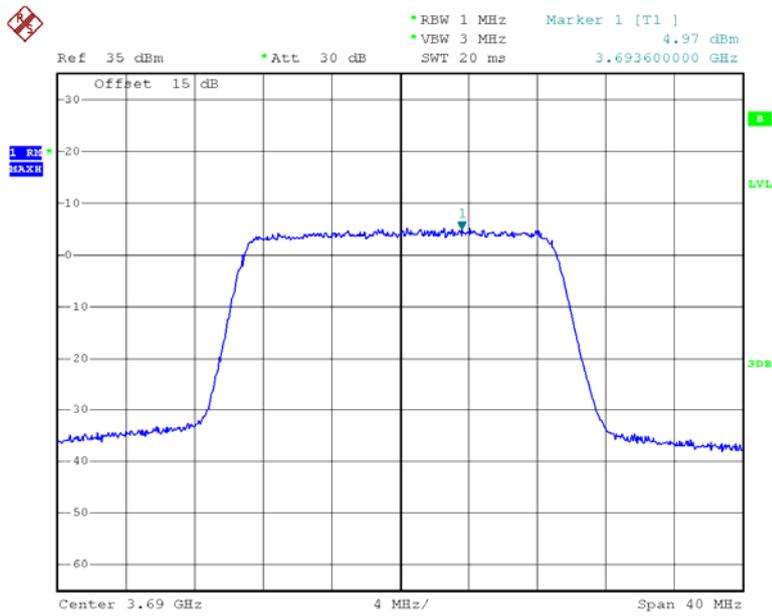


Date: 24.APR.2015 16:24:06

QPSK, 20MHz, Low Channel

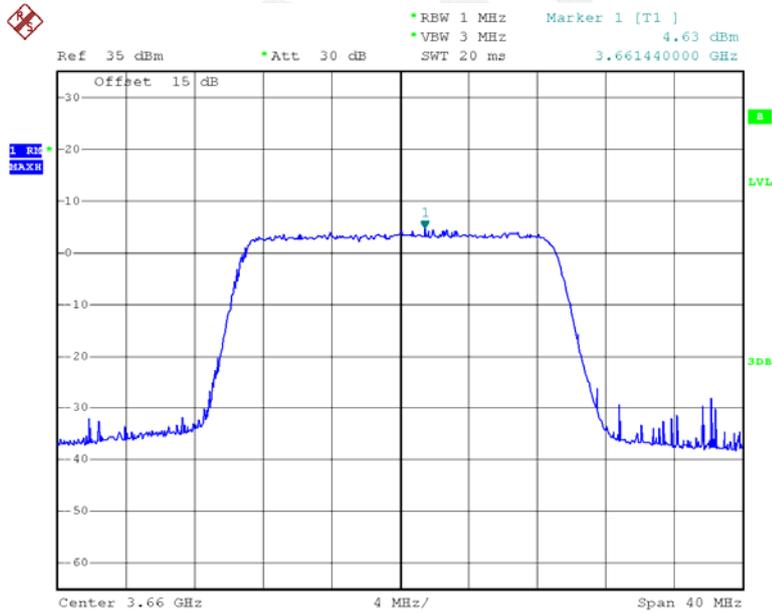


Date: 24.APR.2015 16:25:57

QPSK, 20MHz, Middle Channel

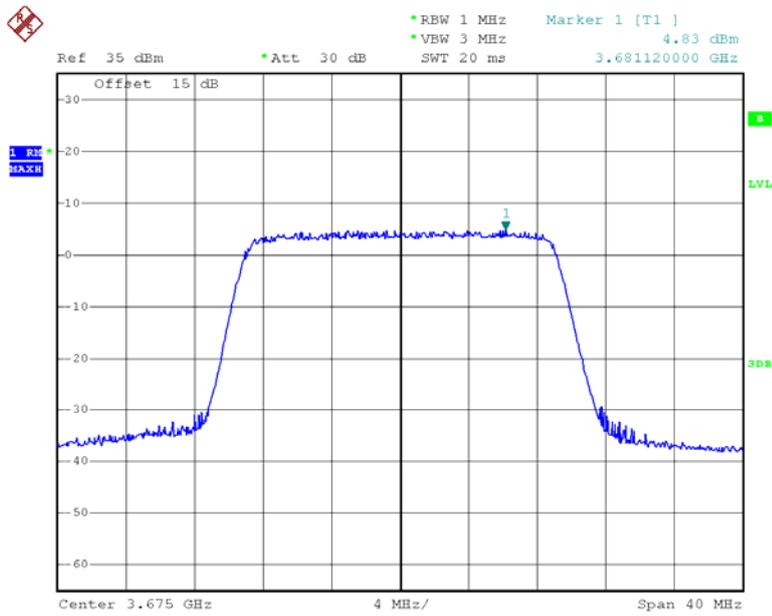

Date: 24.APR.2015 16:21:08

QPSK, 20MHz, High Channel

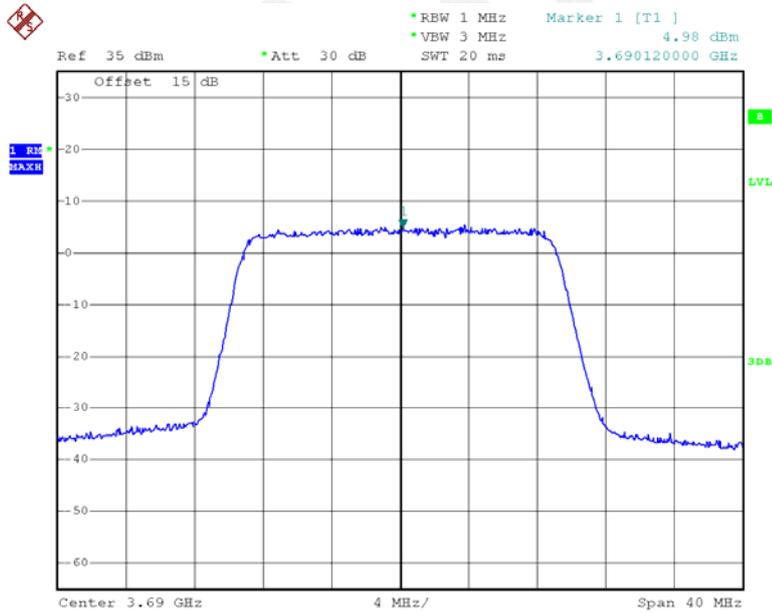

Date: 24.APR.2015 16:23:42


FCC §2.1049 & §90.209 – OCCUPIED BANDWIDTH

Applicable Standard

FCC §2.1049 and §90.209

Test Procedure

The EUT was connected to a CMW500 & spectrum analyzer through a splitter, the EUT power was adjusted to produce maximum output power as specified in the owner’s manual, measurements were performed at middle channel for each of the EUT’s bandwidths and modulations.

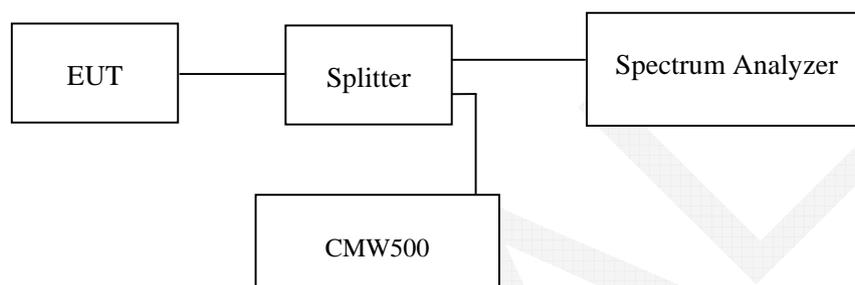

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R & S	Wideband Radio Communication Tester	CMW500	106891	2014-11-23	2015-11-23
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.4 °C
Relative Humidity:	53 %
ATM Pressure:	101.2 kPa


The testing was performed by Allen Qiao on 2015-04-24.

LTE Band: 3650-3700MHz

Bandwidth	Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
5MHz	QPSK	3675	4.50	4.98
	16QAM	3675	4.50	4.98
10MHz	QPSK	3675	8.96	9.80
	16QAM	3675	8.96	9.80
15MHz	QPSK	3675	13.50	15.24
	16QAM	3675	13.50	15.24
20MHz	QPSK	3675	18.00	19.72
	16QAM	3675	18.00	19.72


Please refer to the following plots:

16QAM, 5MHz

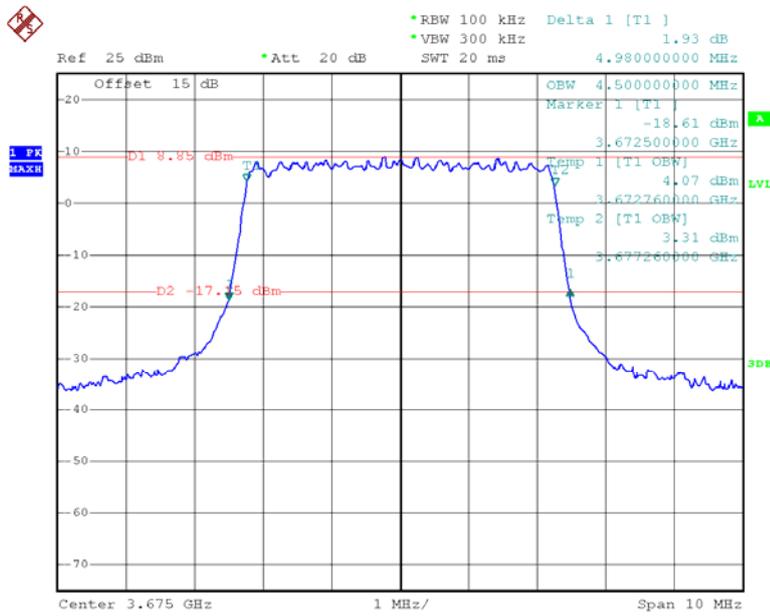


Date: 24.APR.2015 16:04:35

QPSK, 5MHz

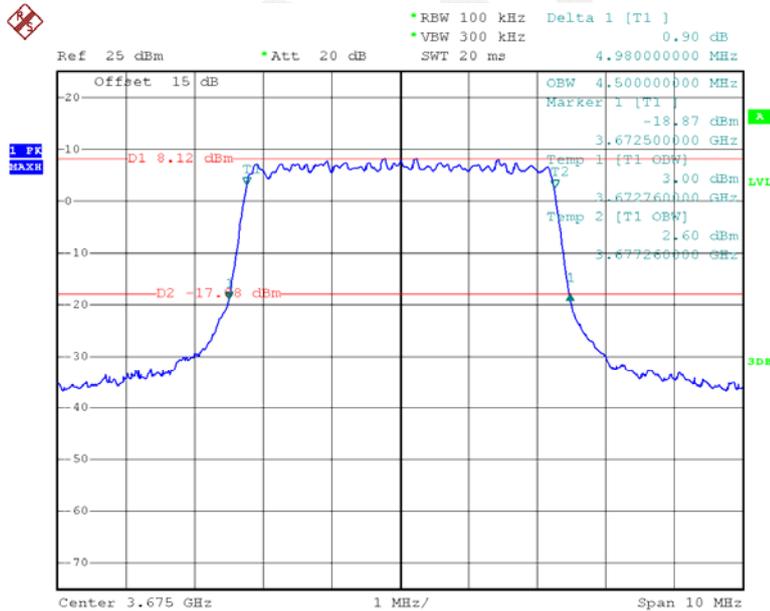


Date: 24.APR.2015 16:01:54

16QAM, 10MHz

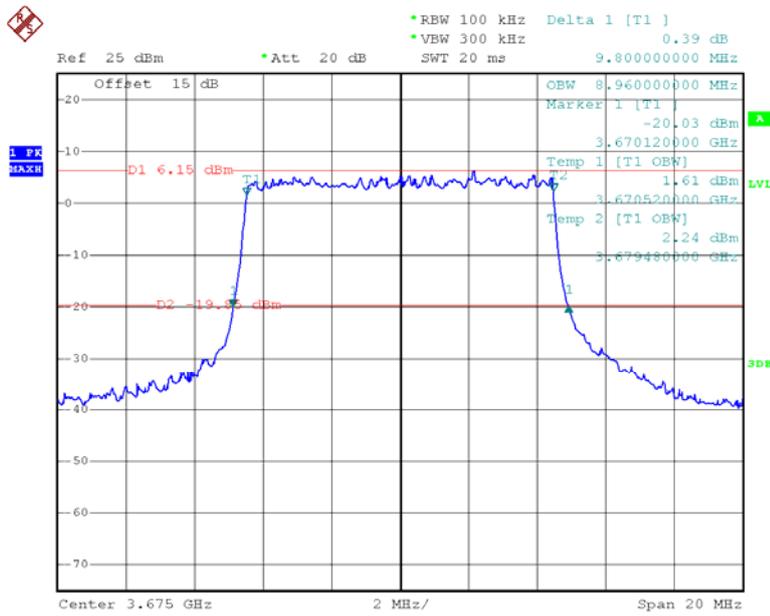


Date: 24.APR.2015 16:11:11

QPSK, 10MHz

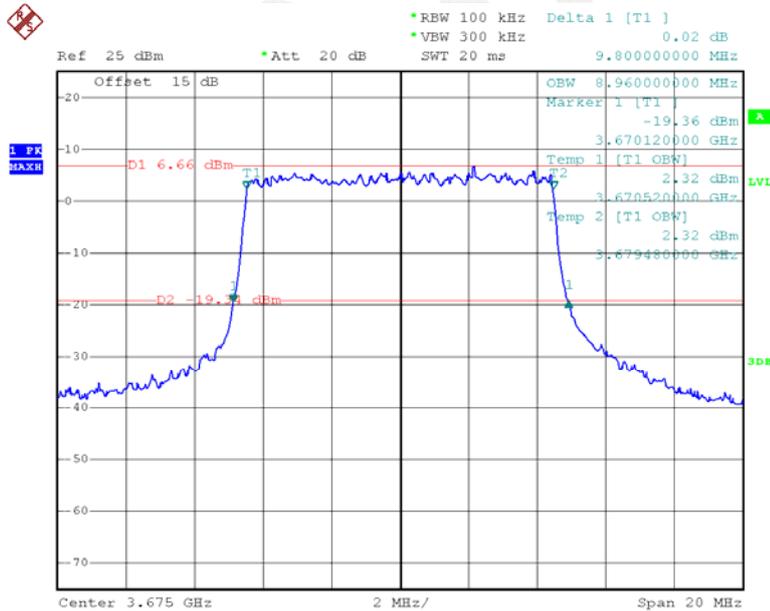


Date: 24.APR.2015 16:10:22

16QAM, 15MHz

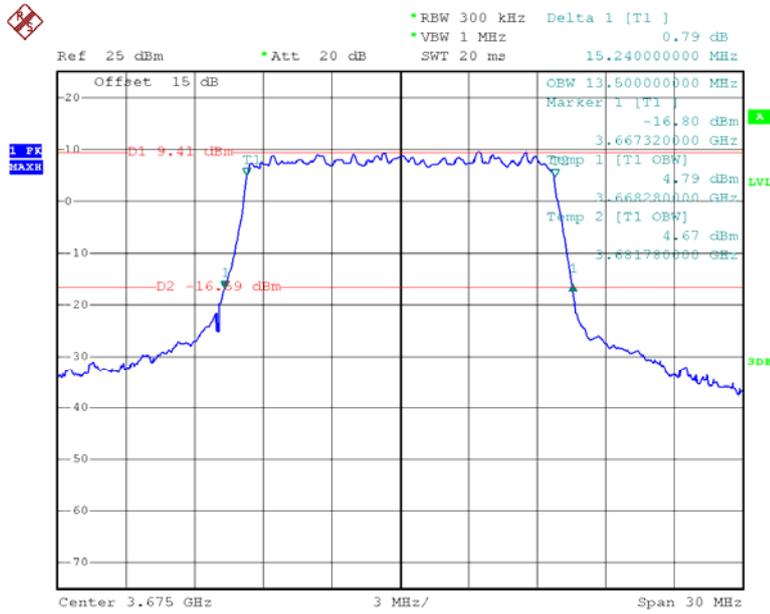


Date: 24.APR.2015 16:15:52

QPSK, 15MHz

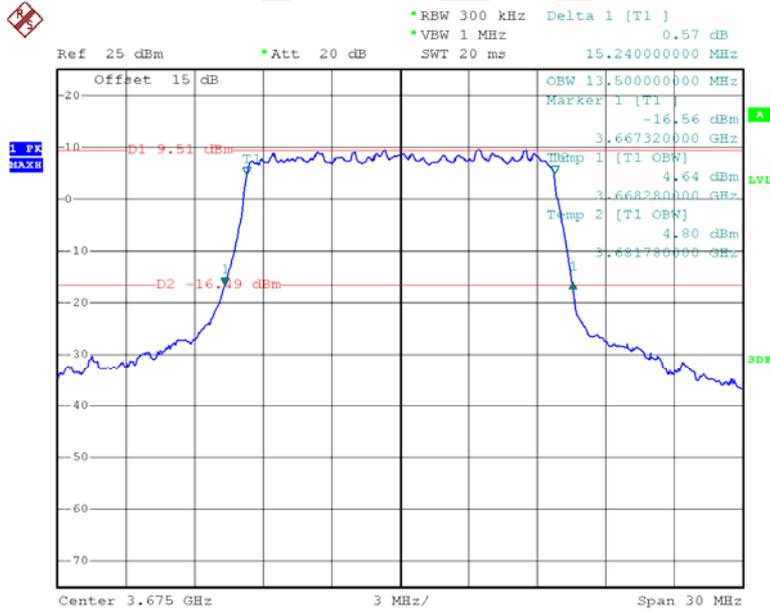


Date: 24.APR.2015 16:15:07

16QAM, 20MHz

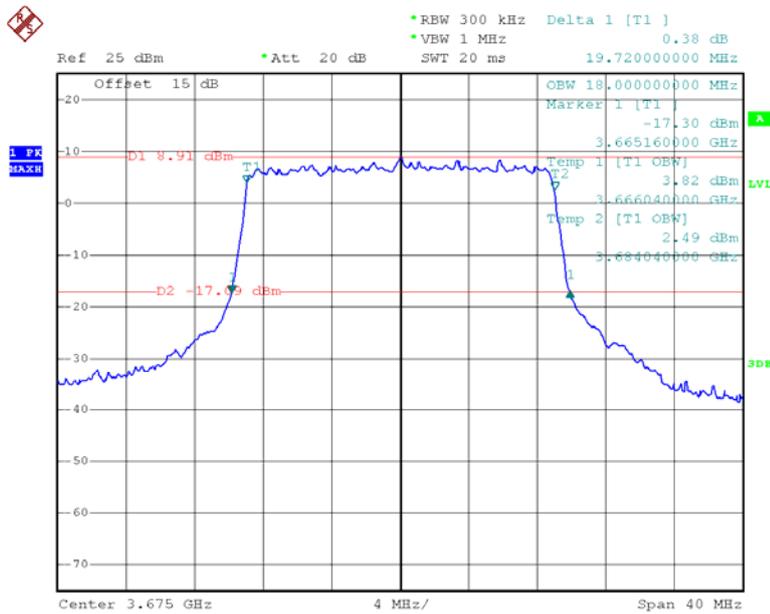

Date: 24.APR.2015 16:19:48

QPSK, 20MHz

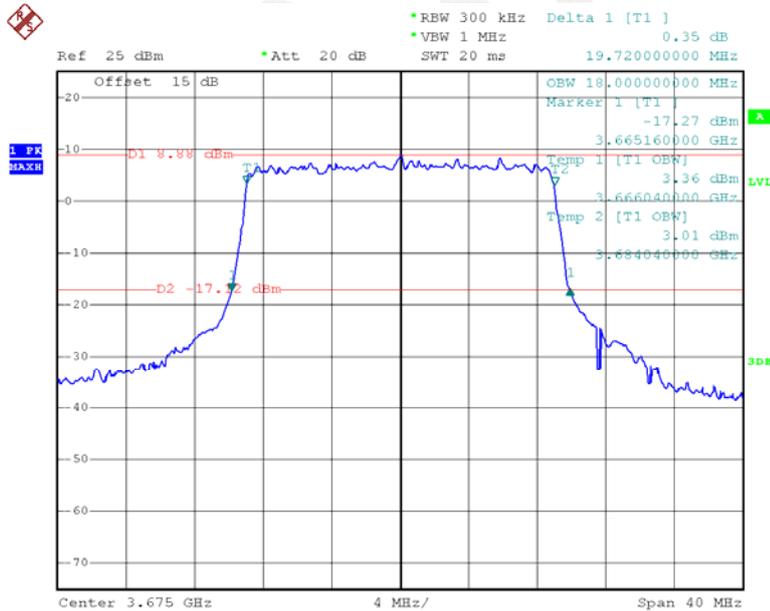

Date: 24.APR.2015 16:20:59

FCC §2.1051 & §90.1323(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard


FCC §2.1051 and §90.1323(a)

Limit

According to FCC §90.1323(a), The power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or less, but at least one percent of the emission bandwidth of the fundamental emission of the transmitter, provided the measured energy is integrated over a 1 MHz bandwidth.

Test Procedure

The EUT was connected to a CMW500 & spectrum analyzer through a splitter, the EUT power was adjusted to produce maximum output power as specified in the owner's manual, measurements were performed at low, middle high channels for each of the EUT's bandwidths and modulations.

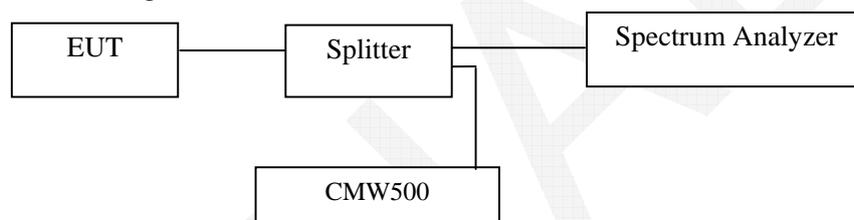

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R & S	Wideband Radio Communication Tester	CMW500	106891	2014-11-23	2015-11-23
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	24.4 °C
Relative Humidity:	53 %
ATM Pressure:	101.2 kPa


The testing was performed by Allen Qiao on 2015-04-24.

Test Mode: Transmitting

16QAM, 5MHz

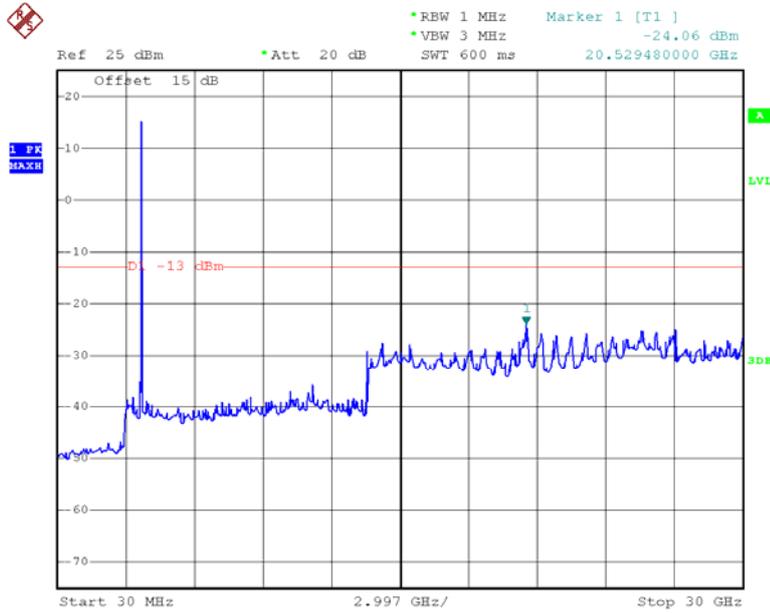


Date: 24.APR.2015 17:52:47

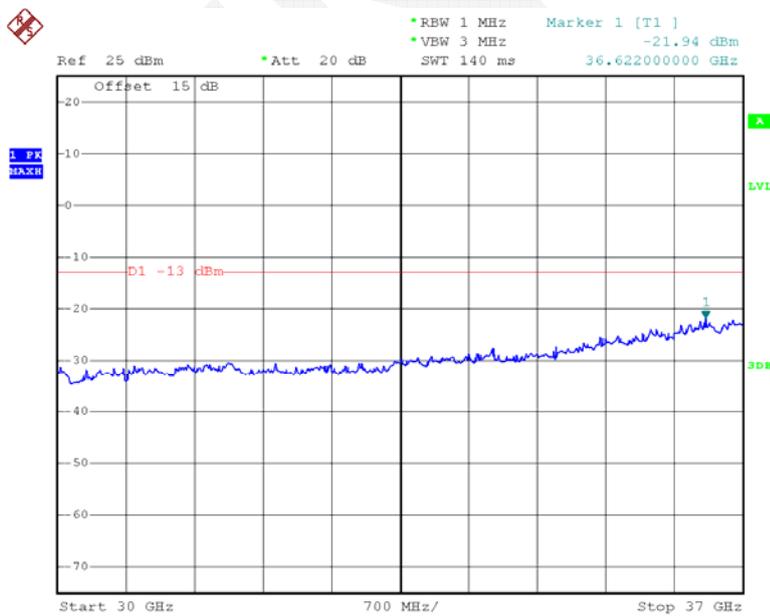


Date: 24.APR.2015 17:55:34

QPSK, 5MHz

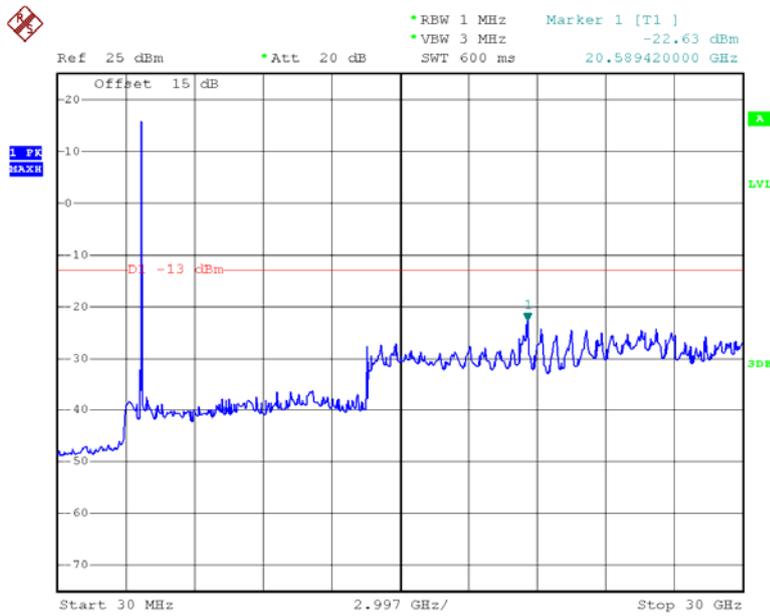


Date: 24.APR.2015 17:55:05

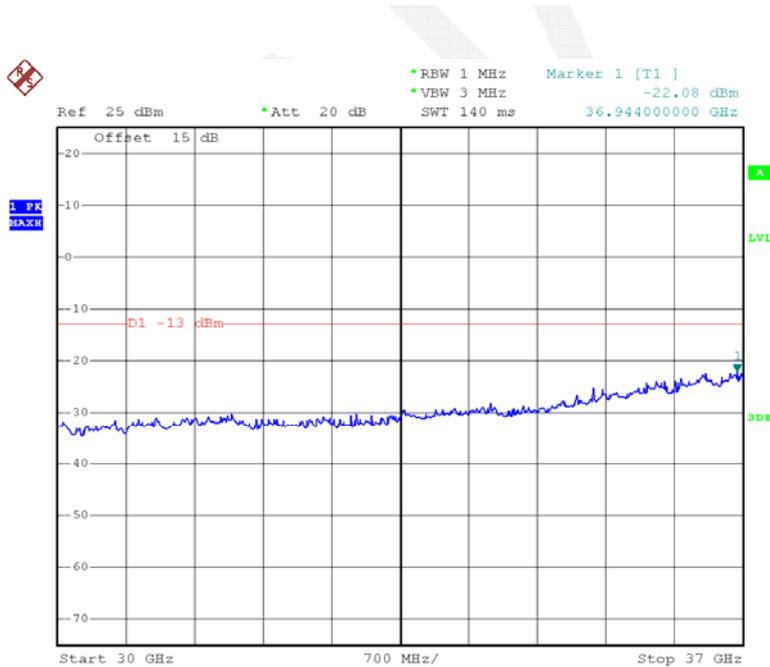


Date: 24.APR.2015 17:55:21

16QAM, 10MHz

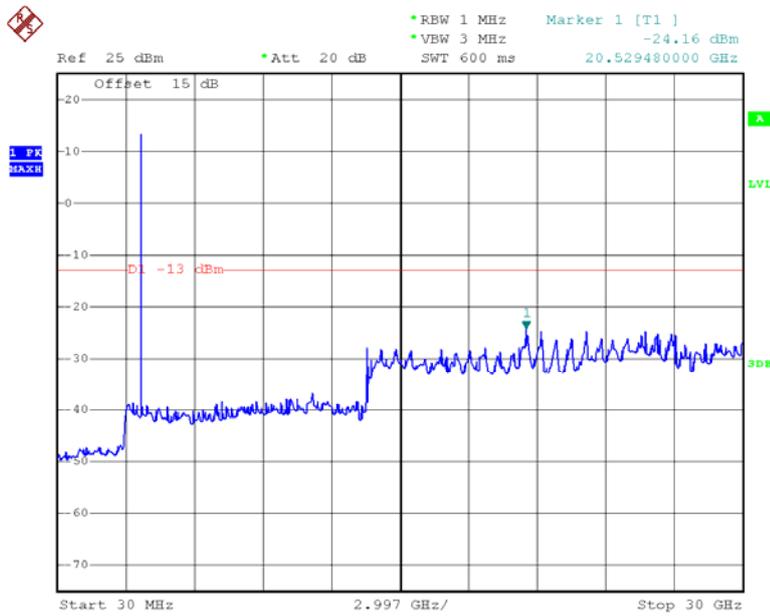


Date: 24.APR.2015 17:57:11

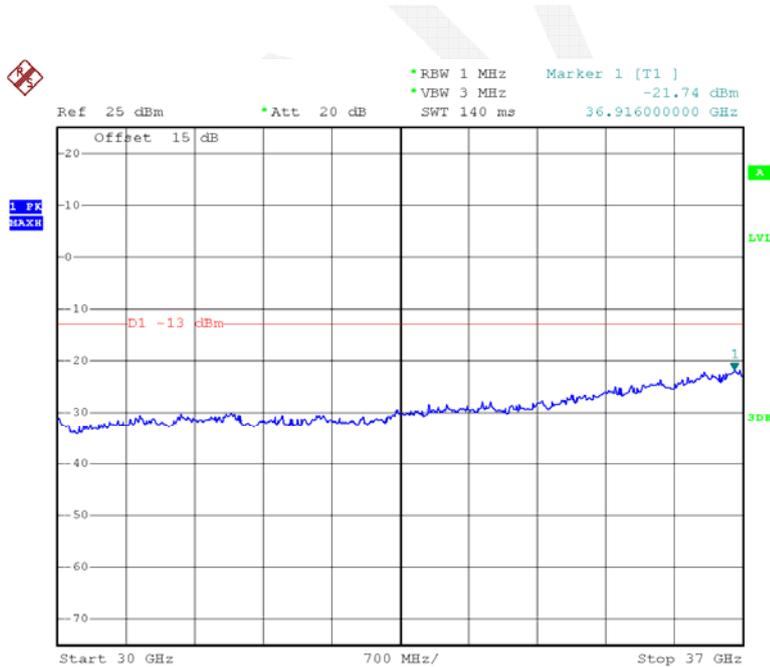


Date: 24.APR.2015 17:56:47

QPSK, 10MHz

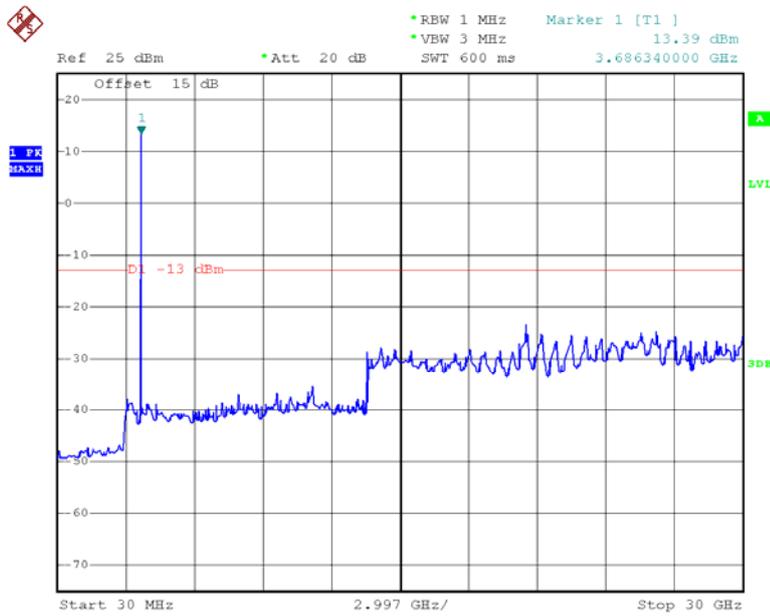


Date: 24.APR.2015 17:57:43

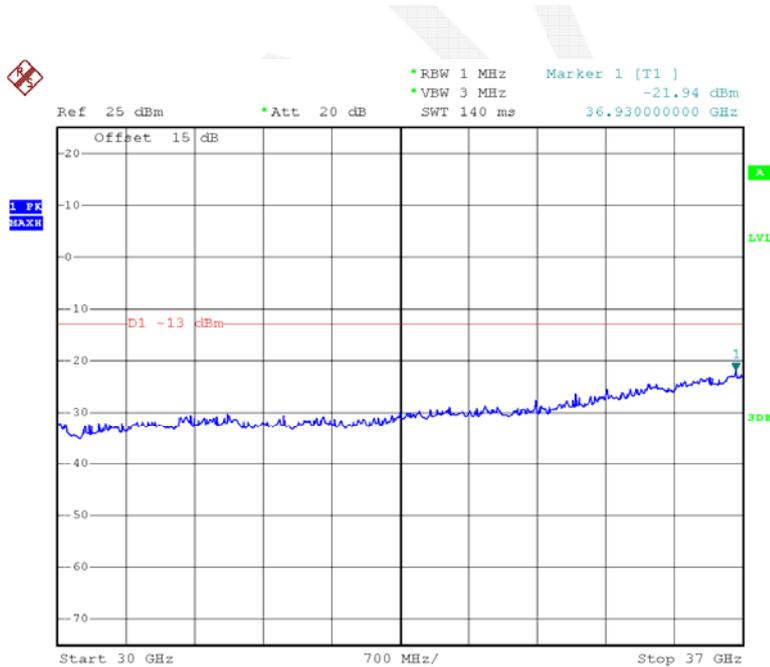


Date: 24.APR.2015 17:56:21

16QAM, 15MHz

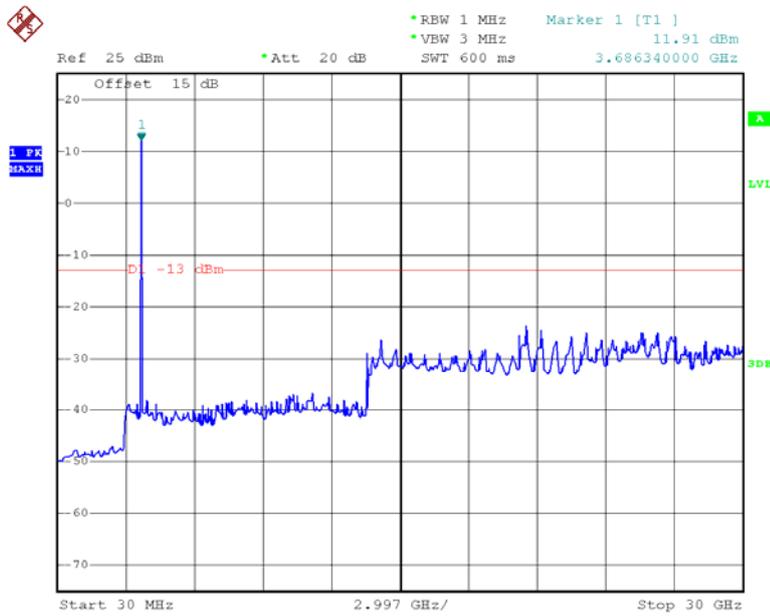


Date: 24.APR.2015 17:58:59

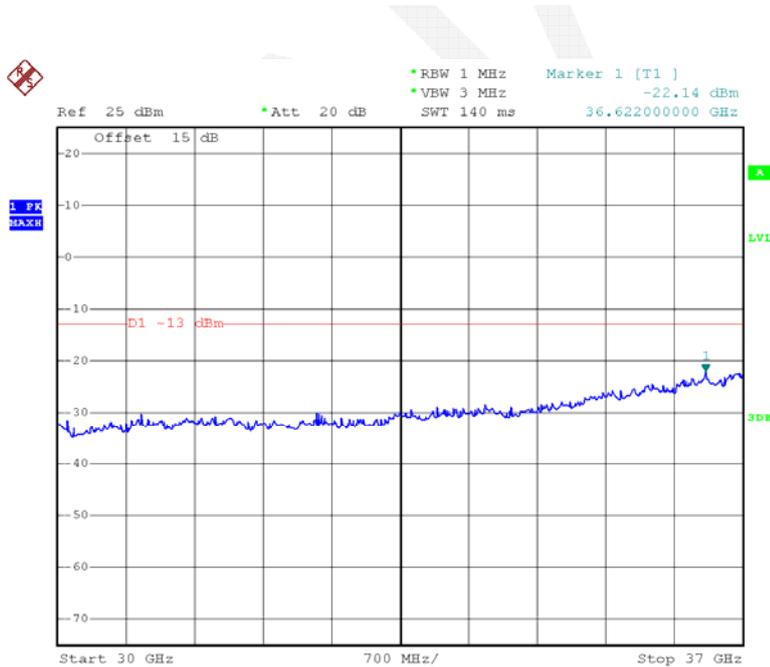


Date: 24.APR.2015 17:59:10

QPSK, 15MHz

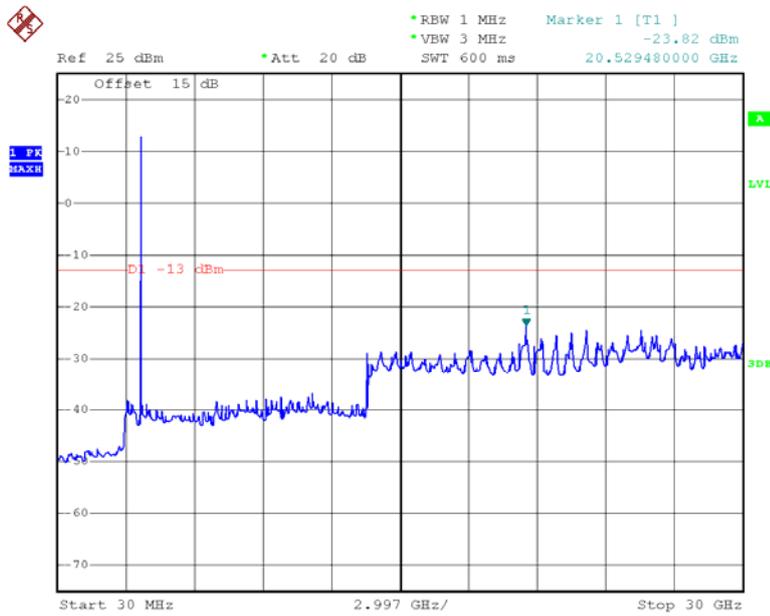


Date: 24.APR.2015 17:58:38

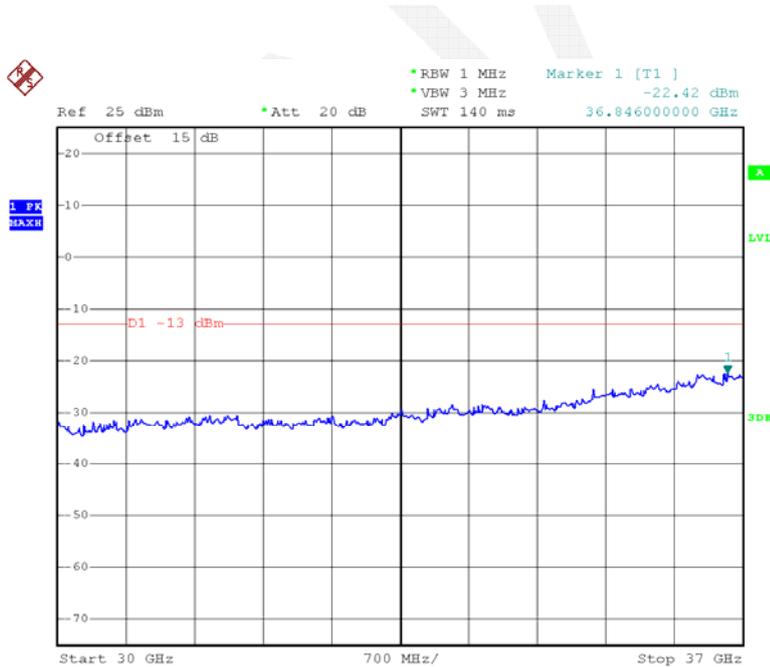


Date: 24.APR.2015 17:59:20

16QAM, 20MHz

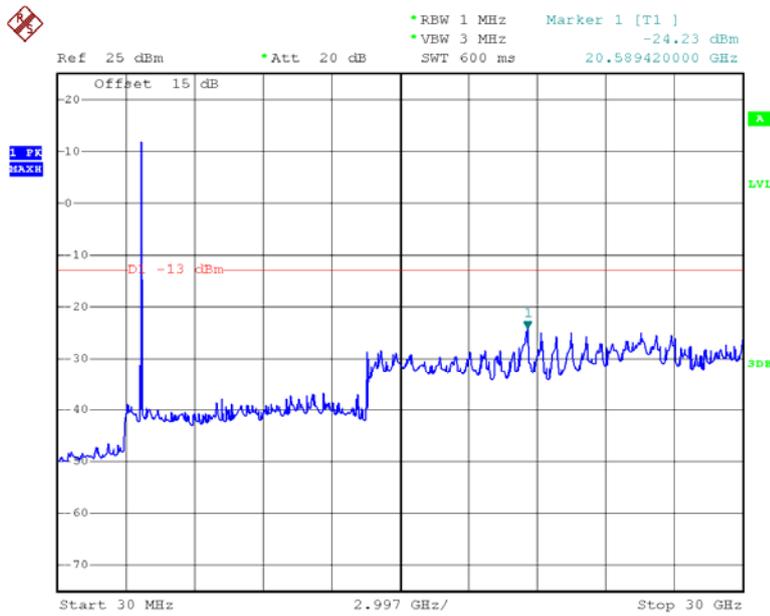


Date: 24.APR.2015 18:00:38

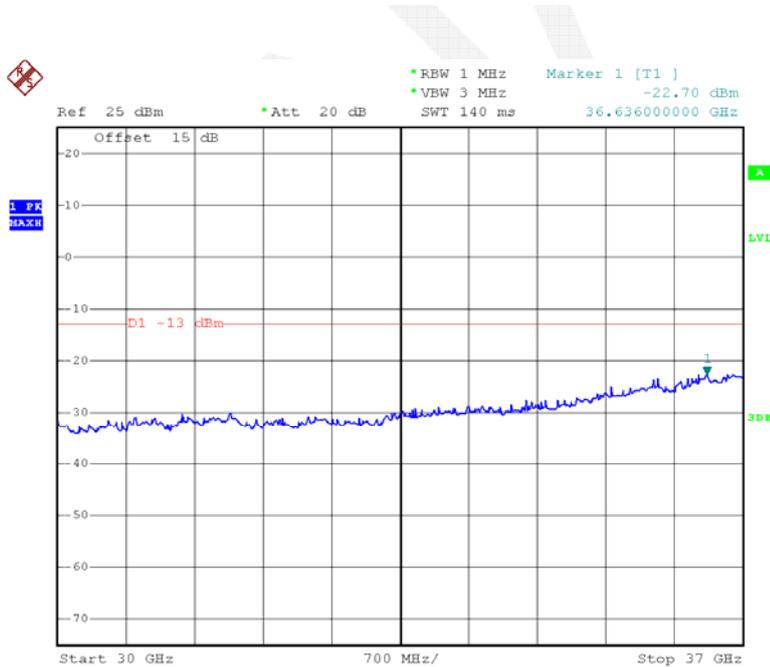


Date: 24.APR.2015 18:00:23

QPSK, 20MHz

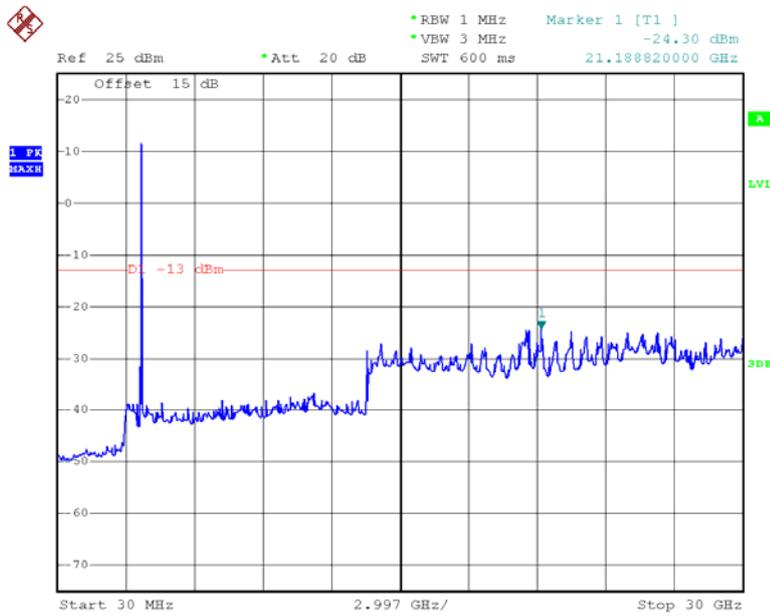


Date: 24.APR.2015 18:00:57

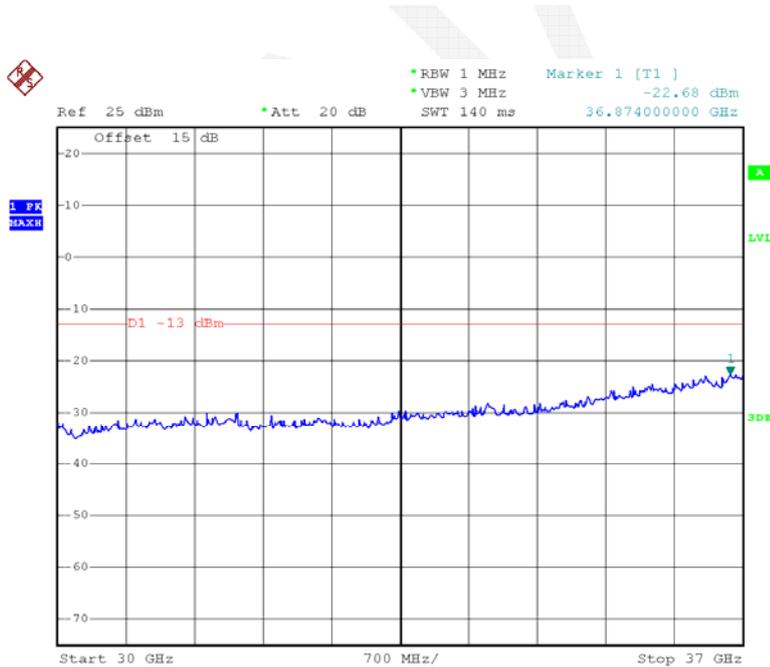

Date: 24.APR.2015 18:00:02


Band Ede:

16QAM, 5MHz, Left Side

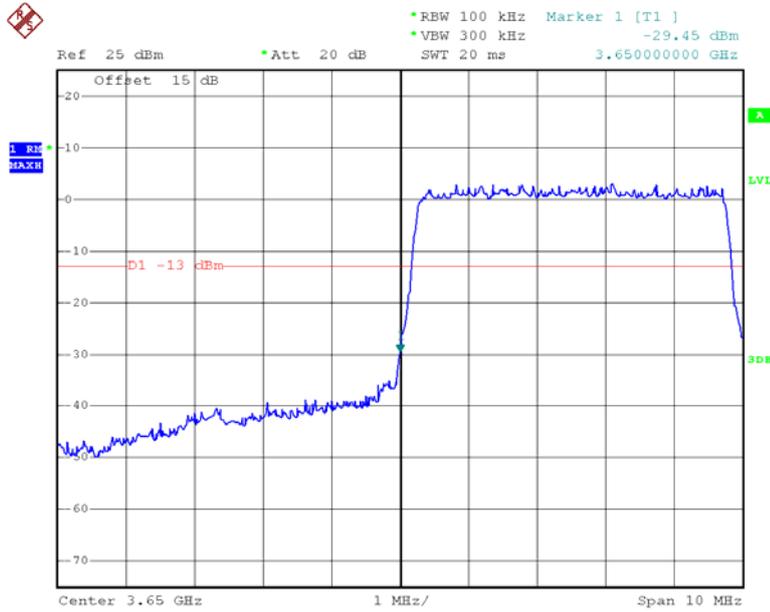


Date: 24.APR.2015 17:29:43

16QAM, 5MHz, Right Side

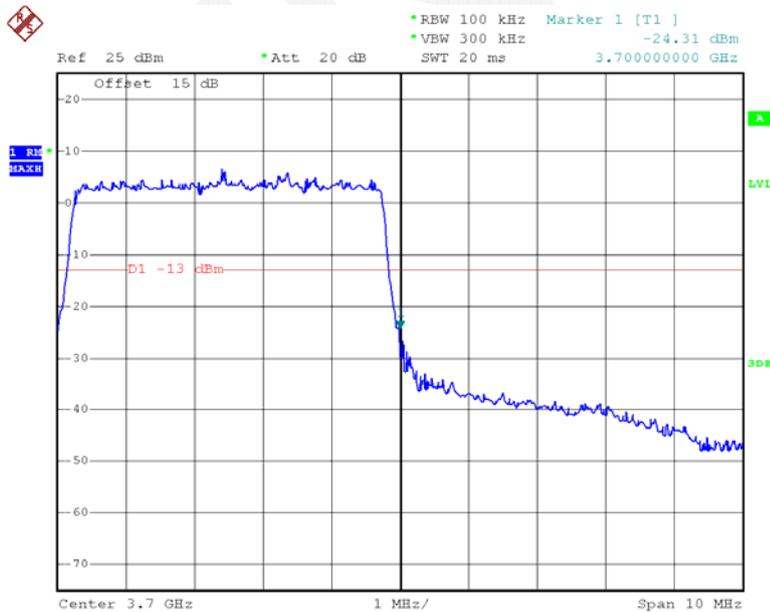


Date: 24.APR.2015 17:31:44

QPSK, 5MHz, Left Side

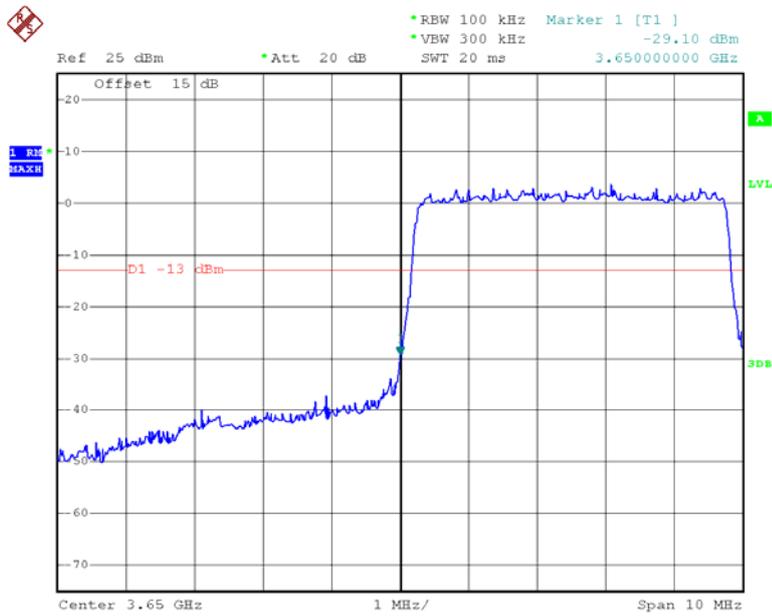


Date: 24.APR.2015 17:29:24

QPSK, 5MHz, Right Side

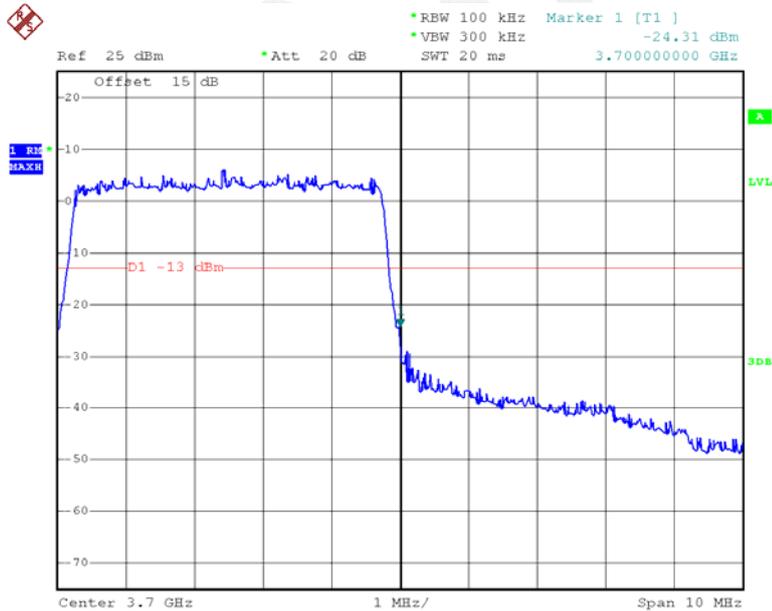


Date: 24.APR.2015 17:32:04

16QAM, 10MHz, Left Side

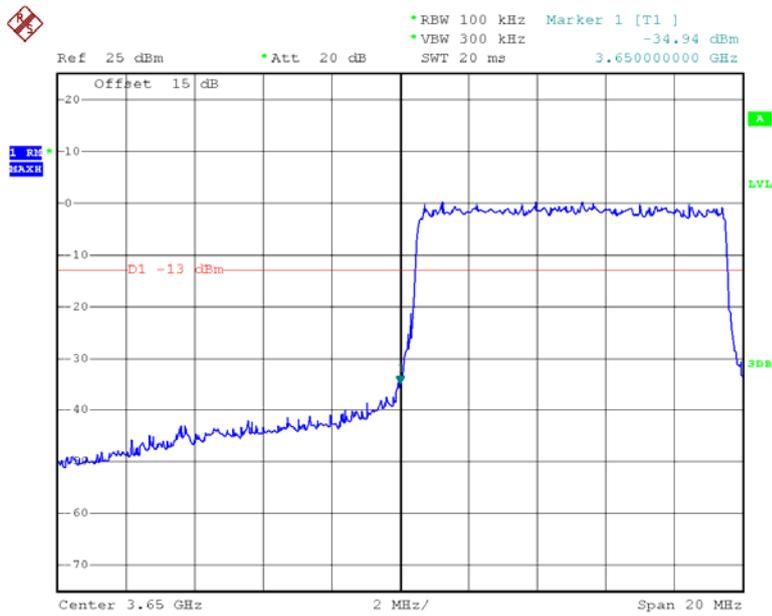


Date: 24.APR.2015 17:25:35

16QAM, 10MHz, Right Side

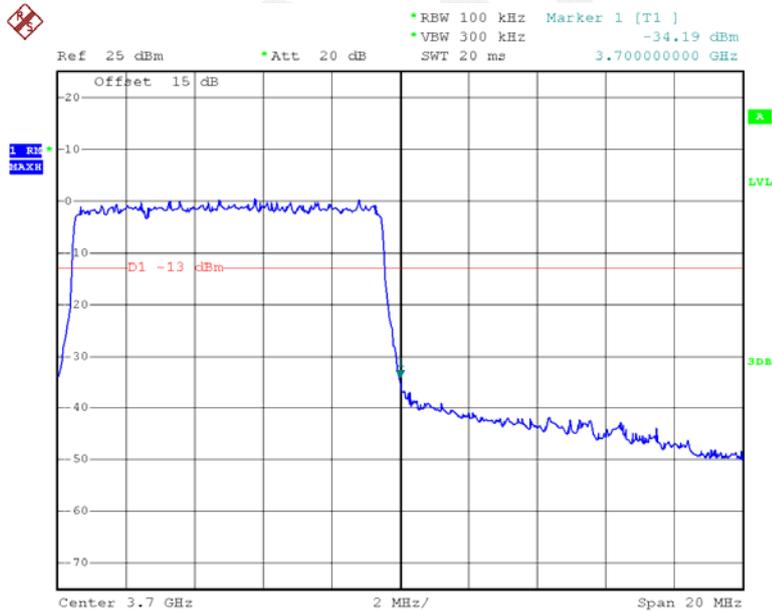


Date: 24.APR.2015 17:17:59

QPSK, 10MHz, Left Side

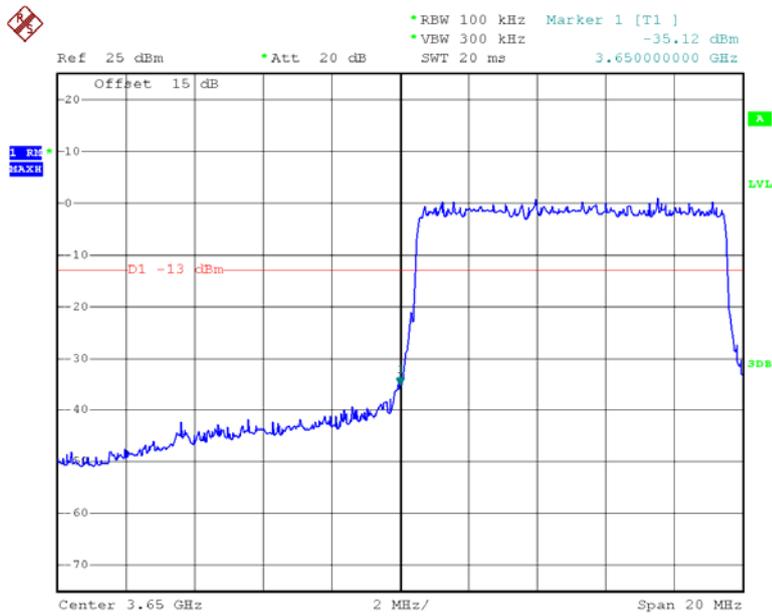


Date: 24.APR.2015 17:25:56

QPSK, 10MHz, Right Side

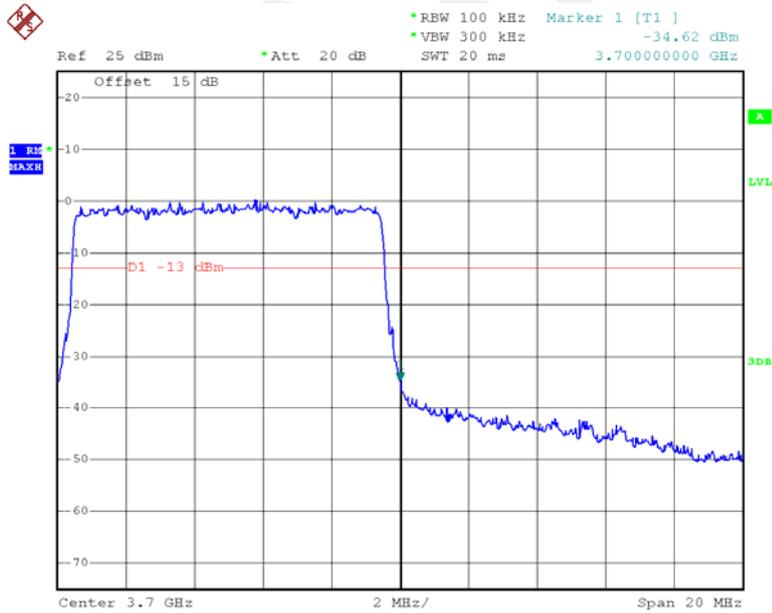


Date: 24.APR.2015 17:18:36

16QAM, 15MHz, Left Side

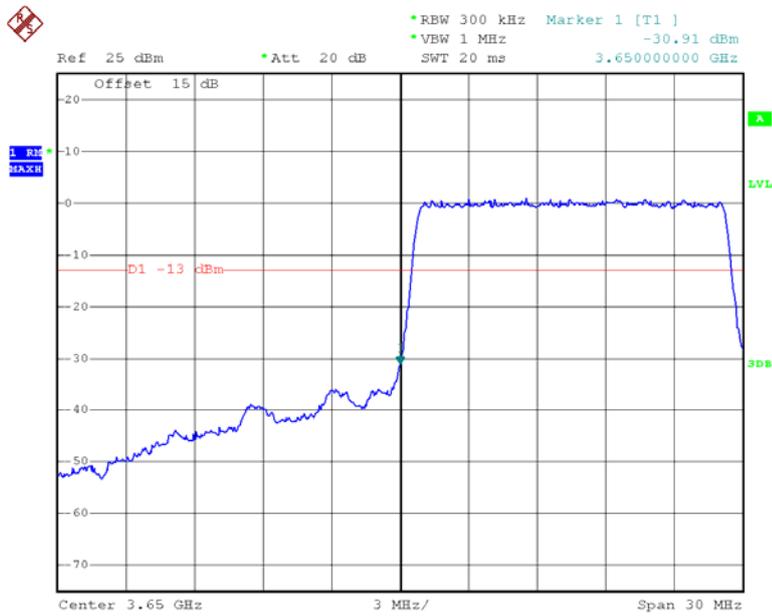


Date: 24.APR.2015 17:37:59

16QAM, 15MHz, Right Side

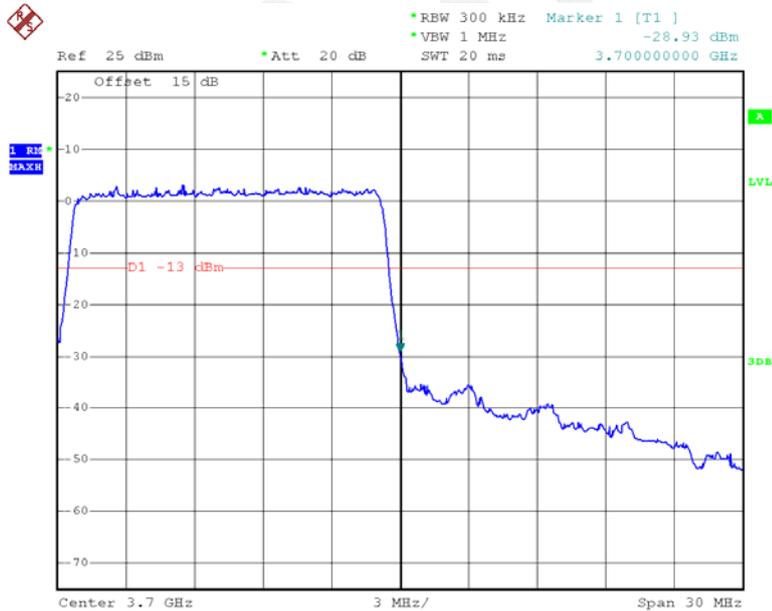


Date: 24.APR.2015 17:40:06

QPSK, 15MHz, Left Side

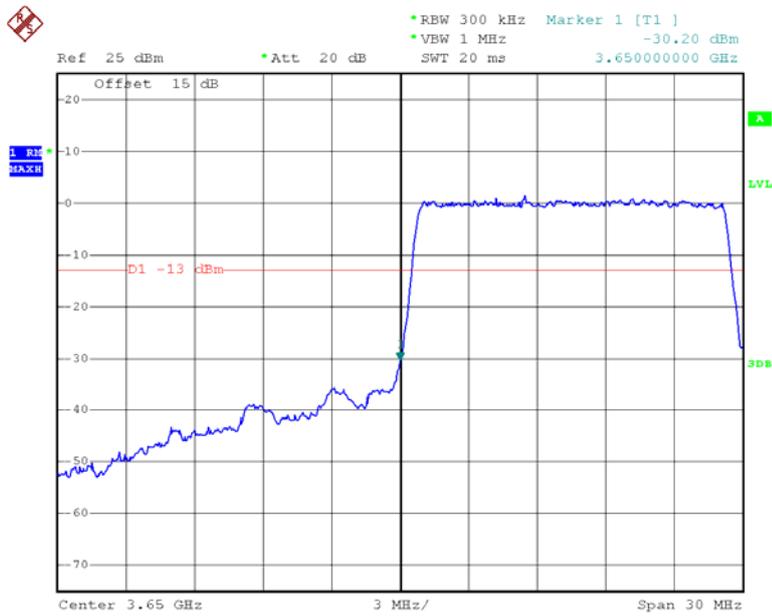


Date: 24.APR.2015 17:37:44

QPSK, 15MHz, Right Side

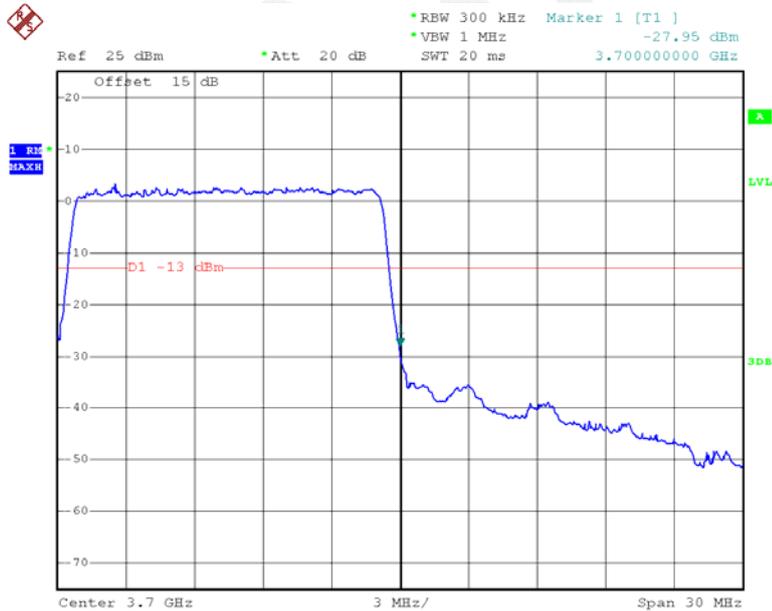


Date: 24.APR.2015 17:40:34

16QAM, 20MHz, Left Side

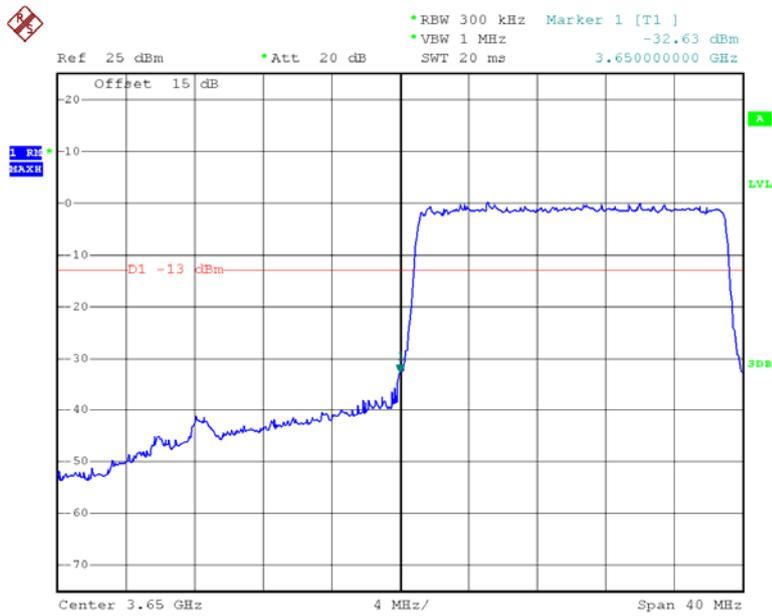


Date: 24.APR.2015 17:43:28

16QAM, 20MHz, Right Side

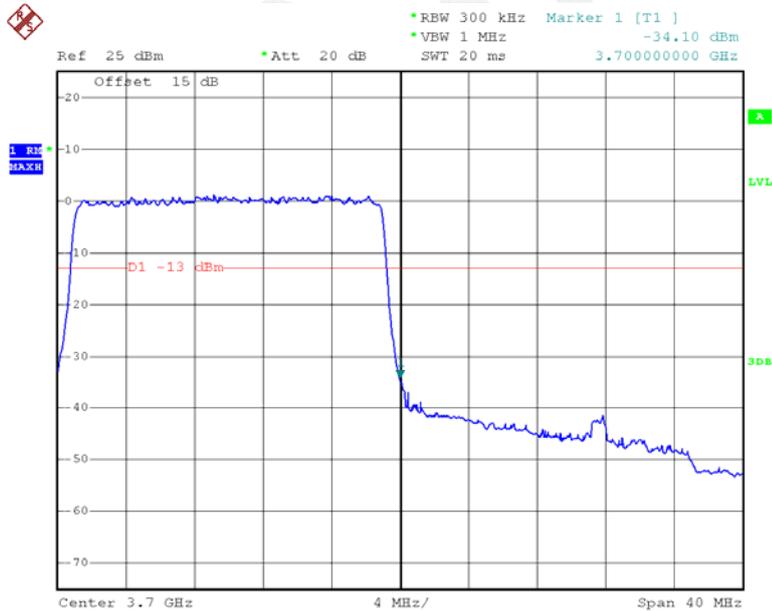


Date: 24.APR.2015 17:42:31

QPSK, 20MHz, Left Side

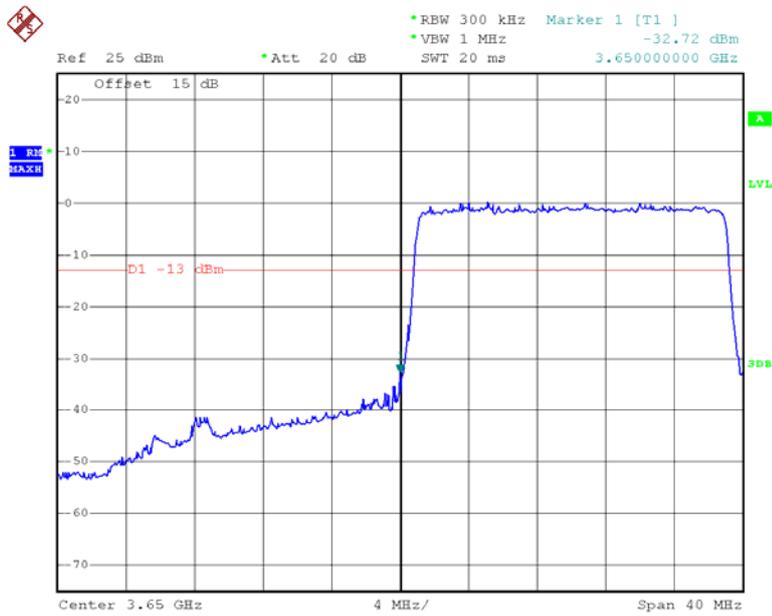

Date: 24.APR.2015 17:43:44

QPSK, 20MHz, Right Side

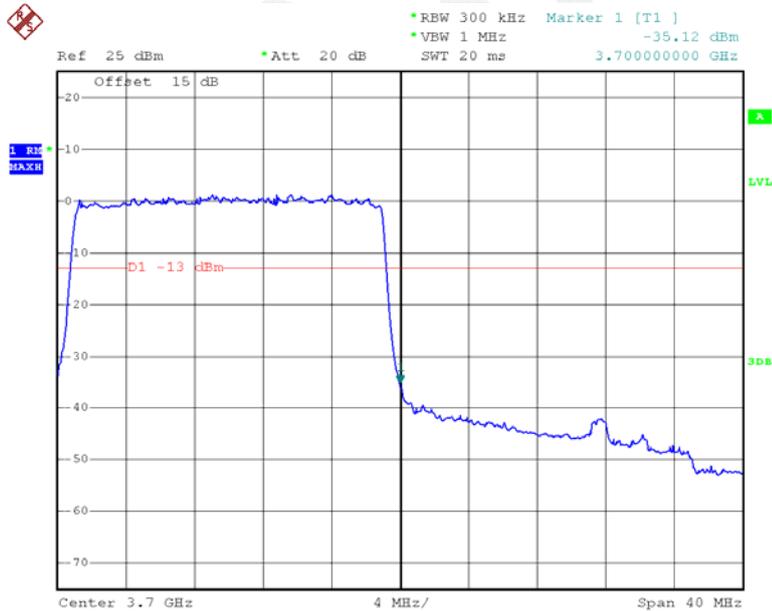

Date: 24.APR.2015 17:42:14

FCC §2.1053 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB = $43 + 10 \log_{10}$ (power out in Watts)

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	Signal Generator	8648A	3426A00831	2014-11-06	2015-11-06
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Agilent	Signal Generator	E8247C	MY43321350	2014-10-16	2015-10-16
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
TDK RF	Horn Antenna	HRN-0118	130 084	2012-09-06	2015-09-06
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Agilent	Spectrum Analyzer	E4440A	SG43360054	2014-12-04	2015-12-04
Agilent	Signal Generator	E8247C	MY43321350	2014-10-16	2015-10-16
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2014-06-16	2017-06-15
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-02 1302	2014-06-16	2017-06-15
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2014-09-06	2015-09-06
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.2 °C
Relative Humidity:	68 %
ATM Pressure:	101.2 kPa

The testing was performed by Allen Qiao on 2015-04-24.

Test Mode: Transmitting

5MHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency: 3675.000 MHz (QPSK)								
7350.000	H	52.49	-35.7	13.2	3	-25.5	-13.0	12.5
7350.000	V	56.57	-31.4	13.2	3	-21.2	-13.0	8.2
11025.000	H	33.25	-48.5	13.0	5.2	-40.7	-13.0	27.7
11025.000	V	34.58	-45.5	13.0	5.2	-37.7	-13.0	24.7
46.490	H	30.25	-56.8	-18.3	0.2	-75.3	-13.0	62.3
46.490	V	42.07	-45	-18.3	0.2	-63.5	-13.0	50.5
Frequency: 3675.000 MHz (16-QAM)								
7350.000	H	52.88	-35.3	13.2	3	-25.1	-13.0	12.1
7350.000	V	56.35	-31.6	13.2	3	-21.4	-13.0	8.4
11025.000	H	33.18	-48.6	13.0	5.2	-40.8	-13.0	27.8
11025.000	V	34.26	-45.8	13.0	5.2	-38.0	-13.0	25.0
46.490	H	30.35	-56.7	-18.3	0.2	-75.2	-13.0	62.2
46.490	V	41.97	-45.1	-18.3	0.2	-63.6	-13.0	50.6

10MHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency: 3675.000 MHz (QPSK)								
7350.000	H	50.36	-37.9	13.2	3	-27.7	-13.0	14.7
7350.000	V	54.36	-33.6	13.2	3	-23.4	-13.0	10.4
11025.000	H	33.10	-48.7	13.0	5.2	-40.9	-13.0	27.9
11025.000	V	34.53	-45.5	13.0	5.2	-37.7	-13.0	24.7
46.490	H	30.29	-56.7	-18.3	0.2	-75.2	-13.0	62.2
46.490	V	42.10	-44.9	-18.3	0.2	-63.4	-13.0	50.4
Frequency: 3675.000 MHz (16-QAM)								
7350.000	H	50.48	-37.7	13.2	3	-27.5	-13.0	14.5
7350.000	V	54.42	-33.5	13.2	3	-23.3	-13.0	10.3
11025.000	H	33.12	-48.6	13.0	5.2	-40.8	-13.0	27.8
11025.000	V	34.14	-45.9	13.0	5.2	-38.1	-13.0	25.1
46.490	H	30.27	-56.8	-18.3	0.2	-75.3	-13.0	62.3
46.490	V	42.08	-45	-18.3	0.2	-63.5	-13.0	50.5

15MHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency: 3675.000 MHz (QPSK)								
7350.000	H	49.32	-38.9	13.2	3	-28.7	-13.0	15.7
7350.000	V	53.75	-34.2	13.2	3	-24.0	-13.0	11.0
11025.000	H	33.07	-48.7	13.0	5.2	-40.9	-13.0	27.9
11025.000	V	34.52	-45.5	13.0	5.2	-37.7	-13.0	24.7
46.490	H	30.19	-56.8	-18.3	0.2	-75.3	-13.0	62.3
46.490	V	42.13	-44.9	-18.3	0.2	-63.4	-13.0	50.4
Frequency: 3675.000 MHz (16-QAM)								
7350.000	H	49.04	-39.2	13.2	3	-29.0	-13.0	16.0
7350.000	V	53.31	-34.6	13.2	3	-24.4	-13.0	11.4
11025.000	H	33.08	-48.7	13.0	5.2	-40.9	-13.0	27.9
11025.000	V	34.10	-45.9	13.0	5.2	-38.1	-13.0	25.1
46.490	H	30.16	-56.9	-18.3	0.2	-75.4	-13.0	62.4
46.490	V	41.97	-45.1	-18.3	0.2	-63.6	-13.0	50.6

20MHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency: 3675.000 MHz (QPSK)								
7350.000	H	48.59	-39.6	13.2	3	-29.4	-13.0	16.4
7350.000	V	52.60	-35.3	13.2	3	-25.1	-13.0	12.1
11025.000	H	32.84	-48.9	13.0	5.2	-41.1	-13.0	28.1
11025.000	V	34.26	-45.8	13.0	5.2	-38.0	-13.0	25.0
46.490	H	30.26	-56.8	-18.3	0.2	-75.3	-13.0	62.3
46.490	V	42.06	-45	-18.3	0.2	-63.5	-13.0	50.5
Frequency: 3675.000 MHz (16-QAM)								
7350.000	H	48.62	-39.6	13.2	3	-29.4	-13.0	16.4
7350.000	V	52.48	-35.4	13.2	3	-25.2	-13.0	12.2
11025.000	H	32.90	-48.9	13.0	5.2	-41.1	-13.0	28.1
11025.000	V	34.01	-46	13.0	5.2	-38.2	-13.0	25.2
46.490	H	30.59	-56.4	-18.3	0.2	-74.9	-13.0	61.9
46.490	V	42.16	-44.9	-18.3	0.2	-63.4	-13.0	50.4

Note:

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1055 & §90.213- FREQUENCY STABILITY

Applicable Standard

FCC §2.1055, §90.213

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external AC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The AC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R & S	Wideband Radio Communication Tester	CMW500	106891	2014-11-23	2015-11-23
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-4	2014-08-11	2015-08-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.2 °C
Relative Humidity:	63 %
ATM Pressure:	101.2 kPa

The testing was performed by Allen Qiao on 2015-04-24.

Test Mode: Transmitting

LTE band (3650-3700MHz) Middle Channel

Middle Channel			
Temperature (°C)	Voltage	Frequency Error (Hz)	Frequency Error (ppm)
-30	120	4.79	0.0013
-20		4.23	0.0012
-10		3.34	0.0009
0		5.41	0.0015
10		6.11	0.0017
20		5.25	0.0014
30		4.83	0.0013
40		5.71	0.0016
50		3.41	0.0009
25		102	5.26
25	138	4.39	0.0012

******* END OF REPORT *******