

FCC PART 15.247

TEST REPORT

For

Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

FCC ID: QISEA360-135

Report Type: Original Report	Product Type: LTE CPE
Test Engineer: Allen Qiao	<i>Allen Qiao</i>
Report Number: RDG140714004-00B	
Report Date: 2015-04-01	
Reviewed By: Jerry Zhang EMC Manager	<i>Jerry Zhang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY.....	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST RESULTS SUMMARY	18
TEST DATA	19
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA	33
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	44

APPLICABLE STANDARD44
TEST PROCEDURE44
TEST EQUIPMENT LIST AND DETAILS.....44
TEST DATA44

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....46

APPLICABLE STANDARD46
TEST PROCEDURE46
TEST EQUIPMENT LIST AND DETAILS.....46
TEST DATA46

FCC §15.247(e) - POWER SPECTRAL DENSITY53

APPLICABLE STANDARD53
TEST PROCEDURE53
TEST EQUIPMENT LIST AND DETAILS.....53
TEST DATA53

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Huawei Technologies Co., Ltd.*'s product, model number: *eA360-135* (FCC ID: *QISEA360-135*) (the "EUT") in this report was a *LTE CPE*, which was measured approximately: 25.5 cm (L) x 22.0 cm (W) x 6.6 cm (H), rated input voltage: DC 54V from adapter.

Adapter information:

Model: UE-PoE-35

Input: AC 100-240V, 50/60Hz, 1.0A Max

Output: DC 54V, 0.65A

** All measurement and test data in this report was gathered from production sample serial number: 140714004 (Assigned by BACL, Dongguan). The EUT was received on 2014-07-17*

Objective

This report is prepared on behalf of *Huawei Technologies Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC PCB submissions with FCC ID: QISEA360-135.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer. For 2.4GHz band, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were tested with Channel 1, 6 and 11. For 802.11n ht40 mode were tested with Channel 3, 6 and 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

EUT Exercise Software

The test software: 'IPOP' was used in testing, which was provided by manufacturer, and configured as following table:

Test Mode	Test Software Version	IPOP		
		2412MHz	2437MHz	2462MHz
802.11b	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	1Mbps	1Mbps	1Mbps
	Power Level Setting (Chain 0)	16	17	17
	Power Level Setting (Chain 1)	/	/	/
802.11g	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	6Mbps	6Mbps	6Mbps
	Power Level Setting (Chain 0)	15	17	16
	Power Level Setting (Chain 1)	/	/	/
802.11n20	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting (Chain 0)	12	13	13
	Power Level Setting (Chain 1)	11	10	15
802.11n40	Test Frequency	2422MHz	2437MHz	2452MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting (Chain 0)	13	12	13
	Power Level Setting (Chain 1)	13	13	15


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017

External I/O Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	Yes	No	1.2	RJ45 Port of Laptop	adapter
RJ45 Cable	Yes	No	0.5	EUT	adapter

Block Diagram of Test Setup

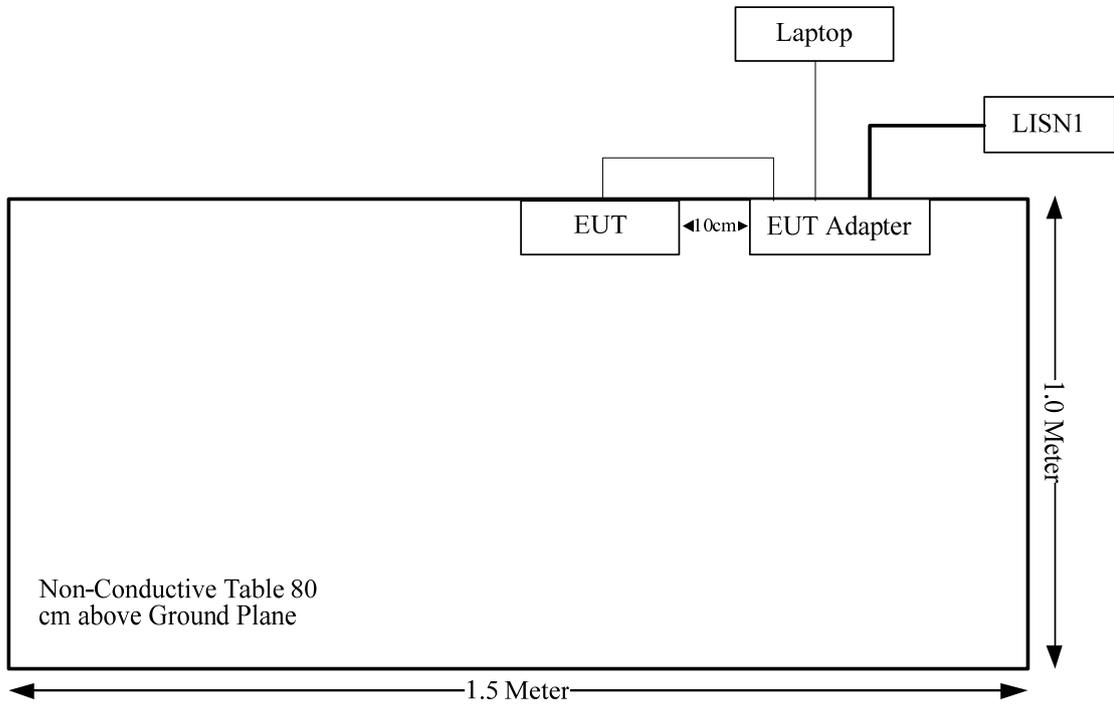

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

According to subpart 1.1307 (b)(1)and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

S = PG/4πR² = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Wi-Fi	2422	2.0	1.58	18.13	65.01	20	0.020	1.0
LTE	3662.5	16	39.81	18.89	77.45	20	0.613	1.0

Wi-Fi (2.4 G) and LTE can transmit at the same time, MPE evaluation is as below formula:

PD1/Limit1+PD2/Limit2+..... < 1, PD (Power Density)

= 0.020/1+0.613/1=0.641 < 1

Result: MPE evaluation of single and simultaneous transmission meet the requirement of standard.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has two integral antenna and antenna gain is 2 dBi. Both antenna fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2:2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

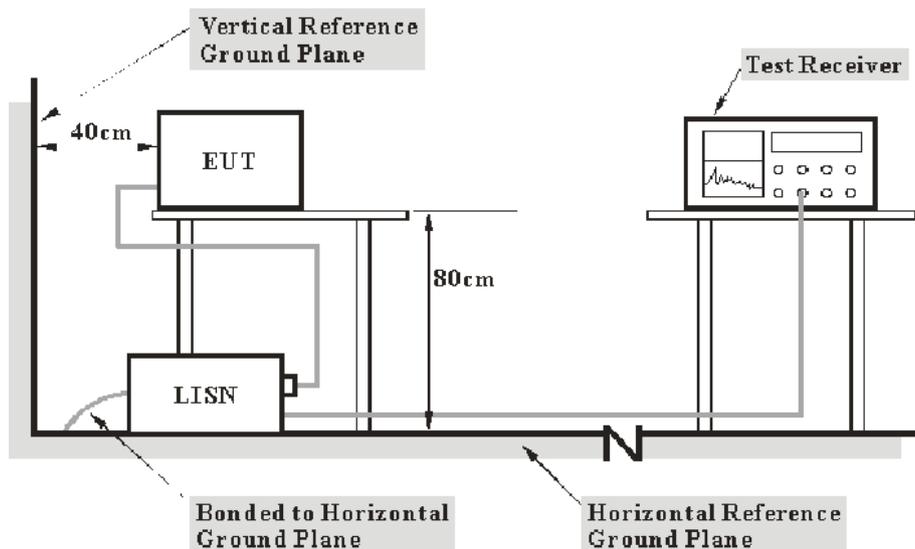

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2014-10-20	2015-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2014-06-09	2015-06-09
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-12-11	2015-12-11
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

12.20 dB at 0.270502 MHz in the **Line** conducted mode

Test Data


Environmental Conditions

Temperature:	24.4 °C
Relative Humidity:	64 %
ATM Pressure:	100.9 kPa

The testing was performed by Allen Qiao on 2015-04-01.

Test Mode: Transmitting


AC120 V, 60 Hz, Line:

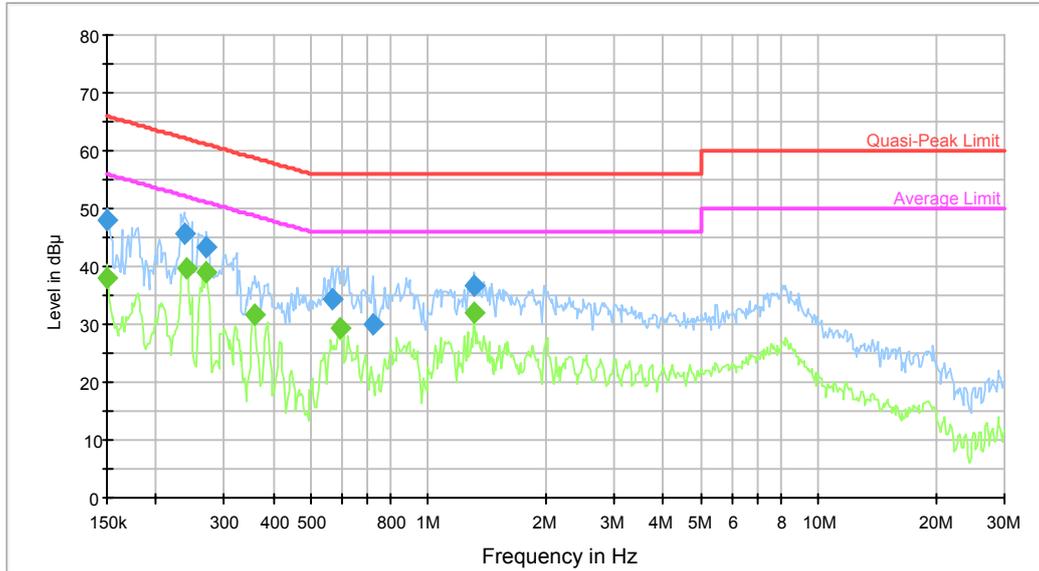

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	48.0	9.000	L1	10.2	18.0	66.0	Compliance
0.236234	45.7	9.000	L1	10.2	16.5	62.2	Compliance
0.270502	43.5	9.000	L1	10.2	17.6	61.1	Compliance
0.567545	34.4	9.000	L1	10.2	21.6	56.0	Compliance
0.720803	30.2	9.000	L1	10.4	25.8	56.0	Compliance
1.310256	36.5	9.000	L1	10.4	19.5	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	37.9	9.000	L1	10.2	18.1	56.0	Compliance
0.240029	39.7	9.000	L1	10.2	12.4	52.1	Compliance
0.270502	38.9	9.000	L1	10.2	12.2	51.1	Compliance
0.360371	31.6	9.000	L1	10.3	17.1	48.7	Compliance
0.595338	29.4	9.000	L1	10.2	16.6	46.0	Compliance
1.310256	32.1	9.000	L1	10.4	13.9	46.0	Compliance

AC120 V, 60 Hz, Neutral:

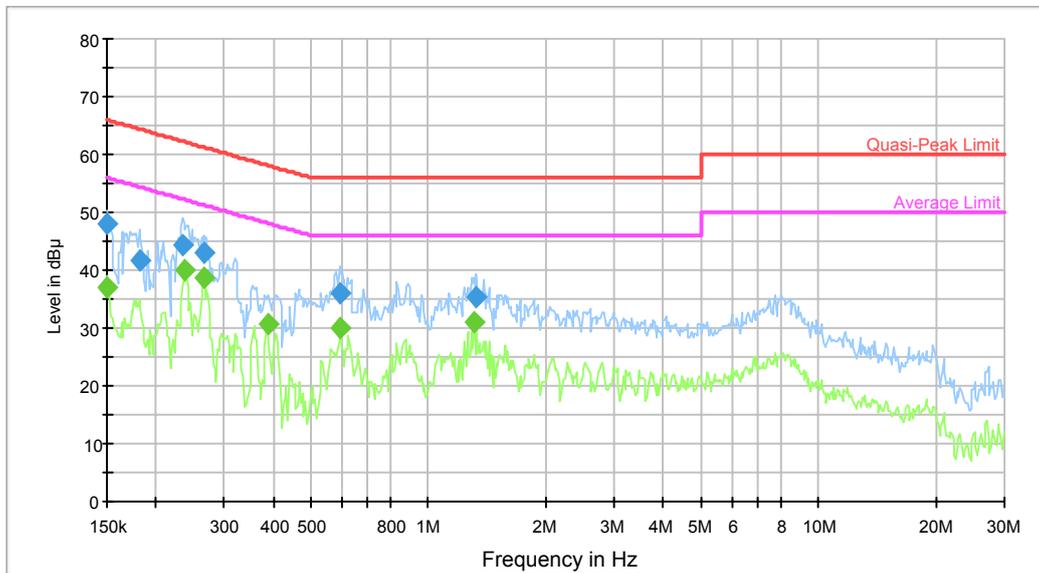

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.150000	48.0	9.000	N	10.2	18.0	66.0	Compliance
0.181612	41.8	9.000	N	10.2	22.6	64.4	Compliance
0.234359	44.4	9.000	N	10.2	17.9	62.3	Compliance
0.266226	42.9	9.000	N	10.2	18.3	61.2	Compliance
0.590613	36.1	9.000	N	10.2	19.9	56.0	Compliance
1.331304	35.4	9.000	N	10.4	20.6	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.150000	36.9	9.000	N	10.2	19.1	56.0	Compliance
0.236234	40.0	9.000	N	10.2	12.3	52.2	Compliance
0.266226	38.6	9.000	N	10.2	12.7	51.2	Compliance
0.387164	30.7	9.000	N	10.2	17.4	48.1	Compliance
0.595338	29.8	9.000	N	10.2	16.2	46.0	Compliance
1.310256	31.0	9.000	N	10.4	15.0	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:


- 30M~200MHz: 5.0 dB
- 200M~1GHz: 6.2 dB
- 1G~6GHz: 4.45 dB
- 6G~18GHz: 5.23 dB

Table 2 – Values of U_{cispr}


Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

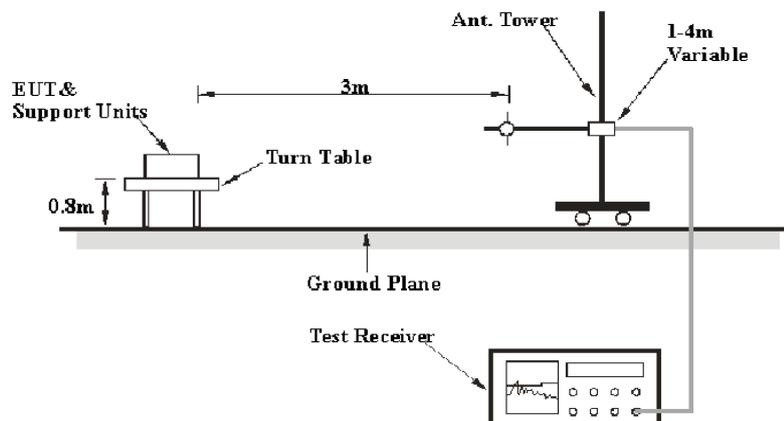

Above 1GHz:

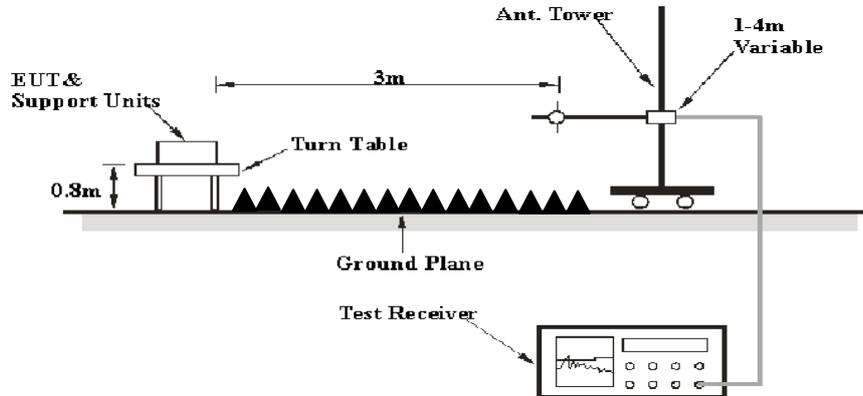

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2014-09-06	2015-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

3.79 dB at 2483.5 MHz in the **Vertical** polarization for 802.11b Mode

Test Data

Environmental Conditions

Temperature:	21°C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Allen Qiao on 2015-02-11.

Mode: Transmitting

802.11b Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.247	
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBµV/m)	Margin (dB)
Low Channel: 2412 MHz									
2412	74.64	PK	H	25.67	3.68	0.00	103.99	N/A	N/A
2412	70.23	AV	H	25.67	3.68	0.00	99.58	N/A	N/A
2412	77.3	PK	V	25.67	3.68	0.00	106.65	N/A	N/A
2412	73.91	AV	V	25.67	3.68	0.00	103.26	N/A	N/A
2390	25.64	PK	V	25.61	3.63	0.00	54.88	74.00	19.12
2390	14.36	AV	V	25.61	3.63	0.00	43.60	54.00	10.40
4824	38.15	PK	H	30.64	5.03	27.41	46.41	74.00	27.59
4824	33.89	AV	H	30.64	5.03	27.41	42.15	54.00	11.85
7236	35.99	PK	H	34.17	6.65	25.90	50.91	74.00	23.09
7236	29.03	AV	H	34.17	6.65	25.90	43.95	54.00	10.05
9648	31.14	PK	H	36.06	8.55	27.46	48.29	74.00	25.71
9648	17.98	AV	H	36.06	8.55	27.46	35.13	54.00	18.87
3985	32.11	PK	H	29.87	4.85	27.21	39.62	74.00	34.38
3985	19.07	AV	H	29.87	4.85	27.21	26.58	54.00	27.42
82.38	44.7	QP	V	7.83	1.13	21.41	32.25	40.00	7.75
Middle Channel: 2437 MHz									
2437	75.36	PK	H	25.74	3.75	0.00	104.85	N/A	N/A
2437	71.05	AV	H	25.74	3.75	0.00	100.54	N/A	N/A
2437	77.65	PK	V	25.74	3.75	0.00	107.14	N/A	N/A
2437	74.21	AV	V	25.74	3.75	0.00	103.70	N/A	N/A
4874	38.24	PK	V	30.77	5.14	27.42	46.73	74.00	27.27
4874	34.18	AV	V	30.77	5.14	27.42	42.67	54.00	11.33
7311	36.65	PK	V	34.35	6.74	25.88	51.86	74.00	22.14
7311	29.55	AV	V	34.35	6.74	25.88	44.76	54.00	9.24
9748	31.67	PK	V	36.30	8.61	27.24	49.34	74.00	24.66
9748	18.6	AV	V	36.30	8.61	27.24	36.27	54.00	17.73
3131	32.76	PK	V	27.62	6.93	27.43	39.88	74.00	34.12
3131	19.61	AV	V	27.62	6.93	27.43	26.73	54.00	27.27
3190	34.65	PK	V	27.81	6.26	27.38	41.34	74.00	32.66
3190	20.69	AV	V	27.81	6.26	27.38	27.38	54.00	26.62
82.38	44.2	QP	V	7.83	1.13	21.41	31.75	40.00	8.25

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.247	
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBµV/m)	Margin (dB)
High Channel: 2462 MHz									
2462	75.89	PK	H	25.80	3.75	0.00	105.44	N/A	N/A
2462	71.36	AV	H	25.80	3.75	0.00	100.91	N/A	N/A
2462	77.88	PK	V	25.80	3.75	0.00	107.43	N/A	N/A
2462	74.01	AV	V	25.80	3.75	0.00	103.56	N/A	N/A
2483.5	29.85	PK	V	25.86	3.67	0.00	59.38	74.00	14.62
2483.5	20.68	AV	V	25.86	3.67	0.00	50.21	54.00	3.79 *
4924	38.77	PK	H	30.90	5.34	27.43	47.58	74.00	26.42
4924	35.85	AV	H	30.90	5.34	27.43	44.66	54.00	9.34
7386	37.25	PK	H	34.53	6.83	25.86	52.75	74.00	21.25
7386	30.17	AV	H	34.53	6.83	25.86	45.67	54.00	8.33
9848	32.34	PK	H	36.54	8.66	26.94	50.60	74.00	23.40
9848	19.24	AV	H	36.54	8.66	26.94	37.50	54.00	16.50
3131	33.38	PK	H	27.62	6.93	27.43	40.50	74.00	33.50
3131	20.17	AV	H	27.62	6.93	27.43	27.29	54.00	26.71
82.38	44.6	QP	V	7.83	1.13	21.41	32.15	40.00	7.85

**Within measurement uncertainty!*

802.11g Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.247	
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBµV/m)	Margin (dB)
Low Channel: 2412 MHz									
2412	76.12	PK	H	25.67	3.68	0.00	105.47	N/A	N/A
2412	67.08	AV	H	25.67	3.68	0.00	96.43	N/A	N/A
2412	78.56	PK	V	25.67	3.68	0.00	107.91	N/A	N/A
2412	70.28	AV	V	25.67	3.68	0.00	99.63	N/A	N/A
2390	31.57	PK	V	25.61	3.63	0.00	60.81	74.00	13.19
2390	17.73	AV	V	25.61	3.63	0.00	46.97	54.00	7.03
4824	36.21	PK	H	30.64	5.03	27.41	44.47	74.00	29.53
4824	30.84	AV	H	30.64	5.03	27.41	39.10	54.00	14.90
7236	34.44	PK	H	34.17	6.65	25.90	49.36	74.00	24.64
7236	21.19	AV	H	34.17	6.65	25.90	36.11	54.00	17.89
9648	28.4	PK	H	36.06	8.55	27.46	45.55	74.00	28.45
9648	16.01	AV	H	36.06	8.55	27.46	33.16	54.00	20.84
3021	32.09	PK	H	27.27	6.73	27.51	38.58	74.00	35.42
3021	18.92	AV	H	27.27	6.73	27.51	25.41	54.00	28.59
82.38	43.8	QP	V	7.83	1.13	21.41	31.35	40.00	8.65
Middle Channel: 2437 MHz									
2437	76.13	PK	H	25.74	3.75	0.00	105.62	N/A	N/A
2437	67.37	AV	H	25.74	3.75	0.00	96.86	N/A	N/A
2437	78.86	PK	V	25.74	3.75	0.00	108.35	N/A	N/A
2437	70.31	AV	V	25.74	3.75	0.00	99.80	N/A	N/A
4874	37.09	PK	V	30.77	5.14	27.42	45.58	74.00	28.42
4874	23.38	AV	V	30.77	5.14	27.42	31.87	54.00	22.13
7311	35.09	PK	V	34.35	6.74	25.88	50.30	74.00	23.70
7311	21.82	AV	V	34.35	6.74	25.88	37.03	54.00	16.97
9748	29.1	PK	V	36.30	8.61	27.24	46.77	74.00	27.23
9748	16.63	AV	V	36.30	8.61	27.24	34.30	54.00	19.70
3021	32.73	PK	V	27.27	6.73	27.51	39.22	74.00	34.78
3021	19.61	AV	V	27.27	6.73	27.51	26.10	54.00	27.90
3906	34.21	PK	V	29.69	4.39	27.28	41.01	74.00	32.99
3906	31.28	AV	V	29.69	4.39	27.28	38.08	54.00	15.92
82.38	44.5	QP	V	7.83	1.13	21.41	32.05	40.00	7.95
High Channel: 2462 MHz									
2462	77.28	PK	H	25.80	3.75	0.00	106.83	N/A	N/A
2462	67.76	AV	H	25.80	3.75	0.00	97.31	N/A	N/A
2462	79.94	PK	V	25.80	3.75	0.00	109.49	N/A	N/A
2462	70.77	AV	V	25.80	3.75	0.00	100.32	N/A	N/A
2483.5	26.98	PK	V	25.86	3.67	0.00	56.51	74.00	17.49
2483.5	16.44	AV	V	25.86	3.67	0.00	45.97	54.00	8.03
4924	37.66	PK	H	30.90	5.34	27.43	46.47	74.00	27.53
4924	24.02	AV	H	30.90	5.34	27.43	32.83	54.00	21.17
7386	35.68	PK	H	34.53	6.83	25.86	51.18	74.00	22.82
7386	22.43	AV	H	34.53	6.83	25.86	37.93	54.00	16.07
9848	29.63	PK	H	36.54	8.66	26.94	47.89	74.00	26.11
9848	17.32	AV	H	36.54	8.66	26.94	35.58	54.00	18.42
3021	33.39	PK	H	27.27	6.73	27.51	39.88	74.00	34.12
3021	20.17	AV	H	27.27	6.73	27.51	26.66	54.00	27.34
82.38	44	QP	V	7.83	1.13	21.41	31.55	40.00	8.45

802.11 n20 Mode


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.247	
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)
Low Channel: 2412 MHz									
2412	73.46	PK	H	25.67	3.68	0.00	102.81	N/A	N/A
2412	62.17	AV	H	25.67	3.68	0.00	91.52	N/A	N/A
2412	74.47	PK	V	25.67	3.68	0.00	103.82	N/A	N/A
2412	63.72	AV	V	25.67	3.68	0.00	93.07	N/A	N/A
2390	27.66	PK	V	25.61	3.63	0.00	56.90	74.00	17.10
2390	15.02	AV	V	25.61	3.63	0.00	44.26	54.00	9.74
4824	33.79	PK	H	30.64	5.03	27.41	42.05	74.00	31.95
4824	26.29	AV	H	30.64	5.03	27.41	34.55	54.00	19.45
7236	32.93	PK	H	34.17	6.65	25.90	47.85	74.00	26.15
7236	20.69	AV	H	34.17	6.65	25.90	35.61	54.00	18.39
9648	27.79	PK	H	36.06	8.55	27.46	44.94	74.00	29.06
9648	15.46	AV	H	36.06	8.55	27.46	32.61	54.00	21.39
3021	31.47	PK	H	27.27	6.73	27.51	37.96	74.00	36.04
3021	18.32	AV	H	27.27	6.73	27.51	24.81	54.00	29.19
82.38	44.3	QP	V	7.83	1.13	21.41	31.85	40.00	8.15
Middle Channel: 2437 MHz									
2437	74.12	PK	H	25.74	3.75	0.00	103.61	N/A	N/A
2437	63.37	AV	H	25.74	3.75	0.00	92.86	N/A	N/A
2437	75.16	PK	V	25.74	3.75	0.00	104.65	N/A	N/A
2437	64.17	AV	V	25.74	3.75	0.00	93.66	N/A	N/A
4874	33.88	PK	H	30.77	5.14	27.42	42.37	74.00	31.63
4874	26.31	AV	H	30.77	5.14	27.42	34.80	54.00	19.20
7311	32.44	PK	H	34.35	6.74	25.88	47.65	74.00	26.35
7311	20.28	AV	H	34.35	6.74	25.88	35.49	54.00	18.51
9748	28.45	PK	H	36.30	8.61	27.24	46.12	74.00	27.88
9748	15.99	AV	H	36.30	8.61	27.24	33.66	54.00	20.34
3985	32.21	PK	H	29.87	4.85	27.21	39.72	74.00	34.28
3985	19.01	AV	H	29.87	4.85	27.21	26.52	54.00	27.48
3021	33.56	PK	H	27.27	6.73	27.51	40.05	74.00	33.95
3021	30.63	AV	H	27.27	6.73	27.51	37.12	54.00	16.88
82.38	43.9	QP	V	7.83	1.13	21.41	31.45	40.00	8.55
High Channel: 2462 MHz									
2462	74.76	PK	H	25.80	3.75	0.00	104.31	N/A	N/A
2462	64.25	AV	H	25.80	3.75	0.00	93.80	N/A	N/A
2462	76.58	PK	V	25.80	3.75	0.00	106.13	N/A	N/A
2462	65.82	AV	V	25.80	3.75	0.00	95.37	N/A	N/A
2483.5	32.86	PK	V	25.86	3.67	0.00	62.39	74.00	11.61
2483.5	19.04	AV	V	25.86	3.67	0.00	48.57	54.00	5.43
4924	34.21	PK	H	30.90	5.34	27.43	43.02	74.00	30.98
4924	27.06	AV	H	30.90	5.34	27.43	35.87	54.00	18.13
7386	33.02	PK	H	34.53	6.83	25.86	48.52	74.00	25.48
7386	21.15	AV	H	34.53	6.83	25.86	36.65	54.00	17.35
9848	29.04	PK	H	36.54	8.66	26.94	47.30	74.00	26.70
9848	16.73	AV	H	36.54	8.66	26.94	34.99	54.00	19.01
3021	32.87	PK	H	27.27	6.73	27.51	39.36	74.00	34.64
3021	19.53	AV	H	27.27	6.73	27.51	26.02	54.00	27.98
82.38	44.6	QP	V	7.83	1.13	21.41	32.15	40.00	7.85

802.11 n40 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.247	
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)
Low Channel: 2422 MHz									
2422	71.26	PK	H	25.70	3.71	0.00	100.67	N/A	N/A
2422	60.02	AV	H	25.70	3.71	0.00	89.43	N/A	N/A
2422	72.86	PK	V	25.70	3.71	0.00	102.27	N/A	N/A
2422	61.54	AV	V	25.70	3.71	0.00	90.95	N/A	N/A
2390	32.38	PK	V	25.61	3.63	0.00	61.62	74.00	12.38
2390	19.36	AV	V	25.61	3.63	0.00	48.60	54.00	5.40
4844	31.58	PK	H	30.69	4.99	27.42	39.84	74.00	34.16
4844	19.92	AV	H	30.69	4.99	27.42	40.64	54.00	13.36
7266	32.38	PK	H	34.24	6.68	25.89	47.41	74.00	26.59
7266	20.11	AV	H	34.24	6.68	25.89	35.14	54.00	18.86
9688	27.11	PK	H	36.15	8.58	27.37	44.47	74.00	29.53
9688	14.77	AV	H	36.15	8.58	27.37	32.13	54.00	21.87
3906	30.82	PK	H	29.69	4.39	27.28	37.62	74.00	36.38
3906	17.73	AV	H	29.69	4.39	27.28	24.53	54.00	29.47
82.38	44.1	QP	V	7.83	1.13	21.41	31.65	40.00	8.35
Middle Channel: 2437 MHz									
2437	72.58	PK	H	25.74	3.75	0.00	102.07	N/A	N/A
2437	61.73	AV	H	25.74	3.75	0.00	91.22	N/A	N/A
2437	73.39	PK	V	25.74	3.75	0.00	102.88	N/A	N/A
2437	62.14	AV	V	25.74	3.75	0.00	91.63	N/A	N/A
4874	33.29	PK	H	30.77	5.14	27.42	41.78	74.00	32.22
4874	25.77	AV	H	30.77	5.14	27.42	34.26	54.00	19.74
7311	31.85	PK	H	34.35	6.74	25.88	47.06	74.00	26.94
7311	19.62	AV	H	34.35	6.74	25.88	34.83	54.00	19.17
9748	27.87	PK	H	36.30	8.61	27.24	45.54	74.00	28.46
9748	15.4	AV	H	36.30	8.61	27.24	33.07	54.00	20.93
3021	31.56	PK	H	27.27	6.73	27.51	38.05	74.00	35.95
3021	18.47	AV	H	27.27	6.73	27.51	24.96	54.00	29.04
3906	32.89	PK	H	29.69	4.39	27.28	39.69	74.00	34.31
3906	30.01	AV	H	29.69	4.39	27.28	36.81	54.00	17.19
82.38	44.9	QP	V	7.83	1.13	21.41	32.45	40.00	7.55
High Channel: 2452 MHz									
2452	73.34	PK	H	25.78	3.78	0.00	102.90	N/A	N/A
2452	62.55	AV	H	25.78	3.78	0.00	92.11	N/A	N/A
2452	74.59	PK	V	25.78	3.78	0.00	104.15	N/A	N/A
2452	63.71	AV	V	25.78	3.78	0.00	93.27	N/A	N/A
2483.5	34.34	PK	V	25.86	3.67	0.00	63.87	74.00	10.13
2483.5	19.84	AV	V	25.86	3.67	0.00	49.37	54.00	4.63
4904	32.14	PK	H	30.85	5.31	27.43	40.87	74.00	33.13
4904	20.28	AV	H	30.85	5.31	27.43	29.01	54.00	24.99
7356	32.37	PK	H	34.45	6.79	25.87	47.74	74.00	26.26
7356	20.62	AV	H	34.45	6.79	25.87	35.99	54.00	18.01
9808	28.49	PK	H	36.44	8.64	27.09	46.48	74.00	27.52
9808	16.05	AV	H	36.44	8.64	27.09	34.04	54.00	19.96
3906	32.33	PK	H	29.69	4.39	27.28	39.13	74.00	34.87
3906	18.95	AV	H	29.69	4.39	27.28	25.75	54.00	28.25
82.38	44.4	QP	V	7.83	1.13	21.41	31.95	40.00	8.05


Conducted Spurious Emissions at Antenna Port

Chain0: 802.11b Low Channel

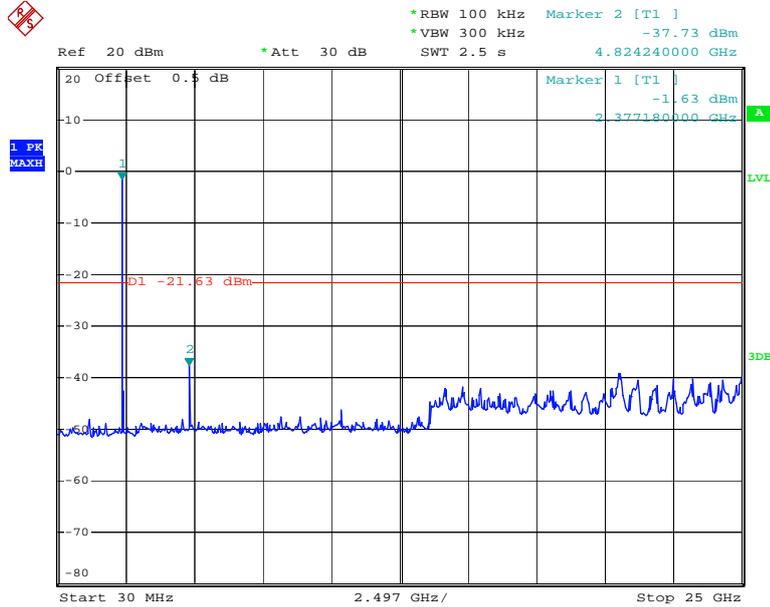


Date: 11.FEB.2015 14:41:46

Chain0: 802.11b Middle Channel

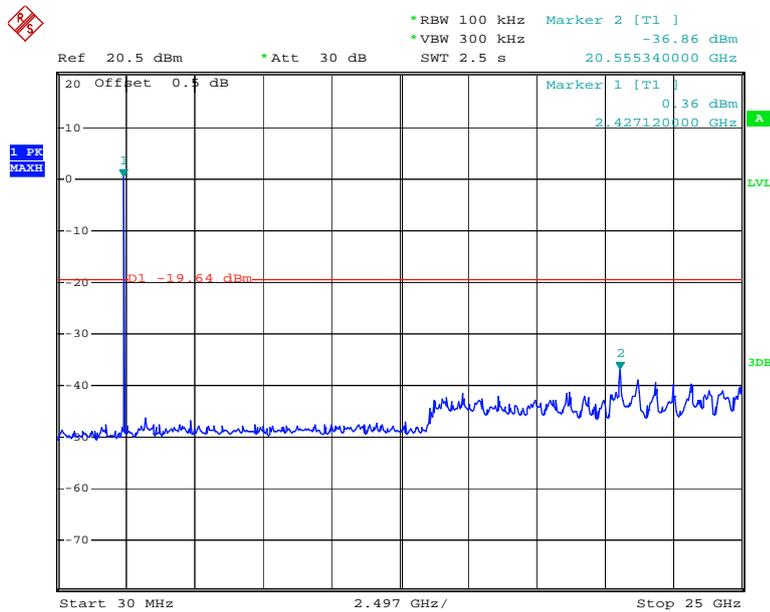


Date: 11.FEB.2015 16:27:45

Chain0: 802.11b High Channel

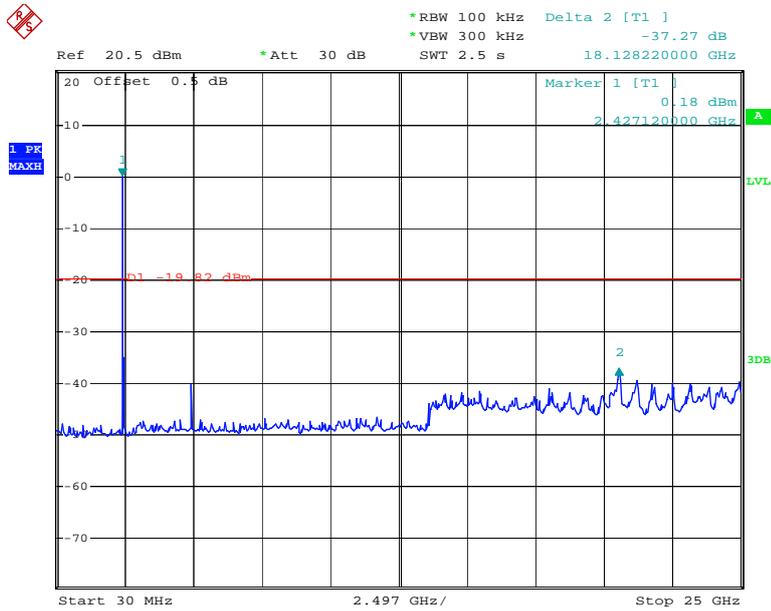


Date: 11.FEB.2015 16:29:30

Chain0: 802.11g Low Channel

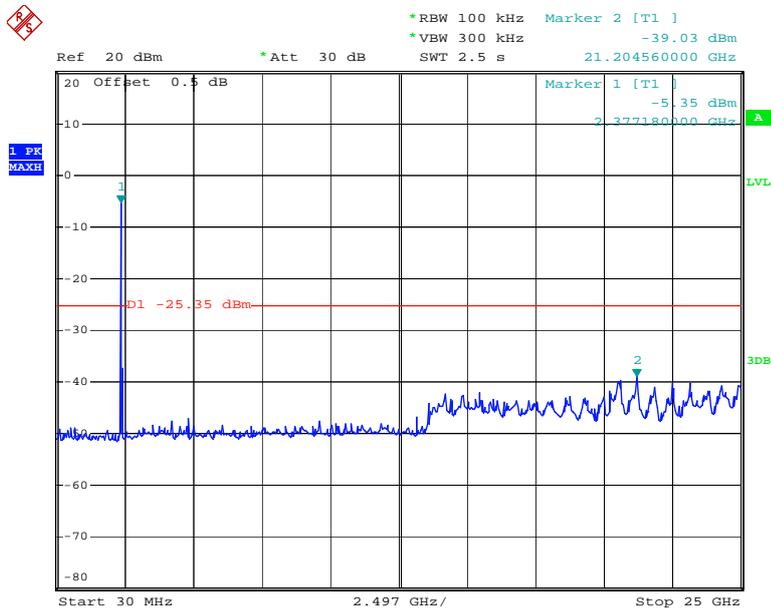


Date: 11.FEB.2015 15:05:03

Chain0: 802.11g Middle Channel

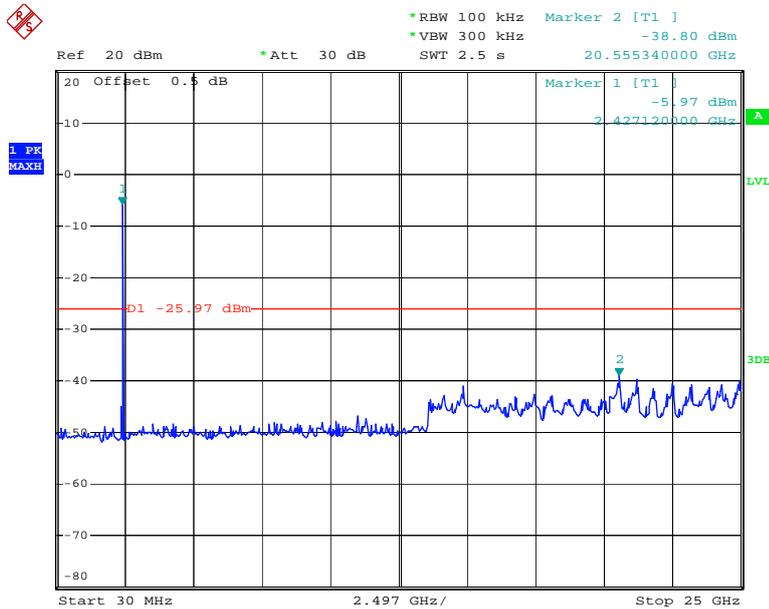


Date: 11.FEB.2015 15:01:22

Chain0: 802.11g High Channel

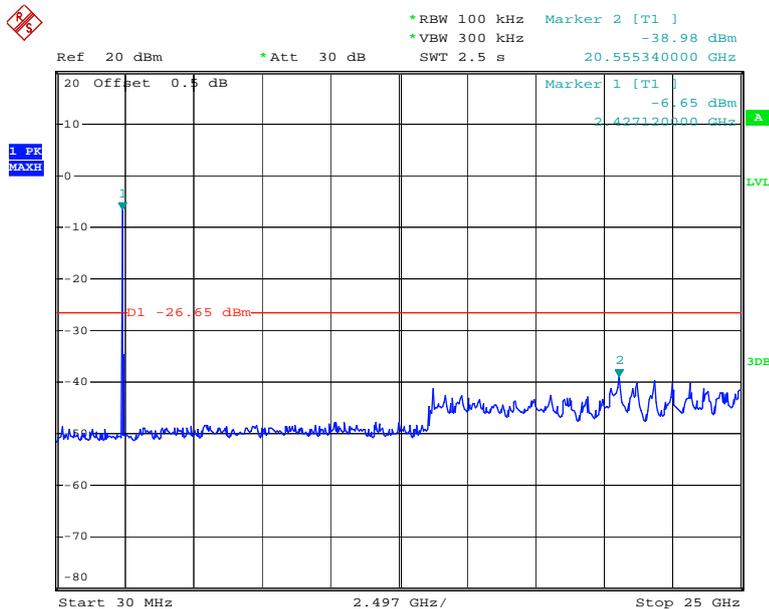


Date: 11.FEB.2015 14:57:10

Chain0: 802.11n20 Low Channel

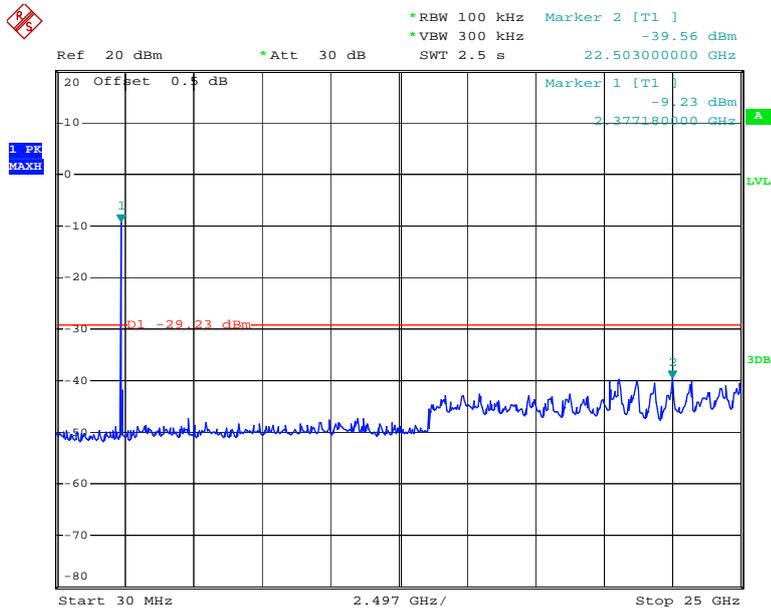


Date: 11.FEB.2015 15:09:52

Chain0: 802.11n20 Middle Channel

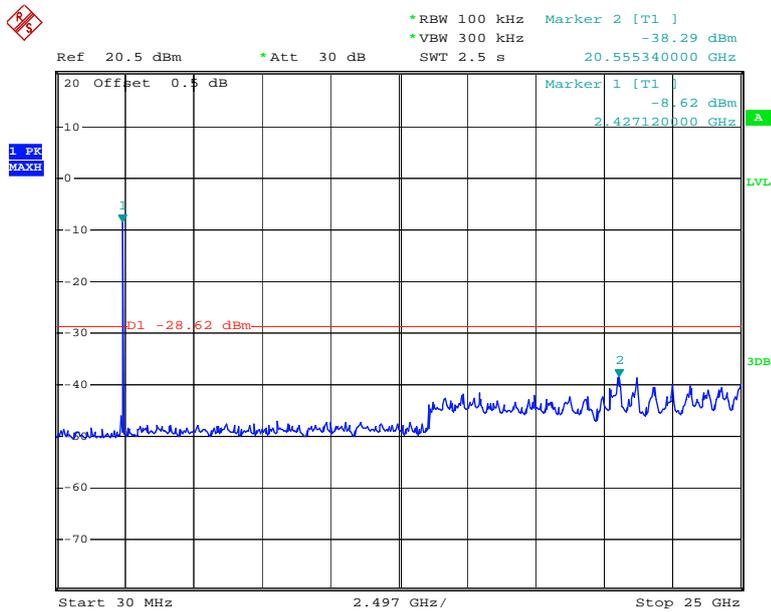


Date: 11.FEB.2015 16:26:22

Chain0: 802.11n20 High Channel

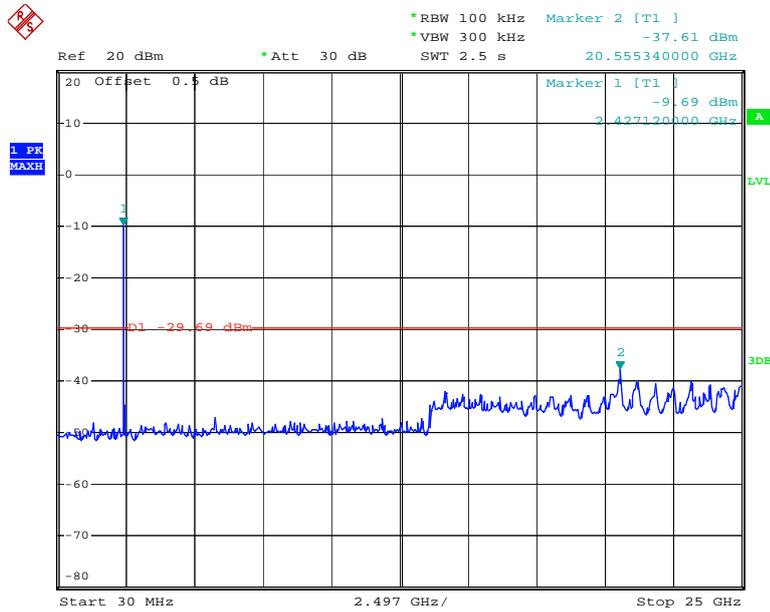


Date: 11.FEB.2015 15:25:01

Chain1: 802.11n20 Low Channel

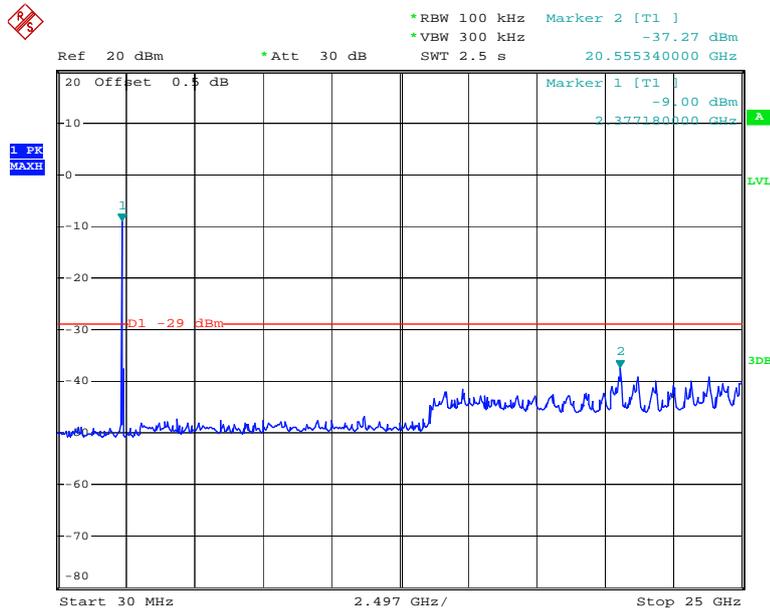


Date: 11.FEB.2015 18:18:44

Chain1: 802.11n20 Middle Channel

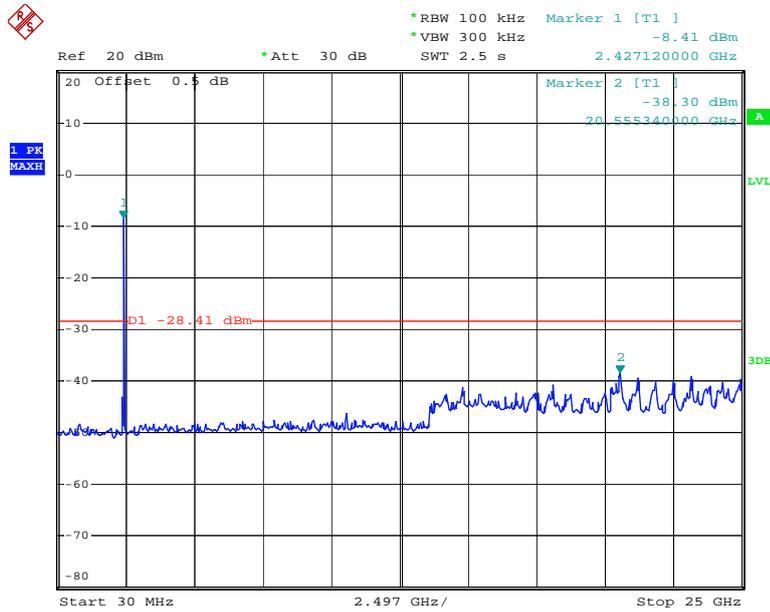


Date: 11.FEB.2015 18:16:22

Chain1: 802.11n20 High Channel

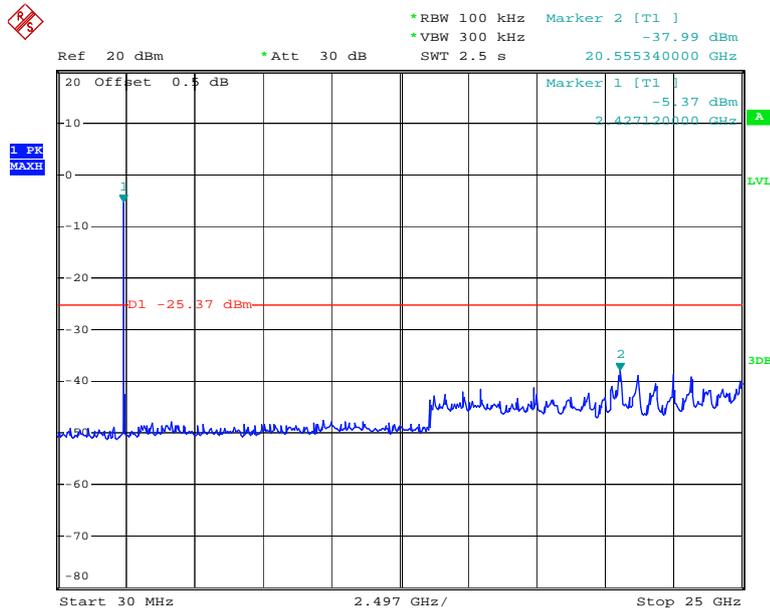


Date: 11.FEB.2015 18:14:53

Chain0: 802.11n40 Low Channel

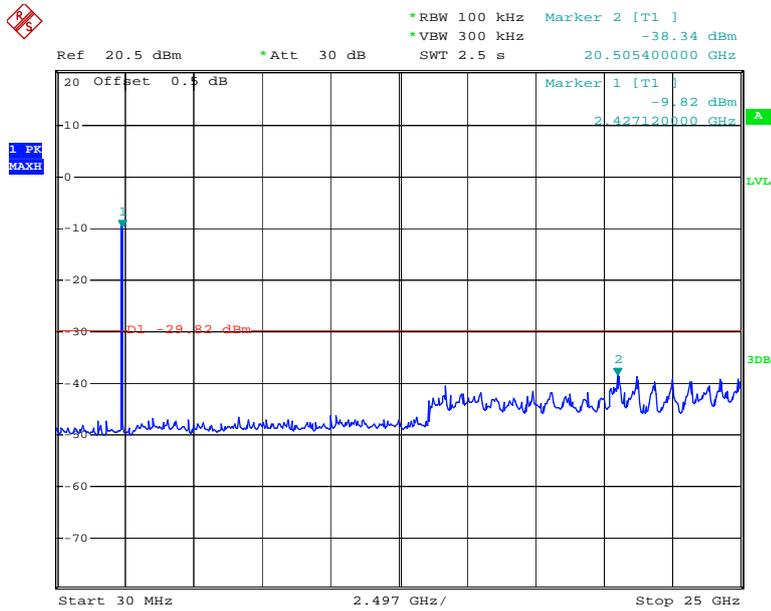


Date: 11.FEB.2015 16:19:54

Chain0: 802.11n40 Middle Channel

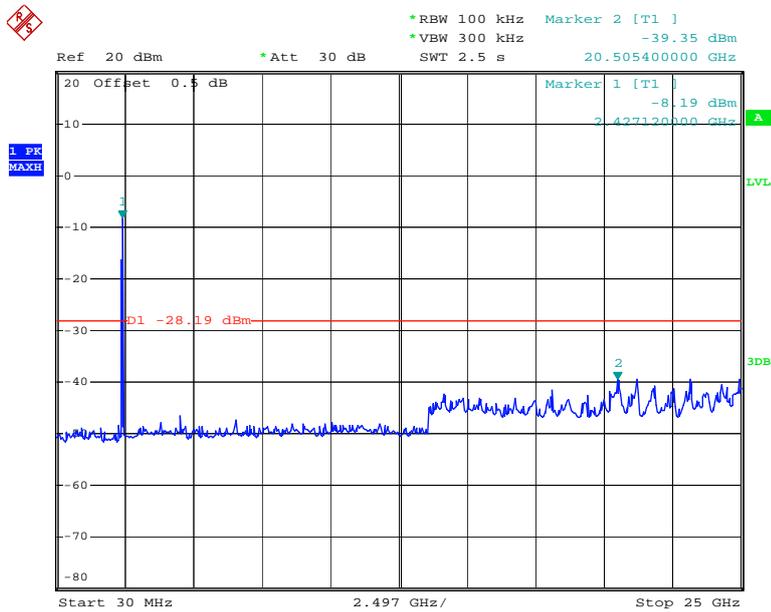


Date: 11.FEB.2015 16:11:56

Chain0: 802.11n40 High Channel

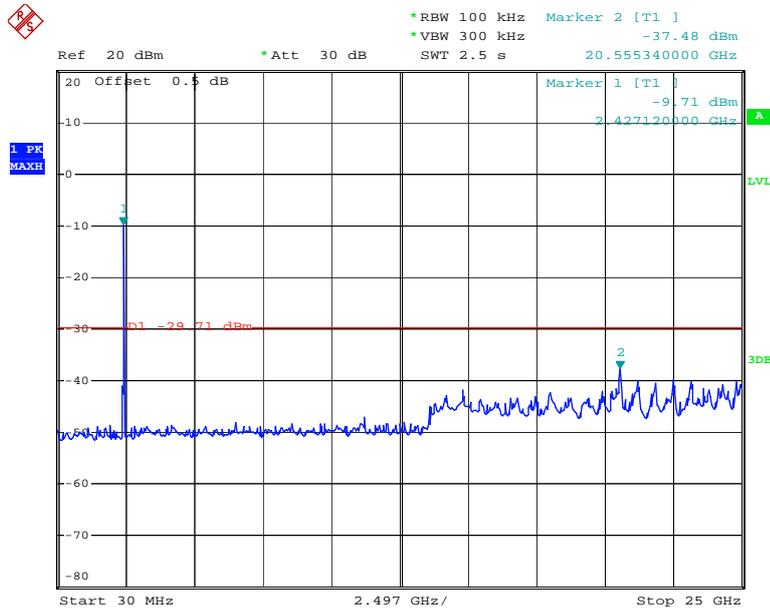


Date: 11.FEB.2015 15:28:52

Chain1: 802.11n40 Low Channel

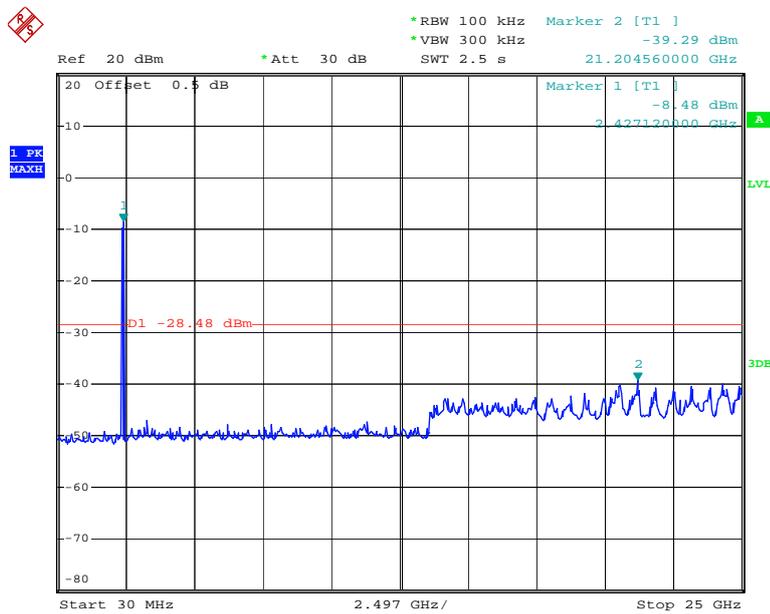


Date: 11.FEB.2015 18:10:59

Chain1: 802.11n40 Middle Channel

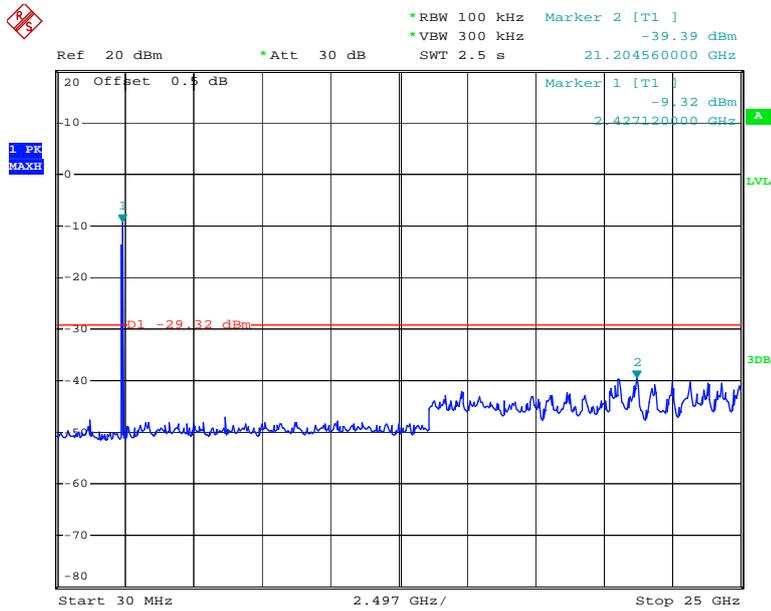

Date: 11.FEB.2015 18:02:12

Chain1: 802.11n40 High Channel

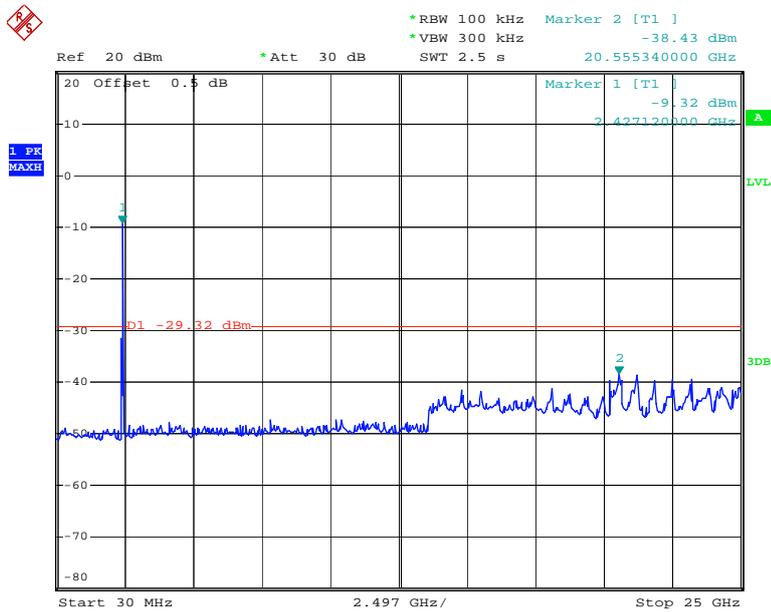

Date: 11.FEB.2015 18:13:32


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

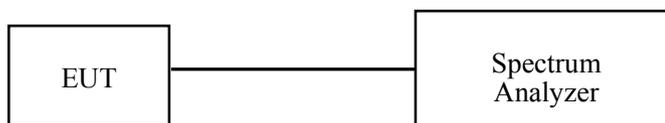

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	21.5 °C
Relative Humidity:	42 %
ATM Pressure:	101.3 kPa

* The testing was performed by Allen Qiao on 2015-02-11.


Test Result: Pass.

Please refer to the following tables and plots.

Test Mode: Transmitting


Test Mode	Channel	Frequency	6 dB Bandwidth (MHz)		Limit
		(MHz)	Chain 0	Chain 1	(kHz)
802.11b	Low	2412	8.00	/	>500
	Middle	2437	8.00	/	>500
	High	2462	8.56	/	>500
802.11g	Low	2412	12.88	/	>500
	Middle	2437	12.48	/	>500
	High	2462	13.76	/	>500
802.11n20	Low	2412	12.40	15.20	>500
	Middle	2437	14.96	15.04	>500
	High	2462	14.64	12.88	>500
802.11n40	Low	2422	36.16	35.04	>500
	Middle	2437	18.88	23.84	>500
	High	2452	35.04	34.56	>500

Chain0: 802.11b Low Channel

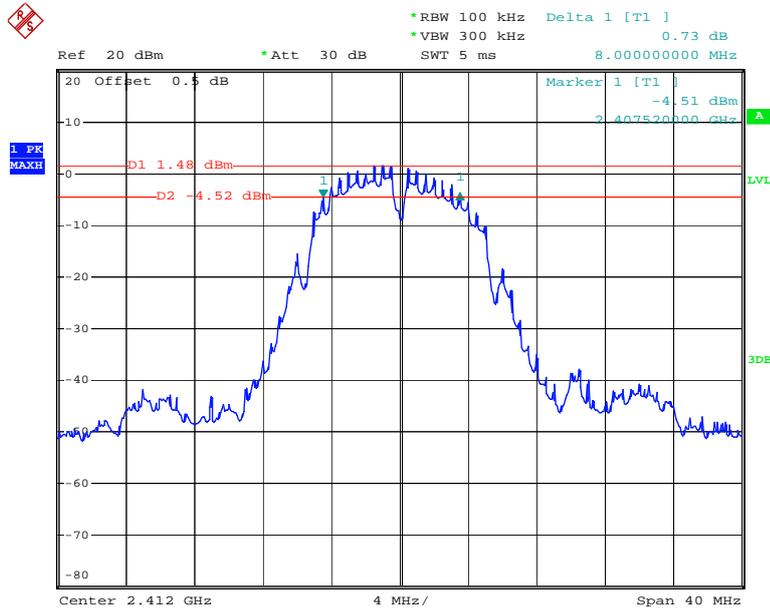


Date: 11.FEB.2015 14:40:02

Chain0: 802.11b Middle Channel

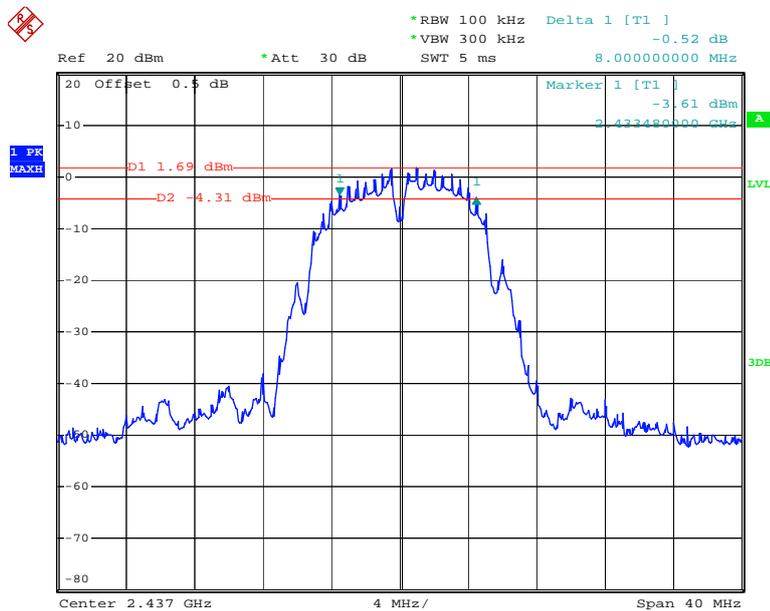


Date: 11.FEB.2015 14:43:37

Chain0: 802.11b High Channel

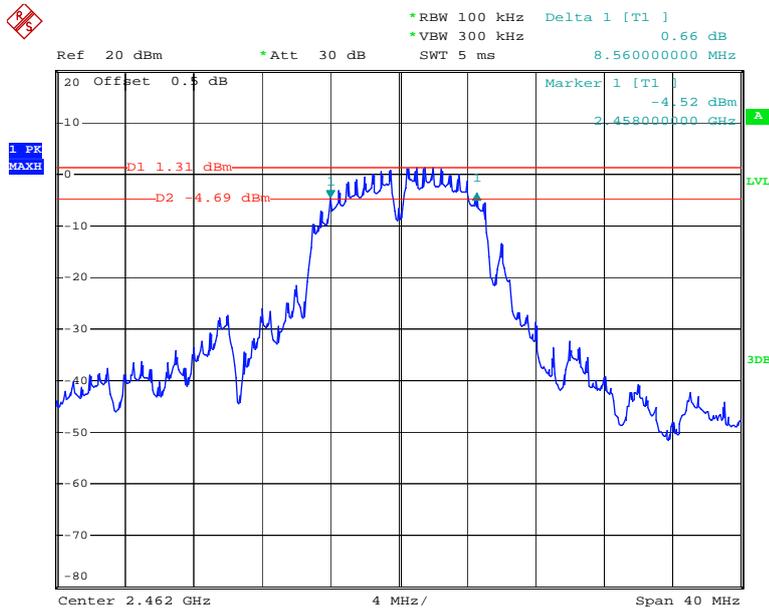


Date: 11.FEB.2015 14:48:03

Chain0: 802.11g Low Channel

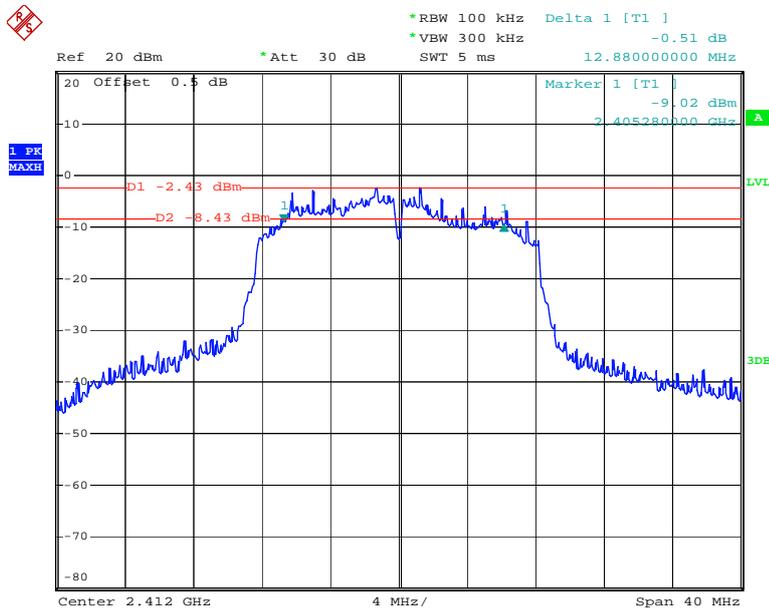


Date: 11.FEB.2015 15:03:08

Chain0: 802.11g Middle Channel

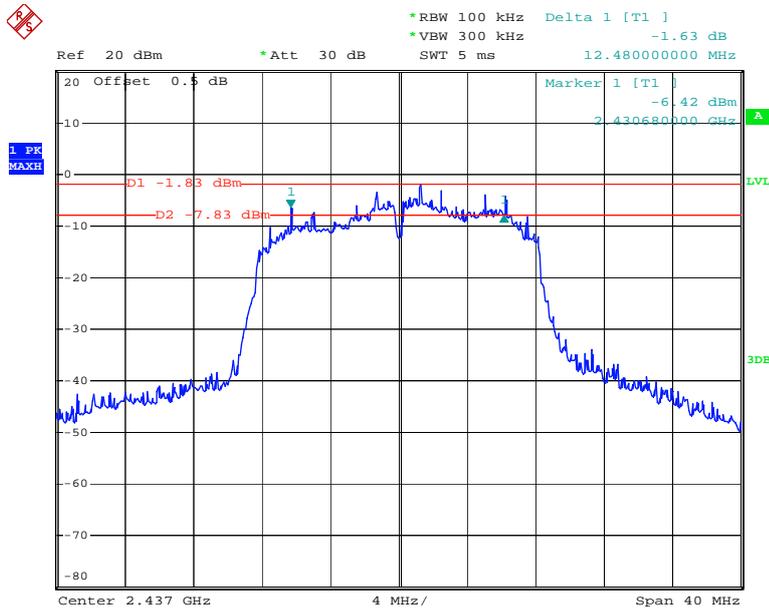


Date: 11.FEB.2015 15:02:01

Chain0: 802.11g High Channel

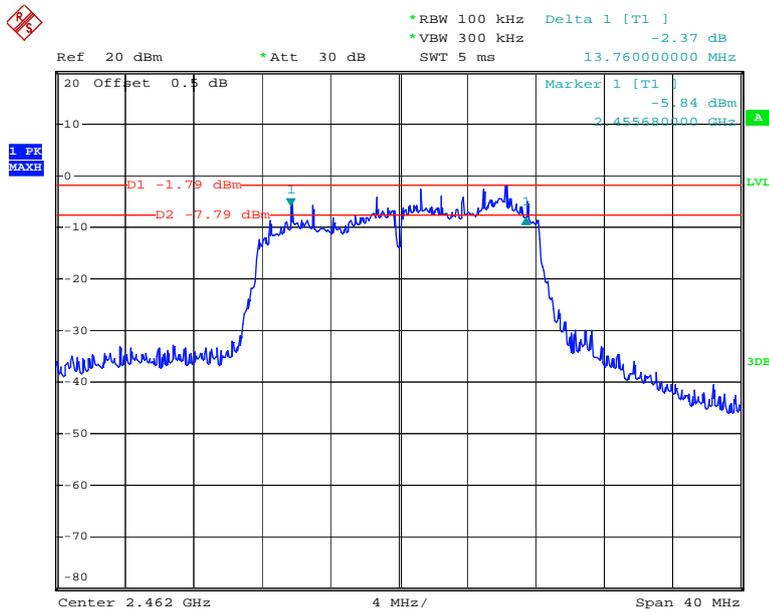


Date: 11.FEB.2015 14:55:20

Chain0: 802.11n20 Low Channel

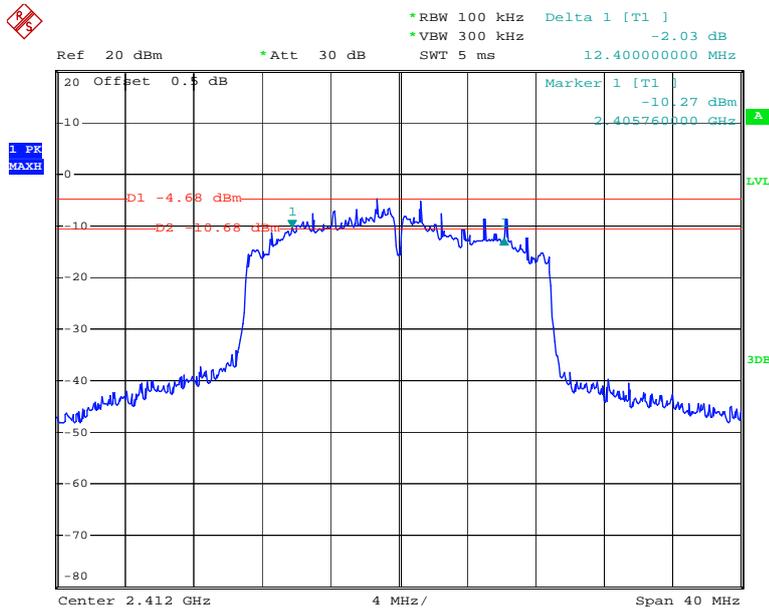


Date: 11.FEB.2015 15:08:09

Chain0: 802.11n20 Middle Channel

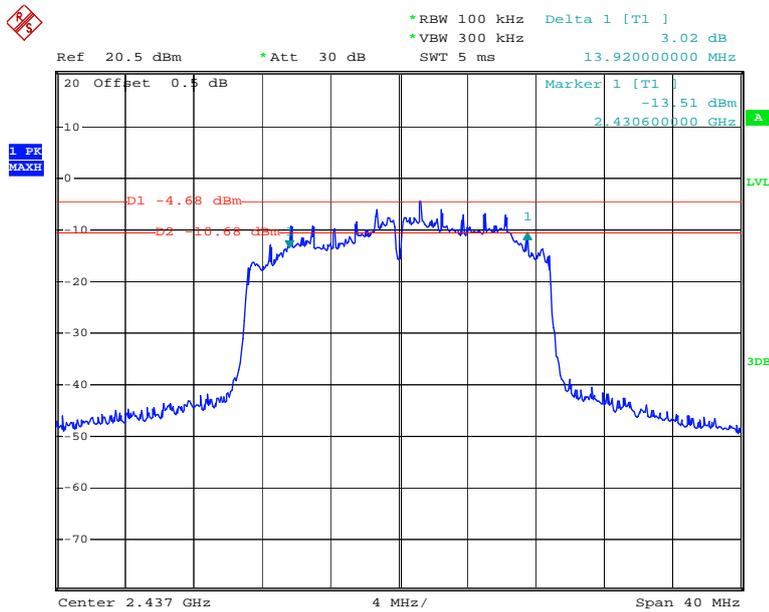


Date: 11.FEB.2015 16:25:19

Chain0: 802.11n20 High Channel

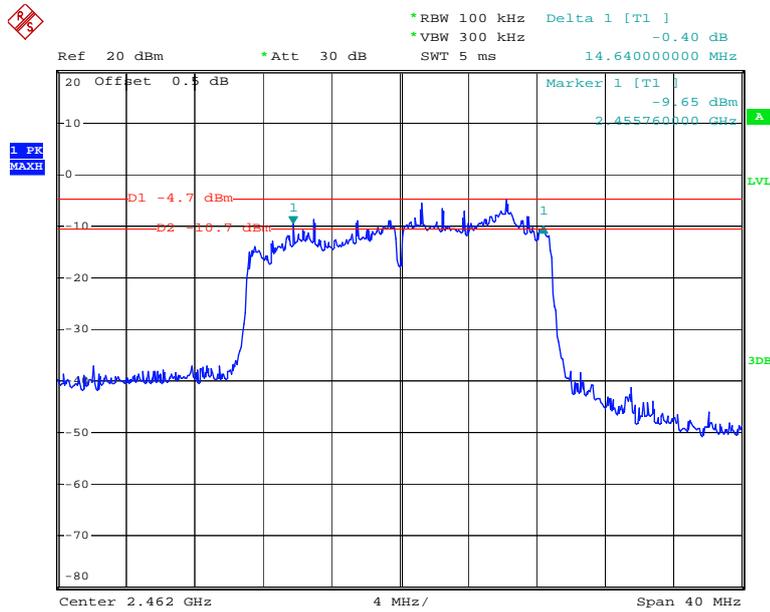


Date: 11.FEB.2015 15:23:13

Chain1: 802.11n20 Low Channel

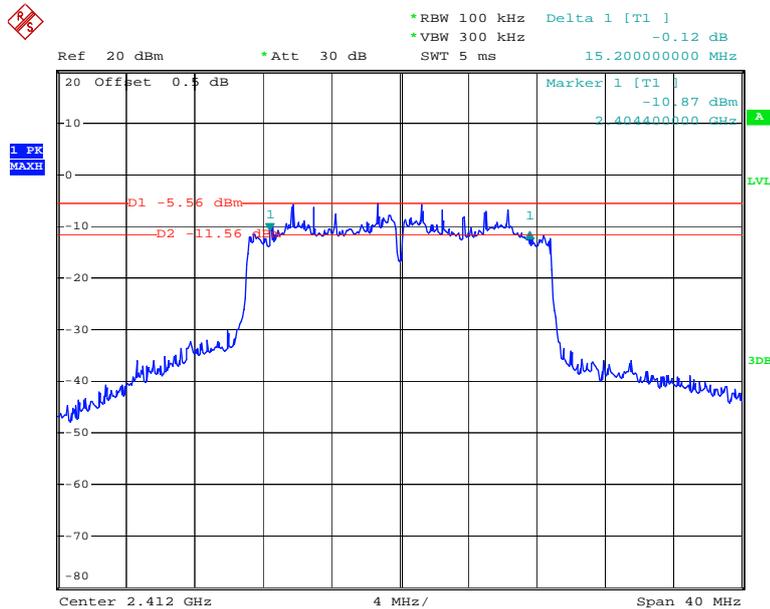


Date: 11.FEB.2015 17:36:31

Chain1: 802.11n20 Middle Channel

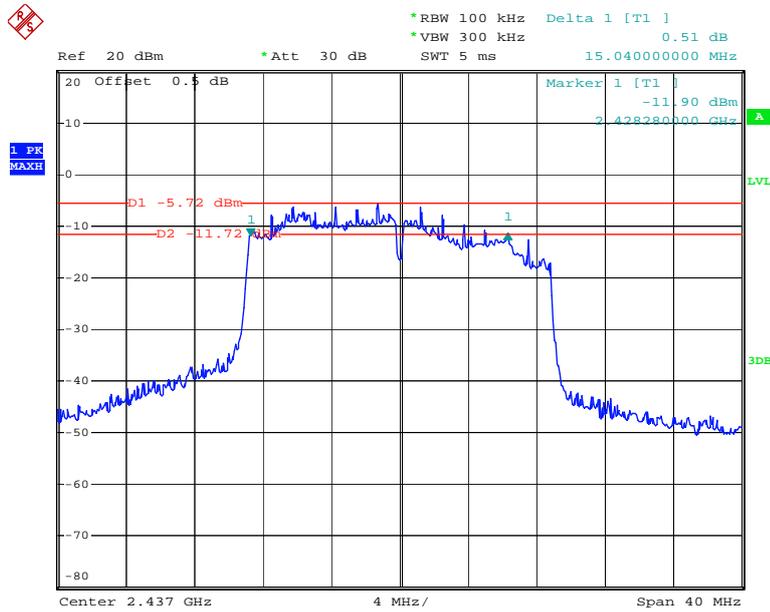


Date: 11.FEB.2015 17:43:00

Chain1: 802.11n20 High Channel

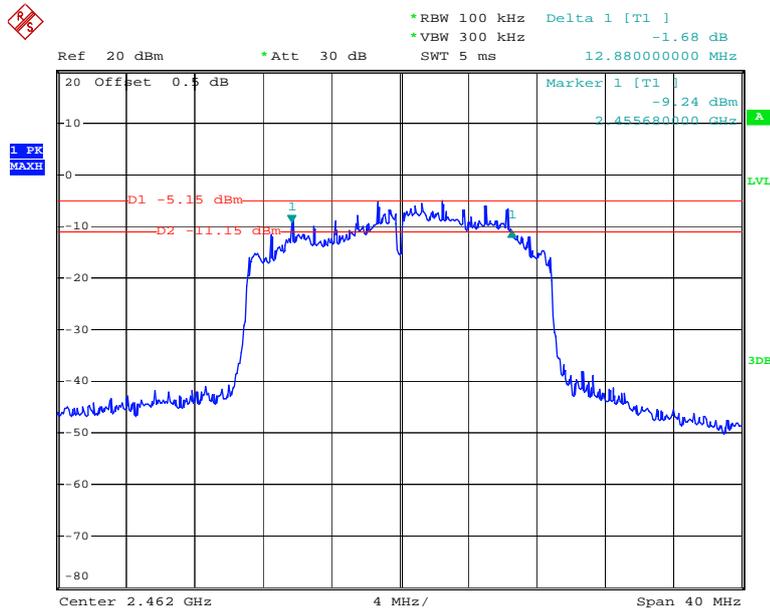


Date: 11.FEB.2015 17:46:55

Chain0: 802.11n40 Low Channel

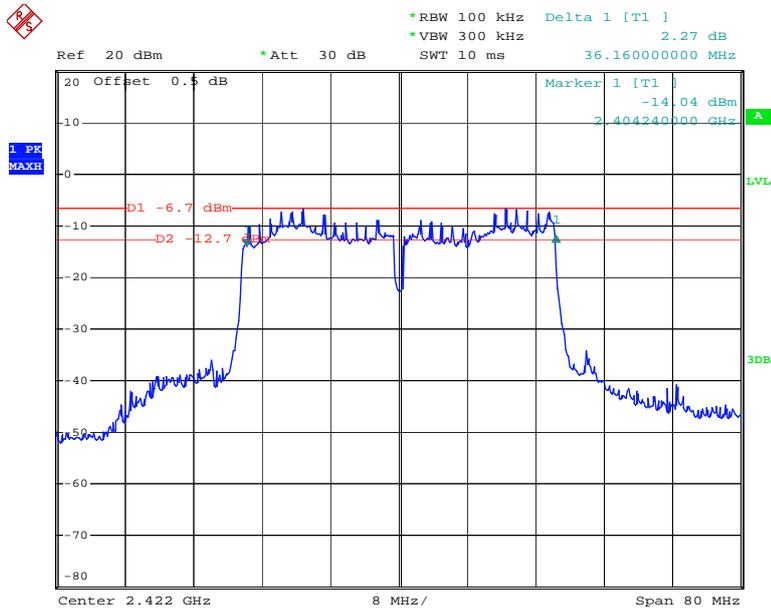


Date: 11.FEB.2015 16:05:51

Chain0: 802.11n40 Middle Channel

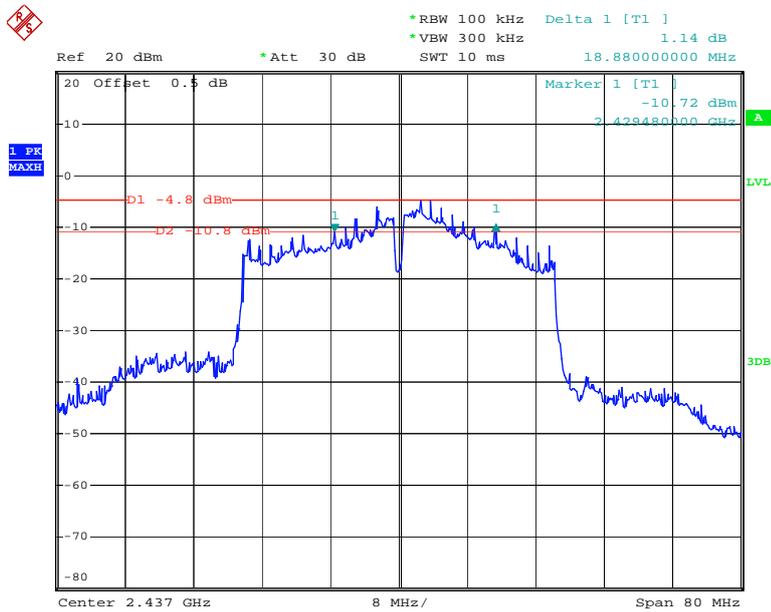


Date: 11.FEB.2015 16:10:00

Chain0: 802.11n40 High Channel

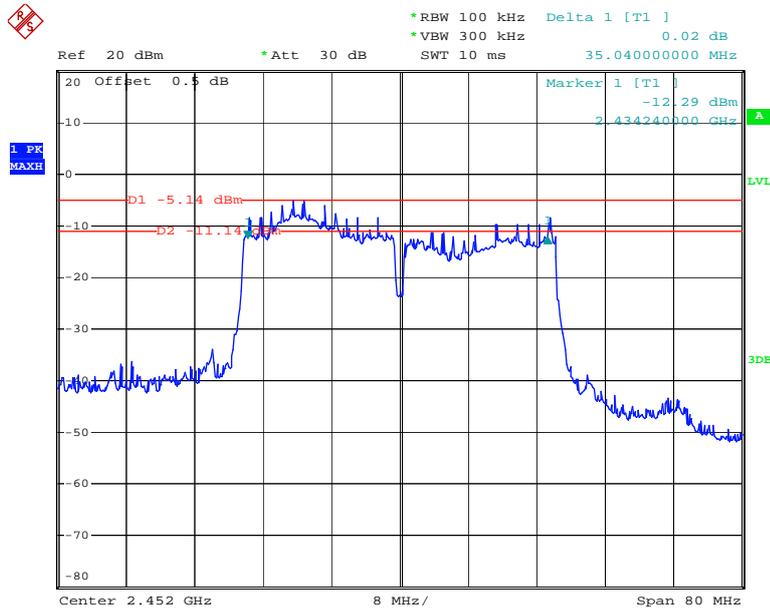


Date: 11.FEB.2015 15:27:27

Chain1: 802.11n40 Low Channel

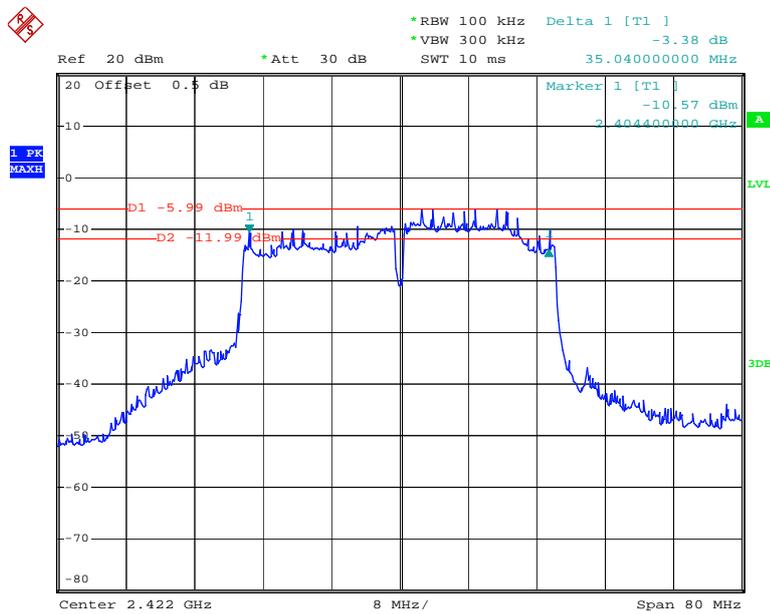


Date: 11.FEB.2015 18:09:59

Chain1: 802.11n40 Middle Channel

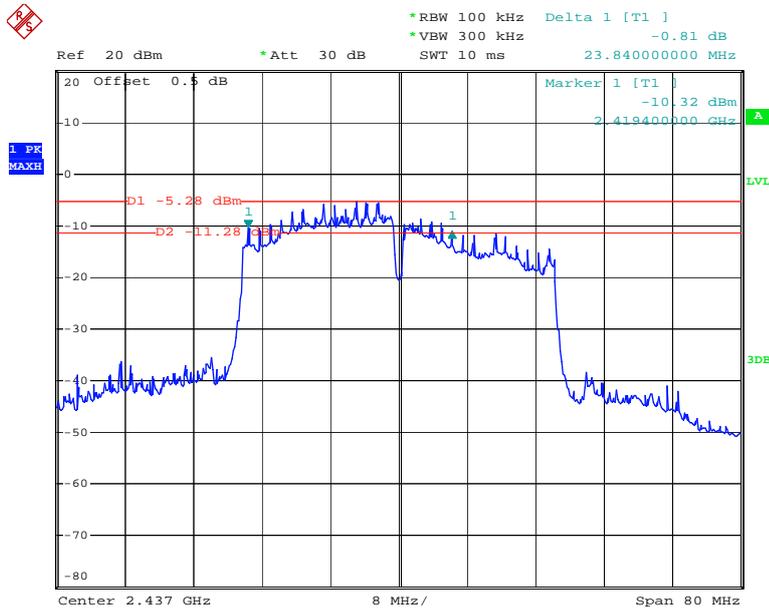

Date: 11.FEB.2015 17:59:58

Chain1: 802.11n40 High Channel

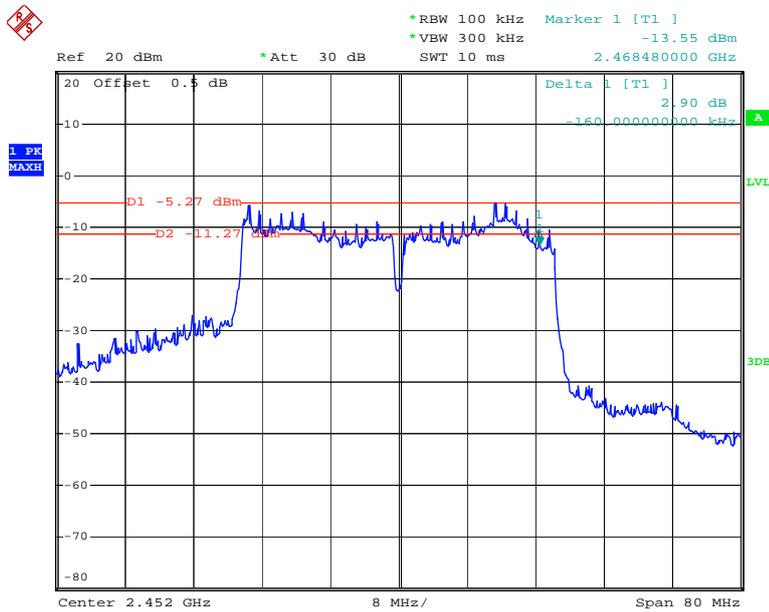

Date: 11.FEB.2015 17:55:15

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. According to KDB 558074 D01 DTS Meas Guidance v03r02, place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a spectrum analyzer or power meter sensor and power meter.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09
Agilent	Wideband Power Sensor	N1921A	MY54210016	2014-11-03	2015-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2014-11-03	2015-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2014-11-03	2015-11-03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	21.5 °C
Relative Humidity:	42 %
ATM Pressure:	101.3 kPa

* The testing was performed by Allen Qiao on 2015-02-11.

Test Mode: Transmitting

Test Mode	Channel	Frequency (MHz)	Conducted Peak Output Power (dBm)			Limit (dBm)	Result
			Chain 0	Chain 1	Total		
802.11b	Low	2412	12.61	/	/	30	PASS
	Middle	2437	13.11	/	/	30	PASS
	High	2462	12.89	/	/	30	PASS
802.11g	Low	2412	16.16	/	/	30	PASS
	Middle	2437	15.35	/	/	30	PASS
	High	2462	15.61	/	/	30	PASS
802.11n20	Low	2412	12.87	13.05	15.97	30	PASS
	Middle	2437	12.55	13.05	15.82	30	PASS
	High	2462	12.89	13.29	16.10	30	PASS
802.11n40	Low	2422	14.86	15.37	18.13	30	PASS
	Middle	2437	14.79	14.82	17.82	30	PASS
	High	2452	14.70	15.25	17.99	30	PASS

Test Mode	Channel	Frequency (MHz)	Conducted Average Output Power (dBm)			Limit (dBm)	Result
			Chain 0	Chain 1	Total		
802.11b	Low	2412	12.38	/	/	30	PASS
	Middle	2437	12.70	/	/	30	PASS
	High	2462	12.60	/	/	30	PASS
802.11g	Low	2412	11.53	/	/	30	PASS
	Middle	2437	10.73	/	/	30	PASS
	High	2462	11.12	/	/	30	PASS
802.11n20	Low	2412	8.31	8.41	11.37	30	PASS
	Middle	2437	8.03	8.48	11.27	30	PASS
	High	2462	8.37	8.76	11.58	30	PASS
802.11n40	Low	2422	8.43	8.74	11.60	30	PASS
	Middle	2437	8.14	8.45	11.31	30	PASS
	High	2452	8.39	8.85	11.64	30	PASS

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	21.5 °C
Relative Humidity:	42 %
ATM Pressure:	101.3 kPa

* *The testing was performed by Allen Qiao on 2015-02-11.*

Test Result: Compliance


Please refer to following table and plots.

Chain0: 802.11b Band Edge, Left Side

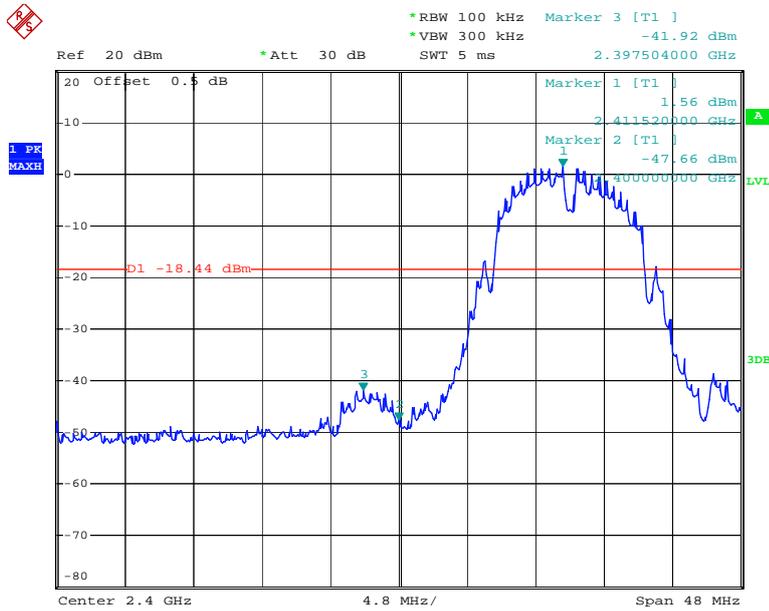


Date: 11.FEB.2015 14:42:10

Chain0: 802.11b Band Edge, Right Side

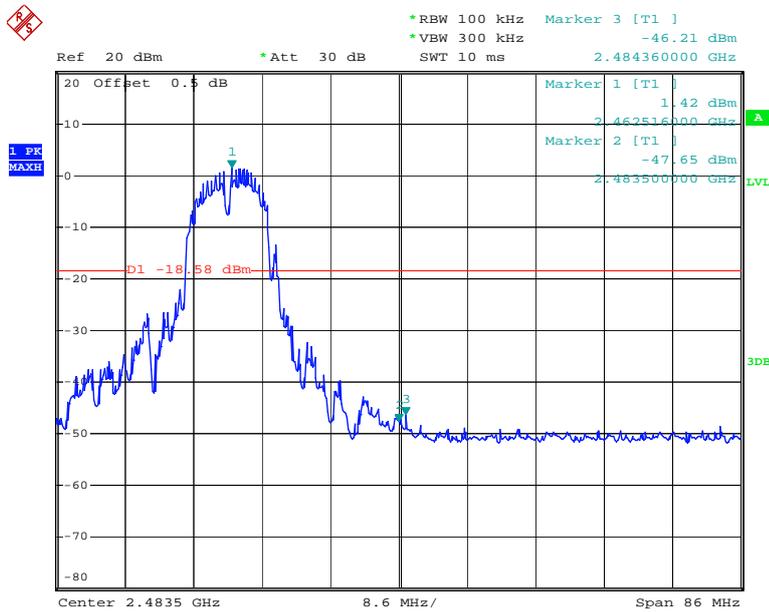


Date: 11.FEB.2015 14:50:12

Chain0: 802.11g Band Edge, Left Side

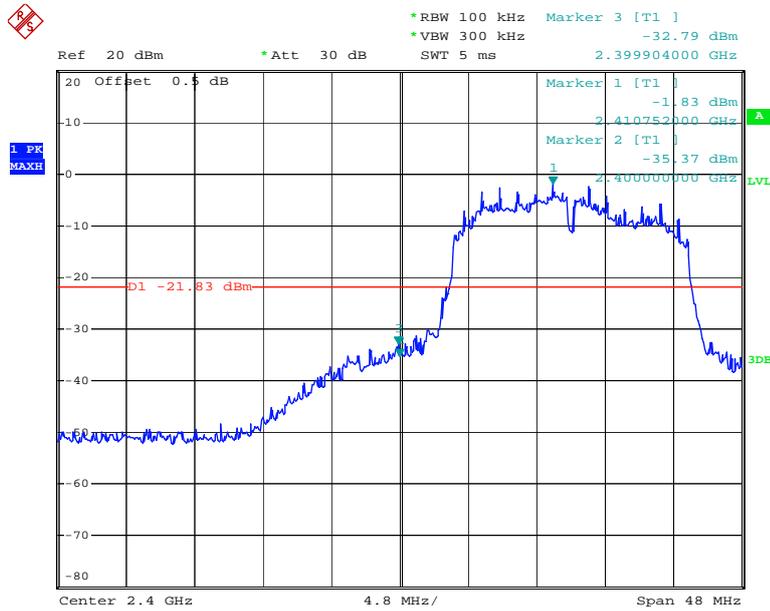


Date: 11.FEB.2015 15:05:29

Chain0: 802.11g Band Edge, Right Side

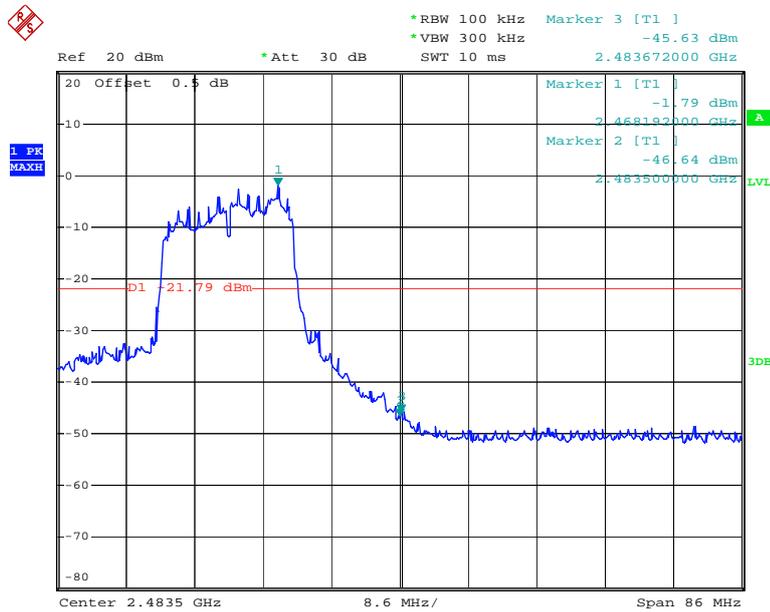


Date: 11.FEB.2015 14:57:41

Chain0: 802.11n20 Band Edge, Left Side

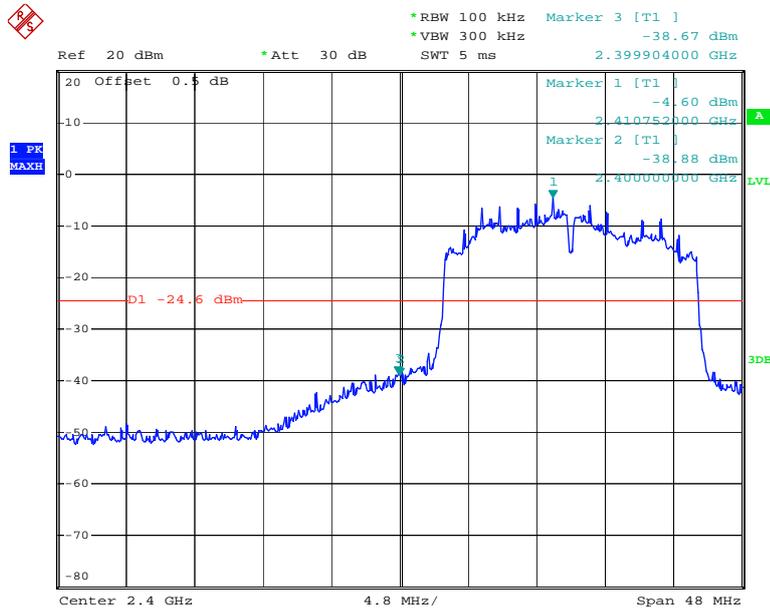


Date: 11.FEB.2015 15:10:16

Chain0: 802.11n20 Band Edge, Right Side

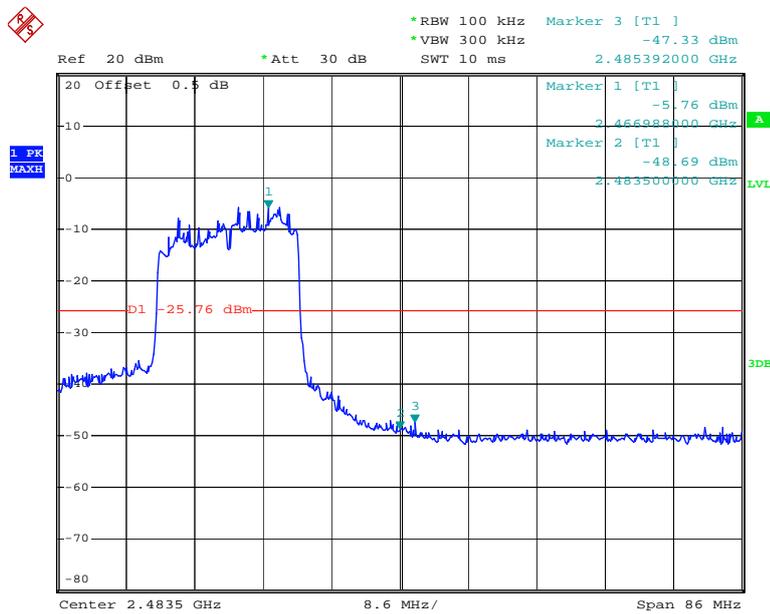


Date: 11.FEB.2015 15:25:39

Chain1: 802.11n20 Band Edge, Left Side

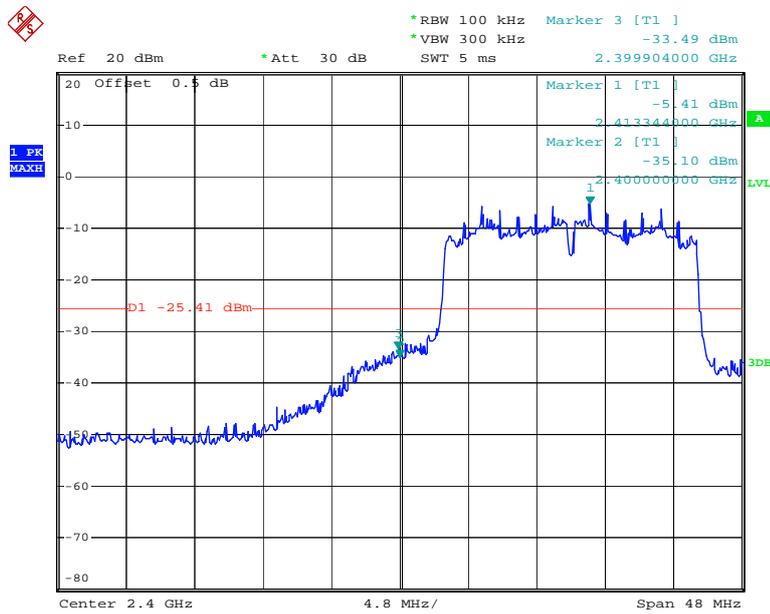


Date: 11.FEB.2015 17:38:51

Chain1: 802.11n20 Band Edge, Right Side

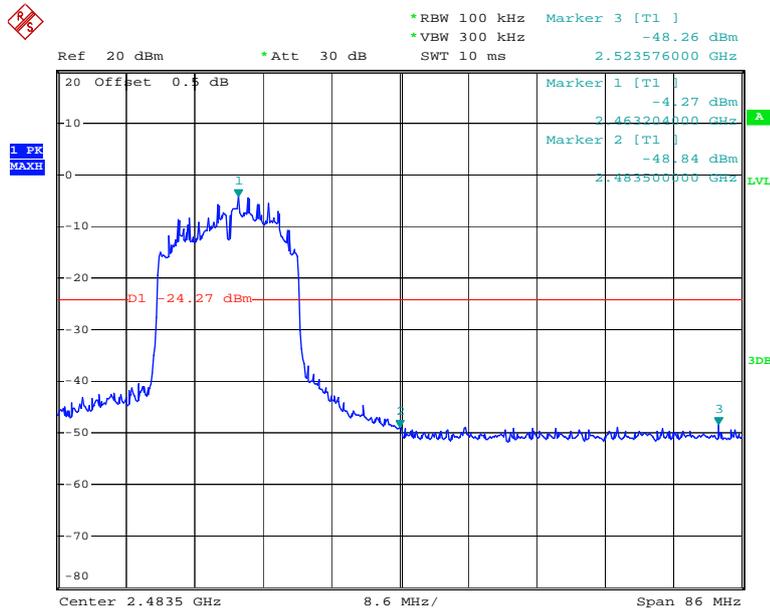


Date: 11.FEB.2015 17:49:22

Chain0: 802.11n40 Band Edge, Left Side

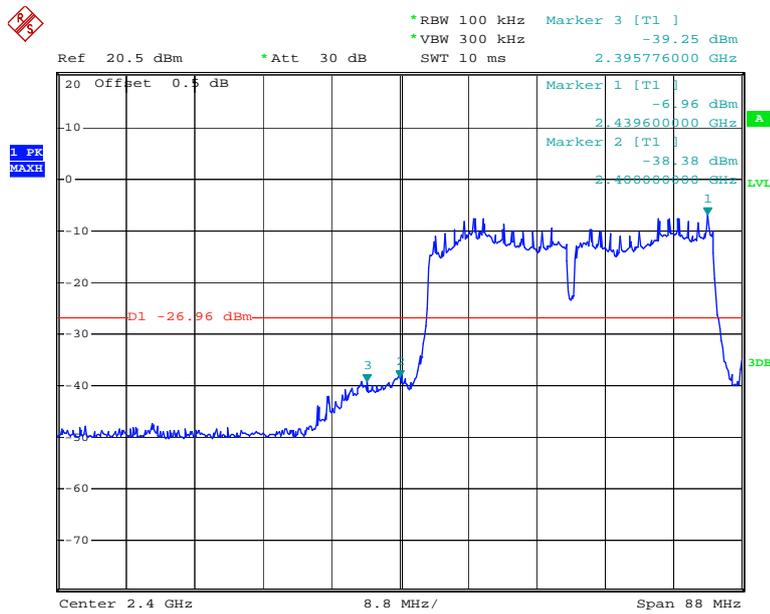


Date: 11.FEB.2015 16:22:21

Chain0: 802.11n40 Band Edge, Right Side

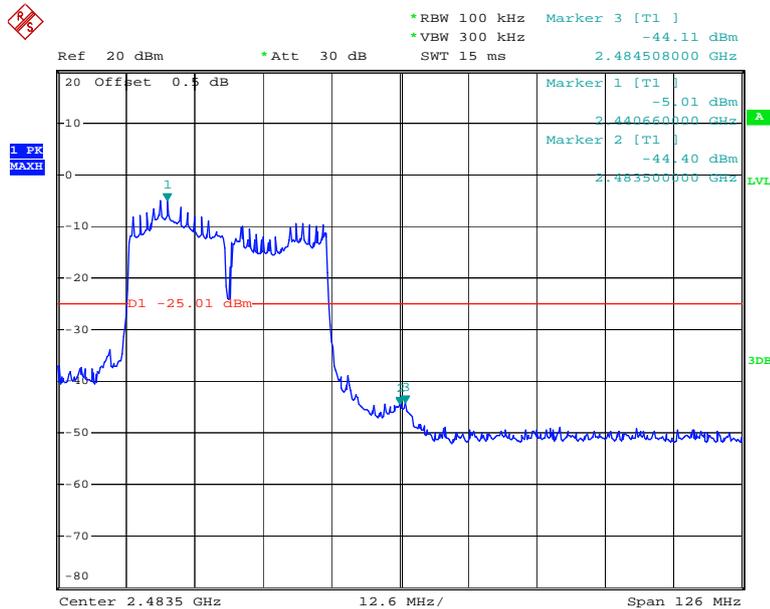


Date: 11.FEB.2015 15:29:16

Chain1: 802.11n40 Band Edge, Left Side

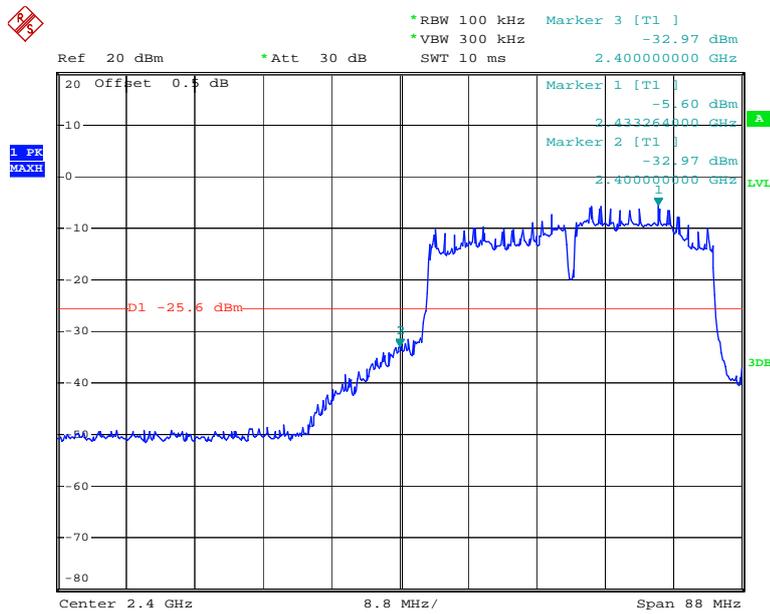

Date: 11.FEB.2015 18:11:39

Chain1: 802.11n40 Band Edge, Right Side

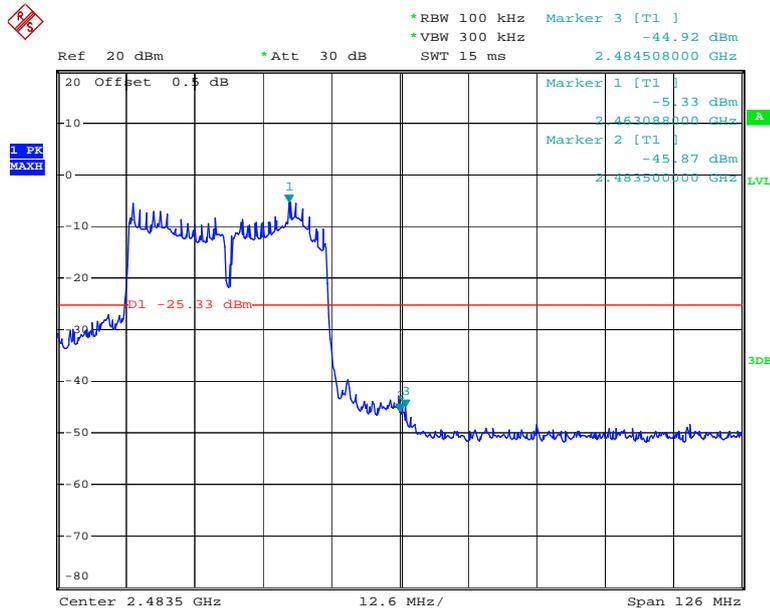

Date: 11.FEB.2015 17:57:44

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	21.5 °C
Relative Humidity:	42 %
ATM Pressure:	101.3 kPa

* The testing was performed by Allen Qiao on 2015-02-11.


Test Mode: Transmitting

Test Result: Pass

Test Mode	Channel	PSD (dBm/3kHz)			Limit (dBm/3kHz)	Result
		Chain 0	Chain 1	Total		
802.11b	Low	-6.77	/	/	8	Pass
	Middle	-8.69	/	/	8	Pass
	High	-11.24	/	/	8	Pass
802.11g	Low	-18.69	/	/	8	Pass
	Middle	-18.93	/	/	8	Pass
	High	-18.12	/	/	8	Pass
802.11n20	Low	-20.89	-20.68	-17.77	8	Pass
	Middle	-21.81	-19.54	-17.52	8	Pass
	High	-21.06	-20.48	-17.75	8	Pass
802.11n40	Low	-21.48	-20.70	-18.06	8	Pass
	Middle	-20.07	-20.00	-17.02	8	Pass
	High	-20.07	-20.75	-17.39	8	Pass


Please refer to the following plots

Chain0: 802.11b Low Channel

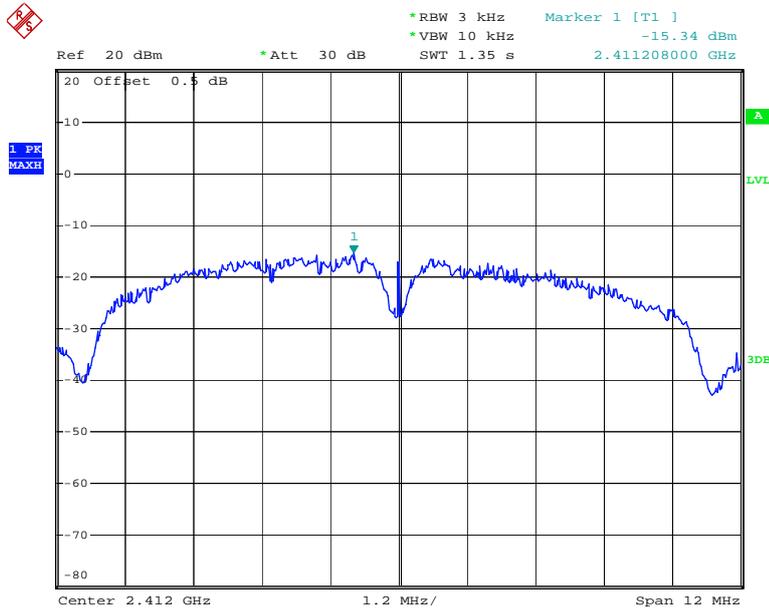


Date: 11.FEB.2015 18:25:14

Chain0: 802.11b Middle Channel

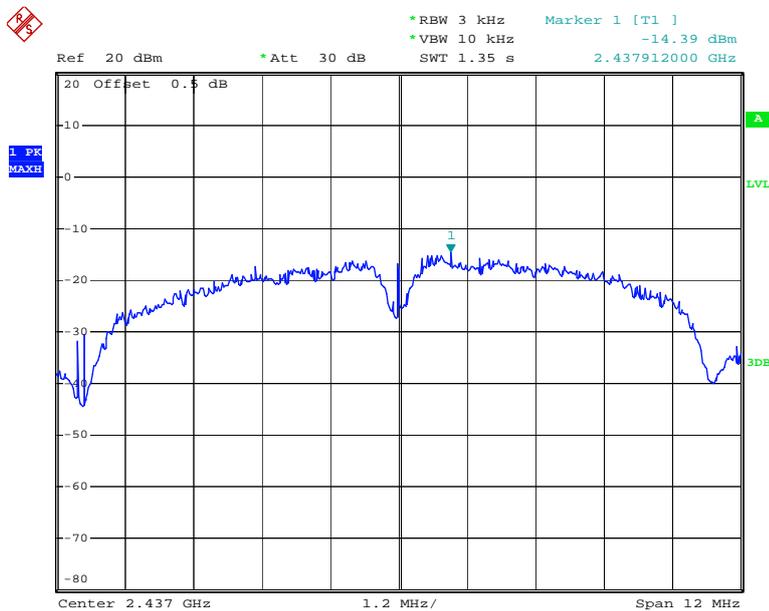


Date: 11.FEB.2015 18:26:05

Chain0: 802.11b High Channel

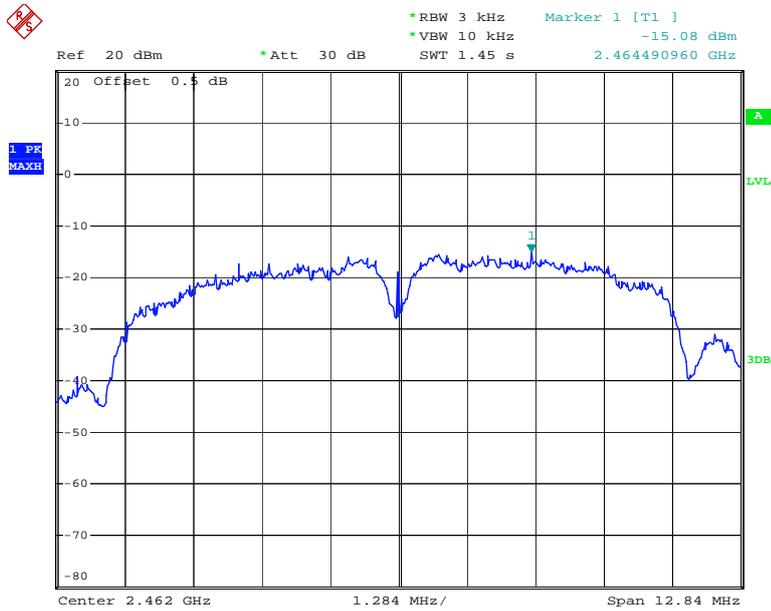


Date: 11.FEB.2015 18:26:55

Chain0: 802.11g Low Channel

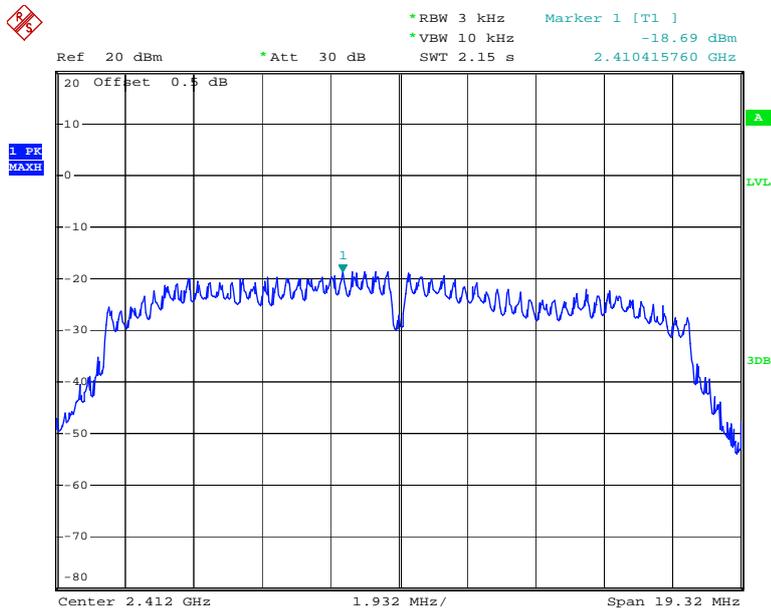


Date: 11.FEB.2015 15:04:38

Chain0: 802.11g Middle Channel

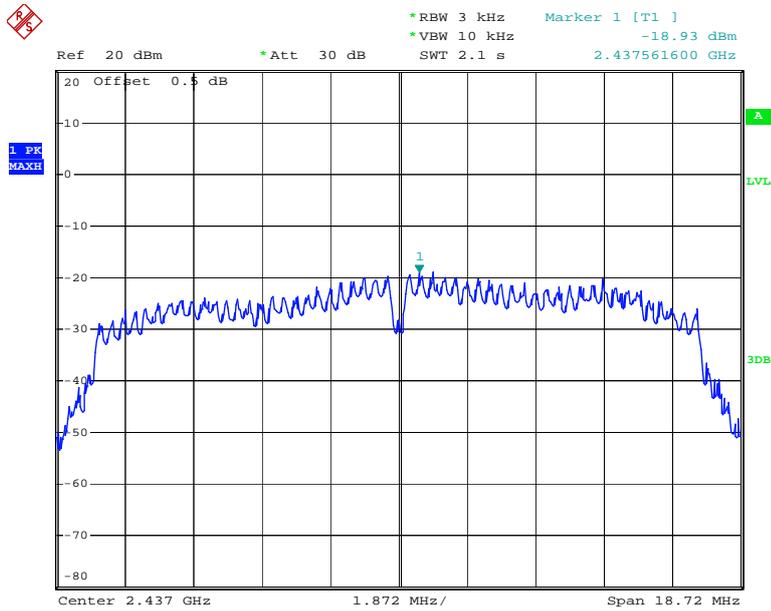


Date: 11.FEB.2015 15:02:16

Chain0: 802.11g High Channel

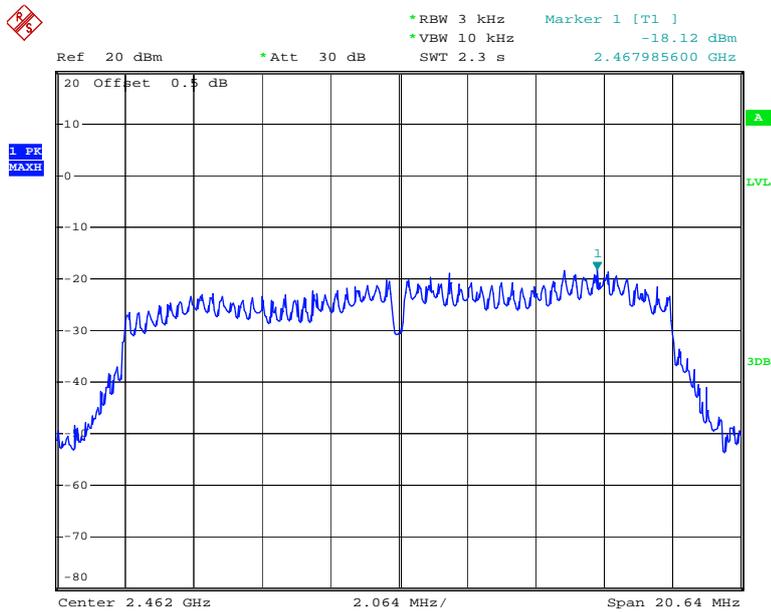


Date: 11.FEB.2015 14:56:45

Chain0: 802.11n20 High Channel

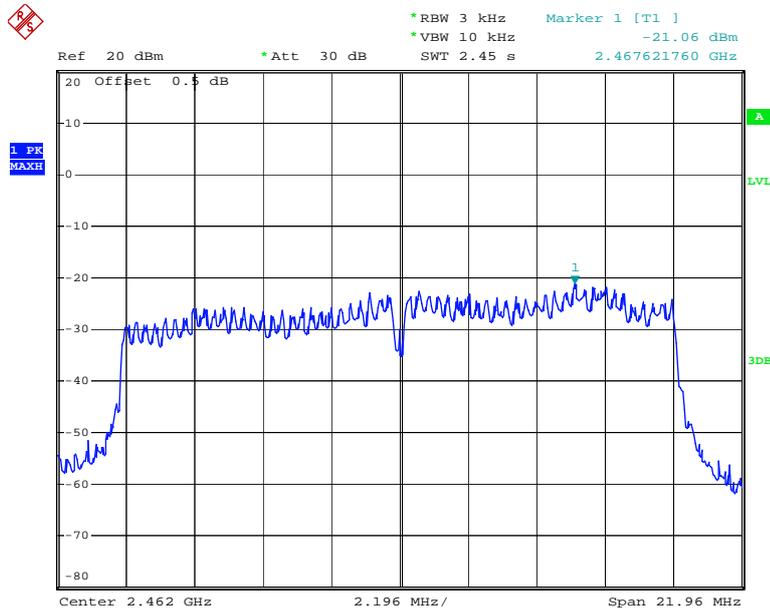


Date: 11.FEB.2015 15:24:35

Chain1: 802.11n20 Low Channel

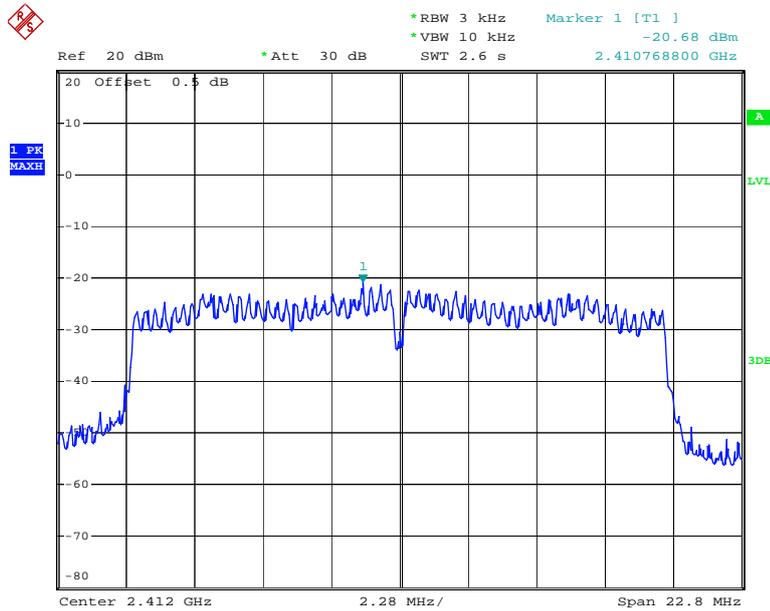


Date: 11.FEB.2015 17:37:55

Chain1: 802.11n20 Middle Channel

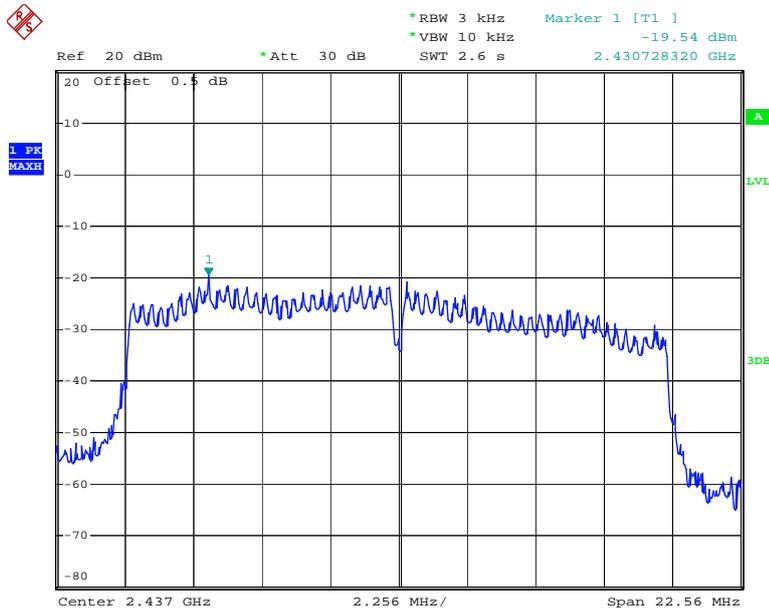


Date: 11.FEB.2015 17:44:29

Chain1: 802.11n20 High Channel

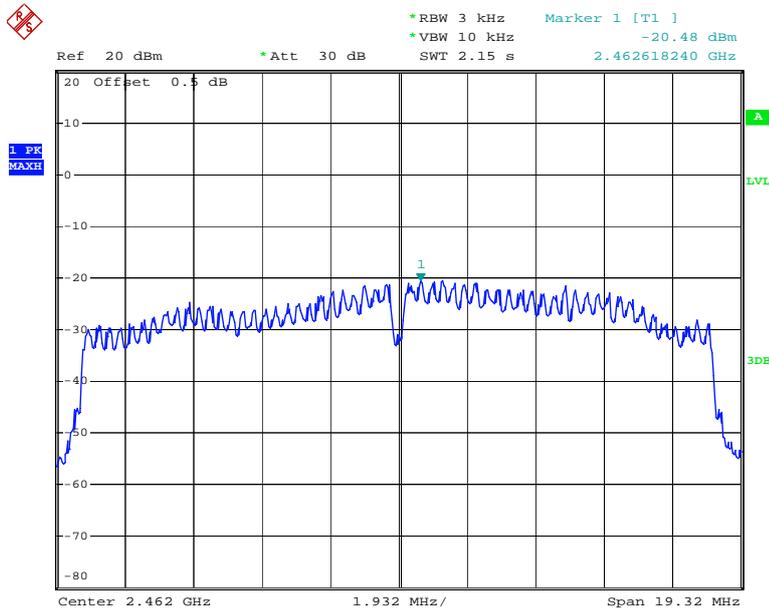


Date: 11.FEB.2015 17:48:24

Chain0: 802.11n40 Low Channel

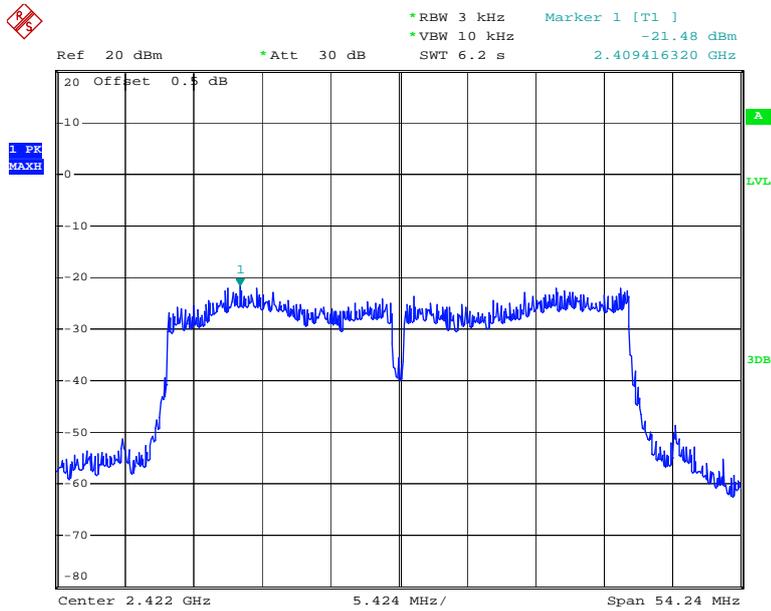


Date: 11.FEB.2015 16:07:26

Chain0: 802.11n40 Middle Channel

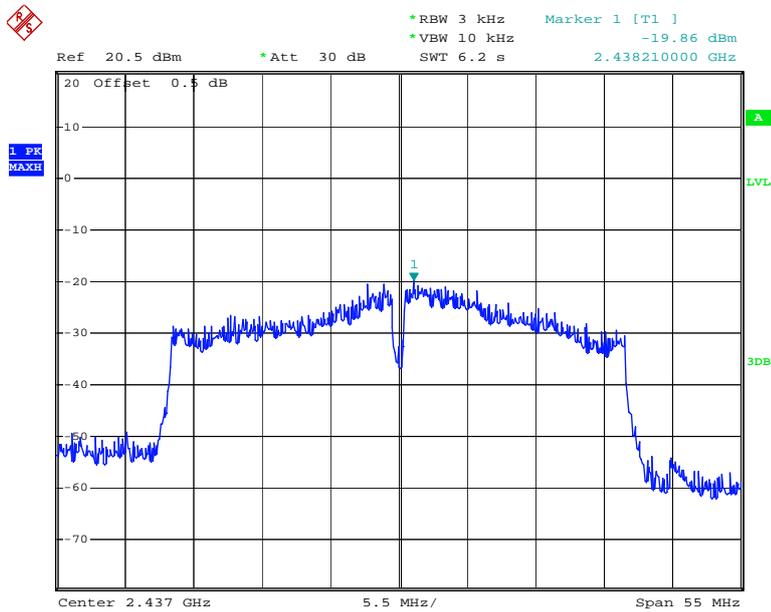


Date: 11.FEB.2015 16:16:26

Chain0: 802.11n40 High Channel

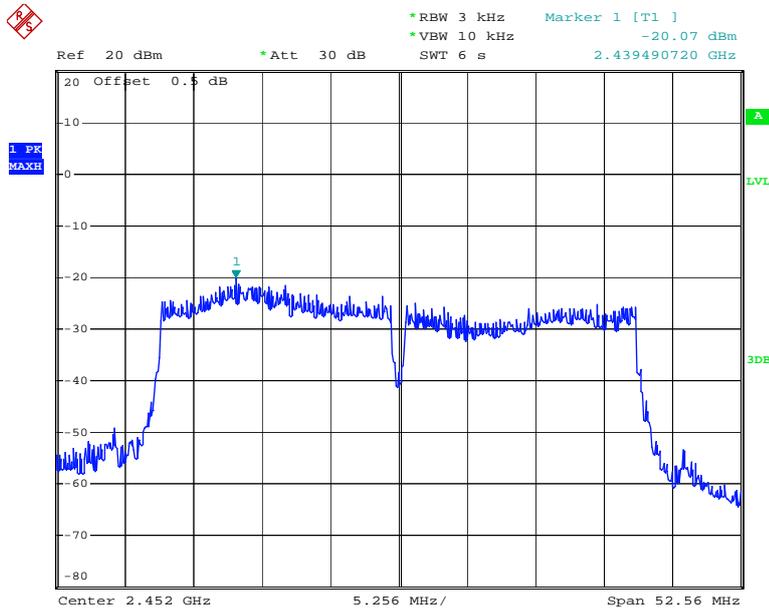

Date: 11.FEB.2015 15:28:28

Chain1: 802.11n40 Low Channel

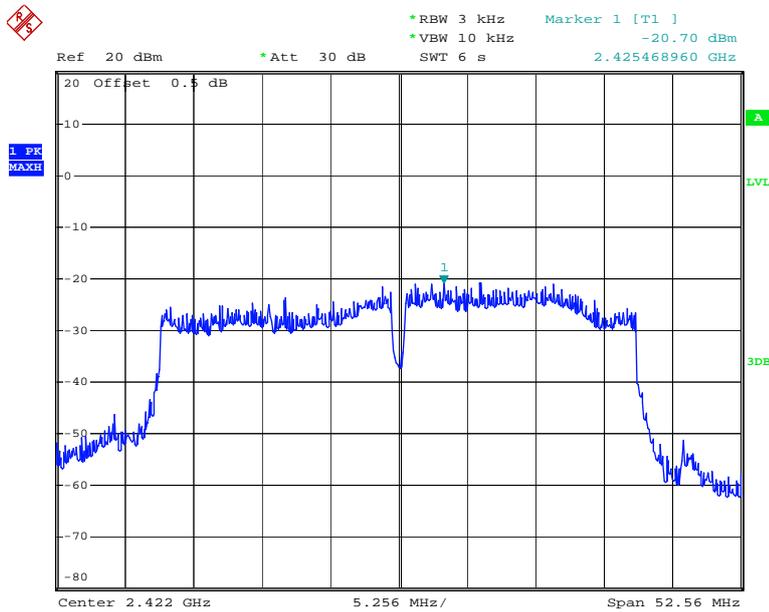

Date: 11.FEB.2015 18:10:34

