



Appendix B DASY5 measurement results

Table of contents
GSM835 Head
GSM835 Body
GSM1900 Head
GSM1900 Body
UMTS Band V Head
UMTS Band V Body
LTE Band V Head
LTE Band V Body
LTE Band VII Head
LTE Band VII Body
WiFi 2.4G Head
WiFi 2.4G Body

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 GSM850 190CH Left hand touch cheek

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 41.296$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.58, 6.58, 6.58); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.250 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.884 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.172 W/kg

Maximum value of SAR (measured) = 0.254 W/kg

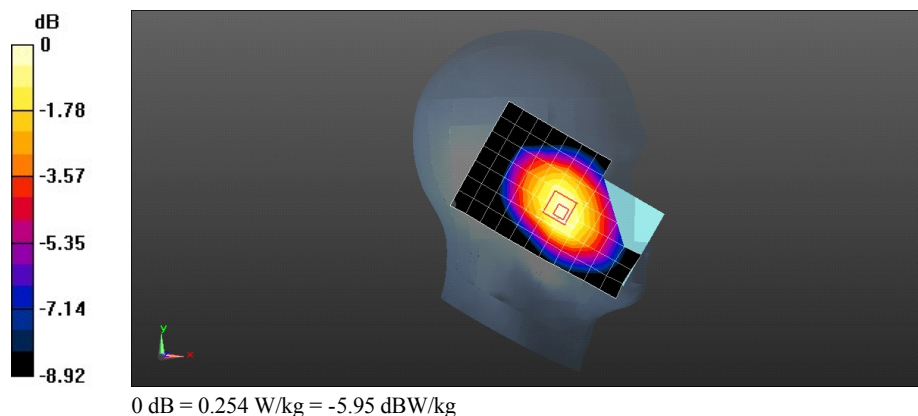

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 GSM850 190CH Left hand touch cheek with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 41.296$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.58, 6.58, 6.58); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.255 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.544 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.256 W/kg

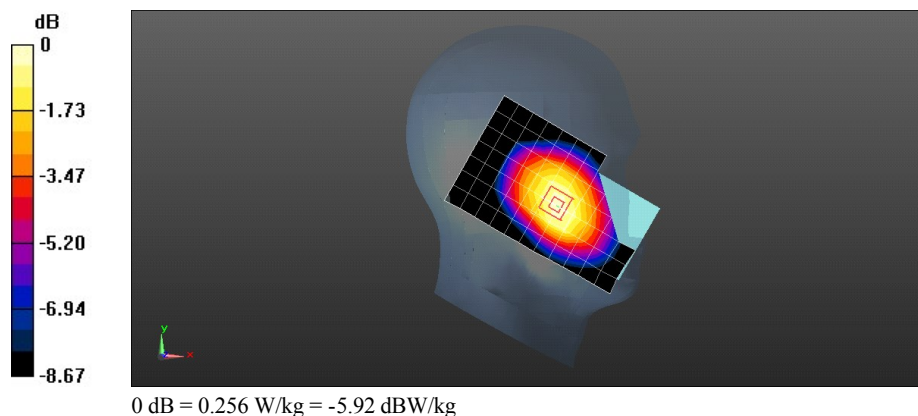

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 GSM850 190CH Back Side 15mm

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.982$ S/m; $\epsilon_r = 52.83$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.21, 6.21, 6.21); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.375 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.03 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.427 W/kg

SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 0.374 W/kg

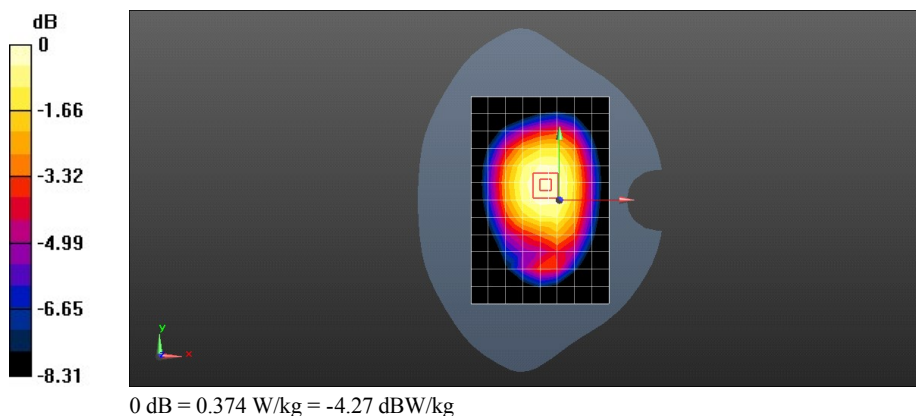

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 GSM850 190CH Back Side 15mm with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.982$ S/m; $\epsilon_r = 52.83$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.21, 6.21, 6.21); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.326 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.66 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.229 W/kg

Maximum value of SAR (measured) = 0.332 W/kg

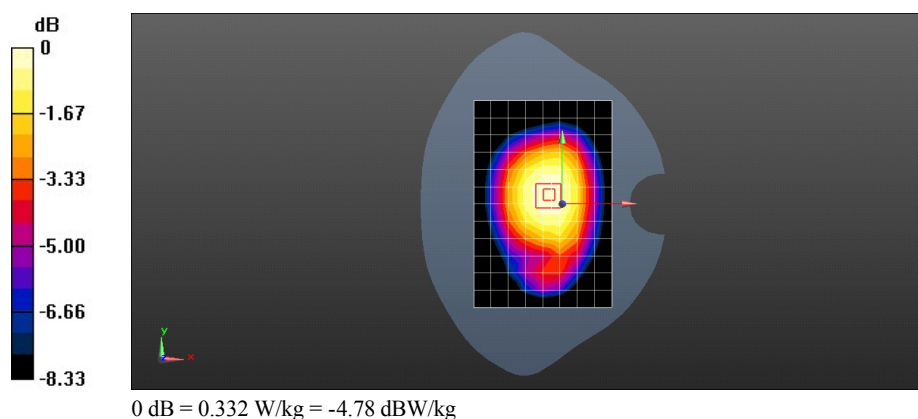

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 GSM850 190CH 2TS Back Side 10mm

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz;Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.982$ S/m; $\epsilon_r = 52.83$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.21, 6.21, 6.21); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.362 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.54 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.424 W/kg

SAR(1 g) = 0.340 W/kg; SAR(10 g) = 0.259 W/kg

Maximum value of SAR (measured) = 0.373 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.54 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.518 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.358 W/kg

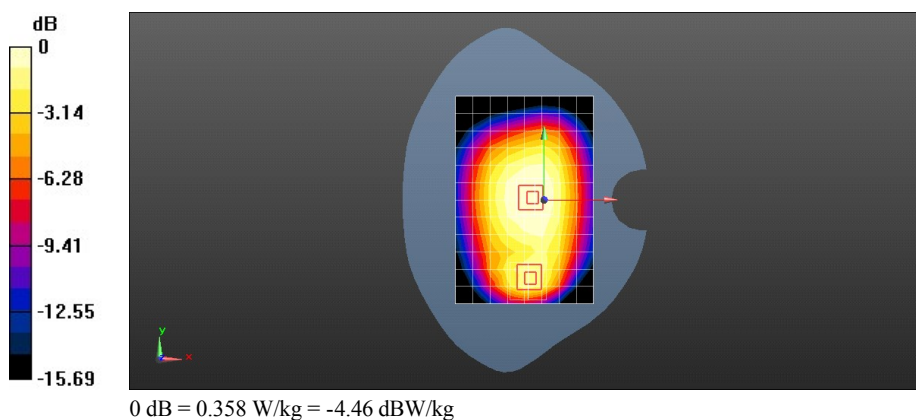

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 GSM850 190CH 2TS Back Side 10mm with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz;Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.982$ S/m; $\epsilon_r = 52.83$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.21, 6.21, 6.21); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.385 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.78 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.426 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.261 W/kg

Maximum value of SAR (measured) = 0.377 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.78 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.491 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.344 W/kg

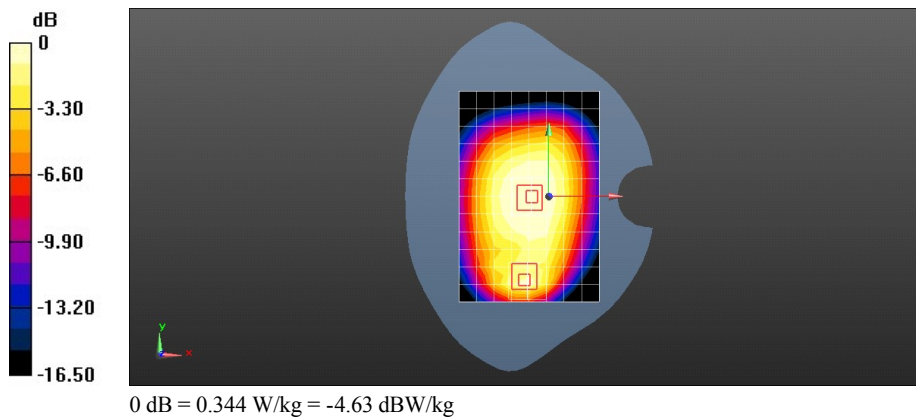

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 GSM1900 512CH Left hand touch check

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1850.2 MHz;Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 40.274$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.09, 5.09, 5.09); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.250 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 6.264 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.150 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.278 W/kg

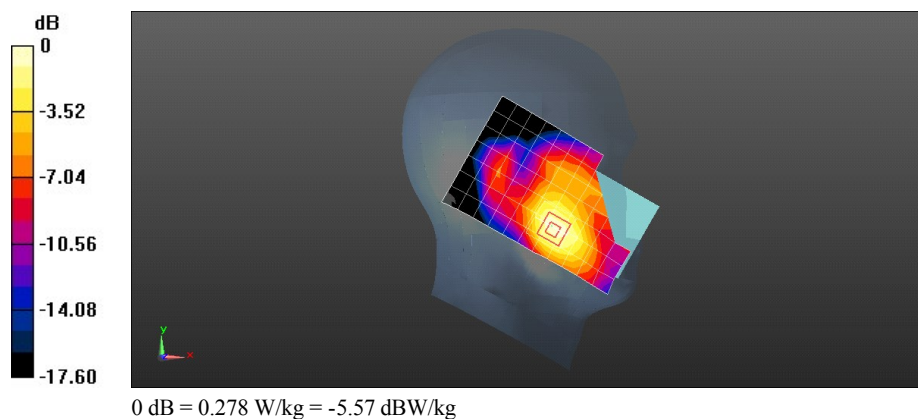

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 GSM1900 512CH Left hand touch cheek with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1850.2 MHz;Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 40.274$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.09, 5.09, 5.09); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.233 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 6.644 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.141 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.257 W/kg

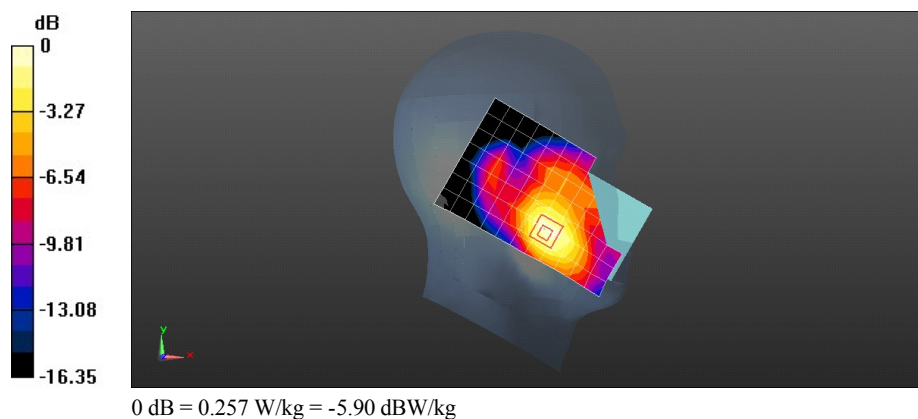

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 GSM1900 661CH Back Side 15mm

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.514$ S/m; $\epsilon_r = 51.56$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = -8.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.522 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.731 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.755 W/kg

SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.278 W/kg

Maximum value of SAR (measured) = 0.573 W/kg

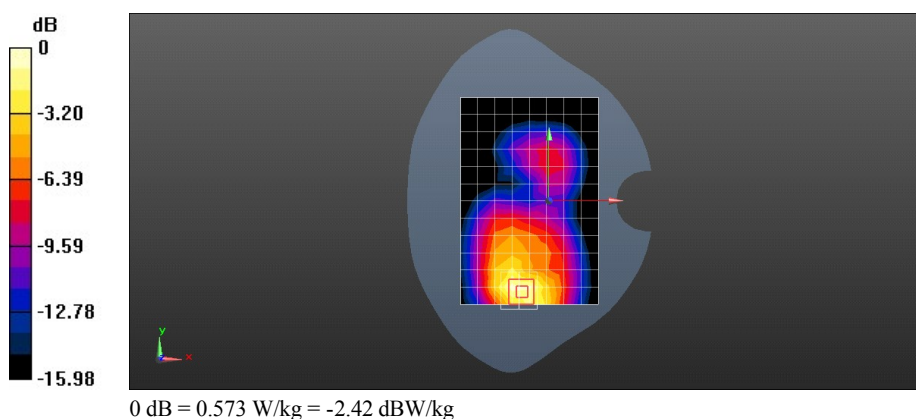

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 GSM1900 661CH Back Side 15mm with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.514$ S/m; $\epsilon_r = 51.56$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = -8.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.580 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.556 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.802 W/kg

SAR(1 g) = 0.499 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 0.604 W/kg

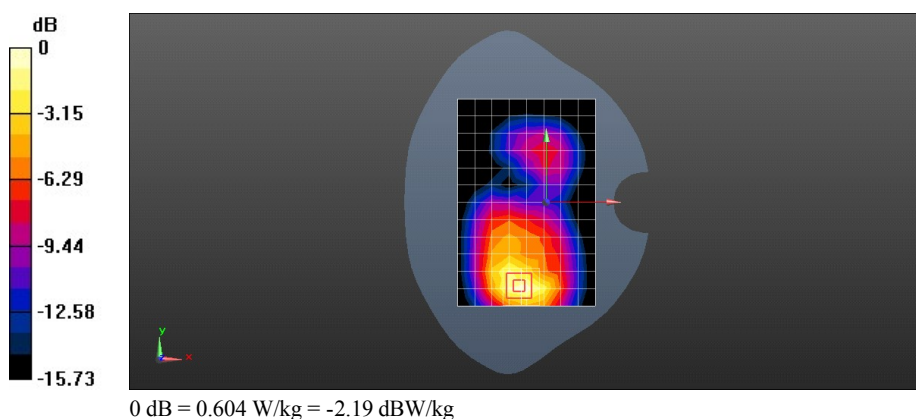

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 GSM1900 GPRS 1TS 810CH Back Side 10mm with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1909.8 MHz;Duty Cycle: 1:8.30042

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.541$ S/m; $\epsilon_r = 51.442$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = -8.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.13 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.128 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.531 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

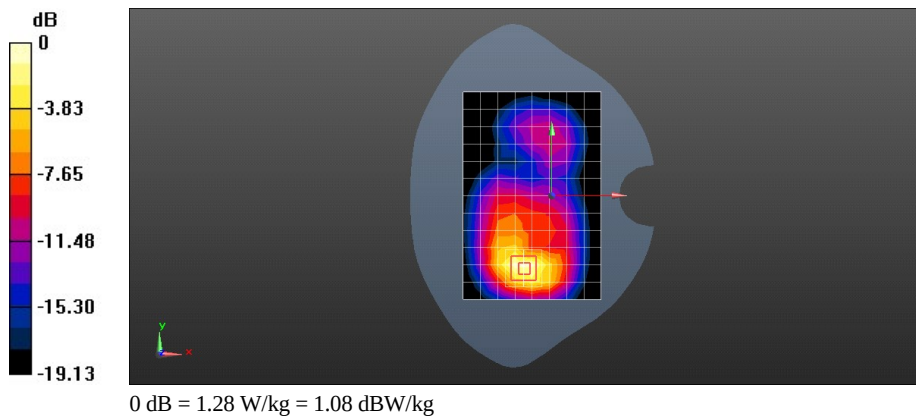

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 UMTS Band V 4233CH Left hand touch cheek

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 846.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.18$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.58, 6.58, 6.58); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 0.349 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.292 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.238 W/kg

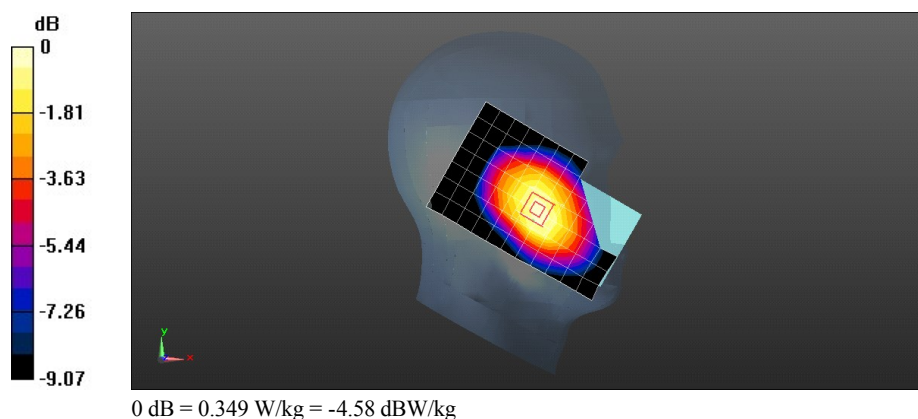

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 UMTS Band V 4233CH Left hand touch cheek with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 846.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.18$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.58, 6.58, 6.58); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.298 W/kg


Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.039 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 0.303 W/kg

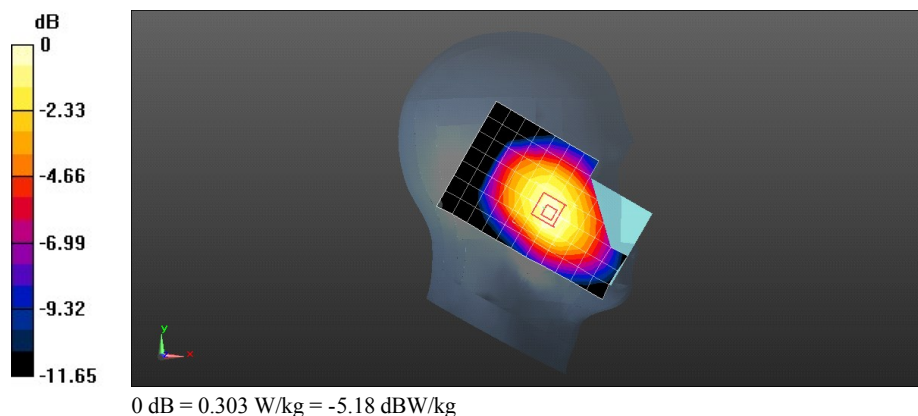

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 UMTS Band V 4182CH Back Side 15mm

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 52.834$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.21, 6.21, 6.21); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.422 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 21.11 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.297 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.430 W/kg

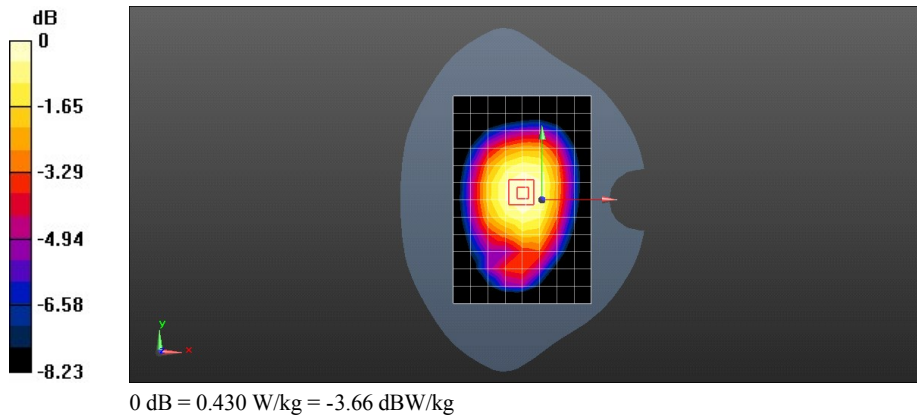

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 UMTS Band V 4182CH Back Side 15mm with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 52.834$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.21, 6.21, 6.21); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.431 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 20.76 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.296 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.428 W/kg

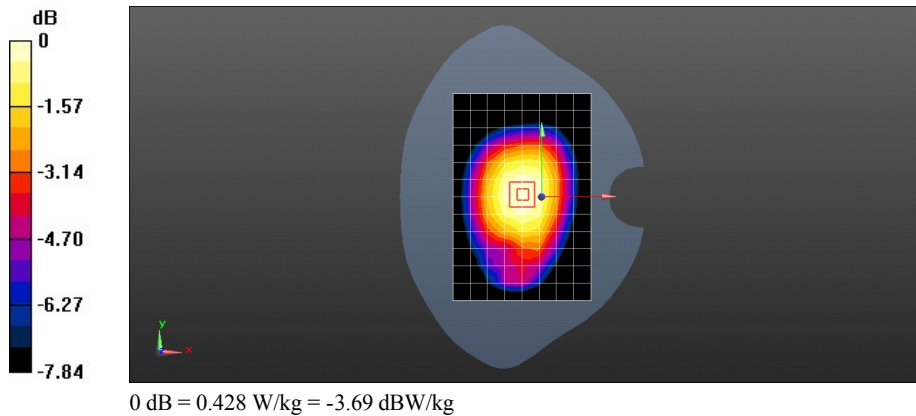

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 UMTS Band V 4182CH Back Side 10mm

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 52.834$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.21, 6.21, 6.21); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.488 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.01 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.449 W/kg; SAR(10 g) = 0.342 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.492 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 22.01 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.760 W/kg

SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.231 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.516 W/kg

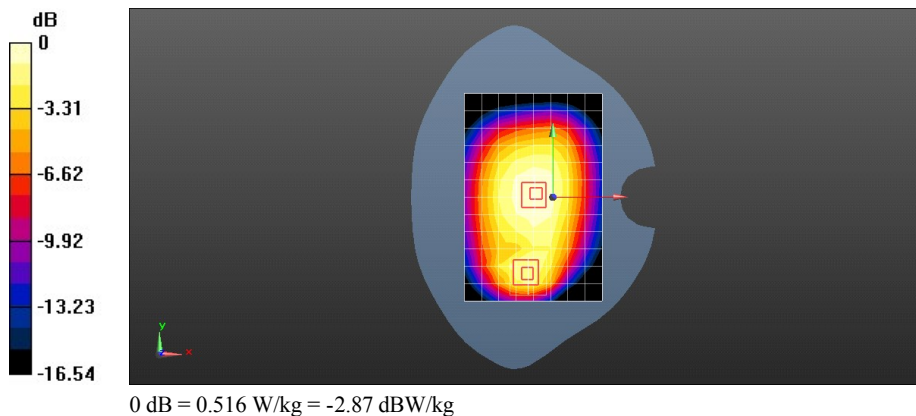

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 UMTS Band V 4182CH Back Side 10mm with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 52.834$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.21, 6.21, 6.21); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.482 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.09 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.546 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.335 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.481 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 22.09 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.199 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.436 W/kg

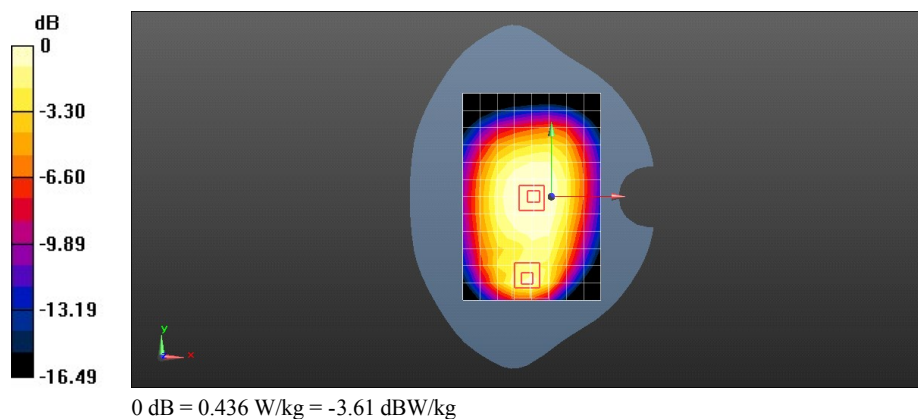

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 LTE Band V 10M QPSK 1RB#49 20450CH Left hand touch cheek

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 829 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.392$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.58, 6.58, 6.58); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.254 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.534 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.255 W/kg

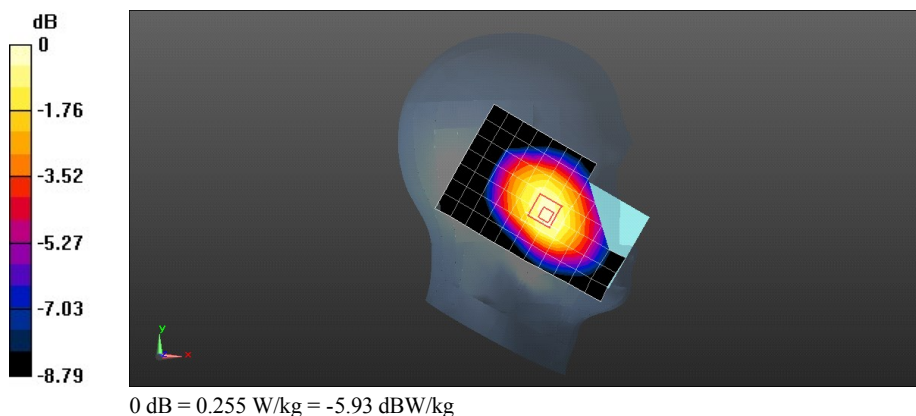

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 LTE Band V 10M QPSK 1RB#49 20450CH Back Side 15mm with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 829 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.966$ S/m; $\epsilon_r = 52.901$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.21, 6.21, 6.21); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 0.348 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.77 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.399 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.242 W/kg

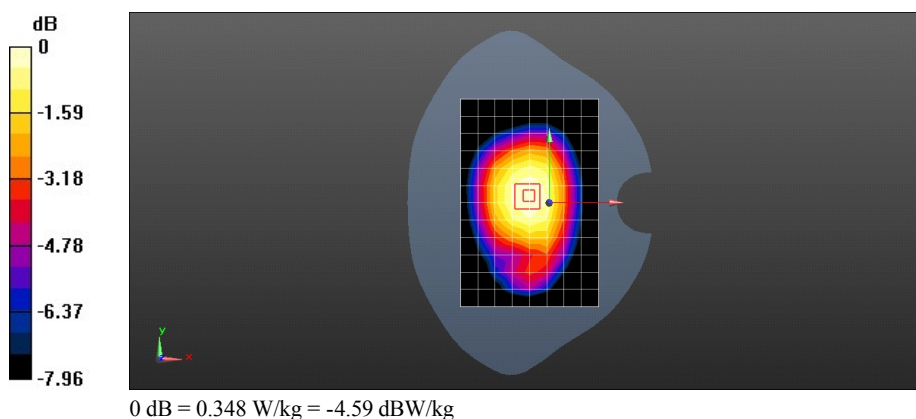

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 LTE Band V 10M QPSK 1RB#49 20450CH Back Side 10mm with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 829 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.966$ S/m; $\epsilon_r = 52.901$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.21, 6.21, 6.21); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.391 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.19 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.272 W/kg

Maximum value of SAR (measured) = 0.393 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.19 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.537 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.171 W/kg

Maximum value of SAR (measured) = 0.376 W/kg

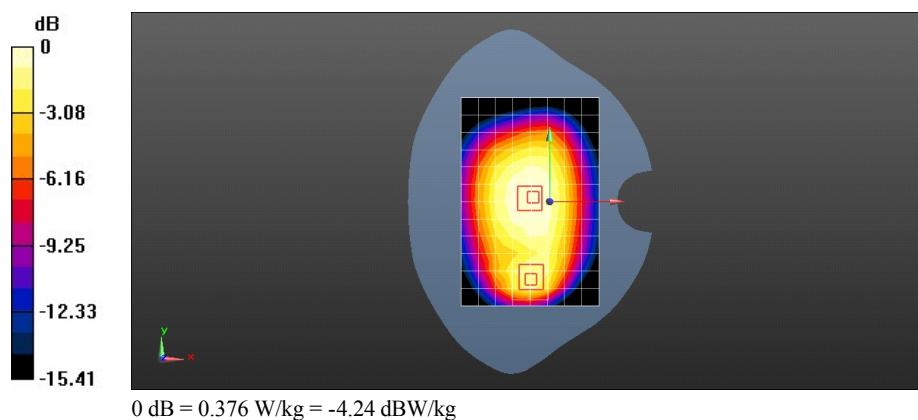

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 LTE Band VII 20M QPSK 1RB#50 21350CH Right hand touch cheek

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 39.974$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.43, 4.43, 4.43); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.429 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.092 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.668 W/kg

SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.455 W/kg

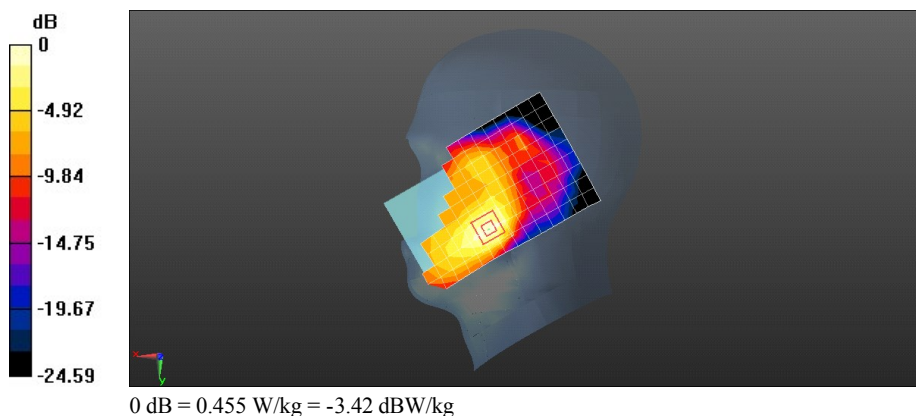

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 LTE Band VII 20M QPSK 1RB#50 21350CH Right hand touch cheek with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 39.974$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.43, 4.43, 4.43); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.424 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.575 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.653 W/kg

SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.450 W/kg

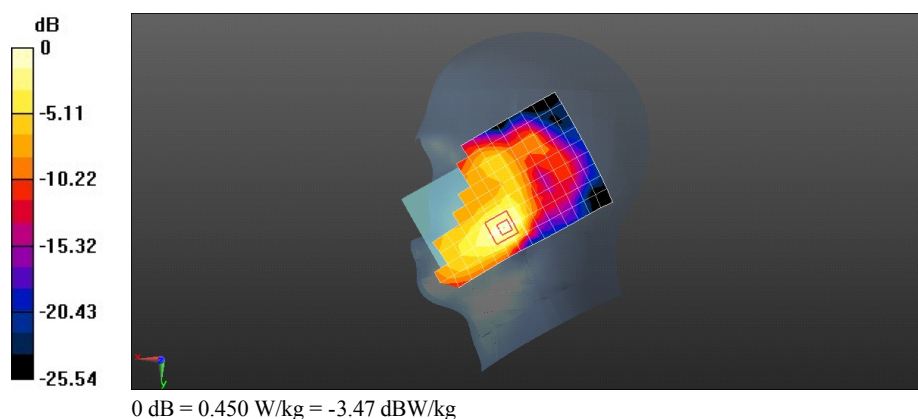

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 LTE Band VII 20M QPSK 1RB#50 20850CH Back Side 15mm

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 2.118$ S/m; $\epsilon_r = 51.997$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.14, 4.14, 4.14); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.663 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.389 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.316 W/kg

Maximum value of SAR (measured) = 0.748 W/kg

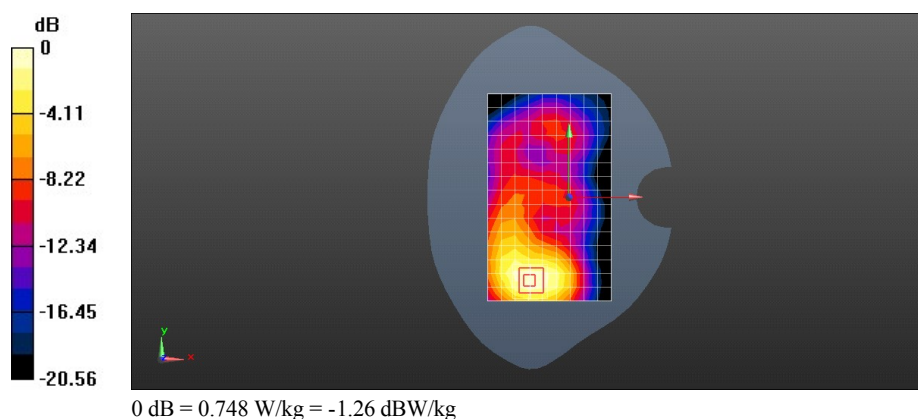

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 LTE Band VII 20M QPSK 1RB#50 20850CH Back Side 15mm with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 2.118$ S/m; $\epsilon_r = 51.997$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.14, 4.14, 4.14); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.693 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.056 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.310 W/kg

Maximum value of SAR (measured) = 0.749 W/kg

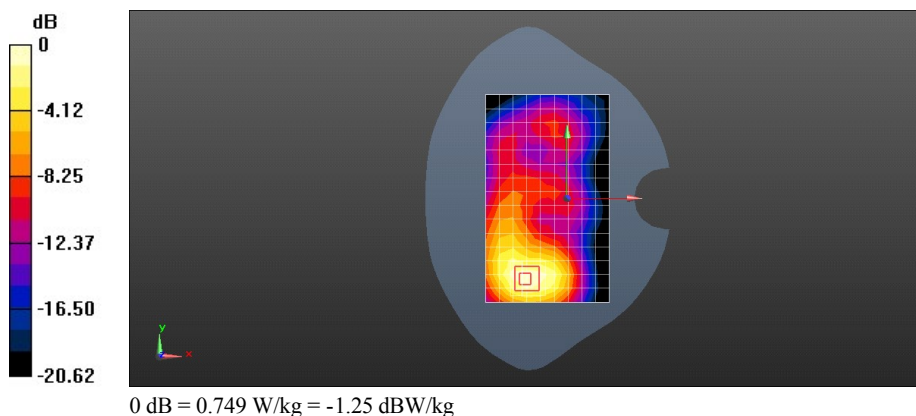

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 LTE Band VII 20M QPSK 50%RB#0 21350CH Bottom Side 10mm

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.154$ S/m; $\epsilon_r = 51.934$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.14, 4.14, 4.14); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.968 W/kg


Configuration/Body/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.30 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.755 W/kg; SAR(10 g) = 0.373 W/kg

Maximum value of SAR (measured) = 0.977 W/kg

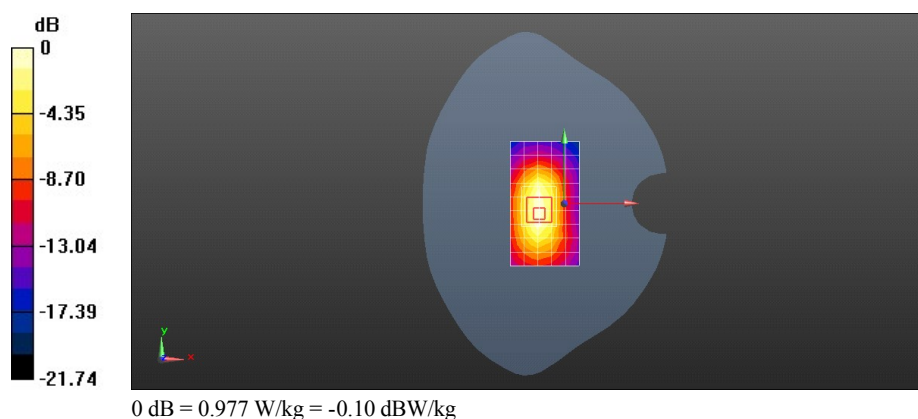

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 LTE Band VII 20M QPSK 50%RB#0 21350CH Bottom Side 10mm with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.154$ S/m; $\epsilon_r = 51.934$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.14, 4.14, 4.14); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.996 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.88 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.797 W/kg; SAR(10 g) = 0.394 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

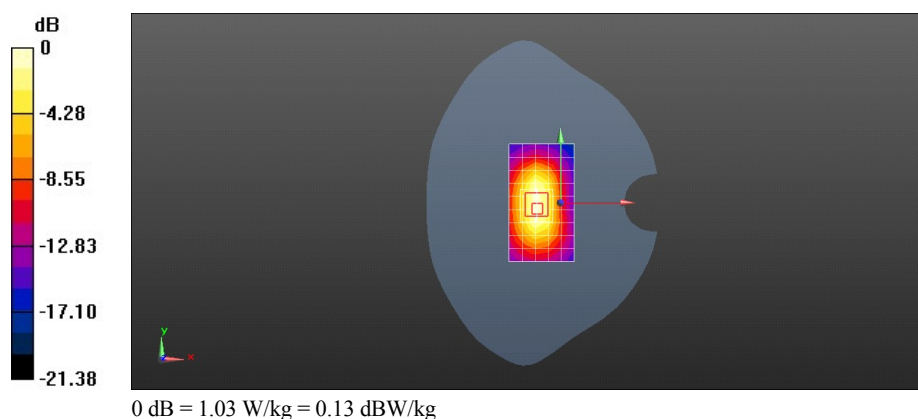

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 WIFI 2.4G 802.11b 6CH Left hand touch cheek

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.761$ S/m; $\epsilon_r = 38.078$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.57, 4.57, 4.57); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.306 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.857 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.507 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 0.319 W/kg

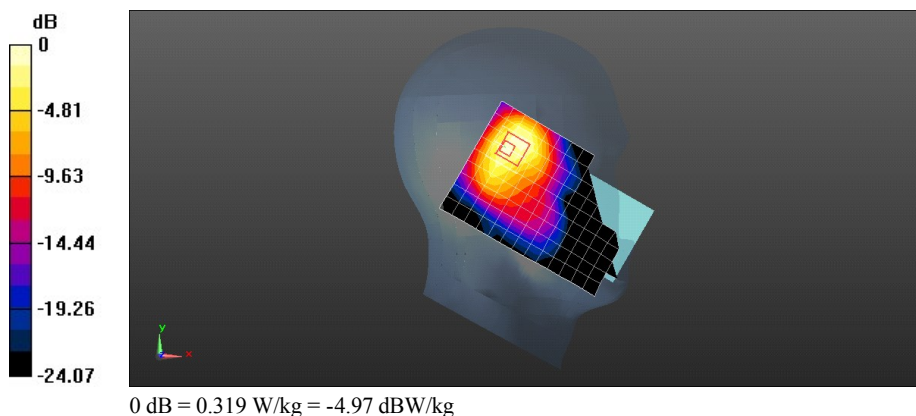

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 WIFI 2.4G 802.11b 6CH Left hand touch cheek with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.761$ S/m; $\epsilon_r = 38.078$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.57, 4.57, 4.57); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.373 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.701 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.609 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.386 W/kg

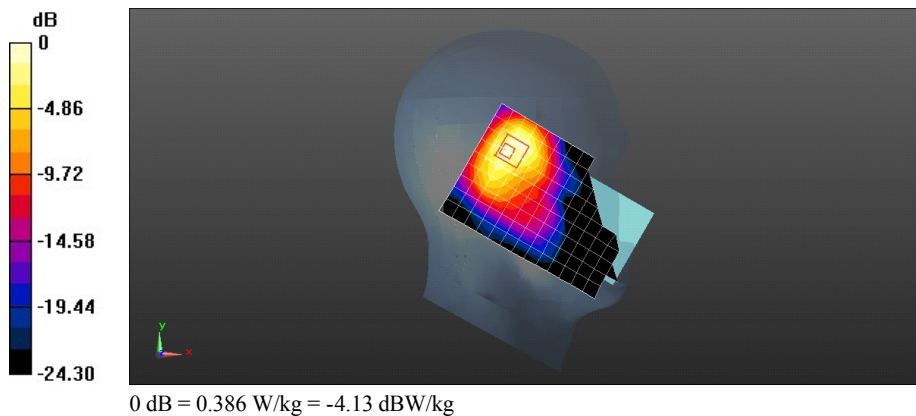

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 WIFI 2.4G 802.11b 11CH Back side 15mm

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 51.417$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.29, 4.29, 4.29); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0854 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.211 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0886 W/kg

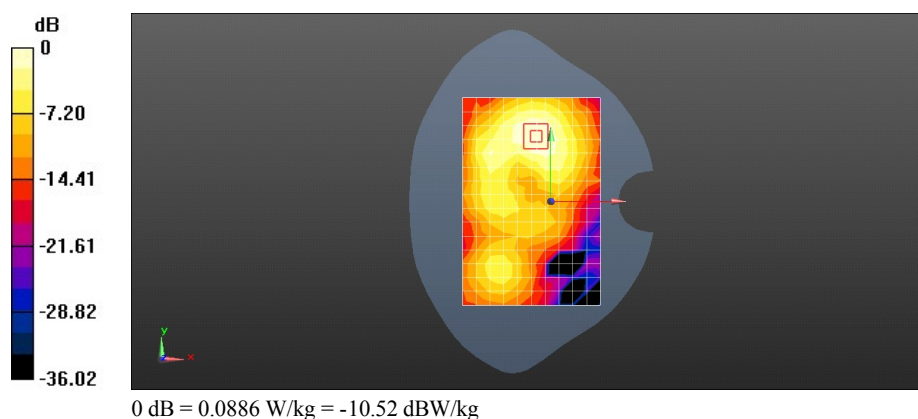

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 WIFI 2.4G 802.11b 11CH Back side 15mm with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 51.417$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.29, 4.29, 4.29); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0935 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.827 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0956 W/kg

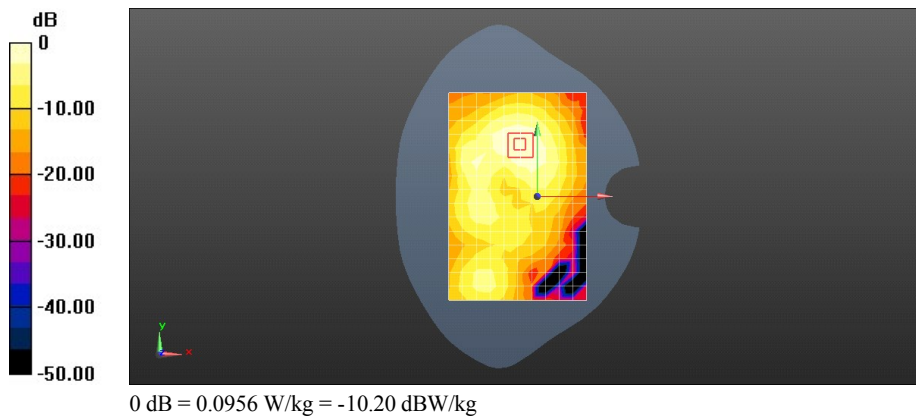

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 WIFI 2.4G 802.11b 11CH Back side 10mm

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 51.417$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.29, 4.29, 4.29); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.221 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.919 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.223 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.919 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.177 W/kg

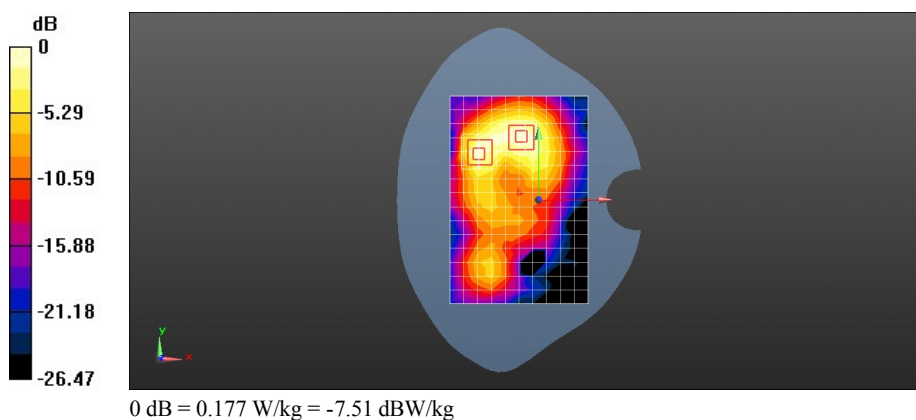

Test Laboratory: HUAWEI SAR/HAC Lab

G620S-L02 WIFI 2.4G 802.11b 11CH Back side 10mm with battery 2#

DUT: HUAWEI G620S-L02,G620S-L02; Type: Smart Phone, HUAWEI Ascend G620S; Serial: SAR2

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 51.417$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.29, 4.29, 4.29); Calibrated: 2014-9-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.182 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.536 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.536 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.257 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.170 W/kg

