



Appendix A. System Check Plots

Table of contents
SystemPerformanceCheck-D2450-EX-Body
SystemPerformanceCheck-D5200-EX-Body
SystemPerformanceCheck-D5300-EX-Body
SystemPerformanceCheck-D5300-EX-Body
SystemPerformanceCheck-D5600-EX-Body
SystemPerformanceCheck-D5800-EX-Body

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D2450-EX-Body

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:860

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.984$ S/m; $\epsilon_r = 51.146$; $\rho = 1000$ kg/m³



Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(6.77, 6.77, 6.77); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ζ Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- ζ DASY52 52.8.8(1222);

Configuration/d=10mm, Pin=250mW/Area Scan (6x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 18.1 W/kg

Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 79.68 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 28.2 W/kg
SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.26 W/kg

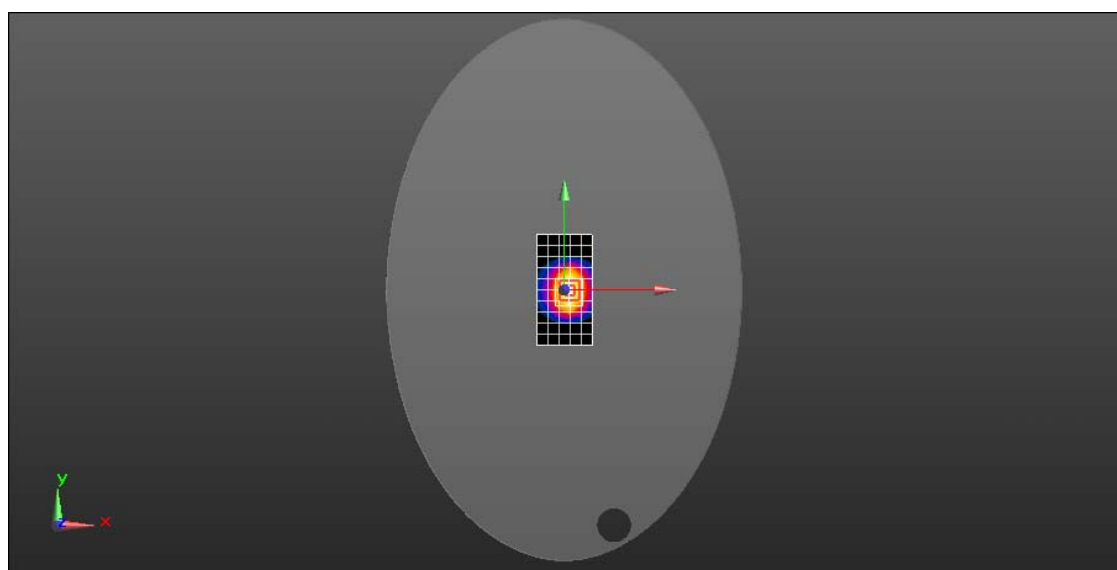

0 dB = 18.1 W/kg = 12.57 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

System Performance Check-D5200-EX-Body

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1155

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.184$ S/m; $\epsilon_r = 48.035$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN7351; ConvF(4.36, 4.36, 4.36); Calibrated: 2015-10-30;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- ζ DASY52 52.8.8(1222);

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5200 MHz/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 16.4 W/kg


System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5200 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.05 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 33.4 W/kg

SAR(1 g) = 8.3 W/kg; SAR(10 g) = 2.32 W/kg

Maximum value of SAR (measured) = 19.2 W/kg

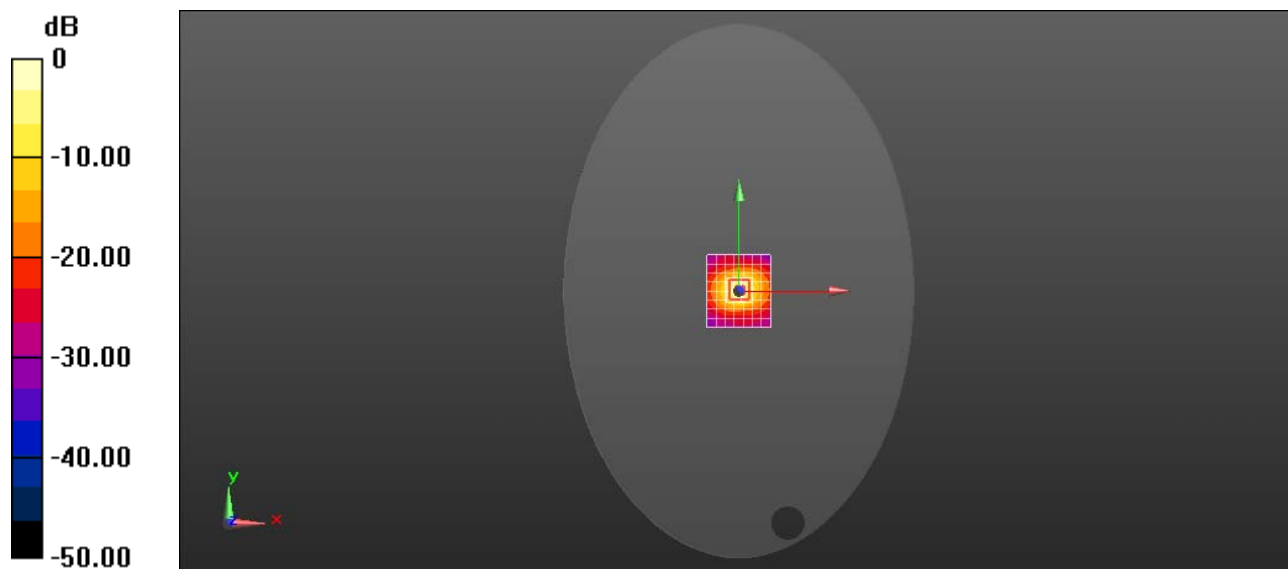

0 dB = 19.2 W/kg = 12.84 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

System Performance Check-D5300-EX-Body

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1155

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.346$ S/m; $\epsilon_r = 47.791$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(4.08, 4.08, 4.08); Calibrated: 2015-4-30;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ζ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ζ Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- ζ DASY52 52.8.8(1222);

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5300 MHz/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 20.3 W/kg


System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5300 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 56.02 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 36.8 W/kg

SAR(1 g) = 8.26 W/kg; SAR(10 g) = 2.29 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

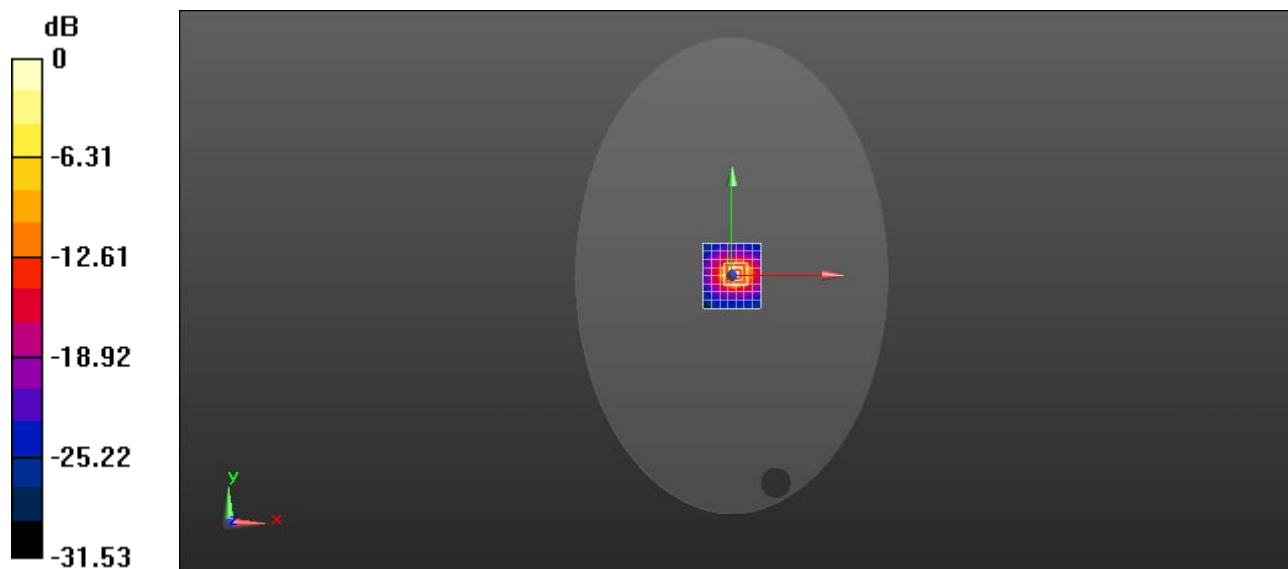

0 dB = 19.7 W/kg = 12.94 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D5300-EX-Body

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1155

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.346$ S/m; $\epsilon_r = 47.791$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN7351; ConvF(4.2, 4.2, 4.2); Calibrated: 2015-10-30;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- ζ DASY52 52.8.8(1222);

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5300 MHz/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 16.3 W/kg


System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5300 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.67 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 32.8 W/kg

SAR(1 g) = 7.92 W/kg; SAR(10 g) = 2.19 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

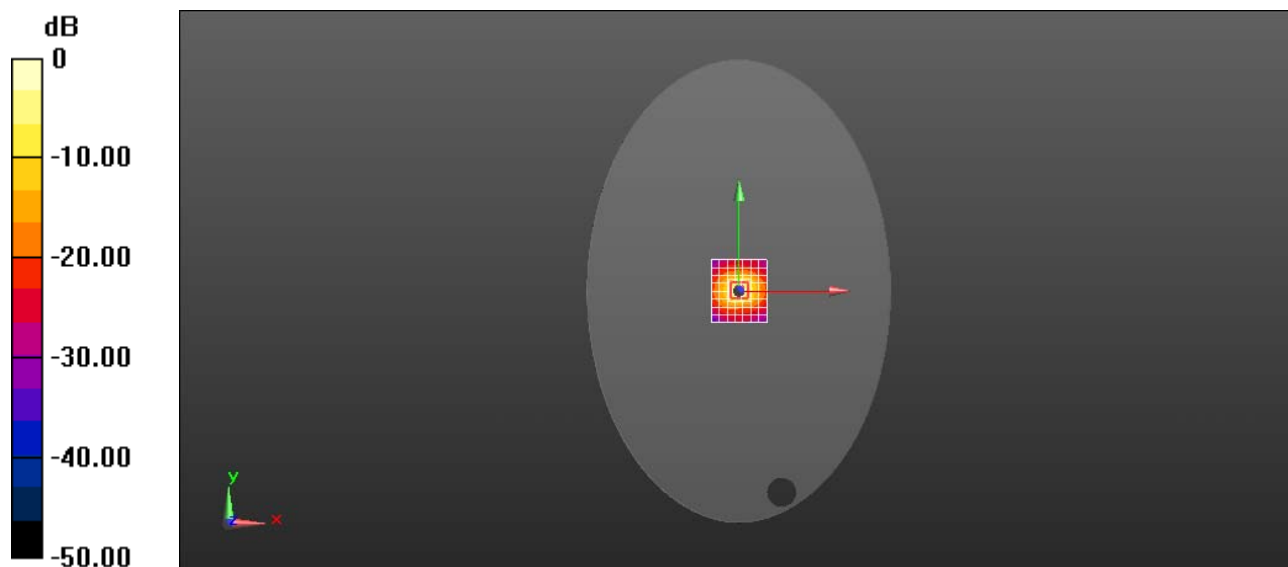

0 dB = 18.6 W/kg = 12.69 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

System Performance Check-D5600-EX-Body

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1155

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.869$ S/m; $\epsilon_r = 47.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(3.71, 3.71, 3.71); Calibrated: 2015-4-30;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ζ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ζ Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- ζ DASY52 52.8.8(1222);

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 21.8 W/kg


System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 60.74 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 38.0 W/kg

SAR(1 g) = 8.59 W/kg; SAR(10 g) = 2.4 W/kg

Maximum value of SAR (measured) = 21.2 W/kg

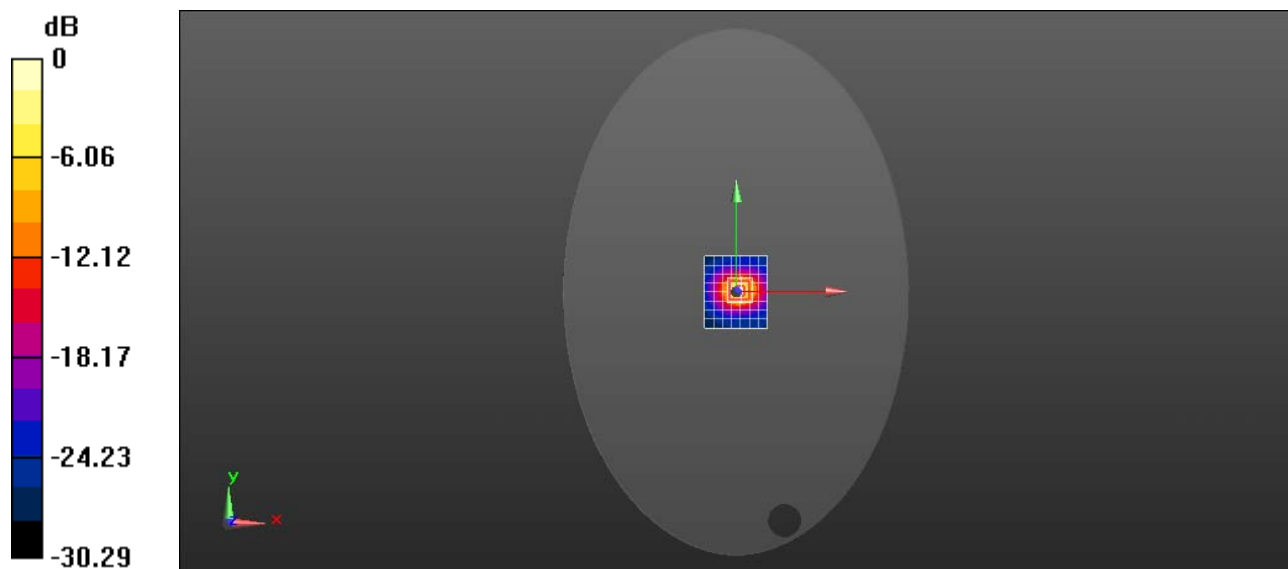

0 dB = 21.2 W/kg = 13.26 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

System Performance Check-D5800-EX-Body

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1155

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.209$ S/m; $\epsilon_r = 46.976$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(3.86, 3.86, 3.86); Calibrated: 2015-4-30;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ζ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ζ Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- ζ DASY52 52.8.8(1222);

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5800 MHz/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 19.2 W/kg



System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5800 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 49.67 V/m; Power Drift = -0.29 dB

Peak SAR (extrapolated) = 34.9 W/kg

SAR(1 g) = 7.5 W/kg; SAR(10 g) = 2.1 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

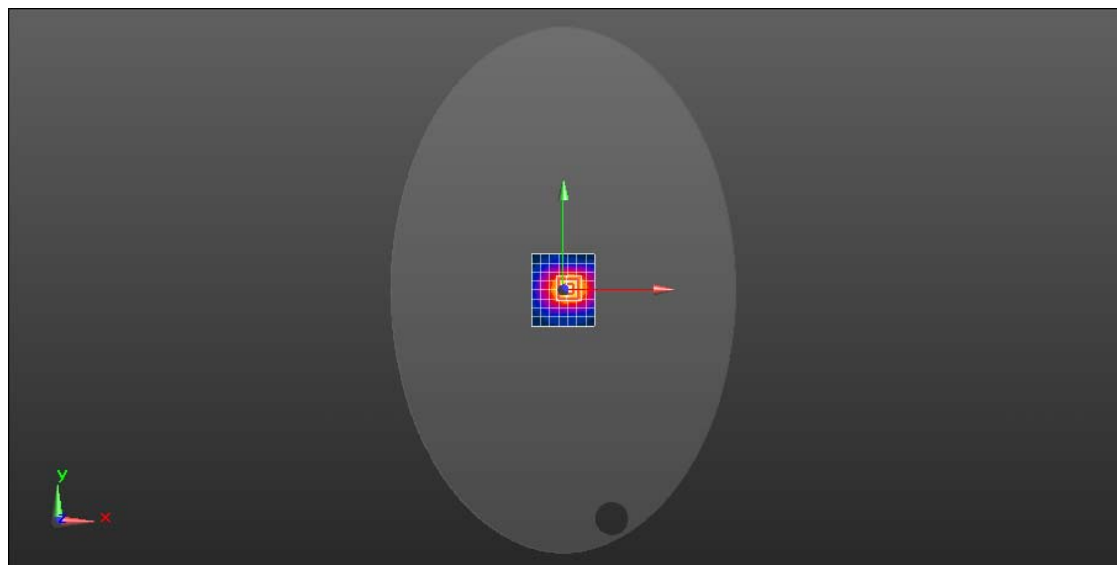

0 dB = 18.6 W/kg = 12.70 dBW/kg