

Test Laboratory: BTL Inc.

Date: 01/14/2016

**T05\_GSM 850\_GSM\_CH190\_Right Cheek\_Battery 2**

**DUT: 1601C017B;**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.89$  S/m;  $\epsilon_r = 42.494$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.2 °C; Liquid Temperature: 22.3 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(9.75, 9.75, 9.75); Calibrated: 01/30/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Front; Type: Twin SAM; Serial: 1784
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Area Scan (9x12x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.374 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.113 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.449 W/kg

**SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.280 W/kg**

Maximum value of SAR (measured) = 0.382 W/kg

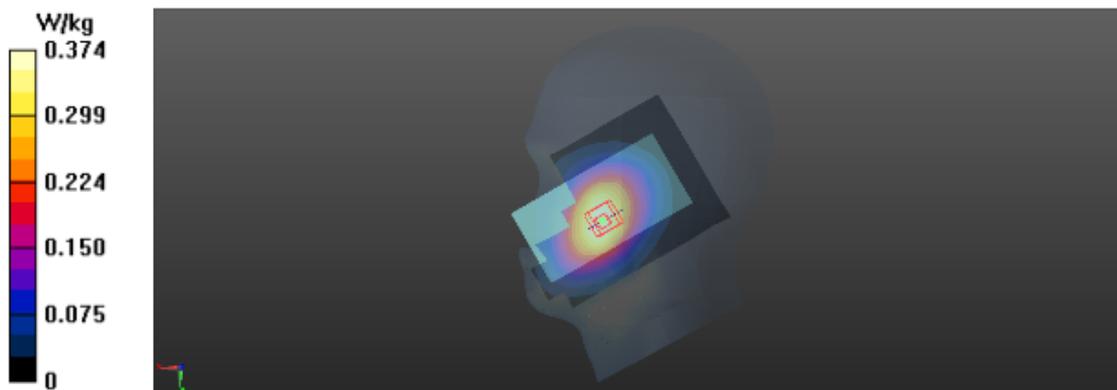

Test Laboratory: BTL Inc.

Date: 01/14/2016

**T16\_GSM 1900\_GSM\_CH661\_Left Cheek\_Battery 2\_SIM 2**

**DUT: 1601C017B;**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.399$  S/m;  $\epsilon_r = 39.356$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.4 °C; Liquid Temperature: 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(8.23, 8.23, 8.23); Calibrated: 01/30/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Area Scan (8x12x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.233 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.198 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.298 W/kg

**SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.126 W/kg**

Maximum value of SAR (measured) = 0.218 W/kg

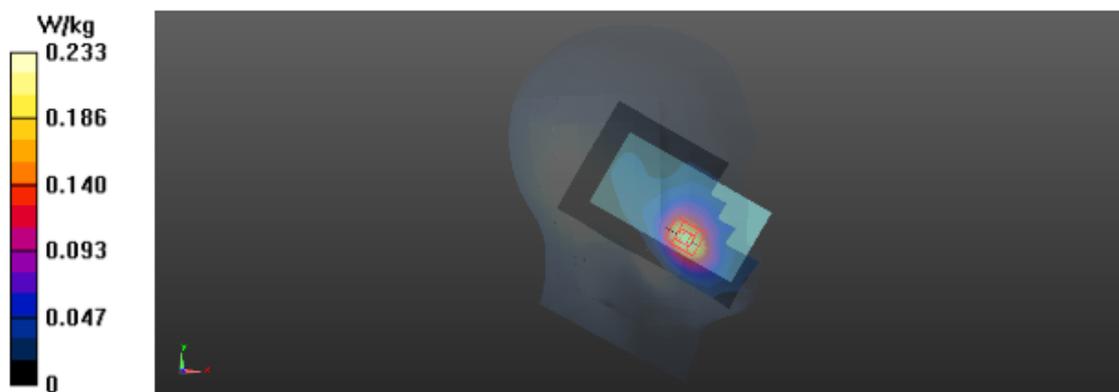

Test Laboratory: BTL Inc.

Date: 01/14/2016

**T19\_WCDMA B2\_RMC12.2K\_CH9400\_Left Cheek**

**DUT: 1601C017B;**

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.399$  S/m;  $\epsilon_r = 39.356$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.4 °C; Liquid Temperature: 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(8.23, 8.23, 8.23); Calibrated: 01/30/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Area Scan (8x12x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.484 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.178 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.612 W/kg

**SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.259 W/kg**

Maximum value of SAR (measured) = 0.450 W/kg

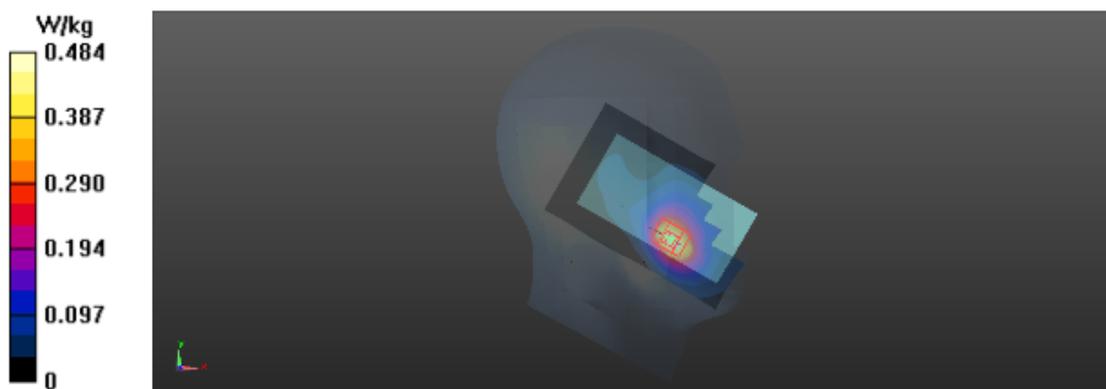

Test Laboratory: BTL Inc.

Date: 02/24/2016

**T24\_WCDMA B5\_RMC 12.2K\_CH4182\_Right Cheek**

**DUT: 1601C017B;**

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.902$  S/m;  $\epsilon_r = 42.304$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.6, 9.6, 9.6); Calibrated: 04/24/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Front; Type: Twin SAM; Serial: 1784
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Area Scan (9x12x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.444 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.226 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.524 W/kg

**SAR(1 g) = 0.426 W/kg; SAR(10 g) = 0.323 W/kg**

Maximum value of SAR (measured) = 0.445 W/kg

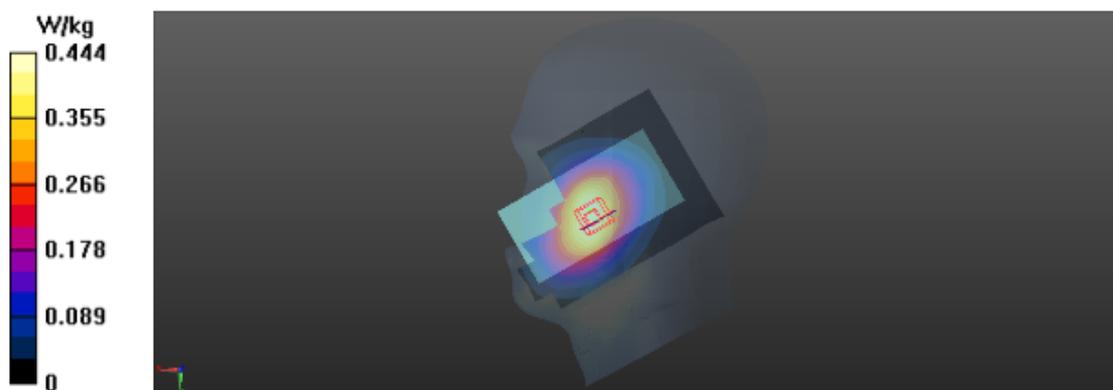

Test Laboratory: BTL Inc.

Date: 01/14/2016

#### T108\_802.11b\_CH6\_Left Cheek\_Battery 4

DUT: 1601C017B;

Communication System: UID 0, IEEE 802.11b WiFi 2.4GHz (DSSS, 1Mbps) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.864$  S/m;  $\epsilon_r = 38.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(7.38, 7.38, 7.38); Calibrated: 01/30/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Area Scan (10x15x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.497 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.996 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.935 W/kg

**SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.221 W/kg**

Maximum value of SAR (measured) = 0.476 W/kg

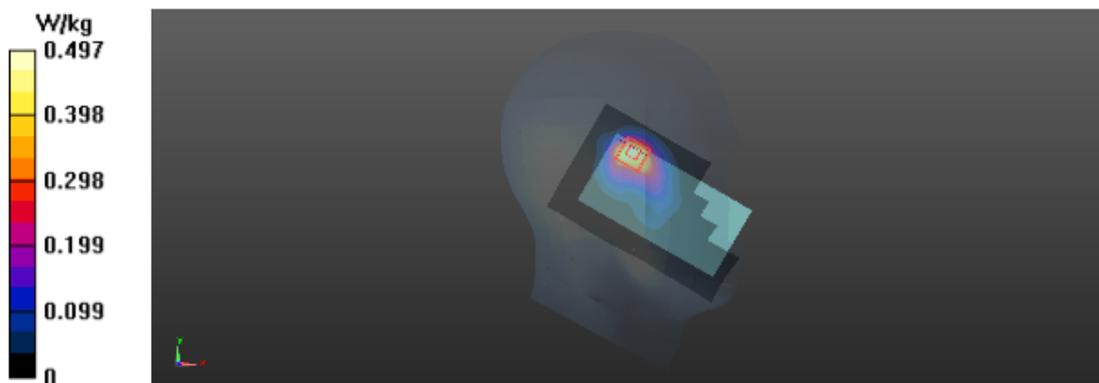

Test Laboratory: BTL Inc.

Date: 01/14/2016

### T34\_GSM 850\_GSM\_CH190\_Rear Face\_1.5cm\_Battery 3

DUT: 1601C017B;

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.975$  S/m;  $\epsilon_r = 54.274$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.19, 10.19, 10.19); Calibrated: 01/30/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Front; Type: Twin SAM; Serial: 1784
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Area Scan (8x12x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.440 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.32 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.501 W/kg

**SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.324 W/kg**

Maximum value of SAR (measured) = 0.435 W/kg

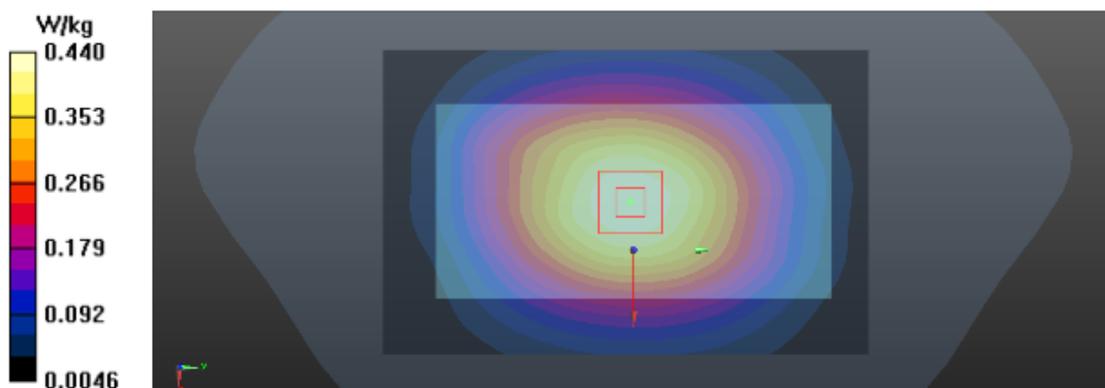

Test Laboratory: BTL Inc.

Date: 01/14/2016

### T45\_GSM 850\_GPRS 2TX\_CH128\_Rear Face\_1cm\_Battery 3

DUT: 1601C017B;

Communication System: UID 0, GPRS 2TX (0); Frequency: 824.2 MHz; Duty Cycle: 1:4.00037

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.961$  S/m;  $\epsilon_r = 54.379$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.19, 10.19, 10.19); Calibrated: 01/30/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Front; Type: Twin SAM; Serial: 1784
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Area Scan (8x12x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.928 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.37 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.873 W/kg; SAR(10 g) = 0.681 W/kg**

Maximum value of SAR (measured) = 0.917 W/kg

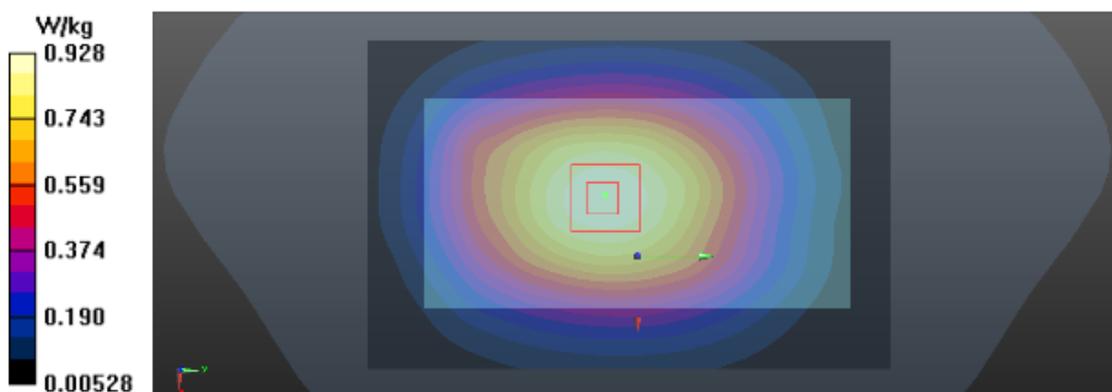

Test Laboratory: BTL Inc.

Date: 01/15/2016

**T50\_GSM 1900\_GSM\_CH661\_Rear Face\_1.5cm**

**DUT: 1601C017B;**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.516$  S/m;  $\epsilon_r = 52.816$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(7.86, 7.86, 7.86); Calibrated: 01/30/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Area Scan (8x12x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.332 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.810 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.491 W/kg

**SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.197 W/kg**

Maximum value of SAR (measured) = 0.348 W/kg

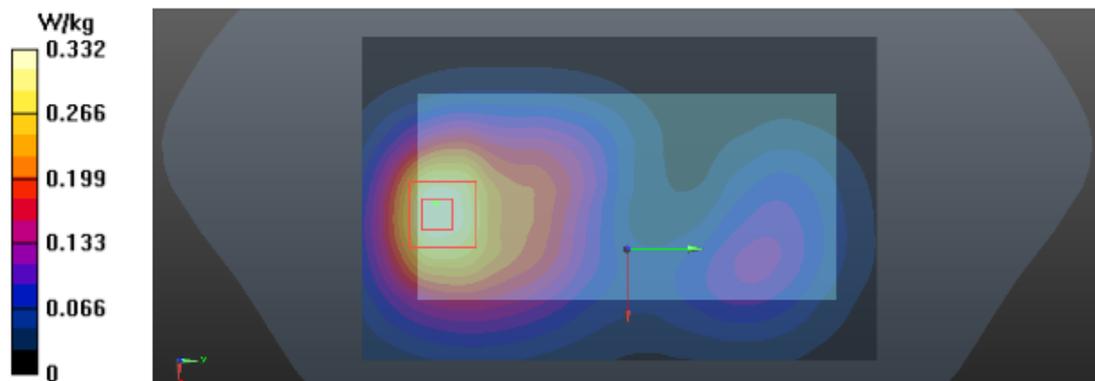

Test Laboratory: BTL Inc.

Date: 01/15/2016

**T64\_GSM 1900\_GPRS 2TX\_CH512\_Bottom Side\_1cm\_Battery 2**

**DUT: 1601C017B;**

Communication System: UID 0, GPRS 2TX (0); Frequency: 1850.2 MHz; Duty Cycle: 1:4.00037

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.476$  S/m;  $\epsilon_r = 52.945$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(7.86, 7.86, 7.86); Calibrated: 01/30/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Area Scan (4x8x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.28 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.77 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.72 W/kg

**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.612 W/kg**

Maximum value of SAR (measured) = 1.20 W/kg

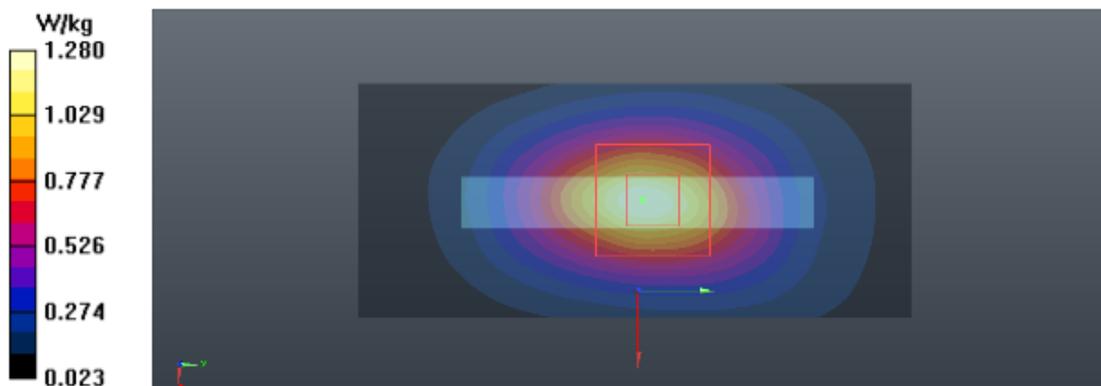

Test Laboratory: BTL Inc.

Date: 01/15/2016

**T73\_WCDMA B2\_RMC 12.2K\_CH9400\_Rear Face\_1.5cm\_Battery 4**

**DUT: 1601C017B;**

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.516$  S/m;  $\epsilon_r = 52.816$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(7.86, 7.86, 7.86); Calibrated: 01/30/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Area Scan (8x12x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.686 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.444 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.976 W/kg

**SAR(1 g) = 0.641 W/kg; SAR(10 g) = 0.391 W/kg**

Maximum value of SAR (measured) = 0.699 W/kg

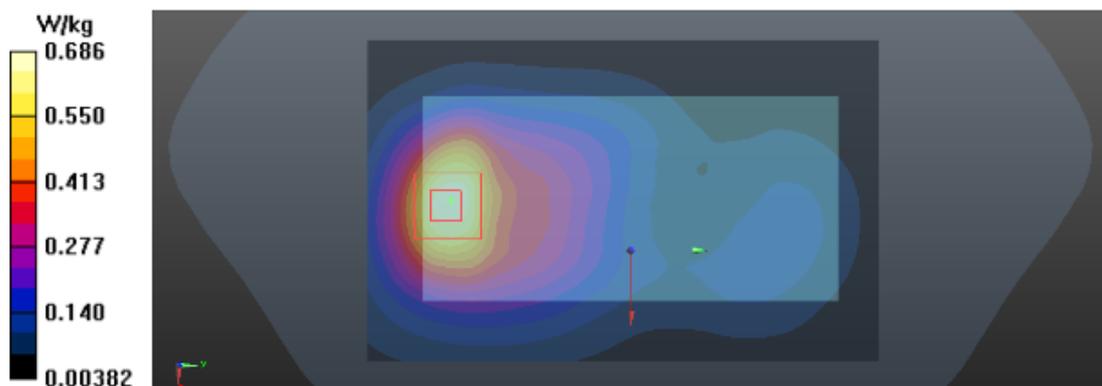

Test Laboratory: BTL Inc.

Date: 01/15/2016

## T83\_WCDMA B2\_RMC 12.2K\_CH9262\_Rear Face\_1cm\_Battery 2

DUT: 1601C017B;

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.478$  S/m;  $\epsilon_r = 52.936$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(7.86, 7.86, 7.86); Calibrated: 01/30/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Area Scan (8x12x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.49 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.82 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.14 W/kg

**SAR(1 g) = 1.38 W/kg; SAR(10 g) = 0.805 W/kg**

Maximum value of SAR (measured) = 1.50 W/kg

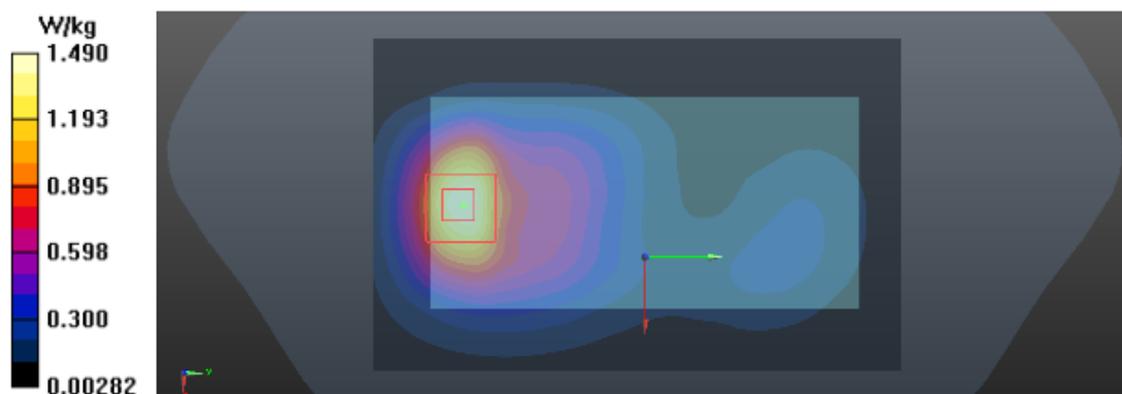

Test Laboratory: BTL Inc.

Date: 02/25/2016

**T88\_WCDMA B5\_RMC 12.2K\_CH4182\_Rear Face\_1.5cm**

**DUT: 1601C017B;**

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.993$  S/m;  $\epsilon_r = 55.268$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.68, 9.68, 9.68); Calibrated: 04/24/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Area Scan (8x12x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.708 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.12 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.837 W/kg

**SAR(1 g) = 0.675 W/kg; SAR(10 g) = 0.514 W/kg**

Maximum value of SAR (measured) = 0.708 W/kg

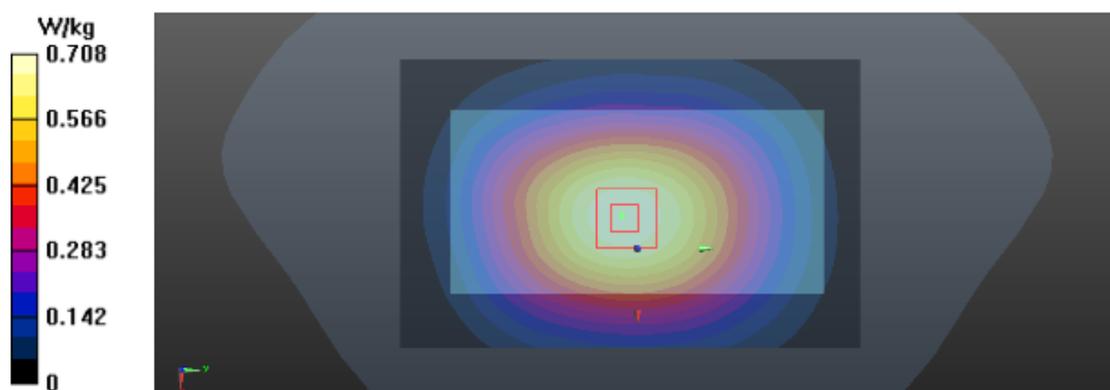

Test Laboratory: BTL Inc.

Date: 02/25/2016

**T98\_WCDMA B5\_RMC 12.2K\_CH4233\_Rear Face\_1cm**

**DUT: 1601C017B;**

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.003$  S/m;  $\epsilon_r = 55.153$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.68, 9.68, 9.68); Calibrated: 04/24/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Area Scan (8x12x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.856 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.63 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.00 W/kg

**SAR(1 g) = 0.811 W/kg; SAR(10 g) = 0.618 W/kg**

Maximum value of SAR (measured) = 0.852 W/kg

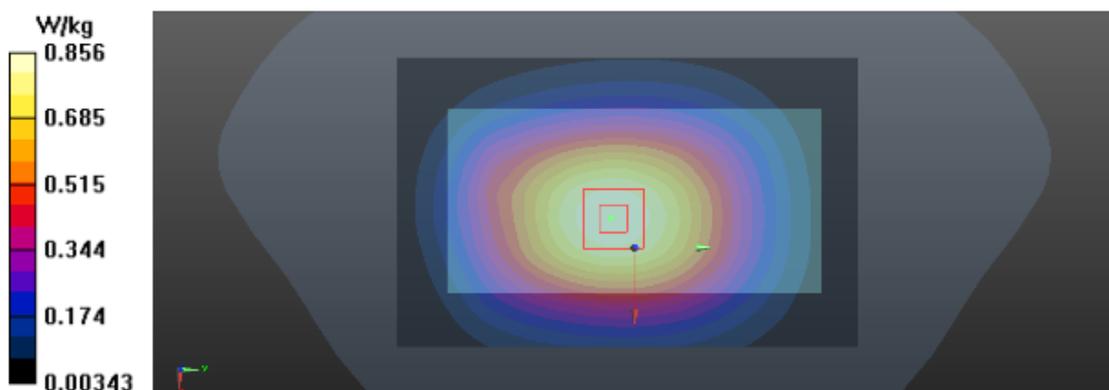

Test Laboratory: BTL Inc.

Date: 01/15/2016

**T110\_802.11b\_CH6\_Rear Face\_1.5cm**

**DUT: 1601C017B;**

Communication System: UID 0, IEEE 802.11b WiFi 2.4GHz (DSSS, 1Mbps) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 2.021$  S/m;  $\epsilon_r = 51.275$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(7.6, 7.6, 7.6); Calibrated: 01/30/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Area Scan (10x15x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0711 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.246 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.102 W/kg

**SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.031 W/kg**

Maximum value of SAR (measured) = 0.0620 W/kg

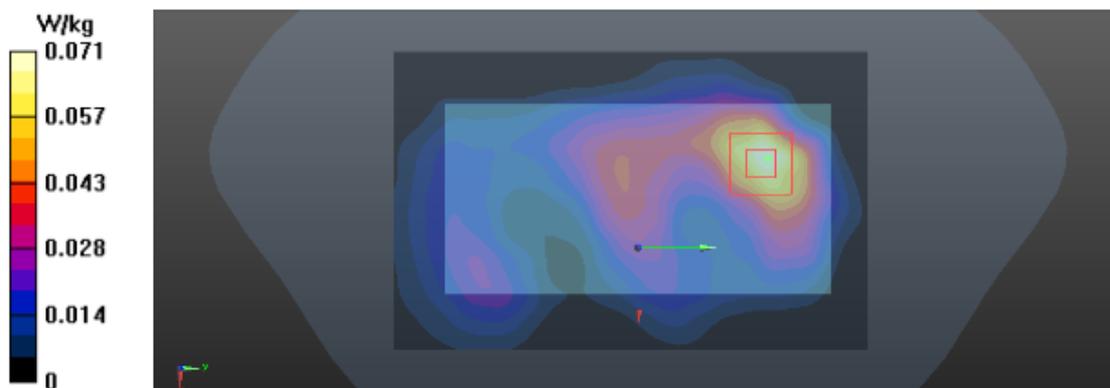

Test Laboratory: BTL Inc.

Date: 01/15/2016

**T115\_802.11b\_CH6\_Rear Face\_1cm**

**DUT: 1601C017B;**

Communication System: UID 0, IEEE 802.11b WiFi 2.4GHz (DSSS, 1Mbps) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 2.021$  S/m;  $\epsilon_r = 51.275$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(7.6, 7.6, 7.6); Calibrated: 01/30/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Area Scan (10x15x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.165 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.581 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.254 W/kg

**SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.071 W/kg**

Maximum value of SAR (measured) = 0.148 W/kg

