



Appendix for Test report

Appendix A: DTS (6 dB) Bandwidth

In this document, the "DTS6dBBW" refers to the measured "DTS (6 dB) Bandwidth" value. In this Appendix, the "fc(DTS6dBBW)" refers to the centre of the measured "DTS6dBBW". The introduction of the "fc(DTS6dBBW)" is due to that other measurements use it as the spectrum analyzer setting.


For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain, and used as respective results for each chain.

Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	DTS6dBBW[MHz]	Verdict
TM1 _Ch0	L	2402	0.65	pass
TM1 _Ch19	M	2440	0.65	pass
TM1 _Ch39	H	2480	0.67	pass

Part II - Test Plots

2.1 TM1_Ch0_L

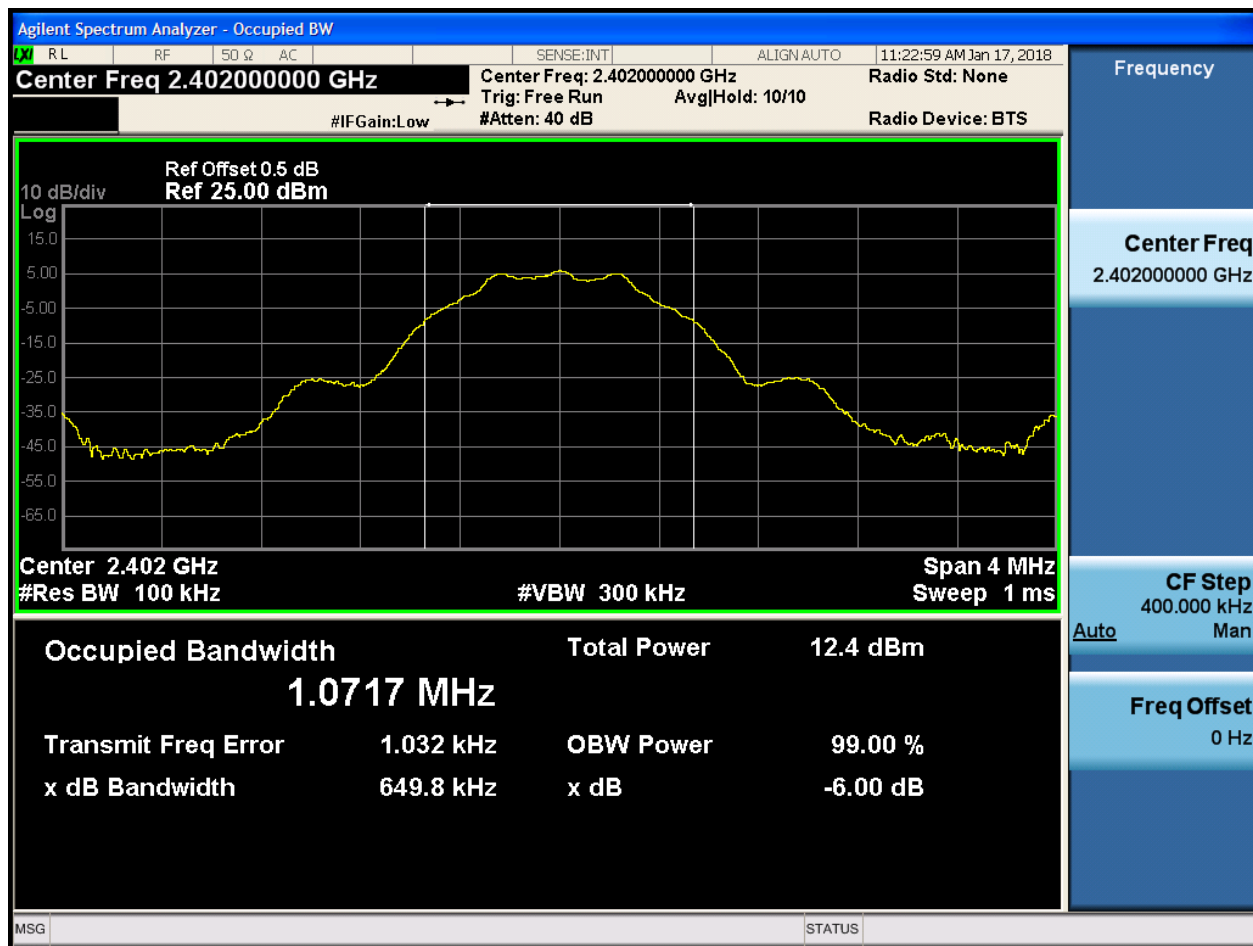



2.2 TM1_Ch19_M





2.3 TM1_Ch39_H



Appendix B: Occupied Bandwidth


For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain, and used as respective results for each chain.

Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Occupied Bandwidth [MHz]	Verdict
TM1 _Ch0	L	2402	1.05	pass
TM1 _Ch19	M	2440	1.04	pass
TM1 _Ch39	H	2480	1.04	pass

Part II - Test Plots

2.1 TM1_Ch0_L

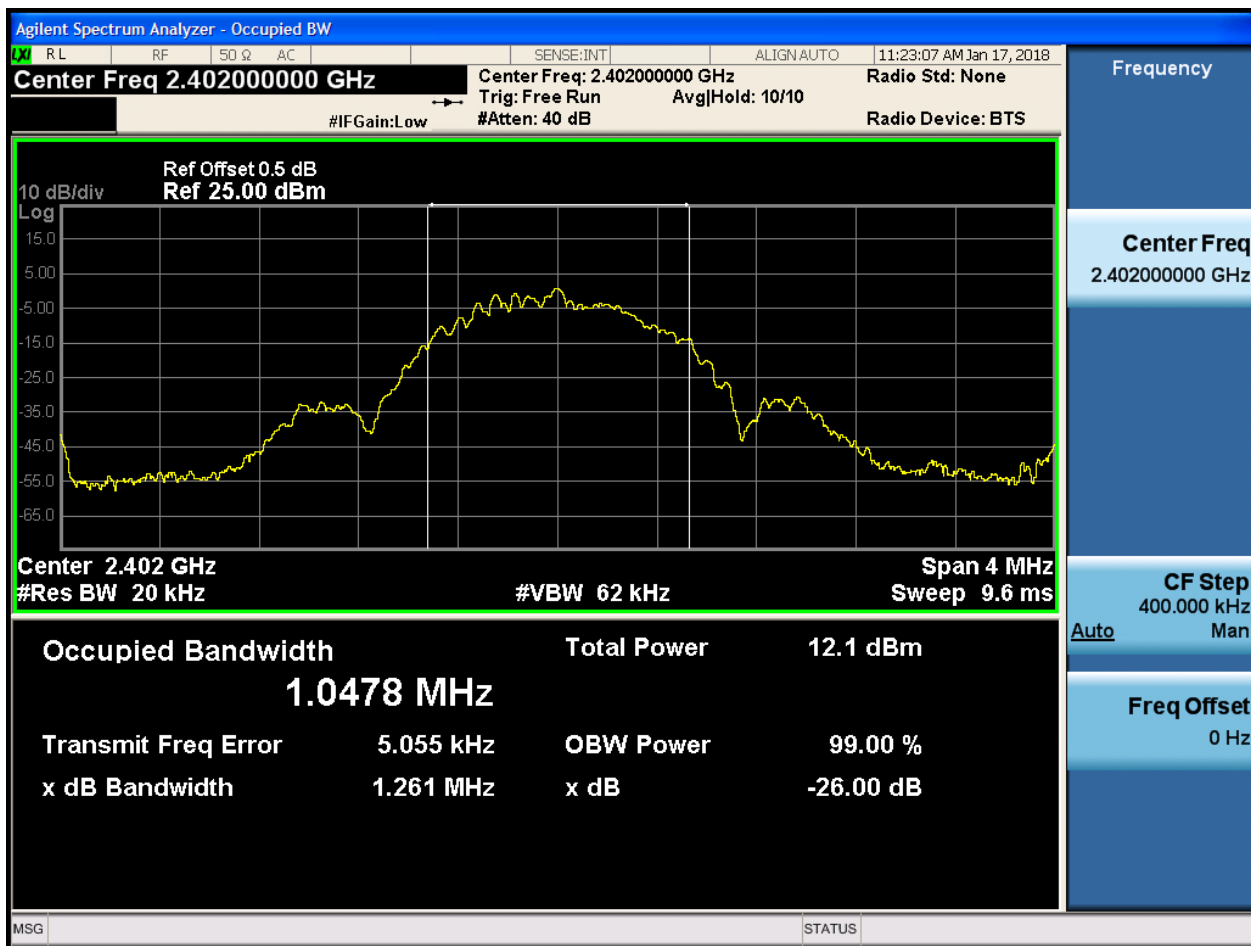



2.2 TM1_Ch19_M





2.3 TM1_Ch39_H






Appendix C: Duty Cycle

Part I - Test Results

Test Mode	TX Freq. [MHz]	Duty cycle [%]
TM1	CH0,CH19,CH39	62

Part II - Test Plots

2.1 TM1

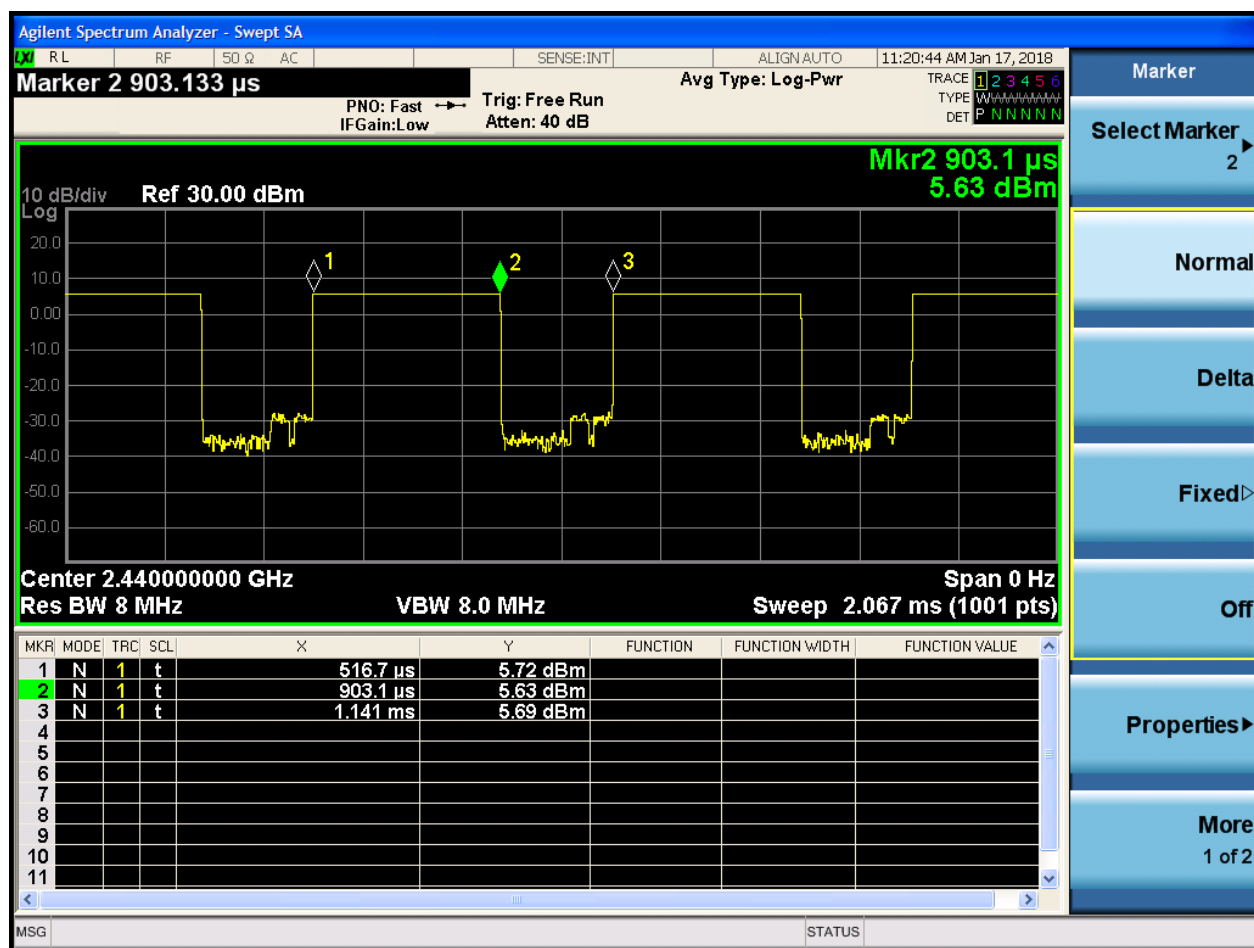

Appendix D: Maximum Conducted Average Output Power


Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Duty Cycle [%]	Power[dBm]	Verdict
TM1 _Ch0	L	2402	62	5.74	pass
TM1 _Ch19	M	2440	62	6.04	pass
TM1 _Ch39	H	2480	62	6.08	pass




Part II - Test Plots

2.1 TM1_Ch0_L

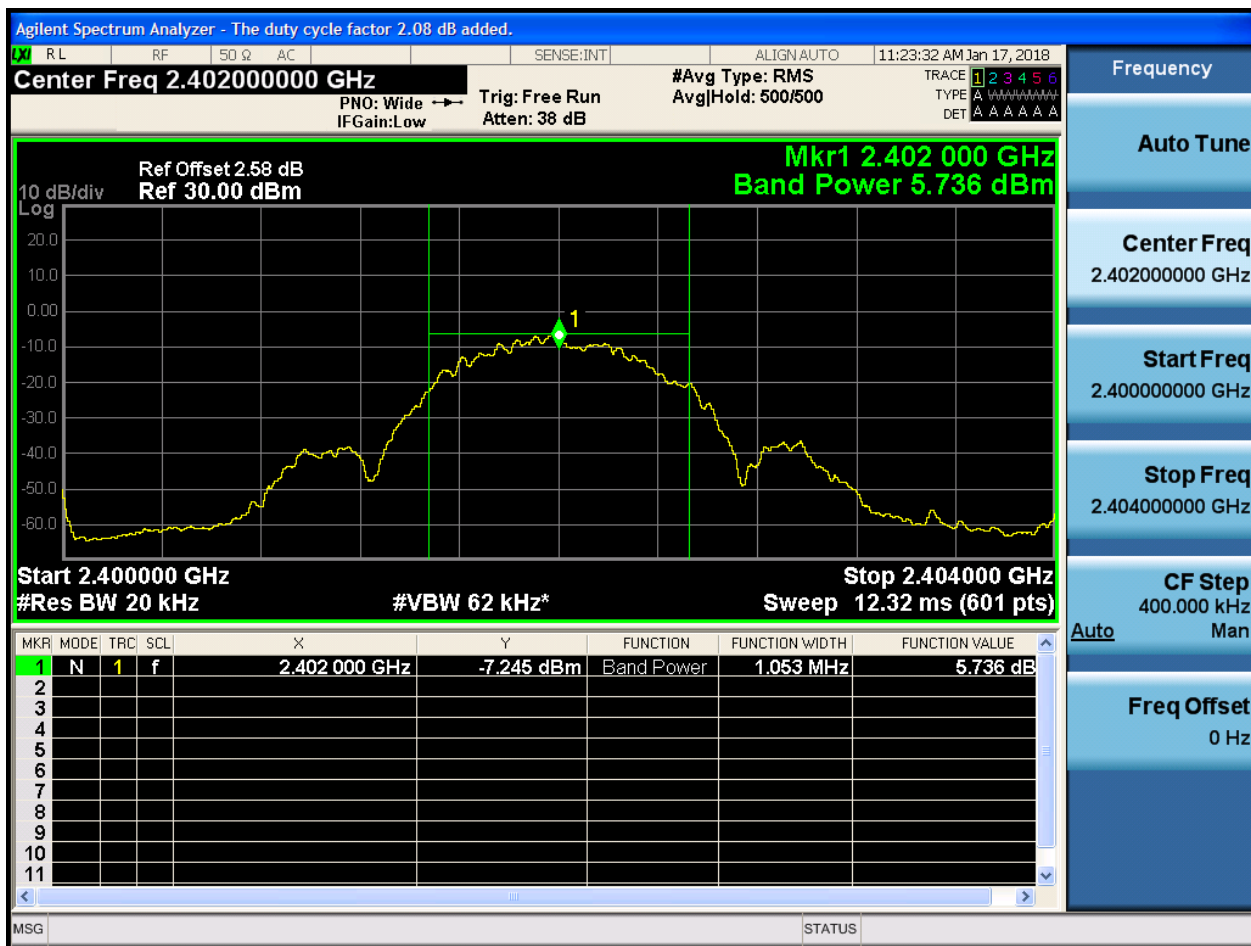




2.2 TM1_Ch19_M

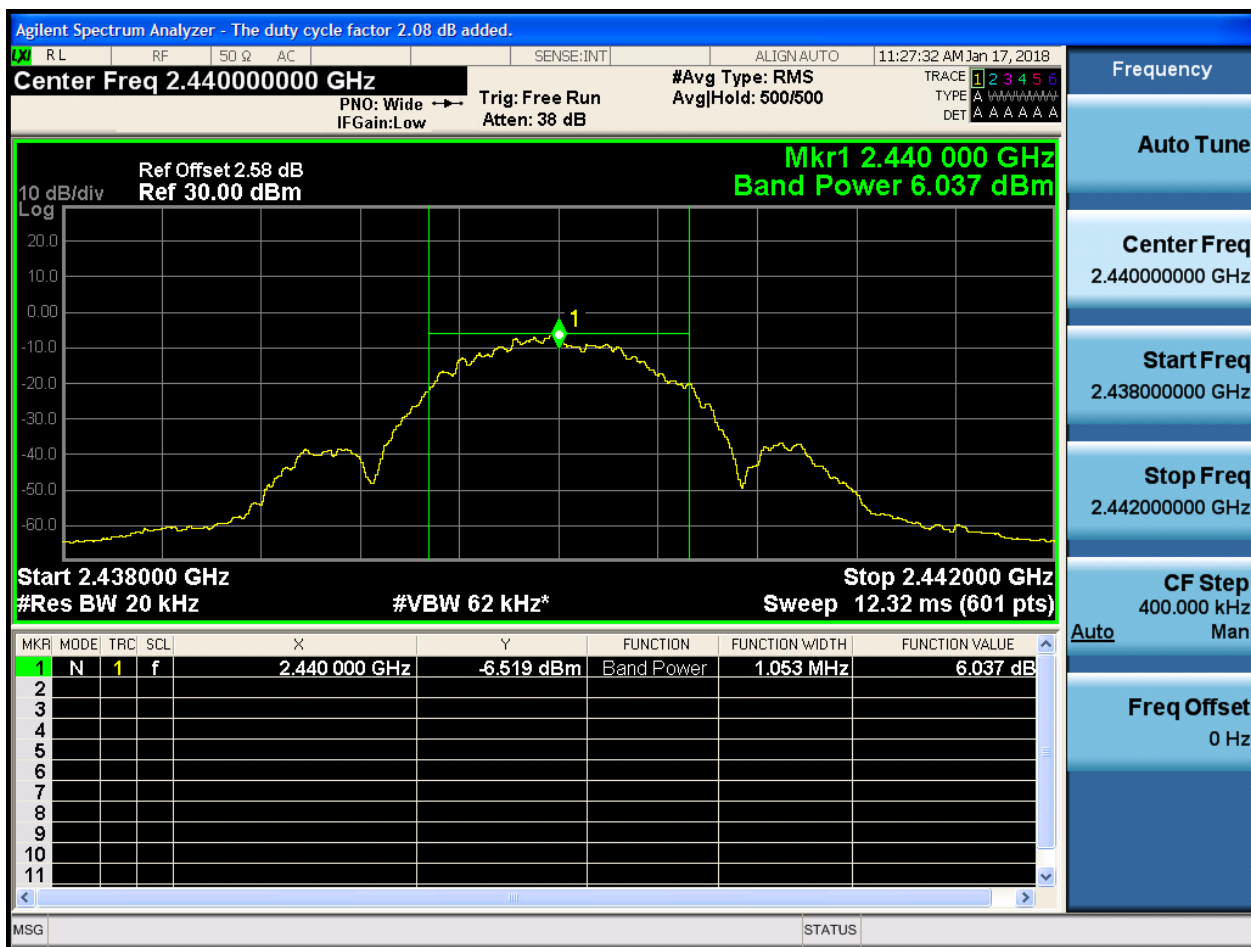



2.3 TM1_Ch39_H

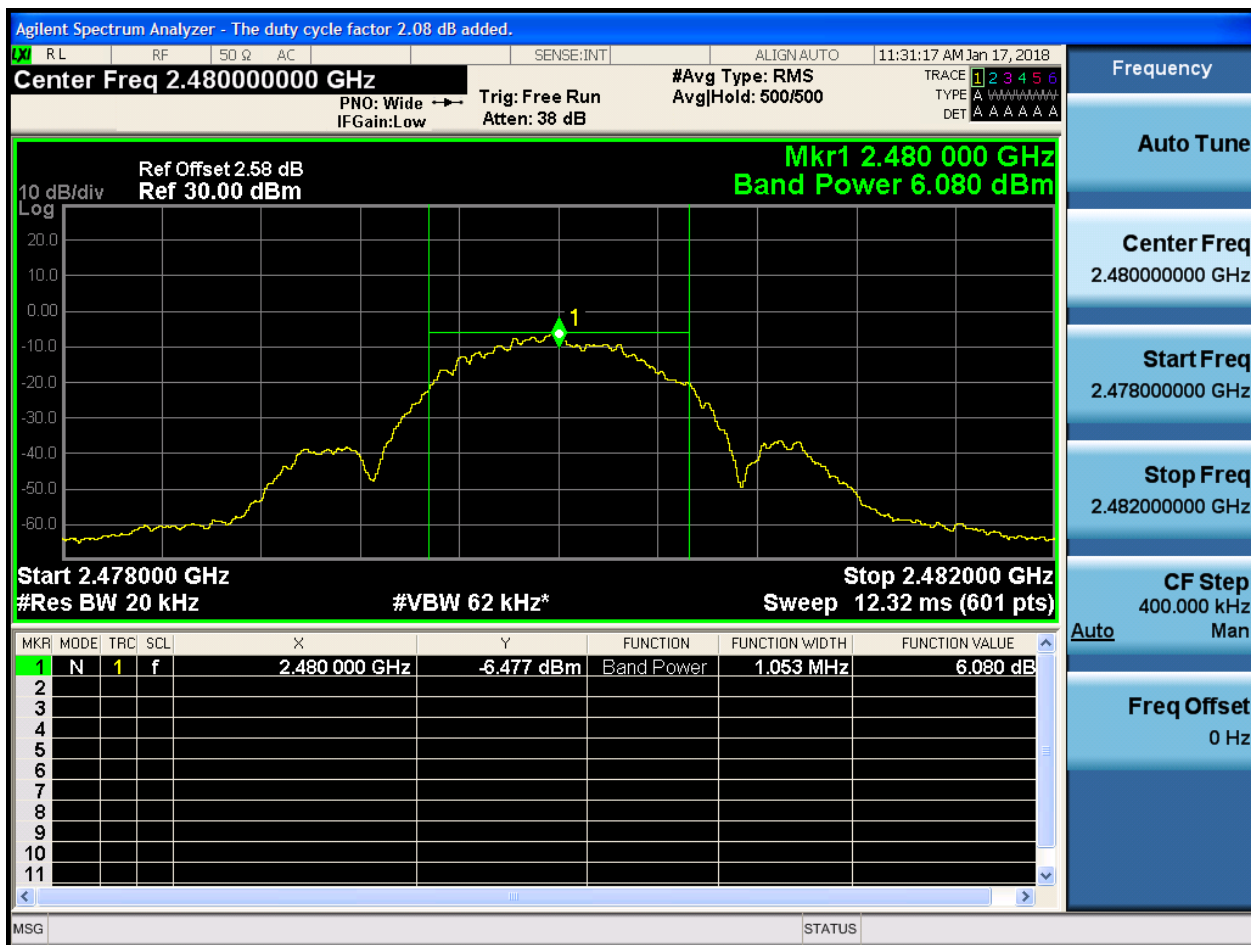

Appendix E: Maximum Power Spectral Density Level

Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Duty Cycle [%]	PSD[dBm/10 kHz]	Verdict
TM1_Ch0	L	2402	62	-8.71	pass
TM1_Ch19	M	2440	62	-8.00	pass
TM1_Ch39	H	2480	62	-8.63	pass




Part II - Test Plots

2.1 TM1_Ch0_L





2.2 TM1_Ch19_M

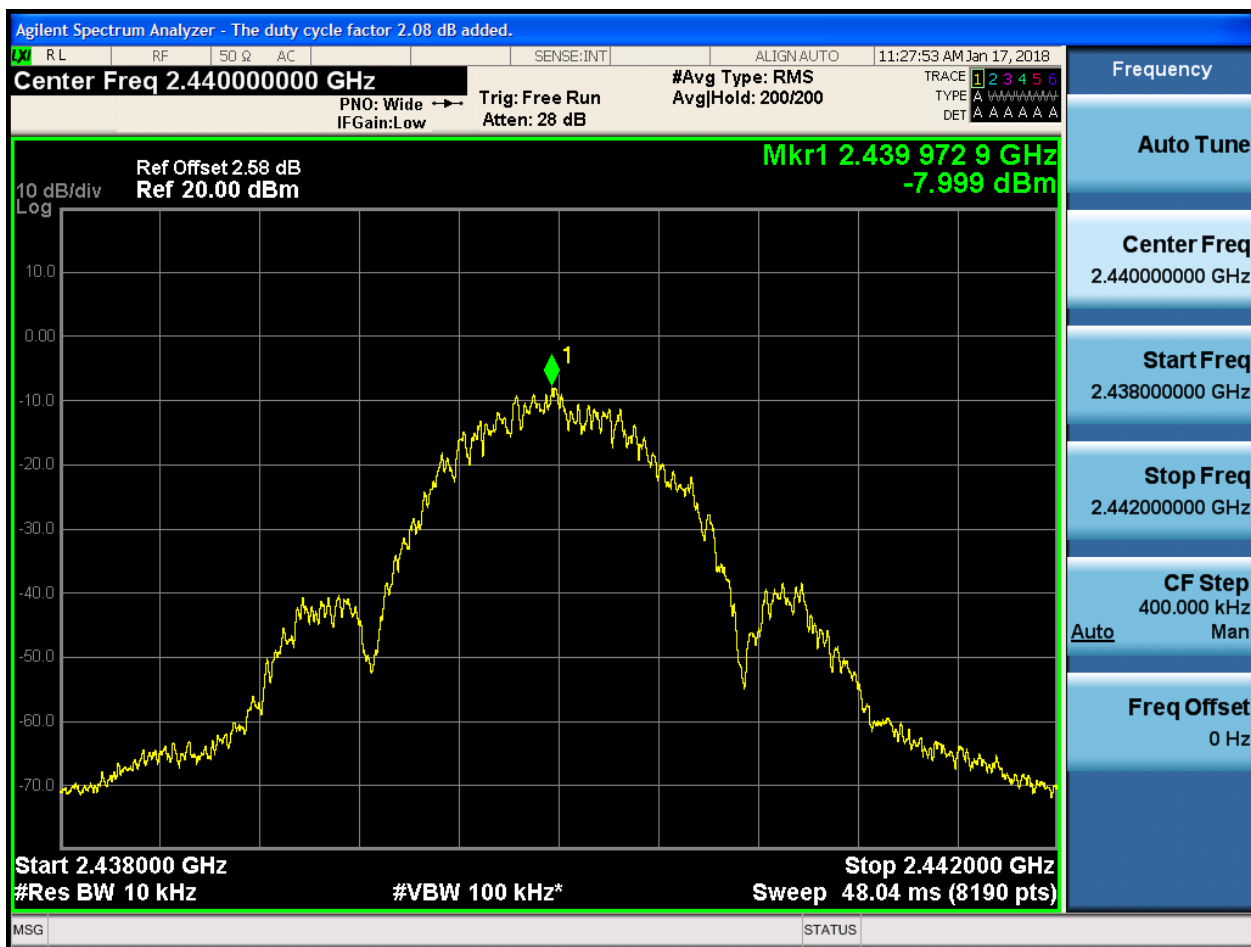



2.3 TM1_Ch39_H



Appendix F: Band Edges Compliance


Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Carrier Power[dBm]	Max.Spurious Level[dBm]	Verdict
TM1_Ch0	L	2402	5.75	-35.55	pass
TM1_Ch39	H	2480	6.05	-47.77	pass



Part II - Test Plots

2.1 TM1_Ch0_L

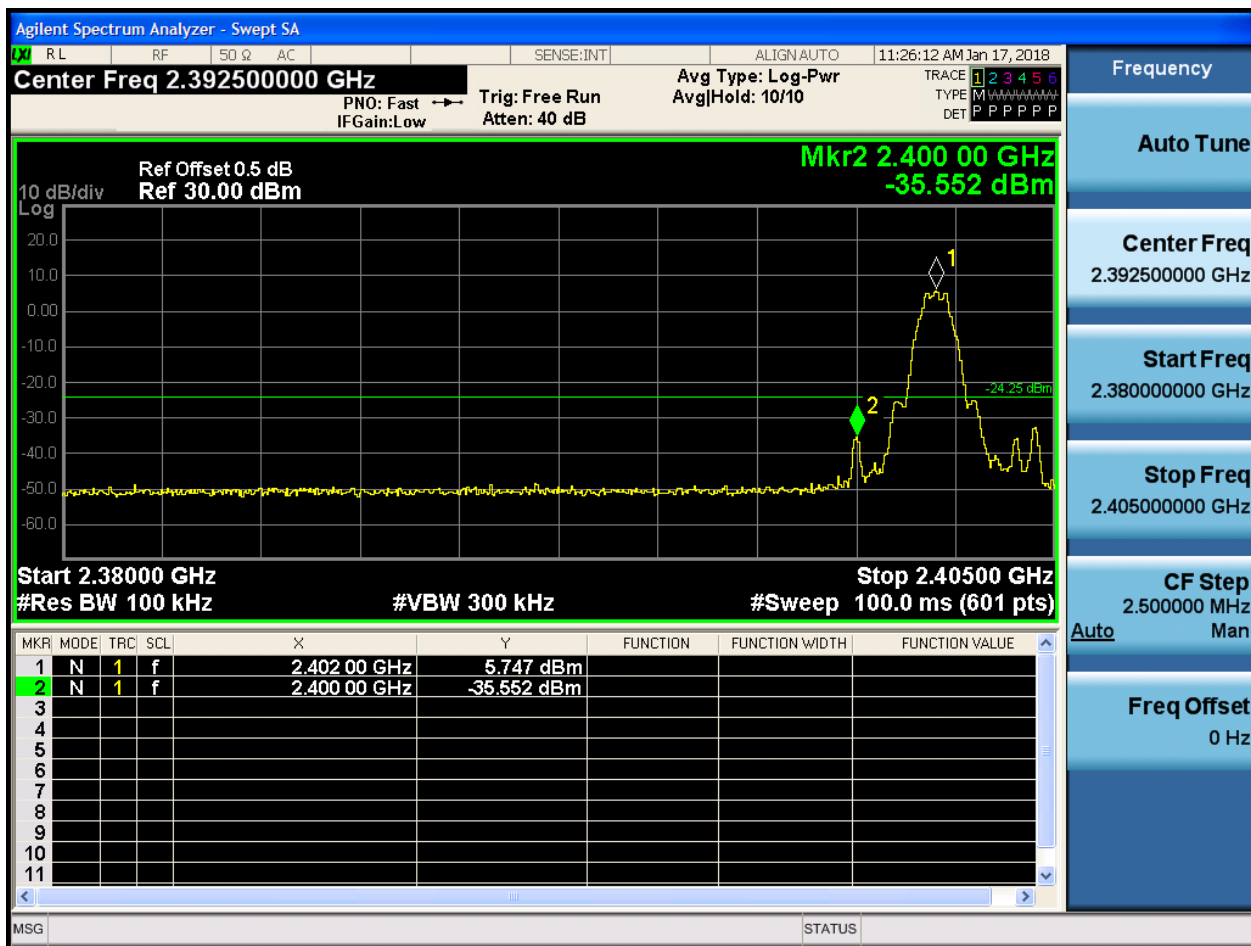



Agilent Spectrum Analyzer - Swept SA

Center Freq 2.483500000 GHz

Ref Offset 0.5 dB
Ref 30.00 dBm

Mkr2 2.483 50 GHz
-47.773 dBm

Start 2.47350 GHz
#Res BW 100 kHz

Stop 2.49350 GHz
#Sweep 100.0 ms (601 pts)

#VBW 300 kHz

10 dB/div
Log

20.0
10.0
0.00
-10.0
-20.0
-30.0
-40.0
-50.0
-60.0

2.480 00 GHz
6.046 dBm

2.483 50 GHz
-47.773 dBm

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.480 00 GHz	6.046 dBm			
2	N	1	f	2.483 50 GHz	-47.773 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								

Frequency

Auto Tune

Center Freq
2.483500000 GHz

Start Freq
2.473500000 GHz

Stop Freq
2.493500000 GHz

CF Step
2.000000 MHz
Man

Freq Offset
0 Hz

MSG

STATUS

Appendix G: Unwanted Emissions into Non-Restricted Frequency

Bands

In this Appendix, the "Pref", which is used as the reference level, refers to the peak power level in any 100 kHz bandwidth within the fundamental emission, the "Puw" refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW [kHz]})$. As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain and used as respective results for each chain, due to the relative-limit requirement.

In the result table, the "< Limit" denotes that "The Puw [dBm] is less than Pref[dBm]-30[dBm], see test plots for detailed".

Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Pref[dBm]	Puw[dBm]	Verdict
TM1_Ch0	L	2402	5.83	<limit	pass
TM1_Ch19	M	2440	6.14	<limit	pass
TM1_Ch39	H	2480	6.17	<limit	pass





Agilent Spectrum Analyzer - Swept SA

Center Freq 79.500 kHz

Ref Offset 0.5 dB
Ref 0.00 dBm

Mkr1 9.235 kHz
-52.682 dBm

Start 9.00 kHz
#Res BW 1.0 kHz

Stop 150.00 kHz
Sweep 134.8 ms (601 pts)

#VBW 3.0 kHz

Frequency

Auto Tune

Center Freq
79.500 kHz

Start Freq
9.000 kHz

Stop Freq
150.000 kHz


CF Step
14.100 kHz
Man


Freq Offset
0 Hz


MSG


STATUS


DC Coupled

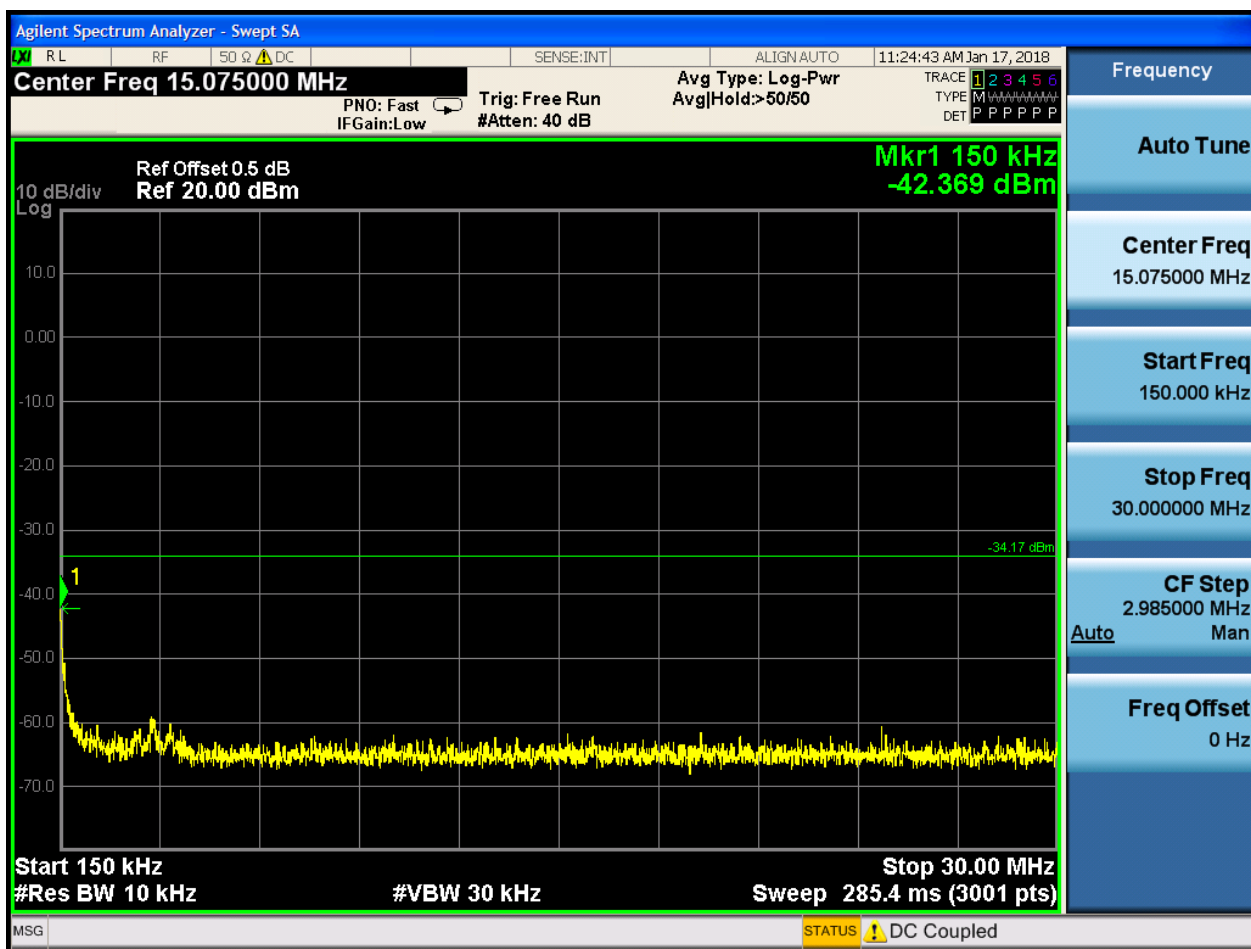

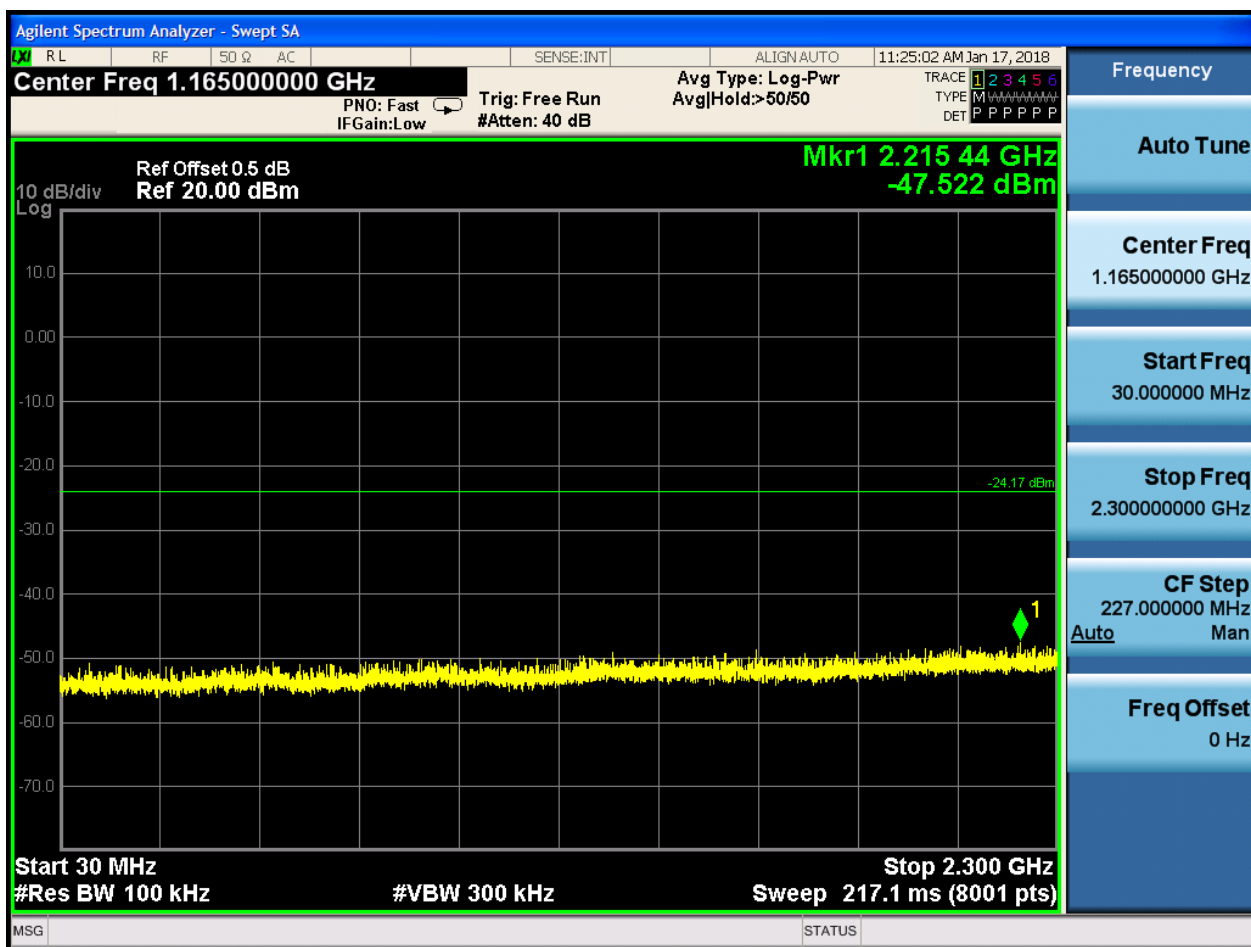

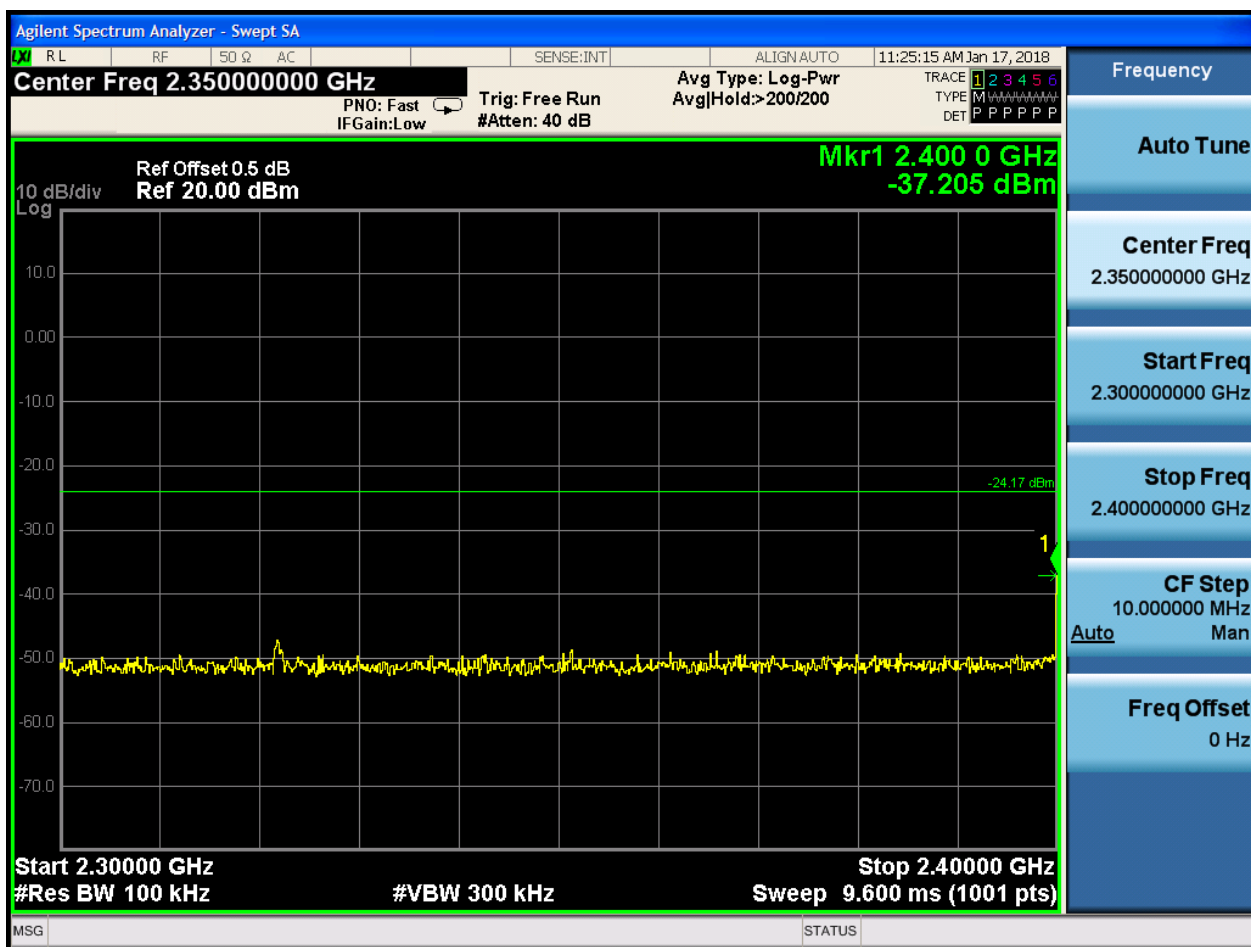

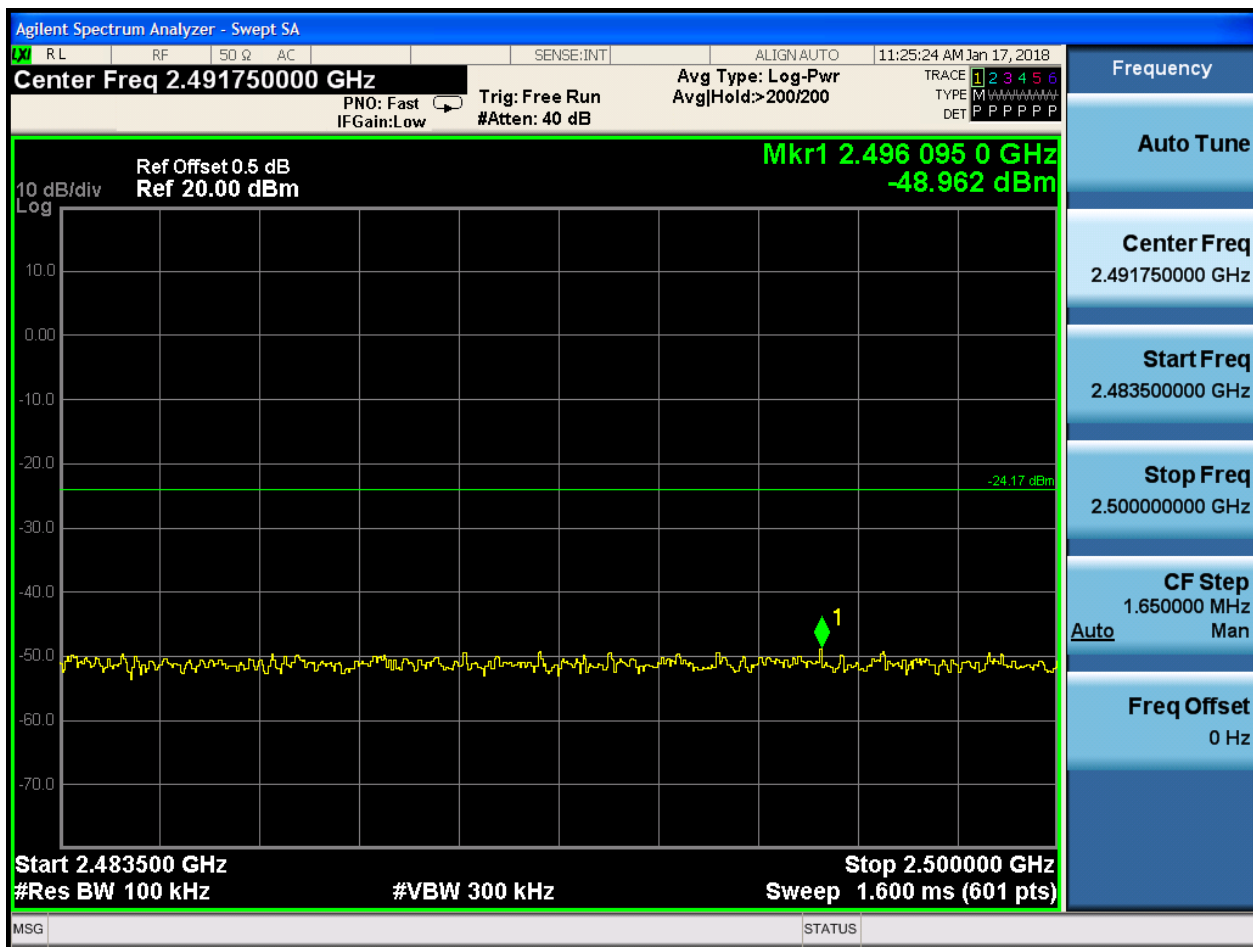


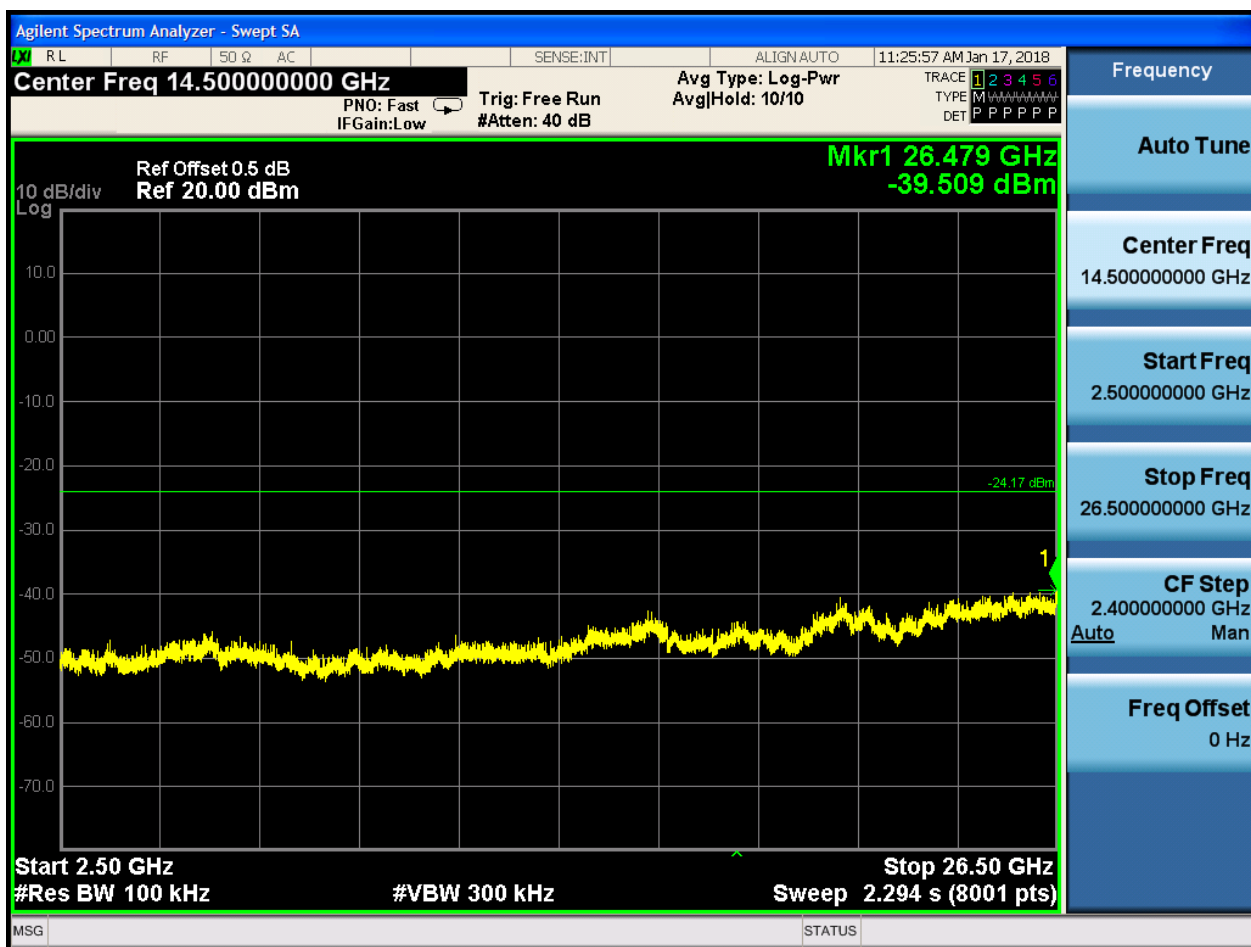





2.2 TM1_Ch19_M


Pref:

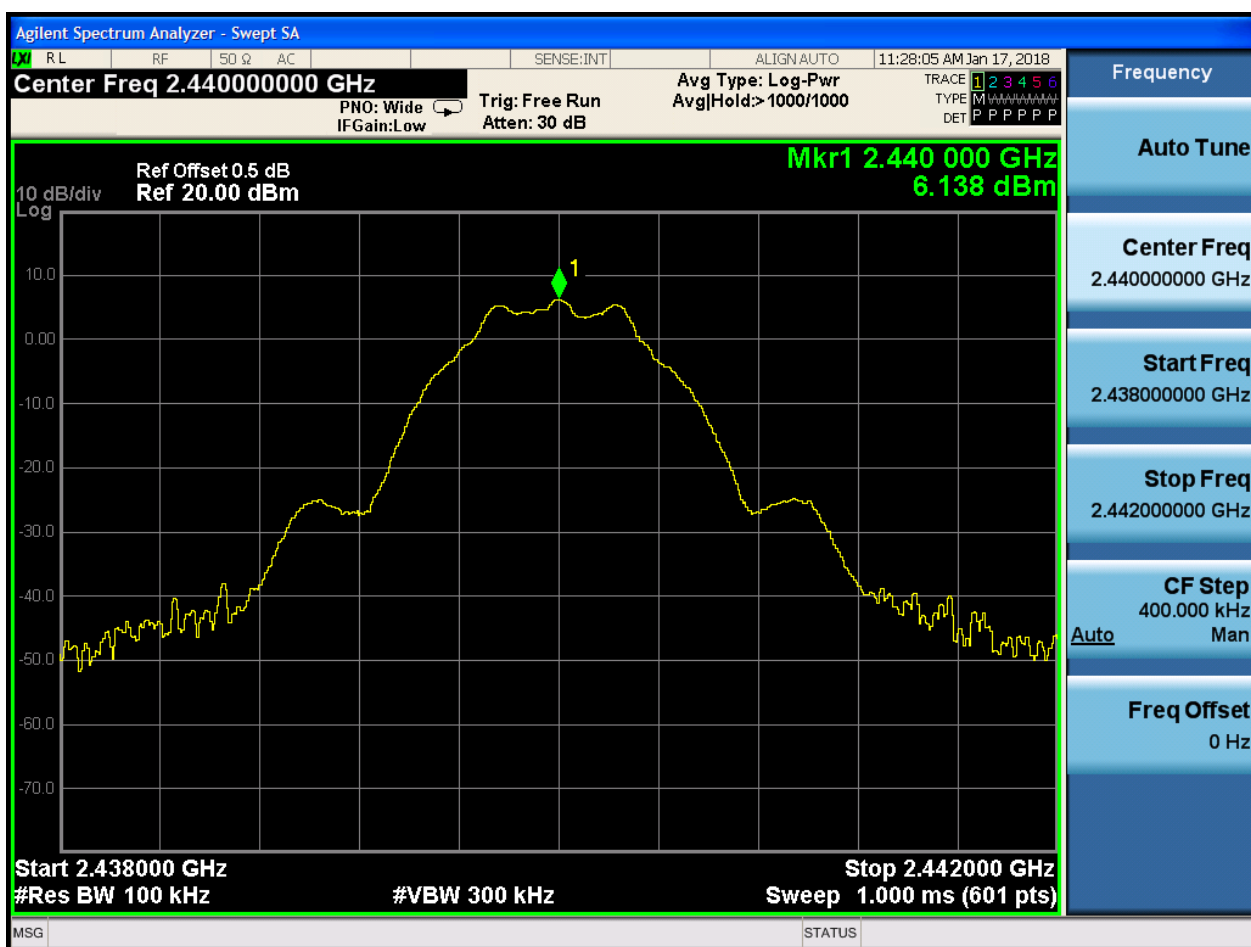


[illegible]

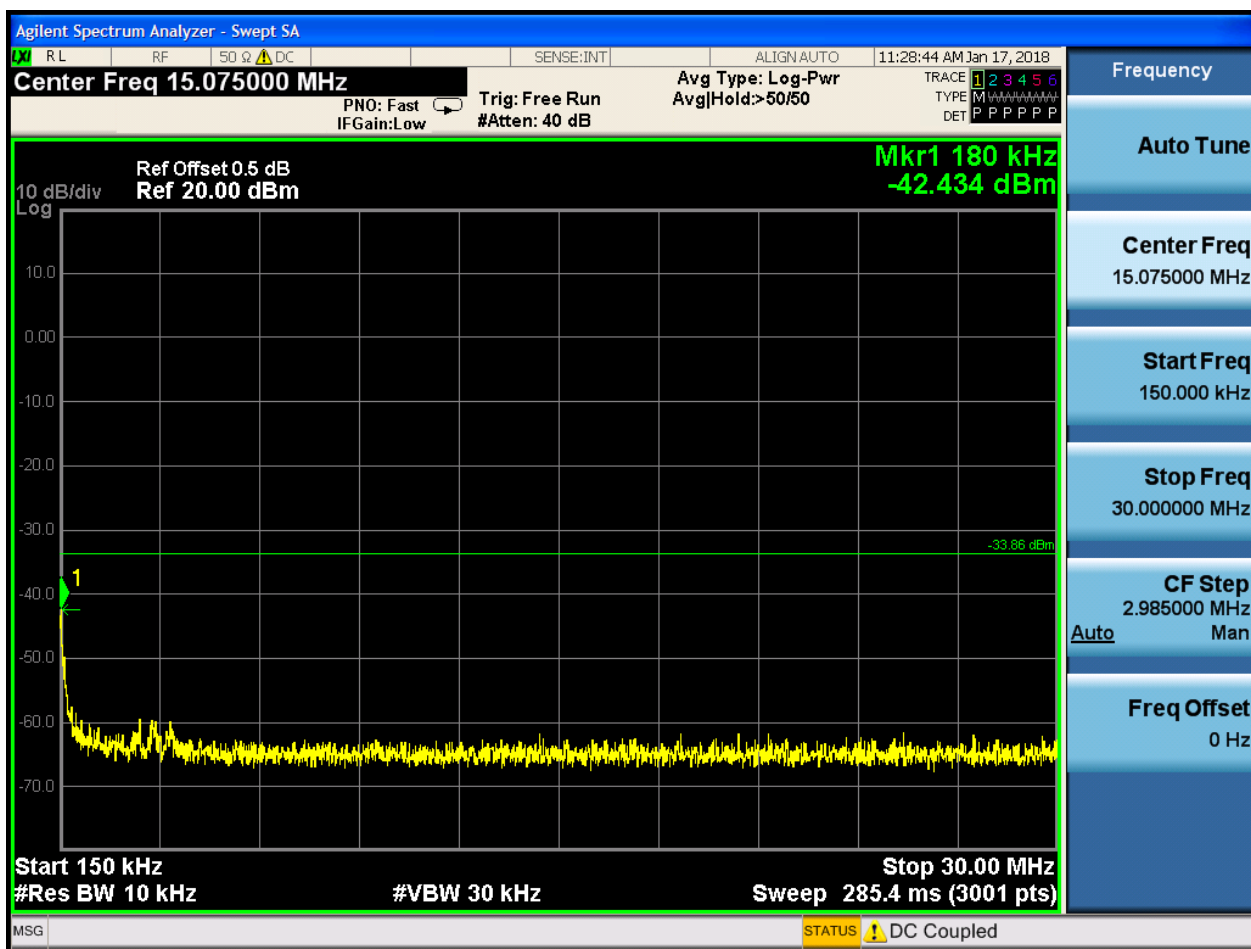

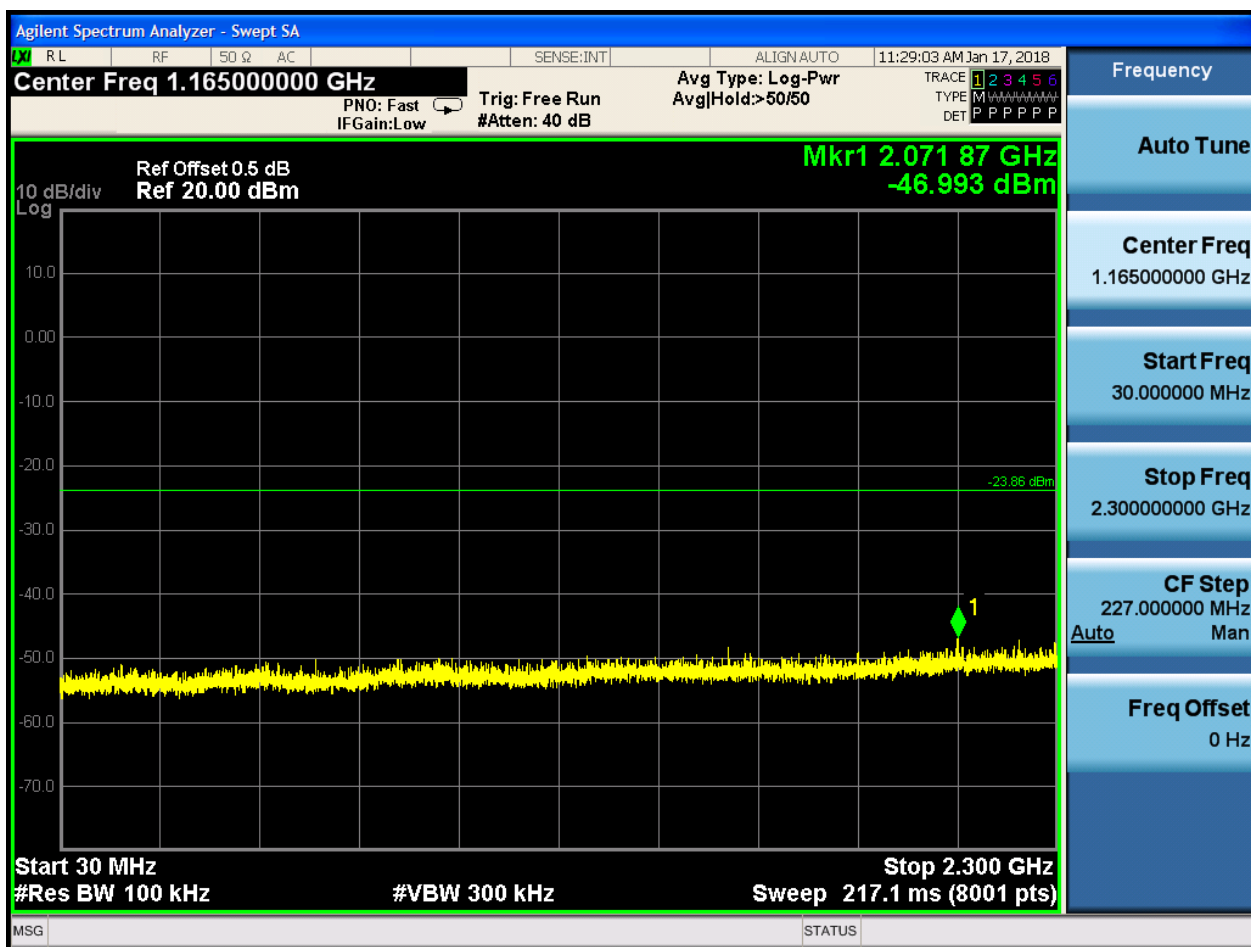

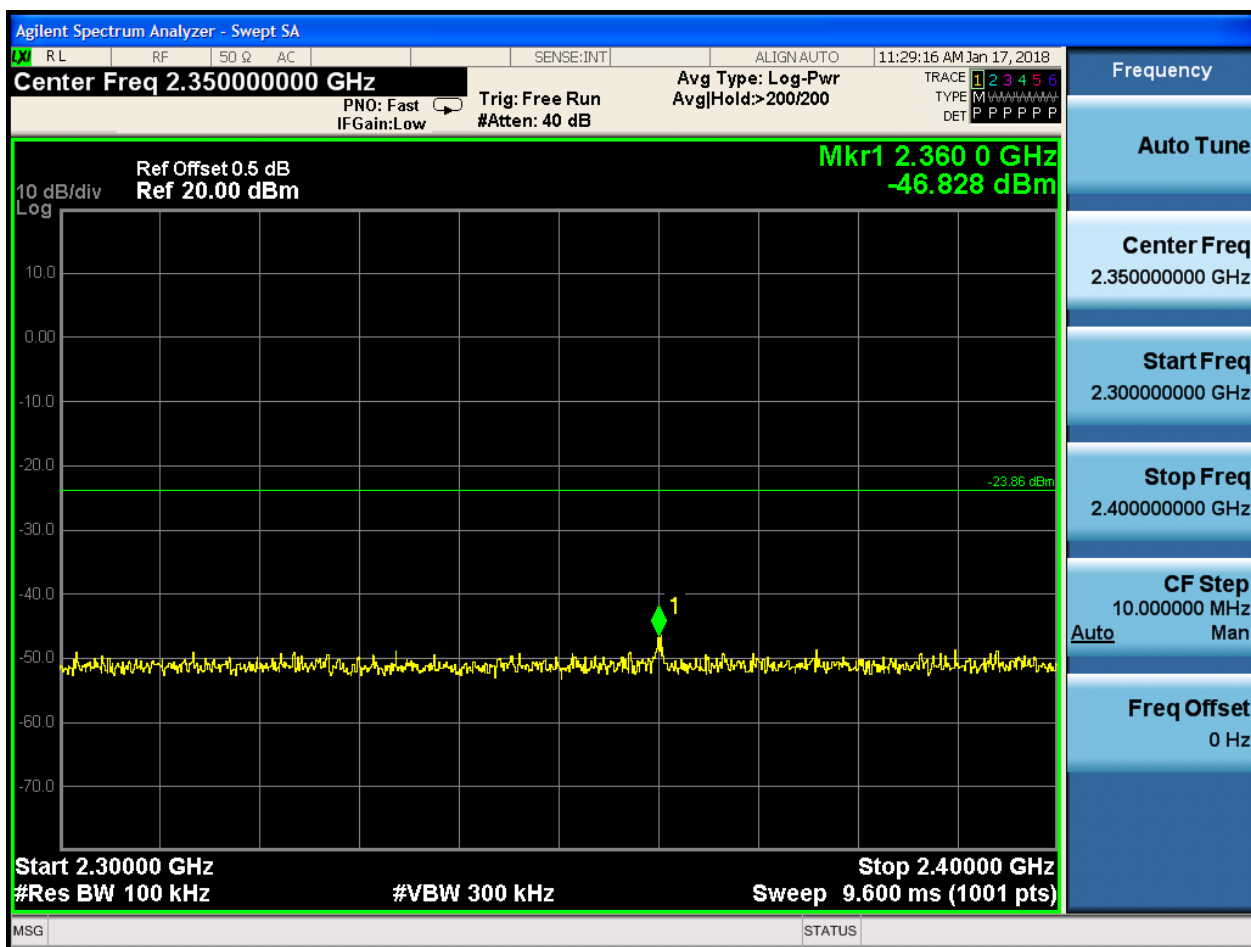

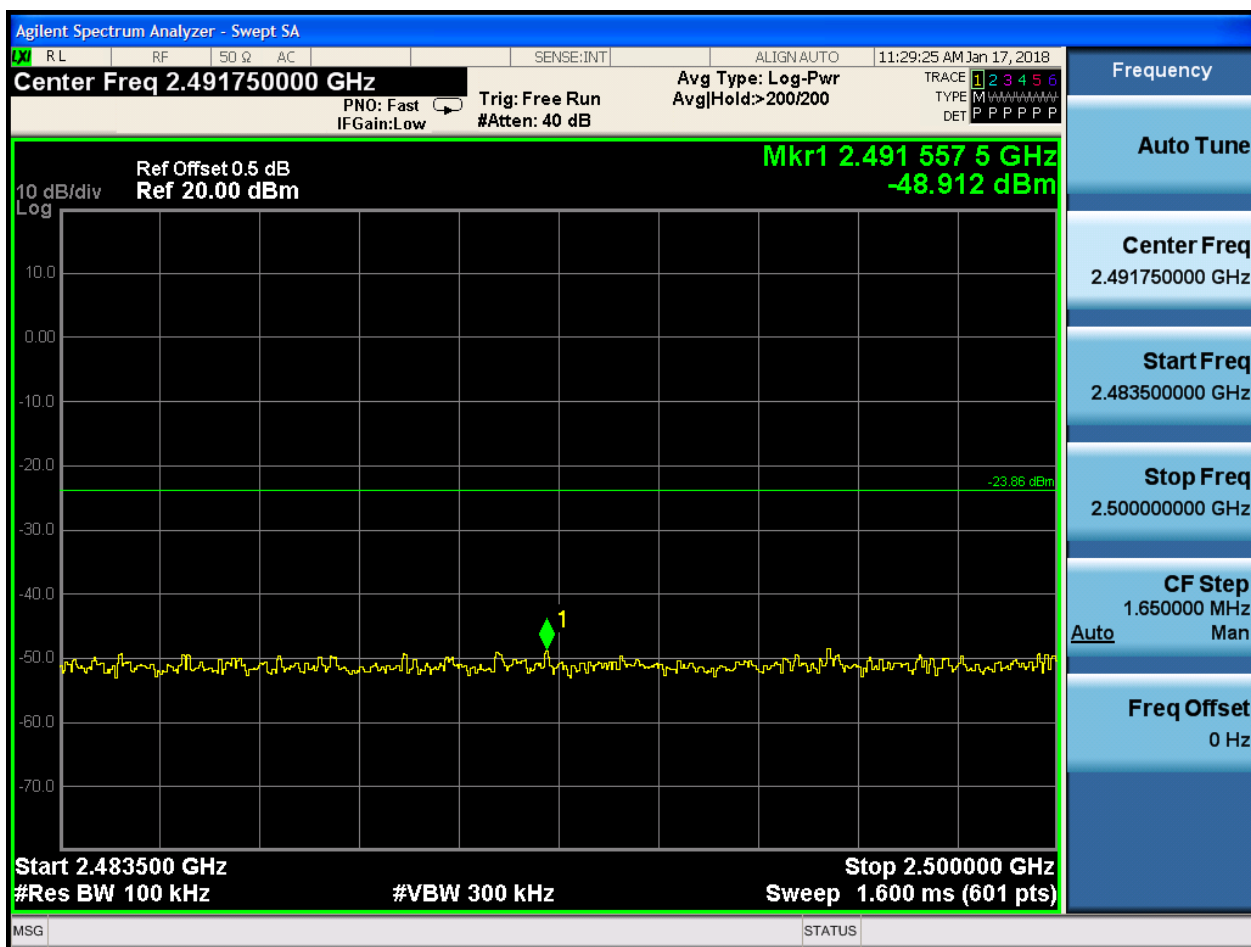






2.3 TM1_Ch39_H


Pref:

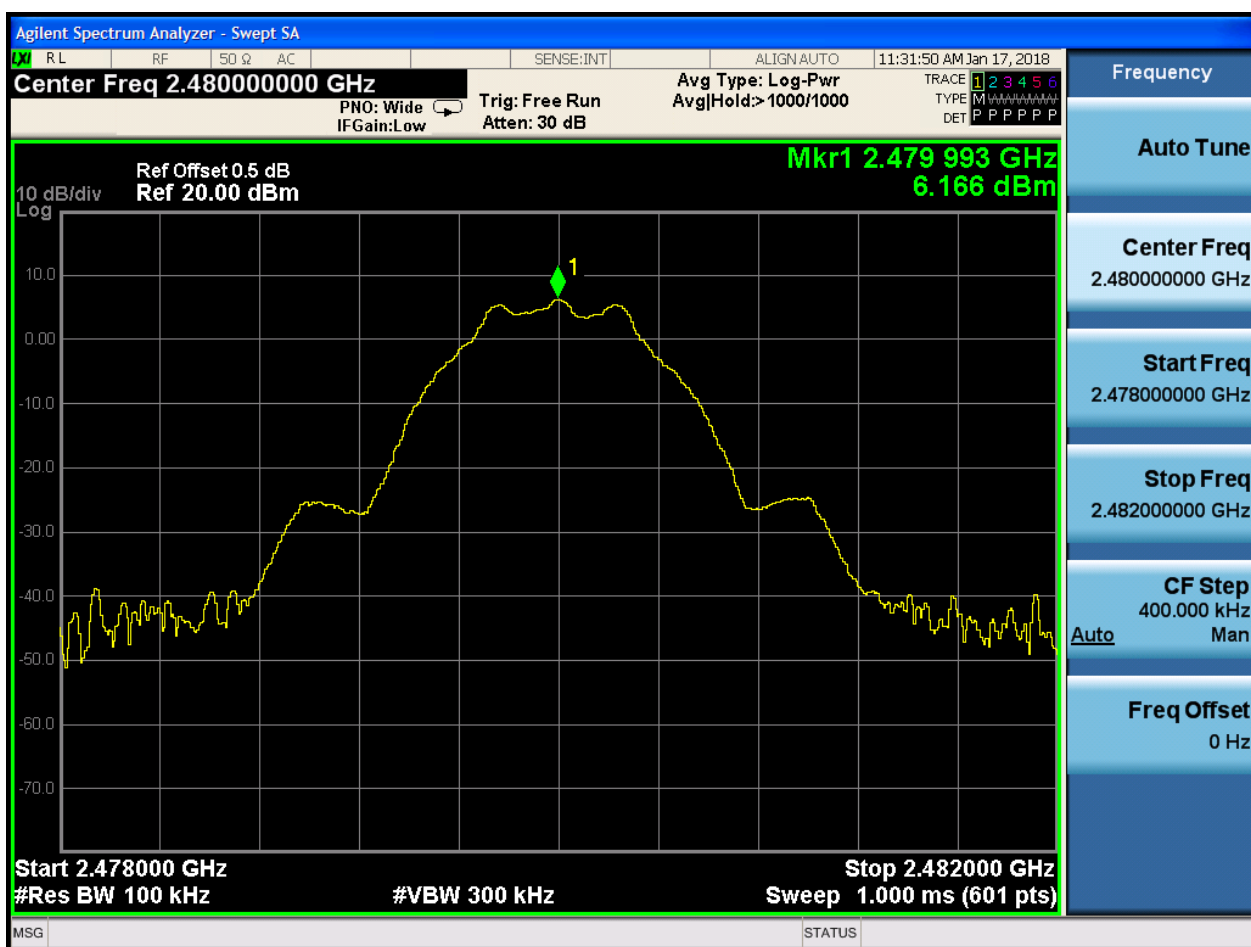






Puw:




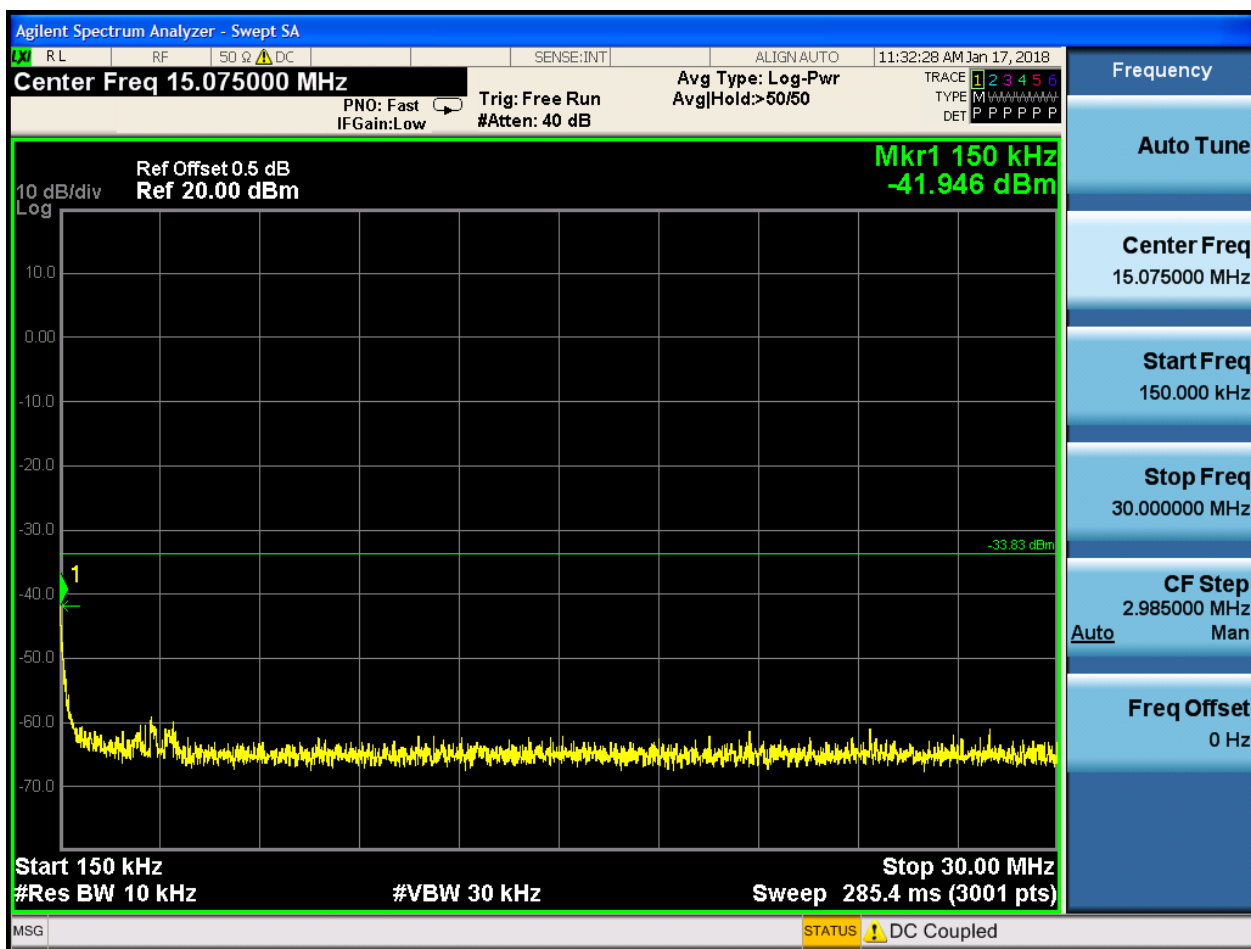

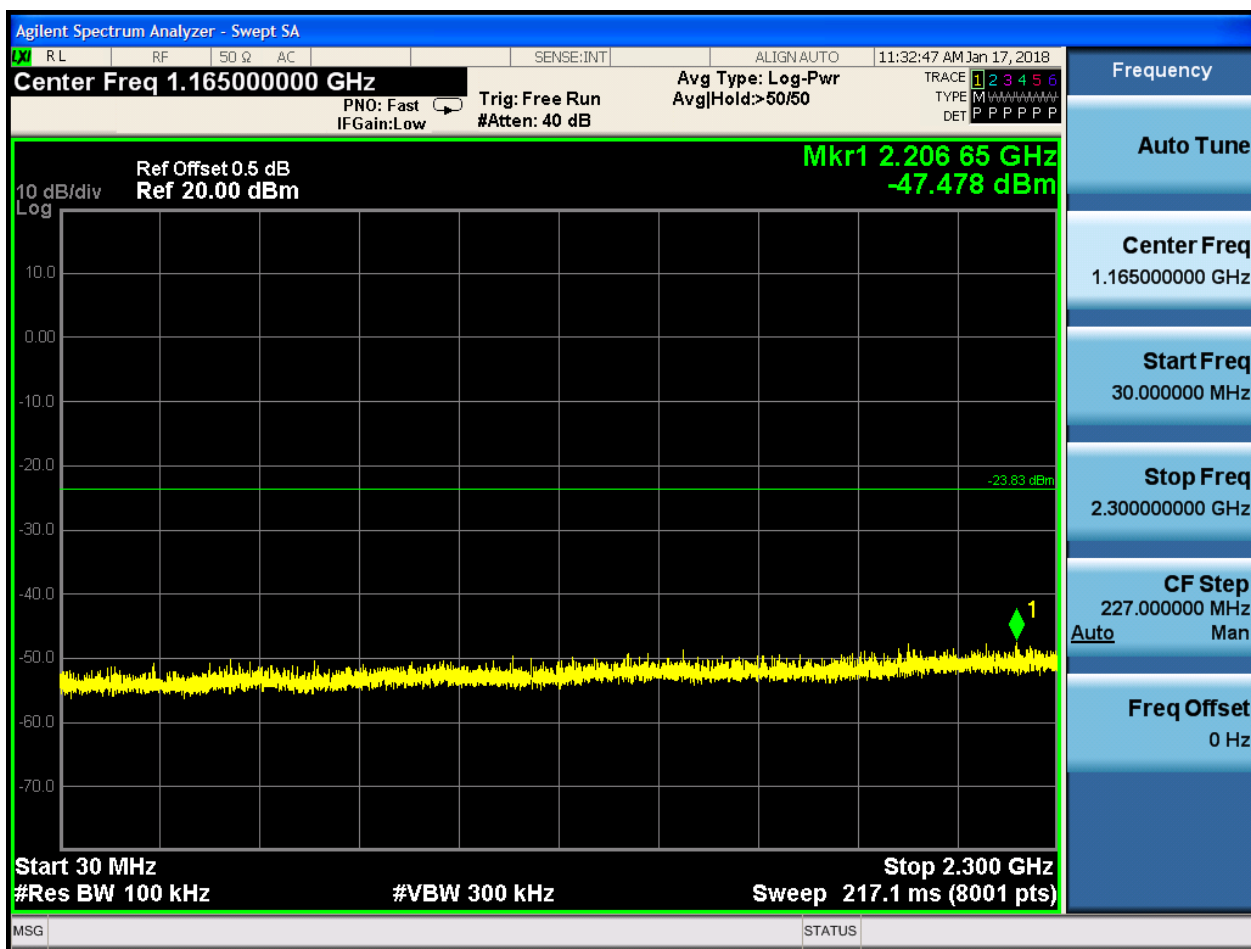

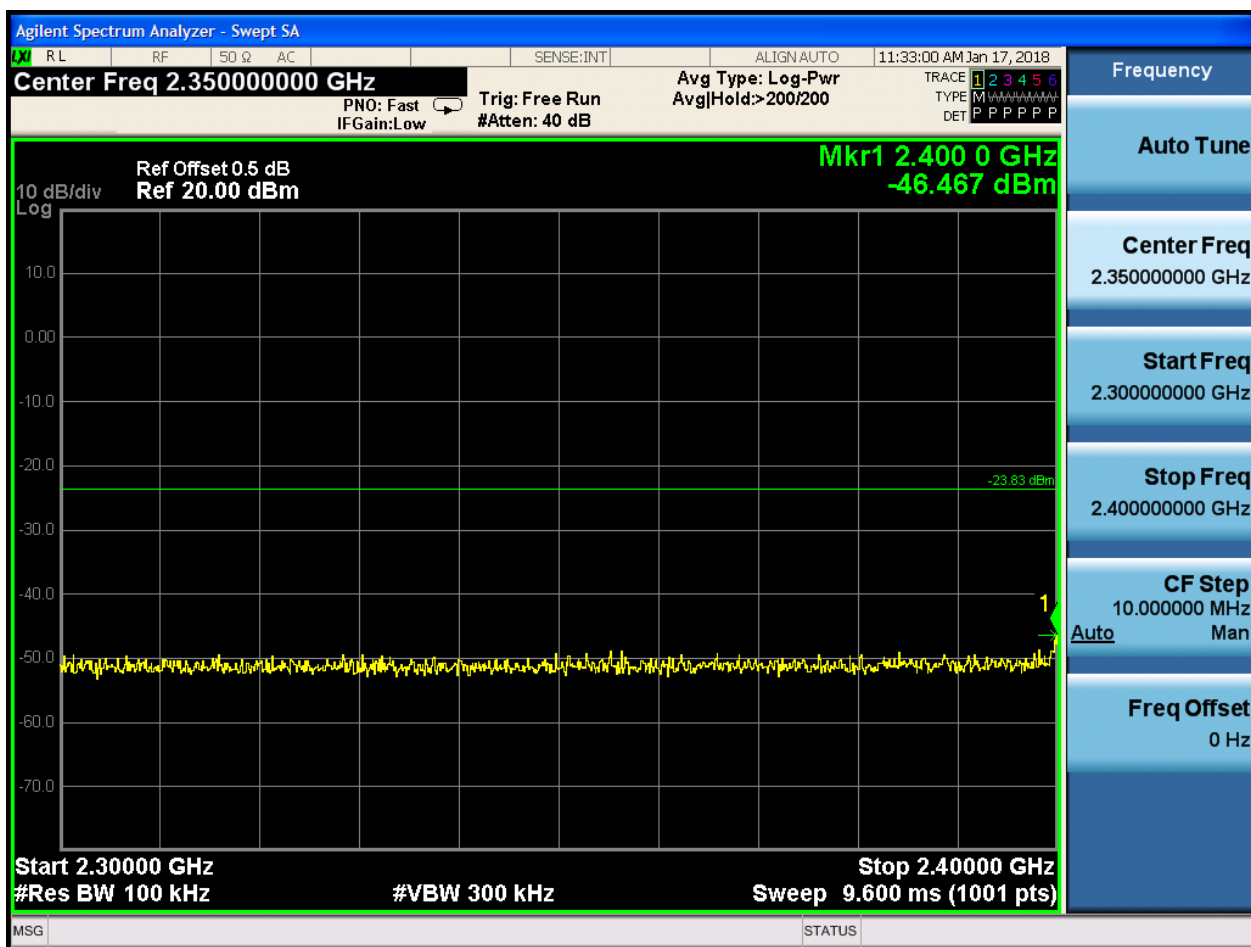

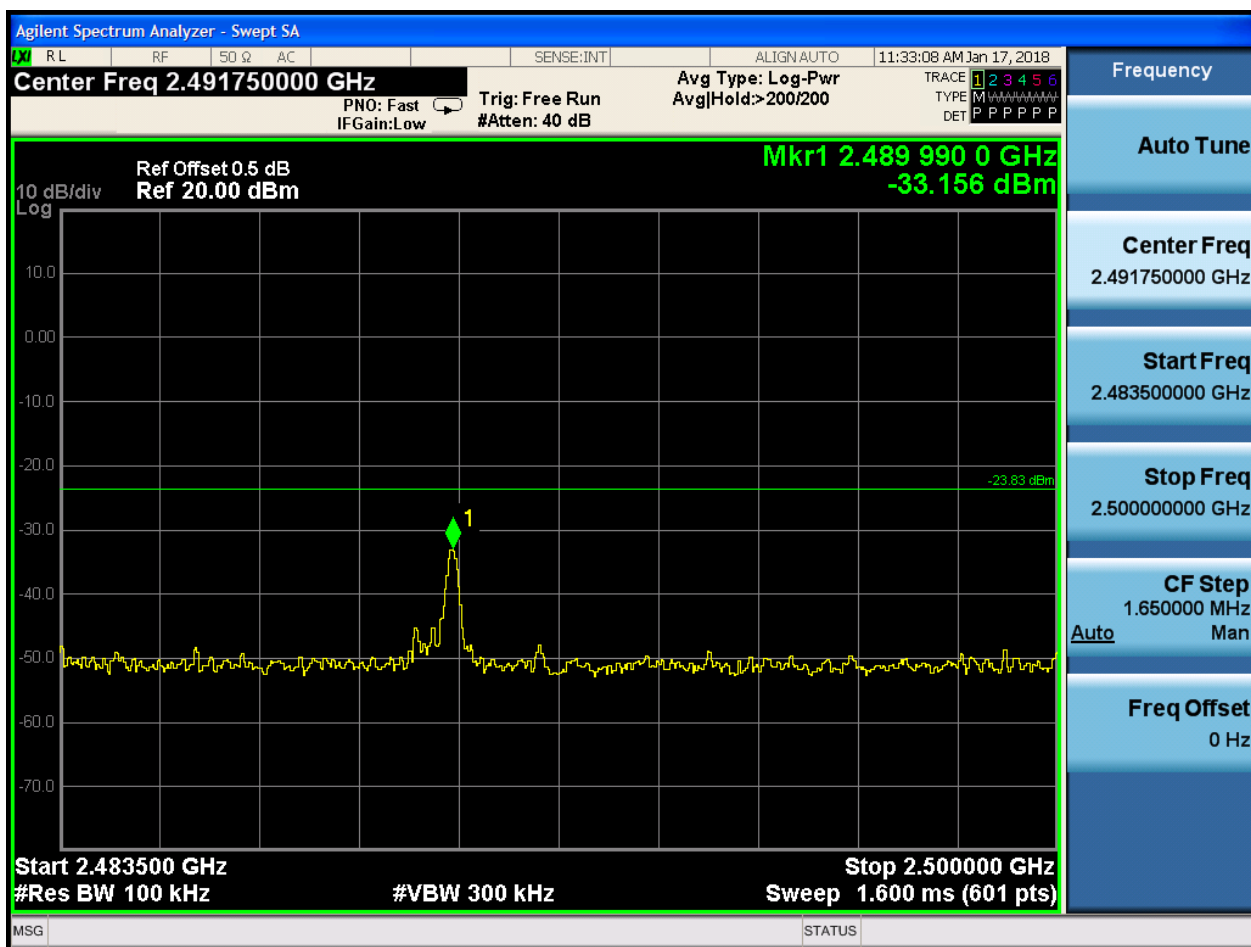

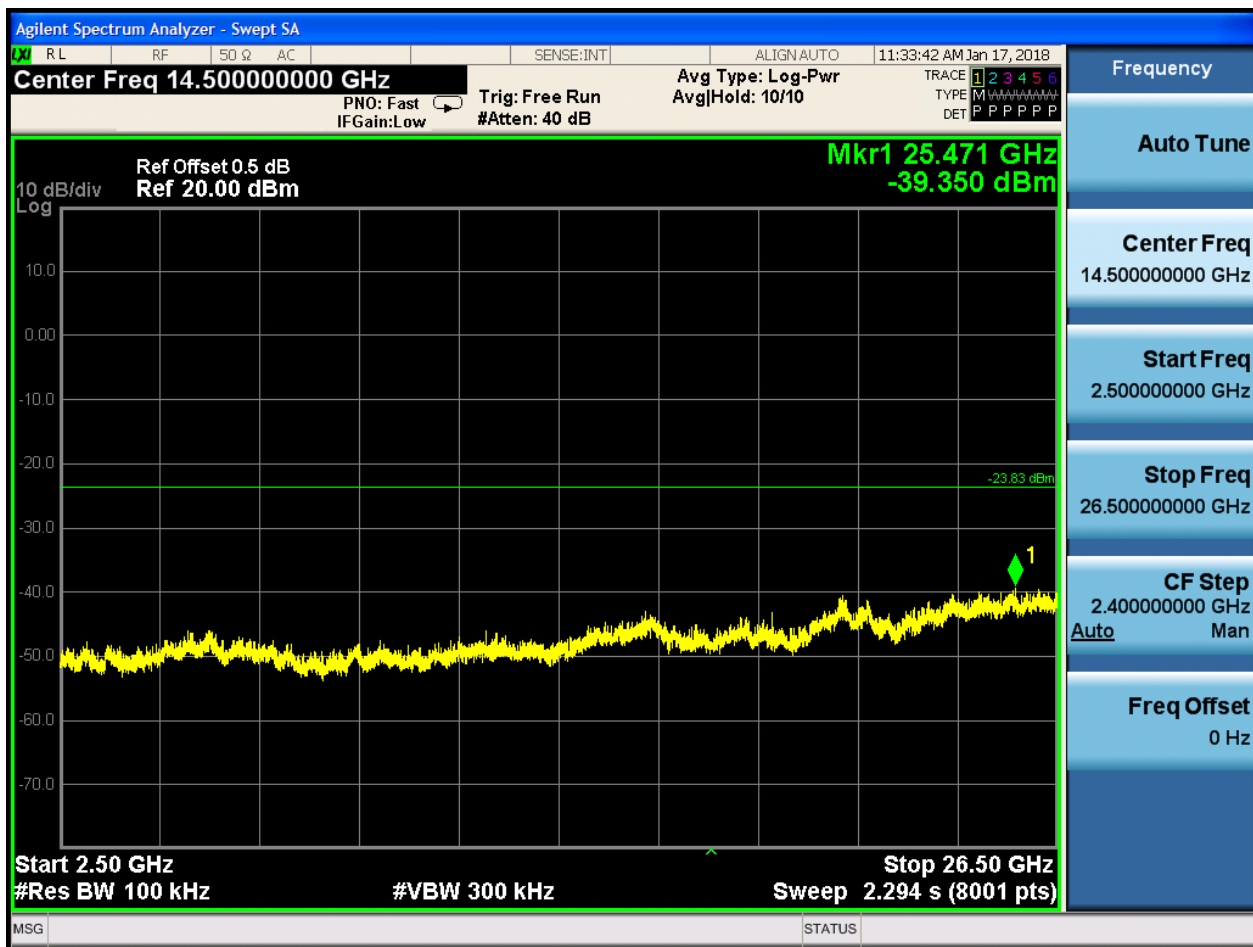

Appendix H: Radiated Spurious Emission & Spurious in Restricted Band

Note: We tested all modes, but the data presented below is the worst case.

Below 1GHz, RBW = 100 kHz, VBW = 300 kHz.

Above 1GHz, RBW = 1 MHz, VBW = 3 MHz.

The simultaneous transmission has been considered


1.1 Part 1: Testing Range of “9 kHz to 30MHz”

NOTE1: No peak found in the Test Range of “9 kHz to 30MHz”

1.2 Part 2: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

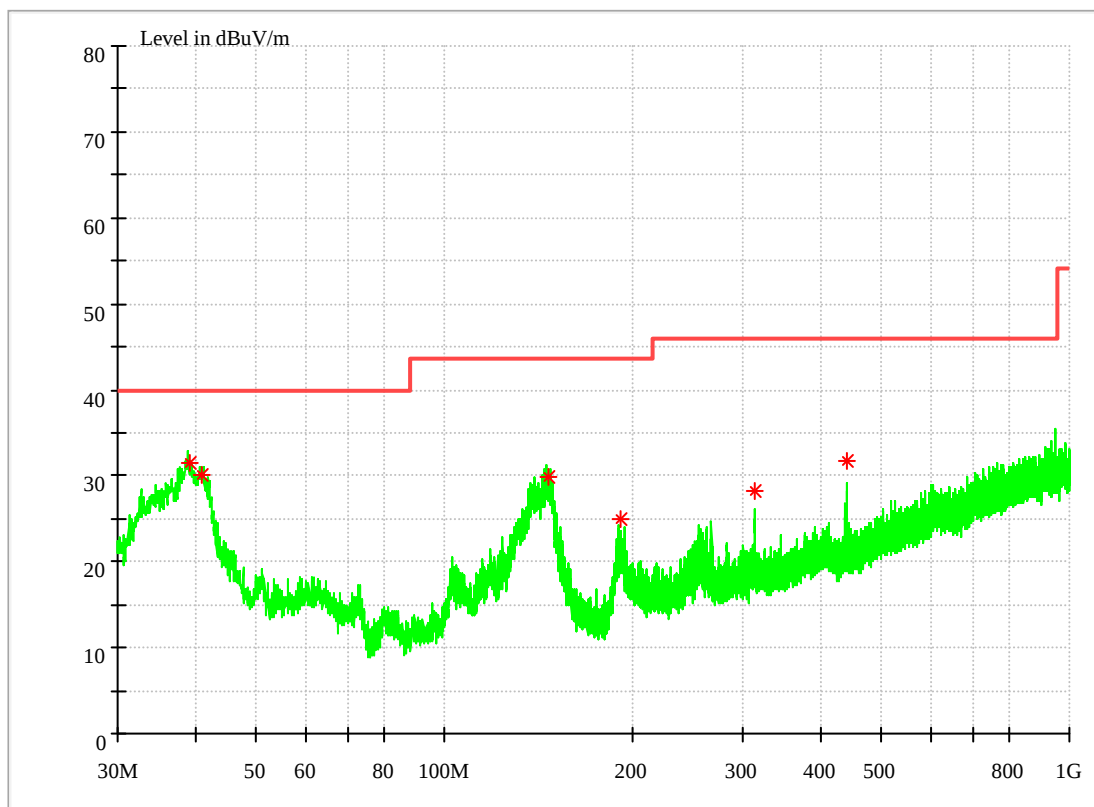

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
39.066800	32.87	40.00	7.13	100.0	V	298.0	17.1
40.969980	30.95	40.00	9.05	100.0	V	50.0	17.6
146.268060	31.35	43.50	12.15	100.0	V	302.0	12.9
190.892280	24.34	43.50	19.16	148.0	H	269.0	12.0
313.789880	26.12	46.00	19.88	100.0	H	10.0	16.9
439.316520	29.14	46.00	16.86	100.0	V	35.0	19.2

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3 Part 3: Testing Range of “1GHz to 3GHz”


Note 1: The testing range of “1GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.

Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).


Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

Test Mode:

1.3.1 Test Mode: TM1

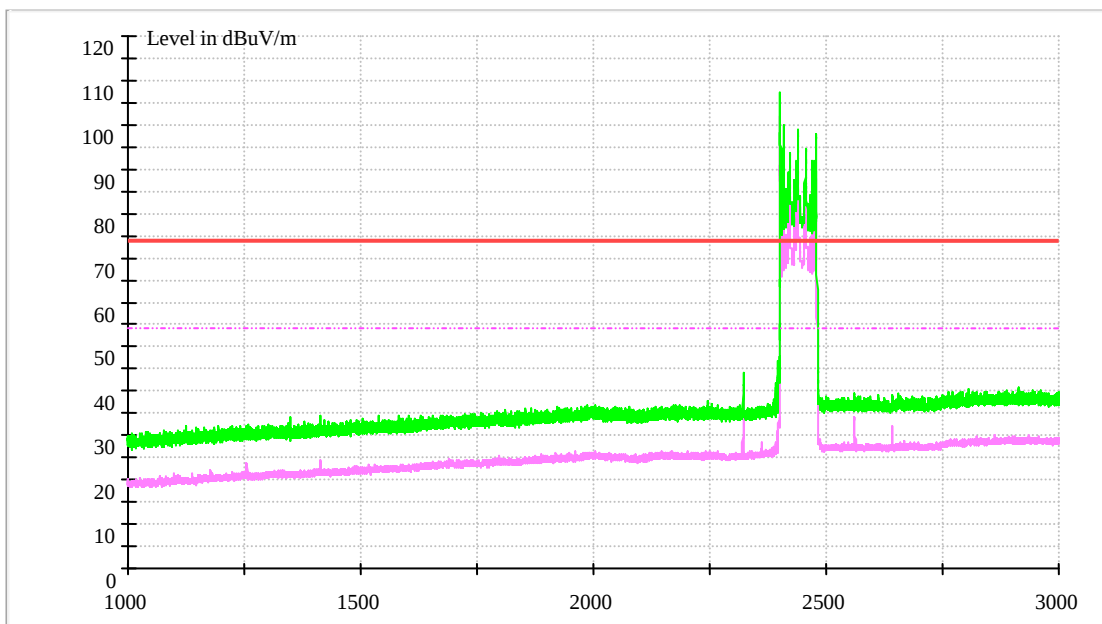

1.3.1.1 Channel 0

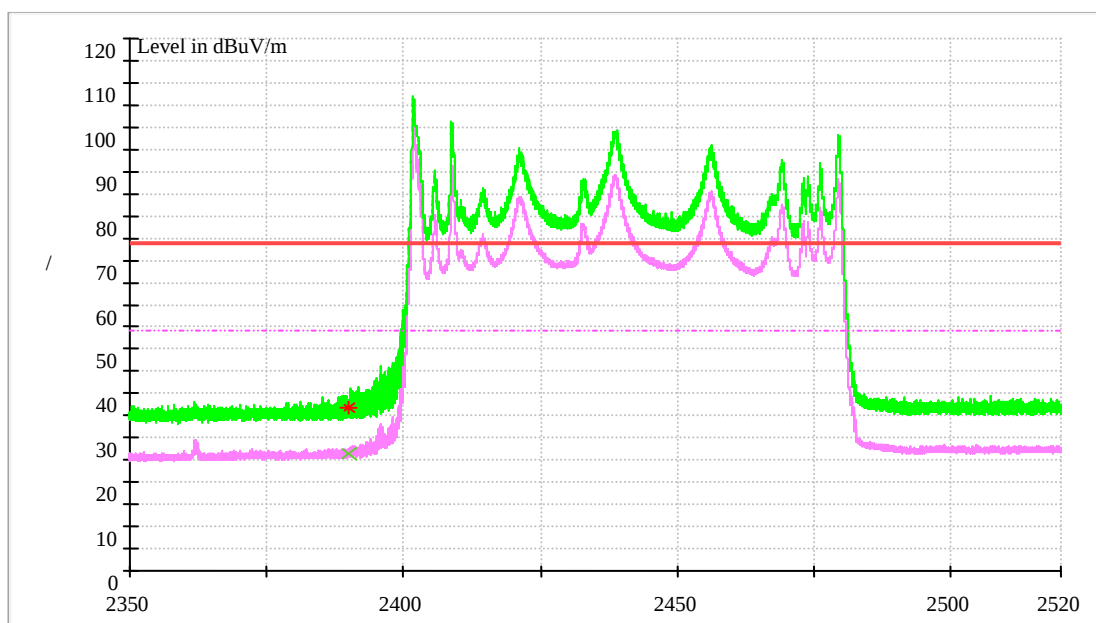

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimut h (deg)	Transd. (dB)
2390.000000	26.55	54.00	27.45	150.0	H	180.0	-8.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimut h (deg)	Transd. (dB)
2390.000000	36.82	74.00	37.18	150.0	H	212.0	-8.5


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.1.2 Channel 39

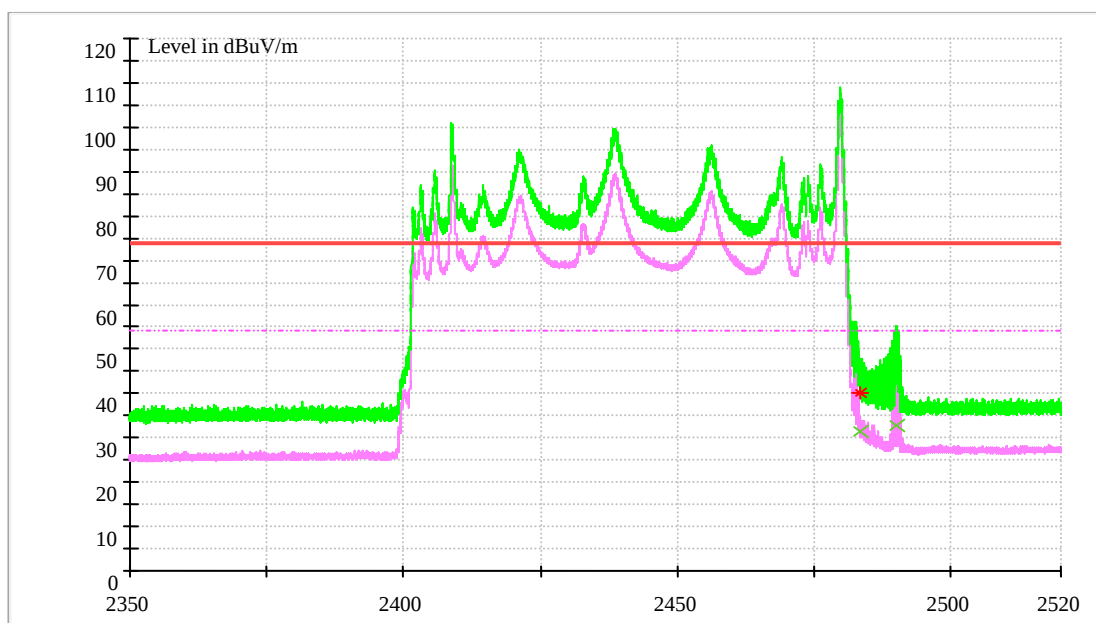

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5000	31.54	54.00	22.46	150.0	H	203.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5000	40.19	74.00	33.81	150.0	H	203.0	-6.8

Note:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.4 Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 3 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

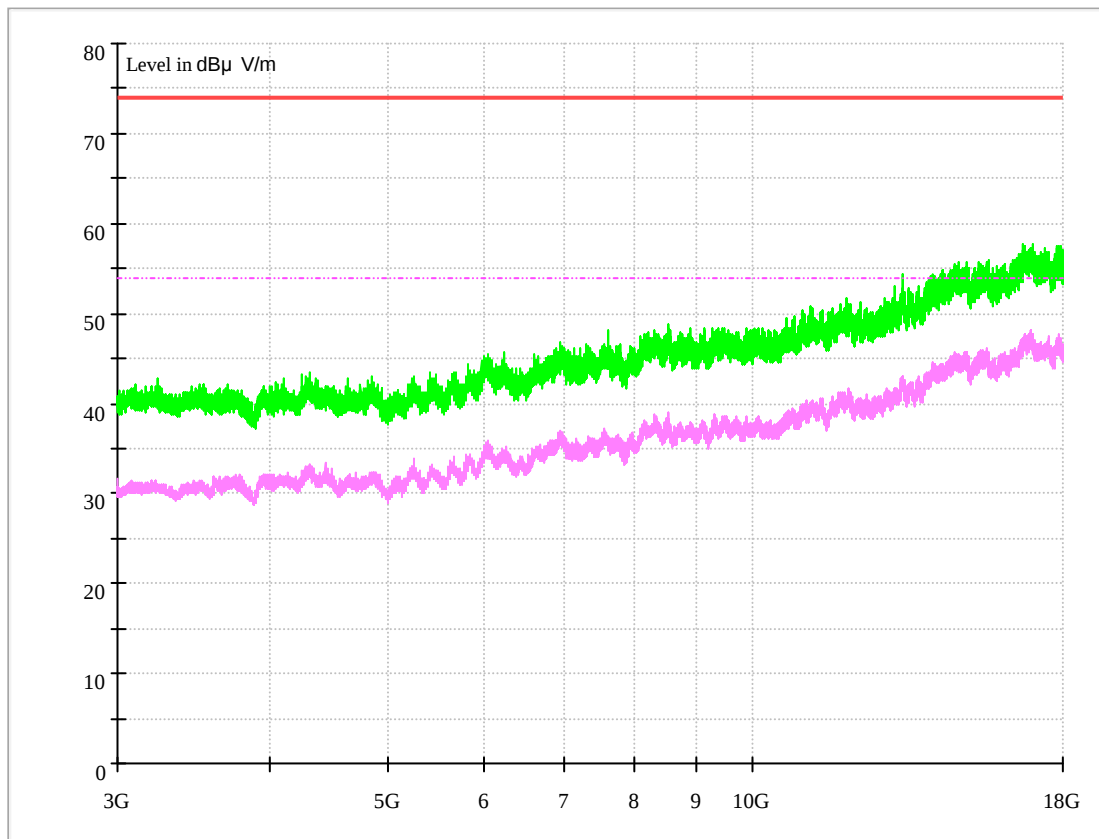




1.5 Part 5: Testing Range of “18 GHz to 26.5 GHz”

NOTE: No peak found in the Test Range of “18 GHz to 26.5GHz”

Appendix I: Conducted Emission at Power Port

Note: RBW =9 kHz, VBW = 30 kHz

Channel 39

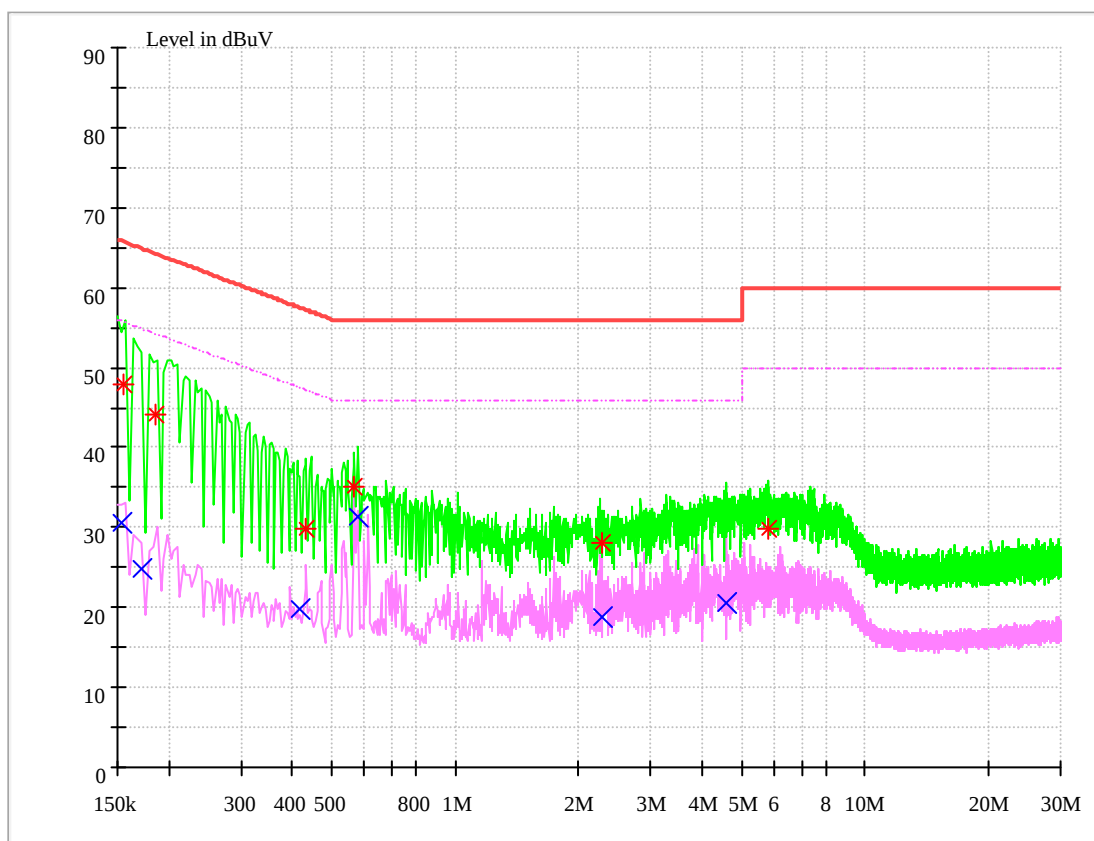

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.153503	30.53	55.81	9.7	25.28	L1	FLO
0.172518	24.82	54.84	9.7	30.02	N	FLO
0.419238	19.77	47.46	9.7	27.70	N	FLO
0.577296	31.28	46.00	9.7	14.72	N	FLO
2.293174	18.80	46.00	9.7	27.20	N	FLO
4.594049	20.51	46.00	9.8	25.49	L1	FLO

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.155498	47.94	65.70	9.7	17.76	N	FLO
0.186288	44.01	64.20	9.7	20.19	L1	FLO
0.430122	29.74	57.25	9.7	27.51	N	FLO
0.567565	35.12	56.00	9.7	20.88	L1	FLO
2.288881	27.99	56.00	9.7	28.01	L1	FLO
5.777148	29.81	60.00	9.8	30.19	L1	FLO

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

END