



EMC Test Report

Product Name: LTE Module

Model Number: ME906V

Report No: SYBH(Z-EMC)048122012-2

FCC ID: QISME906V

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518



Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
4. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
5. The test report is invalid if not marked with "exclusive stamp for the test report".
6. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
7. The test report is invalid if there is any evidence of erasure and/or falsification.
8. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
9. Normally, the test report is only responsible for the samples that have undergone the test.
10. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Applicant: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Receipt Test Item: Dec.16, 2012
Start Date of Test: Dec.17, 2012
End Date of Test: Dec.25, 2012
Test Result: Pass

Approved By
(Lab Manager)

2012-12-26
Date

Liu Chunlin
Name

Signature

Operator
(Test engineer)

2012-12-26
Date

Zheng Ke
Name

Signature



Modification Record

No.	Last Report No.	Modification Description
1	NA	First report



TABLE OF CONTENT

1	General Information	6
1.1	EUT Description	6
1.2	Test Site Information	7
1.3	Applied Standards	7
2	Summary of Results.....	8
3	System Configuration during EMC Test.....	9
3.1	Test Mode	9
3.2	Test System Configuration.....	9
3.3	Cables Used during Test.....	9
3.4	Associated Equipment Used during Test.....	9
4	Electromagnetic Interference (EMI).....	10
4.1	Radiated Disturbance 30MHz to 18GHz	10
5	Main Test Instruments.....	13
6	System Measurement Uncertainty	13
7	Test Data and Graph.....	14
7.1	Radiated Disturbance	14
7.2	Conducted Disturbance.....	16



1 General Information

1.1 EUT Description

EUT Description	
Product Name	LTE Module
Model Number	ME906V
Serials Number	A4P01A92A2200063
TX Frequency	GSM 850:824MHz To 849MHz GSM1900:1850MHz To 1910MHz WCDMA BAND V:824MHz To 849MHz WCDMA BNAD IV:1710MHz To 1755MHz WCDMA BAND II:1850MHz To 1910MHz LTE BAND 2: 1850MHz To1910MHz LTE BNAD 4: 1710MHz To 1755MHz LTE BNAD 5: 1850MHz To 1910MHz LTE BNAD 13:777MHz To 787MHz LTE BAND 17: 704MHz To 716MHz
RX Frequency	GSM850:869MHz To 894MHz; GSM1900:1930MHz To 1990MHz WCDMA BAND V:869MHz To 894MHz WCDMA BNAD IV:1805MHz To 1880MHz WCDMA BAND II:1930MHz To 1990MHz LTE BAND 2: 1930MHz To 1990MHz LTE BNAD 4: 1805MHz To 1880MHz LTE BNAD 5: 869MHz To 894MHz LTE BNAD 13:746MHz To 756MHz LTE BAND 17: 734MHz To 746MHz GPS:1575.42MHz GLONASS:1602MHz
HW Version	MD1ME906VM
SW Version	11.220.01.01.000

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user manual for more detailed description.



1.2 Test Site Information

Site 1:	RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD.
Test Site Location:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.3 Applied Standards

APPLIED STANDARD

47 CFR FCC Part 15:2011, Subpart B



2 Summary of Results

Summary of Results				
Test Items	Test Mode	Performance Class & Required Performance Criteria	Result	Site
<u>Radiated Emissions</u> Enclosure Port	Mode 2	CLASS B	Pass	Site1
<u>Conducted Emissions</u> ☒ DC Power Port ☒ AC Power Port ☐ Telecommunication Ports	Mode1~ Mode2	CLASS B	Pass	Site1
Note: 1, Measurement taken is within the measurement uncertainty of measurement system.				

During the measurement, the environmental conditions complied with the range listed as below.

Item	Required
Ambient temperature	15°C ~ 35°C
Relative humidity	25% ~ 75%
Atmospheric pressure	86kPa ~ 106kPa

3 System Configuration during EMC Test

3.1 Test Mode

Huawei has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was in this test report and defined as below:

Test Mode	
Mode 1:	Traffic
Mode 2:	Idle


Traffic Mode:

State of EUT when switched on and with Radio Resource Control (RRC) connection established

Idle Mode:

State of EUT when switched on but without Radio Resource Control (RRC) connection

3.2 Test System Configuration

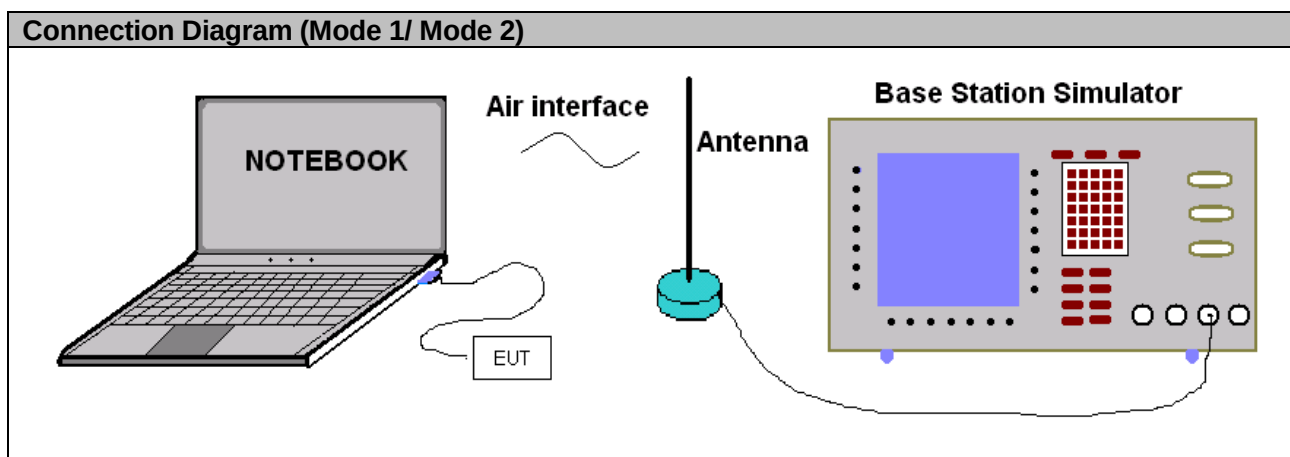

3.3 Cables Used during Test

Cable	Quantity	Length	Type of Cable
USB	1	<3m	shielded

3.4 Associated Equipment Used during Test

Name	Model	Manufacturer	S/N	Calibrated Deadline	Cal interval (month)
Radio Communication Tester	CMU200	R&S	3607111924	2013-06-07	12
Notebook	X200	ThinkPad	31090403588	/	/
Demo Board	MD0MU73 6M VER.B RF	HUAWEI	/	/	/

4 Electromagnetic Interference (EMI)

4.1 Radiated Disturbance 30MHz to 18GHz

4.1.1 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4-2009. The test distance was 3m. The set-up and test methods were according to ANSI C63.4-2009.

A preliminary scan and a final scan of the emissions were made from 30 MHz to 18 GHz by using test script of software; The emissions were measured using Quasi-Peak Detector (30MHz~1GHz) and AV/PK detector (above 1GHz). The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m. The azimuth range of turntable was 0° to 360°. The receiving antenna has two polarizations V and H.

Measurement bandwidth (RBW) for 30MHz to 1000 MHz: 120 kHz;

Measurement bandwidth (RBW) for 1000MHz to 18000 MHz: 1MHz;

EUT was configured in idle mode and the test performed at worst emission state.

4.1.2 Test setup

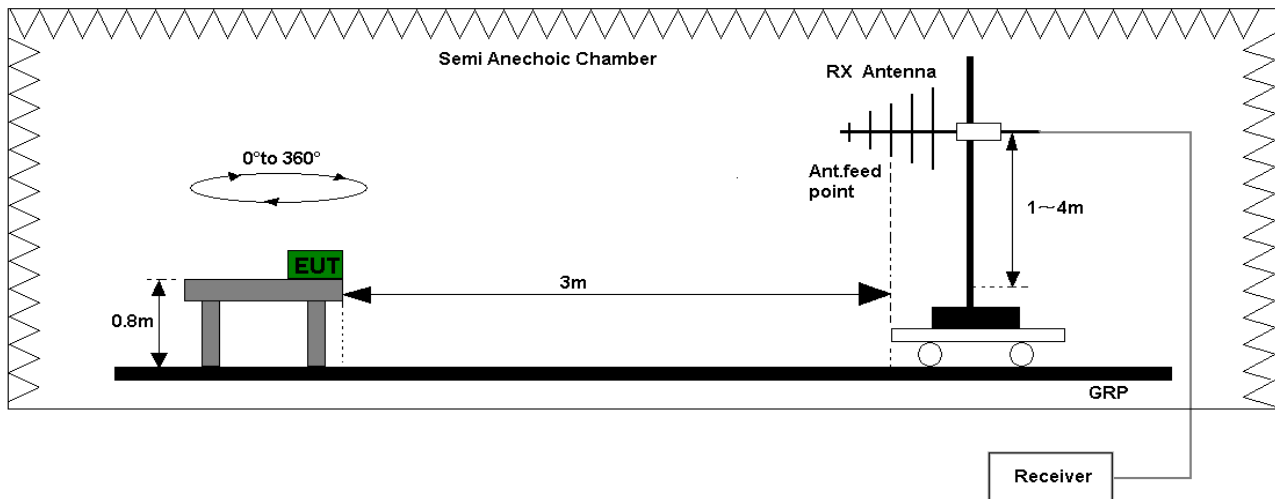


Figure 1. Test set-up of radiated disturbance(30MHz-1GHz)

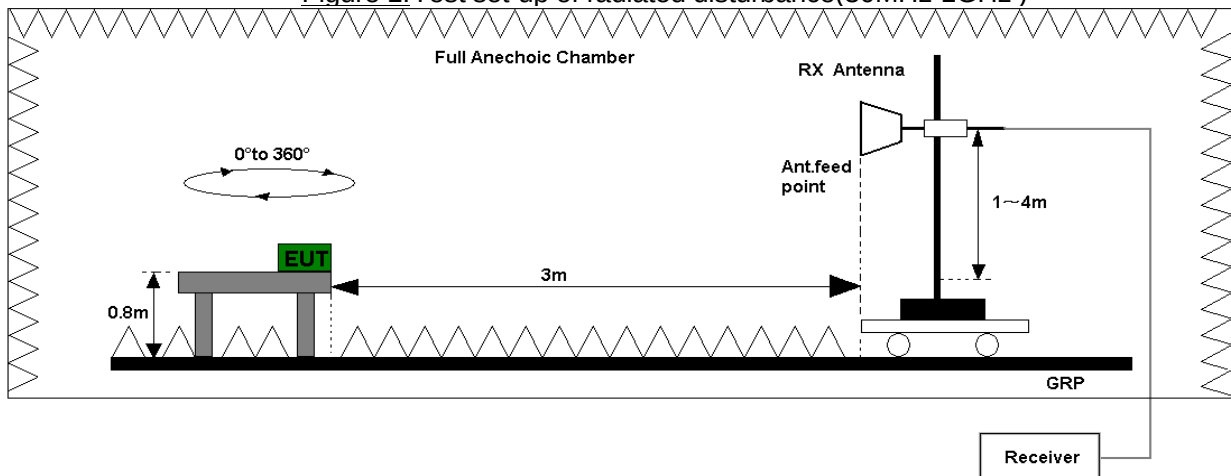


Figure 2. Test set-up of radiated disturbance(above 1GHz)



4.1.3 Test Results

The EUT has met the requirements for Radiated Emission of enclosure port.
The test data see section 7.1 of this report.

Test Limits				
Frequency of Emission (MHz)	Radiated Limit			
	Unit(μ V/m)		Unit(dB μ V/m)	
30-88	100		40	
88-216	150		43.5	
216-960	200		46	
Above 960	500		54	
Above 1000	AV	PK	AV	PK
	500	5000	54	74

4.1.4 Test Procedure

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm away from LISN. The set-up and test methods were according to ANSI C63.4-2009. Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector.

EUT was communicated with the simulator through Air interface, the simulator controls the EUT to transmitter the maximum power which defined in specification of product. The EUT operated on the typical channel.

Measurement bandwidth (RBW) for 150 kHz to 30 MHz: 9 kHz;

The EUT was set in the shielded chamber and operated under nominal conditions.

4.1.5 Test Setup

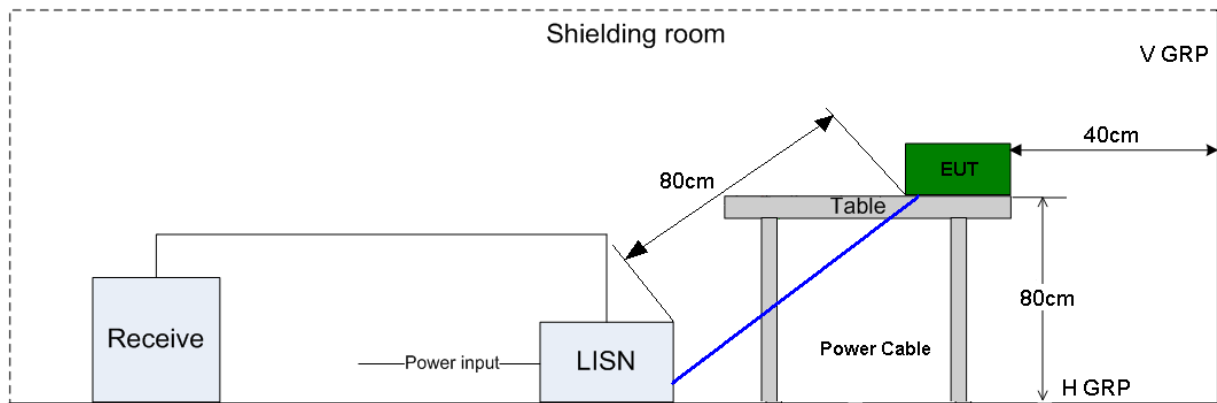


Figure 3. Test Set-up of conducted disturbance

4.1.6 Test Results

The EUT has met requirements for Conducted disturbance of power lines.

The test data see section 7.2 of this report.

Test Limit of AC Power Port		
Frequency range	150kHz ~ 30MHz	
Frequency	Voltage limits	
	QP	AV
0.15MHz~0.5MHz	66-56dBμV	56-46 dBμV
0.5MHz-5MHz	56dBμV	46 dBμV
5MHz~30MHz	60dBμV	50 dBμV



5 Main Test Instruments

Main Test Equipments						
Test item	Test Instrument	Model	S/N	Manufacturer	Calibrated Deadline	Cal interval (month)
RE	EMI Test receiver	ESU26	100150	R&S	May.27, 2013	12
	Broadband Antenna	VULB 9163	9163-941	SCHWARZ BECK	Jul.07, 2013	24
	Horn Antenna	HF906	100683	R&S	May.15, 2013	24
CE	EMI Test receiver	ESCI	101163	R&S	Mar. 05, 2013	12
	Artificial Mains Network	ENV216	100382	R&S	Mar.21, 2013	12
Software Information						
Test Item	Software Name	Manufacturer		Version		
RE	ES-K1	R&S		1.7.1		
CE	EMC32	R&S		V8.52.0		

6 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:


System Measurement Uncertainty		
Items		Extended Uncertainty
RE(30MHz-1GHz)	Field strength (dBμV/m)	U=4.1dB; k=2
RE(1GHz-18GHz)	Field strength (dBμV/m)	U=5.1dB; k=2
CE	Disturbance Voltage (dBμV)	U=2.6dB; k=2



7 Test Data and Graph

Only the worst test result was shown in this report.

7.1 Radiated Disturbance

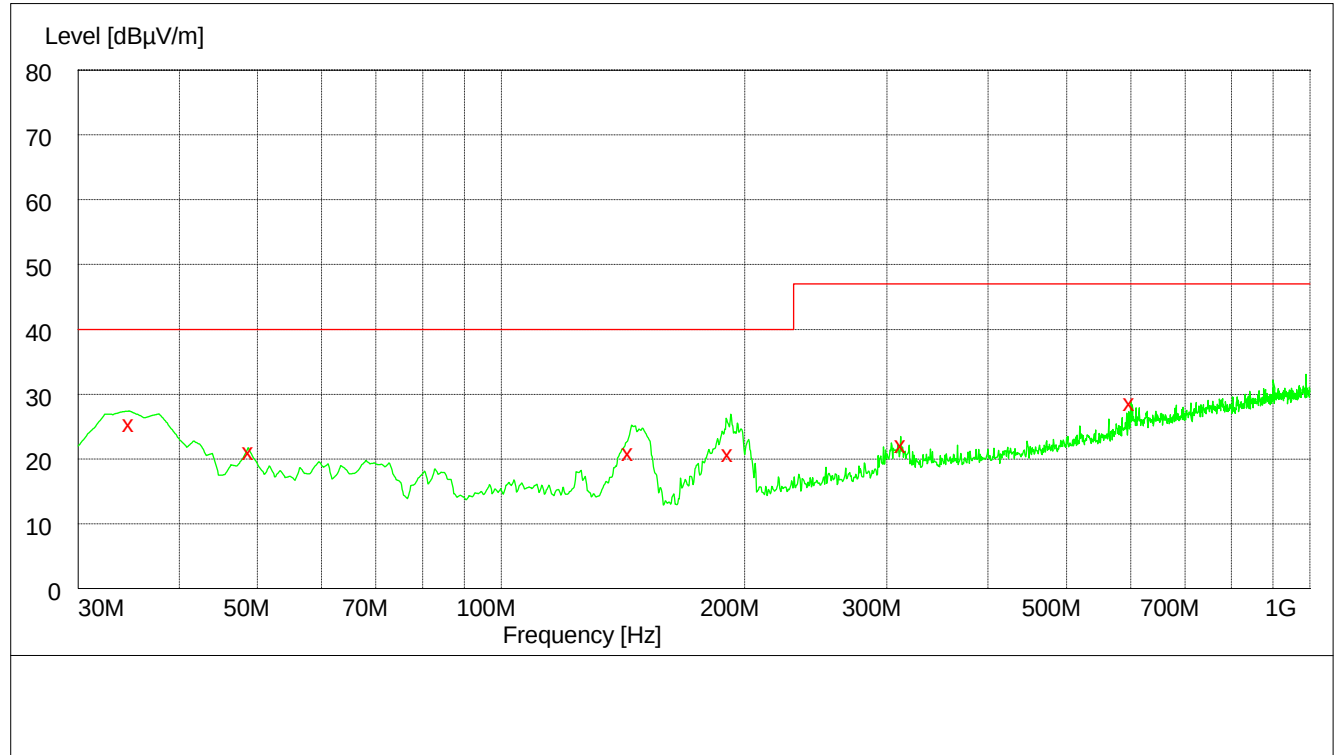

30MHz~1GHz

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV/m	Transducer dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
34.800000	25.90	15.0	40.0	14.1	100.0	29.00	VERTICAL
48.960000	21.60	15.1	40.0	18.4	100.0	316.00	VERTICAL
144.300000	21.40	9.9	40.0	18.6	100.0	360.00	VERTICAL
191.520000	21.30	12.2	40.0	18.7	172.0	359.00	HORIZONTAL
312.960000	22.70	15.4	47.0	24.3	100.0	225.00	HORIZONTAL
600.360000	29.20	21.4	47.0	17.8	100.0	4.00	VERTICAL


Note:

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.



1GHz~18GHz

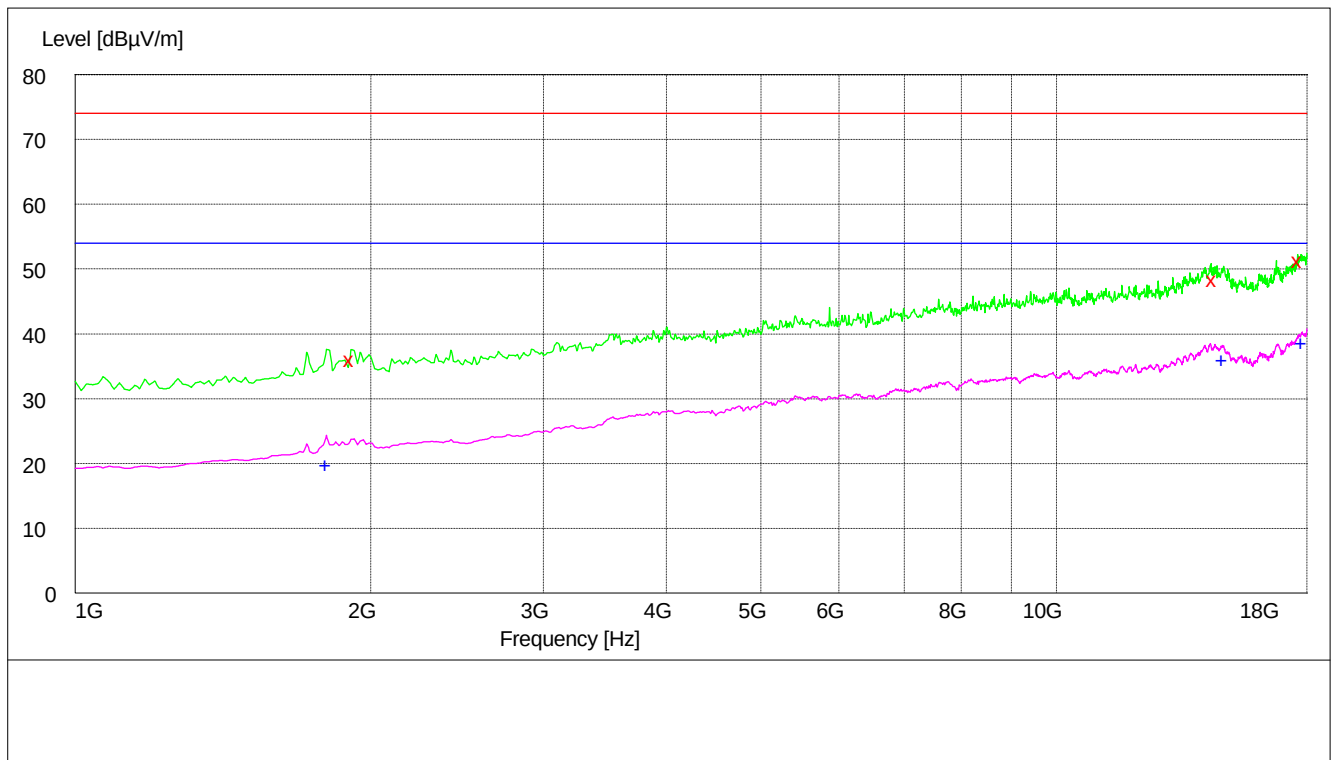

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBμV/m	Transducer dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
1912.700000	36.20	-10.9	74.0	37.8	133.0	162.00	HORIZONTAL
14463.000000	48.70	16.7	74.0	25.3	141.0	270.00	HORIZONTAL
17681.100000	51.60	21.3	74.0	22.4	124.0	46.00	HORIZONTAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transducer dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
1806.400000	19.90	-11.6	54.0	34.1	145.0	146.00	HORIZONTAL
14788.400000	36.10	16.7	54.0	17.9	129.0	74.00	HORIZONTAL
17815.700000	38.80	21.4	54.0	15.2	100.0	126.00	VERTICAL


Note:

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.



7.2 Conducted Disturbance

AC Port Test Data

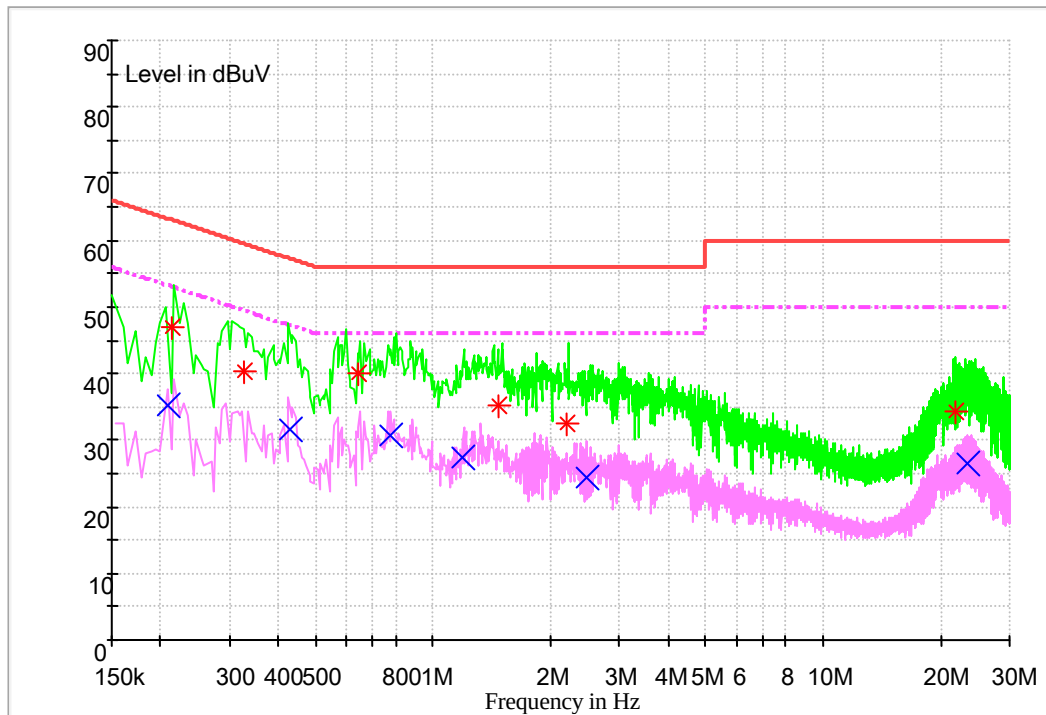

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.213710	47.0	9.7	63.1	16.1	L1	FLO
0.326805	40.2	9.7	59.5	19.3	N	FLO
0.645896	40.0	9.7	56.0	16.0	L1	FLO
1.465774	35.2	9.7	56.0	20.8	L1	FLO
2.201719	32.5	9.7	56.0	23.5	L1	FLO
21.787421	34.4	10.1	60.0	25.6	L1	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.208032	35.2	9.7	53.3	18.1	L1	FLO
0.430590	31.5	9.7	47.2	15.7	N	FLO
0.772696	30.7	9.7	46.0	15.3	N	FLO
1.187411	27.4	9.7	46.0	18.6	N	FLO
2.486704	24.4	9.7	46.0	21.6	N	FLO
23.499586	26.6	10.2	50.0	23.4	L1	FLO

Note:

Level= Reading level+ Transd (cable loss + correction factor)



The reading level is calculated by software which is not shown in the sheet.

-----**END**-----