

# FCC RF Test Report

**Product Name: Smart Phone**

**Product Model: HUAWEI MT1-U06, MT1-U06**

**Report Number: SYBH(Z-RF)001022013-2003**

**FCC ID: QISMT1-U06N**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,  
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808

Fax: +86 755 89652518



## Notice

1. The laboratory has Passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has Passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory has been listed by the US Federal Communications Commission to perform electromagnetic emission measurements. The site recognition number is 97456.
4. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-2.
5. The laboratory has been listed by the VCCI to perform EMC measurements. The accreditation numbers of test site No.1 are R-2364, G-415, C-2583, and T-256, and the accreditation numbers of test site No.2 are R-3760, G-485, C-4210 and T-1237.
6. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
7. The test report is invalid if there is any evidence of erasure and/or falsification.
8. The test report is only valid for the test samples.
9. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.



**Applicant:** Huawei Technologies Co., Ltd.  
**Address:** Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
 Bantian, Longgang District, Shenzhen, 518129, P.R.C  
**Product Name:** Smart Phone  
**Product Model:** HUAWEI MT1-U06, MT1-U06

**Date of Receipt Sample:** 2013-02-03  
**Start Date of Test:** 2013-02-05  
**End Date of Test:** 2013-02-16

**Test Result:** Pass

**Approved by Senior**

<b>Engineer:</b>	2013-03-21	Dai Linjun	
	Date	Name	Signature

<b>Prepared by:</b>	2013-03-21	Zhong Yaning	
	Date	Name	Signature



### Modification Record

No.	Last Report No.	Modification Description
		First report



## CONTENT

1	General Information .....	6
1.1	Applied Standard.....	6
1.2	Test Location.....	6
1.3	Test Environment Condition.....	6
2	Test Summary .....	7
3	Description of the Equipment under Test (EUT) .....	8
3.1	General Description .....	8
3.2	EUT Identity .....	8
3.3	Technical Description.....	10
4	General Test Conditions / Configurations .....	11
4.1	Test Modes .....	11
4.2	EUT Configurations.....	12
4.3	Test Environments .....	13
4.4	Test Setups.....	14
4.5	Test Conditions .....	17
5	Main Test Instruments .....	19



## 1 General Information

### 1.1 Applied Standard

Applied Rules: 47 CFR FCC Part 2, Subpart J (2012 Edition)  
47 CFR FCC Part 15, Subpart C (2012 Edition)

Test Method: FCC KDB 558074 D01 DTS Meas Guidance v02  
FCC KDB 662911 D01 Multiple Transmitter Output v01r2

### 1.2 Test Location

Test Location 1: Reliability Laboratory of Huawei Technologies Co., Ltd.  
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C

### 1.3 Test Environment Condition

Ambient Temperature: 19.5to 25 °C  
Ambient Relative Humidity: 40 to 55 %  
Atmospheric Pressure: Not applicable



## 2 Test Summary

Test Item	FCC Part No.	Requirements	Test Result	Verdict (NOTE 2)
DTS (6 dB) Bandwidth	15.247(a)(2)	≥ 500 kHz.	Appendix A	Pass
Maximum Peak Conducted Output Power	15.247(b)(3)	For directional gain: < 30 dBm – (G[dBi] – 6 [dB]), peak; Otherwise: < 30 dBm, peak.	Appendix B	Pass
Maximum Power Spectral Density Level	15.247(e)	For directional gain: < 8 dBm/3 kHz – (G[dBi] – 6 [dB]), peak. Otherwise: < 8 dBm/3 kHz, peak.	Appendix C	Pass
Band Edges Compliance	15.247(d)	< -20 dBm/100 kHz if total peak power ≤ power limit.	Appendix D	Pass
Unwanted Emissions into Non-Restricted Frequency Bands	15.247(d)	< -20 dBm/100 kHz if total peak power ≤ power limit.	Appendix E	Pass
Unwanted Emissions into Restricted Frequency Bands (Conducted)	15.247(d) 15.209 (NOTE 1)	FCC Part 15.209 field strength limit;	Appendix F	Pass
Unwanted Emissions into Restricted Frequency Bands (Radiated)				
AC Power Line Conducted Emissions	15.207	FCC Part 15.207 conducted limit;	Appendix G	Pass
NOTE 1: According to KDB 558074, antenna-port conducted measurements are acceptable as an alternative to radiated measurements for demonstrating compliance to the limits in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case emissions will also be required.				
NOTE 2: For the verdict, the “N/A” denotes “not applicable”, the “N/T” denotes “not tested”.				



### 3 Description of the Equipment under Test (EUT)

#### 3.1 General Description

HUAWEI MT1-U06, MT1-U06 is subscriber equipment in the UMTS/GSM system. The HSUPA/HSDPA/UMTS frequency band is Band I, Band II, Band IV, Band V and Band VIII. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. The Mobile Phone implements such functions as RF signal receiving/transmitting, UMTS/GSM protocol processing, voice, video, MMS service, GPS, AGPS, NFC and WIFI etc. Externally it provides earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

There are two different types of HUAWEI MT1-U06, MT1-U06. One is with NFC function, its FCC ID is QISMT1-U06N, the other is without NFC function, its FCC ID is QISMT1-U06. The others are the same, including circuit design, PCB board, structure. With the consideration of the identities and differences list above, all the RF tests were conducted to the EUT with NFC function.

**NOTE: Only WIFI test data included in this report.**

#### 3.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

##### 3.2.1 Board

Board		
Hardware Version	Serial Number	Description
HD1U9900M	MT1-U06V100R001C00B104SP03	Main board of Mobile Phone

##### 3.2.2 Sub-Assembly

Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
AC/DC Adapter	HW-050200 A3W	Huawei Technologies Co., Ltd.	Input voltage: ~100-240V 50/60Hz 0.5A Output voltage: 5V  2A Rated Power: 10W

Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
AC/DC Adapter	HW-050200 B3W	Huawei Technologies Co., Ltd.	Input voltage: ~100-240V 50/60Hz 0.5A Output voltage: 5V  2A Rated Power: 10W



Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
AC/DC Adapter	HW-050200 E3W	Huawei Technologies Co., Ltd.	Input voltage: ~100-240V 50/60Hz 0.5A Output voltage: 5V  2A Rated Power: 10W

Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
AC/DC Adapter	HW-050200 U3W	Huawei Technologies Co., Ltd.	Input voltage: ~100-240V 50/60Hz 0.5A Output voltage: 5V  2A Rated Power: 10W

### 3.3 Technical Description

Characteristics	Description			
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11b (20 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11g (20 MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n (20 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11n (40 MHz channel bandwidth)			
TX/RX Operating Range	2412-2462 MHz band	$f_c = 2407 \text{ MHz} + N * 5 \text{ MHz}$ , where: - $f_c$ = "Operating Frequency" in MHz, - $N$ = "Channel Number" with the range from 1 to 11 for the 20 MHz channel bandwidth, or 3 to 9 for the 40 MHz channel bandwidth.		
Data Rate	802.11b	1 Mbps, 2 Mbps, 5.5 Mbps, 11 Mbps		
	802.11g	6 Mbps, 9 Mbps, 12 Mbps, 18 Mbps, 24 Mbps, 36 Mbps, 48 Mbps, 54 Mbps		
	802.11n (SISO)	MCS 0 to MCS 7		
	802.11n (MIMO)	MCS 8 to MCS 15		
Modulation Type	DBPSK/DQPSK/CCK (DSSS), BPSK/QPSK/16QAM/64QAM (OFDM).			
Emission Designator	10M3G1D (for 802.11b mode), 16M4G7D (for 802.11g mode), 16M4G7D (for 802.11n with 20MHz mode), 35M1G7D (for 802.11n with 40MHz mode)			
TX Power Control	<input checked="" type="checkbox"/> Supported, <input type="checkbox"/> Not Supported			
Standby Mode	<input type="checkbox"/> Supported, <input checked="" type="checkbox"/> Not Supported			
Equipment Type	<input type="checkbox"/> Stand-alone equipment, <input type="checkbox"/> Plug-in radio device, <input checked="" type="checkbox"/> Combined equipment			
Antenna	Description	Isotropic Antenna		
	Type	<input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated		
	Ports	<input checked="" type="checkbox"/> Ant 1, <input type="checkbox"/> Ant 2, <input type="checkbox"/> Ant 3		
	Smart System	<input checked="" type="checkbox"/> SISO (for 802.11b/g/n), <input type="checkbox"/> MIMO (for 802.11n): 2 Tx & 2 Rx, <input type="checkbox"/> Diversity (for 802.11b/g) :           Tx &           Rx		
	Gain	-2.2dBi (per antenna port, max.)		
	Remark	When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.		
Power Supply	Type	<input checked="" type="checkbox"/> AC/DC Adapter	<input type="checkbox"/> PoE:	<input type="checkbox"/> Other:



## 4 General Test Conditions / Configurations

### 4.1 Test Modes

NOTE: Typical working modes for each IEEE 802.11 mode are selected to perform tests.

Test Mode	Test Modes Description
11B	IEEE 802.11b with data rate of 11 Mbps using SISO mode.
11G	IEEE 802.11g with data rate of 54 Mbps using SISO mode.
11N20	IEEE 802.11n with data rate of MCS7 and bandwidth of 20 MHz using SISO mode.
11N40	IEEE 802.11n with data rate of MCS15 and bandwidth of 40 MHz using SISO mode.

## 4.2 EUT Configurations

### 4.2.1 General Configurations

Configuration	Description
Test Antenna Ports	Until otherwise specified, <ul style="list-style-type: none"> <li>- All TX tests are performed at all TX antenna ports of the EUT, and</li> <li>- All RX tests are performed at all RX antenna ports of the EUT.</li> </ul>
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

### 4.2.2 Customized Configurations

Test Mode	RF Ch.	TX Freq. [MHz]	Port mode	RX Freq. [MHz]	Ch. BW [MHz]
11B	L	Ch No. 1 / 2412 MHz	BG 1	---	20
			BG 2	---	20
	M	Ch No. 6 / 2437 MHz	BG 1	---	20
			BG 2	---	20
	H	Ch No. 11 / 2462 MHz	BG 1	---	20
			BG 2	---	20
11G	L	Ch No. 1 / 2412 MHz	BG 1	---	20
			BG 2	---	20
	M	Ch No. 6 / 2437 MHz	BG 1	---	20
			BG 2	---	20
	H	Ch No. 11 / 2462 MHz	BG 1	---	20
			BG 2	---	20
11N20	L	Ch No. 1 / 2412 MHz	BG 1	---	20
			BG 2	---	20
	M	Ch No. 6 / 2437 MHz	BG 1	---	20
			BG 2	---	20
	H	Ch No. 11 / 2462 MHz	BG 1	---	20
			BG 2	---	20
11N40	L	Ch No. 3 / 2422 MHz	BG 1	---	40
			BG 2	---	40
	M	Ch No. 6 / 2437 MHz	BG 1	---	40
			BG 2	---	40
	H	Ch No. 9 / 2452 MHz	BG 1	---	40
			BG 2	---	40



### 4.3 Test Environments


NOTE: The values used in the test report may be stringent than the declared.

Environment Parameter	Selected Values During Tests		
	Temperature	Voltage	Relative Humidity
NTNV	Ambient	3.8V	Ambient

## 4.4 Test Setups

### 4.4.1 Test Setup 1


The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

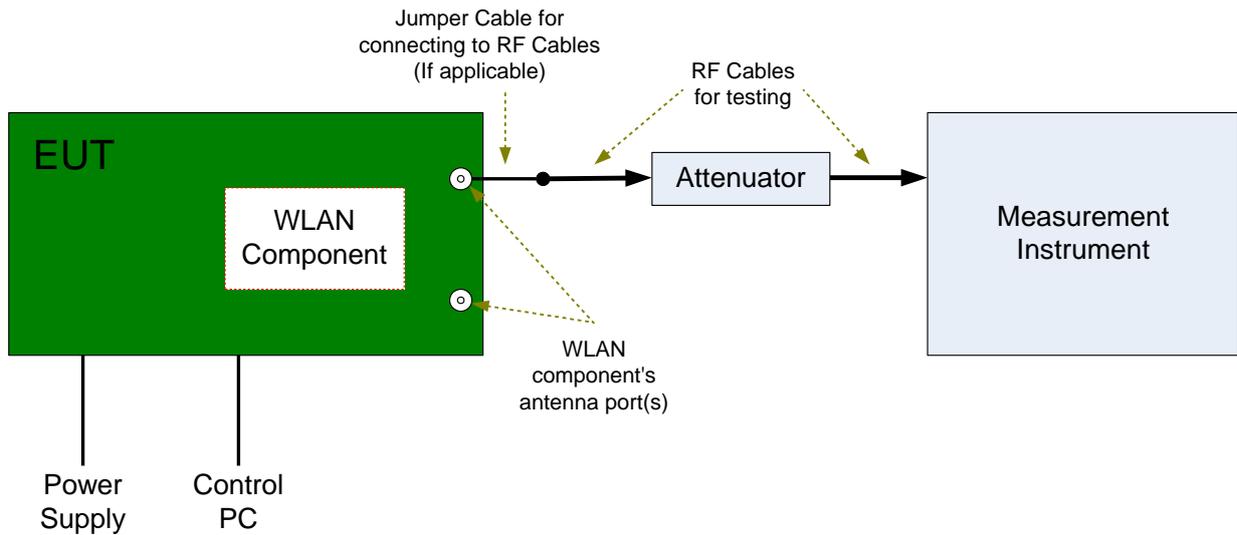


### 4.4.2 Test Setup 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3m. The setup is according to ANSI C63.4 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

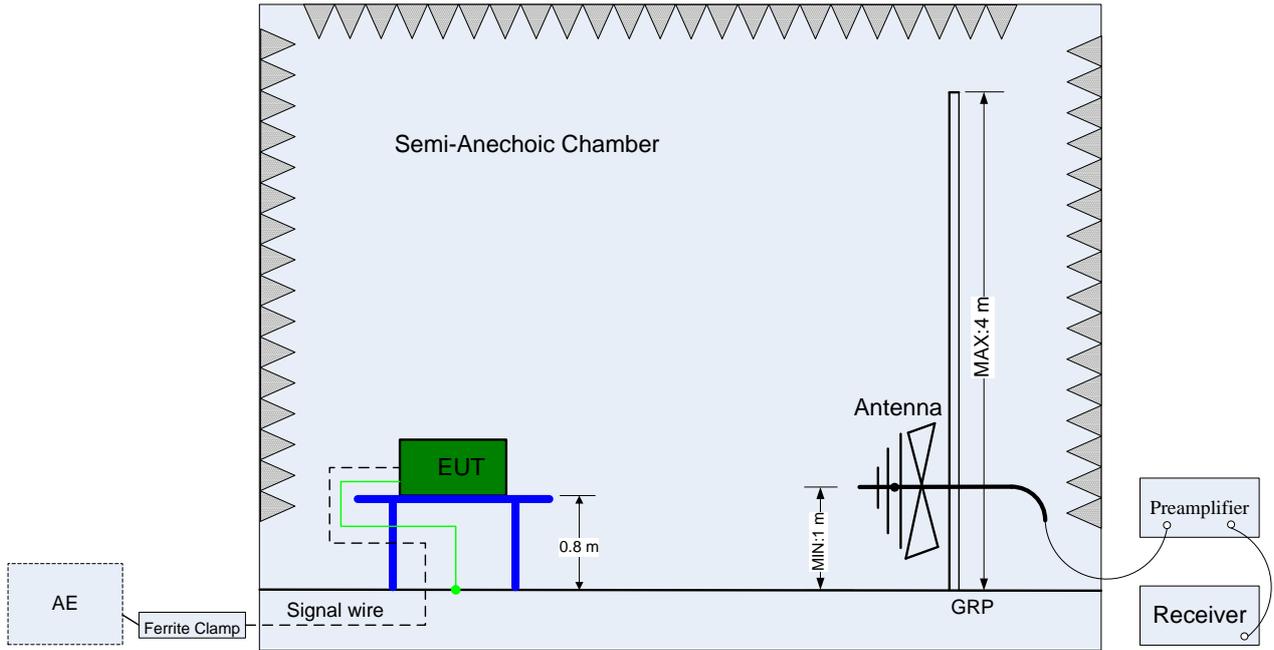

(Below 1 GHz)

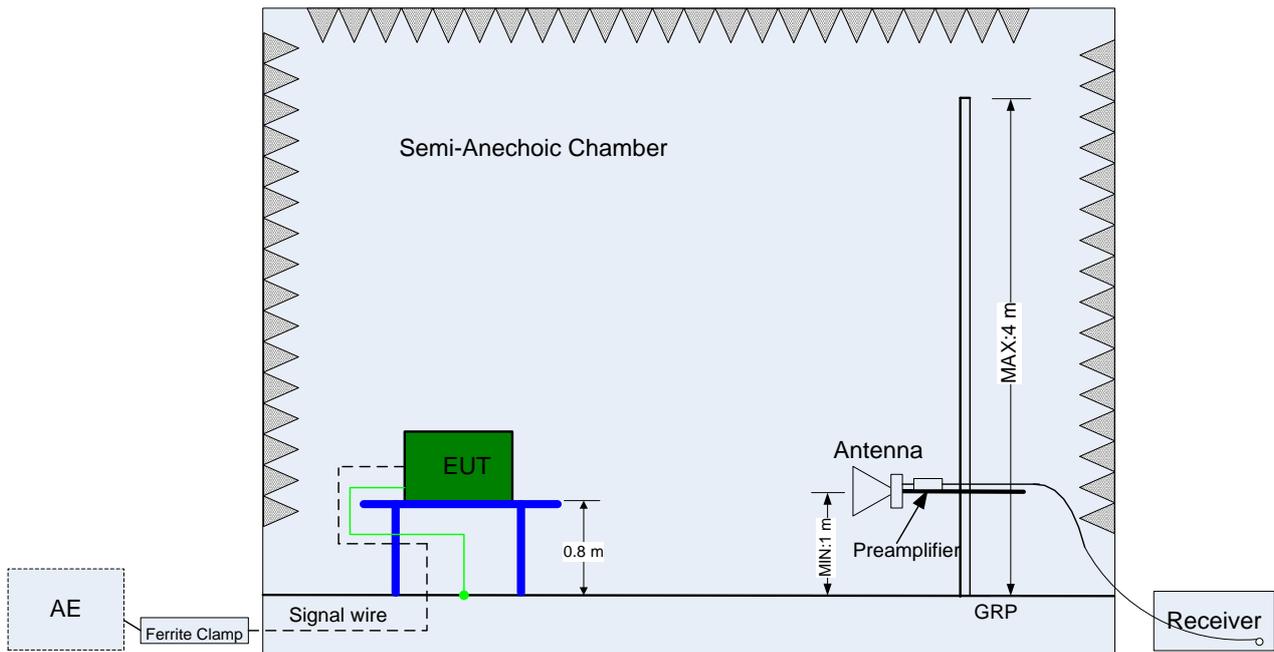

(Above 1 GHz)



#### 4.5 Test Conditions

Test Case	Test Conditions	
	Configuration	Description
DTS (6 dB) Bandwidth	Measurement Method	FCC KDB 558074 §7.1.1 Option 2.
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H 11N40_L, 11 N40_M, 11 N40_H
Maximum Peak Conducted Output Power	Measurement Method	FCC KDB 558074 §7.2.1.2 Option 2 (integrated band power method).
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H 11N40_L, 11 N40_M, 11 N40_H
Maximum Power Spectral Density Level	Measurement Method	FCC KDB 558074 §7.3.1 Option 1 (peak PSD).
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H 11N40_L, 11 N40_M, 11 N40_H
Unwanted Emissions into Non-Restricted Frequency Bands	Measurement Method	FCC KDB 558074 §7.4.1, use Peak PSD.
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H 11N40_L, 11 N40_M, 11 N40_H
Unwanted Emissions into Restricted Frequency Bands (Conducted)	Measurement Method	FCC KDB 558074 §7.4.2, Conducted (antenna-port).
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H 11N40_L, 11 N40_M, 11 N40_H
Unwanted Emissions into Restricted	Measurement Method	FCC KDB 558074 §7.4.2, Radiated (cabinet/case emissions with impedance matching for antenna-port).
	Test Environment	NTNV



Test Case	Test Conditions	
	Configuration	Description
Frequency Bands (Radiated)	Test Setup	Test Setup 2
	EUT Placement	<input checked="" type="checkbox"/> Flatwise, <input type="checkbox"/> Upright, <input type="checkbox"/> Hung
	EUT Configuration	(1) 30 MHz to 1 GHz: 11B_B (Worst Conf.). (2) 1 GHz to 3 GHz: 11B_L, 11B_H 11G_L, 11G_H 11N20_L, 11 N20_H 11N40_L, 11 N40_H (3) 3 GHz to 18 GHz: 11B_L (Worse Conf.), 11B_H (Worse Conf.). (4) 18 GHz to 26.5 GHz: 11B_L (Worse Conf.), 11B_H (Worse Conf.).
	Measurement Method	AC mains conducted.
AC Power Line Conducted Emissions	Test Environment	NTNV
	Test Setup	Test Setup 3
	EUT Configuration	11B_L (Worst Conf.).



## 5 Main Test Instruments

Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal. Due
Power supply	KEITHLEY	2303	1288003	2012-11-09	2013-11-08
Spectrum Analyzer	Agilent	E4440A	MY48250119	2012-07-18	2013-07-17
Signal Analyzer	R&S	FSQ31	200021	2012-11-09	2013-11-08
Spectrum Analyzer	Agilent	N9030A	MY49431698	2012-11-09	2013-11-08
Temperature Chamber	WEISS	WKL64	24600294	2013-01-29	2014-01-28
Signal generator	Agilent	E8257D	MY49281095	2012-07-10	2013-07-09
Spectrum analyzer	R&S	FSU3	200474	2012-03-06	2013-03-05
Spectrum analyzer	R&S	FSU43	100144	2012-03-06	2013-03-05
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	2012-04-06	2013-04-05
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100391	2012-10-12	2013-10-11
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBE CK	VULB 9163	9163-521	2012-12-09	2013-12-08
Pyramidal Horn Antenna(26GHz-40GH z)	ETS-Lindgren	3160-10	00123940	2013-02-28	2014-02-27
Pyramidal Horn Antenna(18GHz-26.5G Hz)	ETS-Lindgren	3160-09	00125912	2013-02-28	2014-02-27

END



# Appendix for Test Report

## Appendix A: DTS (6 dB) Bandwidth

In this document, the "DTS6dBBW" refers to the measured "DTS (6 dB) Bandwidth" value. In this Appendix, the "fc(DTS6dBBW)" refers to the centre of the measured "DTS6dBBW". The introduction of the "fc(DTS6dBBW)" is due to that other measurements use it as the spectrum analyzer setting.

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain, and used as respective results for each chain.


### Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Power Mode	DTS6dBBW[MHz]	Verdict
11B	L	2412	BG1	9.69	pass
11B	L	2412	BG2	10.23	pass
11B	M	2437	BG1	10.15	pass
11B	M	2437	BG2	10.11	pass
11B	H	2462	BG1	10.10	pass
11B	H	2462	BG2	10.10	pass
11G	L	2412	BG1	16.09	pass
11G	L	2412	BG2	16.41	pass
11G	M	2437	BG1	15.11	pass
11G	M	2437	BG2	14.23	pass
11G	H	2462	BG1	16.36	pass
11G	H	2462	BG2	15.15	pass
11N20	L	2412	BG1	16.41	pass
11N20	L	2412	BG2	15.12	pass
11N20	M	2437	BG1	16.31	pass
11N20	M	2437	BG2	15.36	pass
11N20	H	2462	BG1	14.74	pass
11N20	H	2462	BG2	13.80	pass
11N40	L	2422	BG1	33.88	pass
11N40	L	2422	BG2	32.87	pass
11N40	M	2437	BG1	33.86	pass
11N40	M	2437	BG2	31.40	pass
11N40	H	2452	BG1	33.84	pass
11N40	H	2452	BG2	35.06	pass




## Part II - Test Plots

### 2.1 11B\_L@BG1

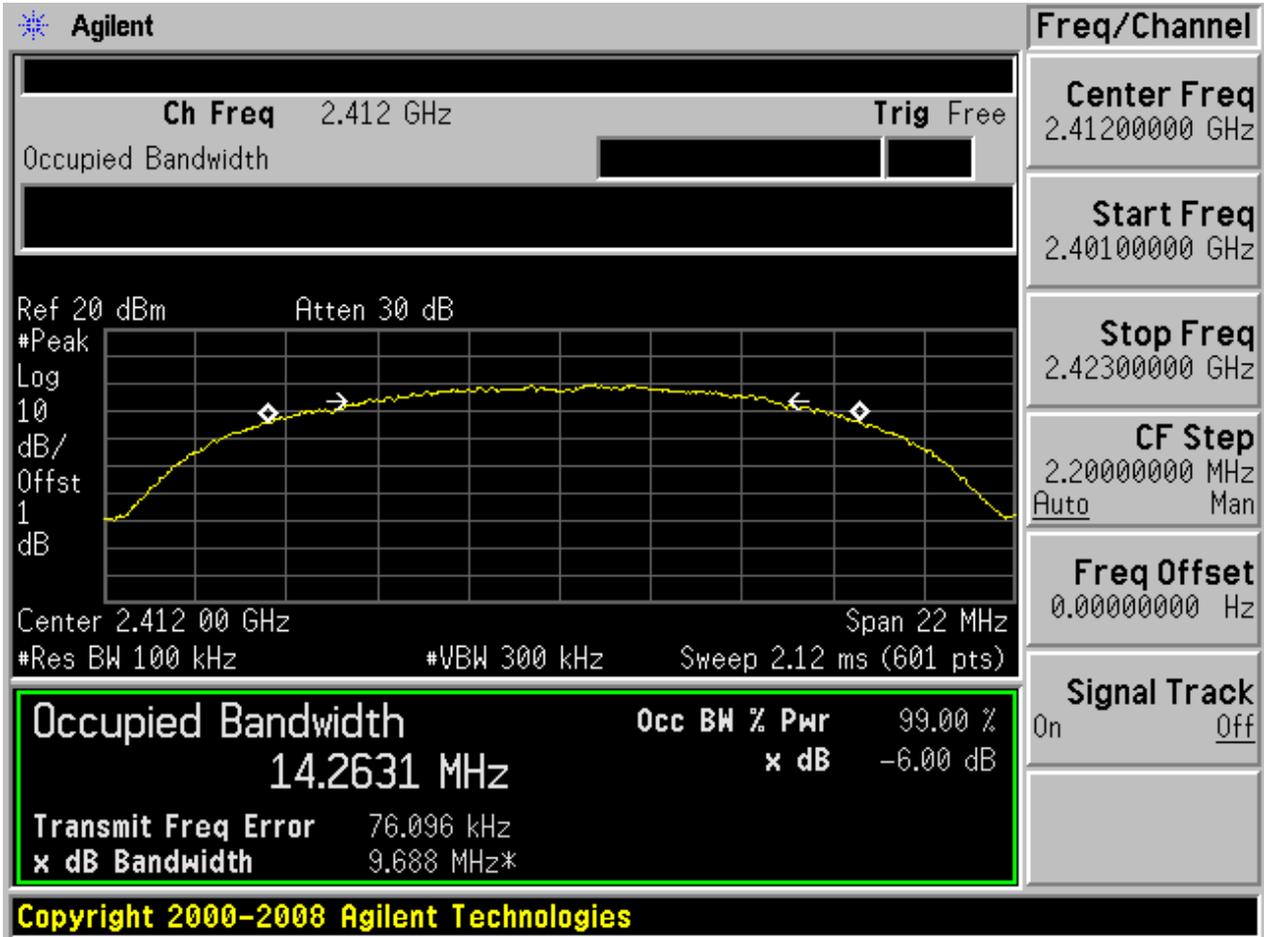




2.2 11B\_L@BG2

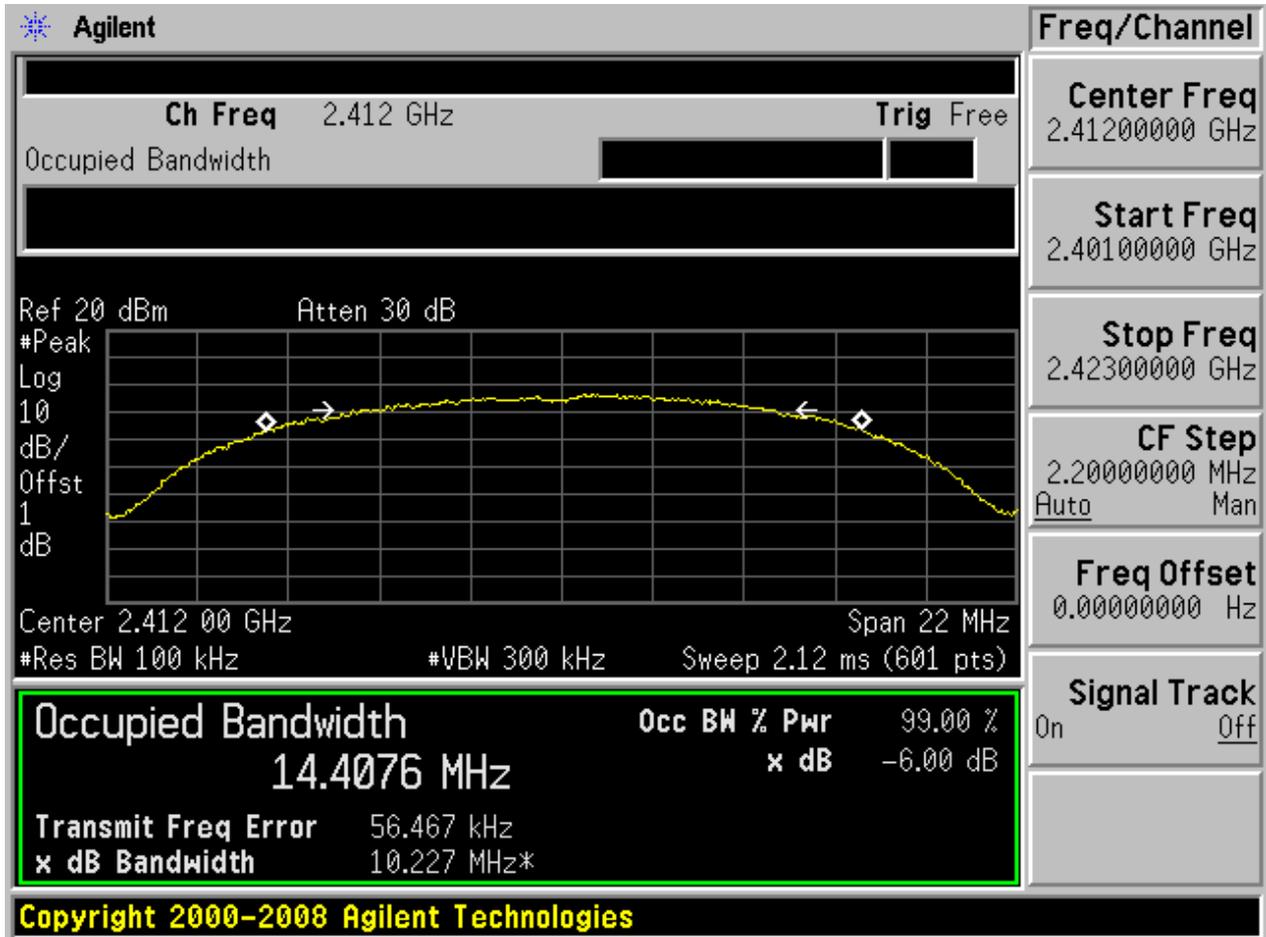




### 2.3 11B\_M@BG1

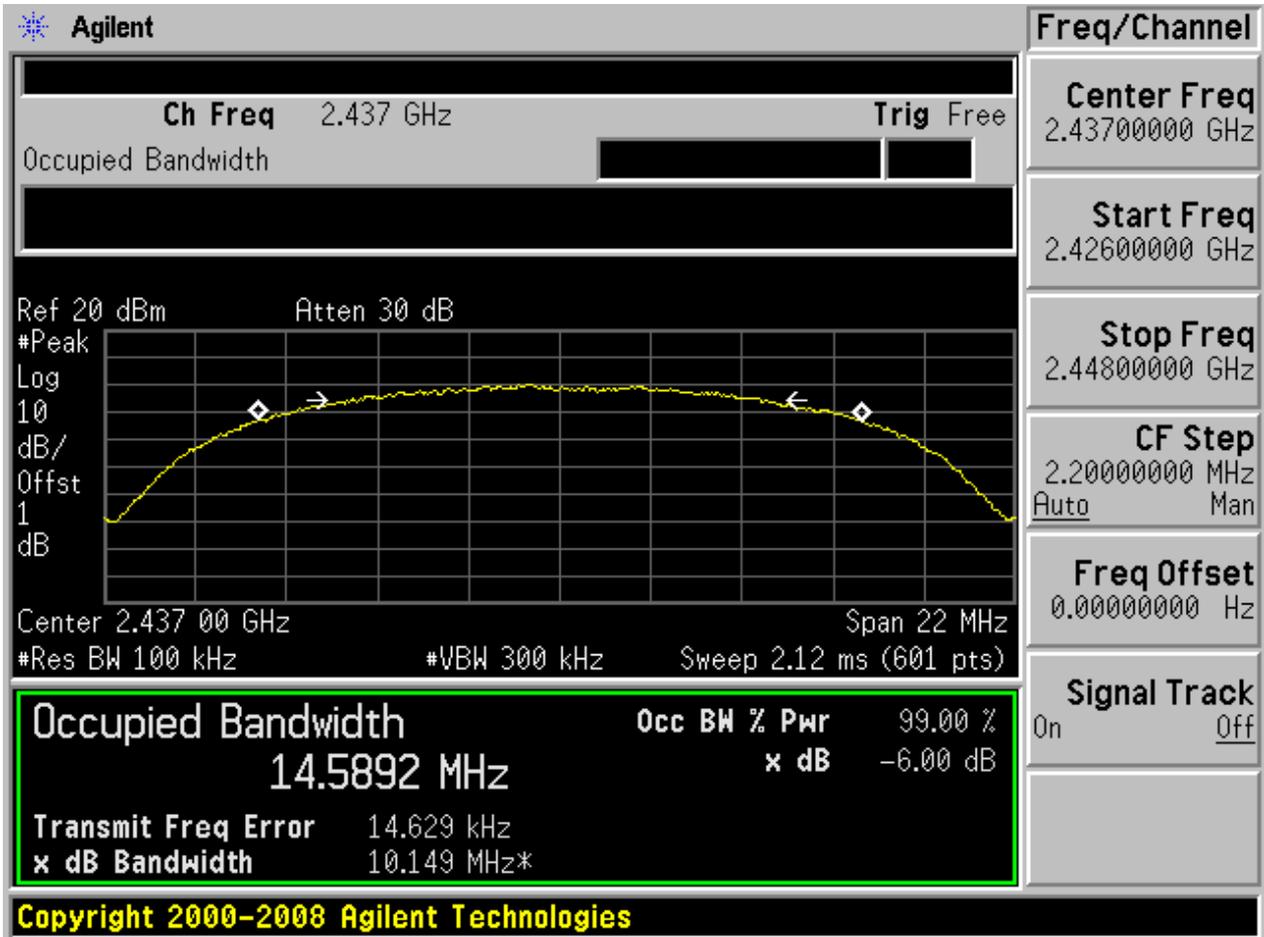




## 2.4 11B\_M@BG2

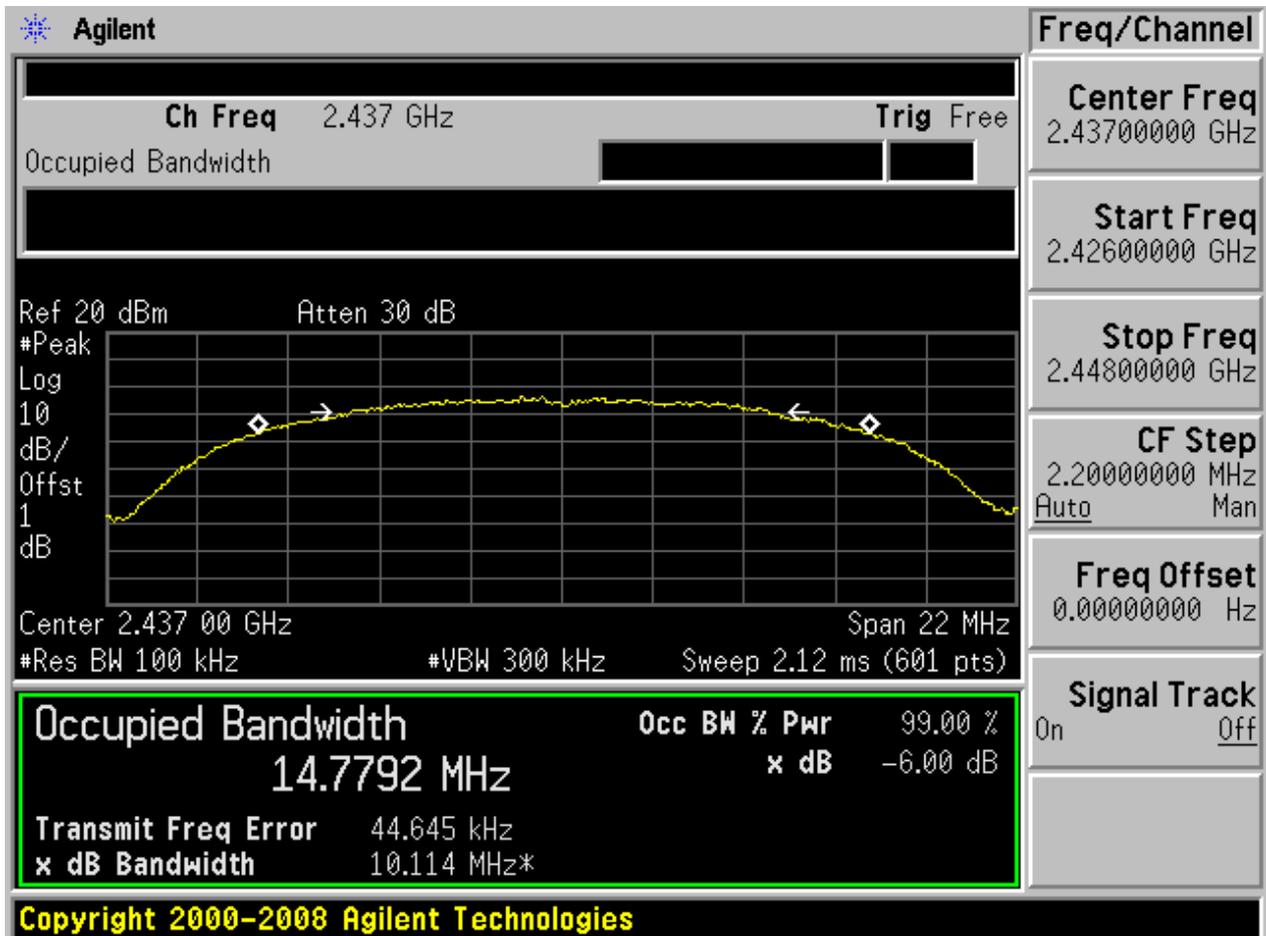




2.5 11B\_H@BG1

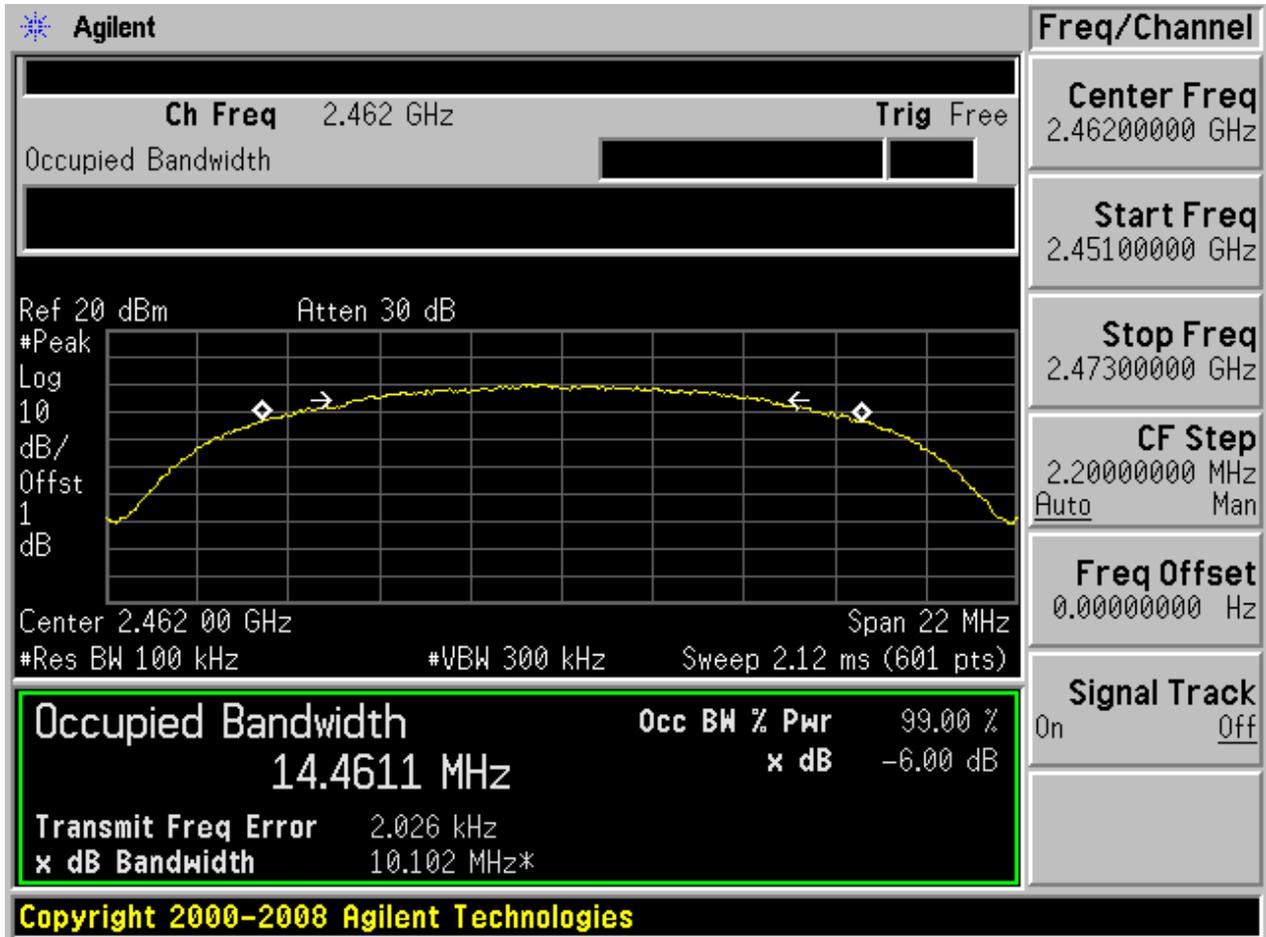




2.6 11B\_H@BG2

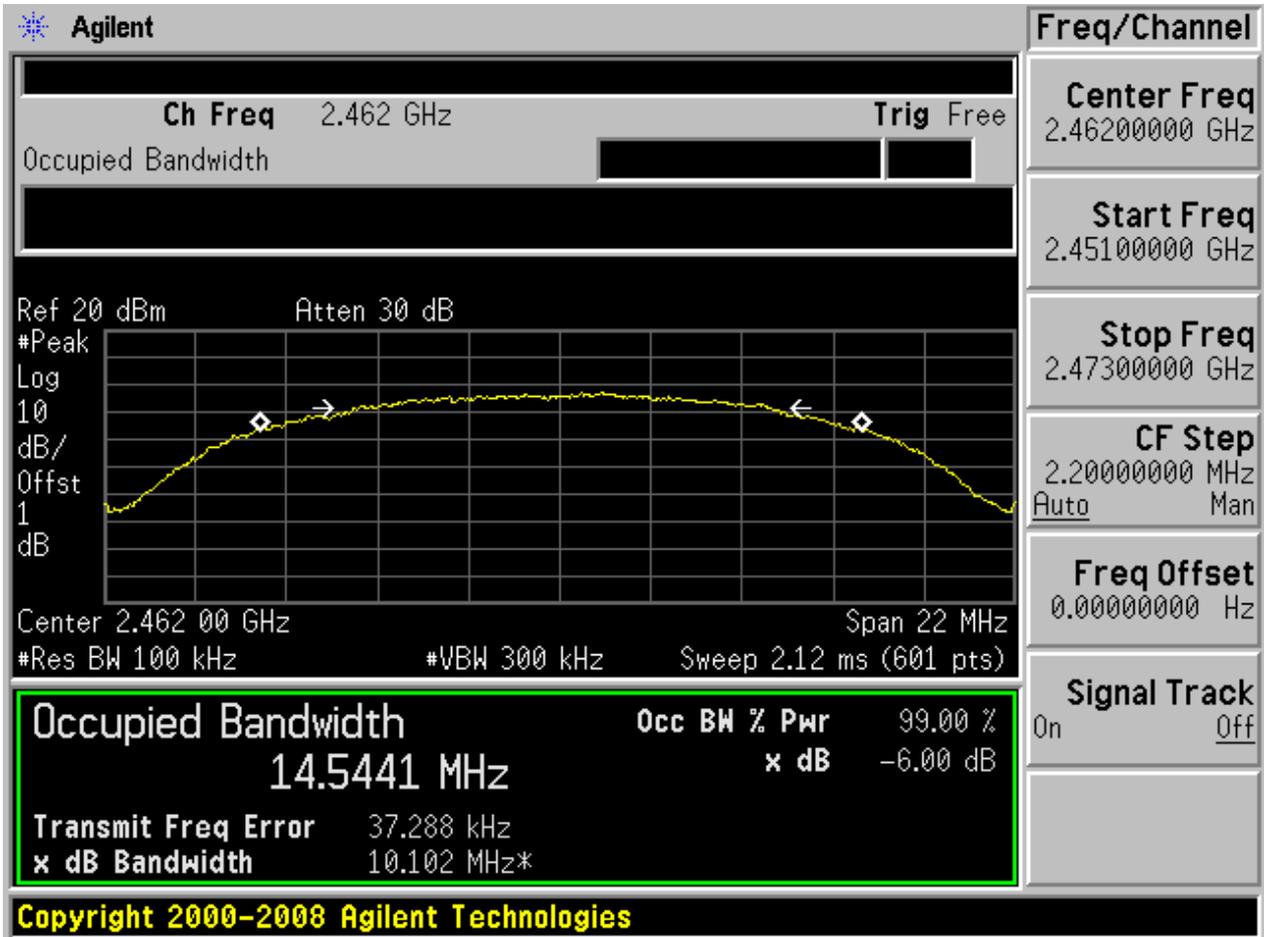




2.7 11G\_L@BG1

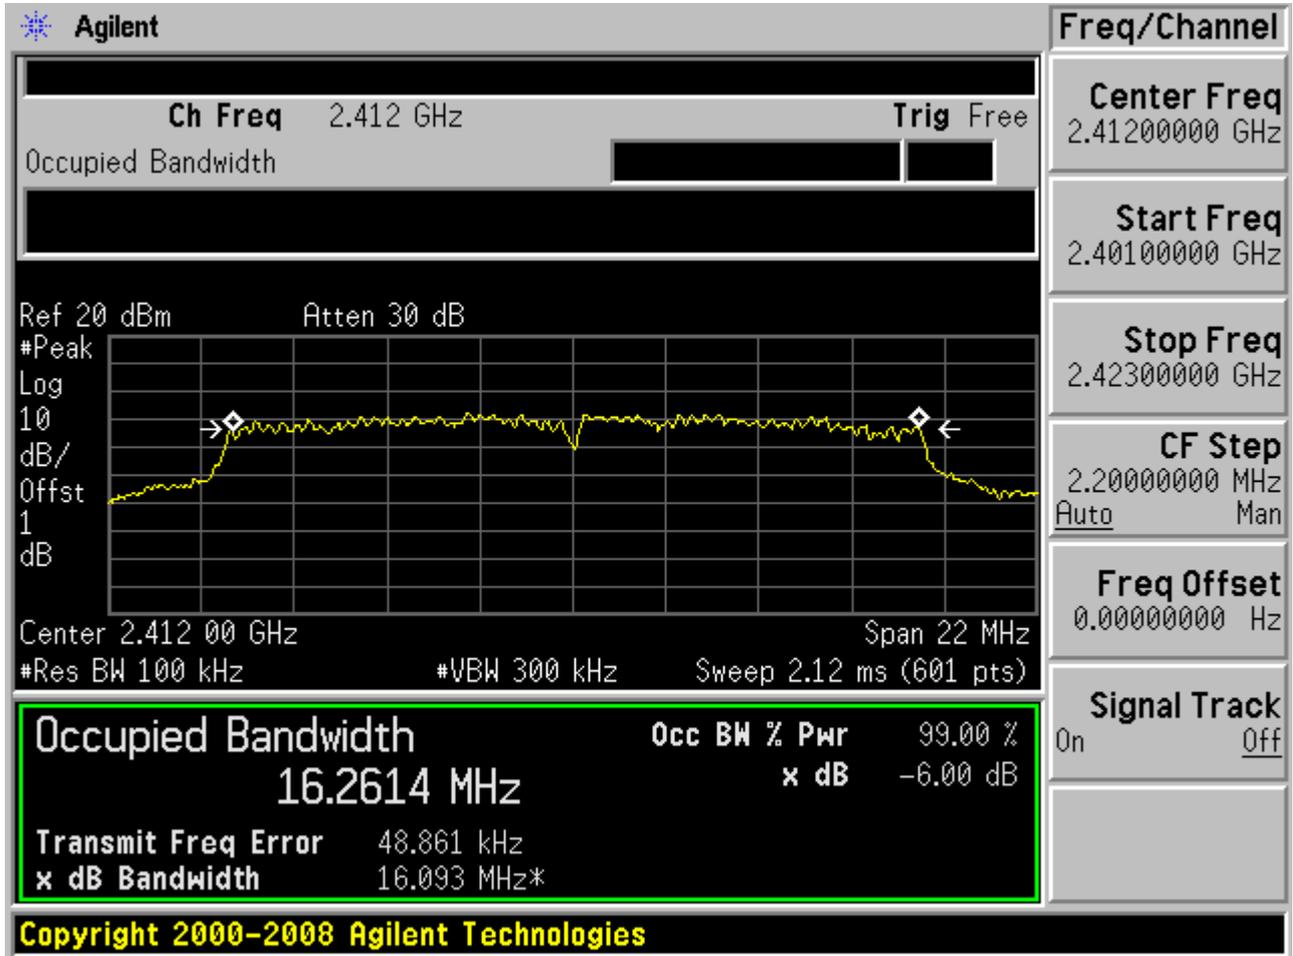




2.8 11G\_L@BG2

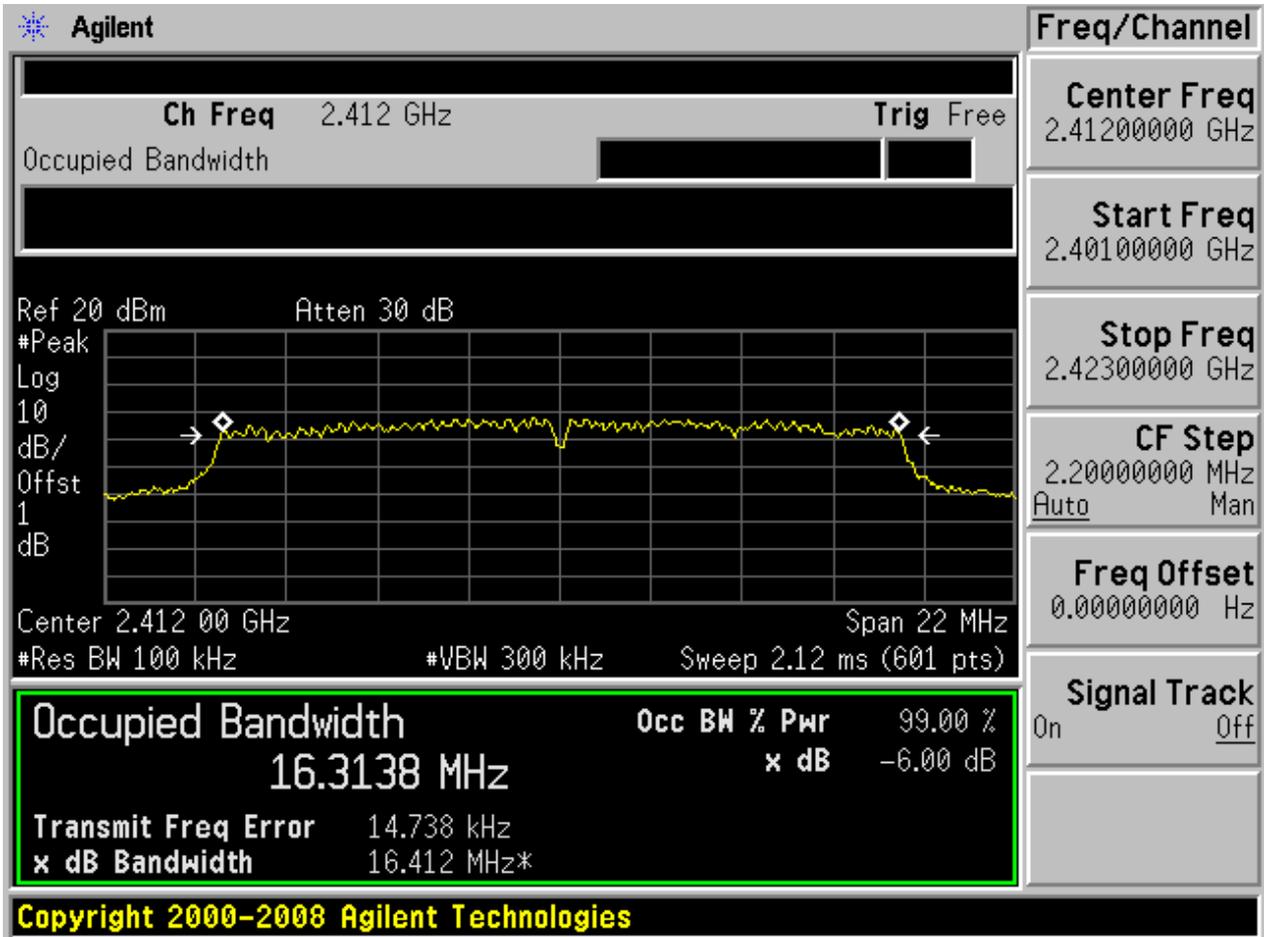




2.9 11G\_M@BG1

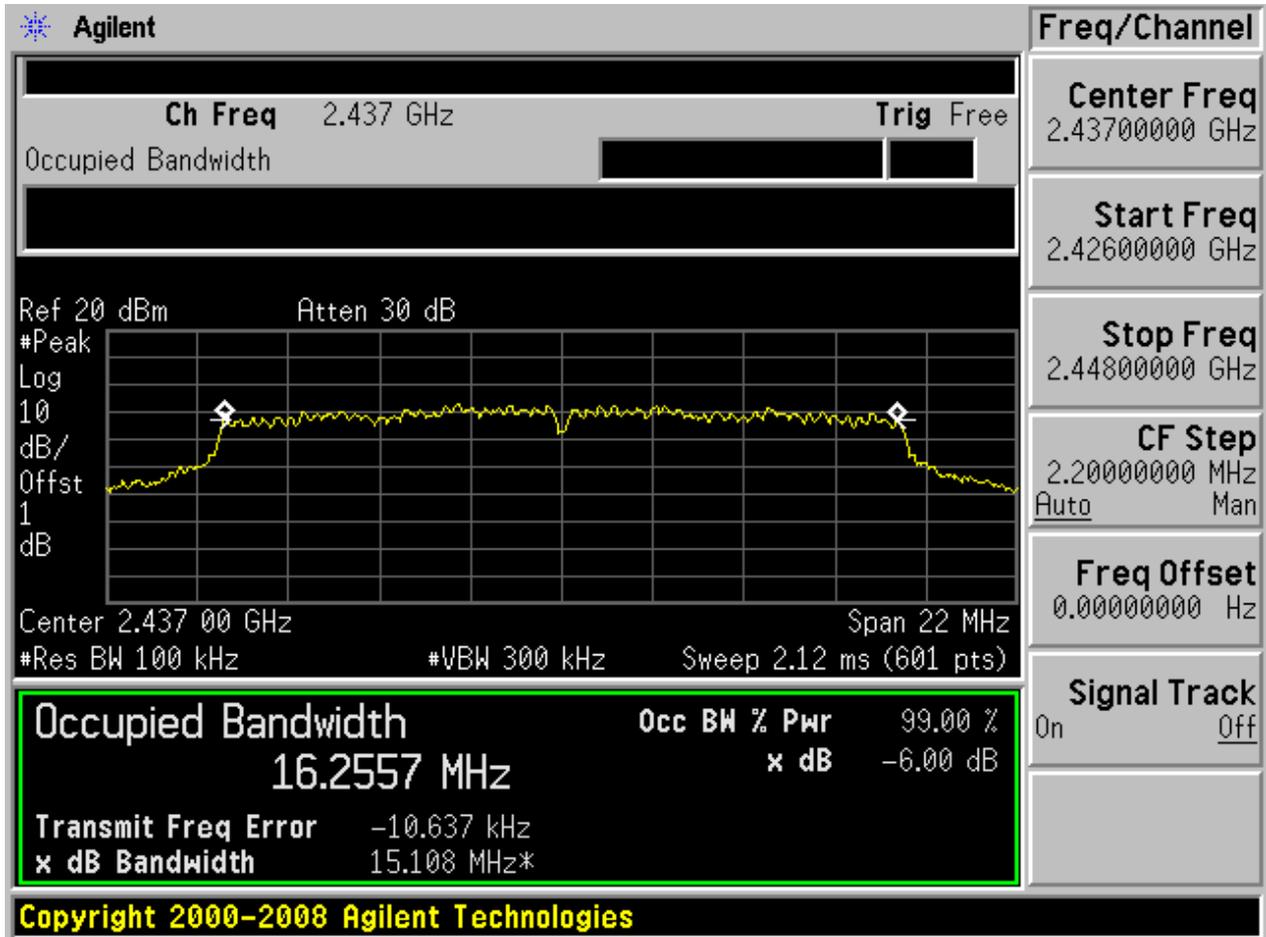




2.10 11G\_M@BG2

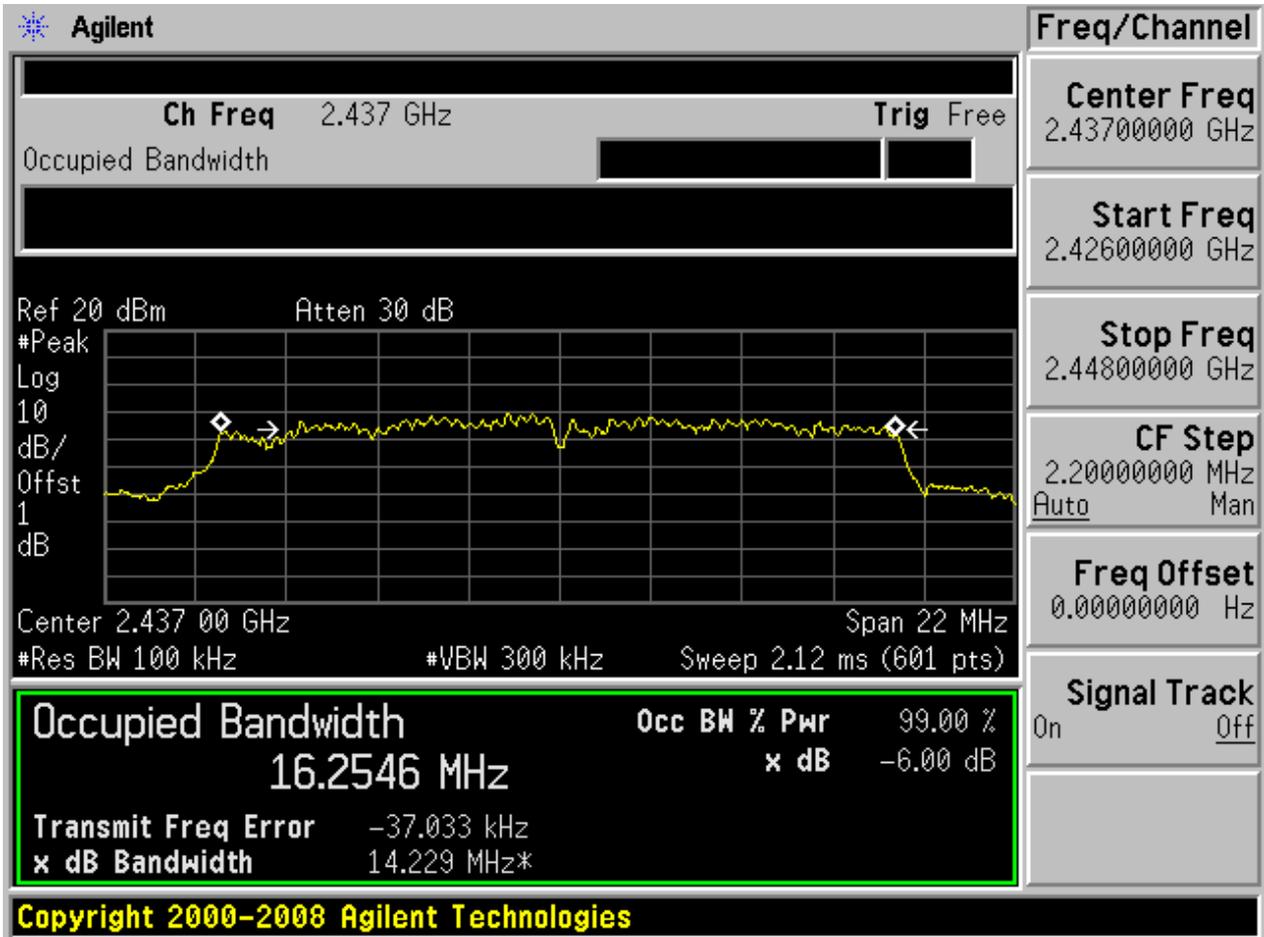




2.11 11G\_H@BG1

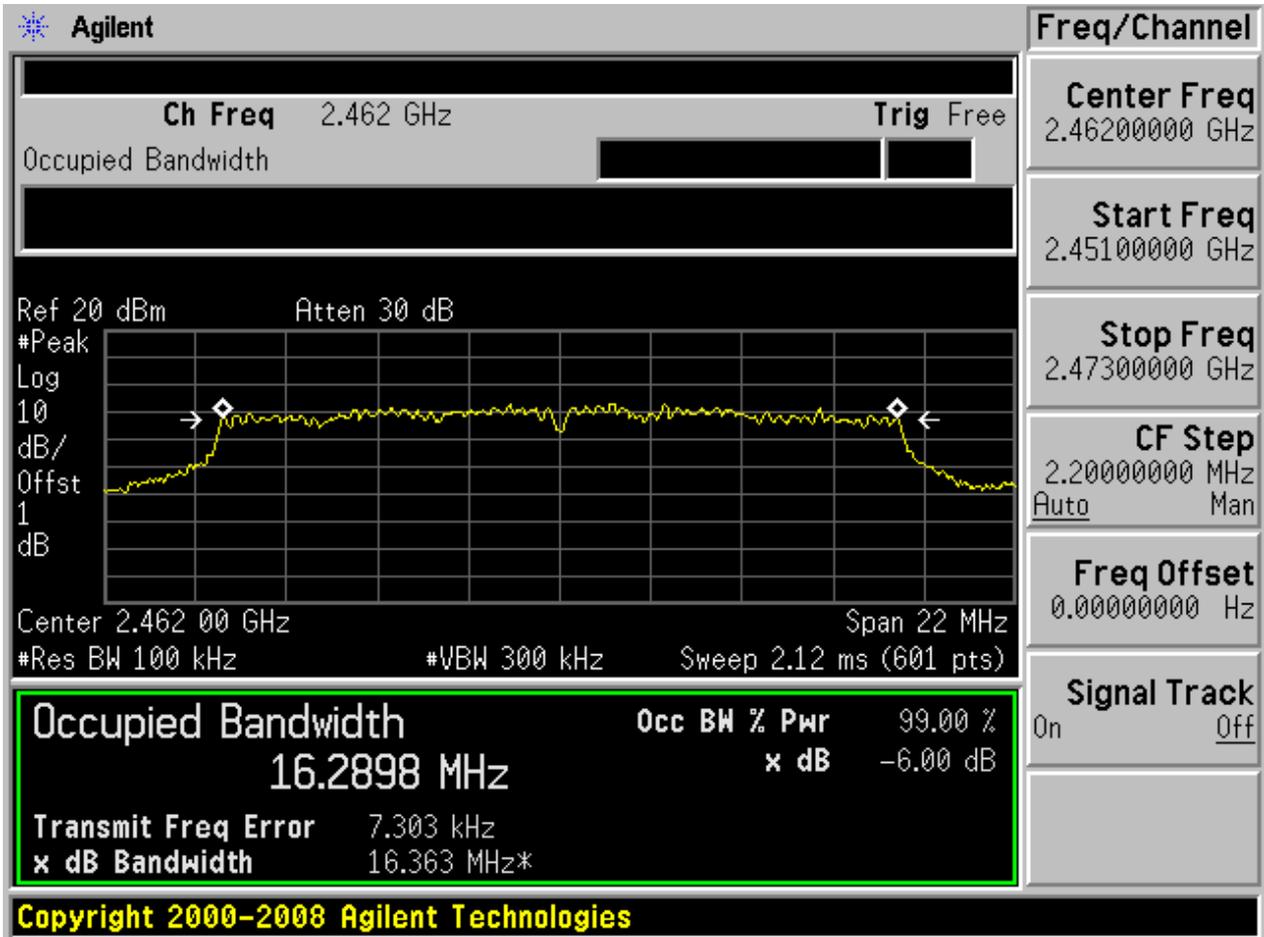




## 2.12 11G\_H@BG2

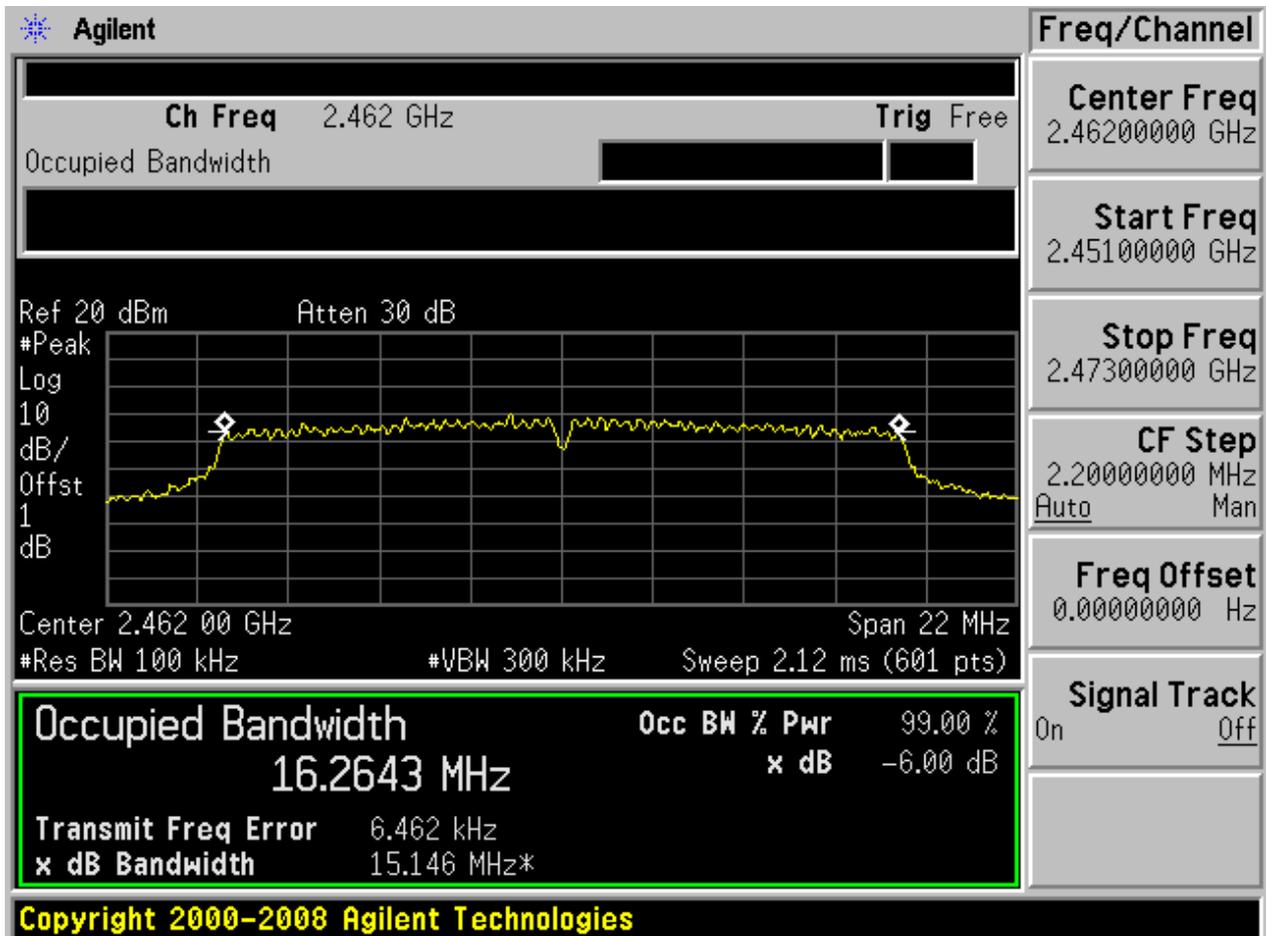




2.13 11N20\_L@BG1

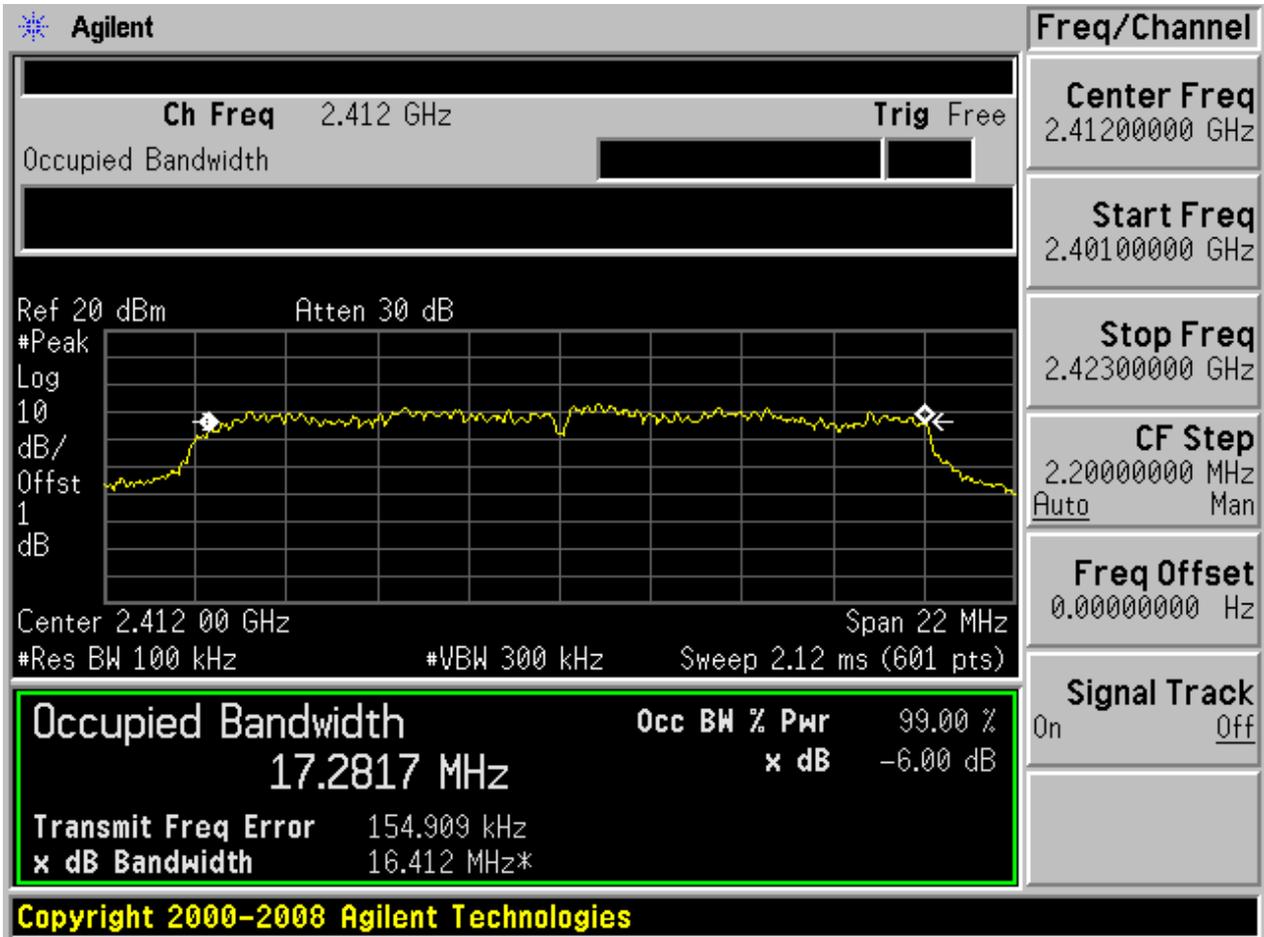




2.14 11N20\_L@BG2

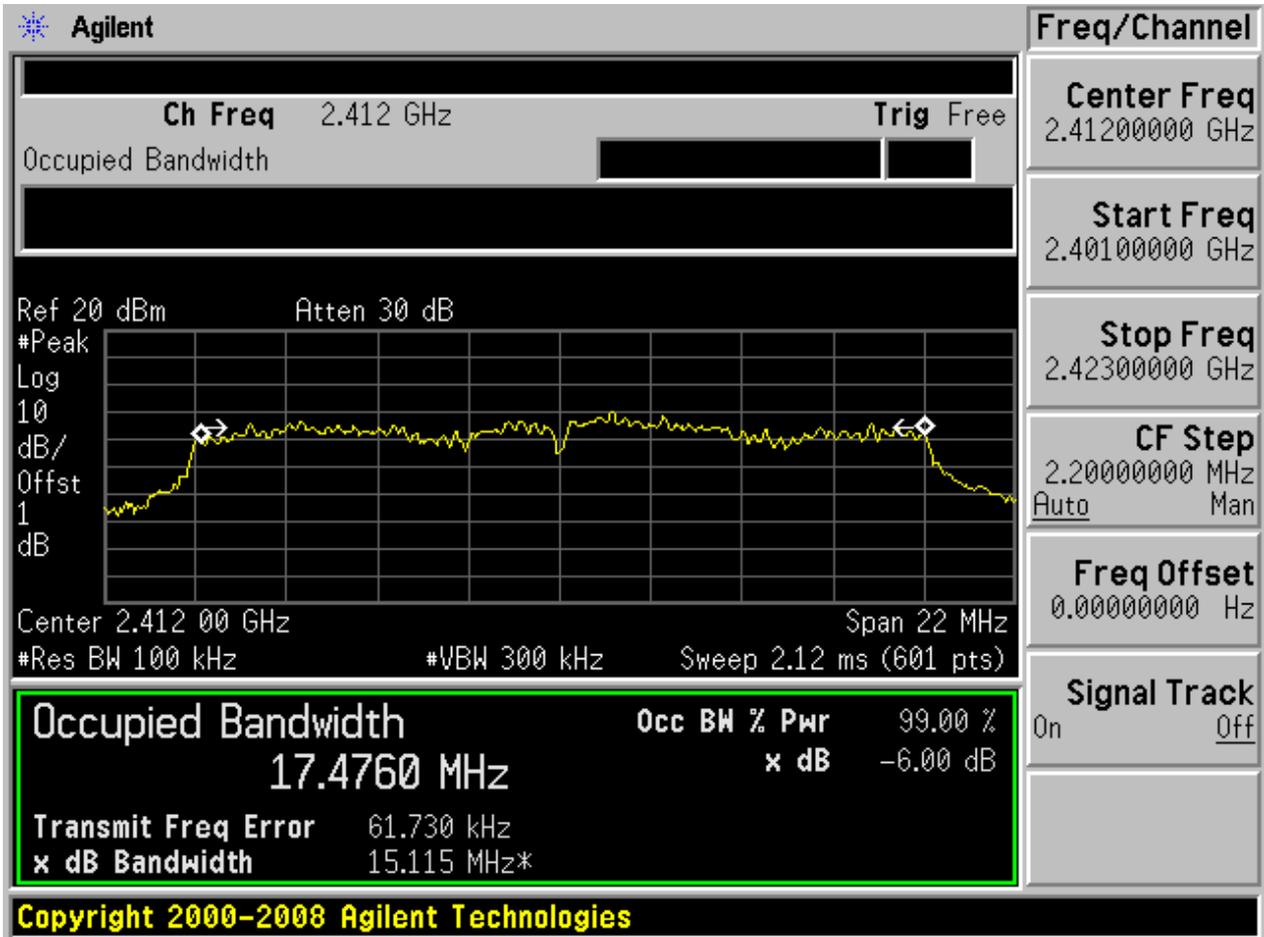




2.15 11N20\_M@BG1

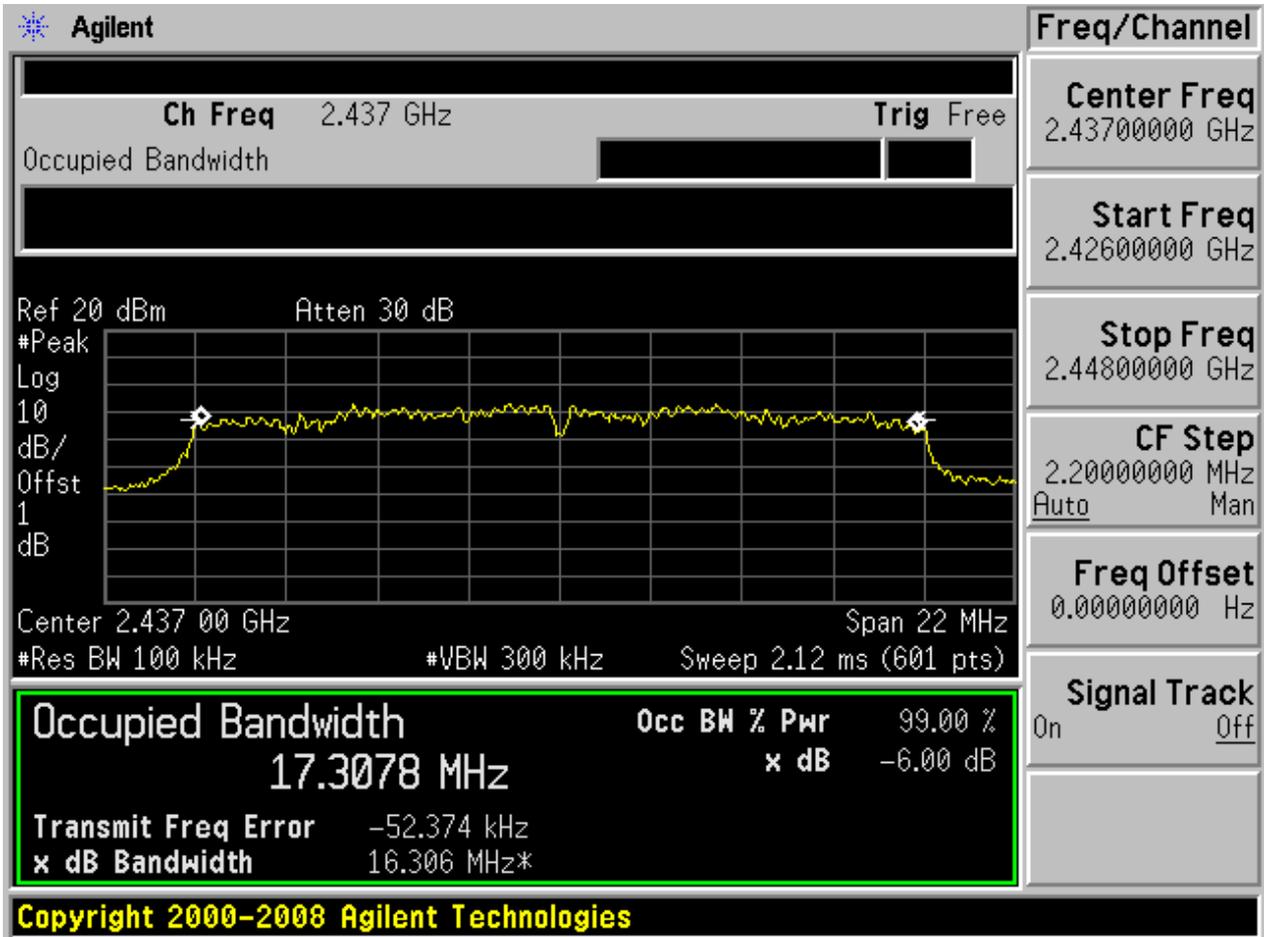




2.16 11N20\_M@BG2

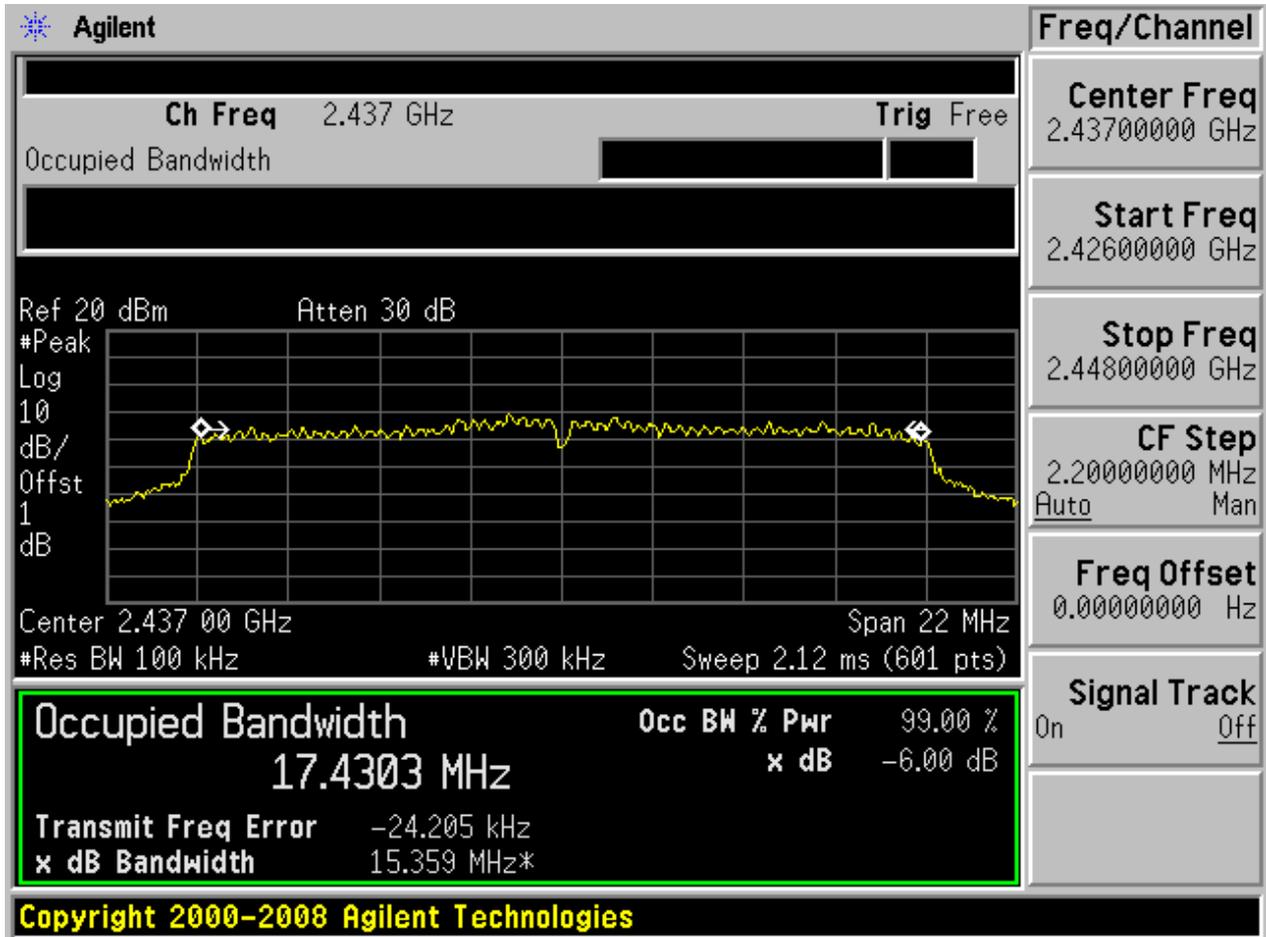




2.17 11N20\_H@BG1

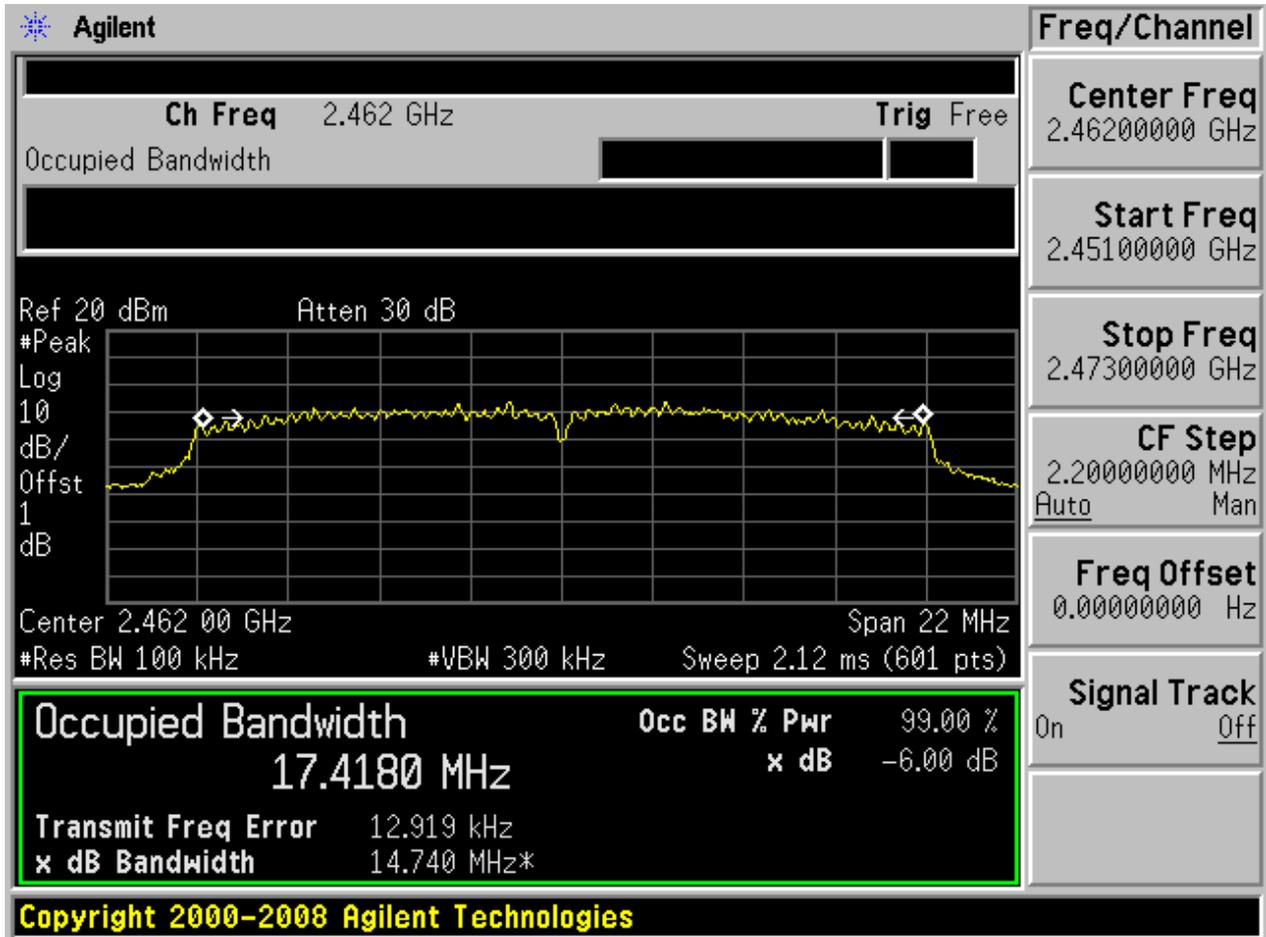




2.18 11N20\_H@BG2

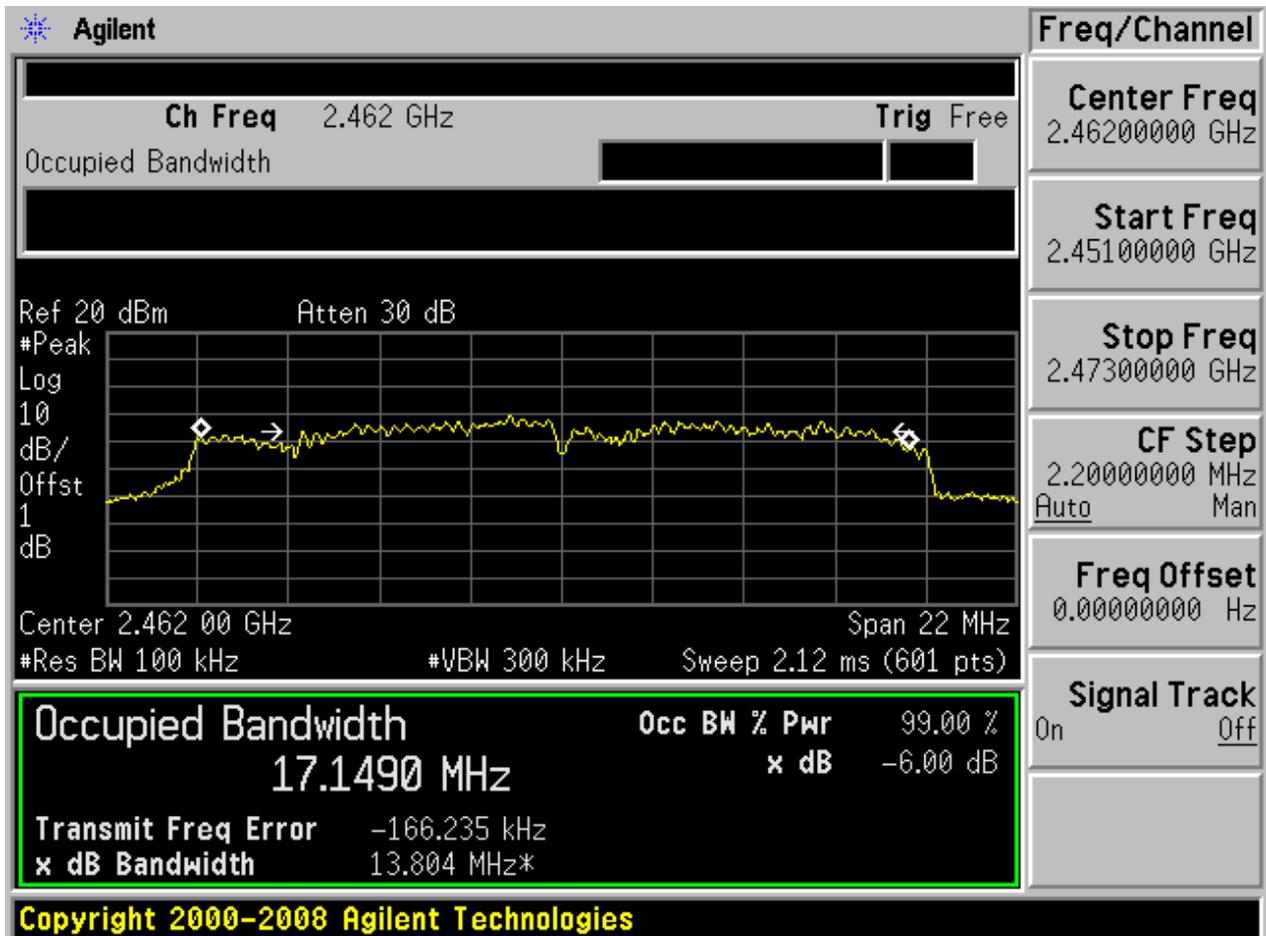




2.19 11N40\_L@BG1

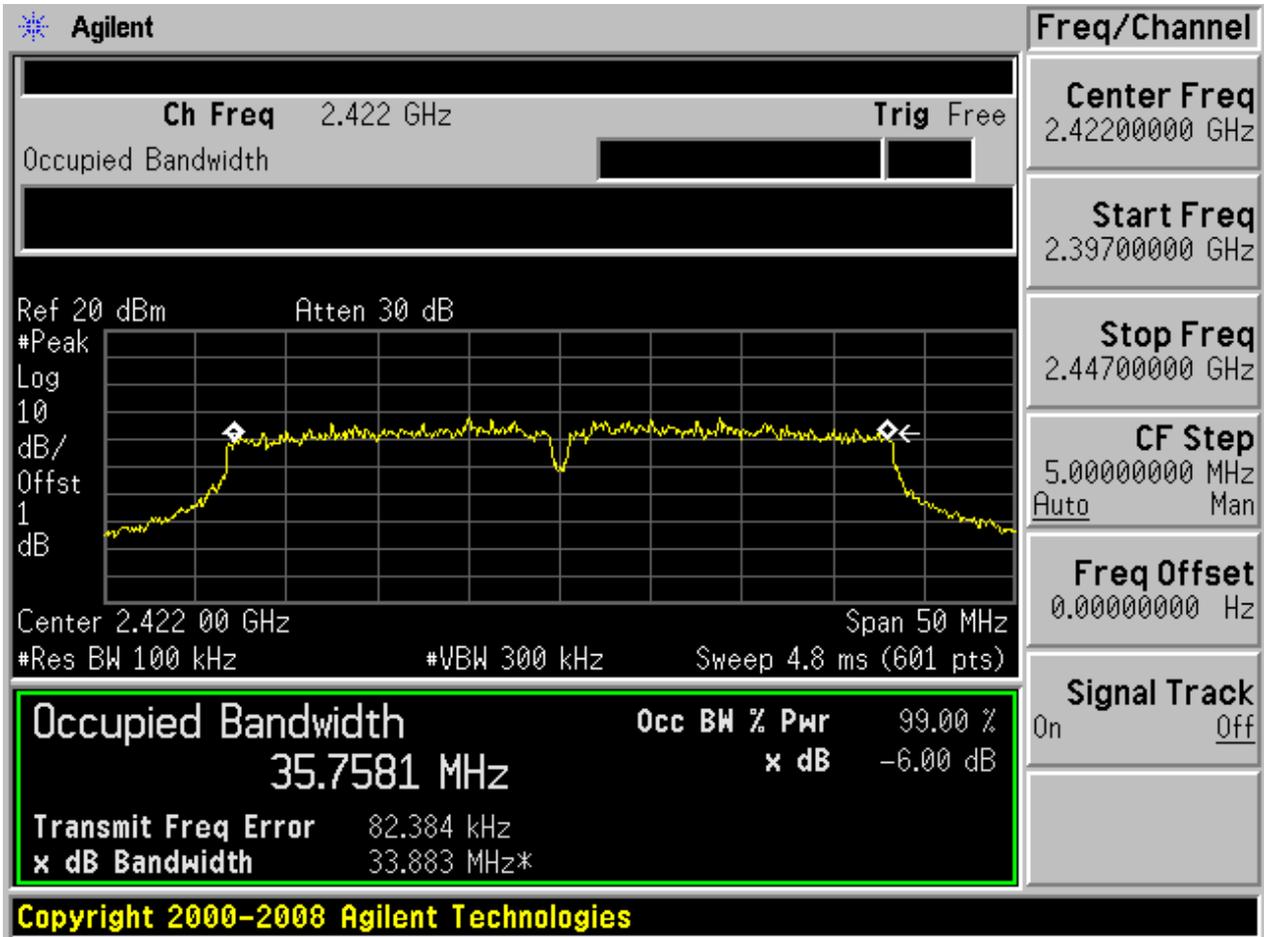




2.20 11N40\_L@BG2

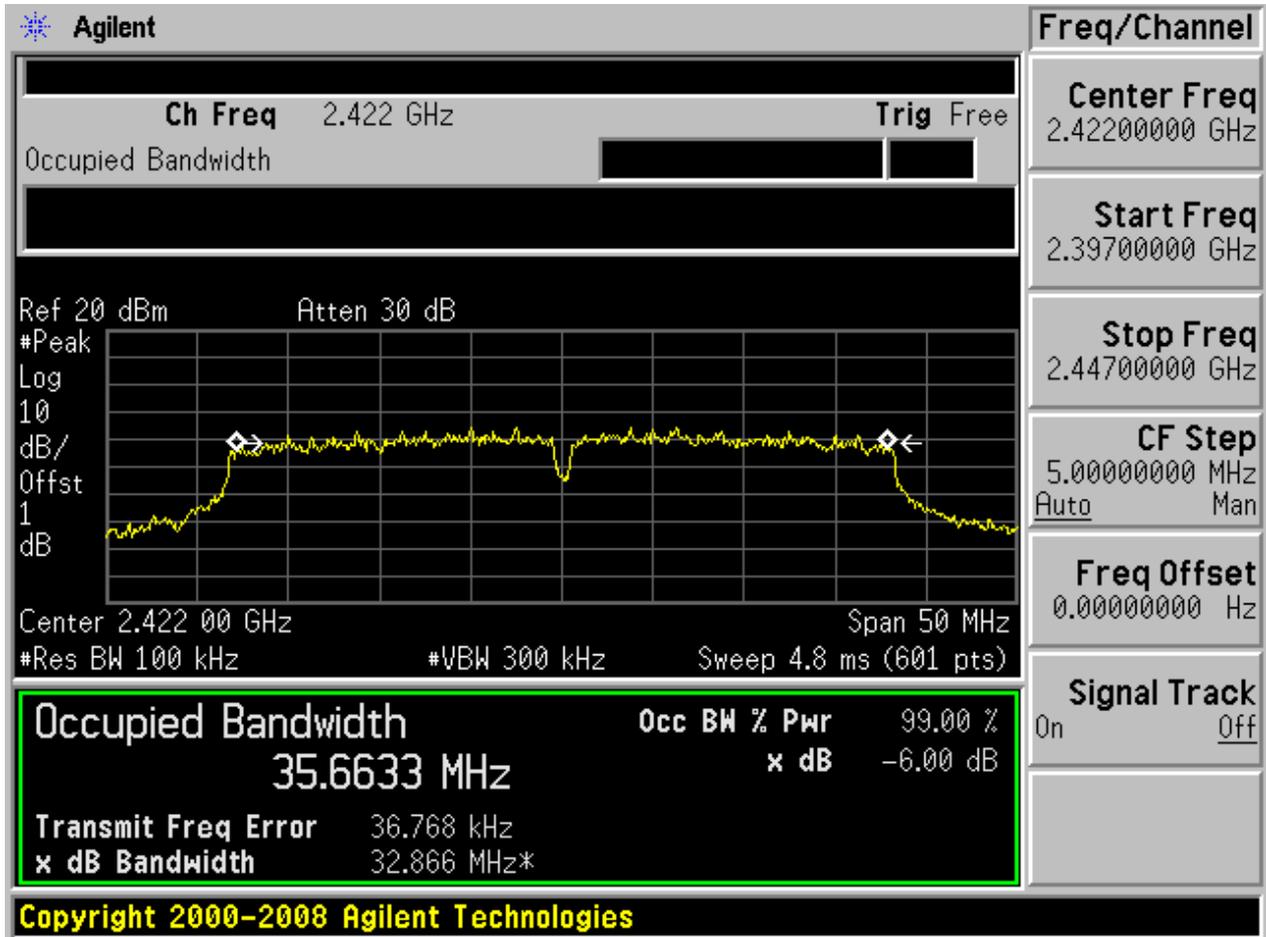




2.21 11N40\_M@BG1

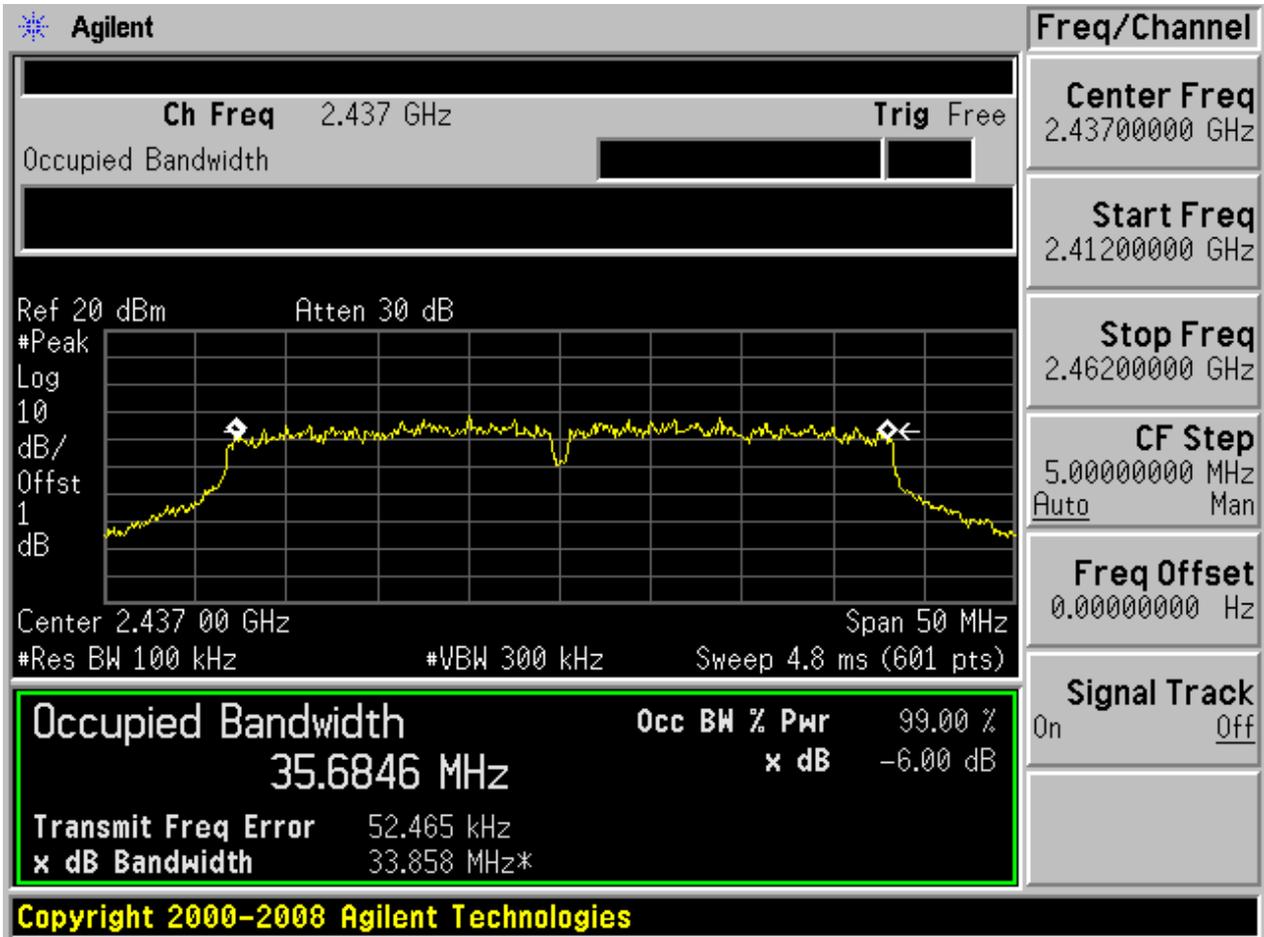




2.22 11N40\_M@BG2

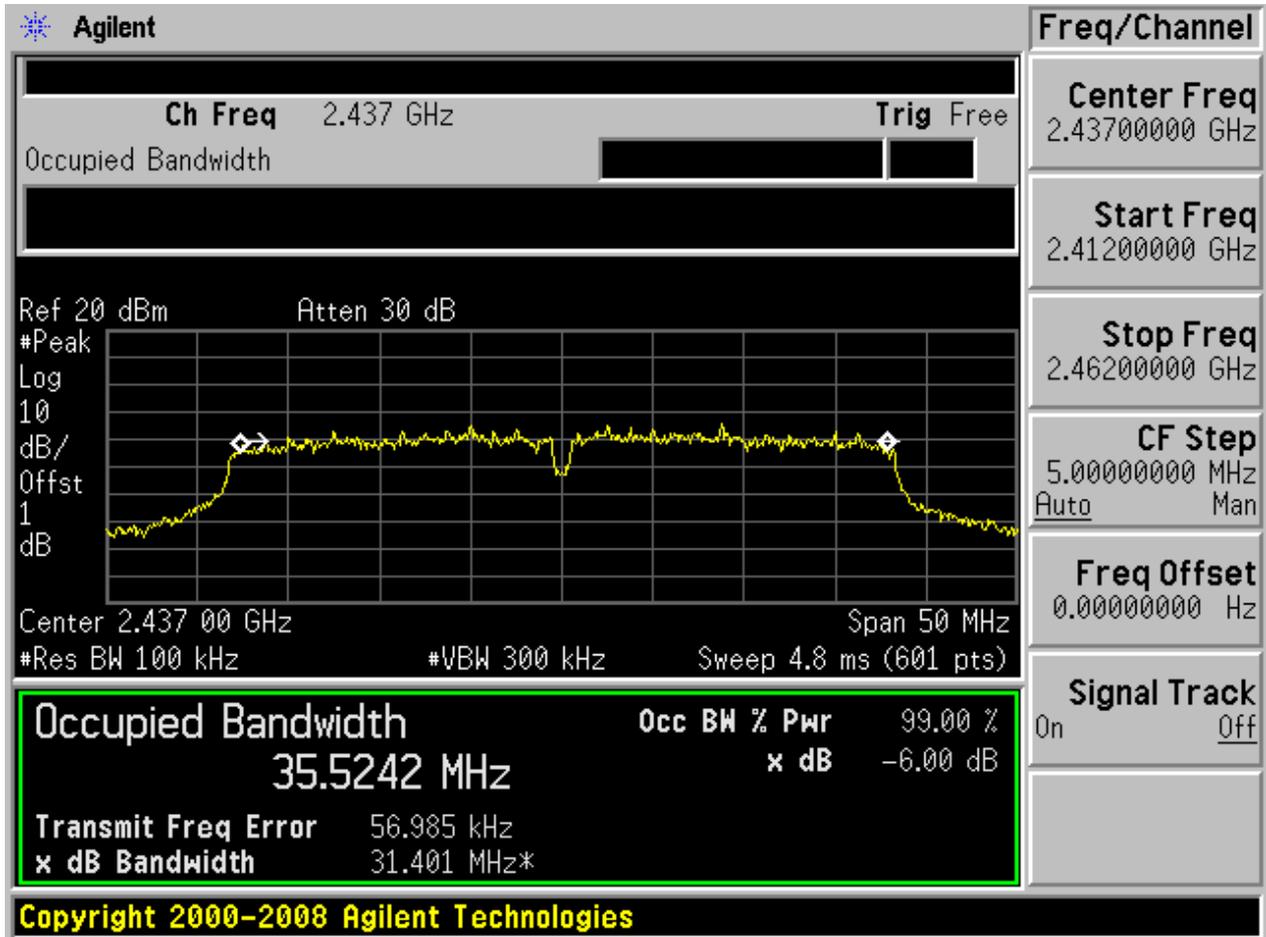




2.23 11N40\_H@BG1

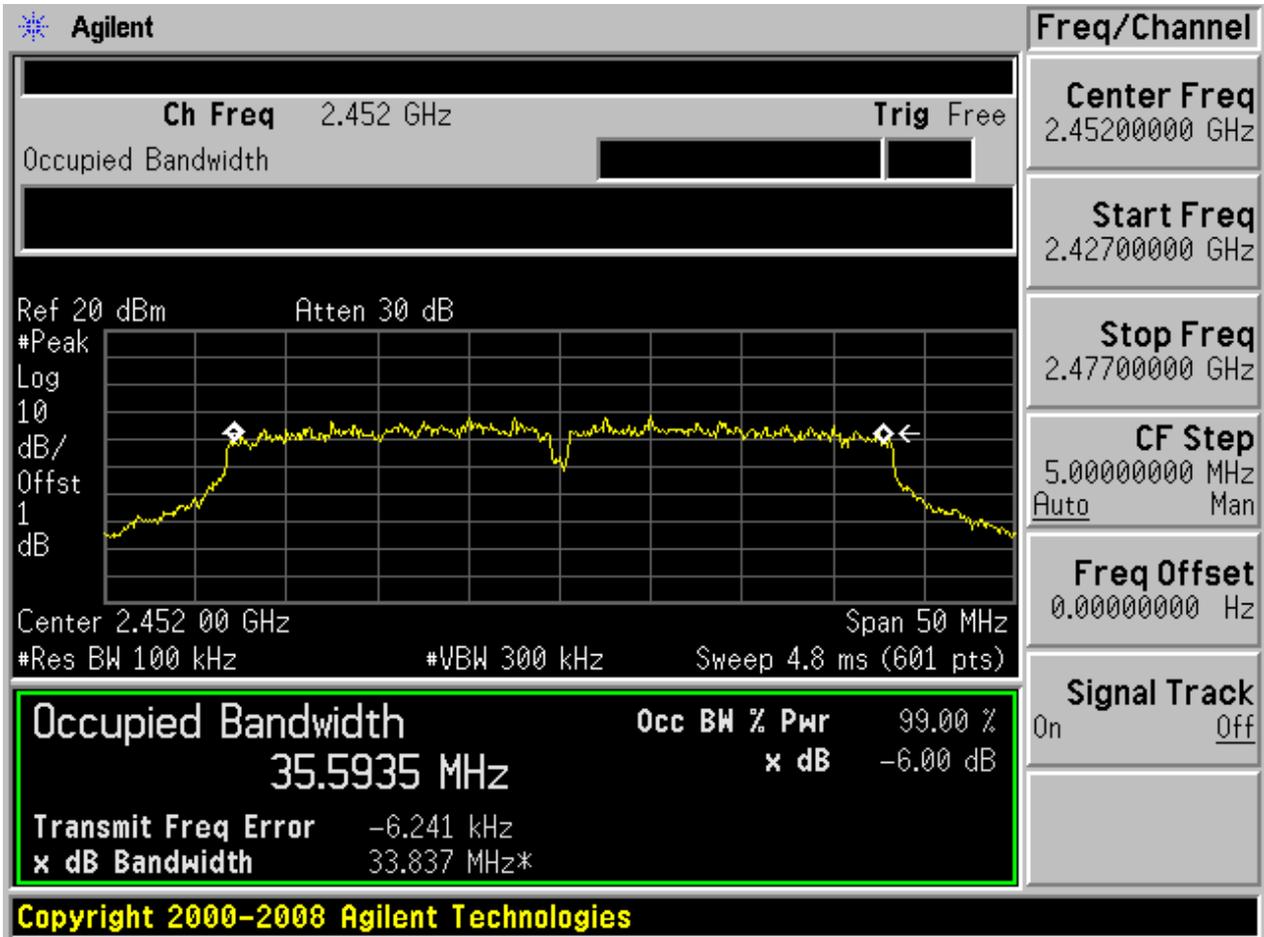

### 2.24 11N40\_H@BG2

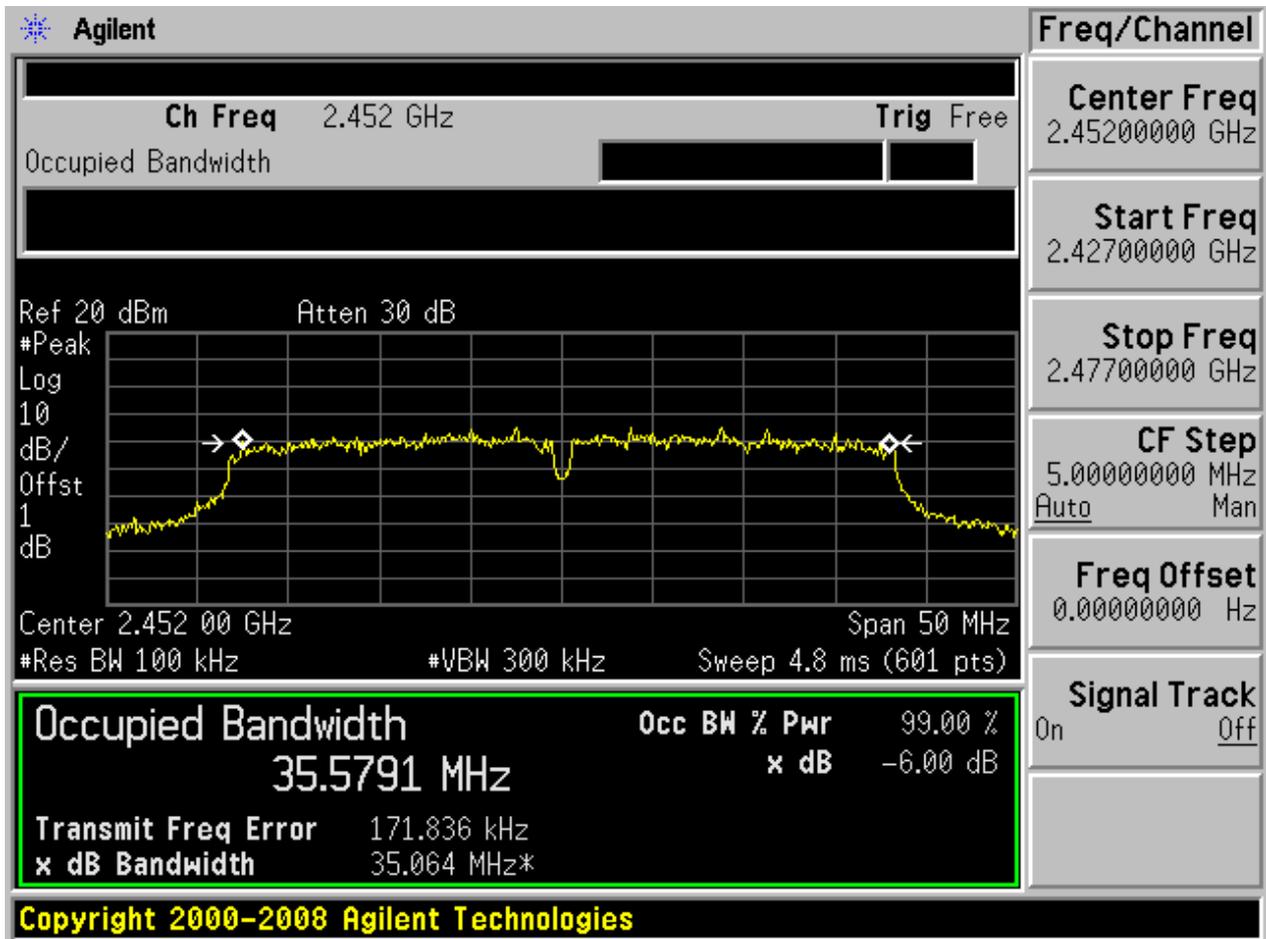

## Appendix B: Maximum Peak Conducted Output Power

### Test Results

Test Mode	Test Channel	Frequency[MHz]	Power Mode	Meas. Level (Cond.) [dBm]	Verdict
11B	L	2412	BG1	23.75	pass
11B	L	2412	BG2	20.35	pass
11B	M	2437	BG1	24.11	pass
11B	M	2437	BG2	20.53	pass
11B	H	2462	BG1	24.12	pass
11B	H	2462	BG2	20.56	pass
11G	L	2412	BG1	23.85	pass
11G	L	2412	BG2	19.64	pass
11G	M	2437	BG1	24.40	pass
11G	M	2437	BG2	19.82	pass
11G	H	2462	BG1	24.15	pass
11G	H	2462	BG2	20.02	pass
11N20	L	2412	BG1	23.95	pass
11N20	L	2412	BG2	18.96	pass
11N20	M	2437	BG1	24.35	pass
11N20	M	2437	BG2	19.15	pass
11N20	H	2462	BG1	24.38	pass
11N20	H	2462	BG2	19.39	pass
11N40	L	2422	BG1	22.95	pass
11N40	L	2422	BG2	23.31	pass
11N40	M	2437	BG1	23.05	pass
11N40	M	2437	BG2	19.92	pass
11N40	H	2452	BG1	20.12	pass
11N40	H	2452	BG2	20.21	pass

## Appendix C: Maximum Power Spectral Density Level


### Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Power Mode	PD[MHz]	Verdict
11B	L	2412	BG1	3.35	pass
11B	L	2412	BG2	1.64	pass
11B	M	2437	BG1	4.61	pass
11B	M	2437	BG2	1.06	pass
11B	H	2462	BG1	4.51	pass
11B	H	2462	BG2	1.68	pass
11G	L	2412	BG1	-0.62	pass
11G	L	2412	BG2	-3.68	pass
11G	M	2437	BG1	0.05	pass
11G	M	2437	BG2	-3.79	pass
11G	H	2462	BG1	0.39	pass
11G	H	2462	BG2	-3.34	pass
11N20	L	2412	BG1	0.06	pass
11N20	L	2412	BG2	-5.13	pass
11N20	M	2437	BG1	0.59	pass
11N20	M	2437	BG2	-4.32	pass
11N20	H	2462	BG1	0.76	pass
11N20	H	2462	BG2	-4.42	pass
11N40	L	2422	BG1	-5.04	pass
11N40	L	2422	BG2	-8.27	pass
11N40	M	2437	BG1	-4.78	pass
11N40	M	2437	BG2	-7.88	pass
11N40	H	2452	BG1	-4.67	pass
11N40	H	2452	BG2	-7.83	pass




## Part II - Test Plots

### 2.1 11B\_L@BG1

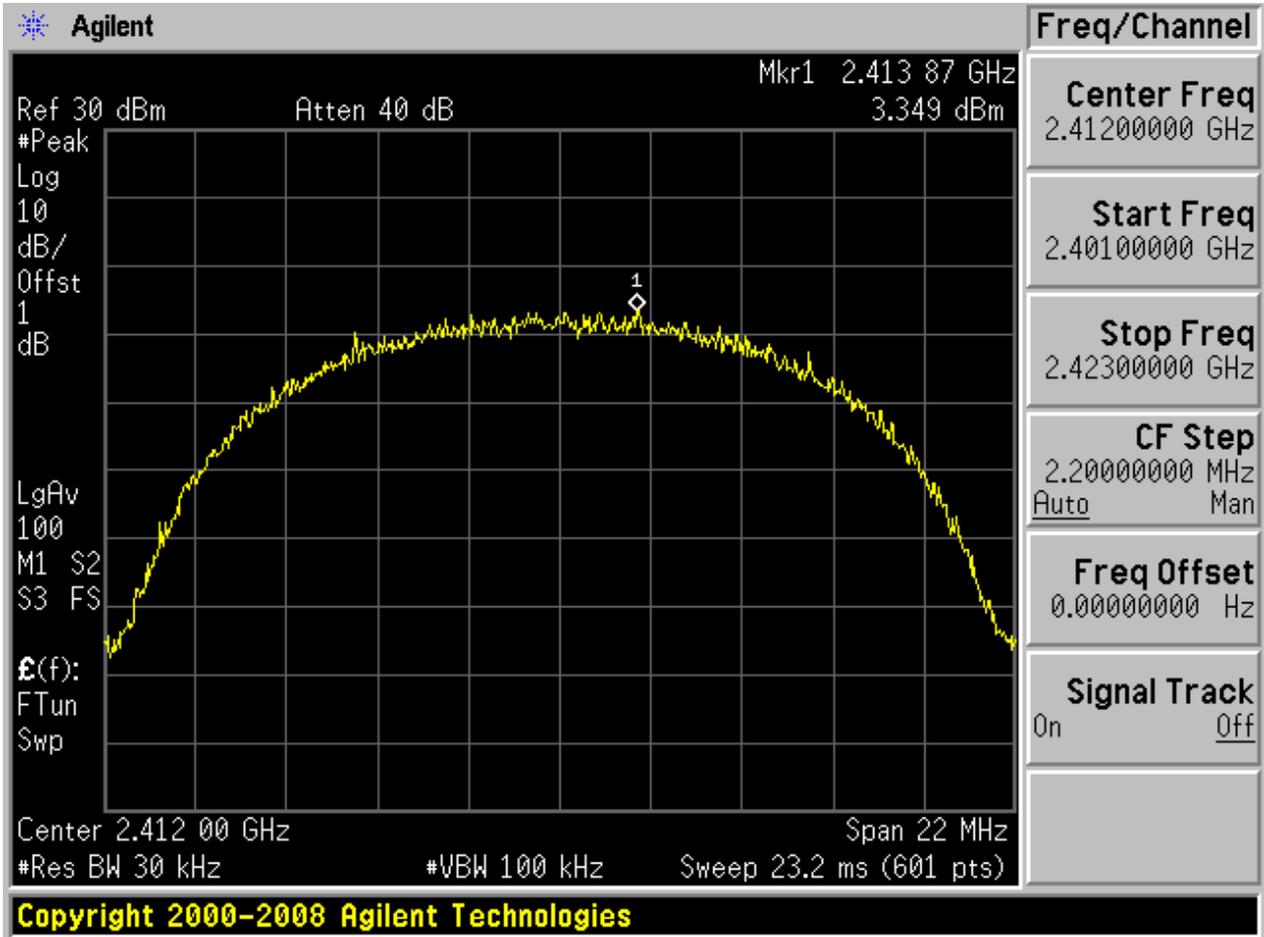




2.2 11B\_L@BG2

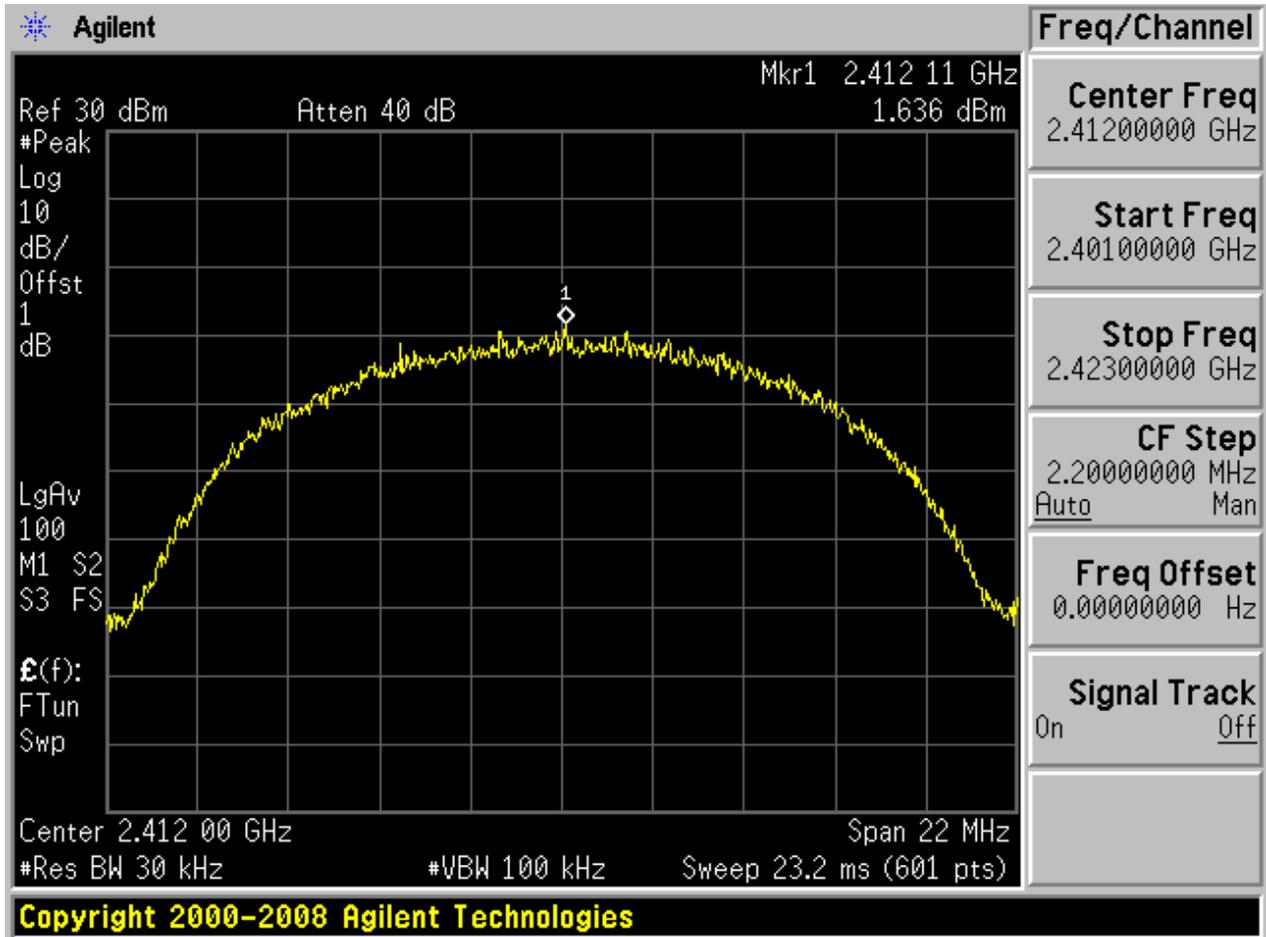


### 2.3 11B\_M@BG1

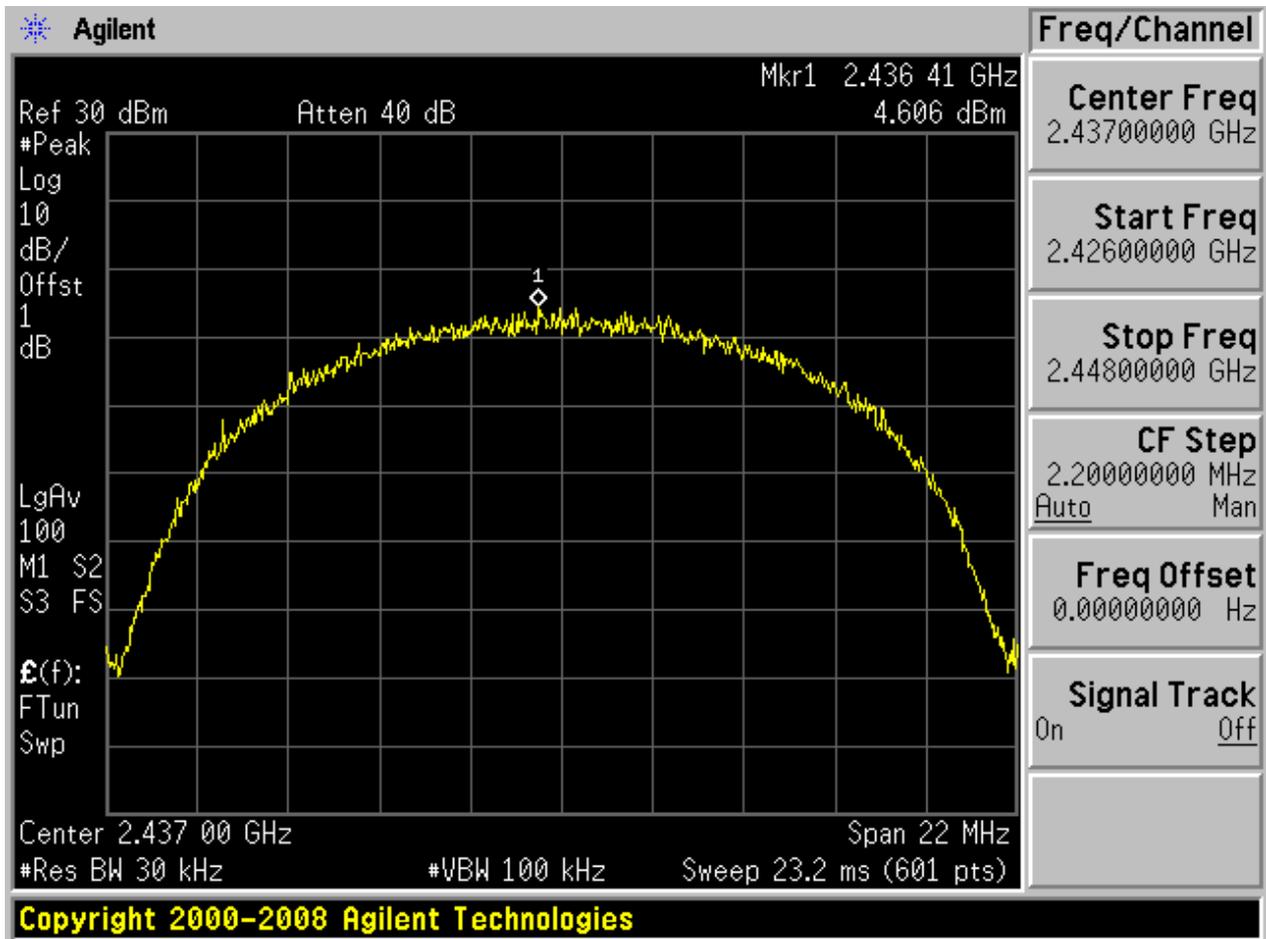




## 2.4 11B\_M@BG2

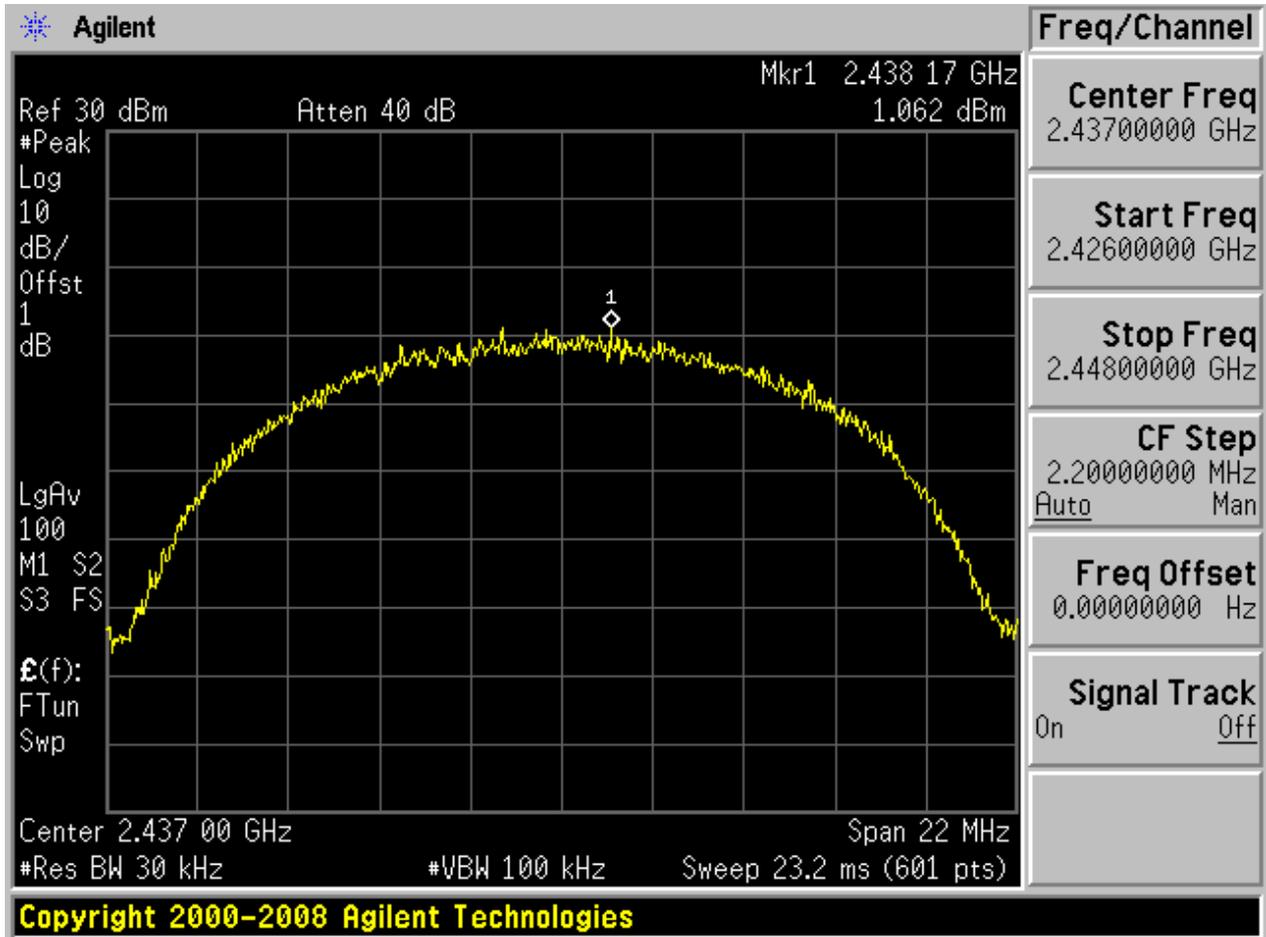




2.5 11B\_H@BG1

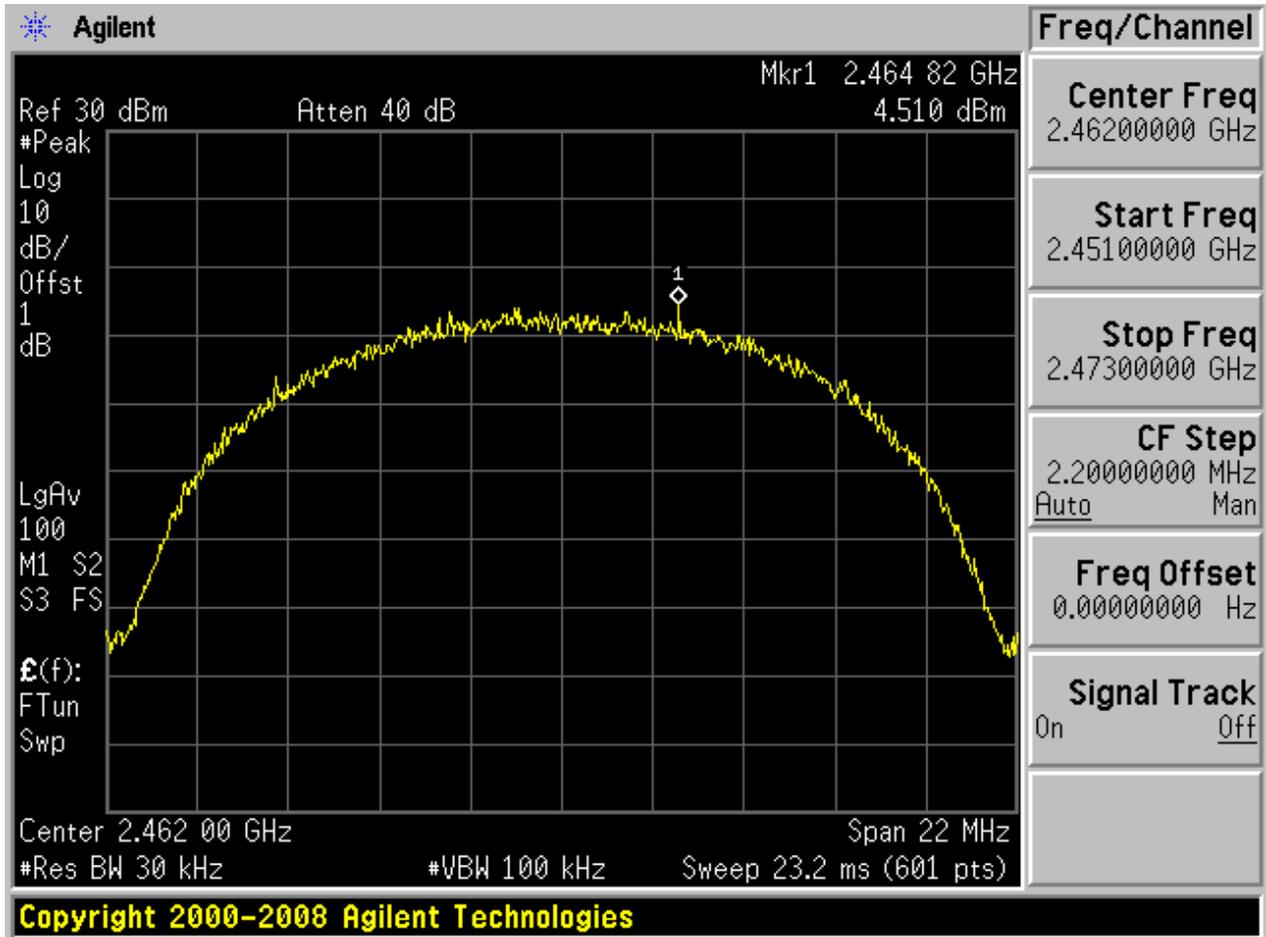


## 2.6 11B\_H@BG2

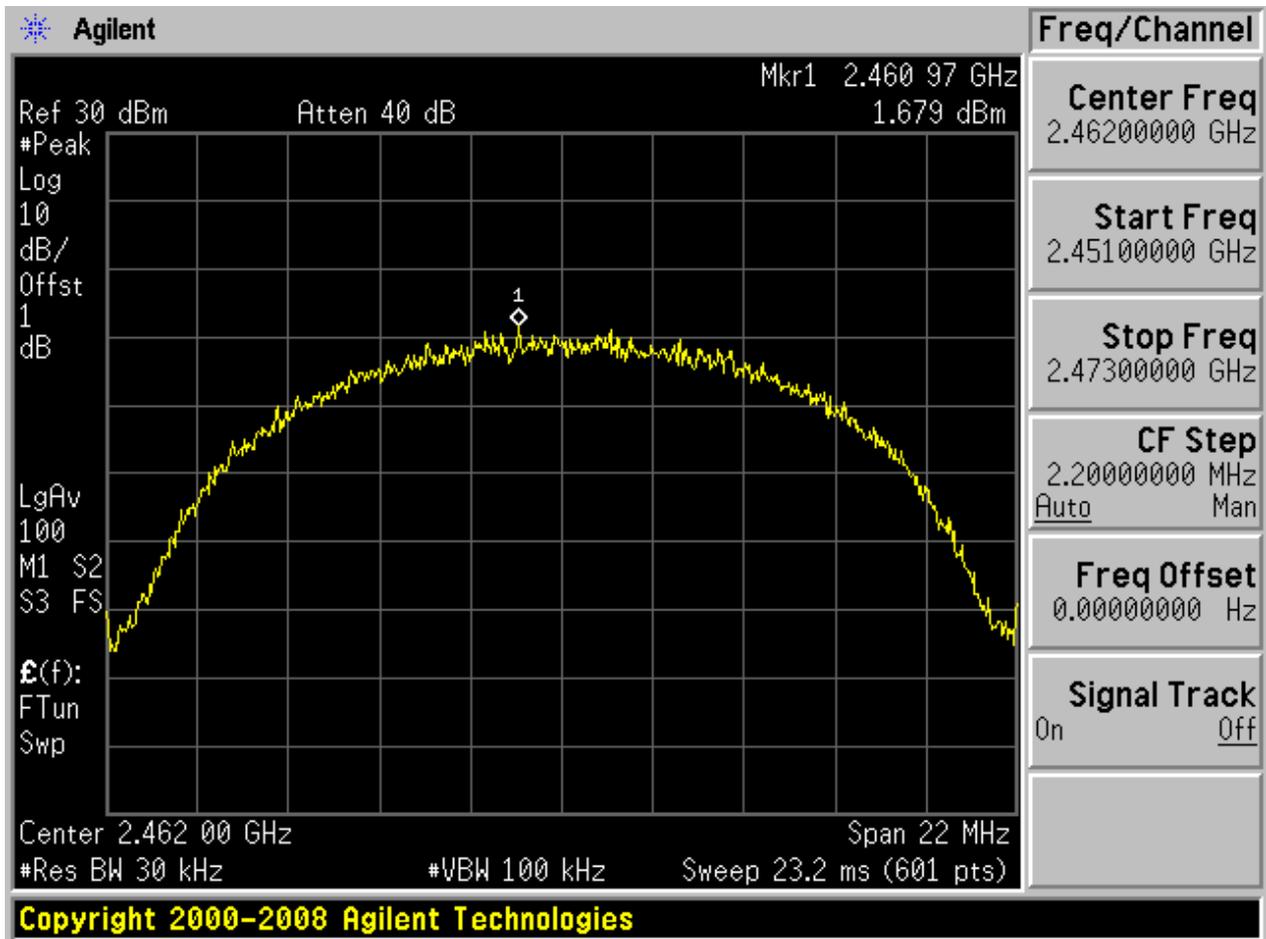




2.7 11G\_L@BG1

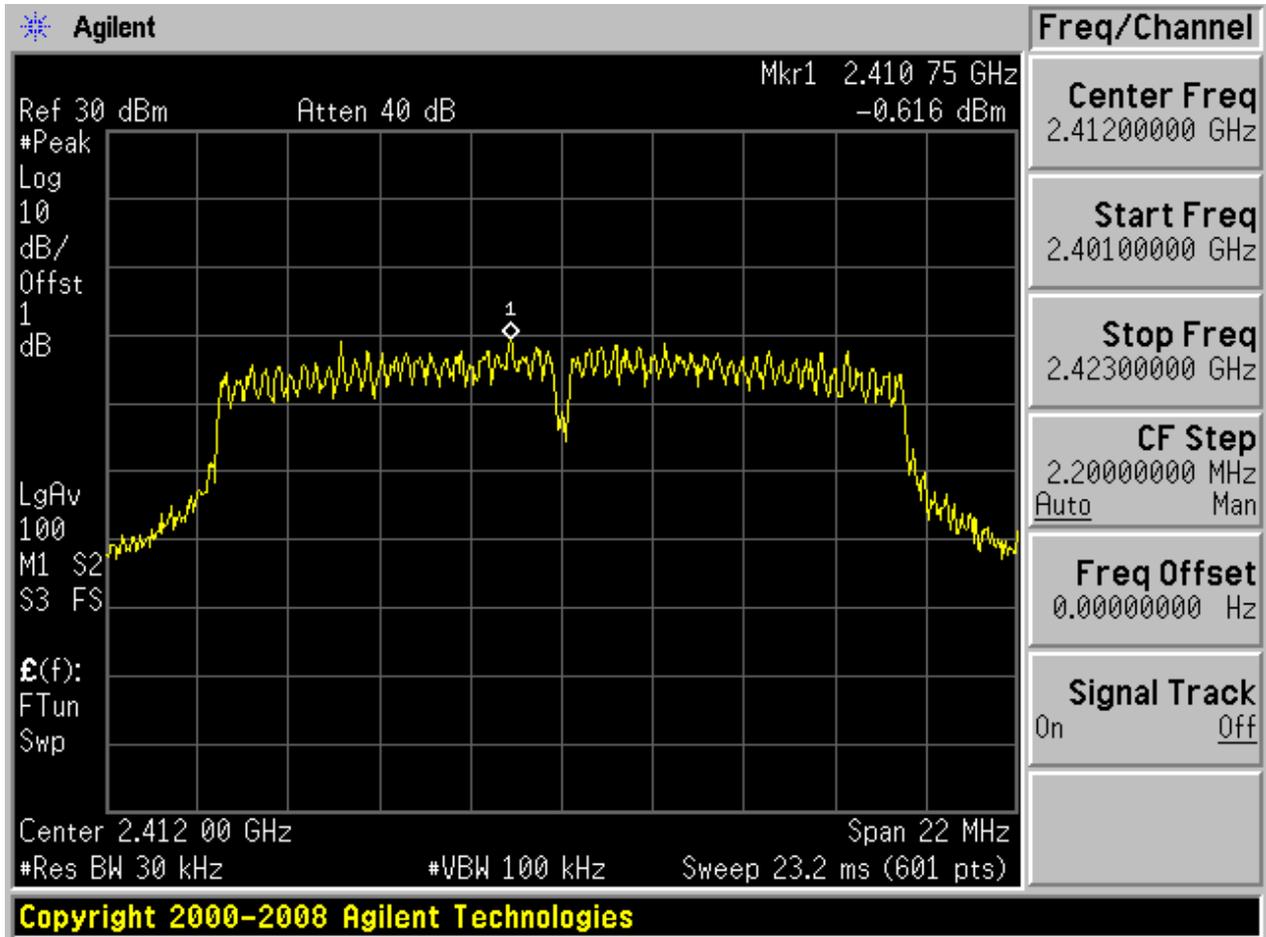




## 2.8 11G\_L@BG2

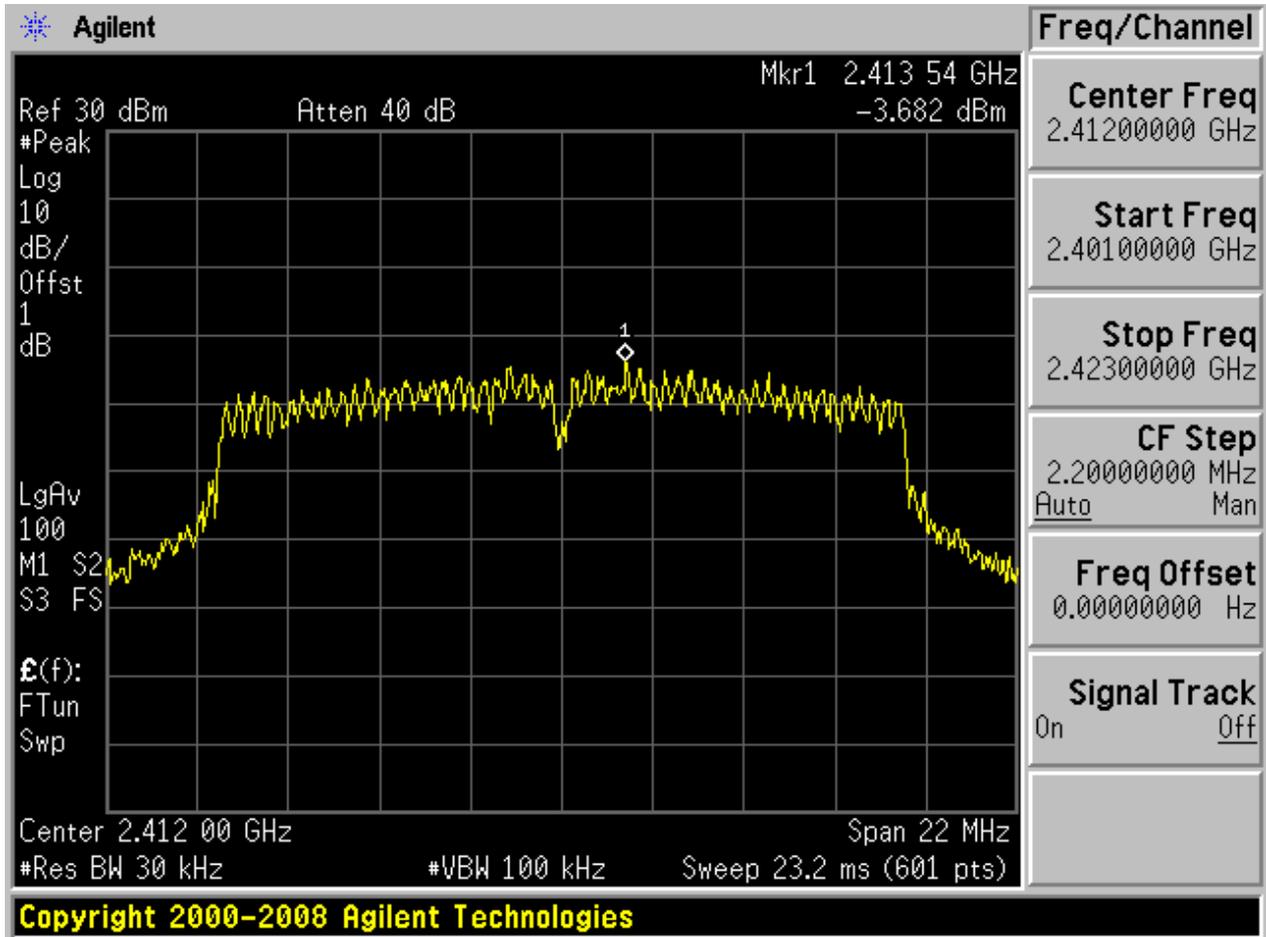




## 2.9 11G\_M@BG1

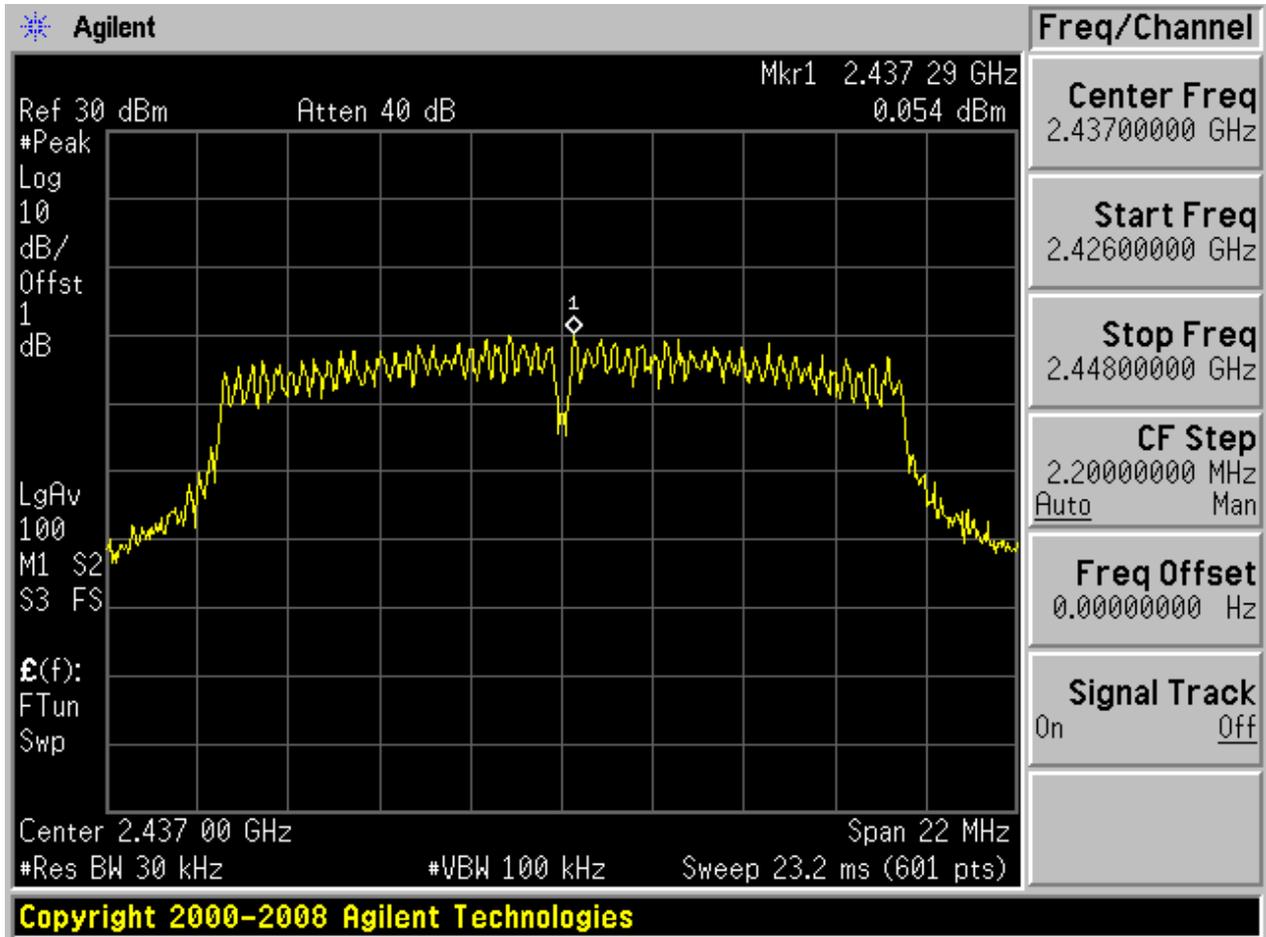




## 2.10 11G\_M@BG2

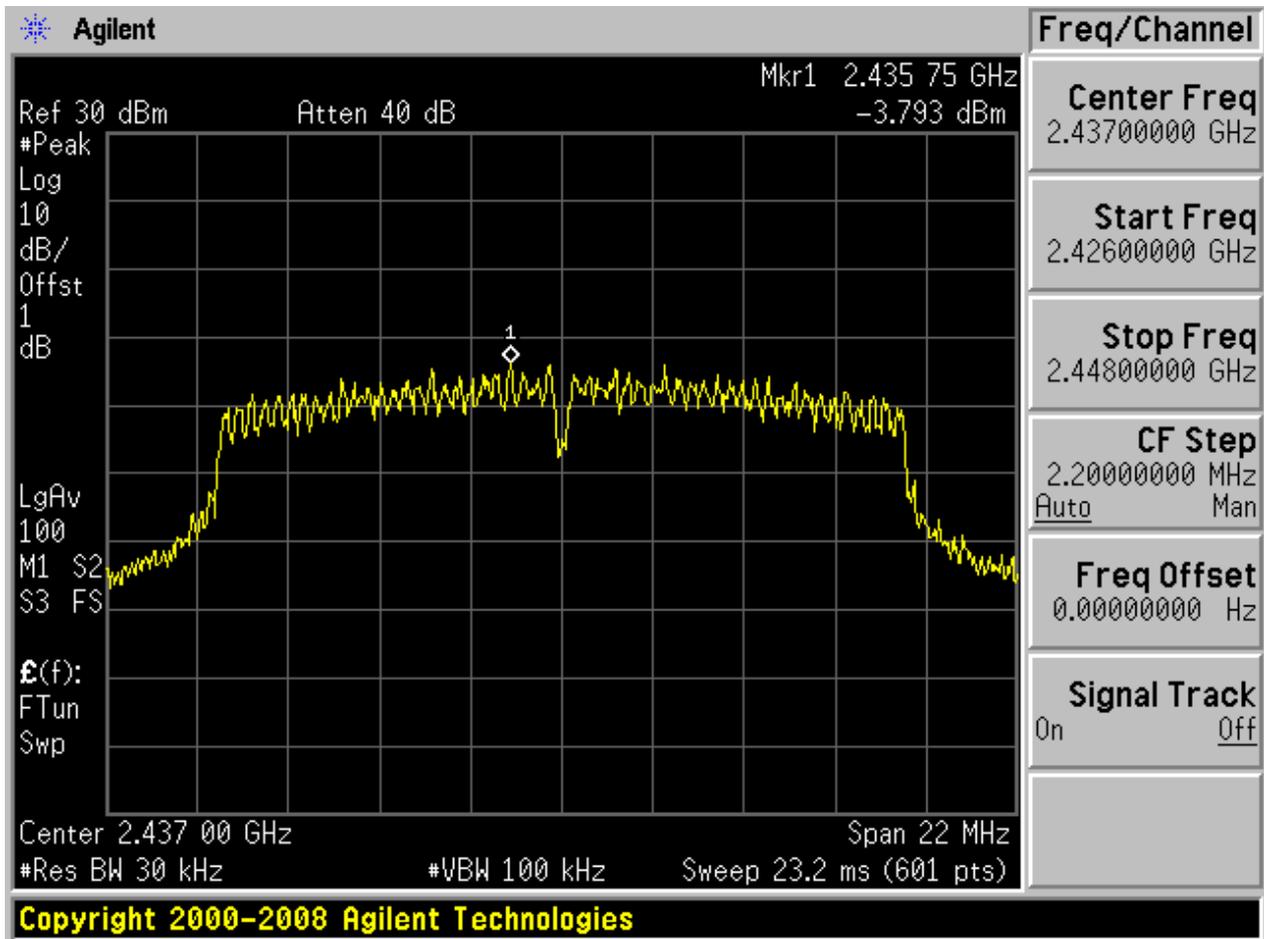




## 2.11 11G\_H@BG1

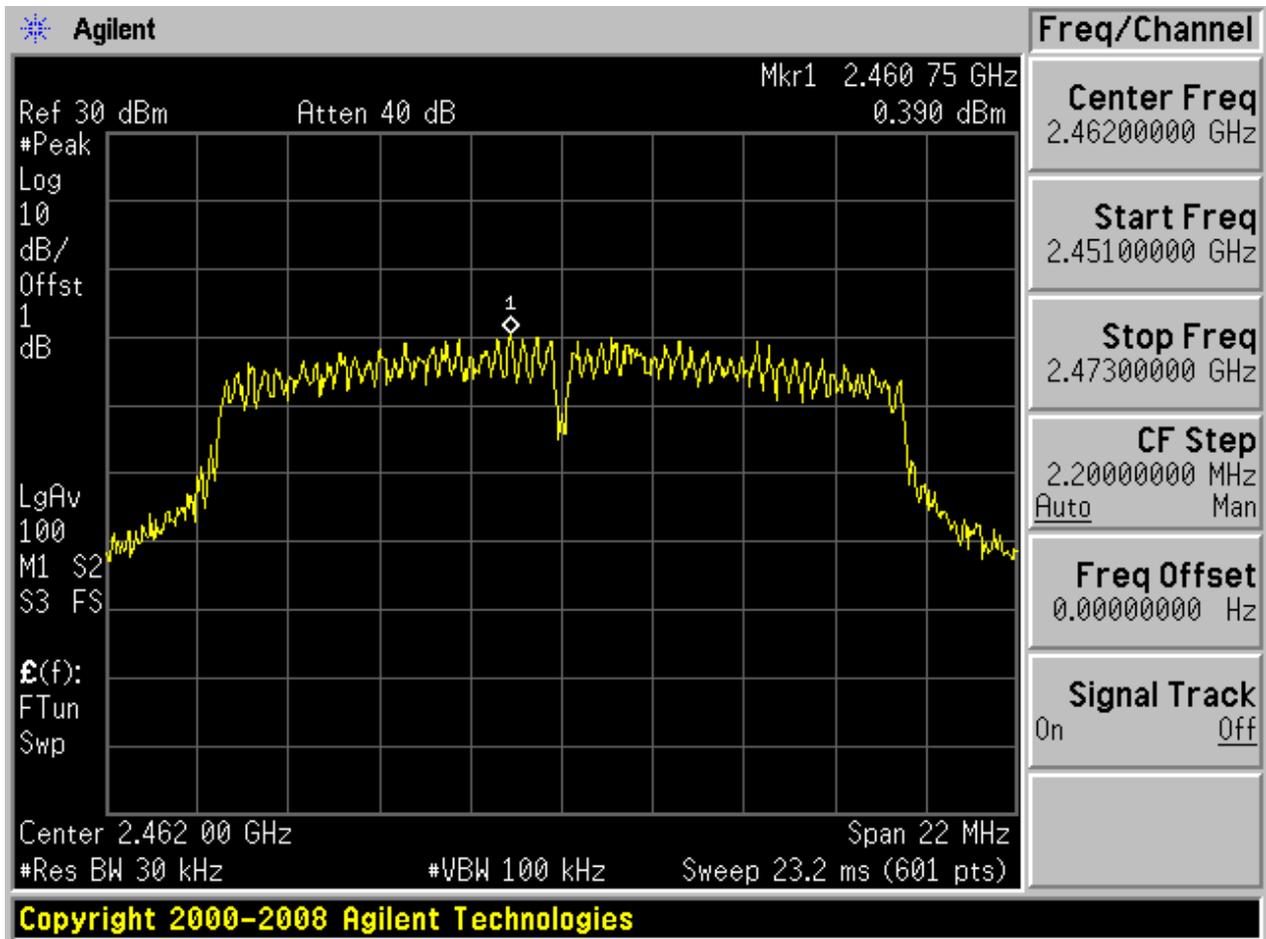




2.12 11G\_H@BG2

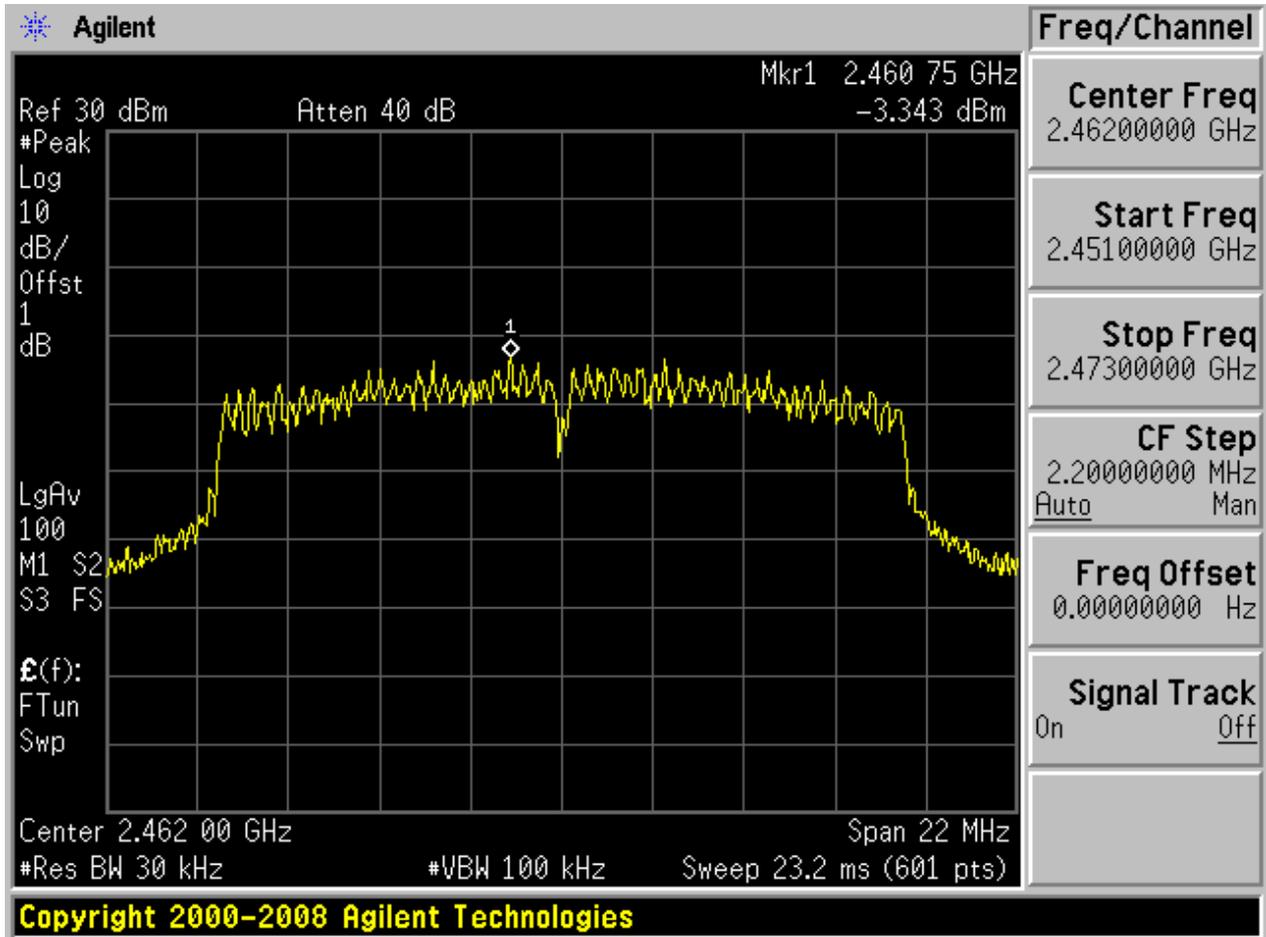


### 2.13 11N20\_L@BG1

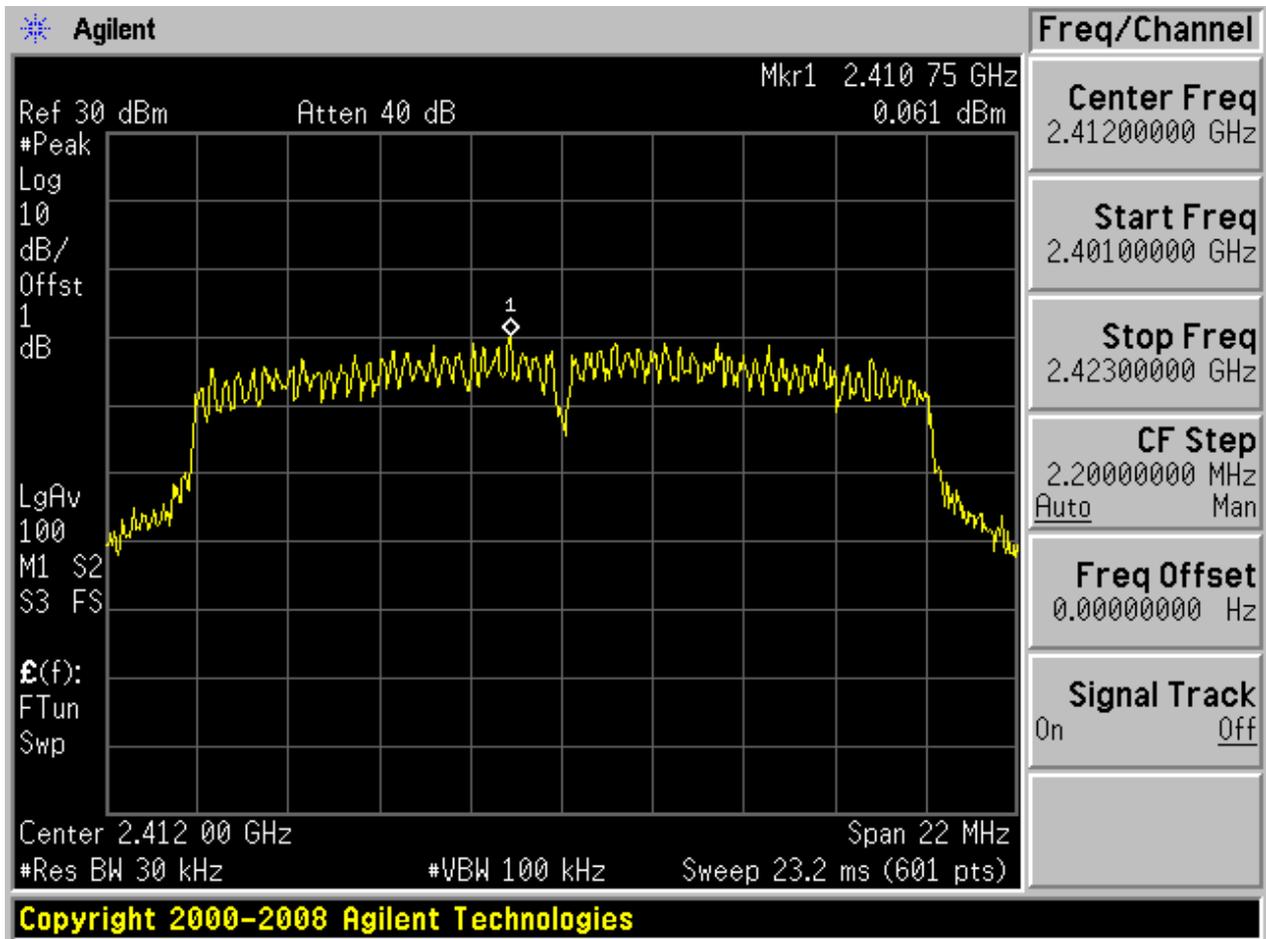




### 2.14 11N20\_L@BG2

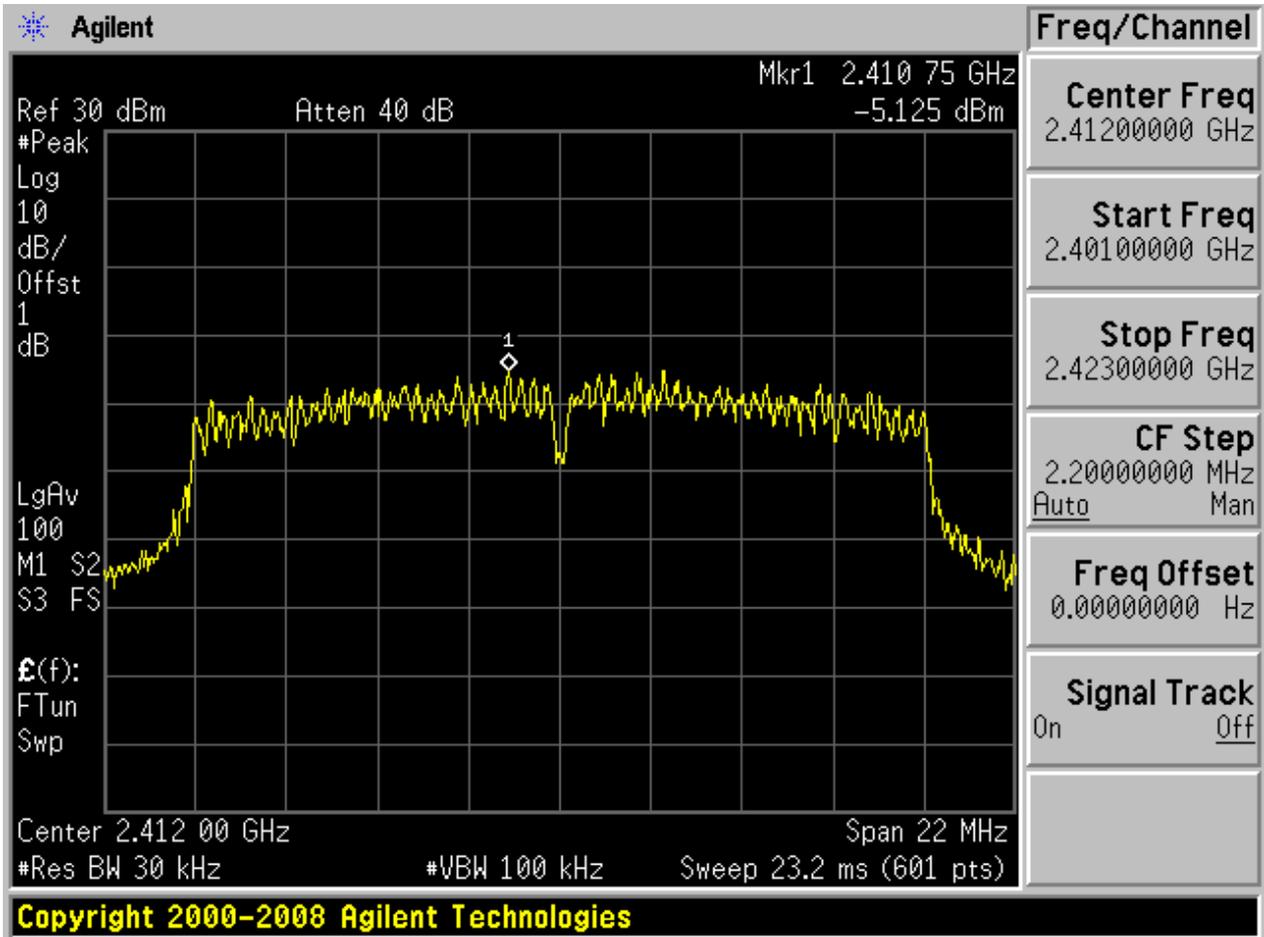


### 2.15 11N20\_M@BG1

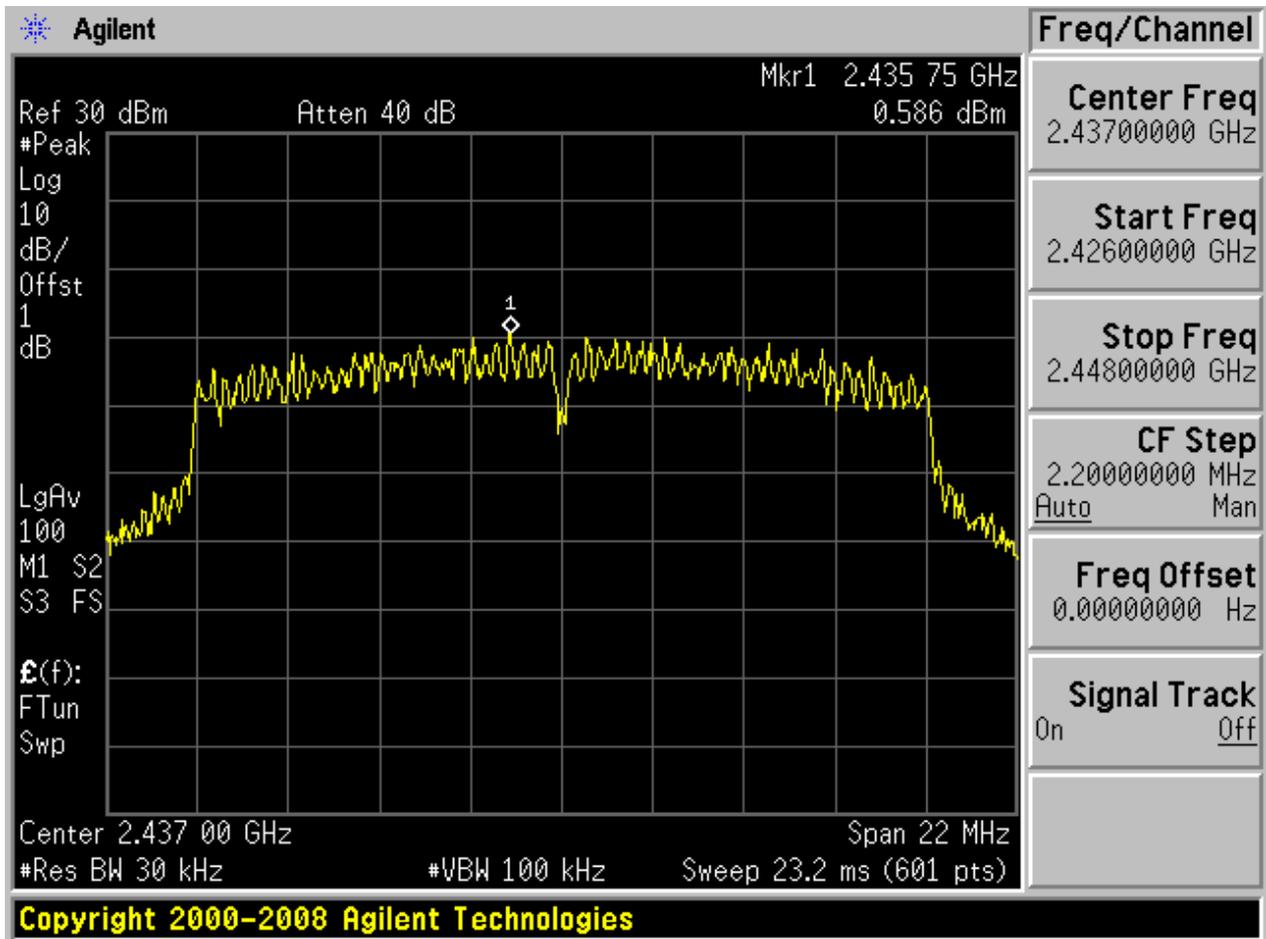




2.16 11N20\_M@BG2

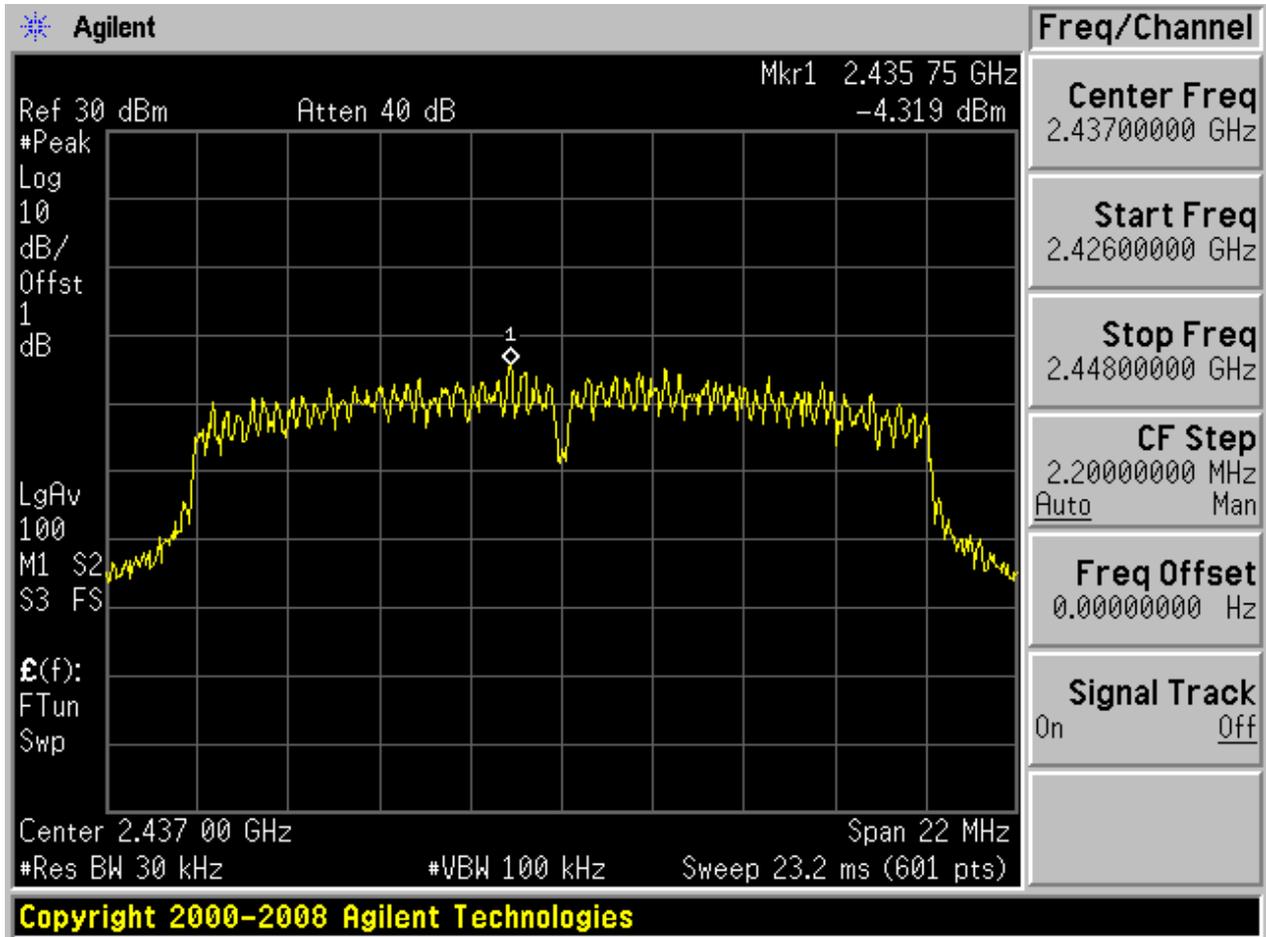




2.17 11N20\_H@BG1

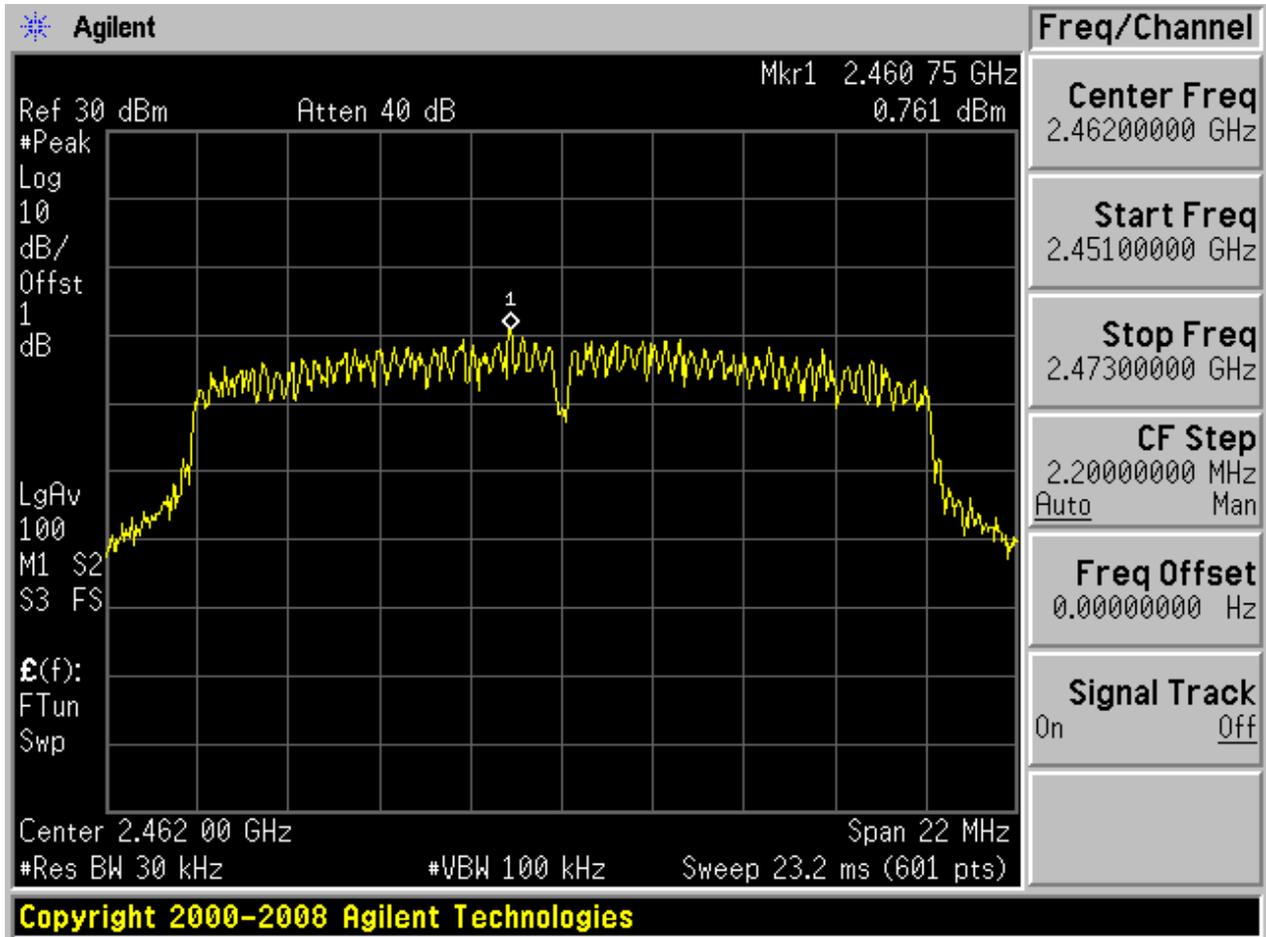




2.18 11N20\_H@BG2

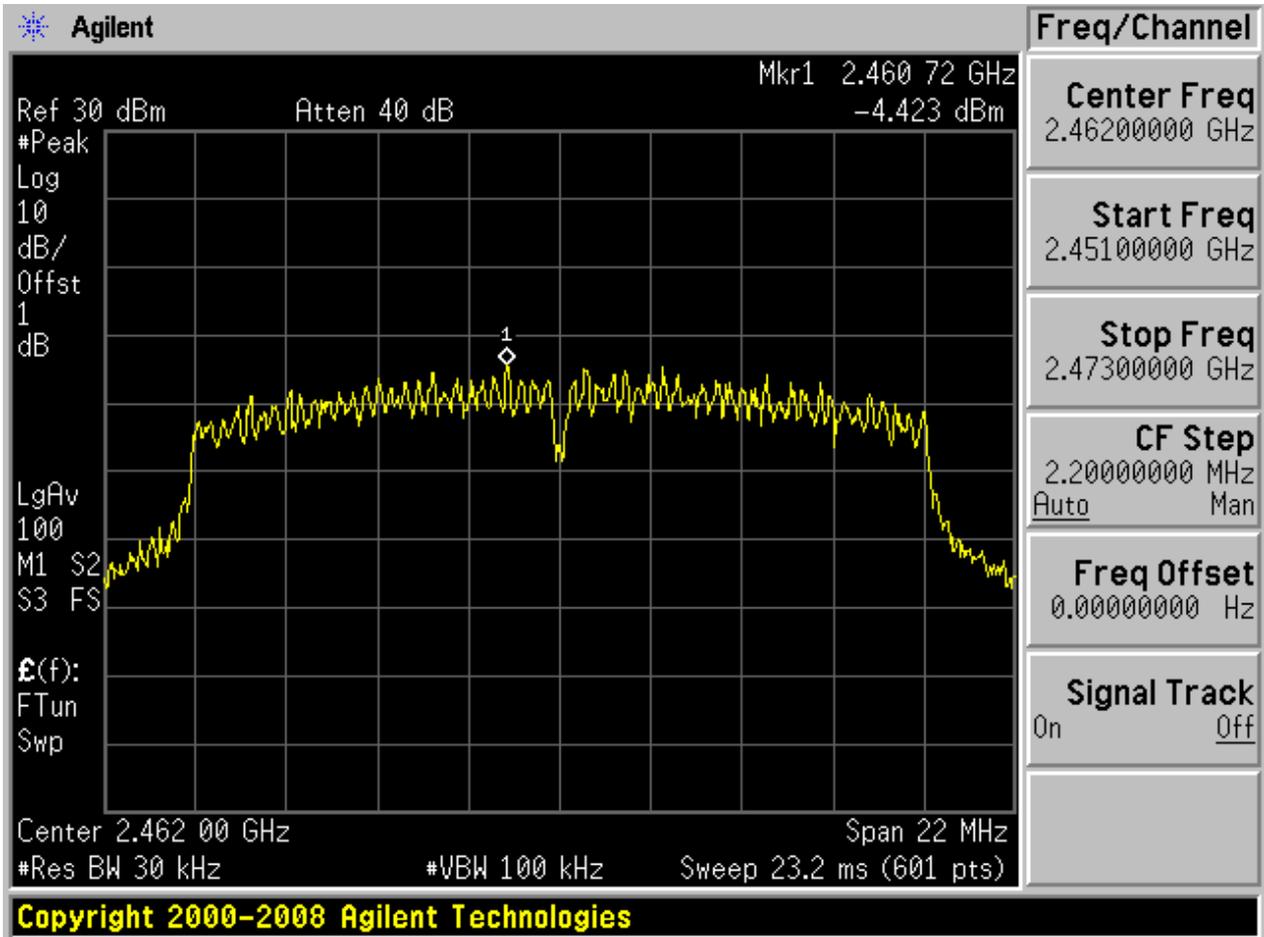




2.19 11N40\_L@BG1

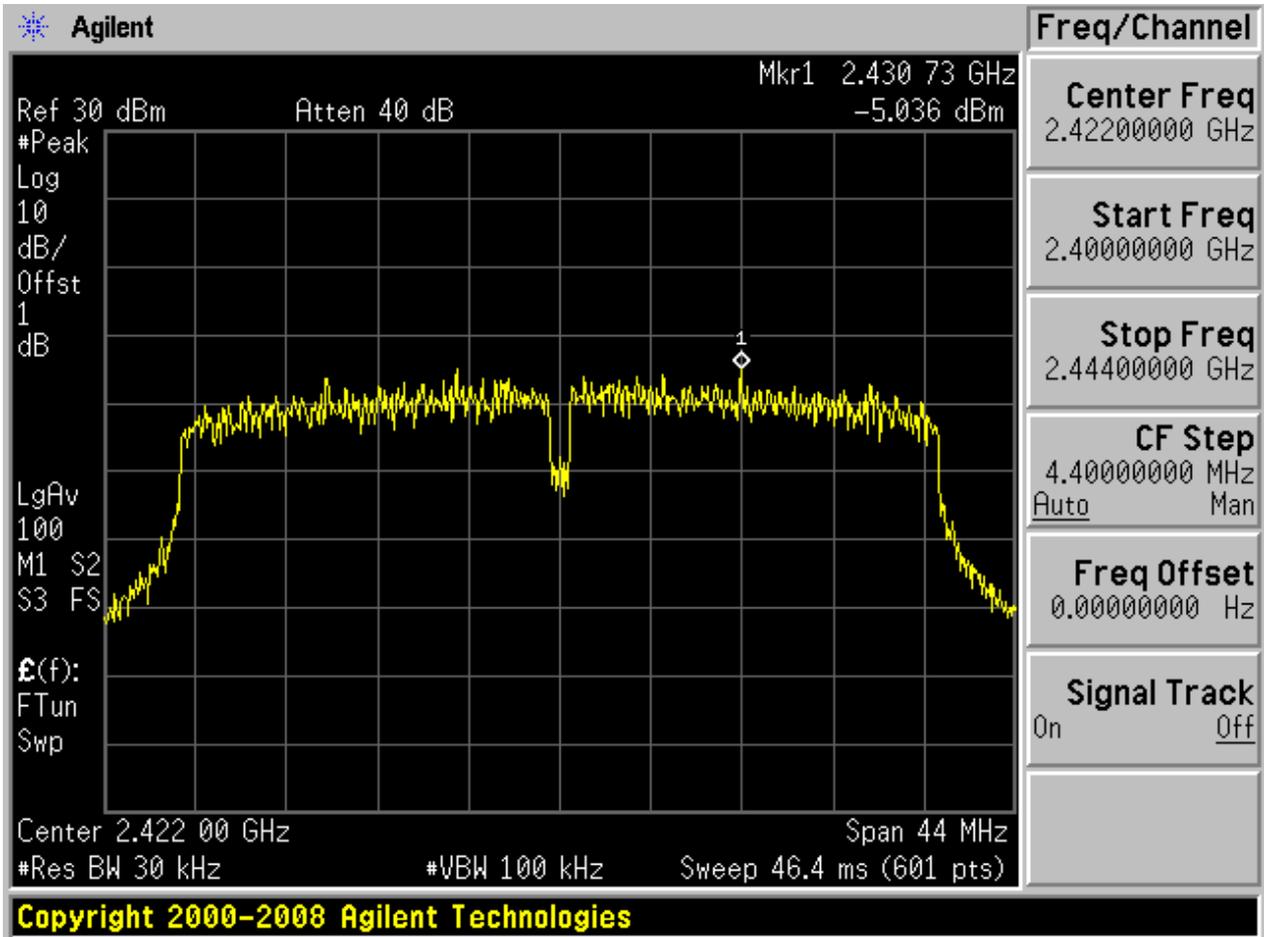




## 2.20 11N40\_L@BG2

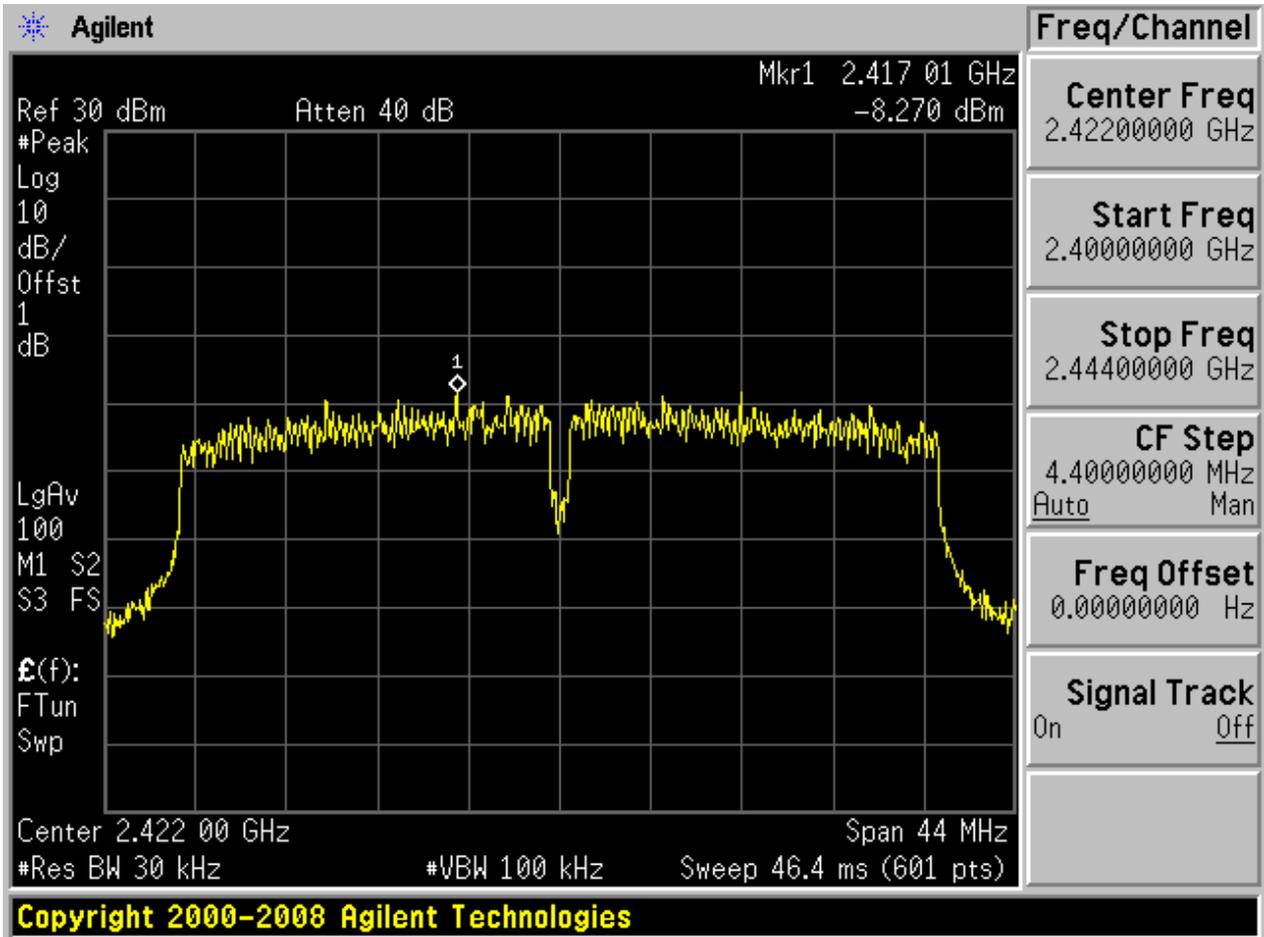




2.21 11N40\_M@BG1

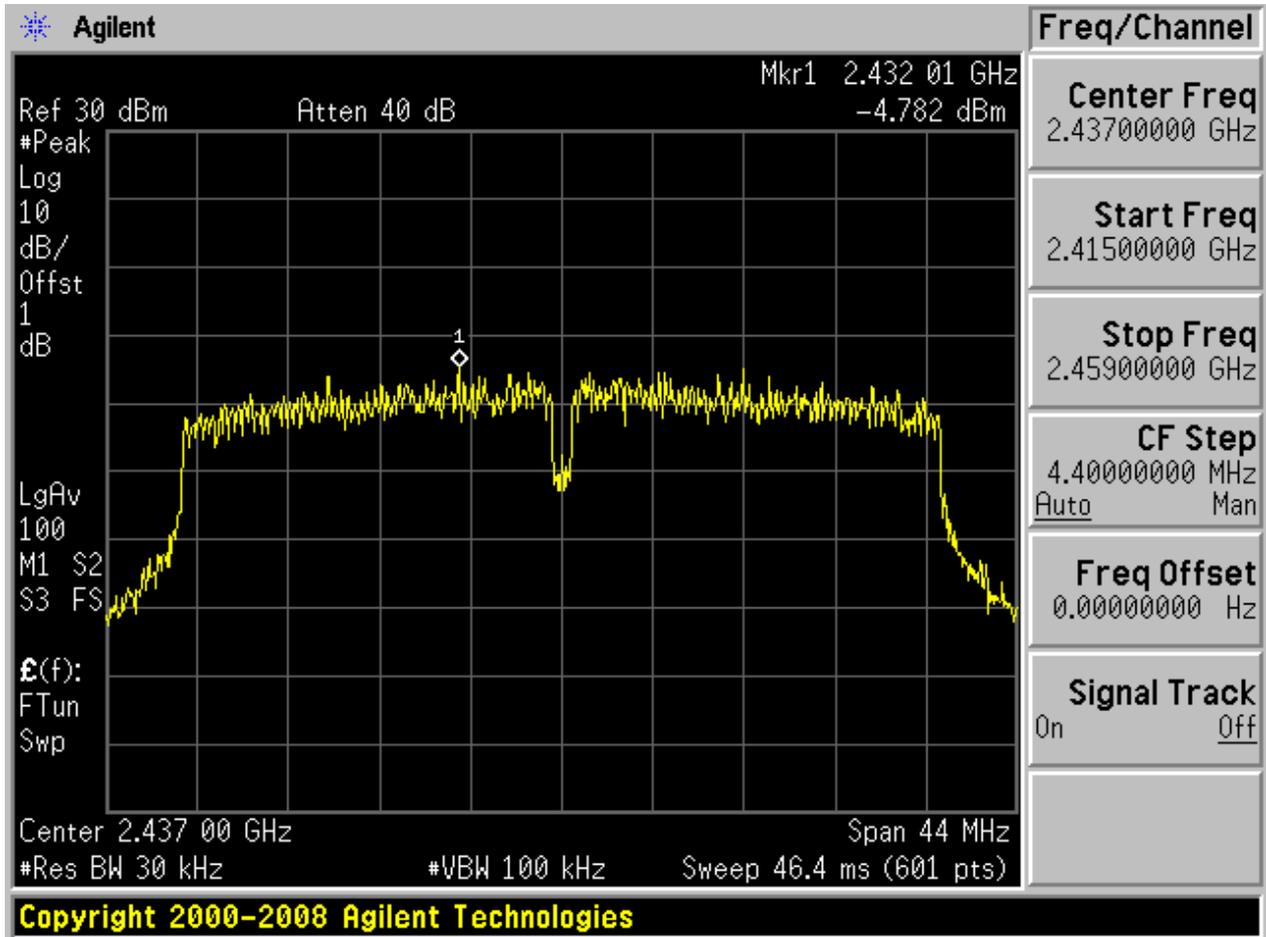




2.22 11N40\_M@BG2

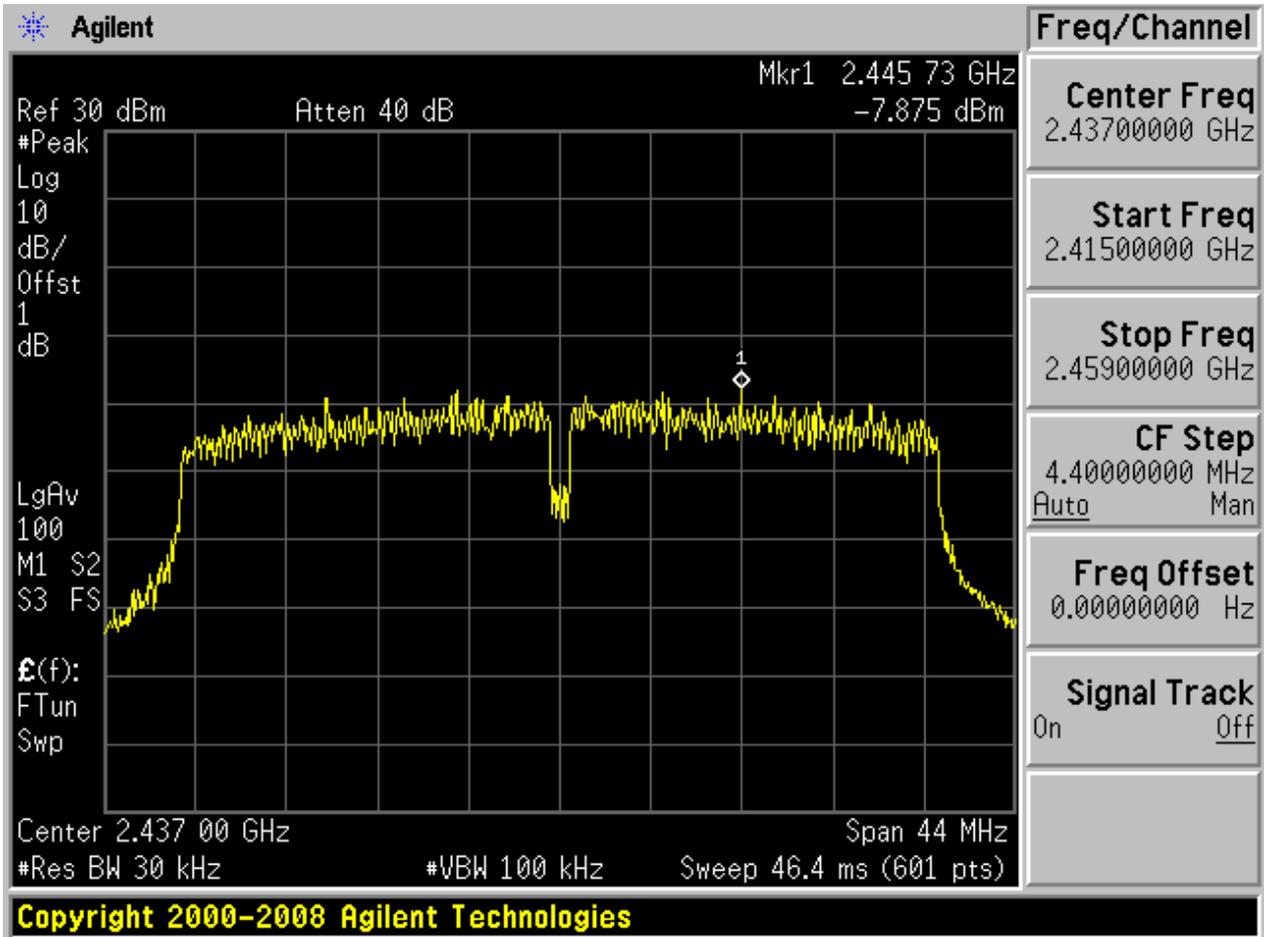


Copyright 2000-2008 Agilent Technologies

### 2.23 11N40\_H@BG1

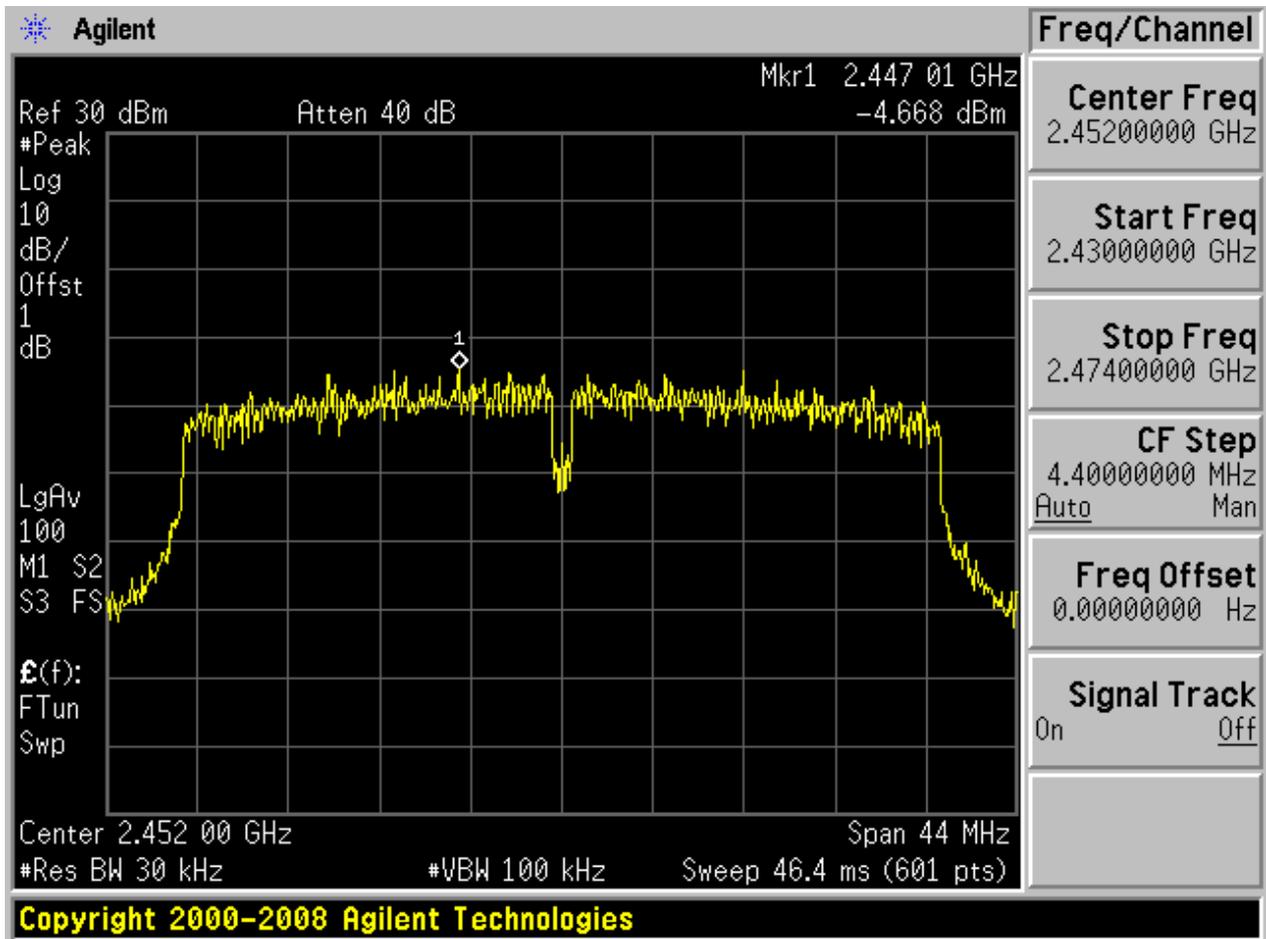



## 2.24 11N40\_H@BG2

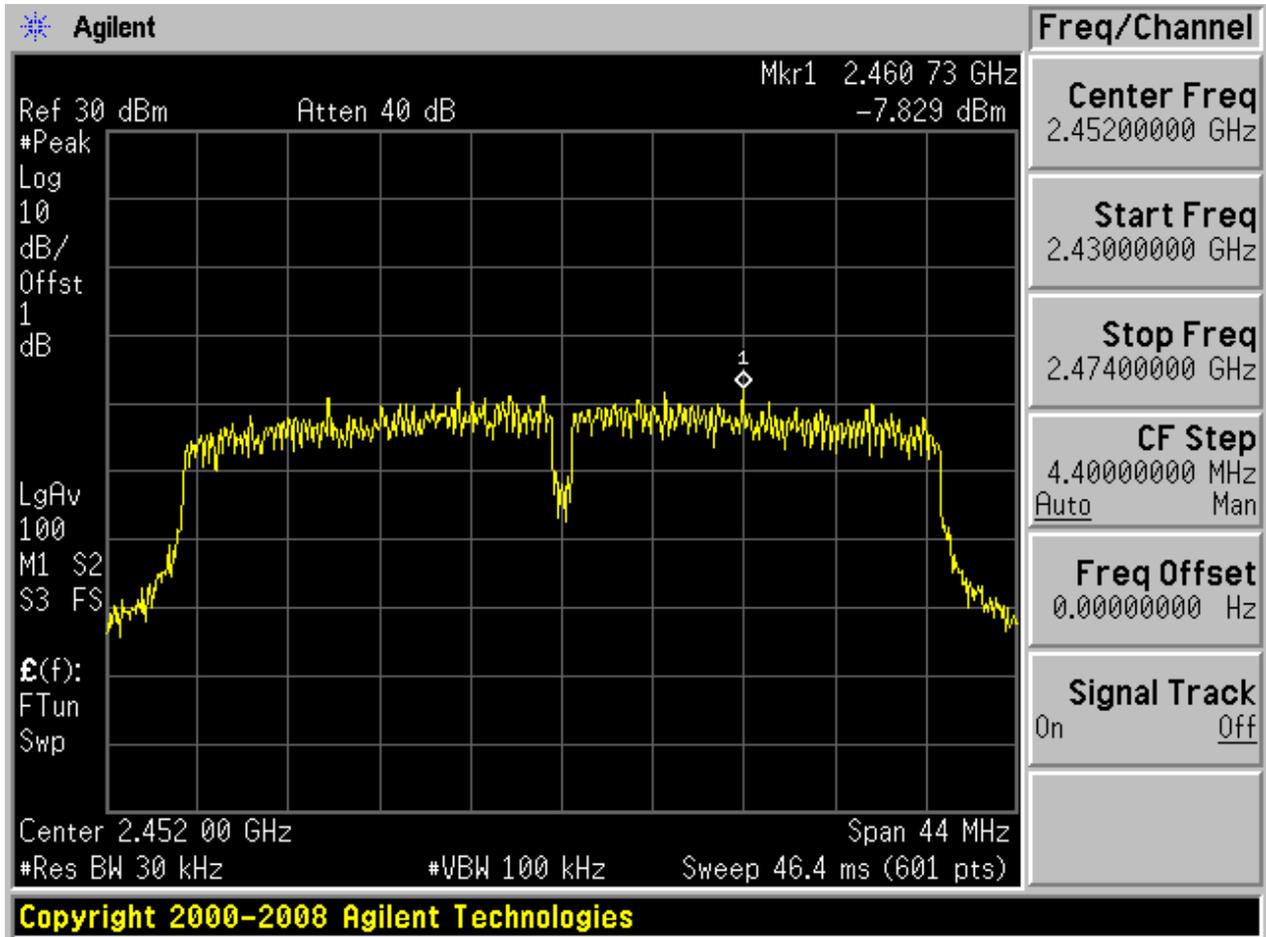


## Appendix D: Band Edges Compliance

### Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Power Mode	Carrier Power[dBm]	Max.Spurious Level[dBm]	Verdict
11B	L	2412	BG1	7.95	-39.49	pass
11B	L	2412	BG2	4.86	-46.83	pass
11B	H	2462	BG1	8.03	-43.46	pass
11B	H	2462	BG2	5.92	-36.30	pass
11G	L	2412	BG1	3.92	-42.35	pass
11G	L	2412	BG2	0.04	-31.96	pass
11G	H	2462	BG1	4.61	-36.94	pass
11G	H	2462	BG2	0.85	-32.62	pass
11N20	L	2412	BG1	4.35	-33.27	pass
11N20	L	2412	BG2	-0.41	-33.58	pass
11N20	H	2462	BG1	4.88	-36.70	pass
11N20	H	2462	BG2	0.20	-41.55	pass
11N40	L	2422	BG1	-0.49	-38.52	pass
11N40	L	2422	BG2	-3.87	-38.10	pass
11N40	H	2452	BG1	-0.27	-43.90	pass
11N40	H	2452	BG2	-3.26	-36.62	pass


## Part II - Test Plots

### 2.1 11B\_L@BG1

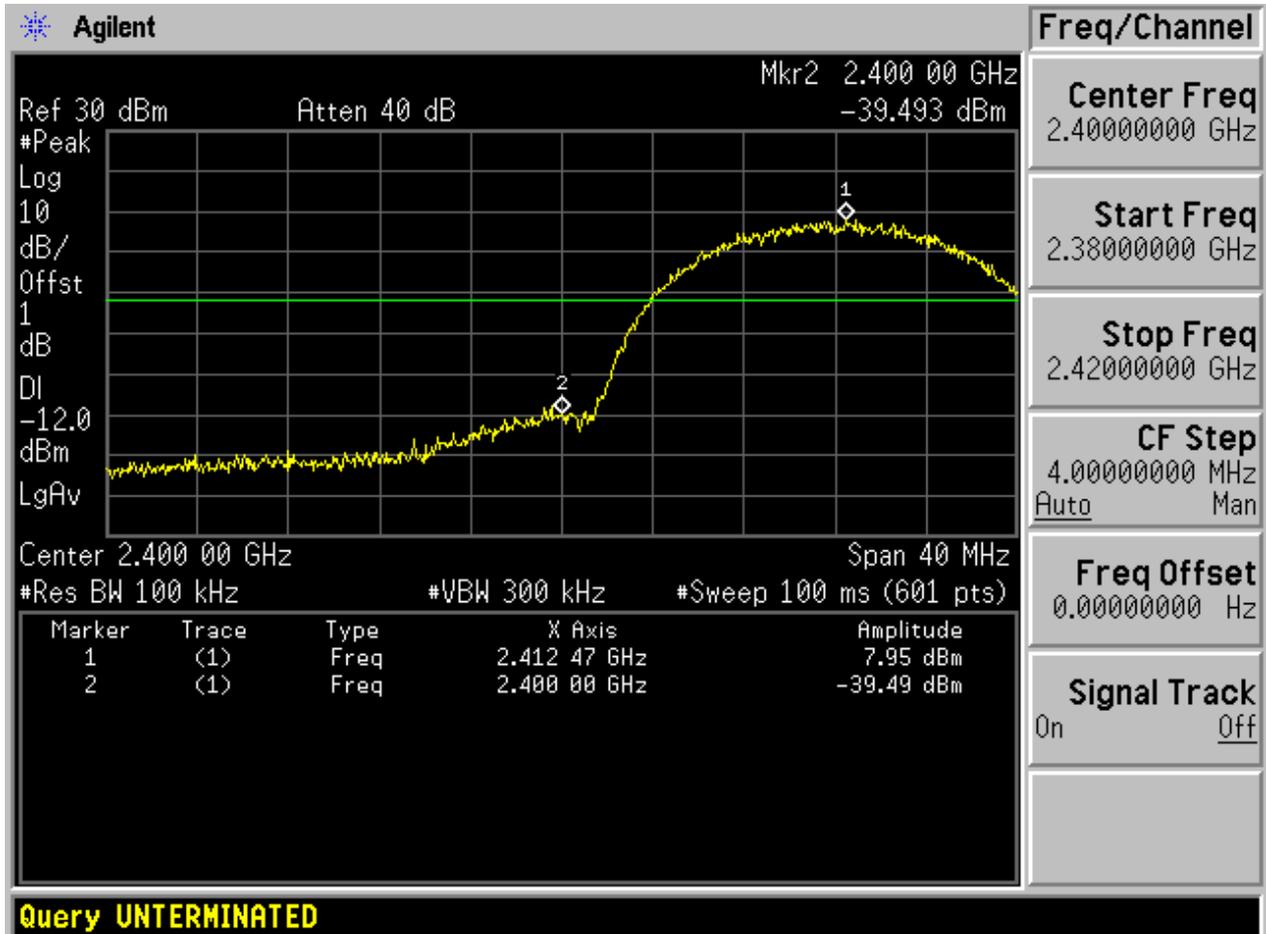





## 2.2 11B\_L@BG2

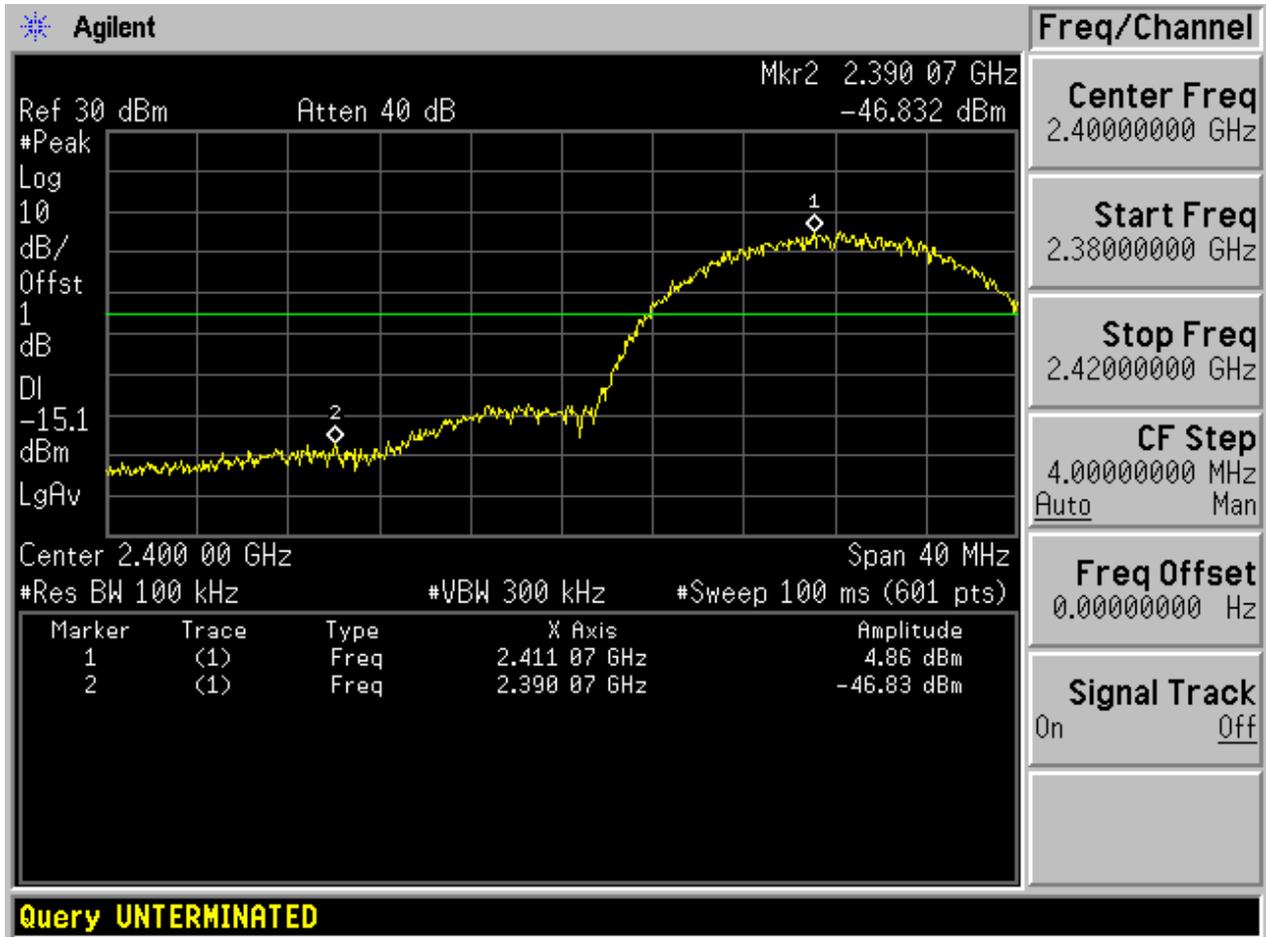

### 2.3 11B\_H@BG1

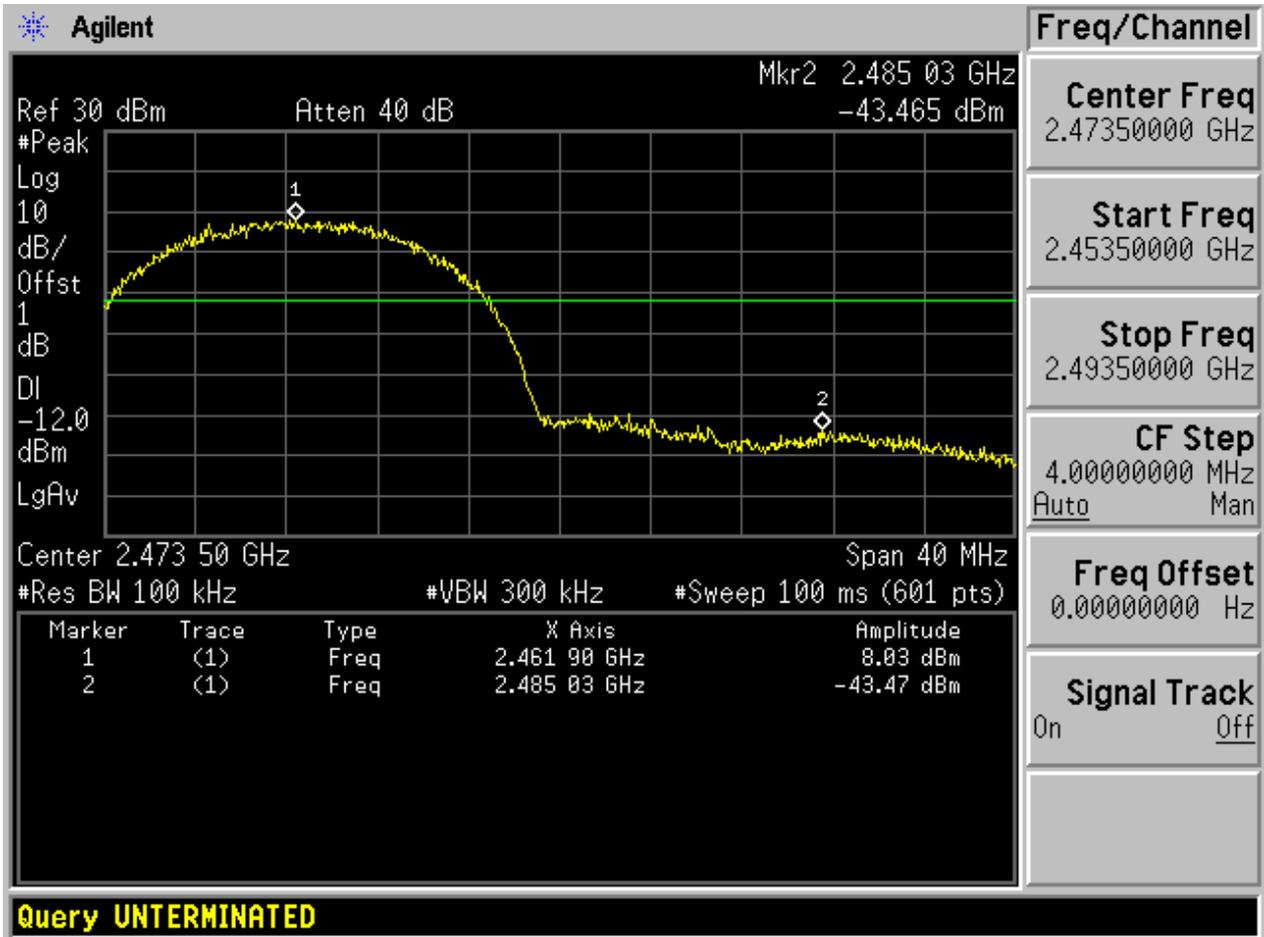


### 2.4 11B\_H@BG2

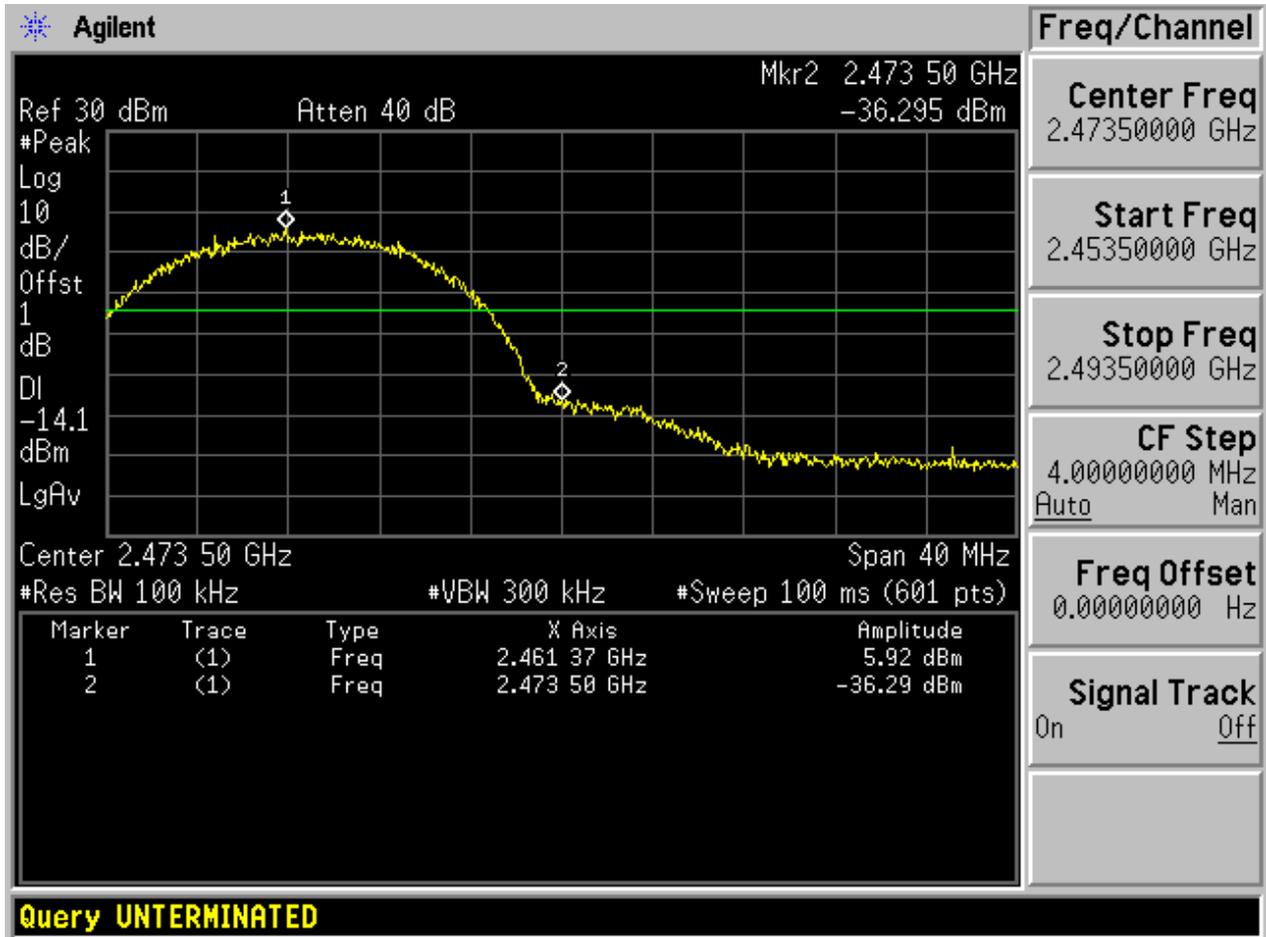





2.5 11G\_L@BG1

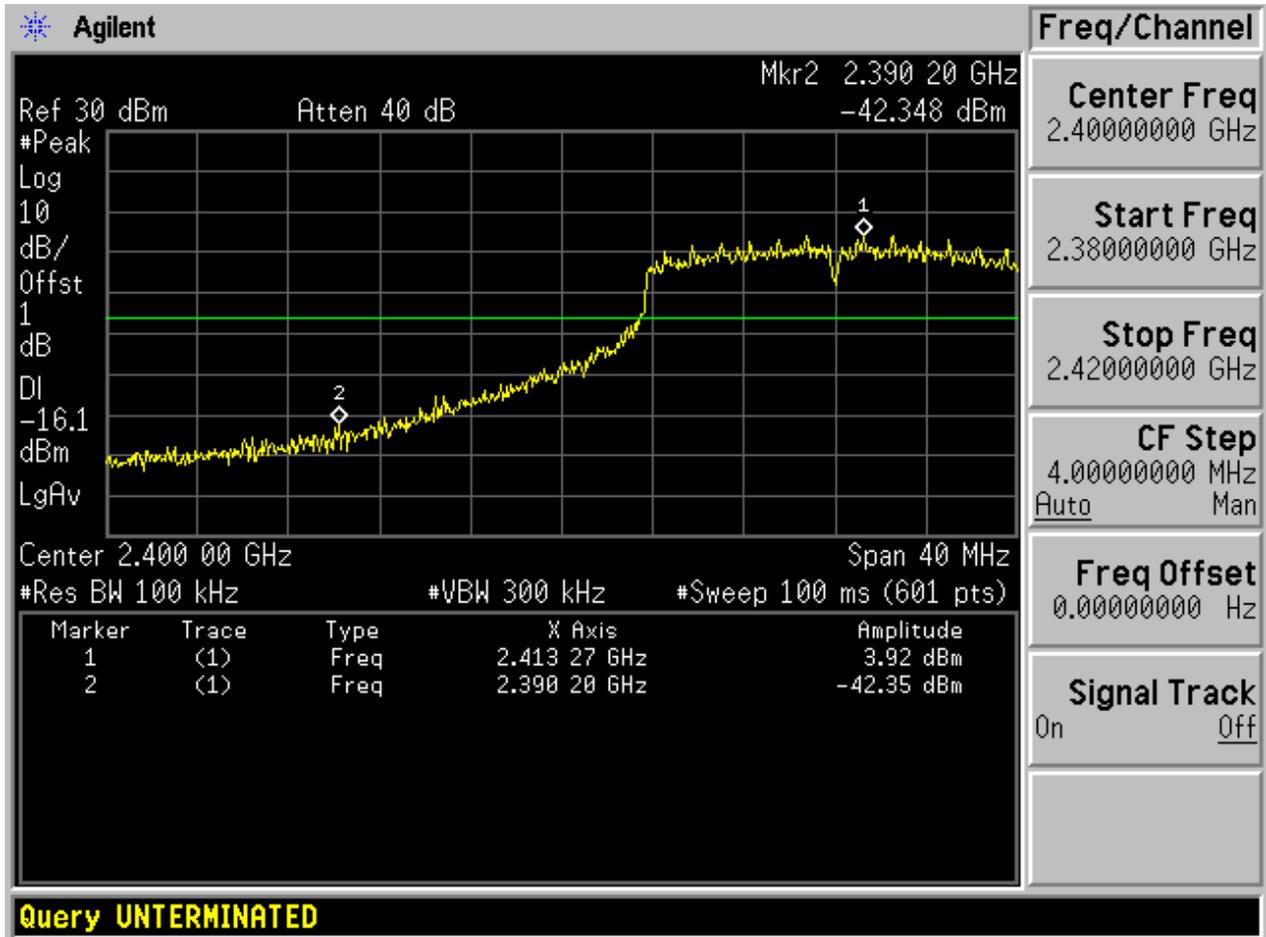


## 2.6 11G\_L@BG2

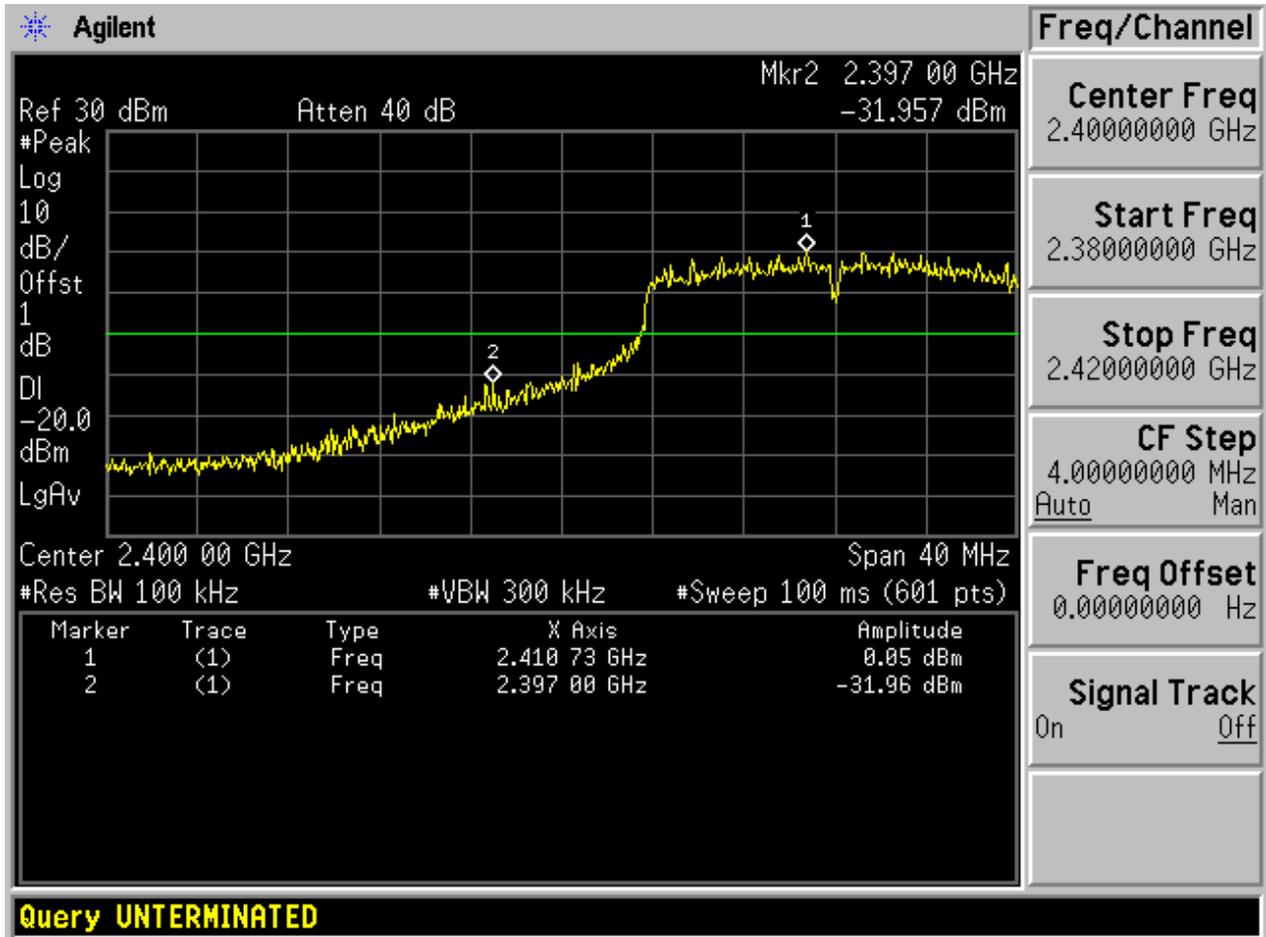


### 2.7 11G\_H@BG1

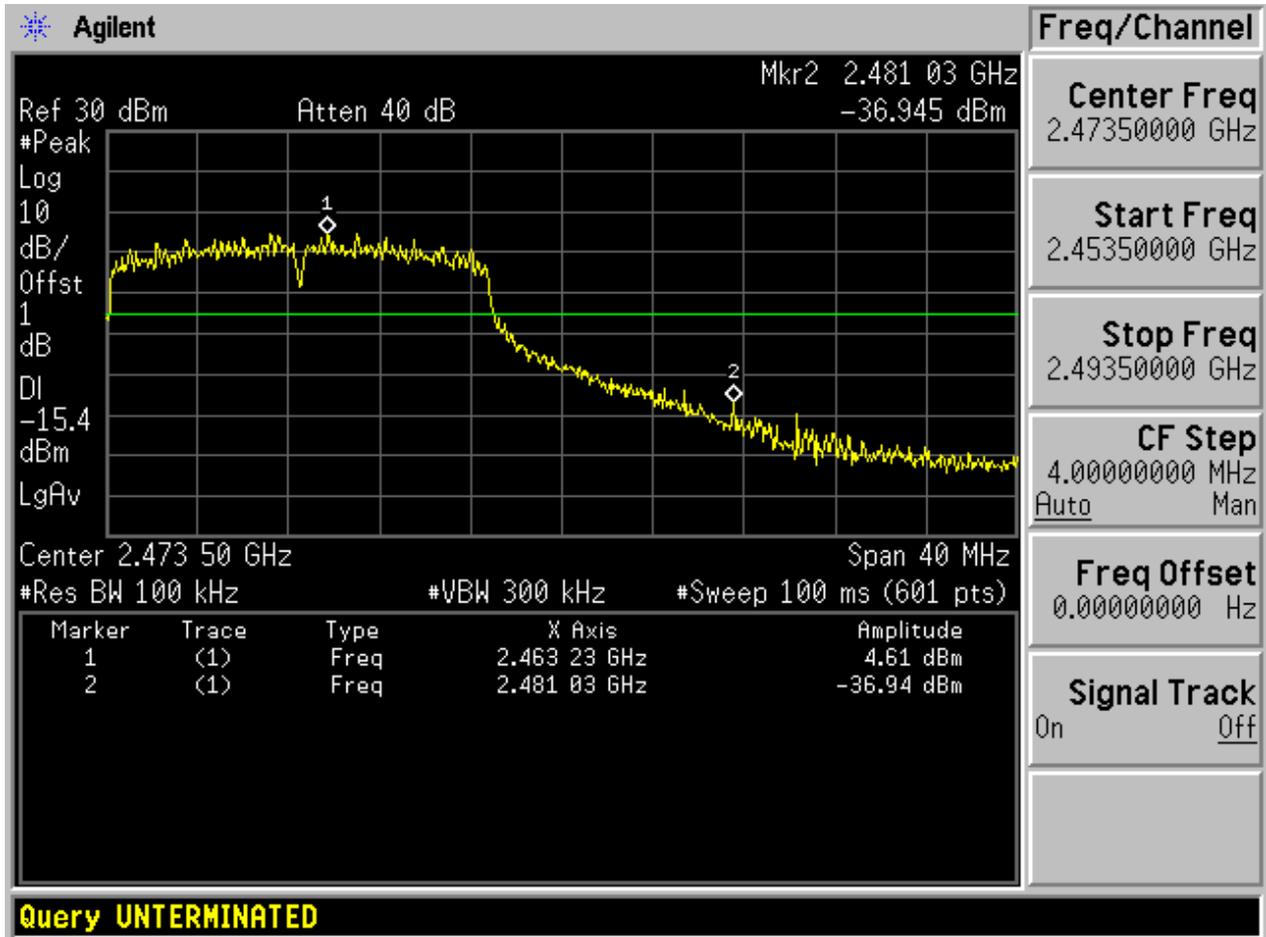


### 2.8 11G\_H@BG2

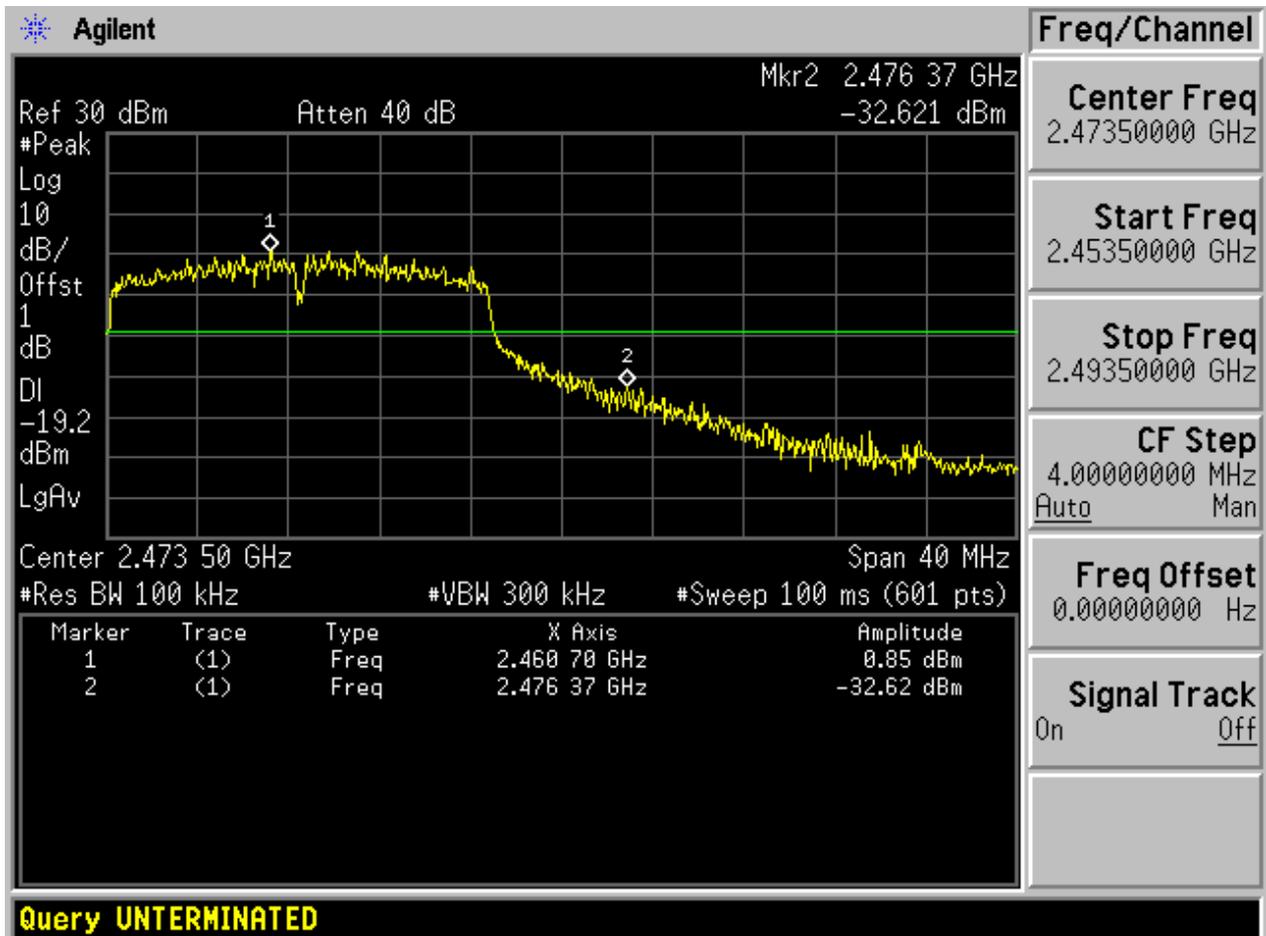


### 2.9 11N20\_L@BG1

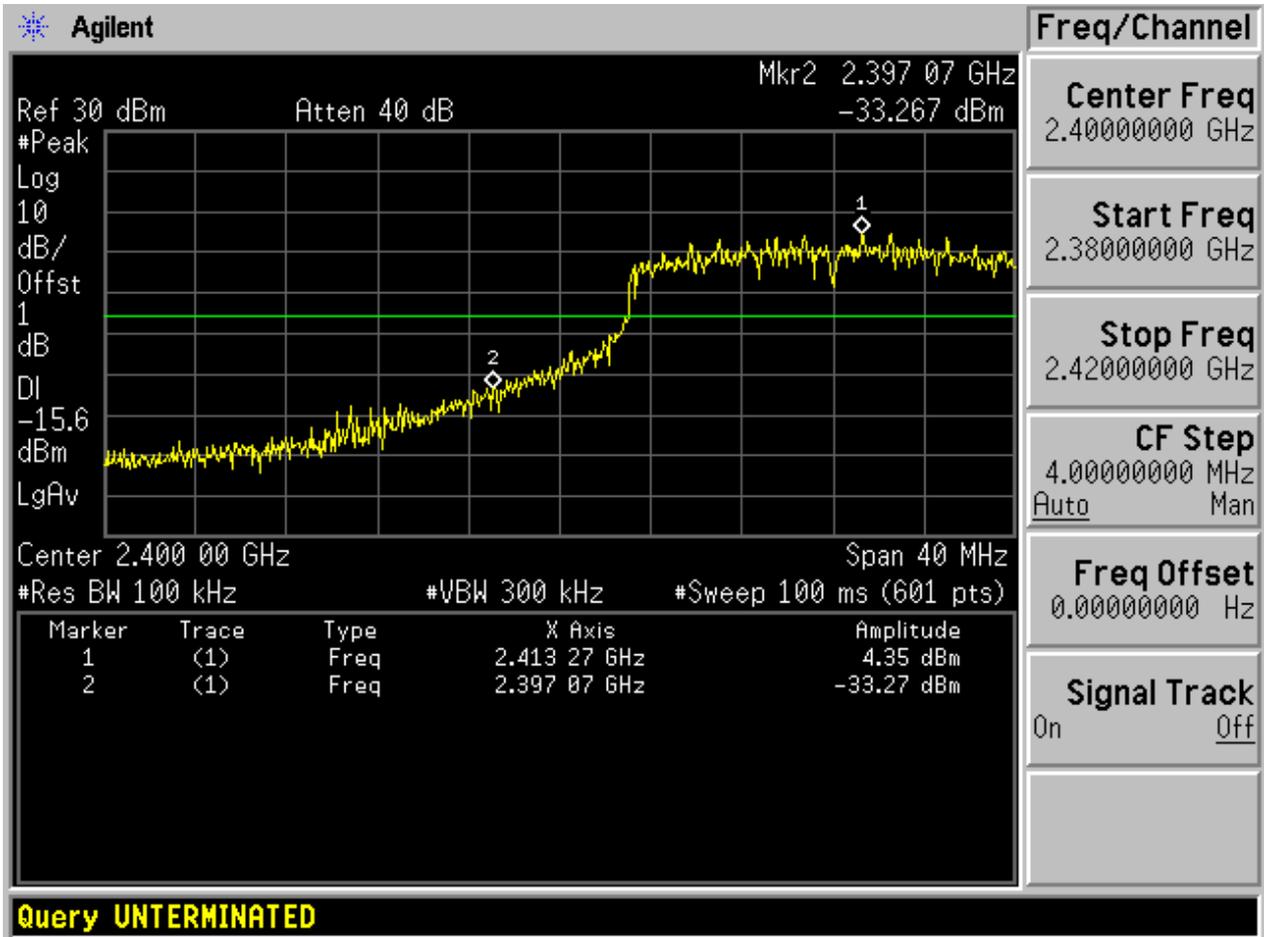

### 2.10 11N20\_L@BG2

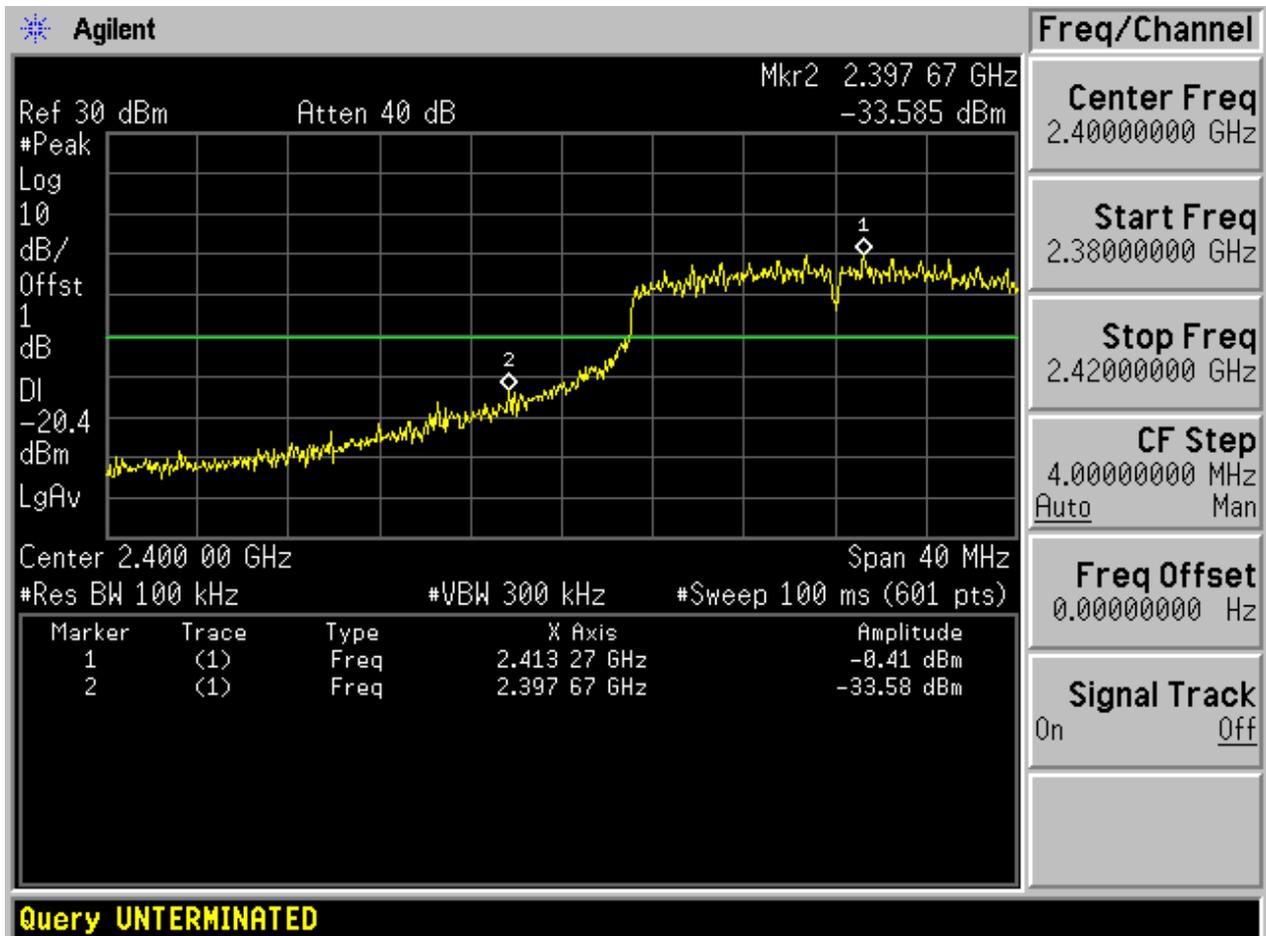


### 2.11 11N20\_H@BG1

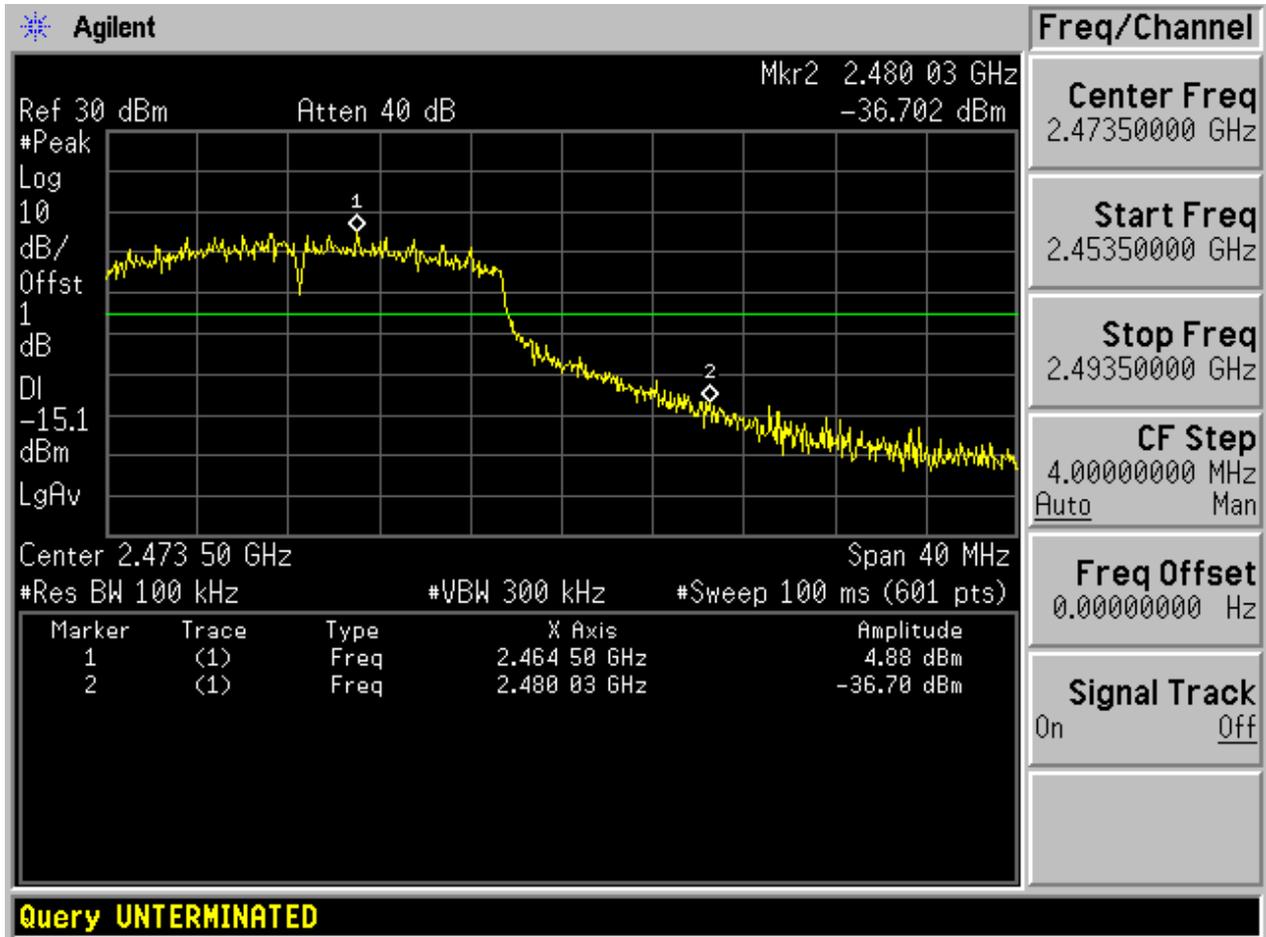





### 2.13 11N40\_L@BG1

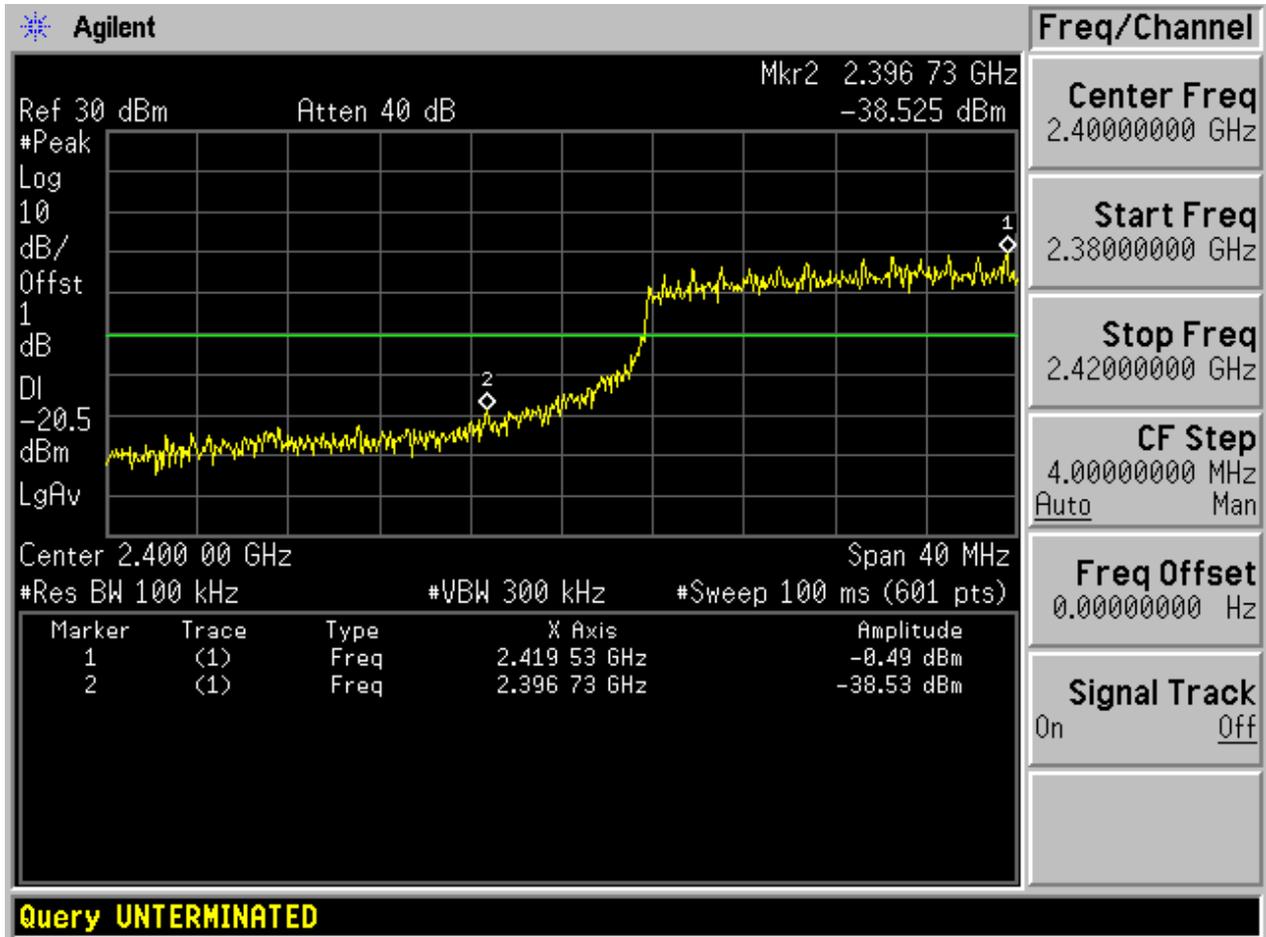

2.14 11N40\_L@BG2

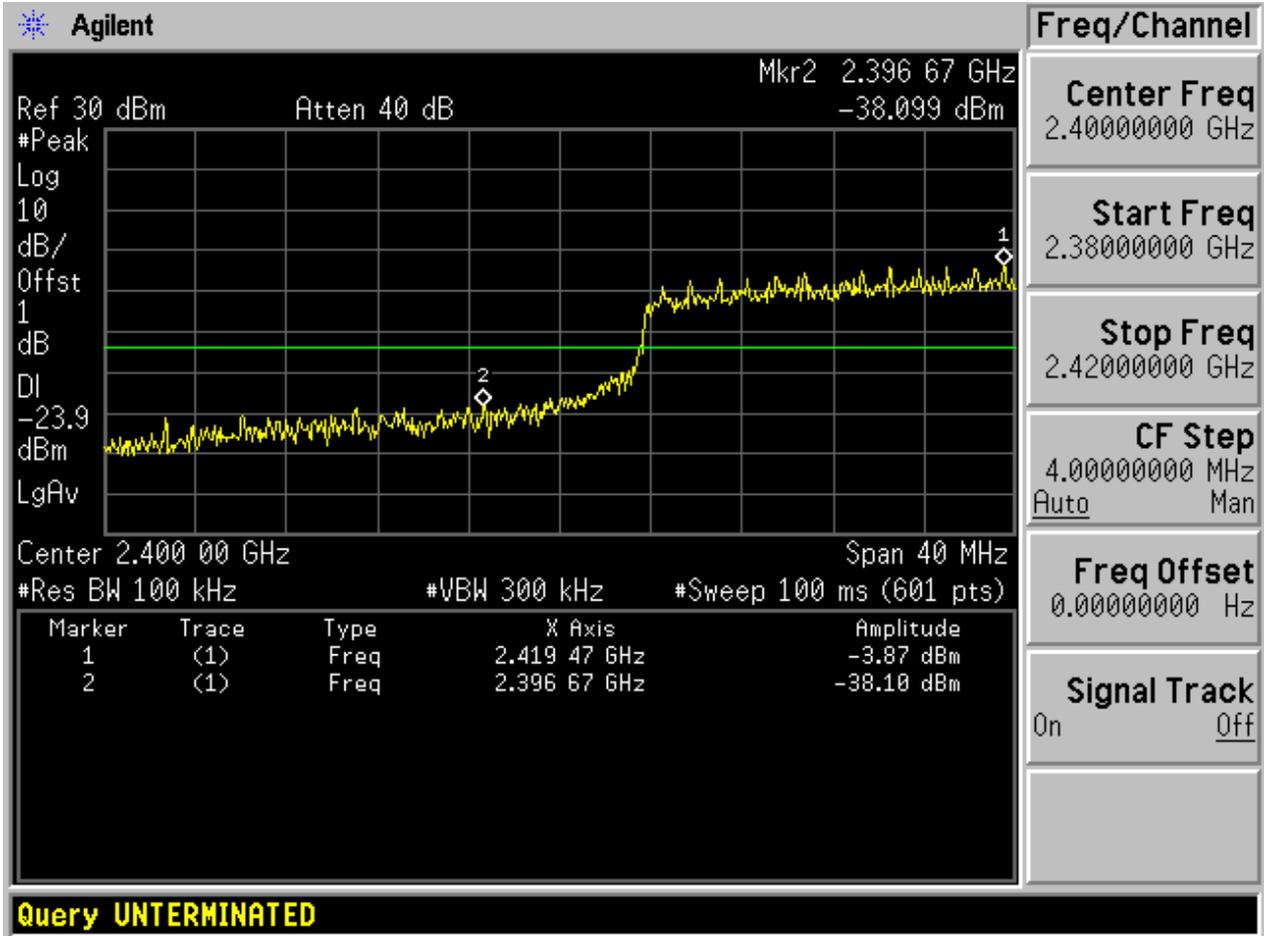

### 2.15 11N40\_H@BG1

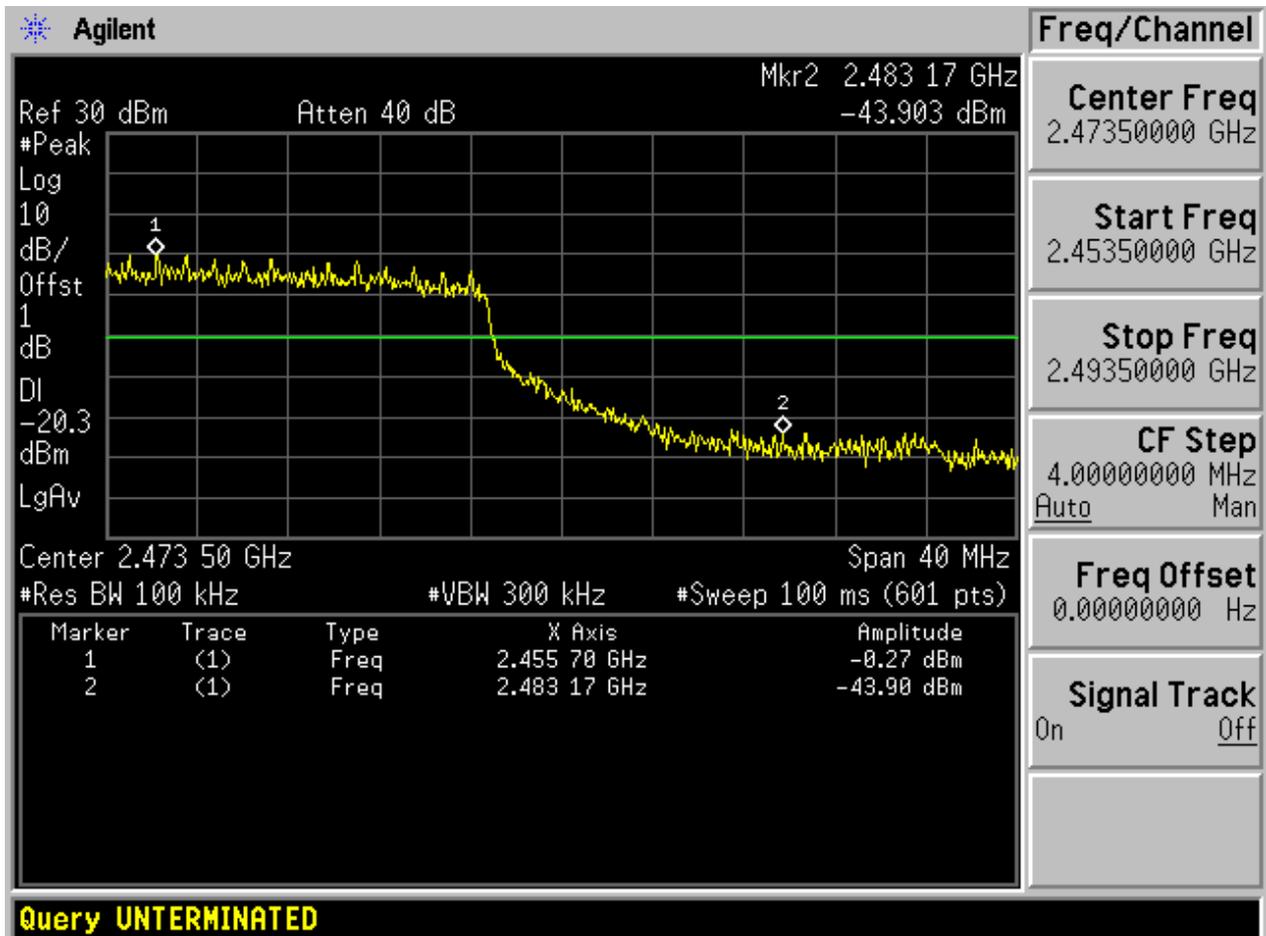



## Appendix E: Unwanted Emissions into Non-Restricted Frequency Bands

In this Appendix, the "Pref", which is used as the reference level, refers to the peak power level in any 100 kHz bandwidth within the fundamental emission, the "Puw" refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW [kHz]})$ . As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain and used as respective results for each chain, due to the relative-limit requirement.

In the result table, the "< Limit" denotes that "The Puw [dBm] is less than Pref[dBm]-20[dBm], see test plots for detailed".

### Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Power Mode	Pref[dBm]	Puw[dBm]	Verdict
11B	L	2412	Ant 1	9.08	<limit	pass
11B	L	2412	Ant 2	6.01	<limit	pass
11B	M	2437	Ant 1	9.64	<limit	pass
11B	M	2437	Ant 2	6.37	<limit	pass
11B	H	2462	Ant 1	9.51	<limit	pass
11B	H	2462	Ant 2	6.15	<limit	pass
11G	L	2412	Ant 1	4.67	<limit	pass
11G	L	2412	Ant 2	0.81	<limit	pass
11G	M	2437	Ant 1	5.35	<limit	pass
11G	M	2437	Ant 2	1.26	<limit	pass
11G	H	2462	Ant 1	5.36	<limit	pass
11G	H	2462	Ant 2	1.63	<limit	pass
11N20	L	2412	Ant 1	5.24	<limit	pass
11N20	L	2412	Ant 2	0.17	<limit	pass



---

---


11N20	M	2437	Ant 1	5.86	<limit	pass
11N20	M	2437	Ant 2	0.79	<limit	pass
11N20	H	2462	Ant 1	5.79	<limit	pass
11N20	H	2462	Ant 2	0.90	<limit	pass
11N40	L	2422	Ant 1	0.00	<limit	pass
11N40	L	2422	Ant 2	-3.29	<limit	pass
11N40	M	2437	Ant 1	0.23	<limit	pass
11N40	M	2437	Ant 2	-2.92	<limit	pass
11N40	H	2452	Ant 1	0.29	<limit	pass
11N40	H	2452	Ant 2	-2.85	<limit	pass



## Part II - Test Plots


### 2.1 11B\_L@BG1


Pref:

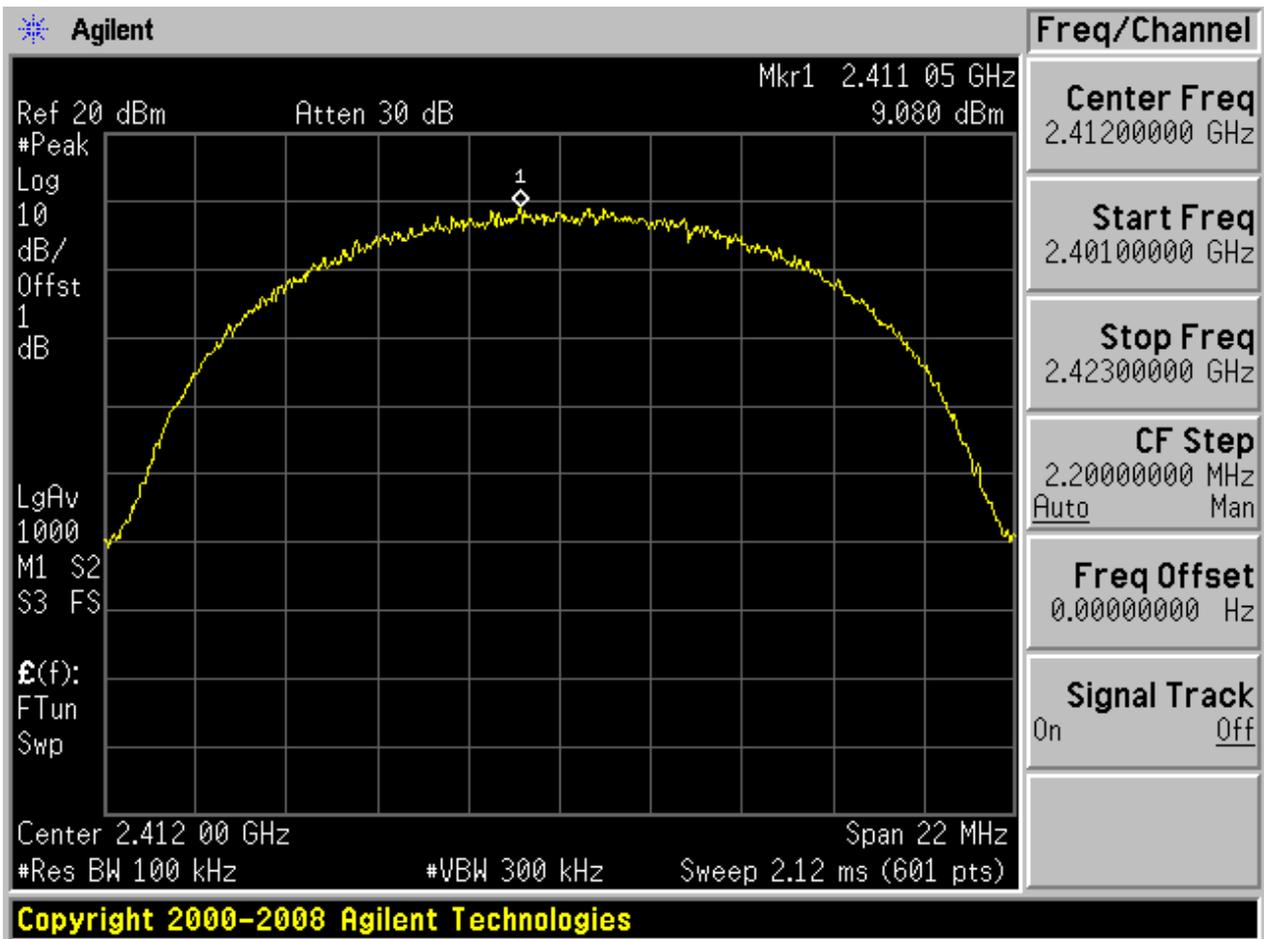





Puw:

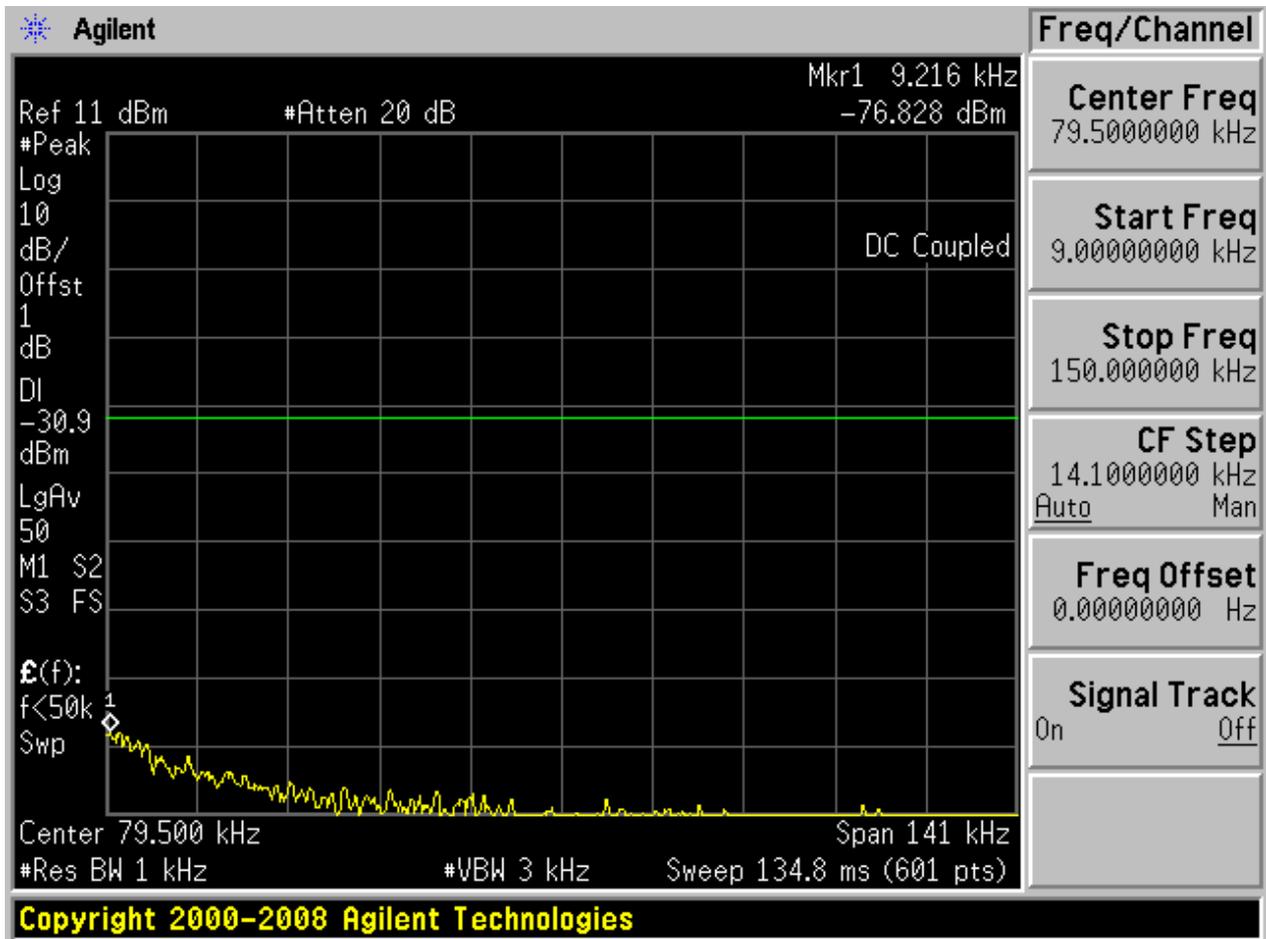


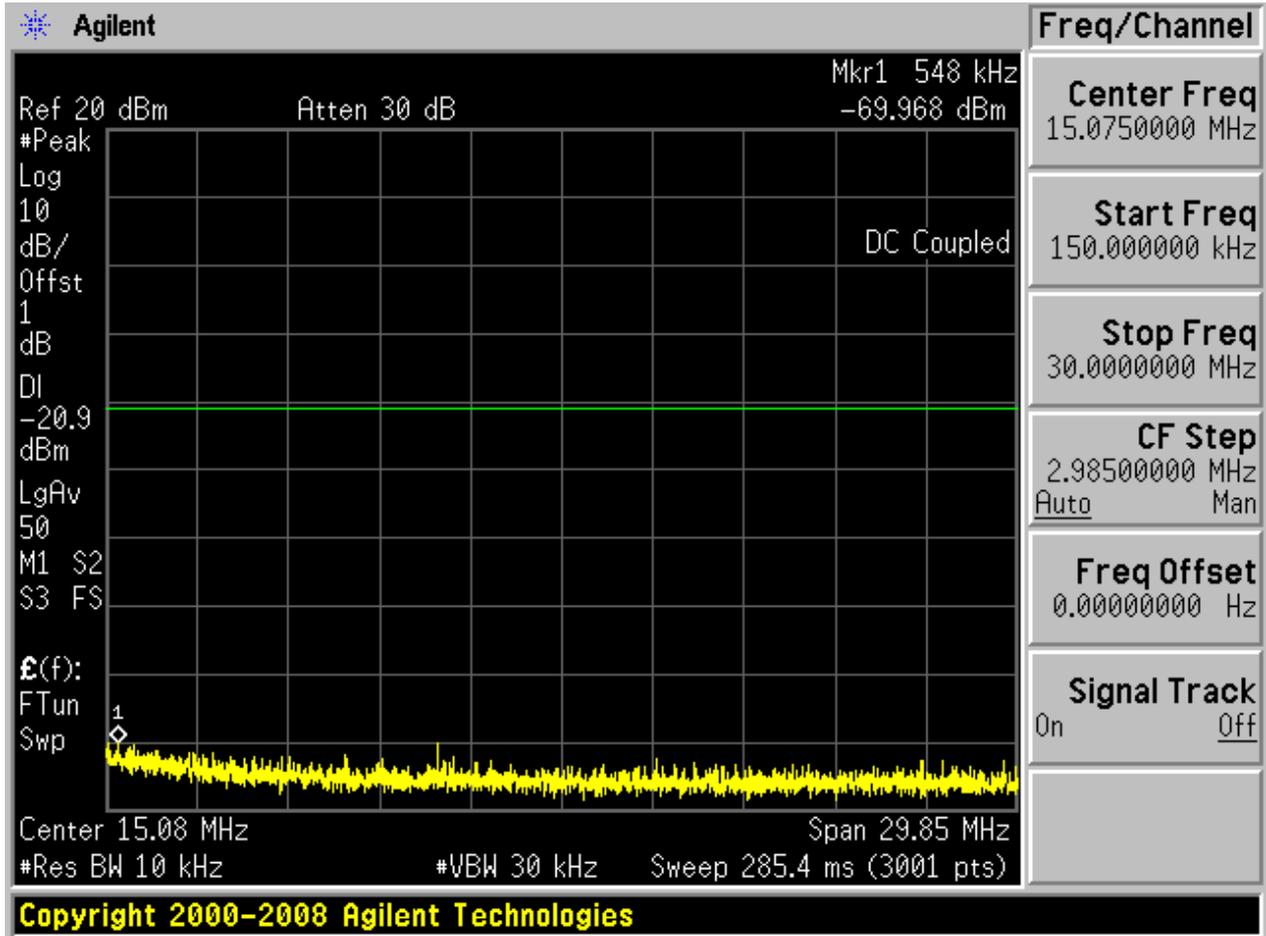



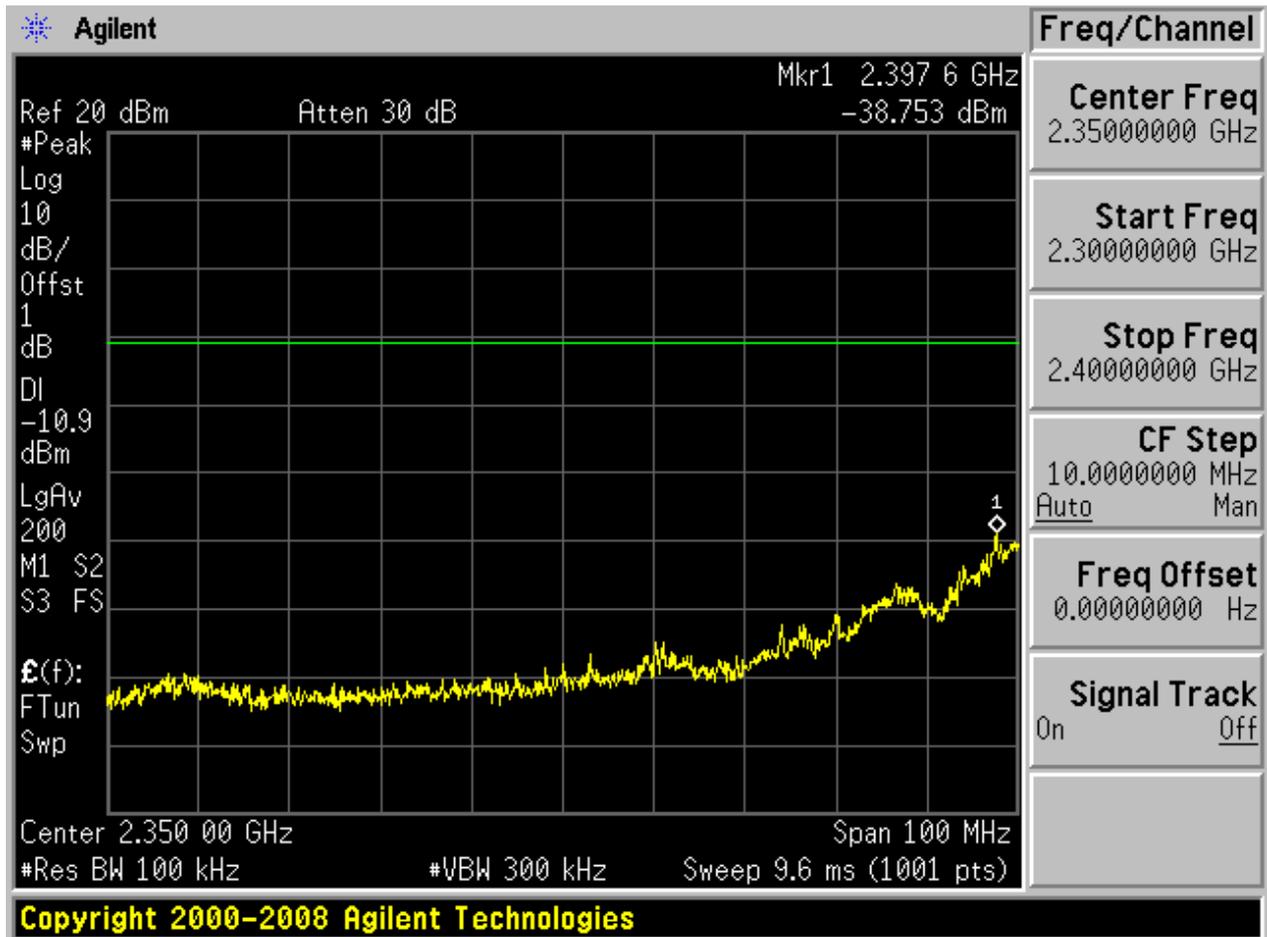

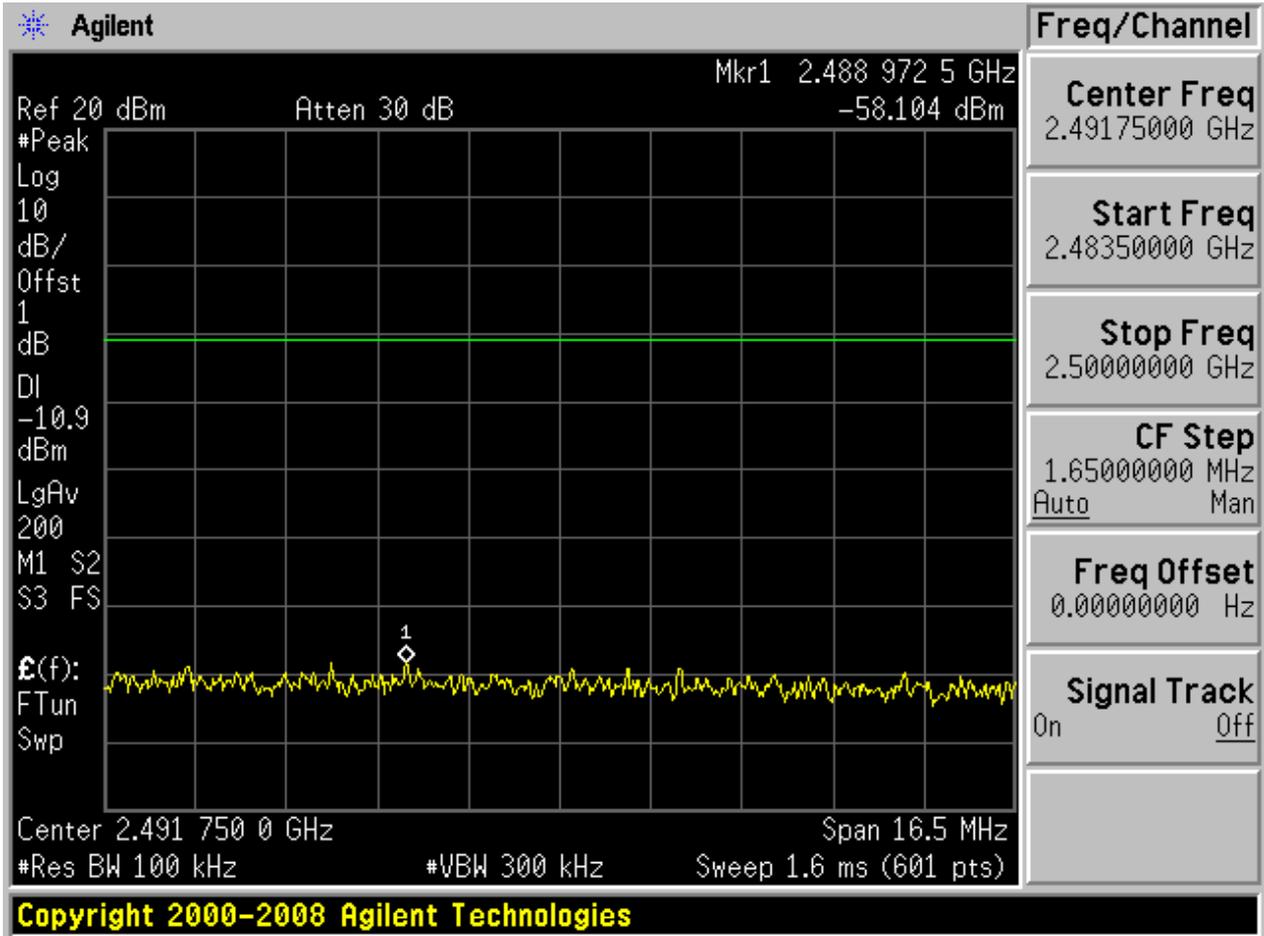


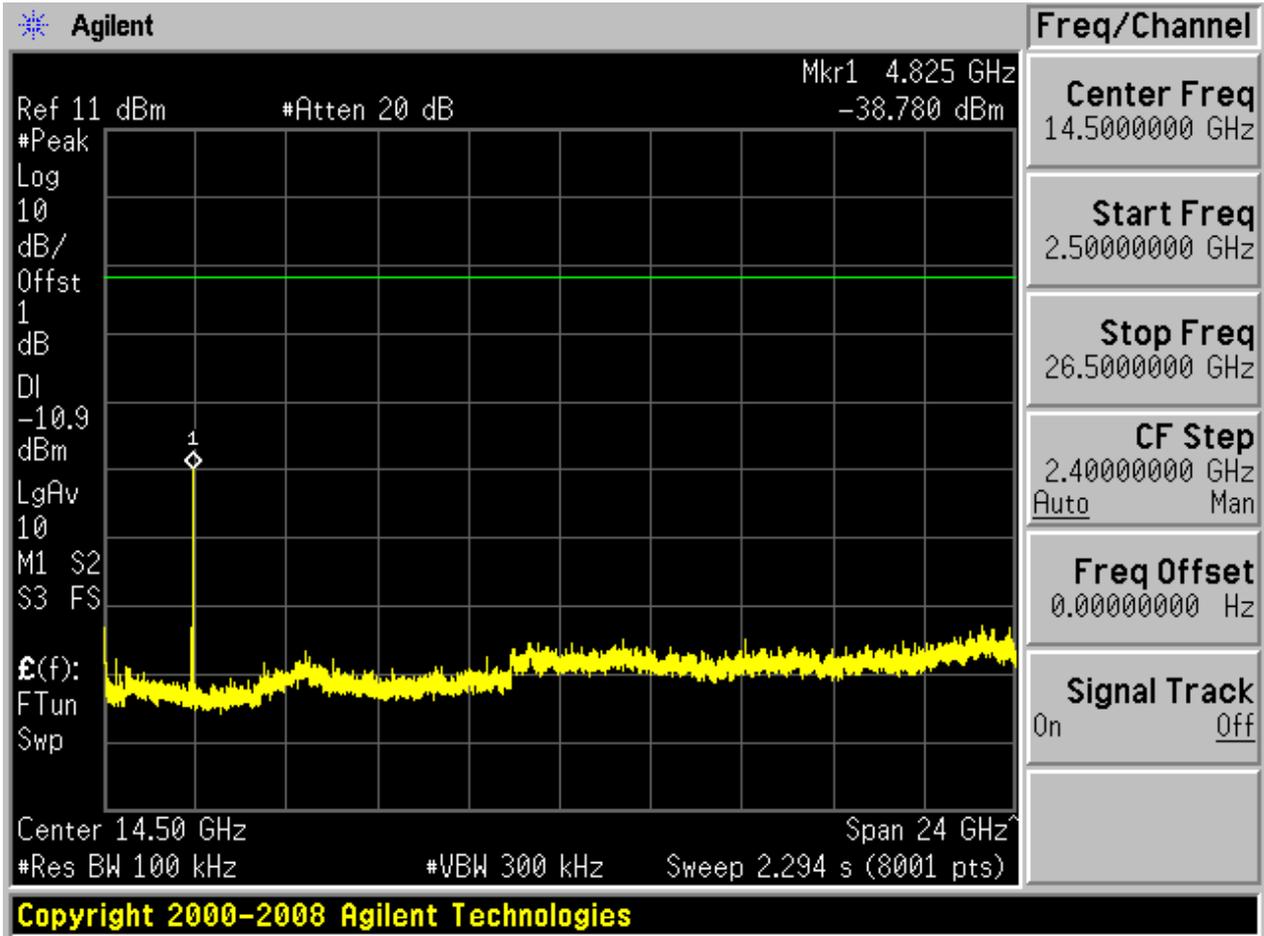




## 2.2 11B\_L@BG2

Pref:

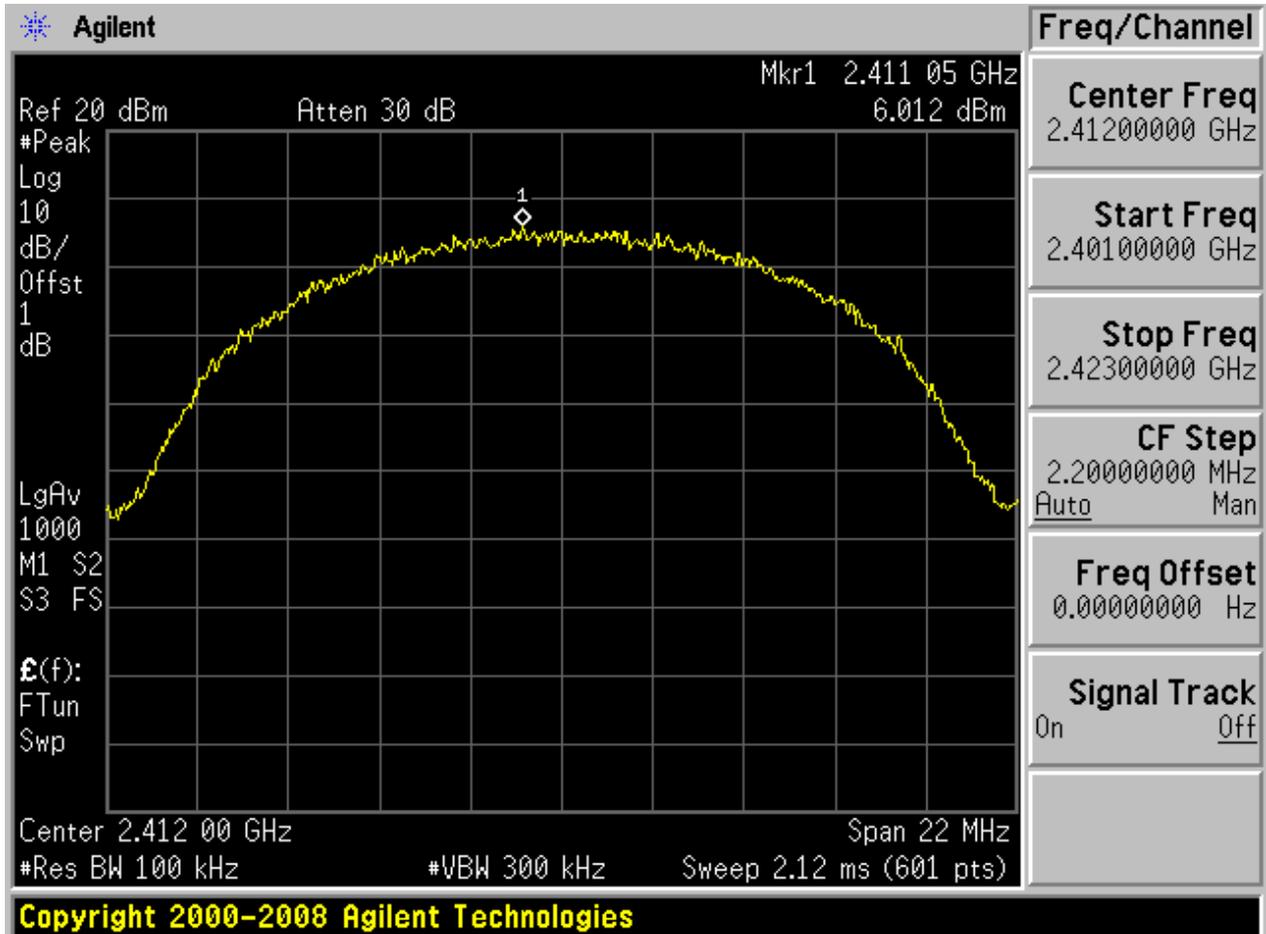






Puw:

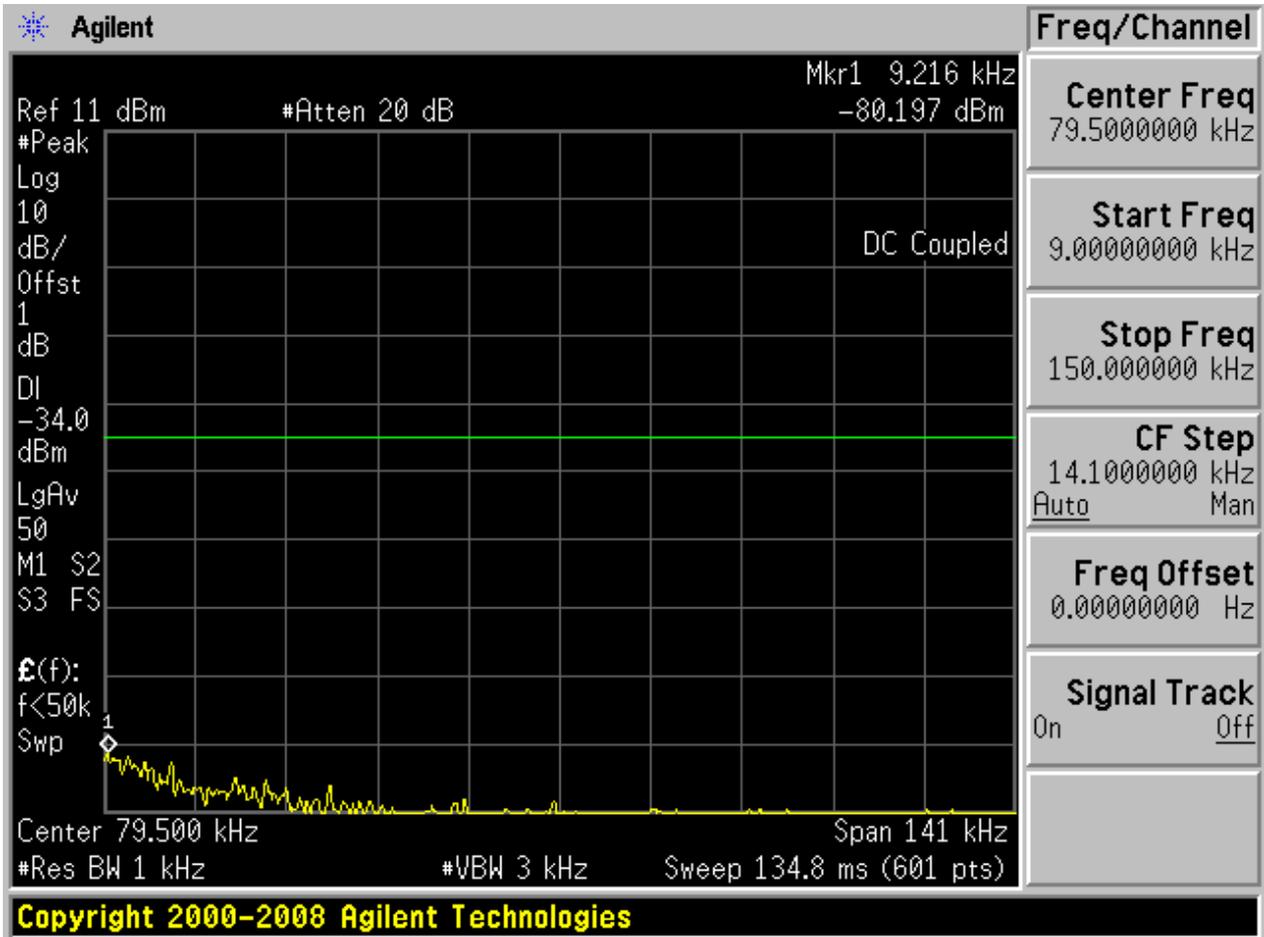




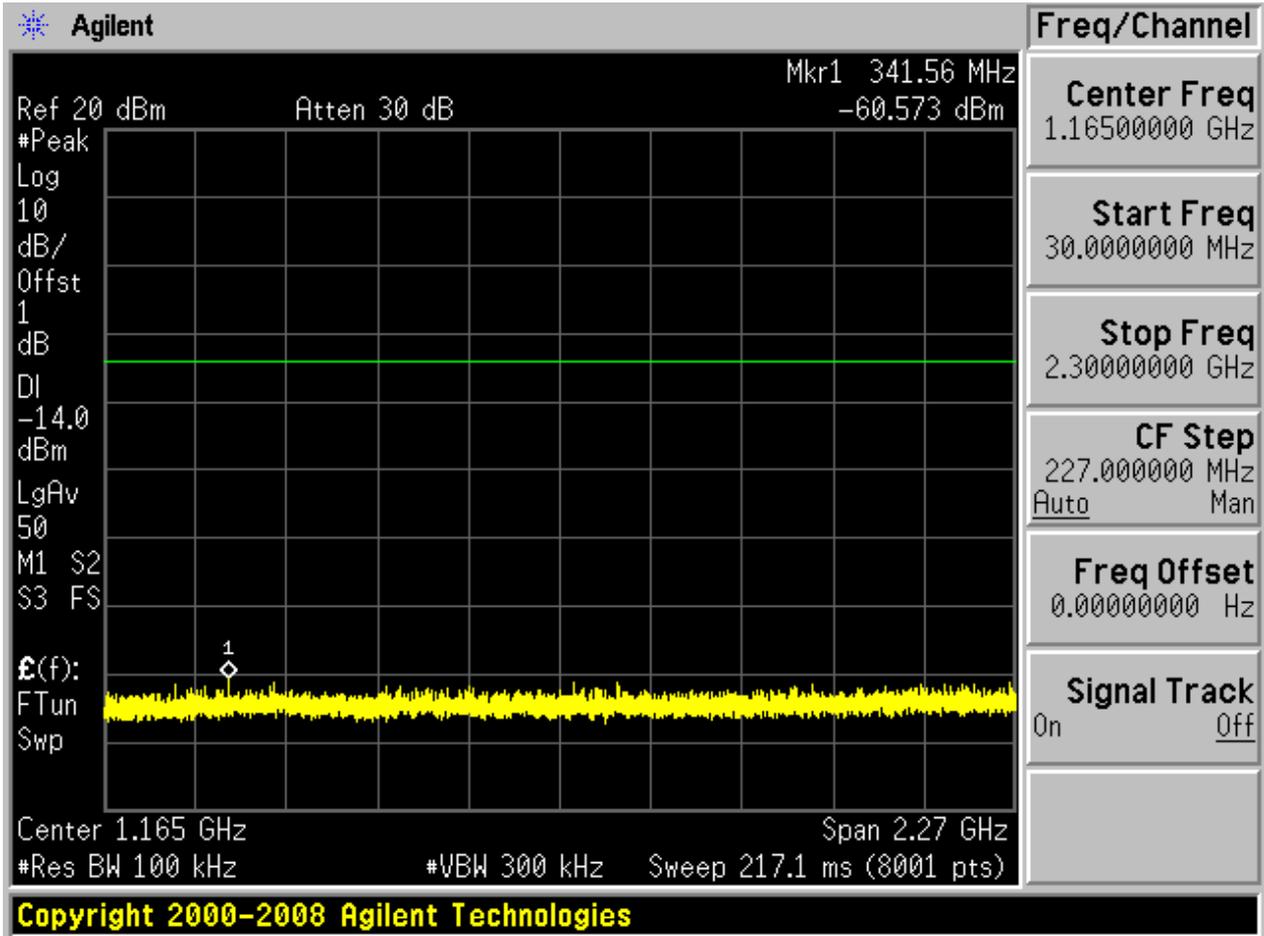

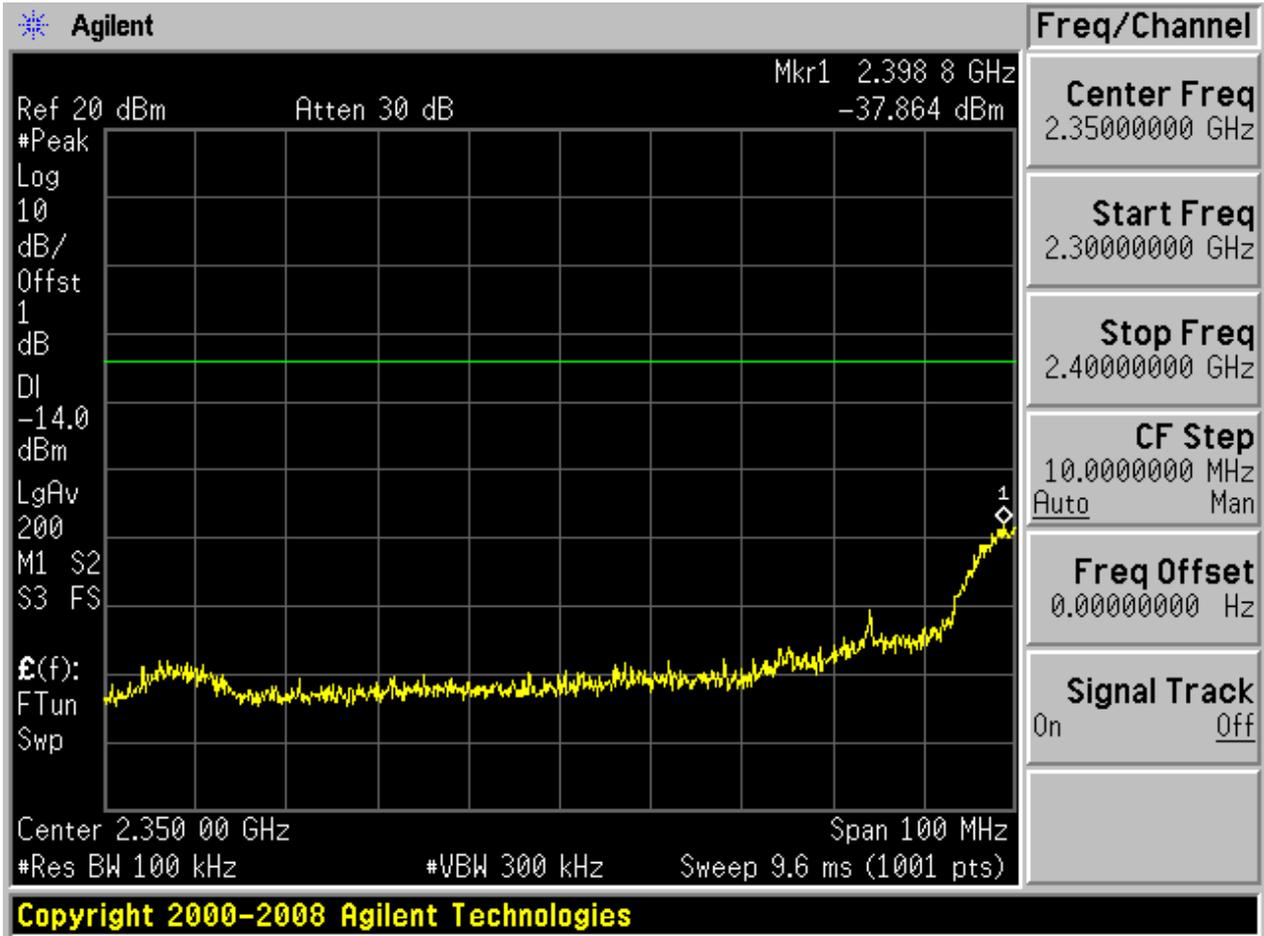

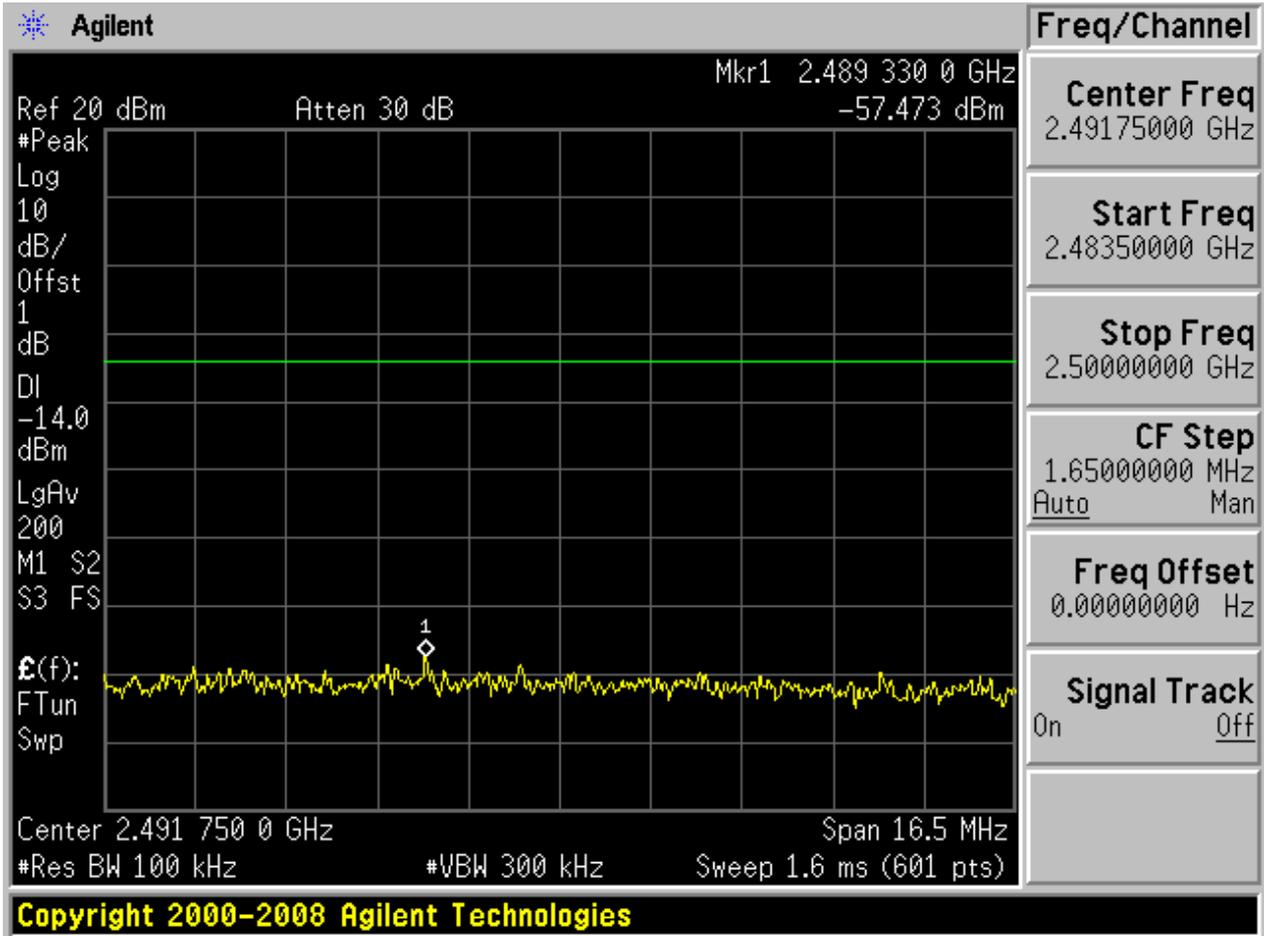


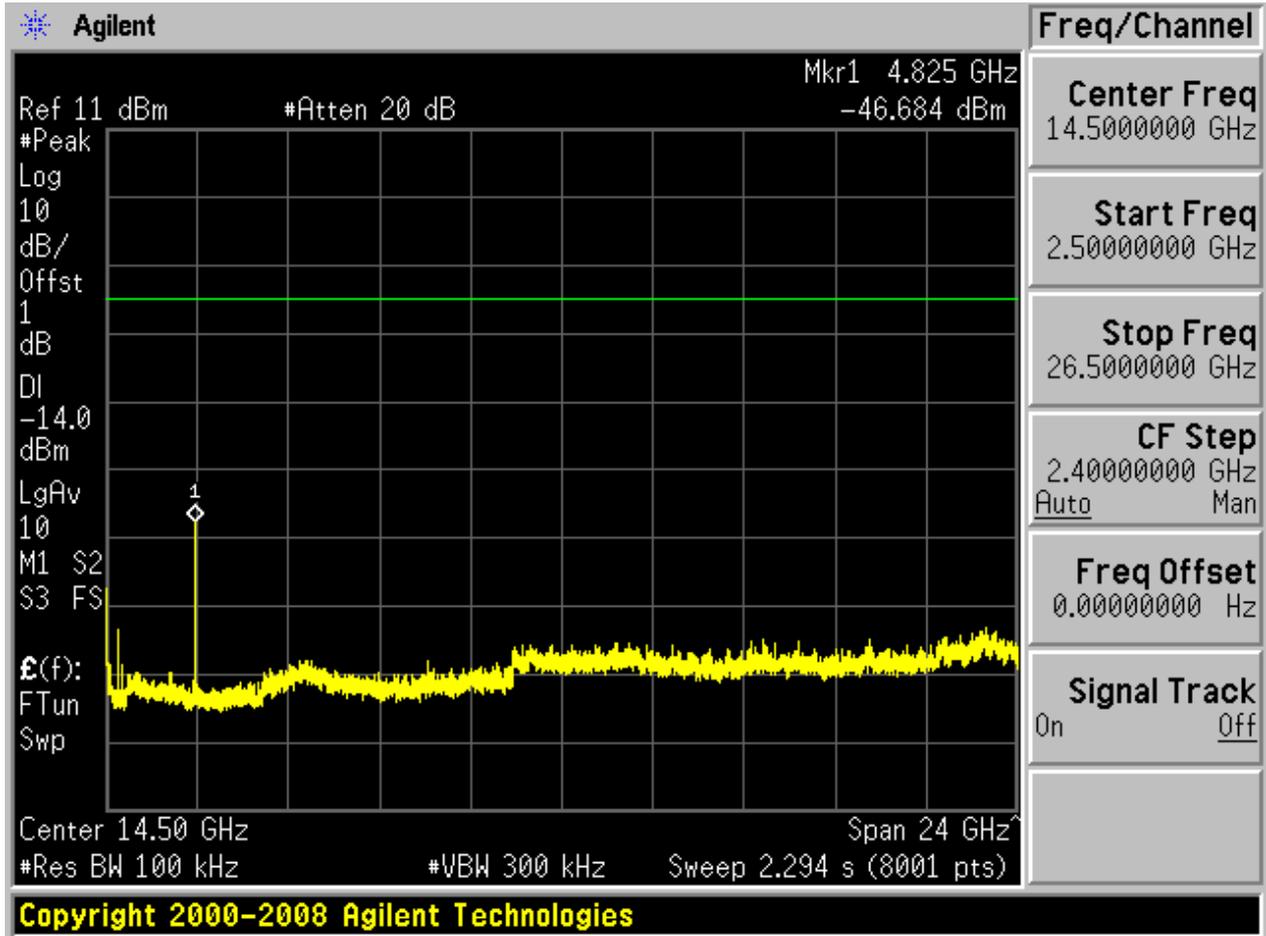




### 2.3 11B\_M@BG1

Pref:

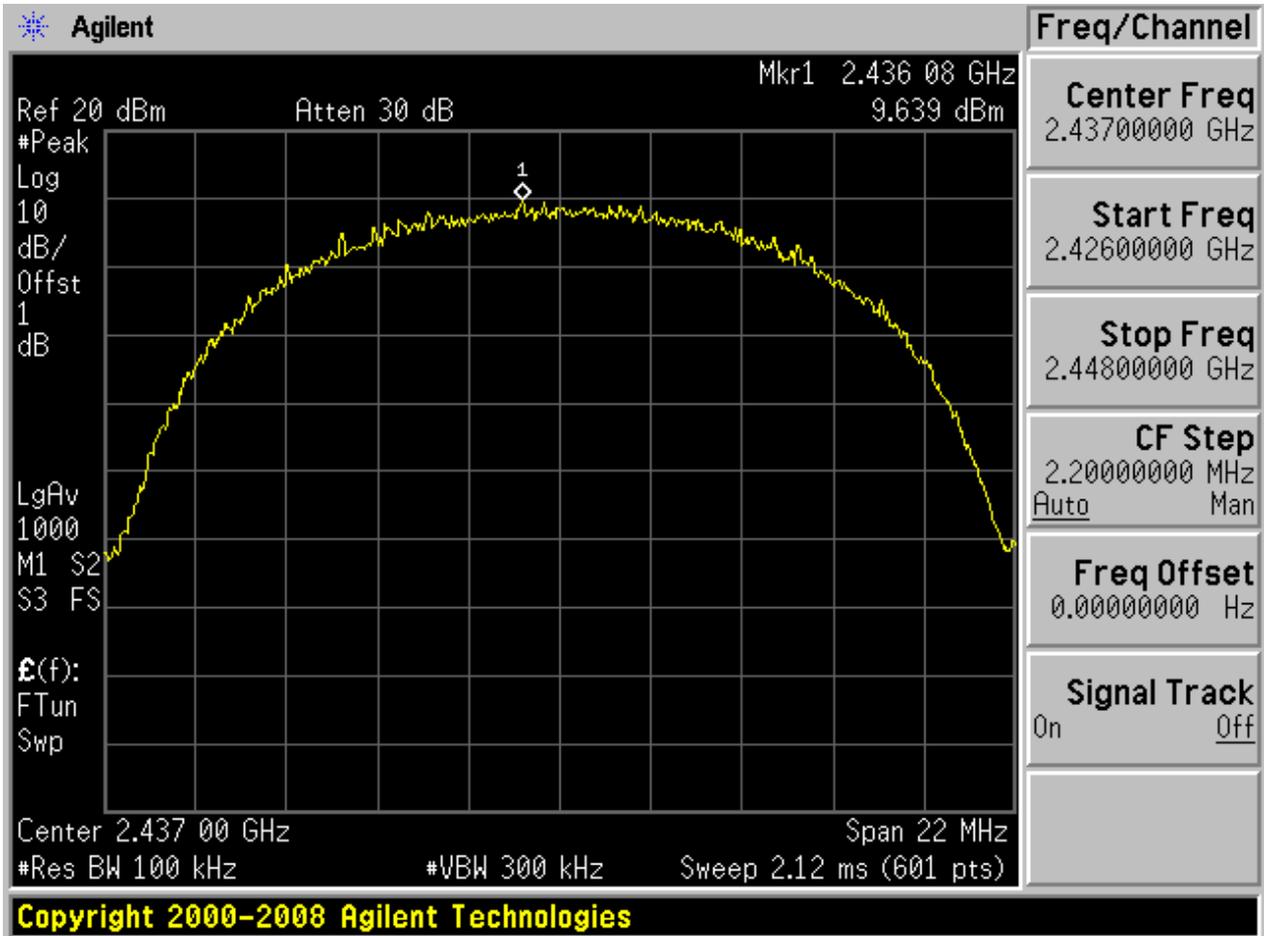






Puw:

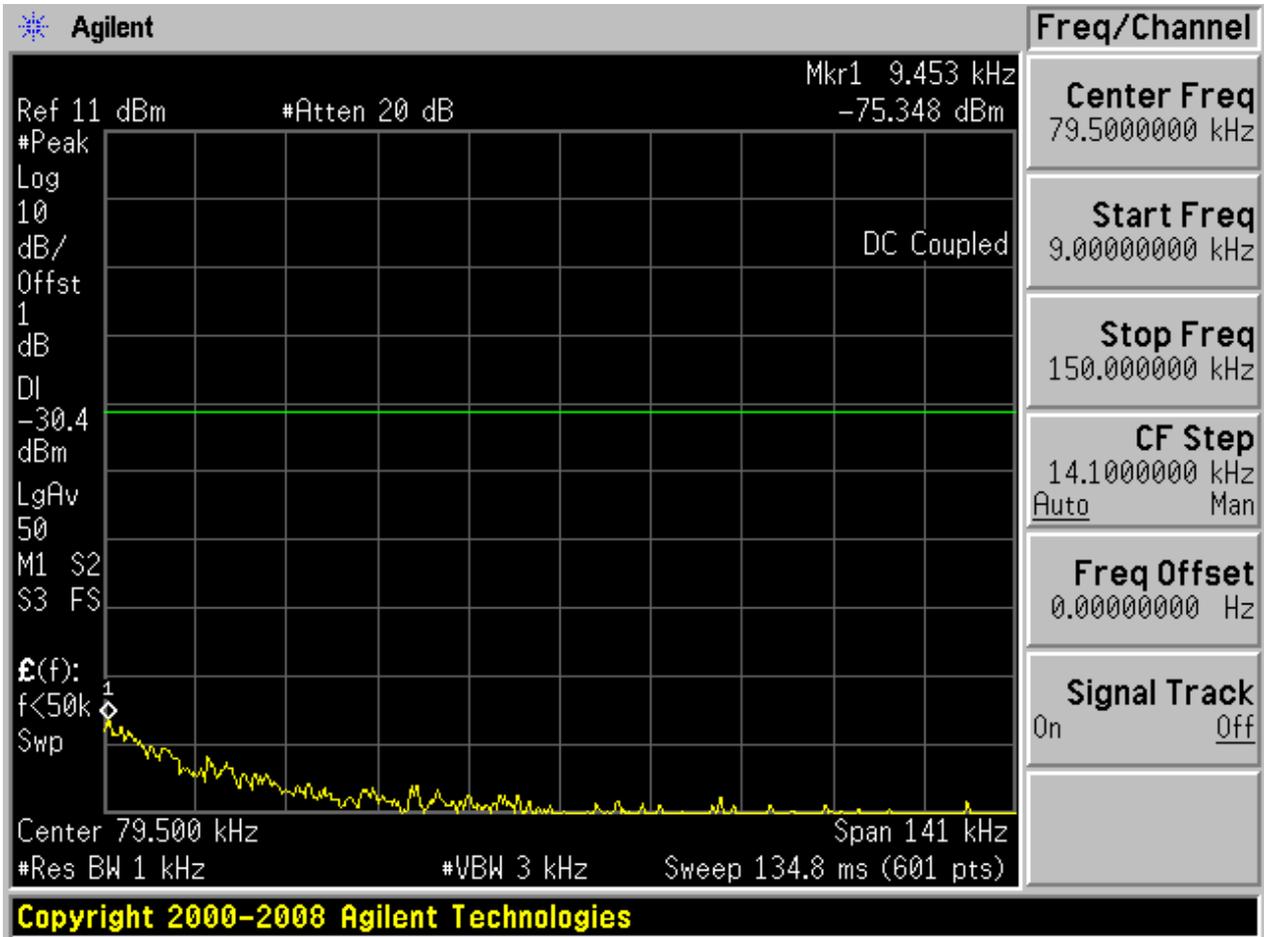




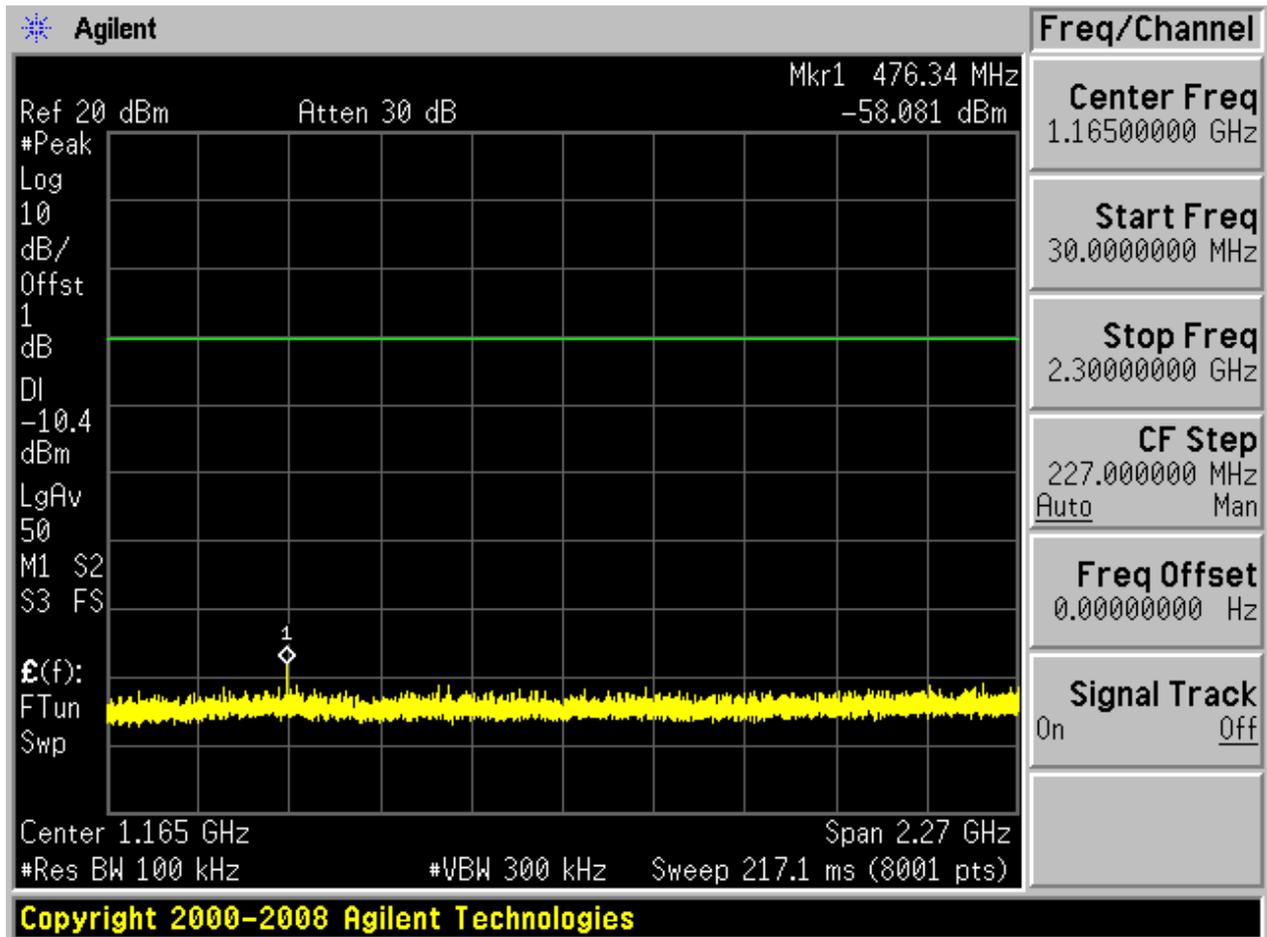

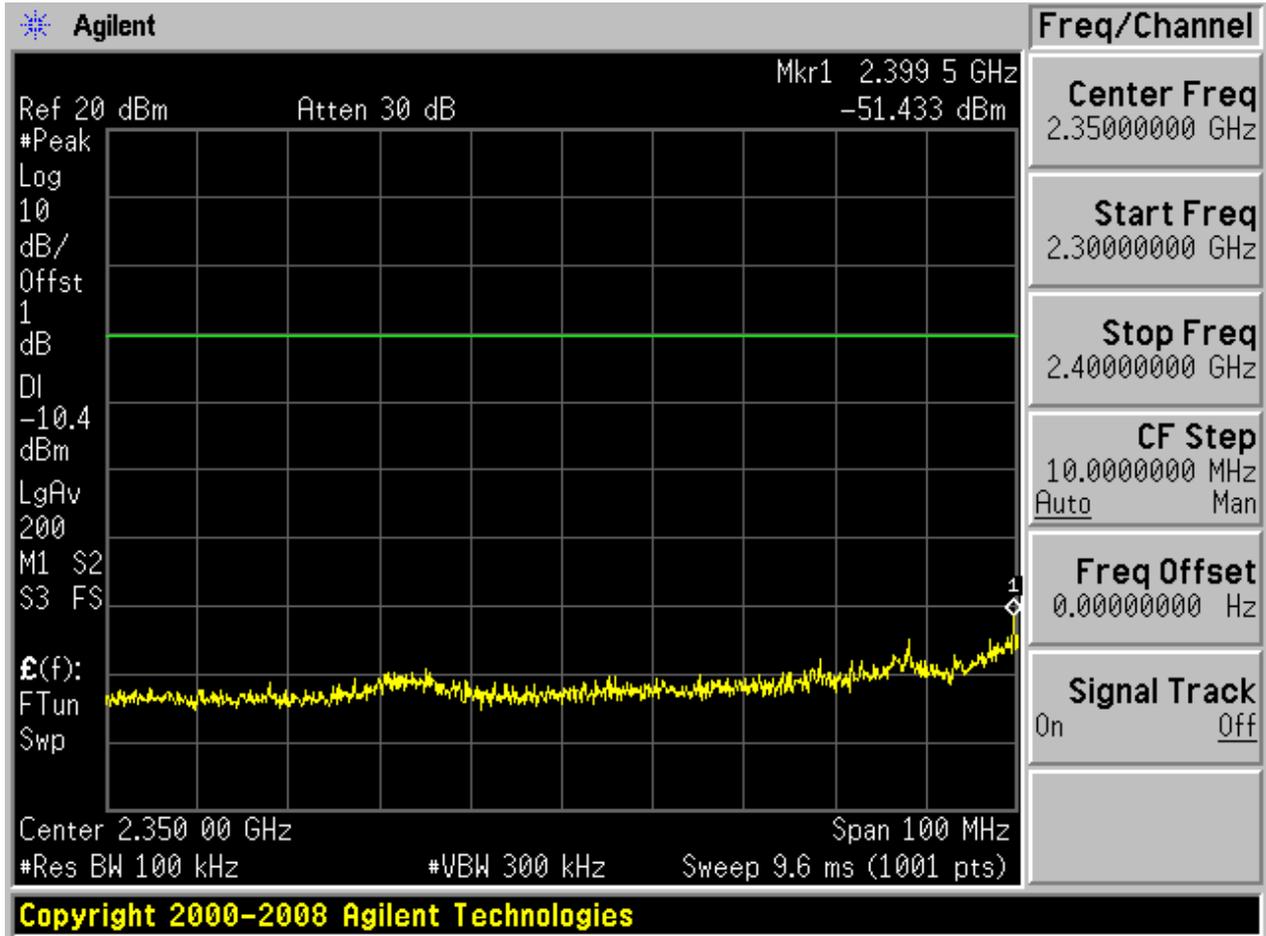

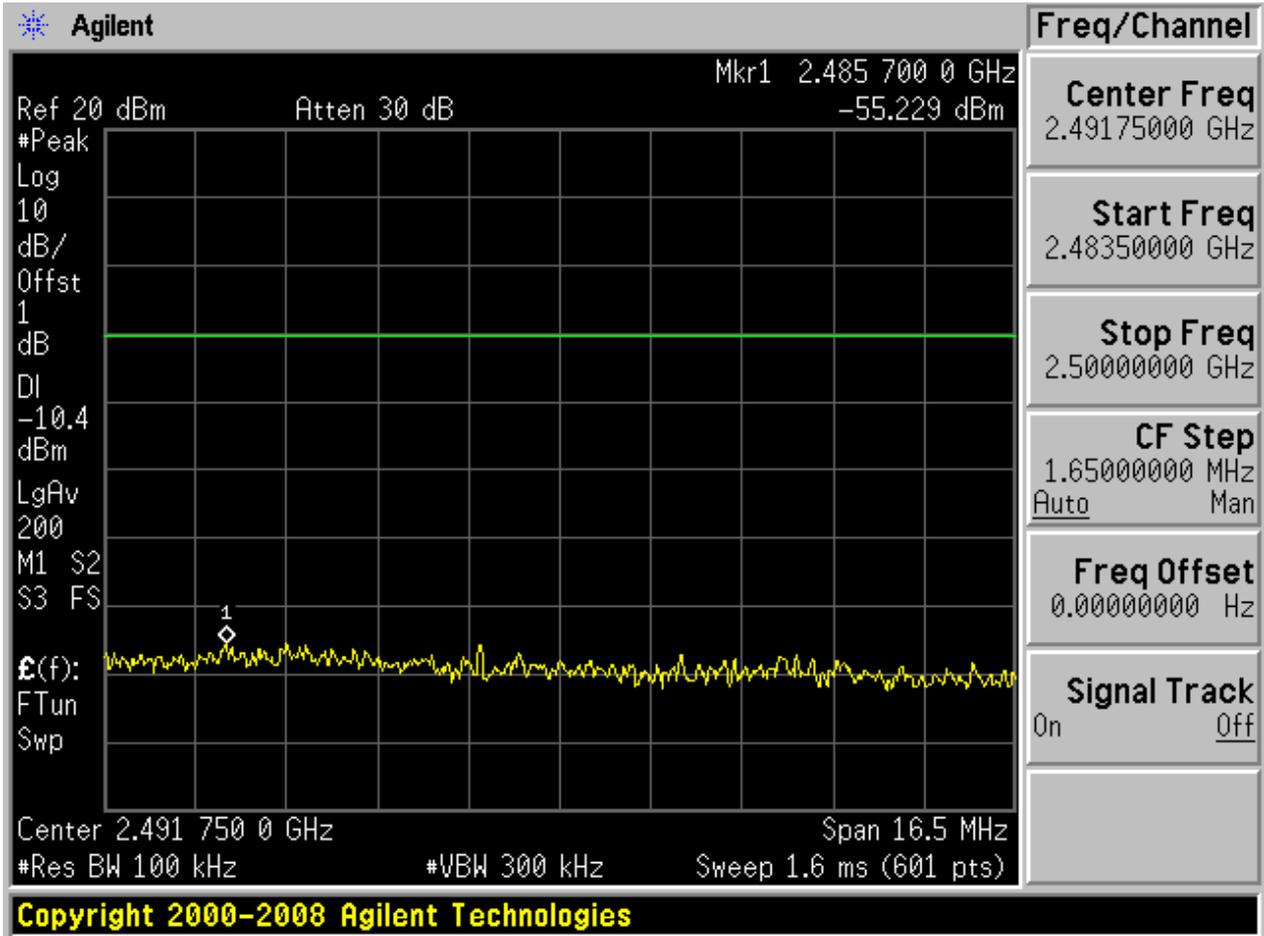


Copyright 2000-2008 Agilent Technologies

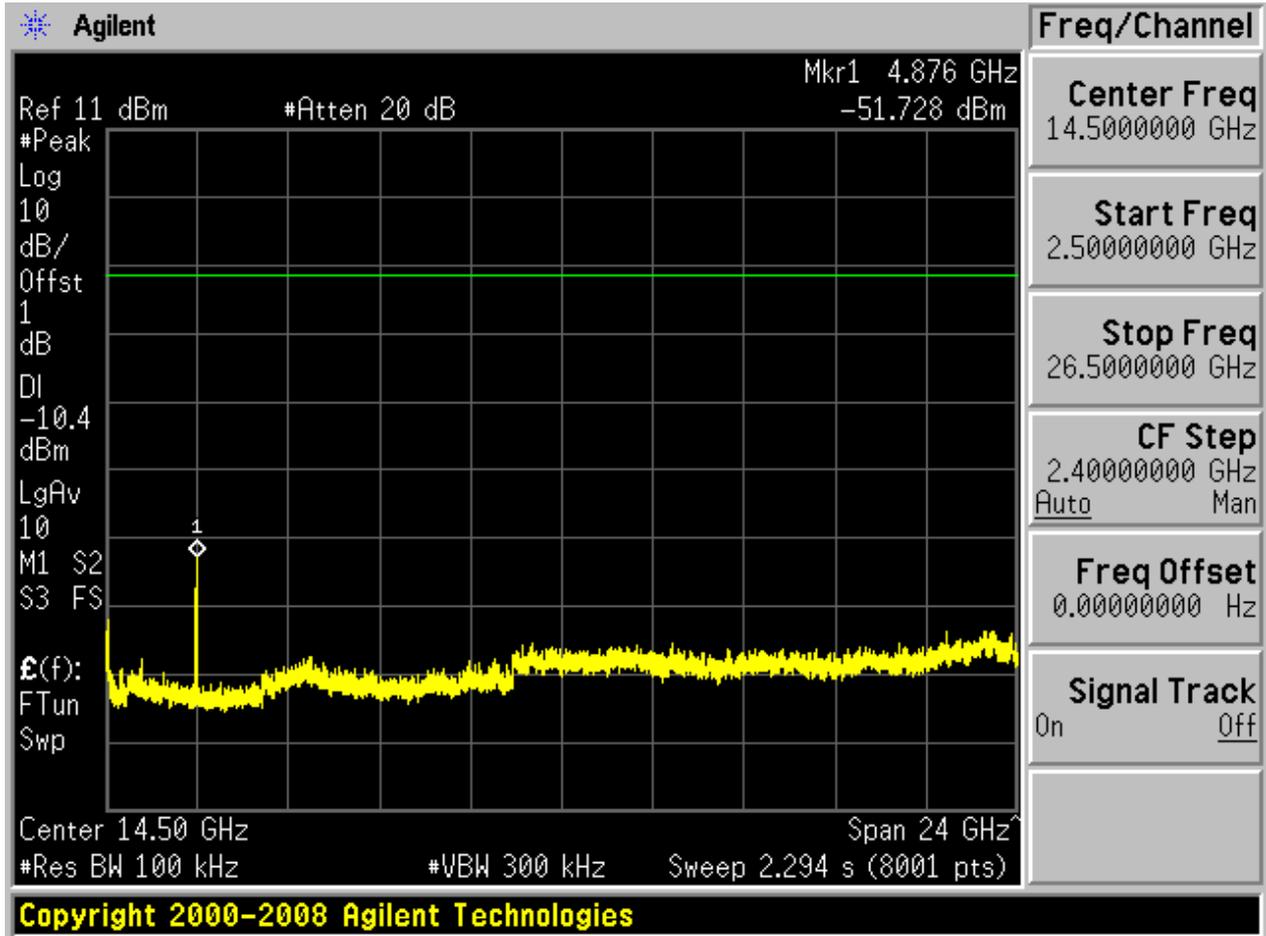




## 2.4 11B\_M@BG2

Pref:

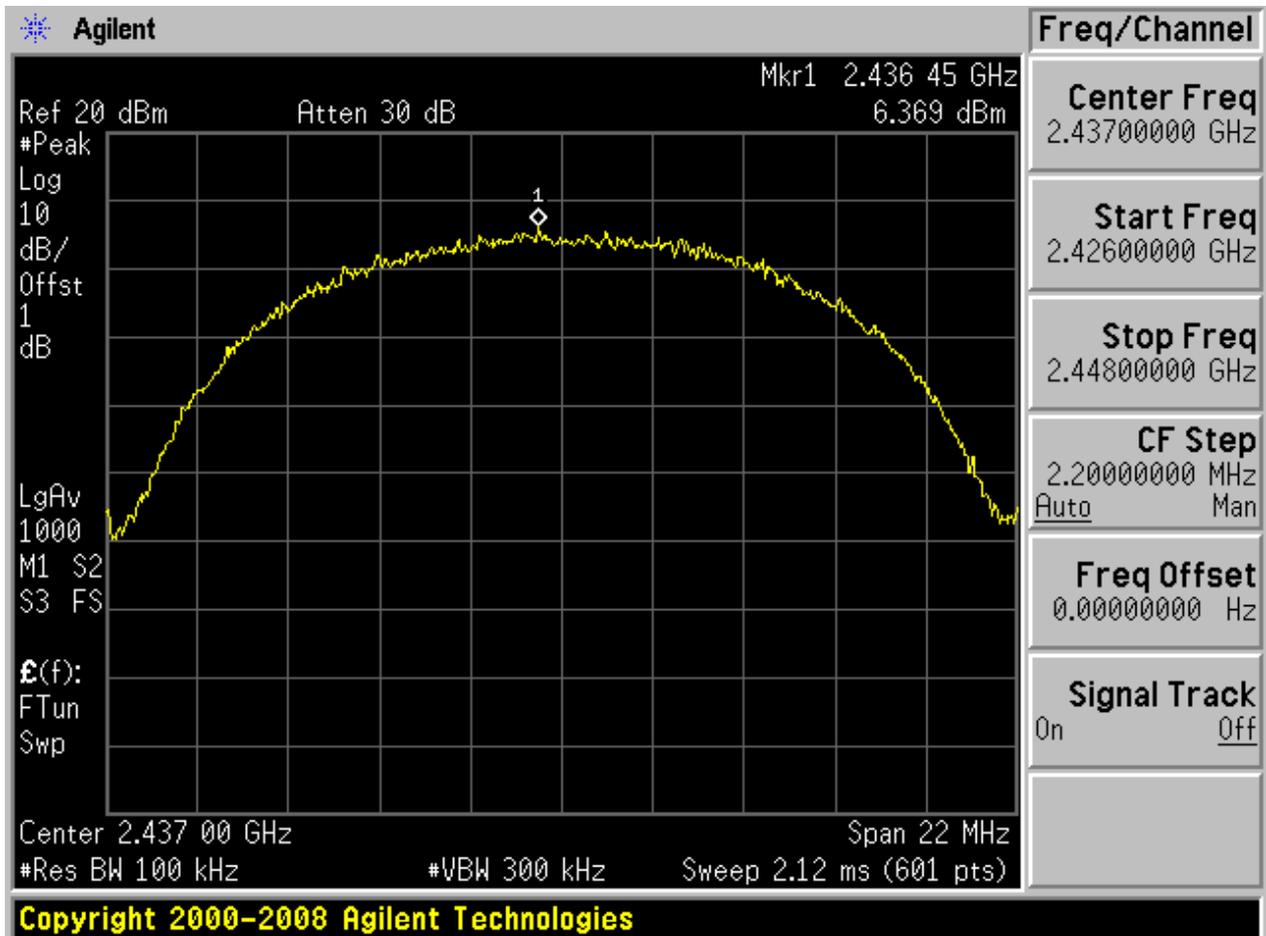





Puw:

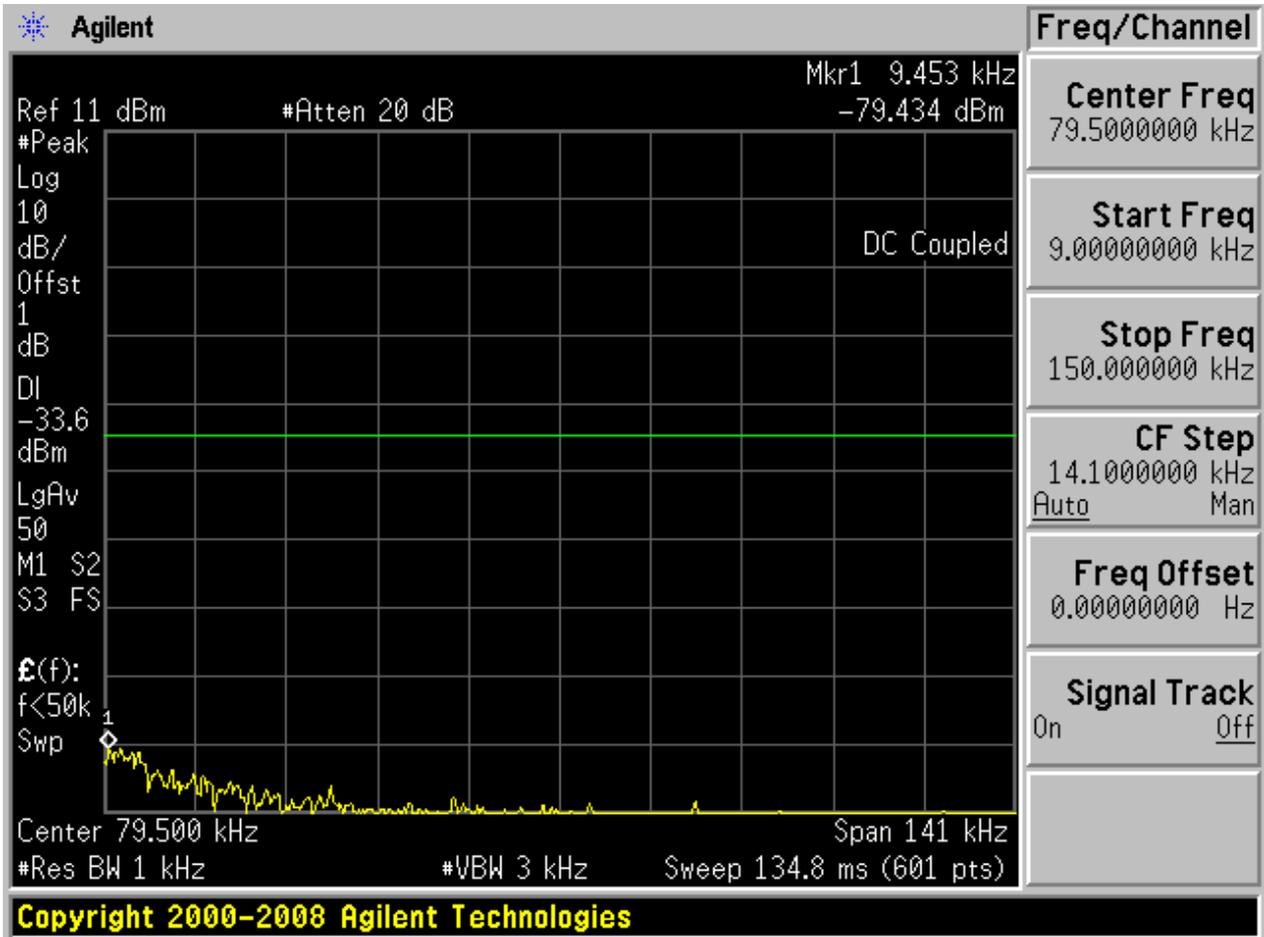




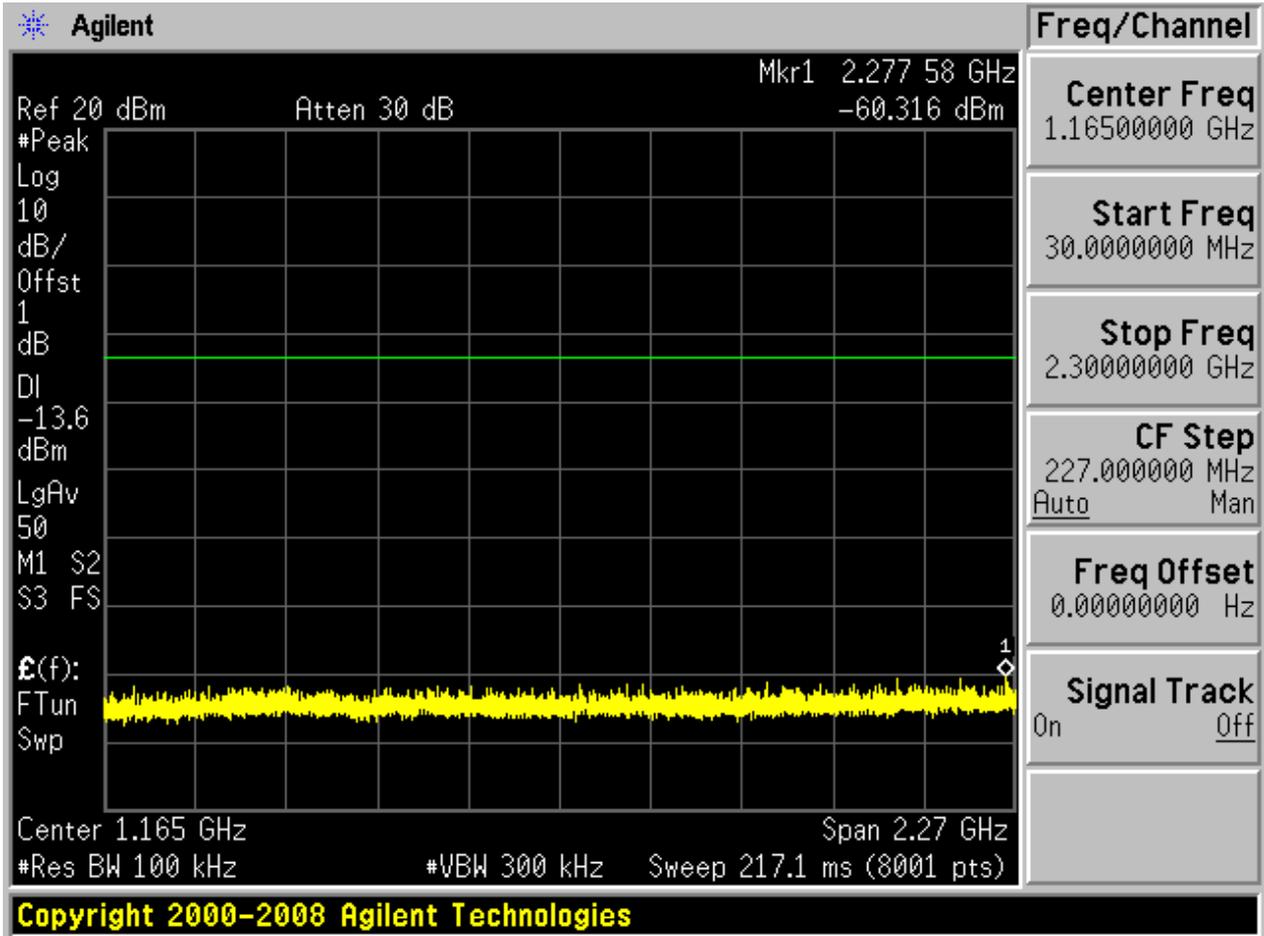



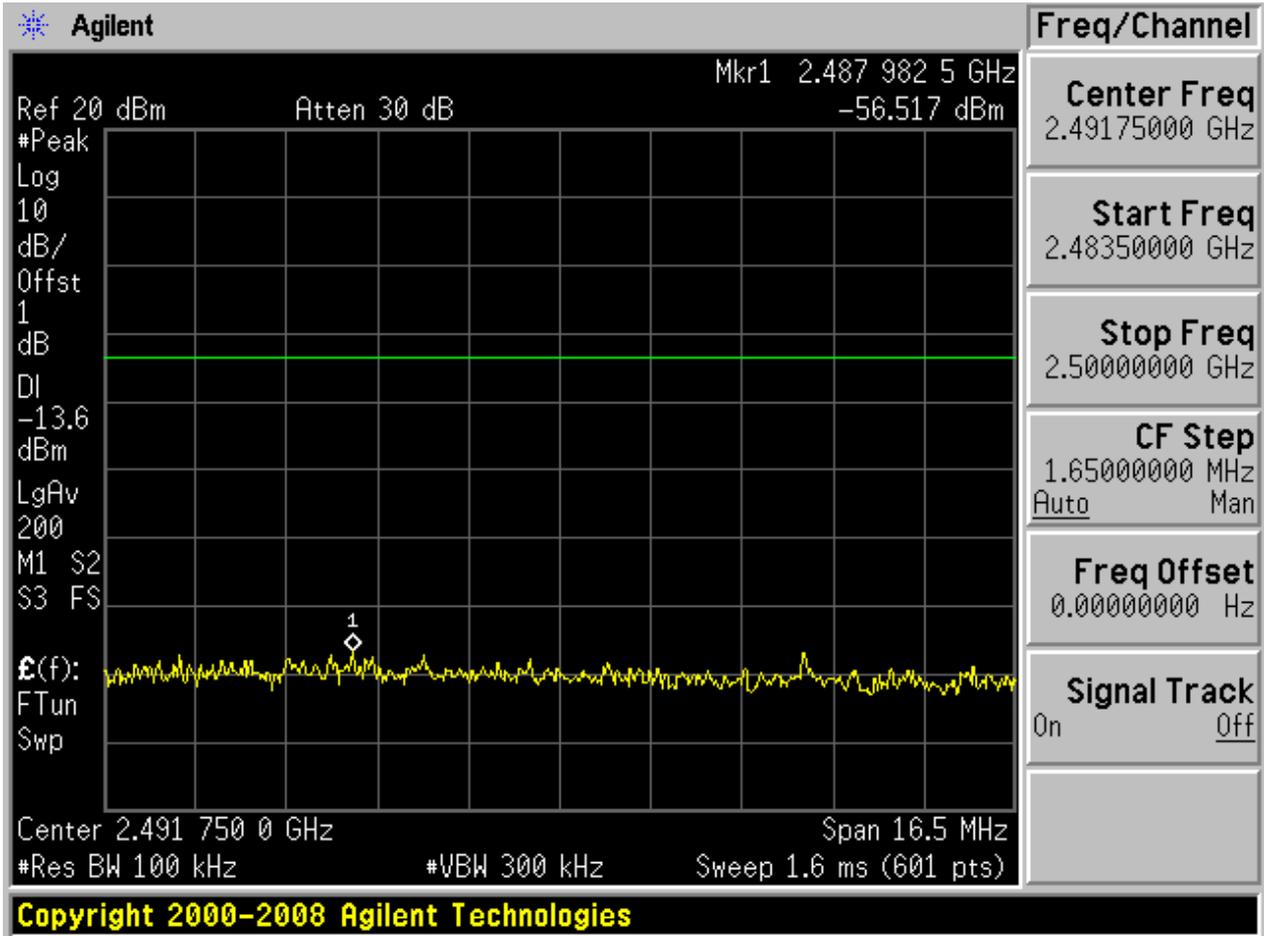


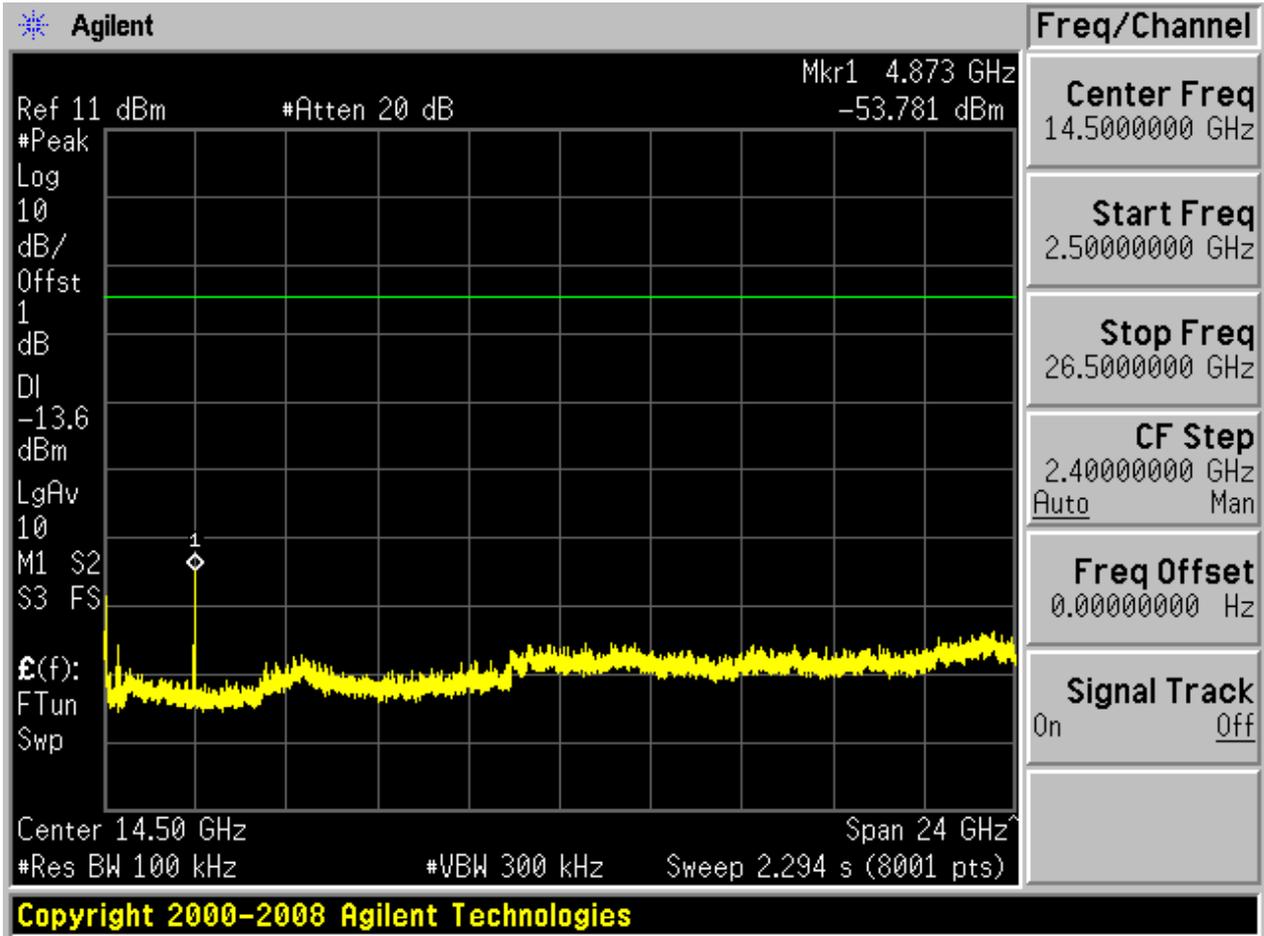




## 2.5 11B\_H@BG1

Pref:

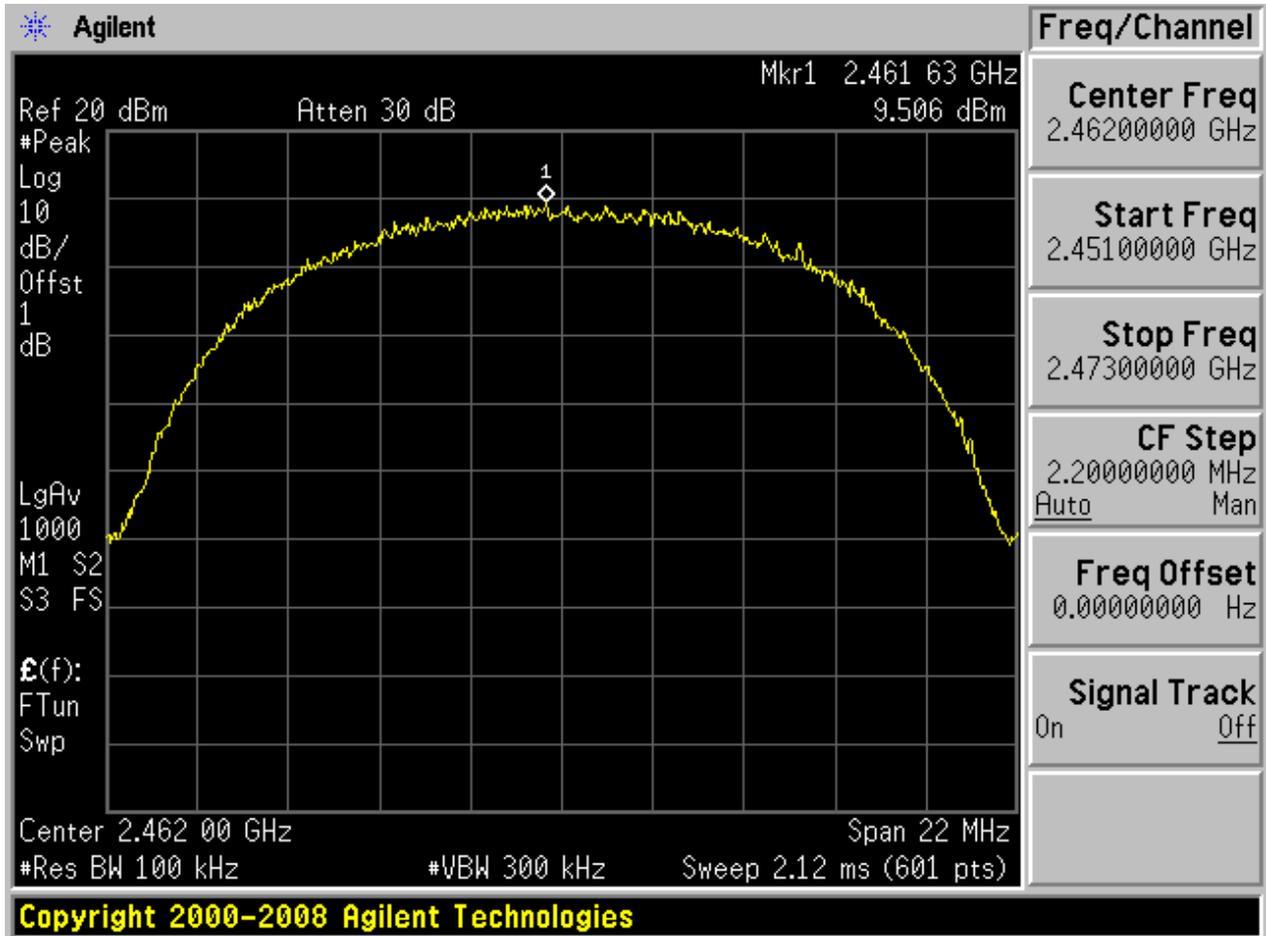






Puw:

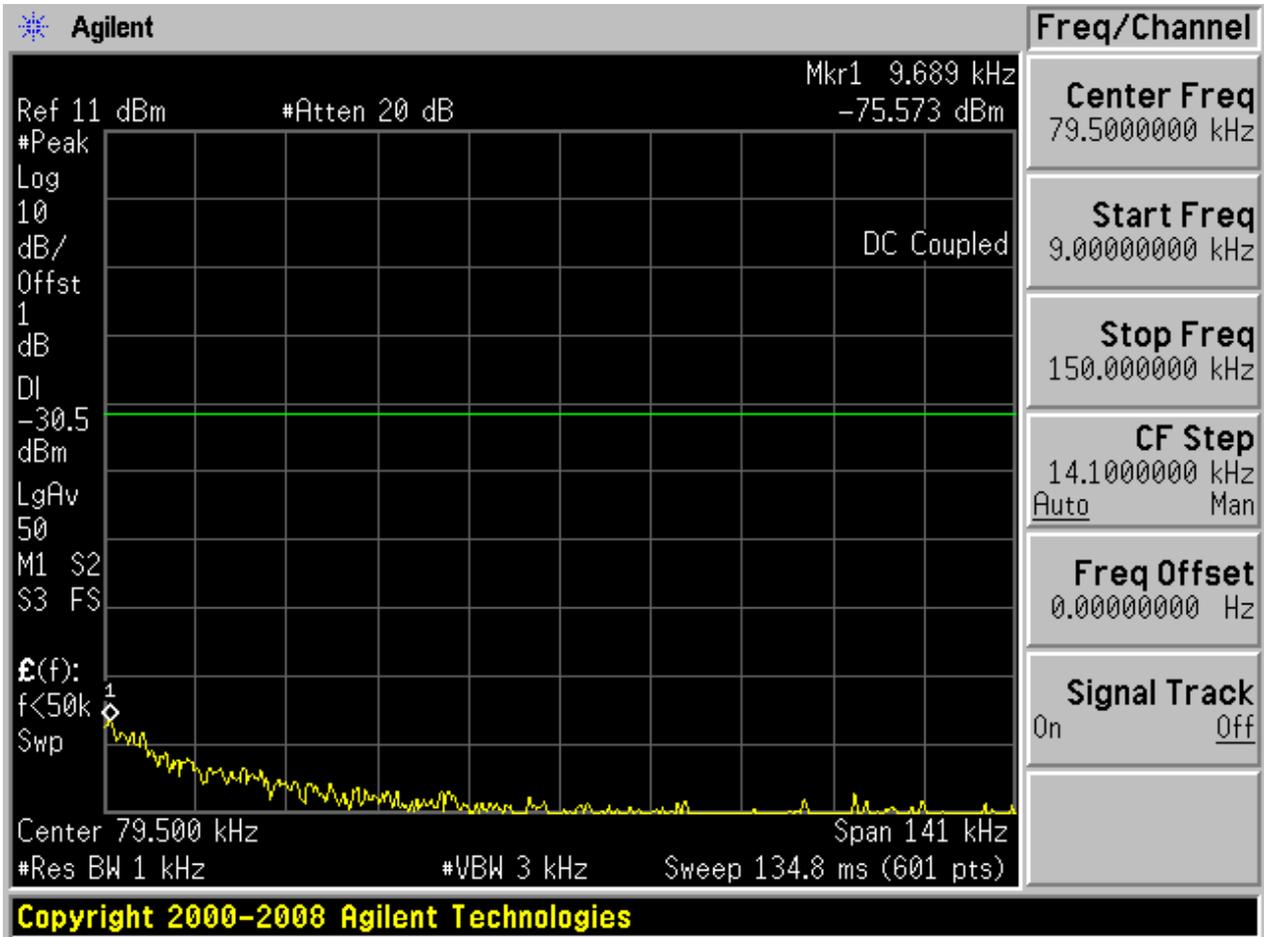




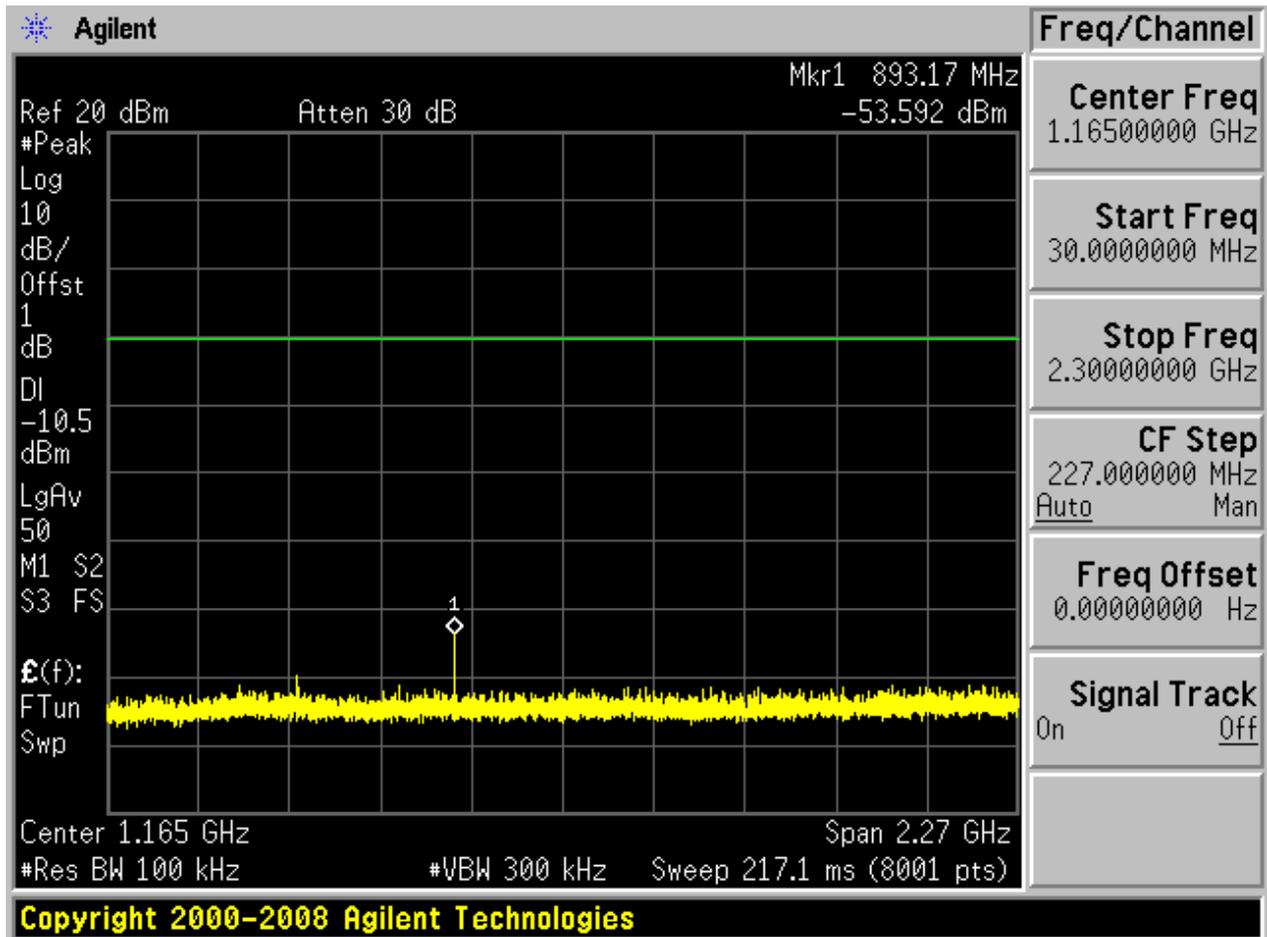

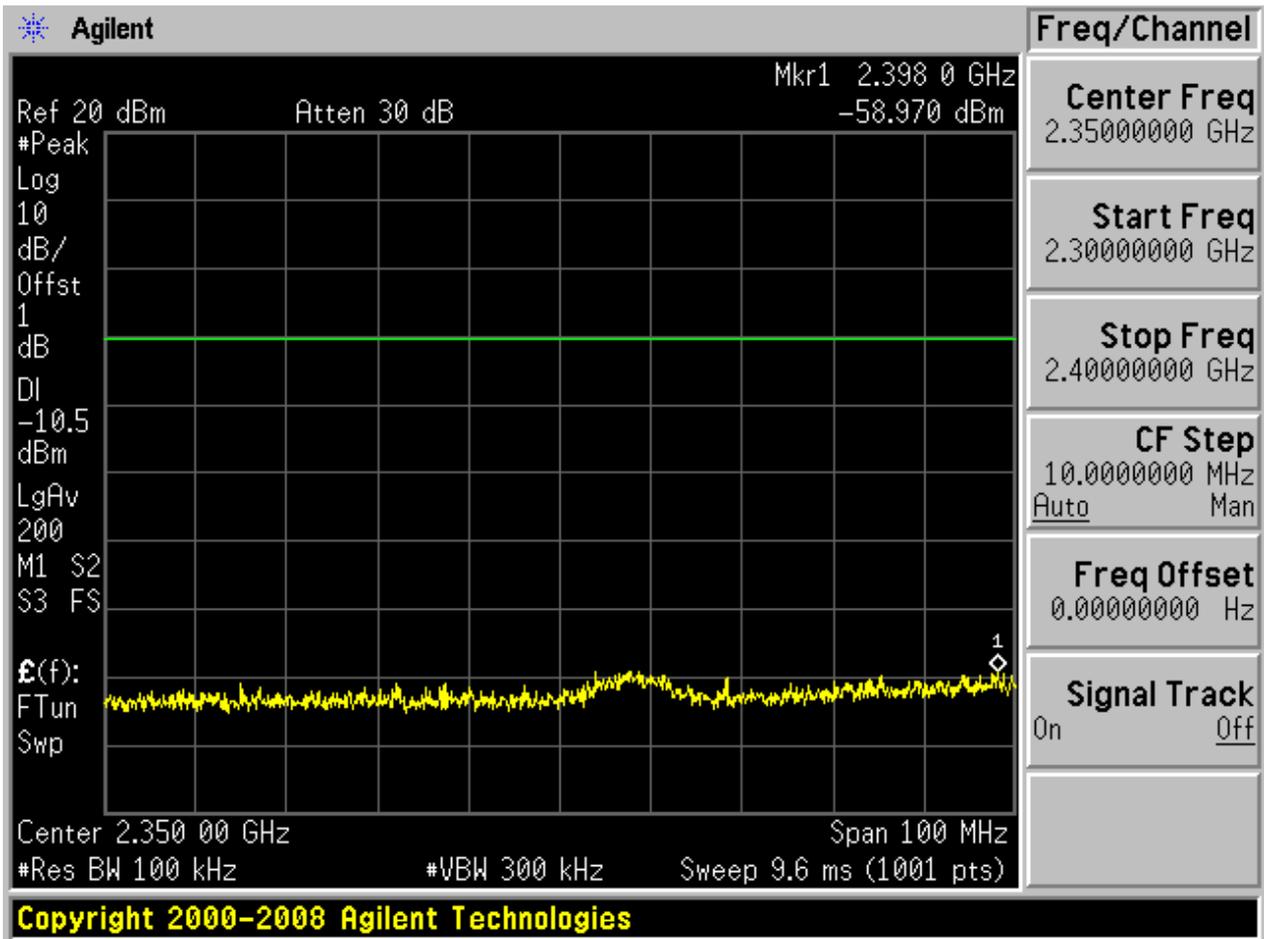

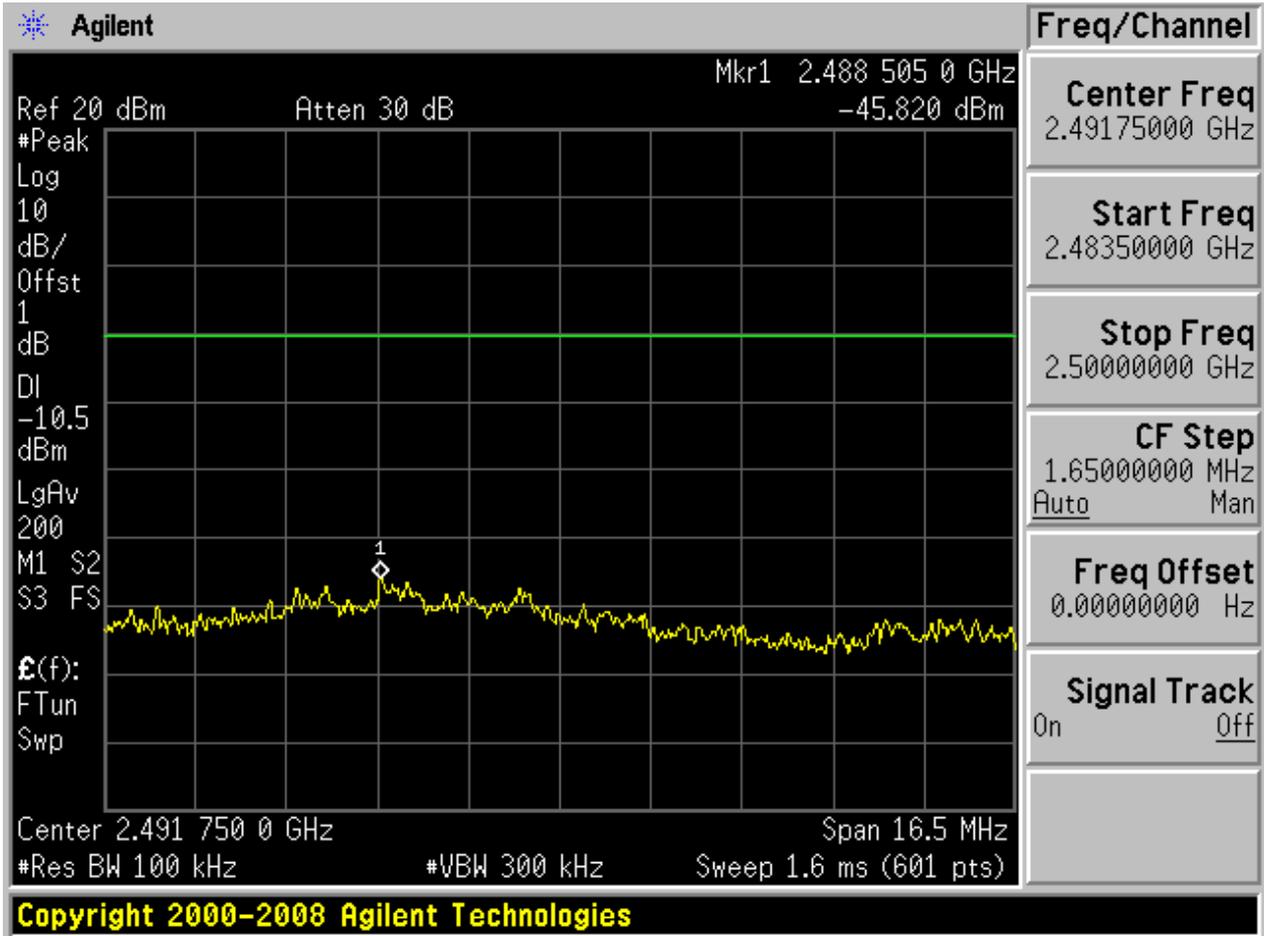


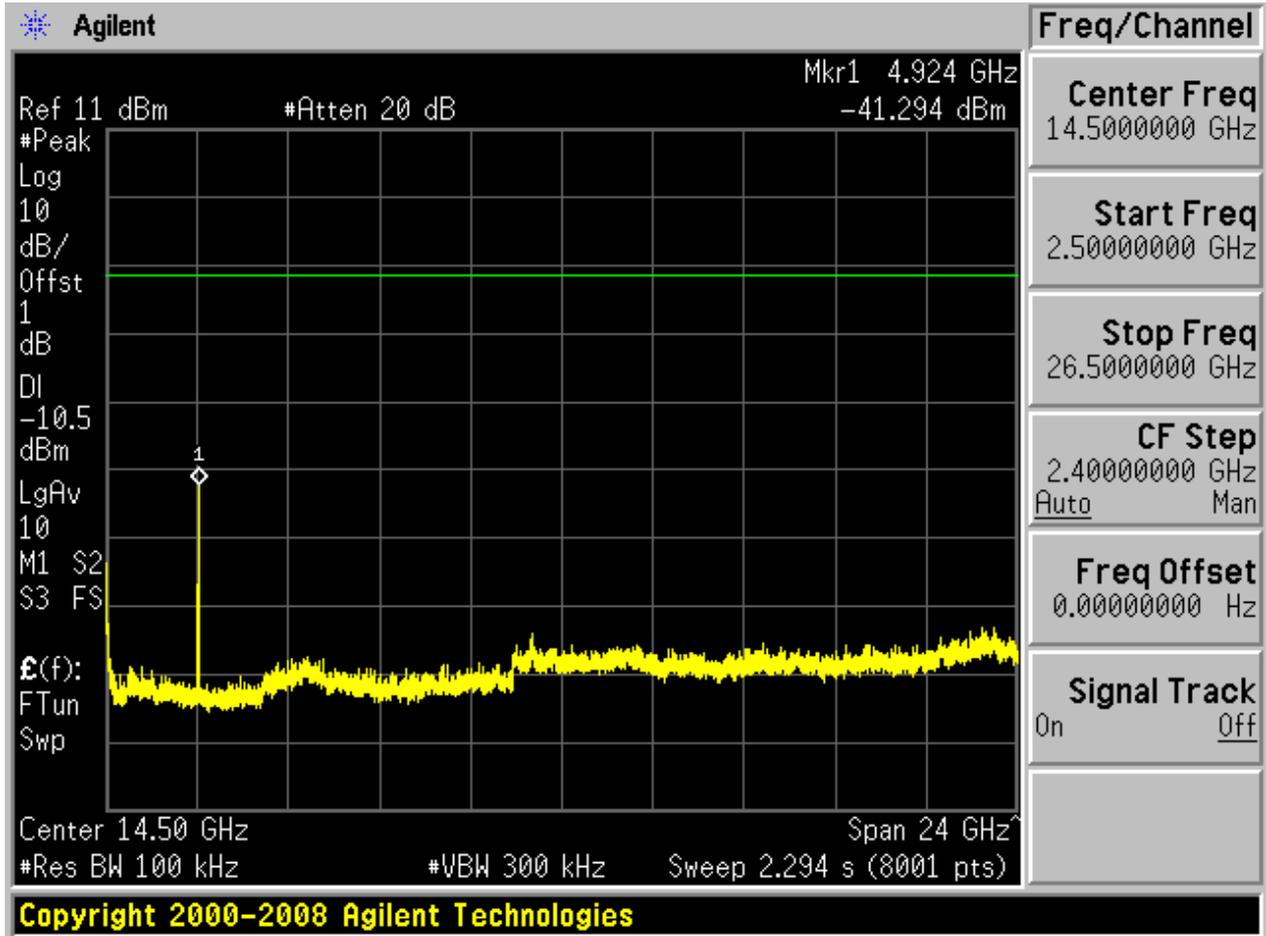




## 2.6 11B\_H@BG2

Pref:

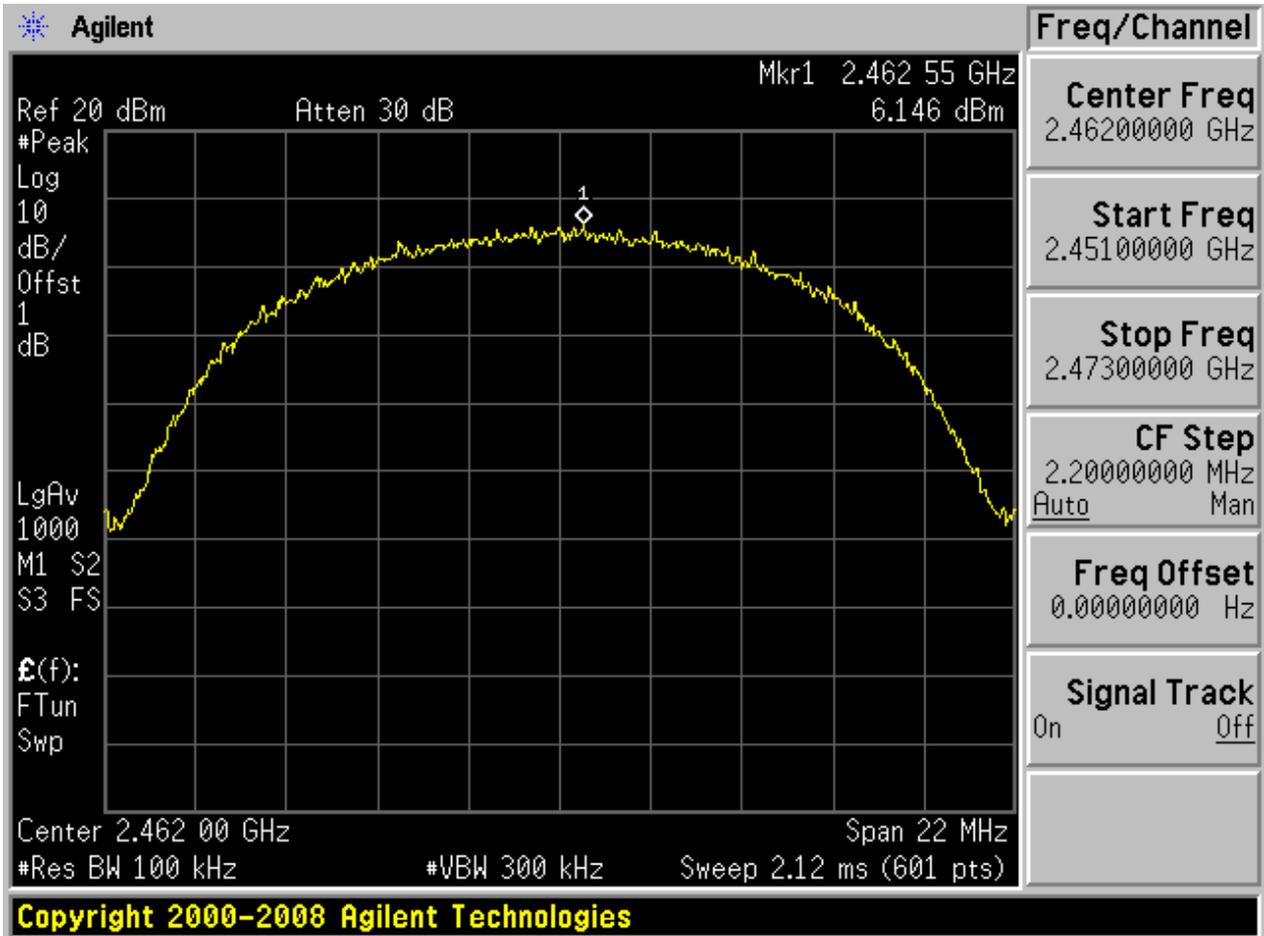






Puw:

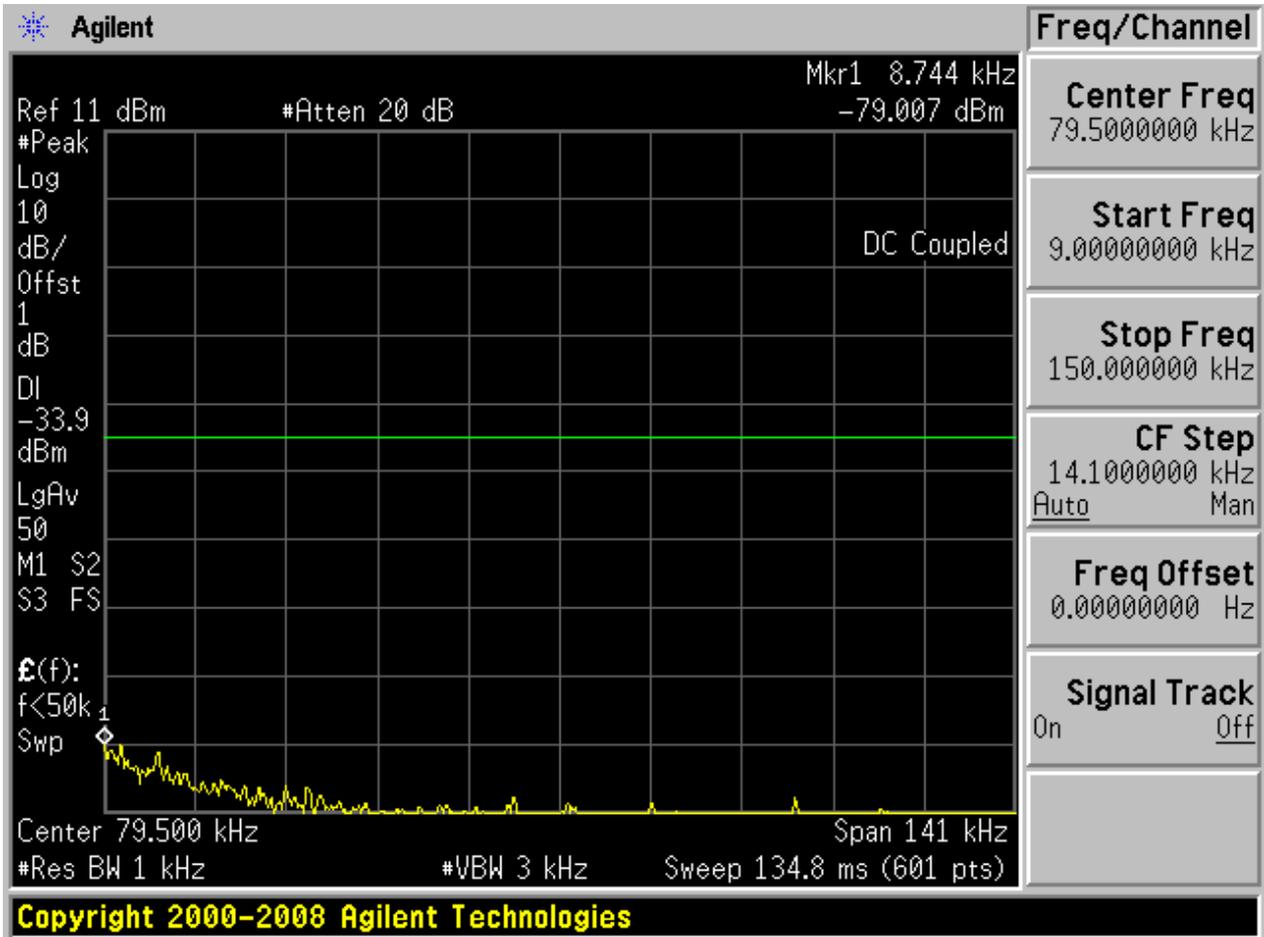




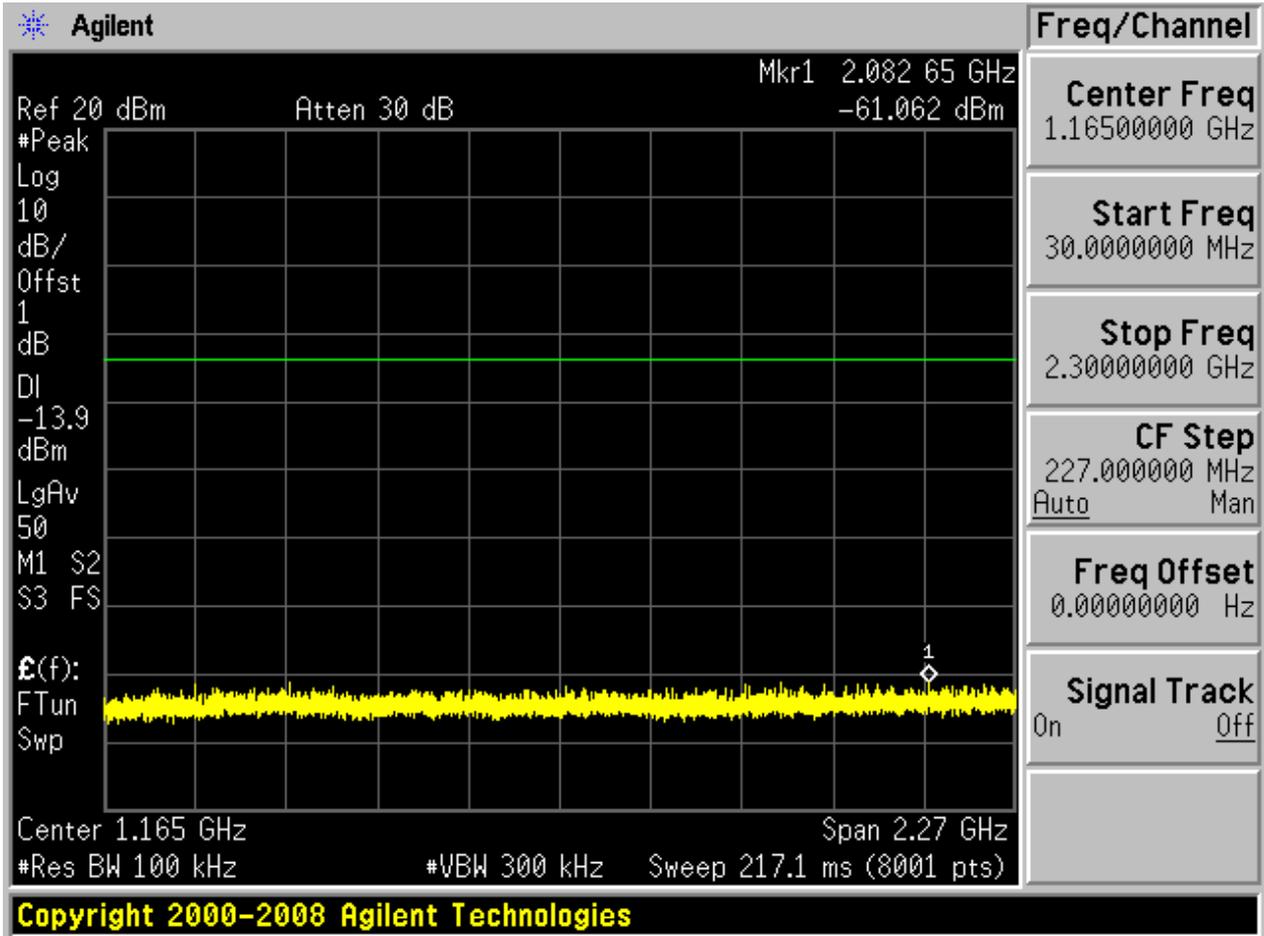

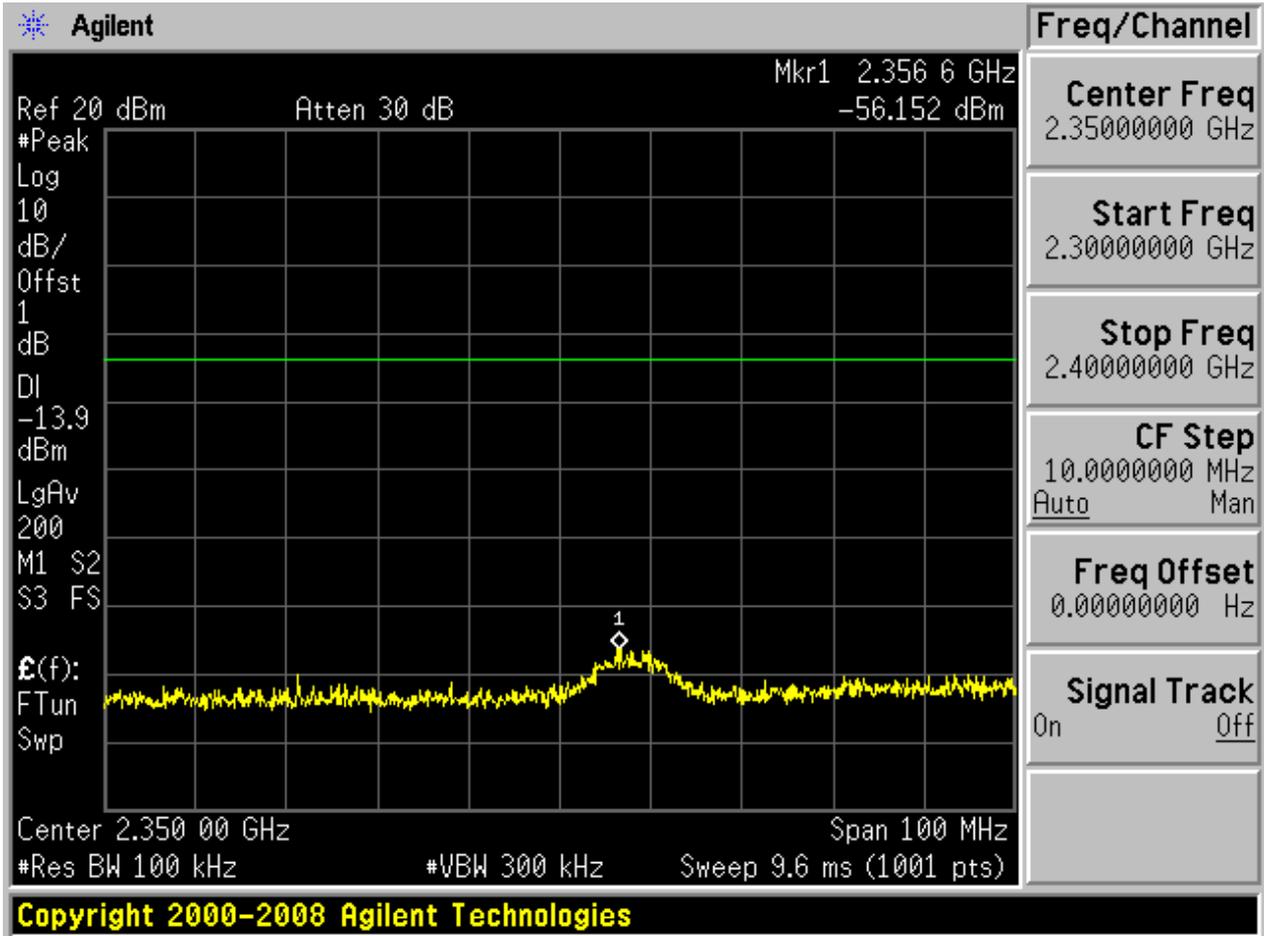

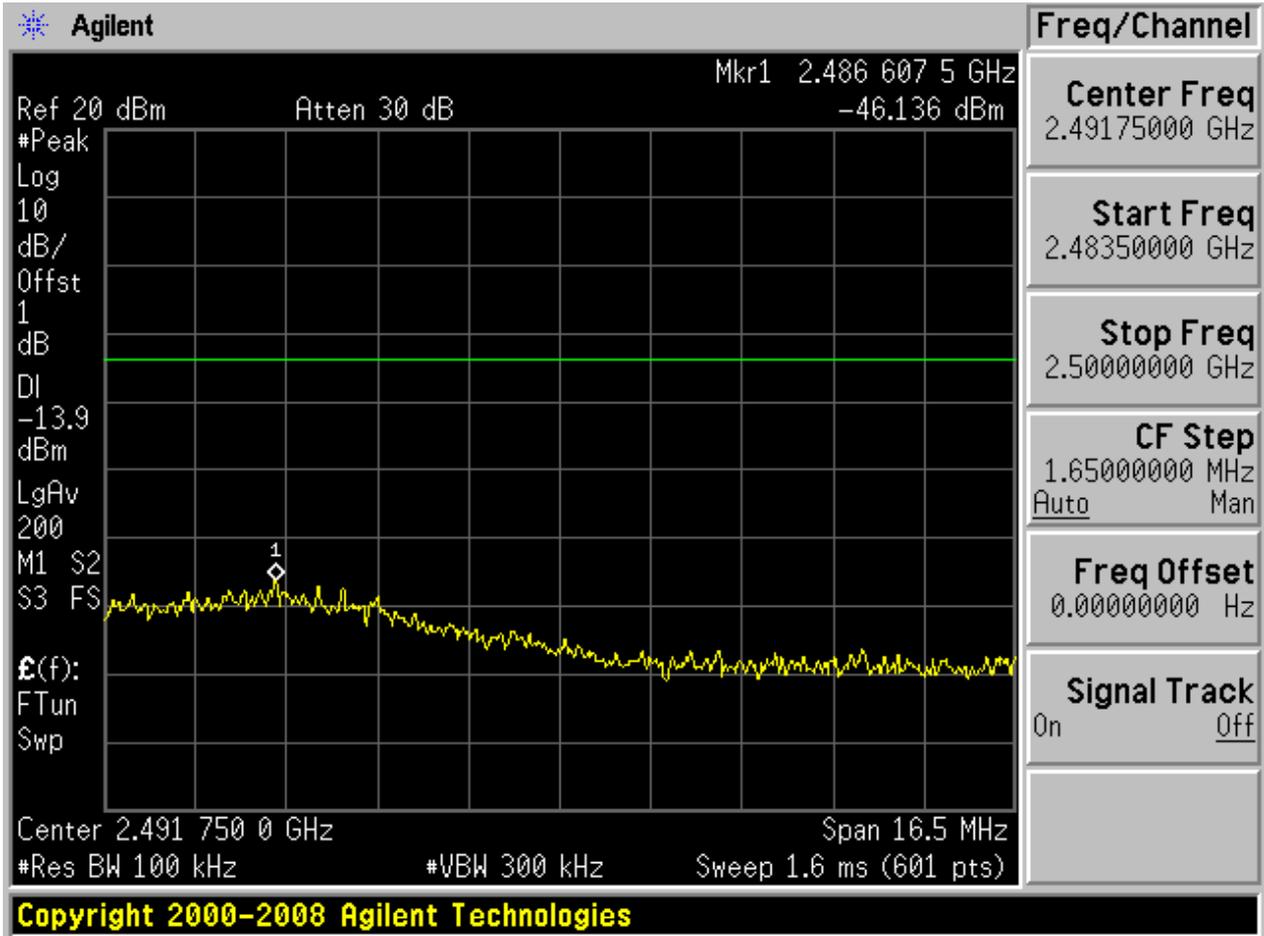


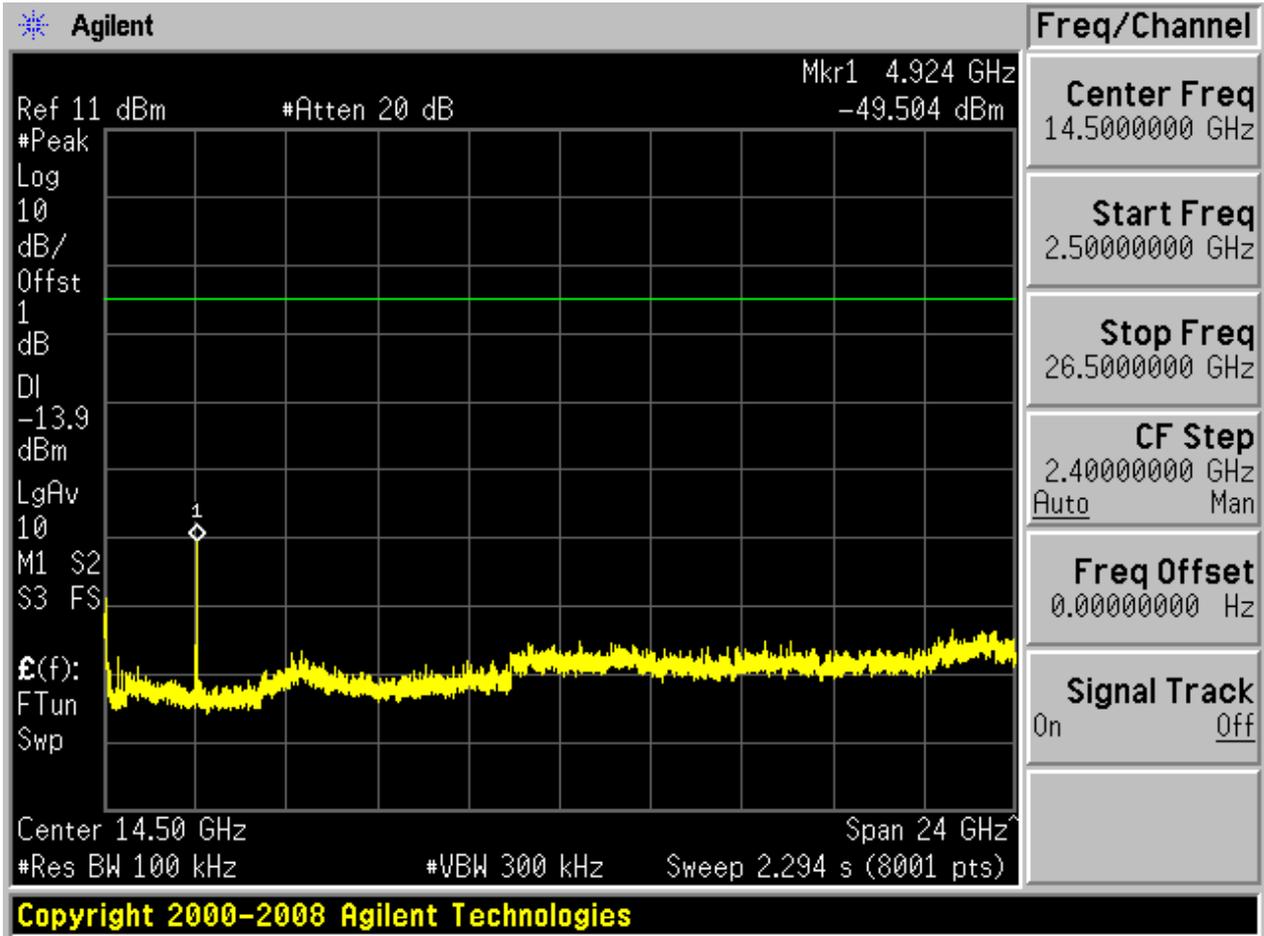




## 2.7 11G\_L@BG1


Pref:

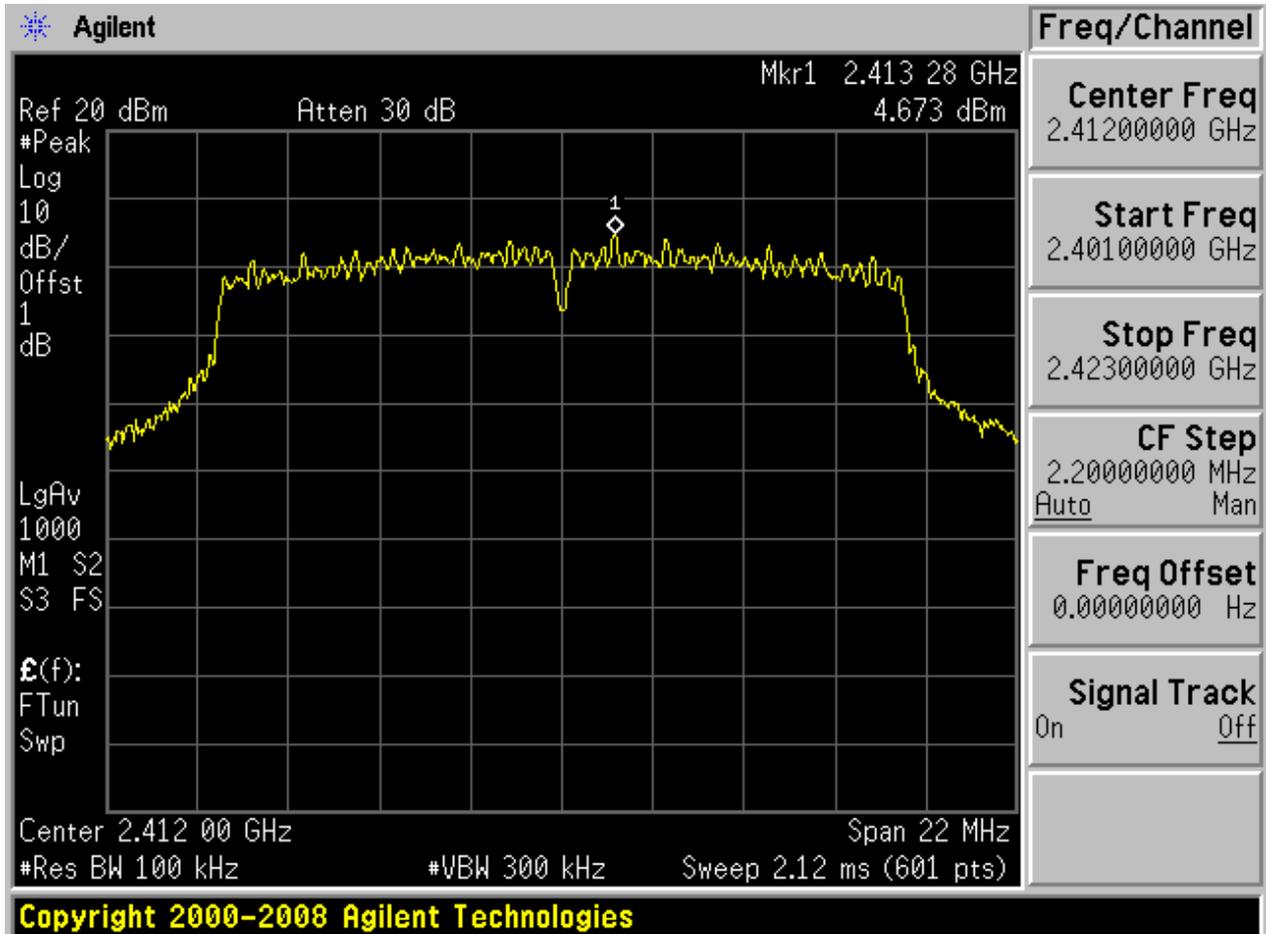






Puw:

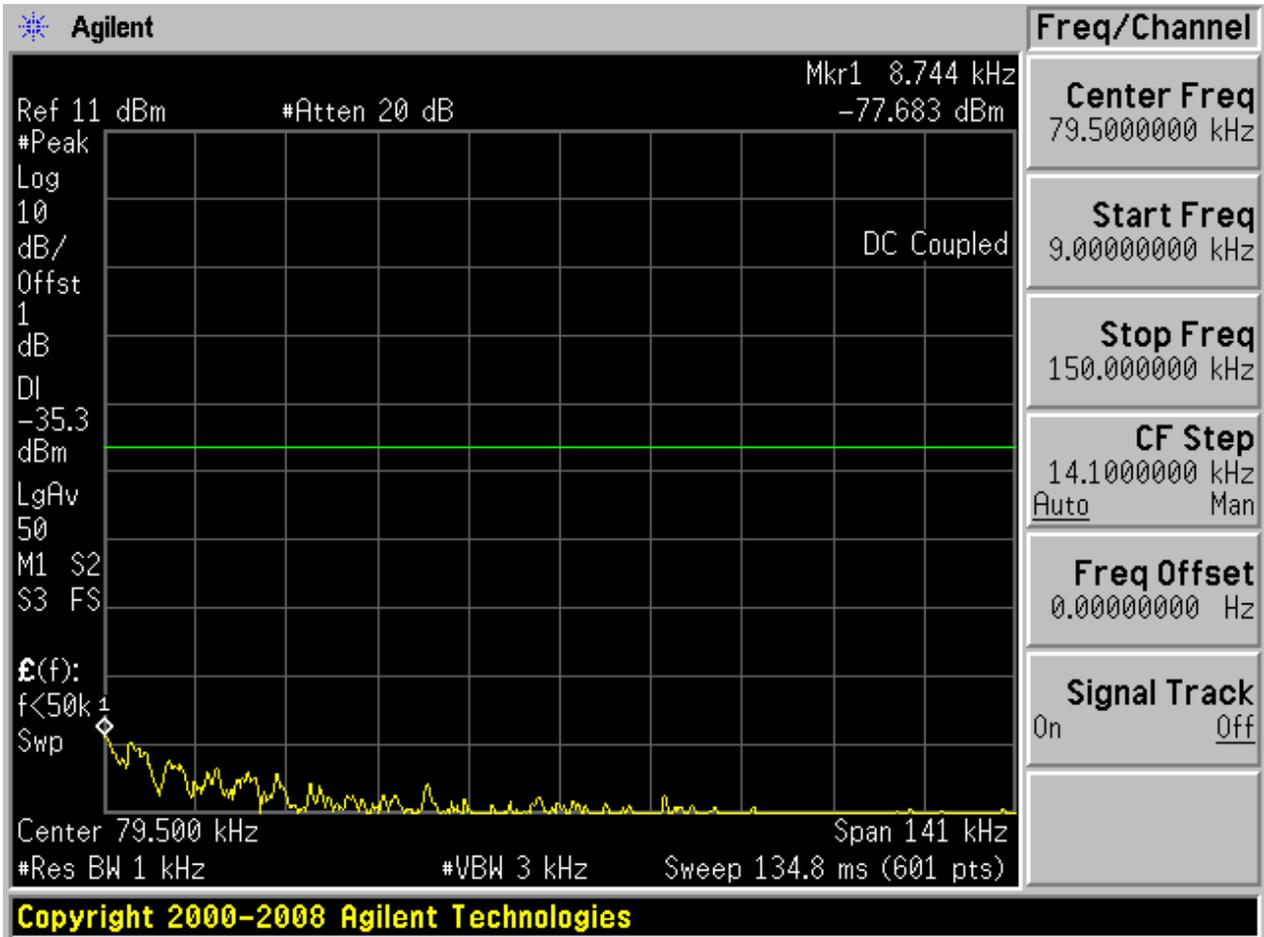


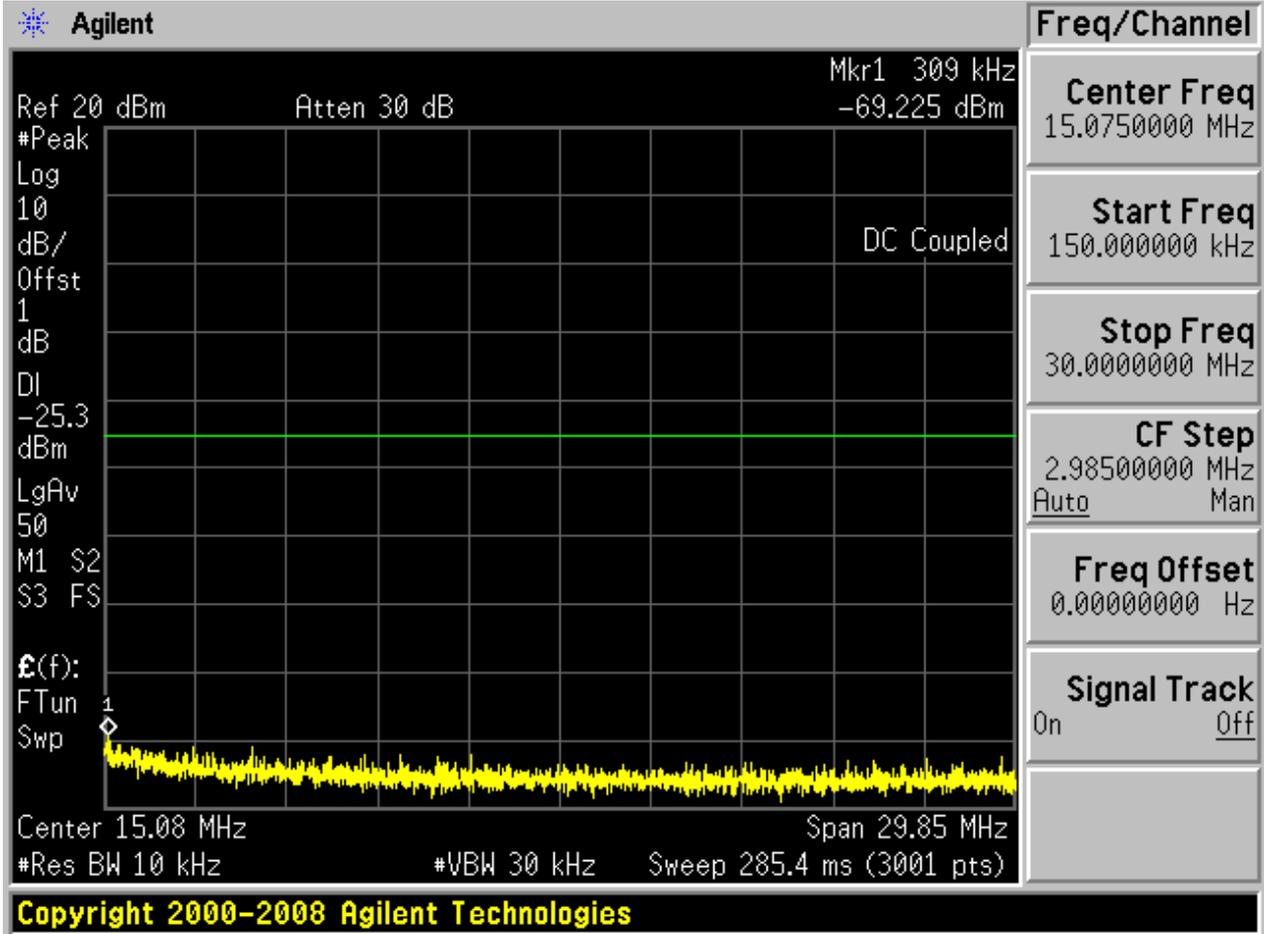

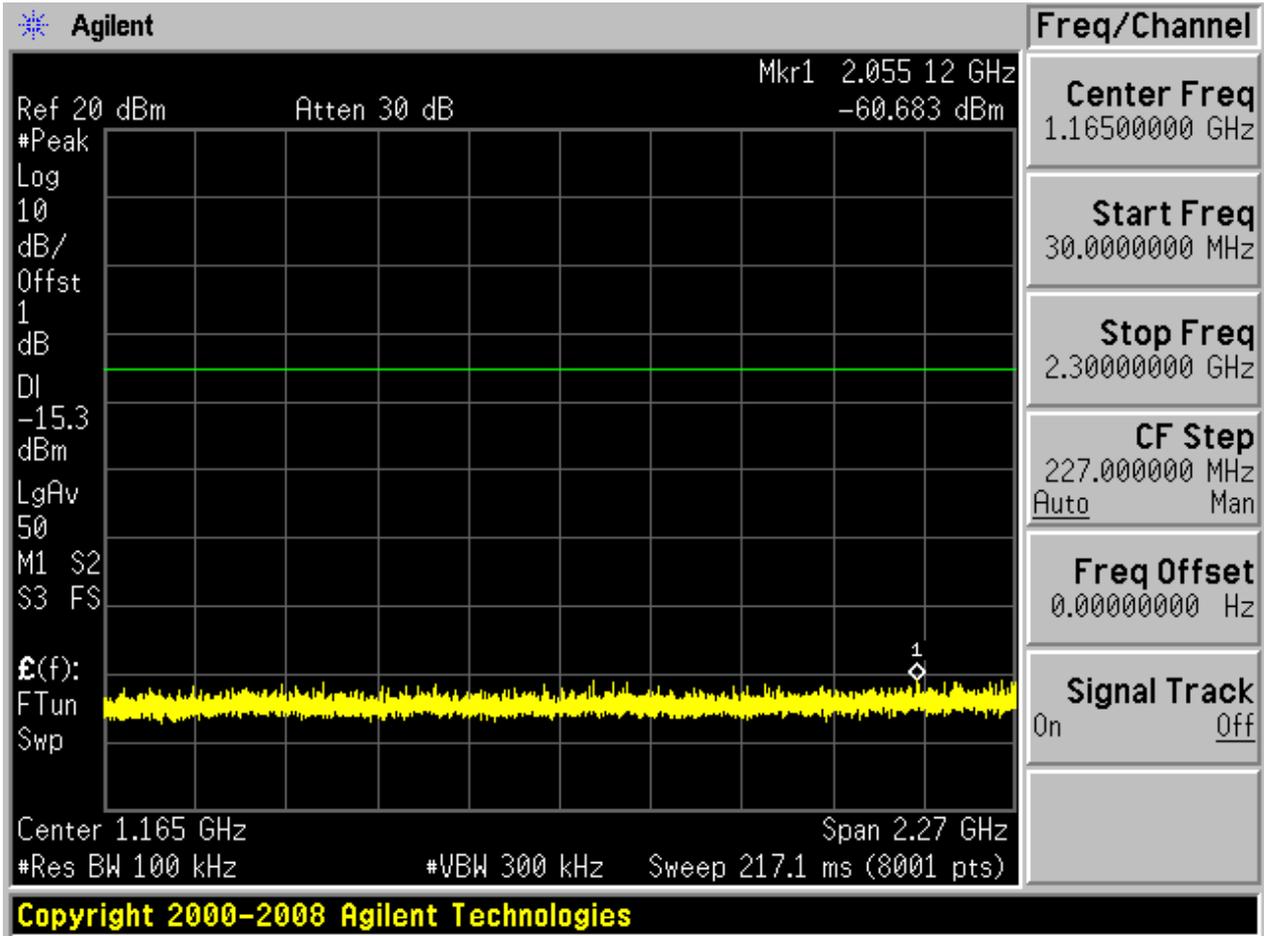

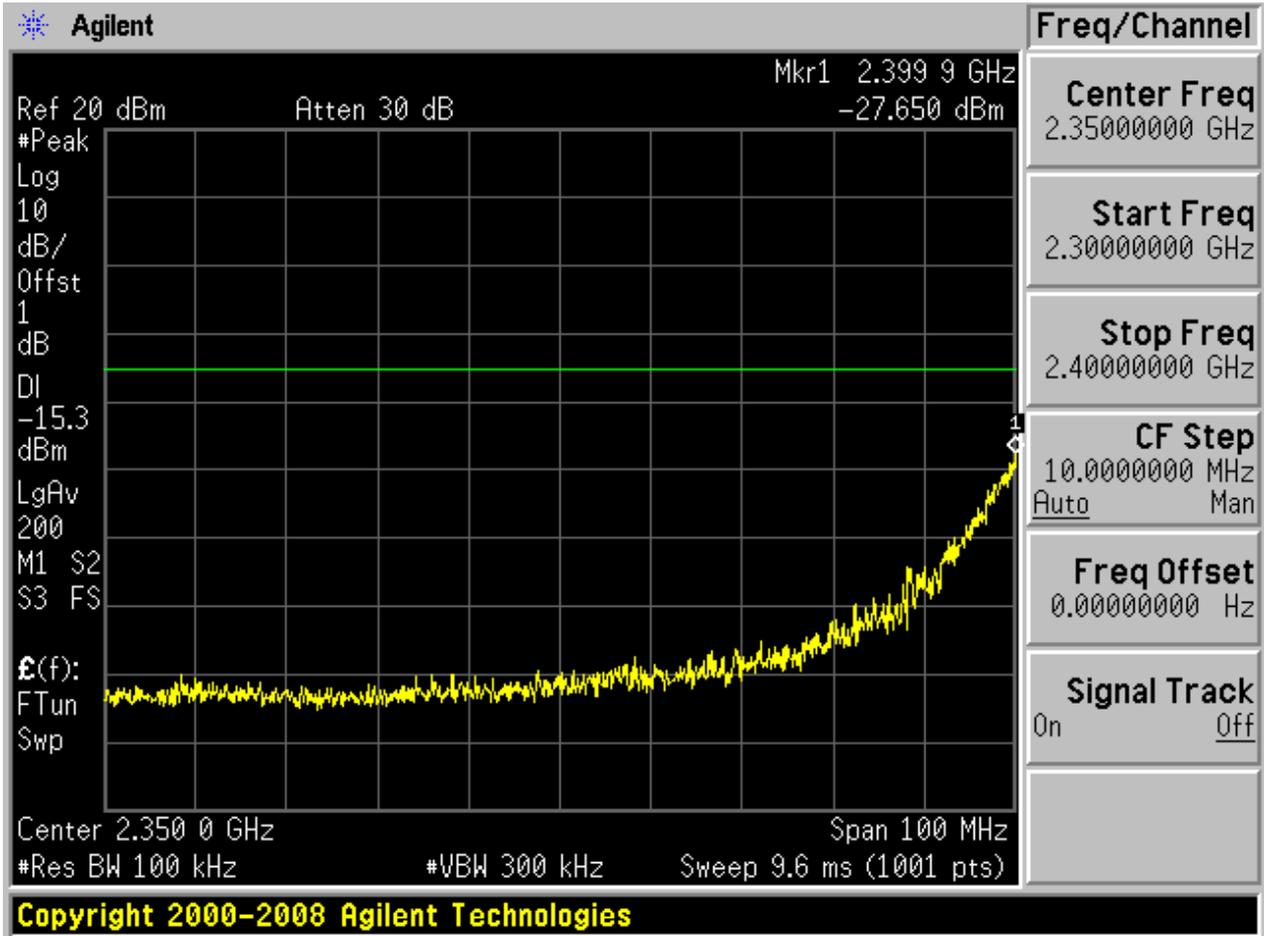

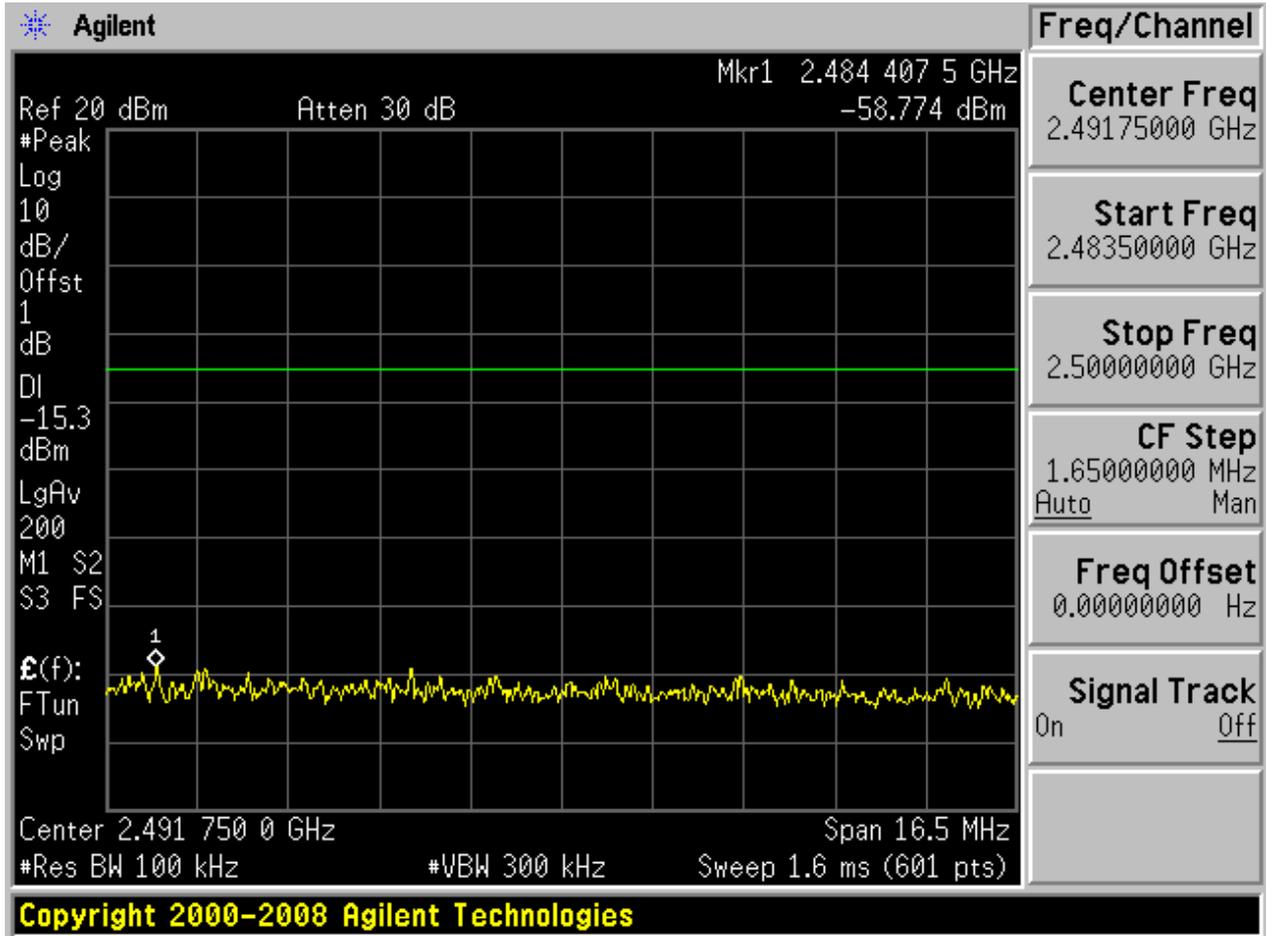


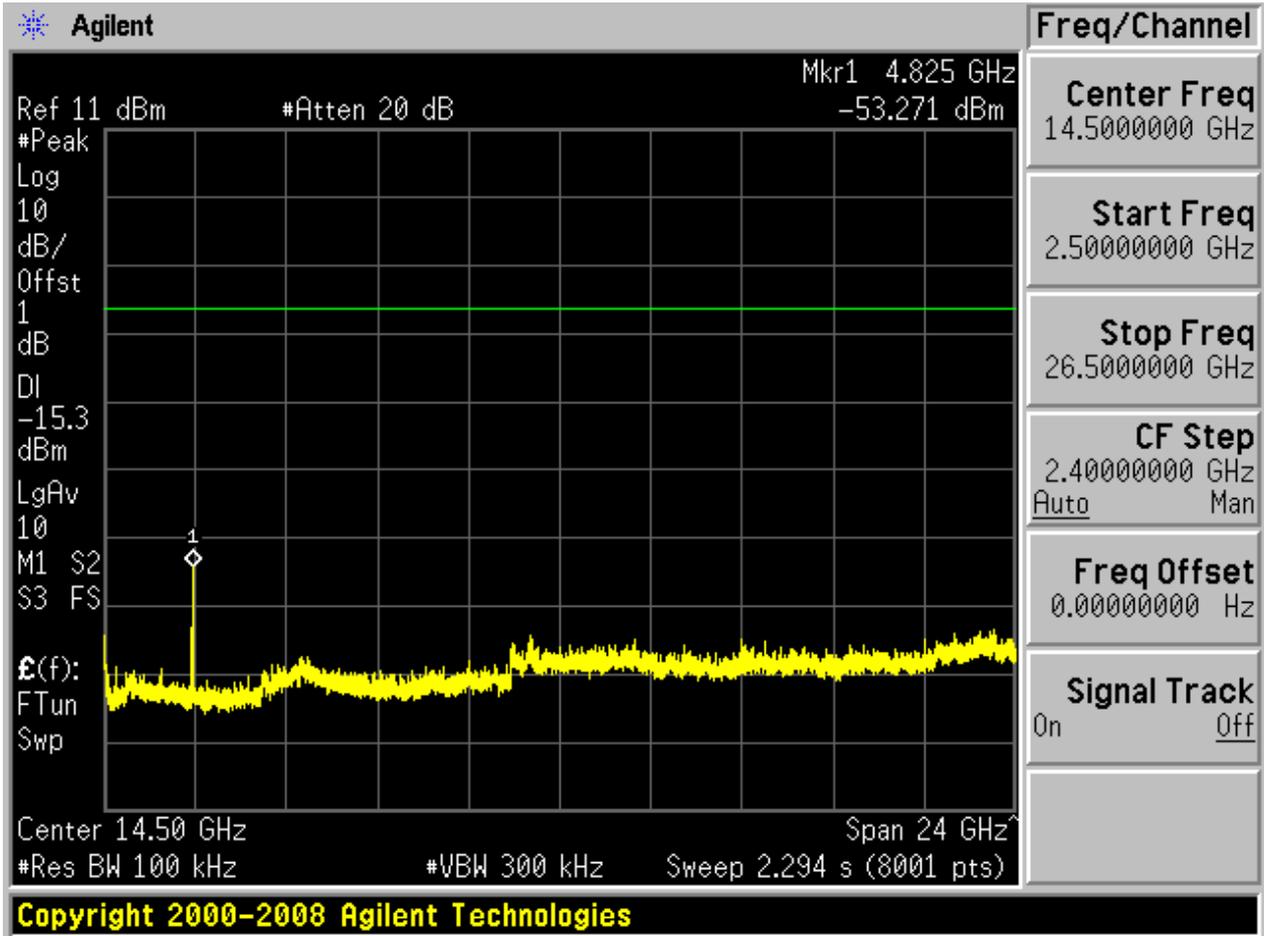




## 2.8 11G\_L@BG2

Pref:

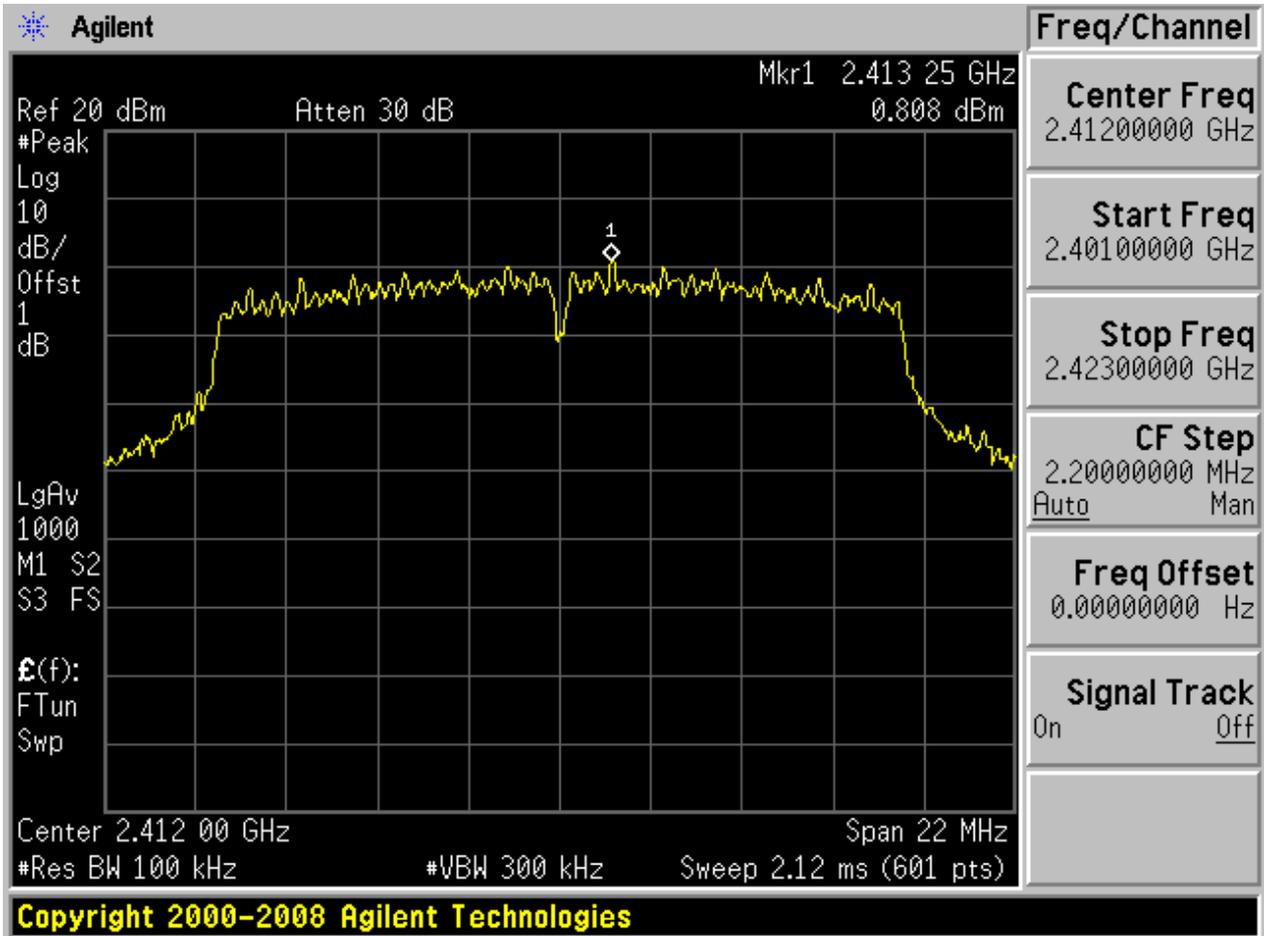






Puw:

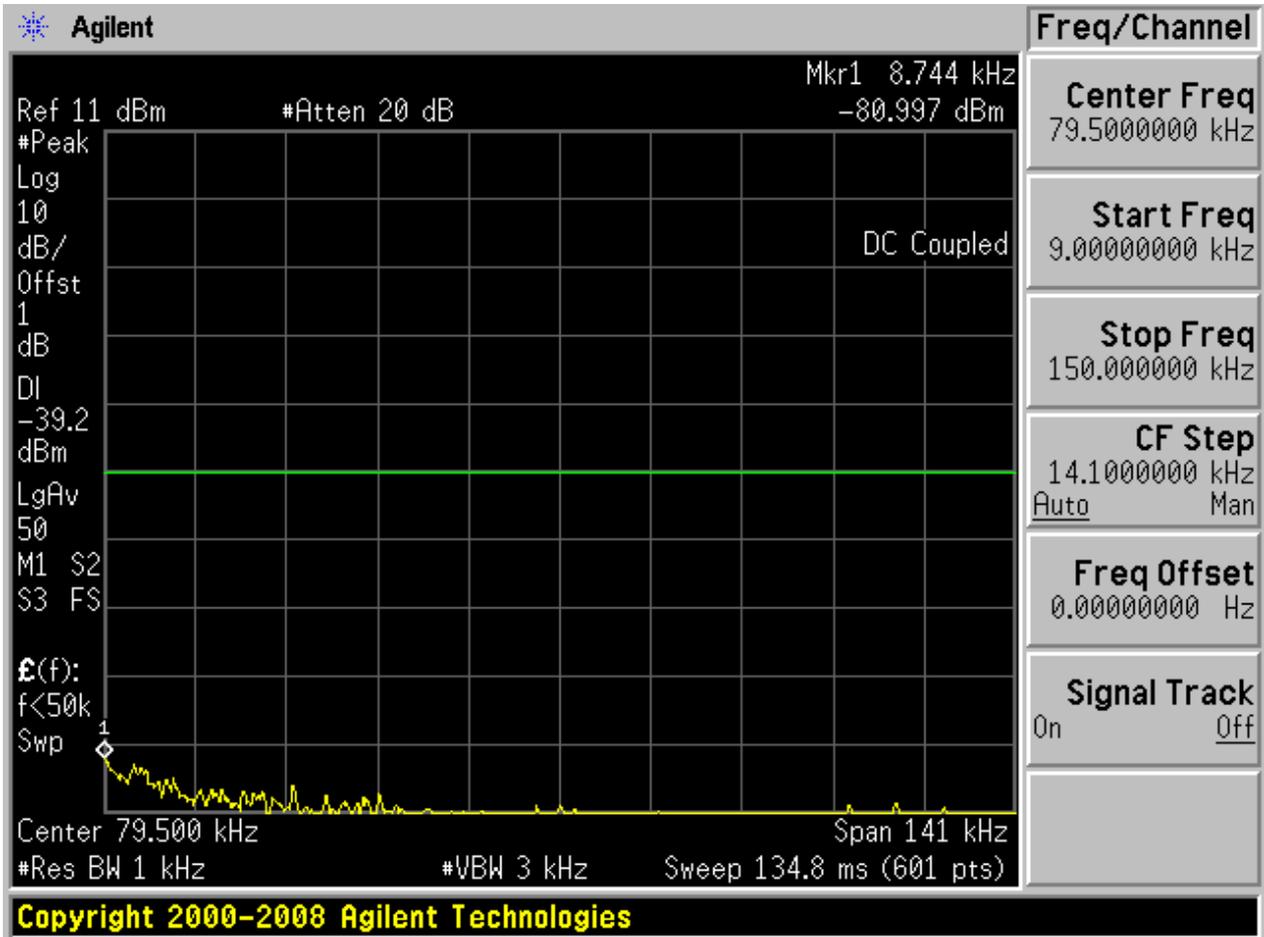




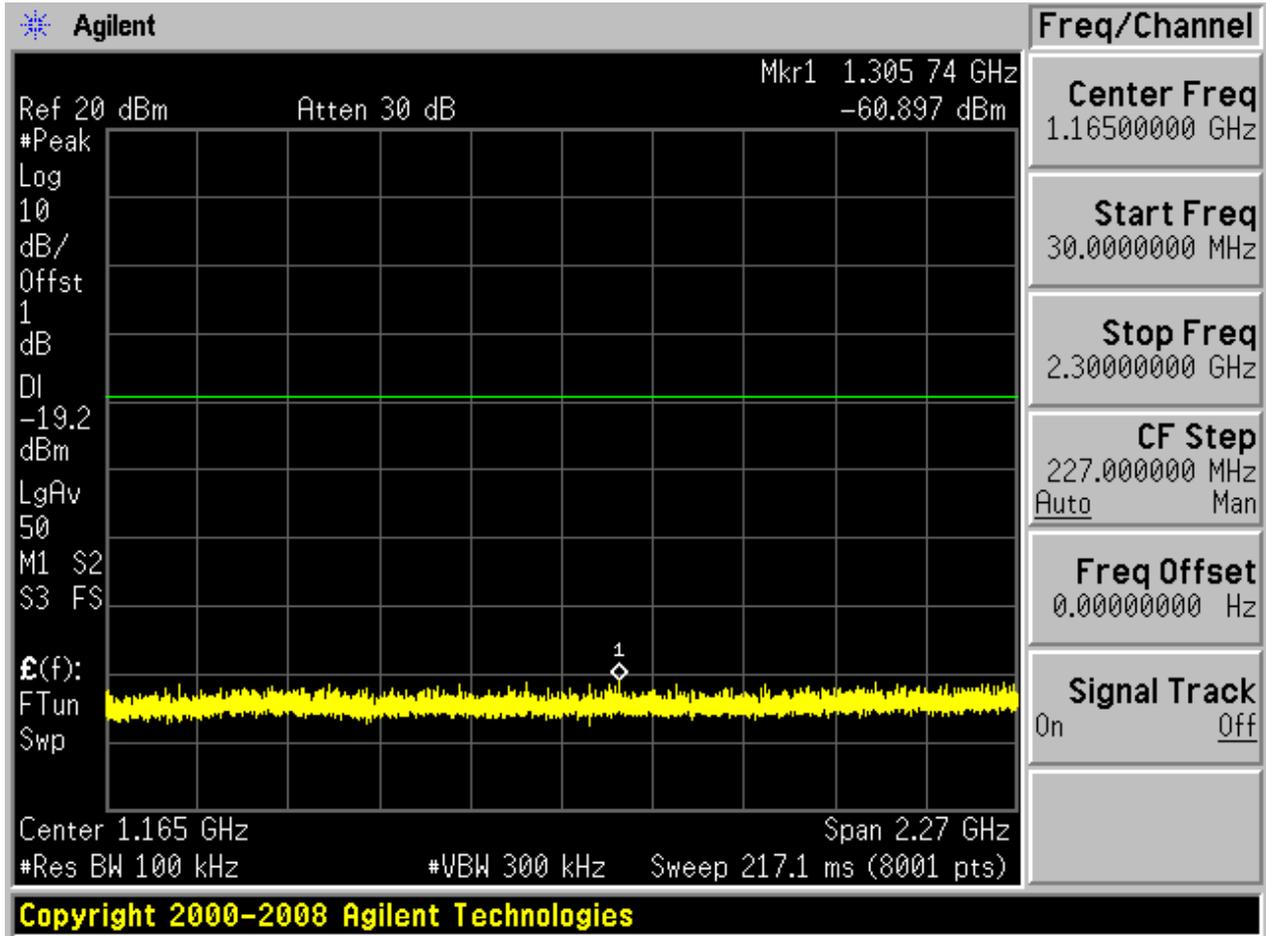

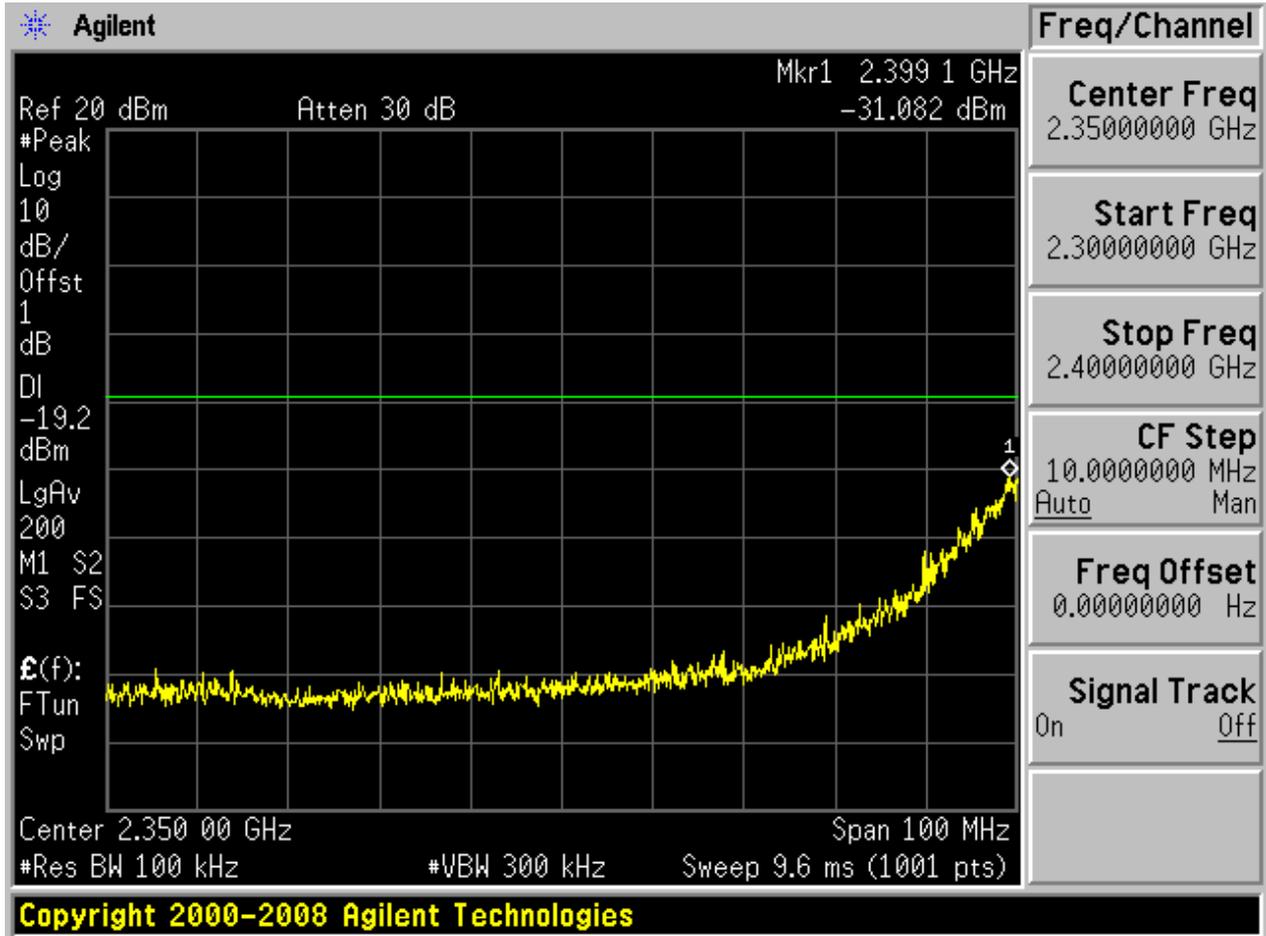

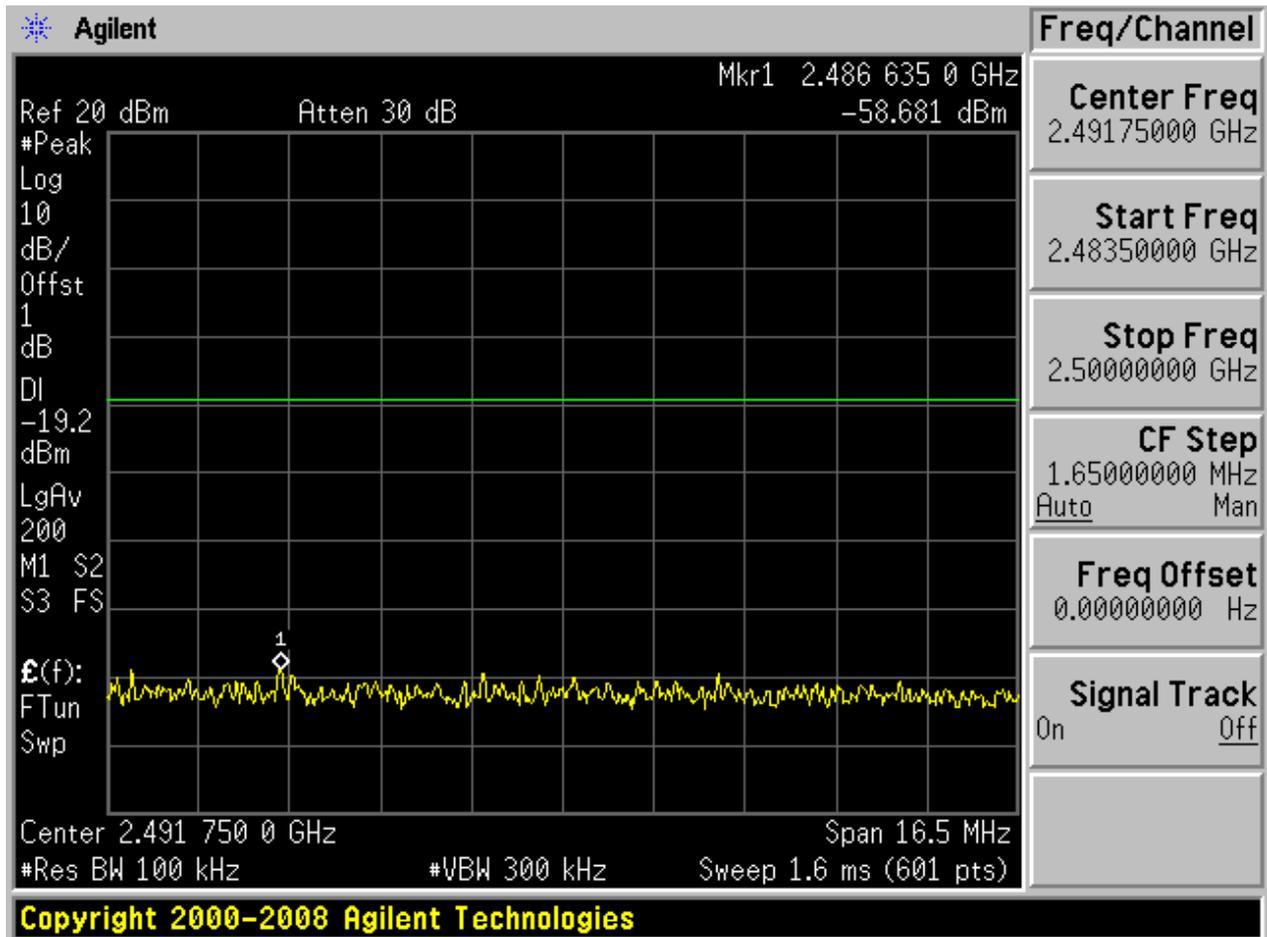


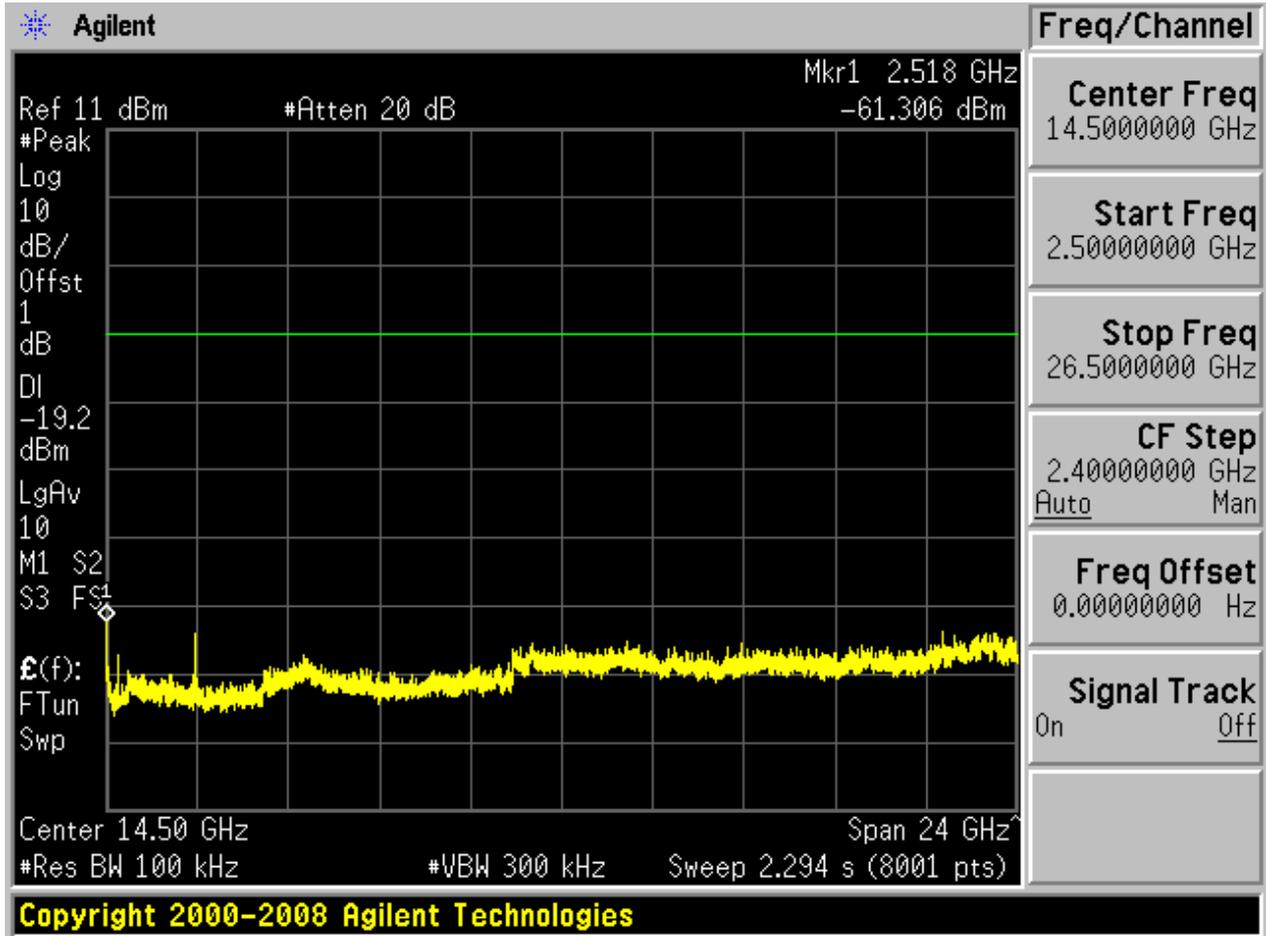




## 2.9 11G\_M@BG1

Pref:

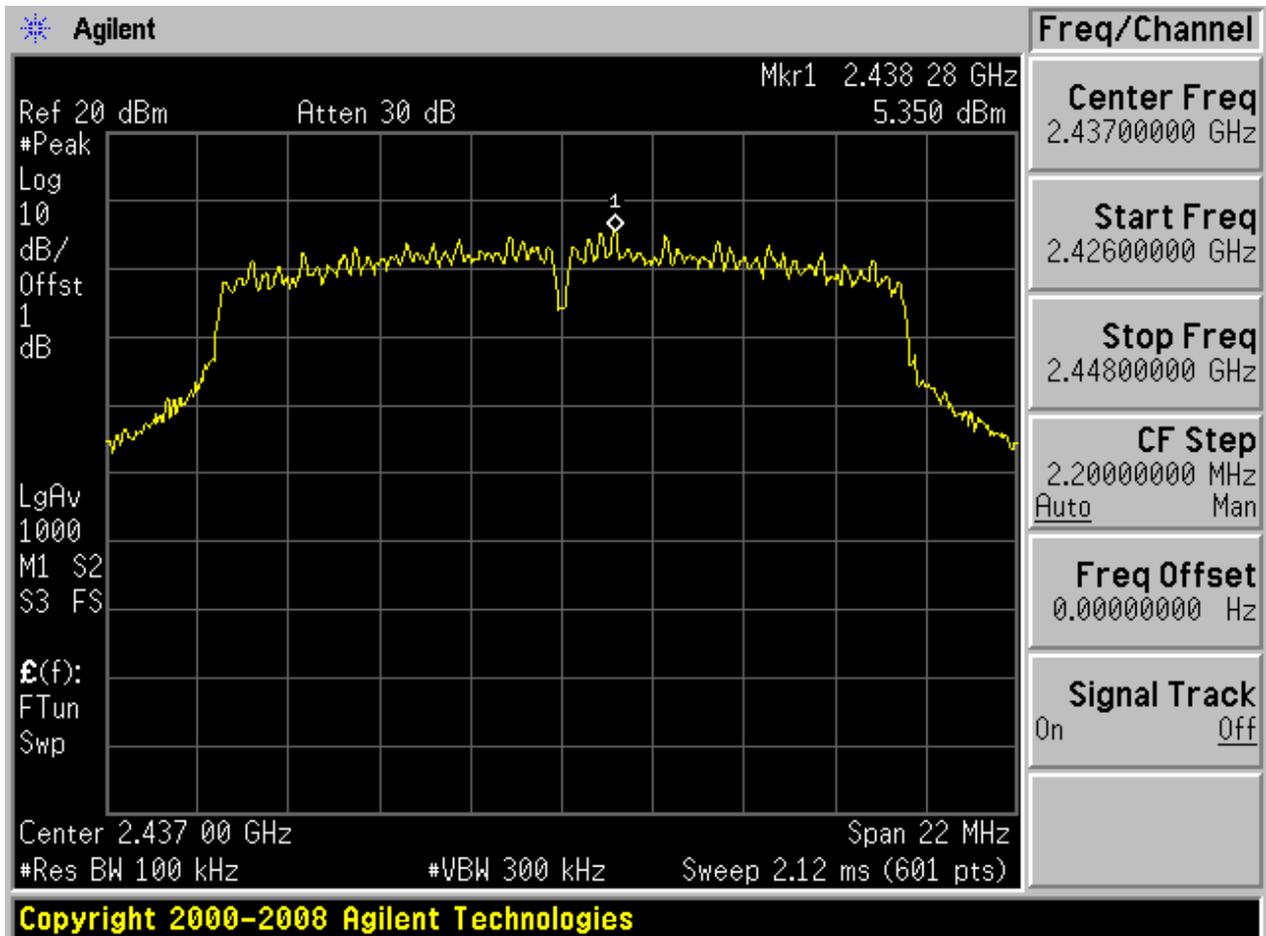






Puw:

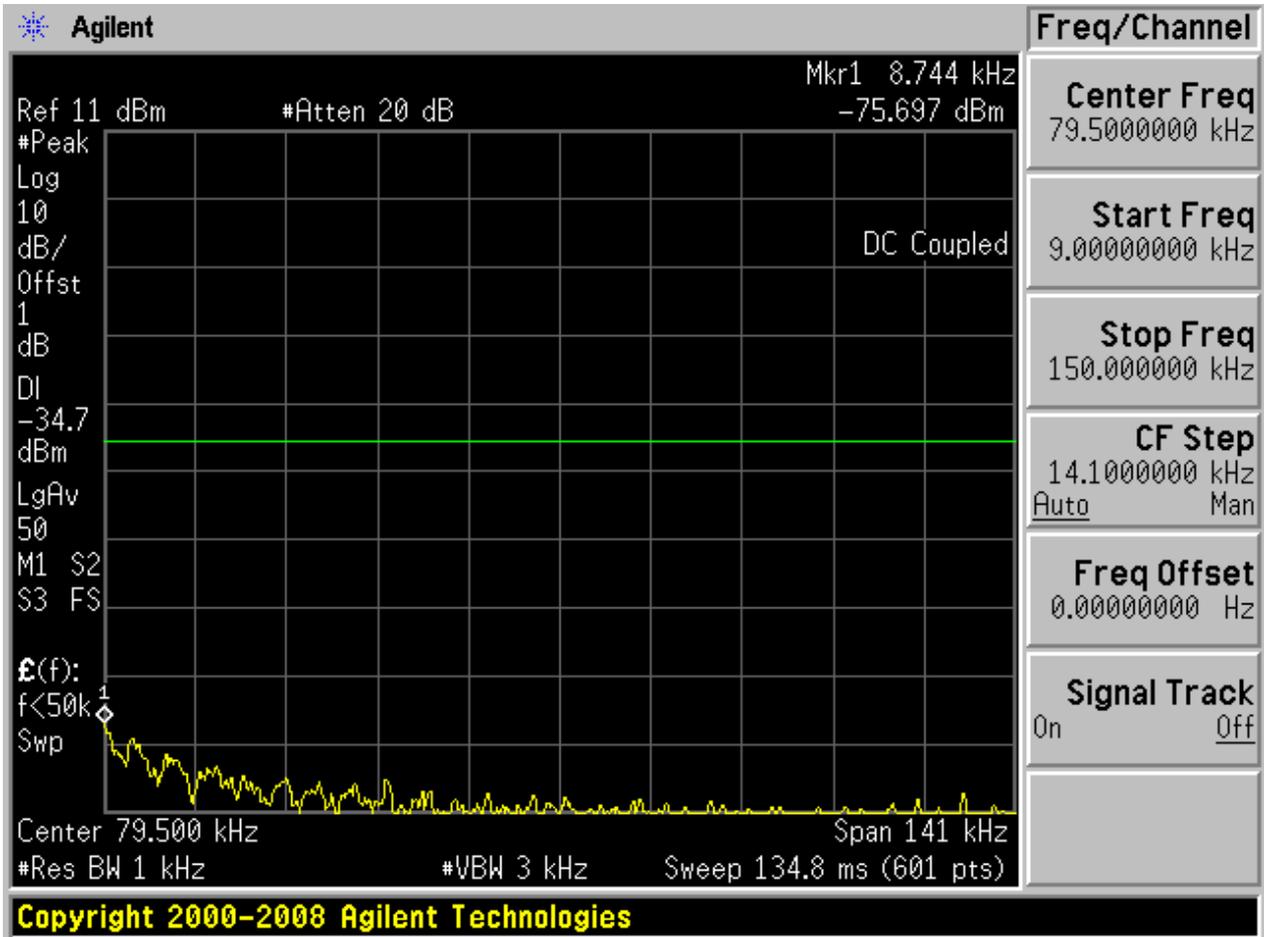




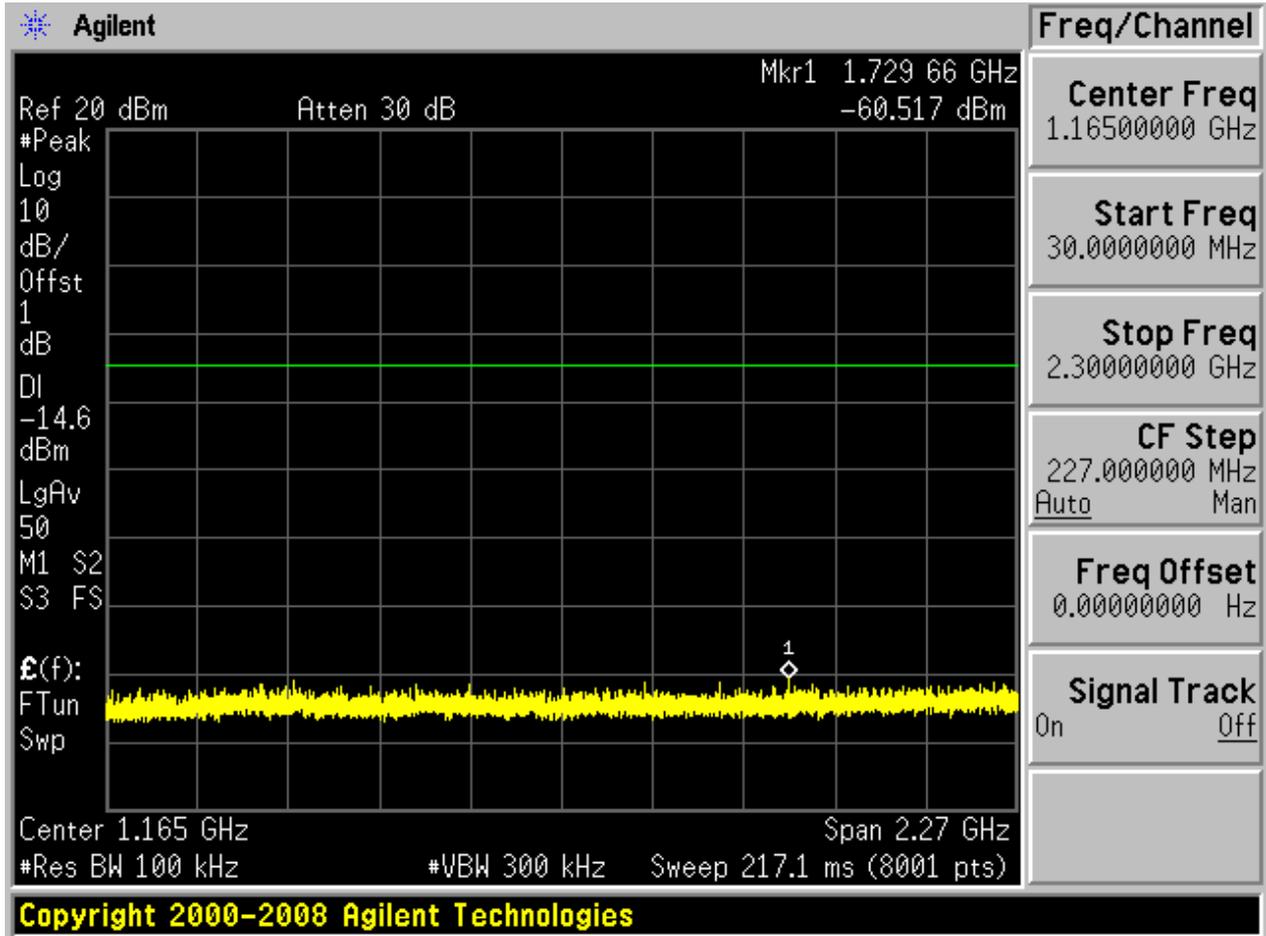

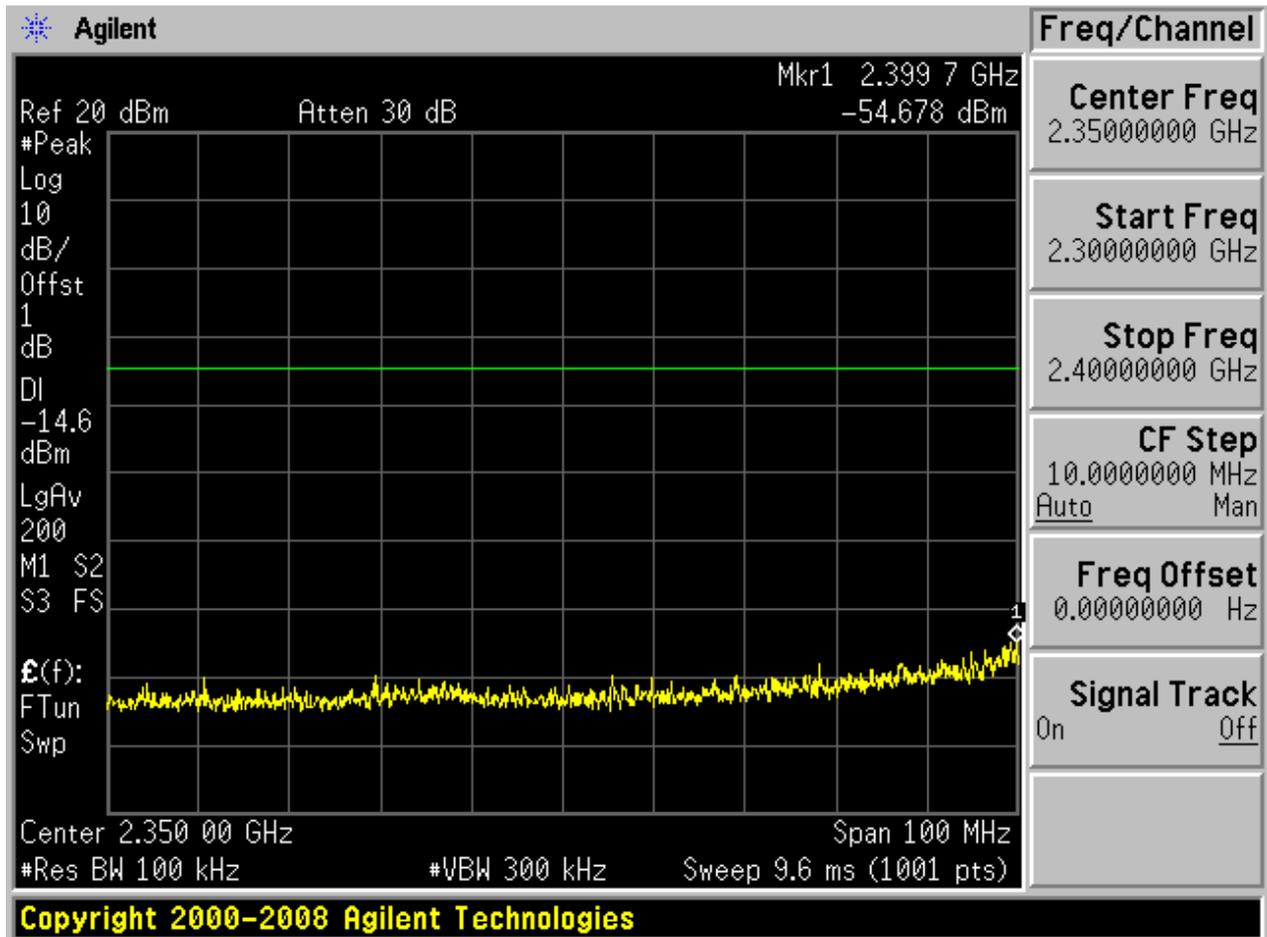

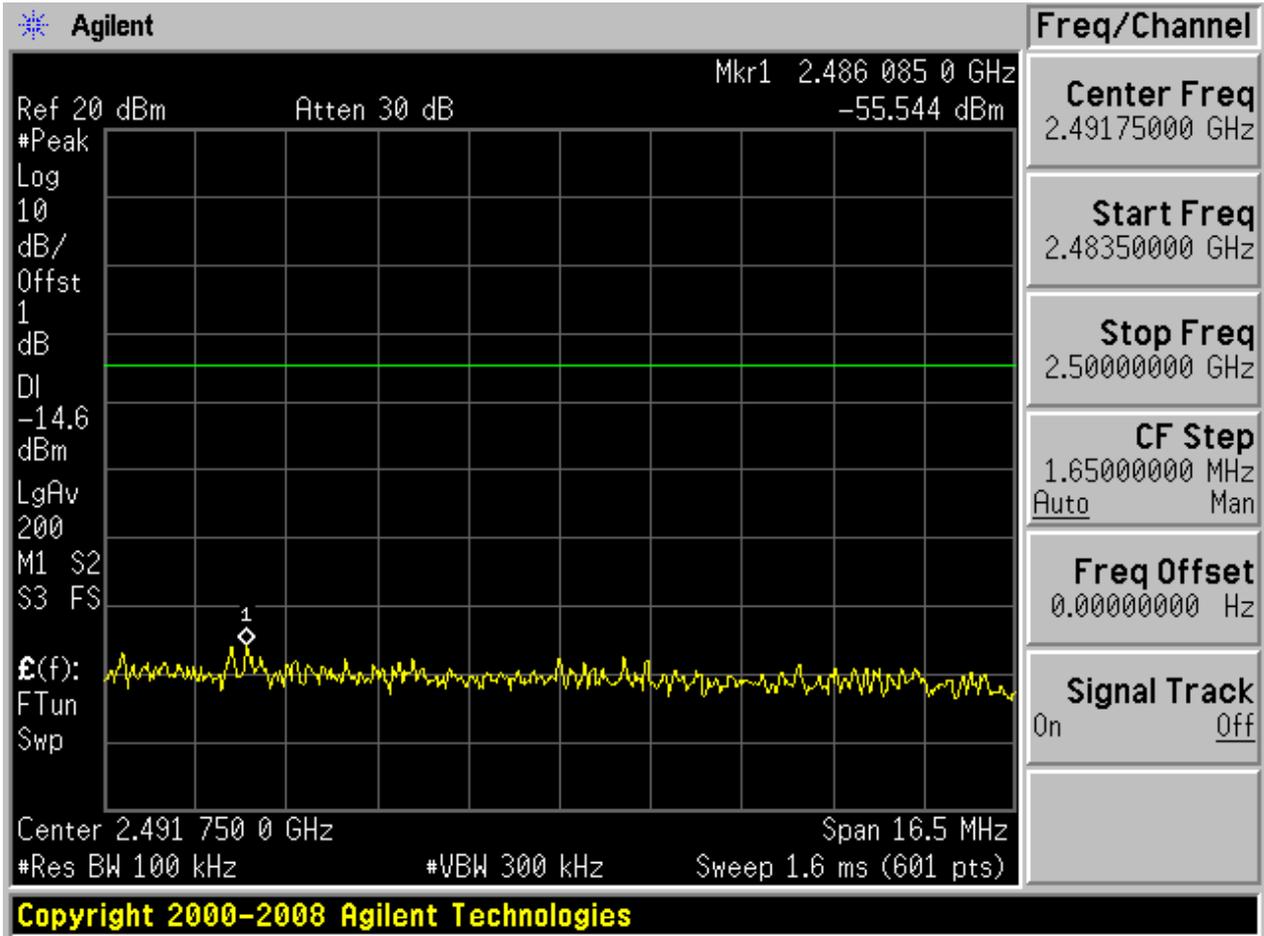


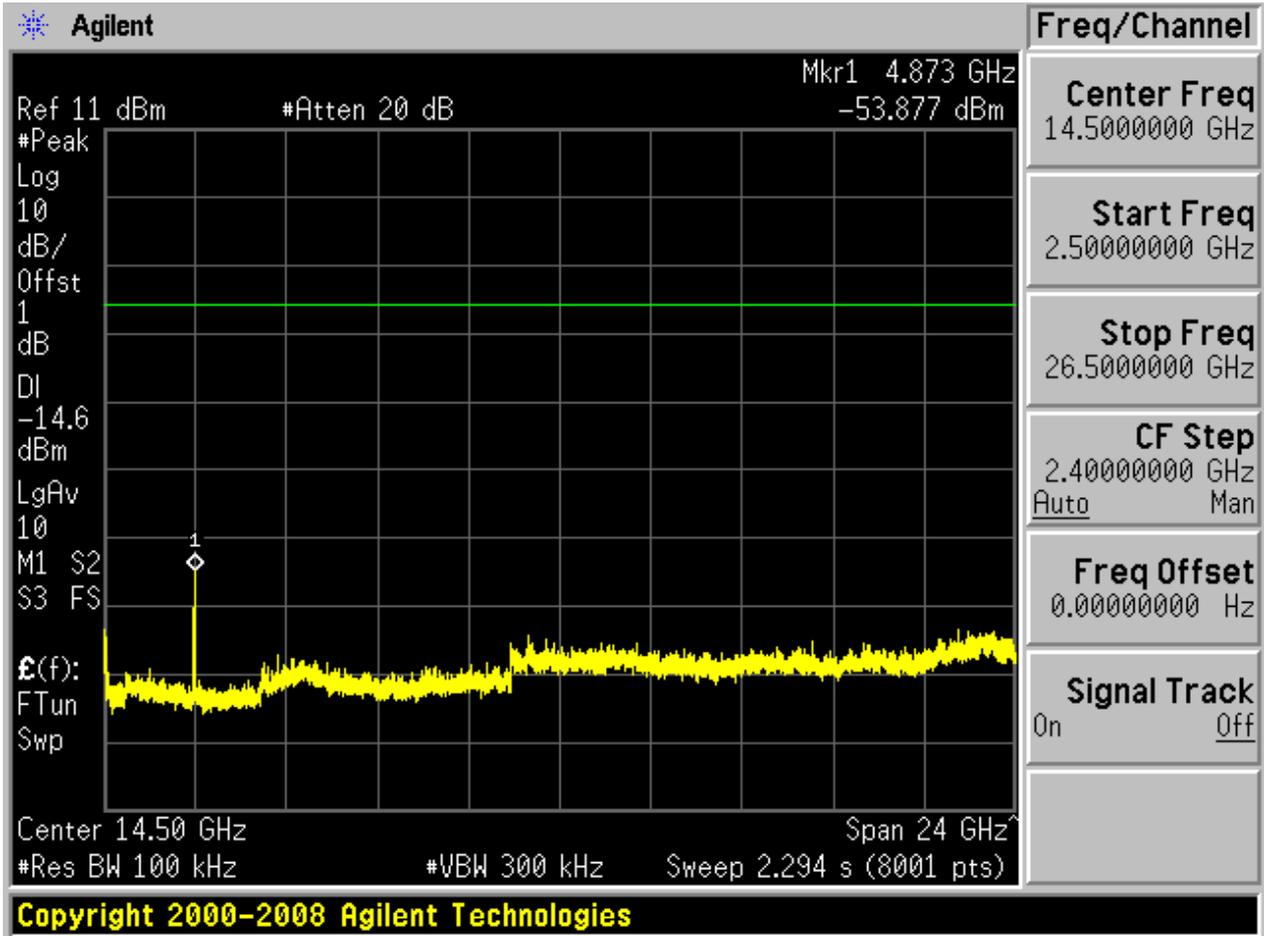




## 2.10 11G\_M@BG2


Pref:

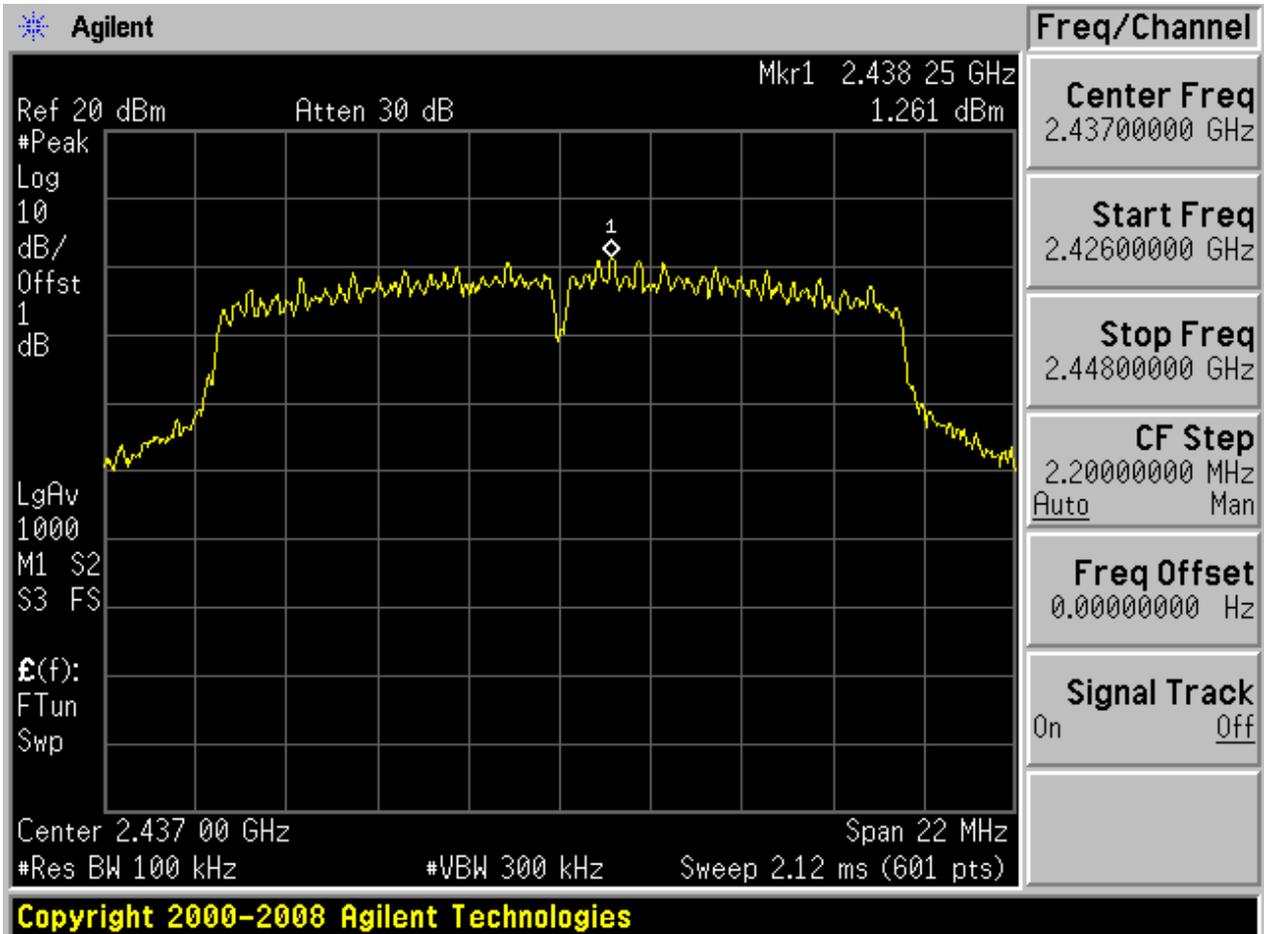






Puw:

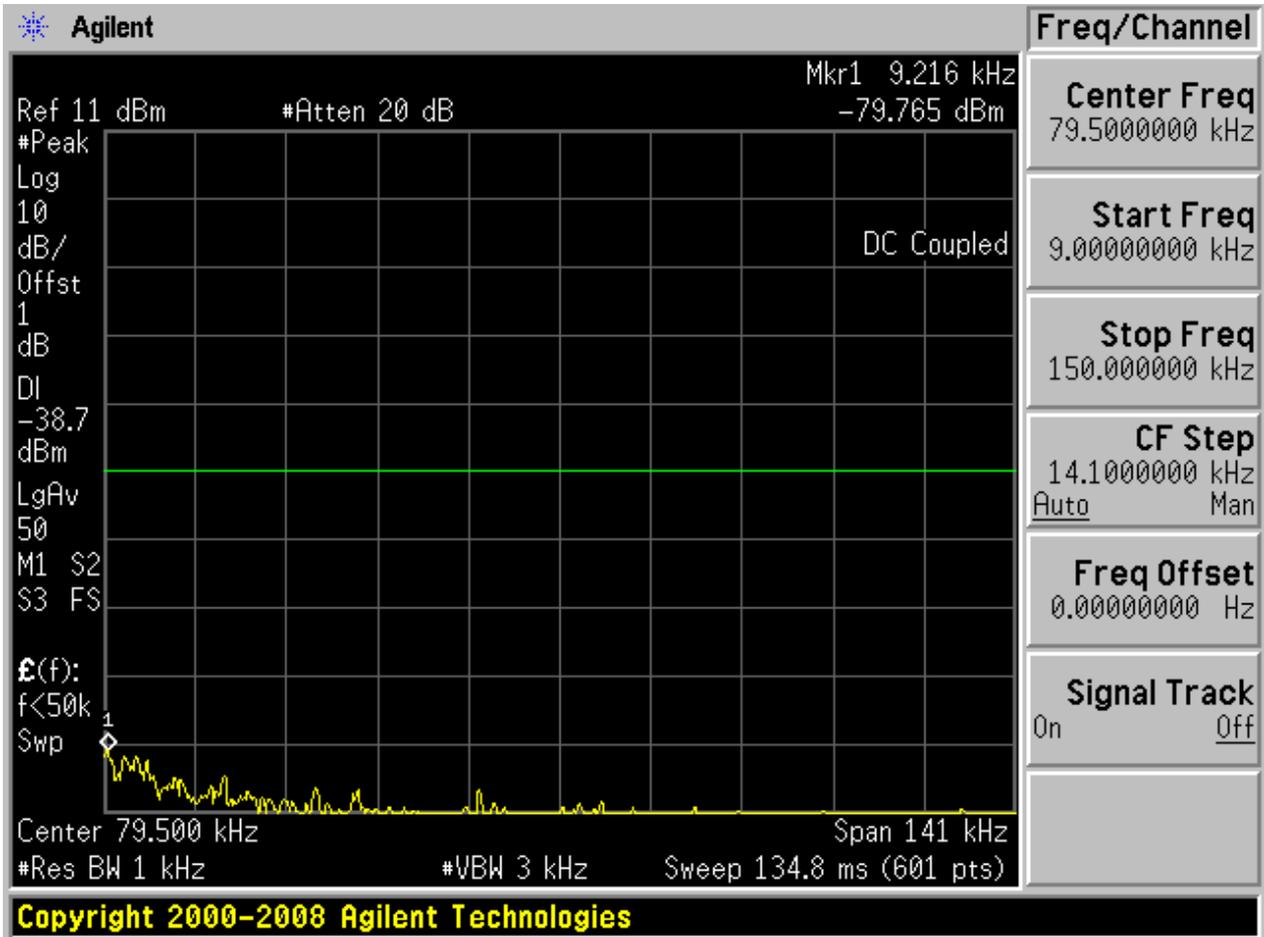


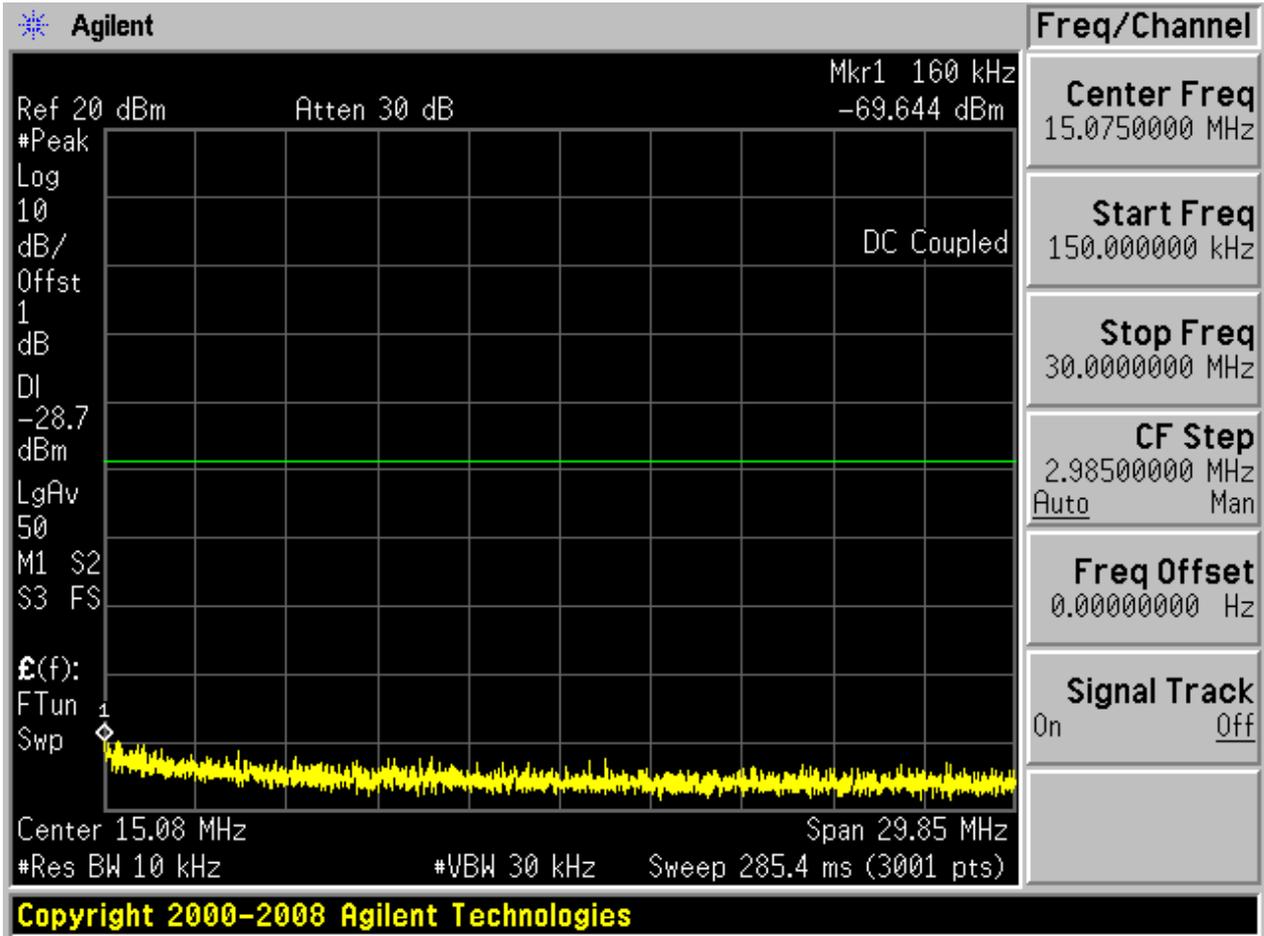

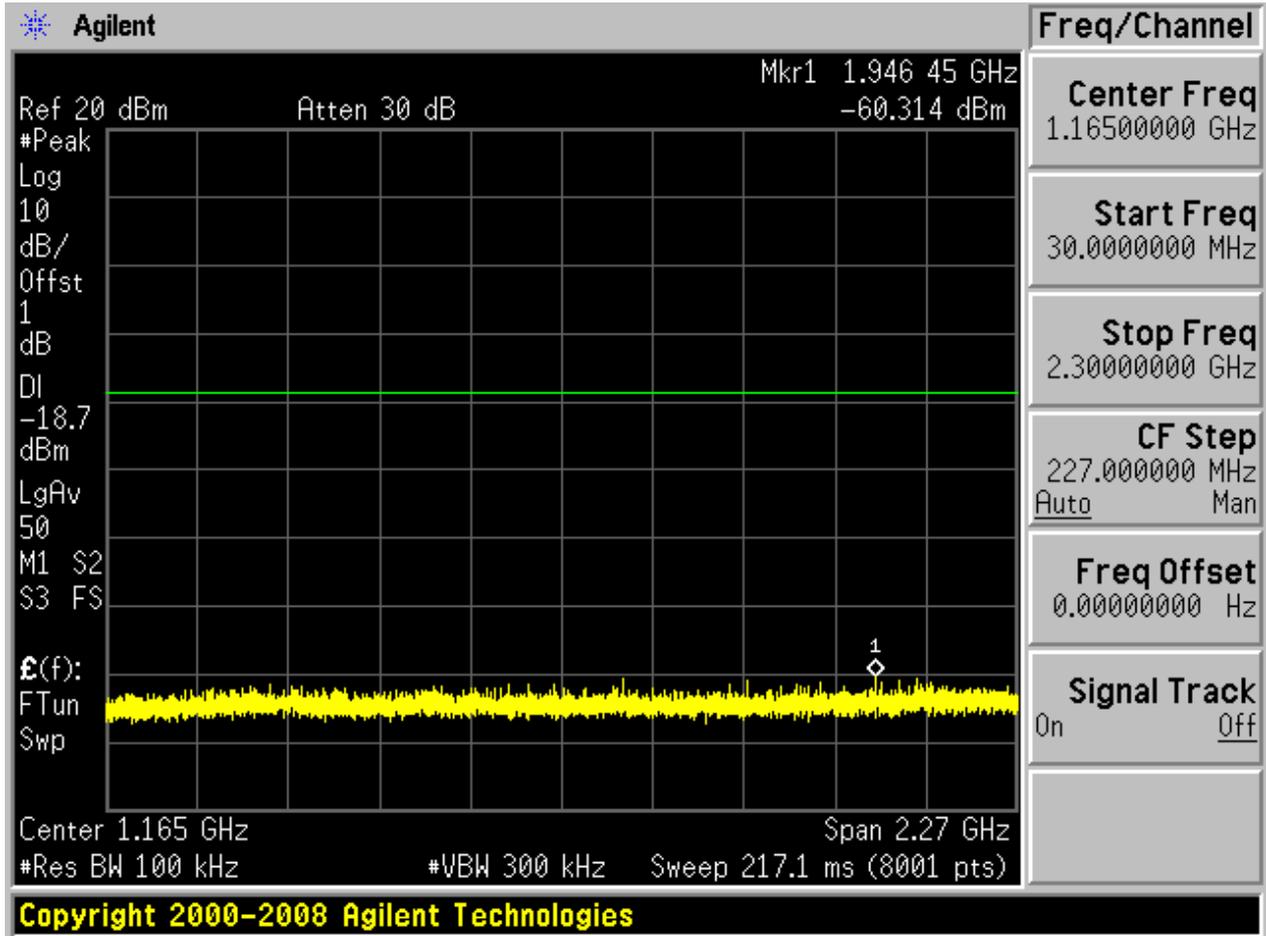

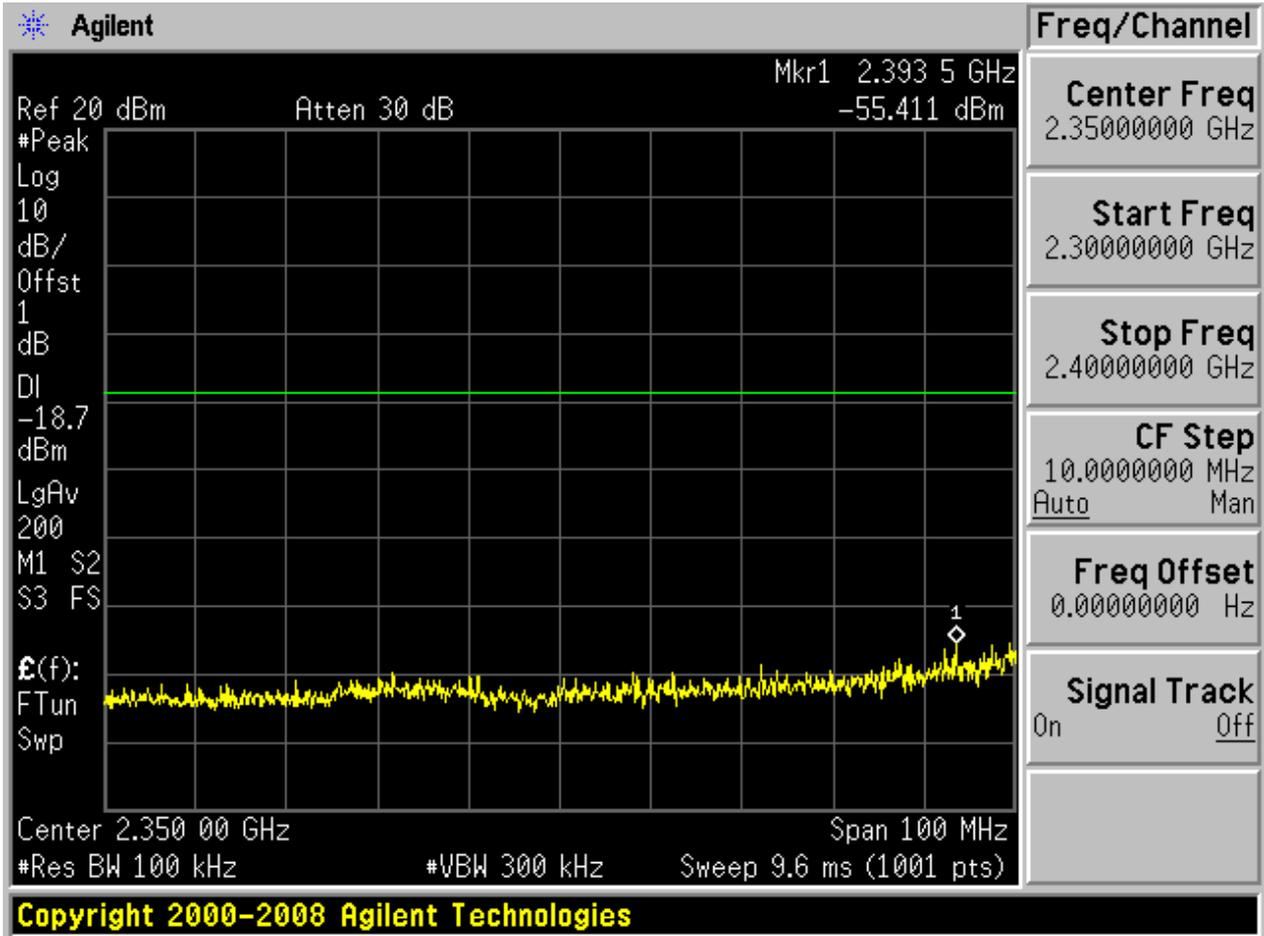

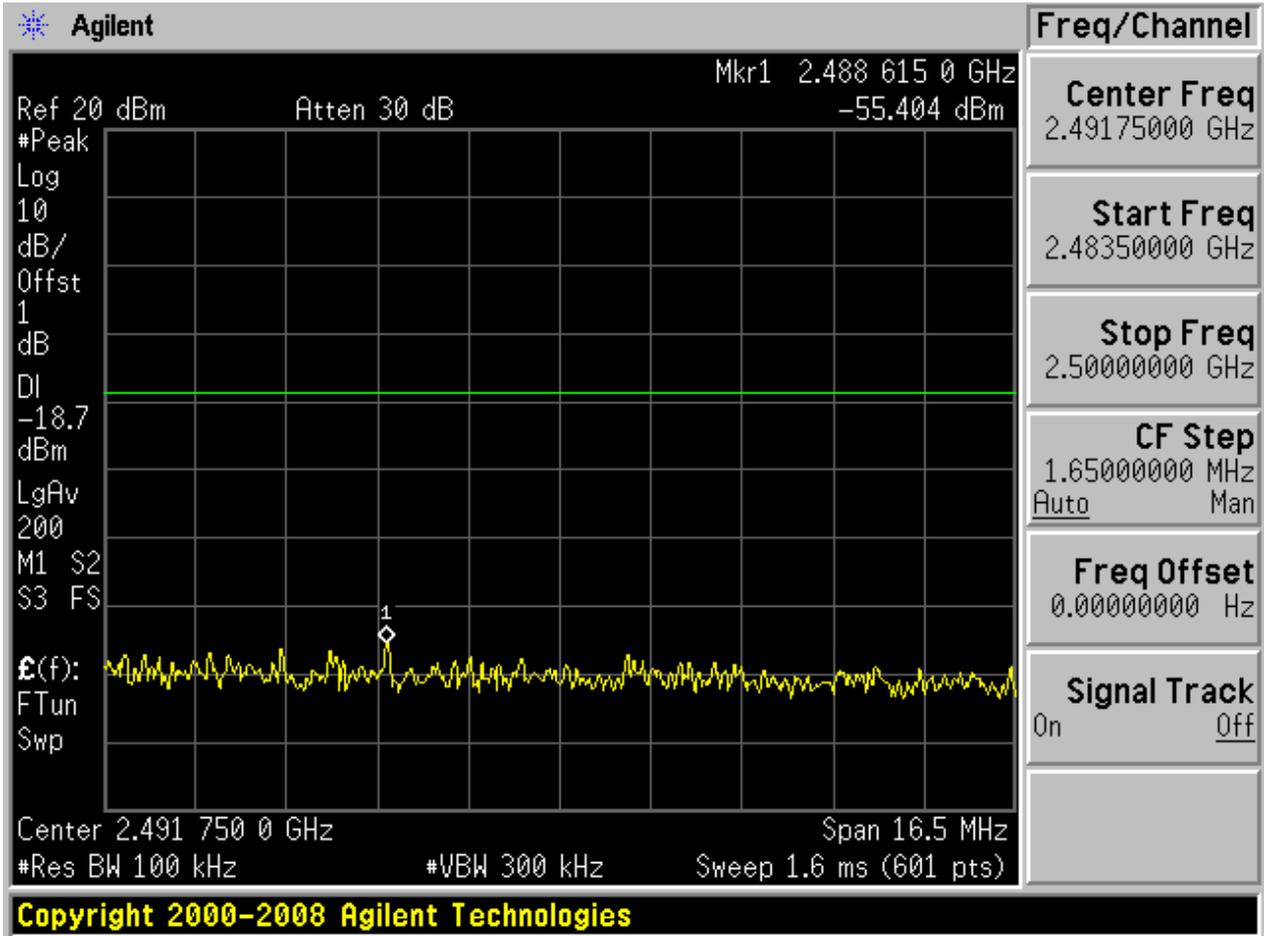


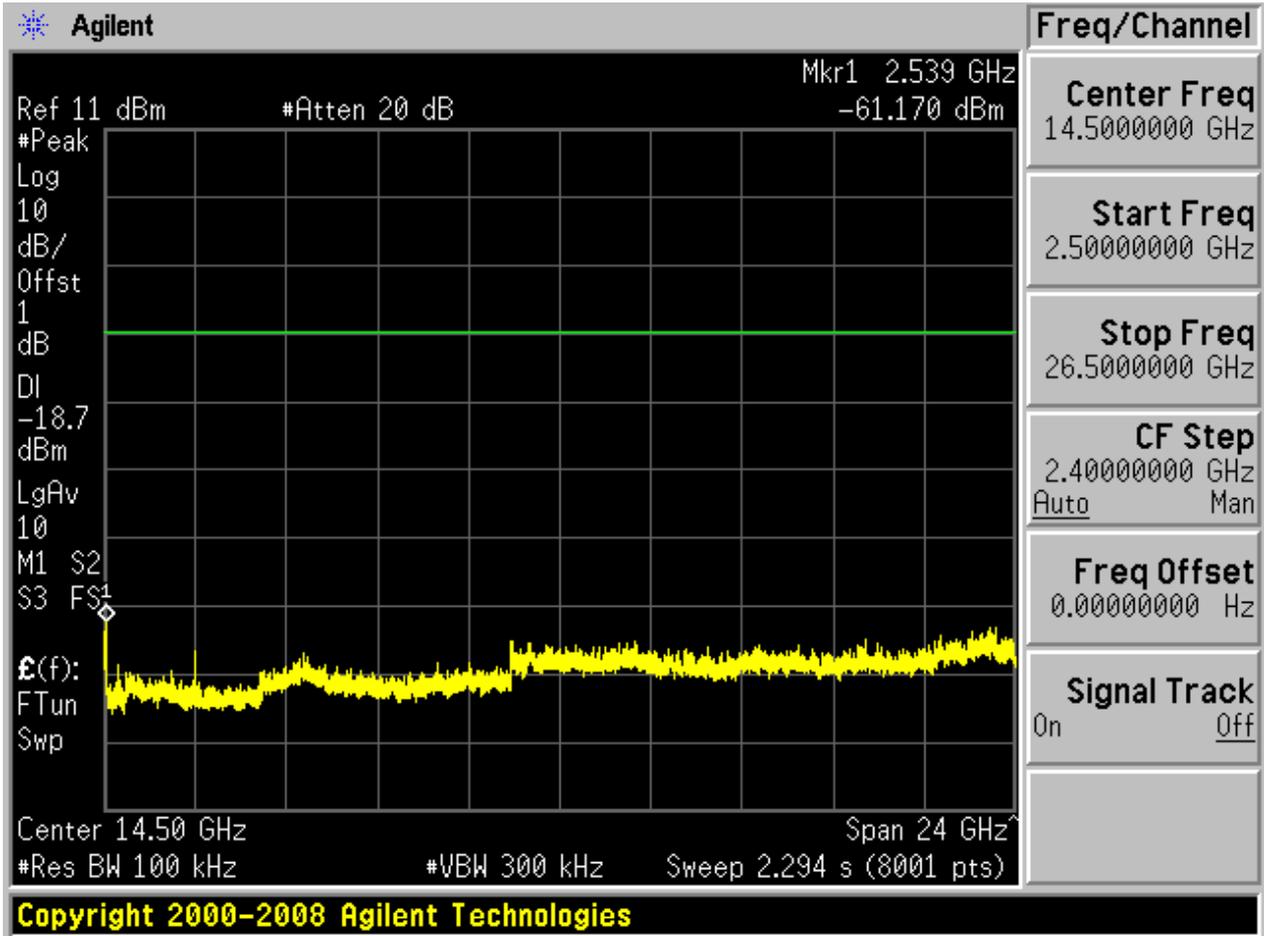




## 2.11 11G\_H@BG1


Pref:

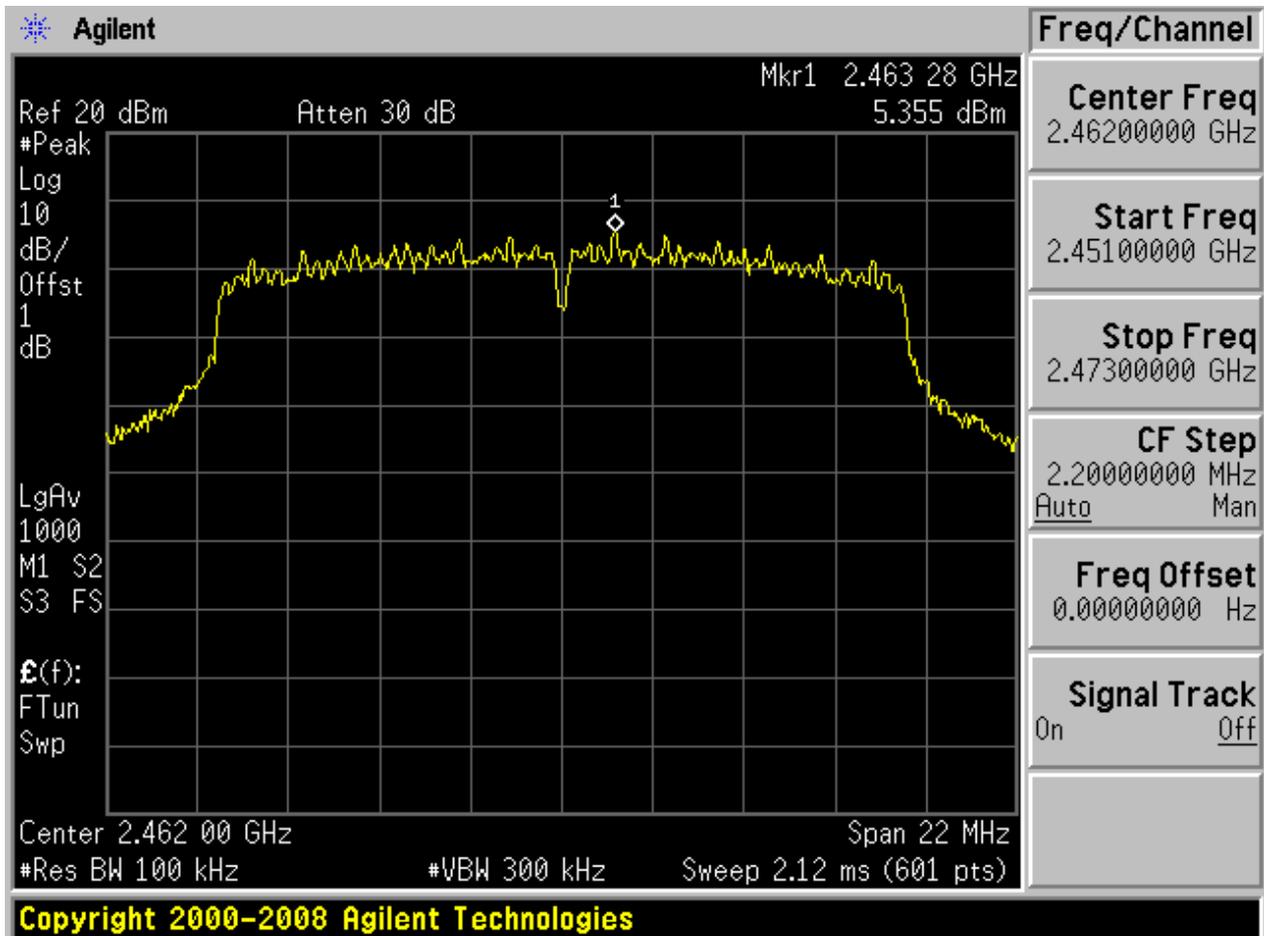






Puw:

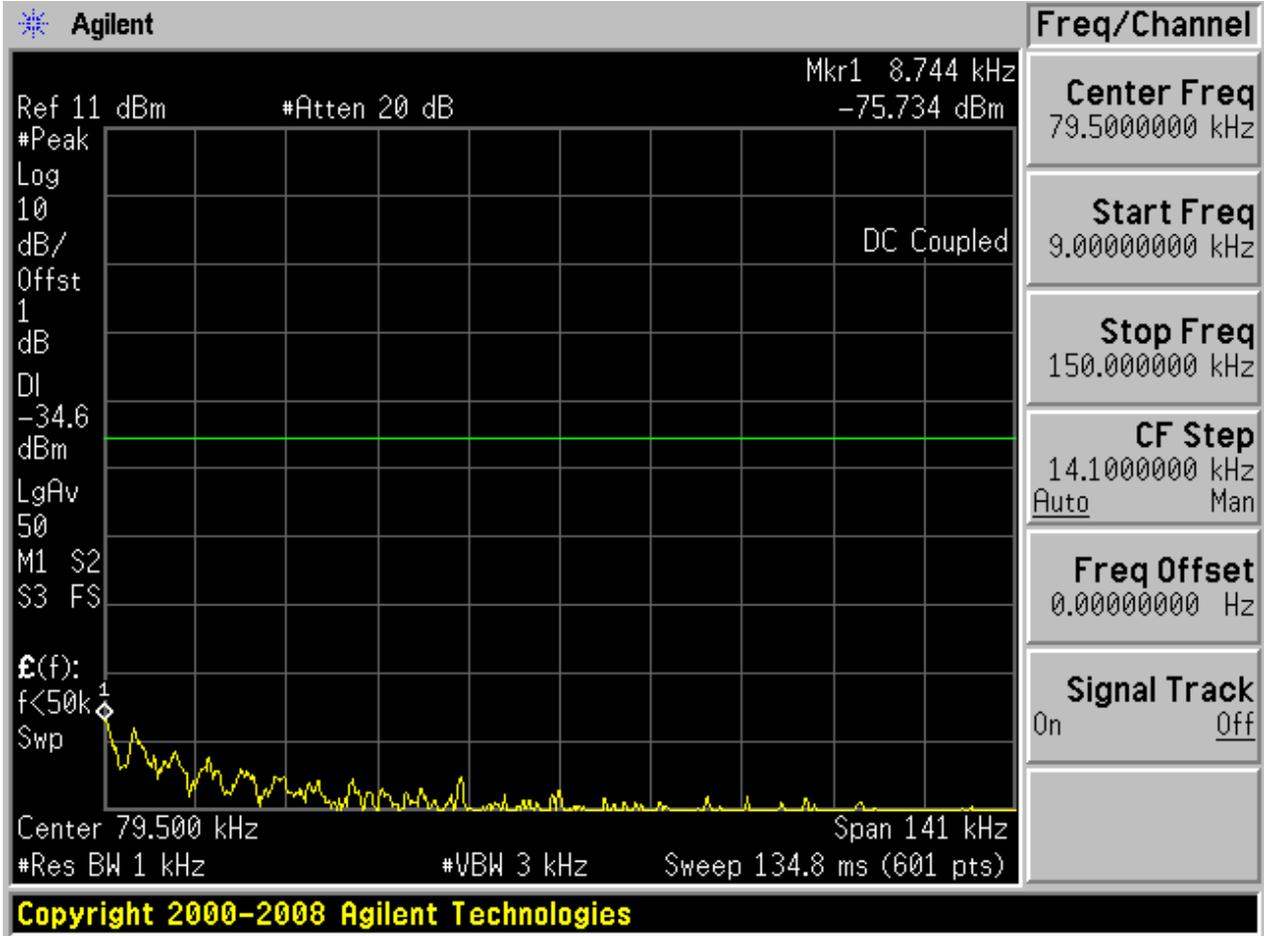


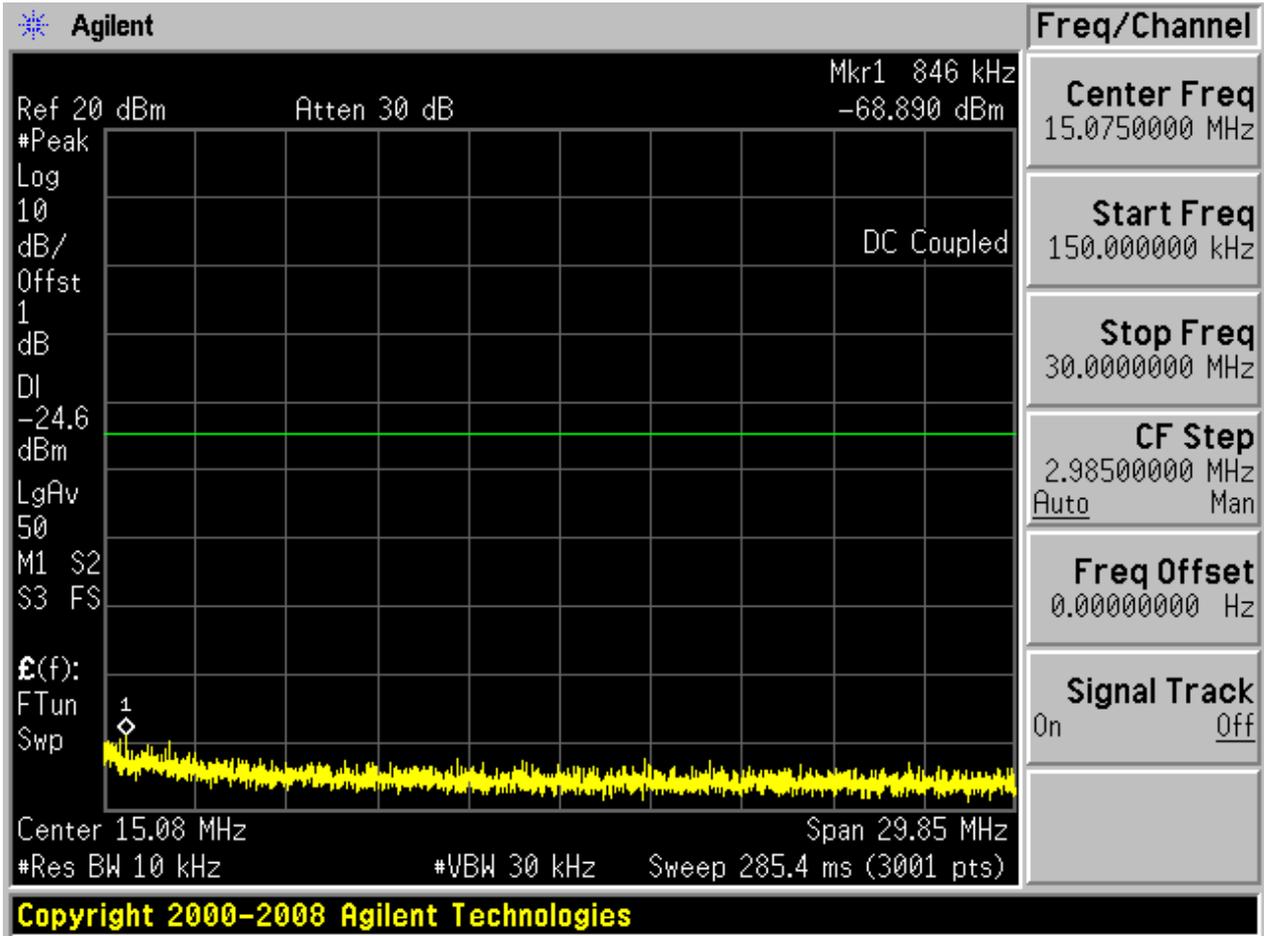

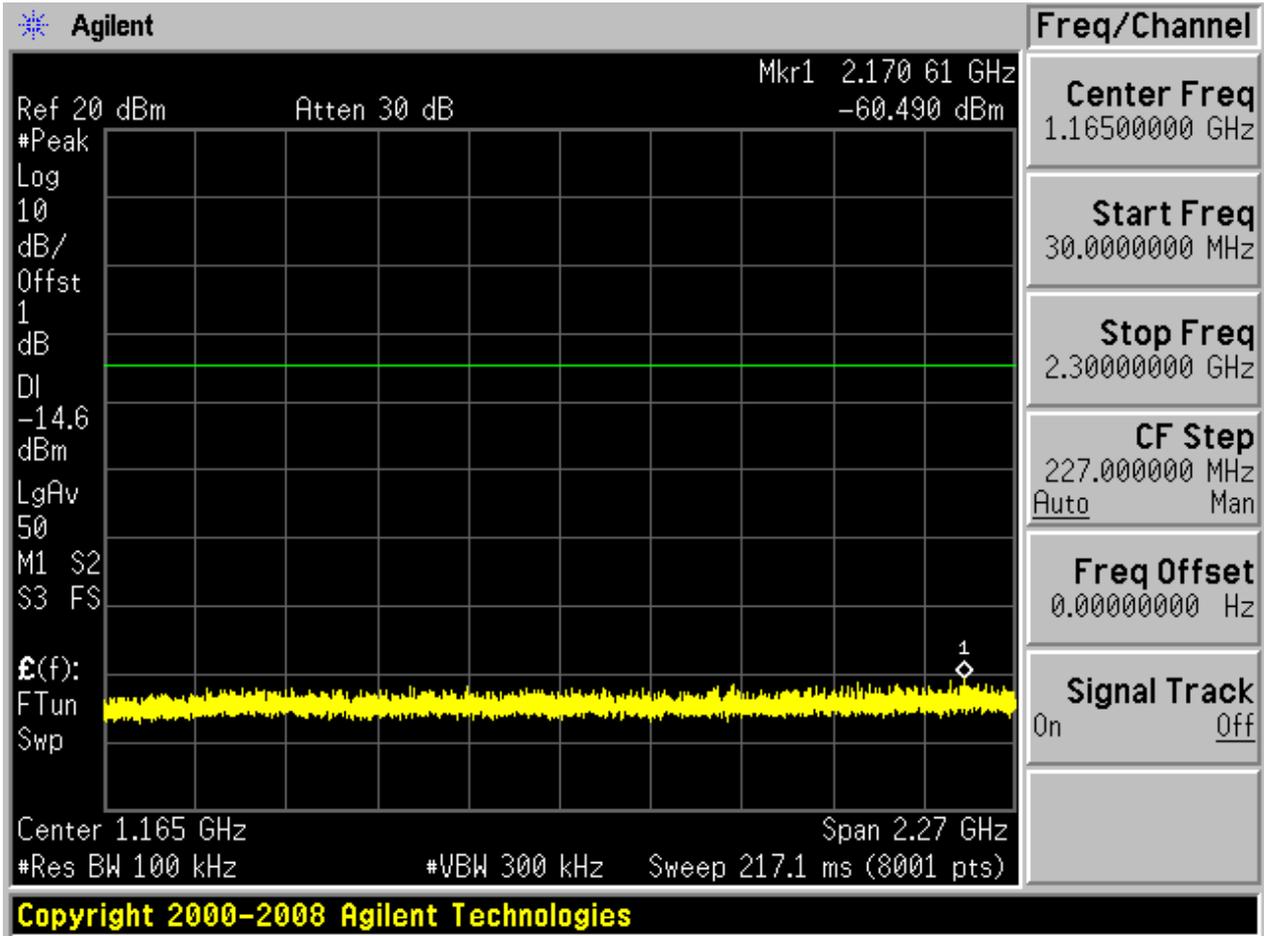

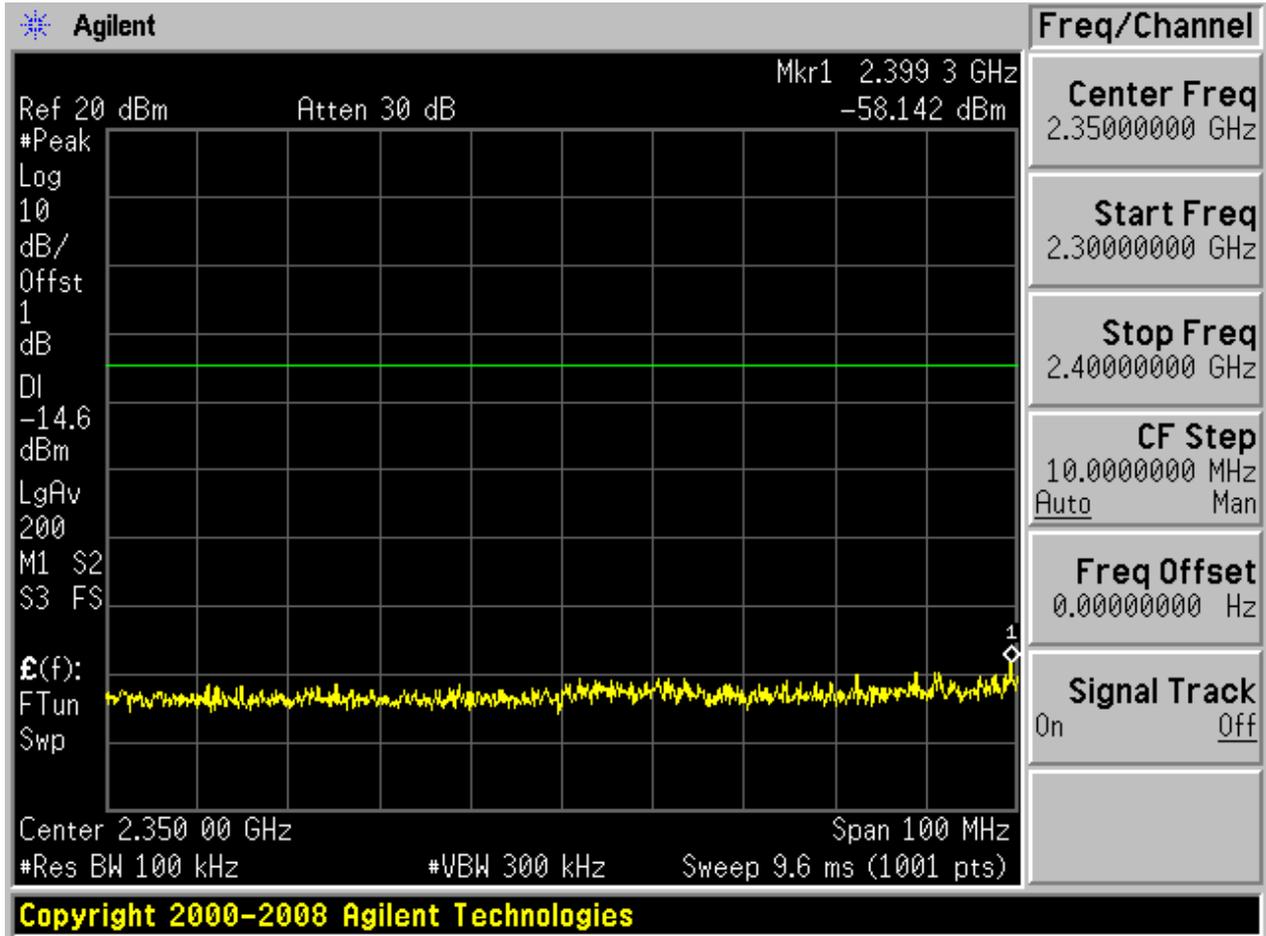

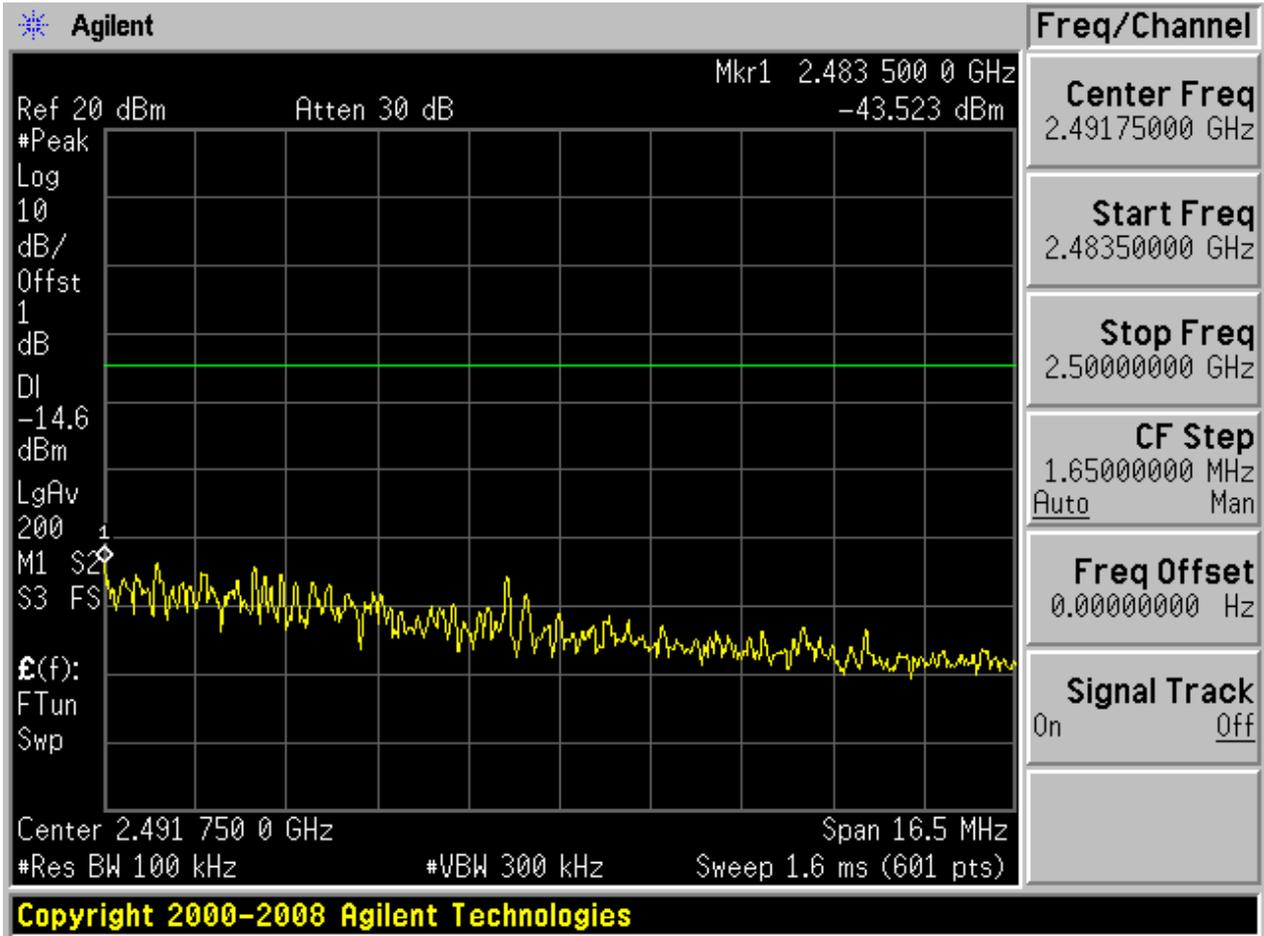


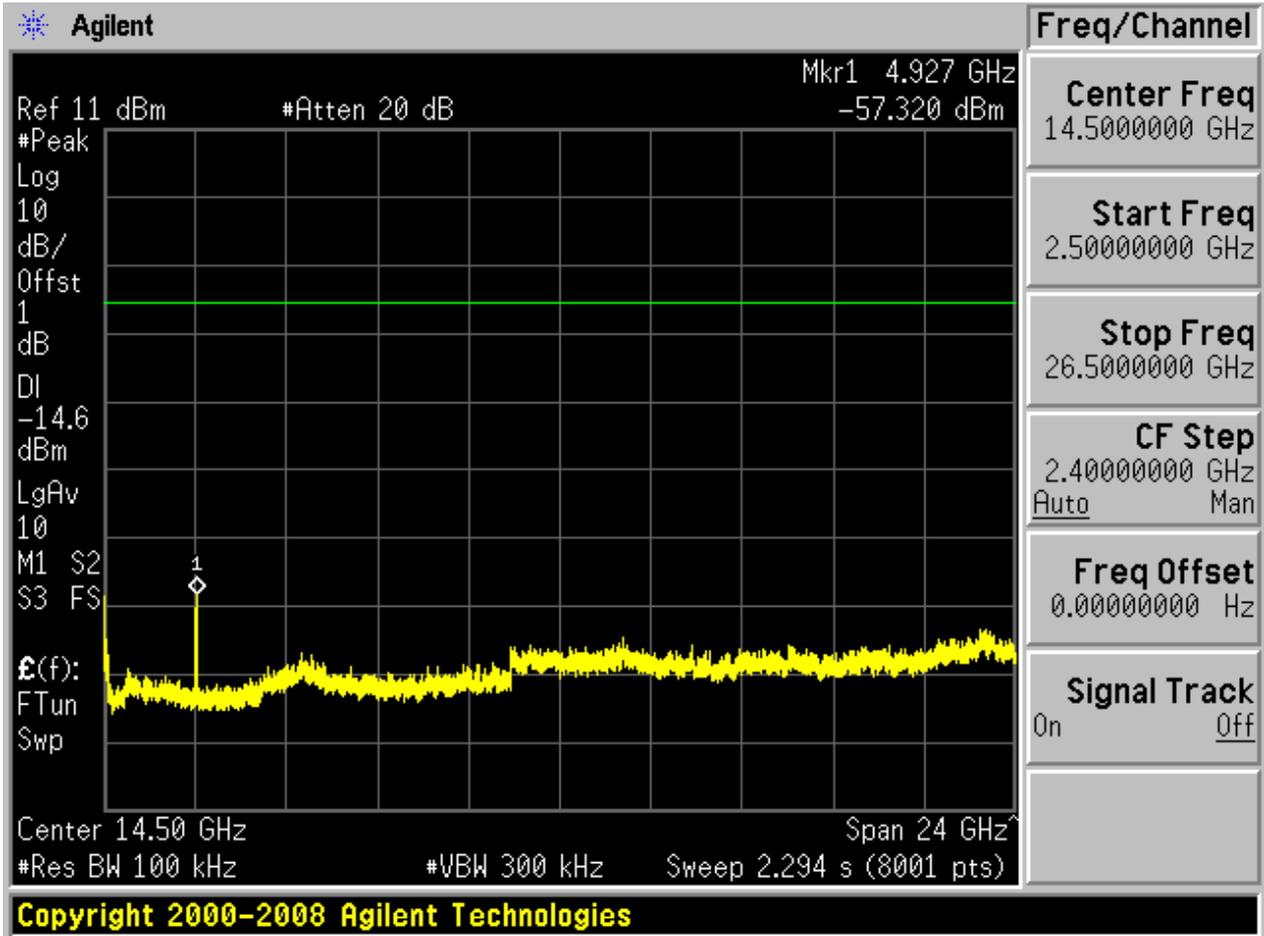




## 2.12 11G\_H@BG2

Pref:

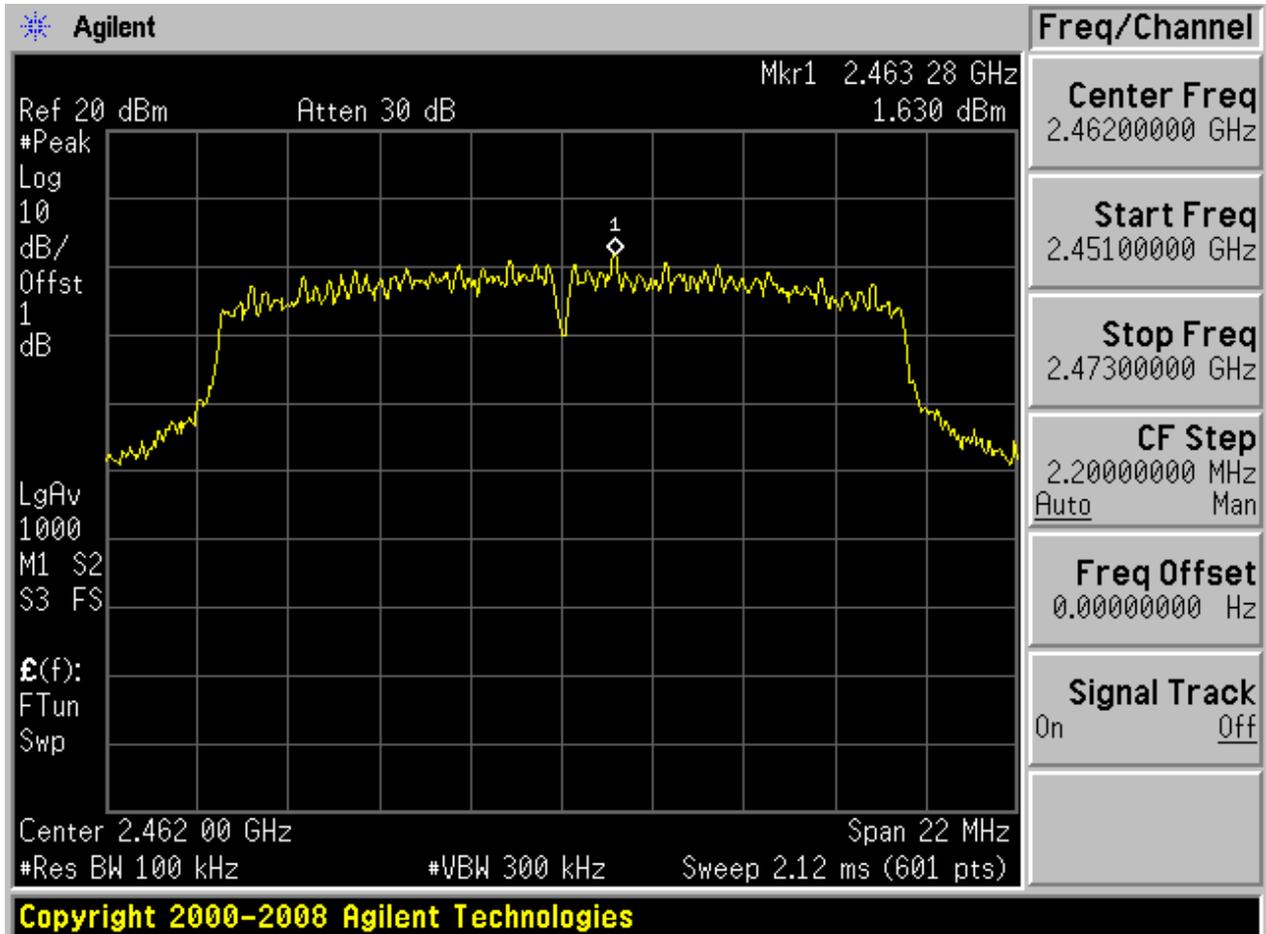






Puw:

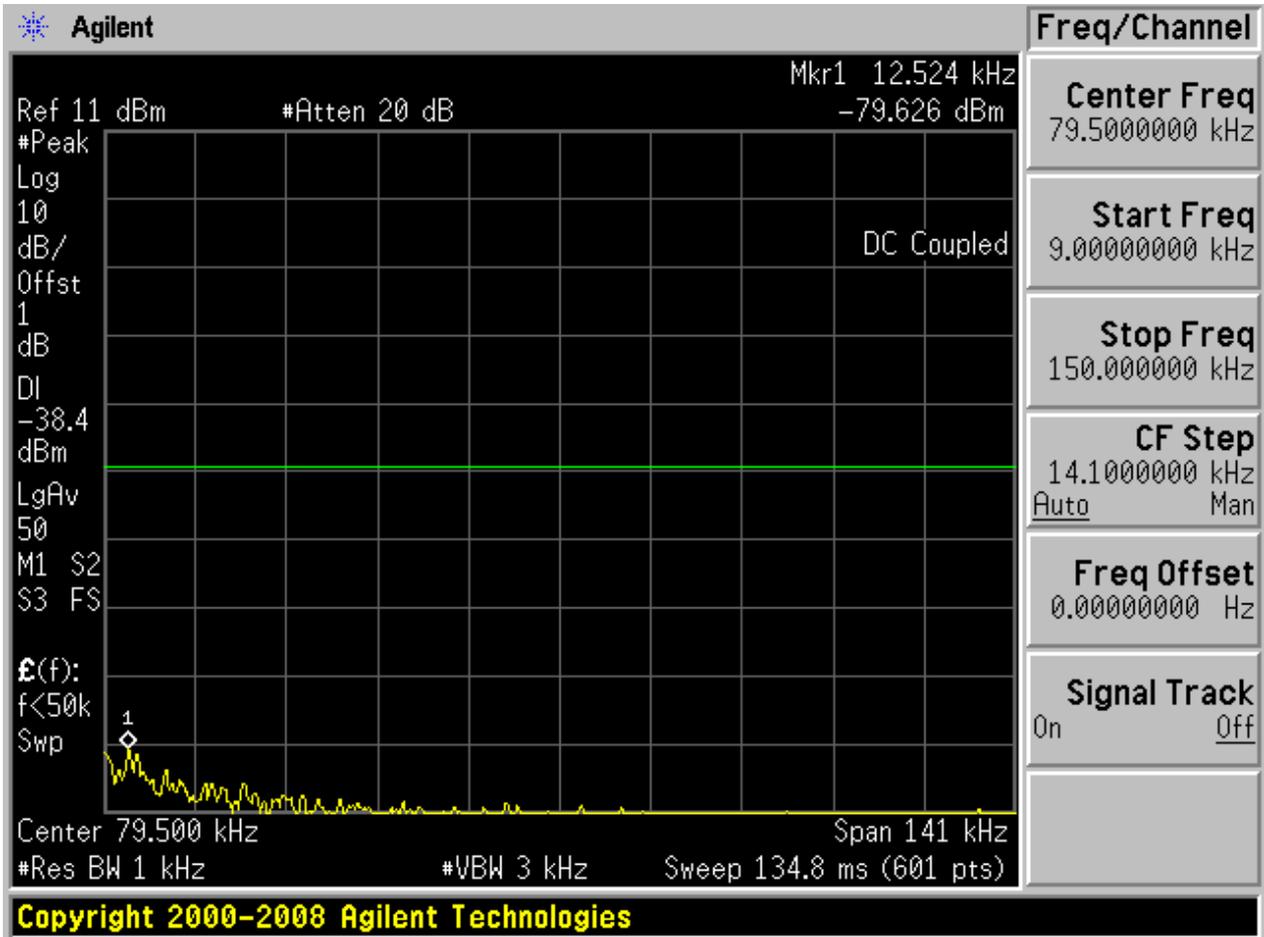




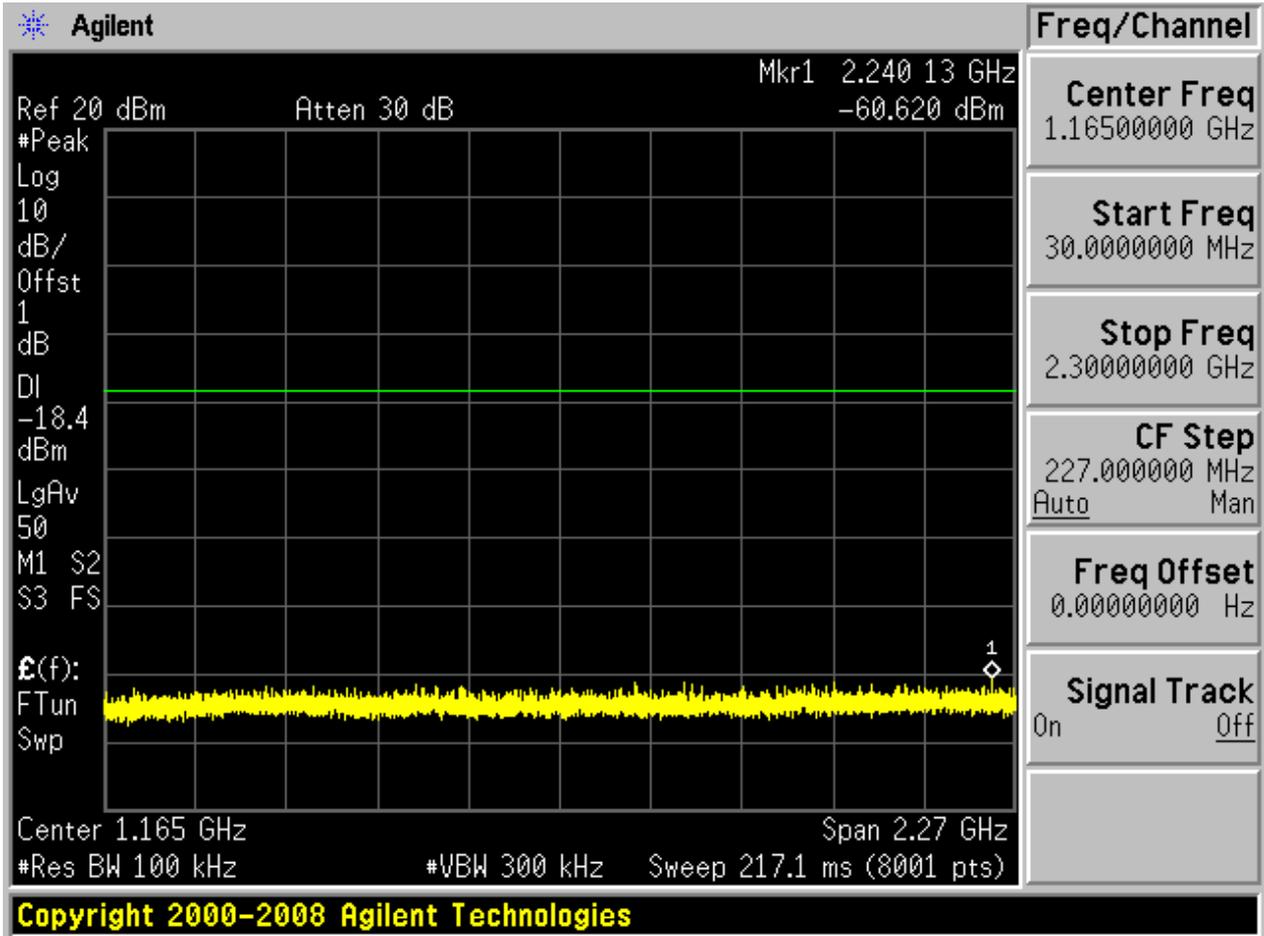

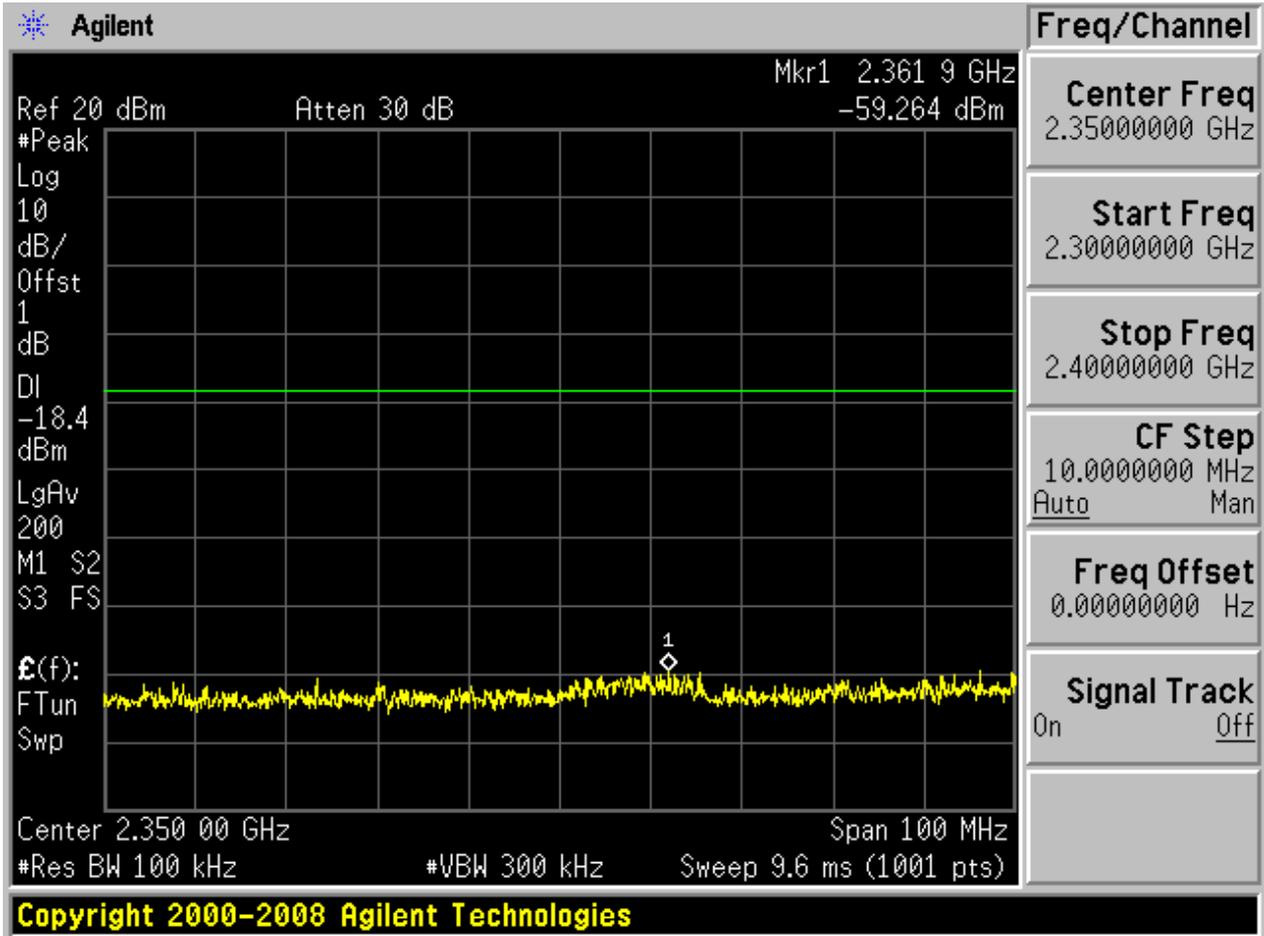

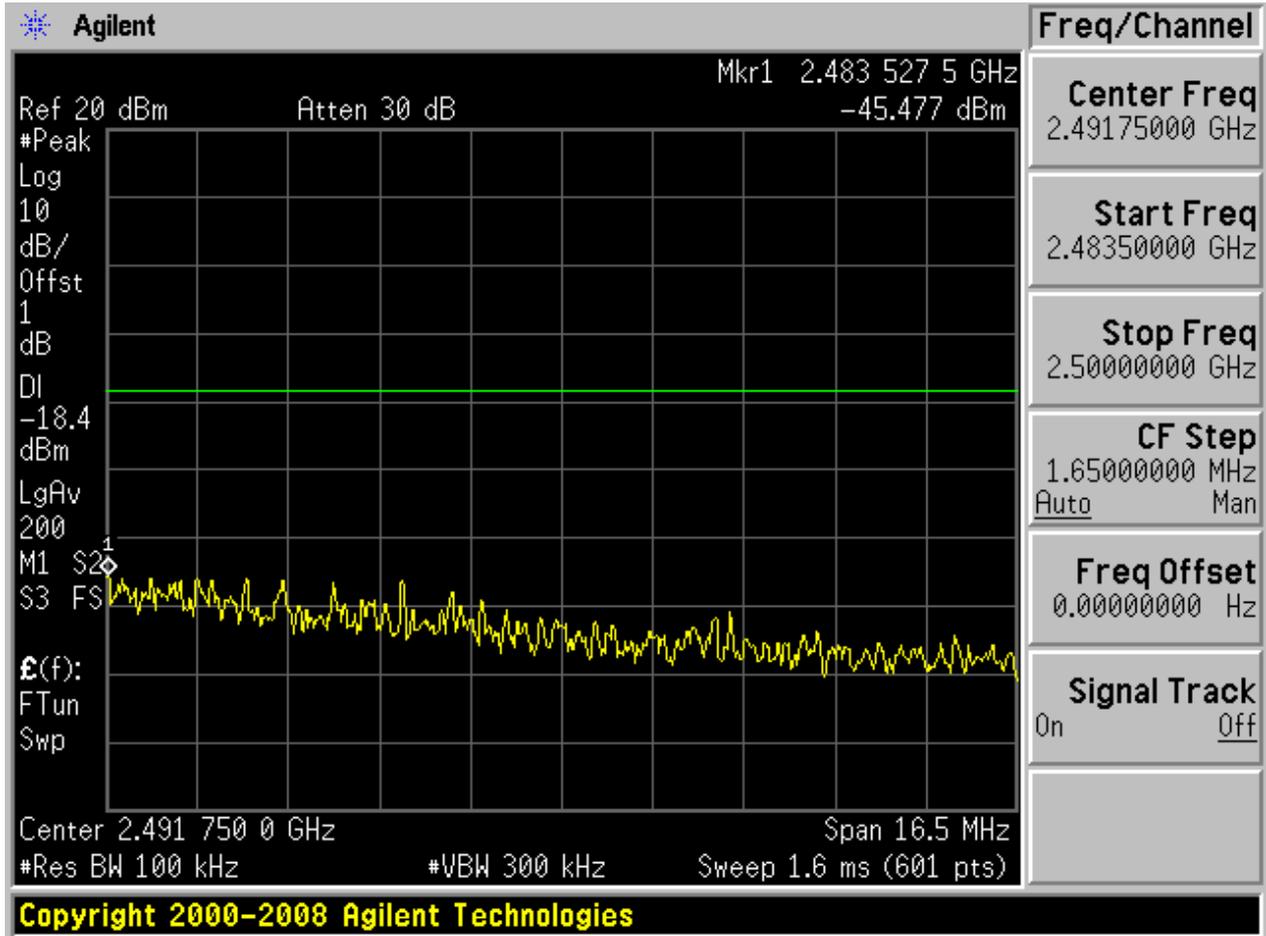


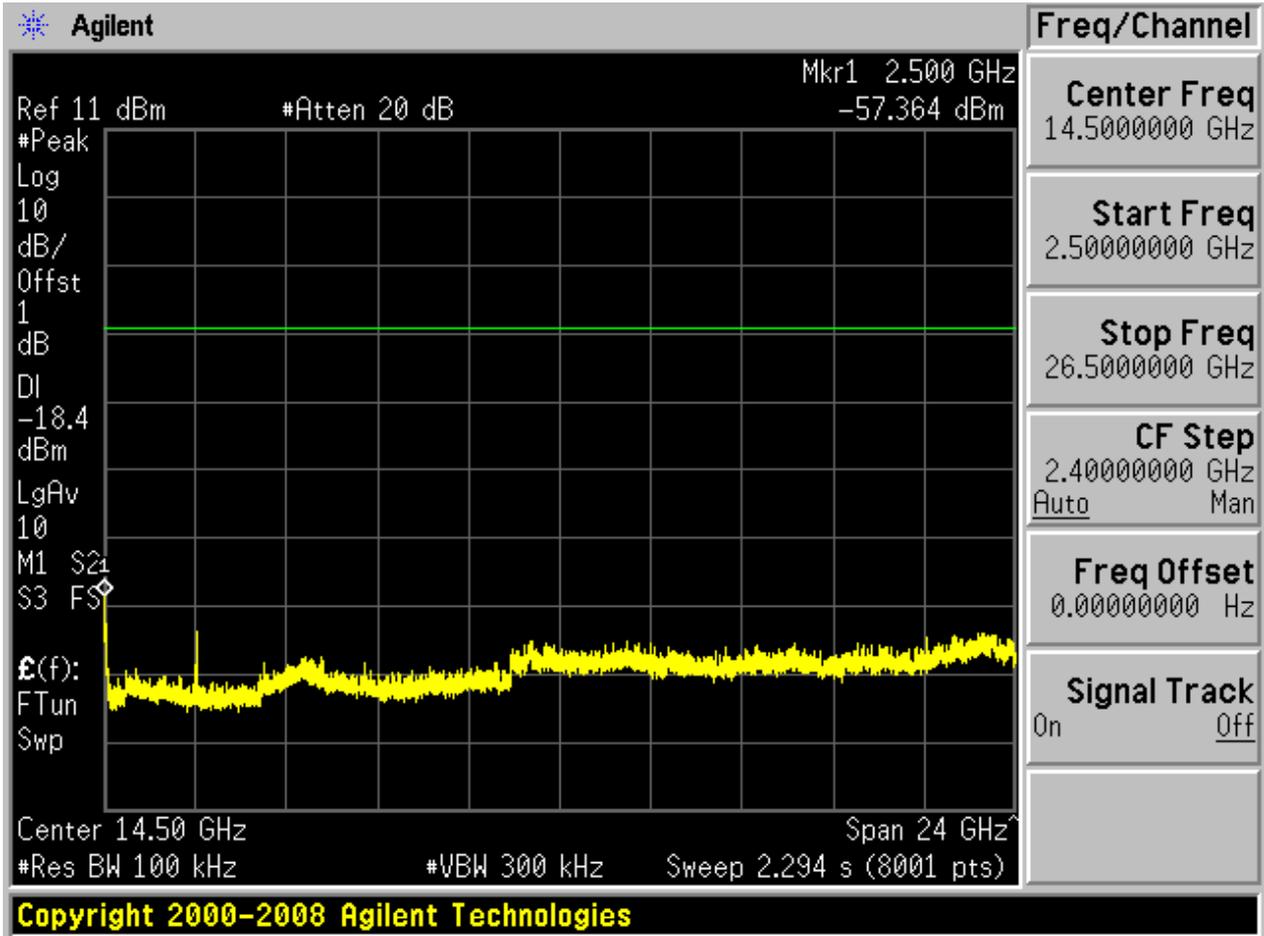




### 2.13 11N20\_L@BG1

Pref:

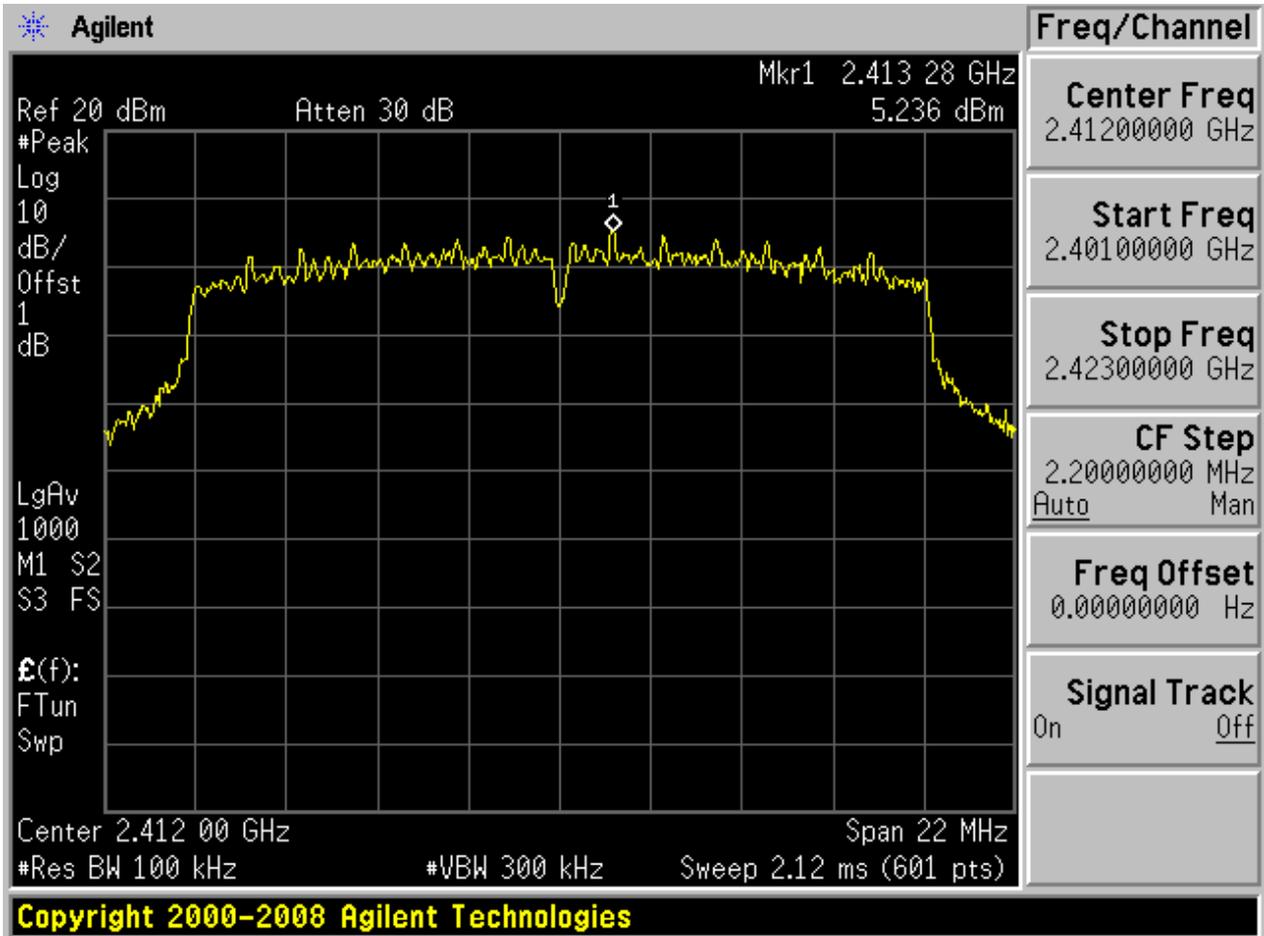






Puw:

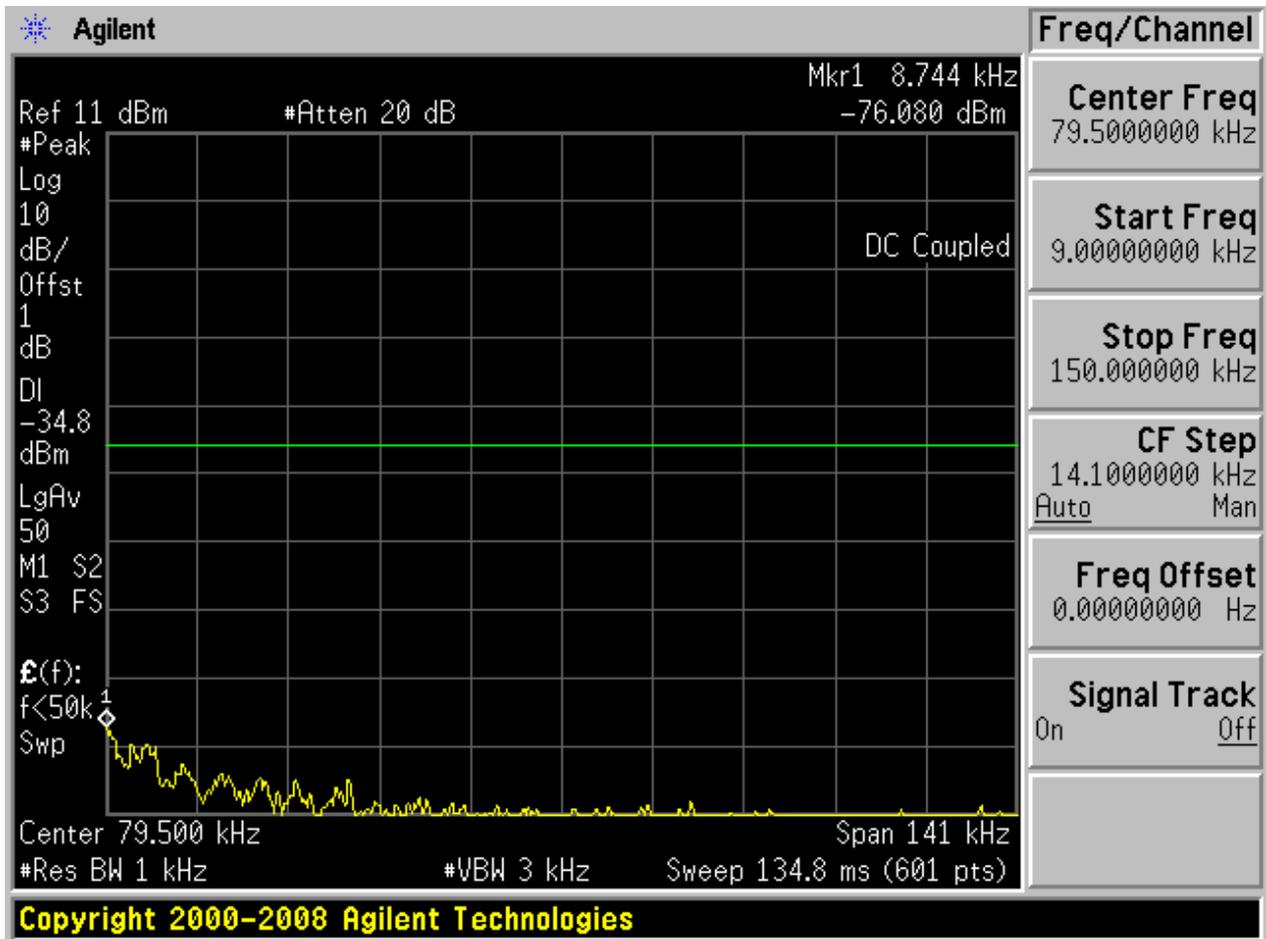




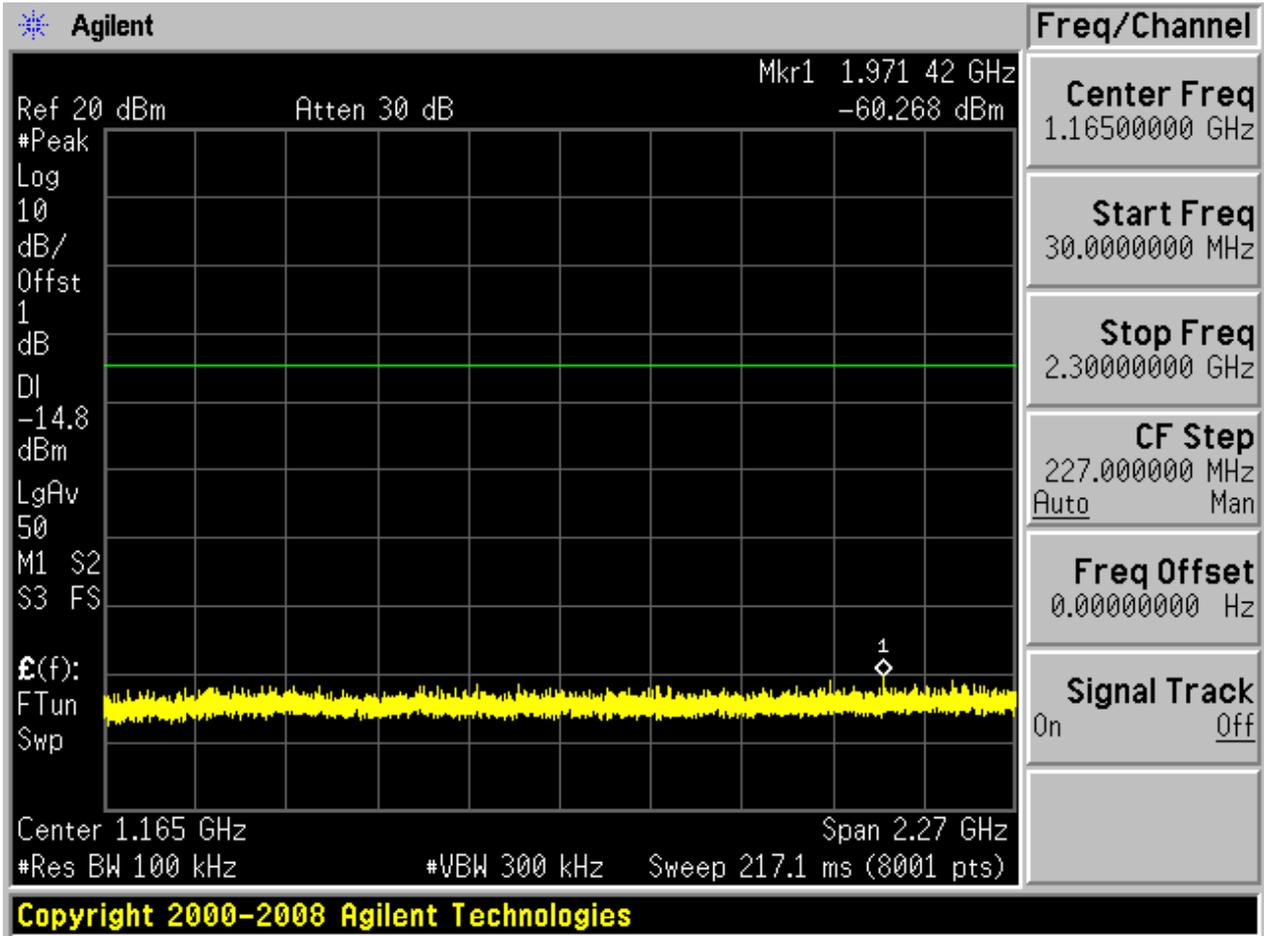

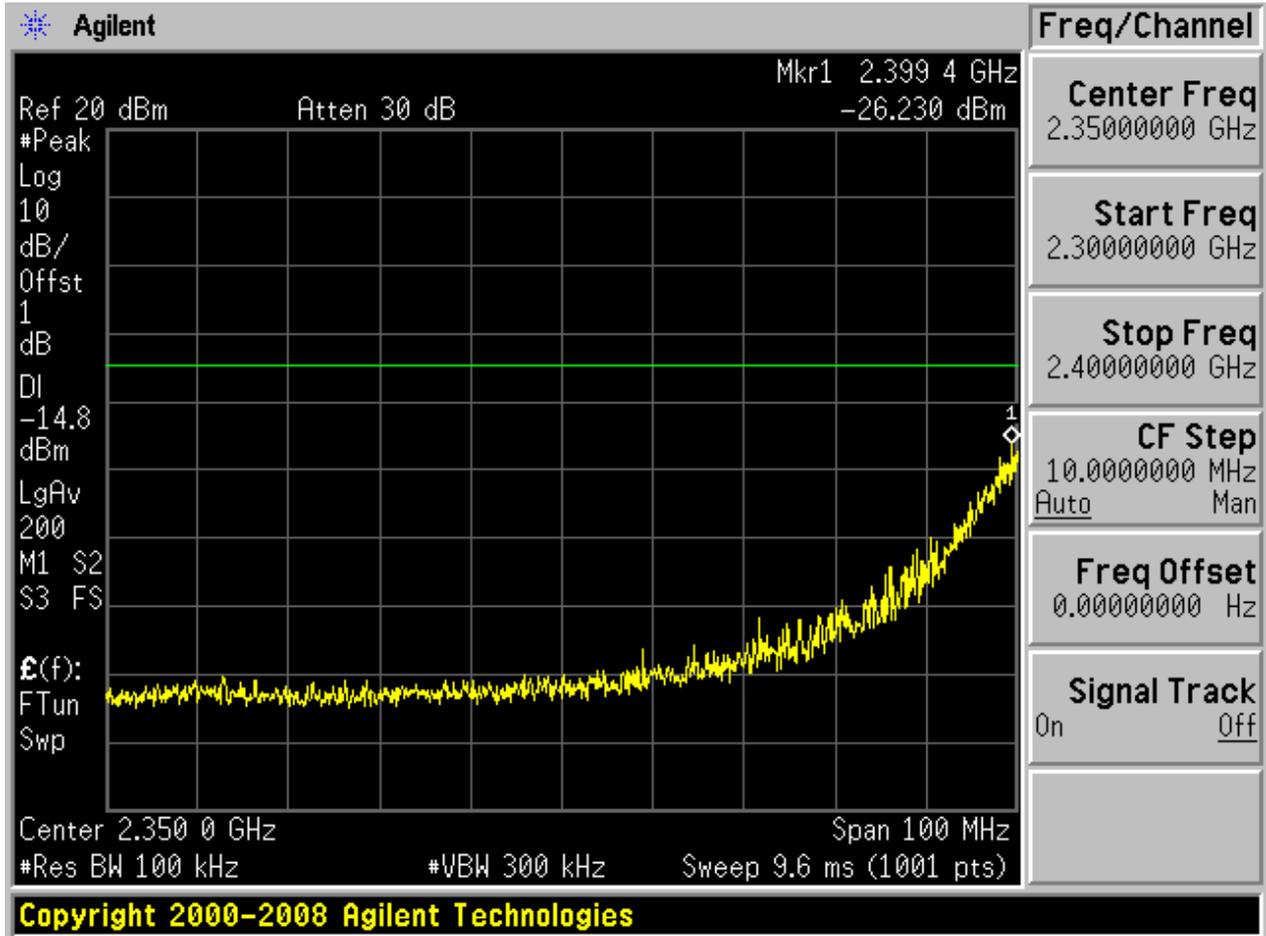

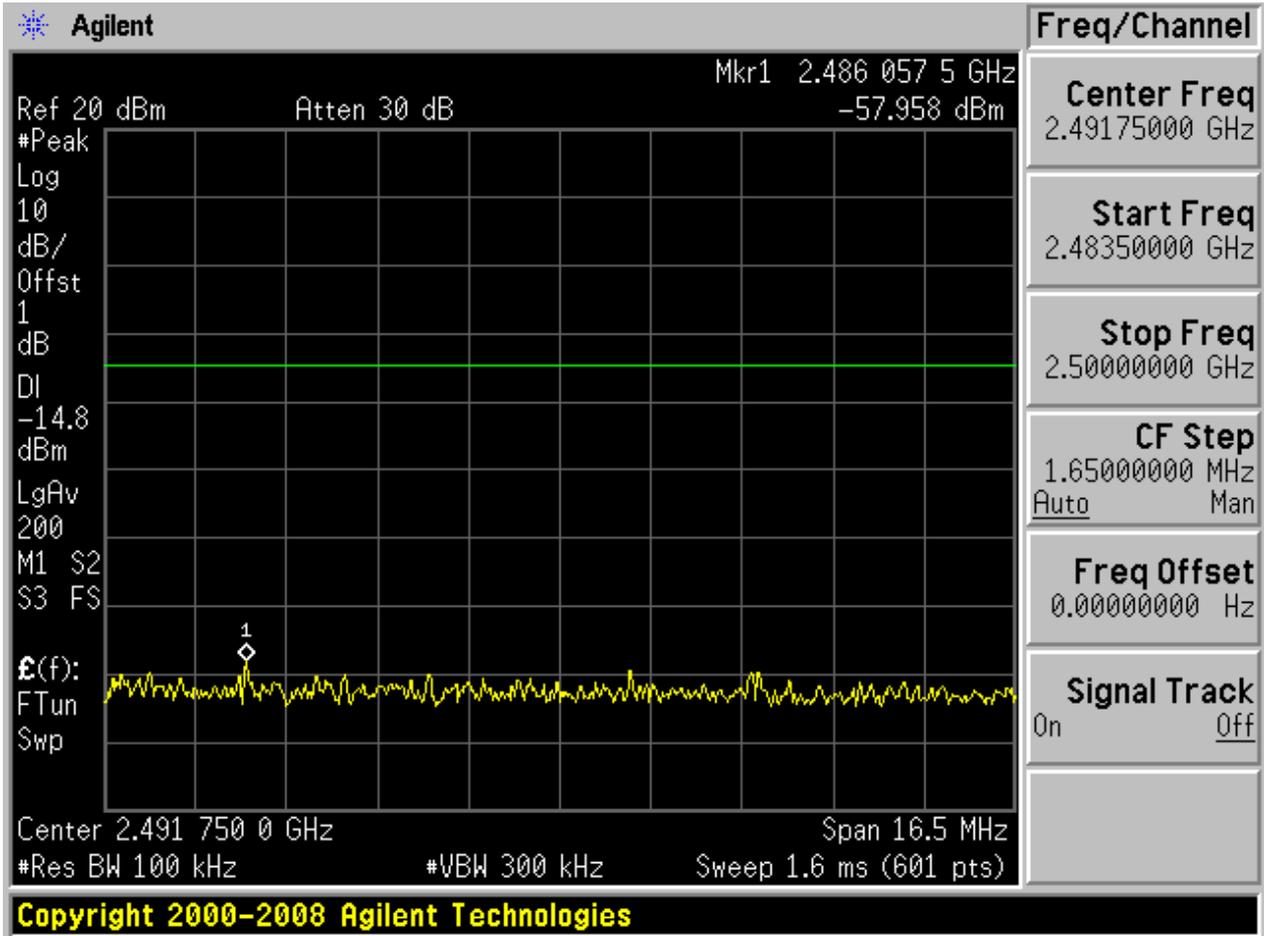


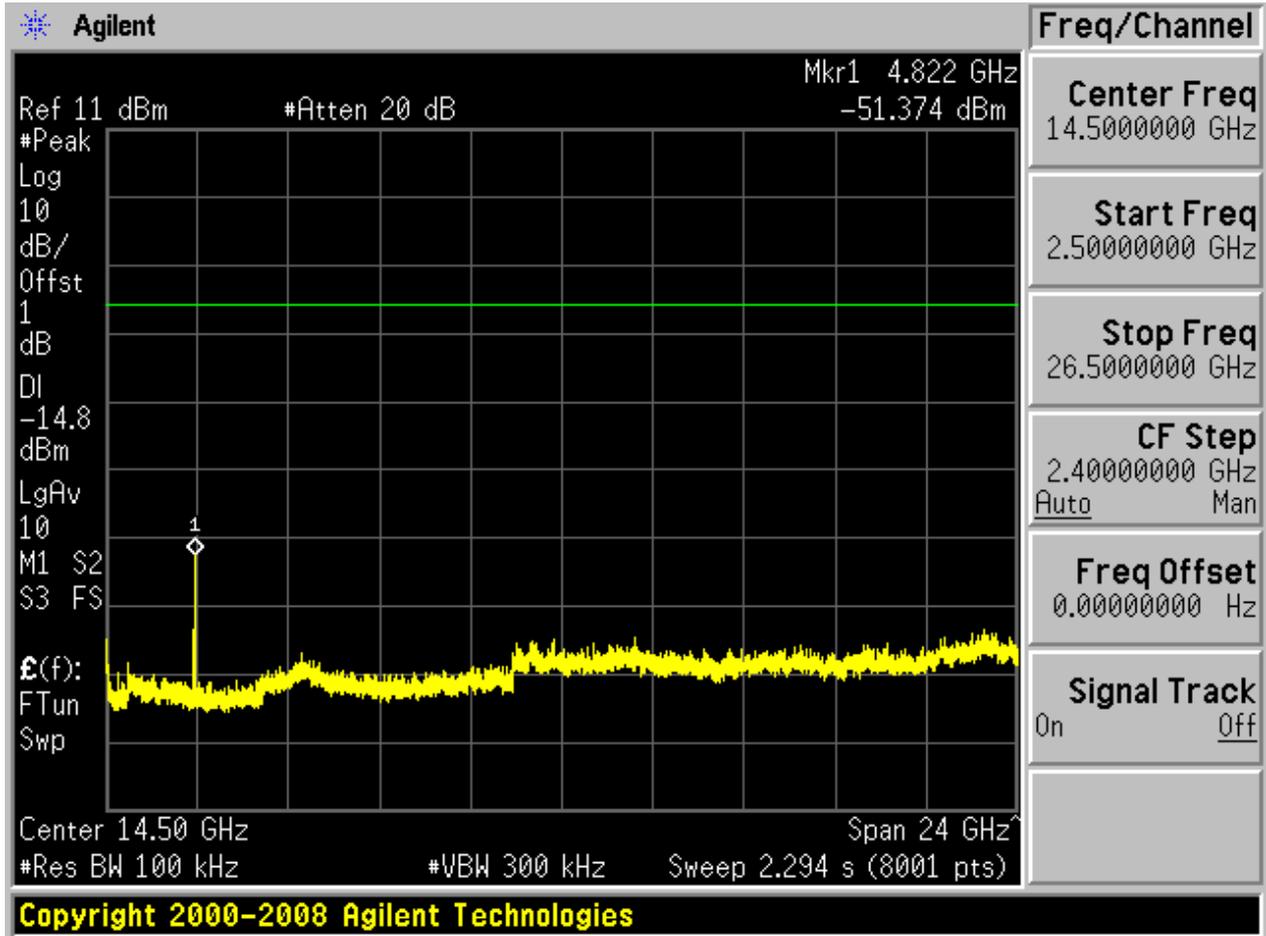




## 2.14 11N20\_L@BG2


Pref:

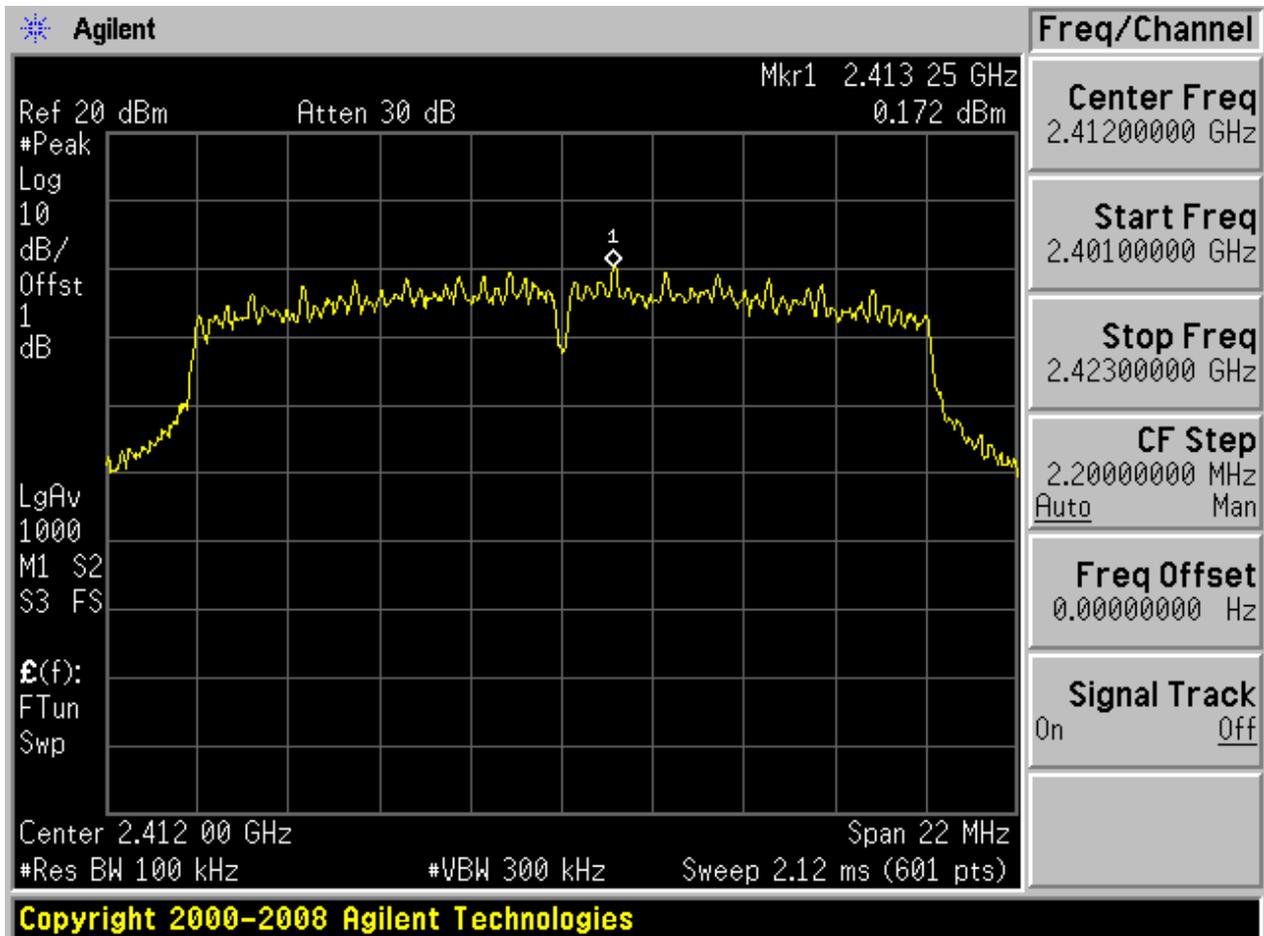






Puw:

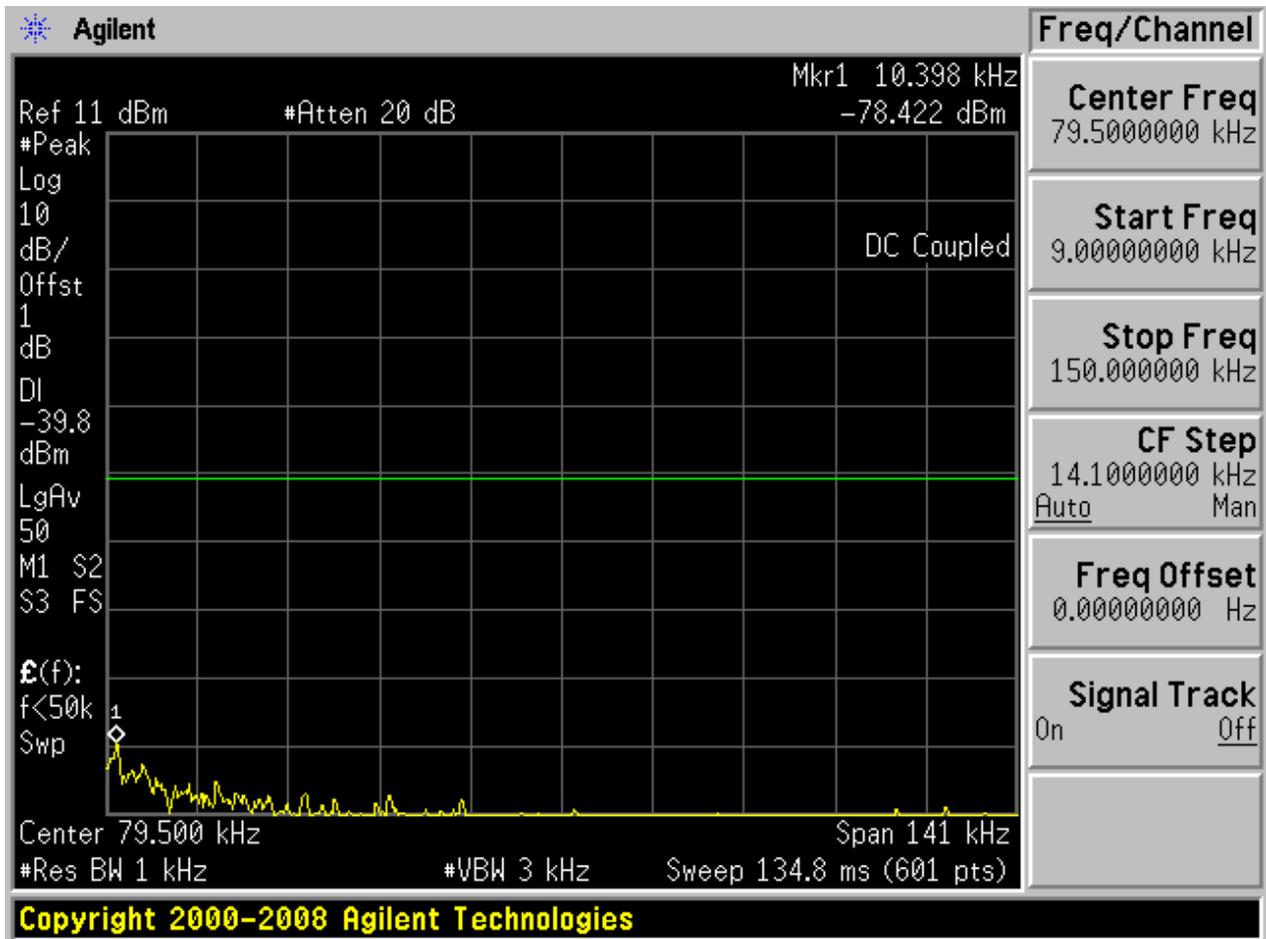


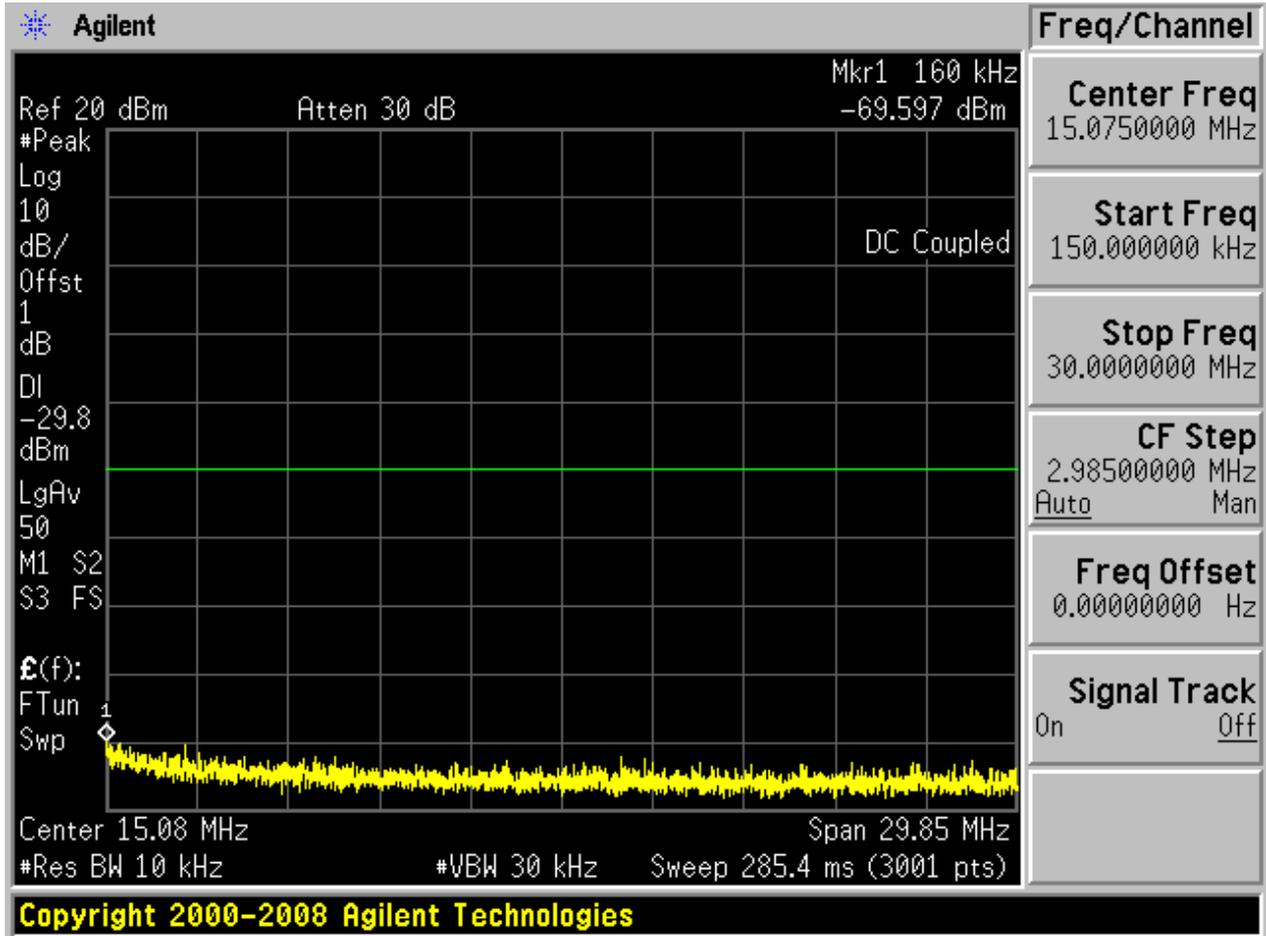

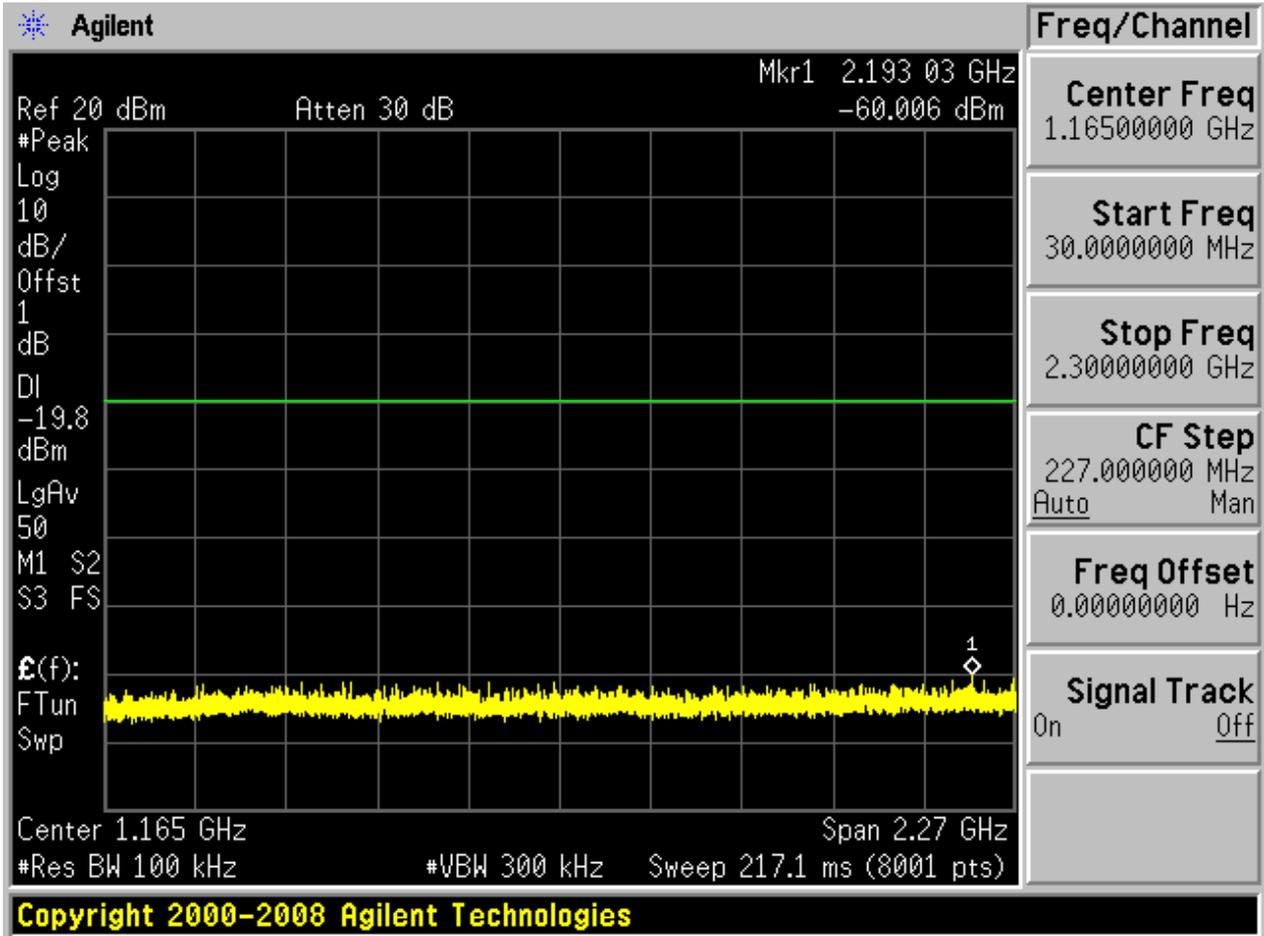

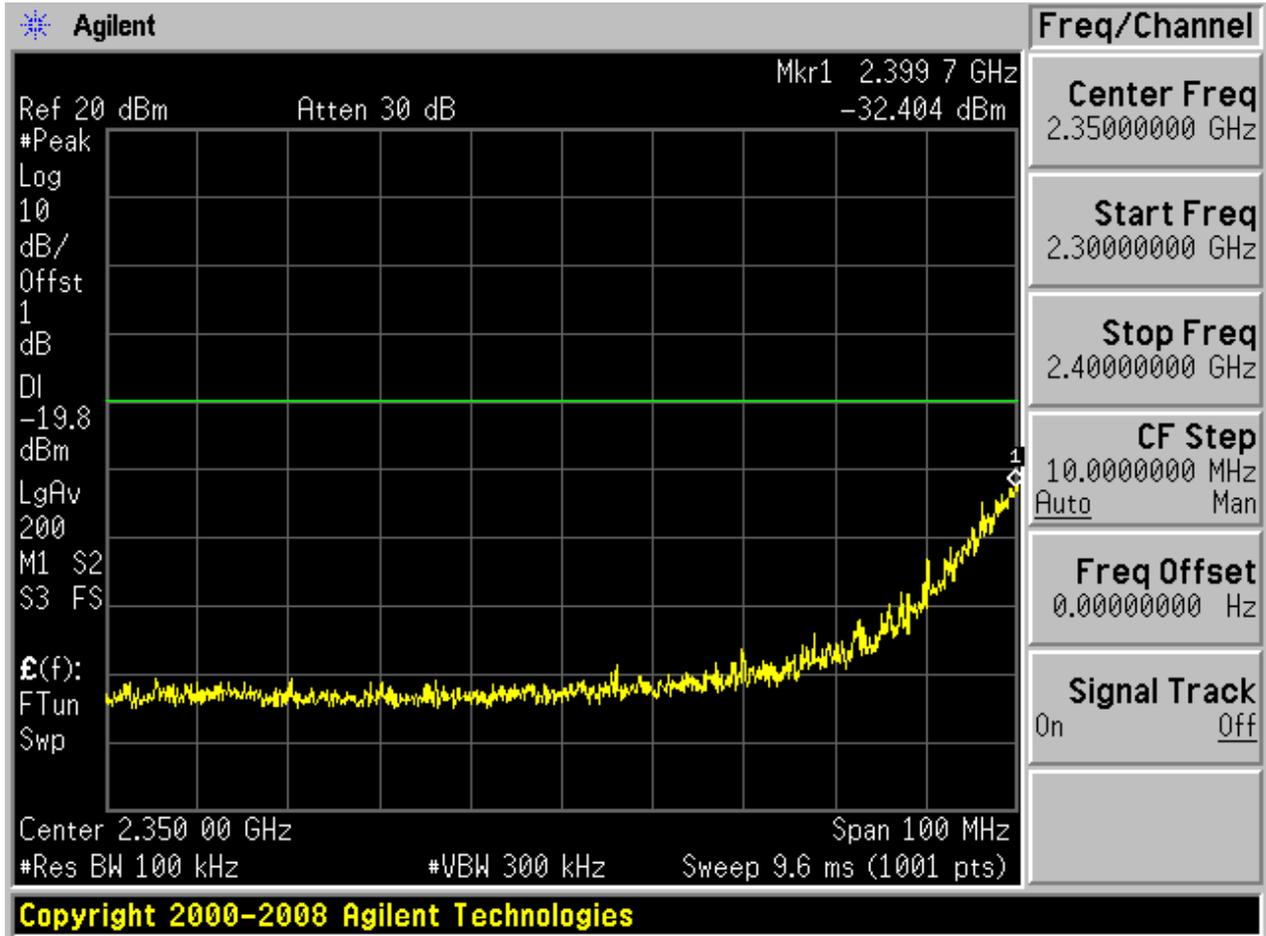

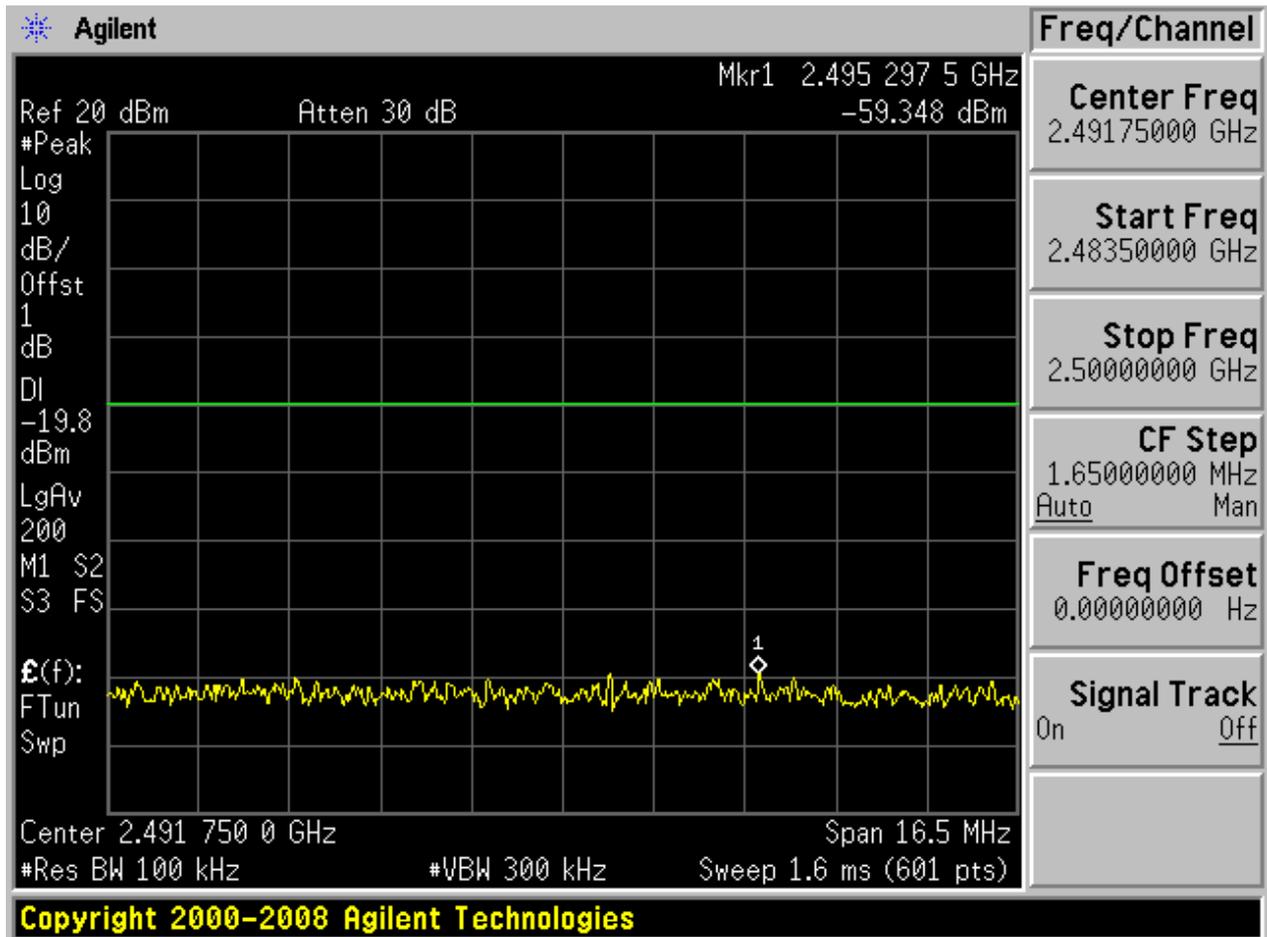


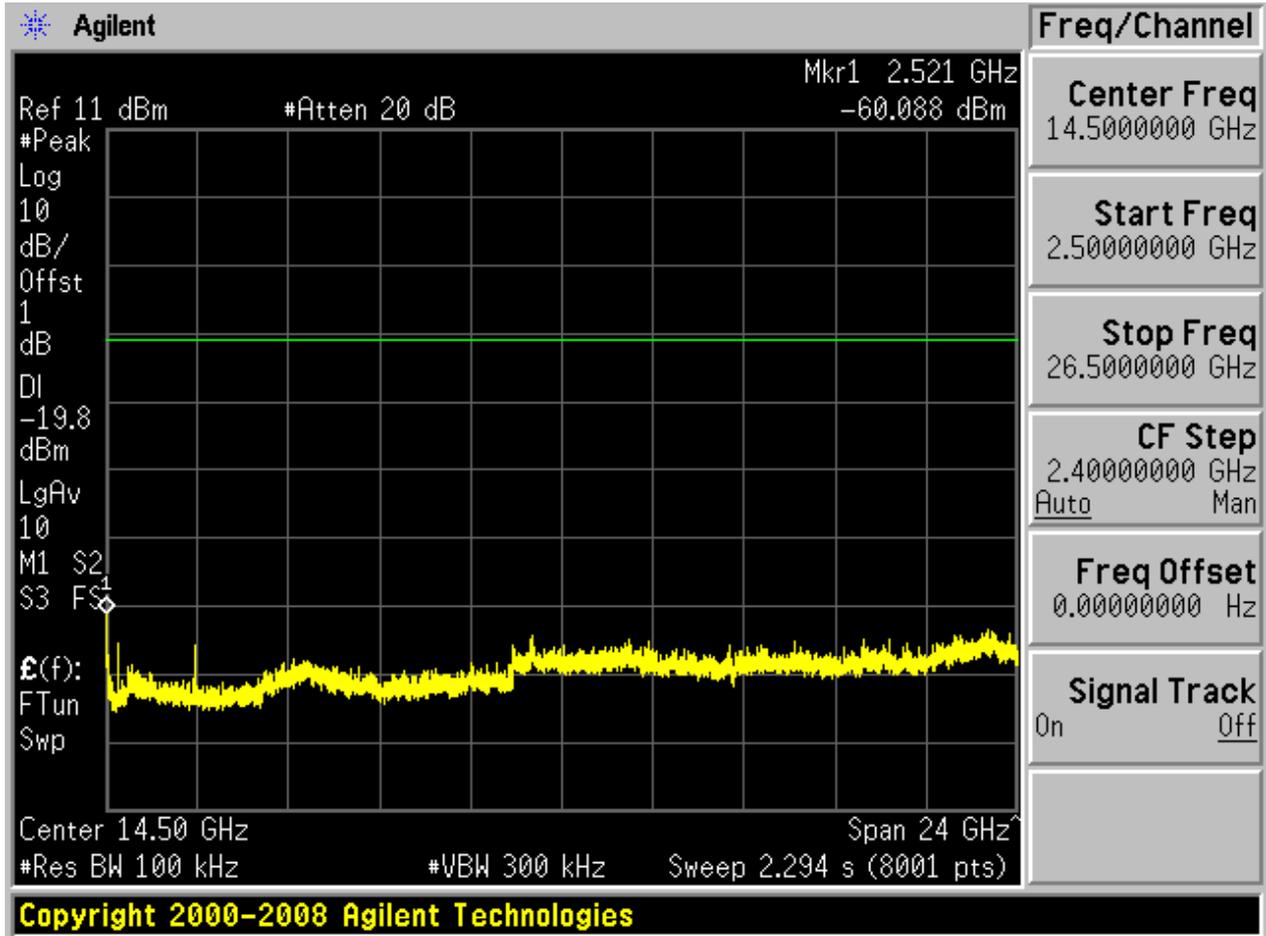




## 2.15 11N20\_M@BG1


Pref:

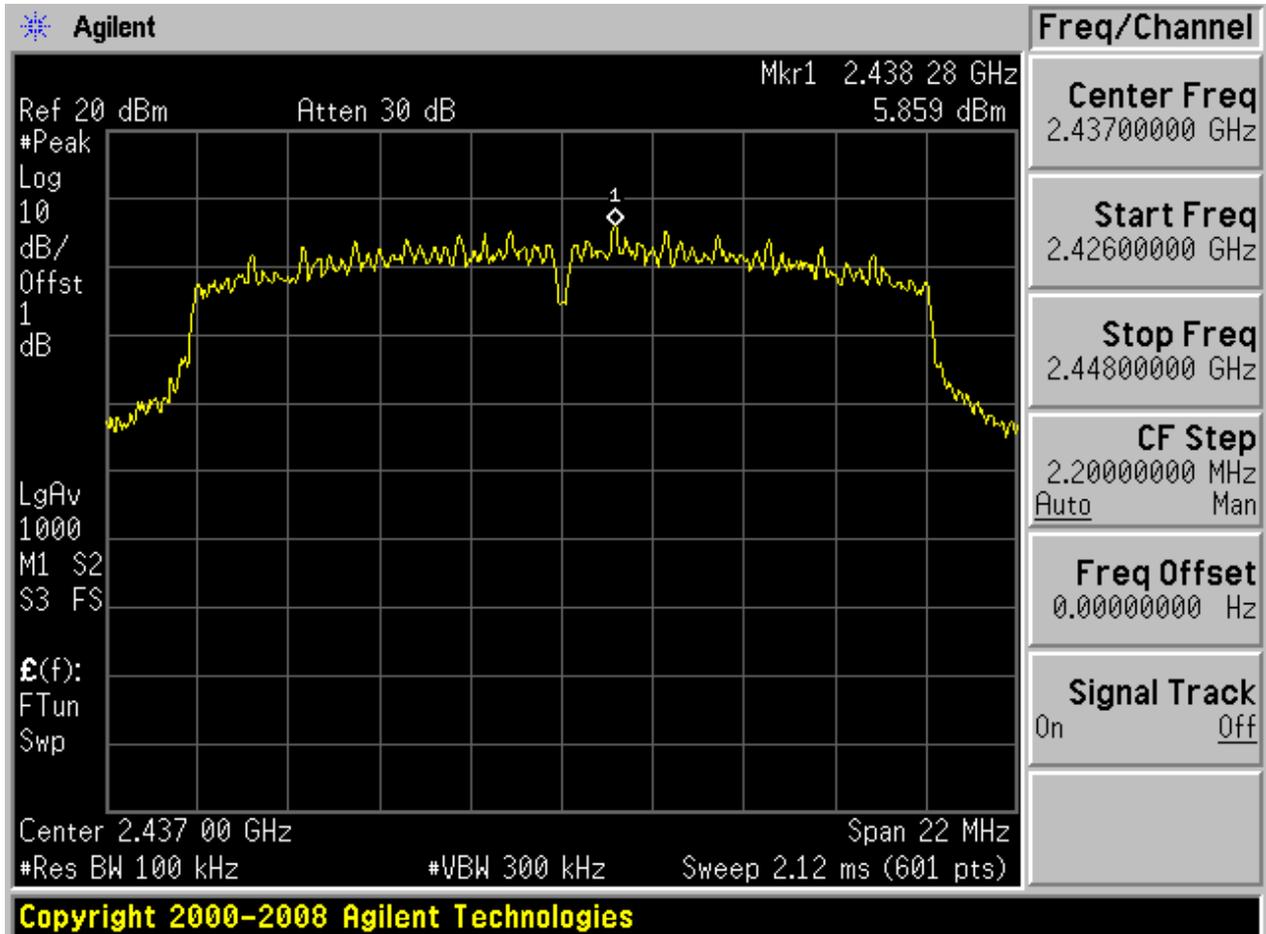






Puw:

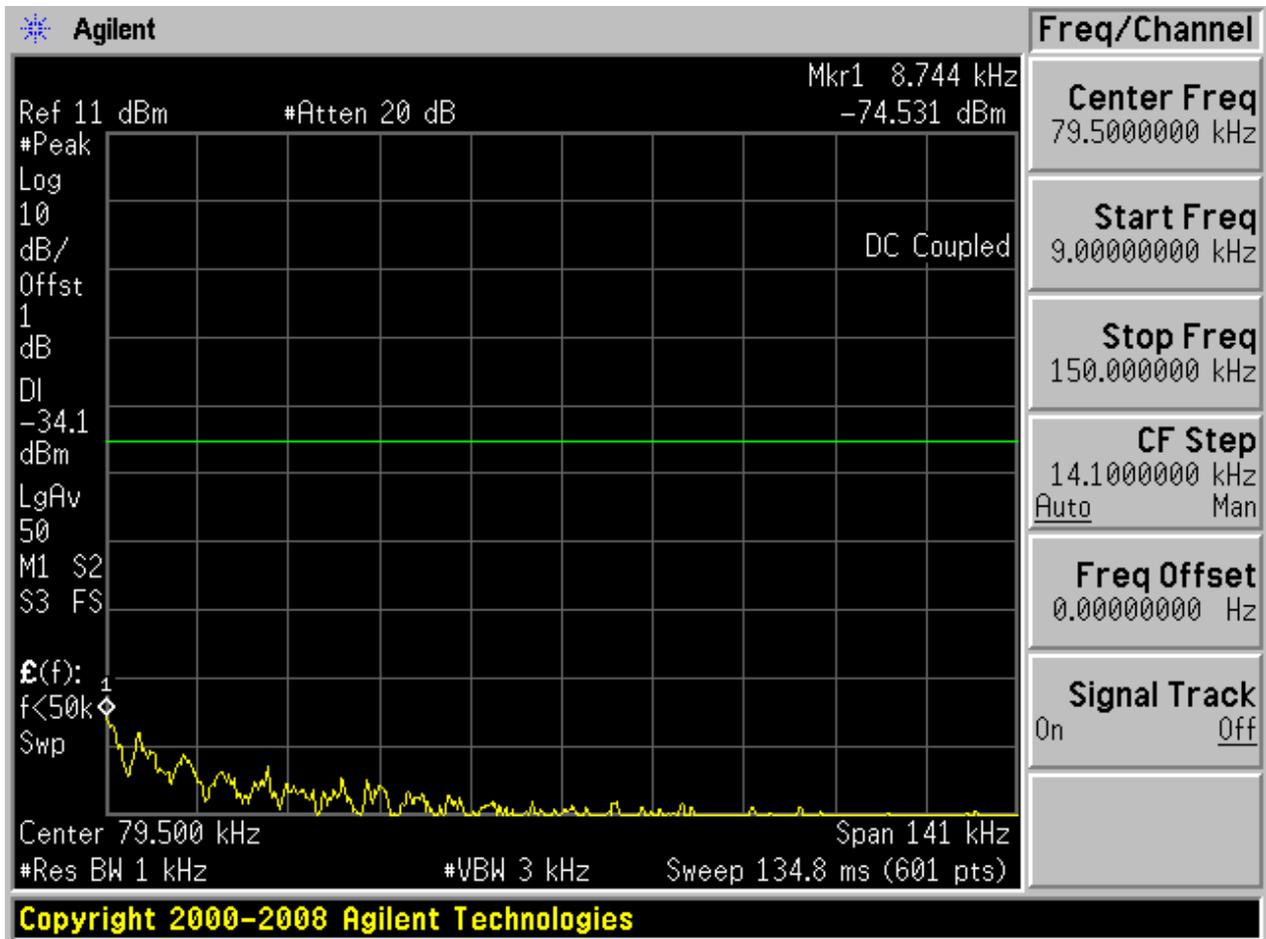


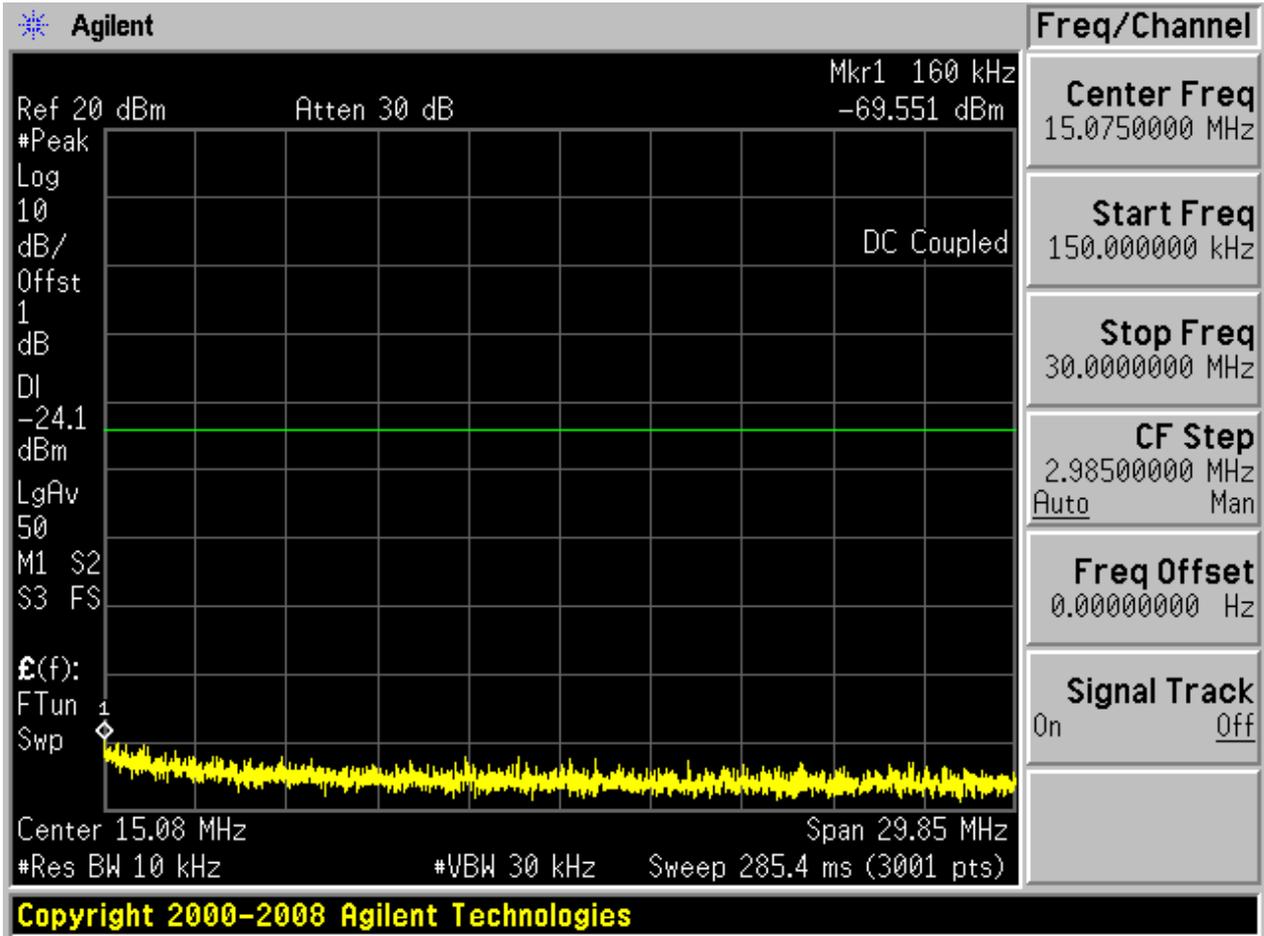

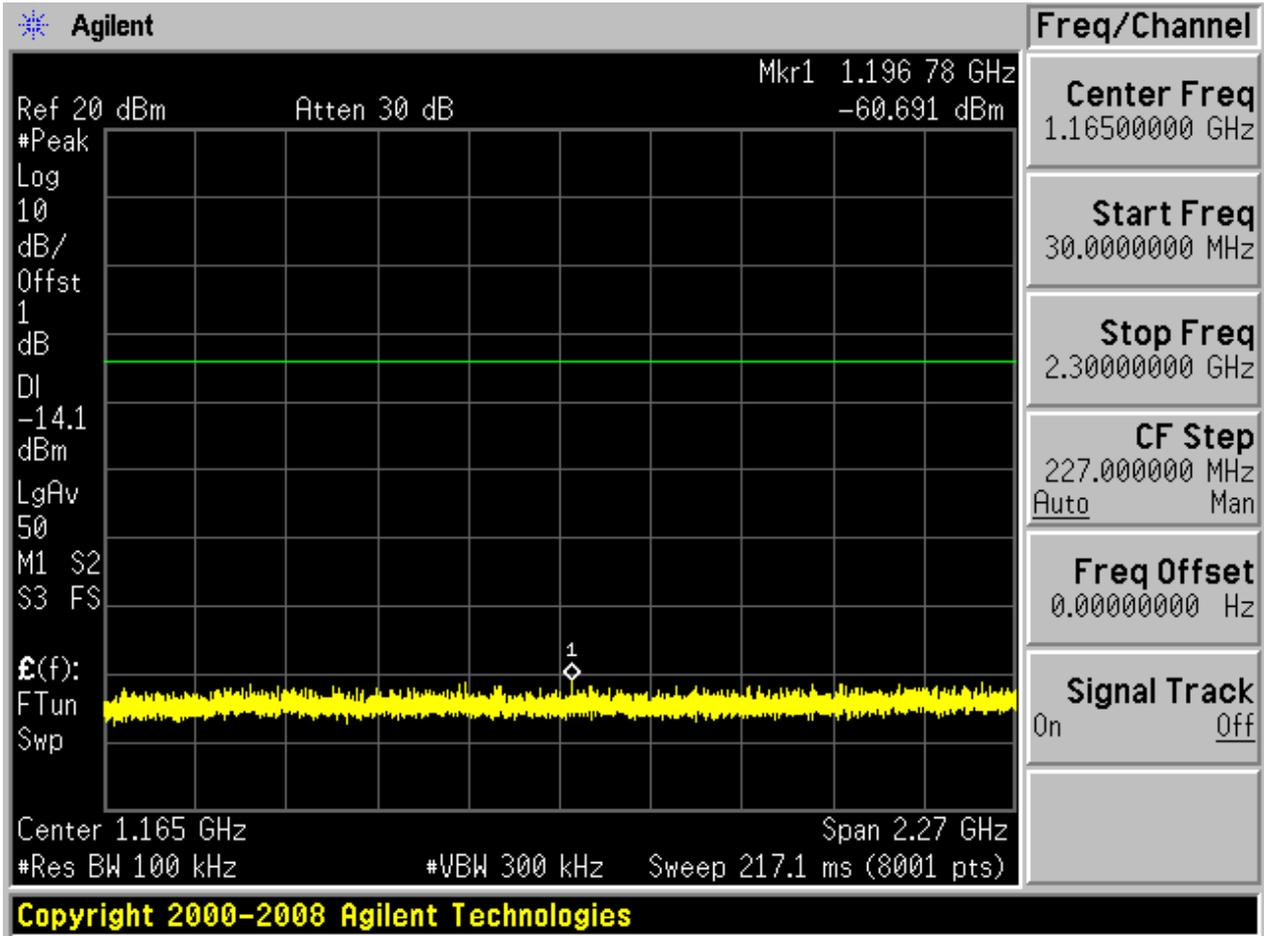

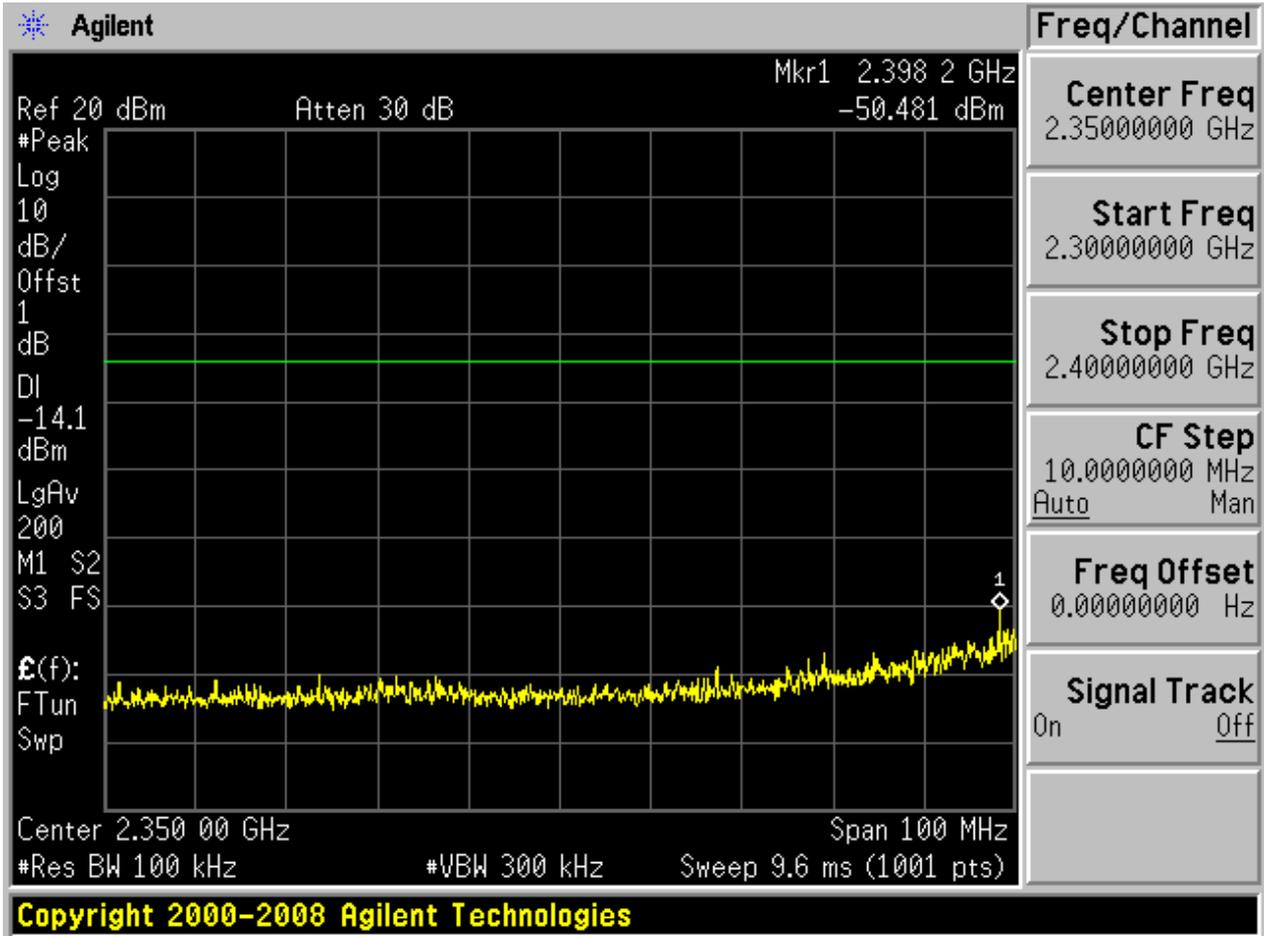

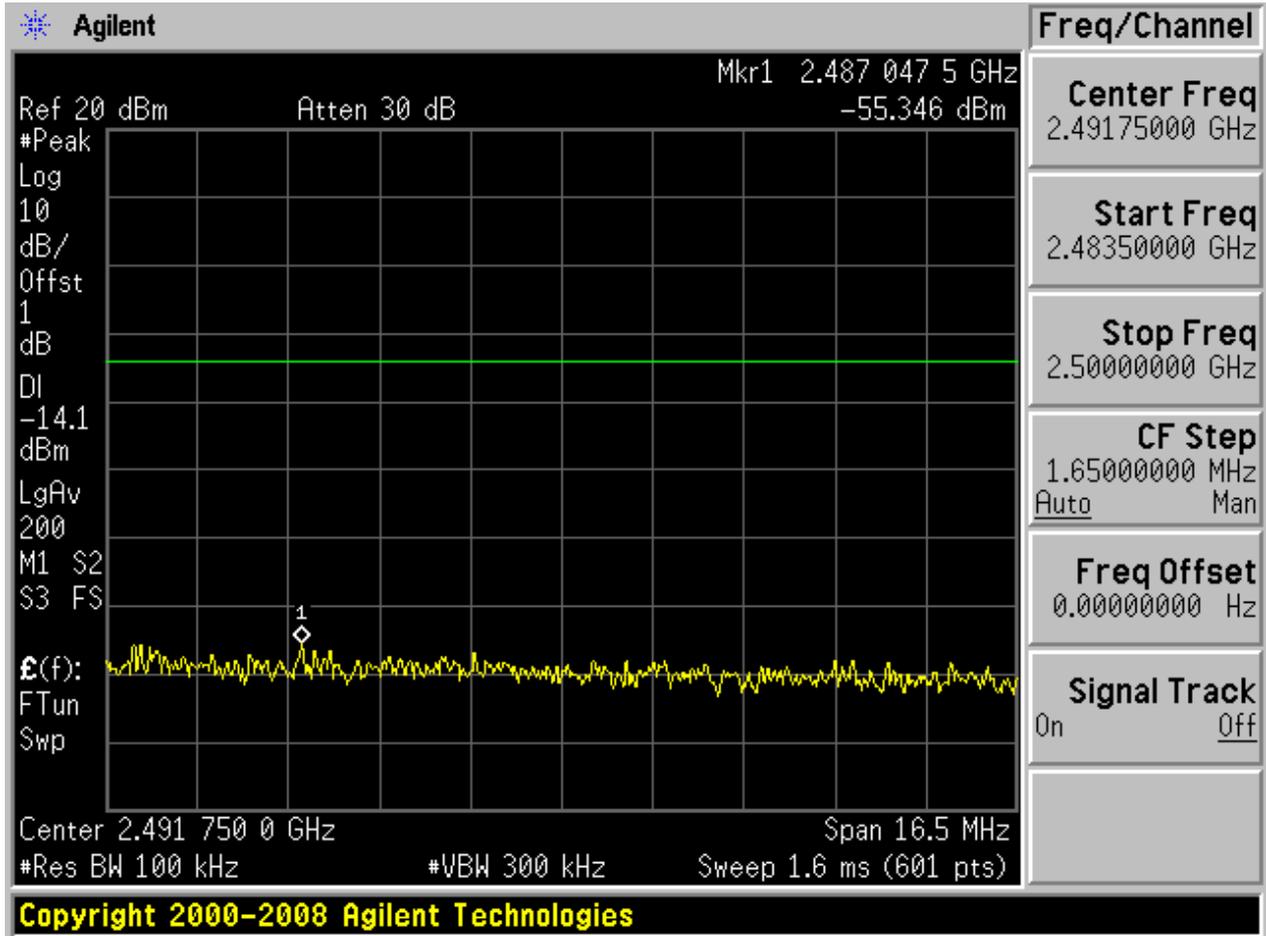


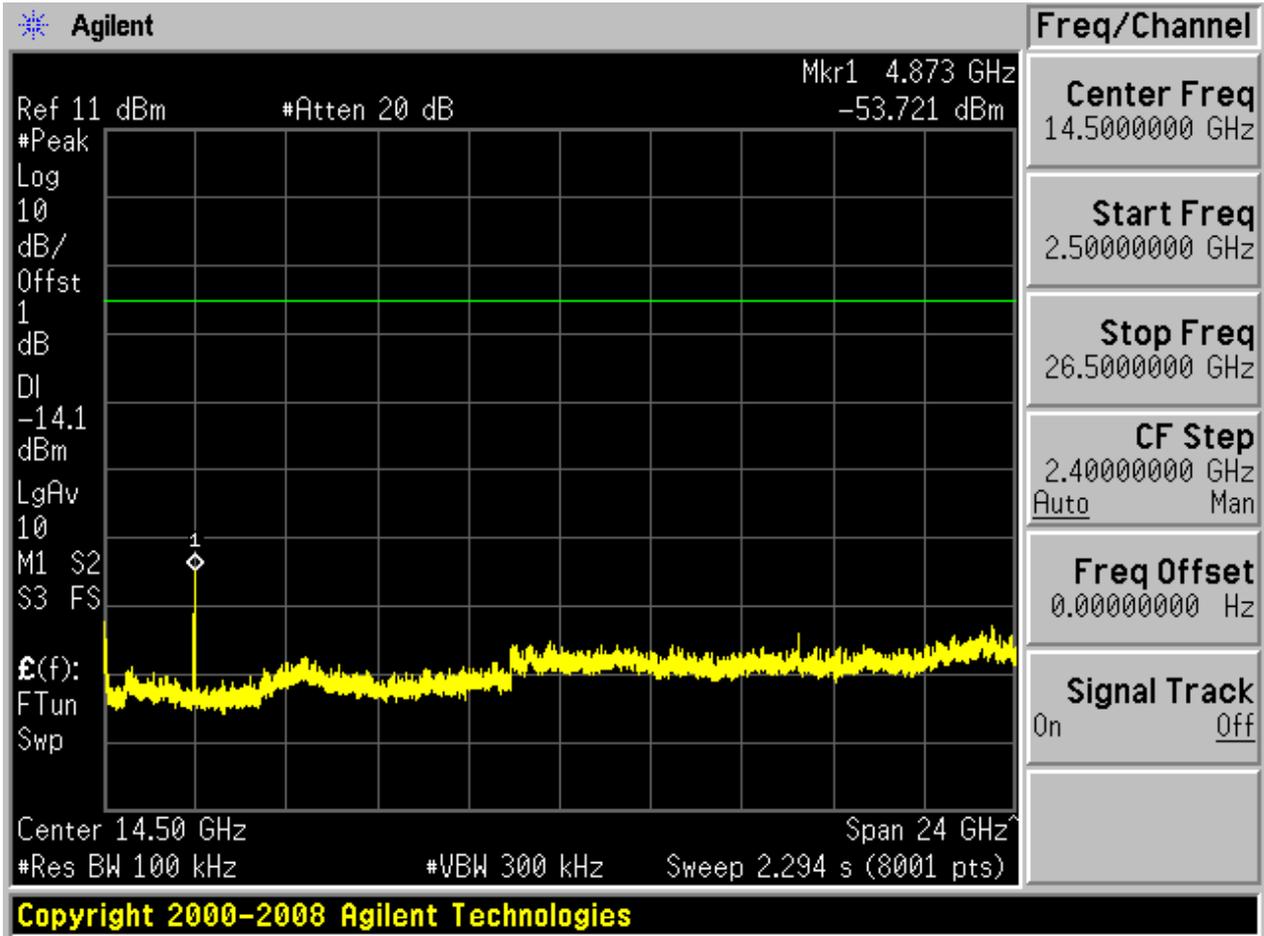




## 2.16 11N20\_M@BG2

Pref:

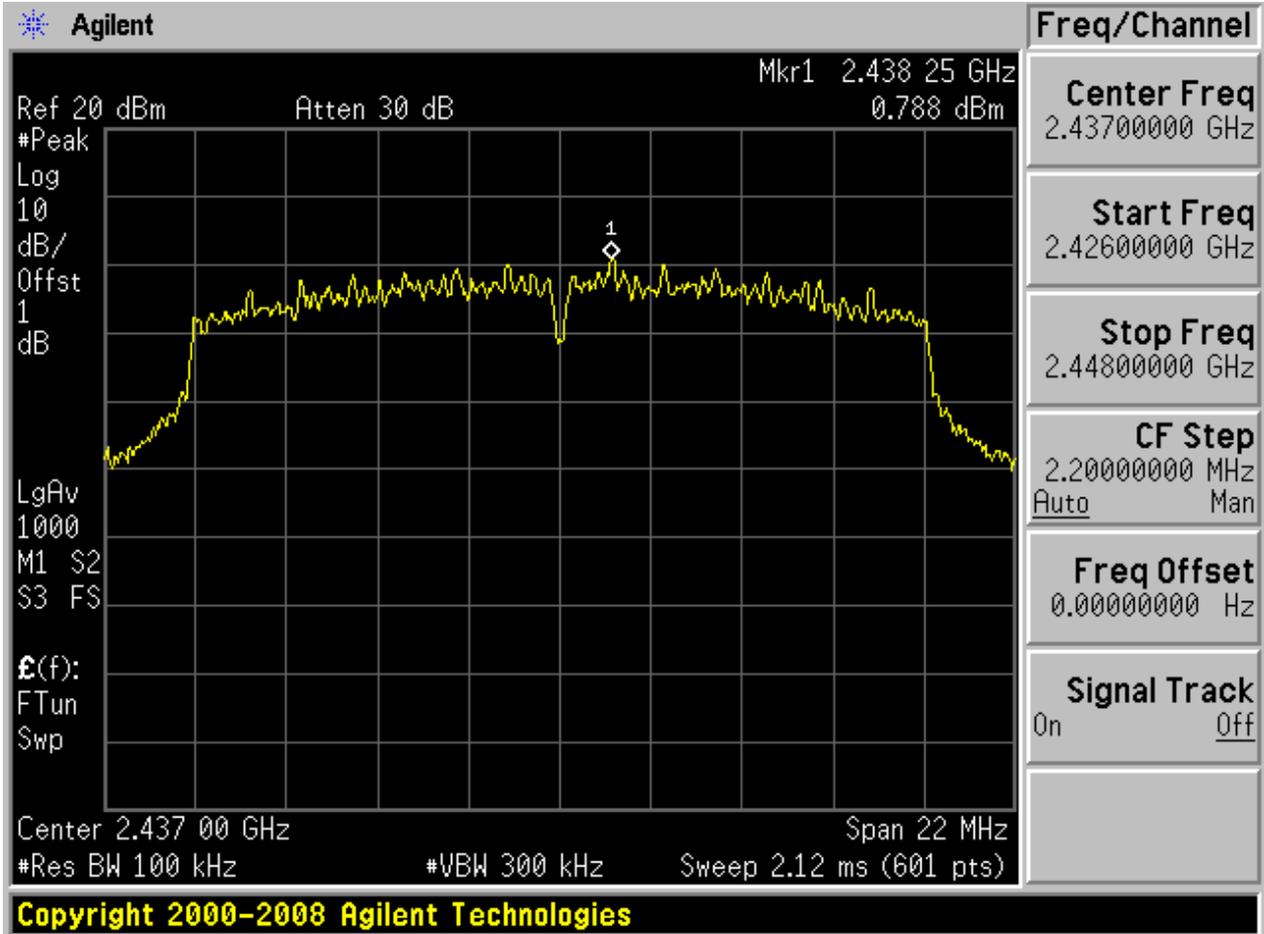






Puw:

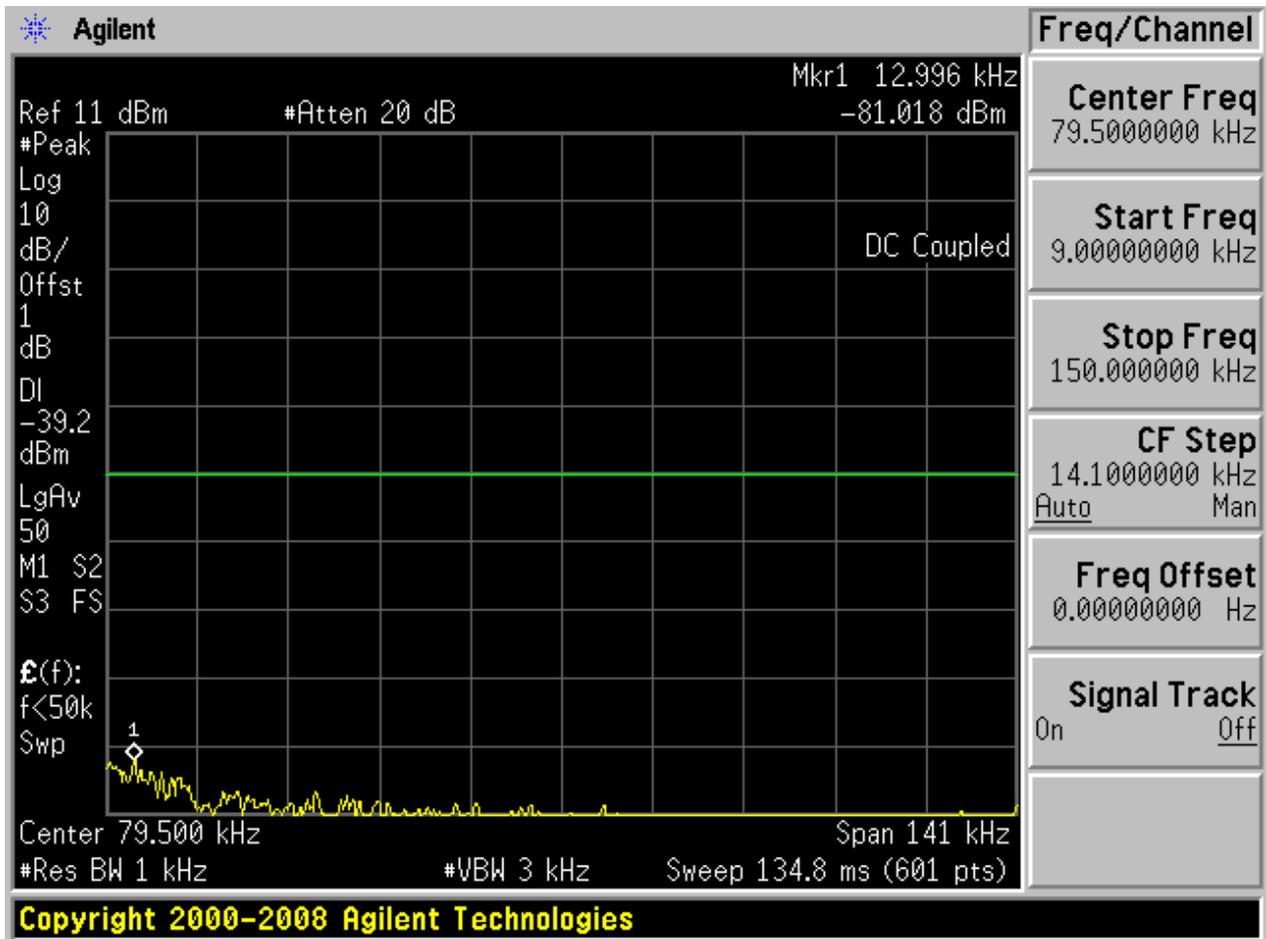




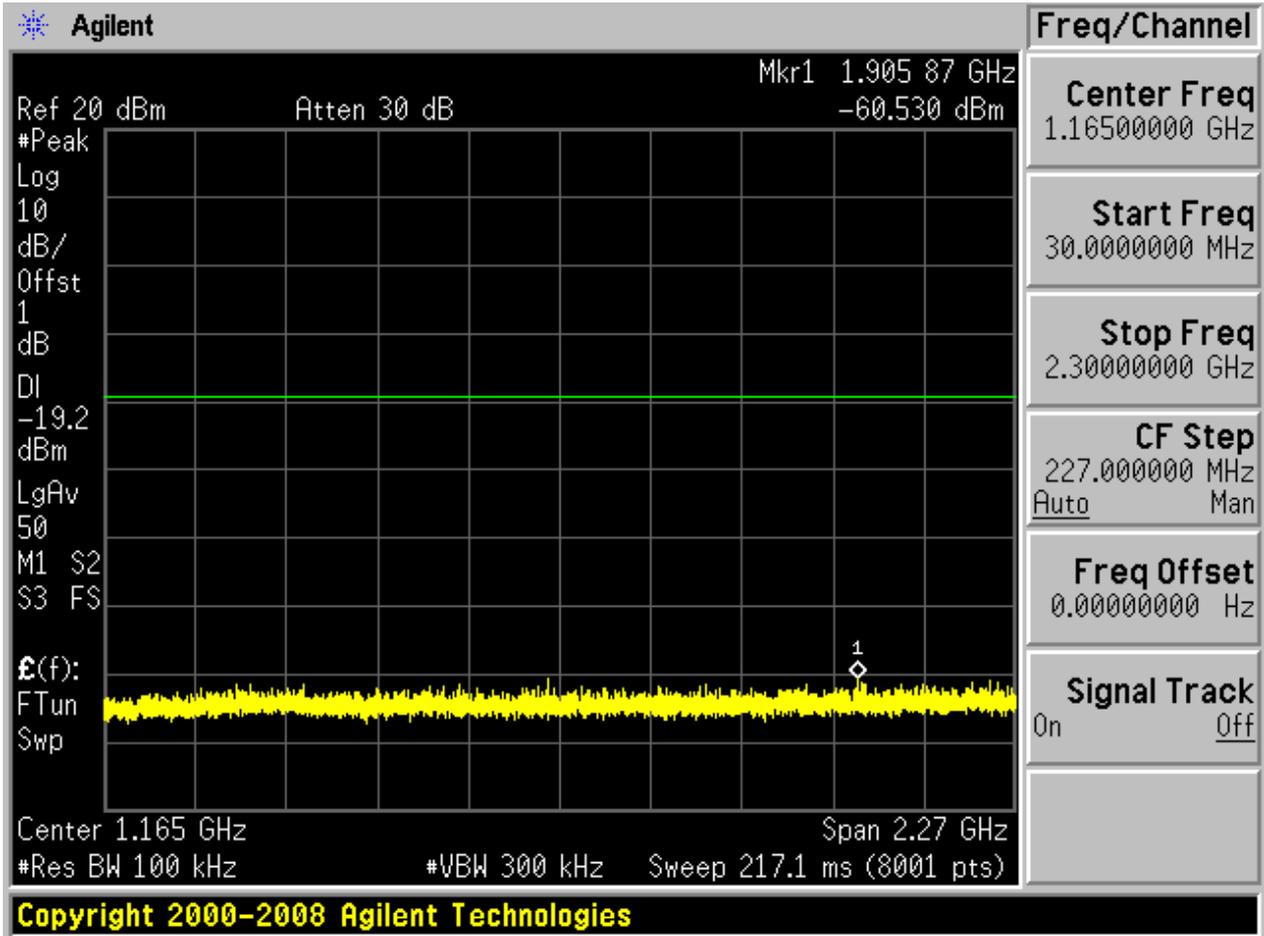

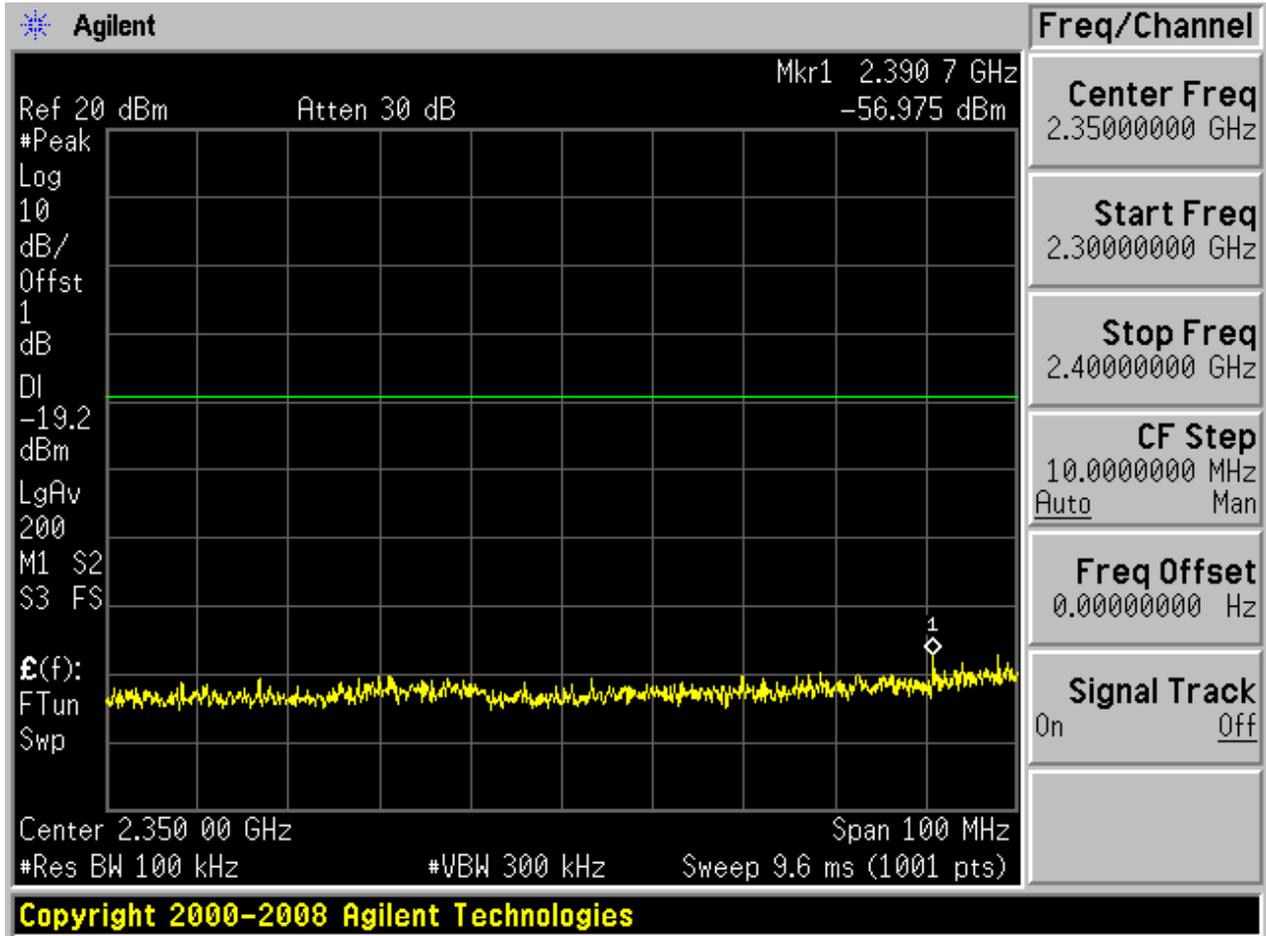

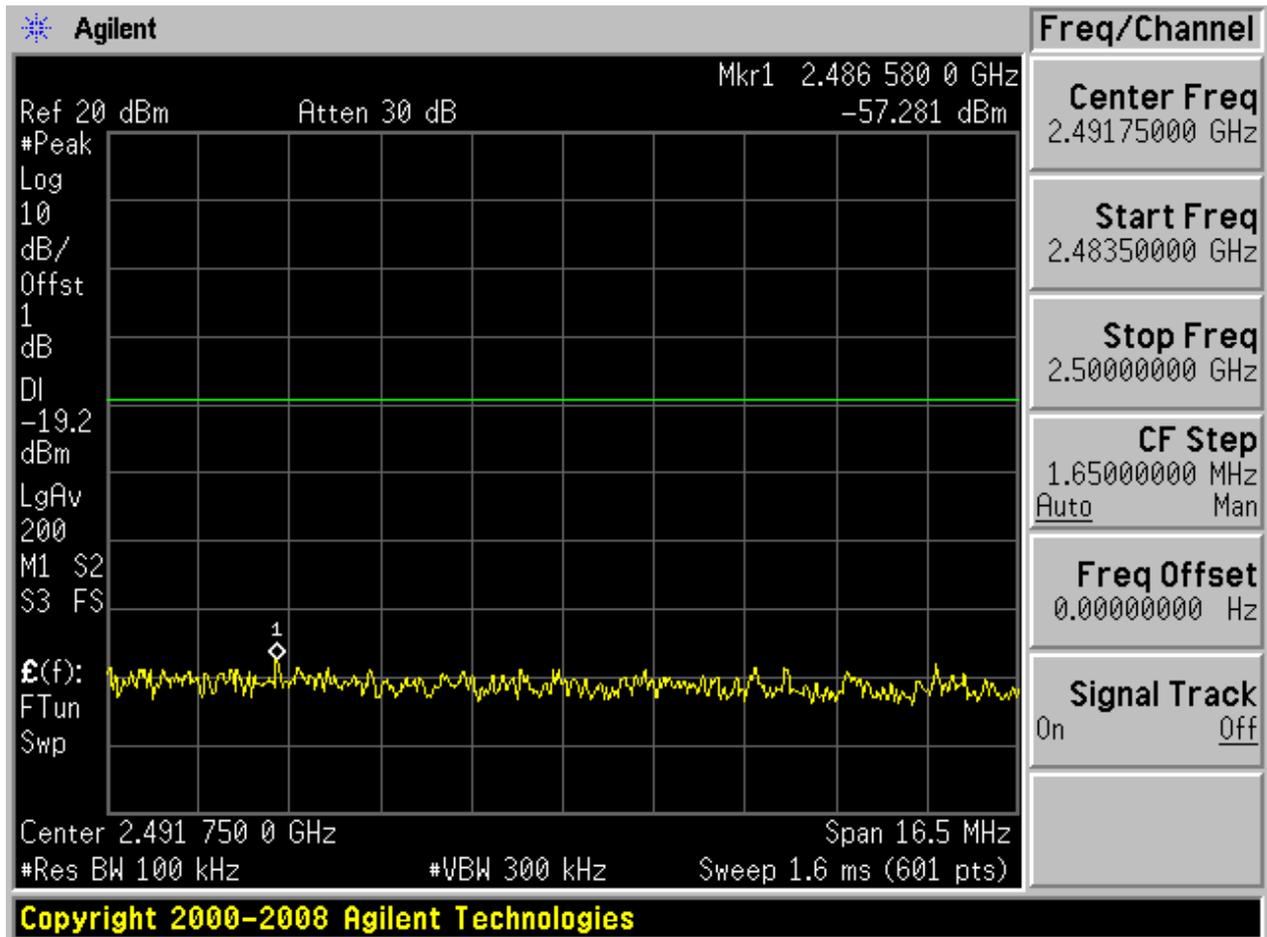


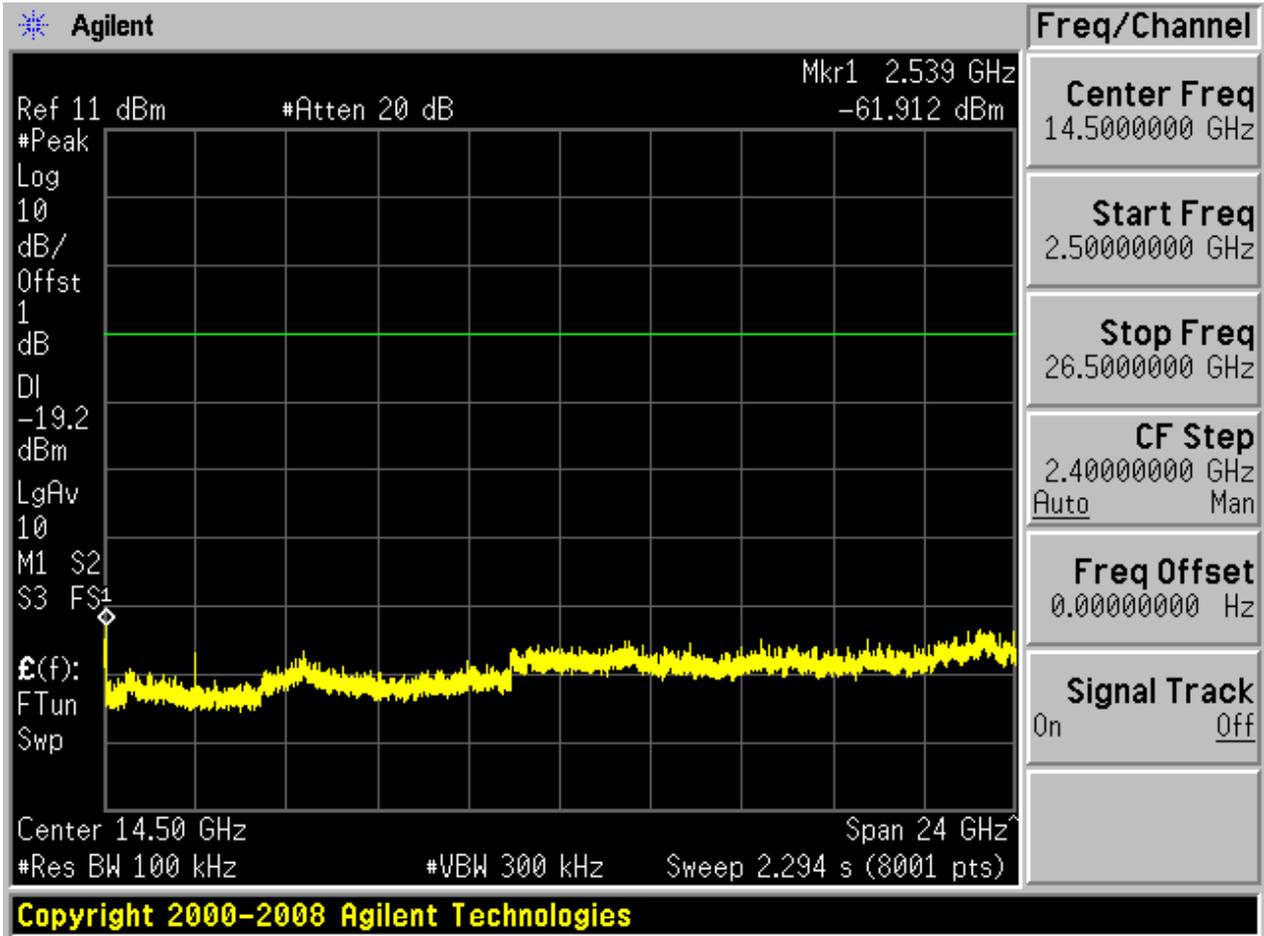




## 2.17 11N20\_H@BG1


Pref:

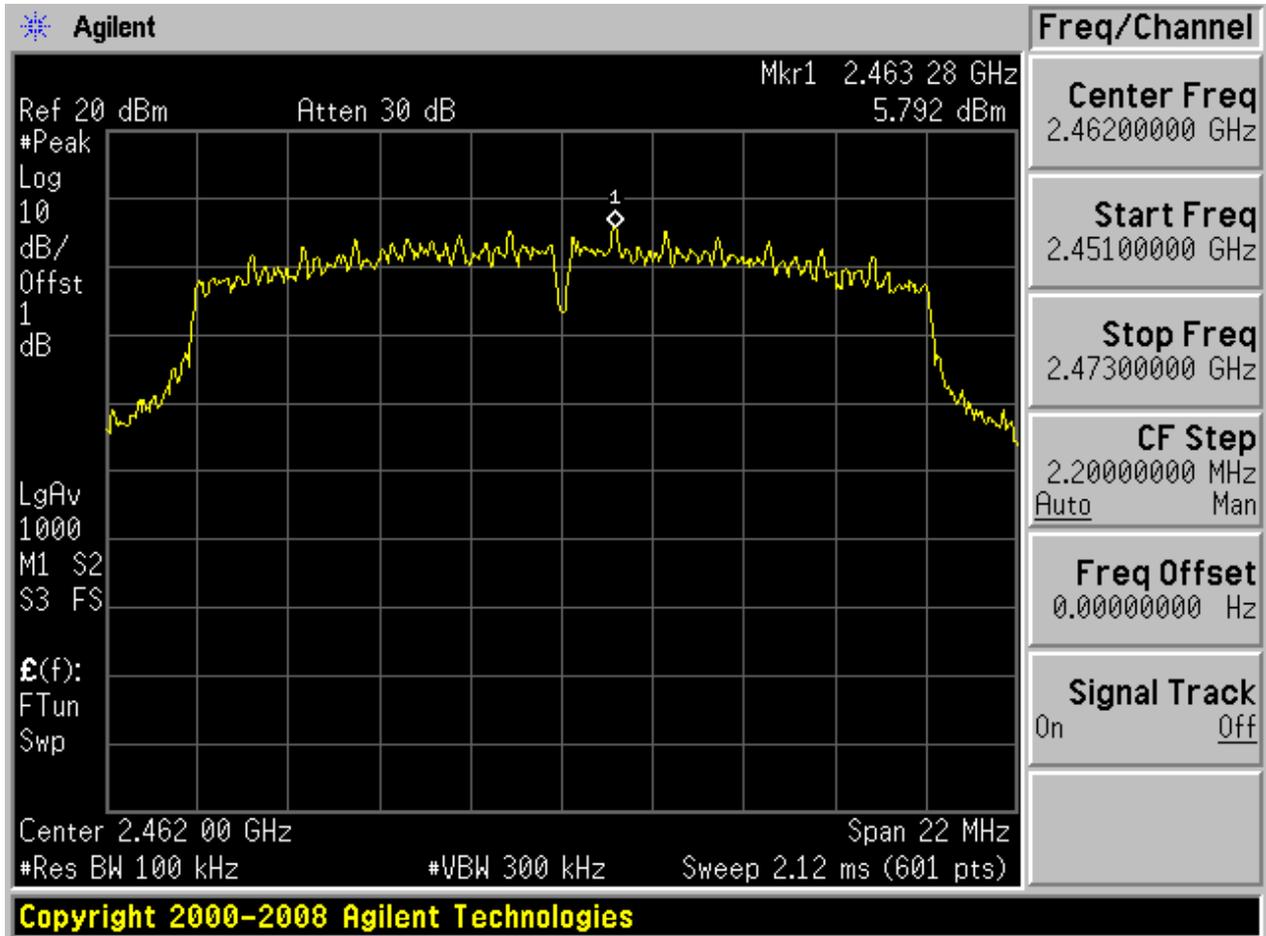






Puw:

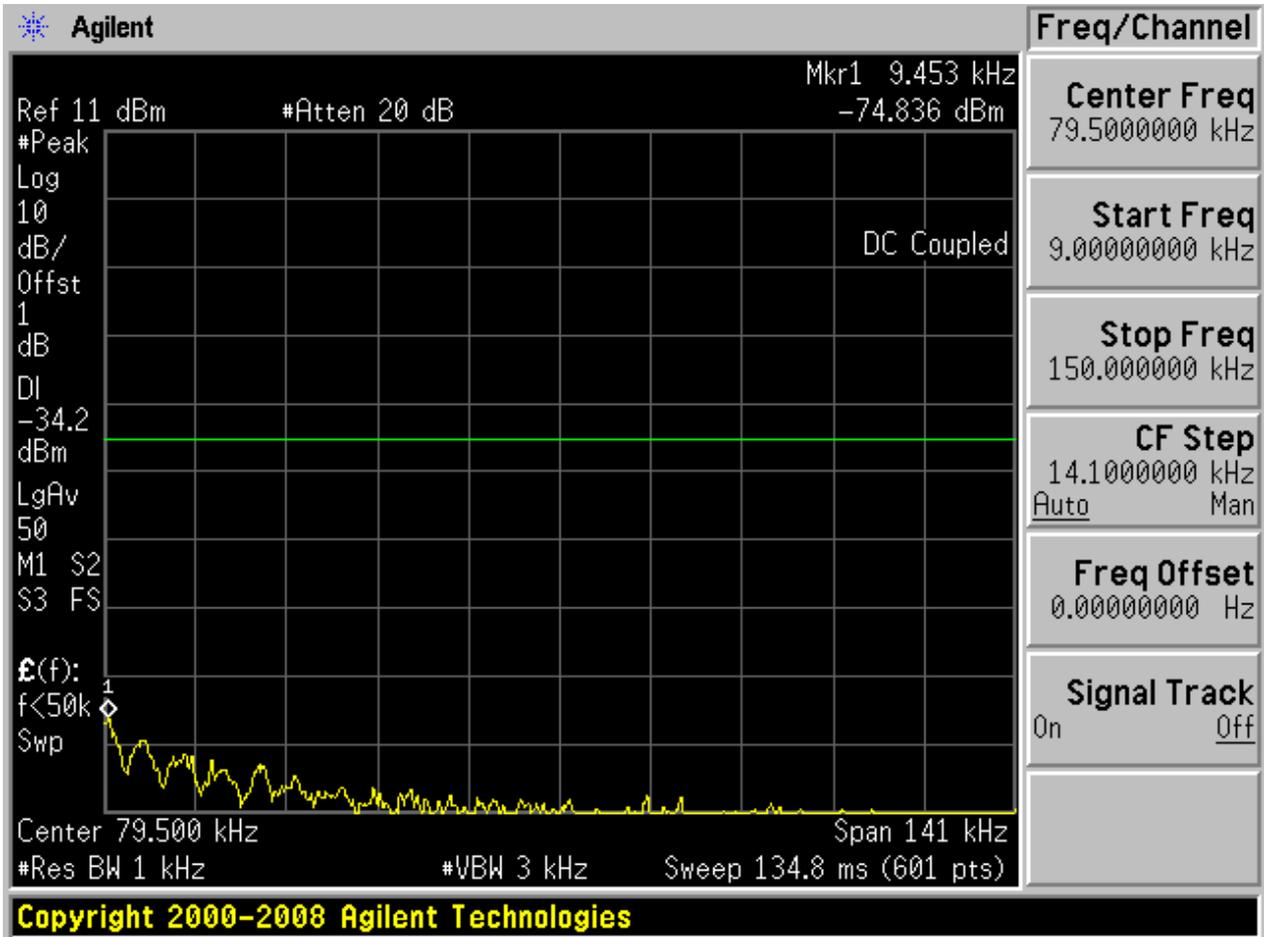


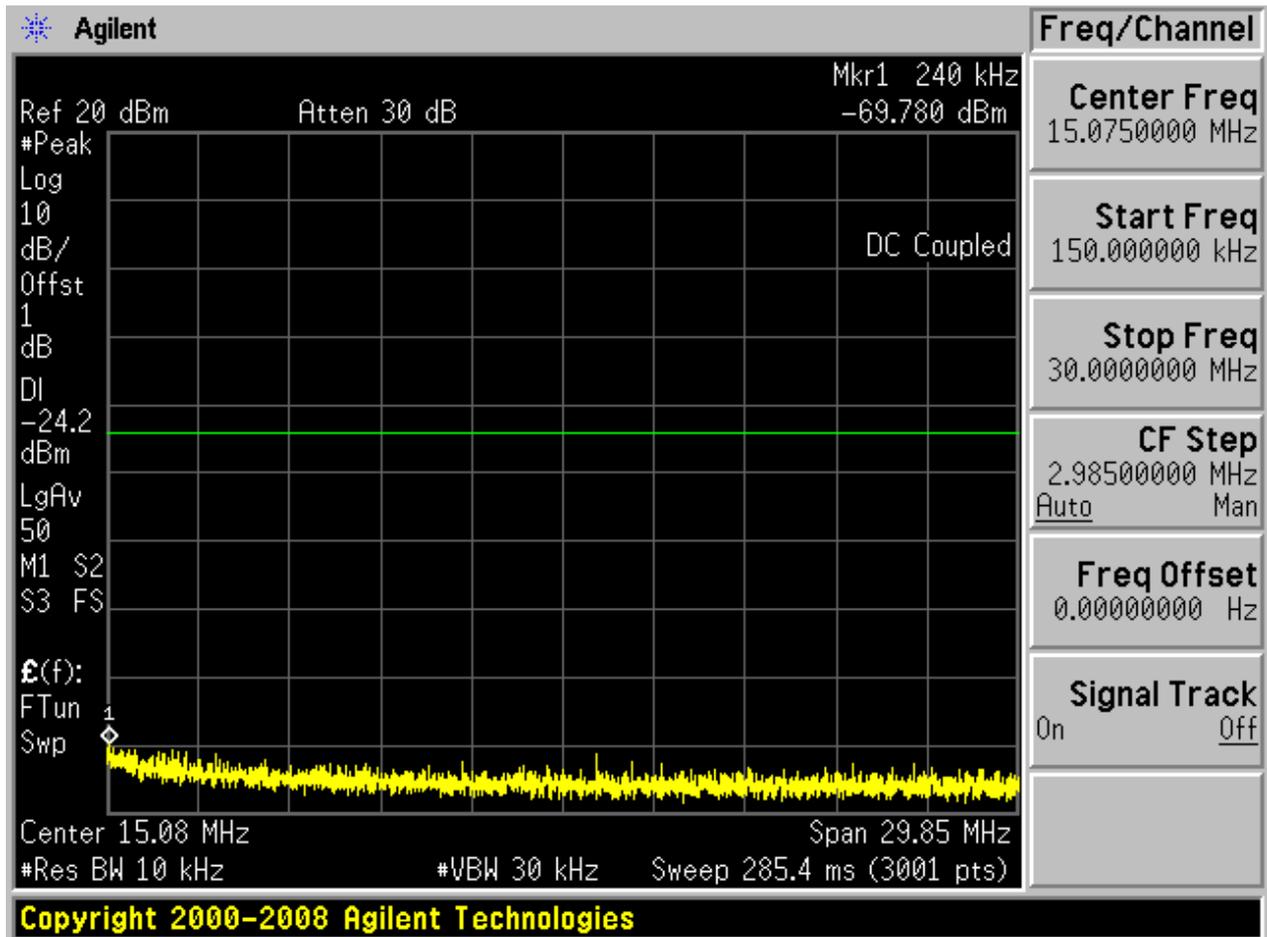

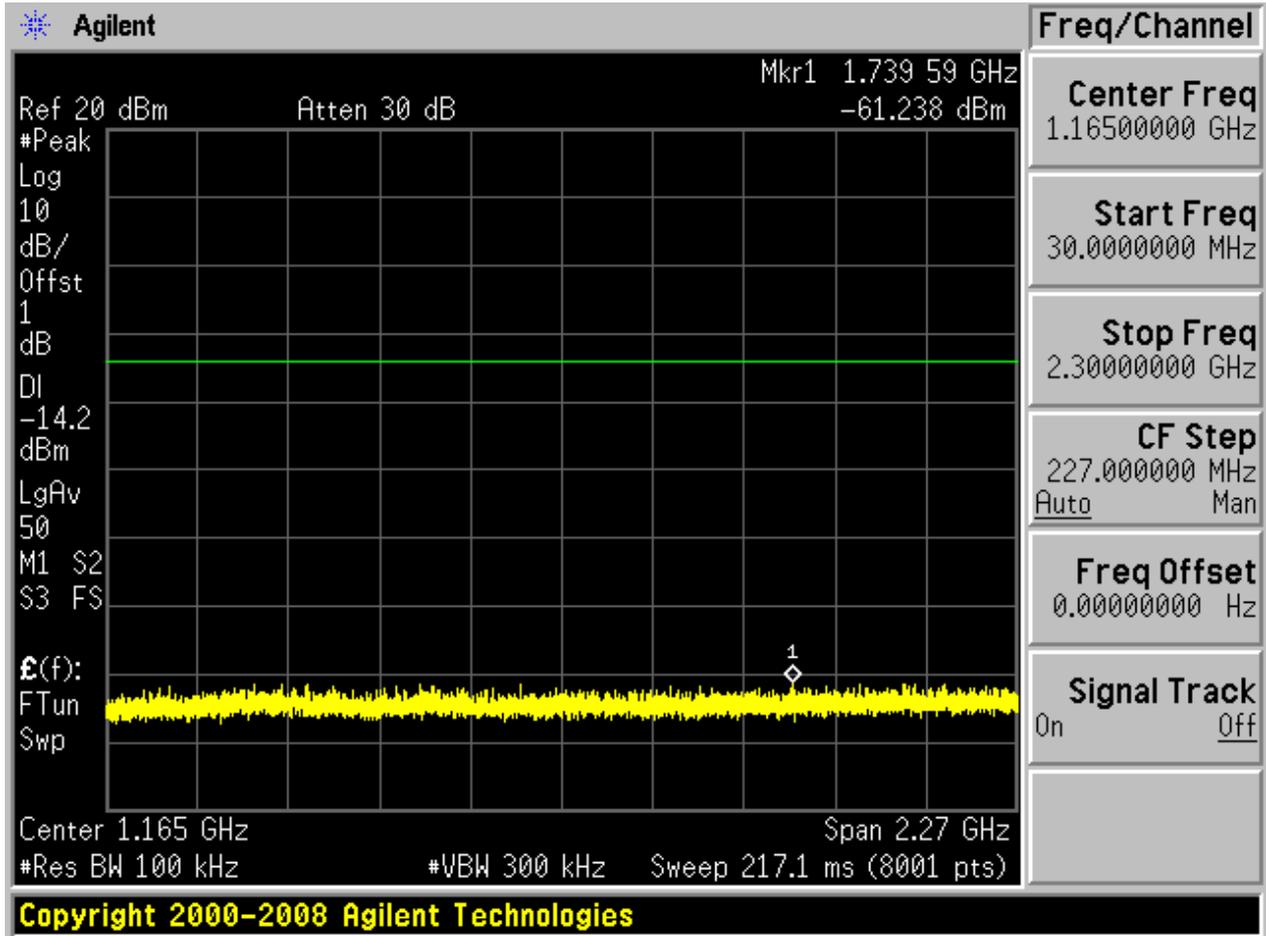

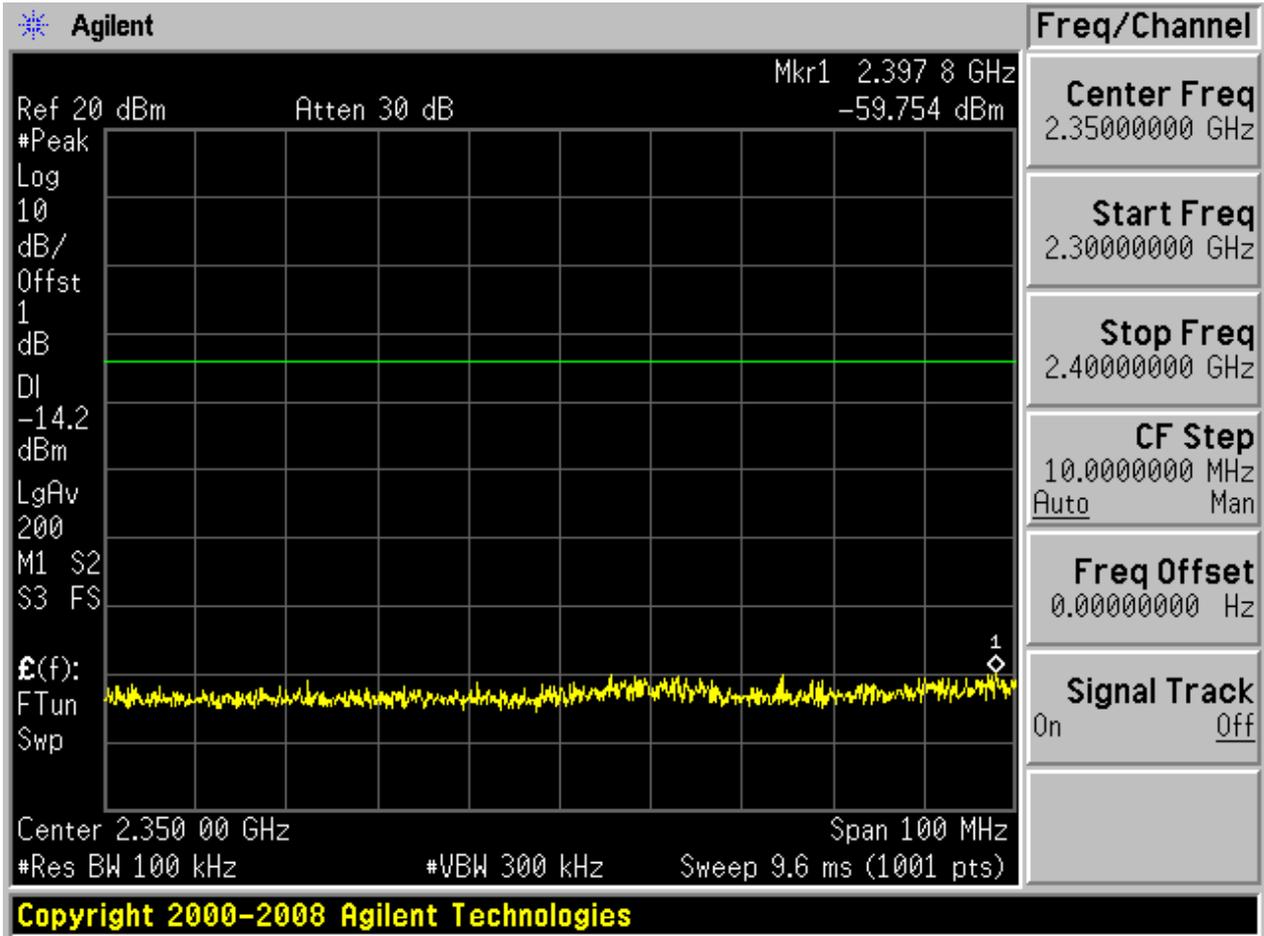

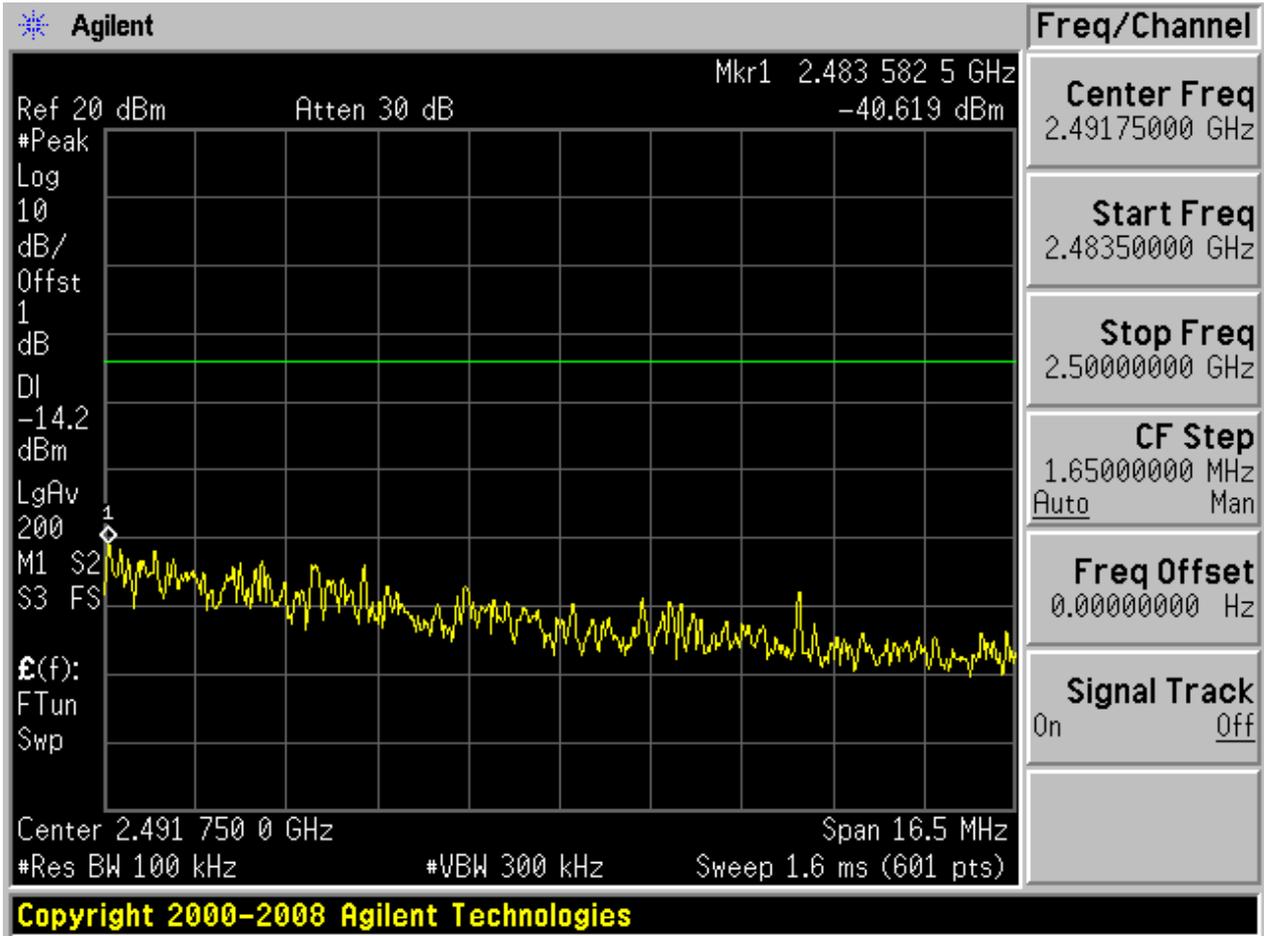


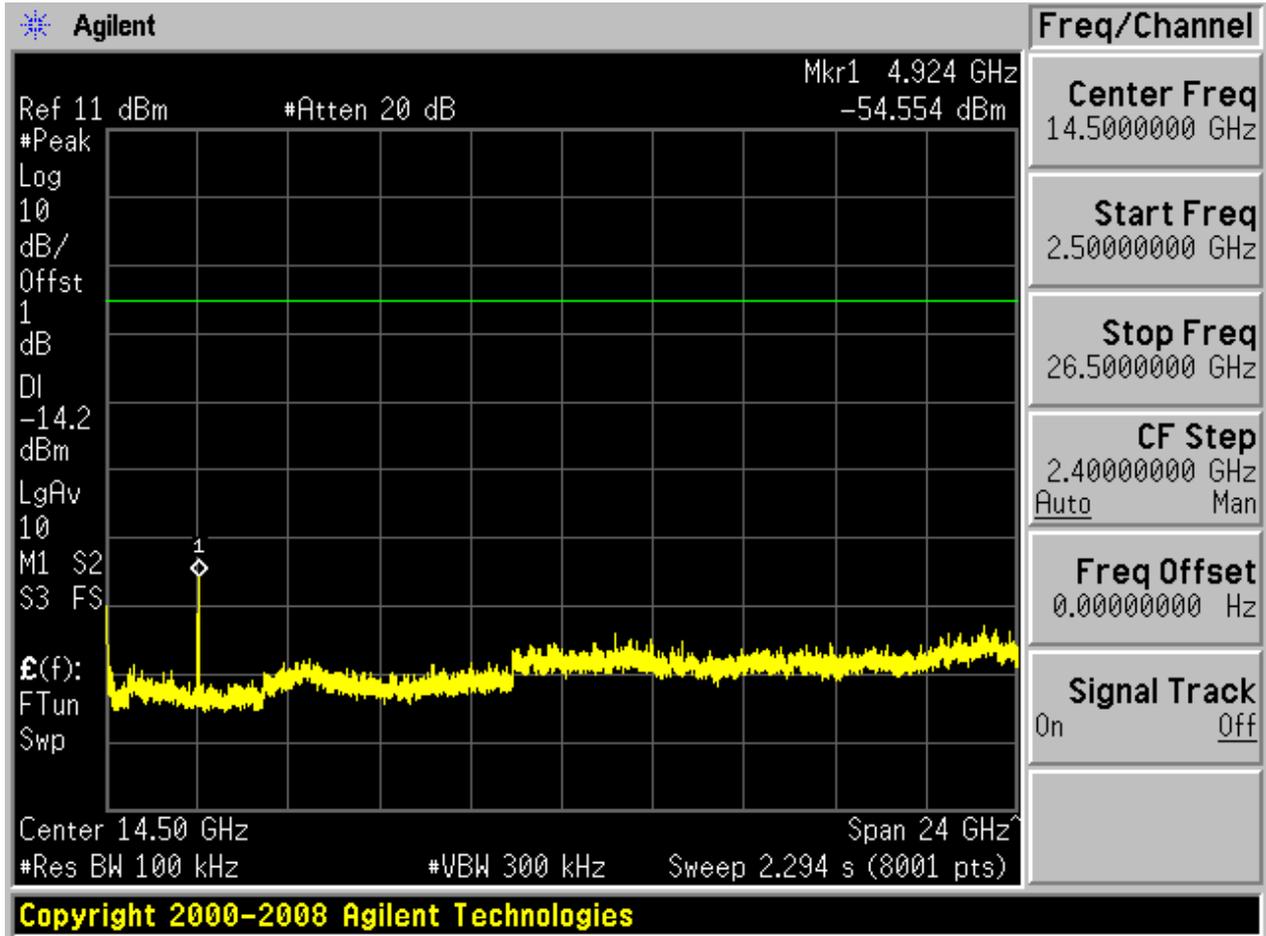




## 2.18 11N20\_H@BG2

Pref:

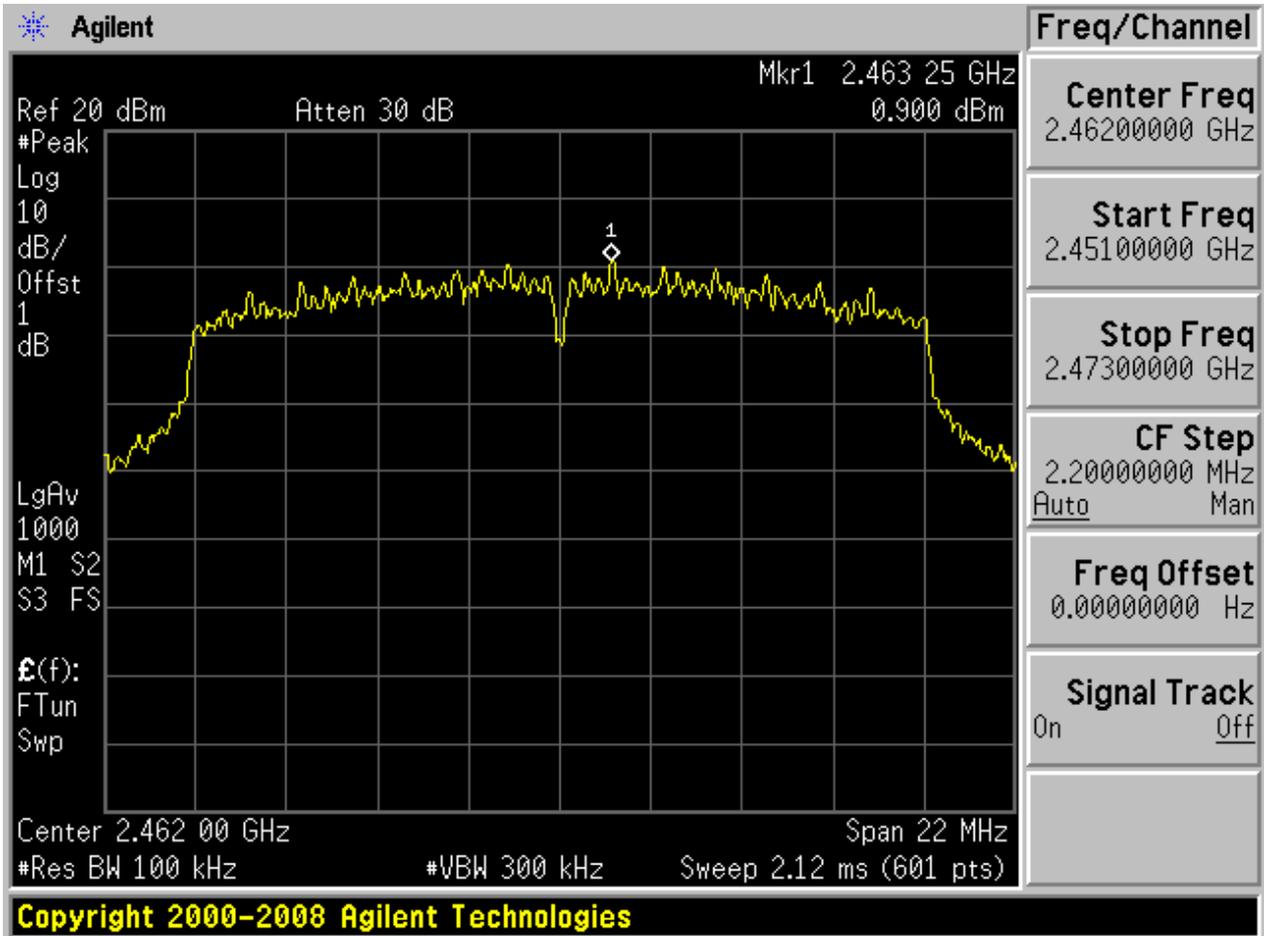






Puw:

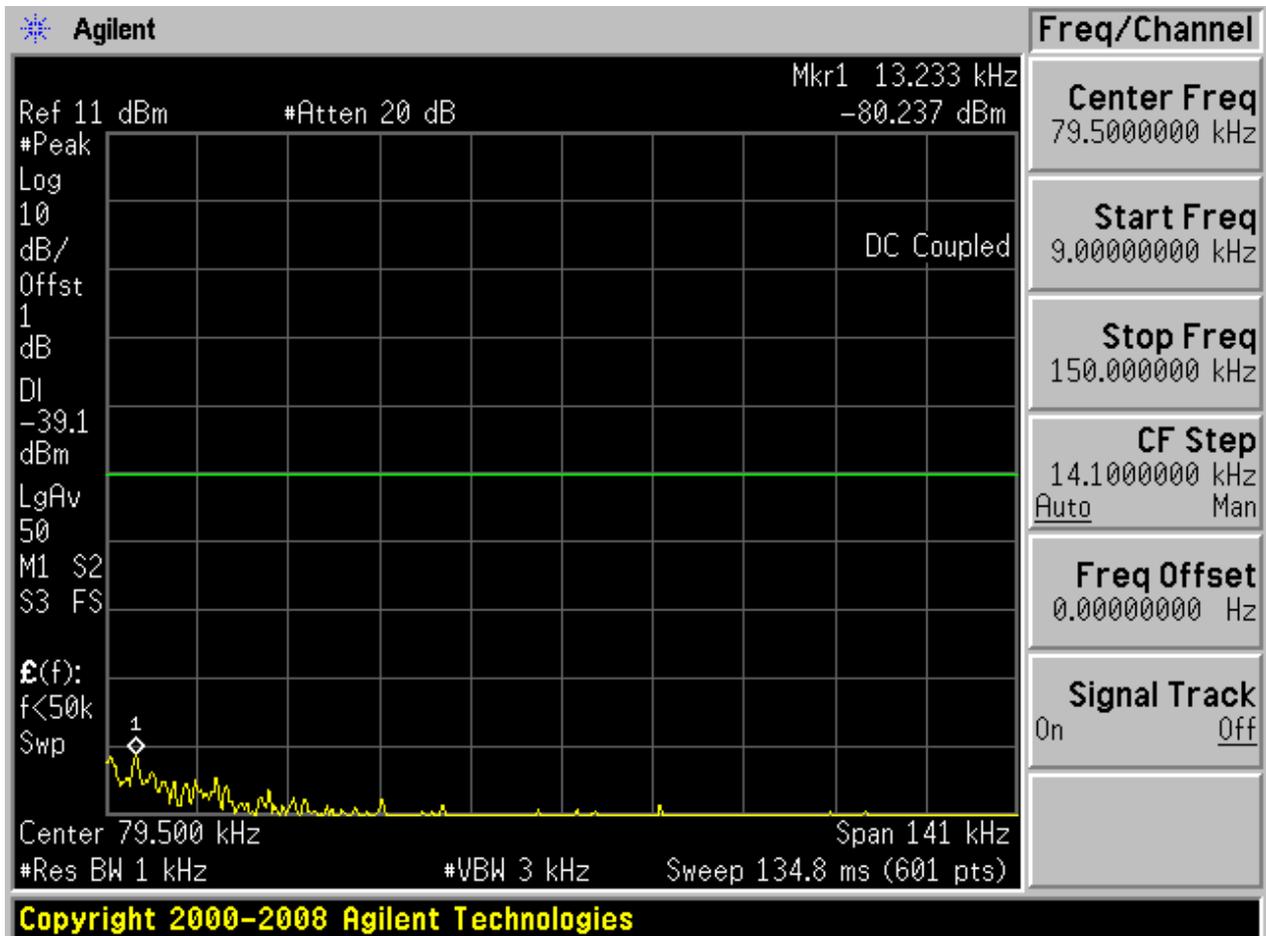




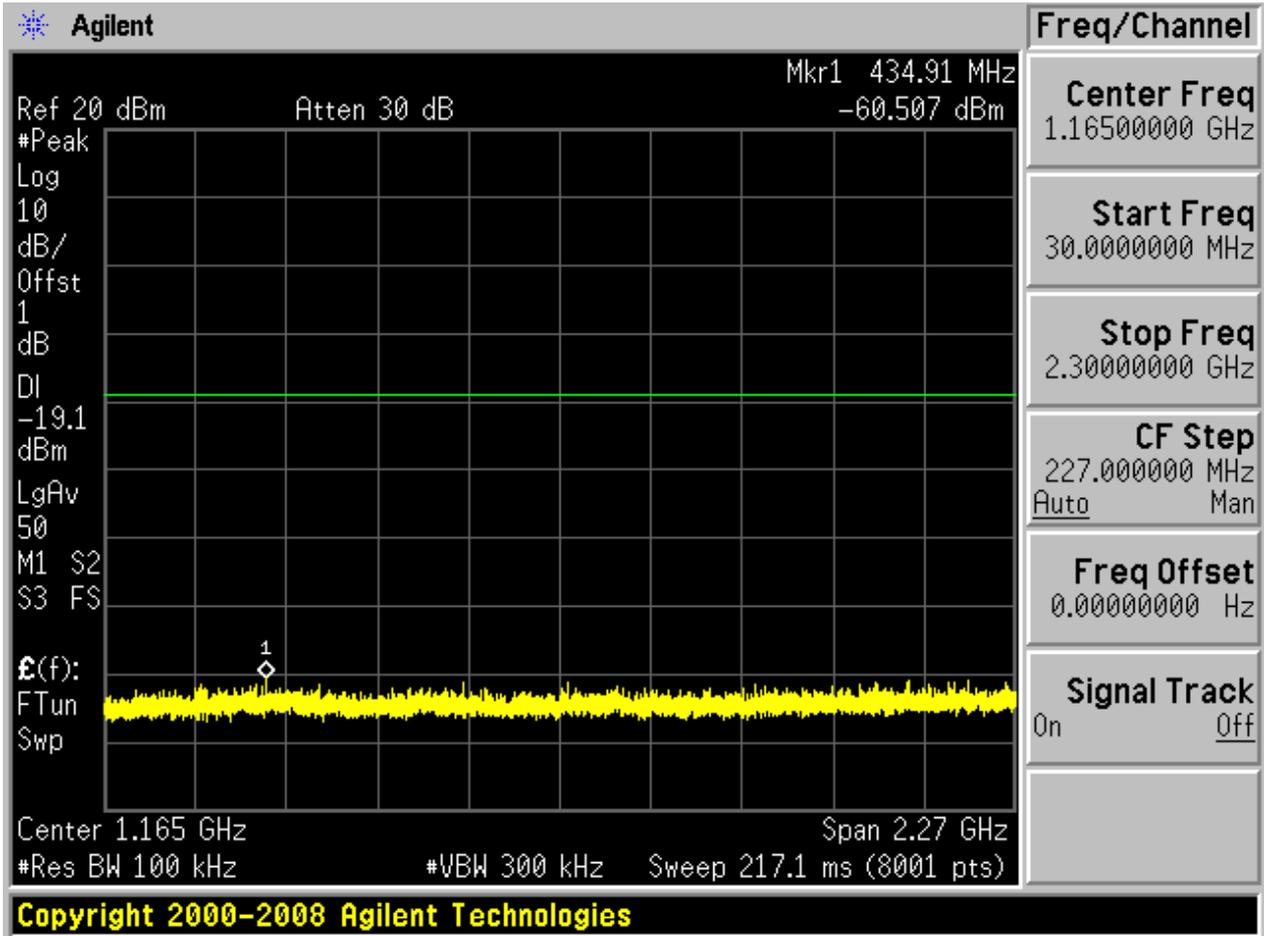

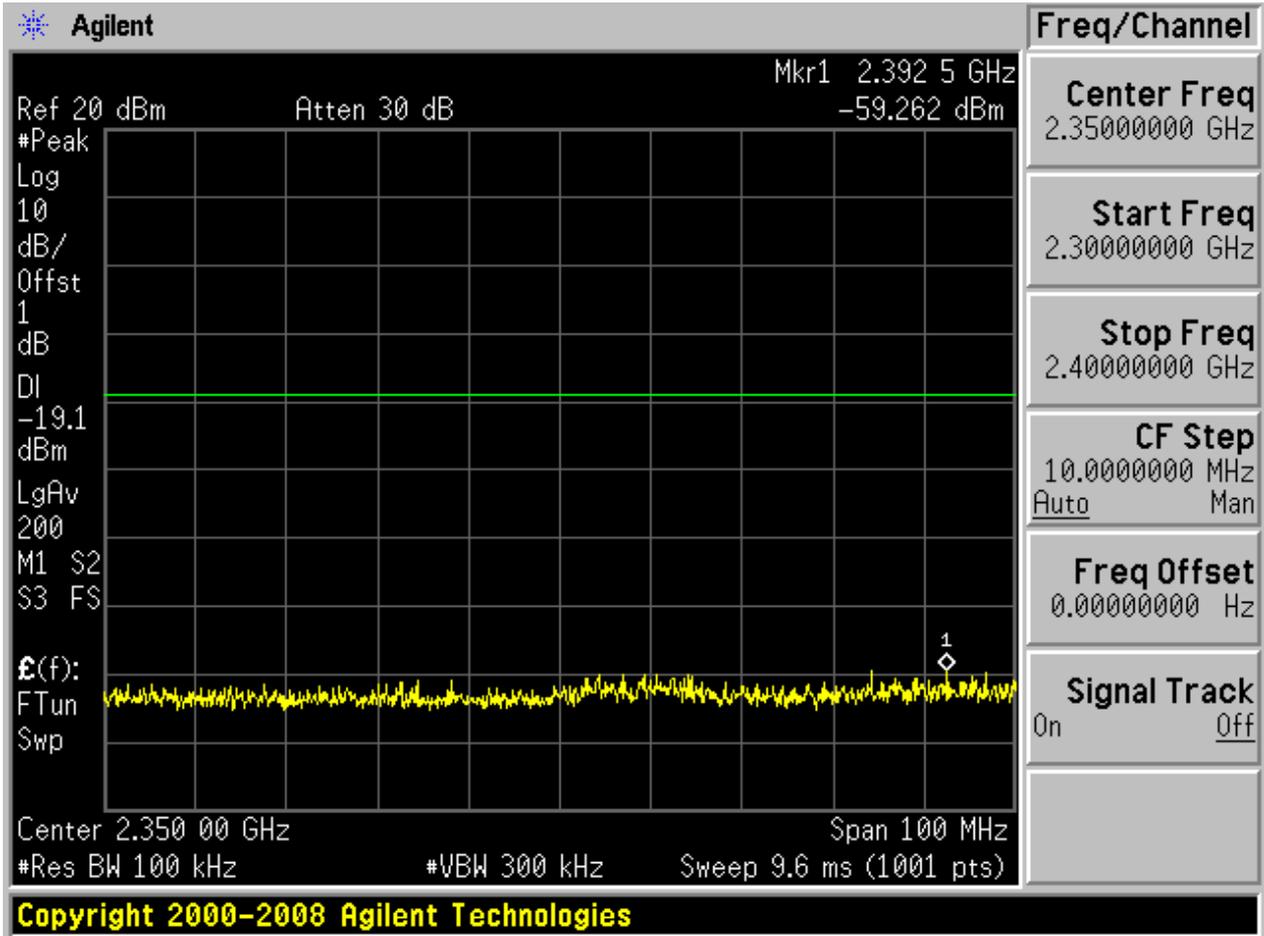

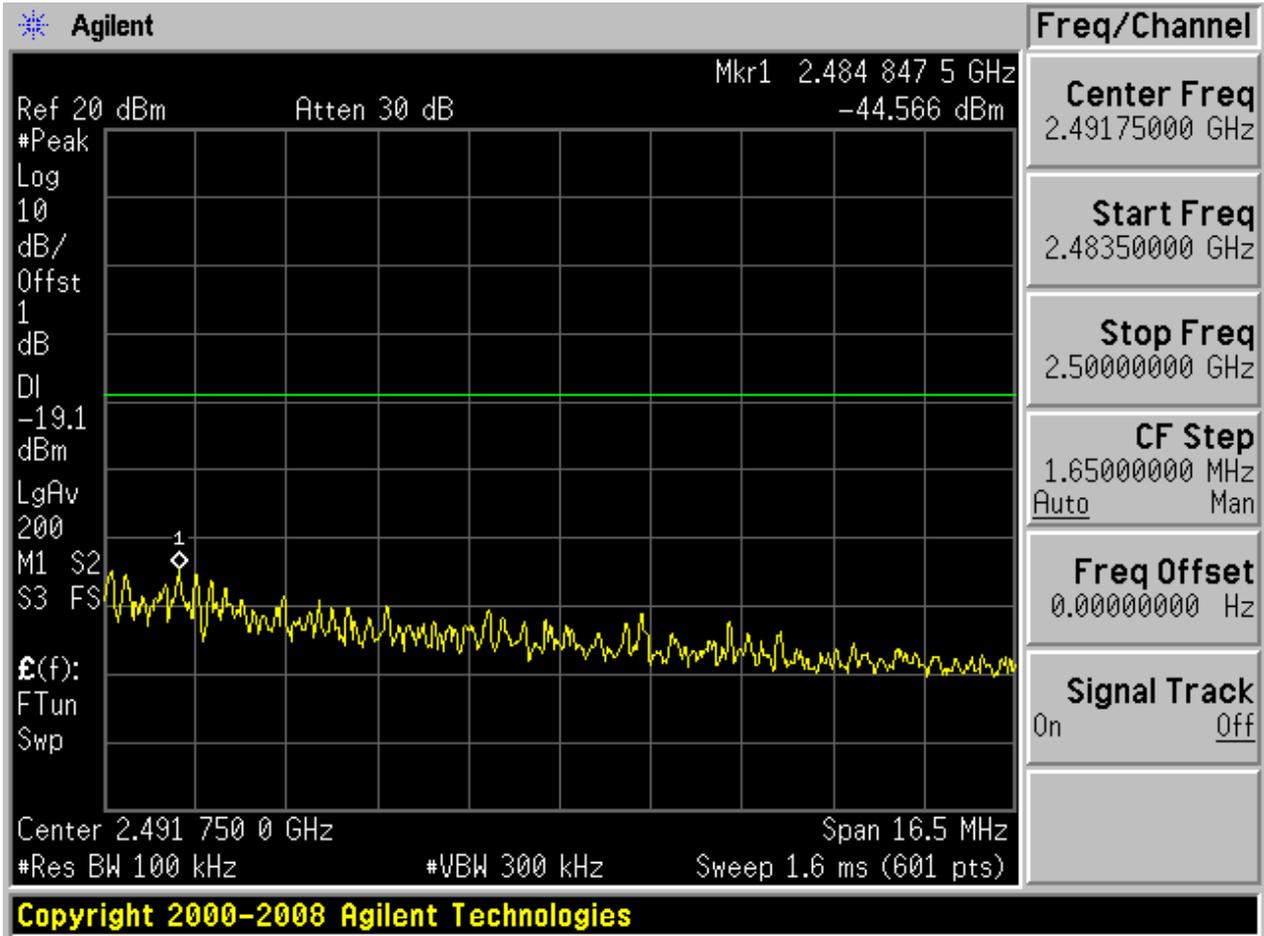


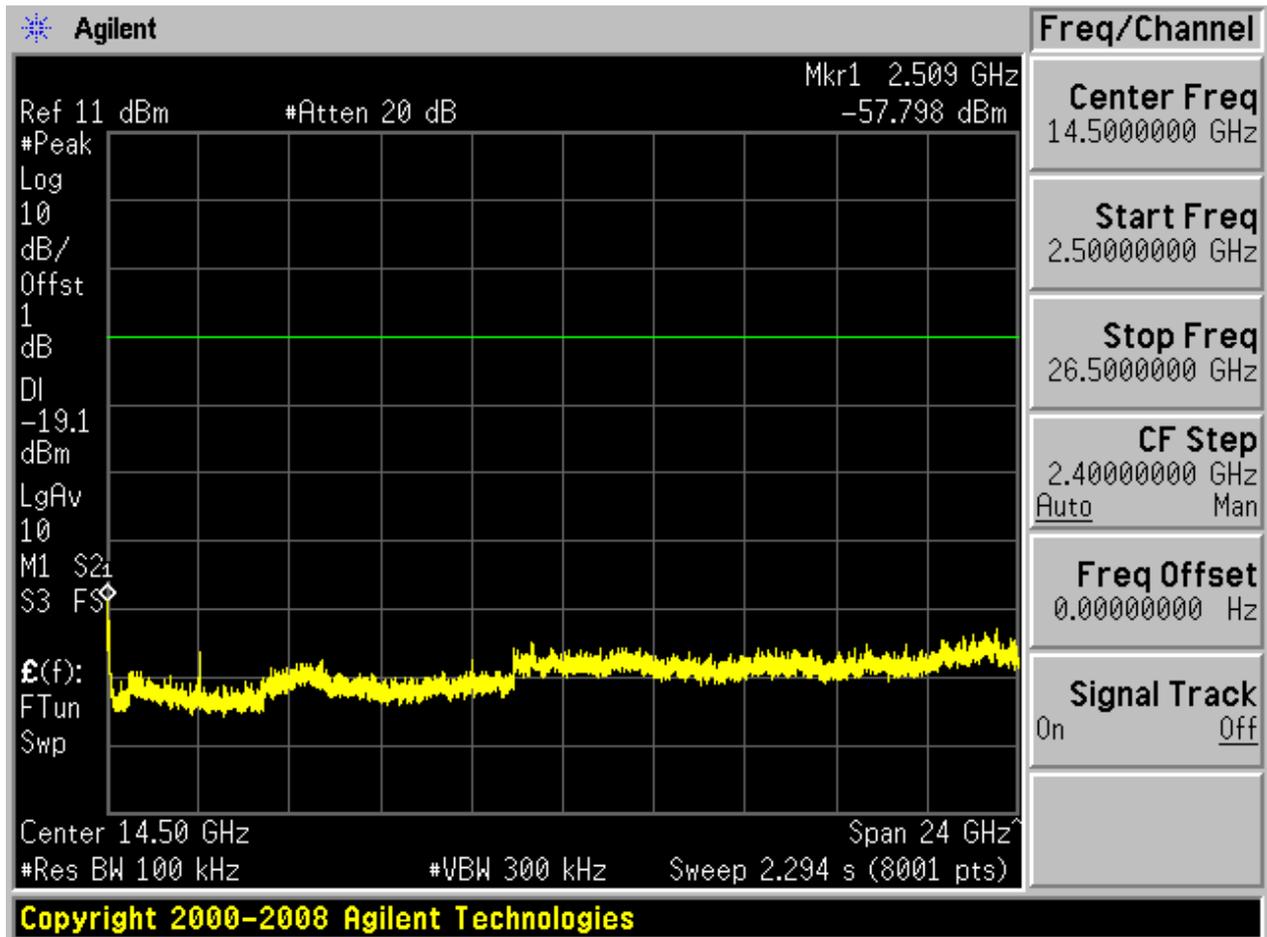




## 2.19 11N40\_L@BG1

Pref:

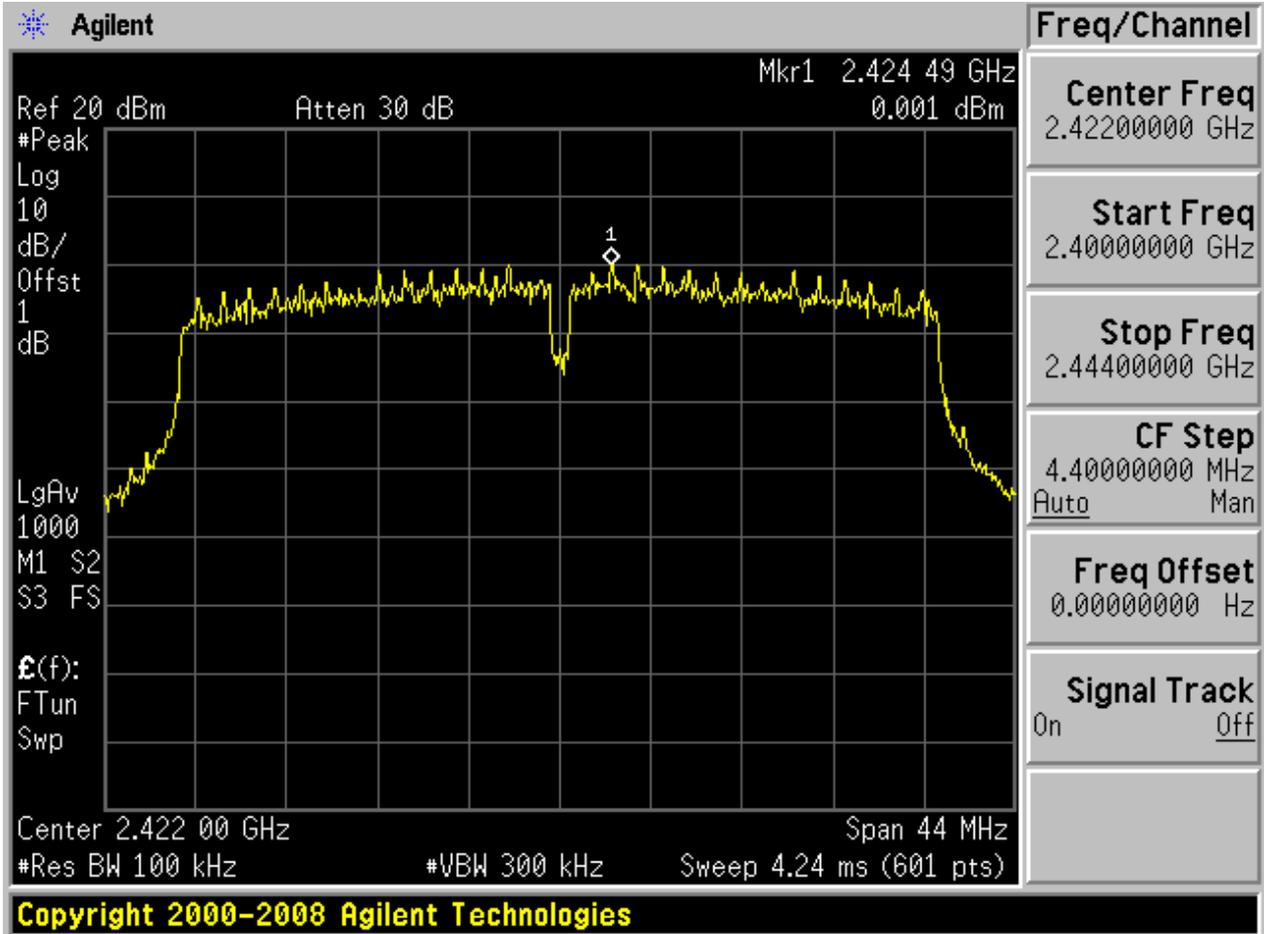





Puw:

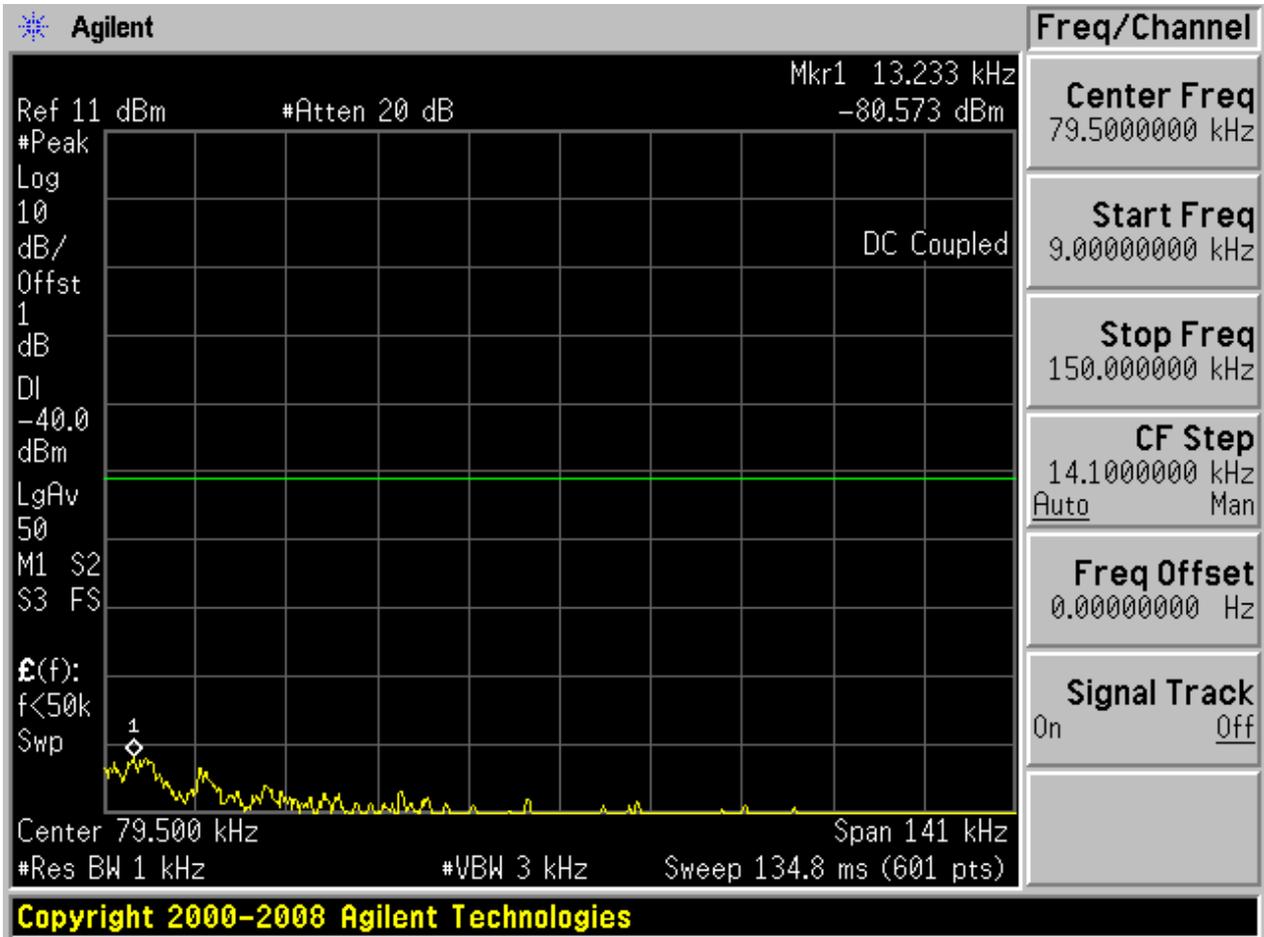






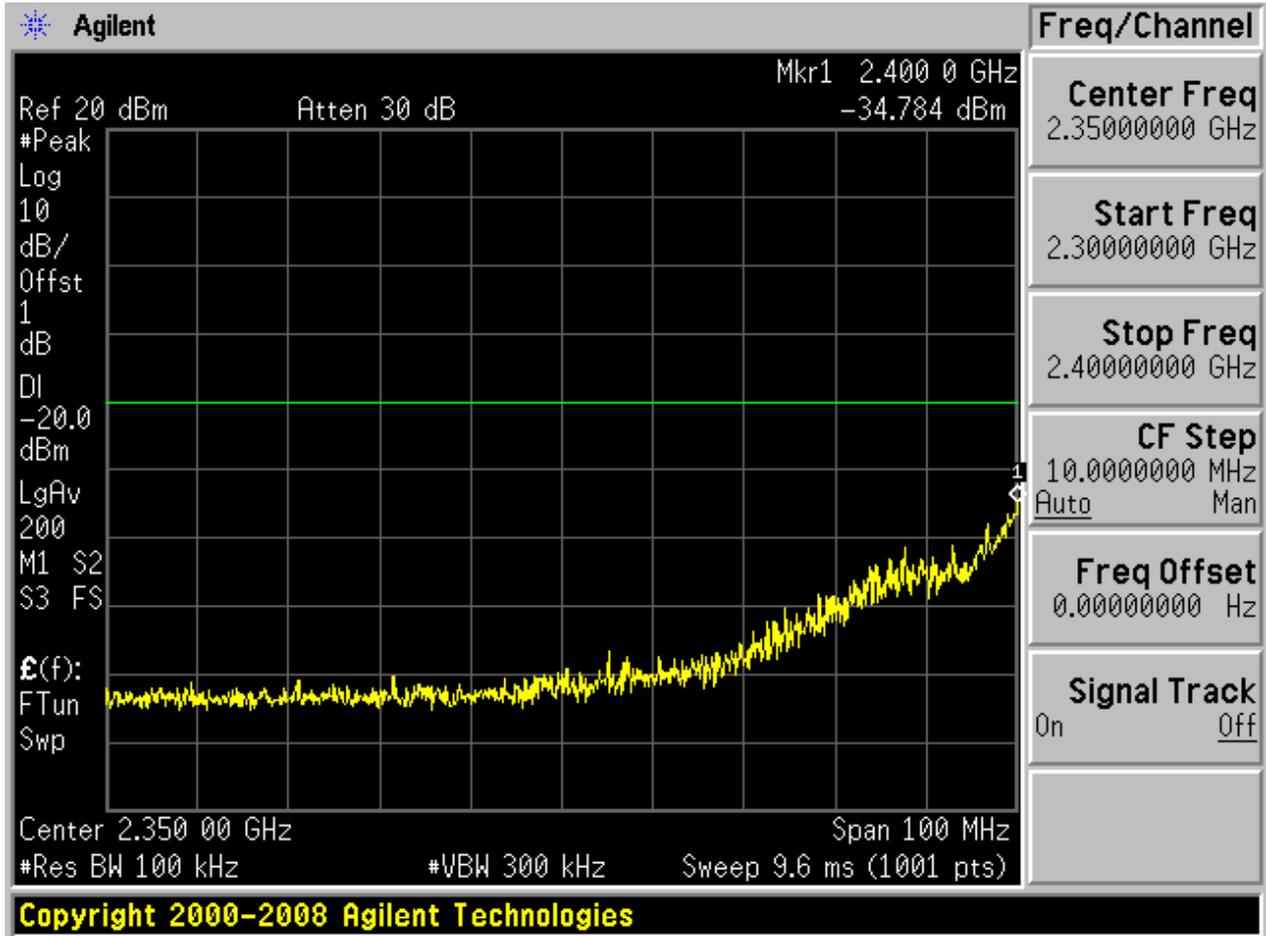

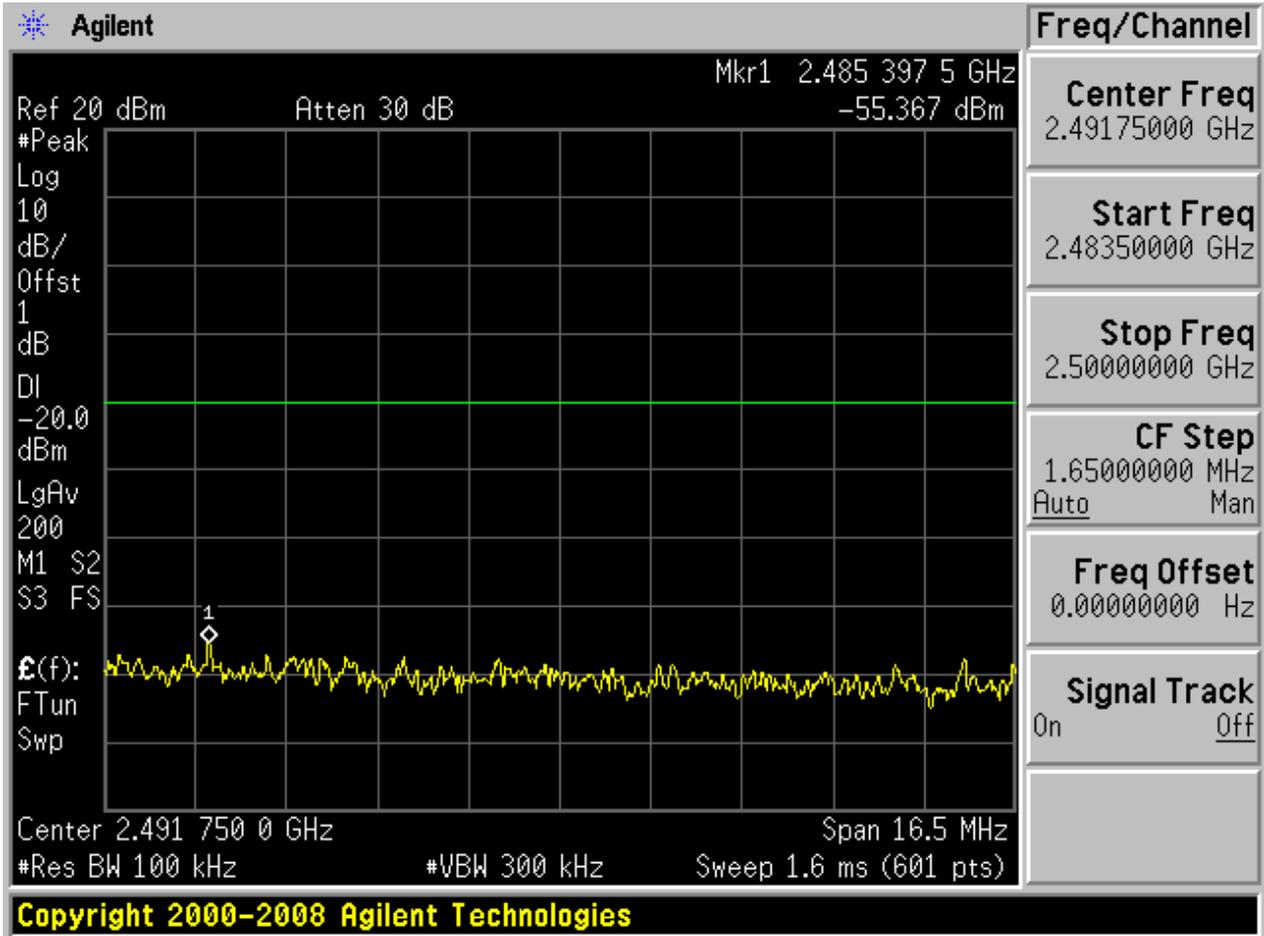


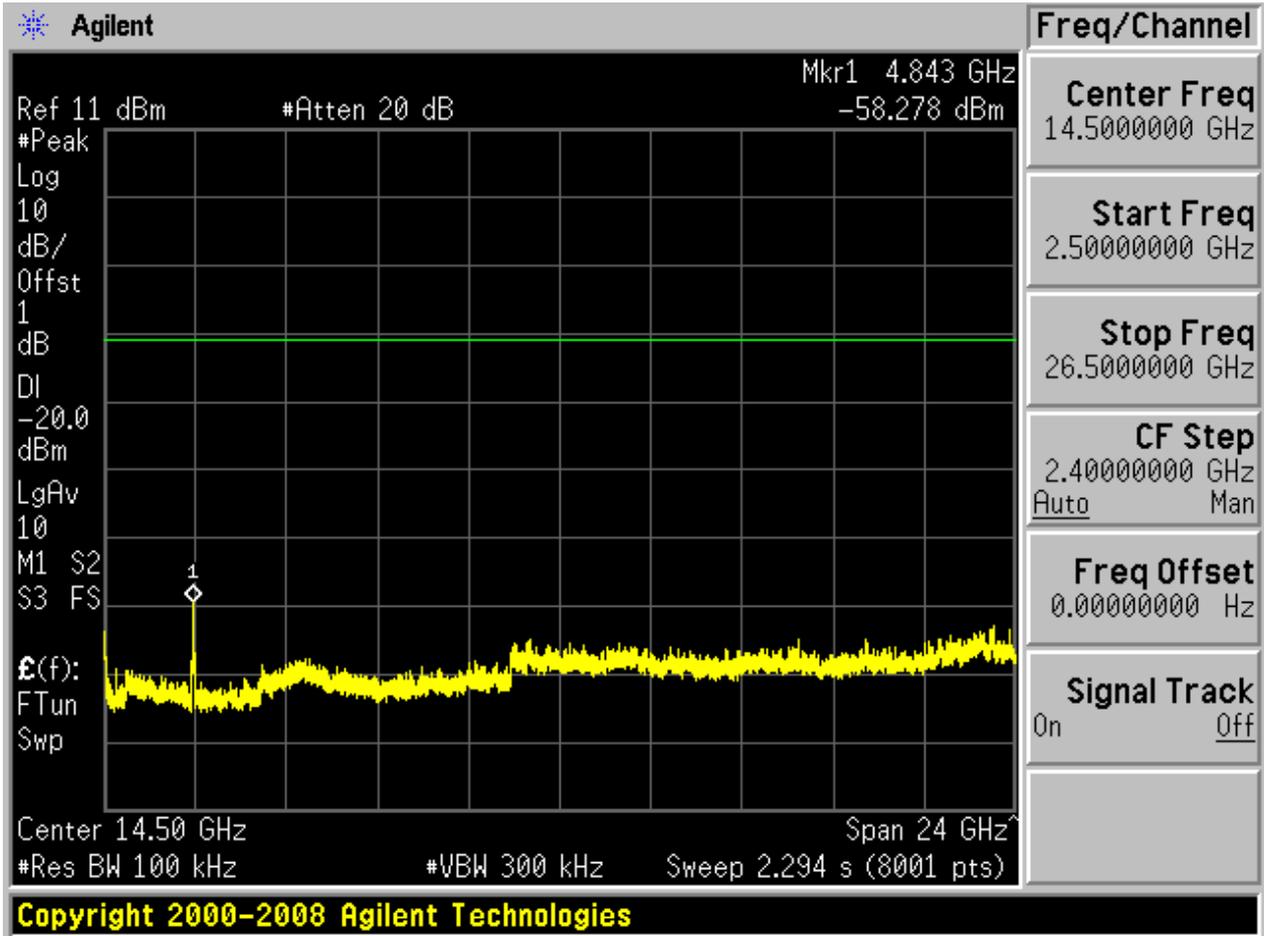




## 2.20 11N40\_L@BG2


Pref:

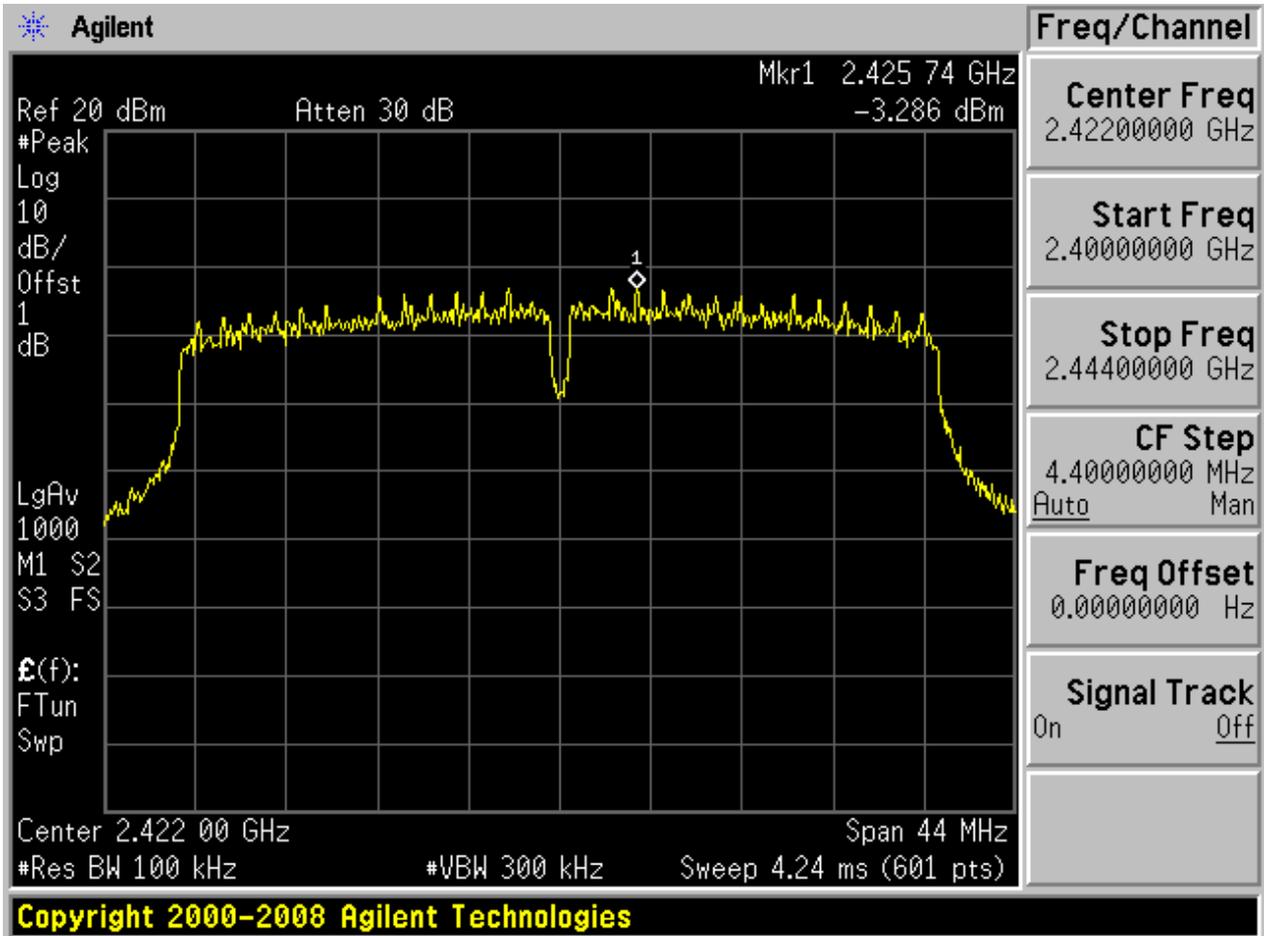






Puw:

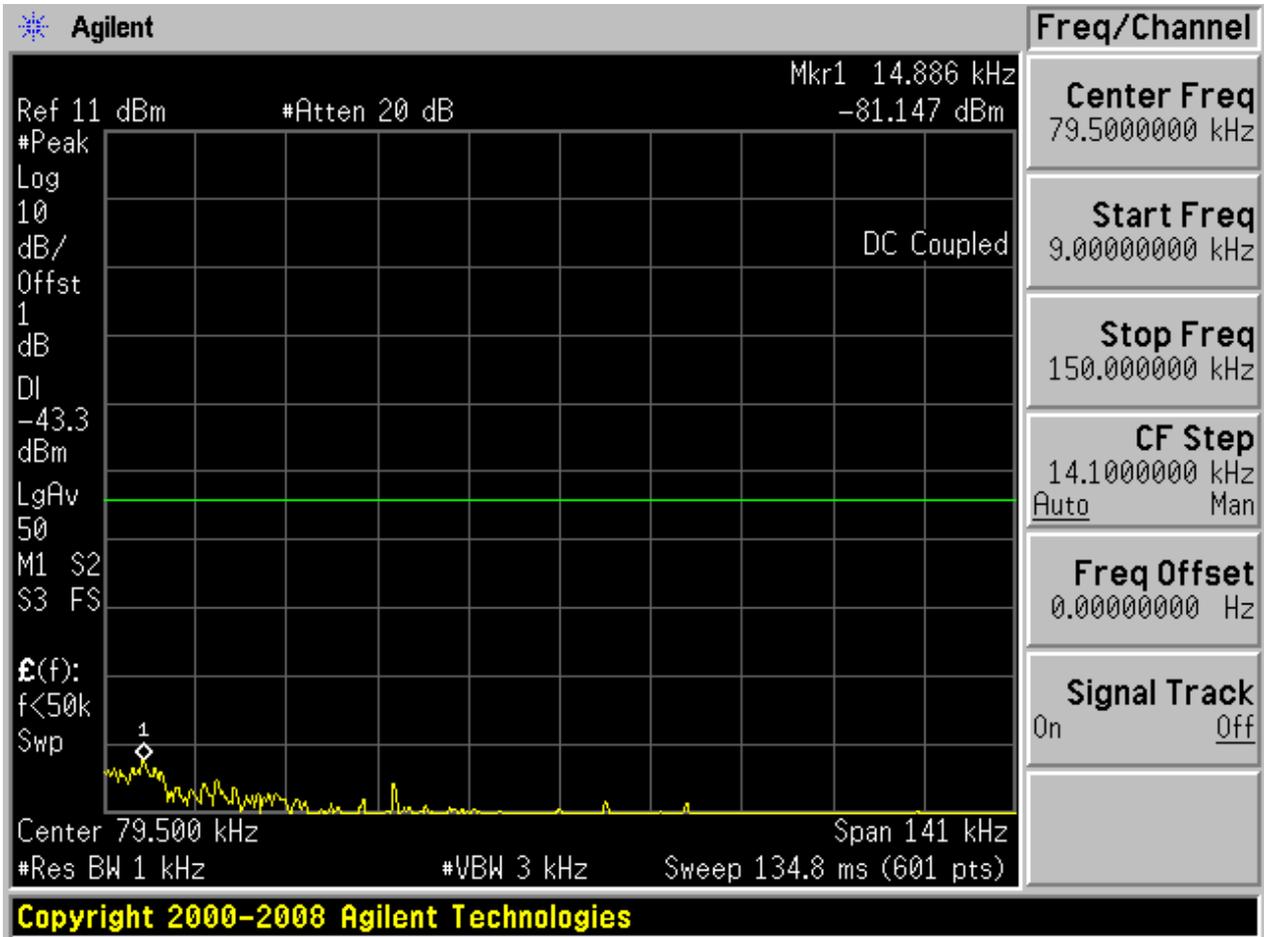


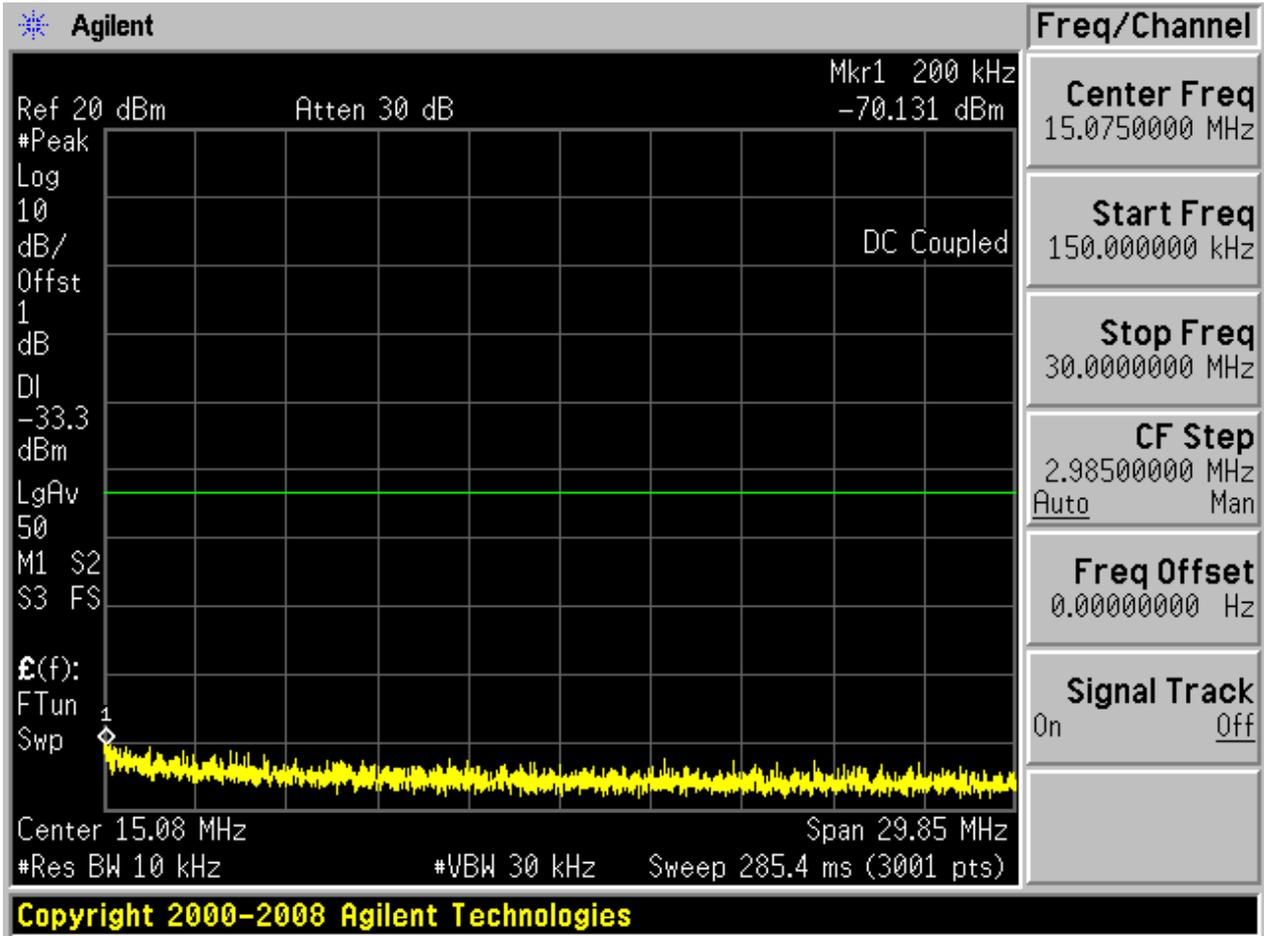

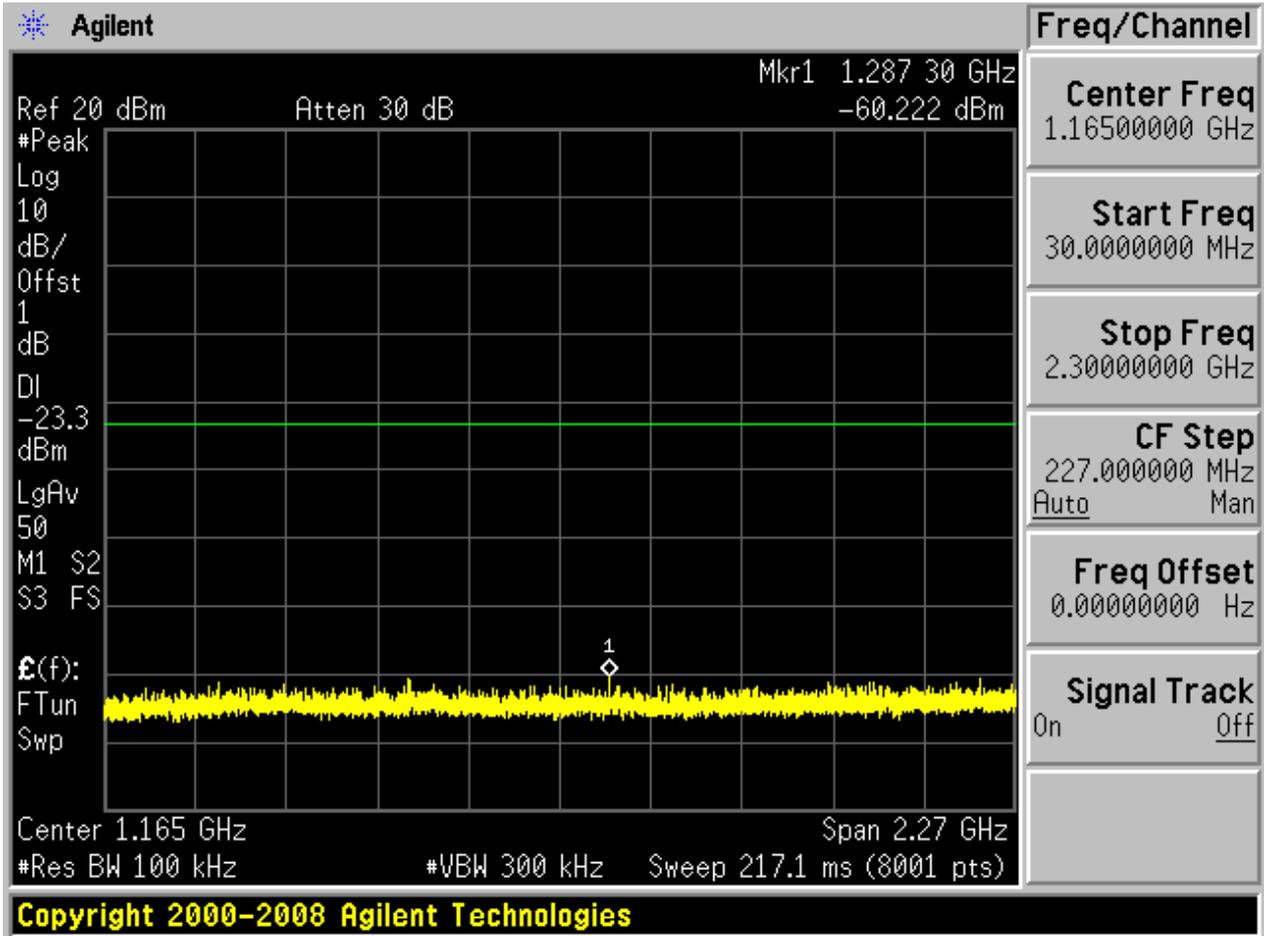

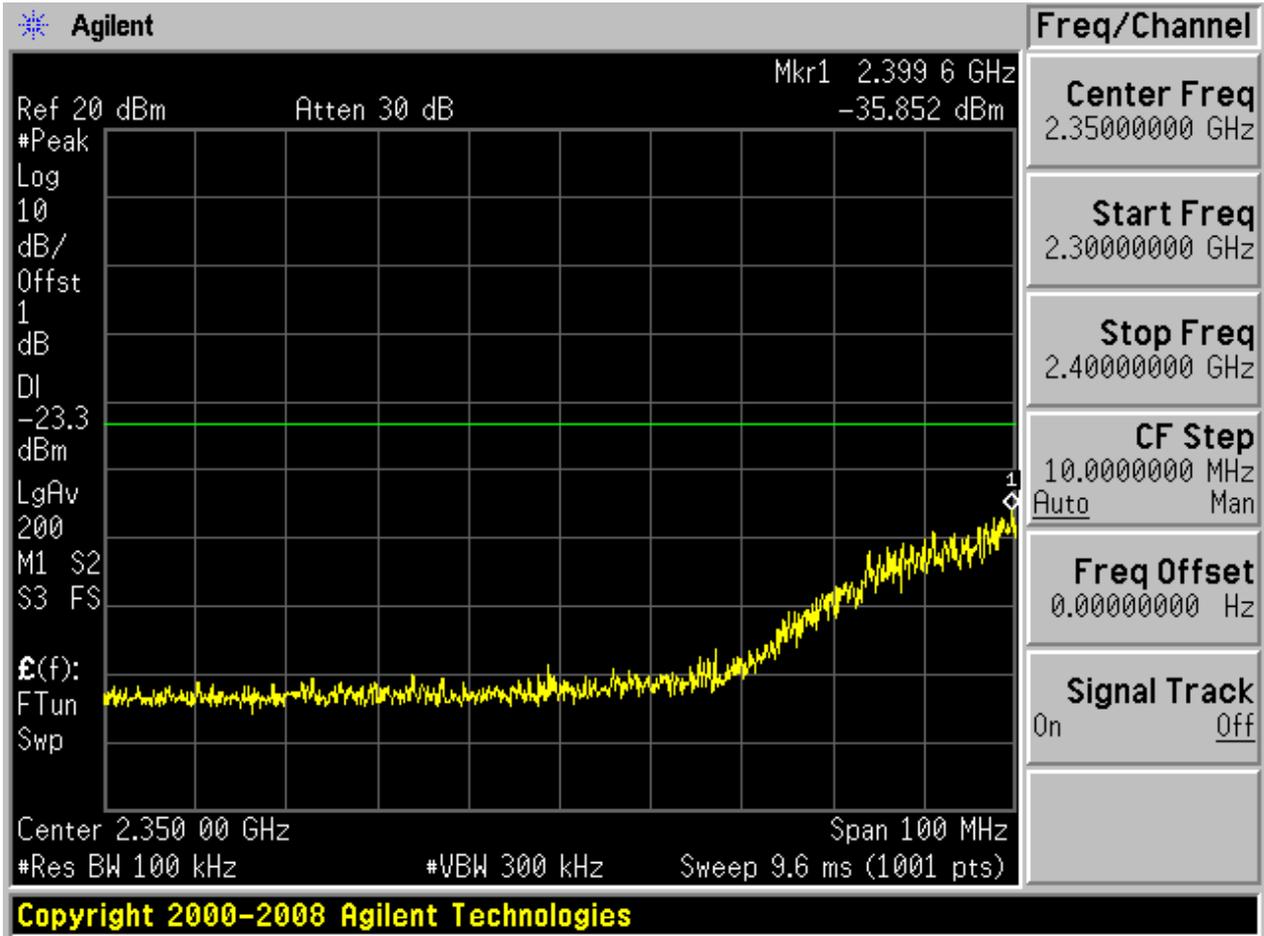

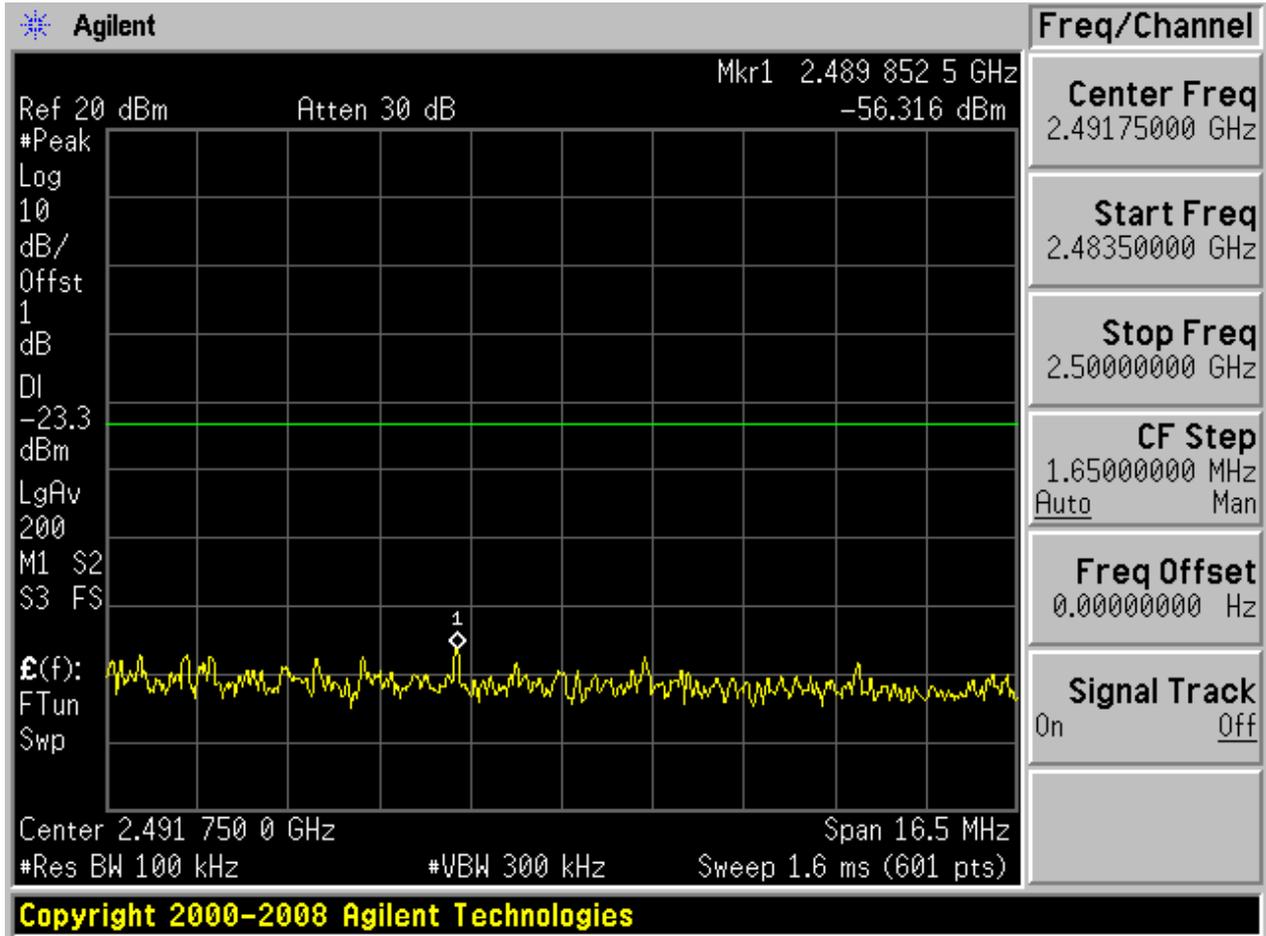


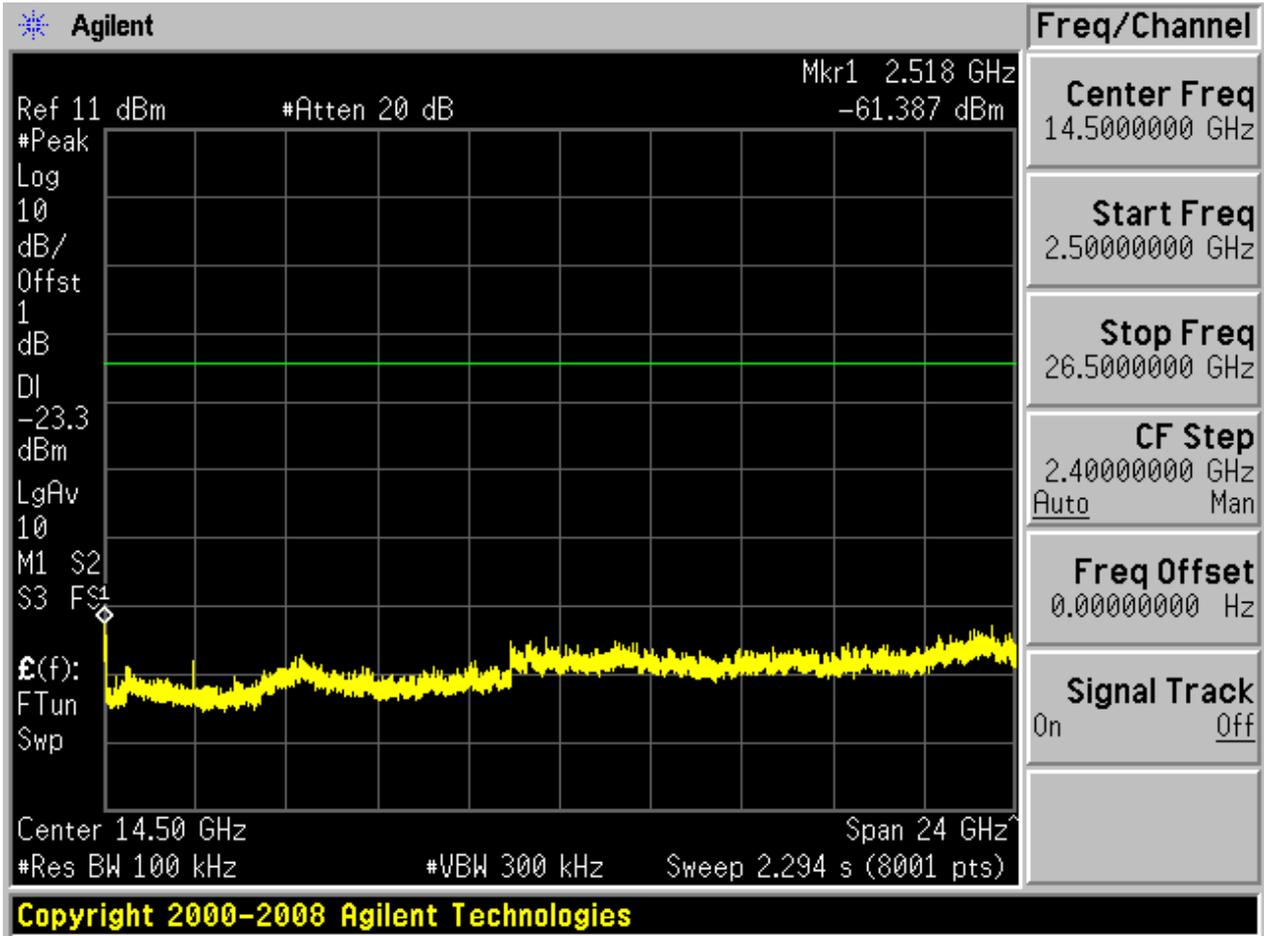




## 2.21 11N40\_M@BG1


Pref:

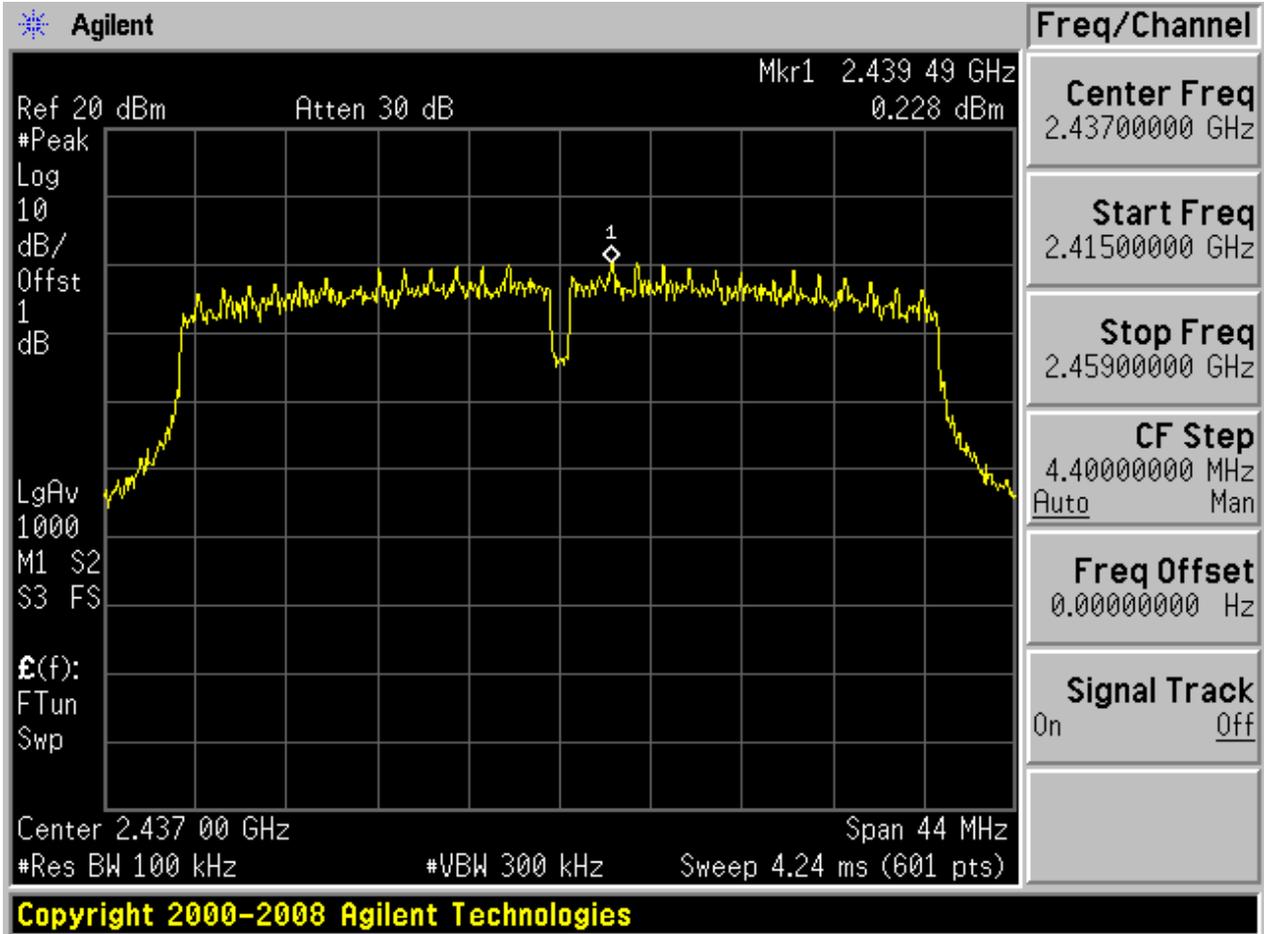





Puw:

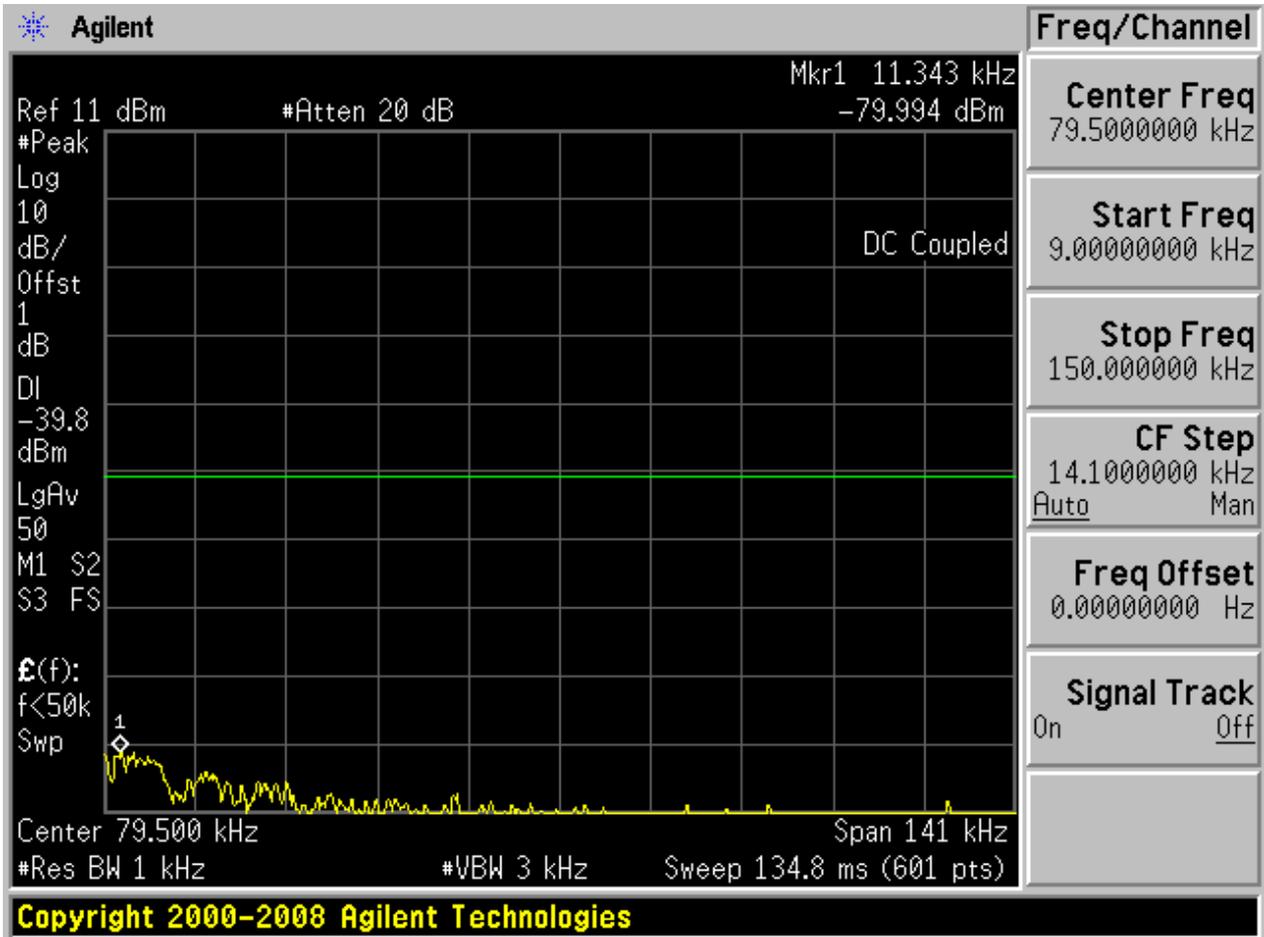


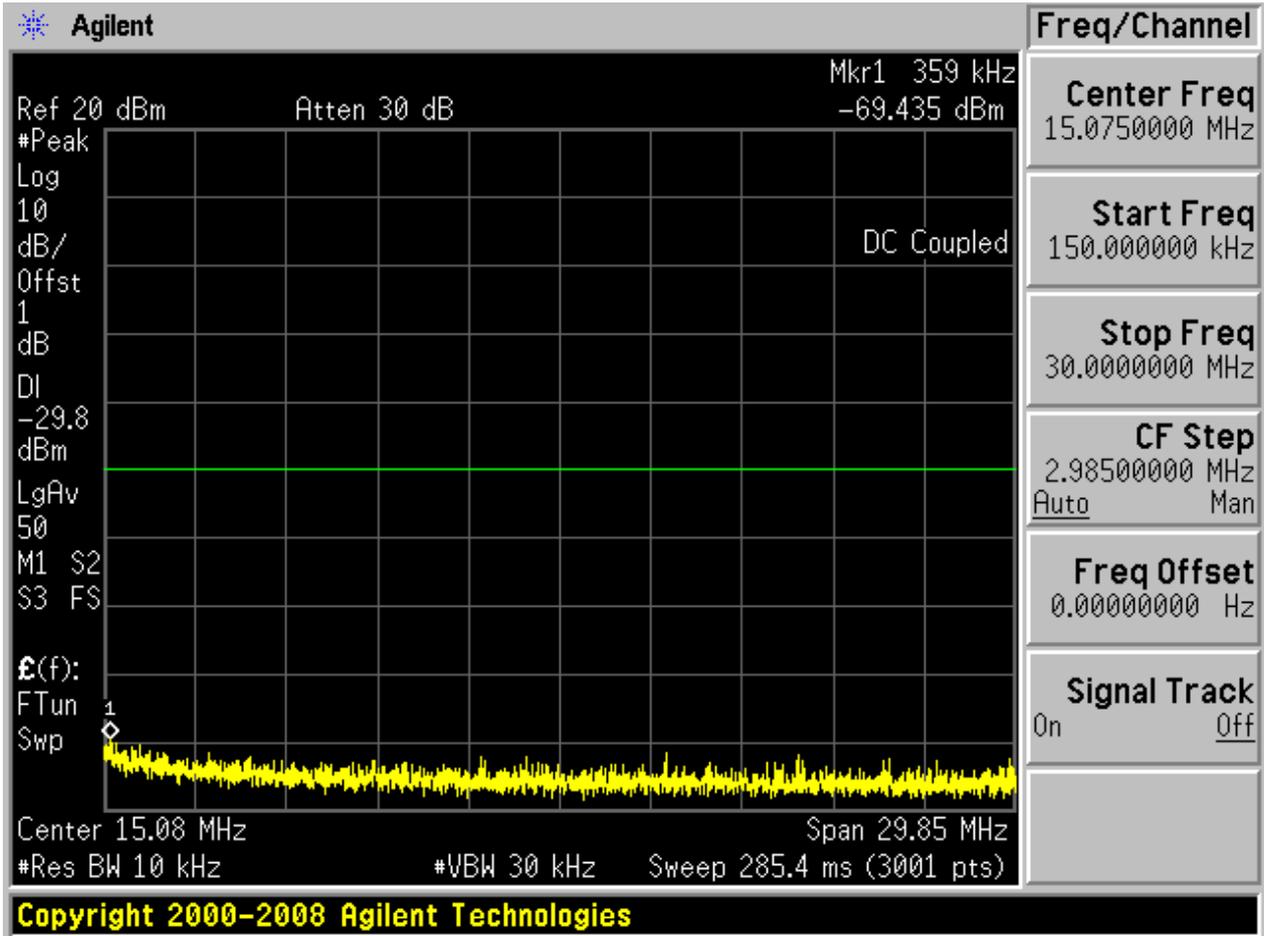



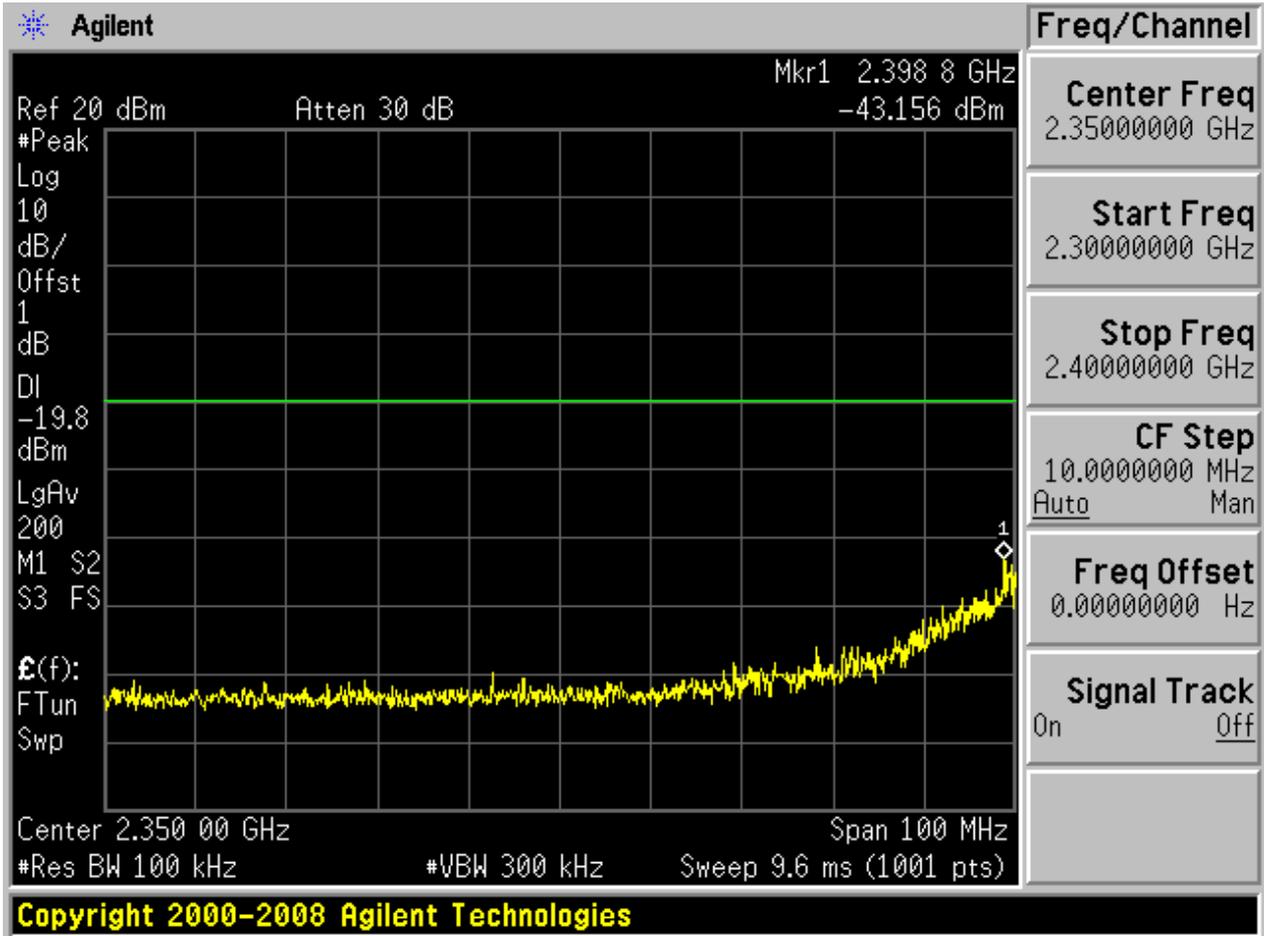

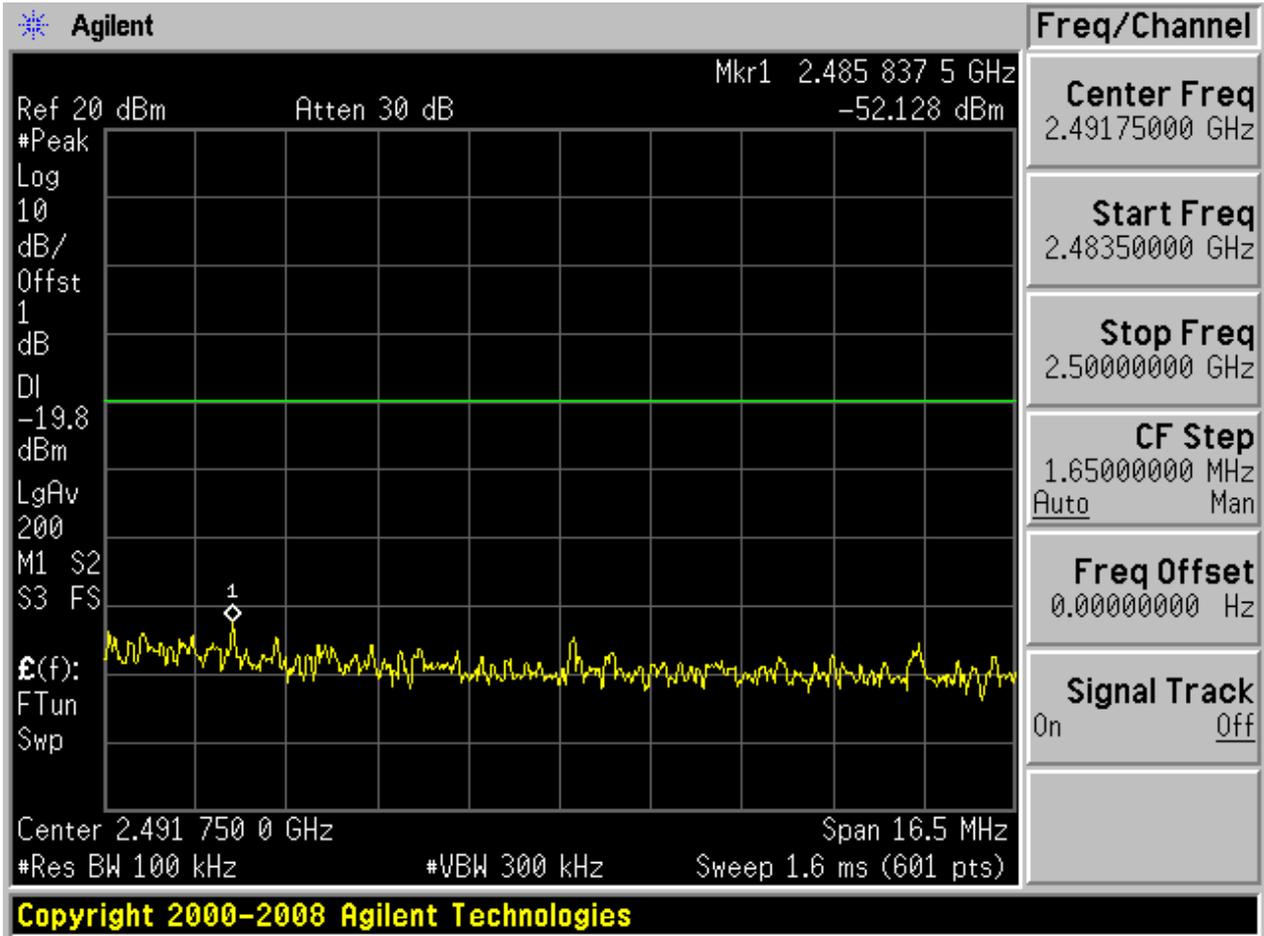


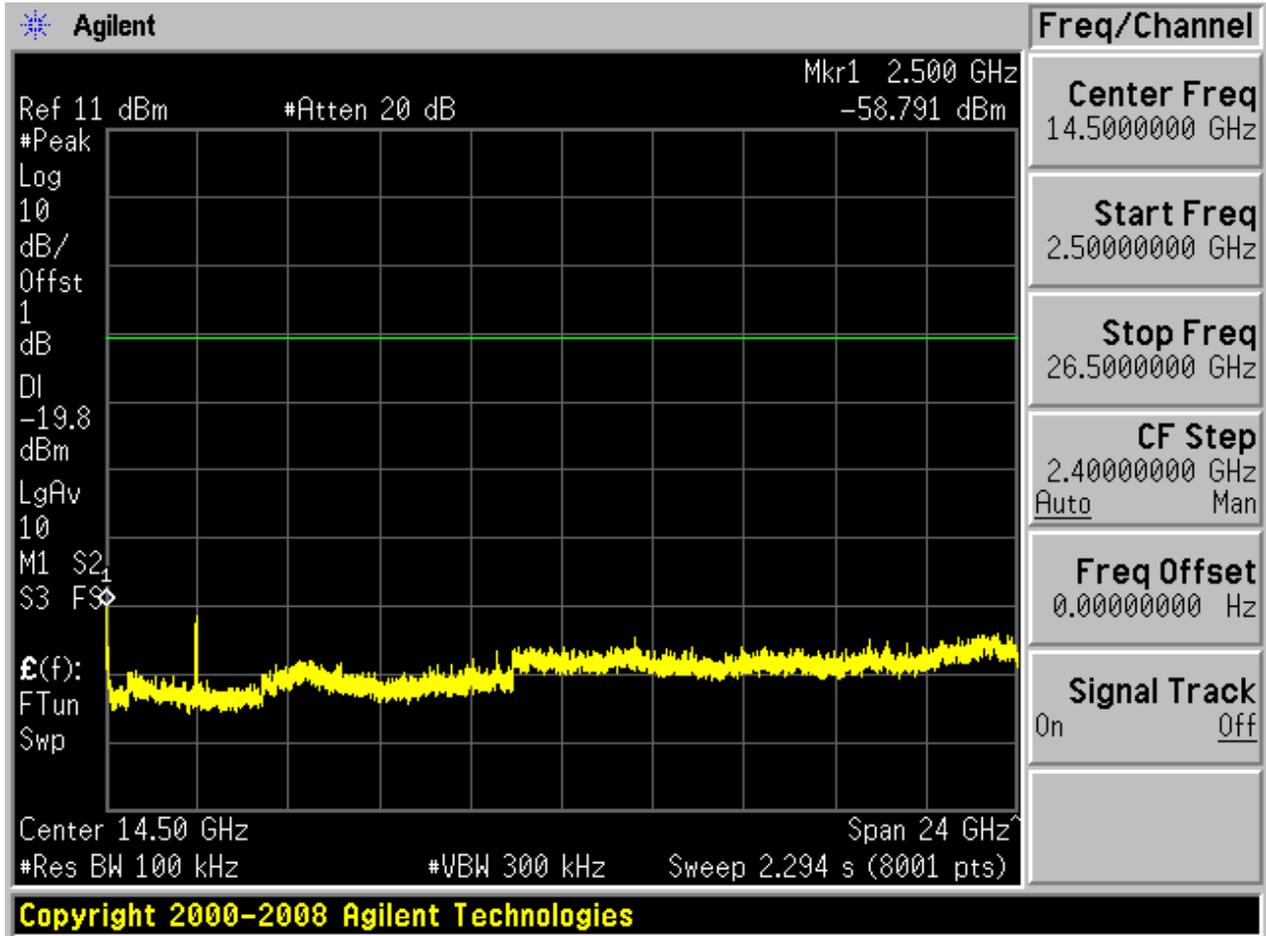




## 2.22 11N40\_M@BG2


Pref:

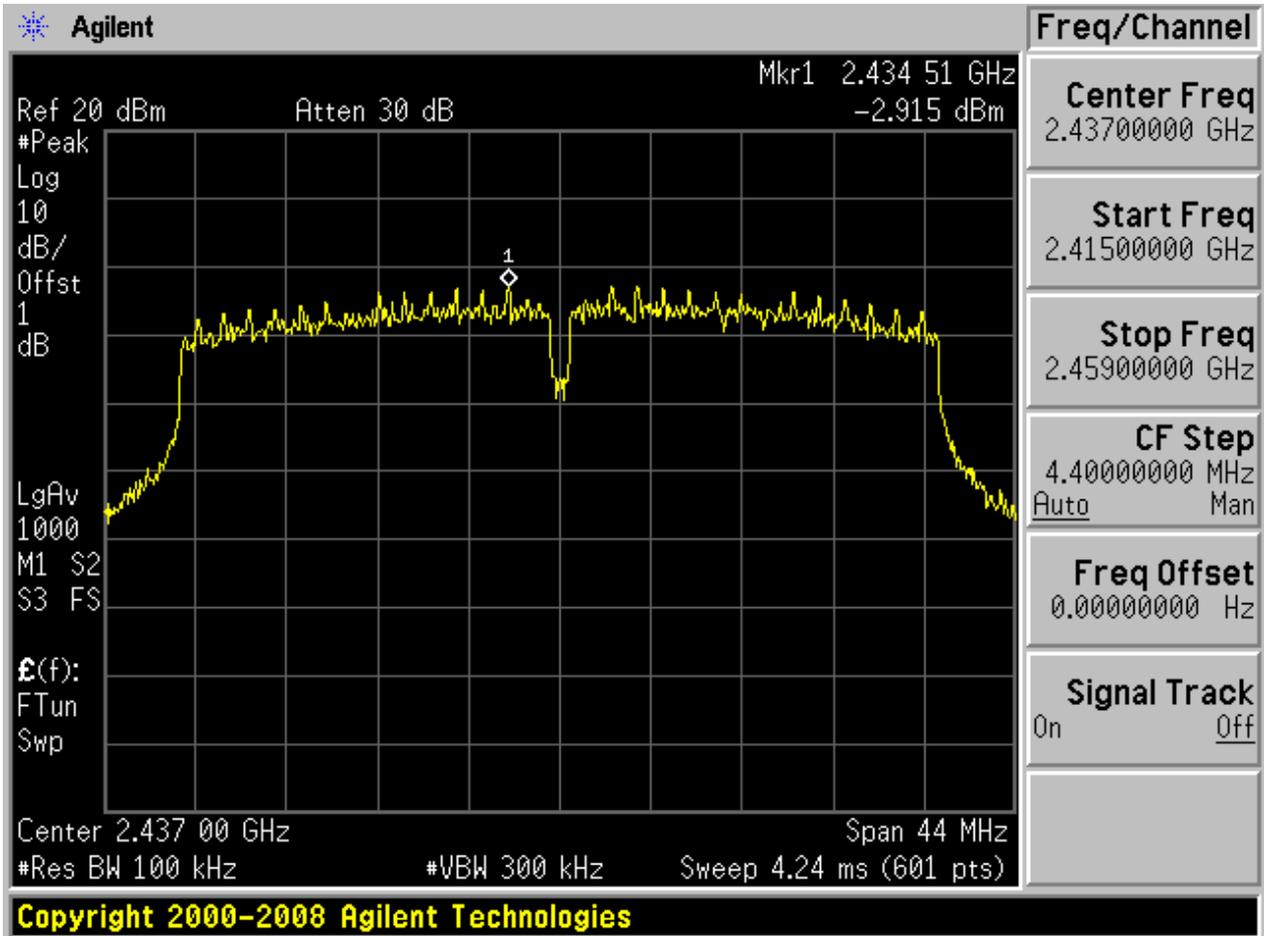






Puw:

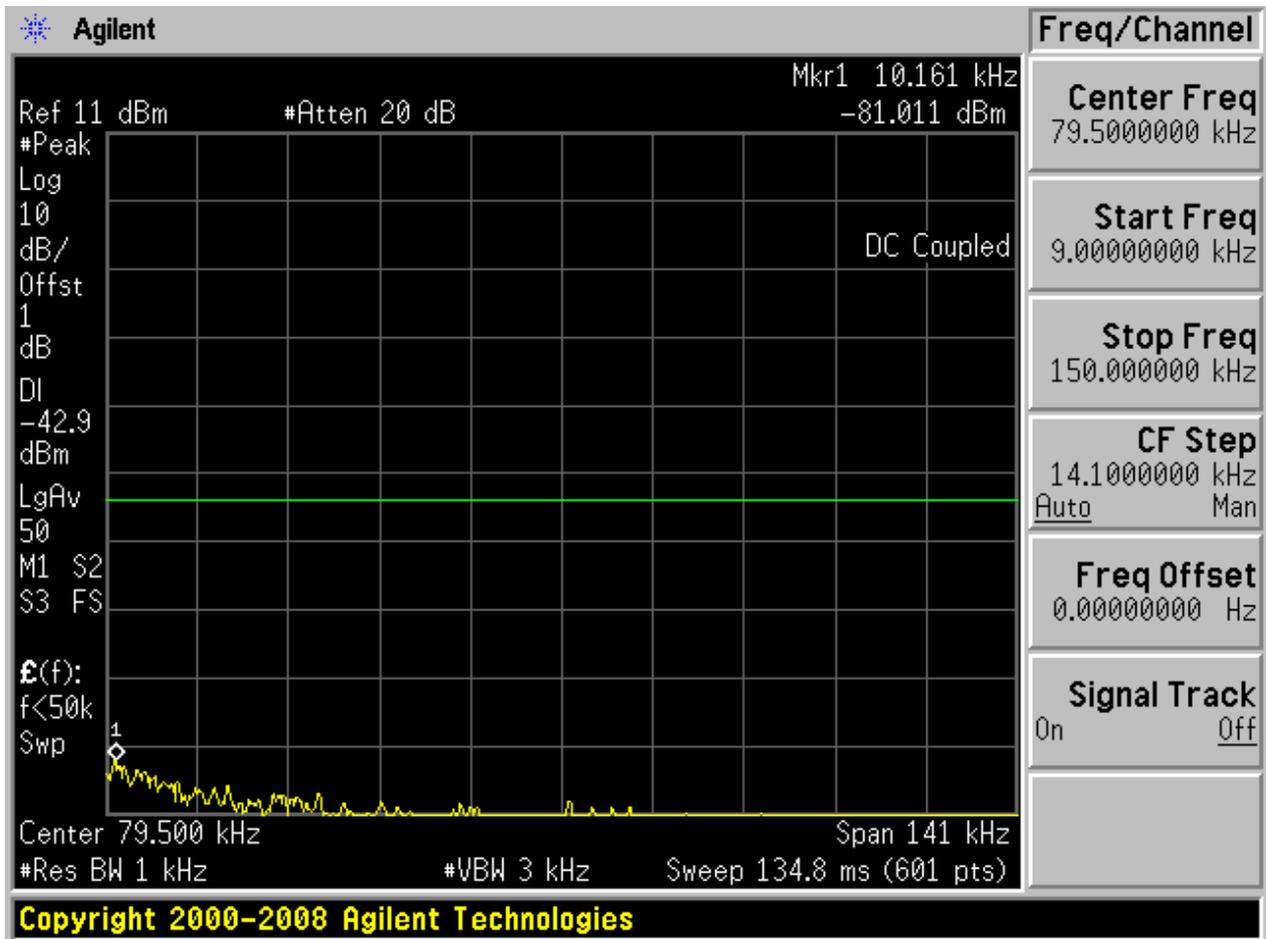


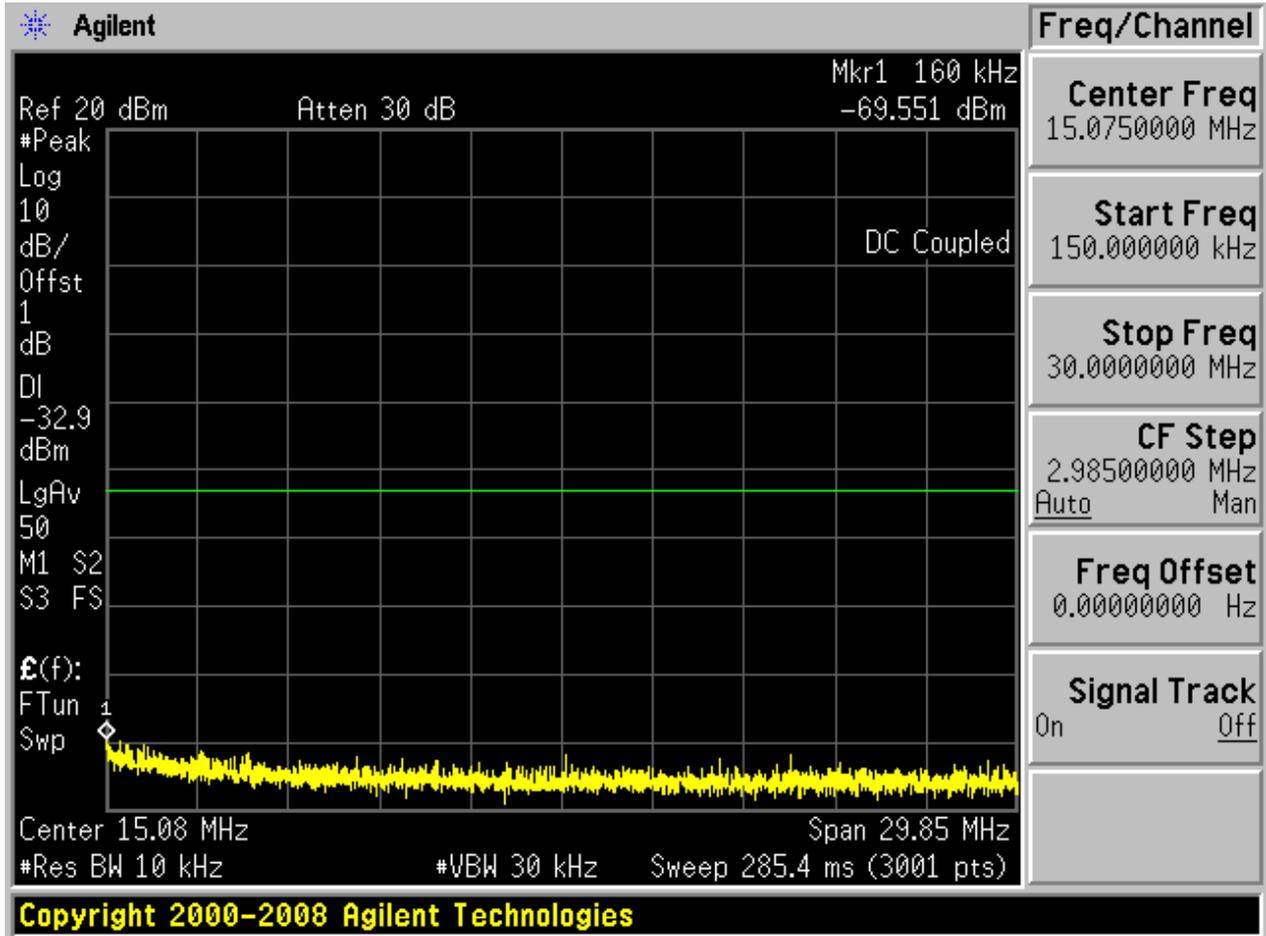

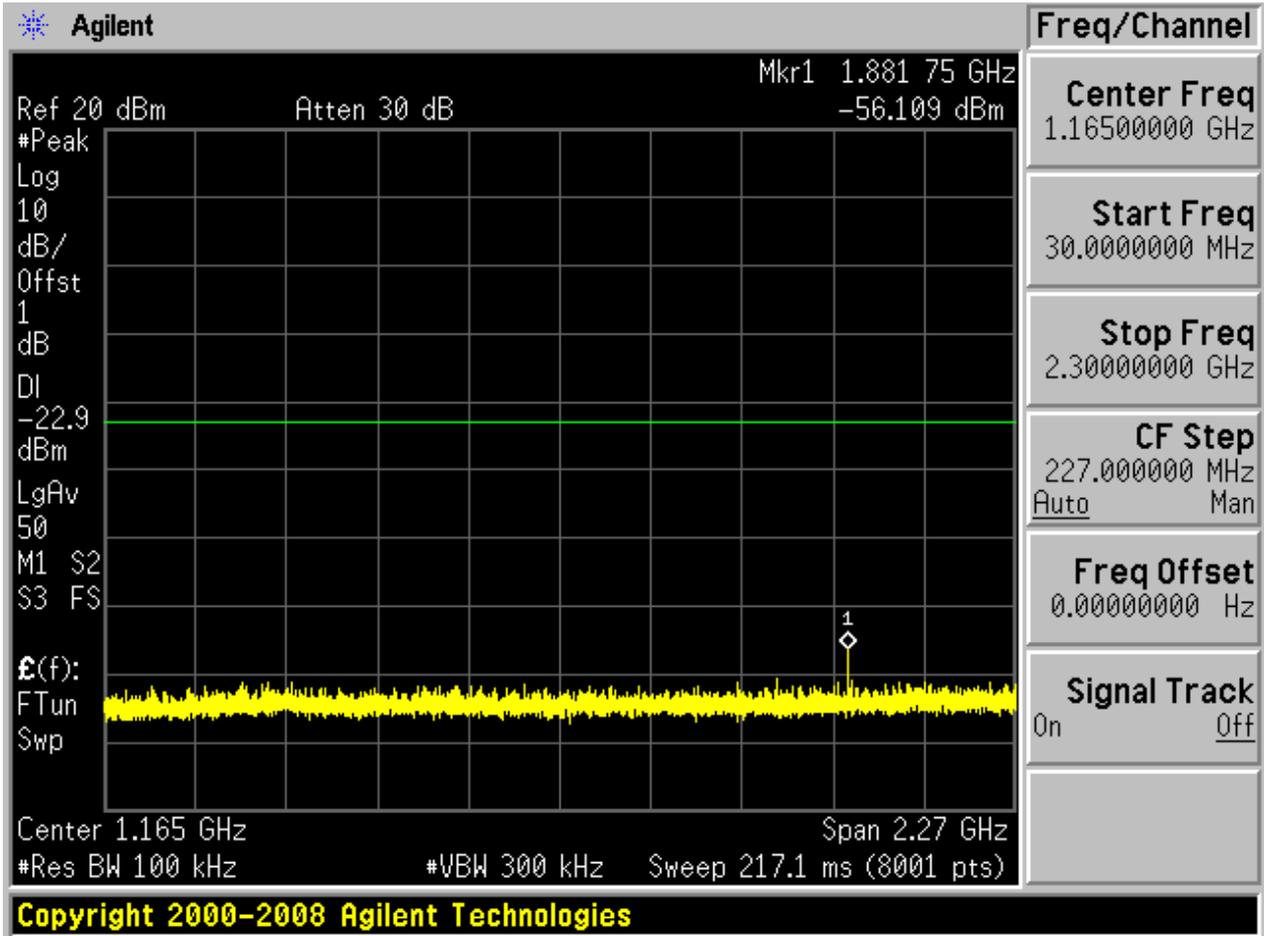

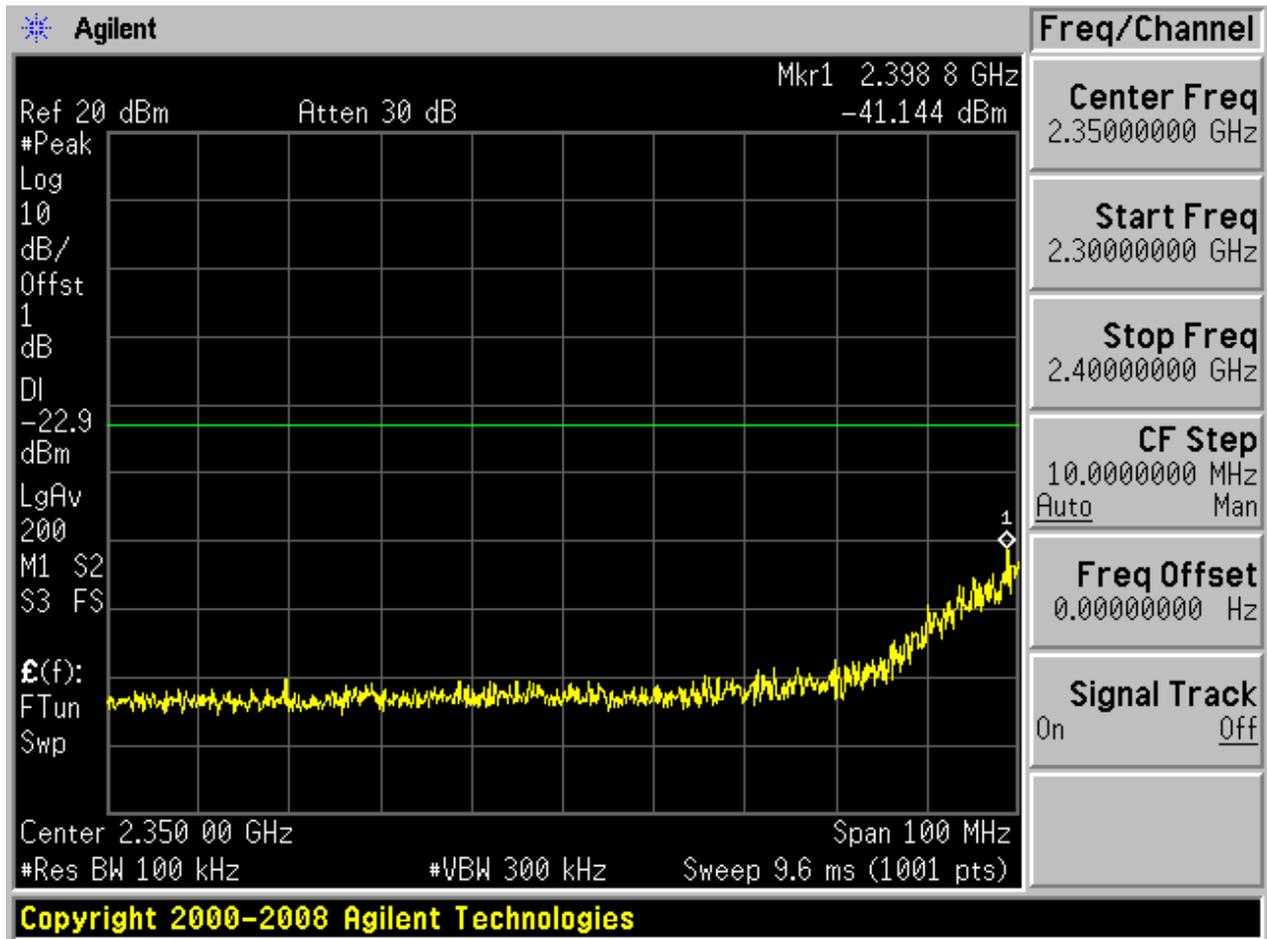

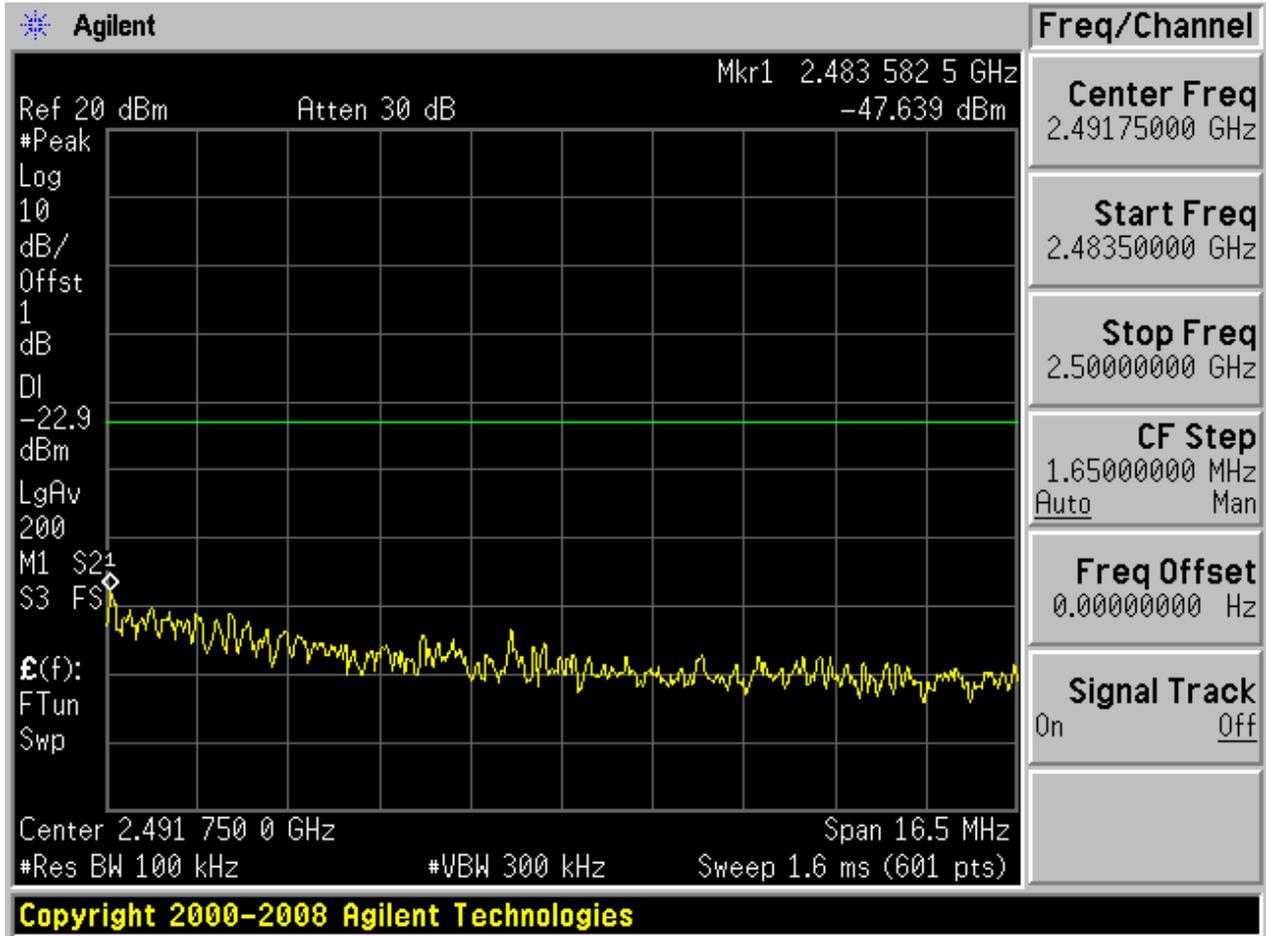


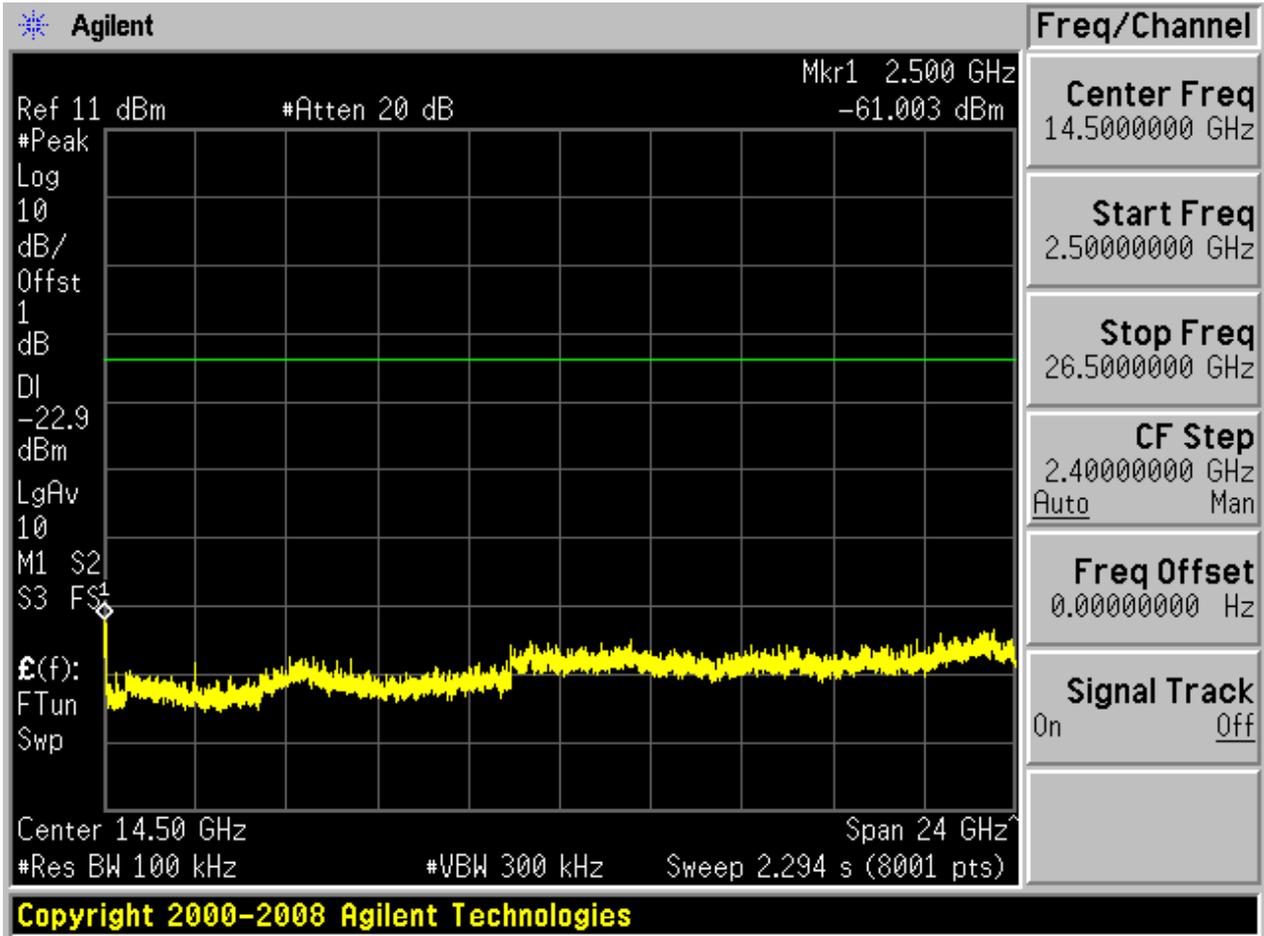




## 2.23 11N40\_H@BG1

Pref:

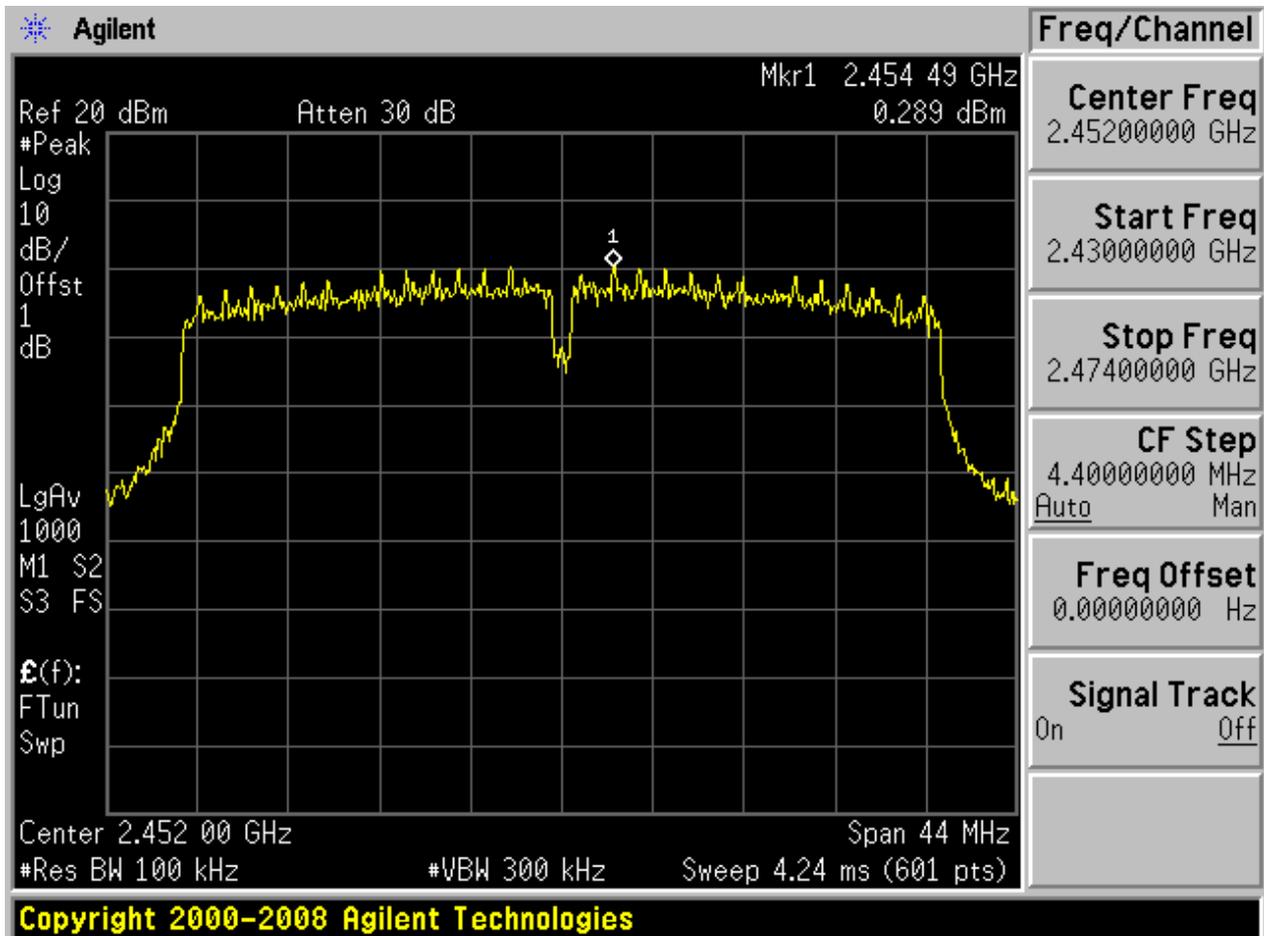






Puw:

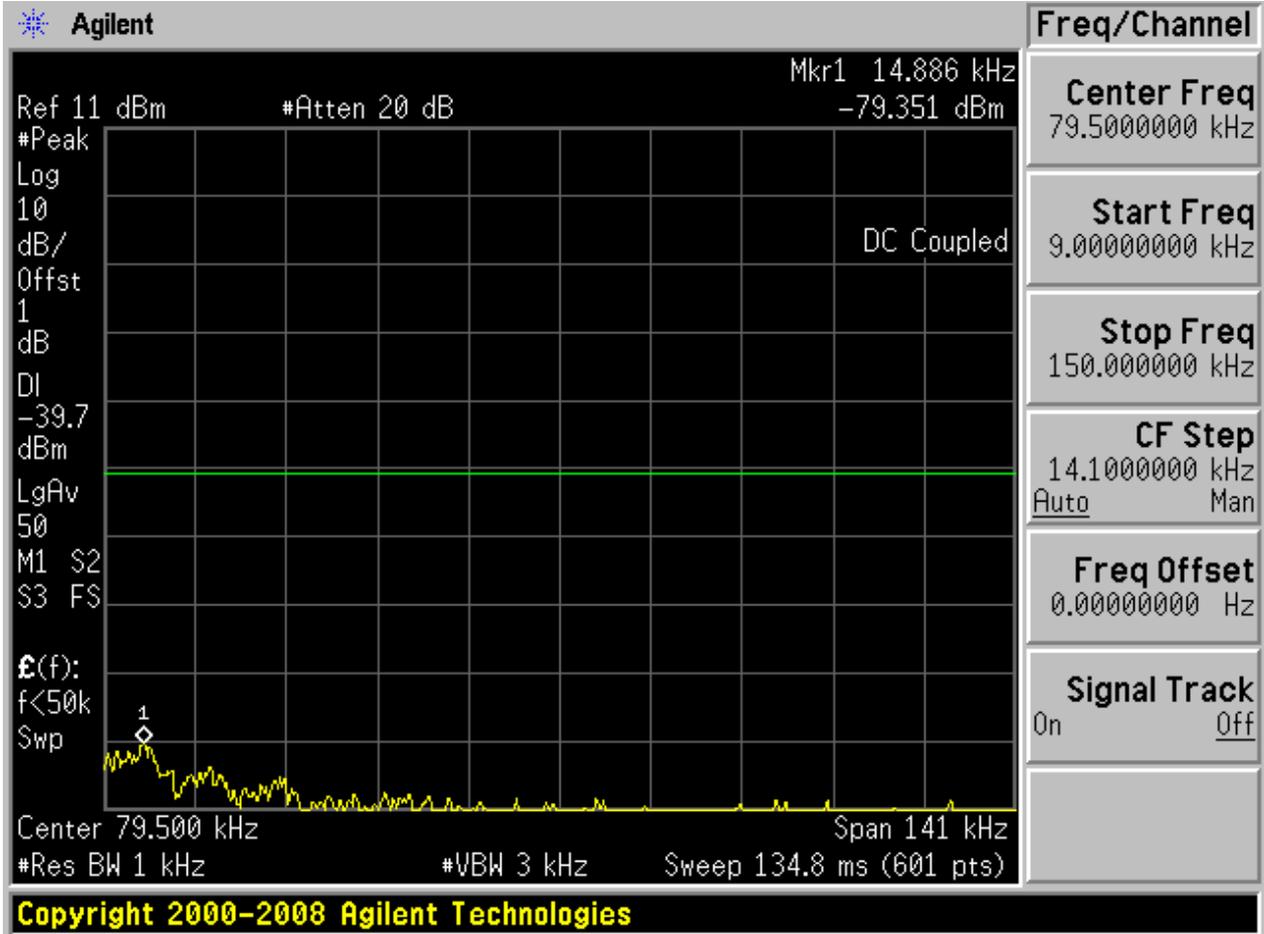




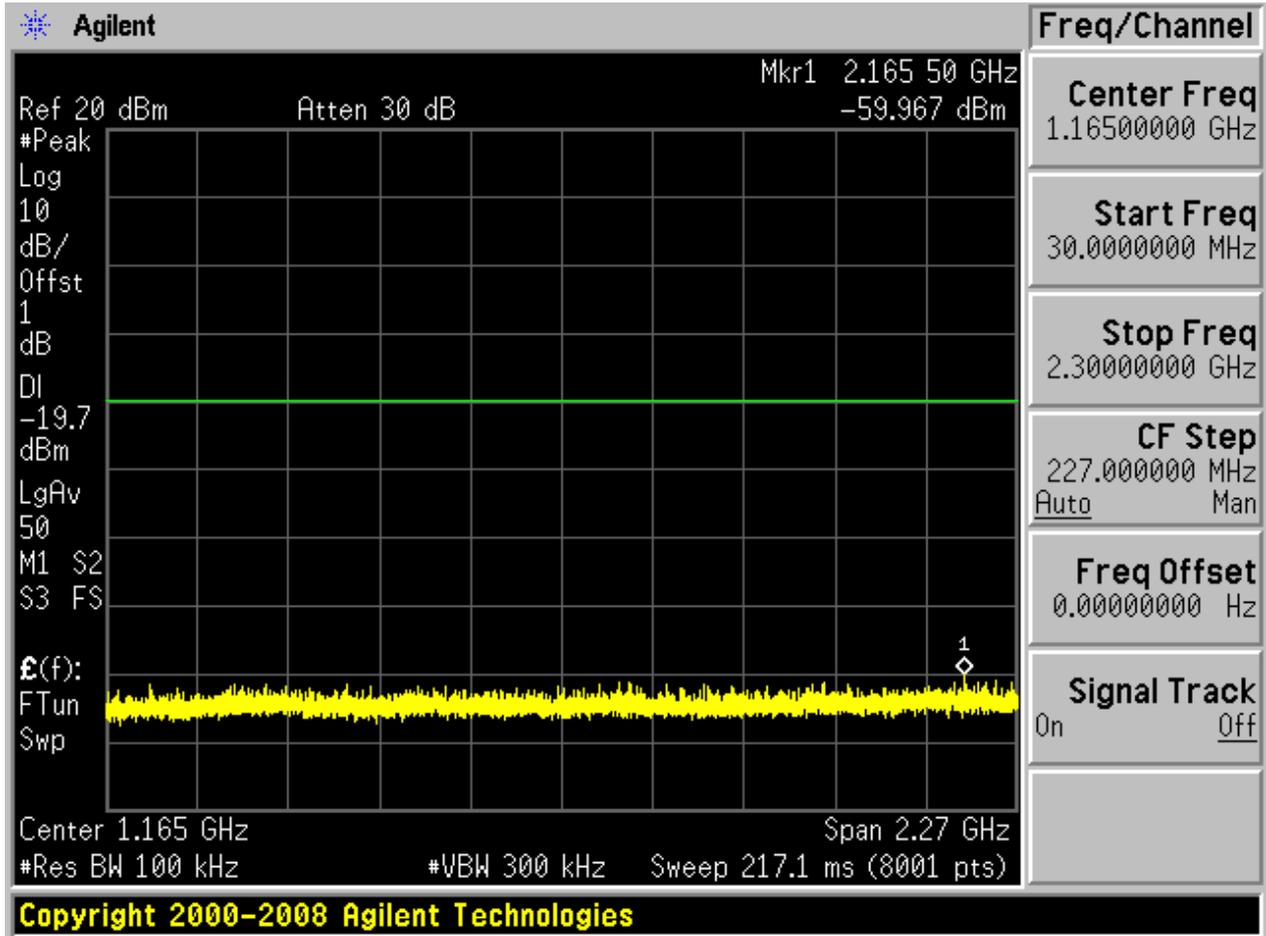

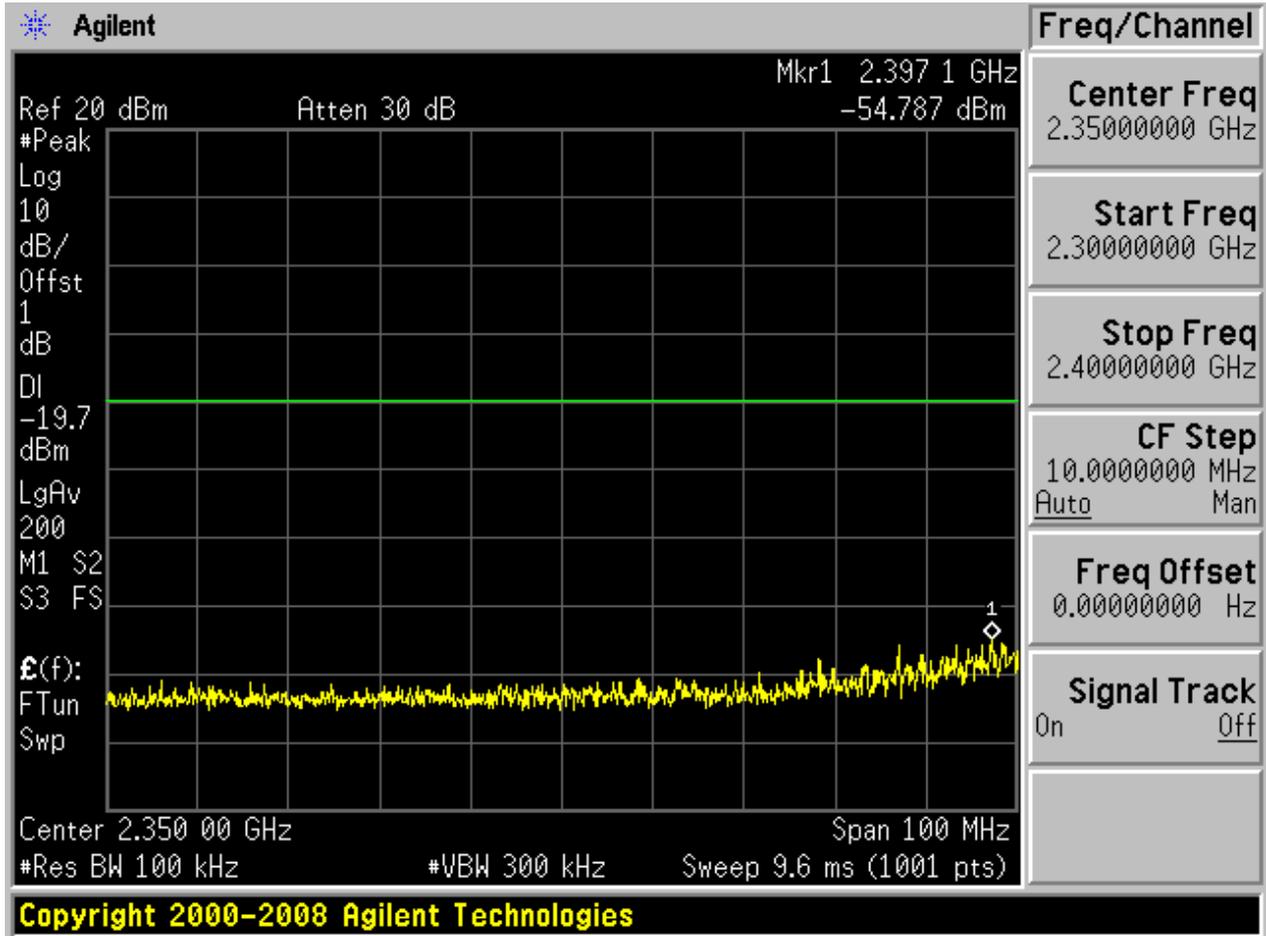

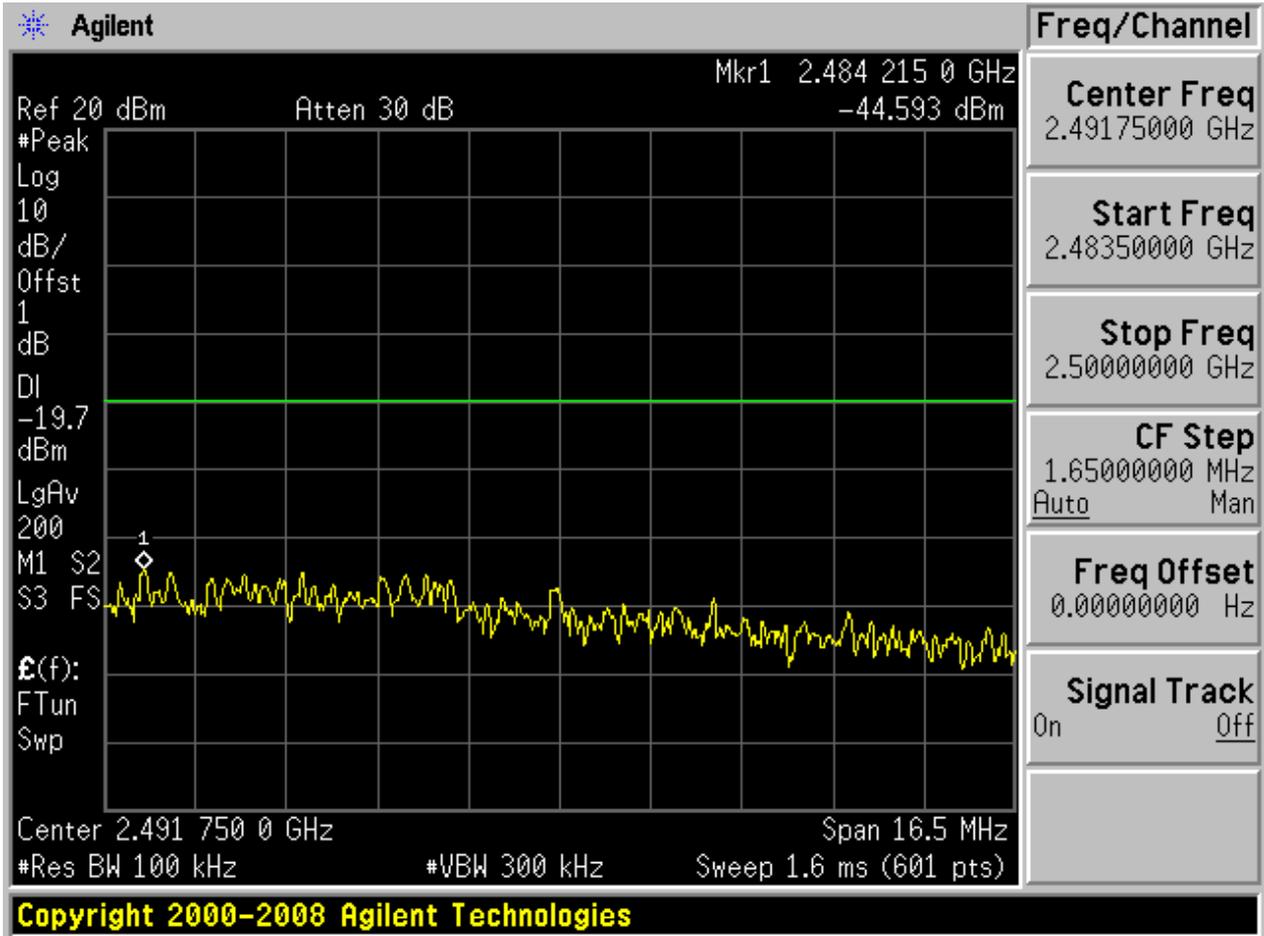


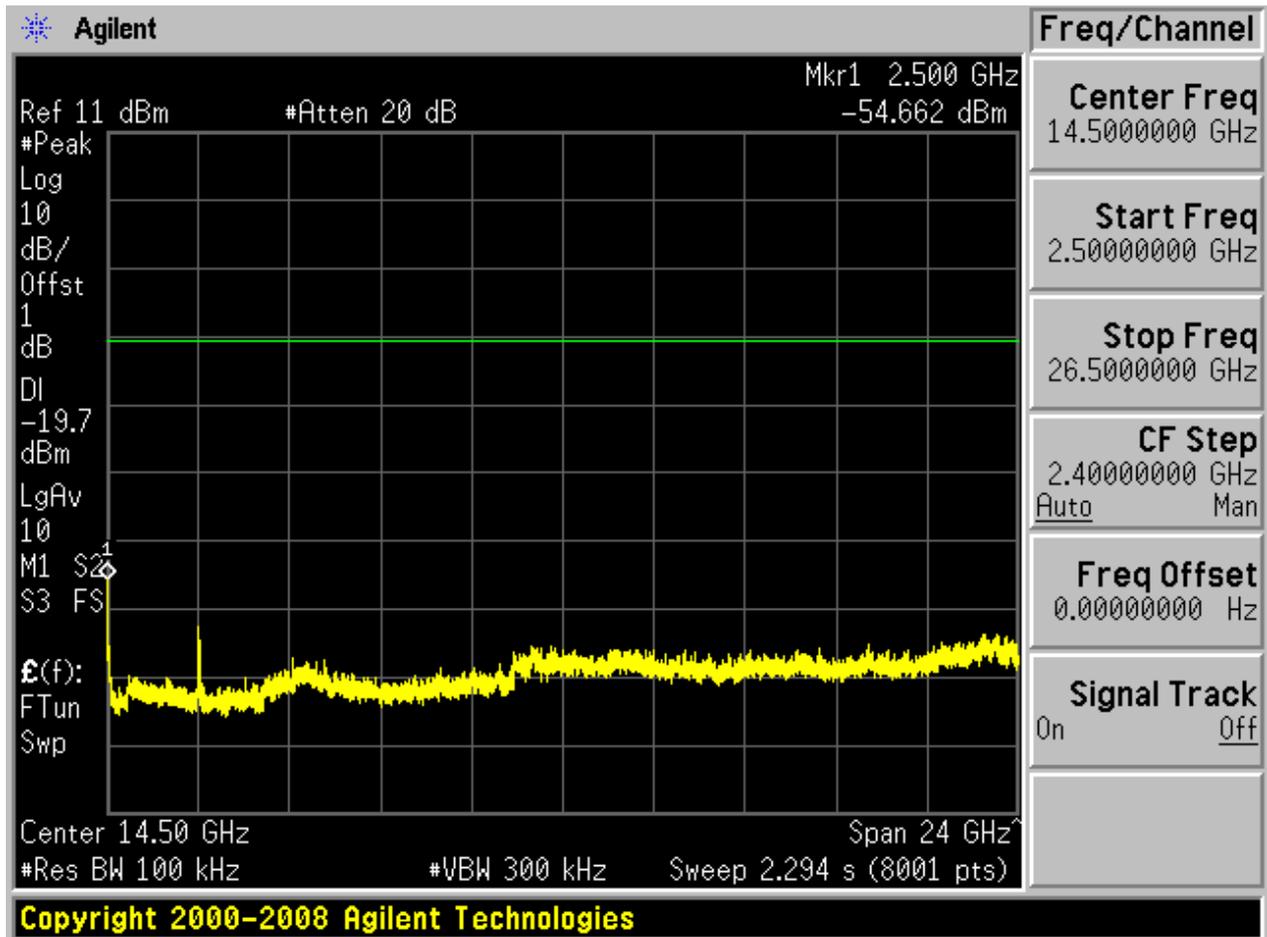




## 2.24 11N40\_H@BG2

Pref:

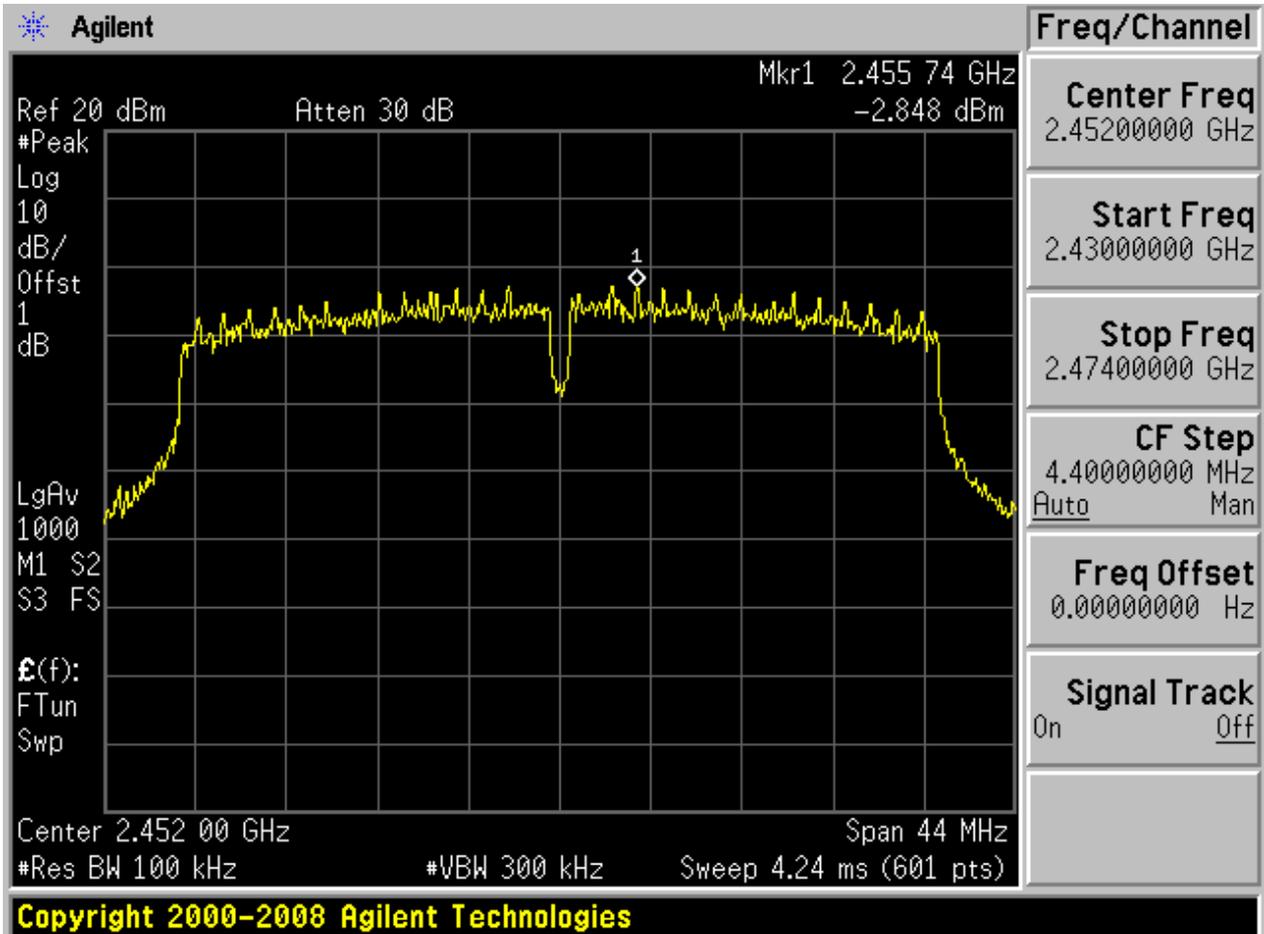






Puw:

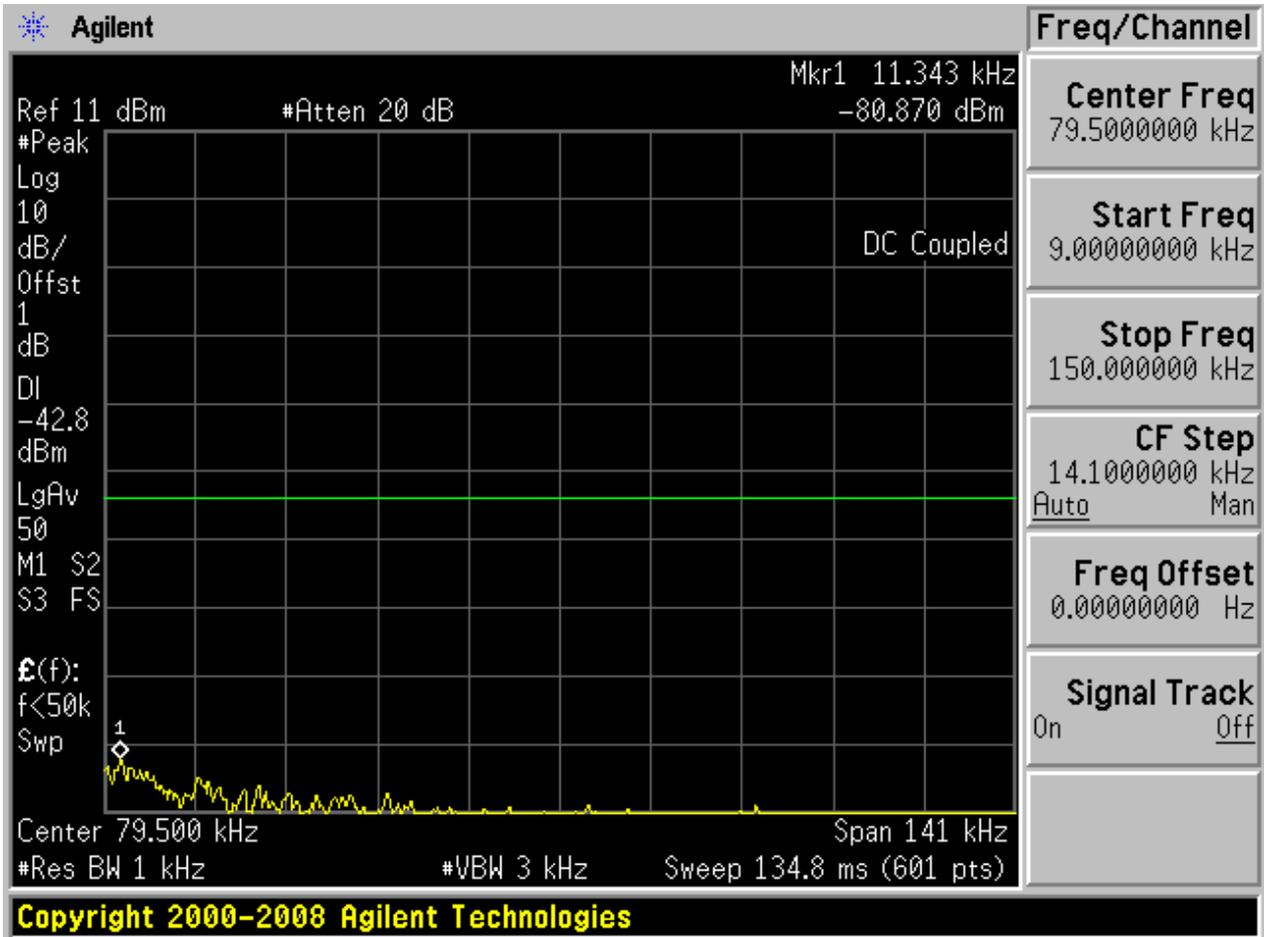




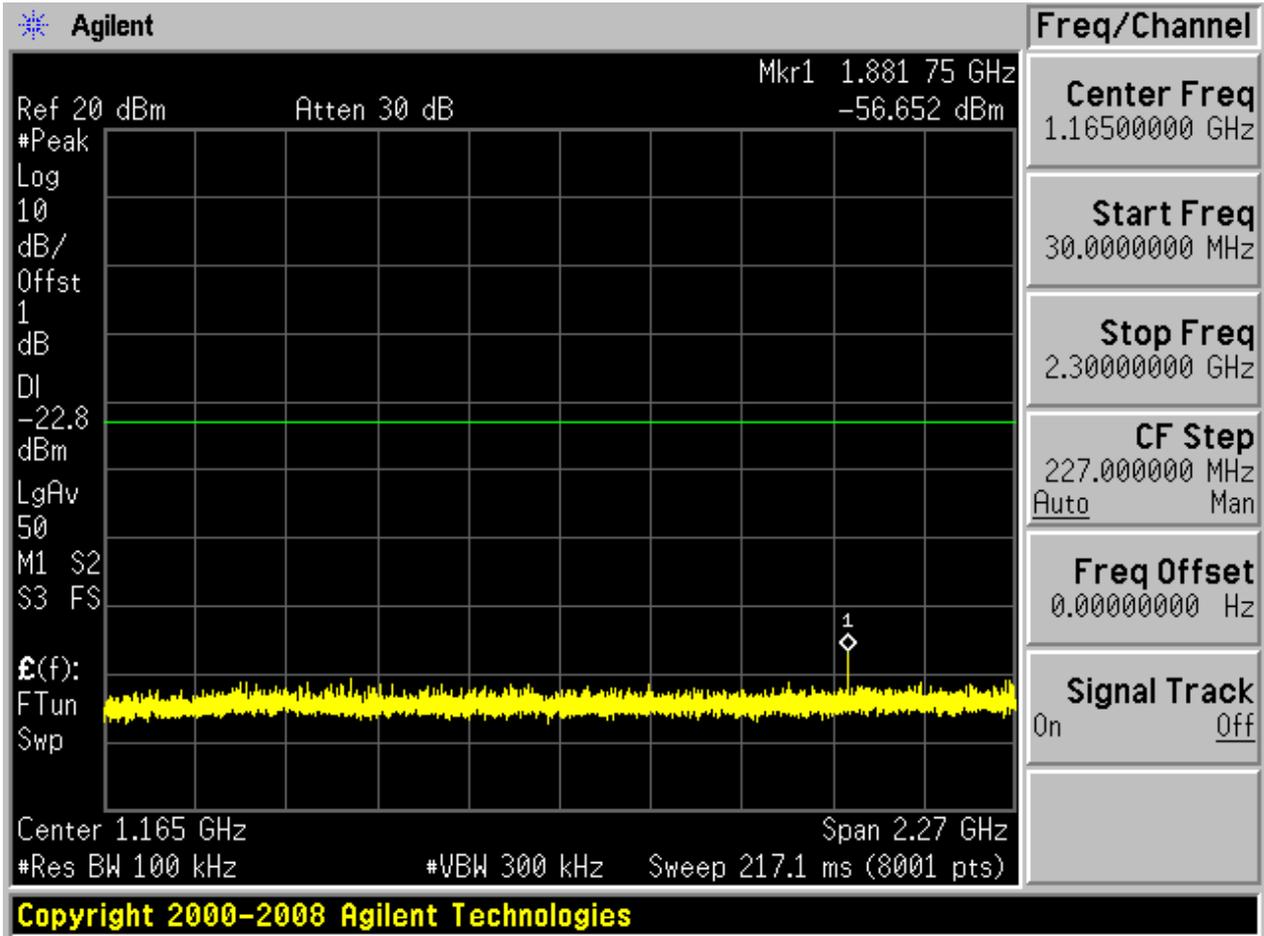

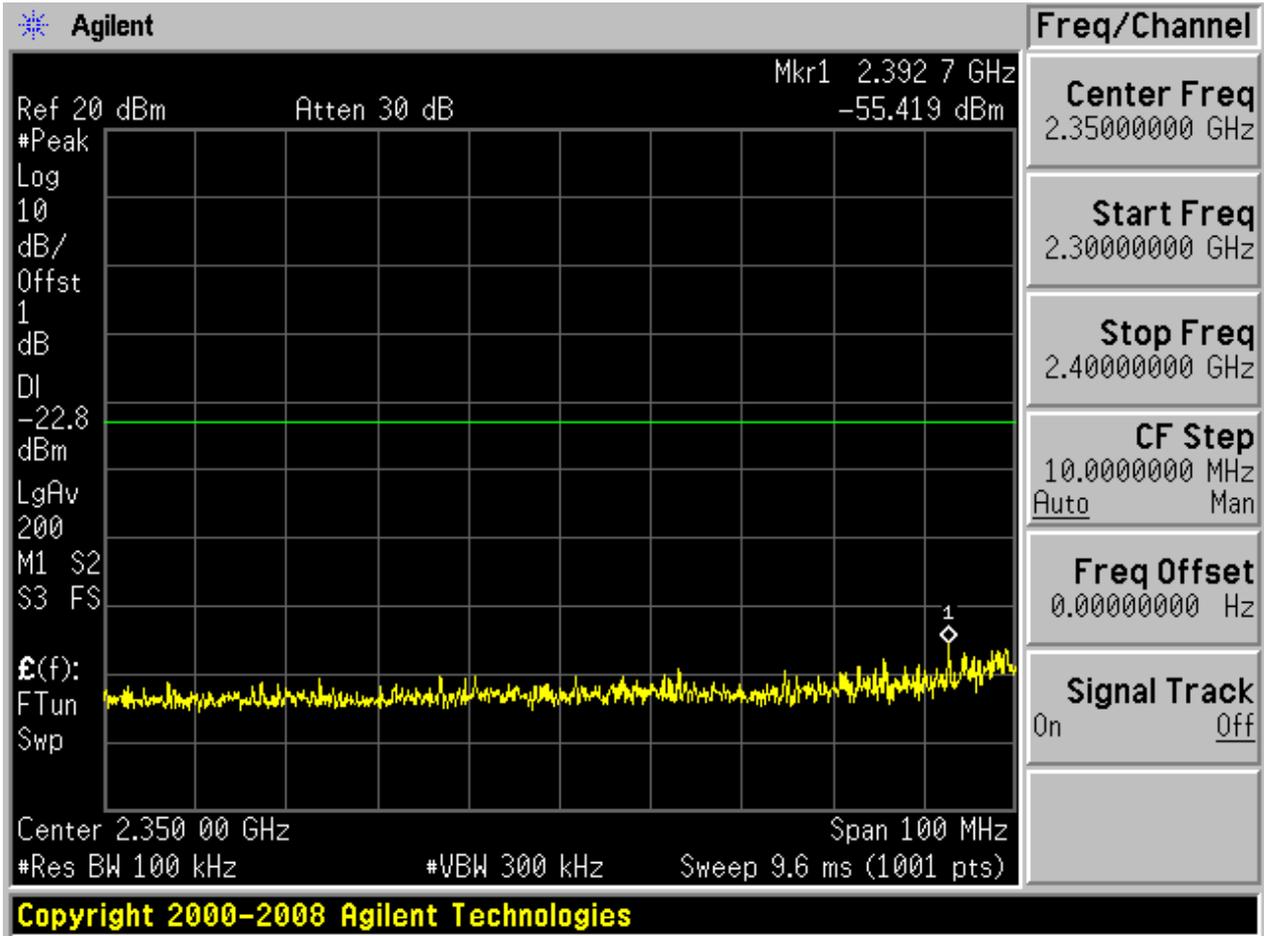

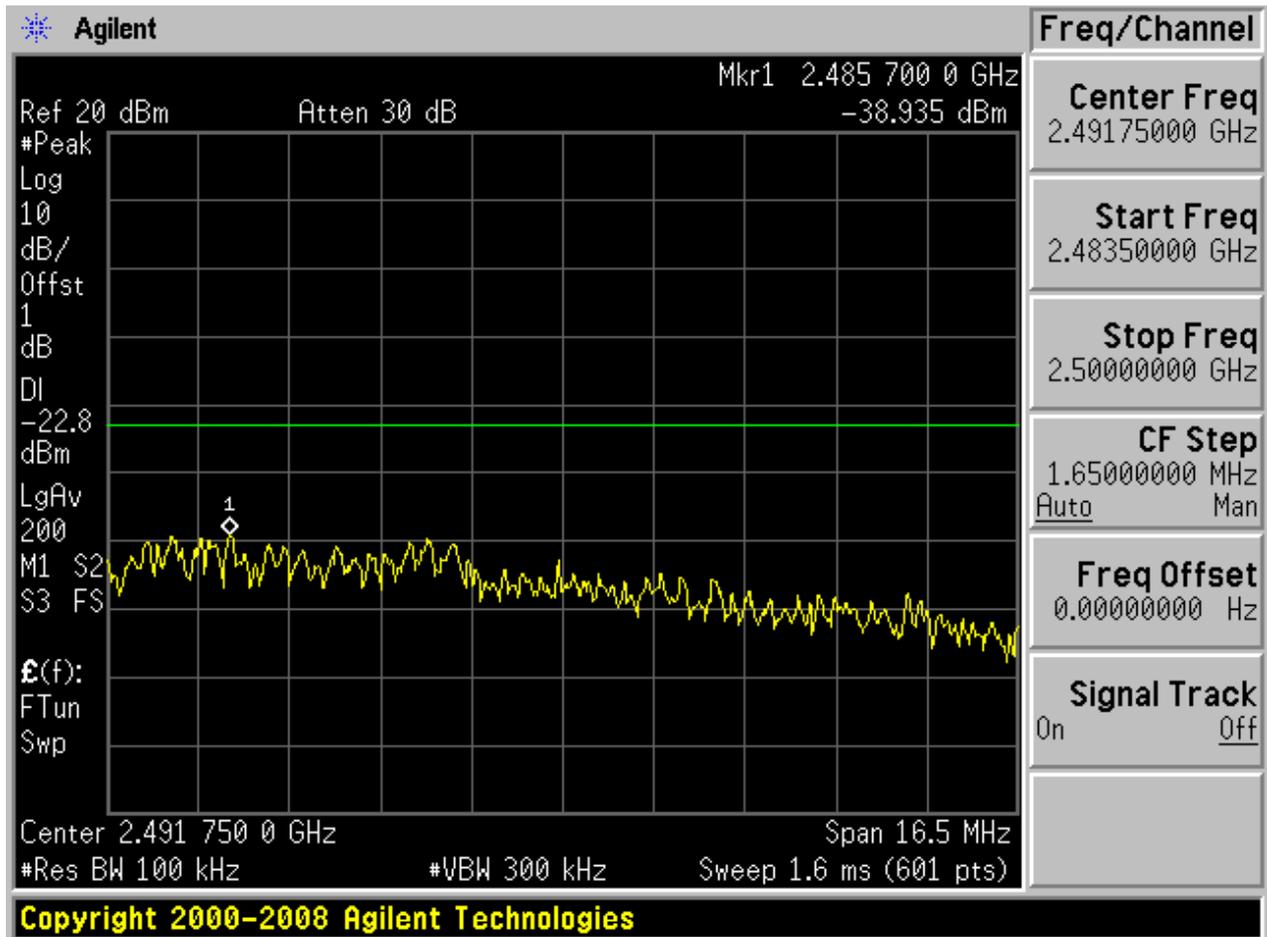

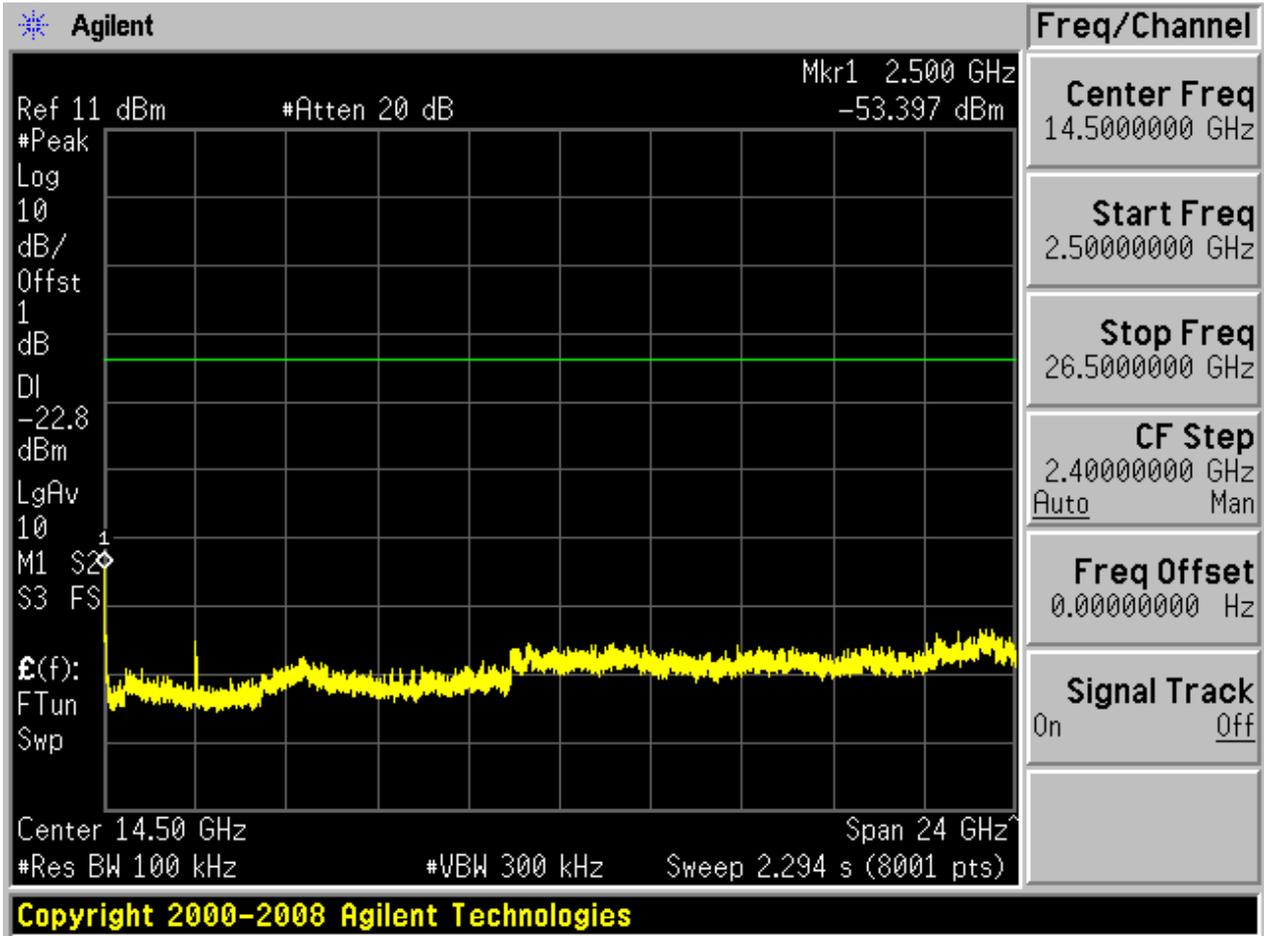

## Appendix F: Unwanted Emissions into Restricted Frequency Bands (Conducted) & Unwanted Emissions into Restricted Frequency Bands (Radiated)

### Part 1: Testing Range of “30 MHz to 1 GHz”


Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is **the WORST case for all Test Modes and Channels**. This range will not be presented for each Test Mode and each Channel.

Note 2: **The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).**

**Part 1: Testing Range of “30 MHz to 1 GHz”**

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is **the WORST case for all Test Modes and Channels**. This range will not be presented for each Test Mode and each Channel.


Note 2: **The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).**

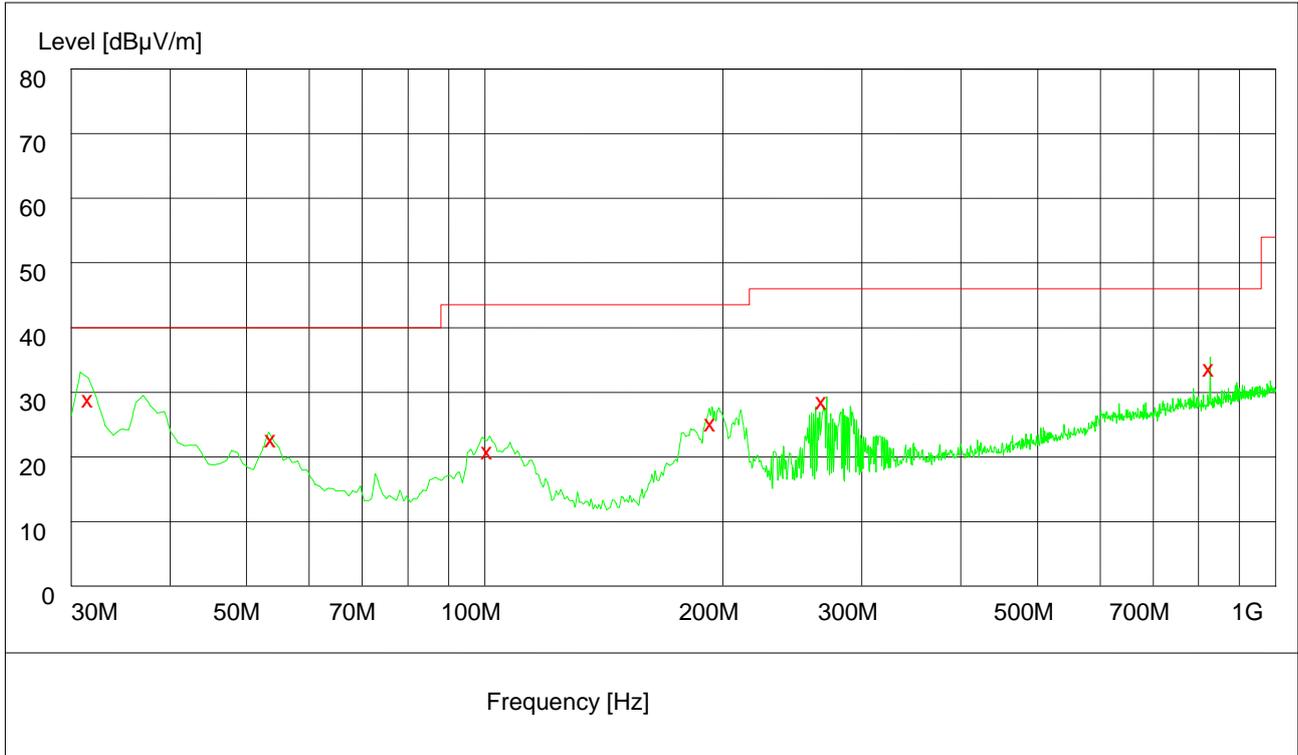

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Plarization
31.620000	29.50	14.7	40.0	10.5	100.0	301.00	VERTICAL
53.880000	23.40	14.7	40.0	16.6	100.0	263.00	VERTICAL
101.280000	22.50	13.5	43.5	21.0	100.0	156.00	VERTICAL
193.860000	25.80	12.2	43.5	17.7	146.0	309.00	HORIZONTAL
267.960000	29.20	14.3	46.0	16.8	100.0	0.00	HORIZONTAL
826.440000	34.30	24.0	46.0	11.7	111.0	213.00	VERTICAL

**Part 2: Testing Range of “18 GHz to 26.5 GHz”**

Note: No peak found in pre- test.

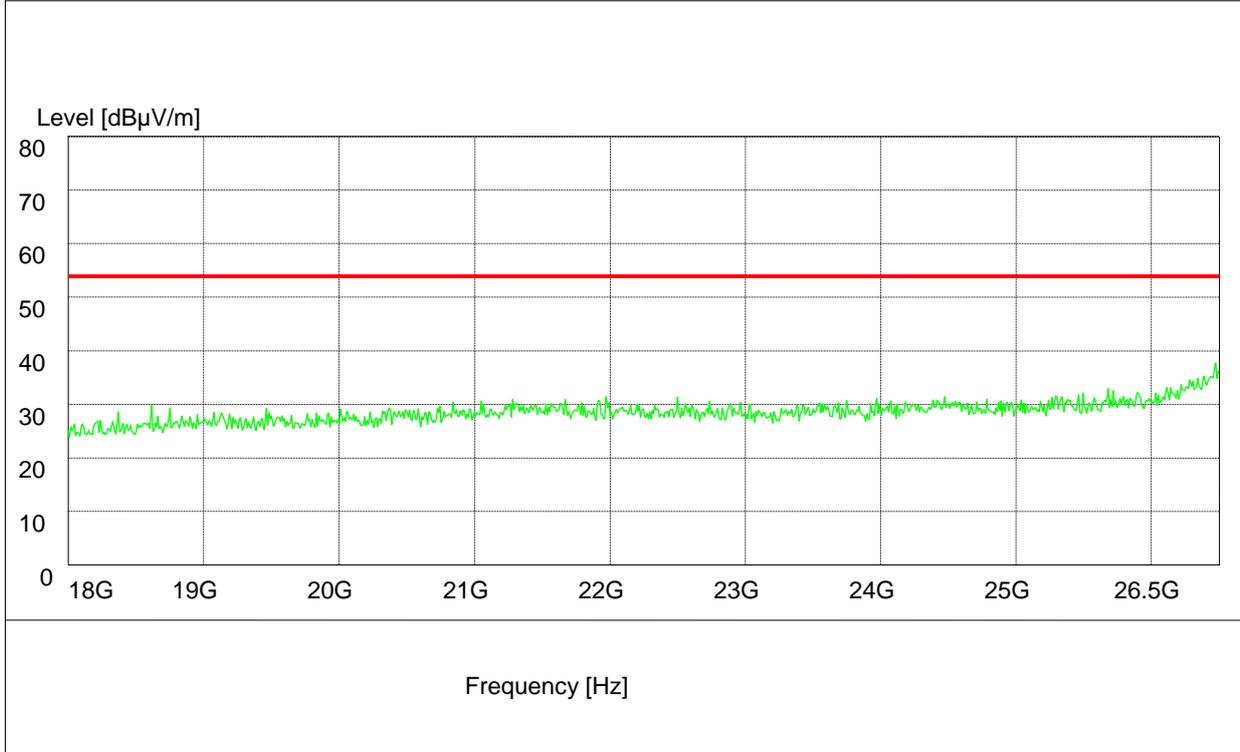


### Part 3: Testing Range of “2.3GHz to 2.5GHz”

- Note 1: The test results and plot for testing range of “2.3 GHz to 2.5 GHz” showed as below is **the WORST case for all Test Modes and Channels**. The testing range of “2.3 GHz to 2.5 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.
- Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).
- Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

## Test Mode: 11b

### Channel 01

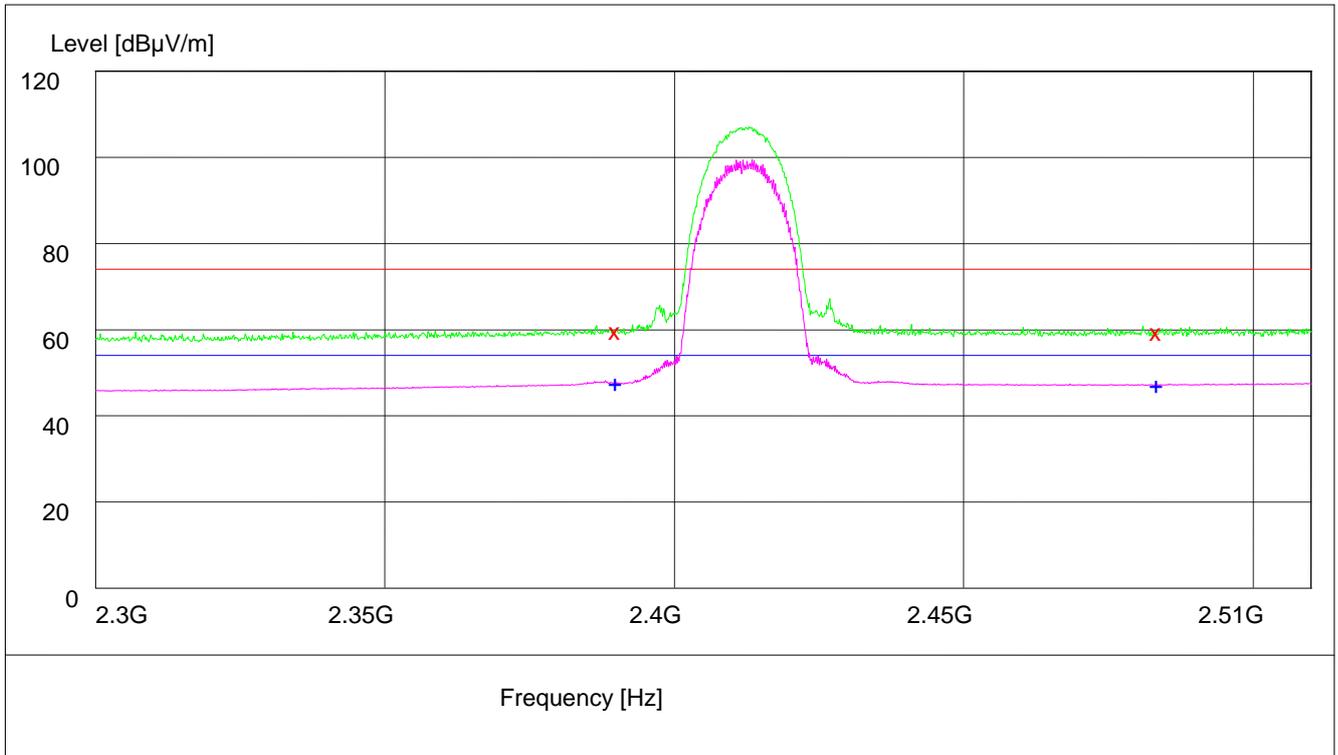

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	60.50	34.8	74.0	13.5	150.0	49.00	HORIZONTAL
2483.500000	60.40	35.1	74.0	13.6	100.0	357.00	HORIZONTAL

MEASUREMENT RESULT: AVDetector



Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	48.40	34.8	54.0	6.6	100.0	129.00	HORIZONTAL
2483.500000	48.10	35.1	54.0	6.9	133.0	360.00	VERTICAL

## Channel 11

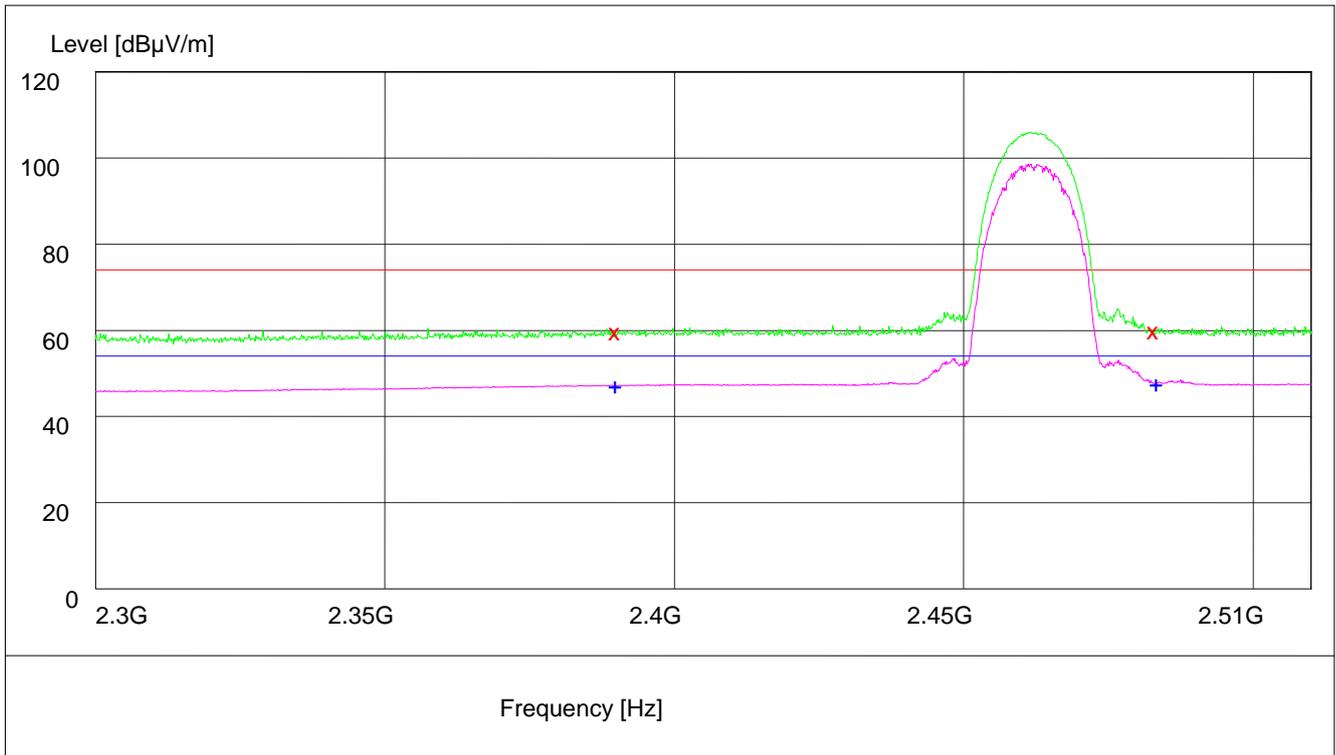

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	60.50	34.8	74.0	13.5	134.0	84.00	VERTICAL
2483.000000	60.80	35.1	74.0	13.2	100.0	186.00	VERTICAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	48.00	34.8	54.0	6.0	150.0	0.00	HORIZONTAL
2483.500000	48.40	35.1	54.0	5.6	100.0	336.00	VERTICAL

# Test Mode: 11g

## Channel 01

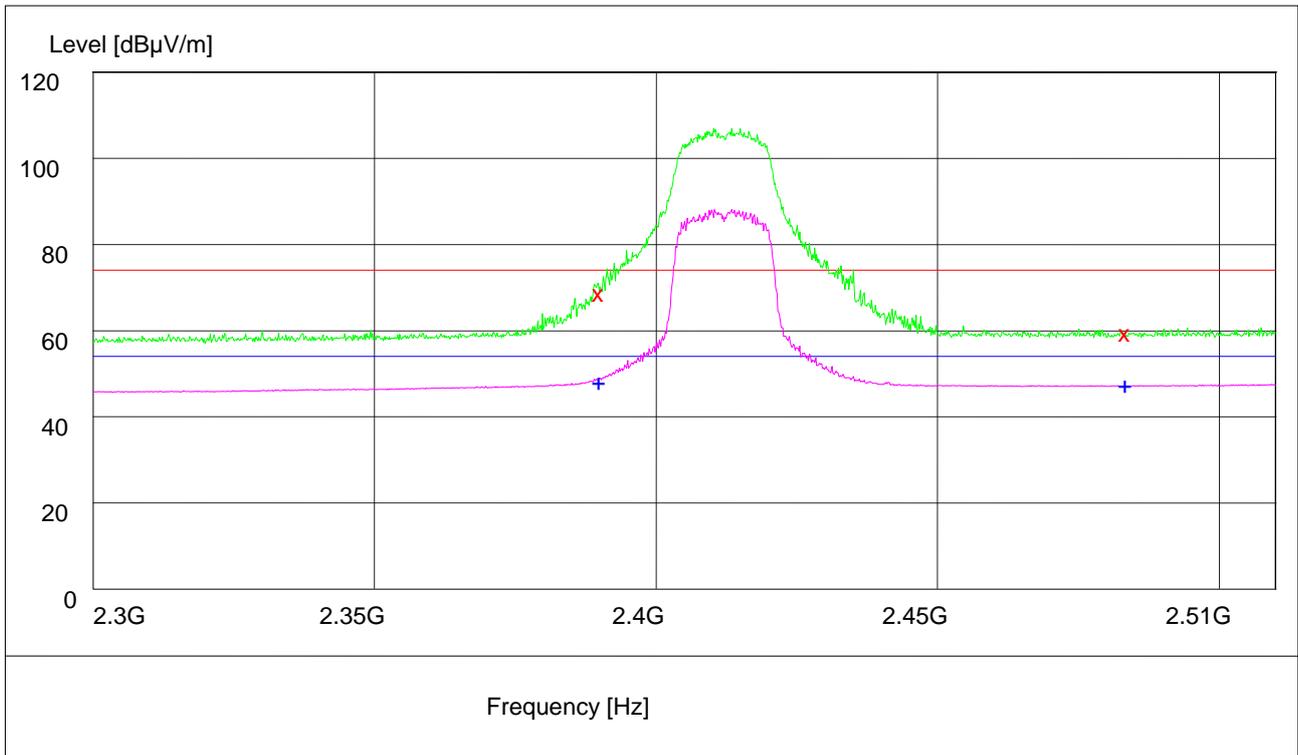

Note: The peak exceeds the limit line is carrier frequency.


MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	69.50	34.8	74.0	4.5	100.0	134.00	HORIZONTAL
2483.500000	60.30	35.1	74.0	13.7	100.0	82.00	HORIZONTAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	48.90	34.8	54.0	5.1	100.0	106.00	HORIZONTAL
2483.500000	48.30	35.1	54.0	5.7	100.0	335.00	HORIZONTAL

## Channel 11

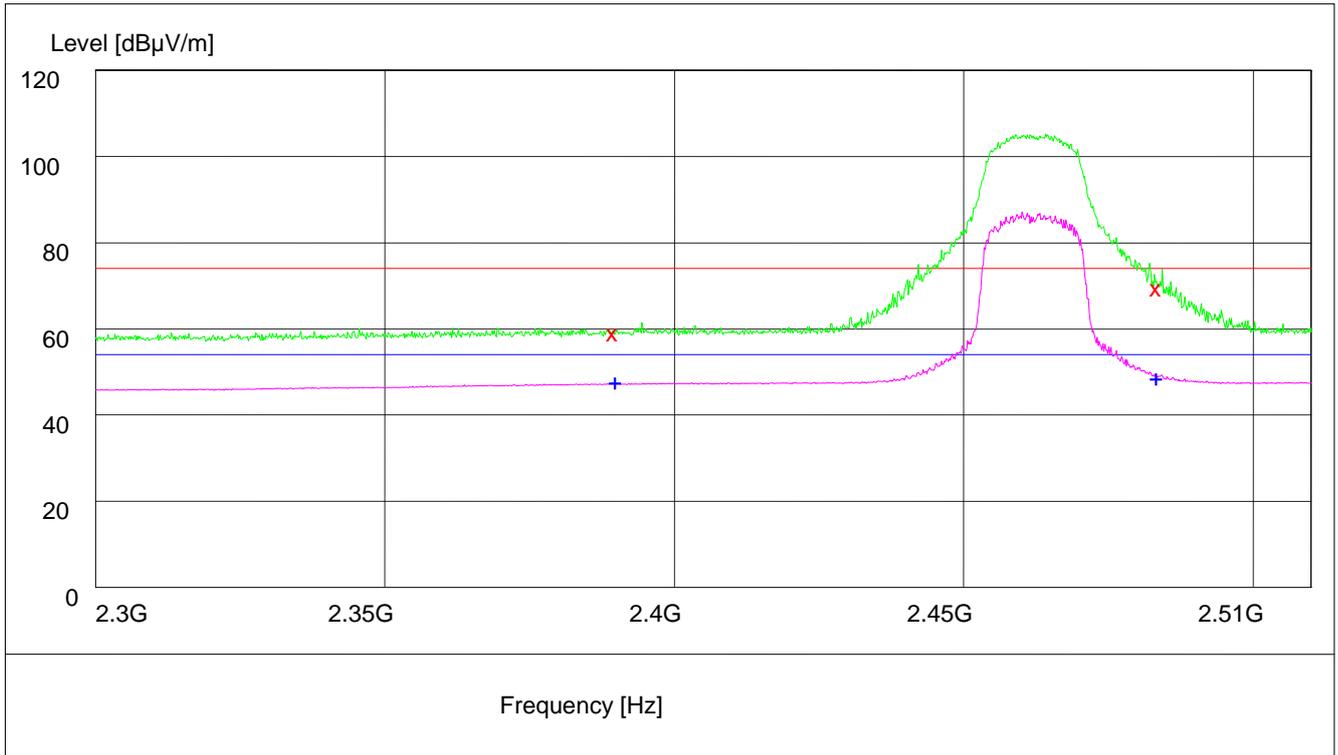

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2389.540000	59.00	34.8	74.0	15.0	146.0	282.00	HORIZONTAL
2483.500000	69.40	35.1	74.0	4.6	100.0	358.00	VERTICAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.040000	47.60	34.8	54.0	6.4	147.0	314.00	VERTICAL
2483.500000	48.50	35.1	54.0	5.5	102.0	334.00	VERTICAL

# Test Mode: 11n

## Channel 01

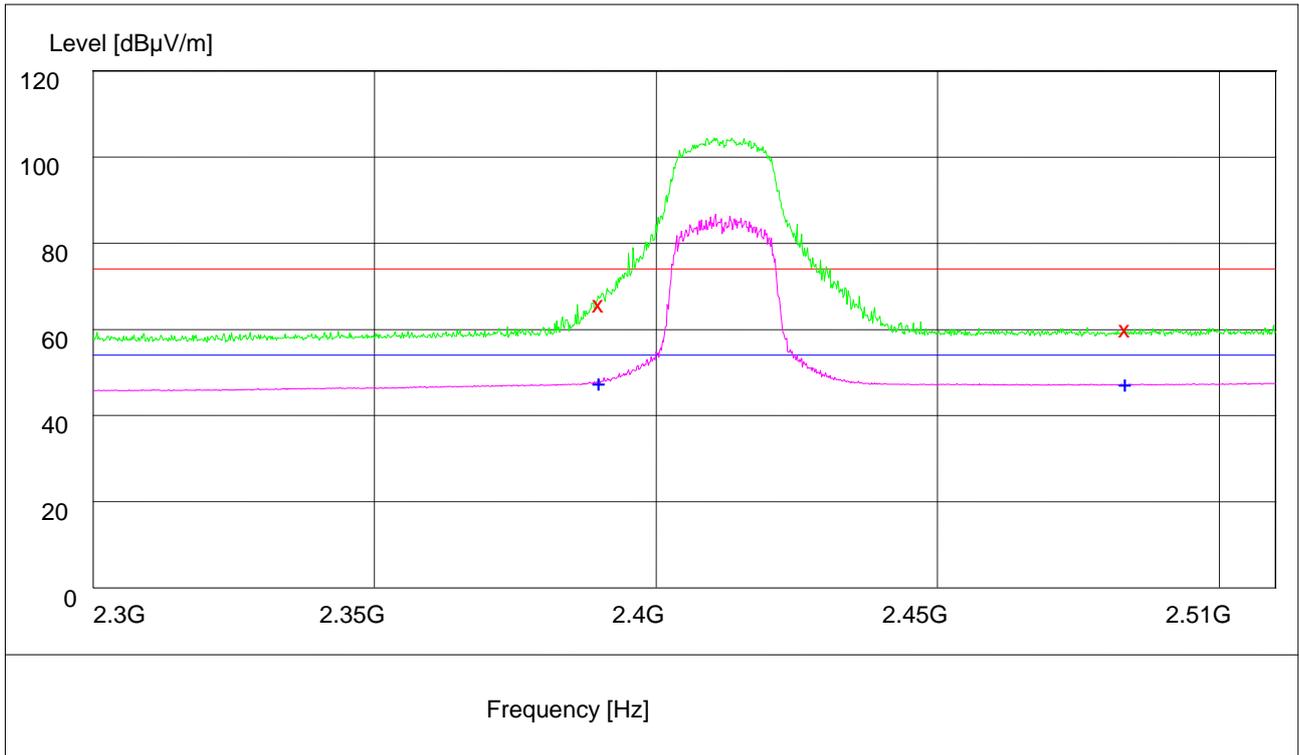

Note: The peak exceeds the limit line is carrier frequency.


MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	66.30	34.8	74.0	7.7	102.0	107.00	HORIZONTAL
2483.500000	60.50	35.1	74.0	13.5	102.0	52.00	VERTICAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	48.00	34.8	54.0	6.0	100.0	104.00	HORIZONTAL
2483.500000	47.70	35.1	54.0	6.3	135.0	315.00	HORIZONTAL

# Channel 11

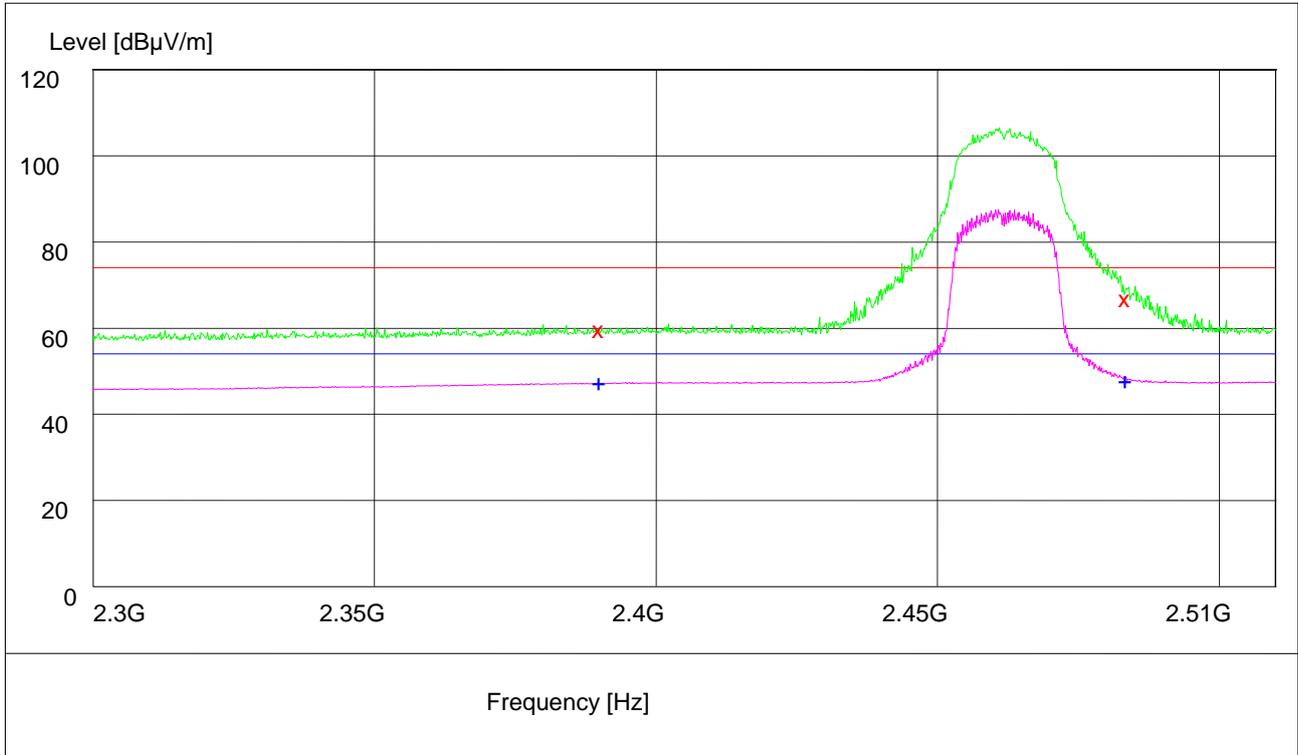

Note: The peak exceeds the limit line is carrier frequency.

### MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	60.50	34.8	74.0	13.5	100.0	227.00	HORIZONTAL
2483.500000	67.80	35.1	74.0	6.2	100.0	111.00	HORIZONTAL

### MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	48.20	34.8	54.0	5.8	114.0	14.00	HORIZONTAL
2483.500000	48.70	35.1	54.0	5.3	100.0	105.00	HORIZONTAL

**Part 4: Testing Range of “1 GHz to 18 GHz”**

- Note 1: The test results and plot for testing range of “1 GHz to 18 GHz” showed as below is **the WORST case for all Test Modes and Channels**. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “1 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).

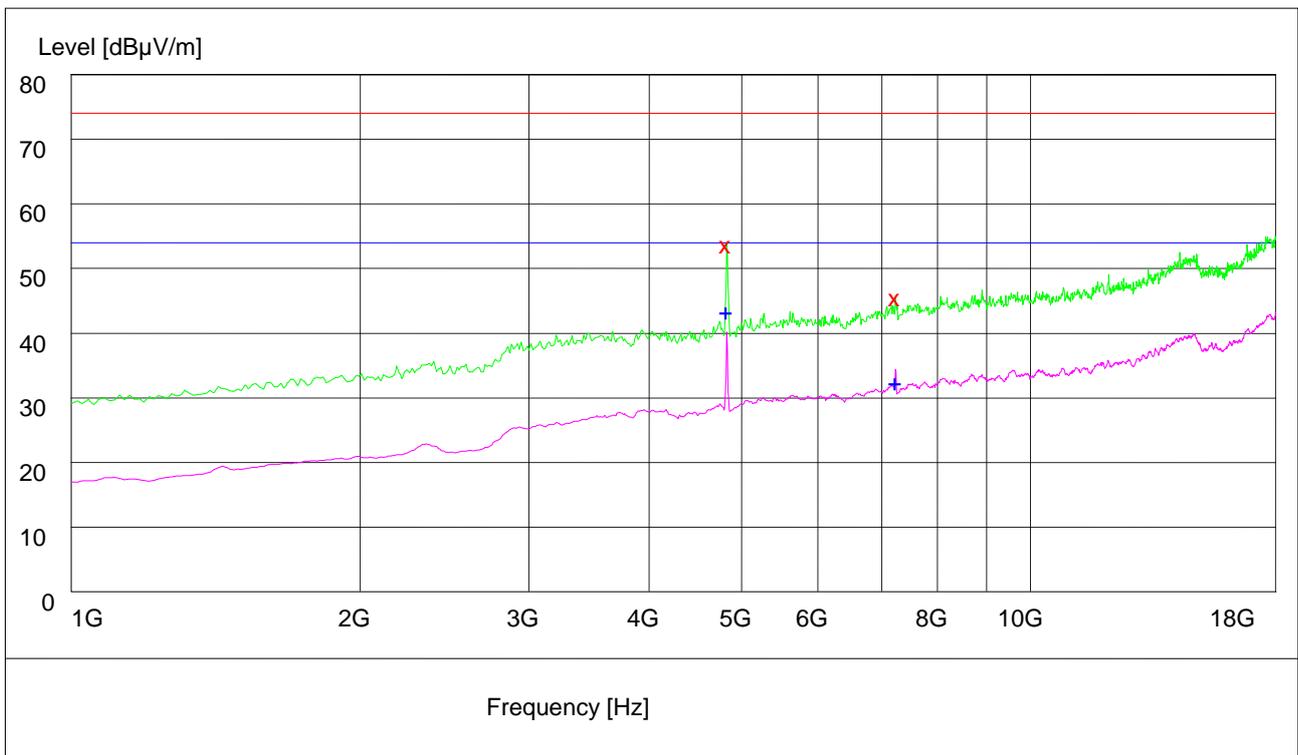

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Polarization
4824.100000	55.10	-2.5	74.0	18.9	100.0	65.00	HORIZONTAL
7235.800000	47.00	2.2	74.0	27.0	121.0	359.00	VERTICAL

MEASUREMENT RESULT: AVDetector


Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Polarization
4824.100000	44.80	-2.5	54.0	9.2	103.0	85.00	HORIZONTAL
7234.800000	33.90	2.3	54.0	20.1	118.0	350.00	VERTICAL



## Appendix G: Conducted Emission at Power Port

### Channel 40

CLASS B Voltage with ENV216

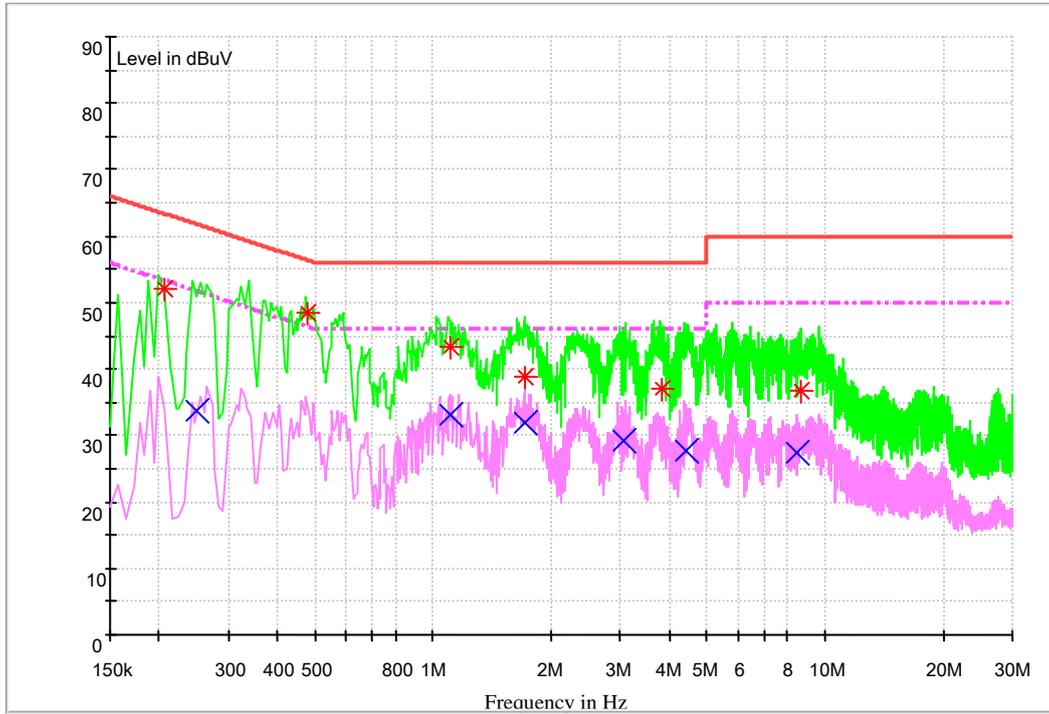

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV	Line	Transd dB	Margin dB	Limit dBμV	PE
0.206032	51.9	N	9.7	11.5	63.4	FLO
0.479479	48.3	N	9.7	8.0	56.3	FLO
1.102024	43.2	N	9.7	12.8	56.0	FLO
1.709531	38.8	N	9.7	17.2	56.0	FLO
3.814590	37.0	N	9.7	19.0	56.0	FLO
8.678388	36.8	N	9.9	23.2	60.0	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV	Line	Transd dB	Margin dB	Limit dBμV	PE
0.248262	33.7	N	9.7	18.1	51.8	FLO
1.103708	33.2	N	9.7	12.8	46.0	FLO
1.708586	32.1	N	9.7	13.9	46.0	FLO
3.065370	29.1	N	9.7	16.9	46.0	FLO
4.412966	27.6	N	9.8	18.4	46.0	FLO
8.466660	27.3	N	9.9	22.7	50.0	FLO

END