


Prüfbericht - Nr.: 17002468 001		Seite 1 von 39			
<i>Test Report No.</i>		<i>Page 1 of 39</i>			
Auftraggeber: <i>Client:</i>	Huawei Technologies Co., Ltd. Huawei Base Bantian. Longgang District Shenzhen 518057 P.R. China				
Gegenstand der Prüfung: <i>Test item:</i>	Out-door Type One-carrier 1900MHz CDMA Base Station				
Bezeichnung: <i>Identification:</i>	BTS3601C-1900, ODU3601C-1900	Serien-Nr.: <i>Serial No.</i>	Pre-production Model		
Wareneingangs-Nr.: <i>Receipt No.:</i>		Eingangsdatum: <i>Date of receipt:</i>	08.01.2004		
Prüfart: <i>Testing location:</i>	Huawei EMC Laboratory A2LA registered test site number 2174.01 as of April 14, 2004.				
Prüfgrundlage: <i>Test specification:</i>	FCC Part 24, subpart E FCC Part 2, subpart J, §2.1033 - §2.1057				
Prüfresultat: <i>Test Result</i>	Der vorstehend beschriebene Prüfgegenstand wurde geprüft und entspricht oben genannter Prüfgrundlage. The a. m. test item passed.				
geprüft / tested by:	kontrolliert / reviewed by				
<u>2004-08-31</u> Datum Date	Deng Jiang Name Name	 Unterschrift Signature	<u>2004-09-03</u> Datum Date	Zhang Xinghai Name Name	 Unterschrift Signature
Sonstiges / Other Aspects:					
Abkürzungen: OK, Pass = entspricht Prüfgrundlage Fail = entspricht nicht Prüfgrundlage N/A = nicht anwendbar			Abbreviations: OK, Pass = passed Fail = failed N/A = not applicable		
<p>Dieser Prüfbericht bezieht sich nur auf den o.g. Prüfgegenstand und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</p> <p>This test report relates to the a. m. test item. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products.</p>					
<small>Authorized format 16.12.1996, R.M.</small>					

1. SUMMARY

Below table summarizes the measurements and results for the CDMA base station. Detailed results and descriptions are shown in the following pages.

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
2.1046	24.232	RF Output Power	PASS
2.1047		Modulation Characteristics	PASS
2.1049		Occupied Bandwidth	PASS
2.1051	24.238	Spurious Emission at Antenna Terminals	PASS
2.1053	24.238	Field Strength of Spurious Emissions	PASS
2.1055	24.235	Frequency Stability	PASS
15.207	15.207	Conducted Emission at Power Supply Terminal Port	PASS

The base station is intended for use in the licensed domestic public cellular radio service and is designed to be placed and operated under the conditions of FCC rules part 24 subpart E.

2. TABLE OF CONTENT

1. SUMMARY	2
2. TABLE OF CONTENT	3
3. PRODUCT DESCRIPTION	5
4. TEST SITE DESCRIPTION	6
4.1. TESTING PERIOD.....	6
4.2. GENERAL SET UP DESCRIPTION.....	6
5. PRODUCT DESCRIPTION	7
5.1. TECHNICAL CHARACTERISTICS	7
5.1.1. <i>Frequency Range</i>	7
5.1.2. <i>Transmitter Power Rating</i>	7
5.1.3. <i>Channel Spacing / Separation</i>	7
5.1.4. <i>Type of Emission</i>	7
5.1.5. <i>Environmental Conditions for Base station</i>	8
5.1.6. <i>Power Source</i>	8
5.1.7. <i>Tune-up Procedure</i>	8
5.1.8. <i>Applied DC Voltages and Currents</i>	8
5.2. EUT IDENTIFICATION LIST	9
5.2.1. <i>FCC Identification</i>	9
6. TRANSMITTER MEASUREMENTS	11
6.1. RF OUTPUT POWER.....	11
6.1.1. <i>Test Conditions</i>	11
6.1.2. <i>Test Specifications and Limits</i>	11
6.1.2.1. Specification	11
6.1.2.2. Limits	11
6.1.3. <i>Test Method and Setup</i>	12
6.1.4. <i>Measurement Results</i>	13
6.1.4.1. Conclusion	13
6.1.4.2. Equipment List.....	13
6.2. MODULATION CHARACTERISTICS	14
6.2.1. <i>Test Conditions</i>	14
6.2.2. <i>Test Specifications and Limits</i>	14
6.2.2.1. Specification	14
6.2.2.2. Limits	14
6.2.3. <i>Test Method and Setup</i>	15
6.2.4. <i>Measurement Results</i>	16
6.2.4.1. Conclusion	16
6.2.4.2. Equipment List.....	16
6.3. OCCUPIED BANDWIDTH	17
6.3.1. <i>Test Conditions</i>	17
6.3.2. <i>Test Specifications and Limits</i>	17
6.3.2.1. Specification	17
6.3.2.2. Limits	17
6.3.3. <i>Test Method and Setup</i>	18
6.3.4. <i>Measurement Results</i>	19
6.3.4.1. Conclusion	19
6.3.4.2. Equipment List.....	19
6.4. SPURIOUS EMISSION AT ANTENNA TERMINAL	20
6.4.1. <i>Test Conditions</i>	20
6.4.2. <i>Test Specifications and Limits</i>	20

6.4.2.1.	Specification	20
6.4.2.2.	Limits	20
6.4.3.	<i>Test Method and Setup</i>	21
6.4.4.	<i>Measurement Results at Block Edges</i>	22
6.4.5.	<i>Measurement Results outside Band Edges</i>	22
6.4.5.1.	Conclusion	23
6.4.5.2.	Equipment List	23
6.5.	FIELD STRENGTH OF SPURIOUS RADIATION	24
6.5.1.	<i>Test Conditions</i>	24
6.5.2.	<i>Test Specifications and Limits</i>	24
6.5.2.1.	Specification	24
6.5.2.2.	Limits	24
6.5.3.	<i>Test Method and Setup</i>	25
6.5.4.	<i>Measurement Results</i>	26
6.5.4.1.	Conclusion	26
6.5.4.2.	Equipment List	26
6.6.	FREQUENCY STABILITY	28
6.6.1.	<i>Test Conditions</i>	28
6.6.2.	<i>Test Specifications and Limits</i>	28
6.6.3.	<i>Test Method and Setup</i>	29
6.6.4.	<i>Measurement Results vs. Variation of Temperature</i>	30
6.6.5.	<i>Measurement Results vs. Variation of Voltage</i>	31
6.6.5.1.	Conclusion	34
6.6.5.2.	Equipment List	34
6.7.	CONDUCTED EMISSION AT POWER SUPPLY TERMINAL PORT	35
6.7.1.	<i>Test Conditions</i>	35
6.7.2.	<i>Test Specifications and Limits</i>	35
6.7.2.1.	Specification	35
6.7.2.2.	Limits	35
6.7.3.	<i>Test Method and Setup</i>	36
6.7.4.	<i>Measurement Results</i>	37
6.7.4.1.	Conclusion	37
6.7.4.2.	Equipment List	38
7.	APPENDIXES	39

3. PRODUCT DESCRIPTION

The BTS3601C/ODU3601C is located between the BSC and the MS in the CDMA2000 mobile communication system.

Under the control of the BSC, the BTS3601C/ODU3601C serves as the radio transceiver equipment of one cell or multiple logical sectors. By connecting to the BSC via the Abis interface, it assists the BSC in managing the radio resource, radio parameter and interface resource. It also implements, via the Um interface, the radio transmission between the BTS and the MS as well as related control functions.

The outdoor BTS3601C/ODU3601C can accommodate to various climates and complex electromagnetic environments. It features low cost, fast installation and flexible environment adaptability. As an essential part of Huawei CDMA BTS series, it allows the radio network to achieve seamless coverage more easily. Different from BTS3601C, ODU3601C don't have Base band Processing Module (MBPM).

4. TEST SITE DESCRIPTION

The test site of:

Huawei Technologies Co. Ltd.
P.O. Box 518129
Huawei base, bantian,
Longgang District, Shenzhen, China

The test site description has been submitted to FCC and registration granted under the registration number 97456 on March 11. 2003. The test site has been accredited by A2LA and the accredited number is 2714.01 in Jan of 2004.

4.1. Testing Period

The test have been performed during the period of
August 01, 2004 to August 15, 2004

4.2. General Set up Description

The base station BTS3601C-1900/ODU3601C-1900 is equipped with a total one identical transceiver. One transceiver has been tested.

5. PRODUCT DESCRIPTION

5.1. Technical Characteristics

5.1.1. Transmission Frequency Range

Lower frequency:	1930 MHz
Upper frequency:	1990 MHz

5.1.2. Transmitter Power Rating

Minimum Power:	No level adjustment possible according to manufacturer statement
Maximum Power:	43 dBm +2/-4 dBm

5.1.3. Channel Spacing / Separation

Channel spacing:	Channel 25: 1931.25 MHz, Channel1000: 1980.00MHz, Channel 1175: 1988.75 MHz
Channel separation	Min. 1.25MHz

5.1.4. Type of Emission

Emission Designation:	1M25F9W
-----------------------	----------------

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

5.1.5. Environmental Conditions for Base station

Minimum temperature:	- 5 °C
Maximum temperature:	+ 50 °C
Relative Humidity:	Max. 90% R.H

5.1.6. Power Source

AC nominal:	200-240 VAC & -48 VDC
AC voltage range	176~-264VAC & -38.4~-57.6V
AC current maximal:	4A(AC) & 15A(DC)

5.1.7. Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033 (9)

Please reference the document Tune-up Procedure in TCF

5.1.8. Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033 (8)

The voltage and current in the final RF stage is:

Voltage: 27VDC
Current: 20 A

5.2. EUT Identification List

Power Supply for type designation BTS3601C-1900/ODU3601C-1900		
Equipment Designation / Description	Serial Number	Remarks
AC-DC Power Module MAPM	21021305432045000022	220VAC to 27VDC
DC-DC Power Module MDPM	21021354824501000012	48VDC to 27VDC

MFEM for type designation BTS3601C-1900/ODU3601C-1900		
Equipment Designation / Description	Serial Number	Remarks
Dual Duplexer Unit MFEM	21023127371047000005 21023128211047000008 21023126545047000011	Each MFEM have 20MHz band width. Three MFEM can cover frequency from 1930MHz to 1990MHz

Transceiver module for type designation BTS3601C-1900/ODU3601C-1900		
Equipment Designation / Description	Serial Number	Remarks
Transceiver module MTRM	21023127381047000004	Transceiver Module

Power Amplifier Module for type designation BTS3601C-1900/ODU3601C-1900		
Equipment Designation / Description	Serial Number	Remarks
Transceiver Unit MPAM	21023127321047000003	Each transceiver unit consist of MTRM module a MPAM module and a fan module

Controller for type designation BTS3601C-1900		
Equipment Designation / Description	Serial Number	Remarks
BTS Base band Processing Module MBPM	21023119341045000012	

Note: Different from BTS3601C, ODU3601C don't have Base band Processing Module (MBPM).

5.2.1. FCC Identification

Grantee Code: QIS
Product Code: BTS3601C-1900, ODU3601C-1900

Prüfbericht - Nr.: 17002468 001
Test Report No.

Seite 10 von 39
Page 10 of 39

FCC Identification: QISBTS3601C-1900, QISODU3601C-1900

6. TRANSMITTER MEASUREMENTS

6.1. RF Output Power

6.1.1. Test Conditions

Preconditioning:	1 hour
Maximum Specified Transmitter Power:	43 dBm
Measured at:	MFEM Output Port
Ambient temperature:	23 °C
Relative humidity:	57 %
Date of Testing:	08.01.2004~08.15.2004

6.1.2. Test Specifications and Limits

6.1.2.1. Specification

CFR 47 (FCC) part 2.1046 and part 24 subpart E

Supporting Standards:

EIA/TIA-603-A: 1992	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
EIA/TIA-102-CAAA:1999	Digital C4FM/CQPSK Transceiver Measurement Methods (ANSI/TIA/EIA-102.CAAA-1999)
EIA/TIA -95B-1999	Mobile Station-Base Station Compatibility Standard for Wideband Spread Spectrum Cellular Systems (ANSI/TIA/EIA-95-B-99)
EIA/TIA-97D-2001	Recommended Minimum Performance Standard for Base Stations Supporting Dual-Mode Spread Spectrum Cellular Mobile Stations

6.1.2.2. Limits

Compliance with 24.232 requires in no any case may the peak power of a base station transmitter exceed 100 W.

Max. peak power	100W
-----------------	------

According to the above requires of peak power as $10 \cdot \log(P) = 50 \text{ dBm}$.


6.1.3. Test Method and Setup

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.983(d)(5). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

Test Set up

The CDMA BTS was set up via the BTS controller simulator and operated at maximal load. The Spectrum analyzer was set with the following settings.

Resolution bandwidth:	28 kHz
Video bandwidth:	300 kHz
Max. Hold function:	active

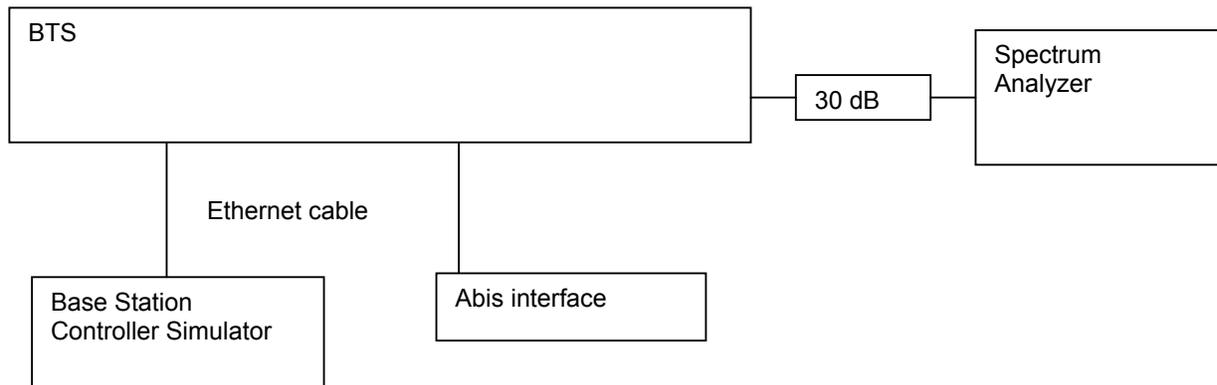

6.1.4. Measurement Results

TEST CONDITIONS		RF Output Power					
		Channel 25 1931.25 MHz		Channel 1000 1980MHz		Channel 1175 1988.75 MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
T_{nom} (23.5 °C)	V_{nom} (220 V) *	43.14	50**	42.72	50**	43.14	50**
Measurement uncertainty (dB)		Equipment			Requirement		
		0.4 dB			N/A		

*() It is the voltage that is measured on the rack within the cabinet.

** () peak power of a base station transmitter

6.1.4.1. Conclusion

The equipment **passed** the requirement of this clause.

For the measurement results refer to appendix A with 4 pages.

6.1.4.2. Equipment List

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until(M/D/Y)
PSA Series Spectrum Analyzer	Agilent	E4445A	MY41000146	10.24.2004
Attenuator	Shanghai Huaxiang	DTS100 (30dB)	15	06.05.2005
Cable	Diverse	RG58-U	n.a	Before test

6.2. Modulation Characteristics

6.2.1. Test Conditions

Preconditioning:	1 hour
Maximum Specified Transmitter Power:	43 dBm
Measured at:	MFEM Output Port
Ambient temperature:	24 °C
Relative humidity:	57 %
Date of Testing:	08.01.2004~08.15.2004

6.2.2. Test Specifications and Limits

6.2.2.1. Specification

CFR 47 (FCC) part 2.1047 and part 24 subpart E

Supporting Standards:

EIA/TIA-603-A: 1992	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
EIA/TIA-102-CAAA:1999	Digital C4FM/CQPSK Transceiver Measurement Methods (ANSI/TIA/EIA-102.CAAA-1999)
EIA/TIA -95B-1999	Mobile Station-Base Station Compatibility Standard for Wideband Spread Spectrum Cellular Systems (ANSI/TIA/EIA-95-B-99)
EIA/TIA-97D-2001	Recommended Minimum Performance Standard for Base Stations Supporting Dual-Mode Spread Spectrum Cellular Mobile Stations

6.2.2.2. Limits


Compliance with 2.1047 requires not a specific modulation characteristic since the EUT is applied for part 24 subpart E.

Limits	Not applicable
--------	----------------

6.2.3. Test Method and Setup

The CDMA BTS was controlled via the BTS simulator. The antenna port was connected to spectrum analyzer through a 30 dB attenuator

Test Set-up

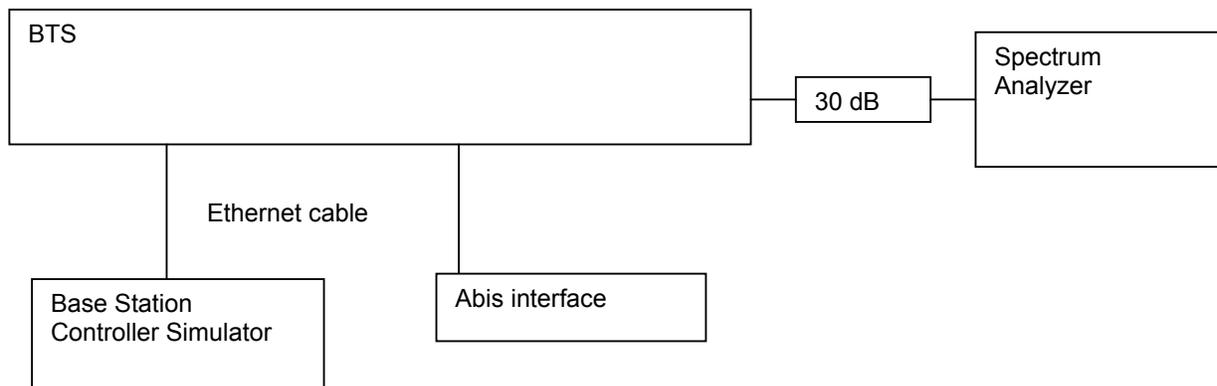

6.2.4. Measurement Results

TEST CONDITIONS		RF Output Power					
		Channel 25 1931.25 MHz		Channel 1000 1980MHz		Channel 1175 1988.75 MHz	
		Rho		Rho		Rho	
		Measured	Limit	Measured	Limit	Measured	Limit
T_{nom} (23.5 °C)	V_{nom} (220V)*	0.99840	N.A.	0.99868	N/A	0.99828	N/A
Measurement uncertainty		Equipment			Requirement		
		0.001			N/A		

*) It is the voltage that is measured on the rack within the cabinet.

6.2.4.1. Conclusion

The equipment **passed** the requirement of this clause.

For the measurement results refer to appendix B with 4 pages.

6.2.4.2. Equipment List

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until(M/D/Y)
PSA Series Spectrum Analyzer	Agilent	E4445A	MY41000146	10.24.2004
Attenuator	Shanghai Huaxiang	DTS100 (30dB)	15	06.05.2005
Cable	Diverse	RG58-U	n.a	Before test

6.3. Occupied Bandwidth

6.3.1. Test Conditions

Preconditioning:	1 hour
Nominal Output Power:	43 dBm
Measured at:	MFEM Output Port
Ambient temperature:	23.5 °C
Relative humidity:	55 %
Date of Testing:	08.01.2004~08.15.2004

6.3.2. Test Specifications and Limits

6.3.2.1. Specification

CFR 47 (FCC) part 2.1049 and part 24 subpart E

Supporting Standards:

EIA/TIA-603-A: 1992	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
EIA/TIA-102-CAAA:1999	Digital C4FM/CQPSK Transceiver Measurement Methods (ANSI/TIA/EIA-102.CAAA-1999)
EIA/TIA -95B-1999	Mobile Station-Base Station Compatibility Standard for Wideband Spread Spectrum Cellular Systems (ANSI/TIA/EIA-95-B-99)
EIA/TIA-97D-2001	Recommended Minimum Performance Standard for Base Stations Supporting Dual-Mode Spread Spectrum Cellular Mobile Stations

6.3.2.2. Limits

Compliance with 2.1049 requires not a specific occupied bandwidth since the EUT is applied for part 24 subpart E and possesses a digital modulation there is no specific requirement formulated in before mentioned rules the 99% rules applies.

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

6.3.3. Test Method and Setup


The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

Measurement bandwidth (RBW): 30 kHz (Resolution bandwidth)
Video bandwidth (VBW): 200 kHz

Test Set-up

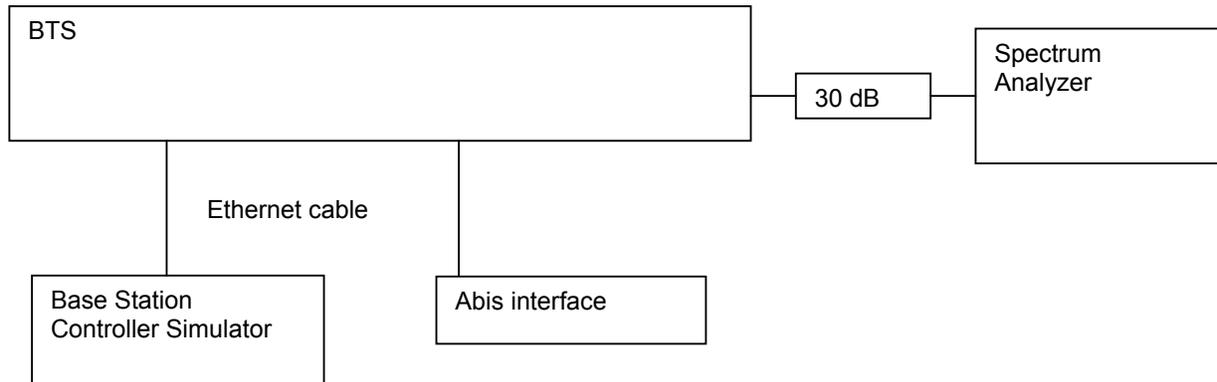

6.3.4. Measurement Results

TEST CONDITIONS		Occupied Bandwidth					
		Channel 25 1931.25 MHz		Channel 1000 1980 MHz		Channel 1175 1988.75. MHz	
		Measured (MHz)	Limit	Measured (MHz)	Limit	Measured (MHz)	Limit
T _{nom} (23.5 °C)	V _{nom} (220V)*	1.2439	N/A	1.2459	N/A	1.2504	N/A
Measurement uncertainty (dB)		Equipment			Requirement		
		0.2%					

*) It is the voltage that is measured on the rack within the cabinet.

6.3.4.1. Conclusion

The equipment **passed** the requirement of this clause.

For the measurement results refer to appendix C with 4 pages.

6.3.4.2. Equipment List

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until(M/D/Y)
PSA Series Spectrum Analyzer	Agilent	E4445A	MY41000146	10.24.2004
Attenuator	Shanghai Huaxiang	DTS100 (30dB)	15	06.05.2005
Cable	Diverse	RG58-U	n.a	Before test

6.4. Spurious Emission at Antenna Terminal

6.4.1. Test Conditions

Preconditioning:	1 hour
Nominal Output Power:	43 dBm
Measured at:	MFEM Output Port
Ambient temperature:	23.5°C
Relative humidity:	55 %
Date of Testing:	08.01.2004~08.15.2004

6.4.2. Test Specifications and Limits

6.4.2.1. Specification

CFR 47 (FCC) part 2.1051 and part 24.238

Supporting Standards:

EIA/TIA-603-A: 1992	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
EIA/TIA-102-CAAA:1999	Digital C4FM/CQPSK Transceiver Measurement Methods (ANSI/TIA/EIA-102.CAAA-1999)
EIA/TIA -95B-1999	Mobile Station-Base Station Compatibility Standard for Wideband Spread Spectrum Cellular Systems (ANSI/TIA/EIA-95-B-99)
EIA/TIA-97D-2001	Recommended Minimum Performance Standard for Base Stations Supporting Dual-Mode Spread Spectrum Cellular Mobile Stations

6.4.2.2. Limits

Compliance with 2.1051 requires that all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).


Rated Power:	43 dBm
Required attenuation:	$43 + 10 \log_{10} (20W) = 56$, 43 dBm – 56 dB
Absolute level	- 13 dBm

6.4.3. Test Method and Setup

The BTS simulator controls the CDMA base station. Antenna port is connected to an spectrum analyzer through a 32 dB notch filter. The BTS operates two channels at a time.

Measurement bandwidth (RBW) for up to 1 MHz adjacent to carrier:	30 kHz
Measurement bandwidth (RBW) for 9 kHz up to 150 kHz:	1 kHz
Measurement bandwidth (RBW) for 150 kHz up to 30 MHz:	10 kHz
Measurement bandwidth (RBW) for 30 MHz up to 1 GHz:	100 kHz
Measurement bandwidth (RBW) for all others frequencies above 1 GHz	1 MHz

Test Set up

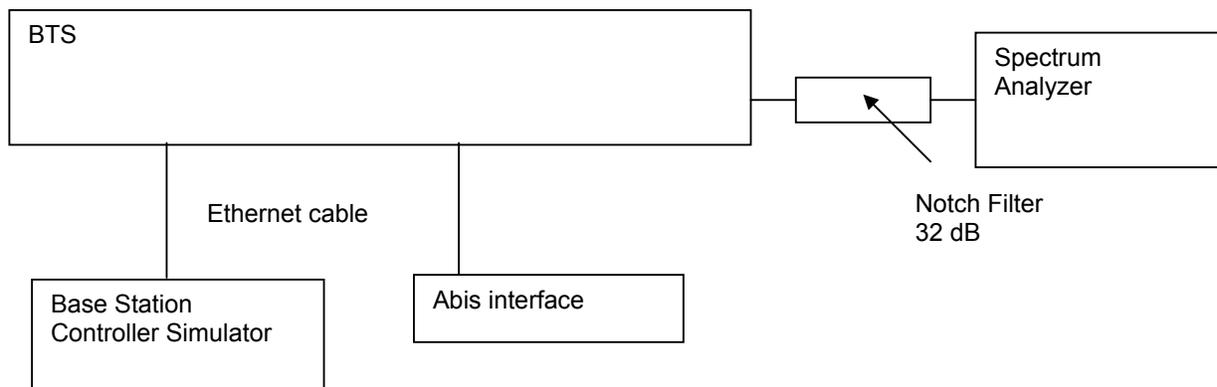

6.4.4. Measurement Results at Block Edges

Channel Number	Frequency of Band edge [MHz]	Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
25	1931.25MHz, Lower edge of block A	43	- 22.91	- 13 dBm	Pass
275	1943.75MHz, Higher edge of block A	43	- 21.36	- 13 dBm	Pass
325	1946.25MHz, Lower edge of block D	43	- 21.57	- 13 dBm	Pass
875	1973.75MHz, Higher edge of block F	43	- 24.11	- 13 dBm	Pass
925	1976.25MHz, Lower edge of block C	43	- 22.05	- 13 dBm	Pass
1175	1988.75MHz, Higher edge of block C	43	- 21.93	- 13 dBm	Pass

Measurement Uncertainty: 1.2 dB

6.4.5. Measurement Results outside Band Edges

Channel Number	Test Range (Frequency)	Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
15	9 kHz ~20GHz	43	<- 13 dBm (See appendix D)	- 13 dBm	Pass
1175	9kHz ~20GHz	43	<- 13 dBm (See appendix D)	- 13 dBm	Pass

Measurement Uncertainty: 1.2 dB

6.4.5.1. Conclusion

The equipment **passed** the requirement of this clause.

For the measurement results refer to appendix D with 17 pages.

6.4.5.2. Equipment List

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until(M/D/Y)
PSA Series Spectrum Analyzer	Agilent	E4440	US40420781	05.26.2005
Attenuator	Shanghai Huaxiang	DTS100	15	06.05.2005
Notch Filter	Celecom	CCF811-1960/60-70A	SZ200069333	07.04.2005
Cable	Huber&Suhner	RG58U	--	Before test

6.5. Field Strength of Spurious Radiation

6.5.1. Test Conditions

Preconditioning:	0.5 hour
Nominal Output Power:	43 dBm
Measured at:	Cabinet
Ambient temperature:	23 °C
Relative humidity:	51 %
Date of testing:	08.15.2004

6.5.2. Test Specifications and Limits

6.5.2.1. Specification

CFR 47 (FCC) part 2.1053 and part.238

Supporting Standards:

EIA/TIA-603-A: 1992	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
EIA/TIA-102-CAAA:1999	Digital C4FM/CQPSK Transceiver Measurement Methods (ANSI/TIA/EIA-102.CAAA-1999)
EIA/TIA -95B-1999	Mobile Station-Base Station Compatibility Standard for Wideband Spread Spectrum Cellular Systems (ANSI/TIA/EIA-95-B-99)
EIA/TIA-97D-2001	Recommended Minimum Performance Standard for Base Stations Supporting Dual-Mode Spread Spectrum Cellular Mobile Stations

6.5.2.2. Limits

Compliance with 22.917 requires that all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Rated Power:	43 dBm
Required attenuation:	$43 + 10 \log_{10} (20W) = 56 \text{ dB}$
Absolute level	$43 \text{ dBm} - 56 \text{ dB} = - 13 \text{ dBm}$

6.5.3. Test Method and Setup

(a) Measurements were made to detect spurious emissions radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data were supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph 2.989(c) as appropriate. For equipment operating on frequencies below 1990 MHz, an Open Field Test is normally required with the measuring instrument antenna located in the far field at all test frequencies. In event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurement will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections, which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with the reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.


(b) Measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emission are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

The BSC simulator controls the CDMA base station. Every antenna port is connected to an artificial 50-Ohm load. The BTS operates two channels at a time.

Measurement bandwidth: 10 kHz – 150 kHz:	200 Hz
Measurement bandwidth: 150 kHz – 30 MHz:	9 kHz
Measurement bandwidth: 30 MHz – 1000 MHz:	120 kHz
Measurement bandwidth: 1GHz – 20 GHz:	1 MHz

Test set up

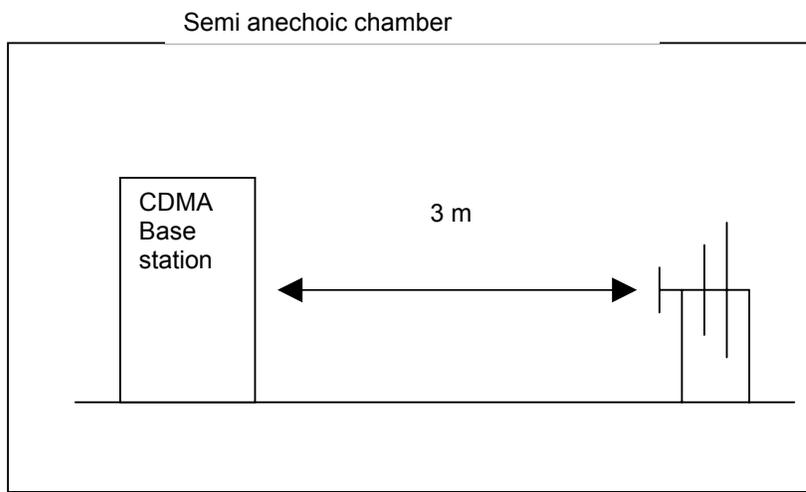

6.5.4. Measurement Results

Frequency in [MHz]	Spurious Emission measurement reading In [dBm]	Signal Generator Level [dBm]	Cable loss [dB]	Antenna gain [dB]	Effective Power ERP [in dBm]	Power in [dBc]	Spurious Emission Limits [dBm]
3968.8889	-36.62	-42	-4.7	10.0	-36.7	79.7	-13dBm
3964.4444	-34.15	-40	-4.5	10.1	-34.4	77.4	-13dBm

Measurement Uncertainty: 6 dB

6.5.4.1. Conclusion

The equipment **passed** the requirement of this clause.

For the measurement results refer to appendix E with 11 pages.

6.5.4.2. Equipment List

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Signal Generator	R&S	SMT 06 1039.2000.06	830723/007	05.31.2005
Test Receiver Display Unit	R&S	ESMI 804.8932.52	829214/011	05.31.2005
Test Receiver RF Unit	R&S	ESMI 1032.5640.53	829550/008	05.31.2005
BiLog Antenna	Schaffner	CBL 6111B	2536	10.16.2004
Pre-Amplifier	Agilent	83017A	3950M00246	12.29.2004
Pre-Amplifier	Agilent	8447D	3950M00246	05.31.2005
Horn Antenna	R&S	HF906 4044.4507.02	359287/005	11.17.2004
Horn Antenna	ETS-LINDGREN	3116	0031541	01.14.2005
Horn Antenna	ETS-LINDGREN	3116	0031542	01.14.2005
Active Monopole-Antenna	Schwarzbeck	VAMP 9240 9k~30MHz	9240119	11.17.2004
Attenuator	HP	8491A (3dB)	36239	Calibrated with setup
Horn Antenna	R&S	HF906 4044.4507.02	359287/006	11.17.2004
Notch Filter	Celecom	CCF811-1960/60-70A	SZ200069333	04.07.2005

Prüfbericht - Nr.: 17002468 001
Test Report No.

Seite 27 von 39
Page 27 of 39

Match load	Shanghai Huaxiang	TF100 (30dB)	03062310	07.02.2005
------------	----------------------	--------------	----------	------------

6.6. Frequency Stability

6.6.1. Test Conditions

Preconditioning:	1 hour
Nominal Output Power:	43 dBm
Measured at:	MFEM Output Port
Ambient temperature:	See below
Relative humidity:	55 % at 20 °C
Date of Testing:	08.08.2004 – 08.14.2004

6.6.2. Test Specifications and Limits

CFR 47 (FCC) part 2.1055 and part 24.235

Supporting Standards:

ANSI C63.4-2003	Methods of Measurement of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
EIA/TIA-603-A: 1992	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
EIA/TIA-102-CAAA:1999	Digital C4FM/CQPSK Transceiver Measurement Methods (ANSI/TIA/EIA-102.CAAA-1999)
EIA/TIA -95B-1999	Mobile Station-Base Station Compatibility Standard for Wideband Spread Spectrum Cellular Systems (ANSI/TIA/EIA-95-B-99)
EIA/TIA-97D-2001	Recommended Minimum Performance Standard for Base Stations Supporting Dual-Mode Spread Spectrum Cellular Mobile Stations

6.6.3. Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in subparagraphs (2) and (3) of paragraph 2.1055


(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10o centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.
- (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

Test Set up


Measurement Bandwidth: 30 kHz

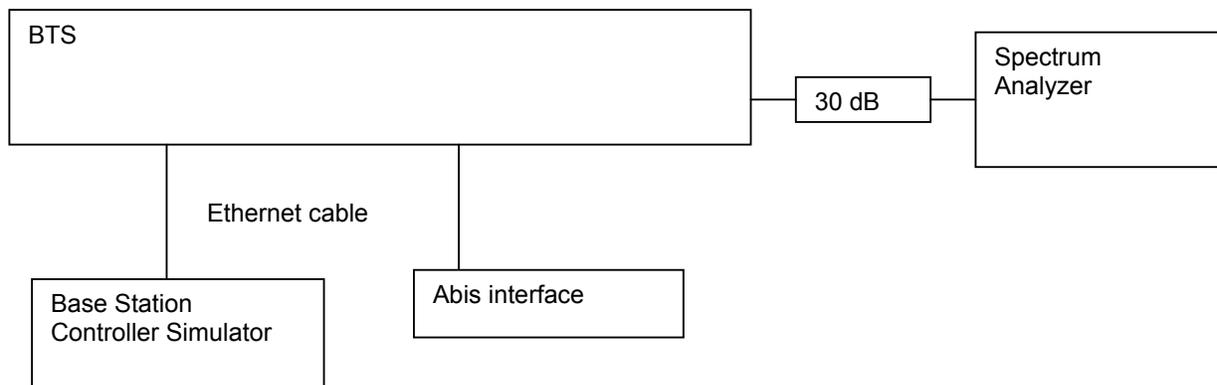

6.6.4. Measurement Results vs. Variation of Temperature

- TRX1: Channel No. 25(1931.25MHz)


Temperature	Power (dBm)	Nominal Frequency	Measured Frequency Error	Result
-30 °C	43	1931.25MHz	-3.89	Pass
-20 °C	43	1931.25MHz	-1.01	Pass
-10 °C	43	1931.25MHz	-3.52	Pass
0 °C	43	1931.25MHz	-1.36	Pass
+10 °C	43	1931.25MHz	-1.81	Pass
+20 °C	43	1931.25MHz	-1.51	Pass
+30 °C	43	1931.25MHz	-1.08	Pass
+40 °C	43	1931.25MHz	4.07	Pass
+50 °C	43	1931.25MHz	1.00	Pass

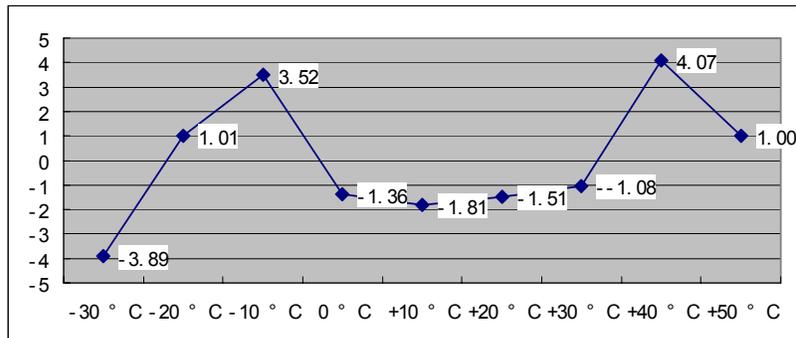

- TRX2: Channel No. 1175(1988.75MHz)

Temperature	Power (dBm)	Nominal Frequency	Measured Frequency Error	Result
-30 °C	43	1988.75MHz	-0.34	Pass
-20 °C	43	1988.75MHz	-6.22	Pass
-10 °C	43	1988.75MHz	-1.17	Pass
0 °C	43	1988.75MHz	-3.34	Pass
+10 °C	43	1988.75MHz	2.12	Pass
+20 °C	43	1988.75MHz	-0.24	Pass
+30 °C	43	1988.75MHz	-3.08	Pass

+40 °C	43	1988.75MHz	-2.01	Pass
+50 °C	43	1988.75MHz	1.24	Pass

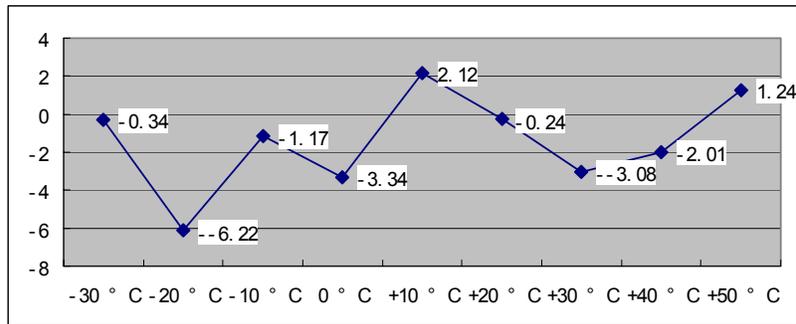


6.6.5. Measurement Results vs. Variation of Voltage

6.6.5.1. AC Power Test Result

- TRX1: Channel No. 25(1931.25MHz)

Voltage	Power (dBm)	Nominal Frequency	Measured Frequency Error	Result
170 V	43	1931.25MHz	-3.72	Pass
200 V	43	1931.25MHz	0.67	Pass
230 V	43	1931.25MHz	-2.19	Pass


Voltage	Power (dBm)	Nominal Frequency	Measured Frequency Error	Result
204 V	43	1931.25MHz	0.79	Pass
240 V	43	1931.25MHz	2.51	Pass
276 V	43	1931.25MHz	-2.84	Pass

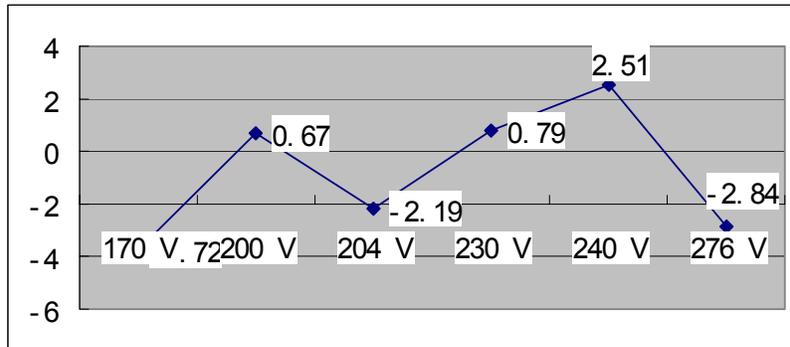

- TRX2: Channel No. 1175(1988.75MHz)

Voltage	Power (dBm)	Nominal Frequency	Measured Frequency Error	Result
170 V	43	1988.75MHz	1.74	Pass
200 V	43	1988.75MHz	2.80	Pass
230 V	43	1988.75MHz	-0.85	Pass

Voltage	Power (dBm)	Nominal Frequency	Measured Frequency Error	Result
204 V	43	1988.75MHz	-5.23	Pass
240 V	43	1988.75MHz	2.93	Pass
276 V	43	1988.75MHz	1.54	Pass

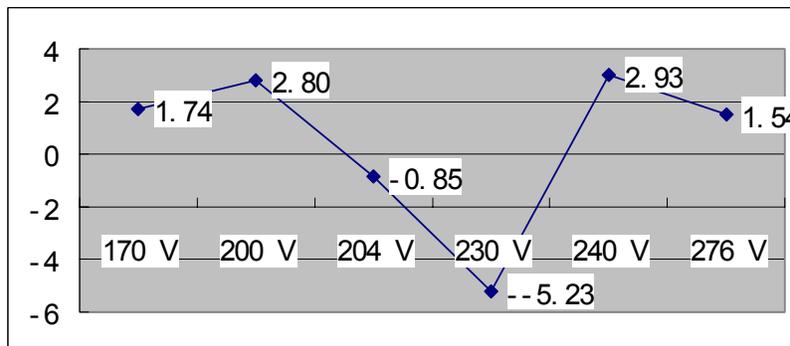


6.6.5.2. DC Power Test Result

- TRX1: Channel No. 25(1931.25MHz)


Voltage	Power (dBm)	Nominal	Measured	Result
---------	-------------	---------	----------	--------

		Frequency	Frequency Error	
-38.4 V	43	1931.25MHz	0.95	Pass
-43.2 V	43	1931.25MHz	0.09	Pass
-48 V	43	1931.25MHz	0.37	Pass
-52.8 V	43	1931.25MHz	0.33	Pass
-57.6 V	43	1931.25MHz	1.10	Pass

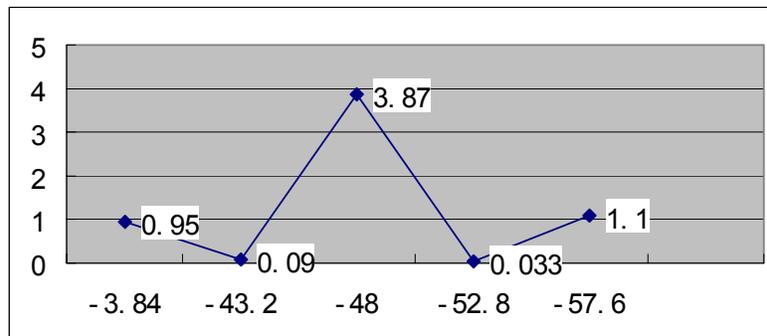

- TRX2: Channel No. 1175(1988.75MHz)

Voltage	Power (dBm)	Nominal Frequency	Measured Frequency Error	Result
-38.4V	43	1988.75MHz	0.9	Pass
-43.2V	43	1988.75MHz	0.53	Pass
-48V	43	1988.75MHz	-0.17	Pass
-52.8V	43	1988.75MHz	-0.98	Pass
-57.6V	43	1988.75MHz	0.22	Pass

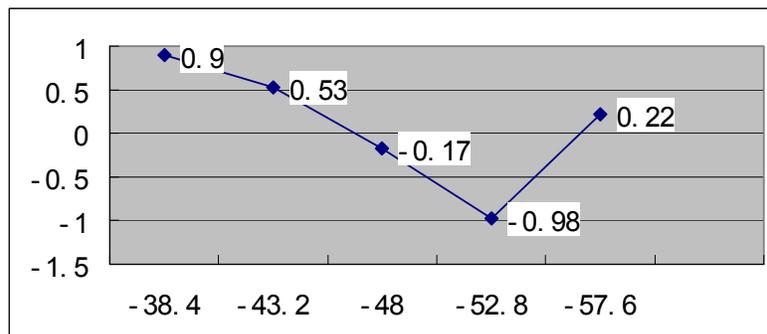

6.6.5.3. Conclusion

The equipment **passed** the requirement of this clause.

For the measurement results refer to appendix F with 31 pages.

6.6.5.4. Equipment List

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until(M/D/Y)
PSA Series Spectrum Analyzer	Agilent	E4445A	MY41000146	10.24.2004
Attenuator	Shanghai Huaxiang	DTS100 (30dB)	15	06.05.2005
Cable	Diverse	RG58-U	n.a.	Before test
Climatic Chamber	Weiss	SB2/1500/80	222/21262	12.10.2004

6.7. Conducted Emission at Power Supply Terminal Port

6.7.1. Test Conditions

Preconditioning:	0.5 hour
Nominal Output Power:	43 dBm
Measured at:	Power Output Port
Ambient temperature:	21 °C
Relative humidity:	55 %
Power Supply:	220 VAC
Date of Testing:	08.07.2004

6.7.2. Test Specifications and Limits

6.7.2.1. Specification

CFR 47 (FCC) part 15.207

Supporting Standards:

ANSI C63.4-2003 Methods of Measurement of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

6.7.2.2. Limits

Compliance with 15.207 requires that all spurious emission must be below the specified limits in clause 15.207.


Frequency of Emission	Conducted Limit (dB μ V)	
	QP	AV
150 kHz – 0.5 MHz	66-56	56-46
0.5 MHz – 5 MHz	56	46
5 MHz – 30 MHz	60	50

6.7.3. Test Method and Setup

The CDMA BTS was setup in the anechoic chamber and operated under nominal conditions.

Measurement Bandwidth: 150 kHz – 30 MHz: 10 kHz

Test set up

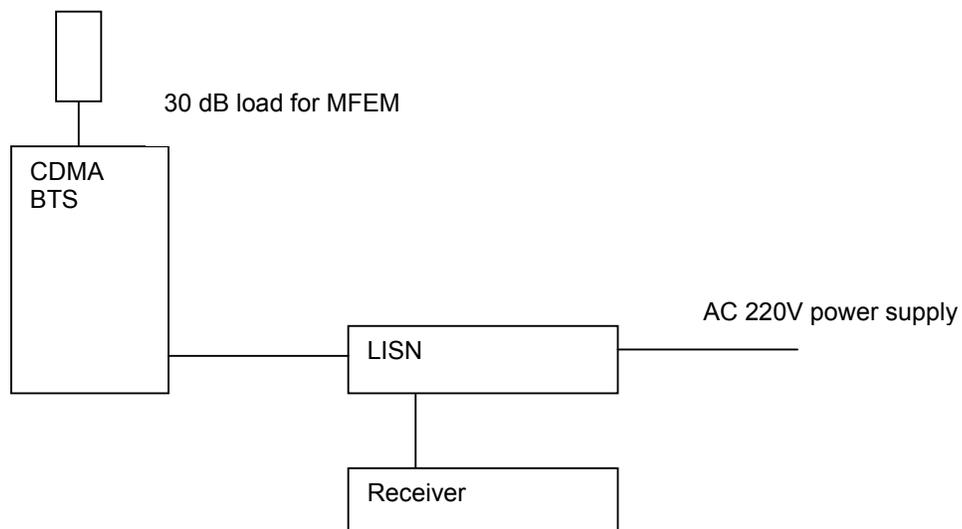

6.7.4. Measurement Results

- BTS3601C Test Result

Frequency in [MHz]	Measured Conducted Emission [dB μ V]	Conducted Emission Limits [dB μ V]	Remarks
0.150000	60.00	66	QP
0.474000	42.30	56	QP
1.288500	43.20	56	QP
2.373000	40.70	56	QP
6.648000	38.40	60	QP
28.684500	42.90	60	QP
0.271500	47.90	51	AV
0.406500	43.60	48	AV
1.356000	42.70	46	AV
2.373000	40.50	46	AV
3.799500	39.10	46	AV
28.684500	42.70	50	AV

- ODU3601C Test Result

Frequency in [MHz]	Measured Conducted Emission [dB μ V]	Conducted Emission Limits [dB μ V]	Remarks
0.150000	56.90	66	QP
0.559500	44.50	56	QP
1.144500	40.70	56	QP
3.970500	34.60	56	QP
0.289500	48.40	51	AV
0.492000	43.30	46	AV
0.559500	44.30	46	AV
0.627000	44.40	46	AV
0.784500	39.10	46	AV
1.144500	40.70	46	AV

6.7.4.1. Conclusion

The equipment **passed** the requirement of this clause.

For the measurement results refer to appendix G with 5 pages.

6.7.4.2. Equipment List

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
LISN	R&S	ENV4200	100001	05.31.2005
Test Receiver	R&S	ESMI-DU 1032.5510.53 ESMI-RF 1032.5640.53	829214/011 829550/008	05.31.2005
Attenuator	Shanghai Huaxiang	DTS100 (30dB)	15	06.05.2005
Cable	Diverse	RG58-U	n.a	Before test
Match load	Shanghai Huaxiang	TF100 (30dB)	03062357	07.02.2005

7. APPENDIXES

Appendix A	Measurement Results RF Output Power	4 pages
Appendix B	Measurement Results Modulation Characteristics	4 pages
Appendix C	Measurement Results Occupied Bandwidth	4 pages
Appendix D	Measurement Results Spurious Emission at Antenna Terminal	17 pages
Appendix E	Measurement Results Field Strength of Spurious Radiation	11 pages
Appendix F	Measurement Results Frequency Stability versus Temperature and Voltage	50 pages
Appendix G	Measurement Results Conducted Emission at Power Port	4 pages
Appendix H	Photos of Test Setup	5 pages