

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM850 EGPRS 2TS 190CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 55.958$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 1.09 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 29.095 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 0.983 W/kg; SAR(10 g) = 0.516 W/kg

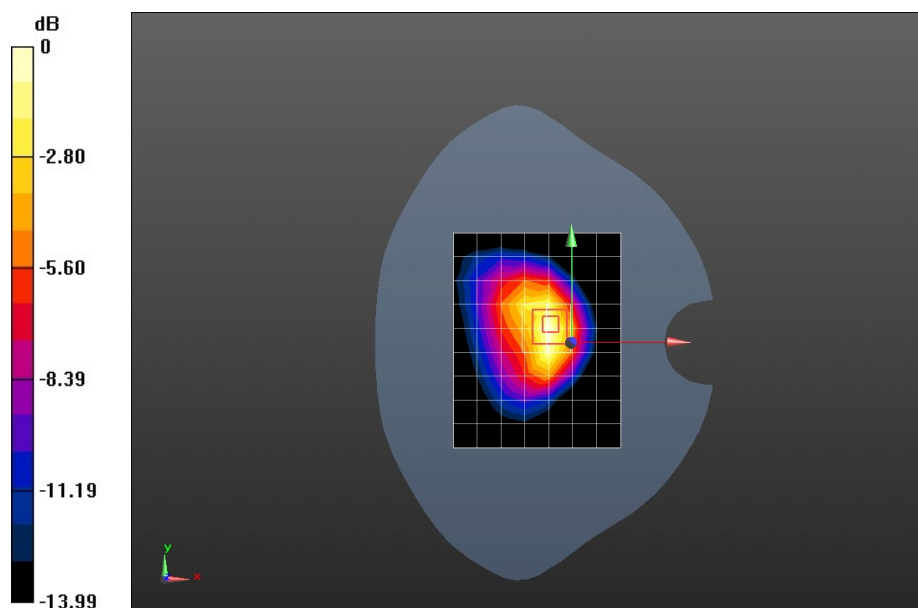

0 dB = 1.09 W/kg = 0.37 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM850 EGPRS 2TS 128CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 824.4 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated): $f = 824.4$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 56.214$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.829 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 18.488 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.467 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.00 W/kg

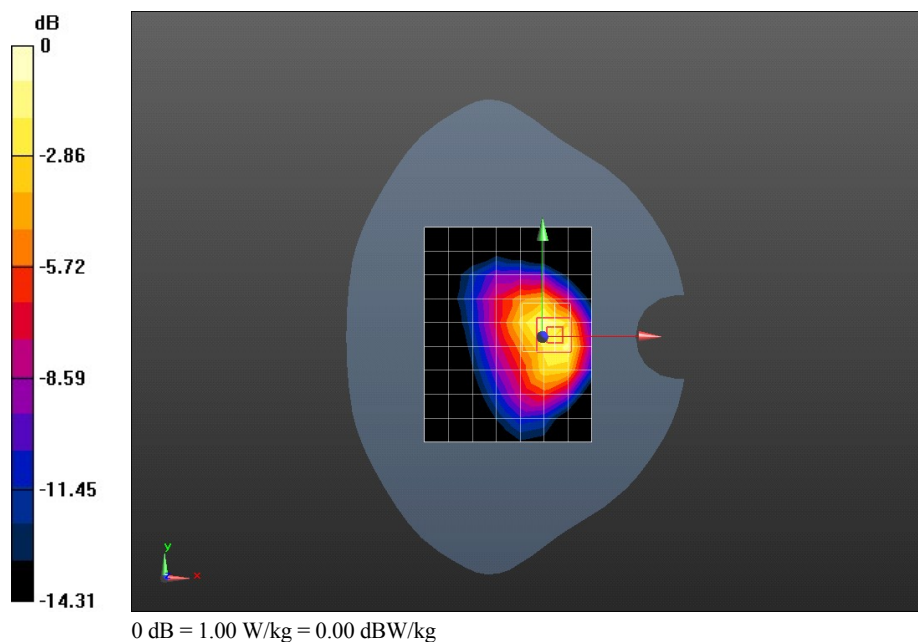

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM850 EGPRS 3TS 251CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-3TS; Frequency: 848.8 MHz; Duty Cycle: 1:2.77013

Medium parameters used: $f = 849$ MHz; $\sigma = 1.003$ mho/m; $\epsilon_r = 55.847$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.06 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 21.082 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.32 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.585 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

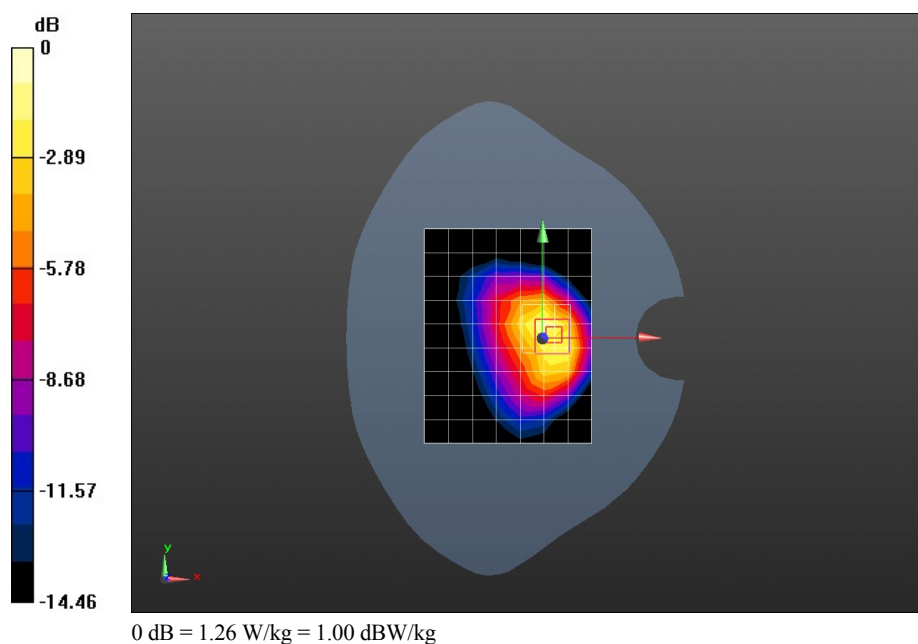

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM850 EGPRS 3TS 190CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-3TS; Frequency: 836.6 MHz; Duty Cycle: 1:2.77013

Medium parameters used: $f = 837$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 55.958$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.03 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 20.572 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.25 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.568 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

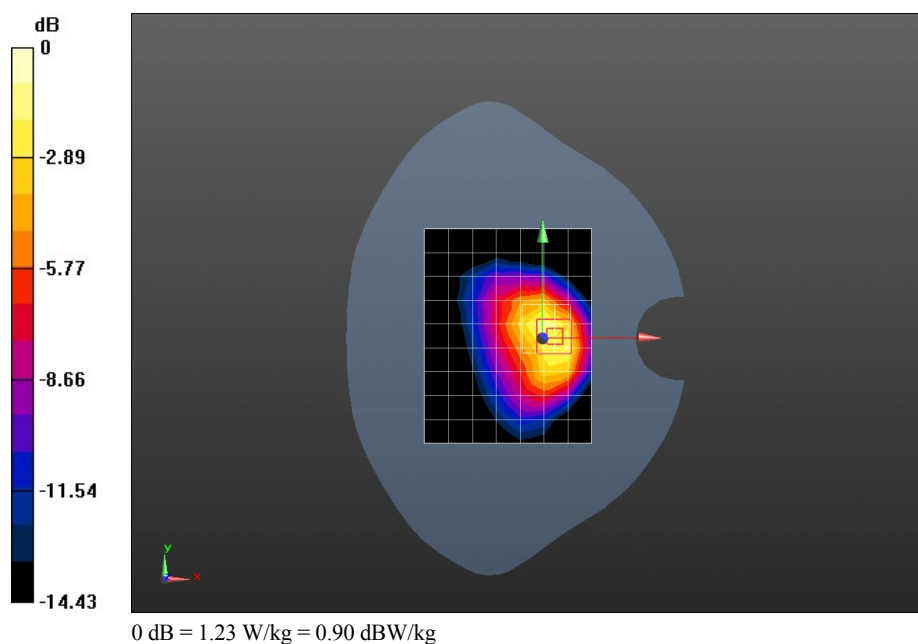

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM850 EGPRS 3TS 128CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-3TS; Frequency: 824.2 MHz; Duty Cycle: 1:2.77013

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 56.184$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.957 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 19.974 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.540 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.15 W/kg

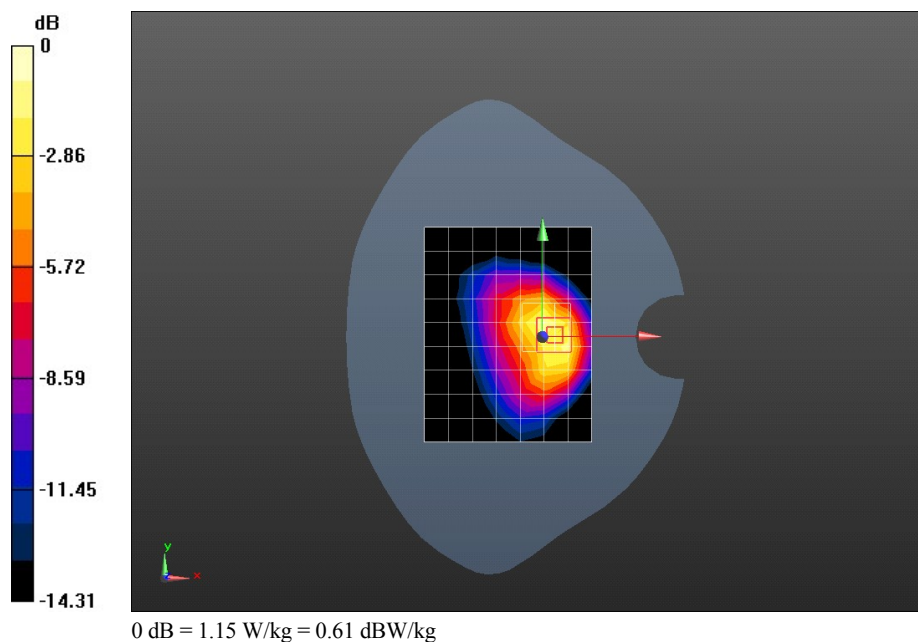

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM850 EGPRS 4TS 251CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-4TS; Frequency: 848.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 849$ MHz; $\sigma = 1.003$ mho/m; $\epsilon_r = 55.847$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.915 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.728 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.957 W/kg; SAR(10 g) = 0.503 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

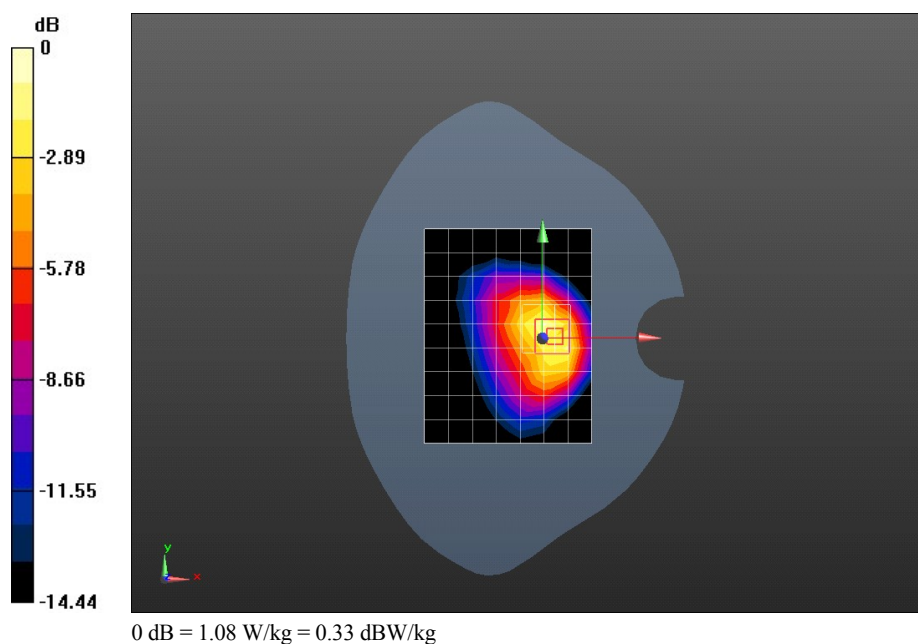

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM850 EGPRS 4TS 190CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-4TS; Frequency: 836.6 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 837$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 55.958$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.873 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.134 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.922 W/kg; SAR(10 g) = 0.485 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

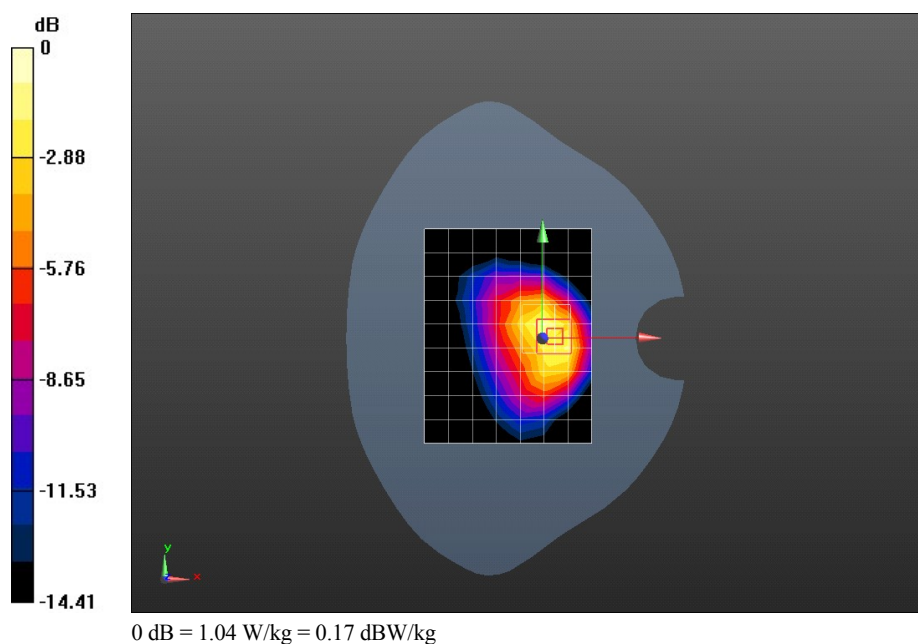

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM850 EGPRS 4TS 128CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-4TS; Frequency: 824.2 MHz; Duty Cycle: 1:2.0797
 Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 56.184$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.807 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 18.327 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.864 W/kg; SAR(10 g) = 0.454 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.974 W/kg

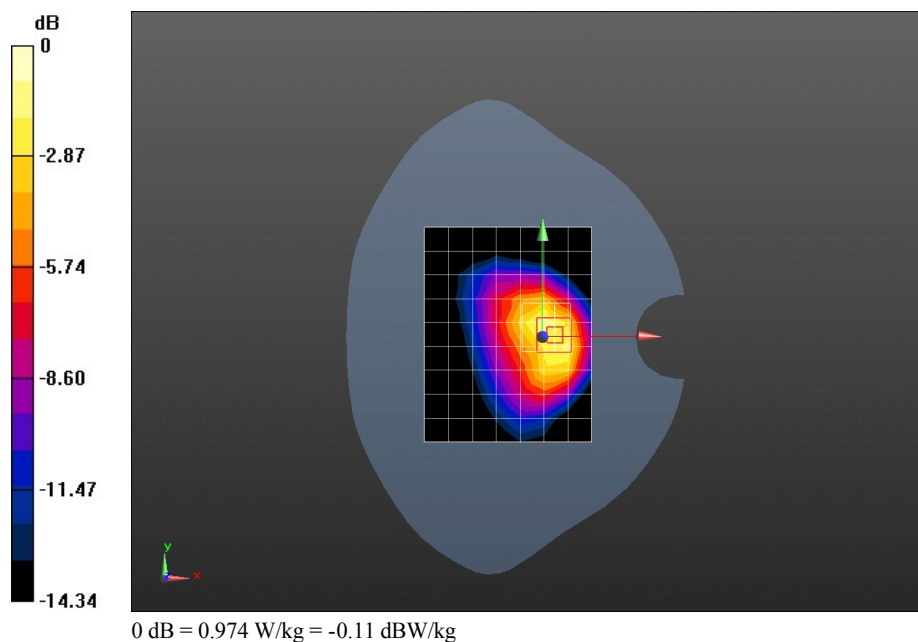

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM1900 GPRS 1TS 661CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 52.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.457 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.281 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.272 W/kg

Maximum value of SAR (measured) = 0.593 W/kg

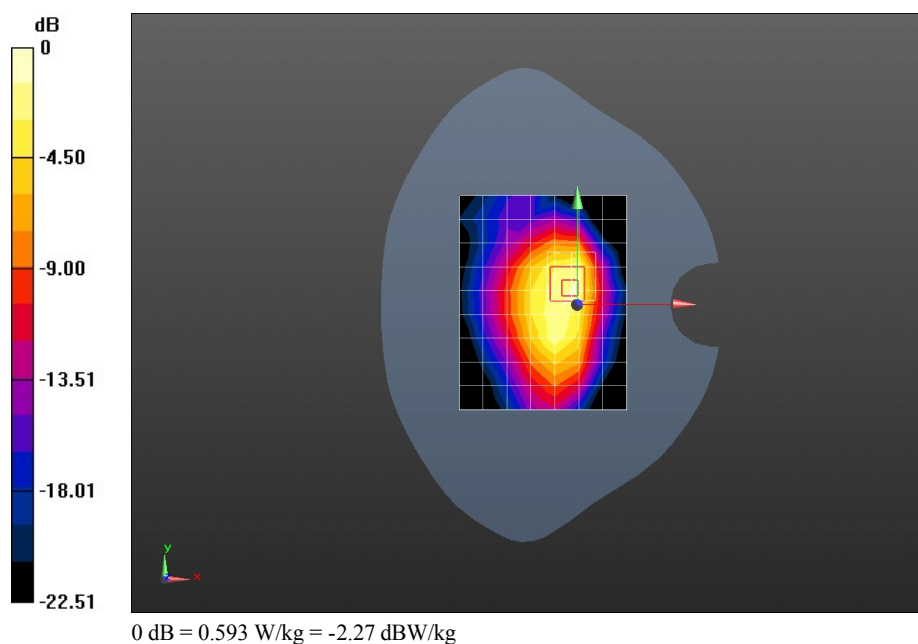

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM1900 GPRS 2TS 661CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 52.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.466 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.732 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.284 W/kg

Maximum value of SAR (measured) = 0.619 W/kg

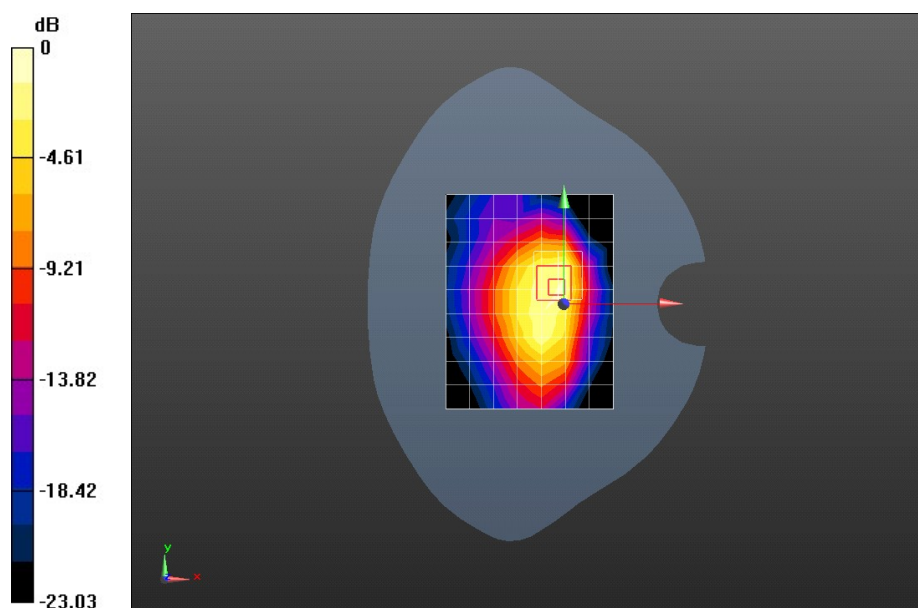

0 dB = 0.619 W/kg = -2.08 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM1900 GPRS 3TS 661CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-3TS; Frequency: 1880 MHz; Duty Cycle: 1:2.77013

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 52.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.555 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.864 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.618 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 0.724 W/kg

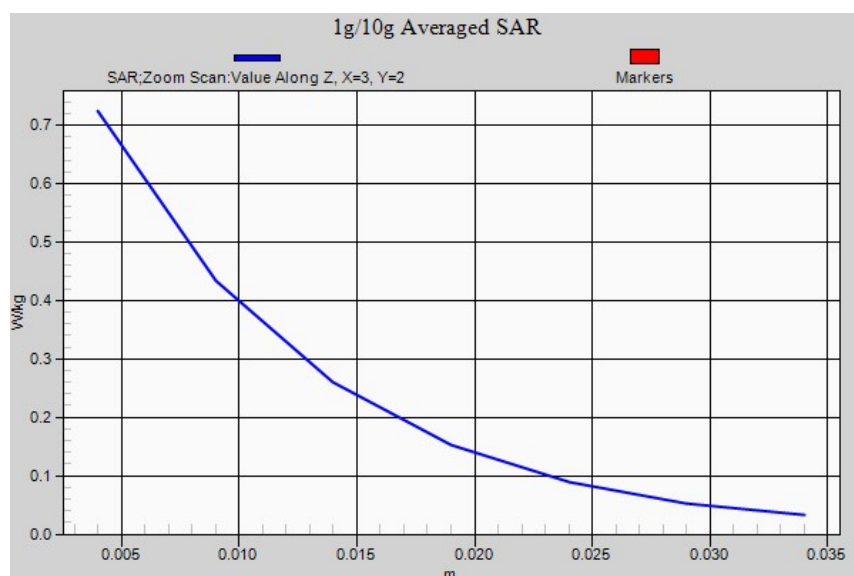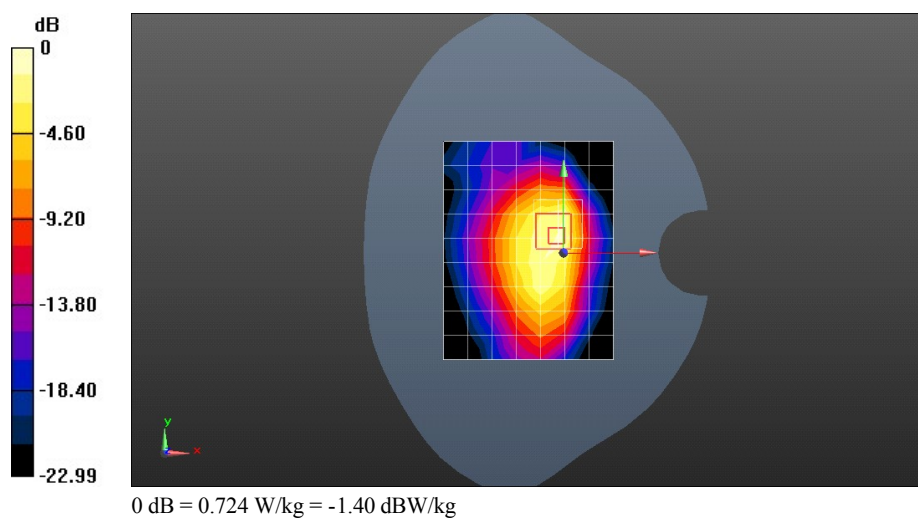

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM1900 GPRS 4TS 661CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-4TS; Frequency: 1880 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 52.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.464 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.340 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.516 W/kg; SAR(10 g) = 0.276 W/kg

Maximum value of SAR (measured) = 0.604 W/kg

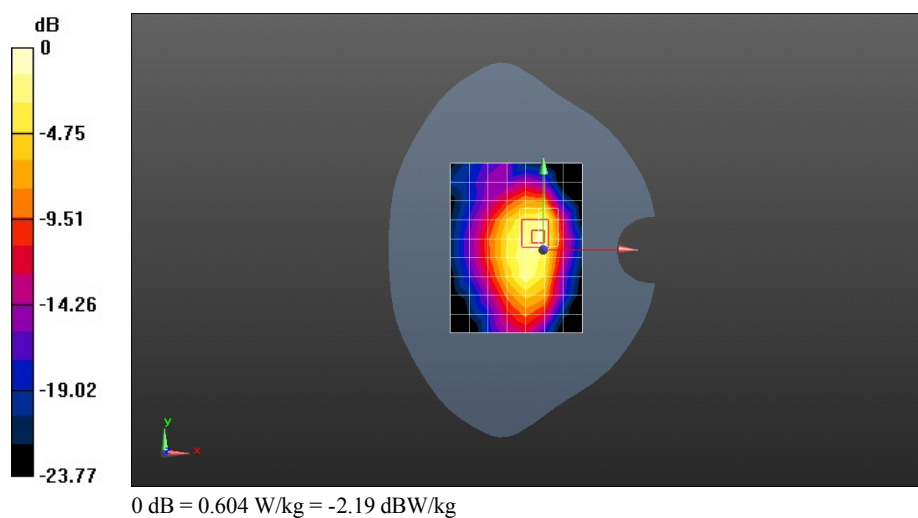

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM1900 GPRS 3TS 661CH Right side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-3TS; Frequency: 1880 MHz; Duty Cycle: 1:2.77013

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 52.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0877 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.731 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0927 W/kg

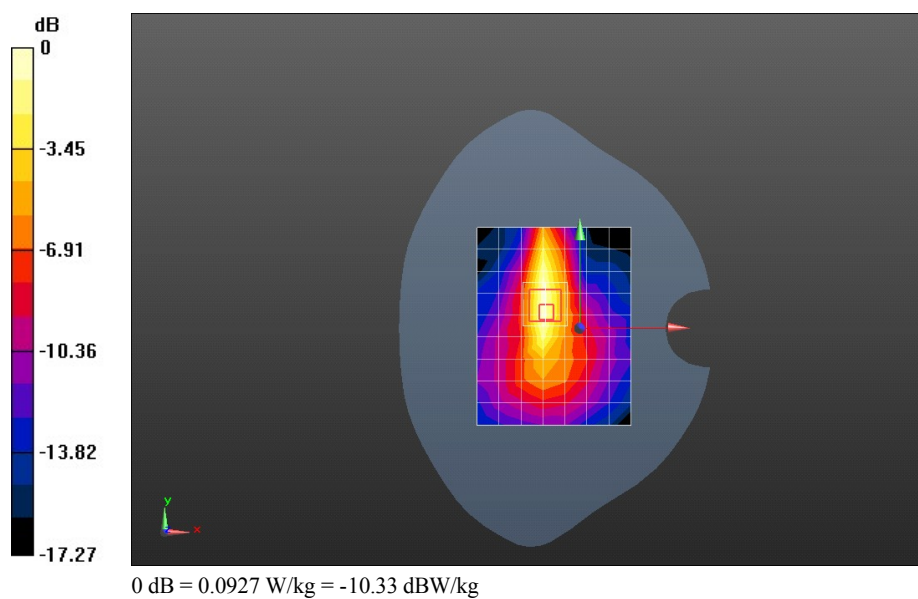

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM1900 GPRS 3TS 661CH Top side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-3TS; Frequency: 1880 MHz; Duty Cycle: 1:2.77013

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 52.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.301 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.293 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.669 W/kg

SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.423 W/kg

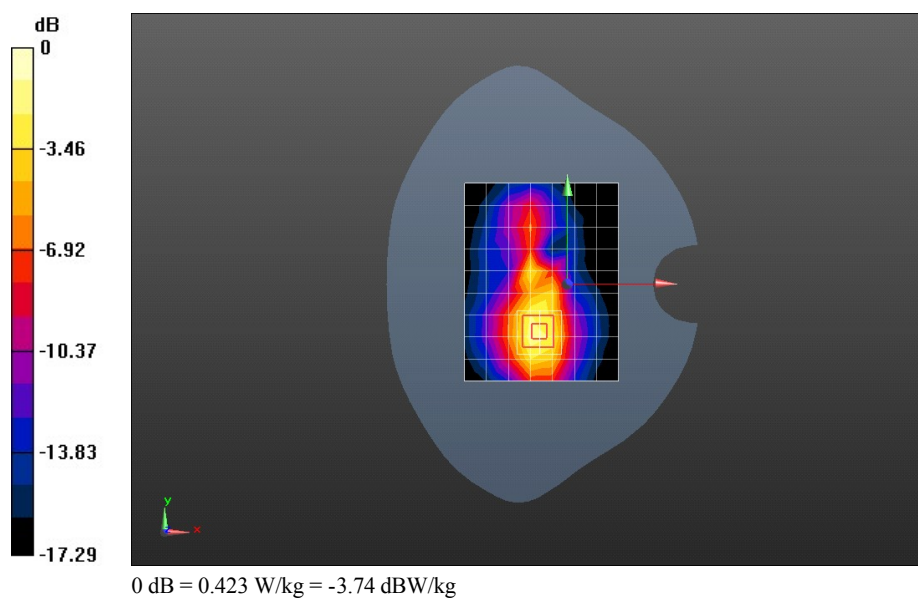

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM1900 EGPRS 1TS 661CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 52.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.566 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.321 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 0.585 W/kg

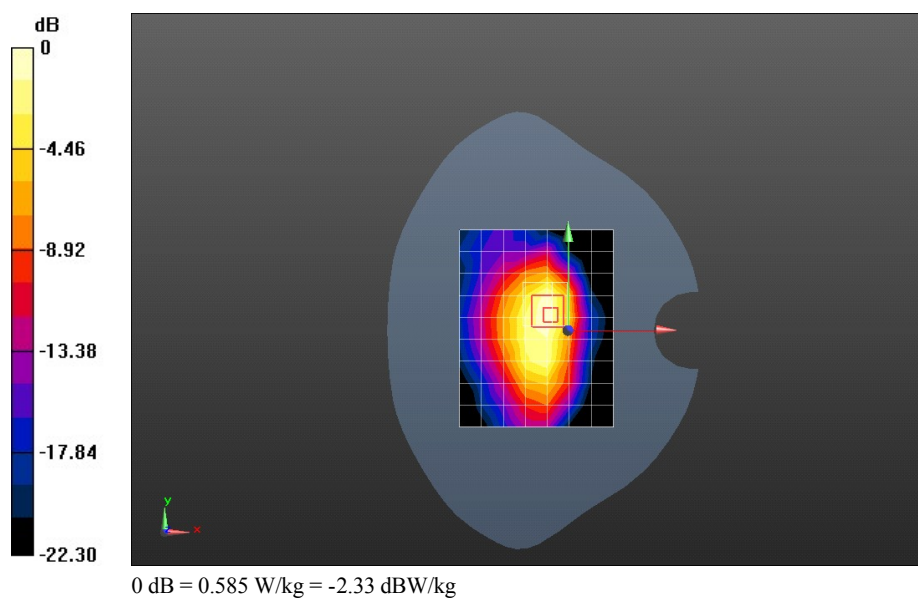

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM1900 EGPRS 2TS 661CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 52.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.598 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.797 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.541 W/kg; SAR(10 g) = 0.290 W/kg

Maximum value of SAR (measured) = 0.630 W/kg

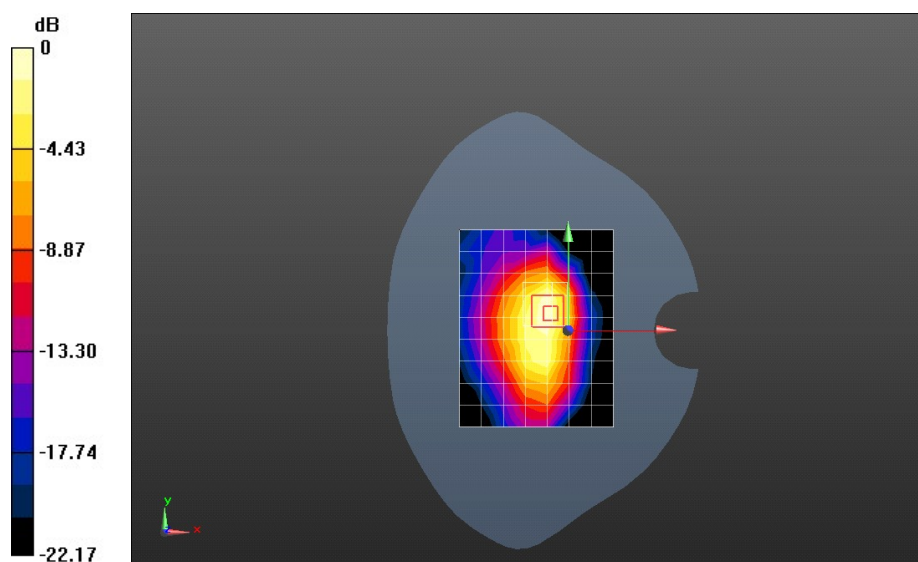

0 dB = 0.630 W/kg = -2.01 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM1900 EGPRS 3TS 661CH Rear side 0mm**DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1**

Communication System: HW-GSM\GPRS\EGPRS-3TS; Frequency: 1880 MHz; Duty Cycle: 1:2.77013

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 52.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.687 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.137 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.618 W/kg; SAR(10 g) = 0.332 W/kg

Maximum value of SAR (measured) = 0.719 W/kg

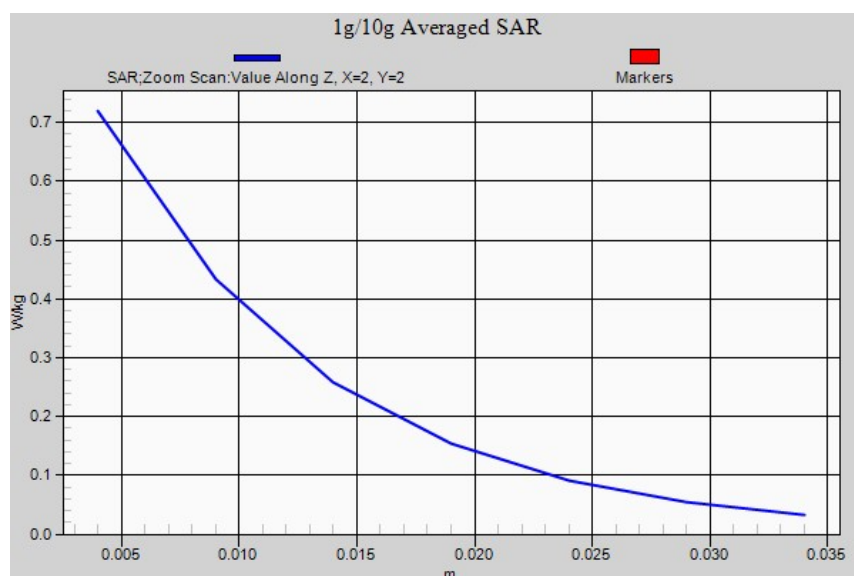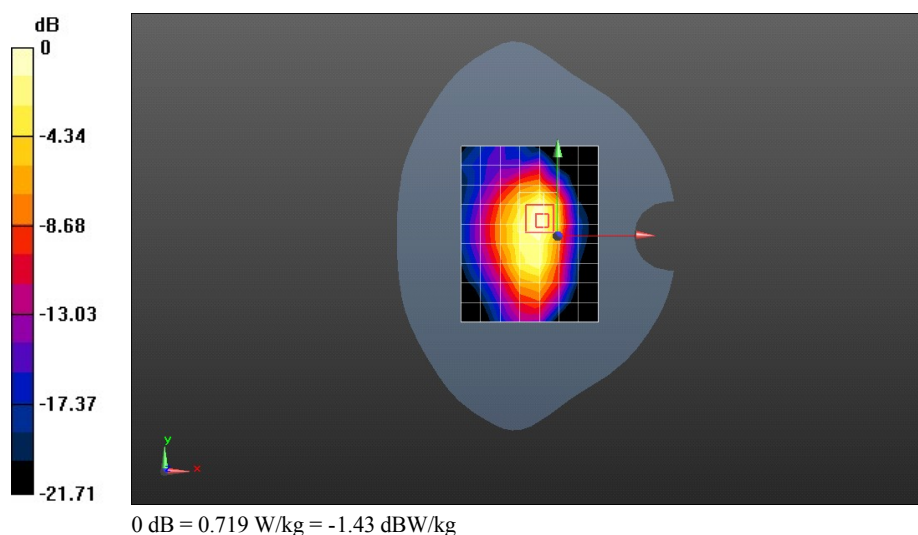

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM1900 EGPRS 3TS 661CH Rear side 0mm-Repeated

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-3TS; Frequency: 1880 MHz; Duty Cycle: 1:2.77013

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 52.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1038
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (10x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.625 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.588 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.319 W/kg

Maximum value of SAR (measured) = 0.672 W/kg

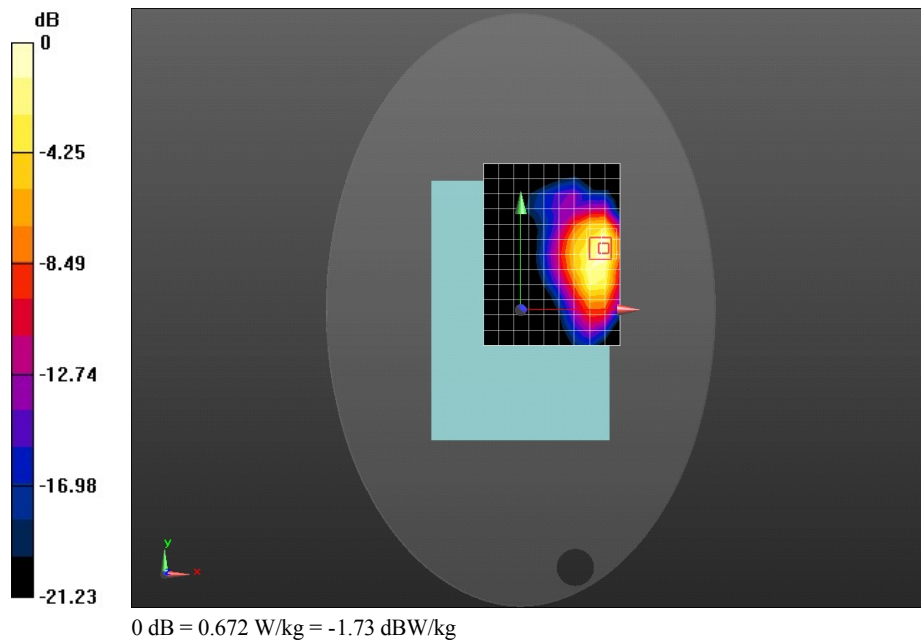

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u GSM1900 EGPRS 4TS 661CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-4TS; Frequency: 1880 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 52.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.565 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.361 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.511 W/kg; SAR(10 g) = 0.274 W/kg

Maximum value of SAR (measured) = 0.591 W/kg

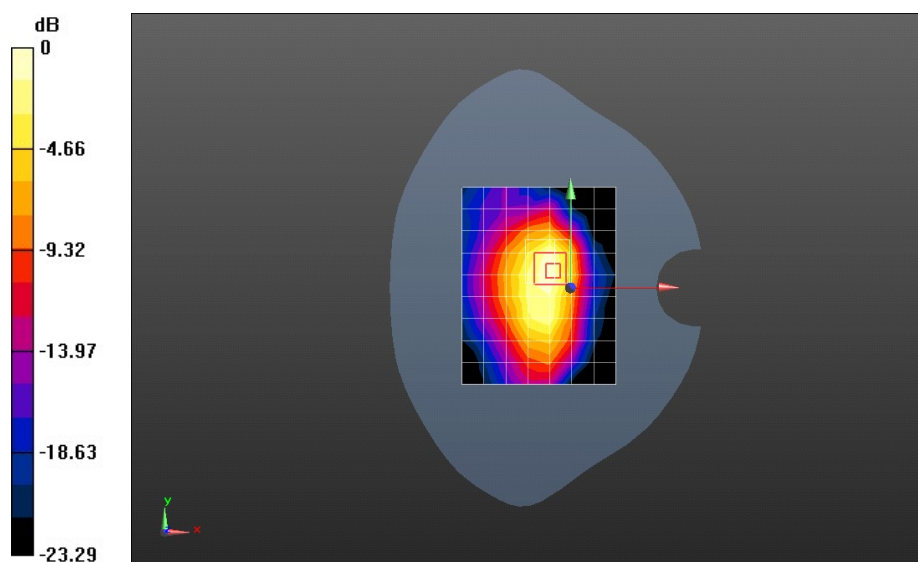

0 dB = 0.591 W/kg = -2.28 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band V 4232CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 846.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.4$ MHz; $\sigma = 1.016$ mho/m; $\epsilon_r = 55.778$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.745 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.282 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.737 W/kg; SAR(10 g) = 0.386 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.820 W/kg

