

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band V 4182CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 56.006$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.792 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 17.046 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.849 W/kg; SAR(10 g) = 0.447 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.960 W/kg

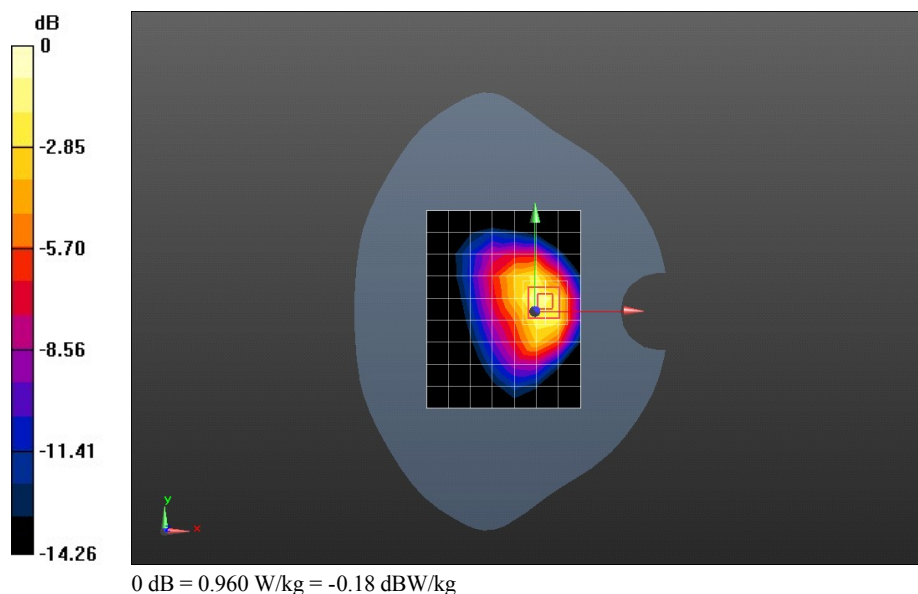

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band V 4133CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 826.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 827$ MHz; $\sigma = 0.991$ mho/m; $\epsilon_r = 55.981$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.717 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.136 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.729 W/kg; SAR(10 g) = 0.383 W/kg

Maximum value of SAR (measured) = 0.815 W/kg

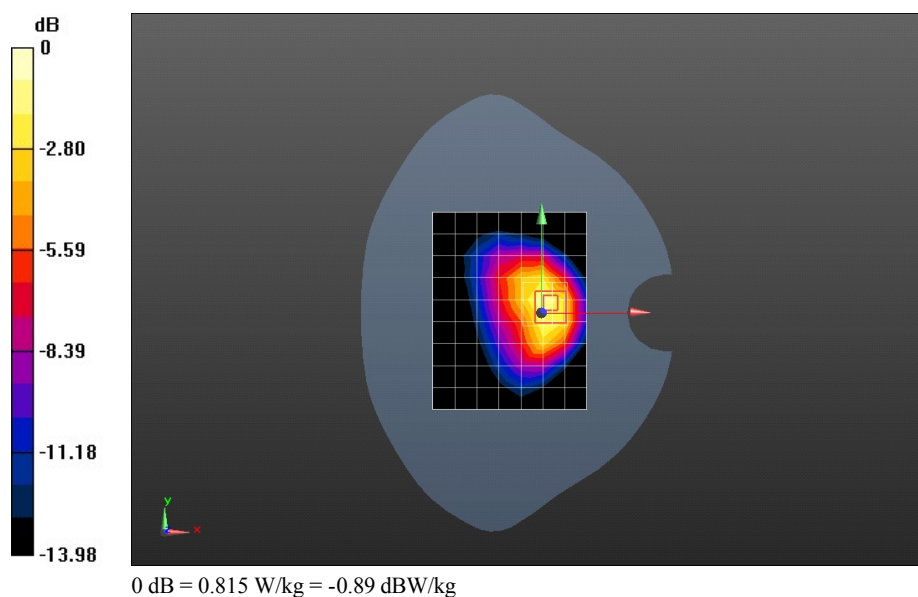

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band V 4182CH Right side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 56.006$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.103 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 8.499 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.071 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.126 W/kg

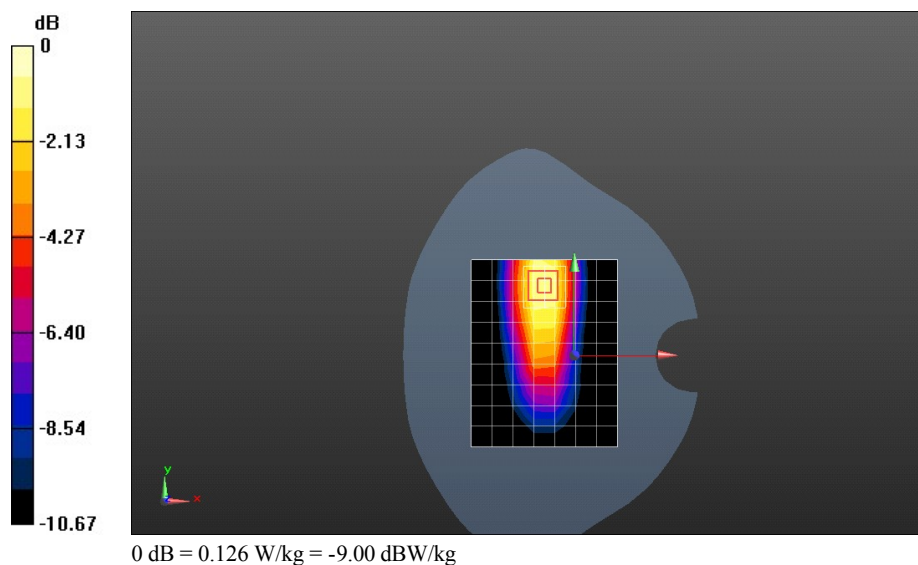

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band V 4182CH Top side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 56.006$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.468 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 18.779 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.219 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.542 W/kg

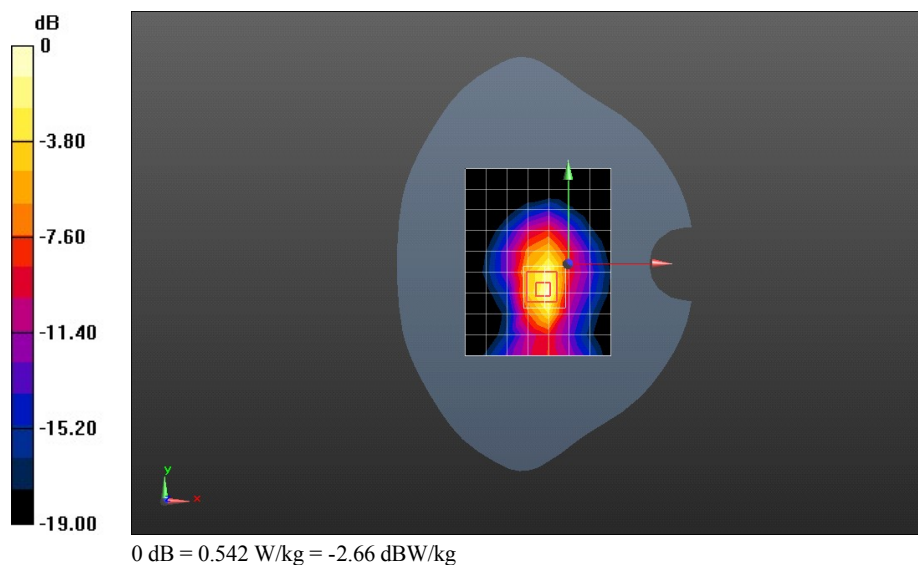

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band V 4182CH Rear side 0mm on HSDPA

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 56.006$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.826 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm



Reference Value = 15.972 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 0.913 W/kg; SAR(10 g) = 0.481 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.03 W/kg

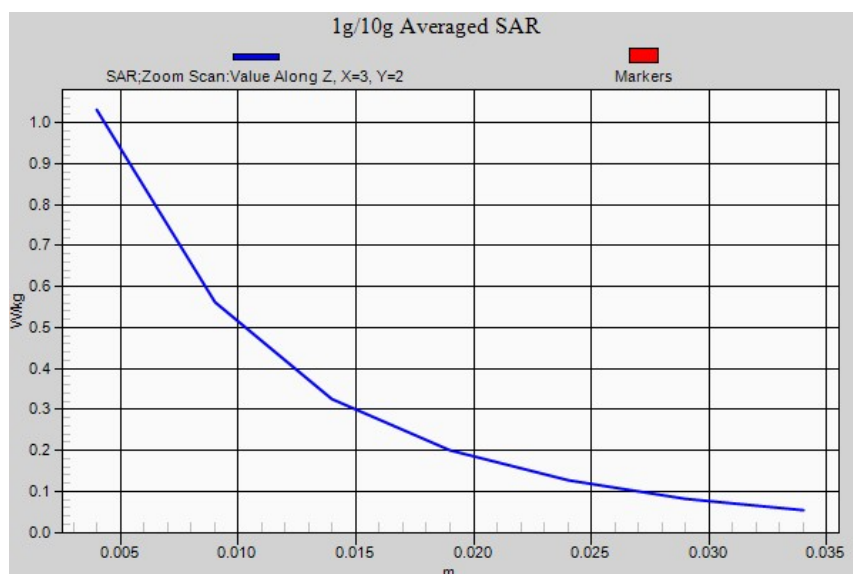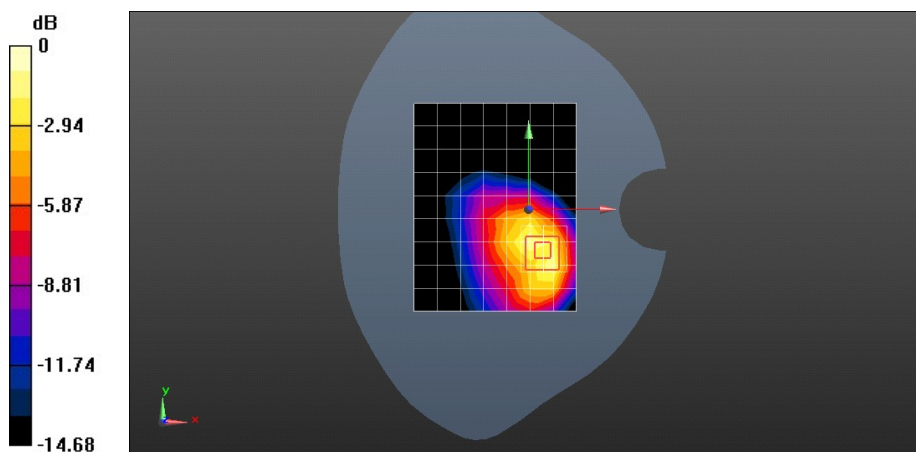

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band V 4182CH Rear side 0mm on HSDPA-repeated

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 56.006$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1038
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (10x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.865 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 2.701 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.822 W/kg; SAR(10 g) = 0.473 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.909 W/kg

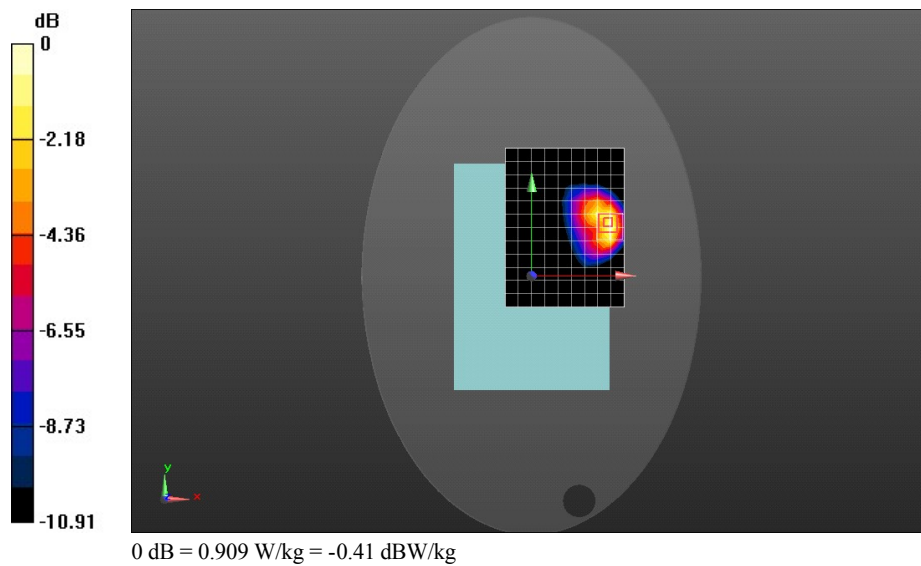

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band V 4182CH Rear side 0mm on HSUPA

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 56.006$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.794 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 16.520 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.764 W/kg; SAR(10 g) = 0.400 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.841 W/kg

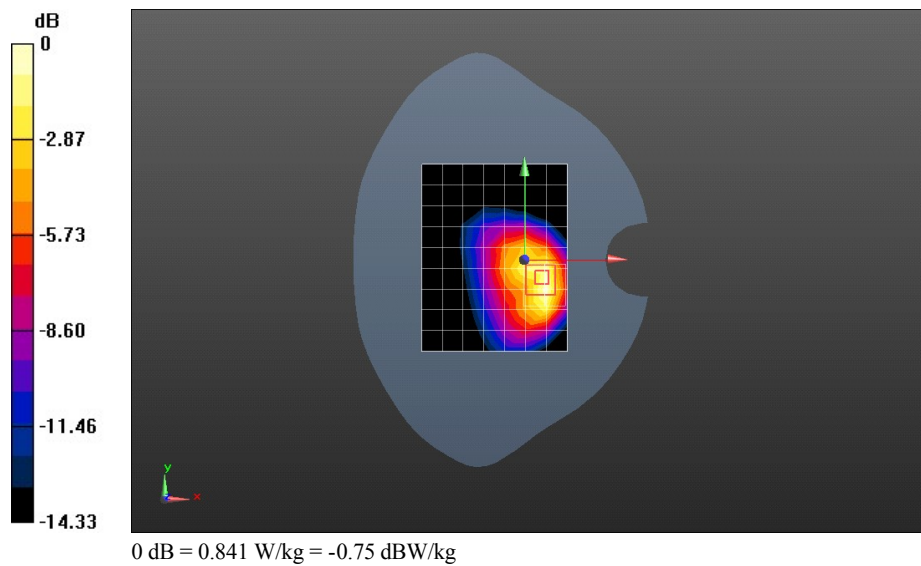

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band II 9537CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1907.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.4$ MHz; $\sigma = 1.565$ mho/m; $\epsilon_r = 53.103$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.606 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 17.567 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.769 W/kg; SAR(10 g) = 0.395 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.900 W/kg

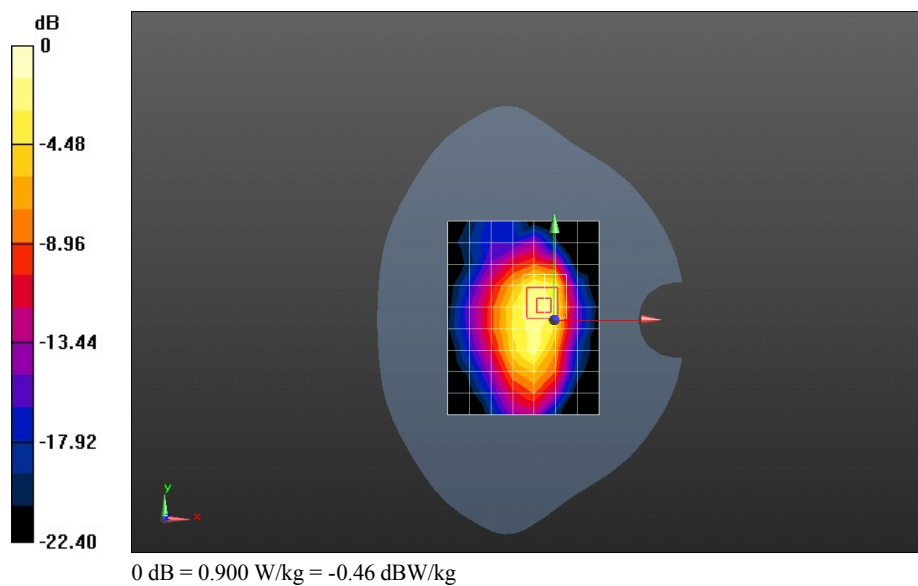

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band II 9400CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 52.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.642 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.356 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.717 W/kg; SAR(10 g) = 0.386 W/kg

Maximum value of SAR (measured) = 0.844 W/kg

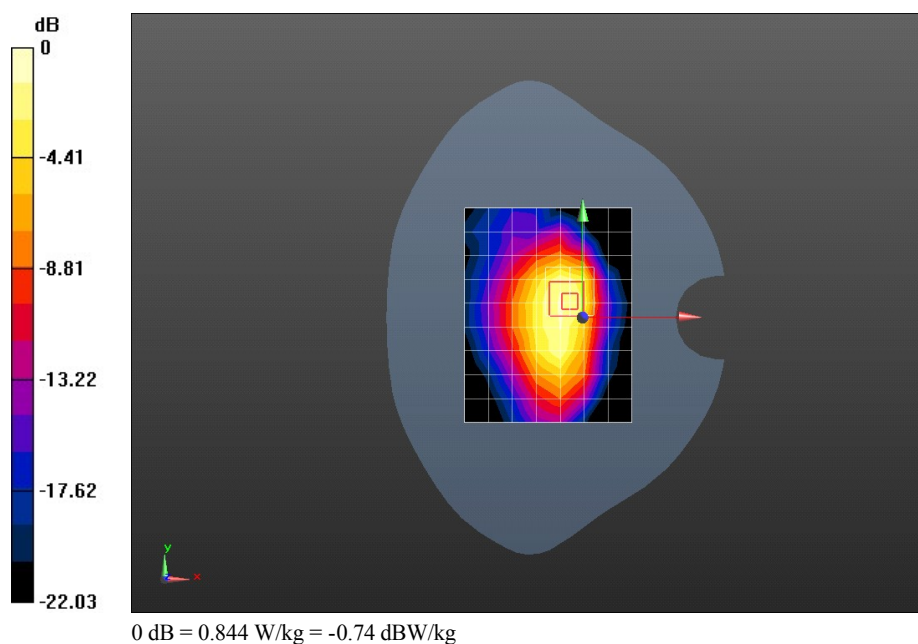

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band II 9263CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1853$ MHz; $\sigma = 1.488$ mho/m; $\epsilon_r = 52.814$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.822 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.011 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.875 W/kg; SAR(10 g) = 0.483 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

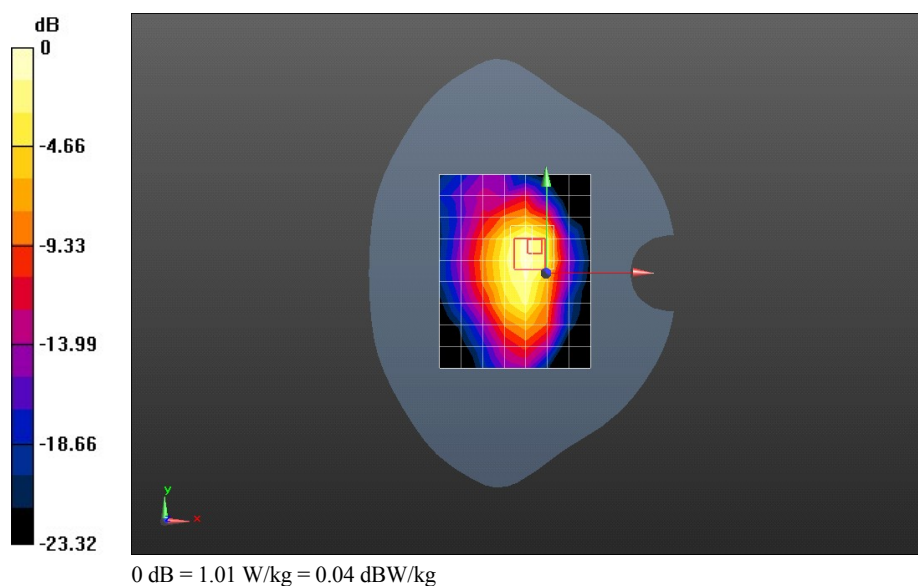

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band II 9400CH Right side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 52.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0719 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.779 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0909 W/kg

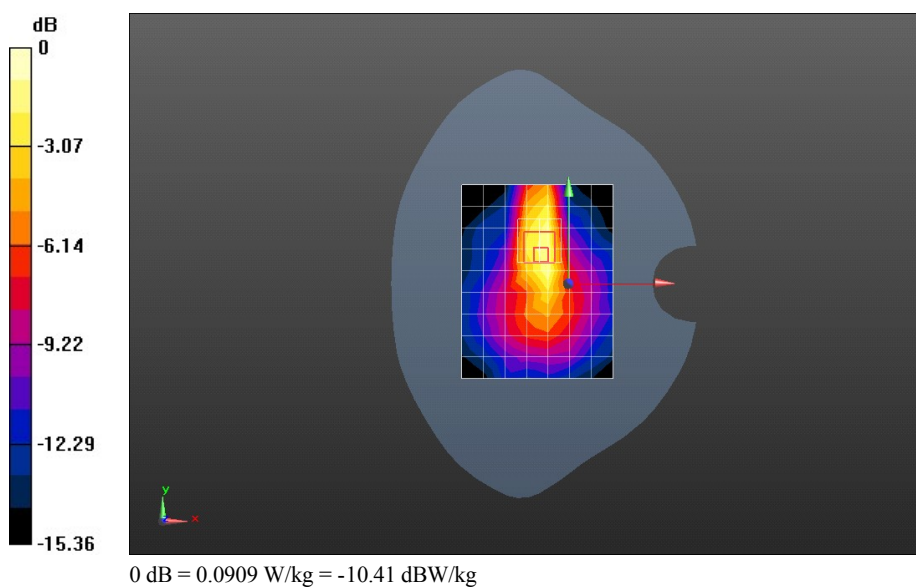

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band II 9400CH Top side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 52.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (7x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.328 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.027 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.545 W/kg

SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.330 W/kg

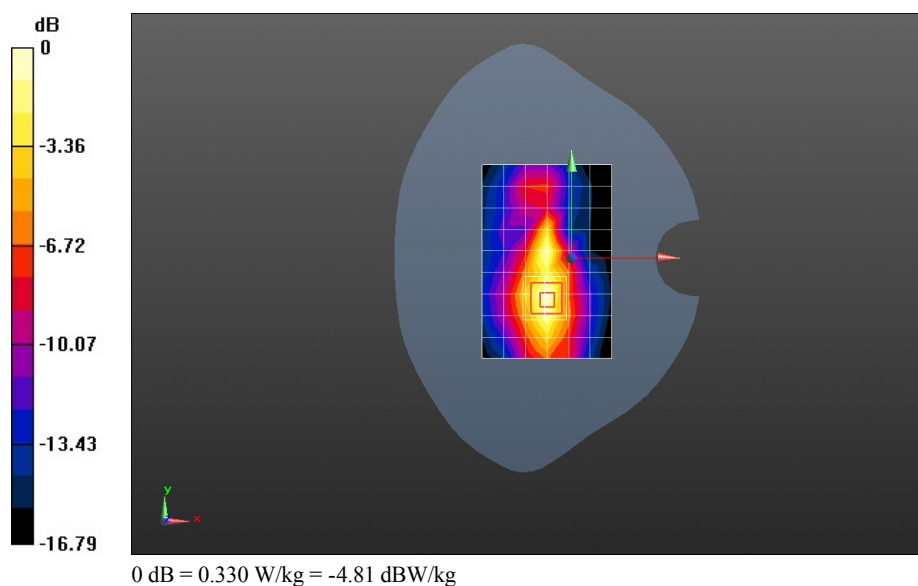

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band II 9263CH Rear side 0mm on HSDPA

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1853$ MHz; $\sigma = 1.488$ mho/m; $\epsilon_r = 52.814$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.09 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 24.997 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.44 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.572 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

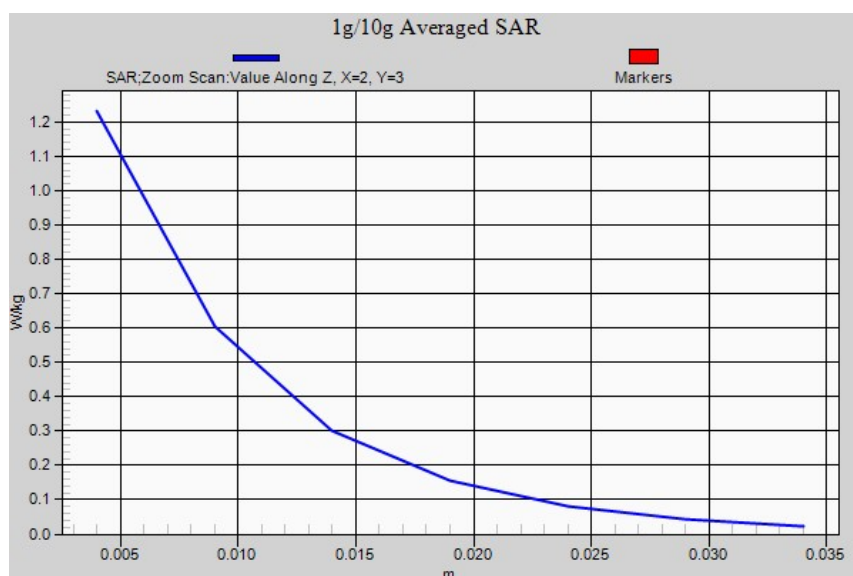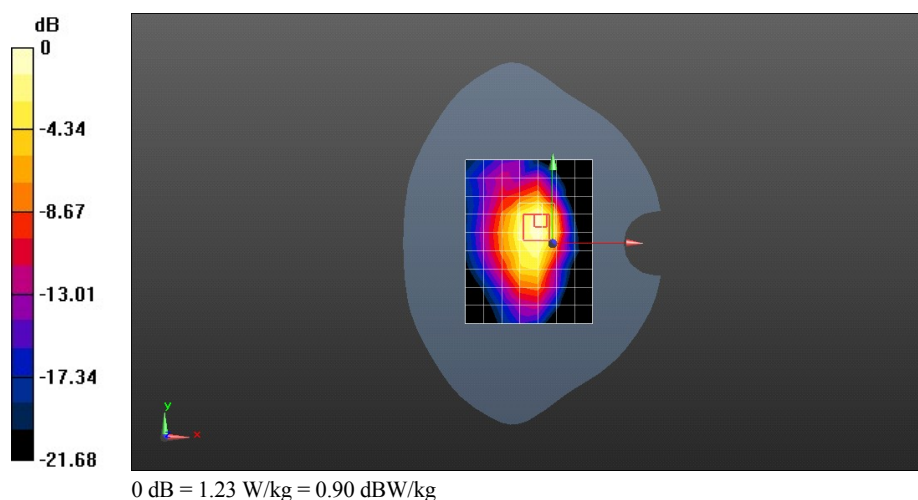

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band II 9263CH Rear side 0mm on HSDPA-repeated

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1853$ MHz; $\sigma = 1.488$ mho/m; $\epsilon_r = 52.814$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1038
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (10x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.859 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 25.523V/m; Power Drift = -0.160 dB

Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.565 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

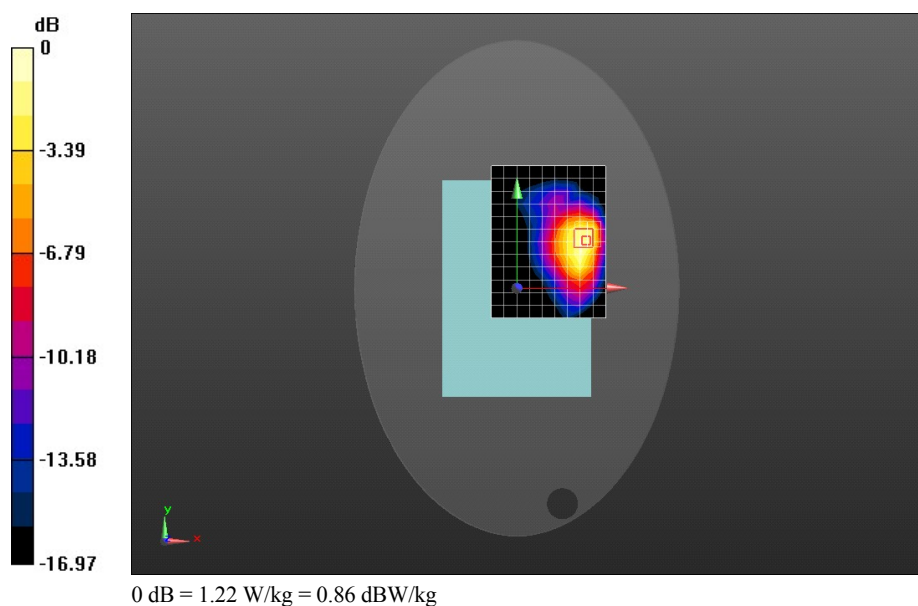

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u UMTS Band II 9263CH Rear side 0mm on HSUPA

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1853$ MHz; $\sigma = 1.488$ mho/m; $\epsilon_r = 52.814$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.970 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.430 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.947 W/kg; SAR(10 g) = 0.506 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

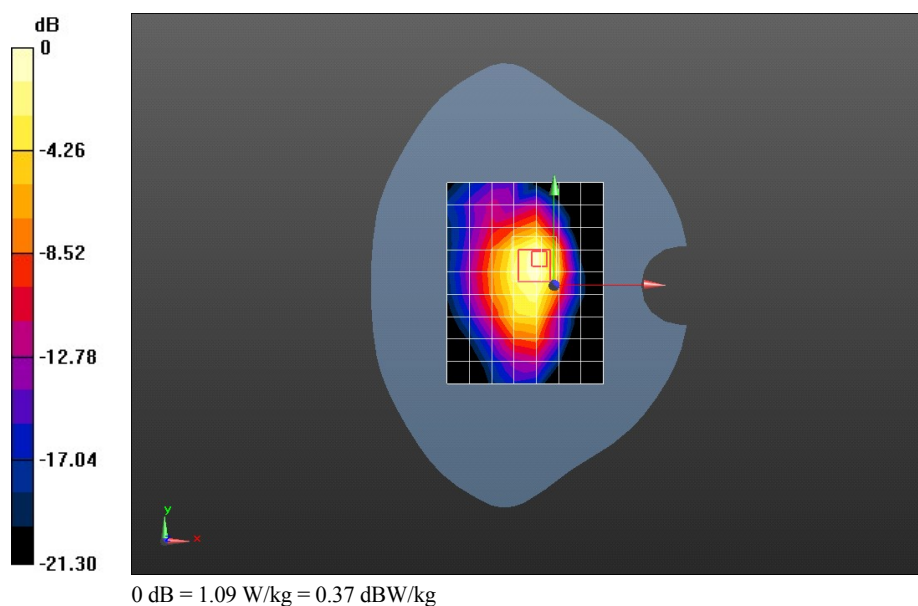

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u WiFi 802.11b 11CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.996$ mho/m; $\epsilon_r = 52.213$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -13.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1038
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (10x12x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.837 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.686 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 0.814 W/kg; SAR(10 g) = 0.315 W/kg

Maximum value of SAR (measured) = 0.916 W/kg

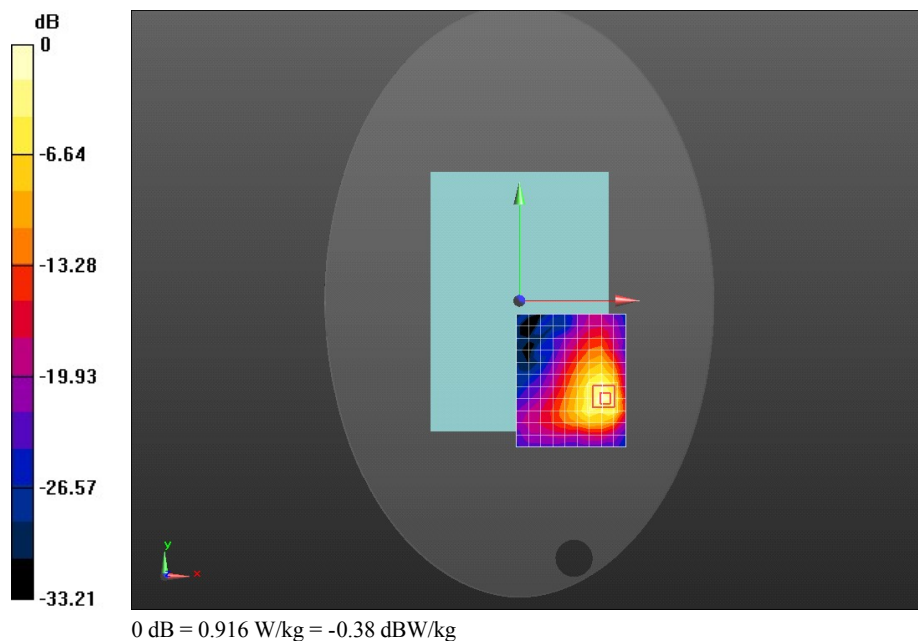

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u WiFi 802.11b 6CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.968$ mho/m; $\epsilon_r = 52.346$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -13.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1038
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (10x12x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.794 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.587 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 0.819 W/kg; SAR(10 g) = 0.316 W/kg

Maximum value of SAR (measured) = 0.979 W/kg

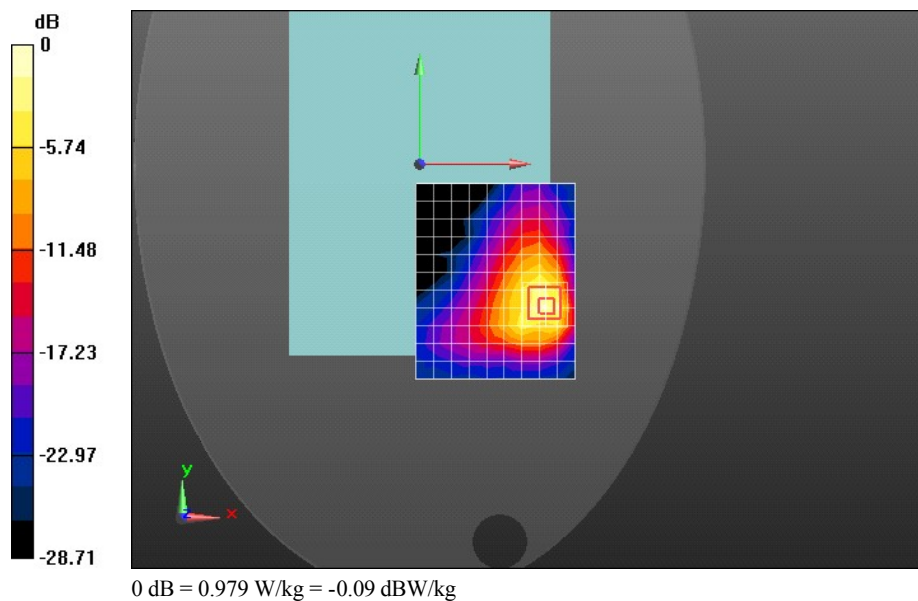

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u WiFi 802.11b 6CH Rear side 0mm-Repeated**DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1**

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.968$ mho/m; $\epsilon_r = 52.346$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -13.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1038
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (10x12x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.937 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.711 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.64 W/kg

SAR(1 g) = 0.922 W/kg; SAR(10 g) = 0.353 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

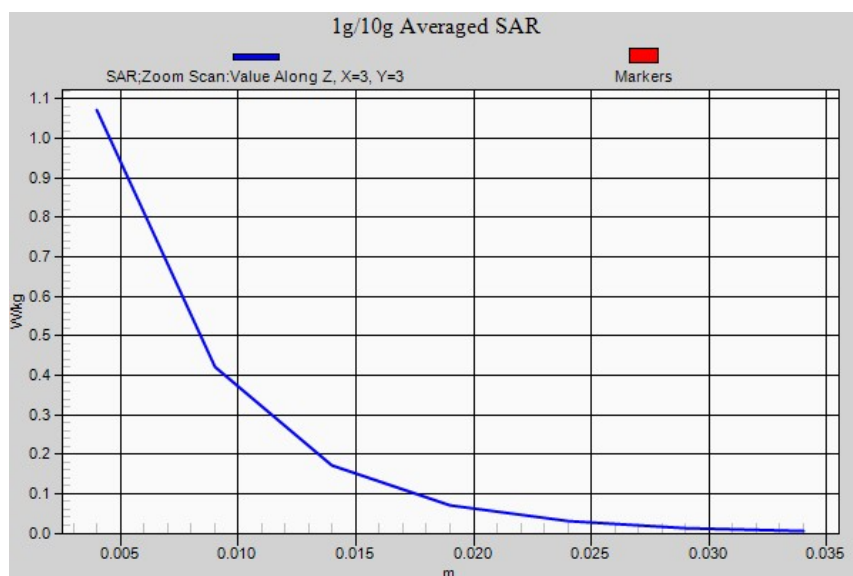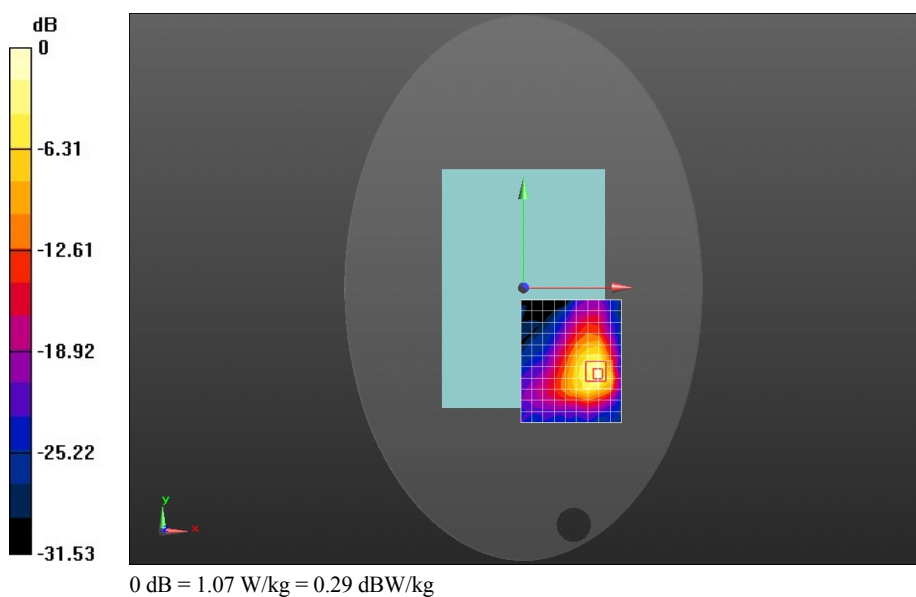

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u WiFi 802.11b 1CH Rear side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.942$ mho/m; $\epsilon_r = 52.478$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1038
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (19x25x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.630 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.700 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.24 W/kg

SAR(1 g) = 0.783 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 0.865 W/kg

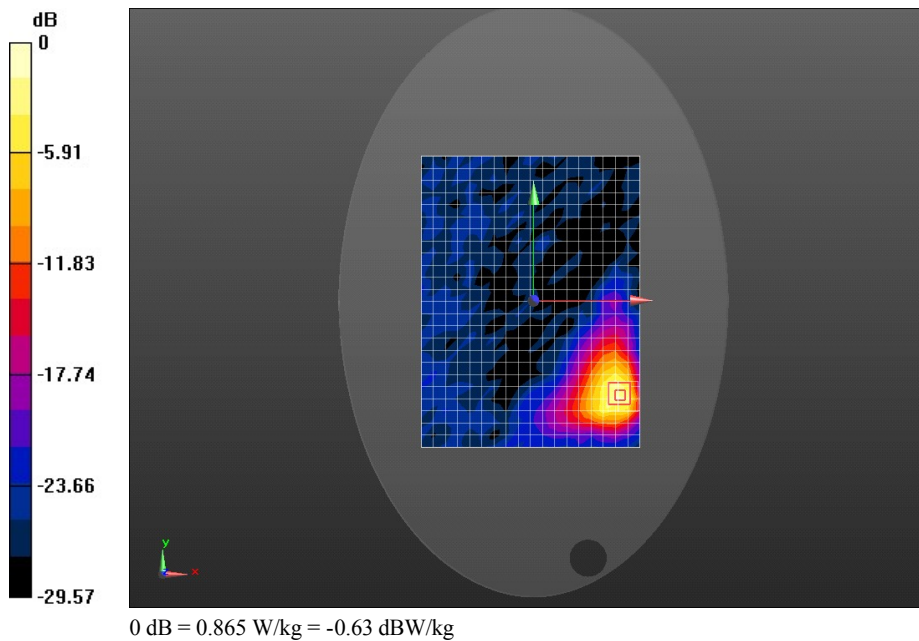

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u WiFi 802.11b 1CH Left side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.942$ mho/m; $\epsilon_r = 52.478$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1038
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (7x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.123 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.318 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.139 W/kg

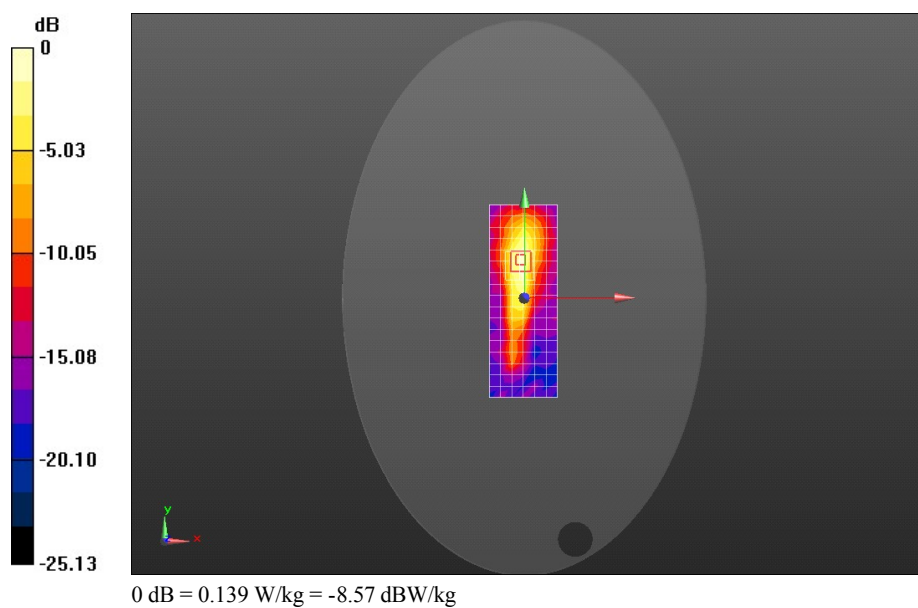

Test Laboratory: HUAWEI SAR/HAC Lab

S10-202u WiFi 802.11b 1CH Top side 0mm

DUT: S10-202u; Type: HUAWEI MediaPad 10 Link; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.942$ mho/m; $\epsilon_r = 52.478$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1038
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/Body/Area Scan (9x25x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.206 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.858 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.435 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.221 W/kg

