

Figure 75 Z-Scan at power reference point (Right Hand Touch Cheek GSM 1900 Channel 512)

GSM 1900 Right Tilt High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Tilt High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.915 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.735 mW/g; SAR(10 g) = 0.445 mW/g

Maximum value of SAR (measured) = 0.802 mW/g

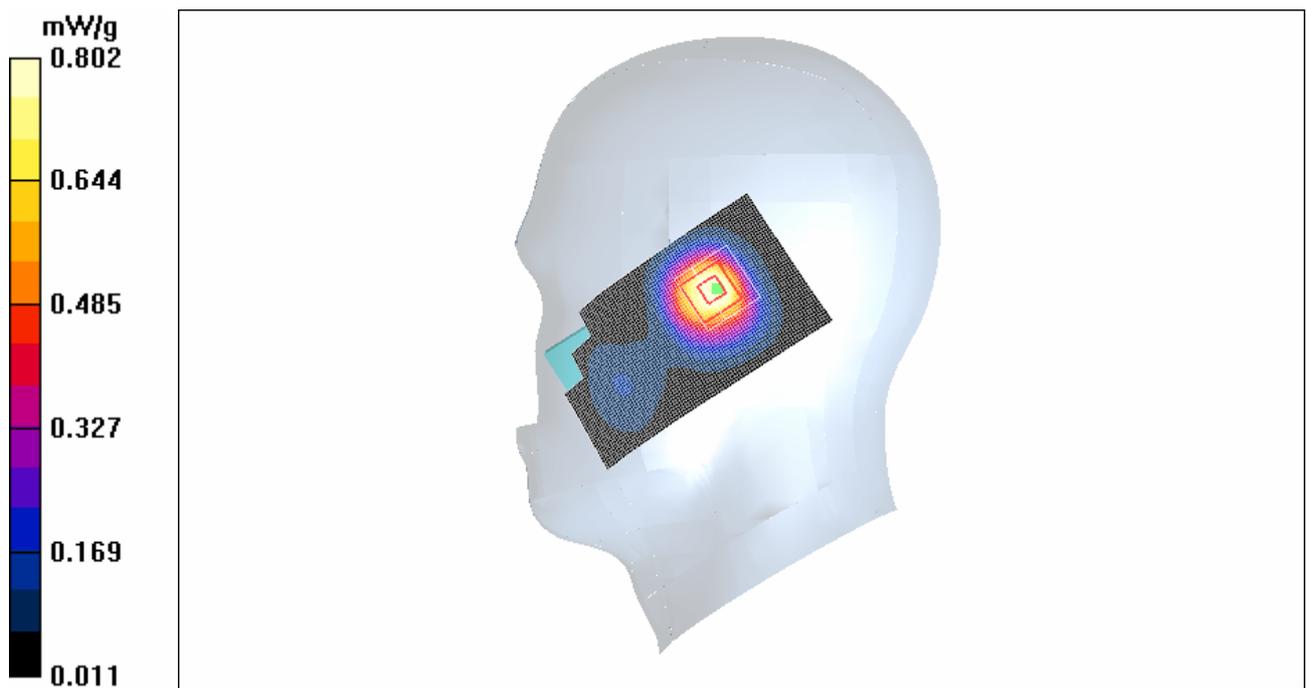


Figure 76 Right Hand Tilt 15° GSM 1900 Channel 810

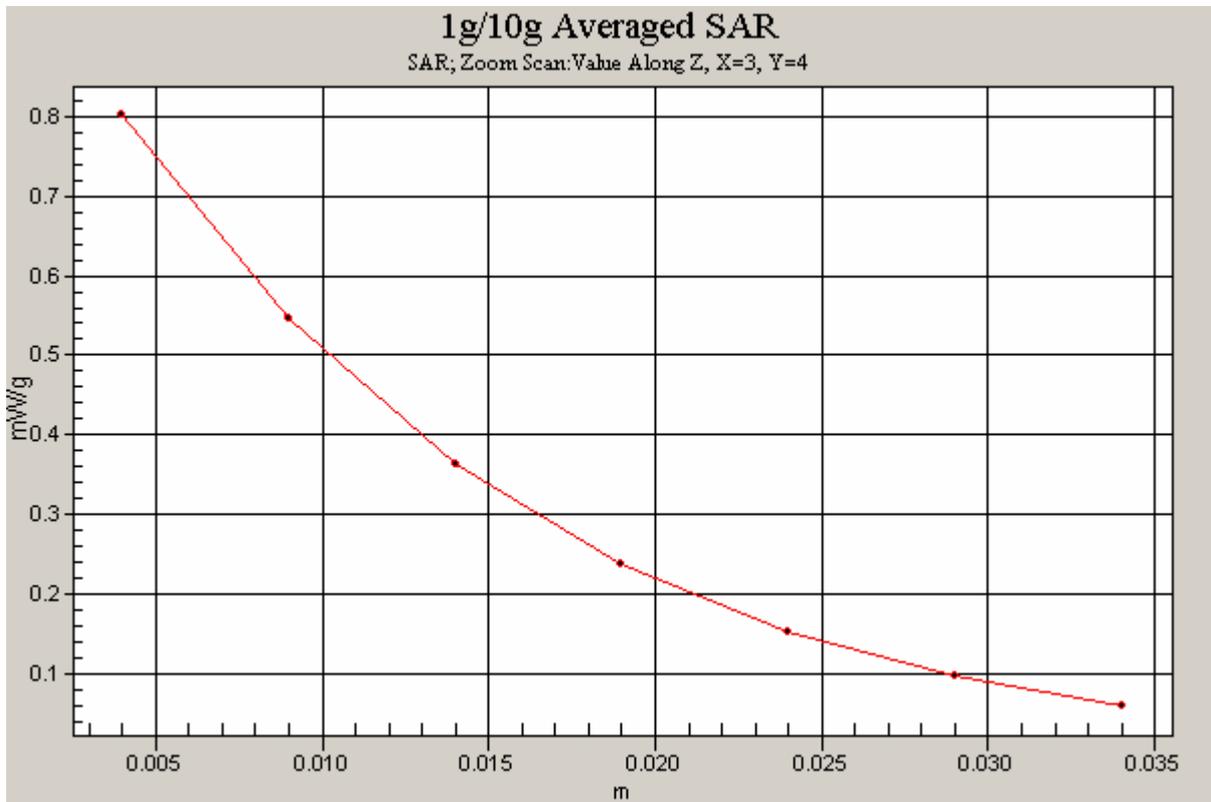


Figure 77 Z-Scan at power reference point (Right Hand Tilt 15° GSM 1900 Channel 810)

GSM 1900 Right Tilt Middle

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Tilt Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.807 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.9 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.916 W/kg

SAR(1 g) = 0.656 mW/g; SAR(10 g) = 0.401 mW/g

Maximum value of SAR (measured) = 0.713 mW/g

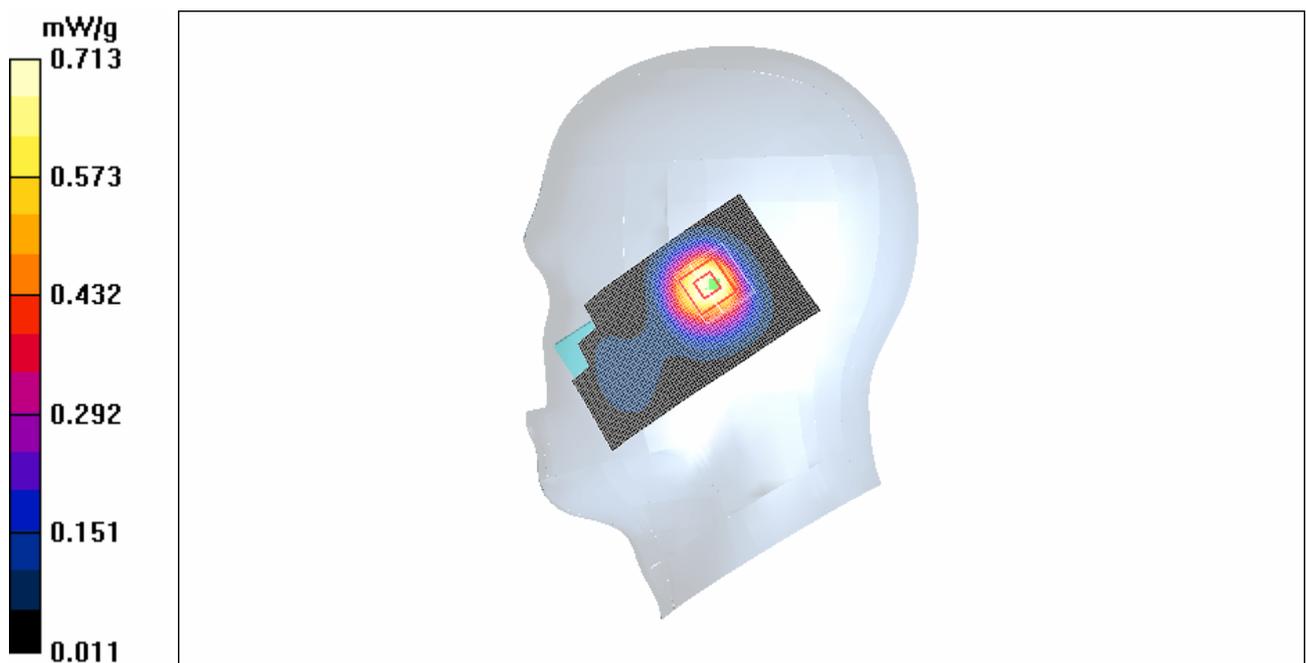


Figure 78 Right Hand Tilt 15° GSM 1900 Channel 661

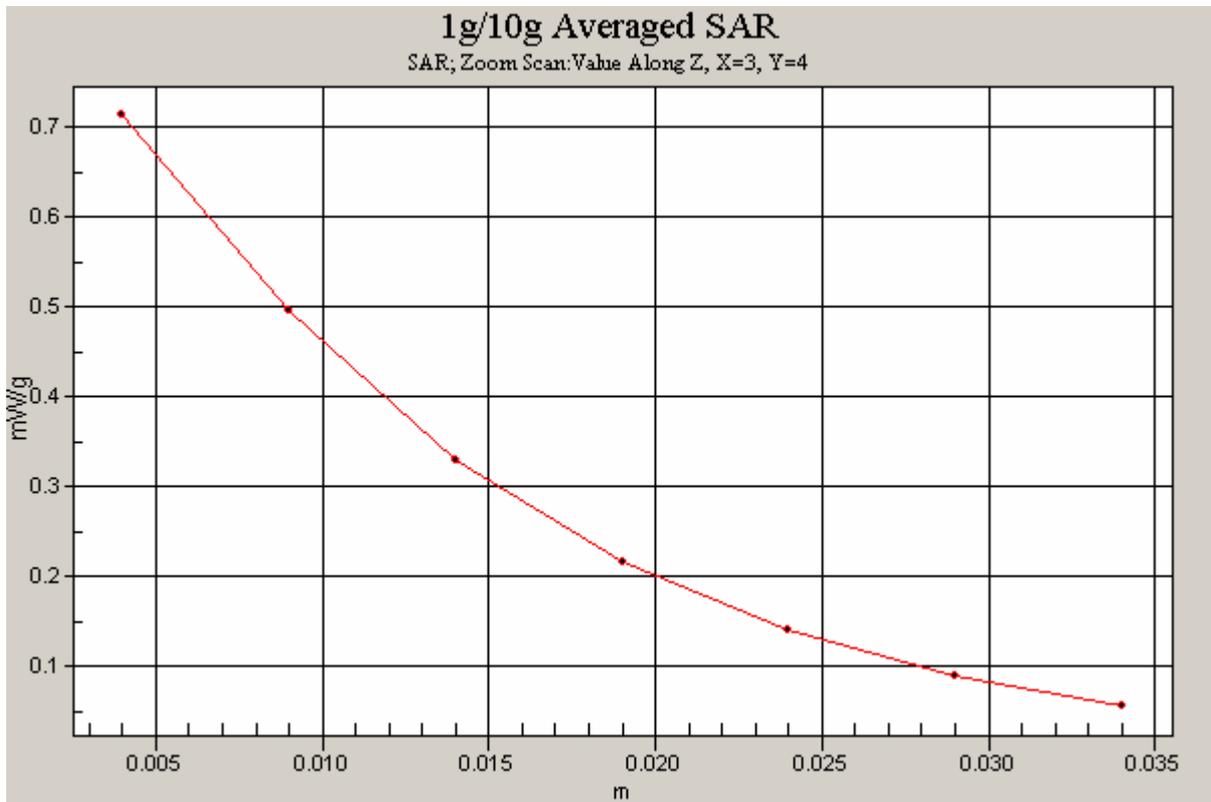


Figure 79 Z-Scan at power reference point (Right Hand Tilt 15° GSM 1900 Channel 661)

GSM 1900 Right Tilt Low

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Tilt Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.465 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.381 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.417 mW/g

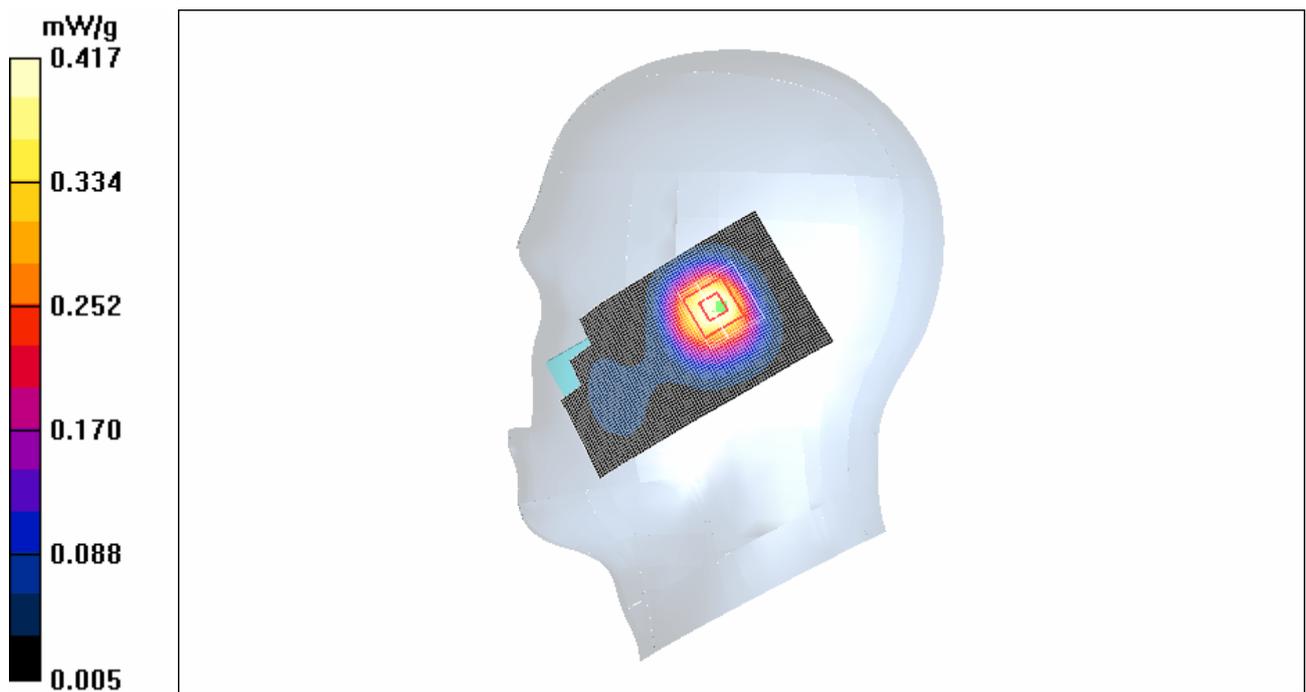


Figure 80 Right Hand Tilt 15° GSM 1900 Channel 512

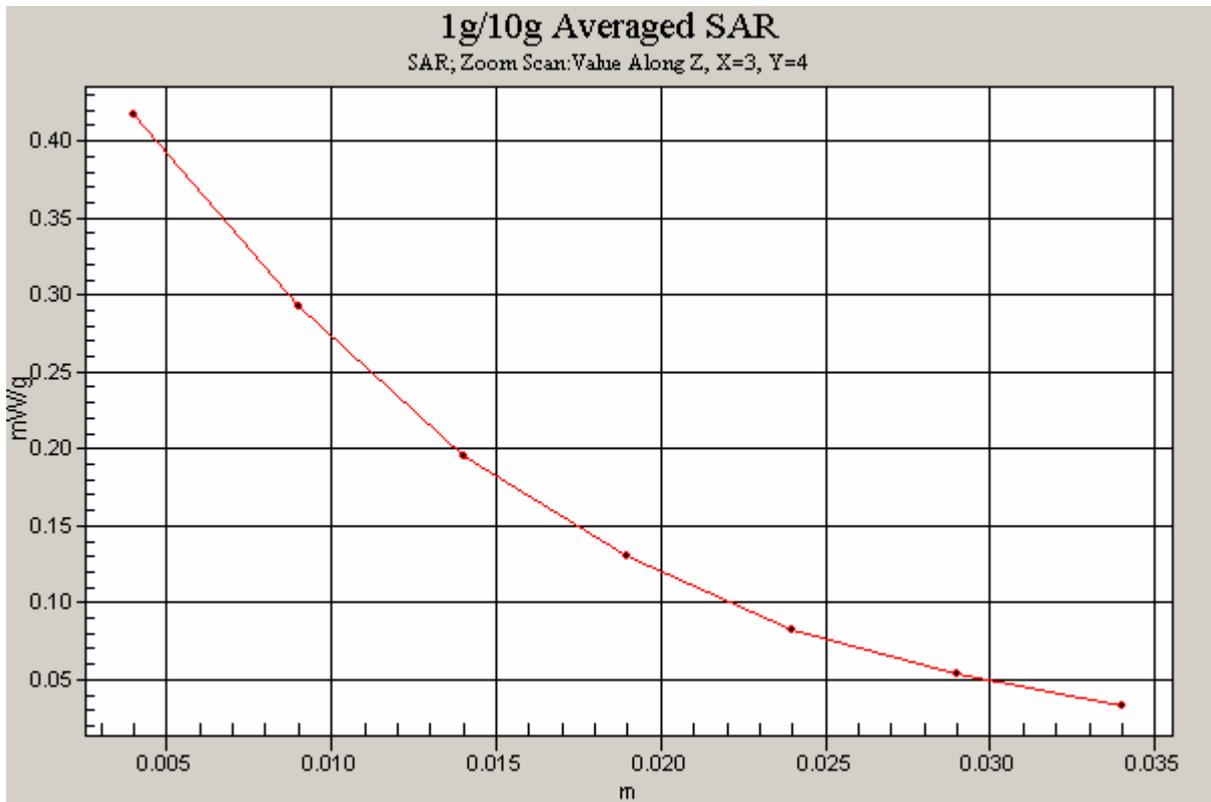


Figure 81 Z-Scan at power reference point (Right Hand Tilt 15° GSM 1900 Channel 512)

GSM 1900 Towards Ground High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.667 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.956 W/kg

SAR(1 g) = 0.576 mW/g; SAR(10 g) = 0.337 mW/g

Maximum value of SAR (measured) = 0.634 mW/g

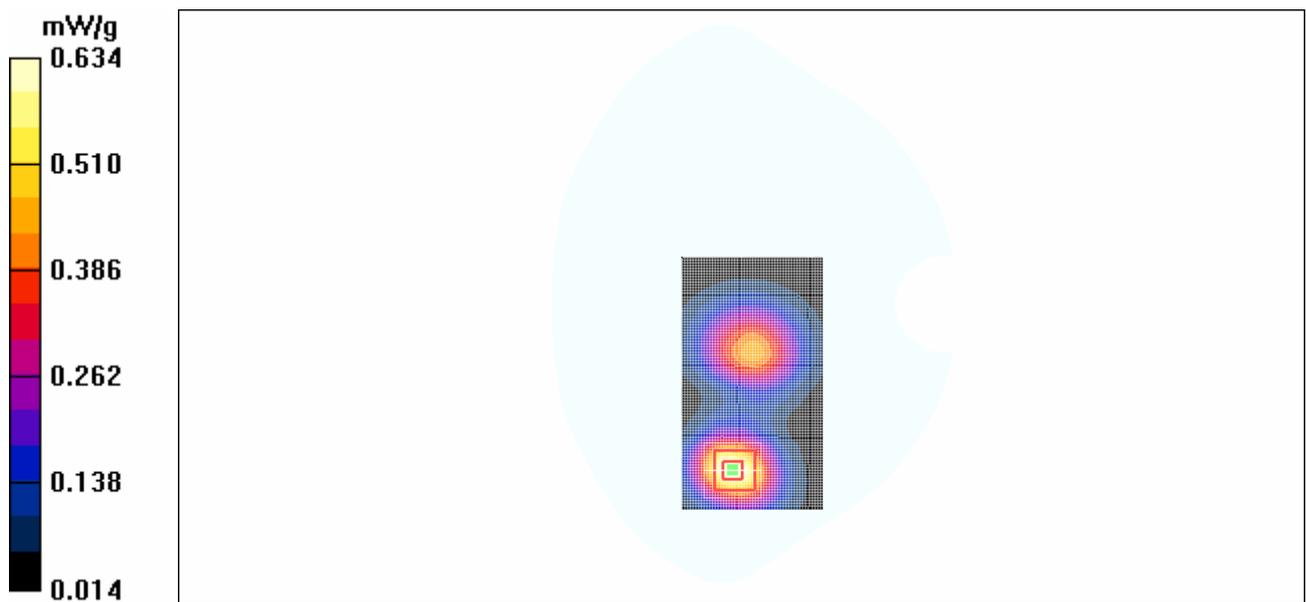


Figure 82 Body, Towards Ground, GSM 1900 Channel 810

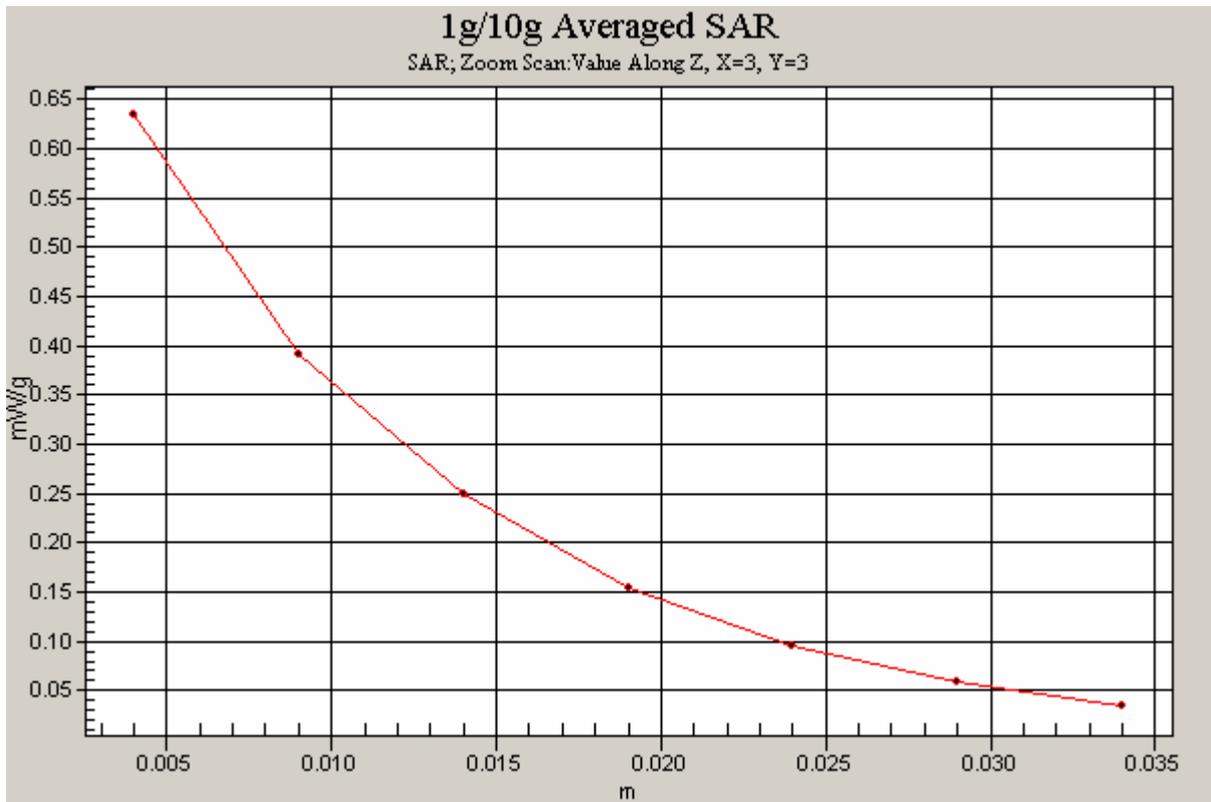


Figure 83 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 Channel 810)

GSM 1900 Towards Ground Middle

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.558 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.806 W/kg

SAR(1 g) = 0.493 mW/g; SAR(10 g) = 0.292 mW/g

Maximum value of SAR (measured) = 0.538 mW/g

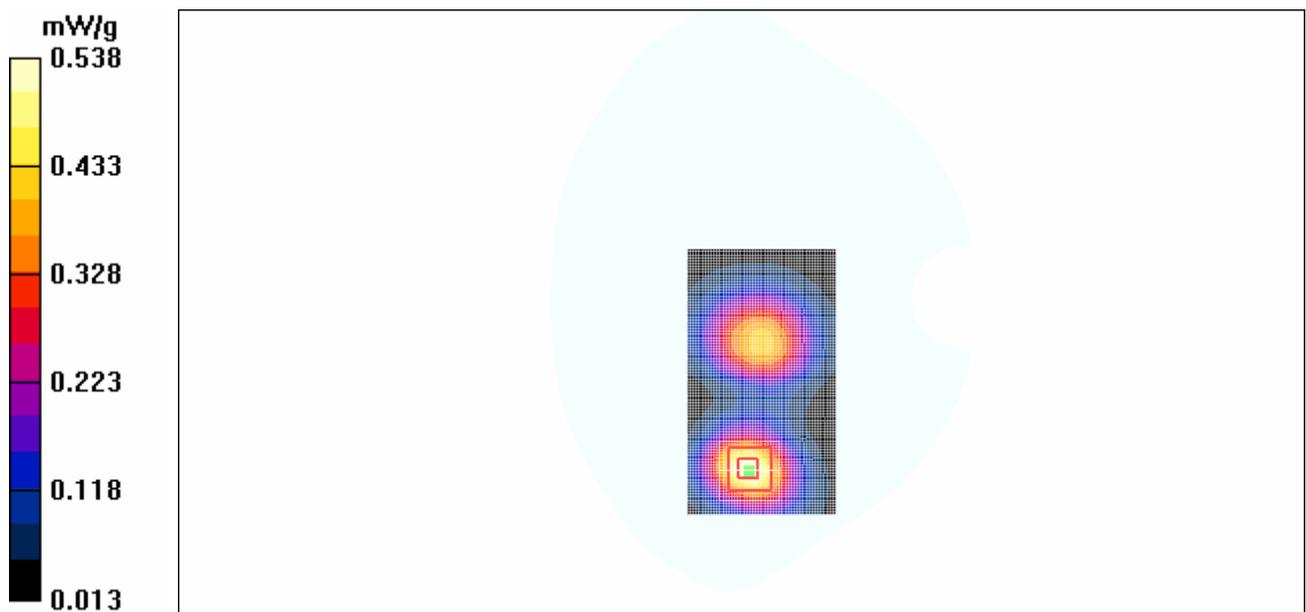


Figure 84 Body, Towards Ground, GSM 1900 Channel 661

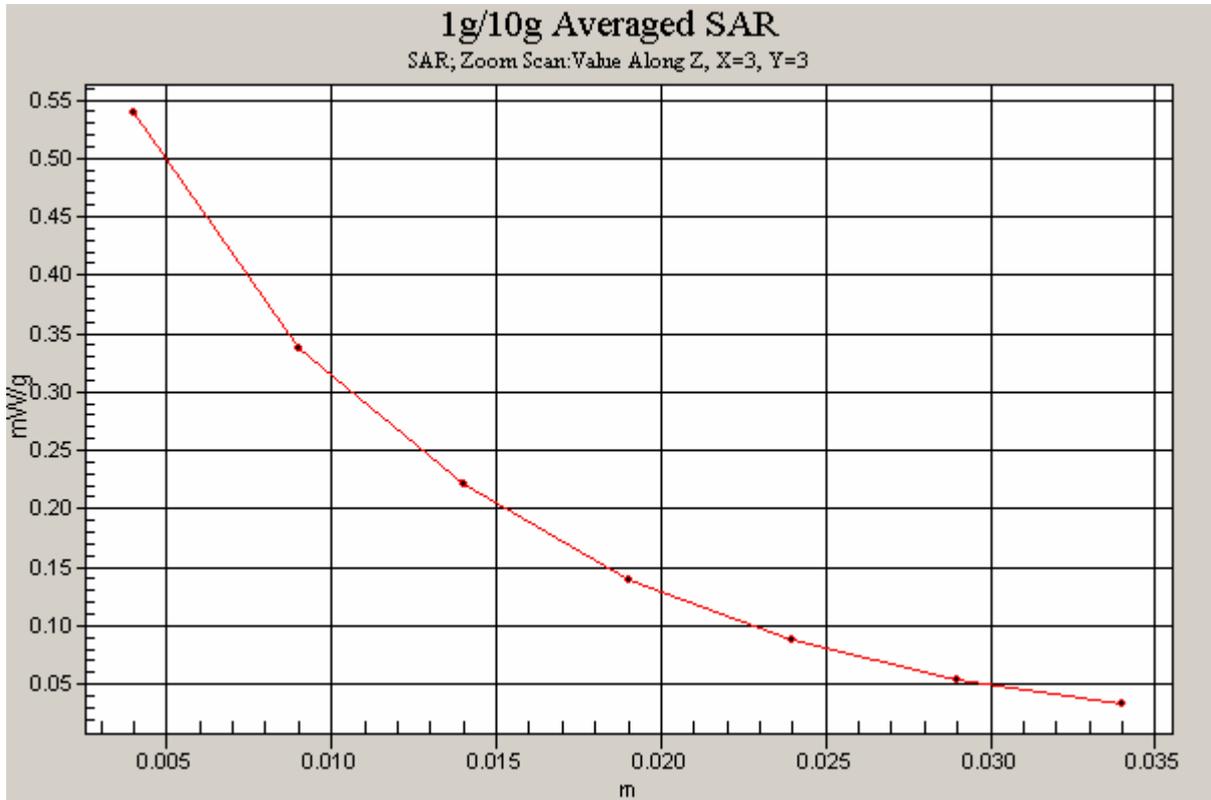


Figure 85 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 Channel 661)

GSM 1900 Towards Ground Low

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.340 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.59 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.179 mW/g

Maximum value of SAR (measured) = 0.329 mW/g

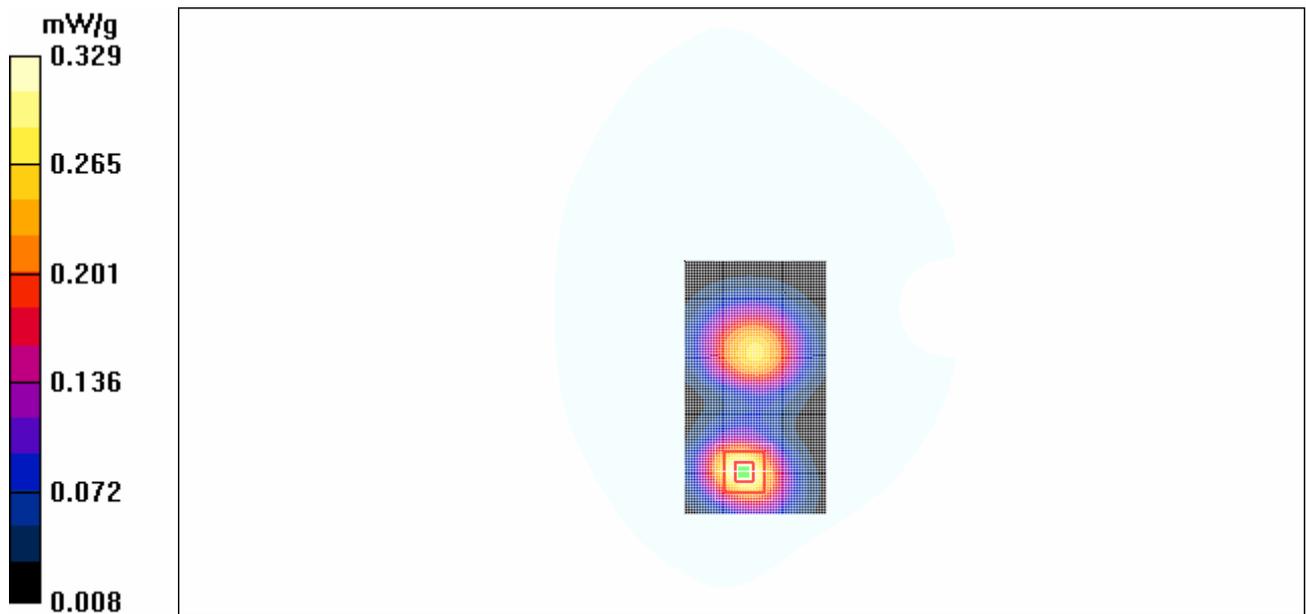


Figure 86 Body, Towards Ground, GSM 1900 Channel 512

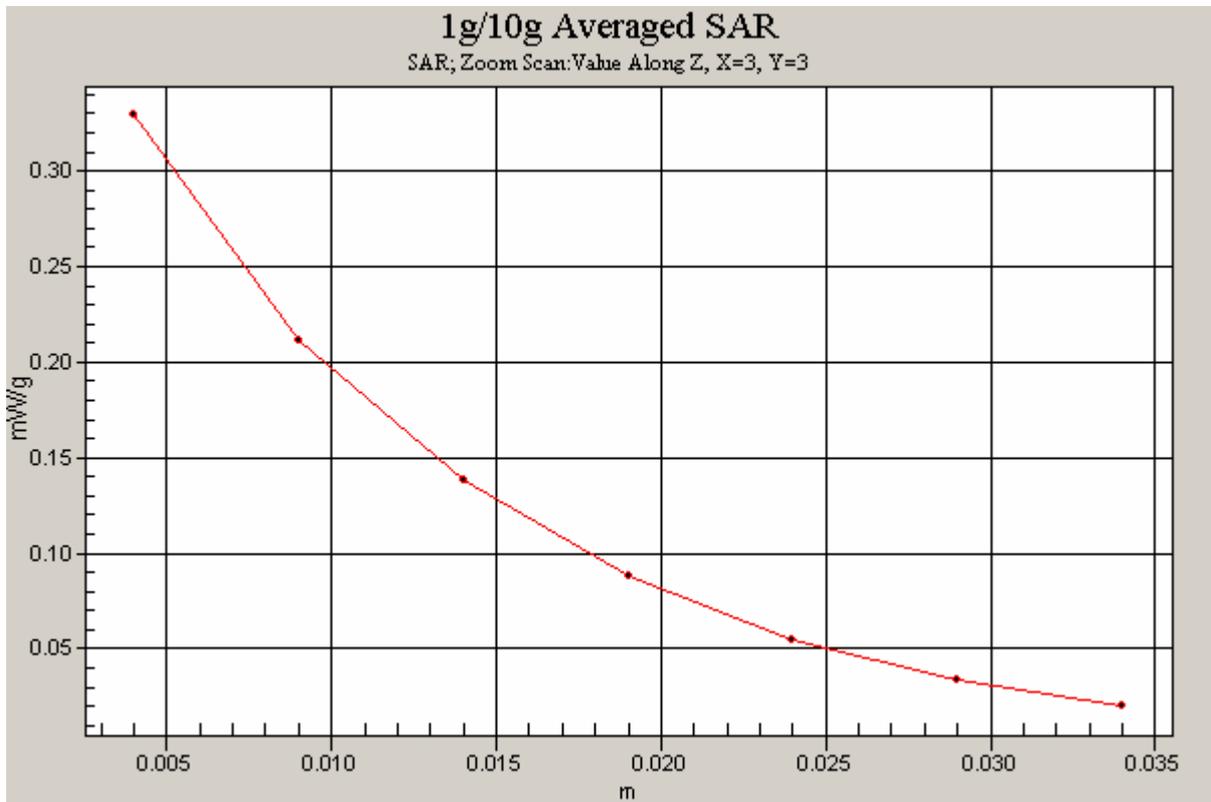


Figure 87 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 Channel 512)

GSM 1900 Towards Phantom High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.522 mW/g

Towards Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.4 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.716 W/kg

SAR(1 g) = 0.447 mW/g; SAR(10 g) = 0.265 mW/g

Maximum value of SAR (measured) = 0.486 mW/g

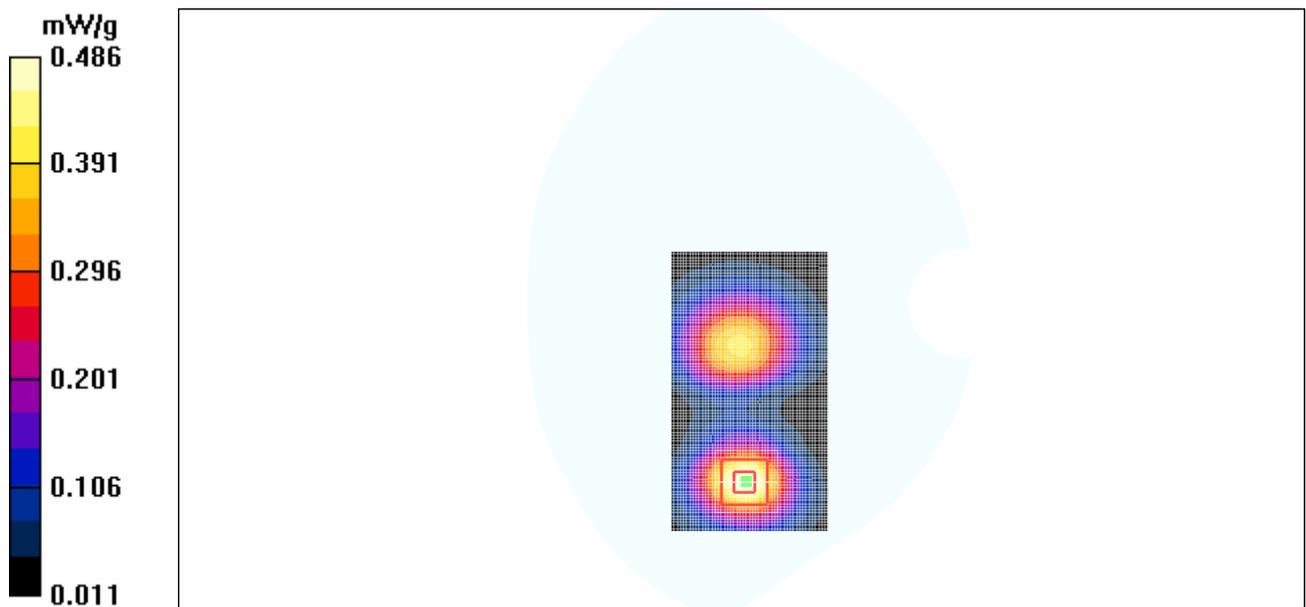


Figure 88 Body, Towards Phantom, GSM 1900 Channel 810

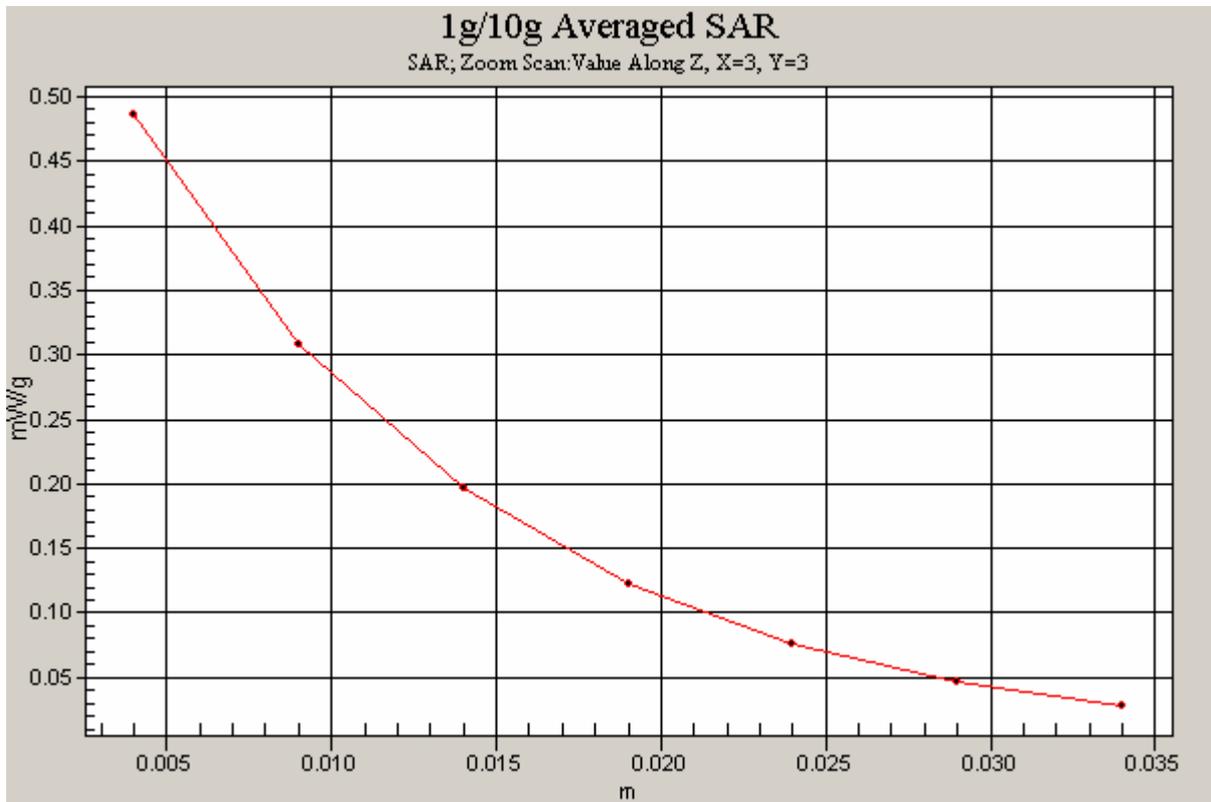


Figure 89 Z-Scan at power reference point (Body, Towards Phantom, GSM 1900 Channel 810)

GSM 1900 Towards Phantom Middle

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.500 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.4 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 0.677 W/kg

SAR(1 g) = 0.426 mW/g; SAR(10 g) = 0.253 mW/g

Maximum value of SAR (measured) = 0.464 mW/g

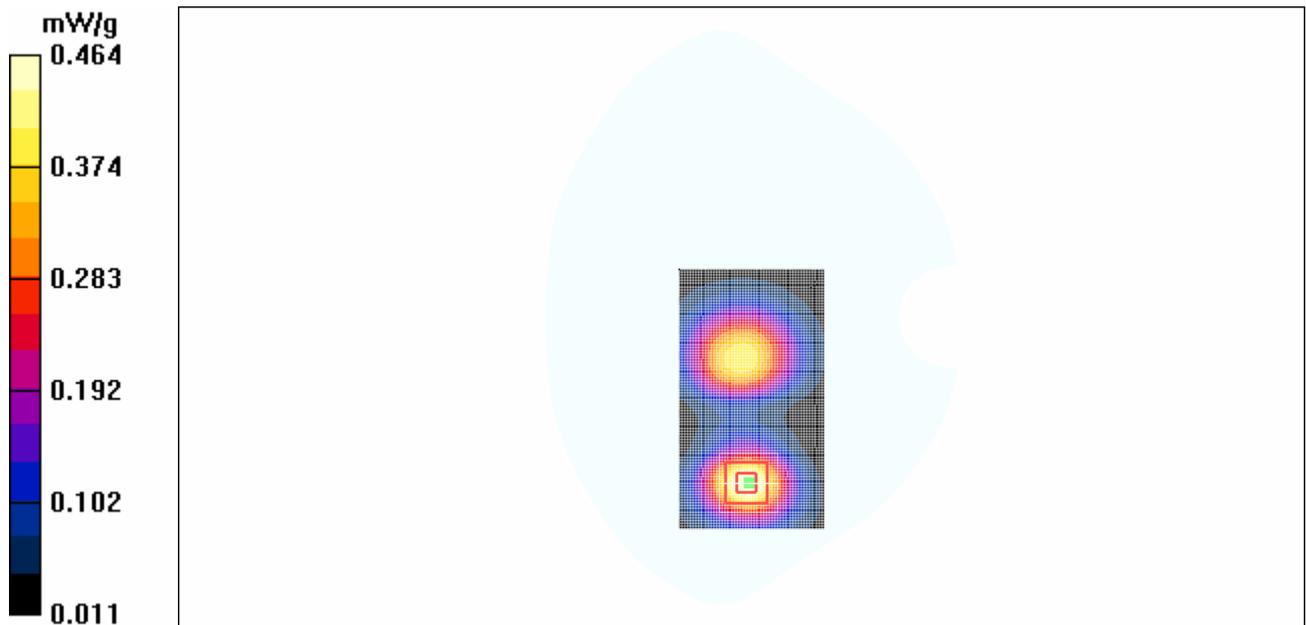


Figure 90 Body, Towards Phantom, GSM 1900 Channel 661

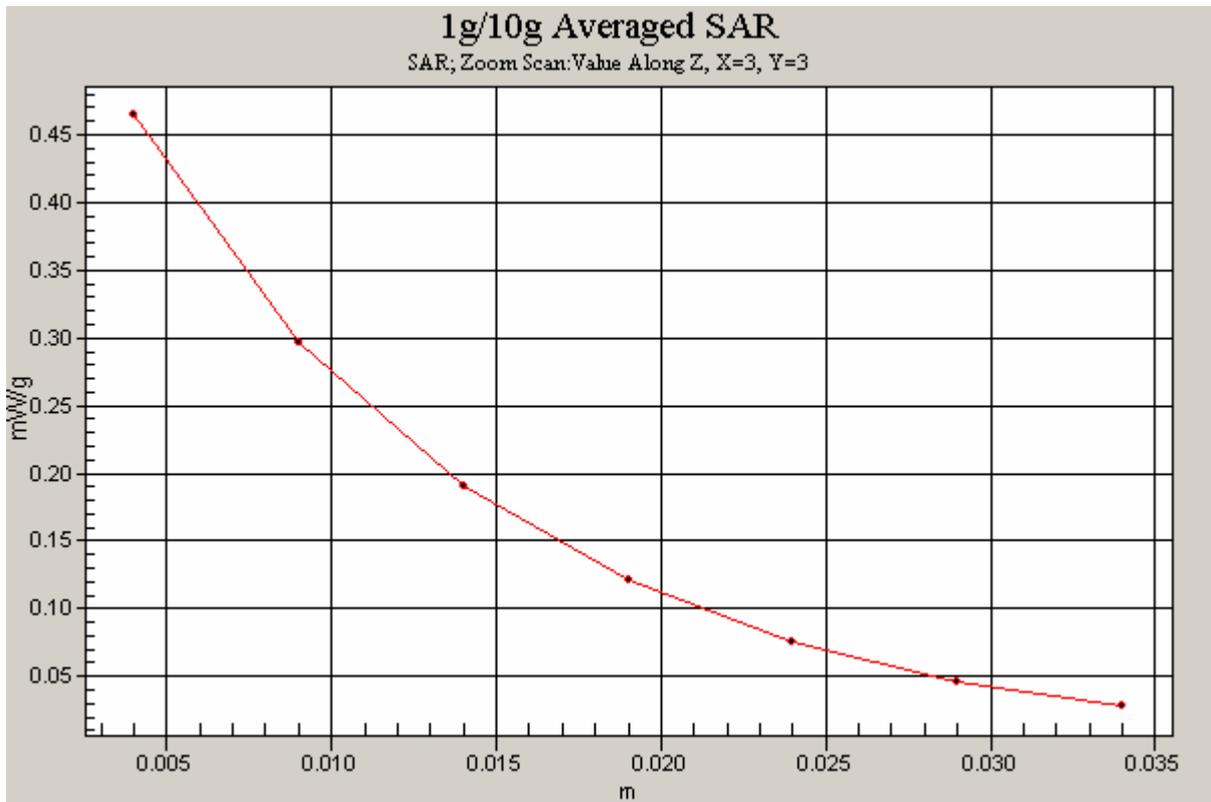


Figure 91 Z-Scan at power reference point (Body, Towards Phantom, GSM 1900 Channel 661)

GSM 1900 Towards Phantom Low

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.313 mW/g

Towards Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.88 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.425 W/kg

SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.160 mW/g

Maximum value of SAR (measured) = 0.294 mW/g

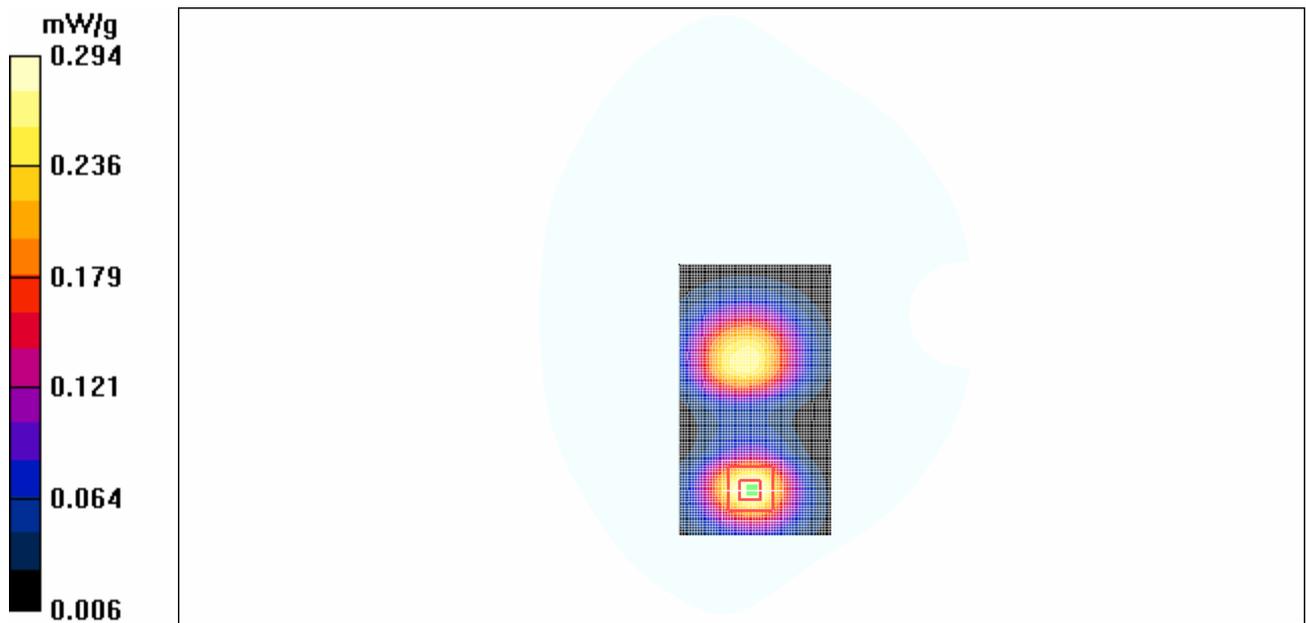


Figure 92 Body, Towards Phantom, GSM 1900 Channel 512

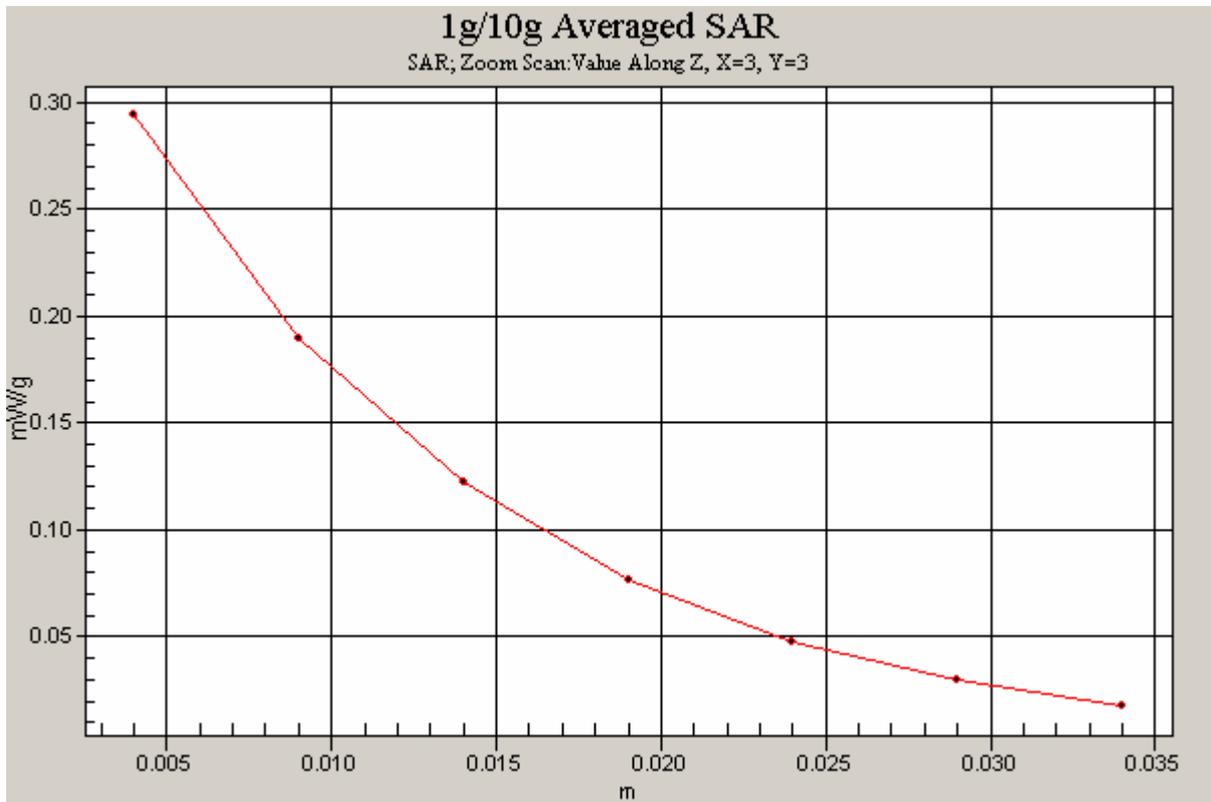


Figure 93 Z-Scan at power reference point (Body, Towards Ground, GSM 1900, Channel 512)

GSM 1900 Earphone Towards Ground High

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.578 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.815 W/kg

SAR(1 g) = 0.501 mW/g; SAR(10 g) = 0.295 mW/g

Maximum value of SAR (measured) = 0.542 mW/g

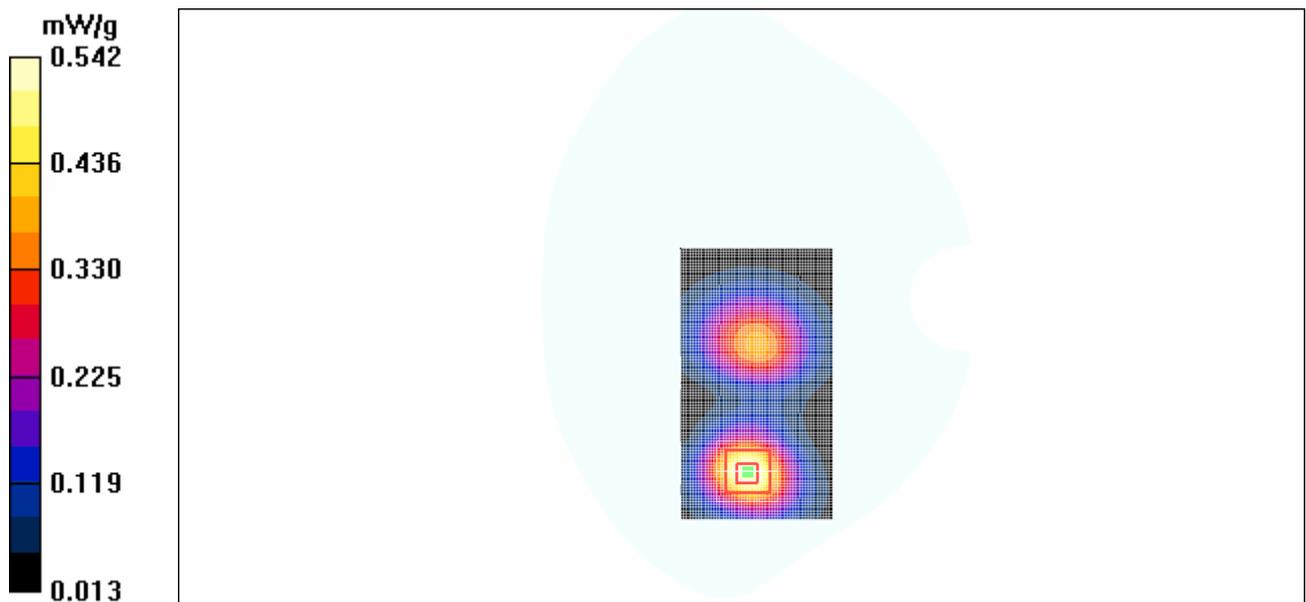


Figure 94 Body with Earphone, Towards Ground, GSM 1900, Channel 810

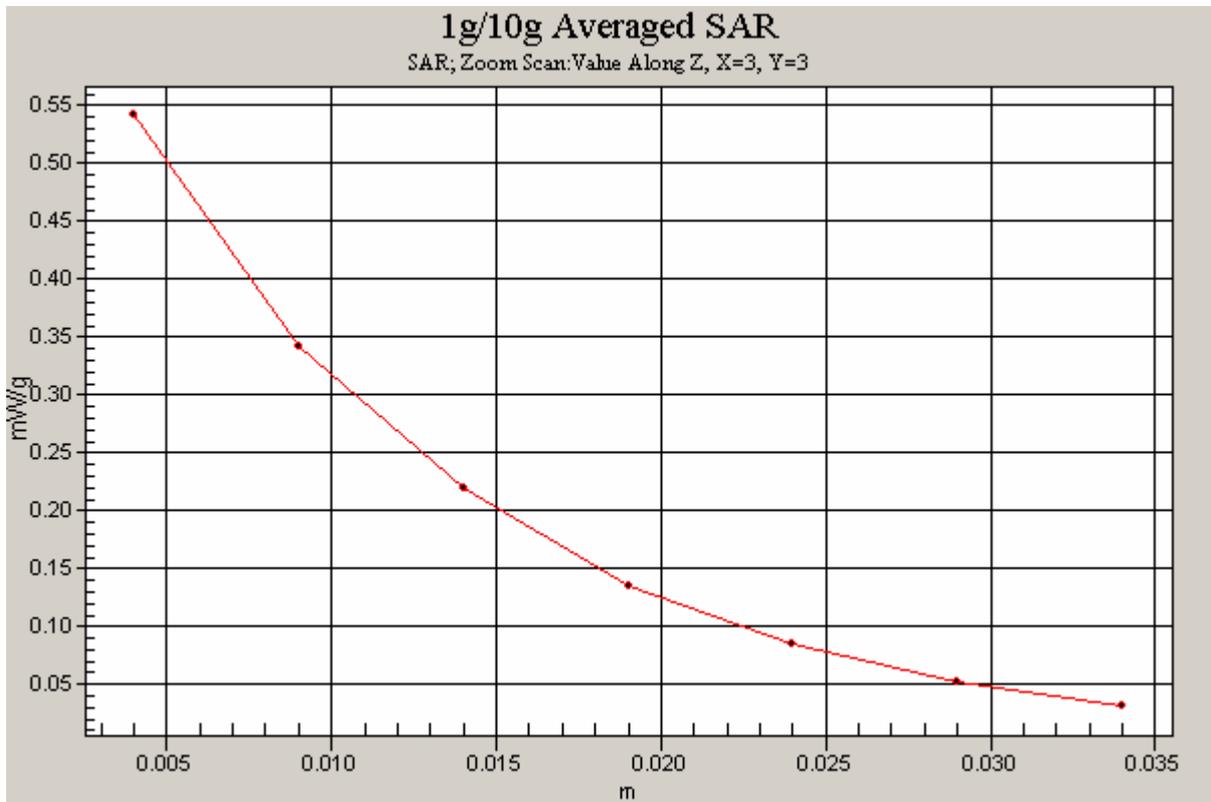


Figure 95 Z-Scan at power reference point (Body with Earphone, Towards Ground, GSM 1900, Channel 810)

GSM 1900 GPRS Towards Ground High

Communication System: GSM 1900+GPRS(2Up); Frequency: 1909.8 MHz;Duty Cycle: 1:4

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.27 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.6 V/m; Power Drift = -0.116 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.673 mW/g

Maximum value of SAR (measured) = 1.25 mW/g

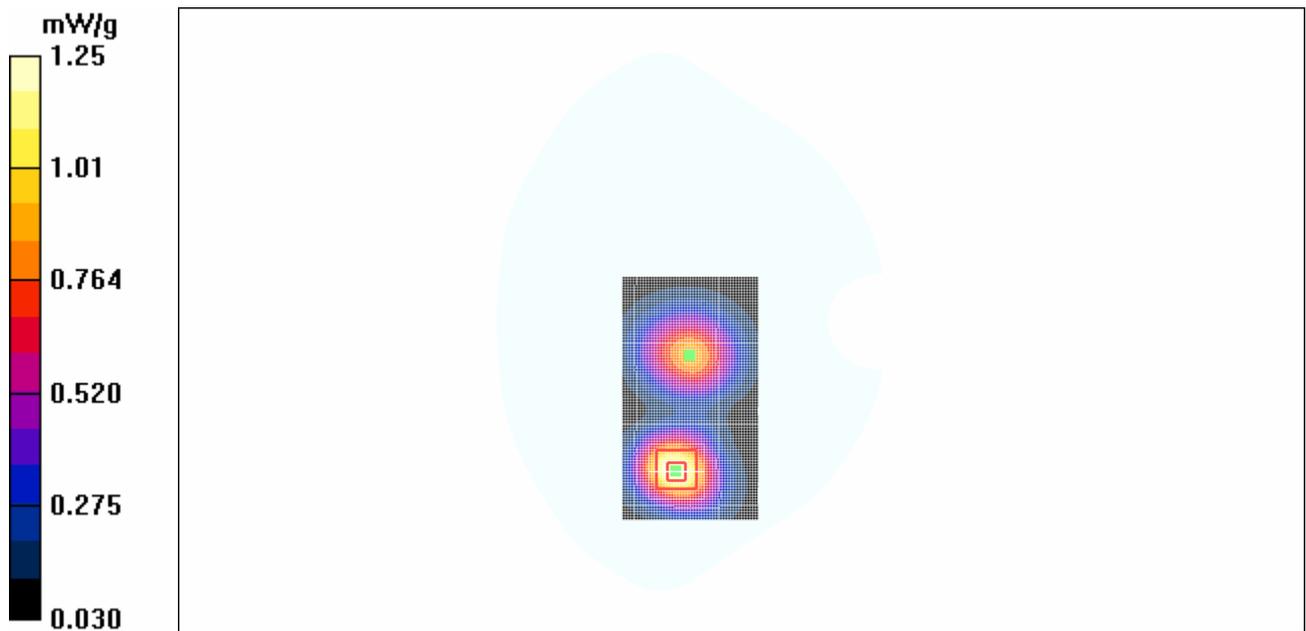


Figure 96 Body, Towards Ground, GSM 1900 GPRS, Channel 810

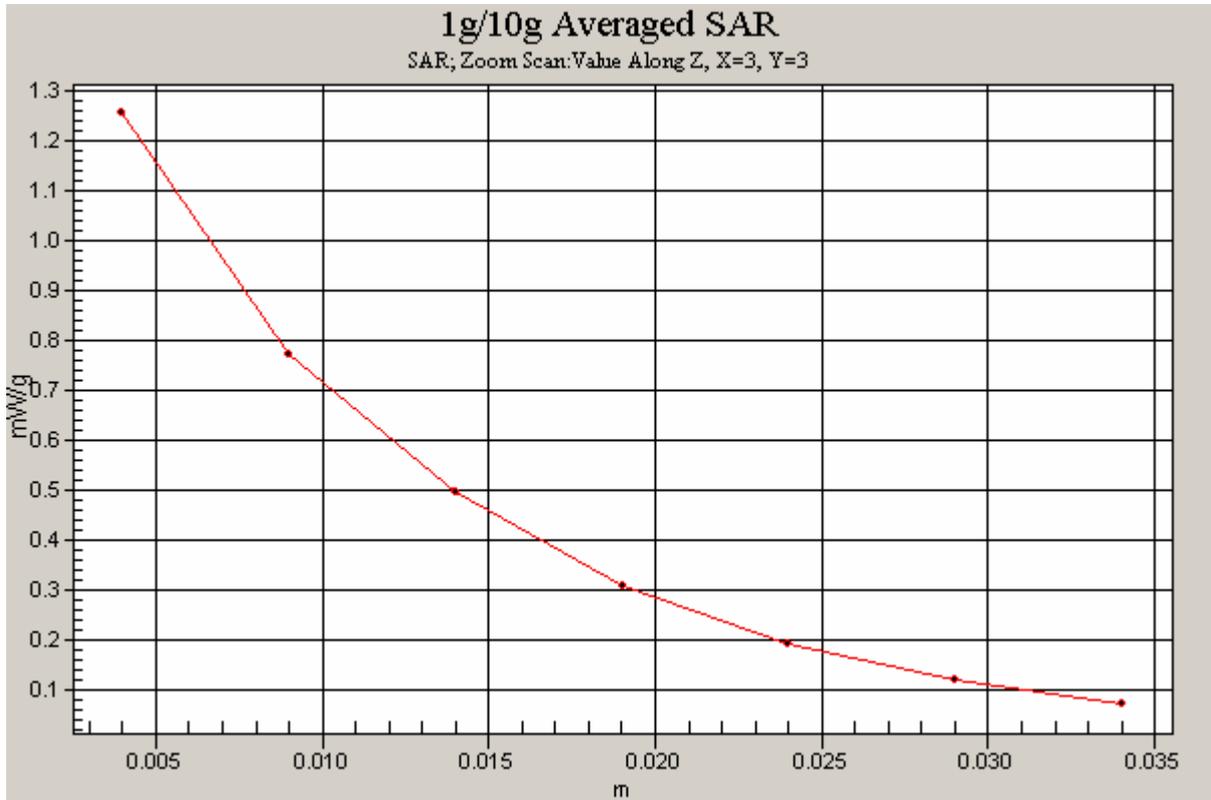


Figure 97 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 GPRS, Channel 810)

GSM 1900 GPRS Towards Ground Middle

Communication System: GSM 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.14 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.0 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.608 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

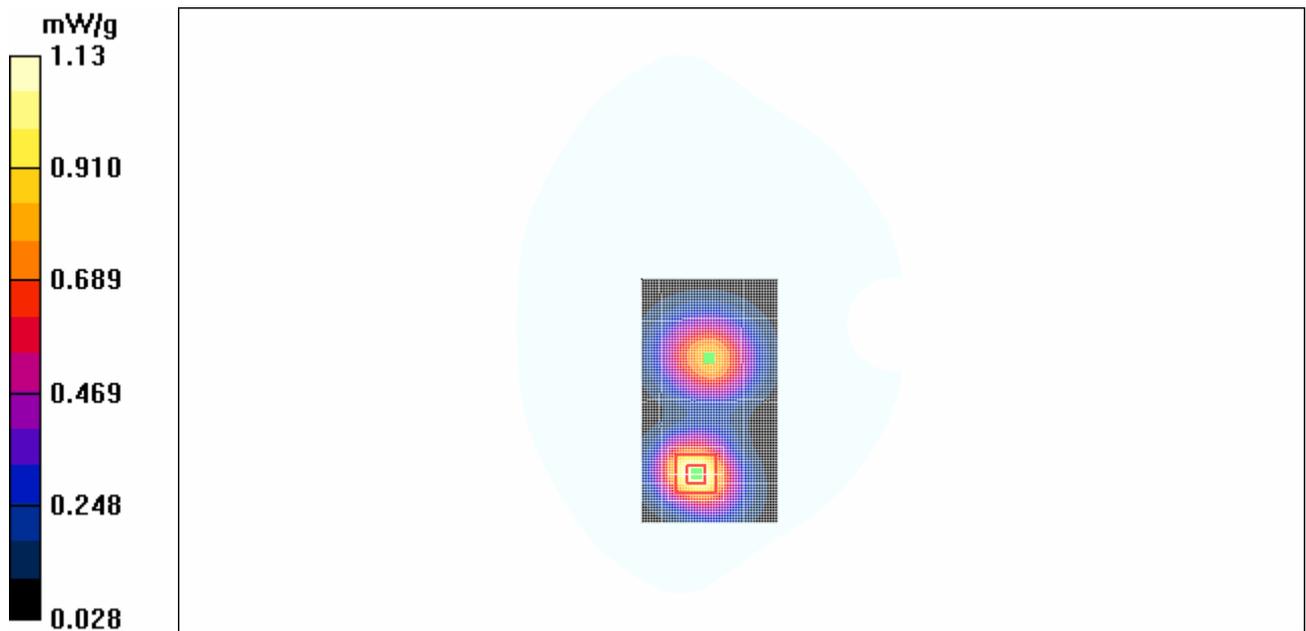


Figure 98 Body, Towards Ground, GSM 1900 GPRS Channel 661

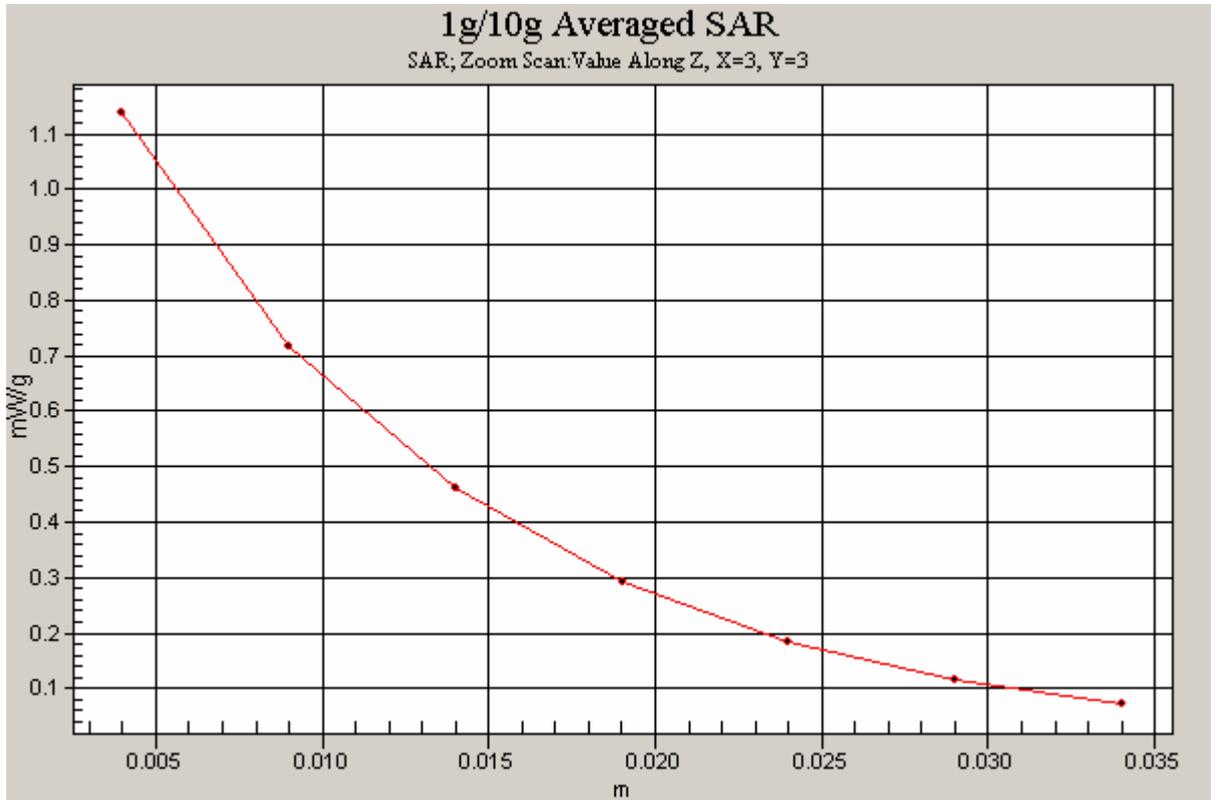


Figure 99 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 GPRS Channel 661)

GSM 1900 GPRS Towards Ground Low

Communication System: GSM 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.748 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.671 mW/g; SAR(10 g) = 0.398 mW/g

Maximum value of SAR (measured) = 0.734 mW/g

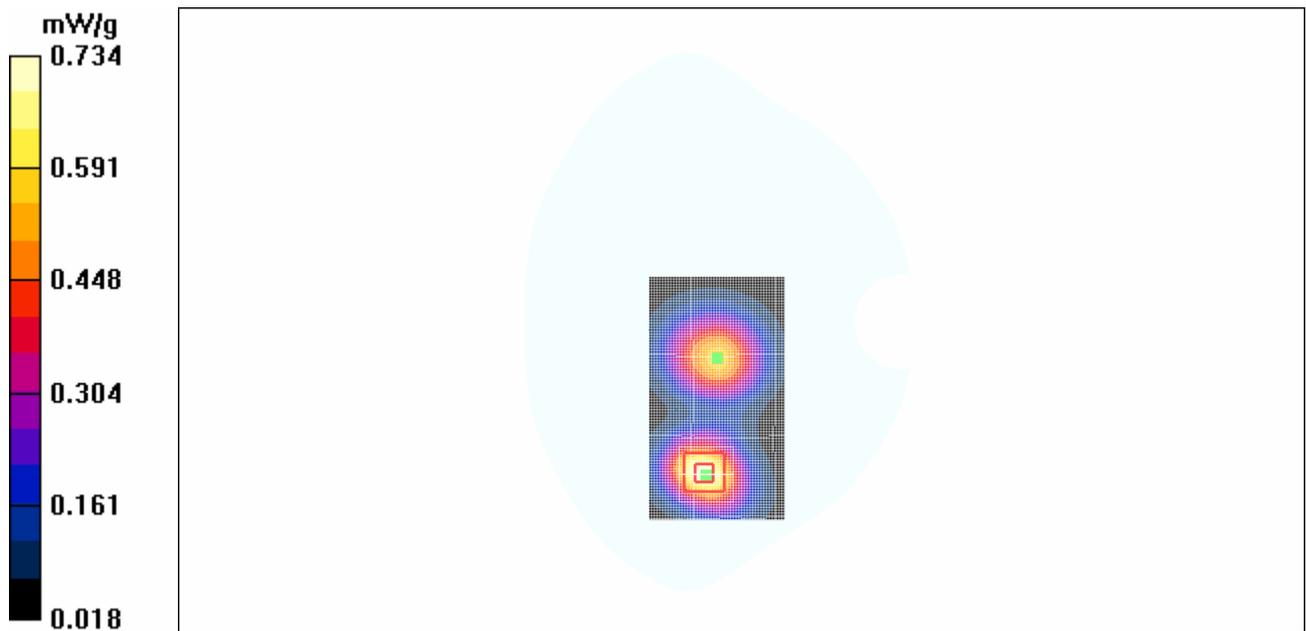


Figure 100 Body, Towards Ground, GSM 1900 GPRS Channel 512

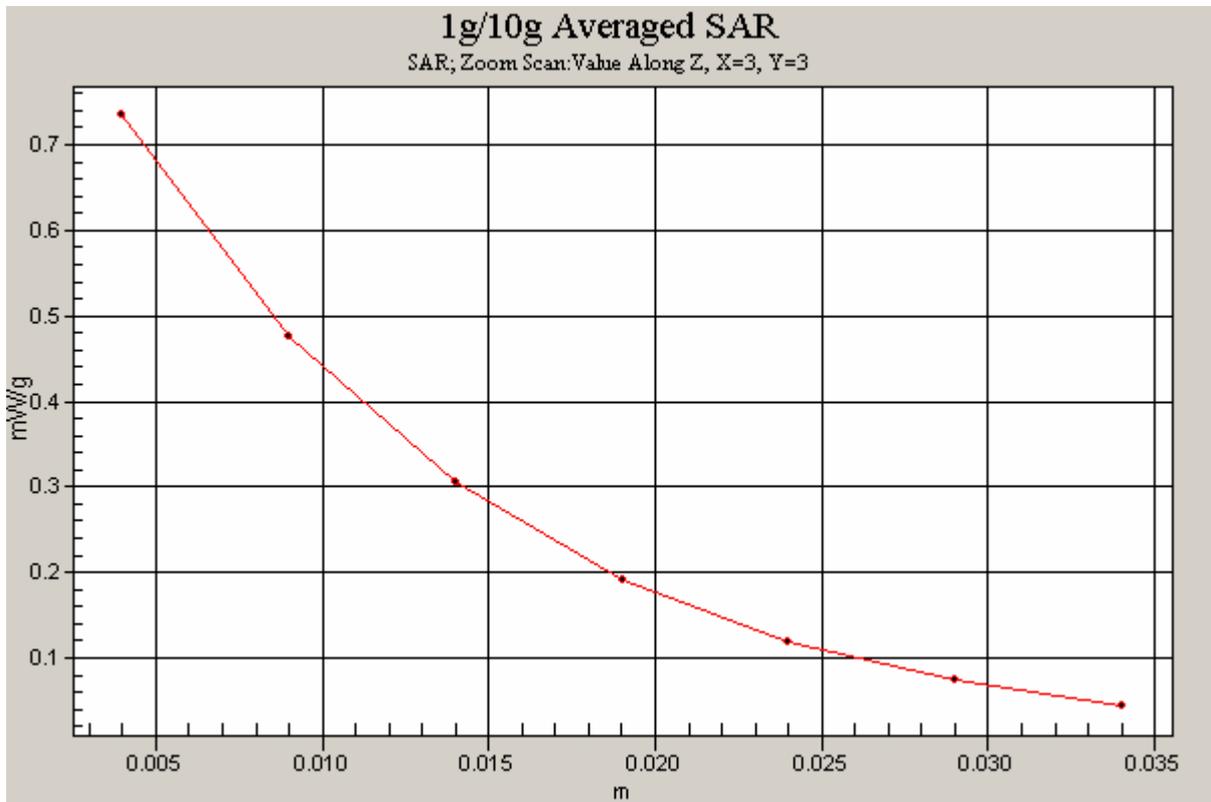


Figure 101 Z-Scan at power reference point (Body, Towards Ground, GSM 1900 GPRS Channel 512)

GSM 1900 GPRS Towards Phantom High

Communication System: GSM 1900+GPRS(2Up); Frequency: 1909.8 MHz;Duty Cycle: 1:4

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.958 mW/g

Towards Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = -0.166 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.852 mW/g; SAR(10 g) = 0.534 mW/g

Maximum value of SAR (measured) = 0.917 mW/g

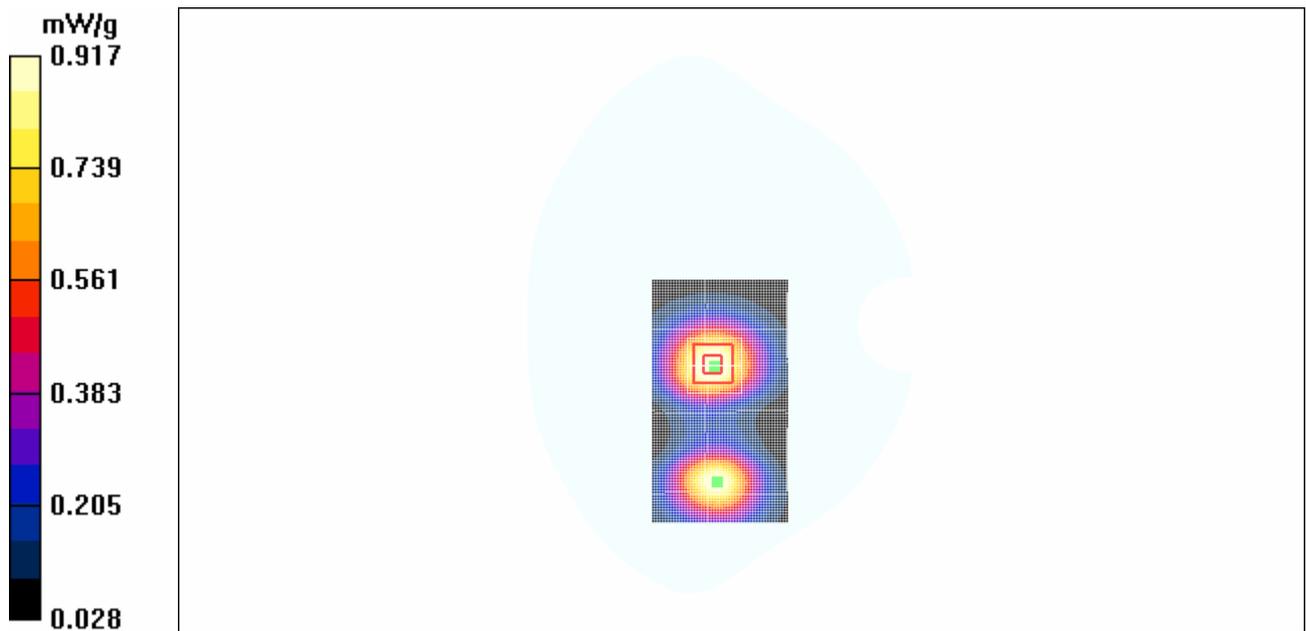


Figure 102 Body, Towards Phantom, GSM 1900 GPRS, Channel 810

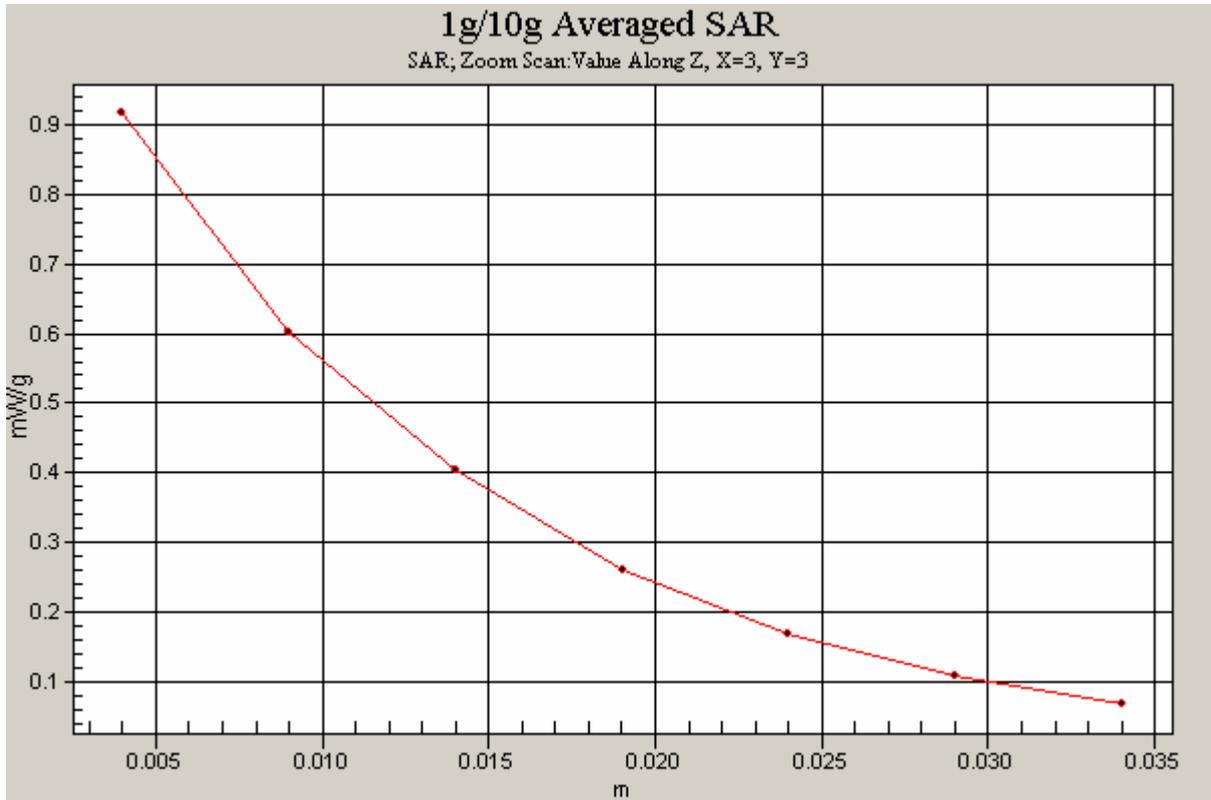


Figure 103 Z-Scan at power reference point (Body, Towards Phantom, GSM 1900 GPRS, Channel 810)

GSM 1900 GPRS Towards Phantom Middle

Communication System: GSM 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.895 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.0 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.798 mW/g; SAR(10 g) = 0.503 mW/g

Maximum value of SAR (measured) = 0.854 mW/g

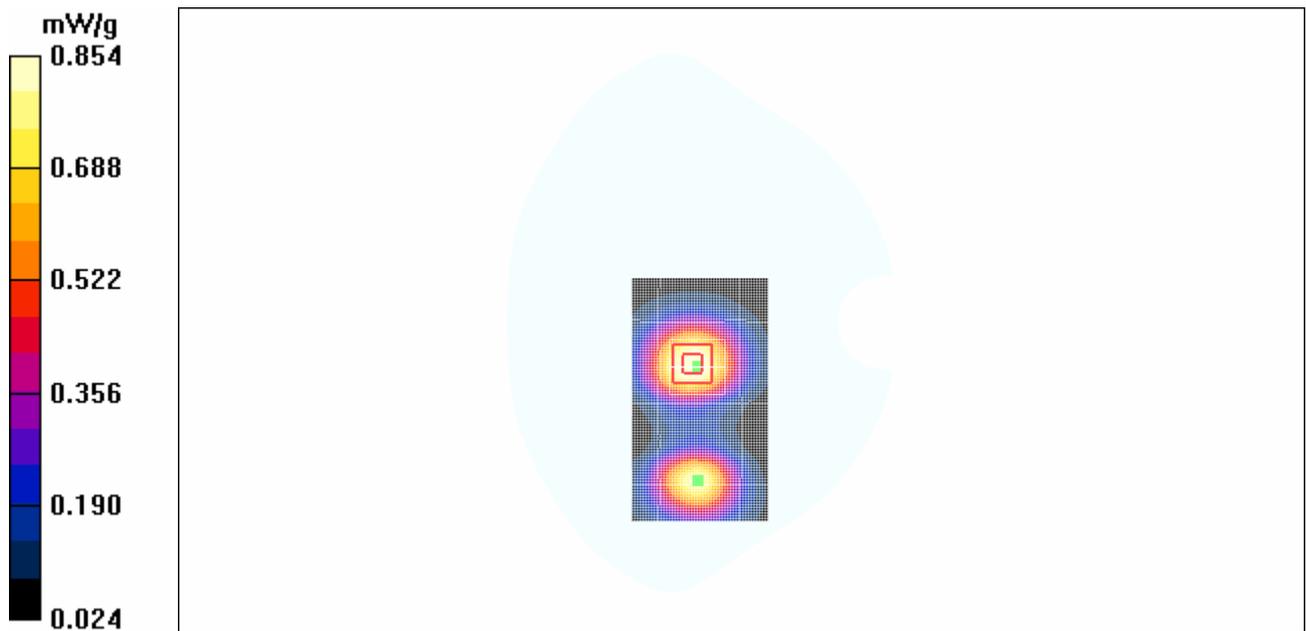


Figure 104 Body, Towards Phantom, GSM 1900 GPRS Channel 661

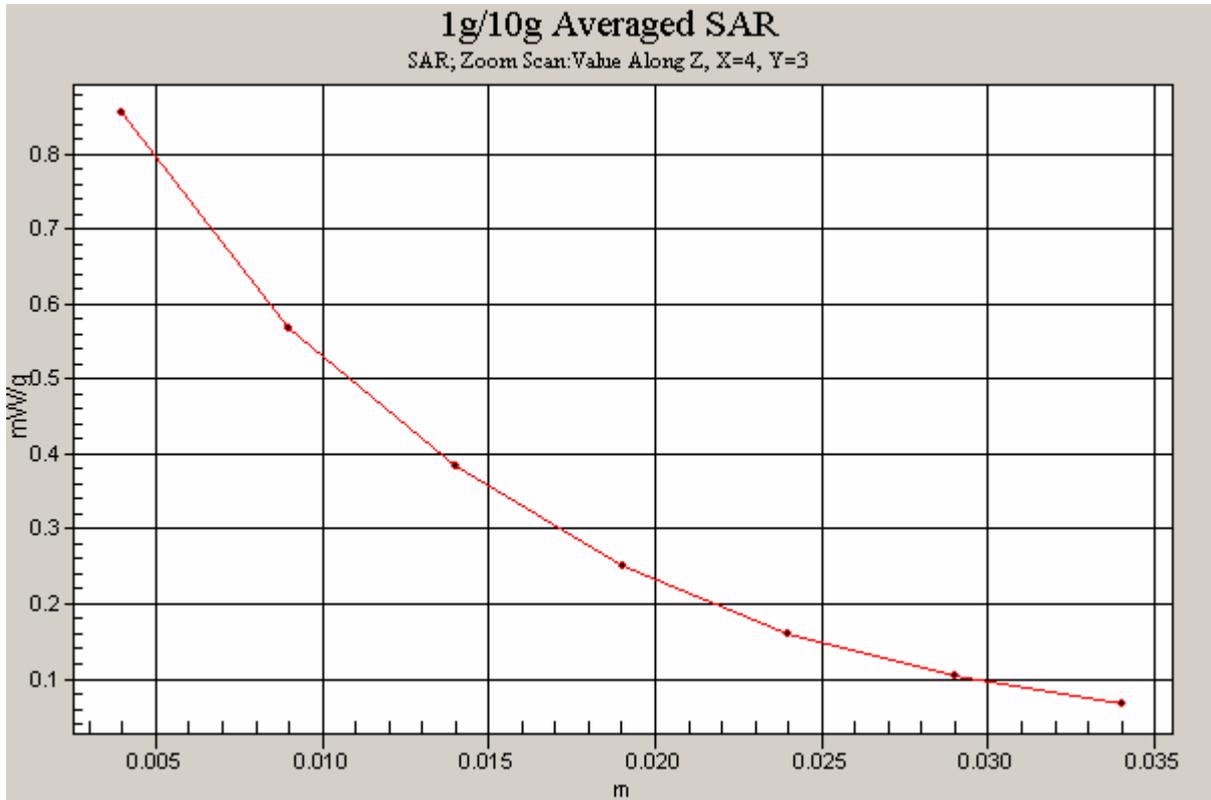


Figure 105 Z-Scan at power reference point (Body, Towards Phantom, GSM 1900 GPRS Channel 661)

GSM 1900 GPRS Towards Phantom Low

Communication System: GSM 1900+GPRS(2Up); Frequency: 1850.2 MHz;Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.586 mW/g

Towards Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.773 W/kg

SAR(1 g) = 0.528 mW/g; SAR(10 g) = 0.336 mW/g

Maximum value of SAR (measured) = 0.564 mW/g

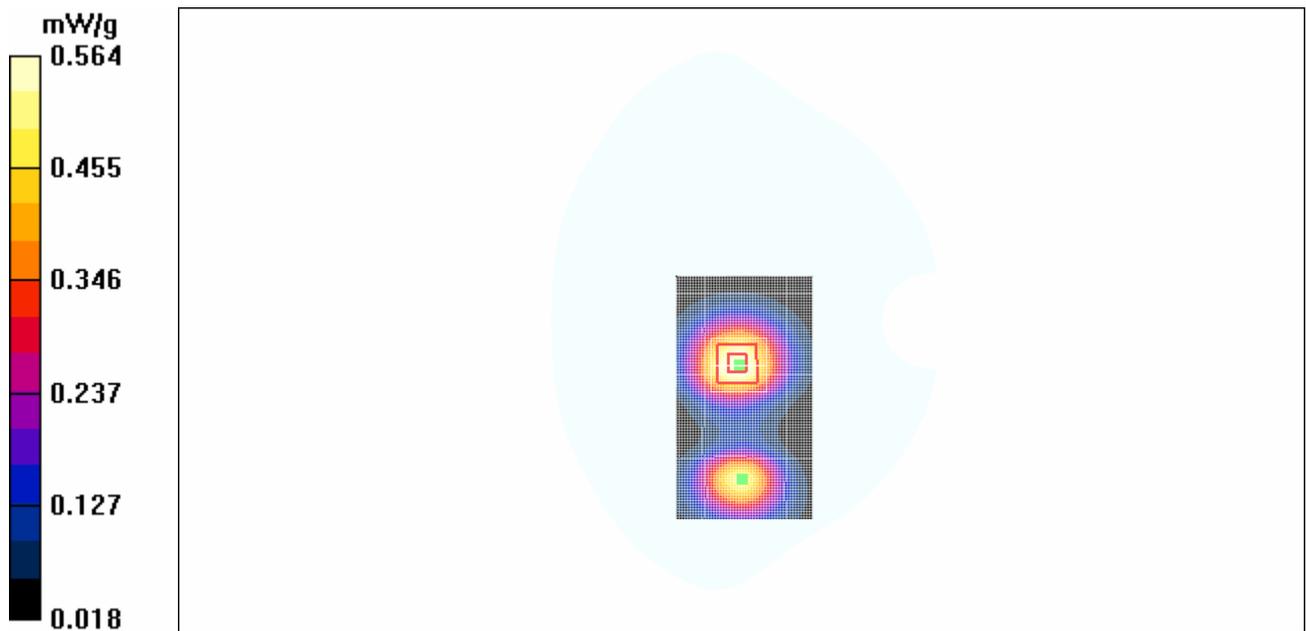


Figure 106 Body, Towards Phantom, GSM 1900 GPRS Channel 512

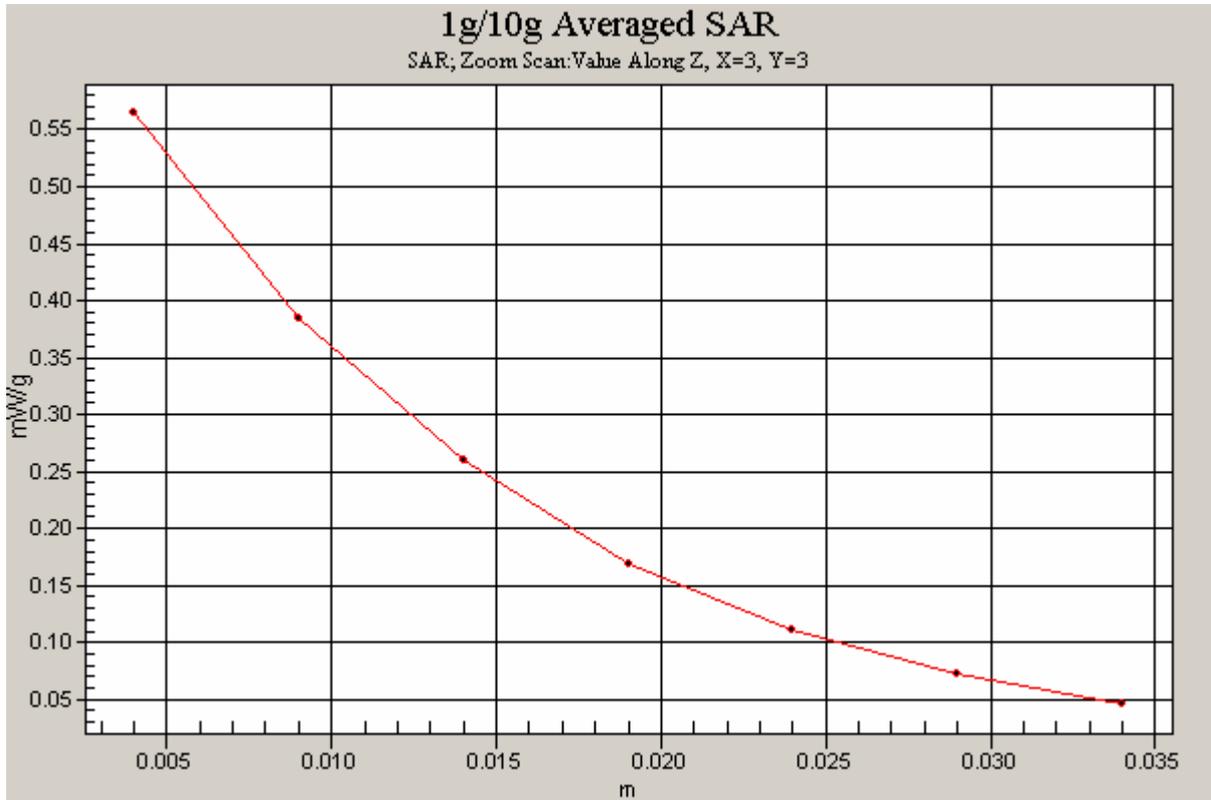


Figure 107 Z-Scan at power reference point (Body, Towards Phantom, GSM 1900 GPRS Channel 512)

ANNEX D: SYSTEM VALIDATION RESULTS

System Performance Check at 835 MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 443

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 41.38$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1531; ConvF(6.85, 6.85, 6.85);

- Electronics: DAE4 Sn452;

d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.54 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.0 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 3.44 W/kg

SAR(1 g) = 2.34 mW/g; SAR(10 g) = 1.53 mW/g

Maximum value of SAR (measured) = 2.52 mW/g

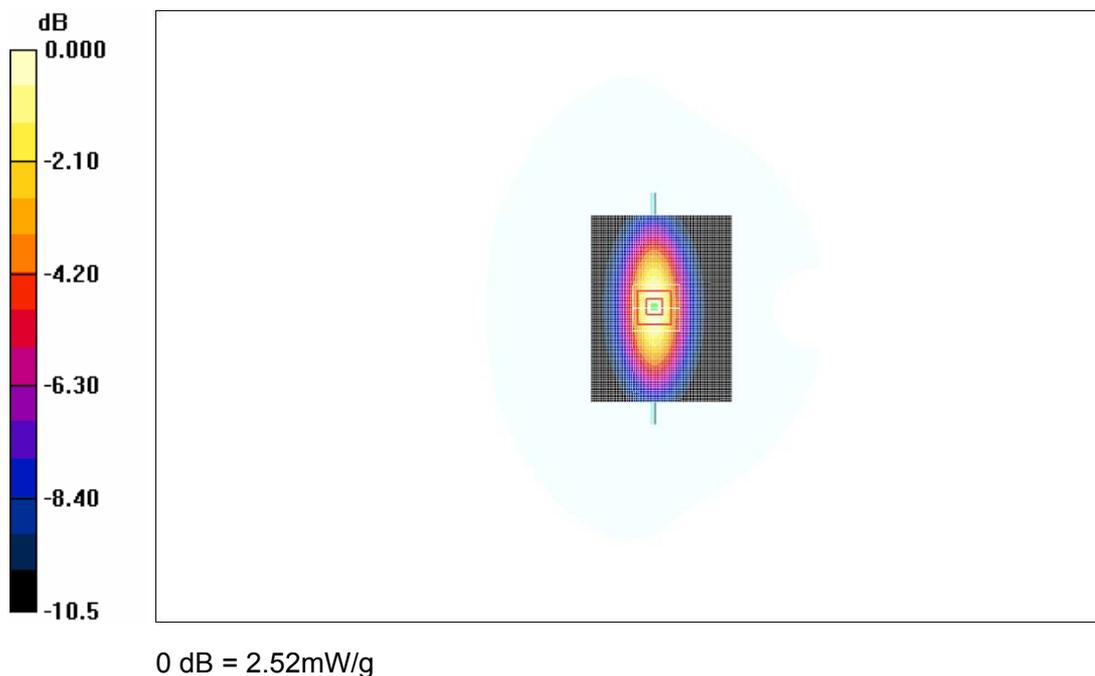


Figure 108 System Performance Check 835MHz 250mW

System Performance Check at 1900 MHz

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 40.03$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

d=10mm, Pin=250mW /Area Scan (101x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 10.8 mW/g

d=10mm, Pin=250mW /Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.8 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 16.0 W/kg

SAR(1 g) = 9.36 mW/g; SAR(10 g) = 4.93 mW/g

Maximum value of SAR (measured) = 10.7 mW/g

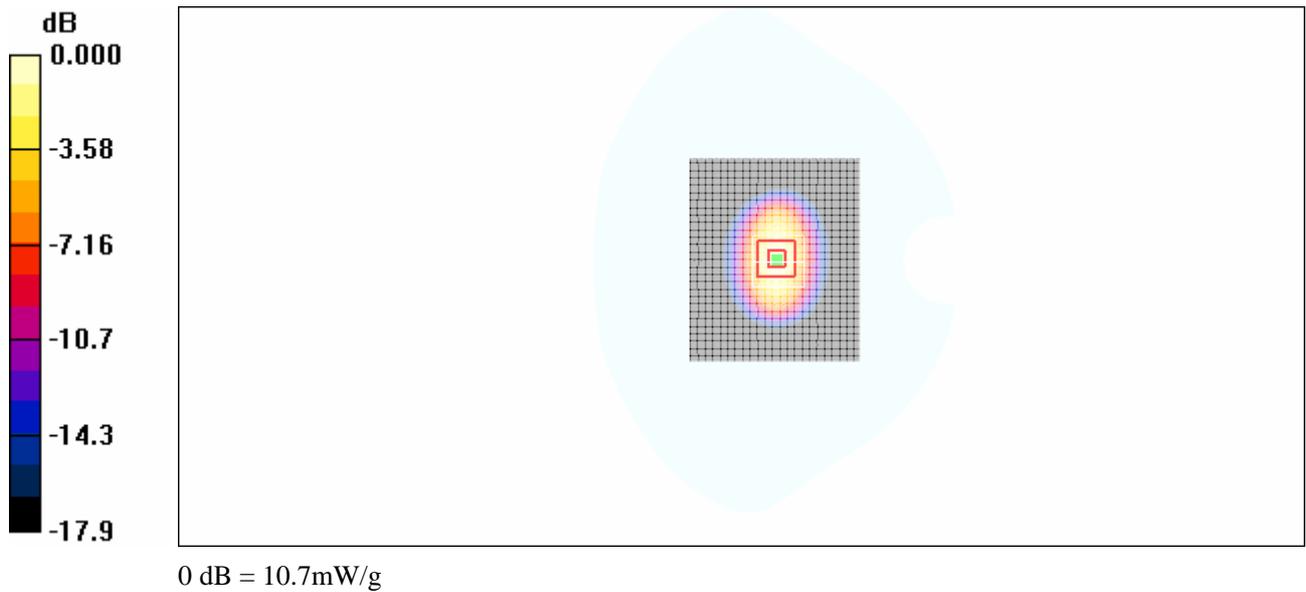


Figure 109 System Performance Check 1900MHz 250mW

TA Technology (Shanghai) Co., Ltd. Test Report

No. RZA2008-1171FCC

Page 136 of 169

ANNEX E: PROBE CALIBRATION CERTIFICATE

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **ET3-1531_Jan08**

CALIBRATION CERTIFICATE

Object: **ET3DV6 - SN:1531**

Calibration procedure(s): **QA CAL-01.v6 and QA CAL-12.v5
Calibration procedure for dosimetric E-field probes**

Calibration date: **January 29, 2008**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498067	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (METAS, No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5088 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (METAS, No. 217-00720)	Aug-08
Reference Probe ES3DV2	SN: 3013	2-Jan-08 (SPEAG, No. ES3-3013_Jan08)	Jan-09
DAE4	SN: 654	20-Apr-07 (SPEAG, No. DAE4-654_Apr07)	Apr-08
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-07)	In house check: Oct-08

	Name	Function	Signature
Calibrated by:	Kolja Pokovic	Technical Manager	
Approved by:	Nils Kuster	Quality Manager	

Issued: January 29, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

TA Technology (Shanghai) Co., Ltd.

Test Report

No. RZA2008-1171FCC

Page 137of 169

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ET3DV6 SN:1531

January 29, 2008

Probe ET3DV6

SN:1531

Manufactured:	July 15, 2000
Last calibrated:	January 22, 2007
Recalibrated:	January 29, 2008

Calibrated for DASY Systems


(Note: non-compatible with DASY2 system!)

ET3DV6 SN:1531

January 29, 2008

Frequency Response of E-Field

(TEM-Cell: If1110 EXX, Waveguide: R22)

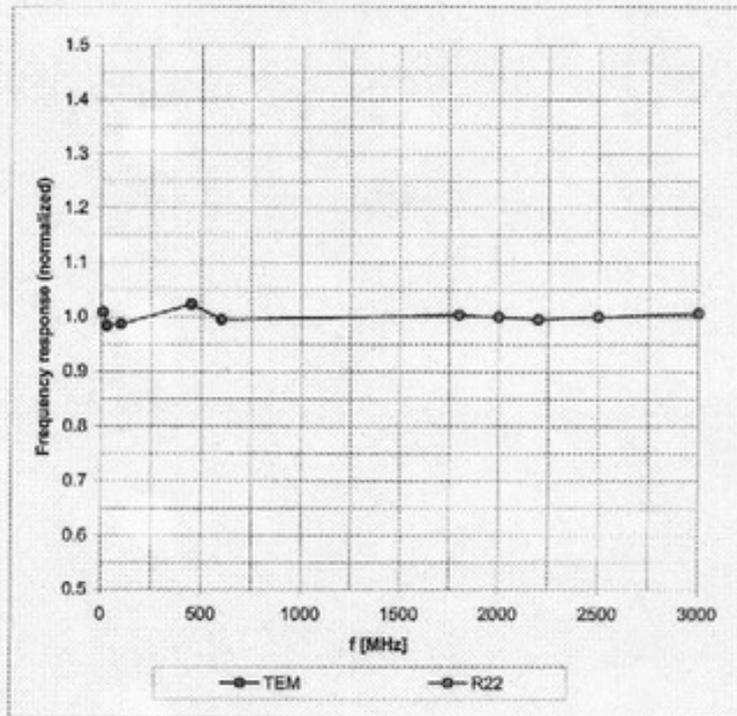

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)