



FCC RF Test Report

**Product Name: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone
with Bluetooth; Ascend G600**

Model Number: HUAWEI U8950N-1, U8950N-1

**Report No: SYBH(Z-RF)018082012-2006
FCC ID:QISU8950N-1**

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C
Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Applicant:	Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Receipt Test Item:	Aug., 10, 2012
Start Date of Test:	Aug., 13, 2012
End Date of Test:	Aug., 24, 2012
Test Result:	Pass

Approved By Senior Engineer Aug., 28, 2012 Dai Linjun *Dai Linjun*
 Date Name Signature

Reviewed By Aug., 28, 2012 Cousy Xu *Cousy XU*
 Date Name Signature

Operated By Aug., 28, 2012 Huang Qiuliang *Huang Qiuliang*
 Date Name Signature



Contents

1	<u>General Information</u>	5
1.1	APPLIED STANDARD.....	5
1.2	TEST LOCATION.....	5
1.3	TEST ENVIRONMENTAL CONDITION.....	5
2	<u>Summary</u>	6
3	<u>Product Description</u>	7
3.1	PRODUCT INFORMATION	7
4	<u>Main Test Instruments</u>	9
5	<u>Test Results</u>	10
5.1	20DB BANDWIDTH MEASUREMENT	10
5.2	IN-BAND RADIATED SPURIOUS EMISSION MEASUREMENTS	11
5.3	RADIATED SPURIOUS EMISSION MEASUREMENTS, OUT-OF-BAND	13
5.4	FREQUENCY STABILITY	15

1 General Information

1.1 Applied Standard	
Applied Rules:	FCC Part 15 Subpart C (15.225): 2011
1.2 Test Location	
Test Location 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
1.3 Test Environmental Condition	
Ambient Temperature:	20 – 25 °C
Ambient Relative Humidity:	45 – 55 %
Atmospheric Pressure:	101 kPa

2 Summary

Table 1 Summary of results

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE					
15.225 (a)	In-Band Emissions	15,848 μ V/m @ 30m 13.553 – 13.567 MHz	RADIATED	Pass	Section 4.2
2.1049	20 dB Bandwidth	N/A		Pass	Section 4.1
15.225(b)	In-Band Emissions	334 μ V/m @ 30m 13.410 – 13.553 MHz 13.567 – 13.710 MHz		Pass	Section 4.2
15.225(c)	In-Band Emissions	106 μ V/m @ 30m 13.110 – 13.410 MHz 13.710 – 14.010 MHz		Pass	Section 4.2
15.225(d) 15.209	Out-of-Band Emissions	Emissions outside of the specified band (13.110 – 14.010 MHz) must meet the radiated limits detailed in 15.209		Pass	Section 4.3
15.225(e)	Frequency Stability Tolerance	\pm 0.01% of Operating Frequency	Temperature Chamber	Pass	Section 4.4
15.207	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	Pass	Part 15B report

3 Product Description

3.1 Product Information

3.1.1 General Description

HUAWEI U8950N-1, U8950N-1 is subscriber equipment in the WCDMA/GSM system. The HSPA/UMTS frequency band is Band I and Band VIII. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only PCS1900 band test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSDPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port(to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

3.1.2 Board Information

Table 2 Board Information

HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Ascend G600		
HUAWEI U8950N-1, U8950N-1		
Board and Module		
Equipment Designation / Description	Software	Hardware
Main board of Mobile Phone	U8950-1V100R001C00B930	HD2U8950M

3.1.3 Adapter Technical Data

AC/DCAdapter Model	HW-050100U1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

AC/DCAdapter Model	HW-050100E1W
--------------------	--------------



Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

AC/DCAdapter Model	HW-050100B1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

AC/DCAdapter Model	HW-050100A1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

AC/DCAdapter Model	HW-050100U2W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

AC/DCAdapter Model	HW-050100E3W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

3.1.4 Battery Technical Data

Name	Qty.	Manufacture	Description
Rechargeable Li-ion	1	Huawei Technologies Co., Ltd.	Battery Model: HB5R1H Rated capacity: 1930mAh Nominal Voltage:  +3.7V Charging Voltage:  +4.2V

4 Main Test Instruments

Table 3 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
LOOP Antennas	R&S	HFH2-Z2	100262	Mar,10,2013
Signal Analyzer	R&S	FSQ31	200021	Sept., 27, 2012
Temperature Chamber	WEISS	WKL64	24600294	Jan., 03, 2013
Signal generator	Agilent	E8257D	MY49281095	Jul., 09, 2013
Test receiver	R&S	ESU26	100150	May., 24, 2013
Tunable Dipole	Schwarzbeck	D69250- UHAP/D6925 0-VHAP	919/1009	Dec., 13, 2012
Tunable Dipole	Schwarzbeck	D69250- UHAP/D6925 0-VHAP	979/917	Dec., 13, 2012
Horn Antenna	R & S	HF906	100683	May., 16, 2013
Horn Antenna	R & S	HF906	100684	May., 16, 2013
Broadband Antenna	Schwarzbeck	VULB 9163	9163-357	Sep.,15, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-356	Sep., 15, 2012


NOTE: All the test equipment are calibrated once a year.

5 Test Results

5.1 20dB Bandwidth Measurement

The 20dB bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.

5.1.1 Test Setup

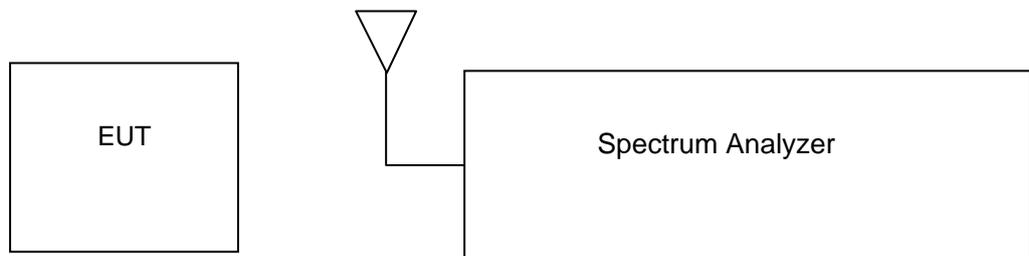


5.1.2 Test Result

Frequency	Occupied Bandwidth
13.56MHz	110KHz


The result of the measurement is passed.

5.2 In-Band Radiated Spurious Emission Measurements

5.2.1 Test Setup

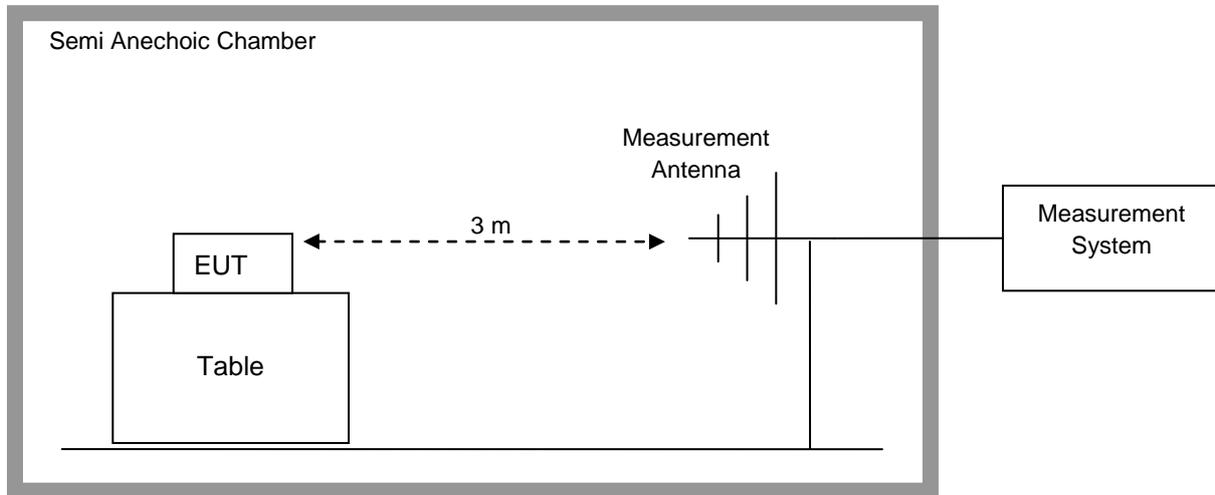

5.2.2 Test Result

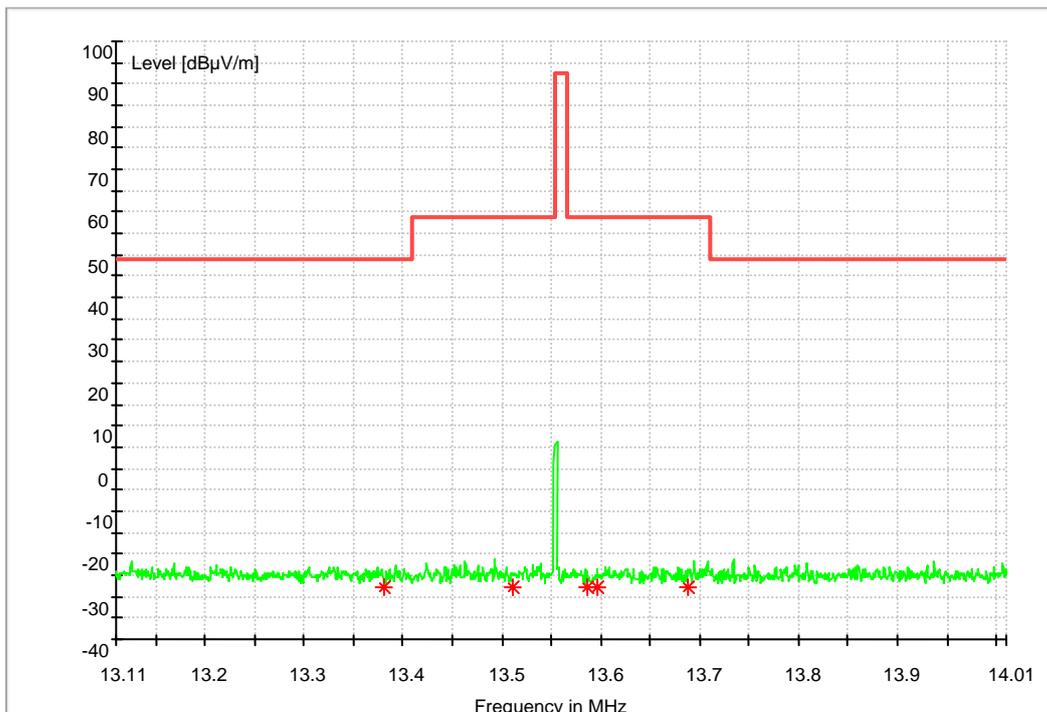

NOTES:

1. All measurements were performed using a loop antenna. The antenna was positioned in three orthogonal positions (X front, Y side, Z top) and the position with the highest emission level was



recorded.


2. Measurements were performed at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)(2). Extrapolation Factor = $20 \log_{10}(30/3)^2 = 40\text{dB}$

3. All measurements were recorded using a spectrum analyzer employing a quasi-peak detector.

The result of the measurement is passed.


5.3 Radiated Spurious Emission Measurements, Out-of-Band

5.3.1 Test Setup

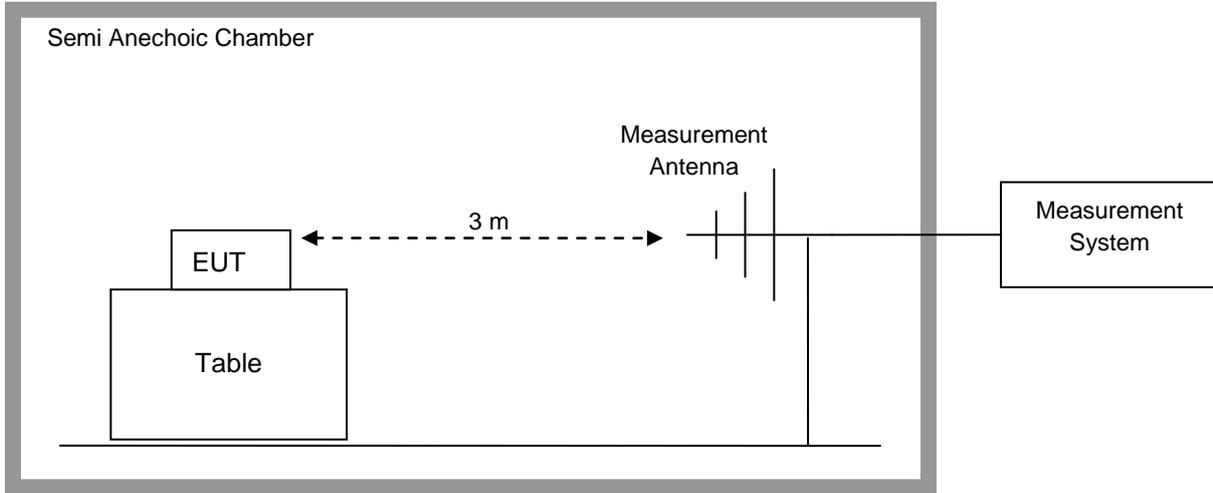


5.3.2 Test Result

9k~30MHz

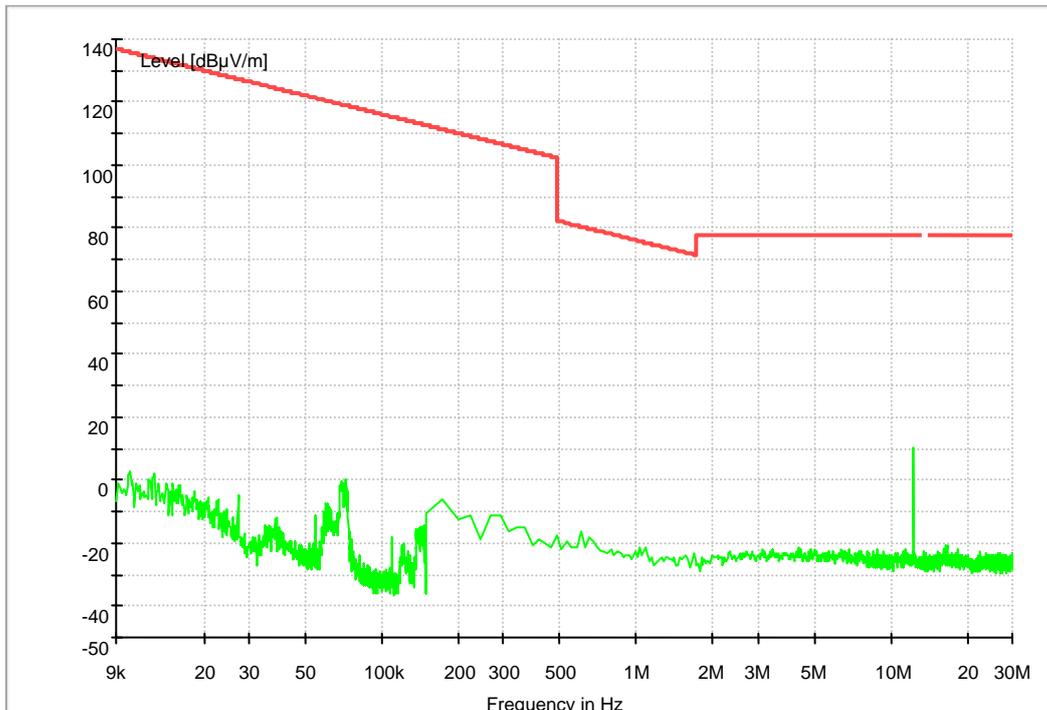

30M~1GHz

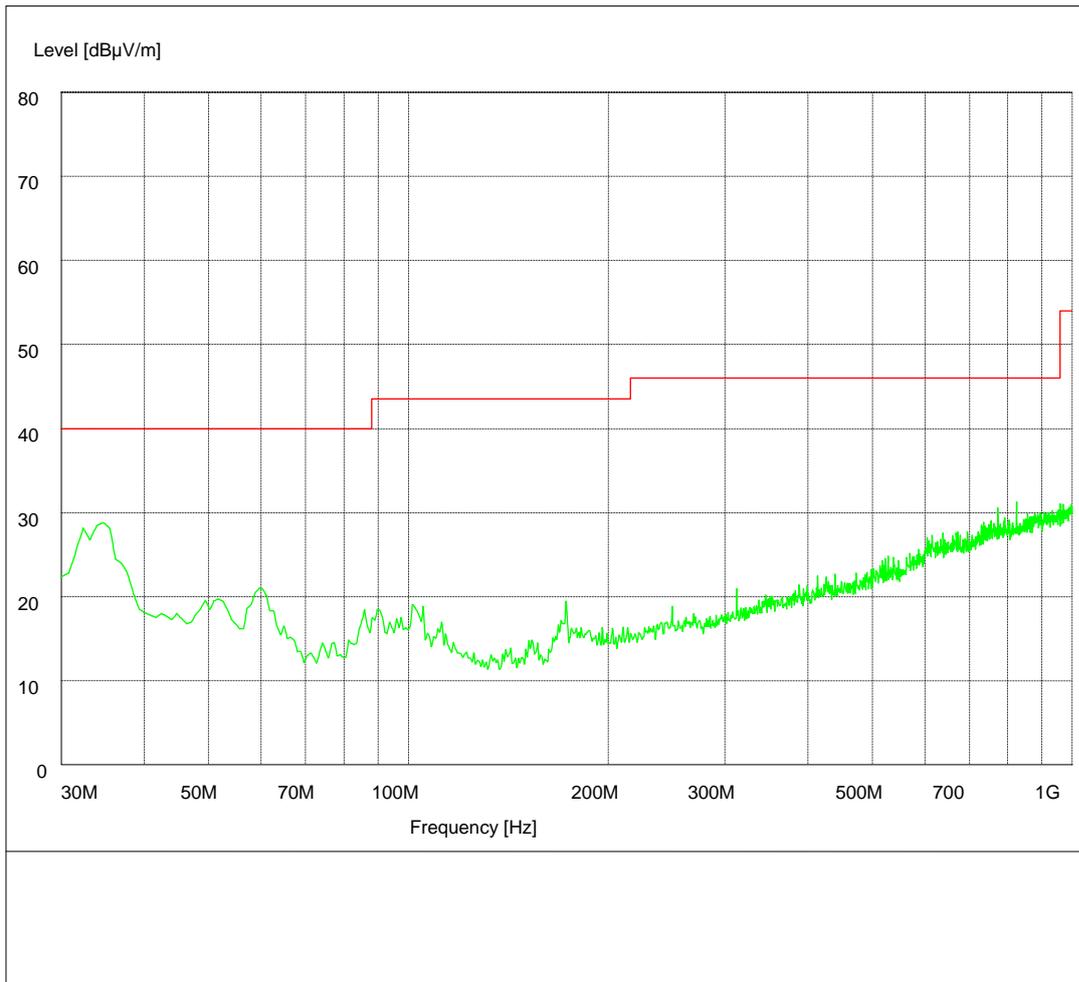

NOTES:

1. All measurements were recorded using a spectrum analyzer employing a quasi-peak detector for emissions below 960MHz.
2. Both Vertical and Horizontal polarities of the receive antenna were evaluated with the worst case emissions being reported. Below 30MHz the Loop antenna was positioned in 3 separate radials.
3. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
4. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.

The result of the measurement is passed.

5.4 Frequency Stability

5.4.1 Test Setup

The EUT was placed in a Climatic Chamber. A small whip antenna was placed close to the EUT, and connected to the measuring Spectrum Analyzer. Measurement performed without modulation on TX.

5.4.2 Test Result

VOLTAGE (%)	POWER Battery	TEMP (°C)	Frequency (MHz)	Freq. Dev. (Hz)	Deviation (%)
100%		-20	13559985	-15	-0.000111
100%		-10	13560014	14	0.000103
100%		0	13560016	16	0.000118
100%		10	13559995	-5	-0.000037
100%		20	13559994	-4	-0.000029
100%		30	13559986	-14	-0.000103
100%		40	13560011	11	0.000081
100%		50	13559984	-16	-0.000118
Battery End Point	3.5	20	13560011	11	0.000081
115%	4.35	20	13560015	15	0.000111

The result of the measurement is passed.

-----The END-----