



FCC RF Test Report

**Product Name: HSPA/UMTS/GPRS/GSM/EDGE Mobile
Phone with Bluetooth; Ascend G600**

Model Number: HUAWEI U8950N-51, U8950N-51

Report No: SYBH(Z-RF)019082012-2001

FCC ID:QISU8950N-51

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C
Tel: +86 755 28780808 Fax: +86 755 89652518



Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Applicant:	Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Receipt Test Item:	Aug.,10, 2012
Start Date of Test:	Aug., 13, 2012
End Date of Test:	Aug., 24, 2012
Test Result:	Pass

Approved By Senior Engineer Aug., 28, 2012 Dai Linjun
 Date Name Signature

Reviewed By Aug., 28, 2012 Cousy Xu
 Date Name Signature

Operated By Aug., 28, 2012 Huang Qiuliang
 Date Name Signature

Contents

1	<u>General Information</u>	5
1.1	APPLIED STANDARD.....	5
1.2	TEST LOCATION.....	5
1.3	TEST ENVIRONMENTAL CONDITION.....	5
2	<u>Summary</u>	6
3	<u>Product Description</u>	7
3.1	PRODUCT INFORMATION	7
4	<u>Test Description</u>	9
4.1	SUPPORTED FREQUENCY RANGE	9
4.2	TRANSMITTER / RECEIVER CHARACTERISTICS.....	9
4.3	ANTENNA GAIN.....	9
5	<u>General Test Conditions / Configurations</u>	10
5.1	RF CHANNELS UNDER TEST.....	10
5.2	TEST MODES.....	10
5.3	TEST ENVIRONMENT	10
5.4	TEST SETUP.....	11
5.5	TEST CONDITIONS	15
6	<u>Main Test Instruments</u>	17
7	<u>Test Results</u>	18
8	<u>Measurement Uncertainty</u>	18



1 General Information

1.1 Applied Standard	
Applied Rules:	47 CFR FCC Part 2:2011, Subpart J 47 CFR FCC Part 22:2011, Subpart H ANSI/TIA 603C:2004
1.2 Test Location	
Test Location 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
1.3 Test Environmental Condition	
Ambient Temperature:	20 – 25 °C
Ambient Relative Humidity:	45 – 55 %
Atmospheric Pressure:	101 kPa



2 Summary

Table 1 Summary of results

Test Case	FCC Part No.	Requirements	Result
Cellular Band			
Transmitter Output Power	2.1046 & 22.913	ERP not exceed 7 W	Pass
Modulation Characteristics	2.1047	Digital modulation	Pass
Occupied Bandwidth	2.1049	(Not specified)	Pass
Band Edges Compliance	2.1051 & 917	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 2.917	Below -13 dBm/1 kHz, 9 kHz to 150 kHz Below -13 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 10 th harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 22.917	Below -13 dBm/100 kHz	Pass
Frequency Stability	2.1055 & 22.355	Maintained within the tolerances of ± 2.5 ppm	Pass

3 Product Description

3.1 Product Information

3.1.1 General Description

HUAWEI U8950N-51, U8950N-51 is subscriber equipment in the WCDMA/GSM system. The HSPA/UMTS frequency band is Band I and Band II and Band V. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only Band V and GSM850 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, NFC, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

3.1.2 Board Information

Table 2 Board Information

HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Ascend G600		
HUAWEI U8950N-51, U8950N-51		
Board and Module		
Hardware Version	serial number:	software status:
HD2U8950M	B9N01A9272800108	U8950-1V100R001C00B930

3.1.3 Adapter Technical Data

AC/DCAdapter Model	HW-050100U1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

AC/DCAdapter Model	HW-050100E1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W



AC/DCAdapter Model	HW-050100B1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

AC/DCAdapter Model	HW-050100A1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

AC/DCAdapter Model	HW-050100U2W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

AC/DCAdapter Model	HW-050100E3W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

3.1.4 Battery Technical Data

Name	Qty.	Manufacture	Description
Rechargeable Li-ion	1	Huawei Technologies Co., Ltd.	Battery Model: HB5R1H Rated capacity: 1930mAh Nominal Voltage:  +3.7V Charging Voltage:  +4.2V



4 Test Description

4.1 Supported Frequency Range

Characteristics	Description
Downlink	869 to 894 MHz
Uplink	824 to 849 MHz

4.2 Transmitter / Receiver Characteristics

Characteristics	Description
System Type	GSM UMTS
TX Output Power (per Antenna Port)	GSM system: Power class 4 UMTS system: Power class 3
Channel Spacing(s) / Bandwidth(s)	GSM system: 200 kHz UMTS system: 5 MHz
Designation of Emissions	GSM system: 248KGXW (GMSK modulation), 248KG7W (8PSK modulation) UMTS system: 4M18F9W

4.3 Antenna Gain

Antenna Gain(dBi)	0.74
Antenna Gain(dBd)	-1.41

5 General Test Conditions / Configurations

5.1 RF Channels under Test

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
TM1/TM2	TX	Channel 128	Channel 192	Channel 251
		824.2MHz	837.0MHz	848.8MHz
	RX	Channel 128	Channel 192	Channel 251
		869.2MHz	882.0MHz	893.8MHz
TM3/TM4/TM5	TX	Channel 4132	Channel 4182	Channel 4233
		826.4MHz	836.4MHz	846.6MHz
	RX	Channel 4357	Channel 4407	Channel 4458
		871.4MHz	881.4MHz	891.6MHz

5.2 Test Modes

Test Mode	Test Modes Description
TM1	GSM/GPRS, GMSK modulation
TM2	EDGE, 8PSK modulation
TM3	WCDMA, QPSK modulation
TM4	HSDPA, QPSK modulation
TM5	HSUPA, QPSK modulation

5.3 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.5V
	VN	3.7V
	VH	4.2V

NOTE: VL= lower extreme test voltage

VN= nominal voltage

VH= upper extreme test voltage


TN= normal temperature

5.4 Test Setup


5.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Ports	Until otherwise declared, all TX tests are ONLY performed at the main Transmitter antenna port (e.g. TRXA, TXA and so on) of the EUT, and all RX tests are ONLY performed at the main Receiver antenna port (e.g. TRXA, RXA and so on) of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

5.4.2 Test Setup 1

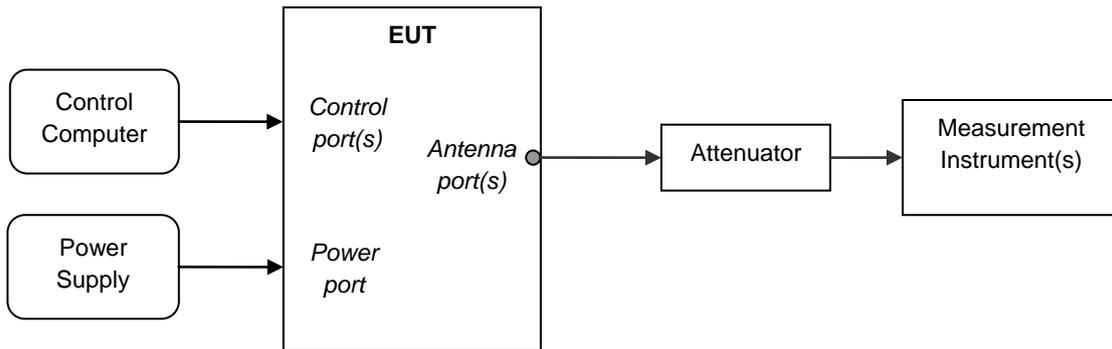

5.4.3 Test Setup 2

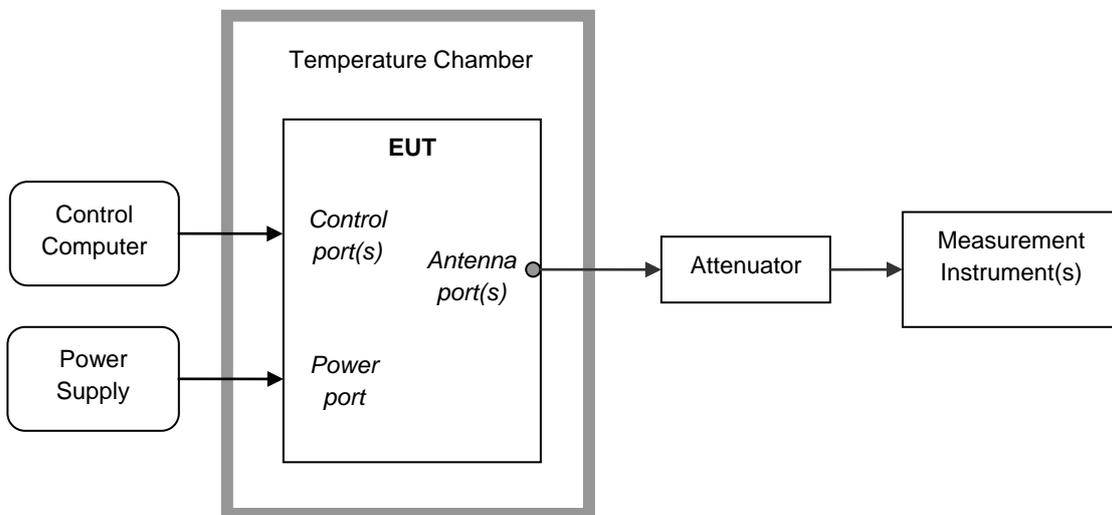


5.4.4 Test Setup 3

NOTE1: Effective radiated power (ERP) or Effective Isotropic radiated power (EIRP) refers to the EUT radiation power output, assuming all emissions are radiated from half-wave dipole antennas or horn antennas.

NOTE2: The EUT was set on insulator 80cm above the Ground Plane. The setup and test methods were according to ANSI-TIA-603C 2004. The measurements were carried through with a Rohde and Schwarz Test Receiver and control software.


Step 1: Pre-test to find the Maximum ERP or EIRP

1. Connect the test system according to the following figure. EUT is running for 30 minutes before test, and measurement instruments are warming-up for 30 minutes.
2. Set up communication link between Universal radio communication tester and EUT, set EUT working frequency, and control EUT to transmit at maximum power.
3. Set the center frequency of the signal analyzer or receiver to the EUT's operating frequency, the RBW is equal to the emission bandwidth of the signal. Set RMS detector for the test, and the span is equal to 2 times of emission bandwidth, the other settings should remain automatic. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°. The receiver antenna has two polarizations V and H. A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other non-metallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized. Measure the EUT maximum RF power and record the result.
4. Changing EUT working frequency and measuring the RF power at channel T, M, B respectively.
Complete the test data.

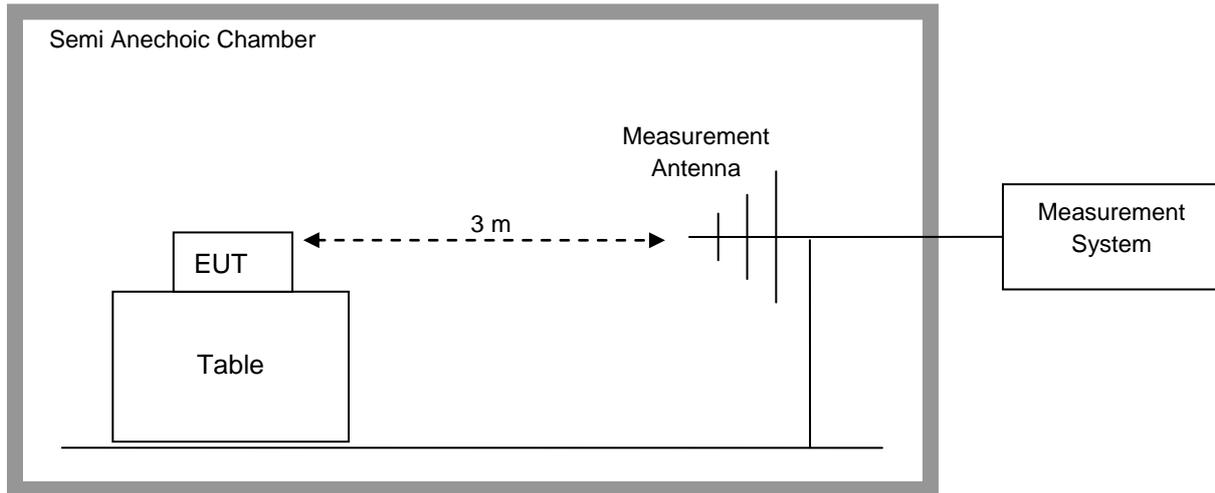

Step 2: Substitution method to verify the maximum ERP or EIRP

1. Measurement setup is according to the following figure. EUT was substituted by antenna, and the polarization is identical with the test antenna; the signal generator was connected to the substitution antenna.
2. The radiated output power, measured by signal analyzer set, is the same as recorded in above item 5). Then this power level is matched by a signal from a calibrated signal generator which is substituted for EUT. The power supplied by the generator is then equal to the ERP or EIRP after corrected by the antenna gain and cable loss.

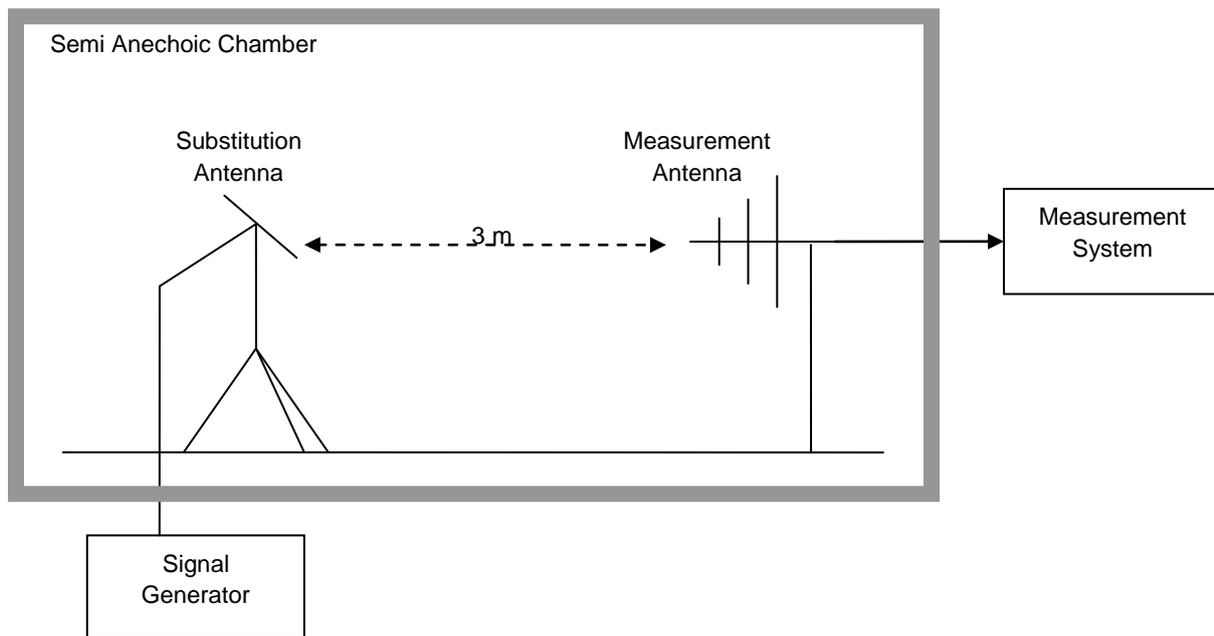

5.5 Test Conditions

Test Case	Test Conditions	
Transmitter Output Power	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1 & Test Setup 3
	Detector	RMS
	RF Channels (TX)	L, M, H
	Test Mode	TM1/TM2/TM3/TM4/TM5
Modulation Characteristics	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	RF Channels (TX)	M
	Test Mode	TM1/TM2/TM3
Occupied Bandwidth	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	L, M, H
	Test Mode	TM1/TM2/TM3
Band Edges Compliance	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	L, H
	Test Mode	TM1/TM2/TM3
Spurious Emission at Antenna Terminals	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	L, M, H
	Test Mode	TM1/TM2/TM3
Field Strength of Spurious Radiation	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	PK
	RF Channels (TX)	M
	Test Mode	TM1/TM2/TM3/TM4/TM5
Frequency Stability	Test Configuration	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) 85%, 100% and 115% of Rated Voltage at Ambient Temperature.
	Test Setup	Test Setup 2
	RF Channels (TX)	M



Test Case	Test Conditions	
	Test Mode	TM1/TM2/TM3

6 Main Test Instruments

Table 3 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sept., 27, 2012
Universal Radio Communication Tester	R&S	CMU200	105822	Oct., 24, 2012
Wireless Communication Test set	Agilent	N4010A	MY49081592	Dec., 14, 2012
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug., 31, 2013
Spectrum Analyzer	Agilent	E4440A	MY49420179	Apr., 20, 2013
Signal Analyzer	R&S	FSQ31	200021	Sept., 27, 2012
Temperature Chamber	WEISS	WKL64	24600294	Jan., 03, 2013
Signal generator	Agilent	E8257D	MY49281095	Jul., 09, 2013
Vector Signal Generator	R&S	SMU200A	104162	Sept., 07, 2012
Test receiver	R&S	ESU26	100150	May., 24, 2013
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	919/1009	Dec., 13, 2012
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	Dec., 13, 2012
Horn Antenna	R & S	HF906	100683	May., 16, 2013
Horn Antenna	R & S	HF906	100684	May., 16, 2013
Broadband Antenna	Schwarzbeck	VULB 9163	9163-357	Sep., 15, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-356	Sep., 15, 2012

NOTE: All the test equipment are calibrated once a year.

7 Test Results

No.	Test Item	Test Result
1	Transmitter Output Power	Appendix A
2	Modulation Characteristics	Appendix B
3	Occupied Bandwidth	Appendix C
4	Band Edges Compliance	Appendix D
5	Spurious Emission at Antenna Terminals	Appendix E
6	Field Strength of Spurious Radiation	Appendix F
7	Frequency Stability	Appendix G
8	Photos of Test Setup	Appendix H

NOTE: There is no test data in Appendix H, only Photos of Test Setup for Field Strength of Spurious Radiation.

8 Measurement Uncertainty

For a 95% confidence level ($k=2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmitter Output Power	Power (dBm)	U =0.39 dB
Occupied Bandwidth	Magnitude (%)	U=0.2%
Band Edge Compliance	Disturbance Power (dBm)	U=2.0 dB
Conducted Spurious Emissions	Disturbance Power (dBm)	U=2.0 dB
Field Strength of Spurious Radiation	ERP (dBm)	U=4.6 dB (30 MHz – 1GHz) U=3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy (ppm)	U=0.21 ppm

-----The END-----



Appendix A

Transmitter Output Power According to FCC Part 2.1046 & Part 22.913



Conducted Power of Transmitter

Table 1 Measurement Results

		RF Output Power (Conducted)					
TEST CONDITIONS		Channel128(B)		Channel192(M)		Channel251(T)	
		824.2MHz		837.0MHz		848.8MHz	
		dBm		dBm		dBm	
T_{nom} / V_{nom}		Measured	Limit	Measured	Limit	Measured	Limit
TM1		32.38	38.50	32.23	38.50	31.97	38.50
TM2		27.23	38.50	27.11	38.50	26.97	38.50
TEST CONDITIONS		Channel4132(B)		Channel4182(M)		Channel4233(T)	
		826.4MHz		836.4MHz		846.6MHz	
		dBm		dBm		dBm	
T_{nom} / V_{nom}		Measured	Limit	Measured	Limit	Measured	Limit
TM3		23.67	38.50	23.91	38.50	23.88	38.50
TM4	Case1	23.38	38.50	23.62	38.50	23.51	38.50
	Case2	22.94	38.50	23.21	38.50	23.13	38.50
	Case3	22.34	38.50	22.63	38.50	22.49	38.50
	Case4	22.31	38.50	22.54	38.50	22.45	38.50
TM5	Case1	22.11	38.50	22.74	38.50	22.88	38.50
	Case2	21.39	38.50	21.15	38.50	21.19	38.50
	Case3	21.43	38.50	21.7	38.50	21.75	38.50
	Case4	21.61	38.50	22.02	38.50	21.52	38.50
	Case5	22.36	38.50	22.81	38.50	22.98	38.50



Effective Radiated Power of Transmitter (ERP)

Table 2 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	FCC limit [dBm]	Result
TM1	824.2	30.97	Dipole Ant.	34.5	-2.75	0.6	31.15	38.5	Pass
TM1	837.0	30.82	Dipole Ant.	34.09	-2.87	0.6	30.62	38.5	Pass
TM1	848.8	30.56	Dipole Ant.	33.81	-2.85	0.6	30.36	38.5	Pass
TM2	824.2	25.82	Dipole Ant.	29.24	-2.75	0.6	25.89	38.5	Pass
TM2	837.0	25.7	Dipole Ant.	28.97	-2.87	0.6	25.5	38.5	Pass
TM2	848.8	25.56	Dipole Ant.	28.81	-2.85	0.6	25.36	38.5	Pass
TM3	826.4	22.26	Dipole Ant.	25.41	-2.75	0.6	22.06	38.5	Pass
TM3	836.4	22.5	Dipole Ant.	25.98	-2.87	0.6	22.51	38.5	Pass
TM3	846.6	22.47	Dipole Ant.	25.72	-2.85	0.6	22.27	38.5	Pass

Note: a, For getting the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

b, SGP=Signal Generator Level

-----The END-----




Appendix B

Modulation Characteristics

According to FCC Part 2.1047 & Part22 Subpart H




Channel 192 (TM1:GPRS/GSM)

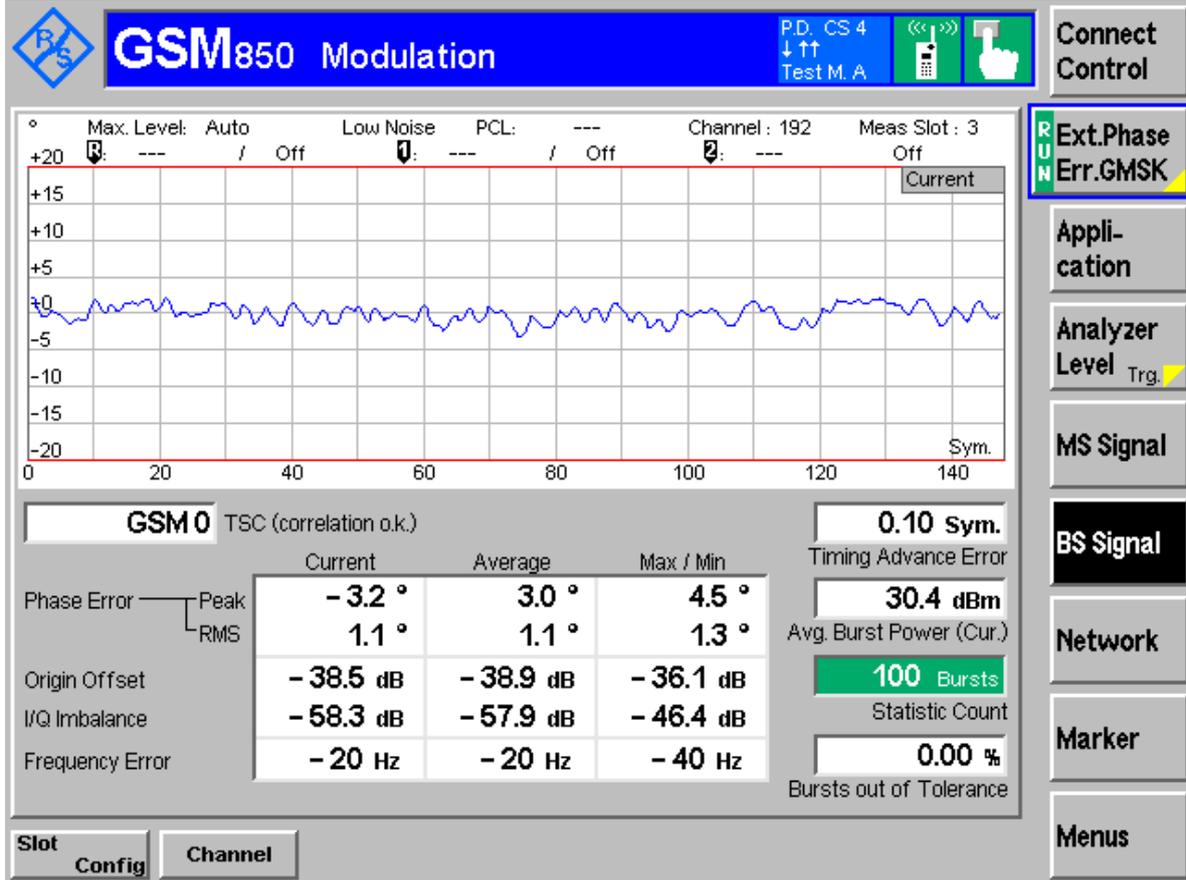




Channel 192 (TM2:EDGE)

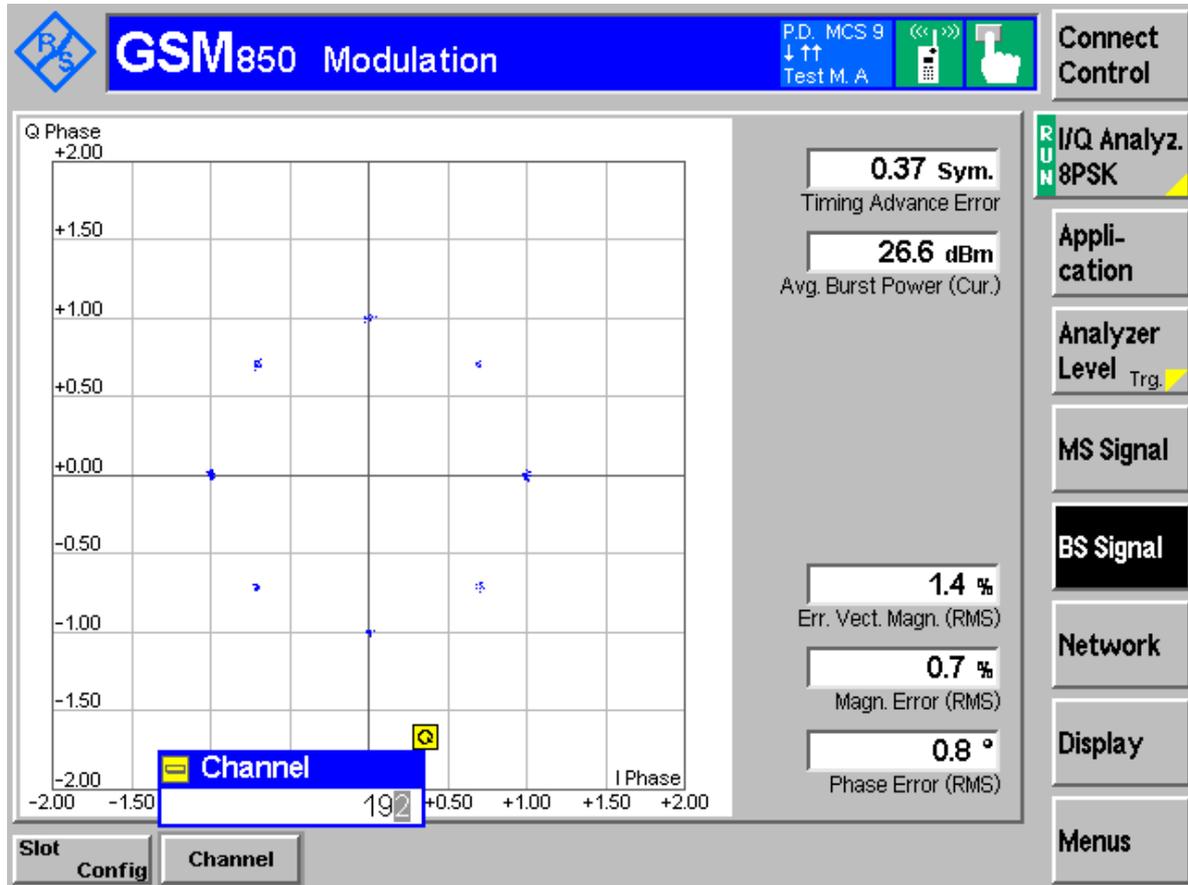



Channel 4182 (TM3: WCDMA)

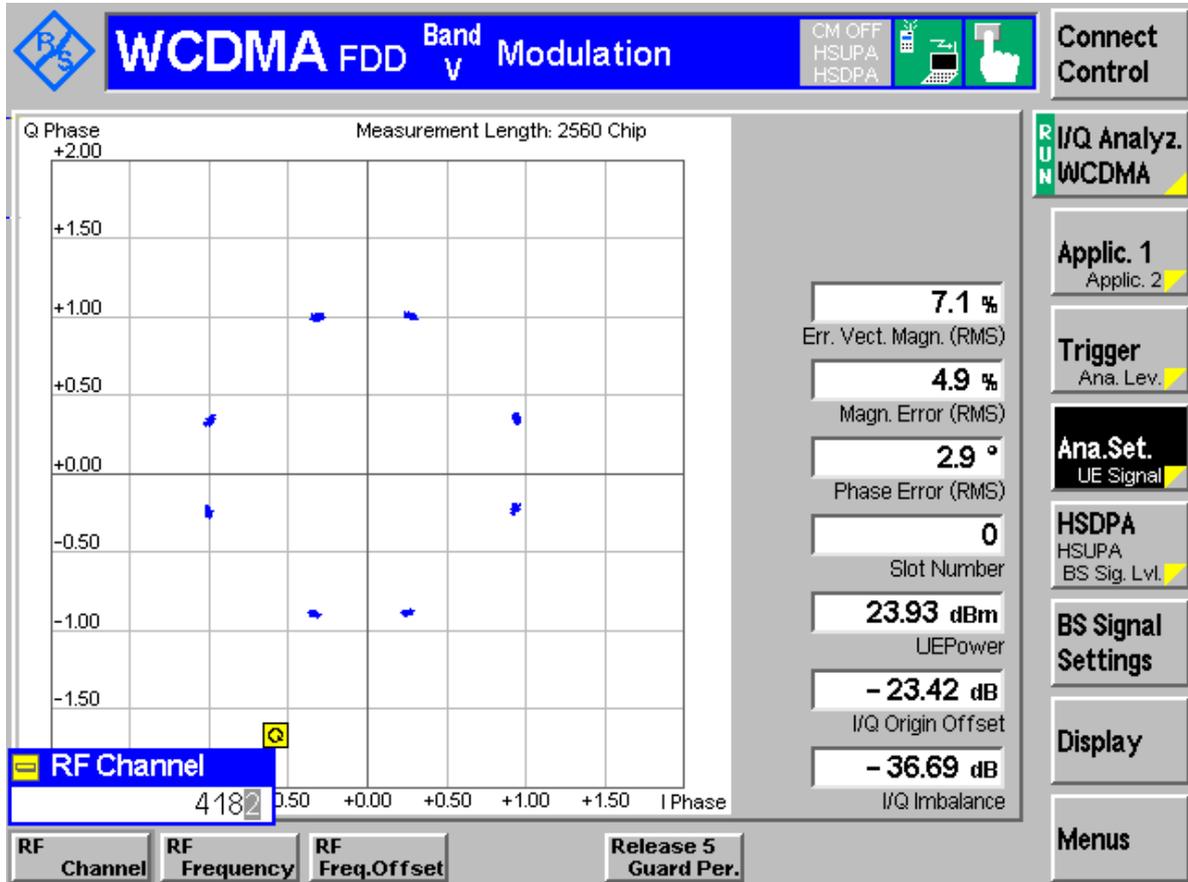

-----The END-----



Appendix C

Occupied Bandwidth According to FCC Part 2.1049 & Part 22 Subpart H



Result Table

Table 1 Measurement Results


Test Mode	RF Channel	Occupied Bandwidth [kHz]	Verdict
TM1	128	243.59	Pass
	192	245.19	Pass
	251	248.40	Pass
TM2	128	245.19	Pass
	192	245.19	Pass
	251	248.40	Pass
Test Mode	RF Channel	Occupied Bandwidth [MHz]	Verdict
TM3	4132	4.17	Pass
	4182	4.18	Pass
	4233	4.15	Pass



Channel 128 (TM2:EDGE)




Ref 35 dBm Att 30 dB RBW 3 kHz VBW 10 kHz SWT 115 ms Marker 1 [T1] 20.83 dBm 824.123076923 MHz

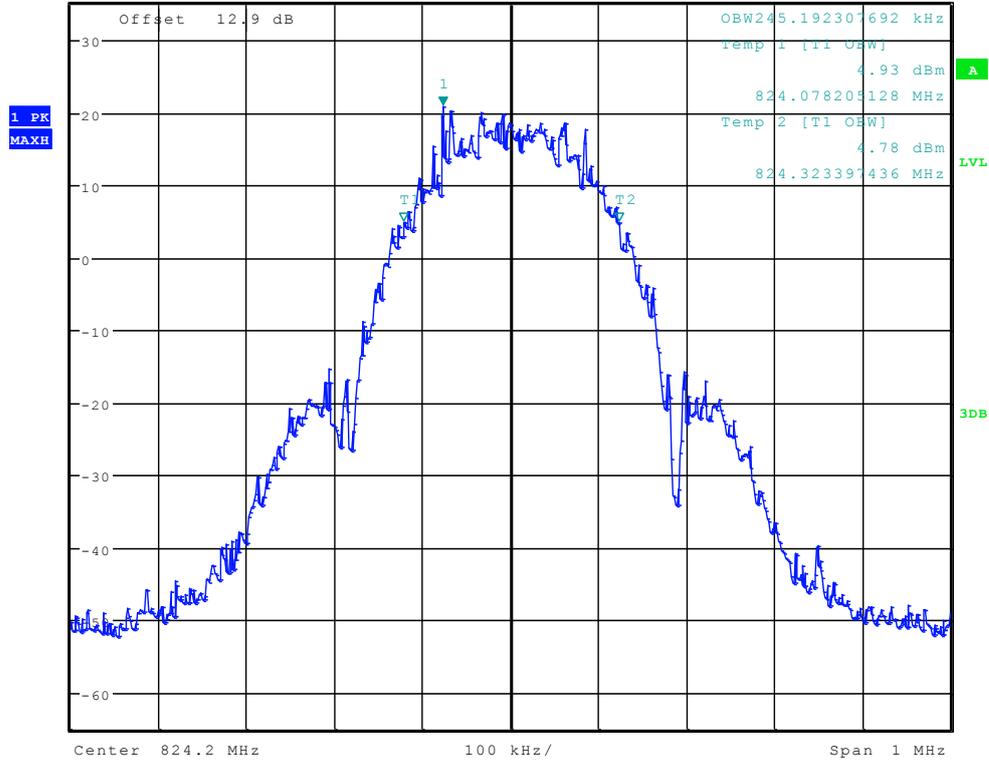

Date: 15.AUG.2012 09:44:13




Channel 4132 (TM3: WCDMA)

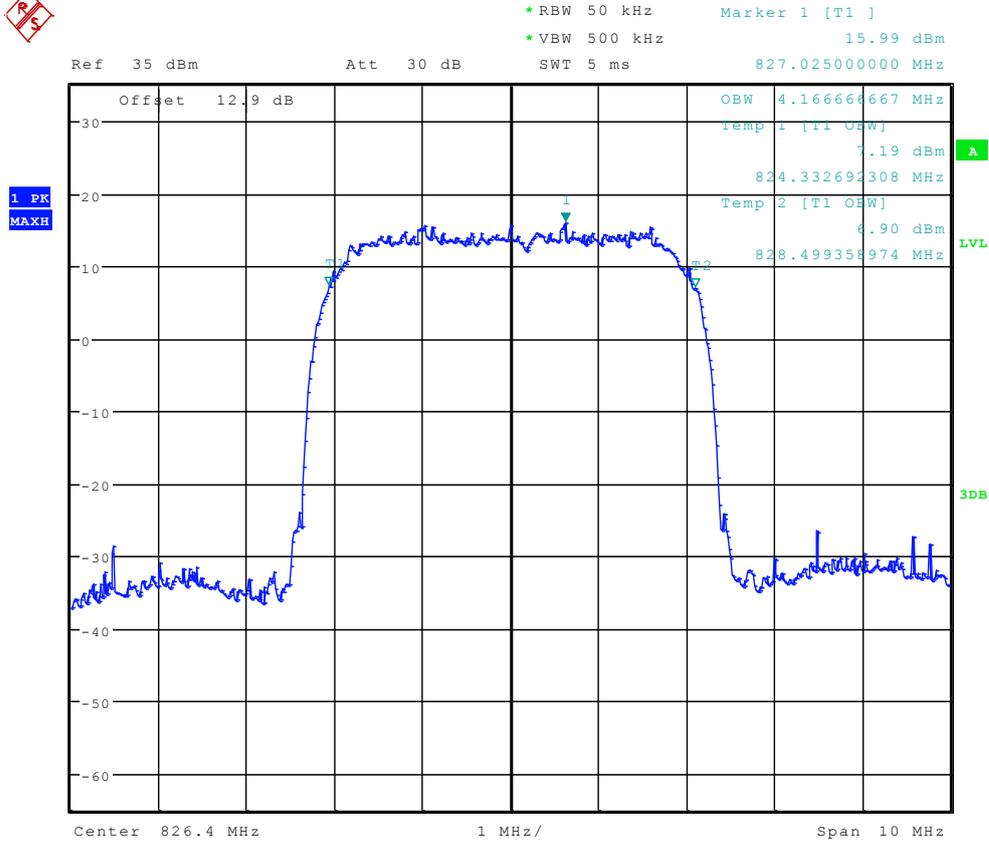

Date: 15.AUG.2012 09:56:16




Channel 192 (TM2:EDGE)

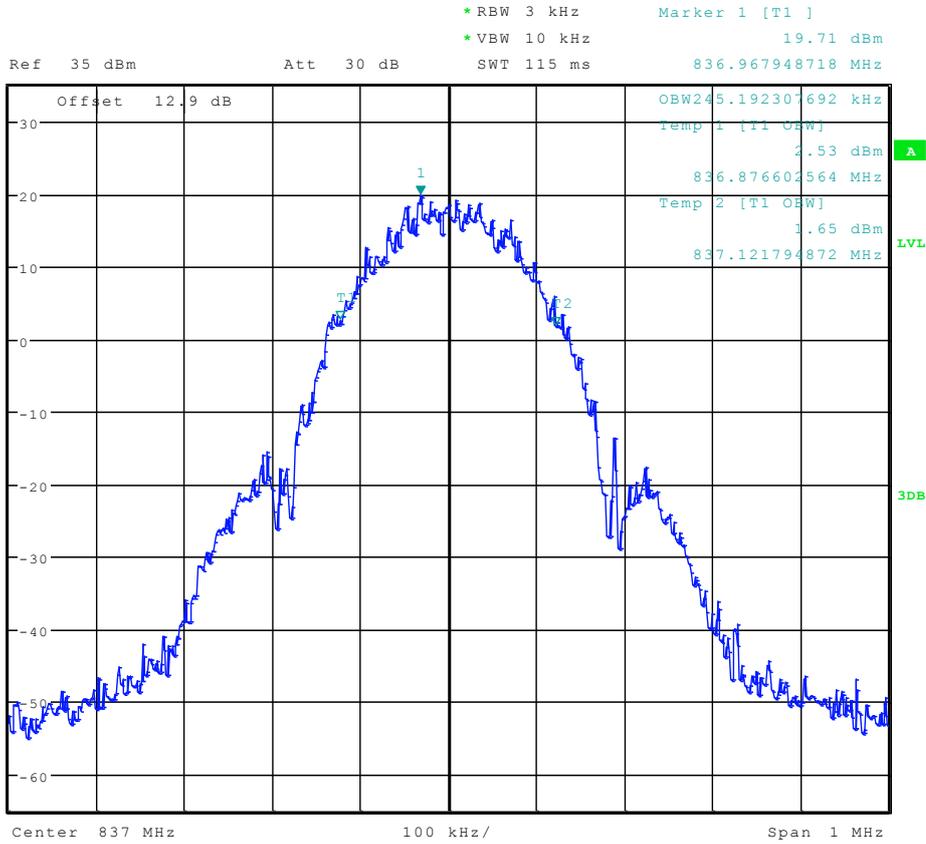

Date: 15.AUG.2012 09:44:45



Channel 4182 (TM3: WCDMA)

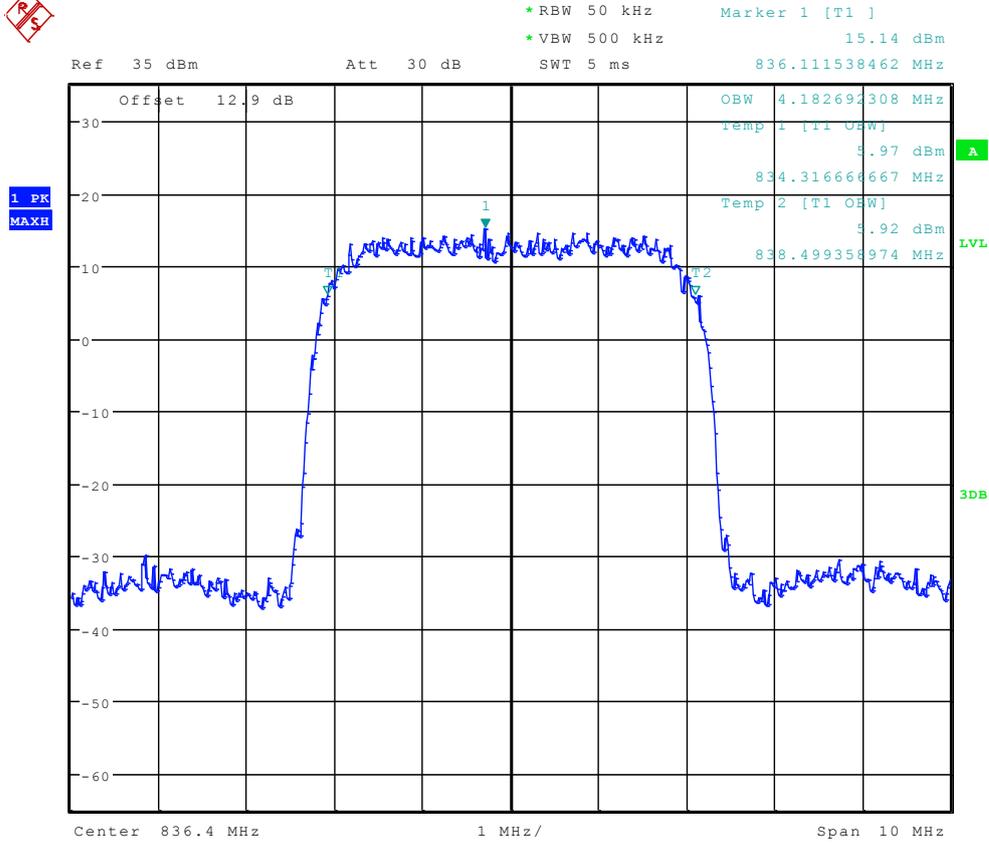


Date: 15.AUG.2012 09:56:29



Channel 251 (TM1:GPRS/GSM)



Ref 35 dBm Att 30 dB SWT 115 ms Marker 1 [T1] 23.95 dBm
 *RBW 3 kHz *VBW 10 kHz 848.783974359 MHz

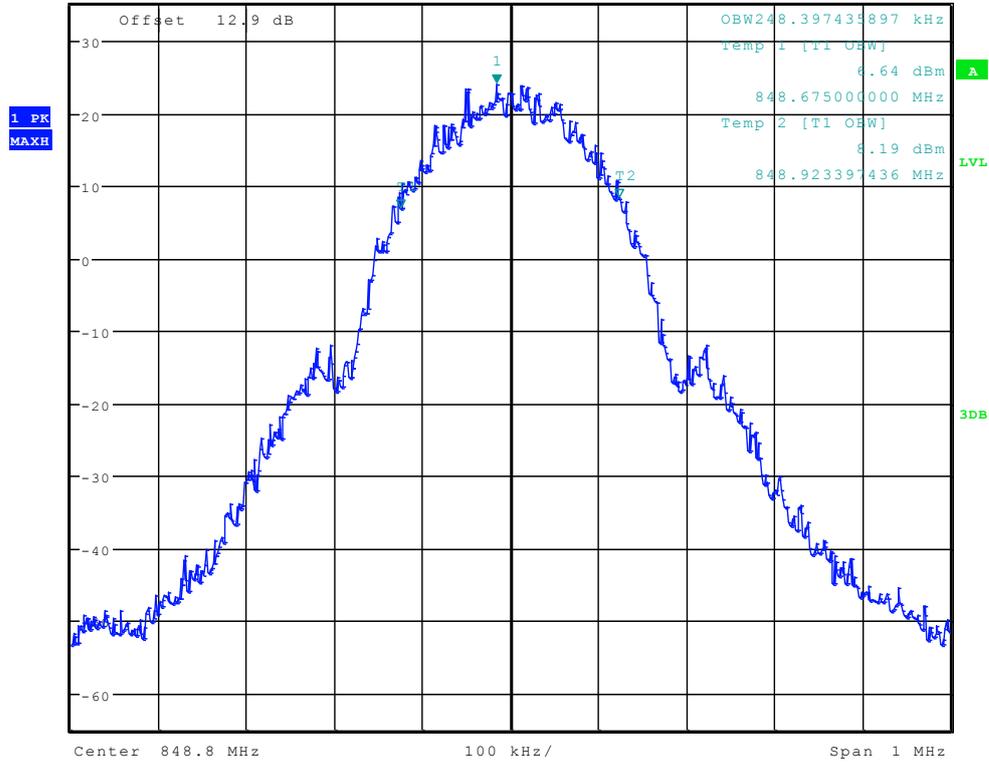


Date: 15.AUG.2012 09:34:53



Channel 251 (TM2:EDGE)




Ref 35 dBm Att 30 dB RBW 3 kHz Marker 1 [T1] 19.42 dBm
 VBW 10 kHz SWT 115 ms 848.798397436 MHz

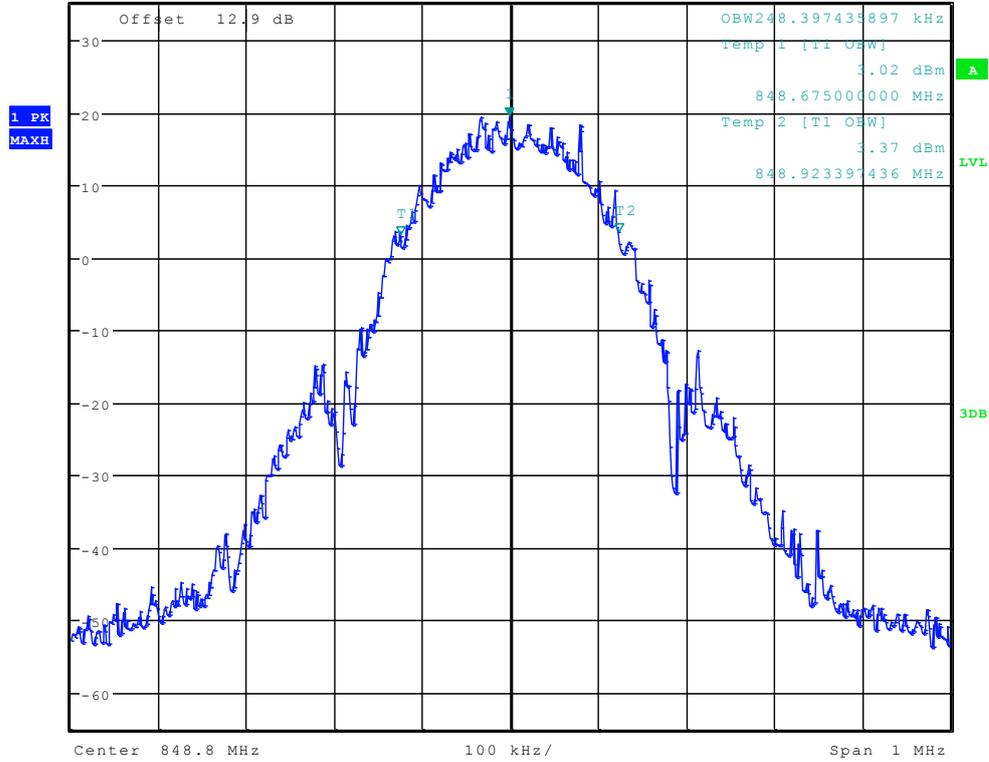

Date: 15.AUG.2012 09:45:29



Channel 4233 (TM3: WCDMA)

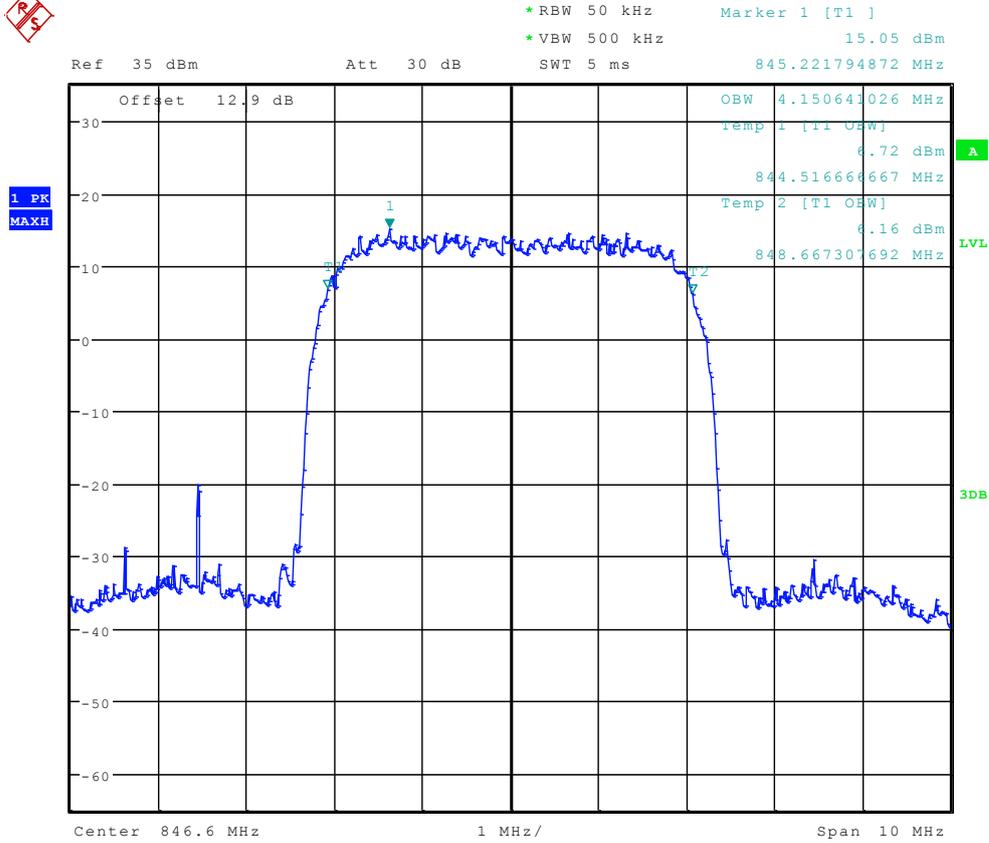

Date: 15.AUG.2012 09:56:43

-----END-----



Appendix D

Band Edges Compliance


According to FCC Part 2.1051 & Part 22 Subpart H



TM1:GPRS/GSM

Left Edge

Channel 128

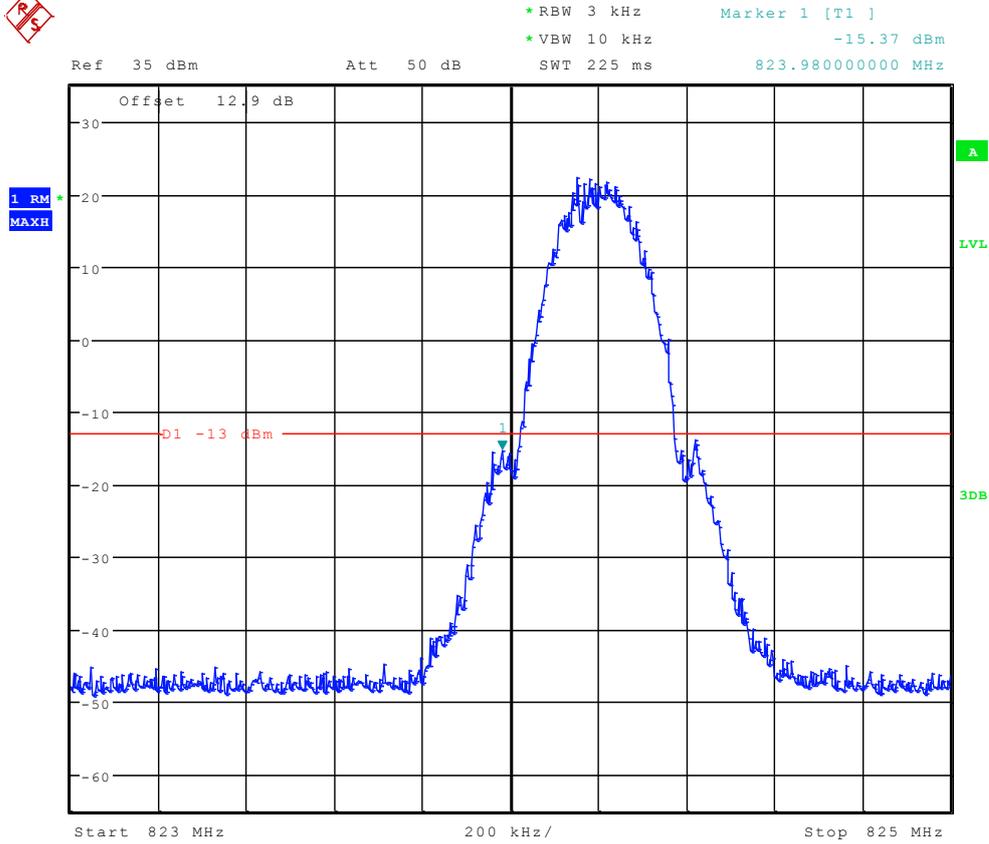


Date: 15.AUG.2012 09:41:06



Right Edge Channel 251



Ref 35 dBm Att 50 dB RBW 3 kHz Marker 1 [T1] -15.84 dBm
* VBW 10 kHz
SWT 225 ms 849.02000000 MHz

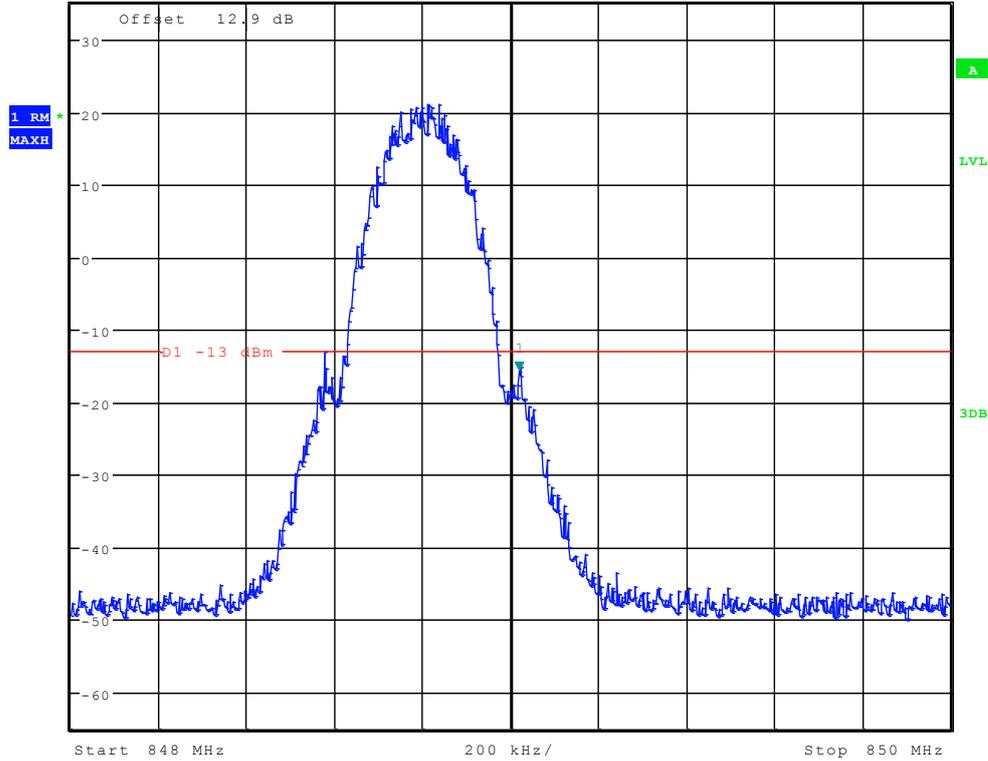


Date: 15.AUG.2012 09:41:41



TM2:EDGE

Left Edge

Channel 128

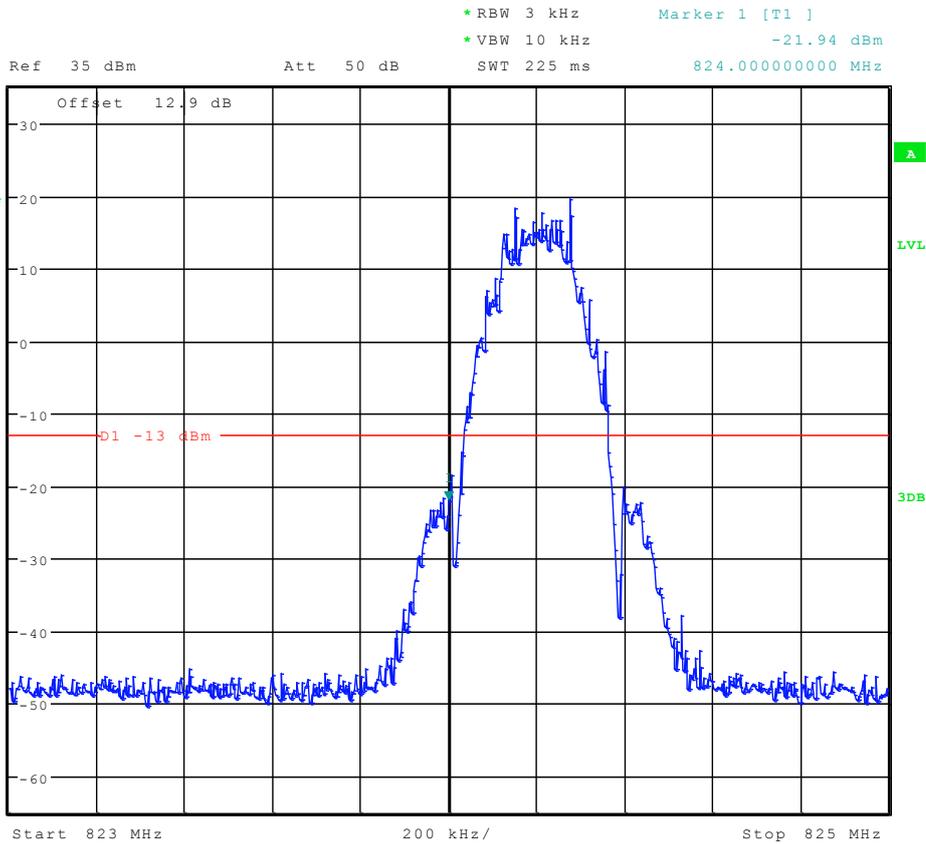


Date: 15.AUG.2012 09:49:40



Right Edge Channel 251



Ref 35 dBm Att 50 dB RBW 3 kHz Marker 1 [T1] -19.16 dBm
VBW 10 kHz 849.01500000 MHz
SWT 225 ms

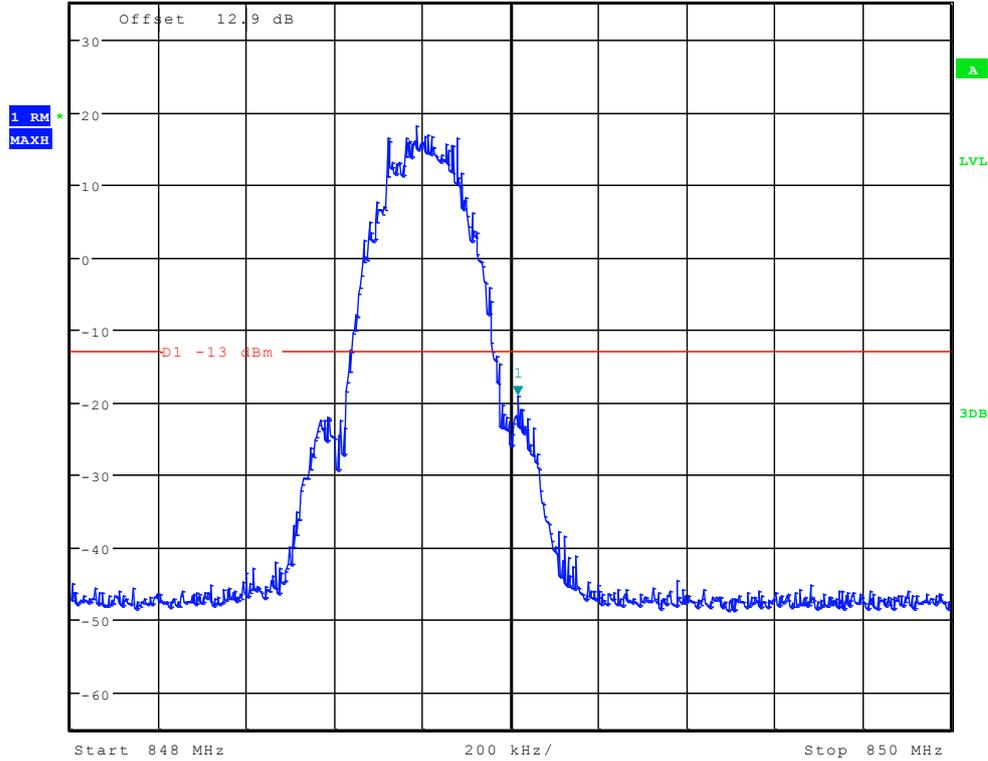


Date: 15.AUG.2012 09:51:25



TM3: WCDMA

Left Edge

Channel 4132

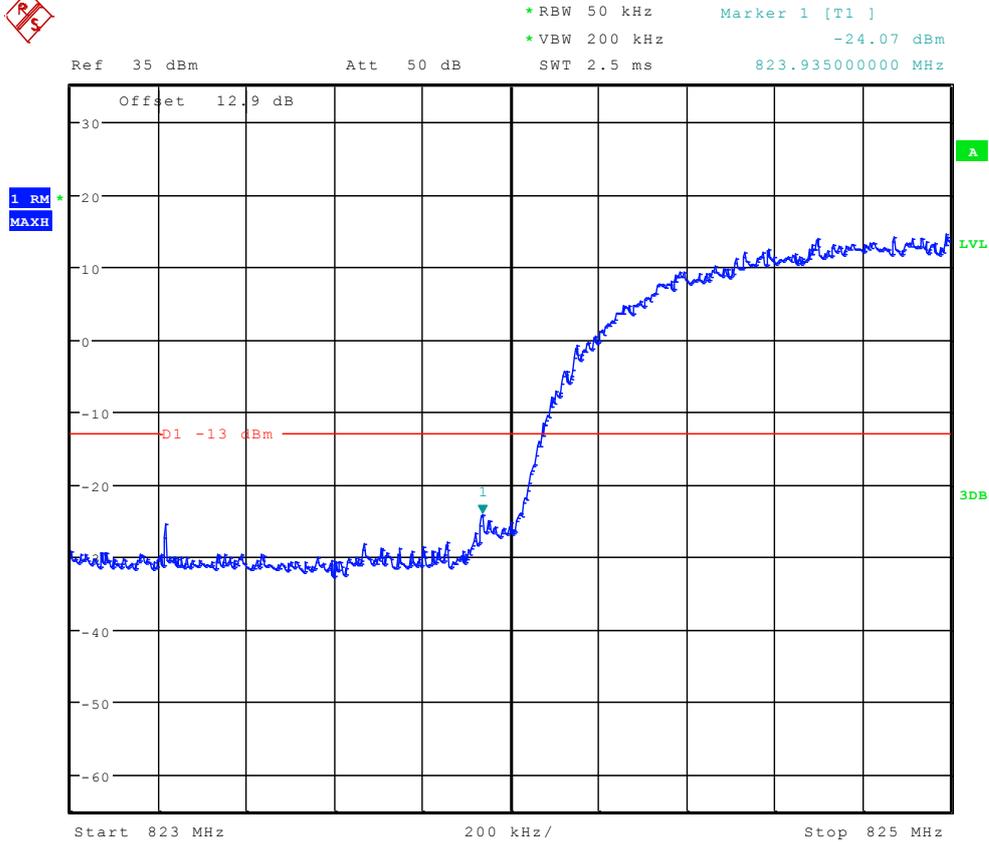


Date: 15.AUG.2012 10:00:19



Right Edge Channel 4233



*RBW 50 kHz Marker 1 [T1]
 *VBW 200 kHz -25.75 dBm
 Ref 35 dBm Att 50 dB SWT 2.5 ms 849.02000000 MHz

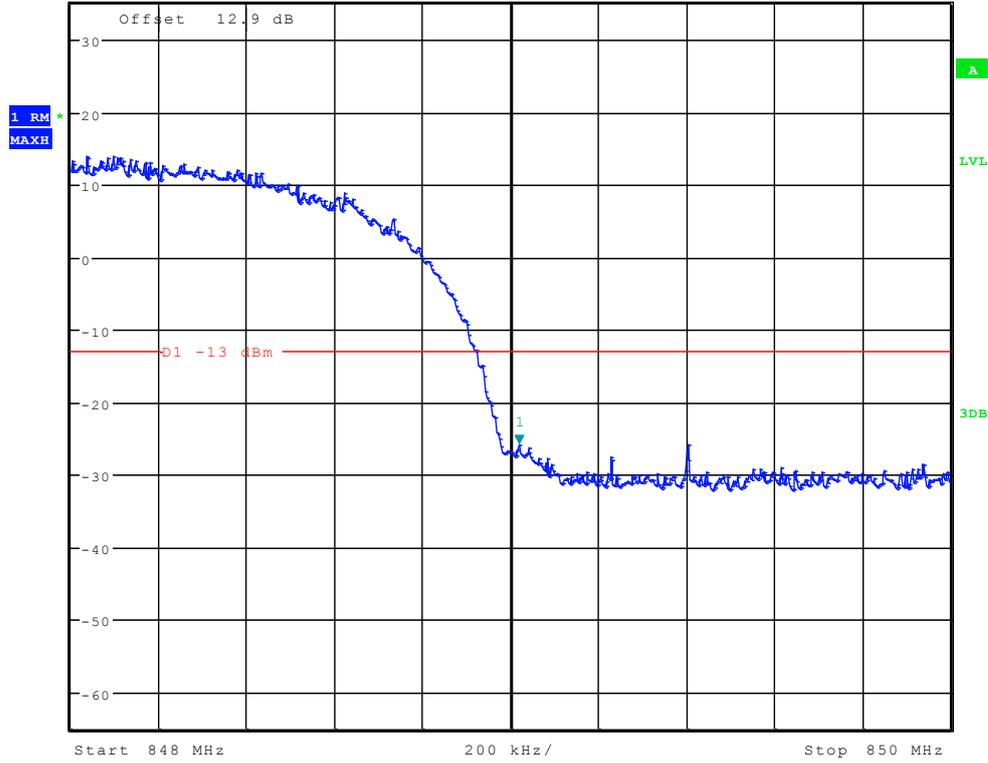

Date: 15.AUG.2012 10:00:33

-----END-----



Appendix E

Spurious Emission at Antenna Terminal


According to FCC Part 2.1051 & Part 22 Subpart H



TM1:GPRS/GSM Channel 128




*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -36.67 dBm
SWT 145 ms 9.903846154 kHz

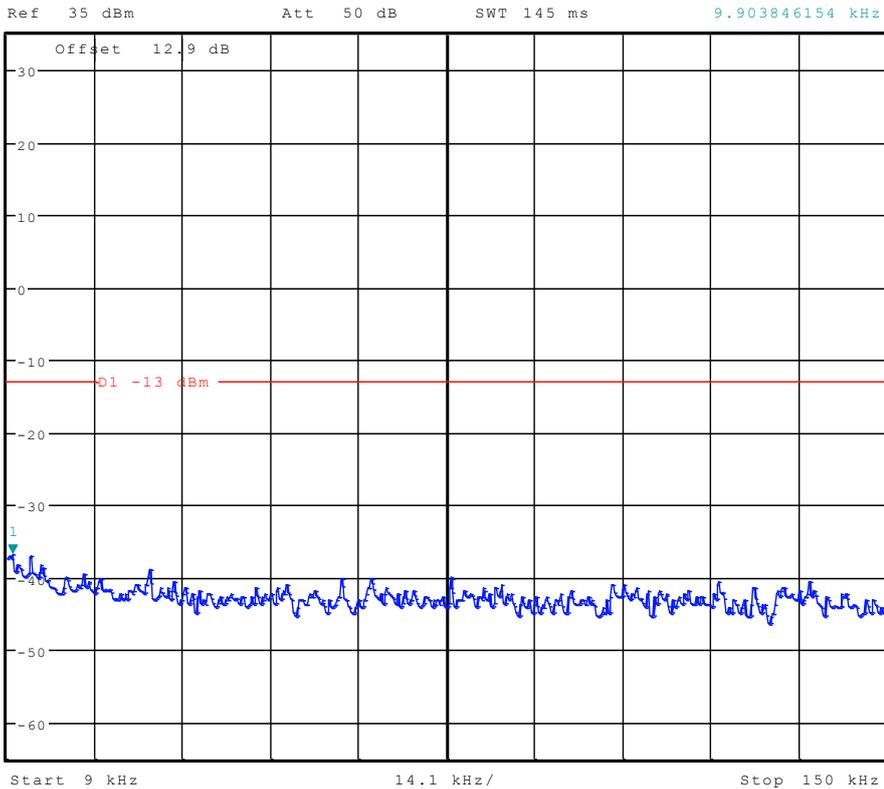

Date: 15.AUG.2012 09:35:08




*RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -31.64 dBm
 Ref 35 dBm Att 50 dB SWT 300 ms 197.836538462 kHz

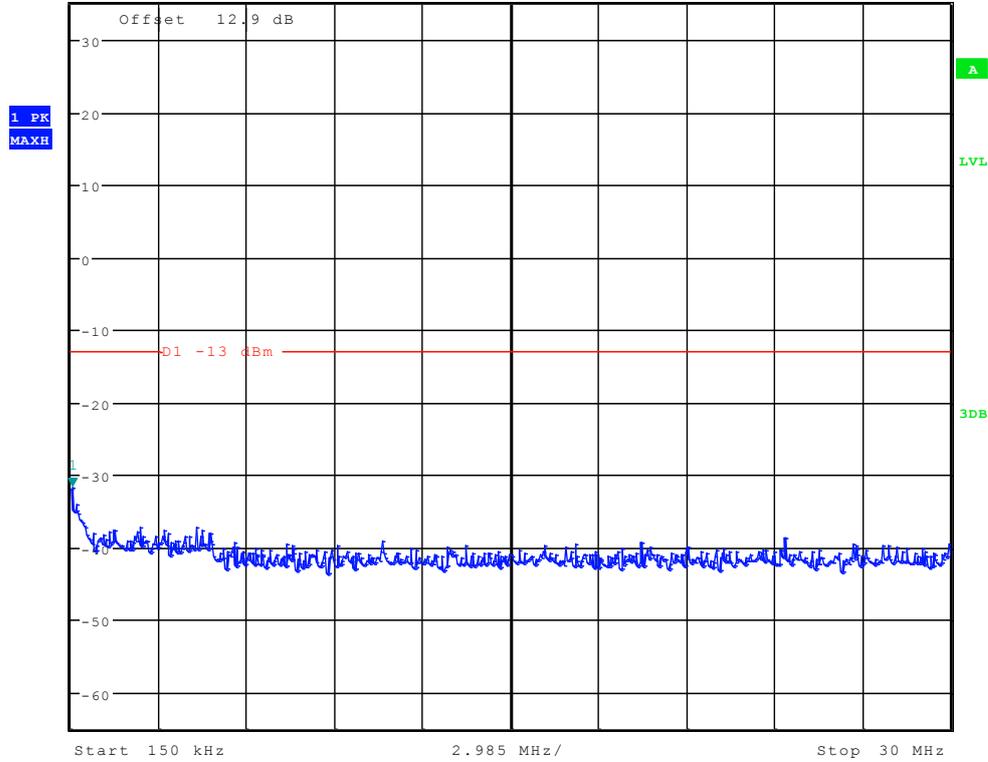

Date: 15.AUG.2012 09:35:51




* RBW 100 kHz Marker 1 [T1]
* VBW 300 kHz 32.87 dBm
Ref 42.9 dBm * Att 35 dB SWT 100 ms 825.897435897 MHz

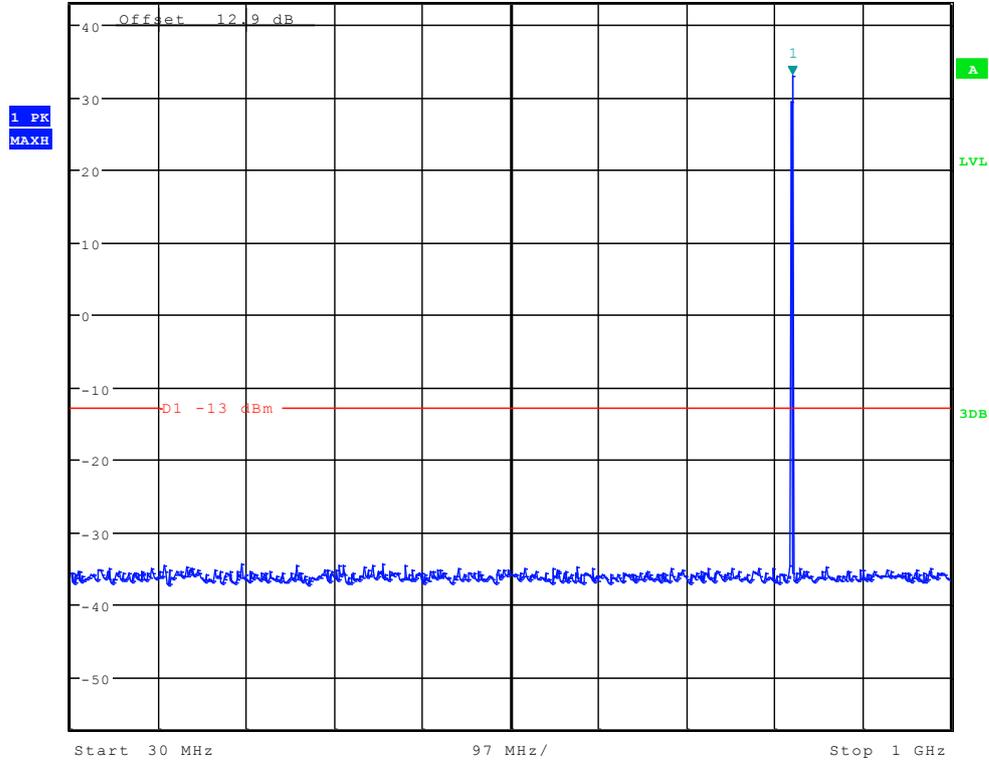

Date: 15.AUG.2012 09:38:40



* RBW 1 MHz Marker 1 [T1]
 * VBW 3 MHz -29.37 dBm
 Ref 35 dBm * Att 35 dB SWT 70 ms 2.544070513 GHz

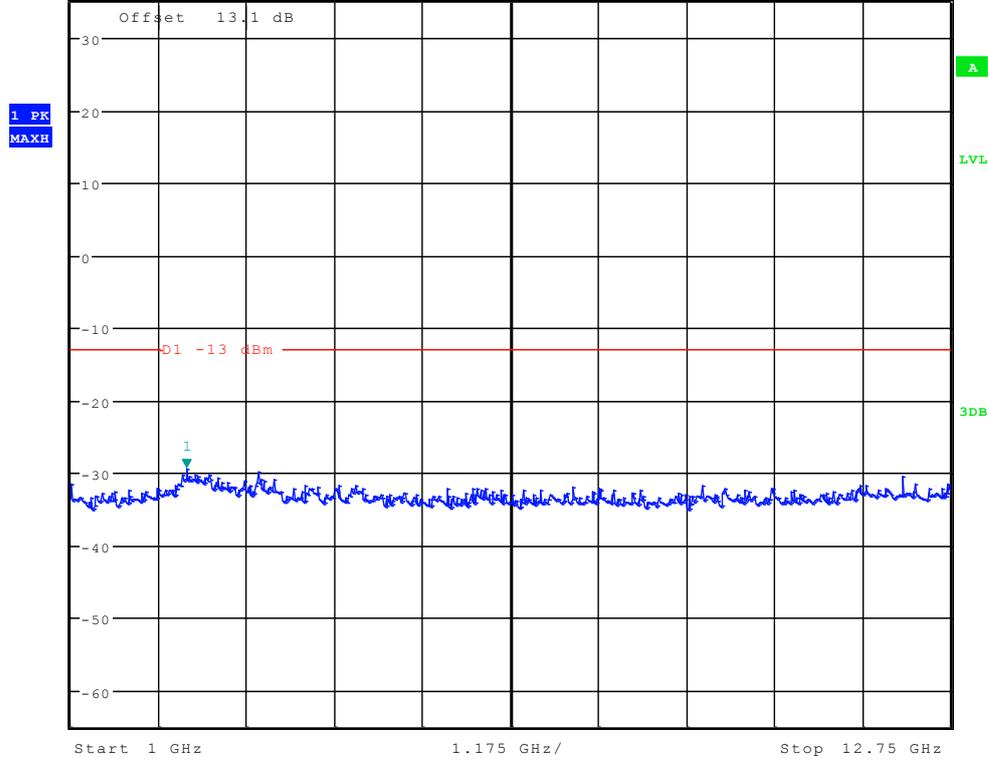

Date: 15.AUG.2012 09:39:24




Channel 192



* RBW 1 kHz Marker 1 [T1]
 * VBW 10 kHz -36.19 dBm
 SWT 145 ms 9.677884615 kHz


Ref 35 dBm Att 50 dB

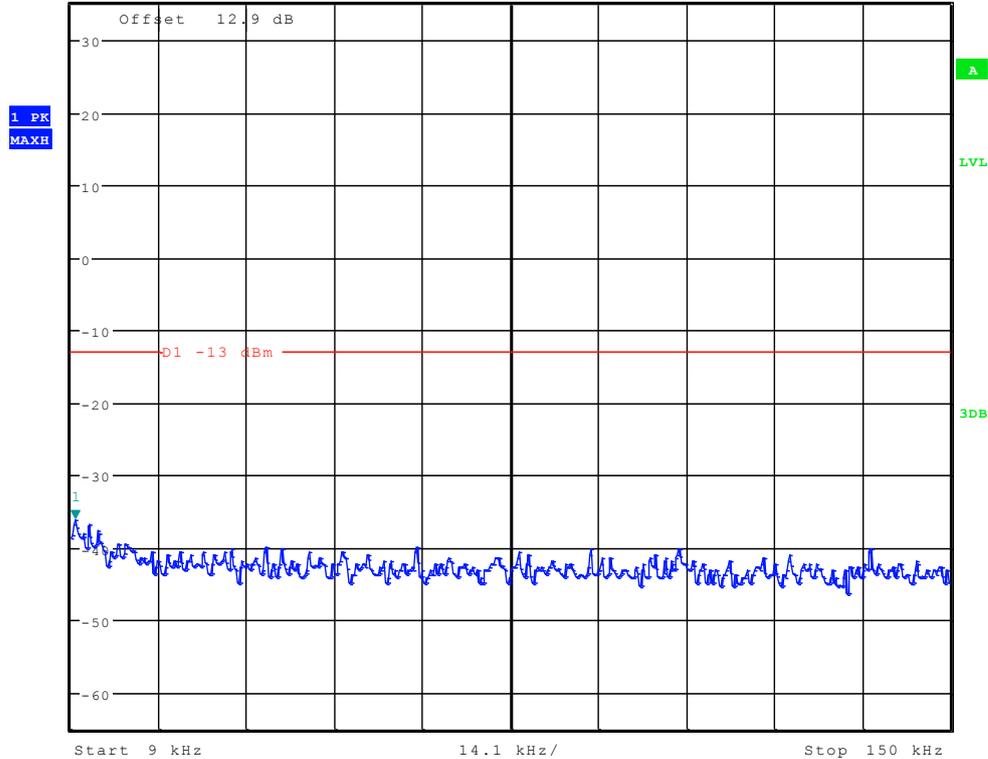

Date: 15.AUG.2012 09:35:22




* RBW 100 kHz Marker 1 [T1]
 * VBW 300 kHz 32.47 dBm
 Ref 42.9 dBm * Att 35 dB SWT 100 ms 838.333333333 MHz

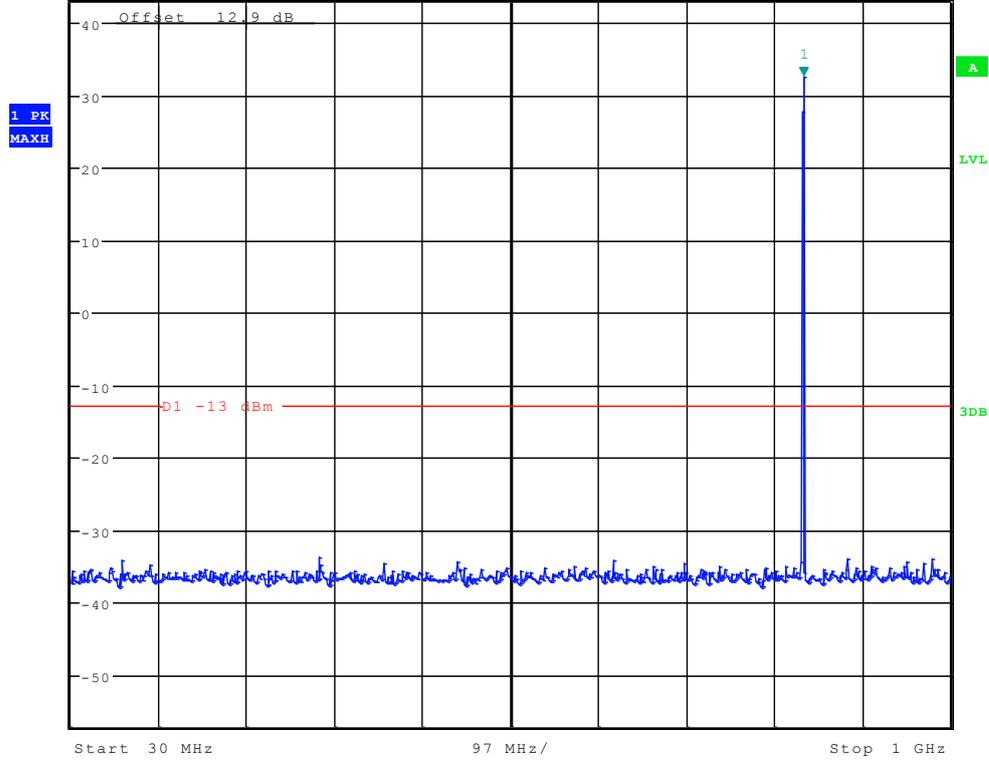

Date: 15.AUG.2012 09:38:54




* RBW 1 MHz Marker 1 [T1]
 * VBW 3 MHz -29.99 dBm
 Ref 35 dBm * Att 35 dB SWT 70 ms 2.883012821 GHz

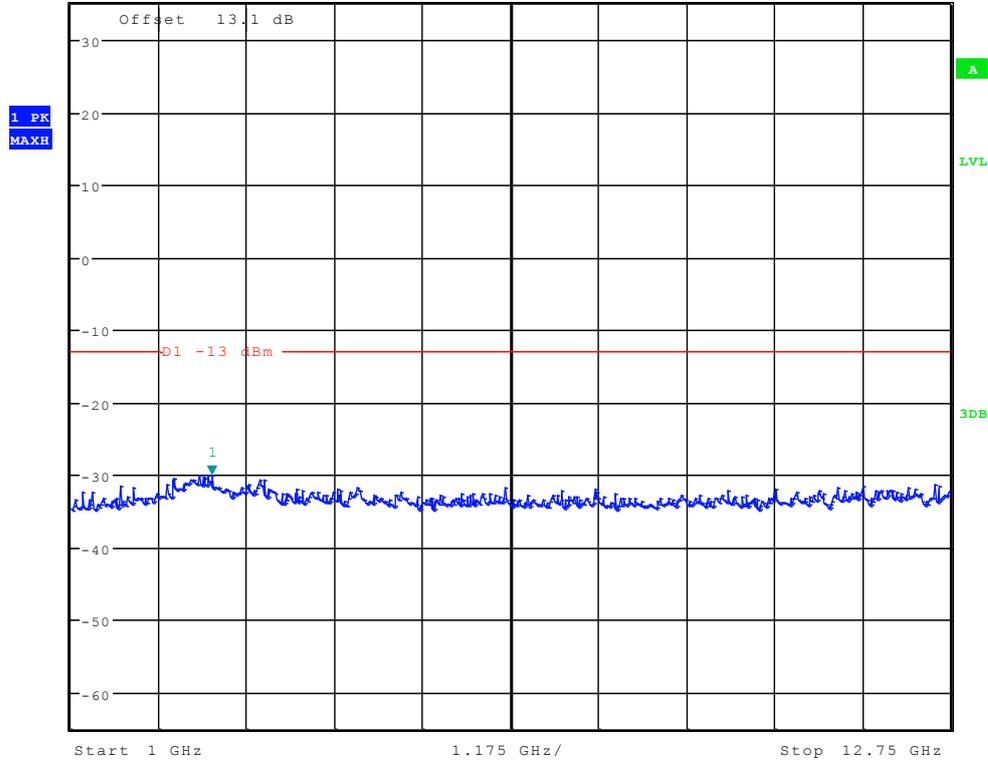

Date: 15.AUG.2012 09:39:38




*RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -30.03 dBm
 Ref 35 dBm Att 50 dB SWT 300 ms 150.00000000 kHz

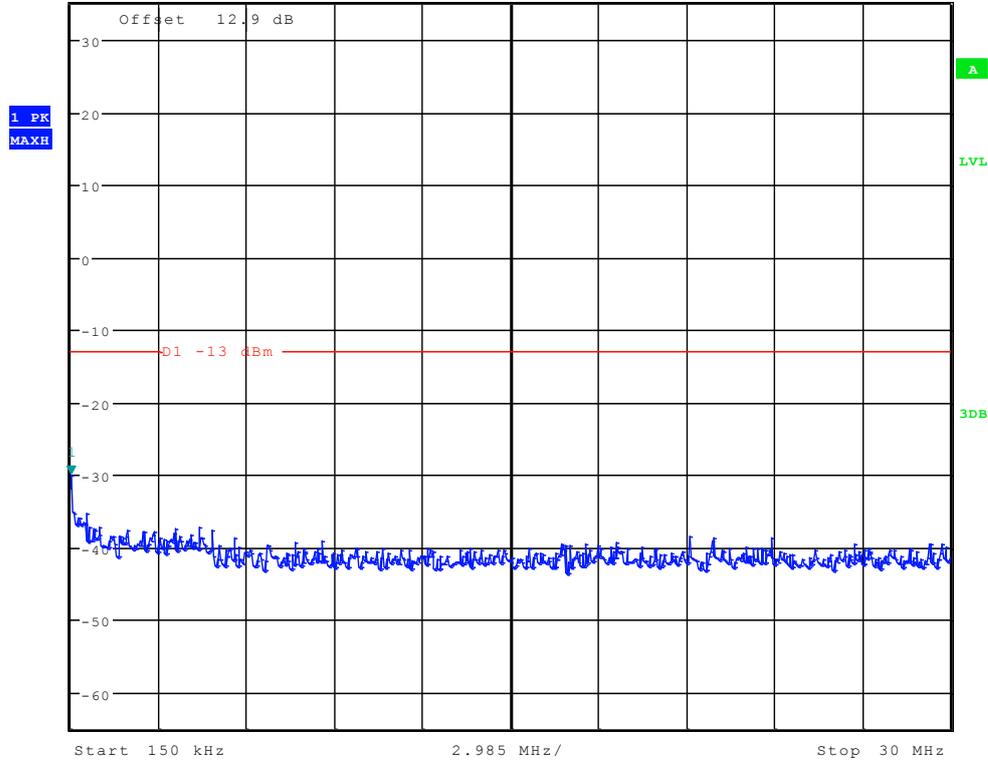

Date: 15.AUG.2012 09:36:20




* RBW 100 kHz Marker 1 [T1]
 * VBW 300 kHz 32.50 dBm
 Ref 42.9 dBm * Att 35 dB SWT 100 ms 849.214743590 MHz

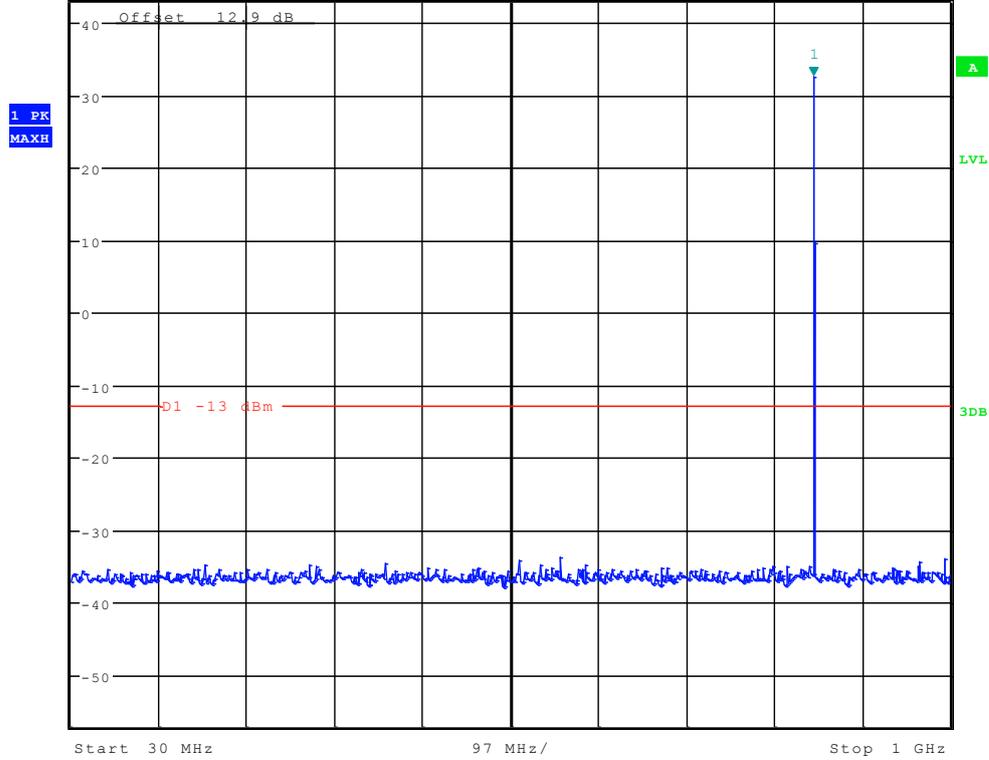

Date: 15.AUG.2012 09:39:09



*RBW 1 MHz Marker 1 [T1]
 *VBW 3 MHz -29.84 dBm
 Ref 35 dBm *Att 35 dB SWT 70 ms 2.694711538 GHz

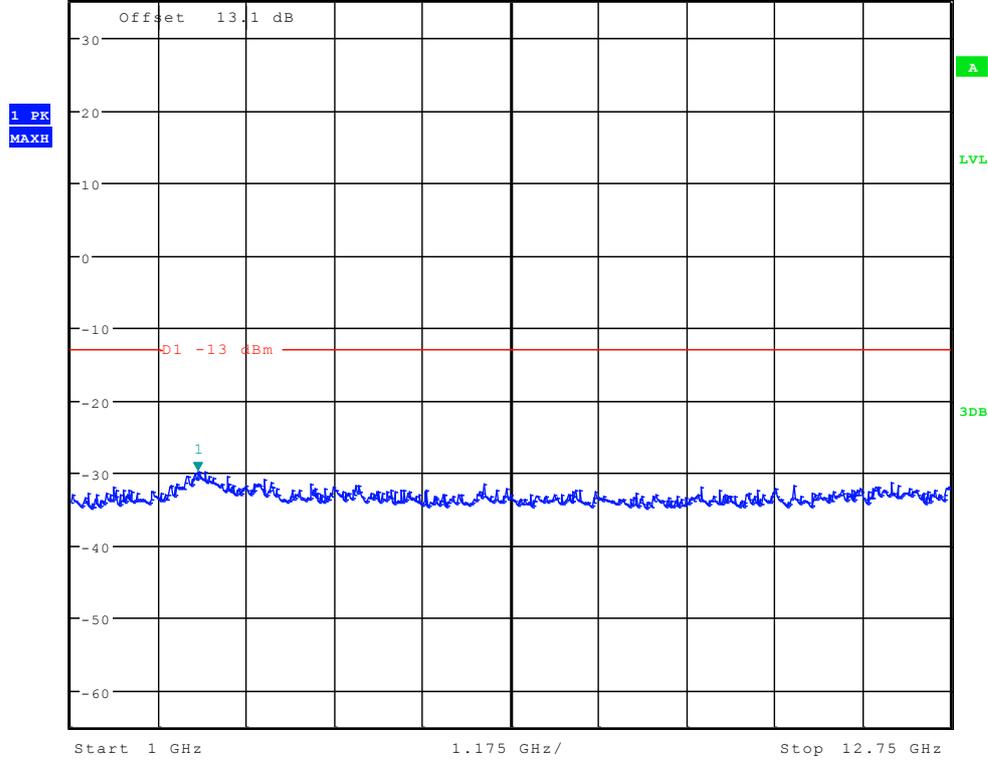

Date: 15.AUG.2012 09:39:53




TM2:EDGE

Channel 128




*RBW 1 kHz Marker 1 [T1]
 *VBW 10 kHz -37.61 dBm
 Ref 35 dBm Att 50 dB SWT 145 ms 9.000000000 kHz

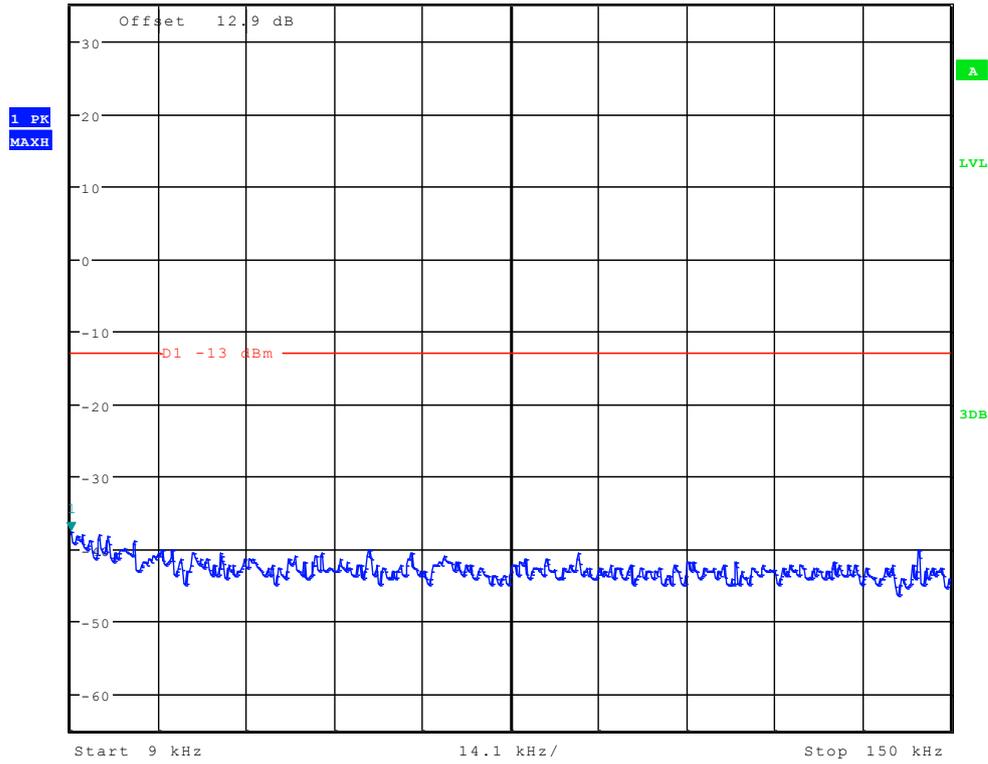

Date: 15.AUG.2012 09:45:44




*RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -32.52 dBm
 Ref 35 dBm Att 50 dB SWT 300 ms 150.00000000 kHz

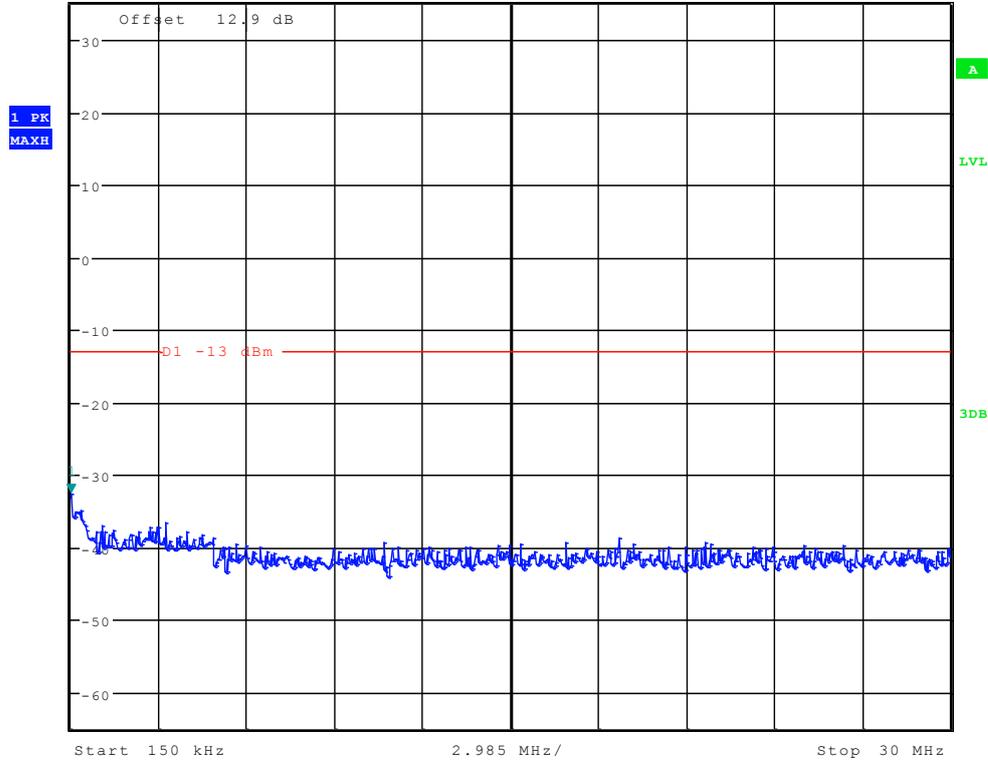

Date: 15.AUG.2012 09:46:28




Ref 42.9 dBm * Att 40 dB * RBW 100 kHz Marker 1 [T1] 31.15 dBm
* VBW 300 kHz
SWT 100 ms 825.897435897 MHz

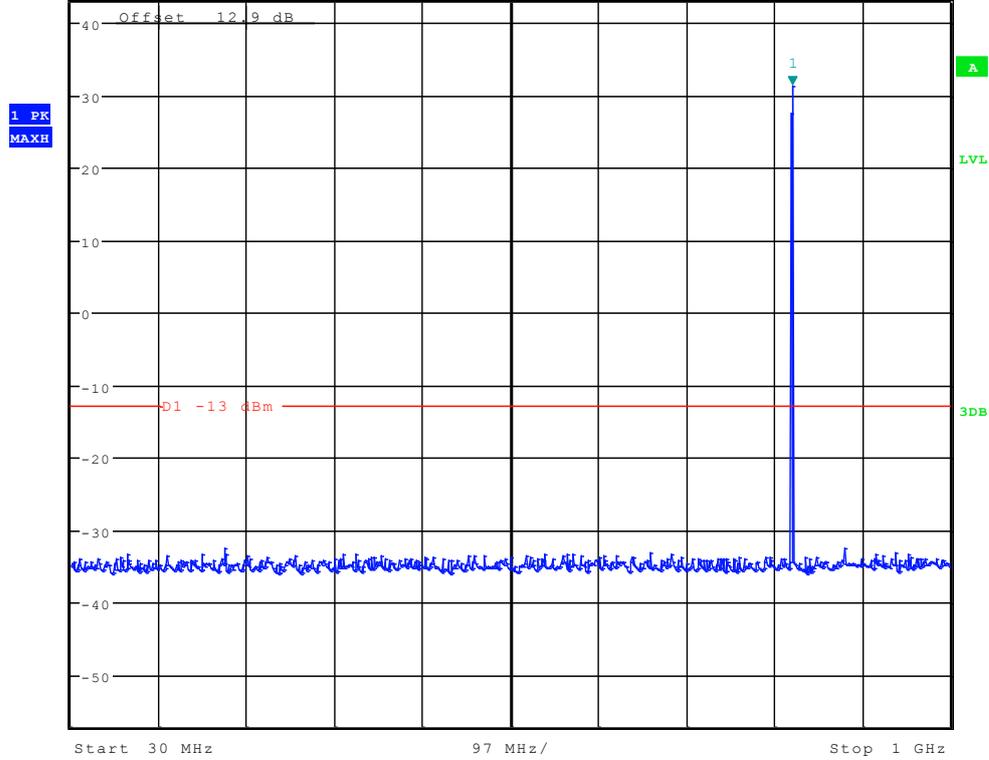

Date: 15.AUG.2012 09:47:46




* RBW 1 MHz Marker 1 [T1]
 * VBW 3 MHz -24.46 dBm
 Ref 35 dBm * Att 40 dB SWT 70 ms 2.901842949 GHz

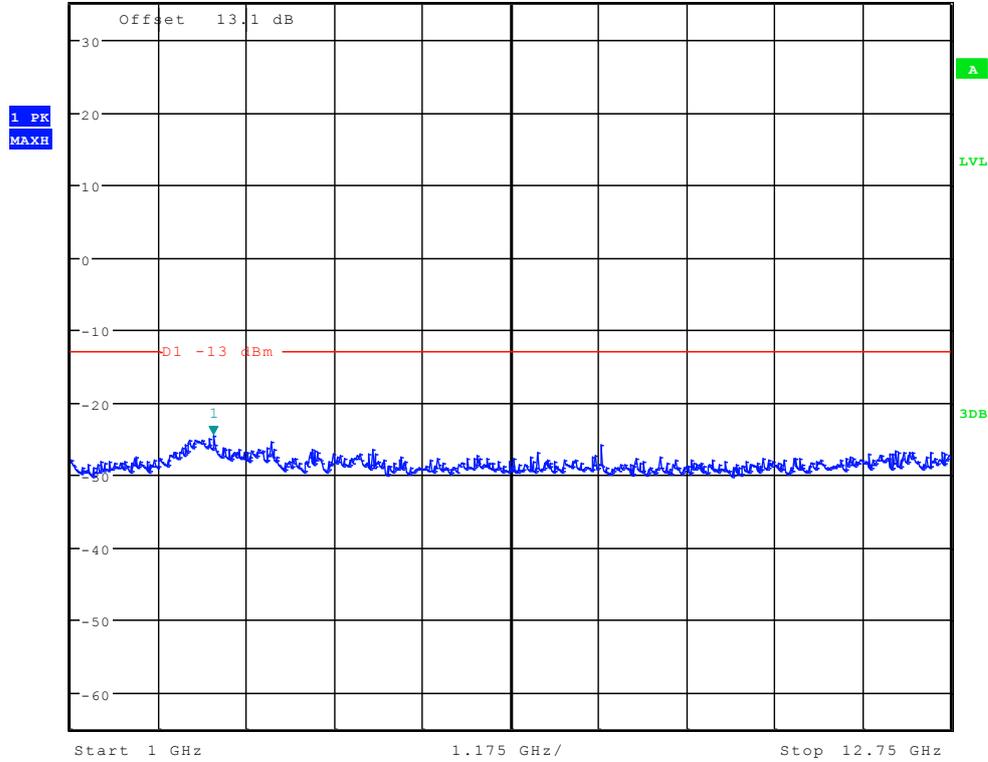

Date: 15.AUG.2012 09:48:30




Channel 192

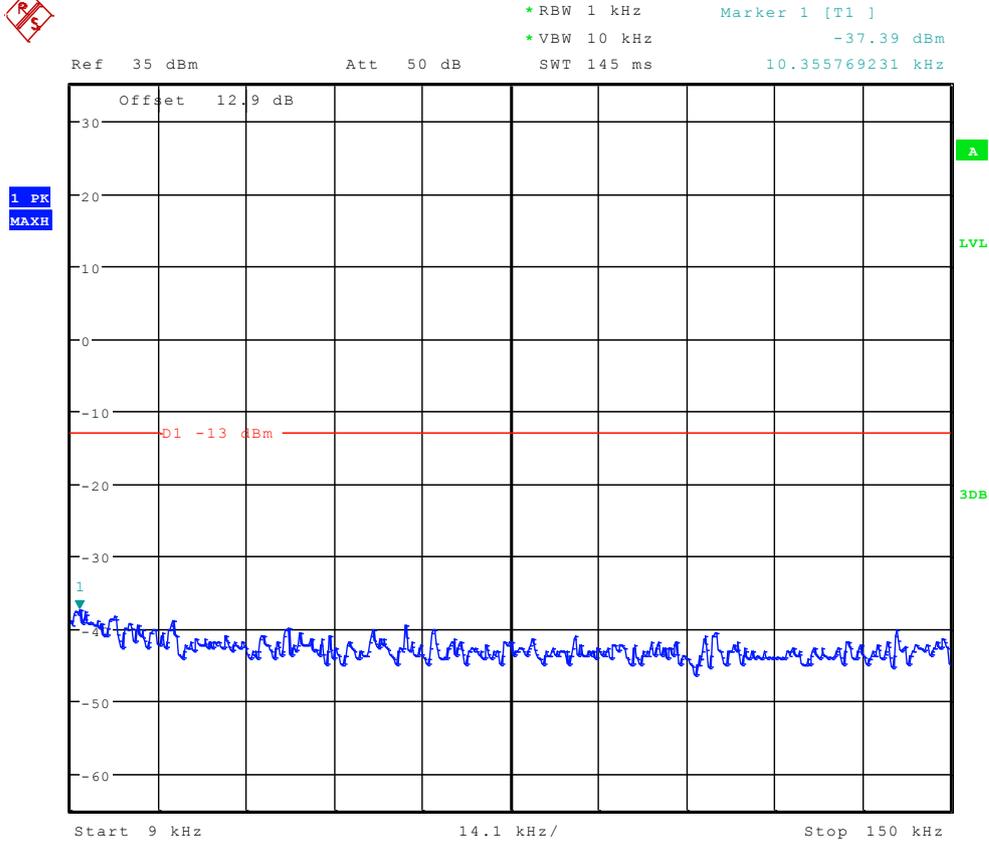

Date: 15.AUG.2012 09:45:58




*RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -29.94 dBm
 Ref 35 dBm Att 50 dB SWT 300 ms 150.00000000 kHz

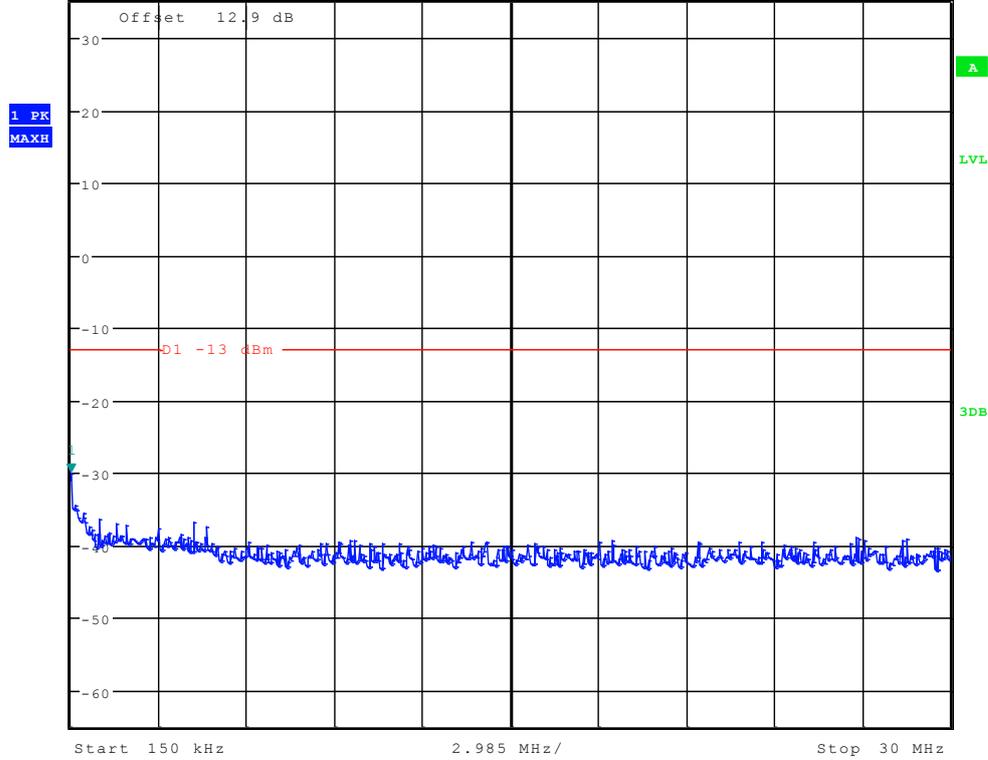

Date: 15.AUG.2012 09:46:42




* RBW 100 kHz Marker 1 [T1]
 * VBW 300 kHz 28.54 dBm
 Ref 42.9 dBm * Att 40 dB SWT 100 ms 838.333333333 MHz

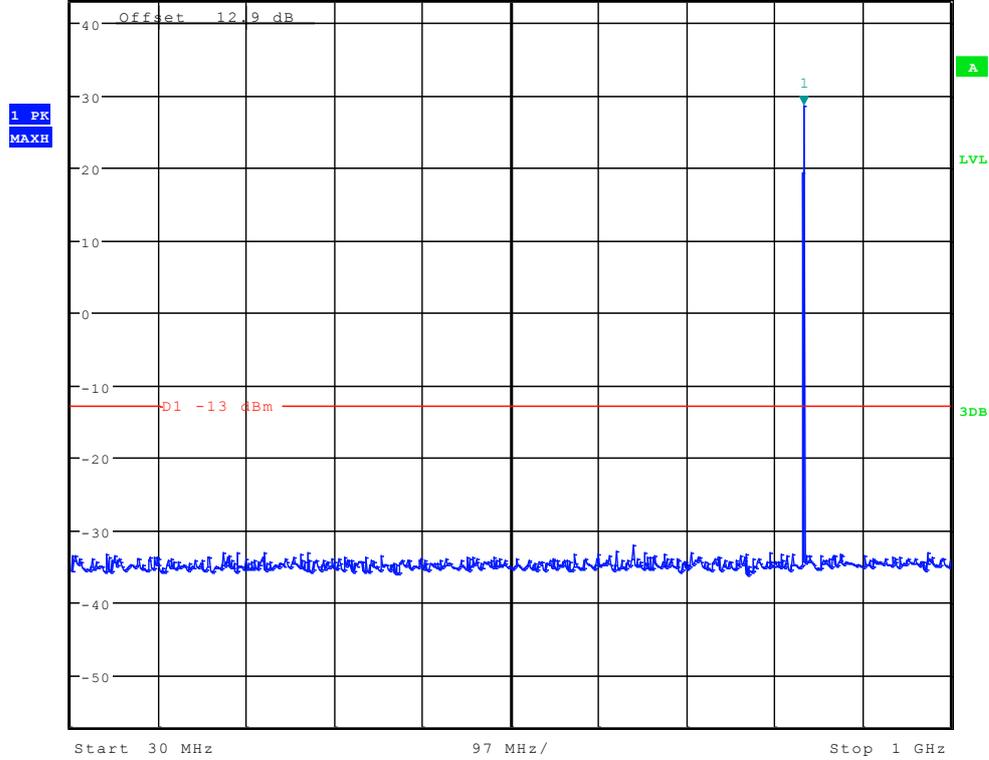

Date: 15.AUG.2012 09:48:01



* RBW 1 MHz Marker 1 [T1]
 * VBW 3 MHz -24.88 dBm
 Ref 35 dBm * Att 40 dB SWT 70 ms 2.675881410 GHz

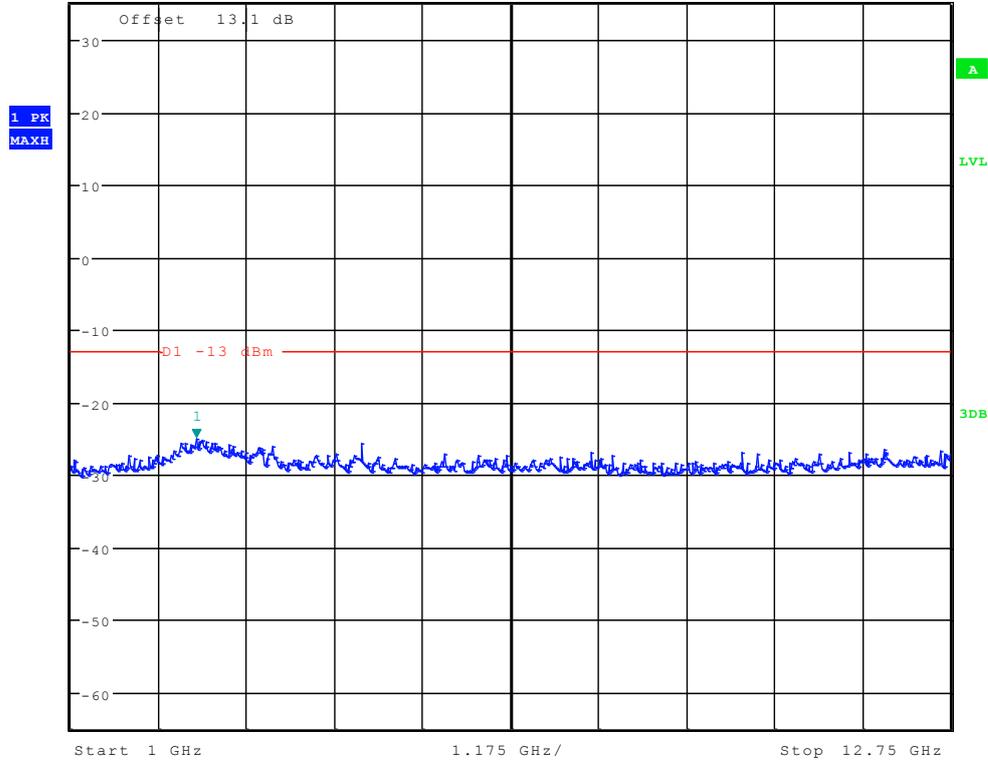


Date: 15.AUG.2012 09:48:45



Channel 251




* RBW 1 kHz Marker 1 [T1]
 * VBW 10 kHz -35.92 dBm
 Ref 35 dBm Att 50 dB SWT 145 ms 9.225961538 kHz

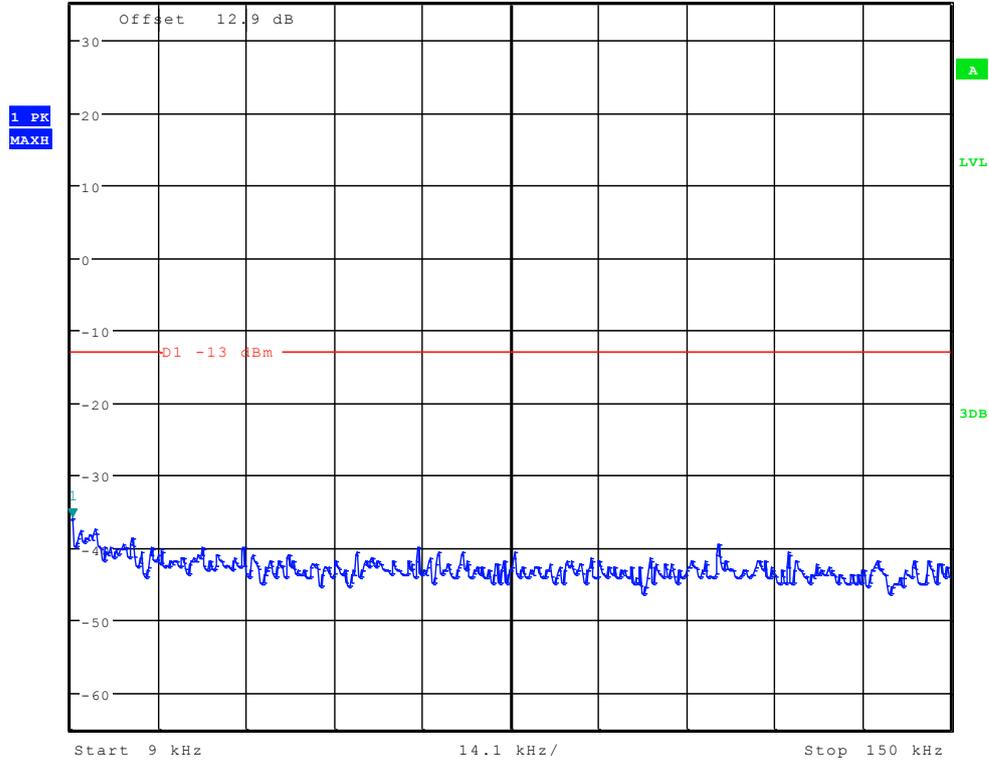

Date: 15.AUG.2012 09:46:13




*RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -31.98 dBm
 Ref 35 dBm Att 50 dB SWT 300 ms 197.836538462 kHz

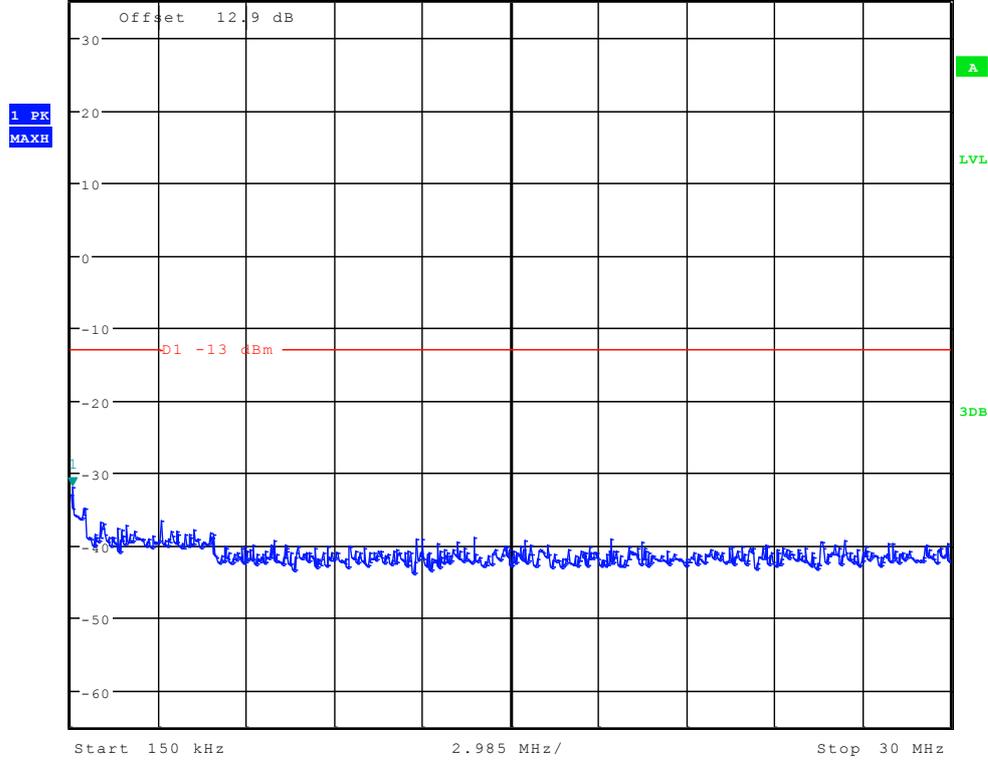

Date: 15.AUG.2012 09:46:56




* RBW 100 kHz Marker 1 [T1]
 * VBW 300 kHz 28.07 dBm
 Ref 42.9 dBm * Att 40 dB SWT 100 ms 849.214743590 MHz

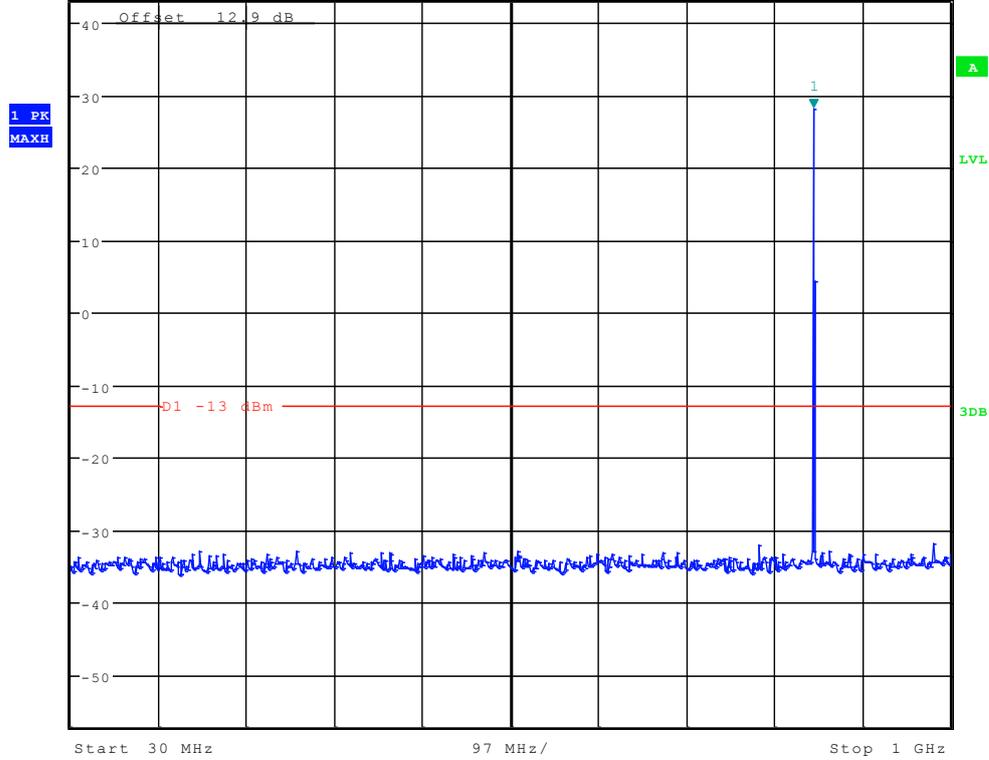

Date: 15.AUG.2012 09:48:15



*RBW 1 MHz Marker 1 [T1]
 *VBW 3 MHz -24.80 dBm
 Ref 35 dBm *Att 40 dB SWT 70 ms 2.807692308 GHz

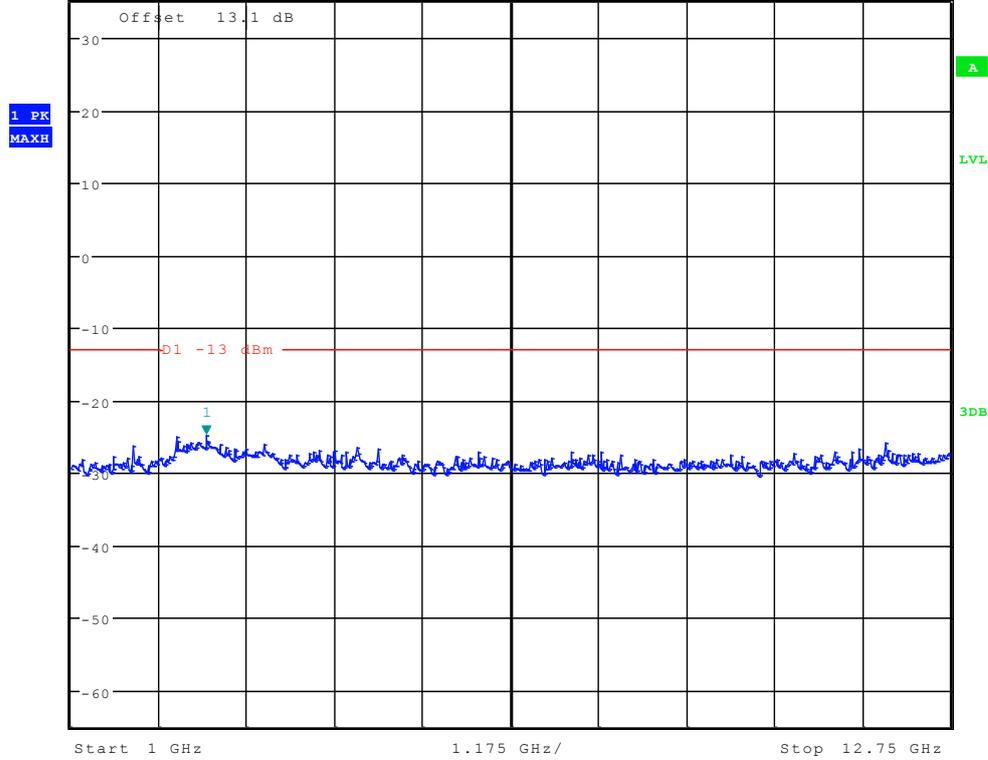


Date: 15.AUG.2012 09:48:59



TM3: WCDMA Channel 4132




*RBW 1 kHz Marker 1 [T1]
 *VBW 10 kHz -36.67 dBm
 Ref 35 dBm Att 50 dB SWT 145 ms 9.000000000 kHz

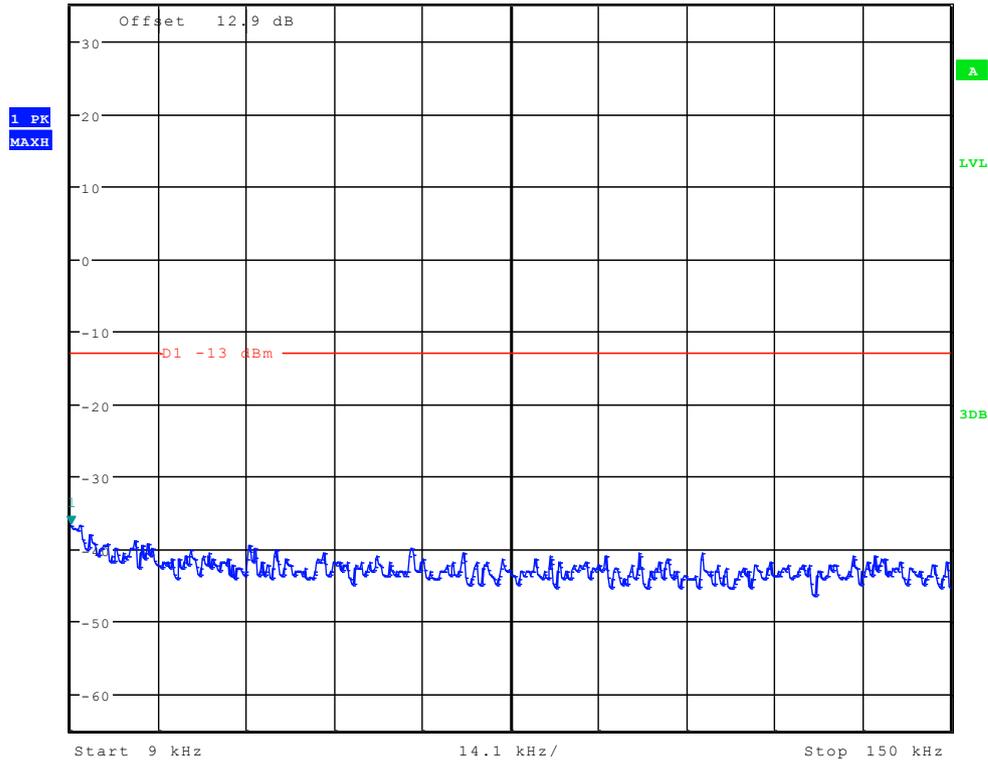

Date: 15.AUG.2012 09:56:58




*RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -31.32 dBm
 Ref 35 dBm Att 50 dB SWT 300 ms 150.000000000 kHz

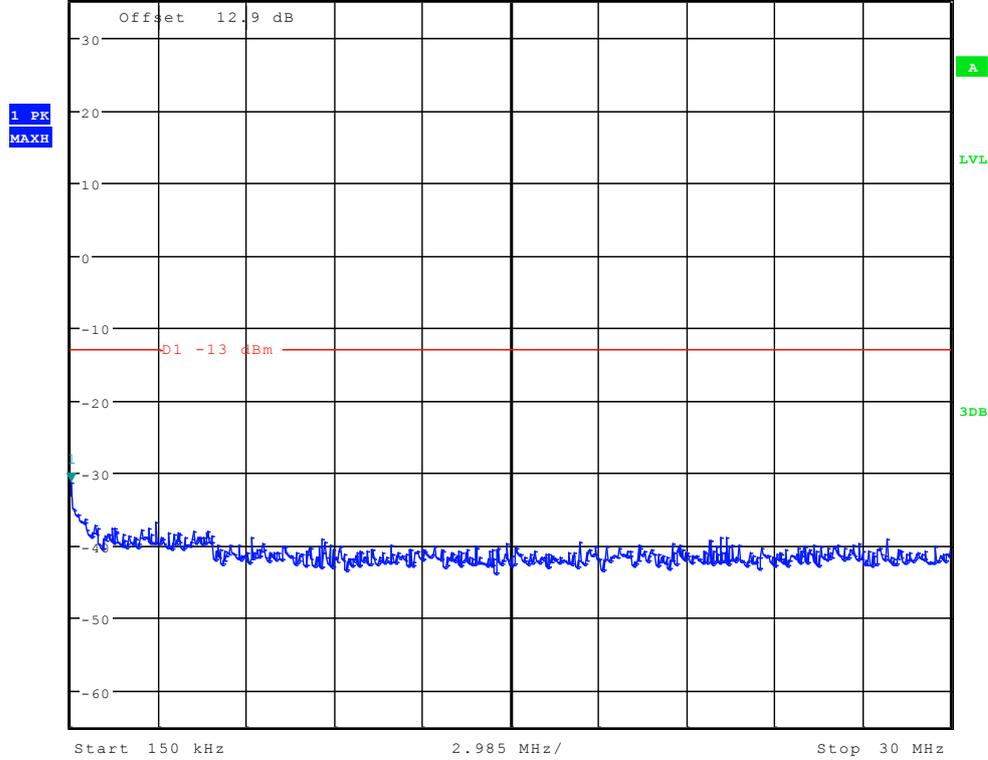

Date: 15.AUG.2012 09:57:41




Ref 27 dBm * Att 35 dB * RBW 100 kHz Marker 1 [T1] 17.74 dBm
* VBW 300 kHz 827.451923077 MHz
SWT 100 ms

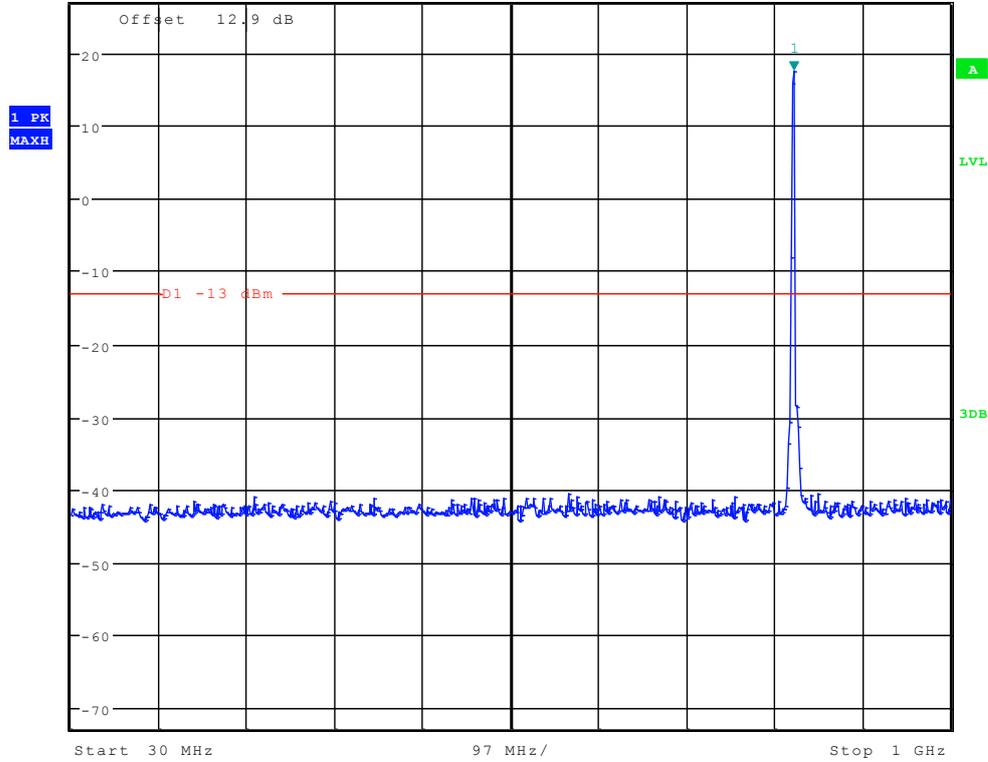

Date: 15.AUG.2012 09:58:52



*RBW 1 MHz Marker 1 [T1]
 *VBW 3 MHz -29.64 dBm
 Ref 35 dBm *Att 35 dB SWT 70 ms 2.506410256 GHz

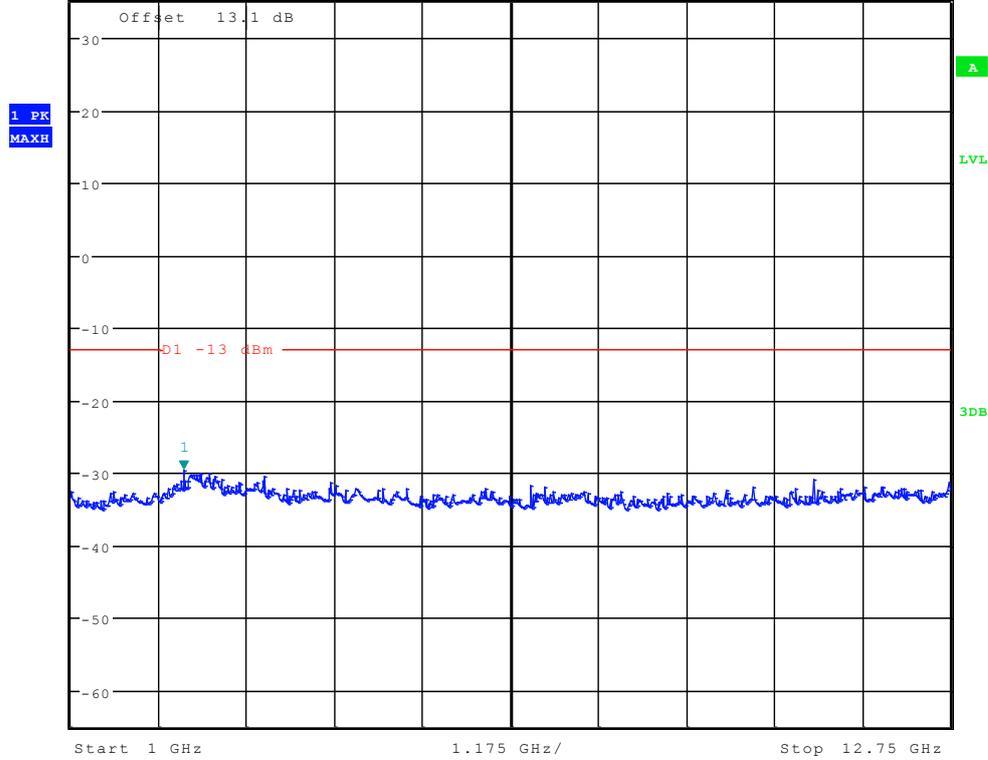


Date: 15.AUG.2012 09:59:36



Channel 4182




Ref 35 dBm Att 50 dB *RBW 1 kHz Marker 1 [T1] -36.19 dBm
 *VBW 10 kHz SWT 145 ms 9.451923077 kHz

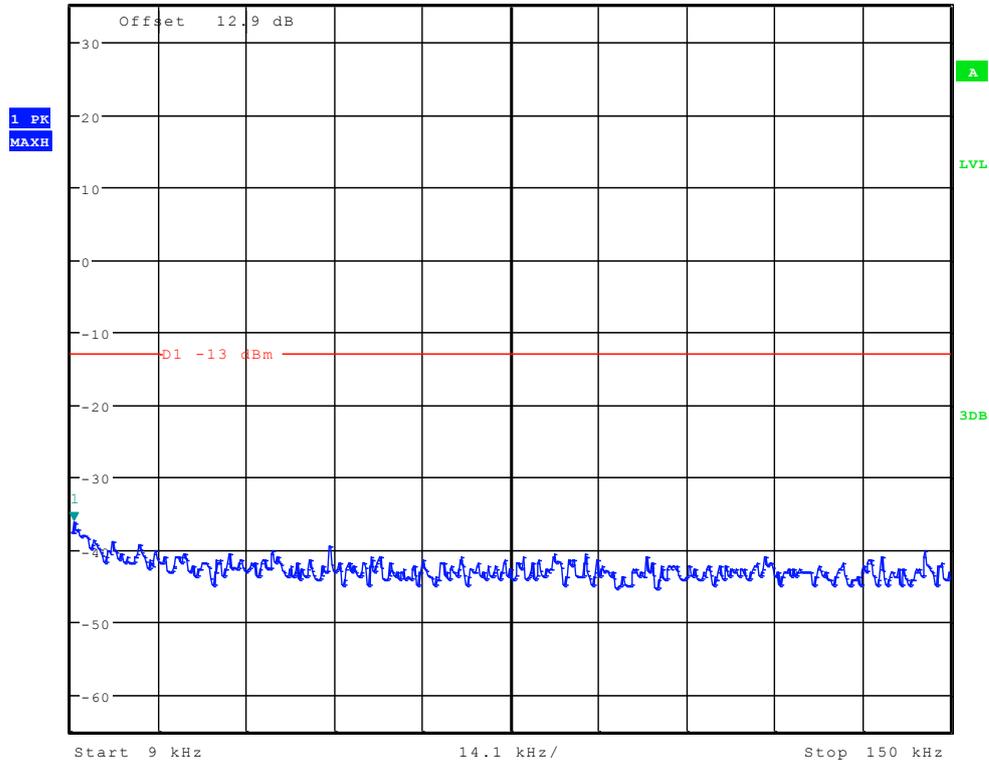

Date: 15.AUG.2012 09:57:12




*RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -31.16 dBm
 Ref 35 dBm Att 50 dB SWT 300 ms 197.836538462 kHz

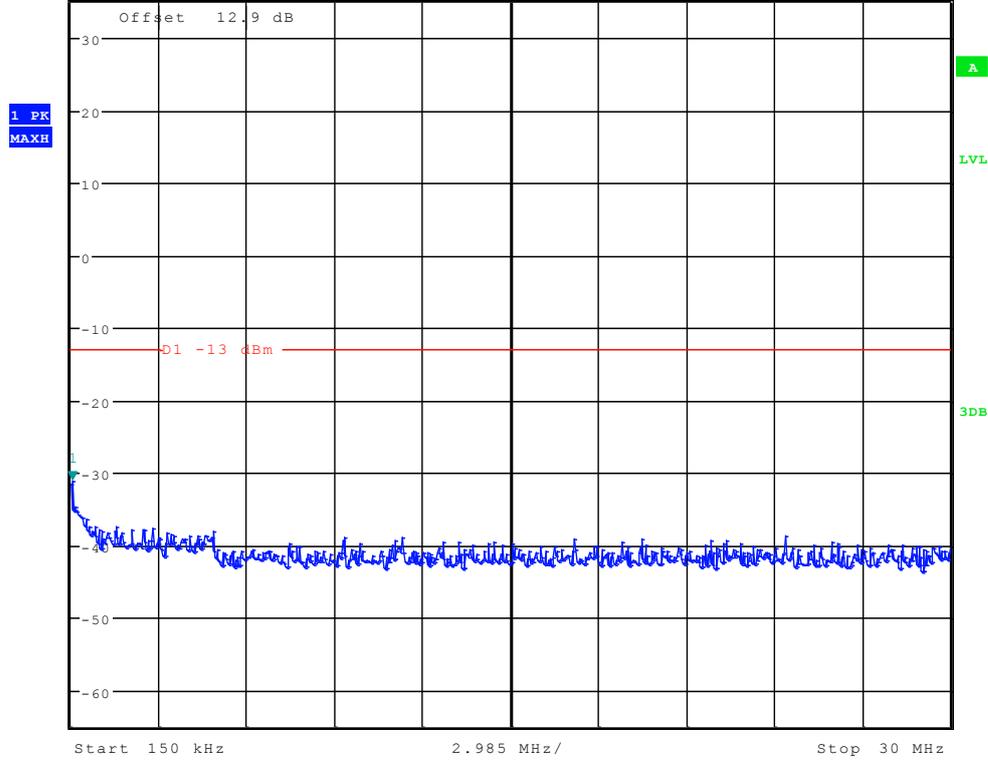

Date: 15.AUG.2012 09:57:56




Ref 27 dBm * Att 35 dB * RBW 100 kHz Marker 1 [T1] 17.63 dBm
* VBW 300 kHz 836.778846154 MHz
SWT 100 ms

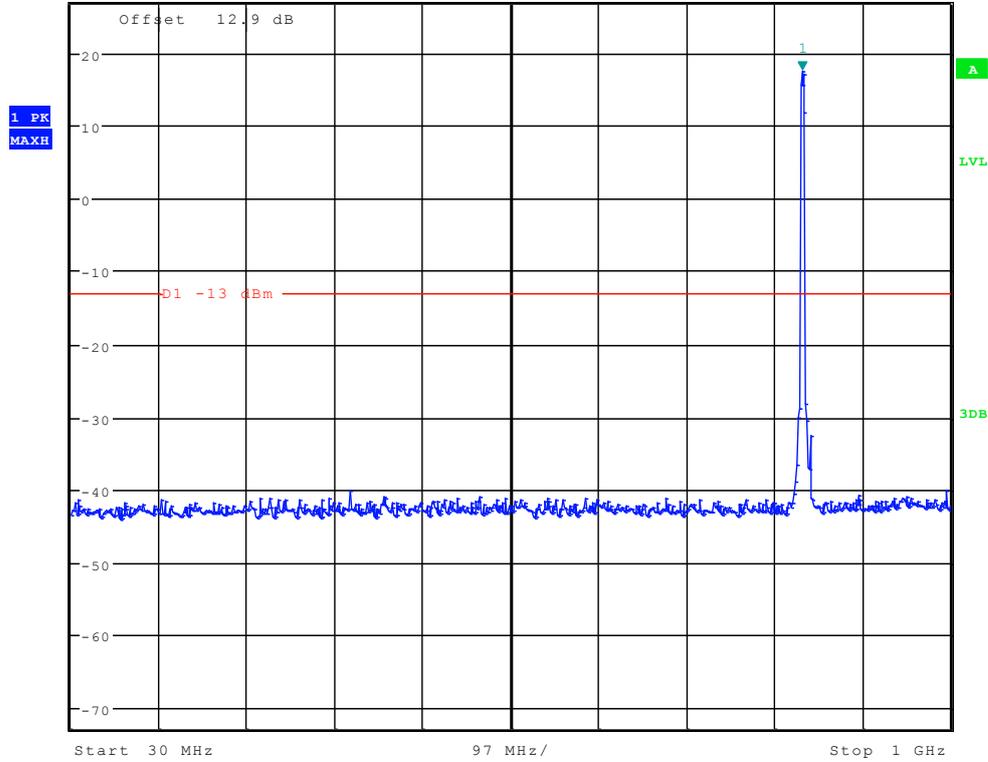

Date: 15.AUG.2012 09:59:06



* RBW 1 MHz Marker 1 [T1]
 * VBW 3 MHz -29.79 dBm
 Ref 35 dBm * Att 35 dB SWT 70 ms 2.694711538 GHz

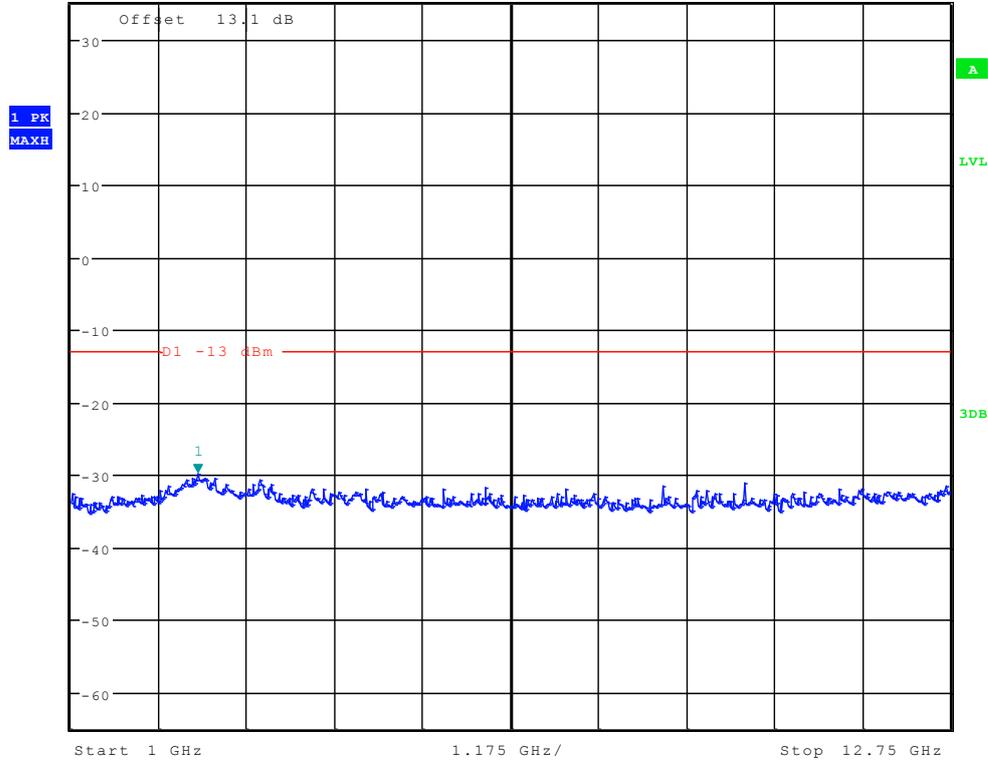


Date: 15.AUG.2012 09:59:50



Channel 4233




* RBW 1 kHz Marker 1 [T1]
 * VBW 10 kHz -35.06 dBm
 Ref 35 dBm Att 50 dB SWT 145 ms 9.000000000 kHz

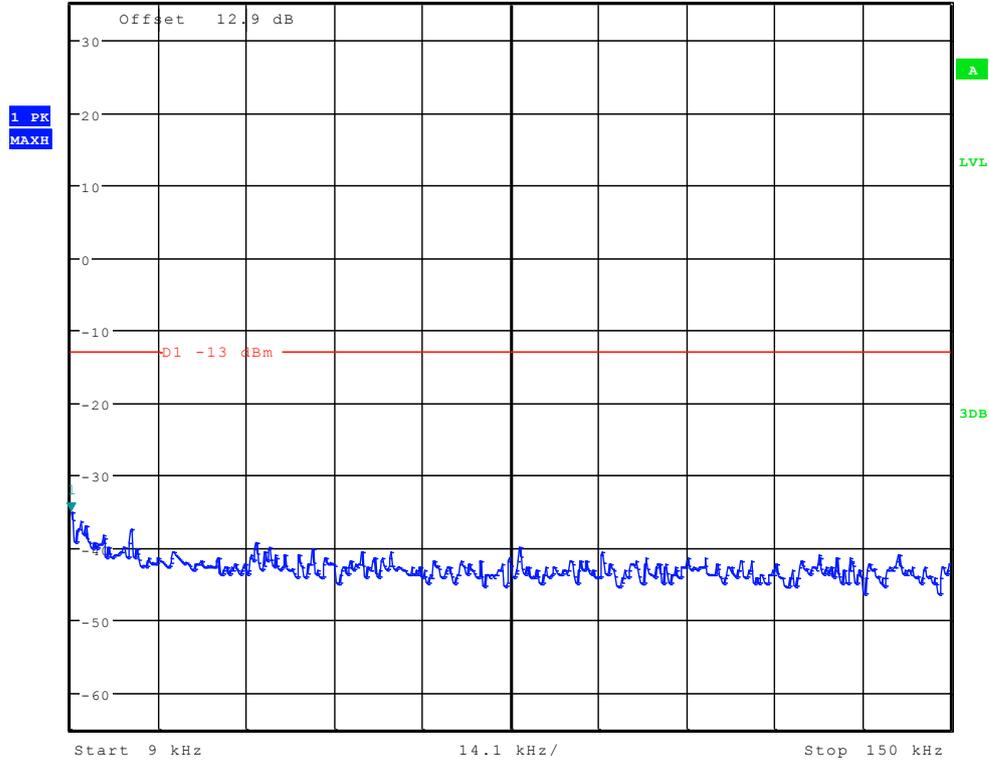

Date: 15.AUG.2012 09:57:27




*RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -32.28 dBm
 Ref 35 dBm Att 50 dB SWT 300 ms 150.00000000 kHz

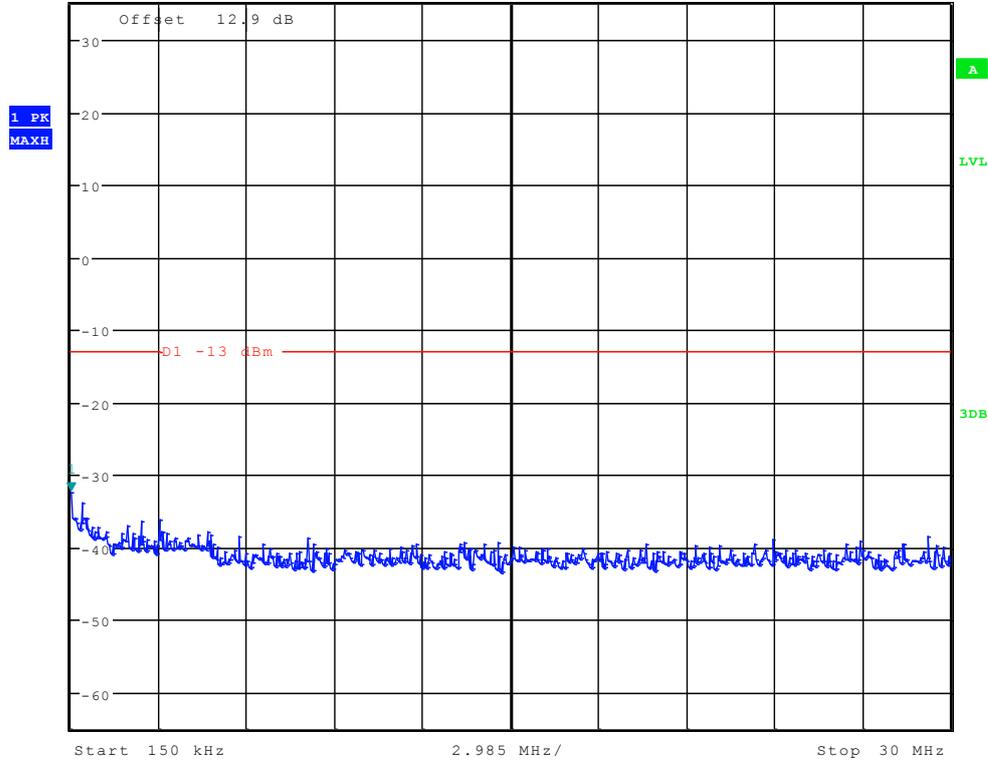

Date: 15.AUG.2012 09:58:10




* RBW 100 kHz Marker 1 [T1]
* VBW 300 kHz 17.33 dBm
Ref 27 dBm * Att 35 dB SWT 100 ms 847.660256410 MHz

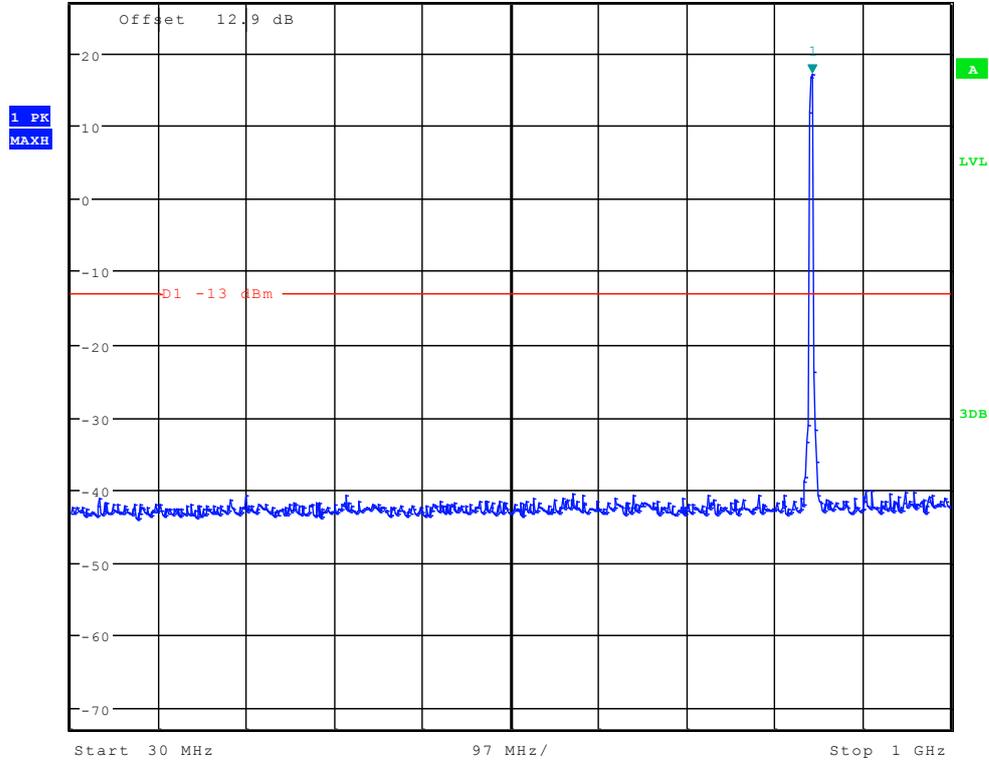

Date: 15.AUG.2012 09:59:21



*RBW 1 MHz Marker 1 [T1]
 *VBW 3 MHz -29.46 dBm
 Ref 35 dBm *Att 35 dB SWT 70 ms 2.562900641 GHz

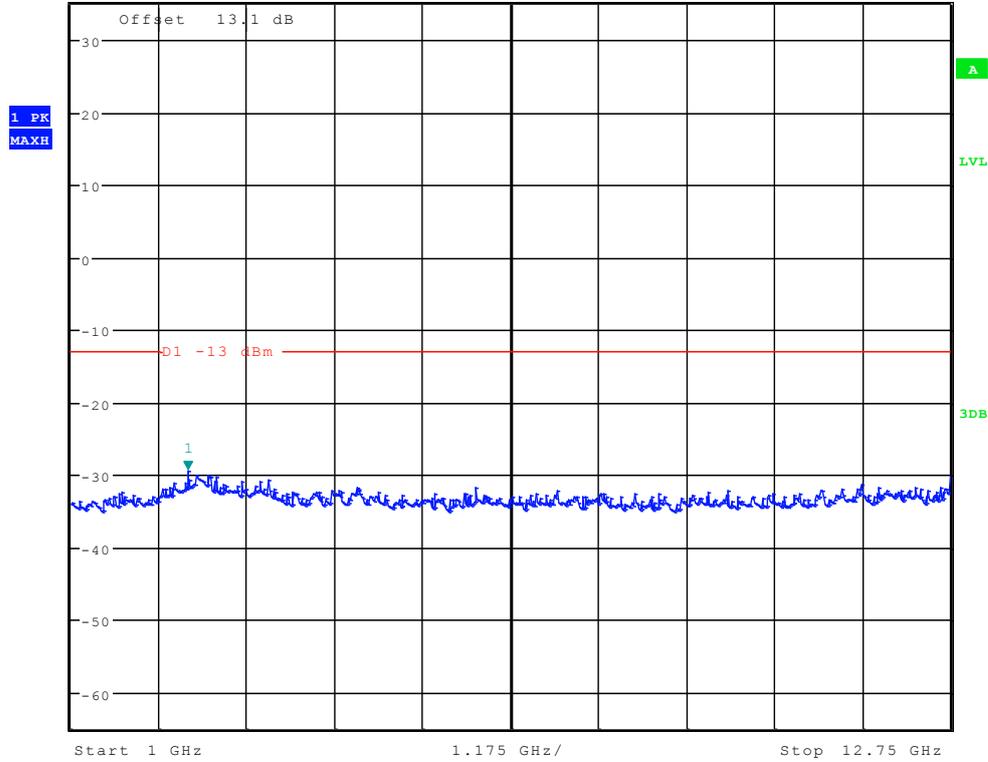

Date: 15.AUG.2012 10:00:05

-----END-----



Appendix F


Radiated spurious emission

According to FCC Part 2.1053& Part 22.917


Note: 1. Simultaneous transmission was investigated and no new emissions were found.
2. RBW \geq 1MHz, VBW $>$ 3 x RBW.

GSM850


(9kHz~30MHz)

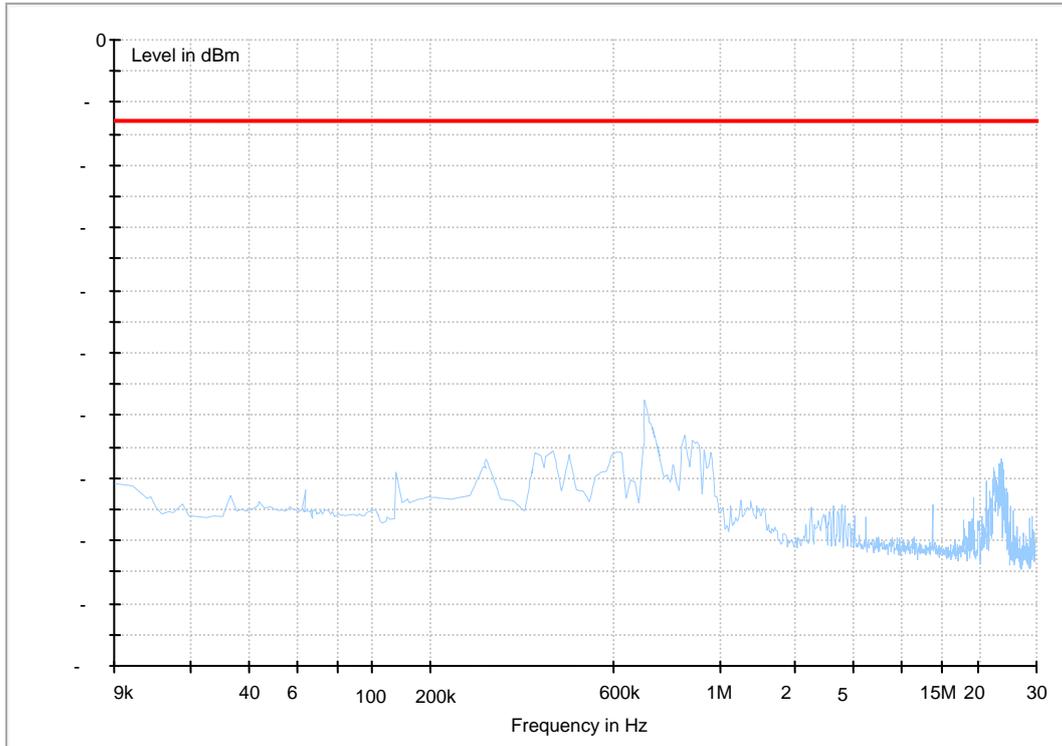

(30MHz~3GHz)

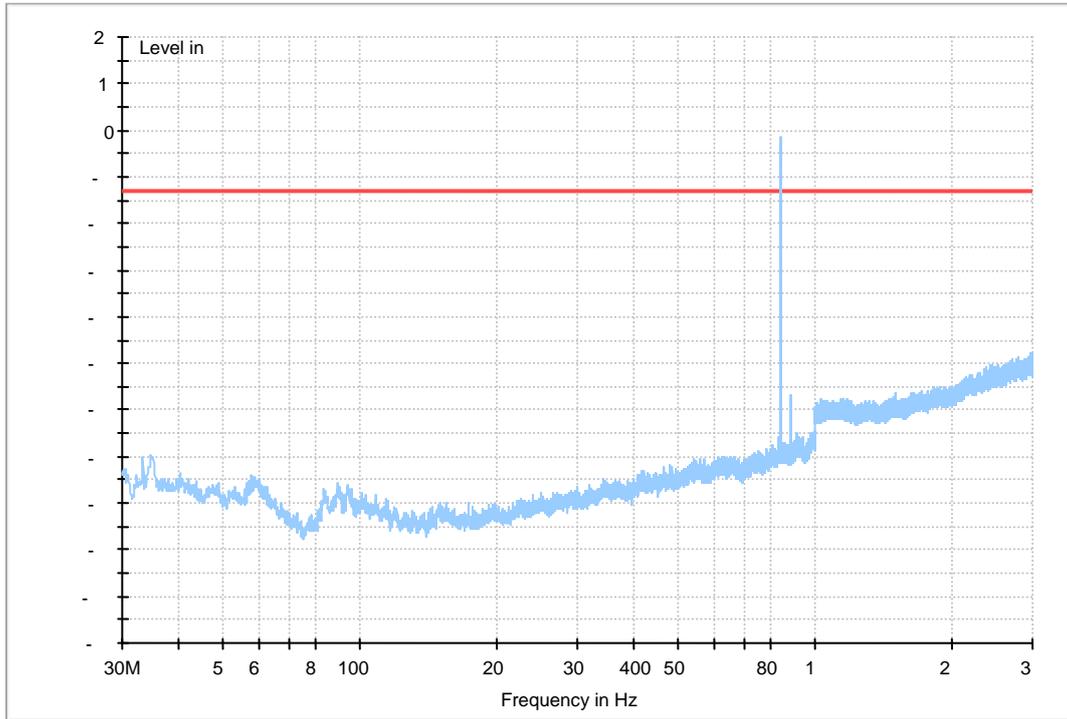


(3GHz~18GHz)

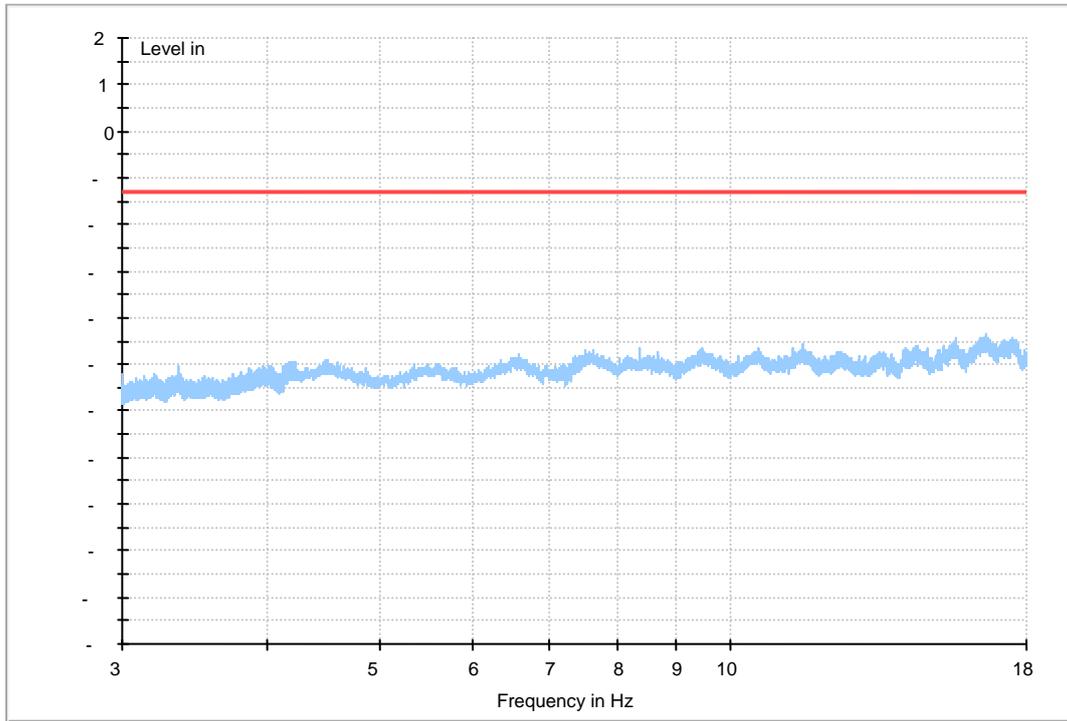


GPRS 850


(9kHz~30MHz)

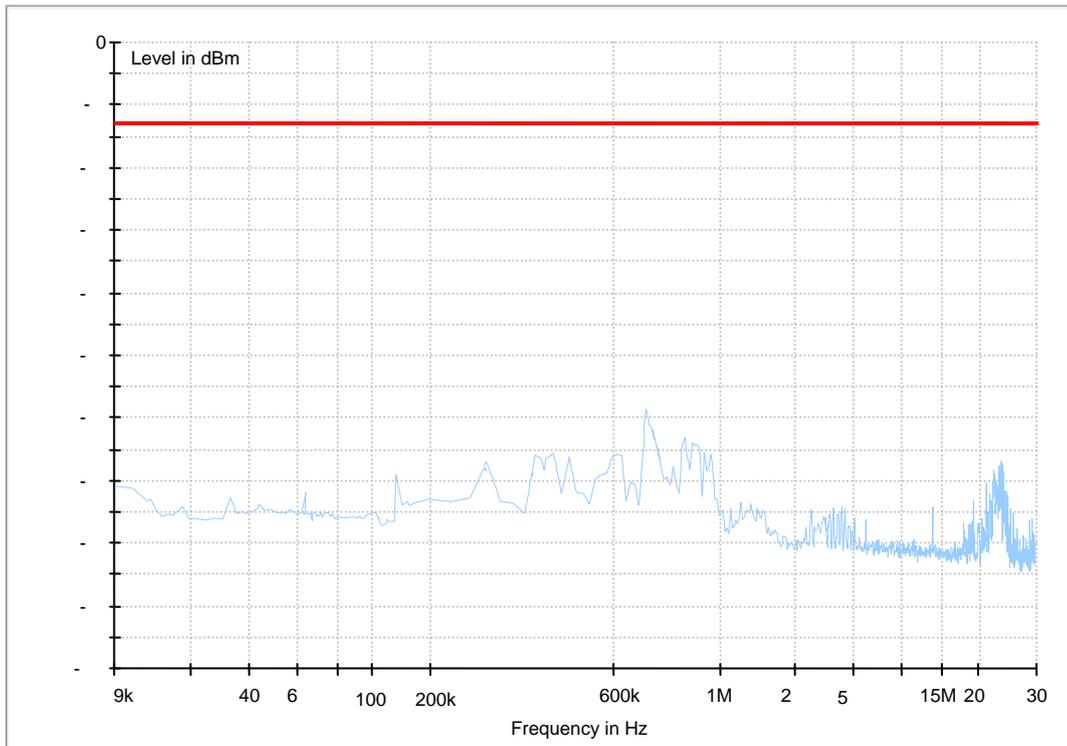

(30MHz~3GHz)

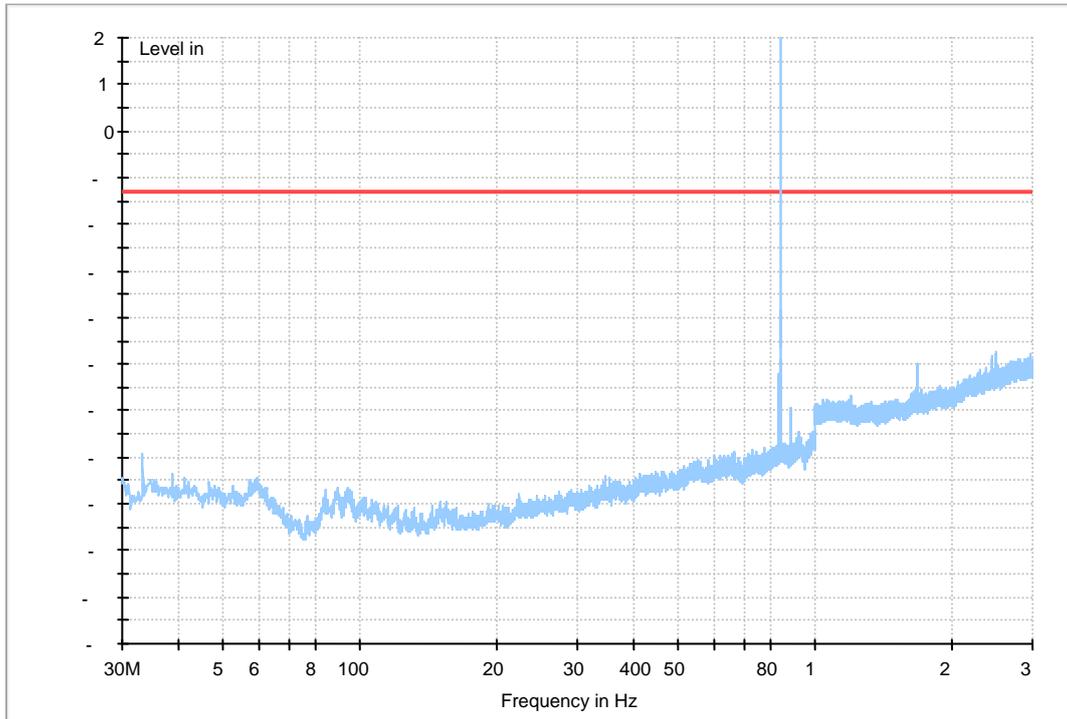


(3GHz~18GHz)

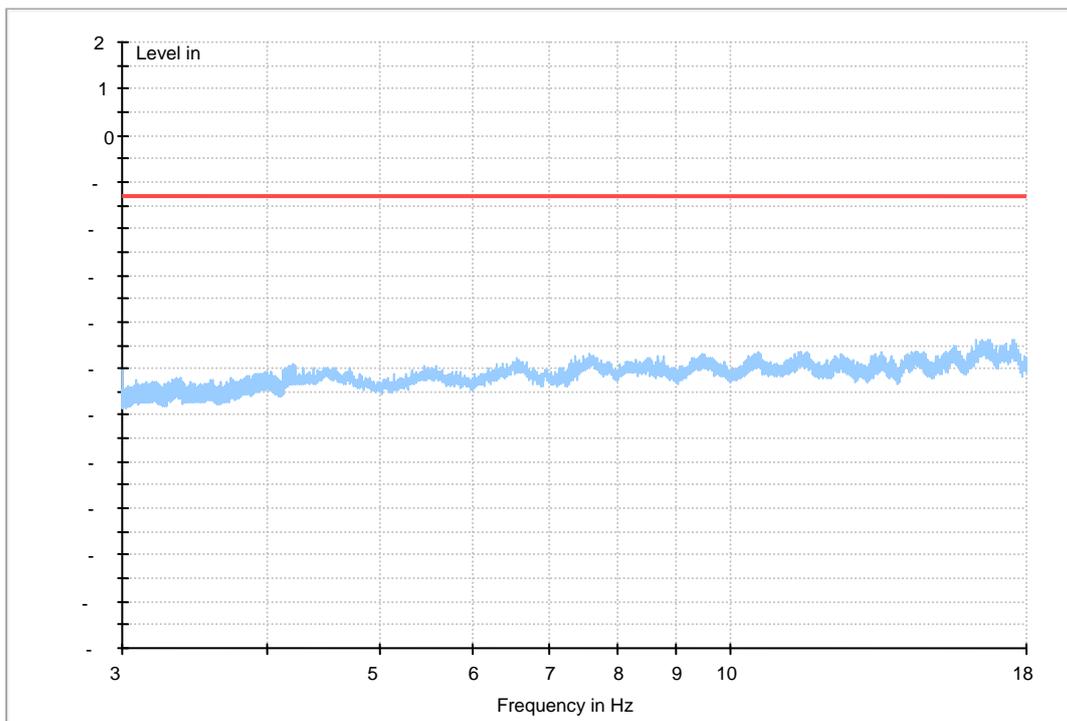


EDGE 850


(9kHz~30MHz)

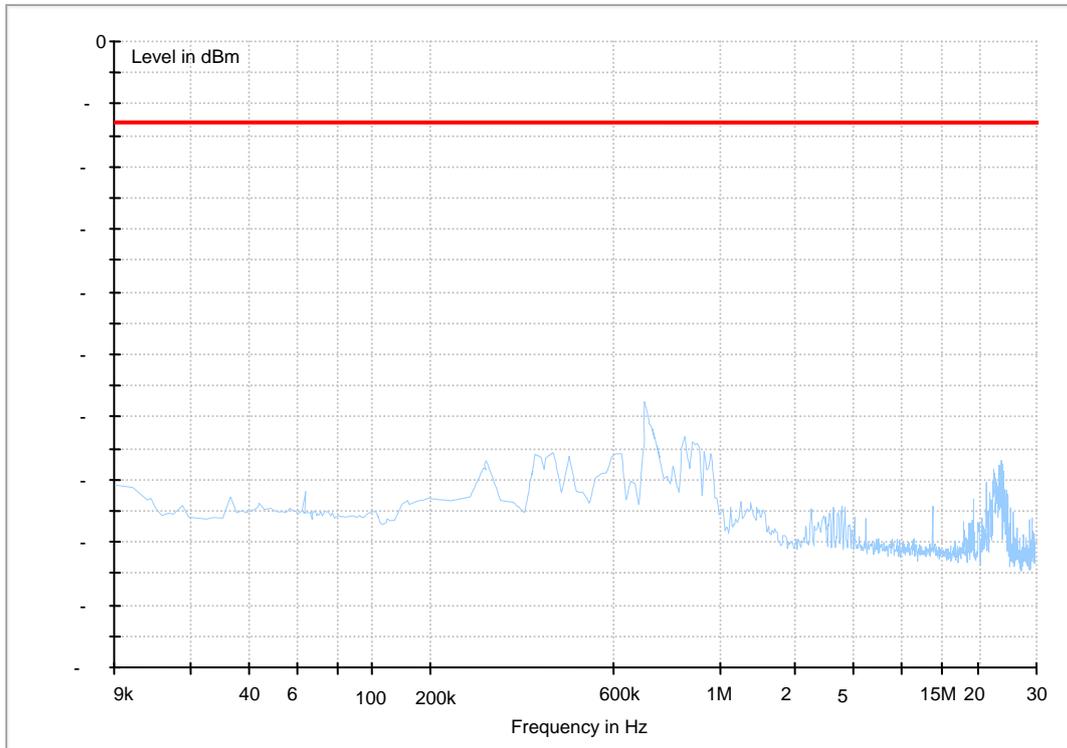

(30MHz~3GHz)

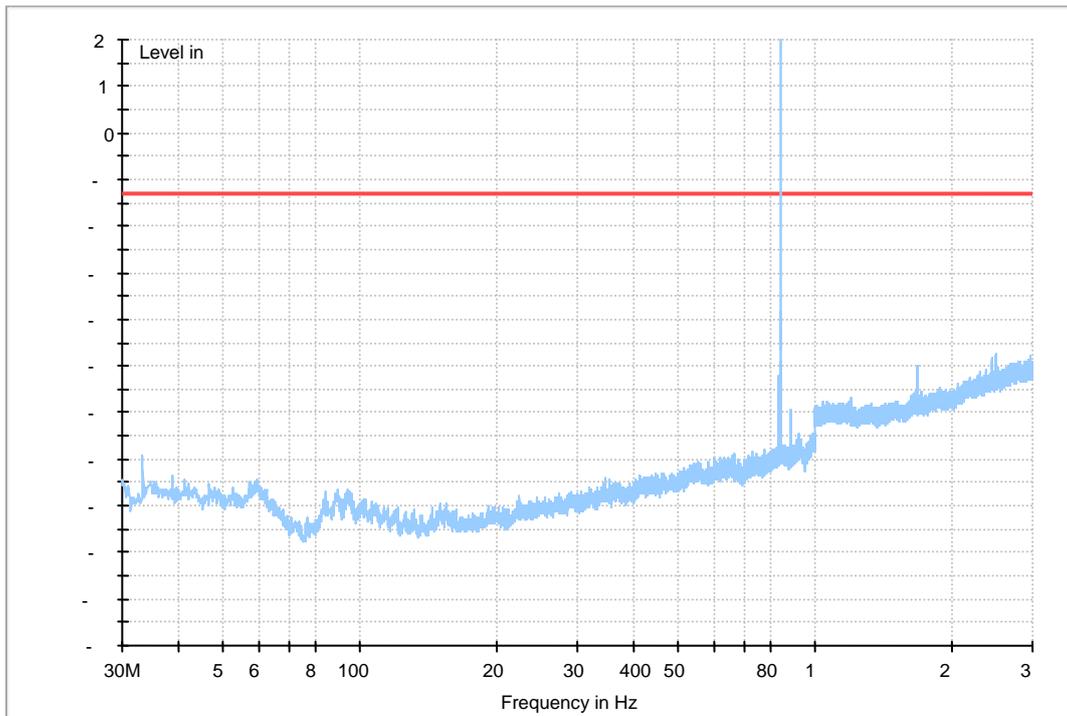


(3GHz~18GHz)

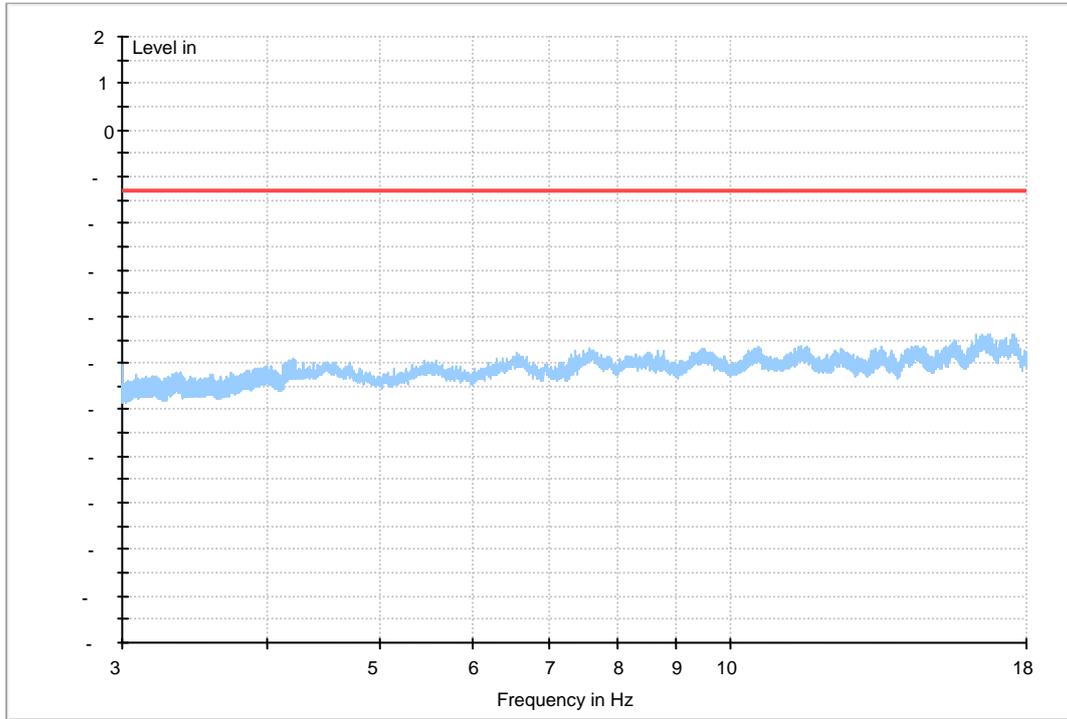


WCDMA Band V


(9KHz~30MHz)

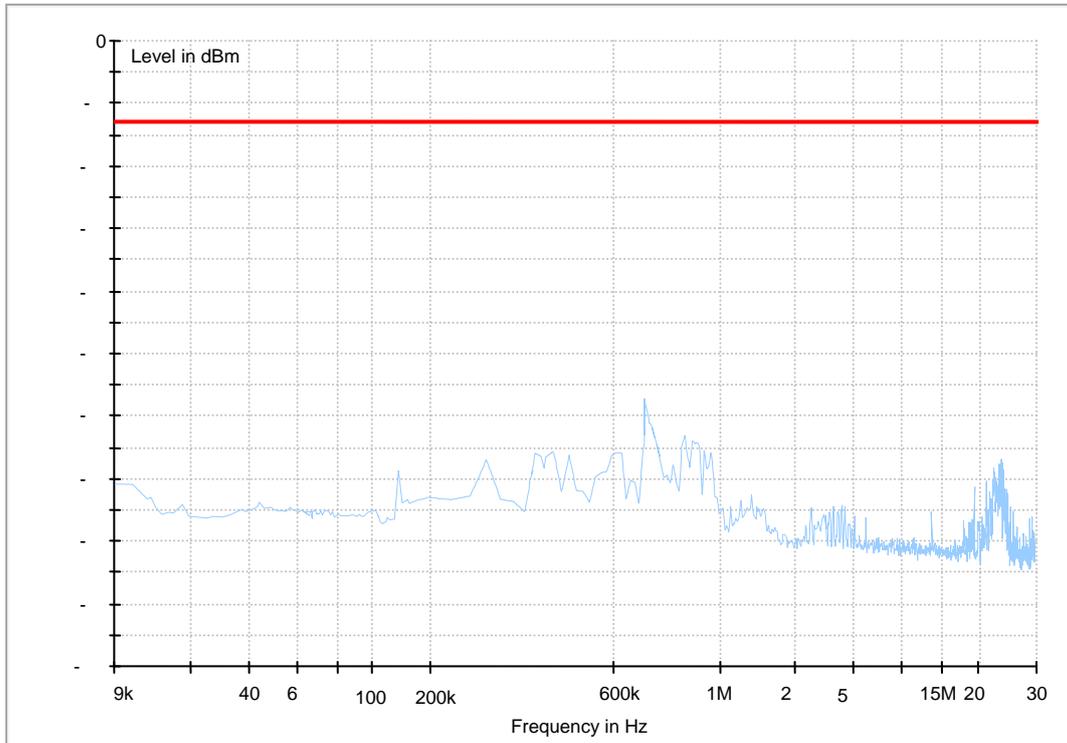

(30MHz~3GHz)

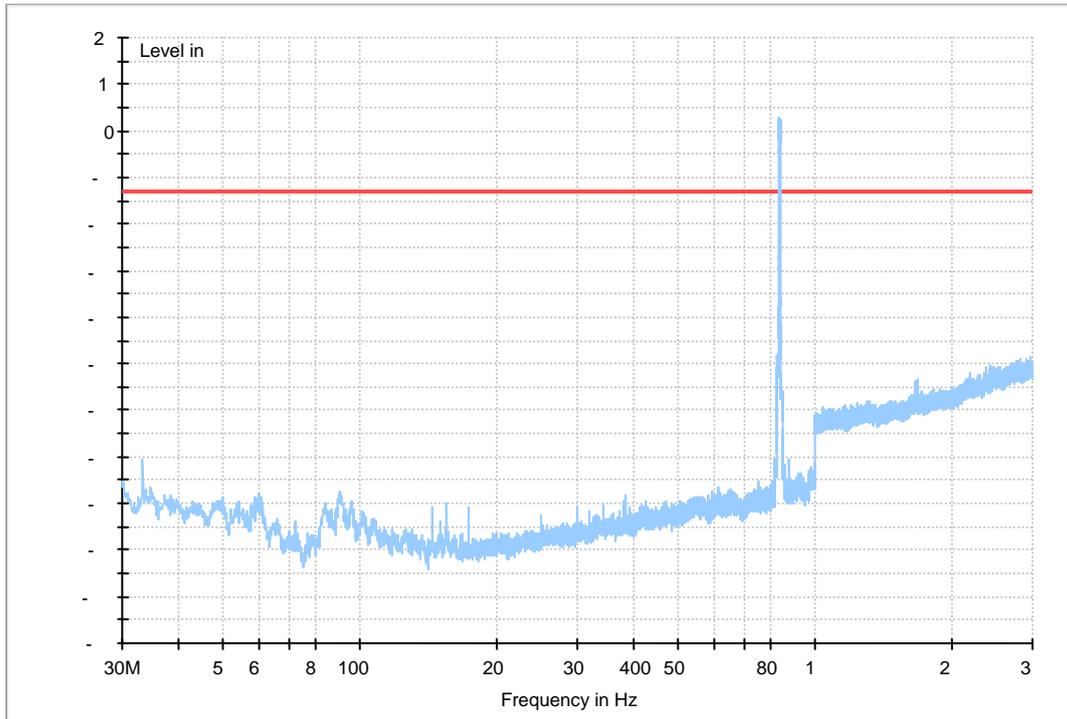


(3GHz~18GHz)

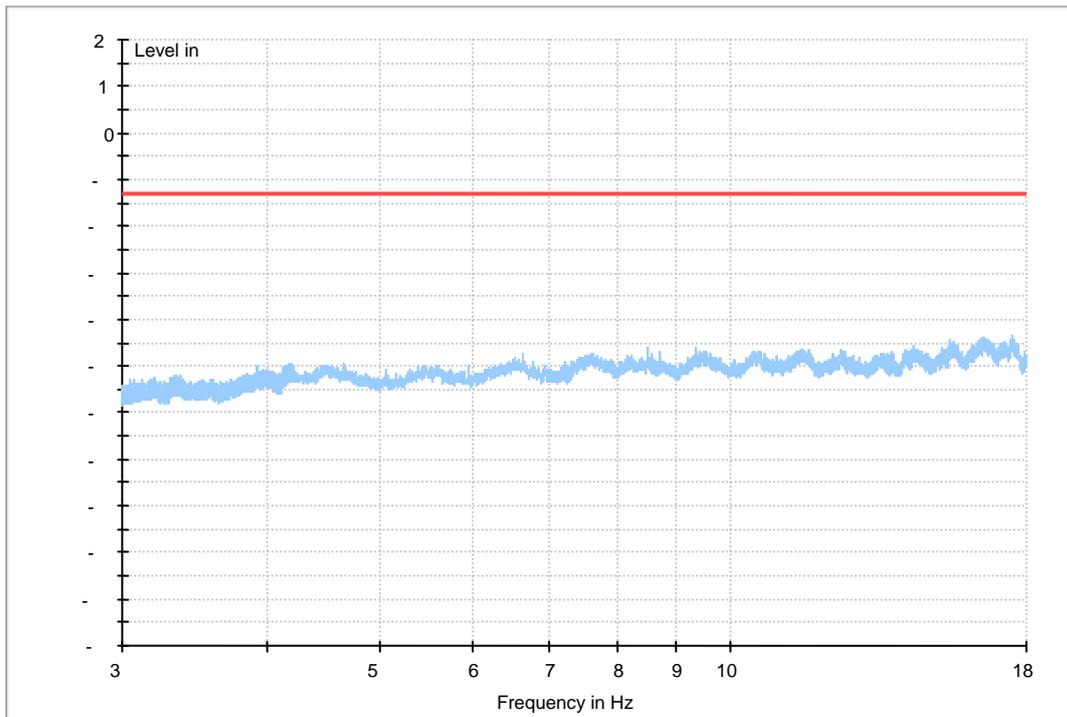


HSDPA Band V


(9KHz~30MHz)

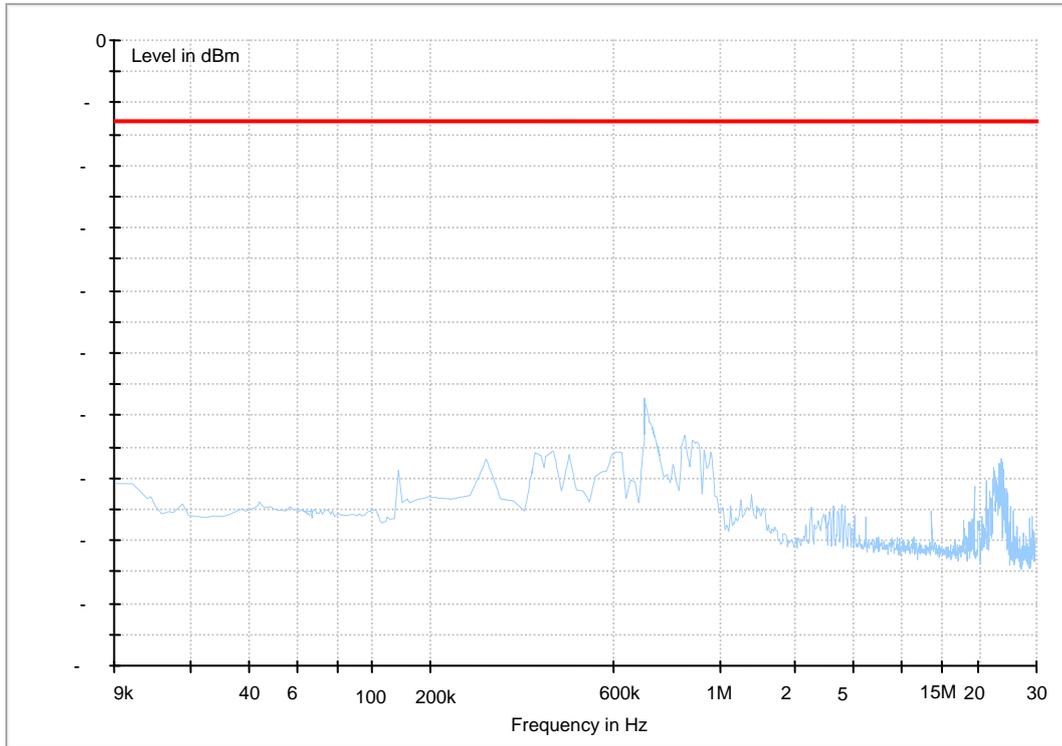

(30MHz~3GHz)

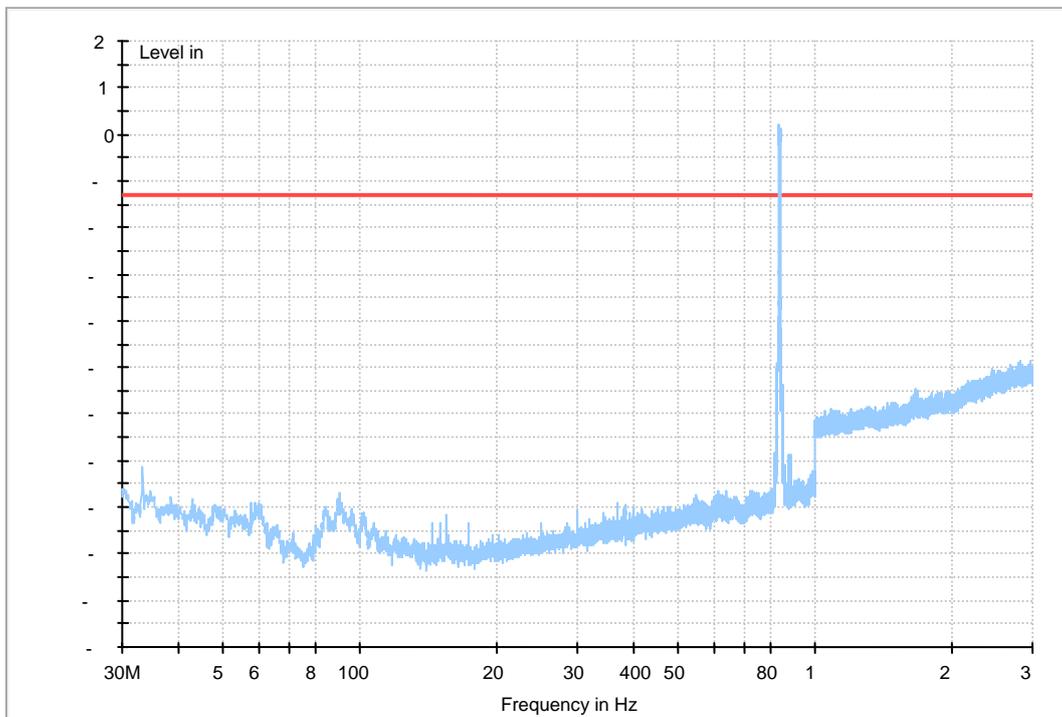


(3GHz~18GHz)

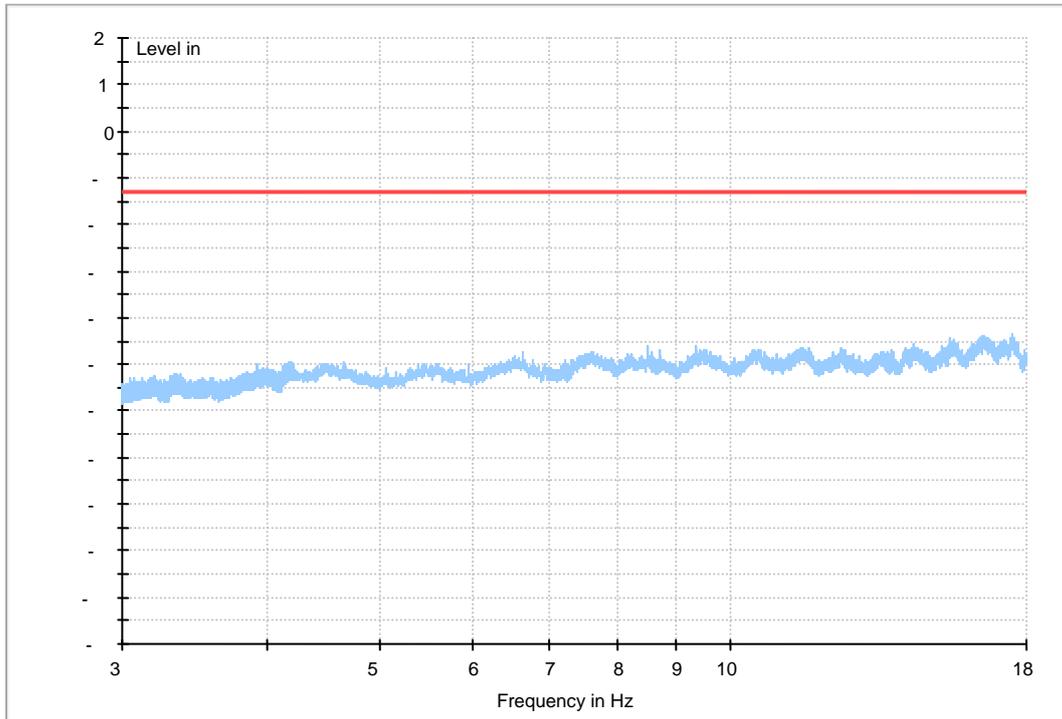


HSUPA Band V


(9KHz~30MHz)

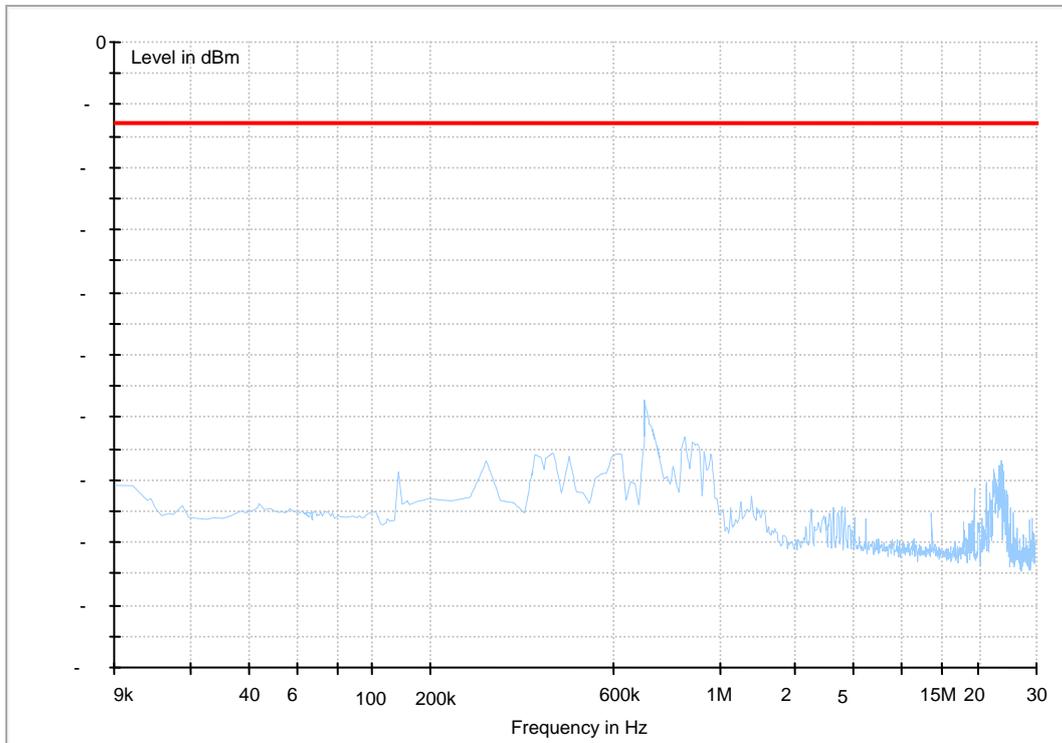

(30MHz~3GHz)

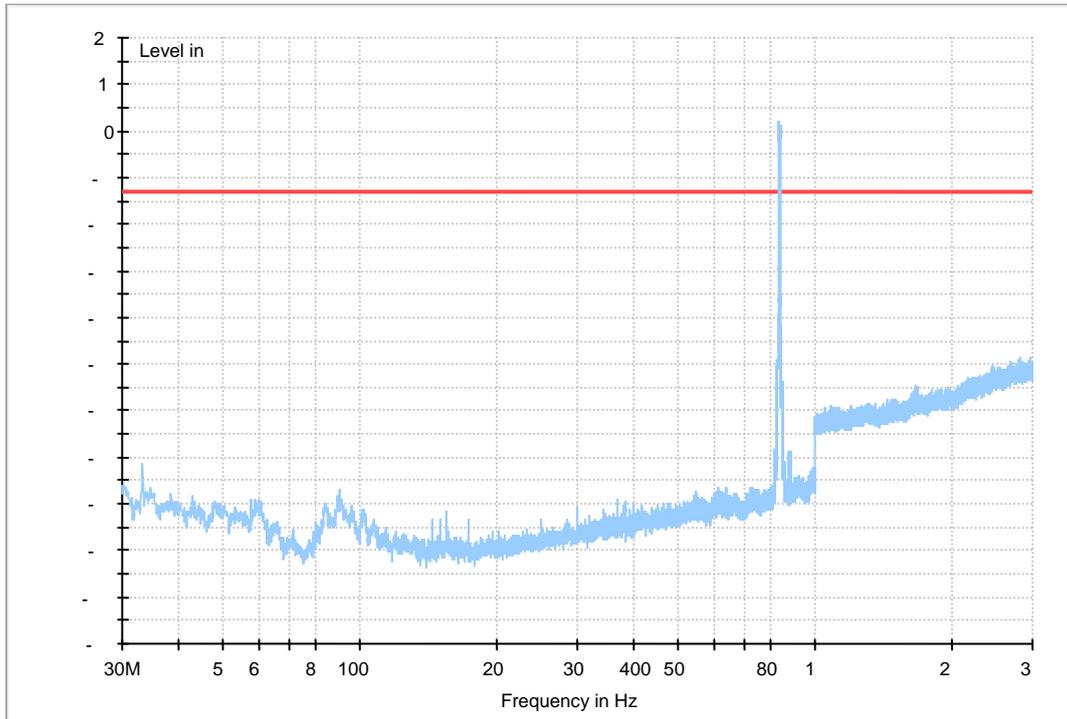

(3GHz~18GHz)

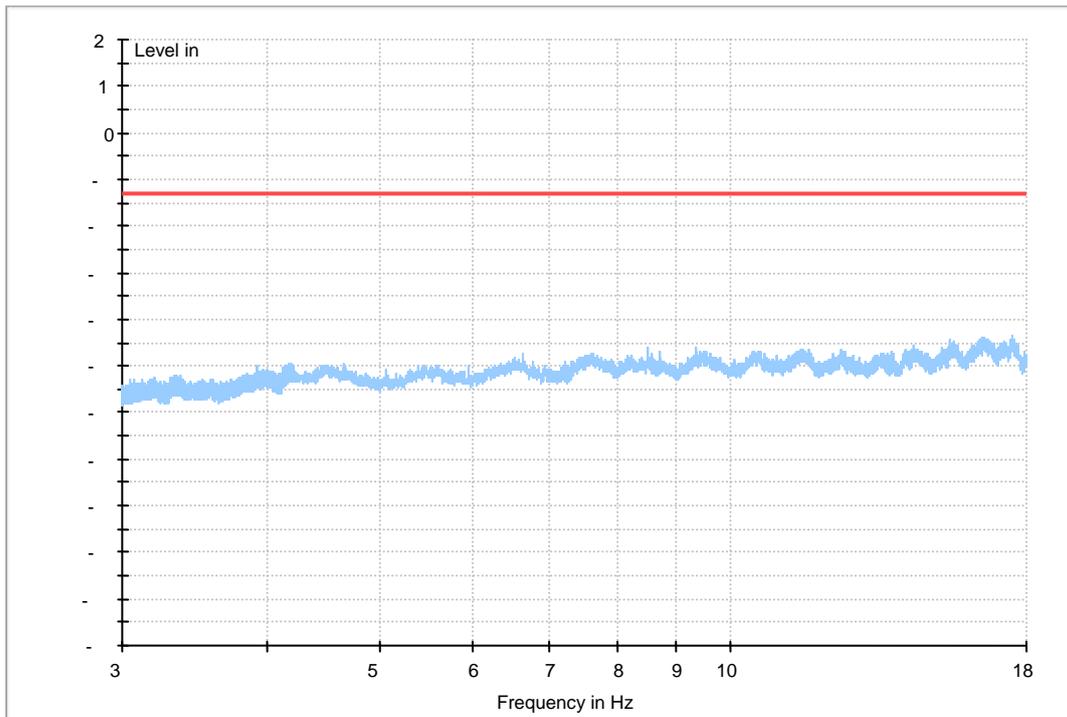

-----THE END-----



Appendix G

Frequency Stability

According to FCC Part 2.1055 & Part 22.355

**Frequency Error vs. Temperature:**

Test Mode	RF Ch.	Volt.	Temp.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	VN	-30 °C	-16	-0.01912	---	±2.5	Pass
			-20 °C	16	0.01912	---	±2.5	Pass
			-10 °C	14	0.01673	---	±2.5	Pass
			0 °C	-6	-0.00717	---	±2.5	Pass
			10 °C	-18	-0.02151	---	±2.5	Pass
			20 °C	-18	-0.02151	---	±2.5	Pass
			30 °C	-17	-0.02031	---	±2.5	Pass
			40 °C	12	0.01434	---	±2.5	Pass
			50 °C	-11	-0.01314	---	±2.5	Pass
TM 2	M	VN	-30 °C	-15	-0.01792	---	±2.5	Pass
			-20 °C	22	0.02628	---	±2.5	Pass
			-10 °C	-14	-0.01673	---	±2.5	Pass
			0 °C	25	0.02987	---	±2.5	Pass
			10 °C	-15	-0.01792	---	±2.5	Pass
			20 °C	-10	-0.01195	---	±2.5	Pass
			30 °C	-14	-0.01673	---	±2.5	Pass
			40 °C	-22	-0.02628	---	±2.5	Pass
			50 °C	10	0.01195	---	±2.5	Pass
TM 3	M	VN	-30 °C	13	0.01553	---	±2.5	Pass
			-20 °C	25	0.02987	---	±2.5	Pass
			-10 °C	-25	-0.02987	---	±2.5	Pass
			0 °C	12	0.01434	---	±2.5	Pass
			10 °C	24	0.02867	---	±2.5	Pass
			20 °C	-20	-0.02389	---	±2.5	Pass
			30 °C	8	0.00956	---	±2.5	Pass
			40 °C	9	0.01075	---	±2.5	Pass
			50 °C	-14	-0.01673	---	±2.5	Pass



Frequency Error vs. Voltage:

Test Mode	RF Ch.	Temp.	Volt.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	TN	VL	19	0.02270	---	±2.5	Pass
			VN	26	0.03106	---	±2.5	Pass
			VH	17	0.02031	---	±2.5	Pass
TM 2	M	TN	VL	-12	-0.01434	---	±2.5	Pass
			VN	-17	-0.02031	---	±2.5	Pass
			VH	-19	-0.02270	---	±2.5	Pass
TM 3	M	TN	VL	28	0.03345	---	±2.5	Pass
			VN	20	0.02389	---	±2.5	Pass
			VH	28	0.03345	---	±2.5	Pass

-----The END-----
