



# **FCC&IC Test Report**

**Product Name: HUAWEI ASCEND X;  
HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;  
HUAWEI U9000; U9000;**

**Model Number: HUAWEI U9000-81/U9000-81**

**Report No: SYBH(Z-RF)025032011-2001  
FCC ID: QISU9000-81  
IC:6369A-U900081**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518



## Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



## REPORT ON

FCC&IC Test of HUAWEI ASCEND X;  
HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with  
Bluetooth; HUAWEI U9000; U9000;

M/N: HUAWEI U9000-81/U9000-81

Report No: SYBH(Z-RF)025032011-2001

FCC ID: QISU9000-81

IC:6369A-U900081

## REGULATION

FCC CFR47 Part 2: Subpart J;


FCC CFR47 Part 22: Subpart H;


RSS-Gen Issue 3

RSS-132 Issue 2

## CONCLUSION

PASS

|             |                          |                                                                                       |
|-------------|--------------------------|---------------------------------------------------------------------------------------|
| Approved By |                          |  |
|             | <u>2011-3-28</u><br>Date | <u>Chen Xiaohong</u><br>Name<br>Signature                                             |

|             |                          |                                                                                       |
|-------------|--------------------------|---------------------------------------------------------------------------------------|
| Reviewed By |                          |  |
|             | <u>2011-3-27</u><br>Date | <u>Xu Guangyi</u><br>Name<br>Signature                                                |

|          |                          |                                                                                       |
|----------|--------------------------|---------------------------------------------------------------------------------------|
| Operator |                          |  |
|          | <u>2011-3-27</u><br>Date | <u>Wuhua</u><br>Name<br>Signature                                                     |

## Contents



|          |                                                |           |
|----------|------------------------------------------------|-----------|
| <b>1</b> | <b><u>Summary</u></b>                          | <b>5</b>  |
| <b>2</b> | <b><u>Product Description</u></b>              | <b>6</b>  |
| 2.1      | PRODUCTION INFORMATION                         | 6         |
| 2.2      | MODIFICATION INFORMATION                       | 6         |
| <b>3</b> | <b><u>Test Site Description</u></b>            | <b>7</b>  |
| 3.1      | TESTING PERIOD                                 | 7         |
| 3.2      | GENERAL SET UP DESCRIPTION                     | 7         |
| <b>4</b> | <b><u>Product Description</u></b>              | <b>8</b>  |
| 4.1      | TECHNICAL CHARACTERISTICS                      | 8         |
| 4.2      | EUT IDENTIFICATION LIST                        | 10        |
| <b>5</b> | <b><u>Main Test Instruments</u></b>            | <b>11</b> |
| <b>6</b> | <b><u>Transmitter Measurements</u></b>         | <b>12</b> |
| 6.1      | EFFECTIVE RADIATED POWER OF TRANSMITTER (EIRP) | 12        |
| 6.2      | CONDUCTED POWER OF TRANSMITTER                 | 17        |
| 6.3      | MODULATION CHARACTERISTICS                     | 19        |
| 6.4      | OCCUPIED BANDWIDTH                             | 21        |
| 6.5      | BAND EDGES COMPLIANCE                          | 24        |
| 6.6      | SPURIOUS EMISSION AT ANTENNA TERMINAL          | 26        |
| 6.7      | FREQUENCY STABILITY                            | 29        |
| <b>7</b> | <b><u>System Measurement Uncertainty</u></b>   | <b>33</b> |
| <b>8</b> | <b><u>Appendices</u></b>                       | <b>34</b> |



# 1 Summary

The table below summarizes the measurements and results for the EUT. Detailed results and descriptions are shown in the following pages.

Table 1 Summary of results

| FCC Measurement Specification | FCC Limits Part(s) | Section in RSS-132 | Description                             | Result     |
|-------------------------------|--------------------|--------------------|-----------------------------------------|------------|
| 2.1046                        | 22.913             | 4.4                | Effective Radiated Power of Transmitter | PASS       |
| 2.1046                        | 22.913             | 4.4                | Conducted Power of Transmitter          | PASS       |
| 2.1047                        | /                  | /                  | Modulation Characteristics              | PASS       |
| 2.1049                        | /                  | 4.5                | Occupied Bandwidth                      | PASS       |
| 2.1051                        | 22.917             | 4.5                | Band Edges compliance                   | PASS       |
| 2.1051                        | 22.917             | 4.5                | Spurious Emission at Antenna Terminal   | PASS       |
| 2.1055                        | 22.355             | 4.3                | Frequency Stability                     | PASS       |
| 2.1053                        | 22.917             | 4.5                | Radiated Spurious Emissions             | (See Note) |

Note: The Radiated Spurious Emissions' test results are shown in the EMC report.



## 2 Product Description

### 2.1 Production Information

#### 2.1.1 General Description

HUAWEI ASCEND X; HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; HUAWEI U9000; U9000- HUAWEI U9000-81/U9000-81 is subscriber equipment in the WCDMA/GSM system. The HSPA/UMTS frequency band is Band I, Band II, Band IV and Band V, only Band V can be used in this report. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, only GSM850MHz band test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video, MMS service, GPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

**Note: Only test for GSM/GPRS/EDGE 850MHz (GSM) and band V (WCDMA) can be included in this report for the requirement of FCC part 2 & 22.**

#### 2.1.2 Support function and Service

The EUT support the function and service as follows:

Table 2 Service and Test mode List

| Service Name   | Characteristic   | Corresponding Test Mode | Note     |
|----------------|------------------|-------------------------|----------|
| Voice and data | Modulation: GMSK | TM1                     | GPRS/GSM |
| Data           | Modulation: 8PSK | TM2                     | EDGE     |
| Data           | Modulation: QPSK | TM3                     | WCDMA    |
| Data           | Modulation: QPSK | TM4                     | HSDPA    |
| Data           | Modulation: QPSK | TM5                     | HSUPA    |

Note: \* The specified GPRS test conditions & settings are defined in 3GPP TS51.010 V5.4.0 and the EDGE test conditions & settings are defined in 3GPP TS51.010 V5.4.0.  
The specified WCDMA test conditions & settings are defined in 3GPP TS 34.121 V7.3.0.

### 2.2 Modification Information

For original equipment, following table is not application.

Table 3 Modification Information

| Model Number   | Board/Module | Original Version | New Version | Modify Information |
|----------------|--------------|------------------|-------------|--------------------|
| Not applicable |              |                  |             |                    |
|                |              |                  |             |                    |
|                |              |                  |             |                    |



### **3 Test Site Description**

The test site of:

***Huawei Technologies Co. Ltd.  
P.O. Box 518129  
Huawei base, Bantian,  
Longgang District, Shenzhen, China***

#### **3.1 Testing Period**

The test have been performed during the period of

**Mar.25, 2011 – Mar.26, 2011**

#### **3.2 General Set up Description**

**TM1:** GPRS/GSM Mode with GMSK Modulation

**TM2:** EDGE Mode with 8PSK Modulation

**TM3:** WCDMA Mode with QPSK Modulation

**TM4:** HSDPA Mode with QPSK Modulation

**TM5:** HSUPA Mode with QPSK Modulation



## 4 Product Description

### 4.1 Technical Characteristics

#### 4.1.1 Frequency Range

Table 4 Frequency Range

|                |                |
|----------------|----------------|
| Uplink band:   | 824 to 849 MHz |
| Downlink band: | 869 to 894 MHz |

#### 4.1.2 Channel Spacing / Separation

Table 5 Channel Spacing / Separation

|                  | EDGE/GPRS/GSM | UMTS/HSPA |
|------------------|---------------|-----------|
| Channel Raster   | 200k Hz       | 200k Hz   |
| Channel spacing: | 200k Hz       | 5M Hz     |

#### 4.1.3 Type of Emission

Table 6 Type of Emission

|                       | GPRS/GSM | EDGE    | UMTS/HSPA |
|-----------------------|----------|---------|-----------|
| Emission Designation: | 300kGXW  | 300KG7W | 5M00F9W   |

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202





#### 4.1.4 Environmental Requirements

Table 7 Environmental Requirements

|                      |          |
|----------------------|----------|
| Minimum temperature: | - 10 °C  |
| Maximum temperature: | + 55 °C  |
| Relative Humidity:   | 5%-95%RH |

#### 4.1.5 Power Source

Table 8 Power Source

|                     |                    |
|---------------------|--------------------|
| AC voltage nominal: | ~ 120 V            |
| AC voltage range    | ~ 100 V to ~ 240 V |
| AC current maximal: | 650mA              |

#### 4.1.6 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (9).

Please reference the document Tune-up Procedure in TCF.

#### 4.1.7 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8).

The voltage and current in the final RF stage is:

Table 9 Applied RF module DC Voltages and Currents

|          |                                                                       |
|----------|-----------------------------------------------------------------------|
| Voltage: | == +2.8V                                                              |
| Current: | 100mA According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8) |



## 4.2 EUT Identification List

### 4.2.1 Board Information

Table 10 Board Information

|                                                                                            |                 |         |
|--------------------------------------------------------------------------------------------|-----------------|---------|
| HUAWEI ASCEND X; HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; HUAWEI U9000; U9000; |                 |         |
| HUAWEI U9000-81/U9000-81                                                                   |                 |         |
| Board and Module                                                                           |                 |         |
| Equipment Designation / Description                                                        | IMEI            | Remarks |
| MAINBOARD                                                                                  | 356161040006249 | PR2.32  |

### 4.2.2 Battery Technical Data

| Name                | Qty. | Manufacture                   | Serials number   | Description                                                                                                                                                                                                                                                                       |
|---------------------|------|-------------------------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rechargeable Li-ion | 1    | Huawei Technologies Co., Ltd. | YJCB107HI0202713 | Battery Model: HHB4Z1<br>Rated capacity: 1400mAh<br>Nominal Voltage:  +3.7V<br>Charging Voltage:  +4.2V |

### 4.2.3 FCC Identification

Grantee Code: QIS  
Product Code: U9000-81  
FCC Identification: QISU9000-81

### 4.2.4 IC Identification

Grantee Code: 6369A  
Product Code: U900081  
IC Identification: 6369A-U900081



## 5 Main Test Instruments

Table 11 Main Test Equipments

| Equipment Description                | Manufacturer | Model                   | Serial Number  | Calibrated until (MM.DD.YYYY) |
|--------------------------------------|--------------|-------------------------|----------------|-------------------------------|
| Receiver                             | R&S          | ESIB 26                 | 100318         | 04.21.2011                    |
| BiLog Antenna                        | Schaffner    | CBL 6112B               | 2747           | 11.16.2011                    |
| Horn Antenna                         | ETS-Lindgren | 3117                    | 00062553       | 08.15.2011                    |
| Horn Antenna                         | ETS-Lindgren | 3160                    | 00060006       | 08.03.2011                    |
| Dipole                               | Schwarzbeck  | D69250-UHAP/D69250-VHAP | 979/917        | 10.11.2011                    |
| Signal Generator                     | R&S          | SMR 40                  | 100325         | 05.11.2011                    |
| Signal Generator                     | R&S          | SMU200A                 | 101717         | 04.10.2011                    |
| Power Supply                         | Keithley     | 2306                    | 1045337        | 05.11.2011                    |
| Climate Chamber                      | WEISS        | WK11-180/170            | 58226049470010 | 10.23.2011                    |
| Universal Radio Communication Tester | R&S          | CMU200                  | 112347         | 03.30.2011                    |
| Wireless communication test set      | Agilent      | 8960                    | GB43461081     | 05.10.2011                    |
| Spectrum Analyzer                    | Agilent      | E4440A                  | 200245         | 08.27.2011                    |



## 6 Transmitter Measurements

### 6.1 Effective Radiated Power of Transmitter (ERP)

#### 6.1.1 Test Conditions

Table 12 Test Conditions

|                      |                                                      |
|----------------------|------------------------------------------------------|
| Preconditioning:     | 0.5 hour                                             |
| Measured at:         | enclosure                                            |
| Ambient temperature: | 25 °C                                                |
| Relative humidity:   | 55%                                                  |
| Test Configurations: | TM1/TM2/TM3/TM4/TM5 at frequency Bottom, Middle, Top |

#### 6.1.2 Test Specifications and Limits

##### 6.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 22.913

##### 6.1.2.2 Supporting Standards

Table 13 Supporting Standards:

|                       |                                                                                                                                                 |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| ANSI/TIA-603-C:2004   | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards                                                             |
| 3GPP TS51.010 V5.4.0  | Digital cellular telecommunications system;<br>Mobile Station (MS) conformance specification;                                                   |
| 3GPP TS 34.121 V7.3.0 | Universal Mobile Telecommunications System (UMTS);<br>User Equipment (UE) conformance specification;<br>Radio transmission and reception (FDD); |

##### 6.1.2.3 Limits

Compliance with part 22.913, mobile/portable stations are limited to 7 watts ERP peak power.  
The calculated longitude ERP by following formula:  $ERP(dBm) = 10 \cdot \log(ERP_{in\ mwatts})$ .

Table 14 Limits

|                              |            |
|------------------------------|------------|
| Maximum Output Power (Watts) | < 7 Watts  |
| Maximum Output Power (dBm)   | < 38.5 dBm |

#### 6.1.3 Test Method and Setup


- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, ERP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in

2.1033(c)(8). Connect the Mobile Phone to the wireless communication tester CMU200 via the air interface. The band class is set as GSM850M and WCDMA850.

- (b) Test the Radiated maximum output power by the CMU200 received from test antenna.
- (c) Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on CMU200, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

## Test setup

### Step 1: Pre-test

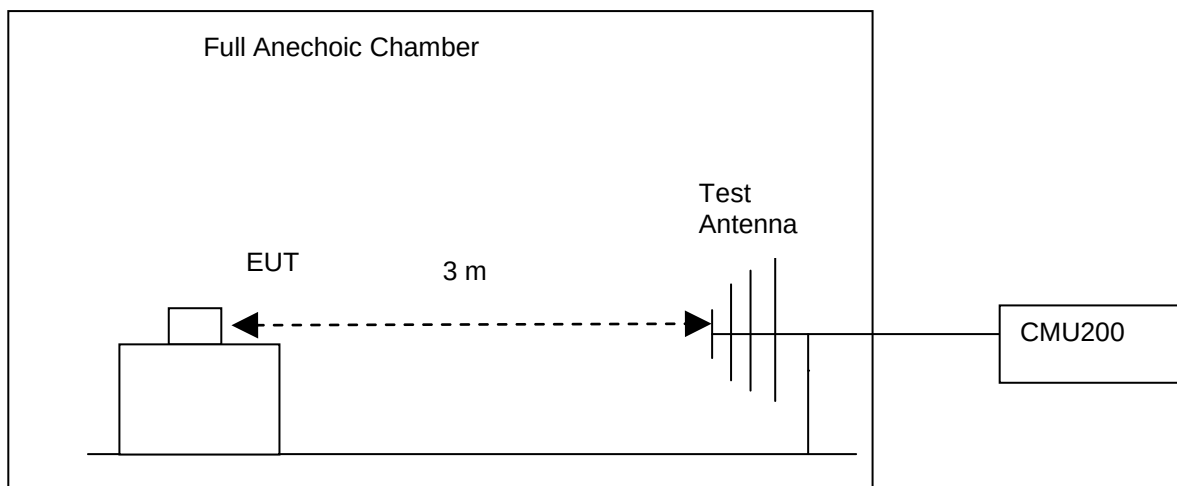

### Step 2: Substitution method to verify the maximum ERP

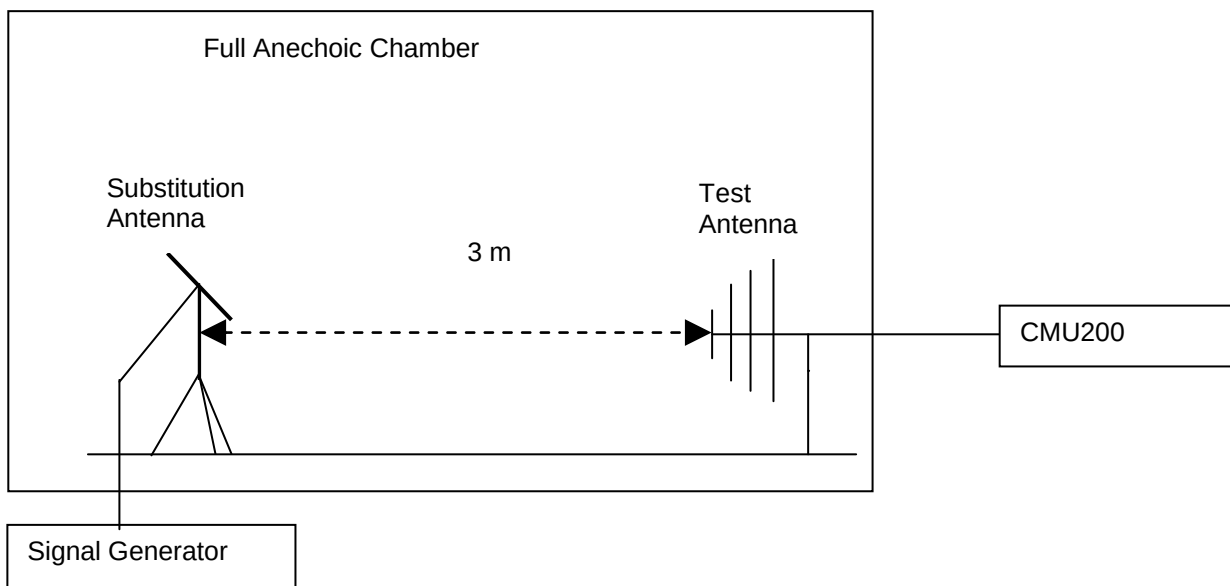


Figure 1. Test Set-up

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.



## 6.1.4 Measurement Results

### 6.1.4.1 Pre-test Results

For HSDPA test mode, there are 4 sub-test for different configuration. For the sub-test 1, The channel is Middle range.

| Sub-test | c     | d     | d (SF) | c/d   | HS (Note1, Note 2) | CM (dB) (Note 3) | MPR (dB) (Note 3) | Test result |
|----------|-------|-------|--------|-------|--------------------|------------------|-------------------|-------------|
| 1        | 2/15  | 15/15 | 64     | 2/15  | 4/15               | 0.0              | 0.0               | 22.03       |
| 2        | 12/15 | 15/15 | 64     | 12/15 | 24/15              | 1.0              | 0.0               | 22.35       |
| 3        | 15/15 | 8/15  | 64     | 15/8  | 30/15              | 1.5              | 0.5               | 22.01       |
| 4        | 15/15 | 4/15  | 64     | 15/4  | 30/15              | 1.5              | 0.5               | 22.75       |

For the following test, the TM4 was used for HSDPA.

For HSUPA test mode, there are 5 sub-test for different configuration. For the sub-test 1, The channel is Middle range.

| Sub-test | $\beta c/\beta d$ | $\beta HS$ | $\beta ec$ | $\beta ed$          | $\beta ed$ (SF) | $\beta ed$ (Codes) | CM (dB) | MPR (dB) | Test result |
|----------|-------------------|------------|------------|---------------------|-----------------|--------------------|---------|----------|-------------|
| 1        | 11/15             | 16/15      | 16/15      | 448/75              | 4               | 1                  | 1.0     | 0.0      | 21.69       |
| 2        | 6/15              | 12/15      | 12/15      | 94/75               | 4               | 1                  | 3.0     | 2.0      | 20.45       |
| 3        | 15/9              | 30/15      | 30/15      | $\beta ed1$ : 47/15 | 4               | 2                  | 2.0     | 1.0      | 21.06       |
| 4        | 2/15              | 2/15       | 2/15       | 56/75               | 4               | 1                  | 3.0     | 2.0      | 21.45       |
| 5        | 15/15             | 24/15      | 24/15      | 224/25              | 4               | 1                  | 1.0     | 0.0      | 21.52       |

For the following test, the TM5 was used for HSUPA.

Table 15 Measurement Results

|                 |                             | RF Output Power (EIRP)    |       |                          |       |                           |       |
|-----------------|-----------------------------|---------------------------|-------|--------------------------|-------|---------------------------|-------|
| TEST CONDITIONS |                             | Channel128(B)<br>824.2MHz |       | Channel192 (M)<br>837MHz |       | Channel251(T)<br>848.8MHz |       |
|                 |                             | dBm                       |       | dBm                      |       | dBm                       |       |
|                 |                             | Measured                  | Limit | Measured                 | Limit | Measured                  | Limit |
| TM1             | Tnom (25 °C)<br>Vnom (3.7V) | 30.98                     | 38.5  | 30.91                    | 38.5  | 30.74                     | 38.5  |
| TM2             | Tnom (25 °C)<br>Vnom (3.7V) | 24.60                     | 38.5  | 24.58                    | 38.5  | 24.61                     | 38.5  |



| TEST CONDITIONS |                             | Channel4132(B)<br>826.4MHz |       | Channel4182(M)<br>836.4MHz |       | Channel4233(T)<br>846.6MHz |       |
|-----------------|-----------------------------|----------------------------|-------|----------------------------|-------|----------------------------|-------|
|                 |                             | dBm                        |       | dBm                        |       | dBm                        |       |
|                 |                             | Measured                   | Limit | Measured                   | Limit | Measured                   | Limit |
| TM3             | Tnom (25 °C)<br>Vnom (3.7V) | 21.50                      | 38.5  | 21.71                      | 38.5  | 21.46                      | 38.5  |
| TM4             | Tnom (25 °C)<br>Vnom (3.7V) | 21.10                      | 38.5  | 20.68                      | 38.5  | 21.09                      | 38.5  |
| TM5             | Tnom (25 °C)<br>Vnom (3.7V) | 20.41                      | 38.5  | 20.34                      | 38.5  | 20.39                      | 38.5  |

### 6.1.4.2 Substitution Results

Table 16 Substitution Results

| Test Mode | Freq. [MHz] | Meas. Level [dBm] | Substitution Antenna Type | SGP [dBm] | Substitution Gain [dBd] | Cable Loss [dB] | Substitution Level (ERP) [dBm] | Limit [dBm] | Result |
|-----------|-------------|-------------------|---------------------------|-----------|-------------------------|-----------------|--------------------------------|-------------|--------|
| TM1       | 824.2       | 30.98             | Dipole Ant.               | 34.64     | -2.95                   | 0.6             | 31.09                          | 38.5        | Pass   |
| TM1       | 837         | 30.91             | Dipole Ant                | 34.63     | -3.06                   | 0.6             | 30.97                          | 38.5        | Pass   |
| TM1       | 848.8       | 30.74             | Dipole Ant                | 34.54     | -3.11                   | 0.6             | 30.83                          | 38.5        | Pass   |
| TM2       | 824.2       | 24.60             | Dipole Ant                | 28.23     | -2.95                   | 0.6             | 24.68                          | 38.5        | Pass   |
| TM2       | 837         | 24.58             | Dipole Ant.               | 28.31     | -3.06                   | 0.6             | 24.65                          | 38.5        | Pass   |
| TM2       | 848.8       | 24.61             | Dipole Ant                | 28.41     | -3.11                   | 0.6             | 24.70                          | 38.5        | Pass   |
| TM3       | 826.4       | 21.50             | Dipole Ant                | 25.13     | -2.95                   | 0.6             | 21.58                          | 38.5        | Pass   |
| TM3       | 836.4       | 21.71             | Dipole Ant                | 25.43     | -3.06                   | 0.6             | 21.77                          | 38.5        | Pass   |
| TM3       | 846.6       | 21.46             | Dipole Ant.               | 25.24     | -3.11                   | 0.6             | 21.53                          | 38.5        | Pass   |
| TM4       | 826.4       | 21.10             | Dipole Ant                | 24.73     | -2.95                   | 0.6             | 21.18                          | 38.5        | Pass   |
| TM4       | 836.4       | 20.68             | Dipole Ant                | 24.45     | -3.06                   | 0.6             | 20.79                          | 38.5        | Pass   |
| TM4       | 846.6       | 21.09             | Dipole Ant.               | 24.92     | -3.11                   | 0.6             | 21.21                          | 38.5        | Pass   |
| TM5       | 826.4       | 20.41             | Dipole Ant                | 24.09     | -2.95                   | 0.6             | 20.54                          | 38.5        | Pass   |
| TM5       | 836.4       | 20.34             | Dipole Ant                | 24.10     | -3.06                   | 0.6             | 20.44                          | 38.5        | Pass   |
| TM5       | 846.6       | 20.39             | Dipole Ant.               | 24.25     | -3.11                   | 0.6             | 20.54                          | 38.5        | Pass   |

Note: a, For getting the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

NOTE: SGP- Signal Generator Level



b, A GSM signal with bandwidth of 200kHz signal with bandwidth of 5MHz is created by the vector generator R&S SMU200A.

A WCDMA/HSPA signal with bandwidth of 5MHz are created by the vector generator R&S SMU200A.

c, RBW=10kHz, VBW=300kHz, and integrated by the instrument to 200kHz for TM1 and TM2.

### 6.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.





## 6.2 Conducted Power of Transmitter

### 6.2.1 Test Conditions

Table 17 Test Conditions

|                      |                                                      |
|----------------------|------------------------------------------------------|
| Preconditioning:     | 0.5 hour                                             |
| Measured at:         | Antenna connector                                    |
| Ambient temperature: | 25 °C                                                |
| Relative humidity:   | 52 %                                                 |
| Test Configurations: | TM1/TM2/TM3/TM4/TM5 at frequency Bottom, Middle, Top |

### 6.2.2 Test Specifications and Limits

#### 6.2.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 22 subpart H

#### 6.2.2.2 Supporting Standards

Table 18 Supporting Standards:

|                       |                                                                                                                                                 |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| ANSI/TIA-603-C:2004   | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards                                                             |
| 3GPP TS51.010 V5.4.0  | Digital cellular telecommunications system;<br>Mobile Station (MS) conformance specification;                                                   |
| 3GPP TS 34.121 V7.3.0 | Universal Mobile Telecommunications System (UMTS);<br>User Equipment (UE) conformance specification;<br>Radio transmission and reception (FDD); |

#### 6.2.2.3 Limits

Compliance with part 22.913, in no any case may the peak power of a mobile station transmitter exceed 7 W. The calculated longitude ERP by following formula:

$$\text{ERP(dBm)} = 10 \cdot \log(\text{ERP}_{\text{in mwatts}}).$$

And for conducted power, we can use Antenna Gain to calculate the limit. So the conducted power:

$$\begin{aligned} P_{\text{cod}}(\text{dBm}) &= \text{ERP(dBm)} - \text{Gain(dBd)}. \\ \text{and Gain (dBd)} &= \text{Gain(dBi)} - 2.15\text{dB} \end{aligned}$$

Table 19 Limits

|                                      |                    |
|--------------------------------------|--------------------|
| Maximum Output Power (Watts)         | < 7 Watts(38.5dBm) |
| Antenna Gain(dBi):                   | 0.8                |
| Antenna Gain(dBd):                   | -1.35              |
| Maximum Conducted Output Power (dBm) | < 39.85dBm         |

### 6.2.3 Test Method and Setup

(a)For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, Conducted maximum power shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the Mobile Phone to the wireless communication tester CMU200 via the antenna connector. The band class is set as GSM850M and WCDMA850M.

(b)Test the Conducted maximum output power by the CMU200.

#### Test setup

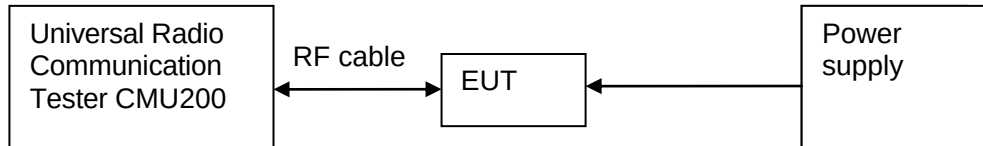


Figure 2. Test Set-up

### 6.2.4 Measurement Results

Table 20 Measurement Results

|                 |                             | RF Output Power (Conducted) |       |                            |       |                            |       |
|-----------------|-----------------------------|-----------------------------|-------|----------------------------|-------|----------------------------|-------|
| TEST CONDITIONS |                             | Channel128(B)<br>824.2MHz   |       | Channel192 (M)<br>837MHz   |       | Channel251(T)<br>848.8MHz  |       |
|                 |                             | dBm                         |       | dBm                        |       | dBm                        |       |
|                 |                             | Measured                    | Limit | Measured                   | Limit | Measured                   | Limit |
| TM1             | Tnom (25 °C)<br>Vnom (3.7V) | 32.33                       | 39.85 | 32.26                      | 39.85 | 32.09                      | 39.85 |
| TM2             | Tnom (25 °C)<br>Vnom (3.7V) | 25.95                       | 39.85 | 25.93                      | 39.85 | 25.96                      | 39.85 |
|                 |                             |                             |       |                            |       |                            |       |
| TEST CONDITIONS |                             | Channel4132(B)<br>826.4MHz  |       | Channel4182(M)<br>836.4MHz |       | Channel4233(T)<br>846.6MHz |       |
|                 |                             | dBm                         |       | dBm                        |       | dBm                        |       |
|                 |                             | Measured                    | Limit | Measured                   | Limit | Measured                   | Limit |
| TM3             | Tnom (25 °C)<br>Vnom (3.7V) | 22.85                       | 39.85 | 23.06                      | 39.85 | 22.81                      | 39.85 |
| TM4             | Tnom (25 °C)<br>Vnom (3.7V) | 22.45                       | 39.85 | 22.03                      | 39.85 | 22.44                      | 39.85 |
| TM5             | Tnom (25 °C)<br>Vnom (3.7V) | 21.76                       | 39.85 | 21.69                      | 39.85 | 21.74                      | 39.85 |

### 6.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.



## 6.3 Modulation Characteristics

### 6.3.1 Test Conditions

Table 21 Test Conditions

|                      |                                |
|----------------------|--------------------------------|
| Preconditioning:     | 0.5 hour                       |
| Measured at:         | Antenna connector              |
| Ambient temperature: | 25 °C                          |
| Relative humidity:   | 52 %                           |
| Test Configurations: | TM1/TM2/TM3at frequency Middle |

### 6.3.2 Test Specifications and Limits

#### 6.3.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 22 subpart H

#### 6.3.2.2 Supporting Standards

Table 22 Supporting Standards:

|                       |                                                                                                                                                 |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| ANSI/TIA-603-C:2004   | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards                                                             |
| 3GPP TS51.010 V5.4.0  | Digital cellular telecommunications system;<br>Mobile Station (MS) conformance specification;                                                   |
| 3GPP TS 34.121 V7.3.0 | Universal Mobile Telecommunications System (UMTS);<br>User Equipment (UE) conformance specification;<br>Radio transmission and reception (FDD); |

#### 6.3.2.3 Limits

No specific modulation characteristics requirement limits in part 2.1047 and part 22 subpart H.

Table 23 Limits

|        |                |
|--------|----------------|
| Limits | Not applicable |
|--------|----------------|

### 6.3.3 Test Method and Setup

Connect the Mobile Phone to Wireless Communication Tester R&S CMU200 via the antenna connector. The band class is set as GSM850M and WCDMA850M; the Mobile Phone's output is matched with 50  $\Omega$  loads, test method was according to 3GPP TS 51.010 and TS 34.121. The waveform quality and constellation of the Mobile Phone was tested.

#### Test setup

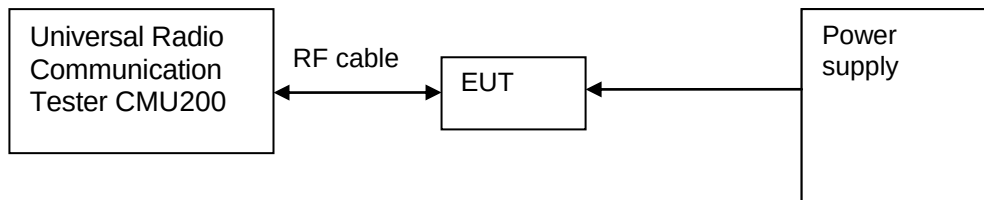


Figure 3. Test Set-up

### 6.3.4 Measurement Results

Table 24 Measurement Results

|                          |                         | Modulation Characteristic  |                     |
|--------------------------|-------------------------|----------------------------|---------------------|
| TEST CONDITIONS          |                         | Channel192(M)<br>837MHz    |                     |
|                          |                         | Measured                   |                     |
|                          |                         | TM1                        | TM2                 |
| T <sub>nom</sub> (25 °C) | V <sub>nom</sub> (3.7V) | Refer to Appendix A        | Refer to Appendix A |
|                          |                         |                            |                     |
|                          |                         | Modulation Characteristic  |                     |
| TEST CONDITIONS          |                         | Channel4182(M)<br>836.4MHz |                     |
|                          |                         | Measured                   |                     |
|                          |                         | TM3                        |                     |
| T <sub>nom</sub> (25 °C) | V <sub>nom</sub> (3.7V) | Refer to Appendix A        |                     |

### 6.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.  
For the measurement results refer to appendix A.



## 6.4 Occupied Bandwidth

### 6.4.1 Test Conditions

Table 25 Test Conditions

|                      |                                              |
|----------------------|----------------------------------------------|
| Preconditioning:     | 0.5 hour                                     |
| Measured at:         | Antenna connector                            |
| Ambient temperature: | 25 °C                                        |
| Relative humidity:   | 55 %                                         |
| Test Configurations: | TM1/TM2/TM3 at frequency Bottom, Middle, Top |

### 6.4.2 Test Specifications and Limits

#### 6.4.2.1 Specification

CFR 47 (FCC) part 2.1049 and part 22 subpart H.

#### 6.4.2.2 Supporting Standards

Table 26 Supporting Standards:

|                       |                                                                                                                                           |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| ANSI/TIA-603-C:2004   | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards                                                       |
| 3GPP TS51.010 V5.4.0  | Digital cellular telecommunications system; Mobile Station (MS) conformance specification;                                                |
| 3GPP TS 34.121 V7.3.0 | Universal Mobile Telecommunications System (UMTS); User Equipment (UE) conformance specification; Radio transmission and reception (FDD); |

#### 6.4.2.3 Limits

No specific occupied bandwidth requirement in part 22 subpart H, but the occupied bandwidth was defined in part 2.1049: the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Table 27 Limits

|                               |                        |
|-------------------------------|------------------------|
| Upper /lower frequency limits | 0.5% of the mean power |
|-------------------------------|------------------------|

### 6.4.3 Test Method and Setup

Mobile Phone was connected to the wireless signal analyzer Agilent E4440A via the one RF connector. The band class is set as GSM850M and WCDMA850M; Mobile Phone was controlled to transmit maximum power. Measure and record the occupied bandwidth of the Mobile Phone by the Agilent E4440A.

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

Refer to 47CFR part2.1049 section (g)&(h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

For TM1/TM2 following RBW and VBW are employed:

Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)

Video bandwidth (VBW): 10 kHz

For TM3 system following RBW and VBW are employed:

Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)

Video bandwidth (VBW): 500 kHz

## Test Set-up

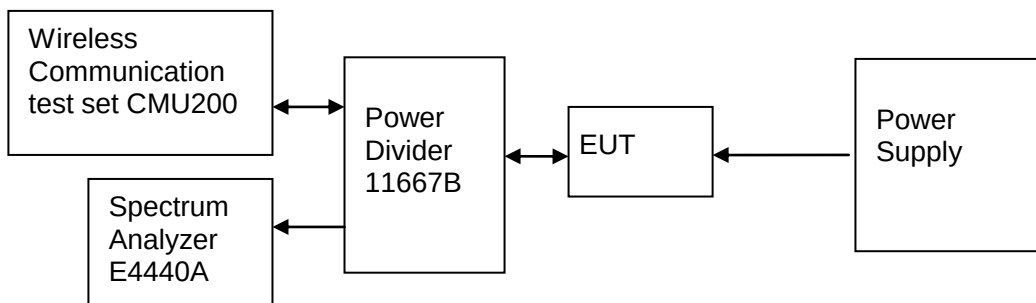


Figure 4. Test Set-up

## 6.4.4 Measurement Results

Table 28 Measurement Results

| TEST CONDITIONS          |     | Occupied Bandwidth         |        |                          |        |                            |        |
|--------------------------|-----|----------------------------|--------|--------------------------|--------|----------------------------|--------|
|                          |     | Channel128 (B)<br>824.2MHz |        | Channel192 (M)<br>837MHz |        | Channel251 (T)<br>848.8MHz |        |
|                          |     | Measured<br>(kHz)          |        | Measured<br>(kHz)        |        | Measured<br>(kHz)          |        |
|                          |     | TM1                        | TM2    | TM1                      | TM2    | TM1                        | TM2    |
| T <sub>nom</sub> (25 °C) | 99% | 243.50                     | 240.13 | 242.77                   | 236.96 | 240.43                     | 243.56 |
| V <sub>nom</sub> (3.7V)  |     |                            |        |                          |        |                            |        |
| TEST CONDITIONS          |     | Occupied Bandwidth         |        |                          |        |                            |        |



|                                                     |     | Channel4132(B)<br>826.4MHz | Channel4182(M)<br>836.4MHz | Channel4233 (T)<br>846.6MHz |
|-----------------------------------------------------|-----|----------------------------|----------------------------|-----------------------------|
|                                                     |     | Measured<br>(MHz)          | Measured<br>(MHz)          | Measured<br>(MHz)           |
|                                                     |     | TM3                        | TM3                        | TM3                         |
| T <sub>nom</sub> (25 °C)<br>V <sub>nom</sub> (3.7V) | 99% | 4.14                       | 4.15                       | 4.14                        |

## 6.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.  
For the measurement results refer to appendix B.



## 6.5 Band Edges Compliance

### 6.5.1 Test Conditions

Table 29 Test Conditions

|                      |                                      |
|----------------------|--------------------------------------|
| Preconditioning:     | 0.5 hour                             |
| Measured at:         | Antenna connector                    |
| Ambient temperature: | 25°C                                 |
| Relative humidity:   | 55 %                                 |
| Test Configurations: | TM1/TM2/TM3 at frequency Bottom, Top |

### 6.5.2 Test Specifications and Limits

#### 6.5.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 22.917

#### 6.5.2.2 Supporting Standards

Table 30 Supporting Standards:

|                       |                                                                                                                                                 |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| ANSI/TIA-603-C:2004   | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards                                                             |
| 3GPP TS51.010 V5.4.0  | Digital cellular telecommunications system;<br>Mobile Station (MS) conformance specification;                                                   |
| 3GPP TS 34.121 V7.3.0 | Universal Mobile Telecommunications System (UMTS);<br>User Equipment (UE) conformance specification;<br>Radio transmission and reception (FDD); |

#### 6.5.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least  $43 + 10 \log_{10} P(W)$ . (Whereas P is the rated power of the EUT in Watt).

Table 31 Limits

|                       | TM1                                     | TM2                                       | TM3                                        |
|-----------------------|-----------------------------------------|-------------------------------------------|--------------------------------------------|
| Rated Power:          | 33 dBm                                  | 27 dBm                                    | 24 dBm                                     |
| Required attenuation: | $43 + 10 \log(2) = 46$ , 33 dBm - 46 dB | $43 + 10 \log(0.5) = 40$ , 27 dBm - 40 dB | $43 + 10 \log(0.25) = 37$ ; 24 dBm - 37 dB |
| Absolute level        | - 13 dBm                                | - 13 dBm                                  | - 13 dBm                                   |

### 6.5.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer Agilent E4440A via the one RF connector, the band class is set as GSM850M and WCDMA850M. Mobile Phone was controlled to transmit maximum power. Measure and record band edges compliance of the Mobile Phone by the Agilent E4440A.



The limit is -13dBm.

For TM1/TM2 following RBW and VBW are employed:

Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)

Video bandwidth (VBW): 10 kHz

For TM3 system following RBW and VBW are employed:

Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)

Video bandwidth (VBW): 500 kHz

## Test Set-up

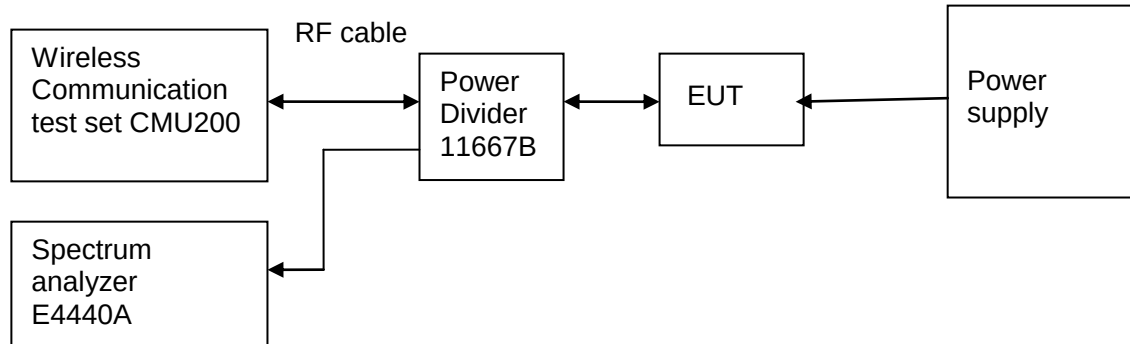


Figure 5. Test Set-up

## 6.5.4 Measurement Results

Table 32 Measurement Results outside Band Edges

| Band     | Frequency of Band edges [MHz]       | Channel Number | Test Mode | Spurious Level measured [dBm] | FCC limit | Result |
|----------|-------------------------------------|----------------|-----------|-------------------------------|-----------|--------|
| Cellular | $T_{nom}$ (25 °C), $V_{nom}$ (3.7V) |                |           |                               |           |        |
|          | 824.2                               | 128            | TM1       | <-13(See appendix C)          | - 13 dBm  | Pass   |
|          | 848.8                               | 251            | TM1       | <-13(See appendix C)          | - 13 dBm  | Pass   |
|          | 824.2                               | 128            | TM2       | <-13(See appendix C)          | - 13 dBm  | Pass   |
|          | 848.8                               | 251            | TM2       | <-13(See appendix C)          | - 13 dBm  | Pass   |
|          | 826.4                               | 4132           | TM3       | <-13(See appendix C)          | - 13 dBm  | Pass   |
|          | 846.6                               | 4233           | TM3       | <-13(See appendix C)          | - 13 dBm  | Pass   |

## 6.5.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix C.



## 6.6 Spurious Emission at Antenna Terminal

### 6.6.1 Test Conditions

Table 33 Test Conditions

|                      |                                              |
|----------------------|----------------------------------------------|
| Preconditioning:     | 0.5 hour                                     |
| Measured at:         | Antenna connector                            |
| Ambient temperature: | 25°C                                         |
| Relative humidity:   | 50 %                                         |
| Test Configurations: | TM1/TM2/TM3 at frequency Bottom, Middle, Top |

### 6.6.2 Test Specifications and Limits

#### 6.6.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 22.917

#### 6.6.2.2 Supporting Standards

Table 34 Supporting Standards:

|                       |                                                                                                                                                 |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| ANSI/TIA-603-C:2004   | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards                                                             |
| 3GPP TS51.010 V5.4.0  | Digital cellular telecommunications system;<br>Mobile Station (MS) conformance specification;                                                   |
| 3GPP TS 34.121 V7.3.0 | Universal Mobile Telecommunications System (UMTS);<br>User Equipment (UE) conformance specification;<br>Radio transmission and reception (FDD); |

#### 6.6.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least  $43 + 10 \log_{10} P$ . (Whereas P is the rated power of the EUT in Watt).

Table 35 Limits

|                       | TM1                                         | TM2                                           | TM3                                            |
|-----------------------|---------------------------------------------|-----------------------------------------------|------------------------------------------------|
| Rated Power:          | 33dBm                                       | 27 dBm                                        | 24 dBm                                         |
| Required attenuation: | $43 + 10 \log (2) = 46$ ,<br>33 dBm - 46 dB | $43 + 10 \log (0.5) = 40$ ,<br>27 dBm - 40 dB | $43 + 10 \log (0.25) = 37$ ;<br>24 dBm - 37 dB |
| Absolute level        | - 13 dBm                                    | - 13 dBm                                      | - 13 dBm                                       |

### 6.6.3 Test Method and Setup

Mobile Phone was connected to the wireless signal analyzer Agilent E4440A via the one RF connector, the band class is set as GSM850M and WCDMA850M. Mobile Phone was controlled to transmit maximum power. Measure and record the Conducted Spurious Emission of the Mobile Phone by the Agilent E4440A.

According to part 22.917, the defined measurement bandwidth as following:

22.917 (b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;  
Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;  
Measurement bandwidth (RBW) for 30 MHz up to 1 GHz: 100 kHz (GSM)  
Measurement bandwidth (RBW) for 30 MHz up to 1 GHz: 1 MHz (WCDMA);  
Measurement bandwidth (RBW) for 1 GHz up to 12.75 GHz: 1 MHz;

#### Test Set-up

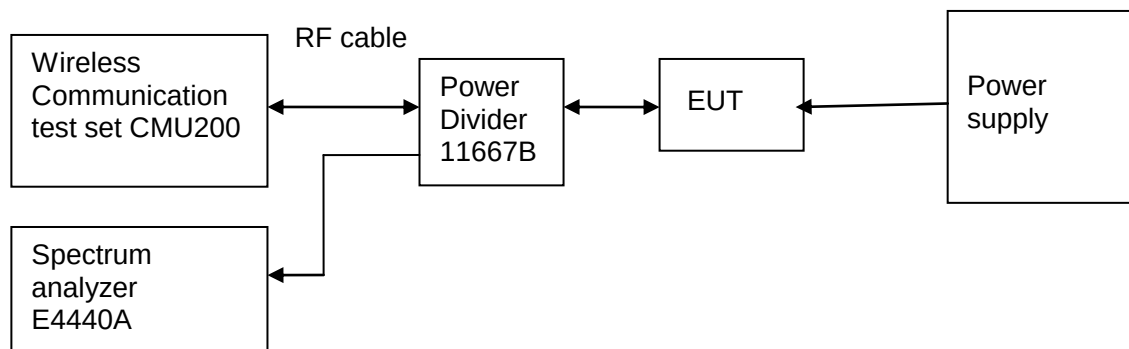


Figure 6. Test Set-up



## 6.6.4 Measurement Results

Table 36 Measurement Results

| Channel Number  | Test Mode | Test Range (Frequency) | Output Power [dBm] | Spurious Level measured [dBm] | FCC limit | Result |
|-----------------|-----------|------------------------|--------------------|-------------------------------|-----------|--------|
| Channel 128(B)  | TM1       | 9 kHz~12.75GHz         | 33                 | <- 13 dBm<br>(See appendix D) | - 13 dBm  | Pass   |
|                 | TM2       | 9 kHz~12.75GHz         | 27                 | <- 13 dBm<br>(See appendix D) | - 13 dBm  | Pass   |
| Channel 4132(B) | TM3       | 9 kHz~12.75GHz         | 24                 | <- 13 dBm<br>(See appendix D) | - 13 dBm  | Pass   |
| Channel 192(M)  | TM1       | 9 kHz~12.75GHz         | 33                 | <- 13 dBm<br>(See appendix D) | - 13 dBm  | Pass   |
|                 | TM2       | 9 kHz~12.75GHz         | 27                 | <- 13 dBm<br>(See appendix D) | - 13 dBm  | Pass   |
| Channel 4182(M) | TM3       | 9 kHz~12.75GHz         | 24                 | <- 13 dBm<br>(See appendix D) | - 13 dBm  | Pass   |
| Channel 251(T)  | TM1       | 9 kHz~12.75GHz         | 33                 | <- 13 dBm<br>(See appendix D) | - 13 dBm  | Pass   |
|                 | TM2       | 9 kHz~12.75GHz         | 27                 | <- 13 dBm<br>(See appendix D) | - 13 dBm  | Pass   |
| Channel 4233(T) | TM3       | 9 kHz~12.75GHz         | 24                 | <- 13 dBm<br>(See appendix D) | - 13 dBm  | Pass   |

## 6.6.5 Conclusion

The equipment **PASSED** the requirement of this clause.  
For the measurement results refer to appendix D.



## 6.7 Frequency Stability

### 6.7.1 Test Conditions

Table 37 Test Conditions

|                      |                                 |
|----------------------|---------------------------------|
| Preconditioning:     | 0.5 hour                        |
| Measured at:         | Antenna connector               |
| Ambient temperature: | See below                       |
| Relative humidity:   | 55 % at 25 °C                   |
| Test Configurations: | TM1/TM2/TM3 at frequency Middle |

### 6.7.2 Test Specifications and Limits

#### 6.7.2.1 Specification

CFR 47 (FCC) part 2.1055 and part 22.355

#### 6.7.2.2 Supporting Standards

Table 38 Supporting Standards:

|                       |                                                                                                                                                 |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| ANSI/TIA-603-C:2004   | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards                                                             |
| 3GPP TS51.010 V5.4.0  | Digital cellular telecommunications system;<br>Mobile Station (MS) conformance specification;                                                   |
| 3GPP TS 34.121 V7.3.0 | Universal Mobile Telecommunications System (UMTS);<br>User Equipment (UE) conformance specification;<br>Radio transmission and reception (FDD); |

#### 6.7.2.3 Limits

According to part 22.355, from 821MHz to 896MHz, for mobile device, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances 2.5ppm.

### 6.7.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30 ° to +50 ° centigrade for all equipment except that specified in subparagraphs
- (2) and (3) of paragraph 2.1055

(a) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(b) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery

operating end point, which shall be specified by the manufacturer. Mobile phone can work normally from 3.6V to 4.2V, test below is done according to this limit.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

(c) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

The EUT can only work in such extreme voltage 3.6V and 4.2V, so here the EUT is tested in the 3.6V and 4.2V.

## Test Set up

Connect the Mobile Phone to the Wireless Communication test set CMU200 via the connector. Then measure the frequency error by the Wireless Communication test set CMU200. The Mobile Phone's output is matched with a 50  $\Omega$  load.

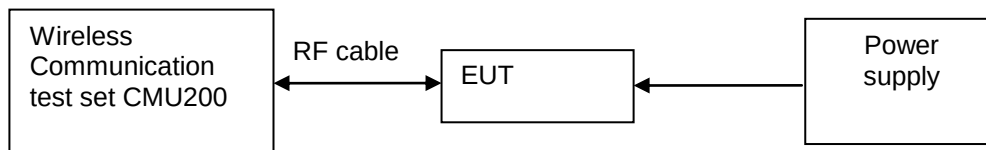


Figure 7. Test Set-up

## 6.7.4 Measurement Results

### 6.7.4.1 Measurement Results vs. Variation of Temperature

#### ● TM1, 3.7V DC Channel No.192(837.0MHz)

Table 39 Measurement Results vs. Variation of Temperature

| Temperature | Power (dBm) | Nominal Frequency (MHz) | Measured Frequency Error(Hz) | Result |
|-------------|-------------|-------------------------|------------------------------|--------|
| -30 °C      | 33          | 837.0                   | -11                          | Pass   |
| -20 °C      | 33          | 837.0                   | -3                           | Pass   |
| -10 °C      | 33          | 837.0                   | 9                            | Pass   |
| 0 °C        | 33          | 837.0                   | -15                          | Pass   |
| +10 °C      | 33          | 837.0                   | 10                           | Pass   |
| +20 °C      | 33          | 837.0                   | -7                           | Pass   |
| +30 °C      | 33          | 837.0                   | 14                           | Pass   |
| +40 °C      | 33          | 837.0                   | -2                           | Pass   |
| +50 °C      | 33          | 837.0                   | 12                           | Pass   |



● **TM2, 3.7V DC Channel No.192(837.0MHz)**

Table 40 Measurement Results vs. Variation of Temperature

| Temperature | Power (dBm) | Nominal Frequency (MHz) | Measured Frequency Error(Hz) | Result |
|-------------|-------------|-------------------------|------------------------------|--------|
| -30 °C      | 27          | 837.0                   | -16                          | Pass   |
| -20 °C      | 27          | 837.0                   | 5                            | Pass   |
| -10 °C      | 27          | 837.0                   | 10                           | Pass   |
| 0 °C        | 27          | 837.0                   | -12                          | Pass   |
| +10 °C      | 27          | 837.0                   | 5                            | Pass   |
| +20 °C      | 27          | 837.0                   | -7                           | Pass   |
| +30 °C      | 27          | 837.0                   | 13                           | Pass   |
| +40 °C      | 27          | 837.0                   | -1                           | Pass   |
| +50 °C      | 27          | 837.0                   | -8                           | Pass   |

● **TM3, 3.7V DC Channel No.4182(836.4MHz)**

Table 41 Measurement Results vs. Variation of Temperature

| Temperature | Power (dBm) | Nominal Frequency (MHz) | Measured Frequency Error(Hz) | Result |
|-------------|-------------|-------------------------|------------------------------|--------|
| -30 °C      | 24          | 836.4                   | 2                            | Pass   |
| -20 °C      | 24          | 836.4                   | -10                          | Pass   |
| -10 °C      | 24          | 836.4                   | -5                           | Pass   |
| 0 °C        | 24          | 836.4                   | 12                           | Pass   |
| +10 °C      | 24          | 836.4                   | -7                           | Pass   |
| +20 °C      | 24          | 836.4                   | -15                          | Pass   |
| +30 °C      | 24          | 836.4                   | 8                            | Pass   |
| +40 °C      | 24          | 836.4                   | -11                          | Pass   |
| +50 °C      | 24          | 836.4                   | 3                            | Pass   |



#### 6.7.4.2 Measurement Results vs. Variation of Voltage

- **TM1, 25 °C ,Channel No. 192(837.0MHz)**

Table 42 Measurement Results vs. Variation of Voltage

| Voltage | Power (dBm) | Nominal Frequency (MHz) | Measured Frequency Error(Hz) | Result |
|---------|-------------|-------------------------|------------------------------|--------|
| 3.6     | 33          | 837.0                   | 3                            | Pass   |
| 3.7     | 33          | 837.0                   | -14                          | Pass   |
| 4.2     | 33          | 837.0                   | 5                            | Pass   |

- **TM2, 25 °C ,Channel No. 192(837.0MHz)**

Table 43 Measurement Results vs. Variation of Voltage

| Voltage | Power (dBm) | Nominal Frequency (MHz) | Measured Frequency Error(Hz) | Result |
|---------|-------------|-------------------------|------------------------------|--------|
| 3.6     | 27          | 837.0                   | -11                          | Pass   |
| 3.7     | 27          | 837.0                   | -2                           | Pass   |
| 4.2     | 27          | 837.0                   | 15                           | Pass   |

- **TM3, 25 °C ,Channel No. 4182(836.4MHz)**

Table 44 Measurement Results vs. Variation of Voltage

| Voltage | Power (dBm) | Nominal Frequency (MHz) | Measured Frequency Error(Hz) | Result |
|---------|-------------|-------------------------|------------------------------|--------|
| 3.6     | 24          | 836.4                   | 7                            | Pass   |
| 3.7     | 24          | 836.4                   | -10                          | Pass   |
| 4.2     | 24          | 836.4                   | -9                           | Pass   |

#### 6.7.5 Conclusion

The equipment **PASSED** the requirement of this clause.





## 7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Table 45 System Measurement Uncertainty

| Items                                           |                         | Extended Uncertainty |
|-------------------------------------------------|-------------------------|----------------------|
| Effective Radiated Power of Transmitter         | ERP (dBm)               | U=3dB; k=2           |
| Band Width                                      | Magnitude (%)           | U=0.2%; k=2          |
| Band Edge Compliance                            | Disturbance Power(dBm)  | U=2.0dB; k=2         |
| Conducted Spurious Emission at Antenna Terminal | Disturbance Power(dBm)  | U=2.0dB; k=2         |
| Frequency Stability                             | Frequency Accuracy(ppm) | U=0.21ppm; k=2       |
| Field Strength of Spurious Radiation            | ERP(dBm)                | U=2.2dB; k=2         |



## 8 Appendices

|            |                                                           |          |
|------------|-----------------------------------------------------------|----------|
| Appendix A | Measurement Results Modulation Characteristics            | 4 pages  |
| Appendix B | Measurement Results Occupied Bandwidth                    | 10 pages |
| Appendix C | Measurement Results Band Edges Compliance                 | 7 pages  |
| Appendix D | Measurement Results Spurious Emission at Antenna Terminal | 37 pages |

(END OF REPORT)




# **Appendix A**

## **Modulation Characteristics**

According to FCC Part 2.1047 & Part22 Subpart H  
& RSS-132




## TM1:GPRS/GSM Channel 192

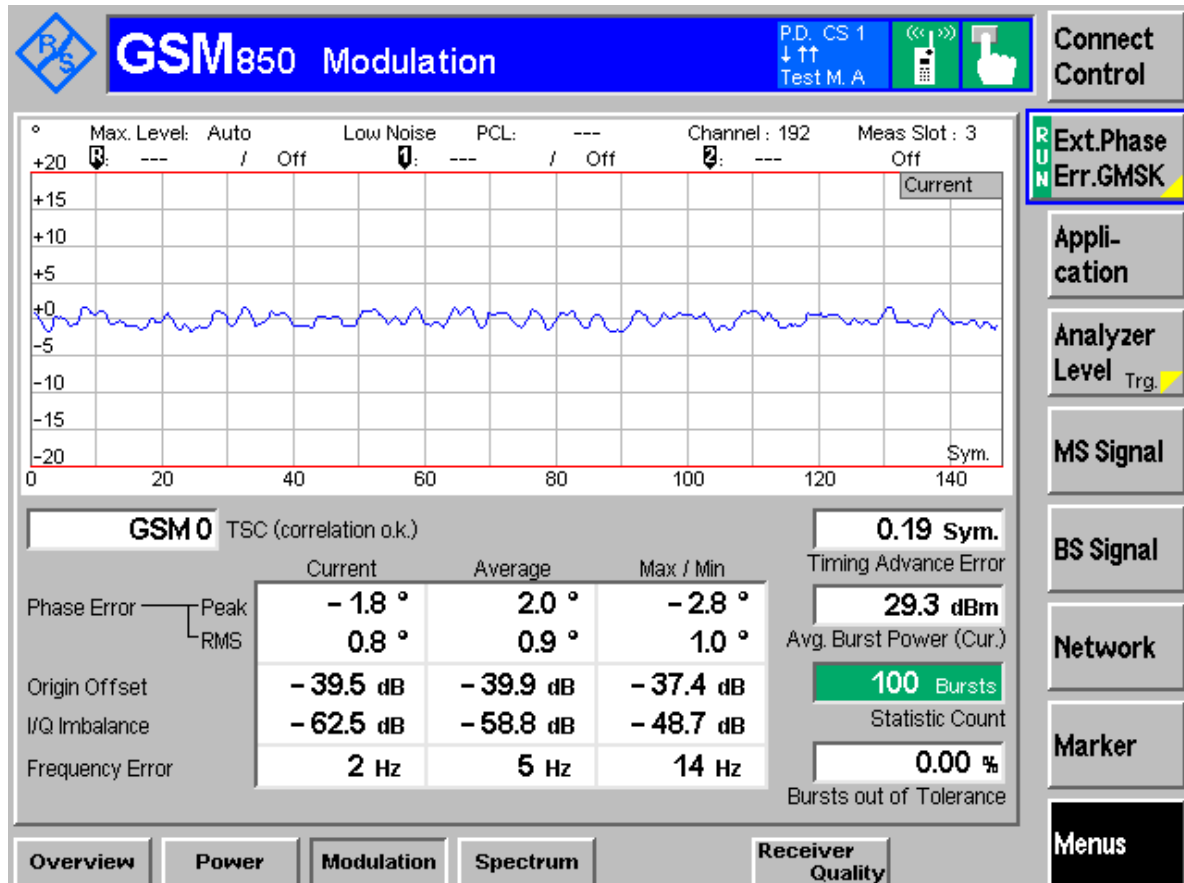




## TM2:EDGE Channel 192

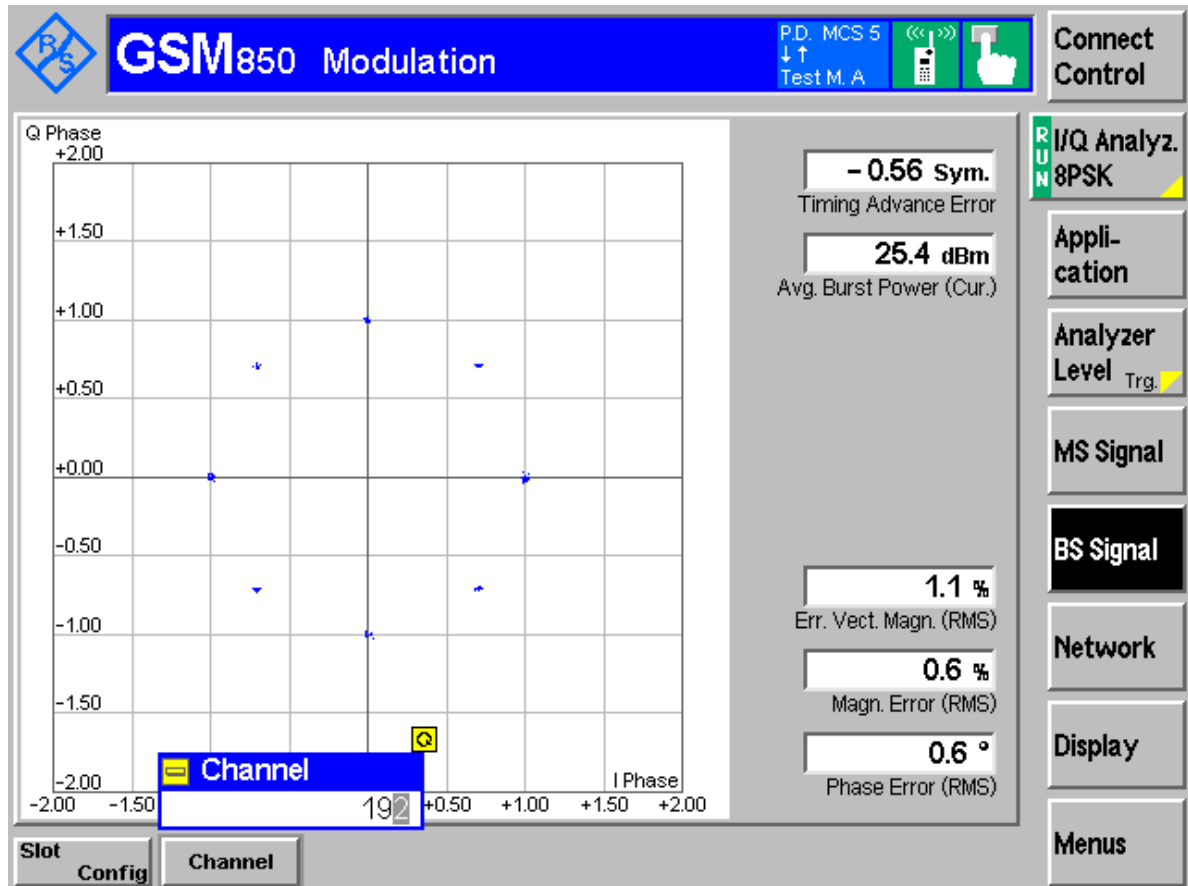



## TM3:WCDMA Channel 4182

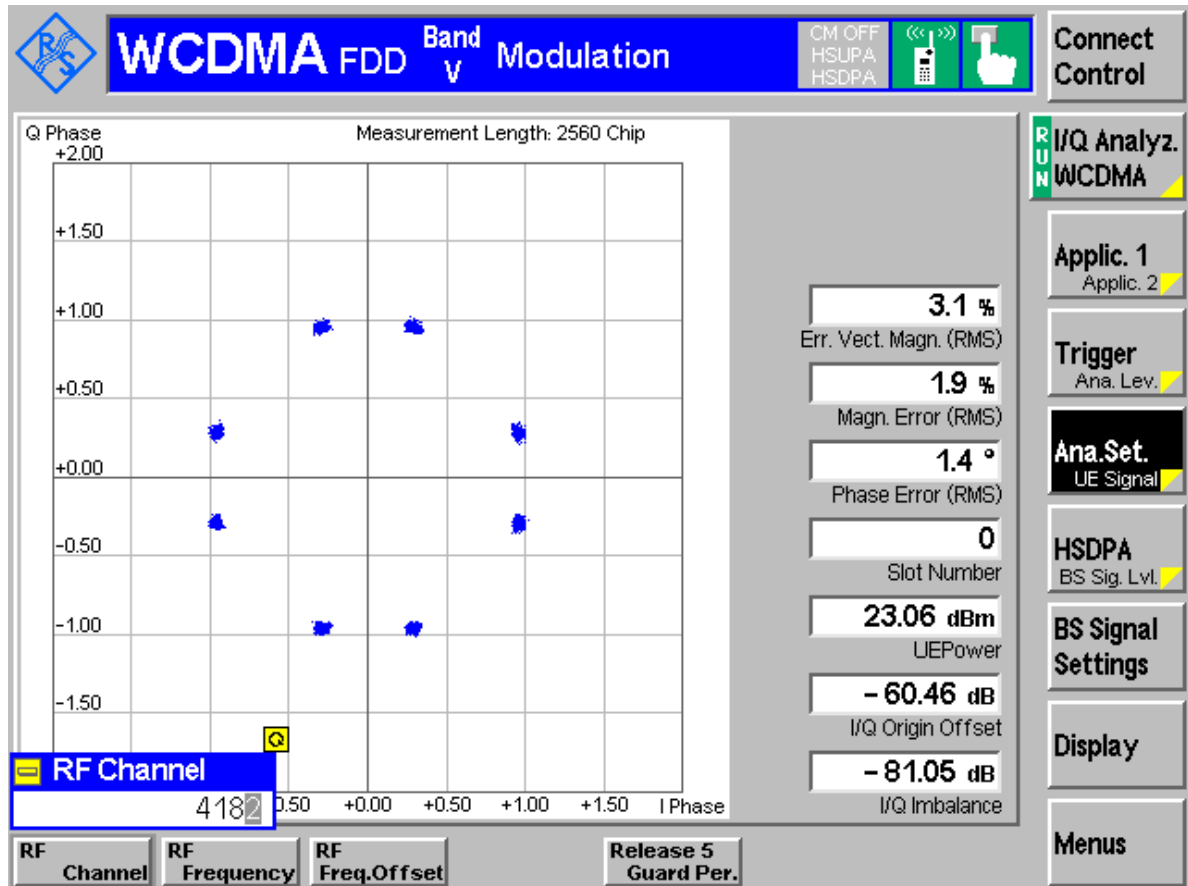




## **Appendix B**

### **Occupied Bandwidth** According to FCC Part 2.1049 & Part 22 Subpart H & RSS-132




## TM1:GPRS/GSM Channel 128

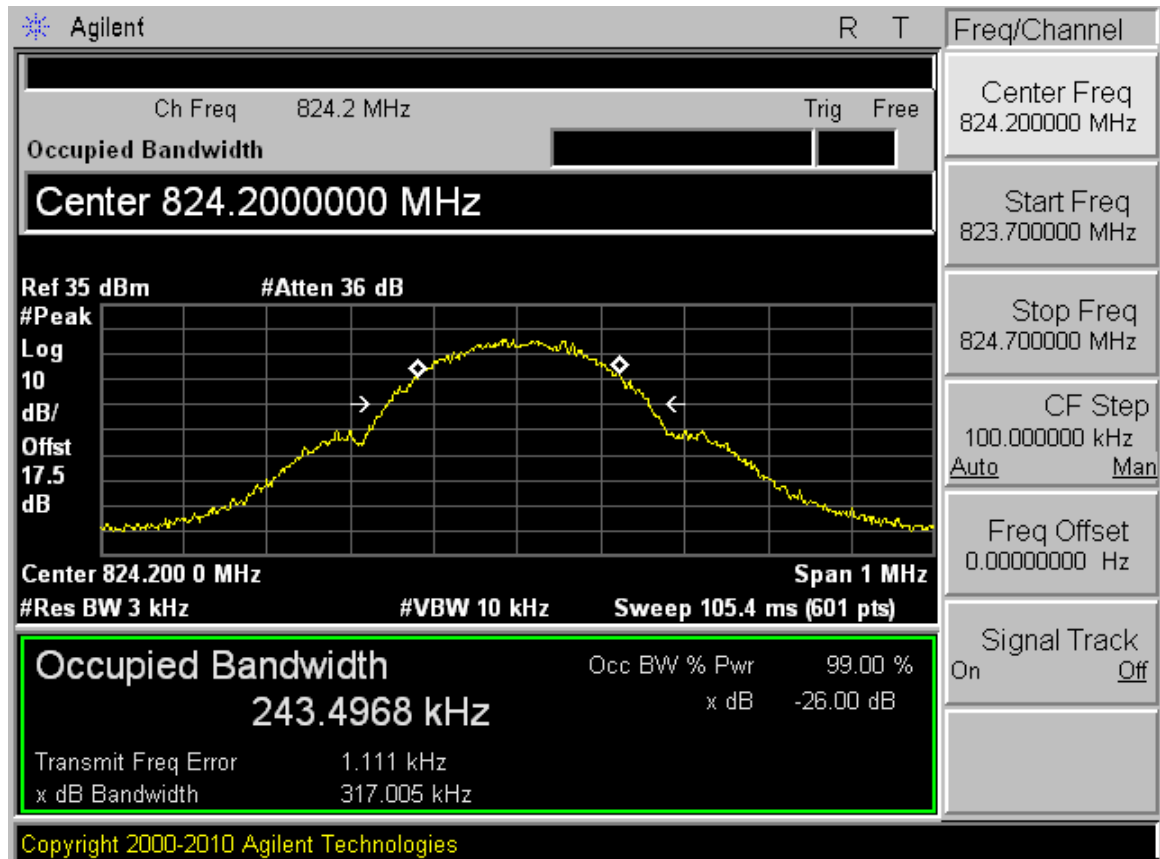






## TM2:EDGE Channel 128

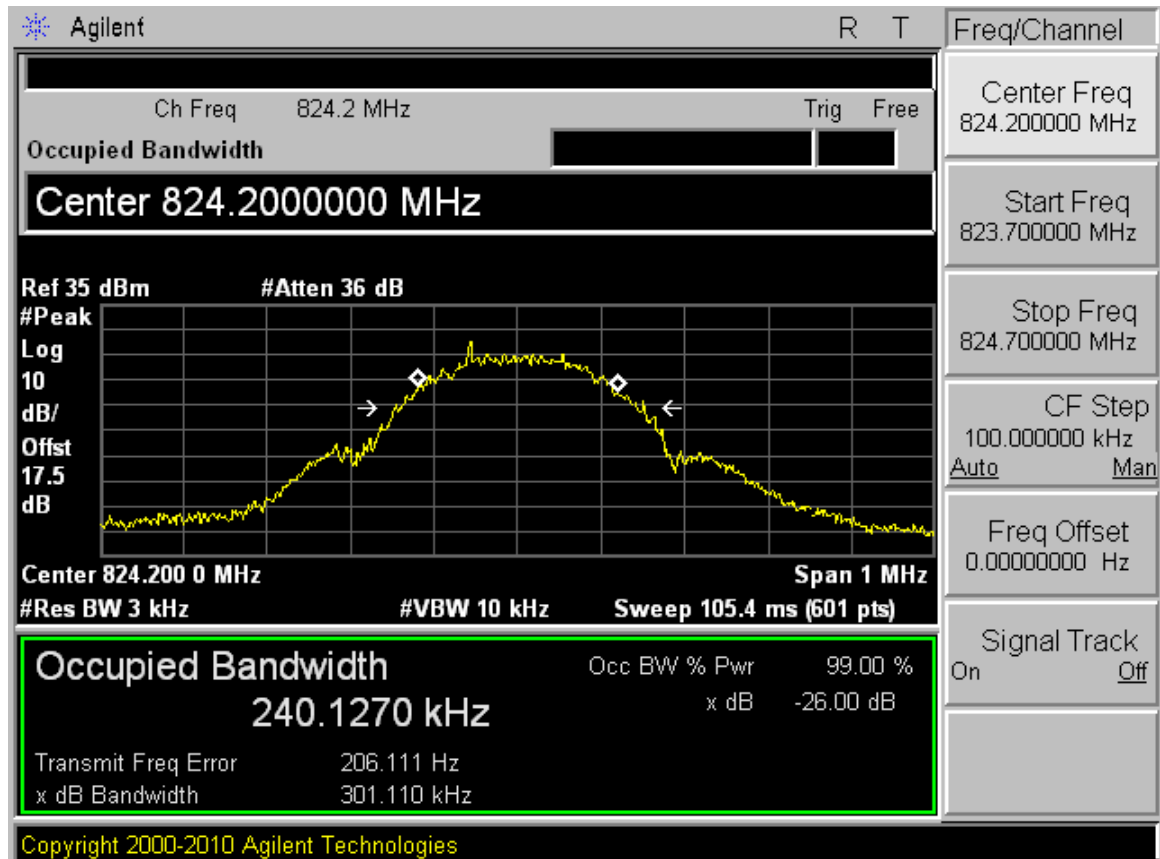




## TM3: WCDMA Channel 4132

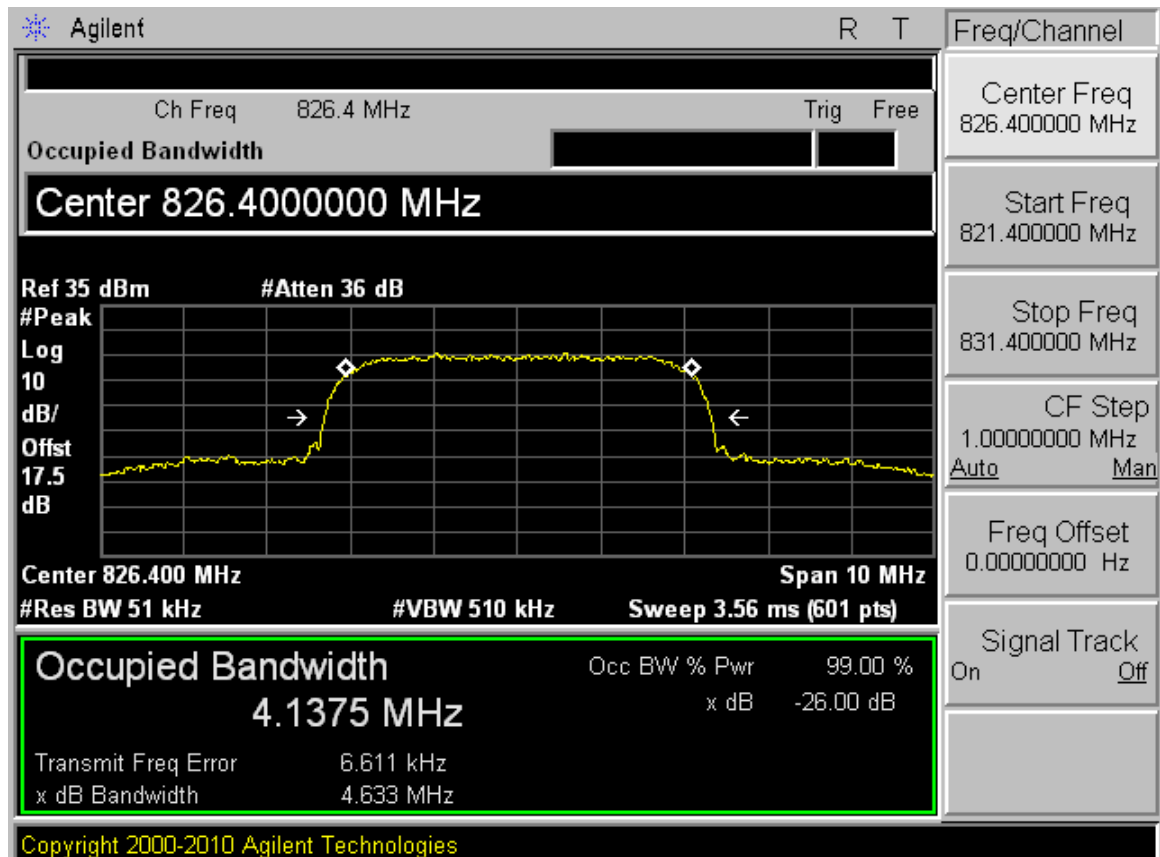




## TM1:GPRS/GSM Channel 192

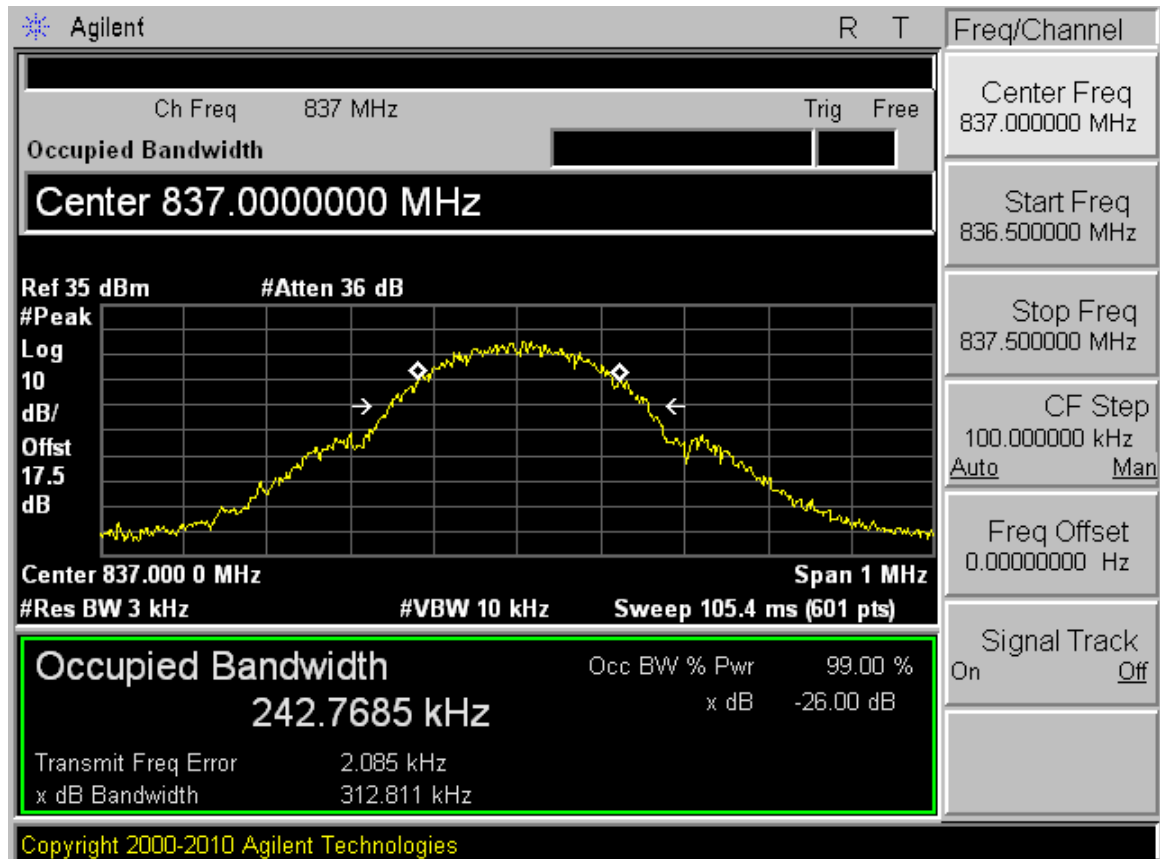




## TM2:EDGE Channel 192

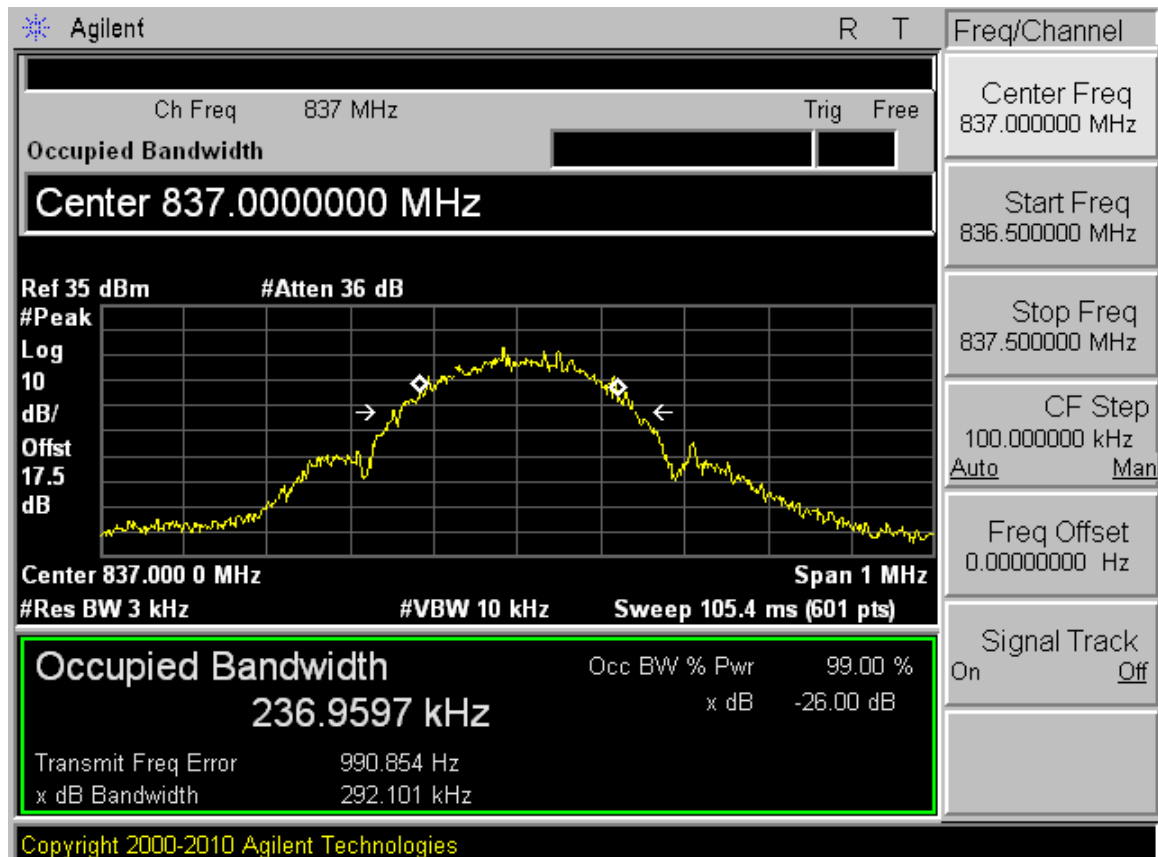




## TM3: WCDMA Channel 4182

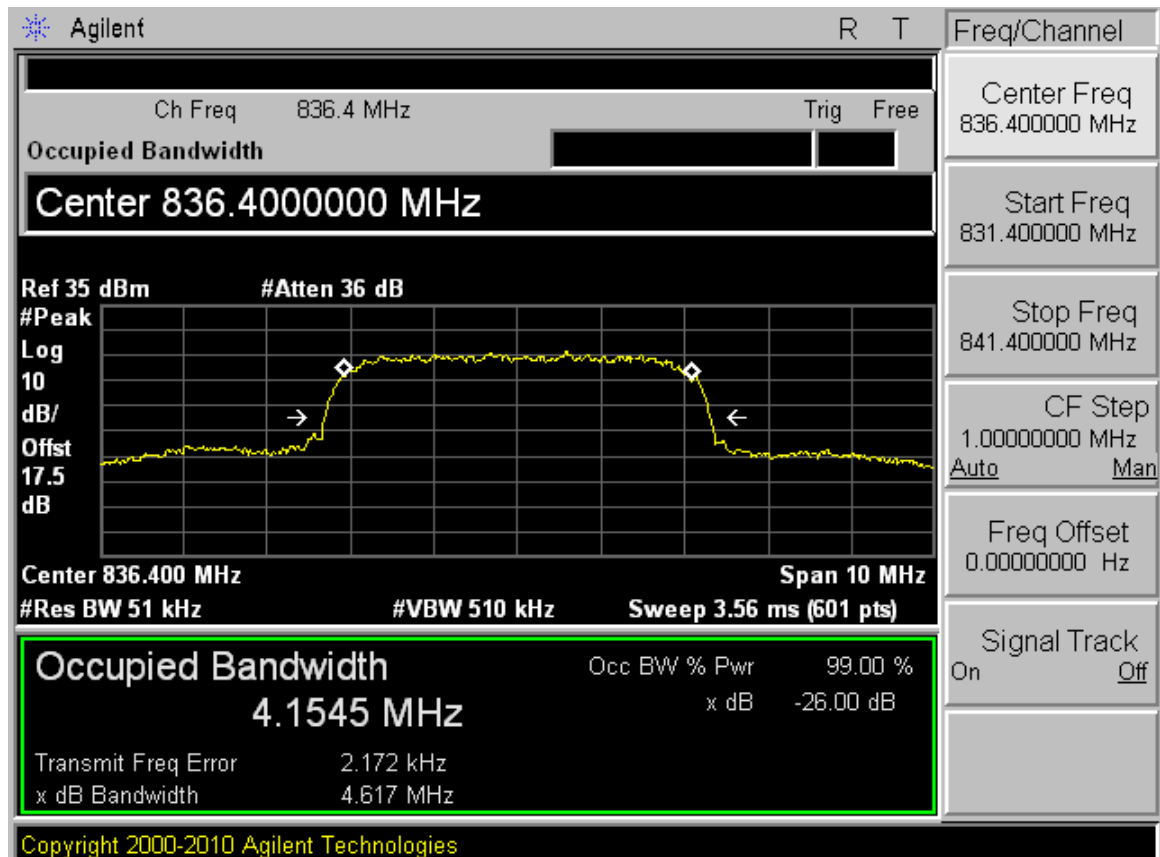




## TM1:GPRS/GSM Channel 251

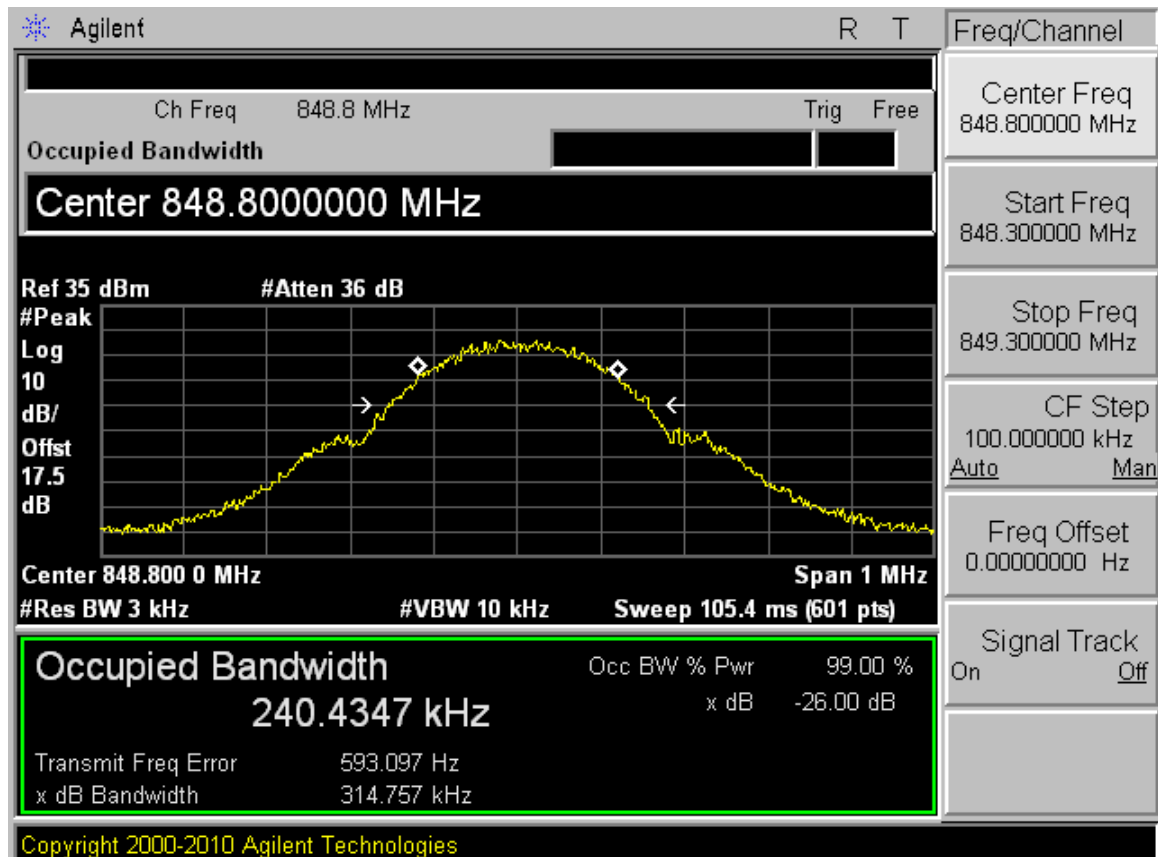




## TM2:EDGE Channel 251

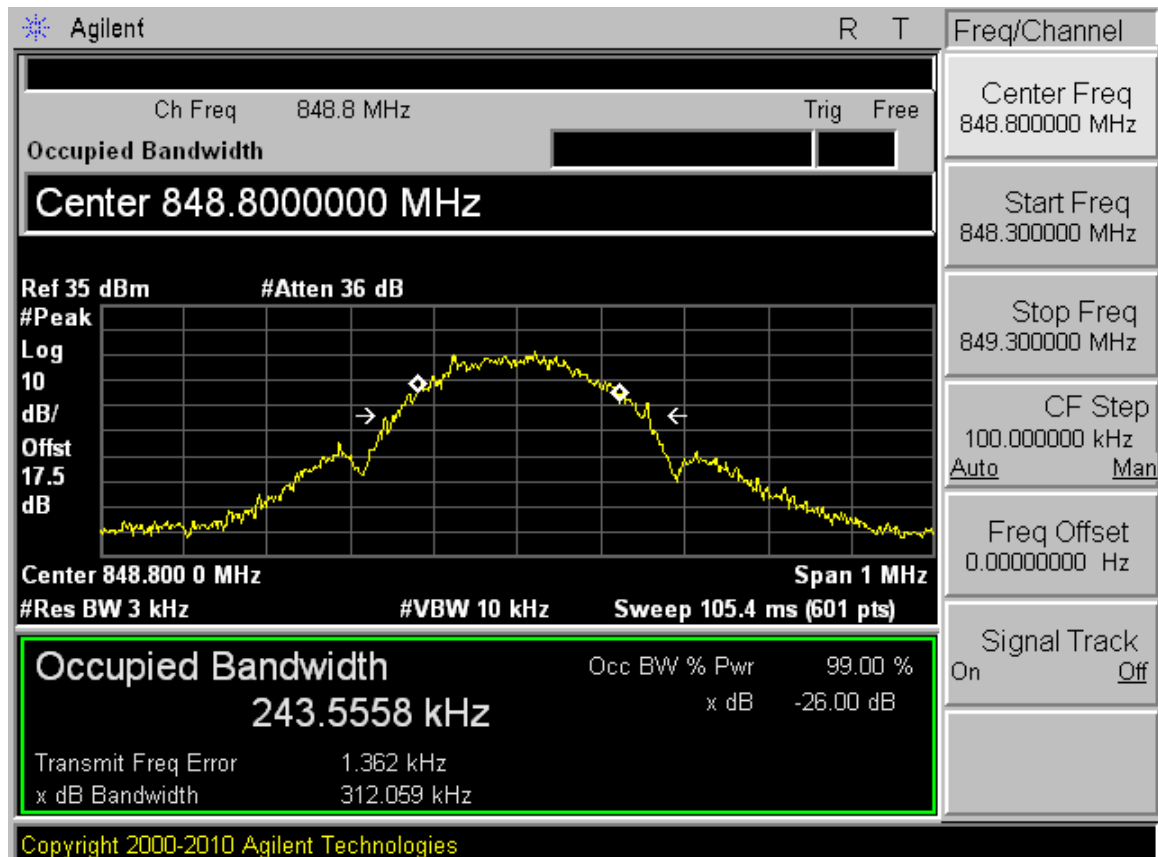



## TM3: WCDMA Channel 4233

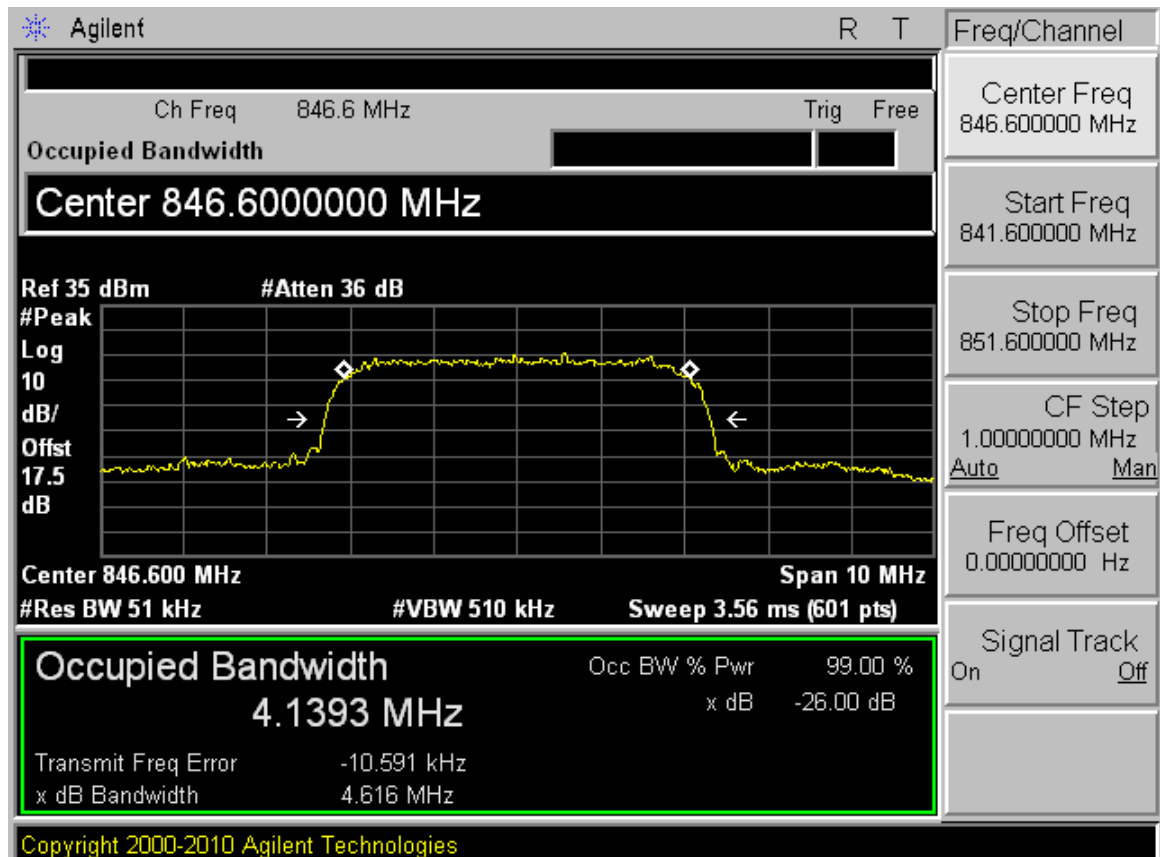





## **Appendix C**


### **Band Edges Compliance**

**According to FCC Part 2.1051 & 22.917& RSS-132  
& RSS-132**




## TM1:GPRS/GSM

Left Edge  
Channel 128

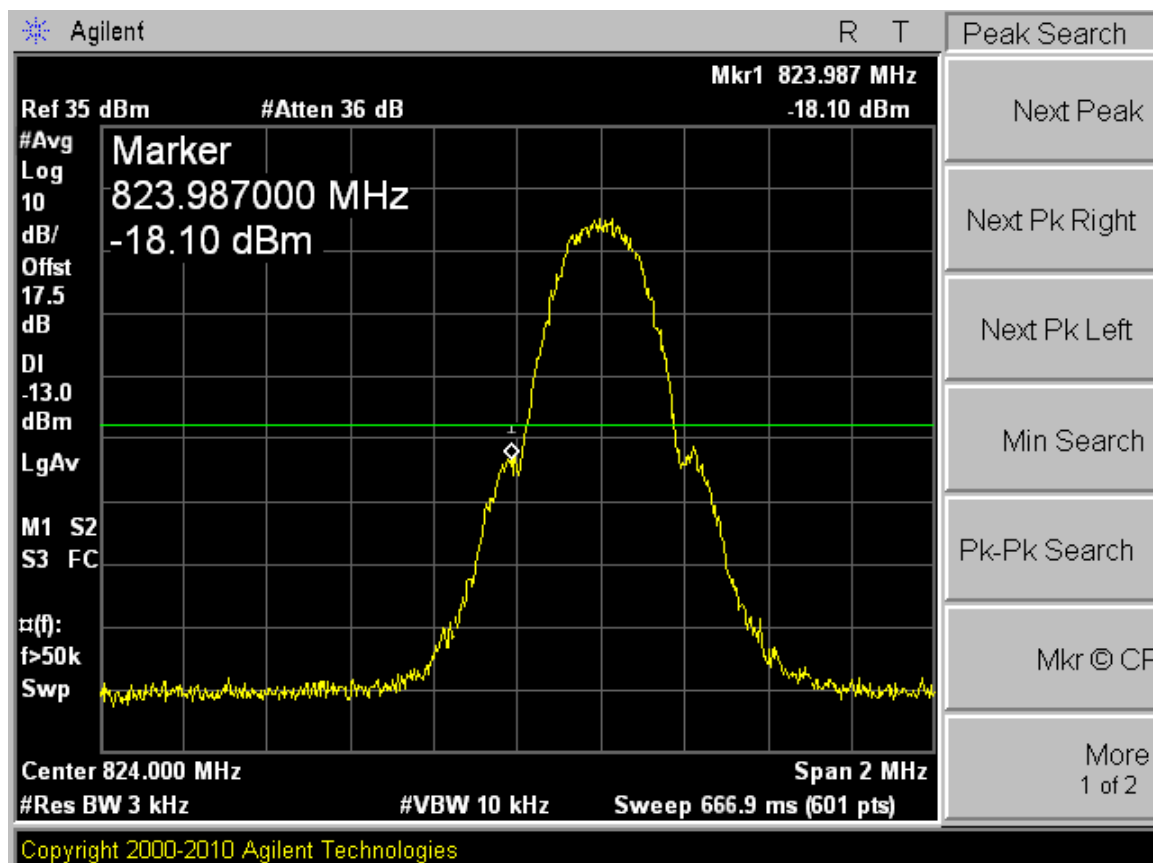




## Right Edge Channel 251

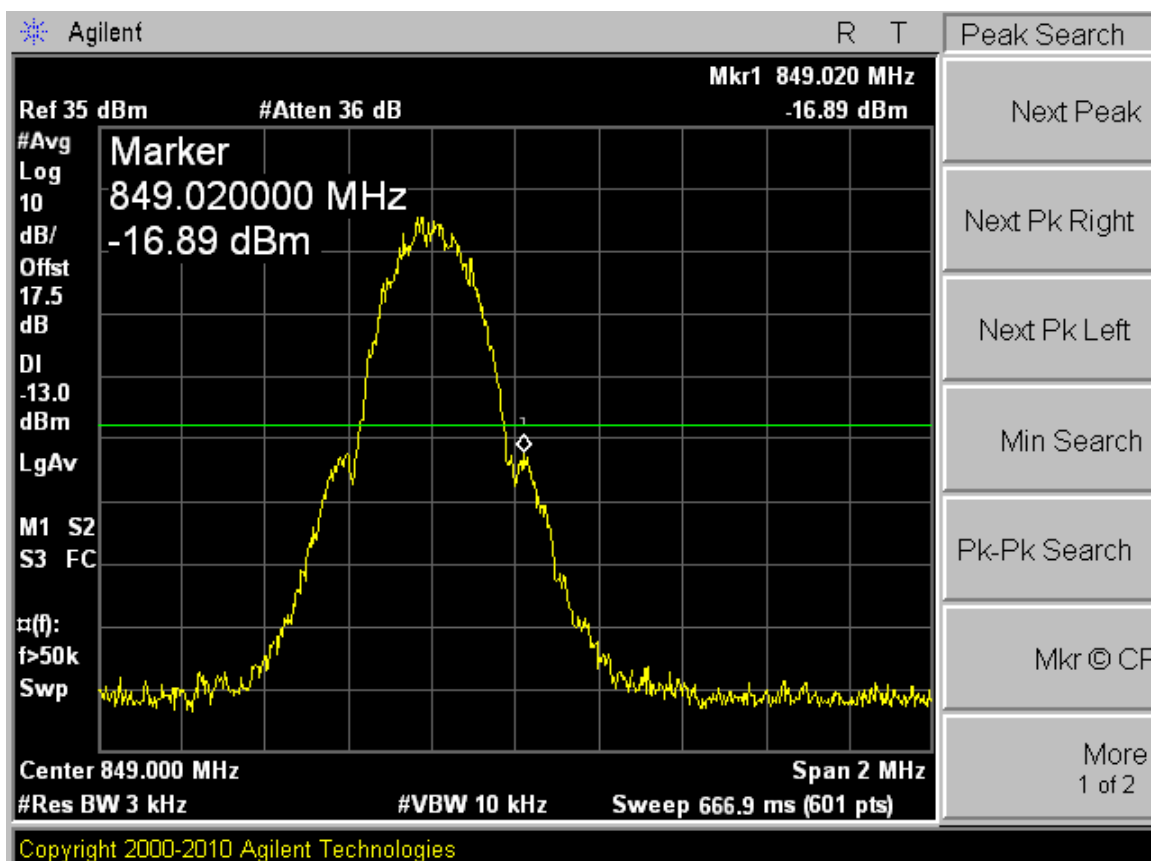




# TM2:EDGE

Left Edge  
Channel 128

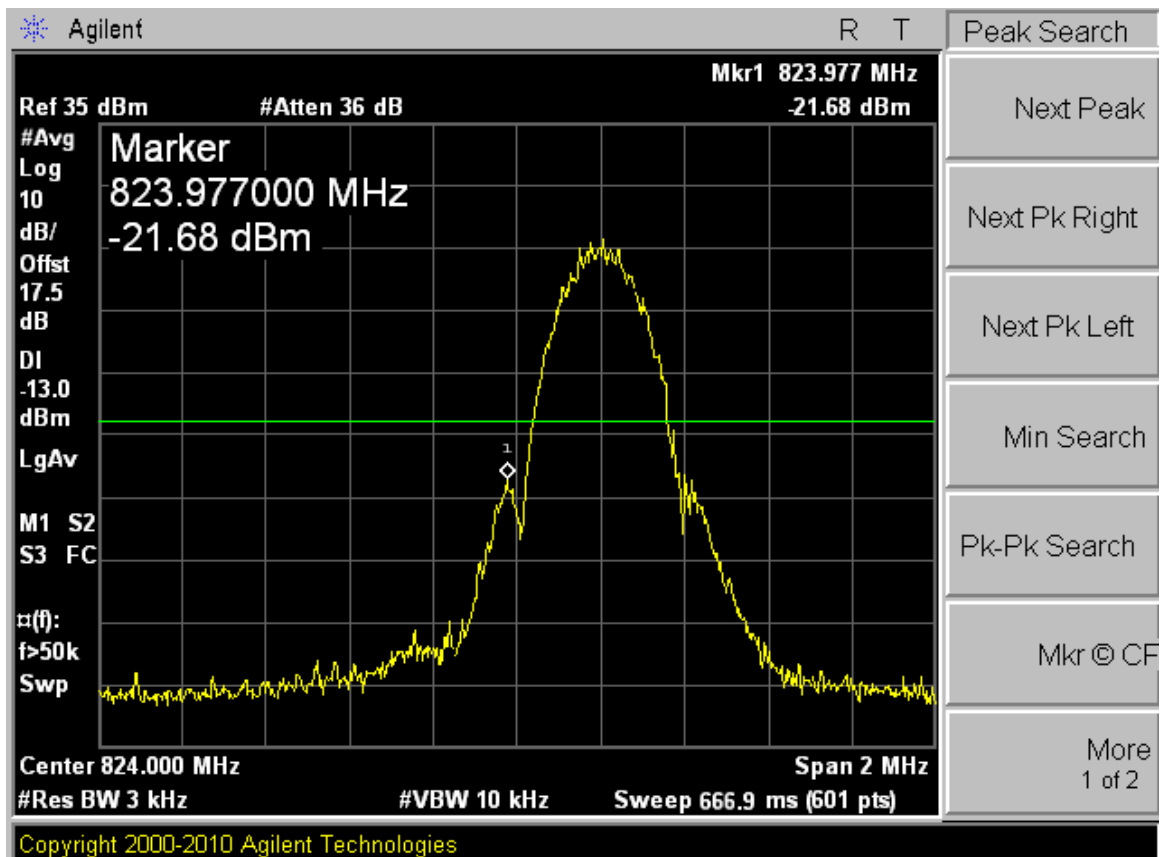



## Right Edge Channel 251

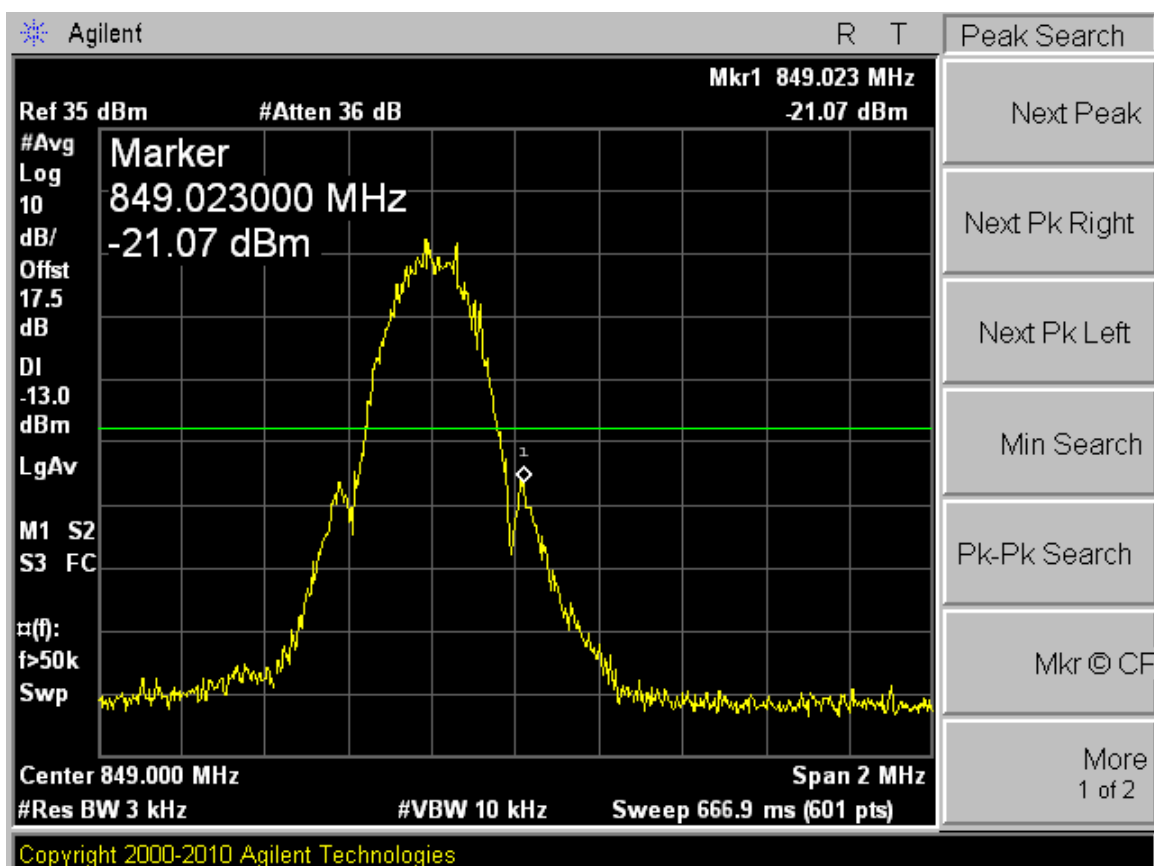




# TM3:WCDMA


## Left Edge

### Channel 4132

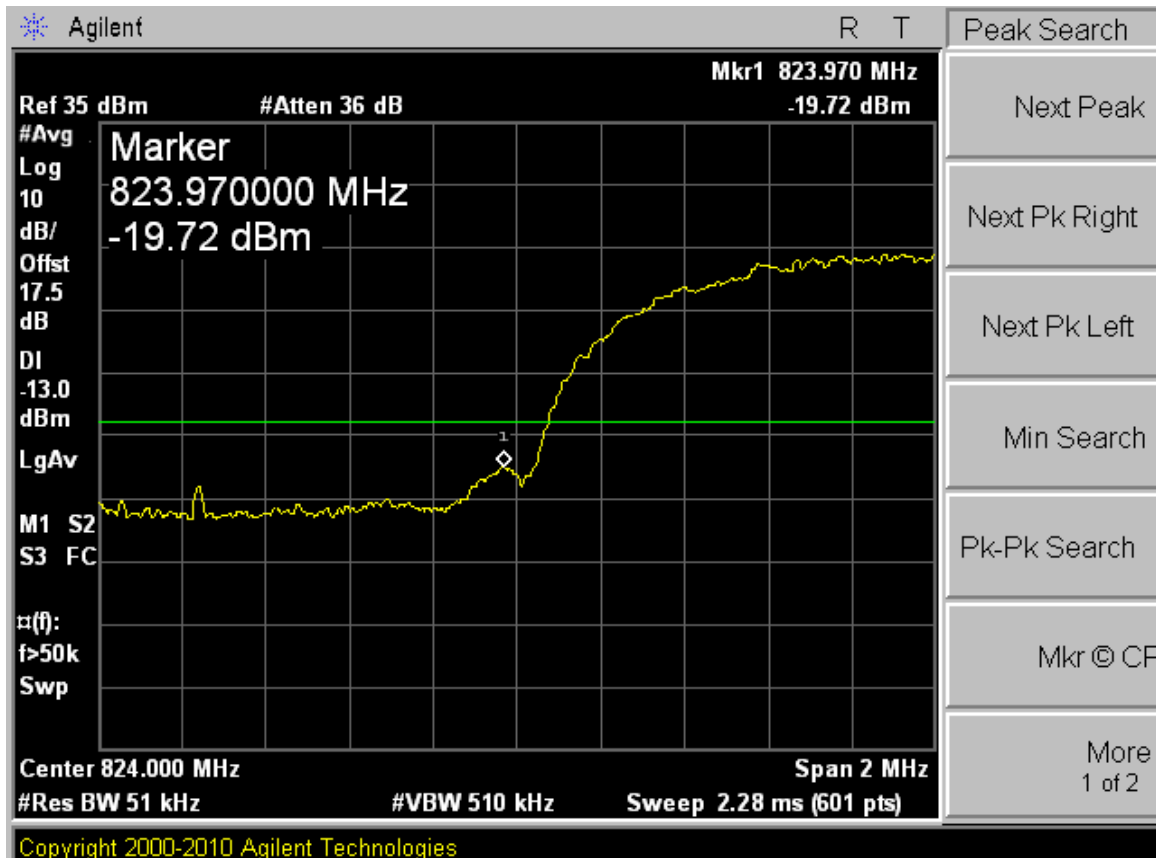



## Right Edge Channel 4233

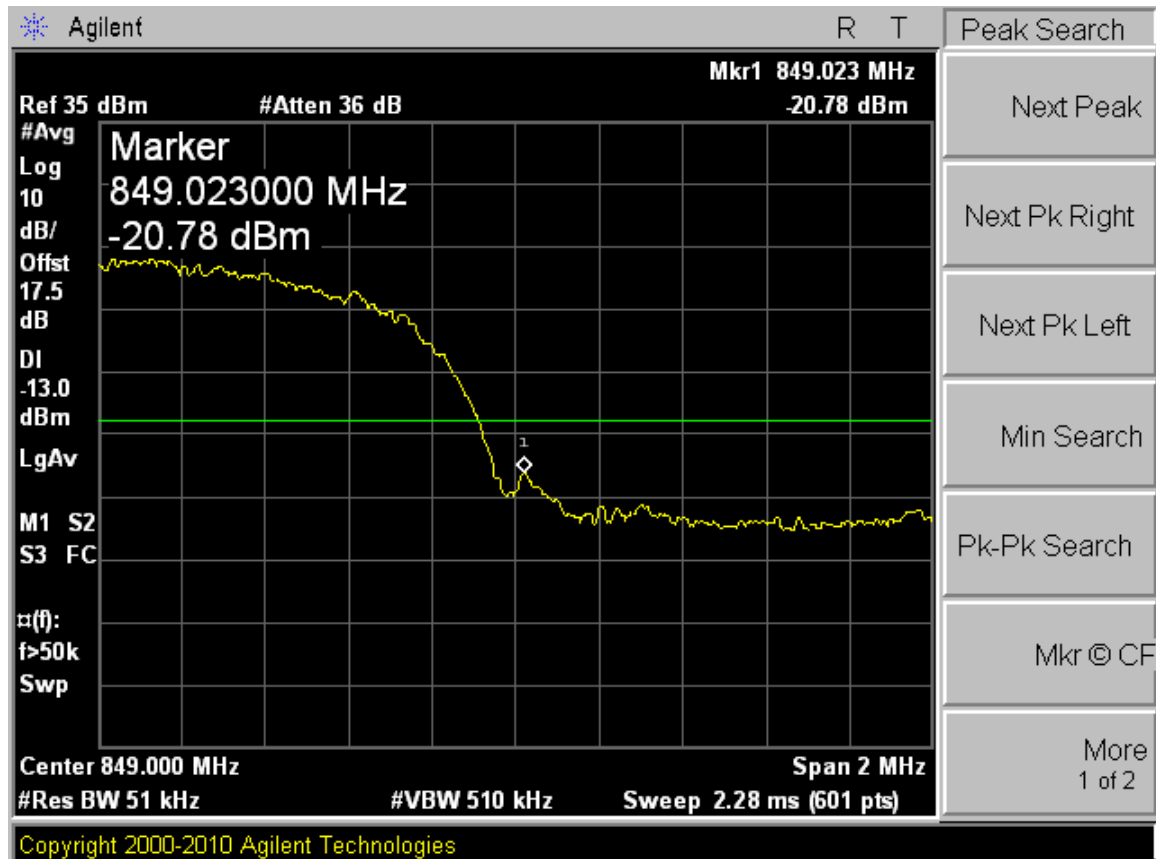



## **Appendix D**

# Spurious Emission at Antenna Terminal


According to FCC Part 2.1051 & 22.917 & RSS-132  
& RSS-132








## TM1:GPRS/GSM

### Channel 128

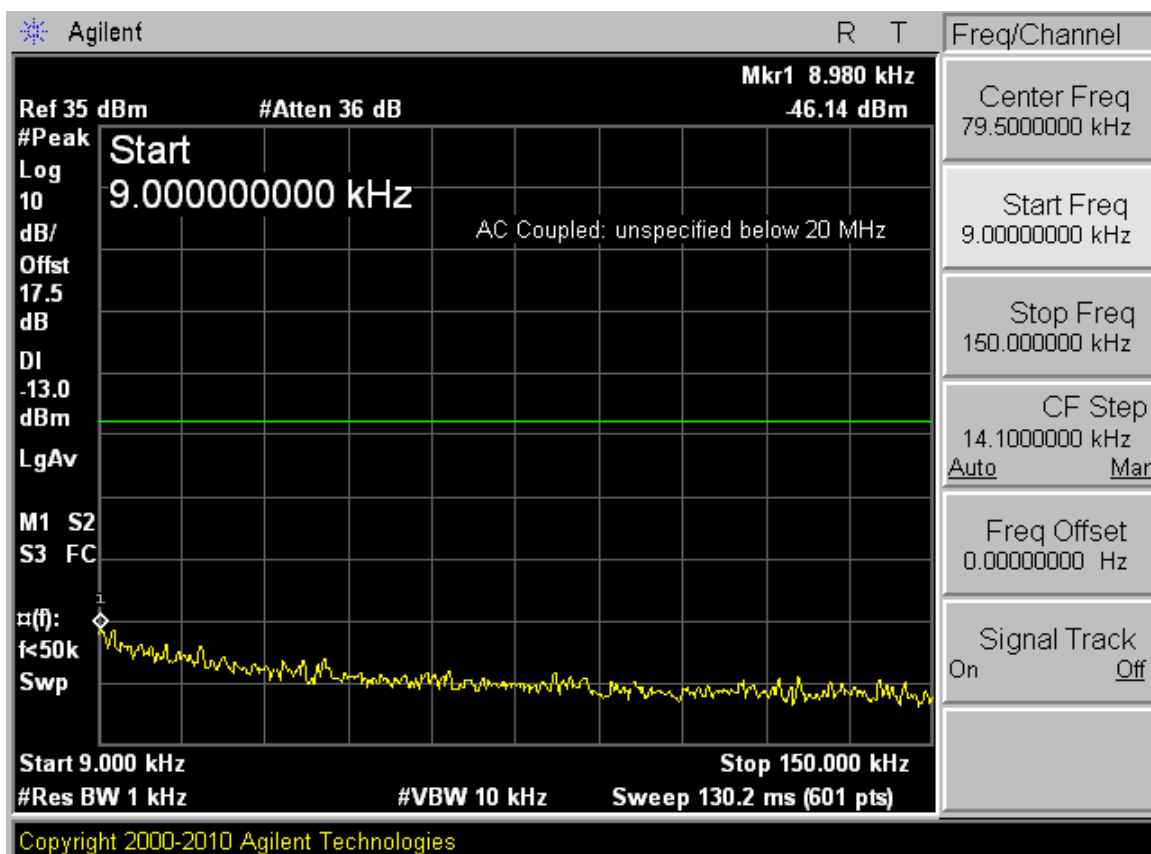

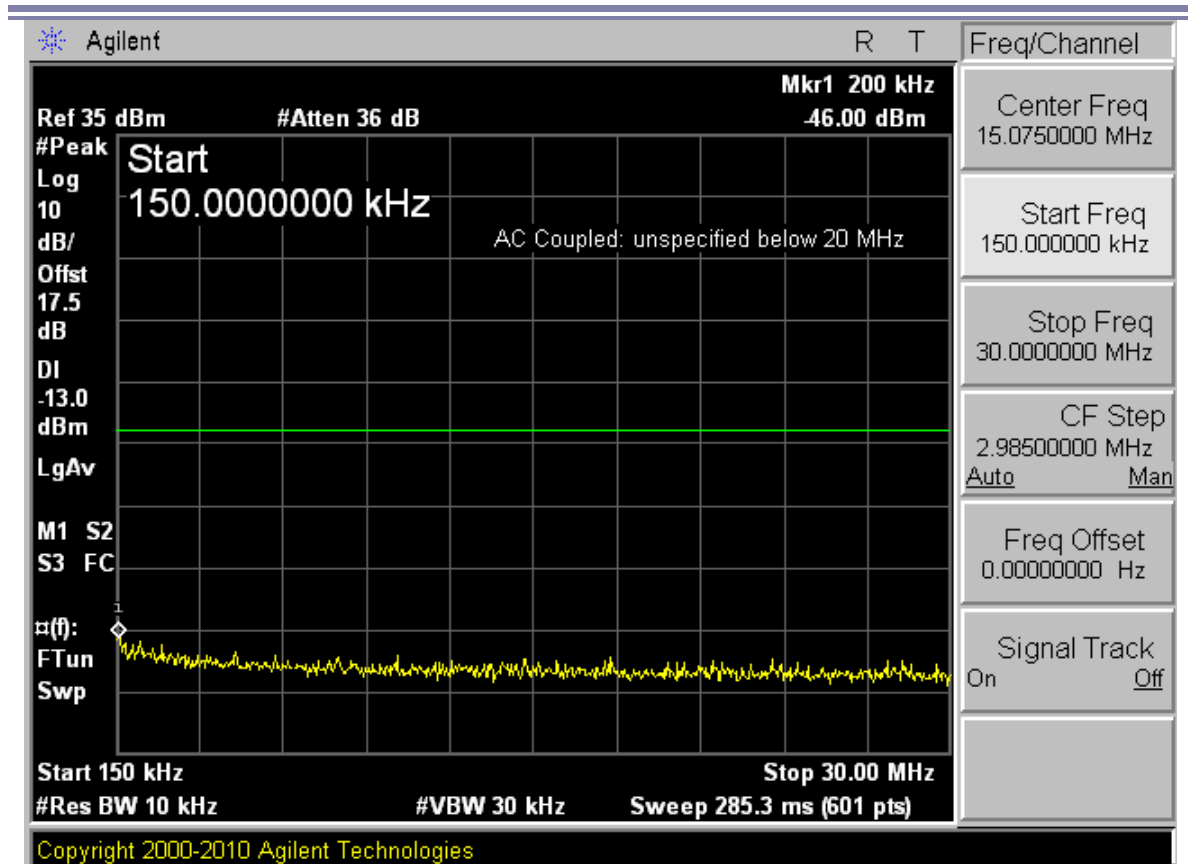


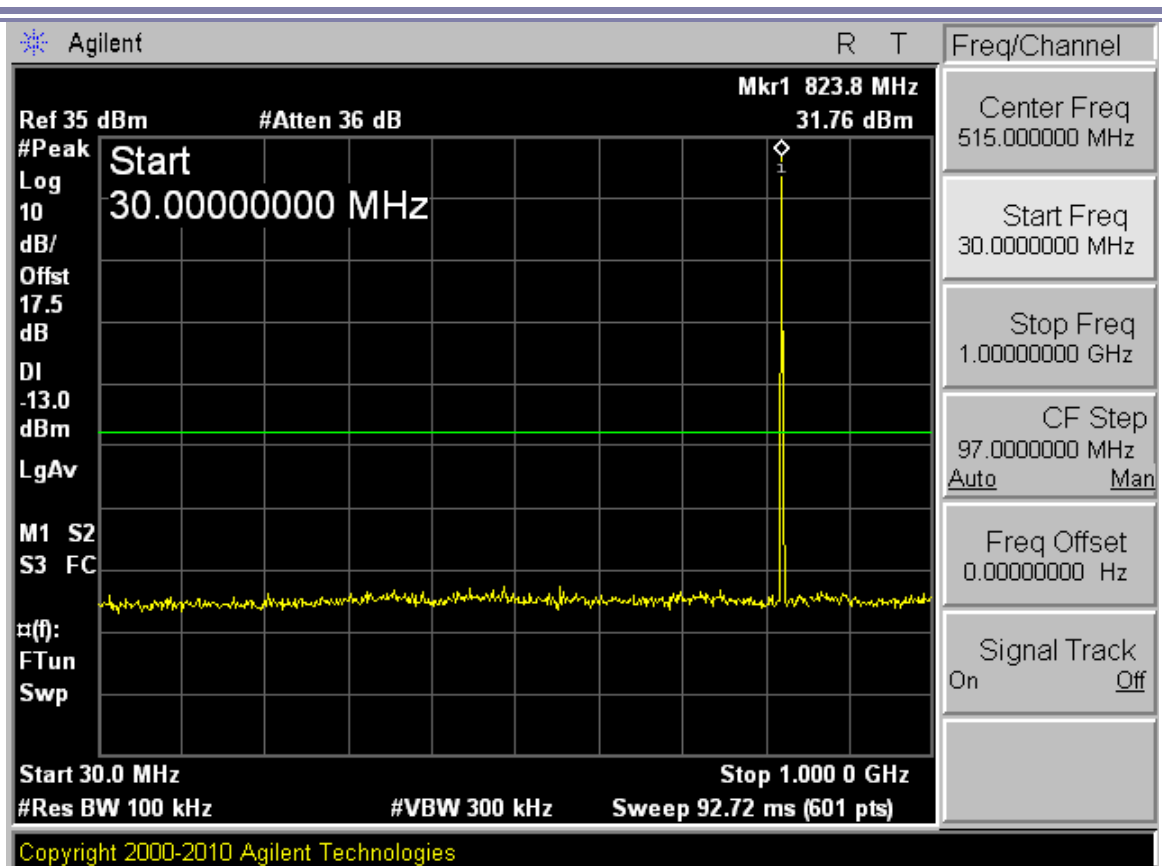


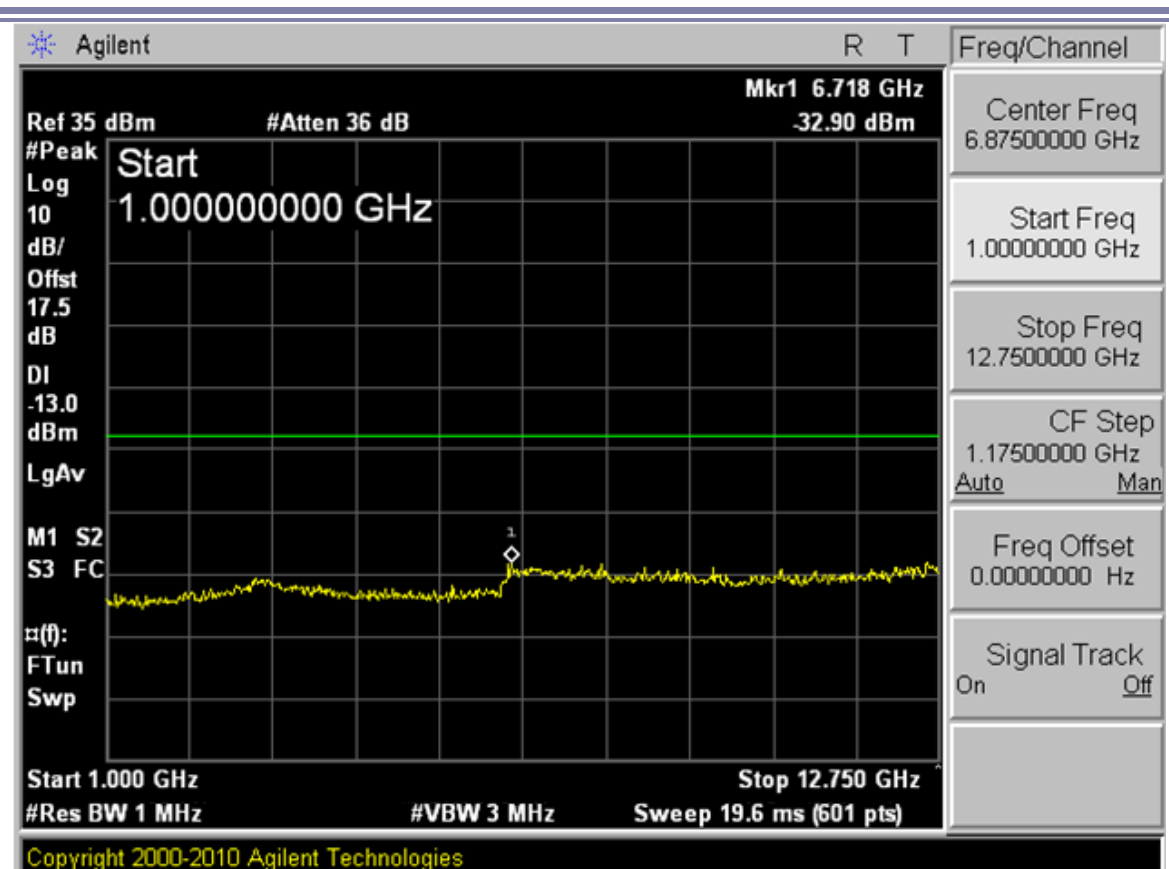





## Channel 192

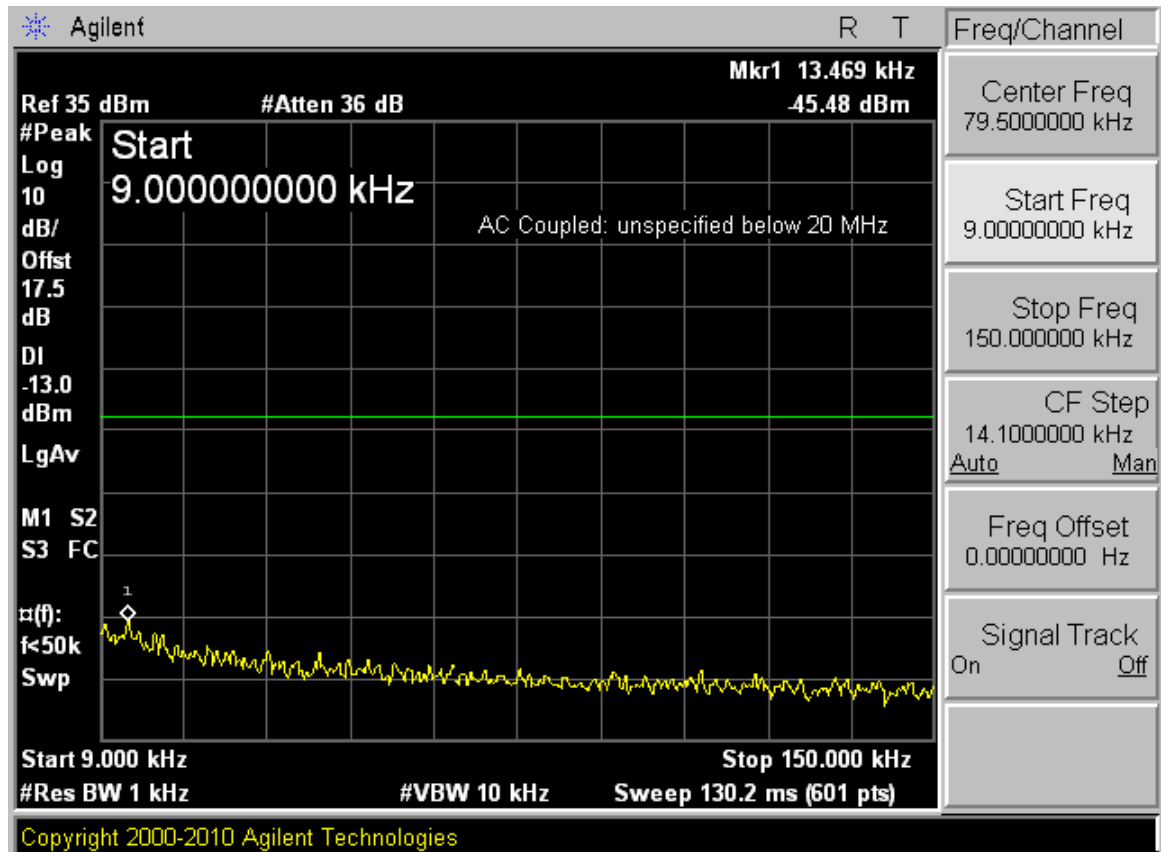

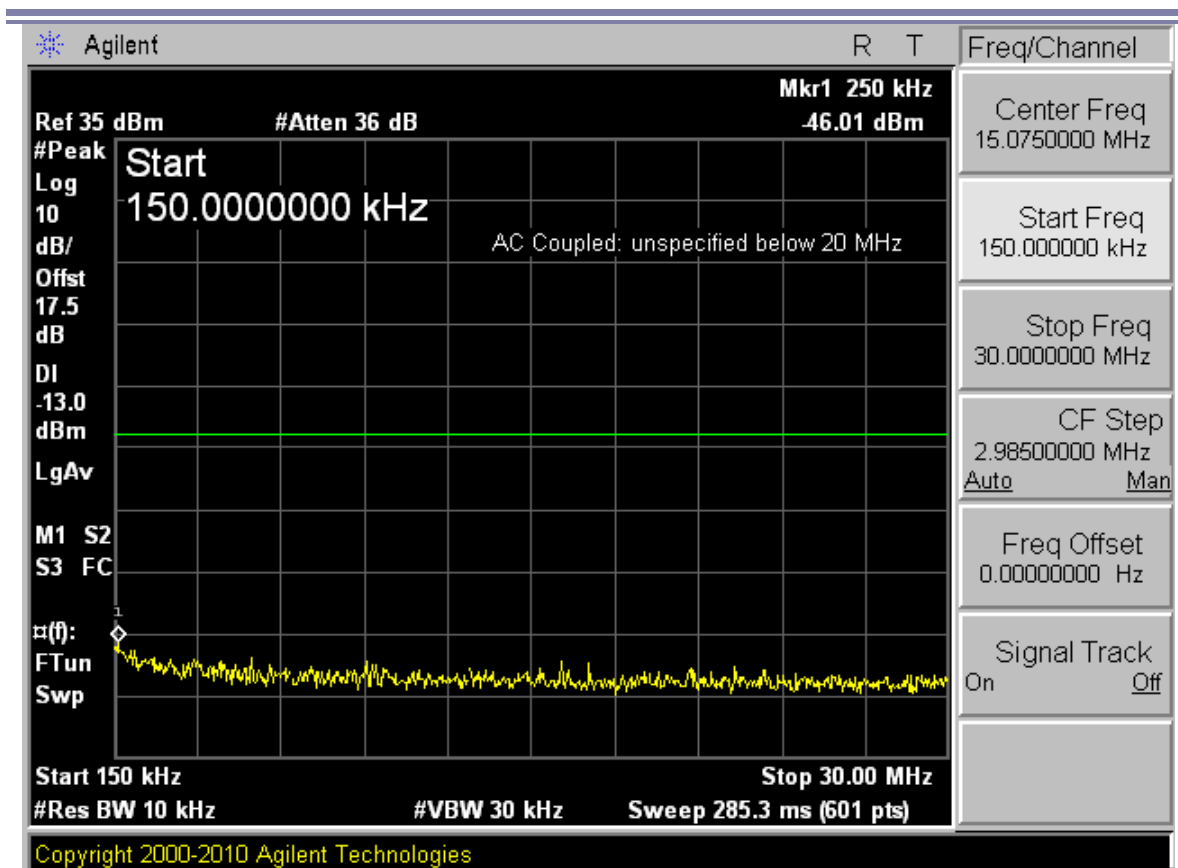

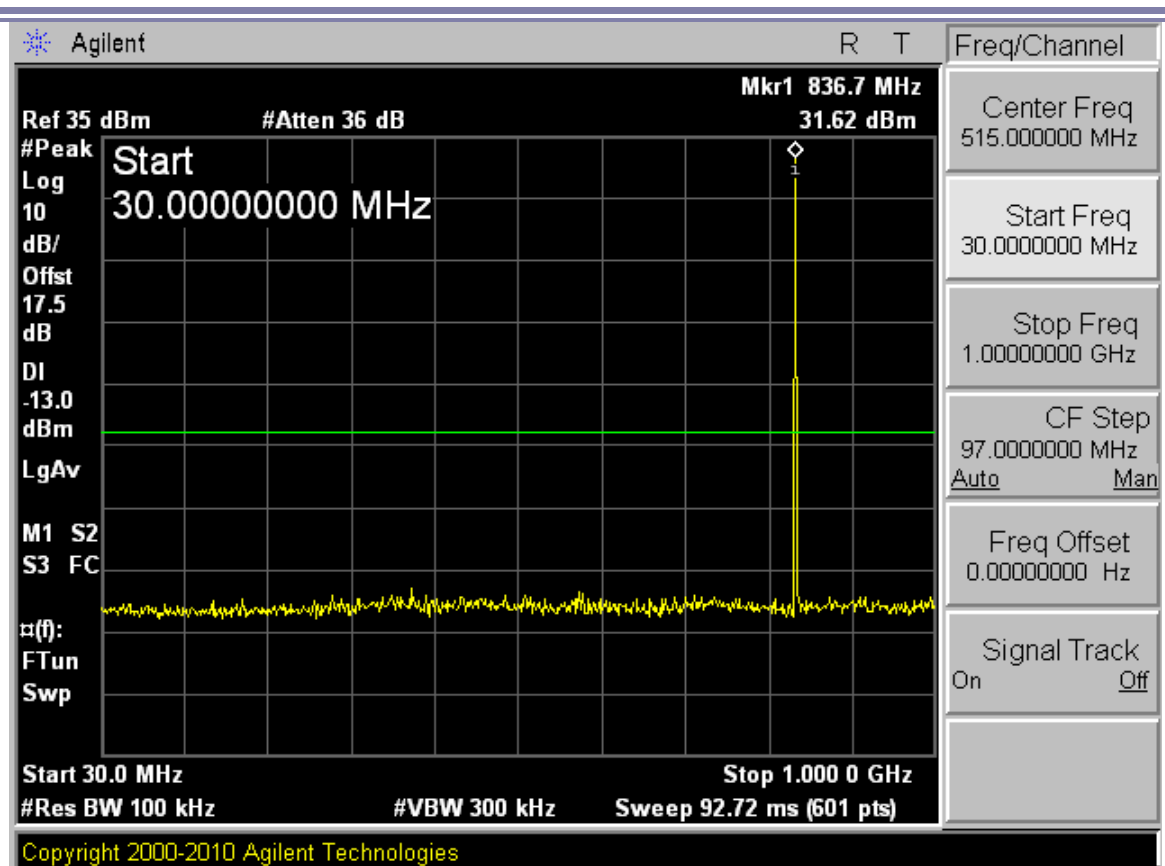


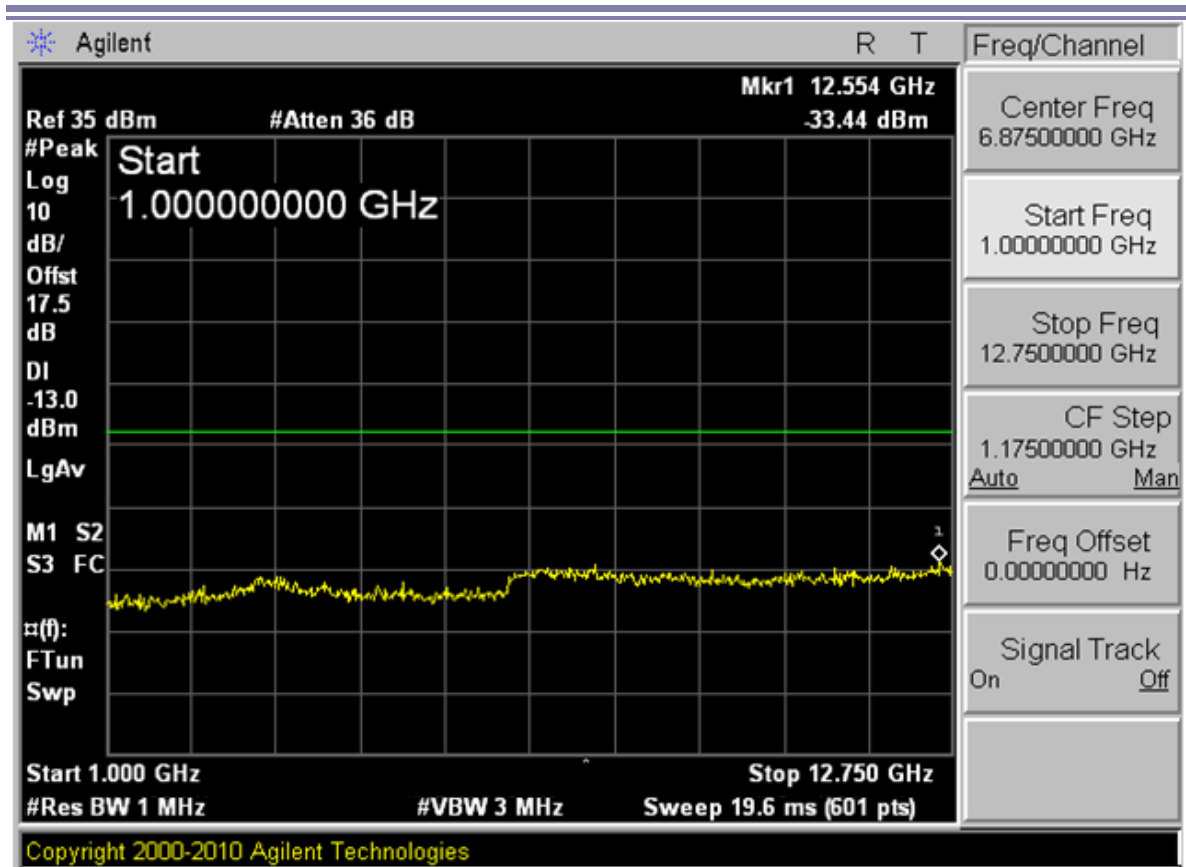








## Channel 251

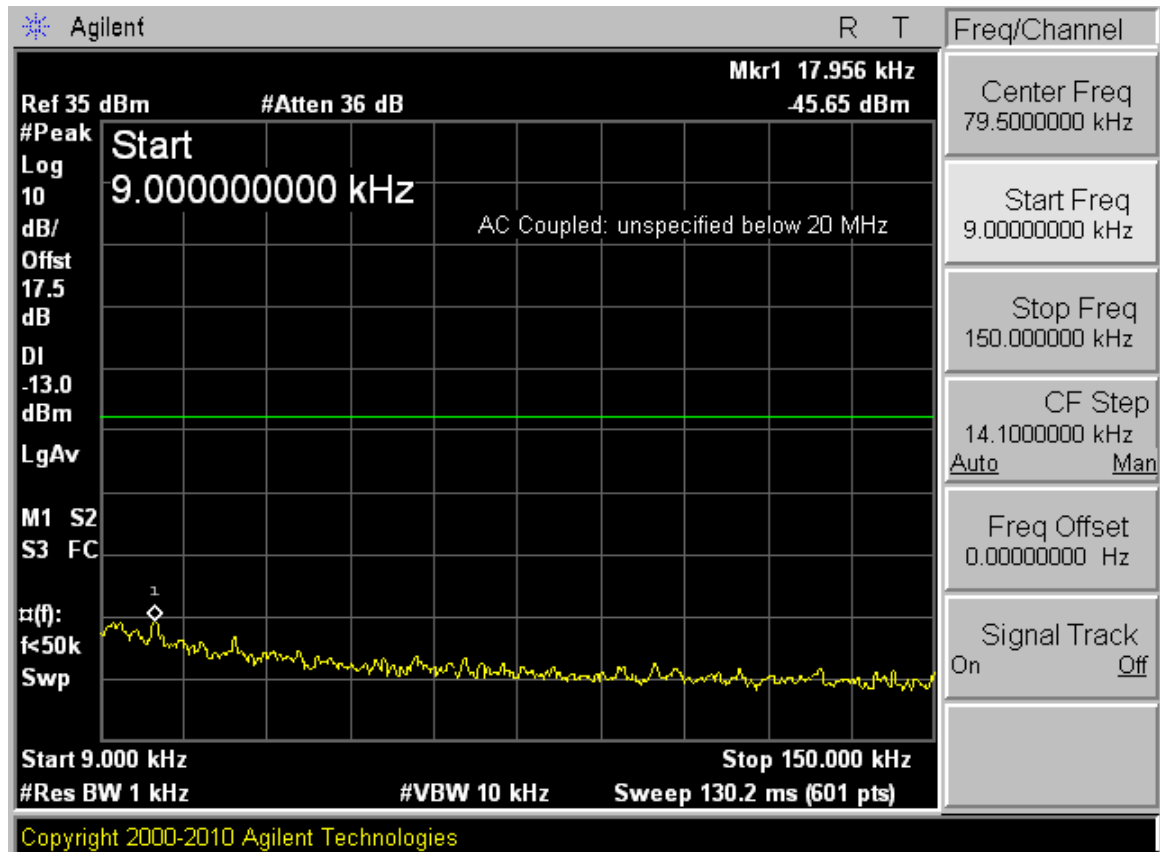

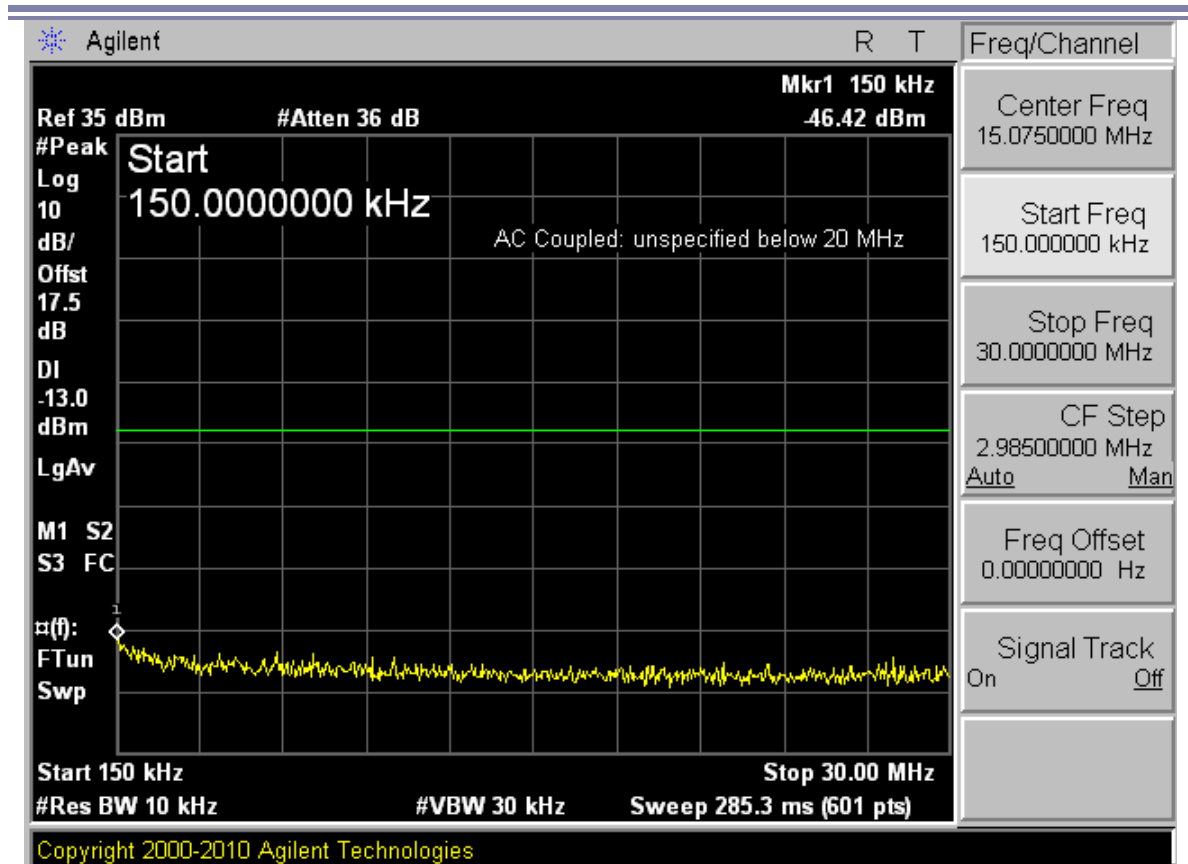


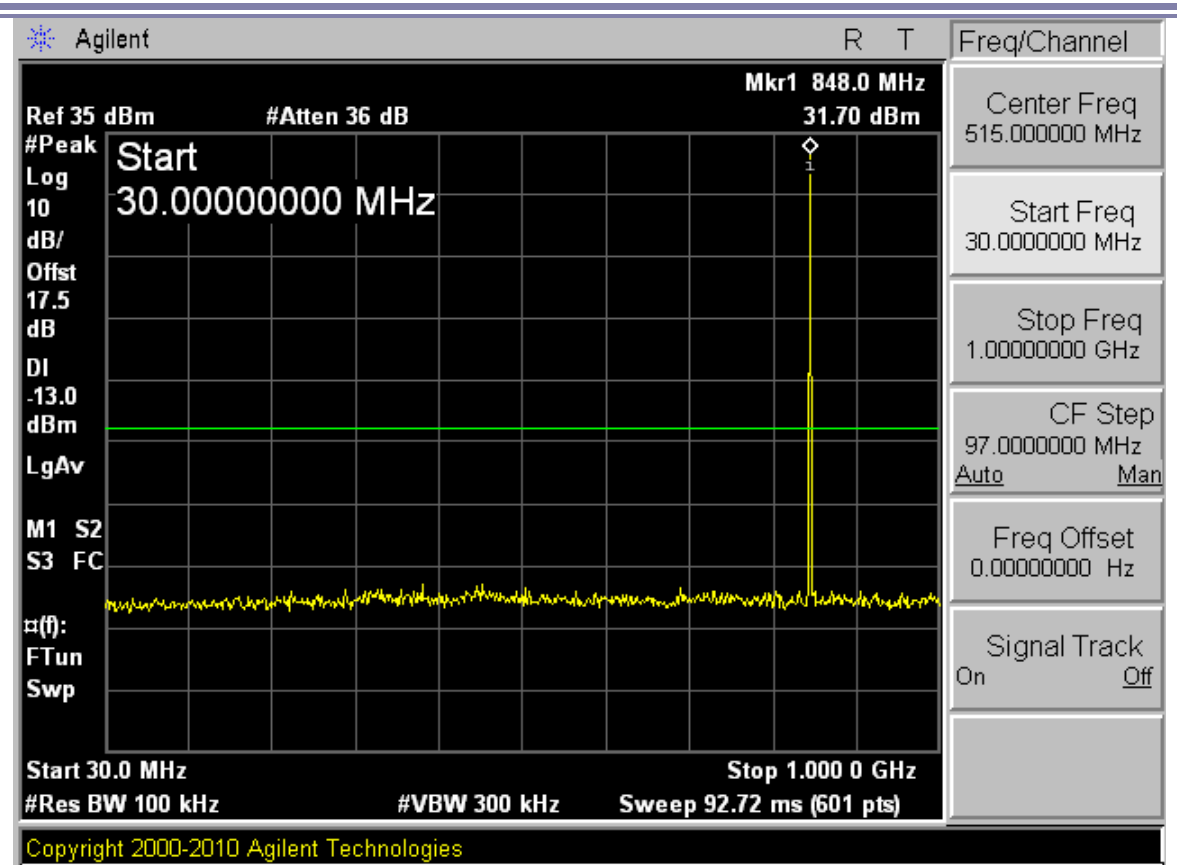


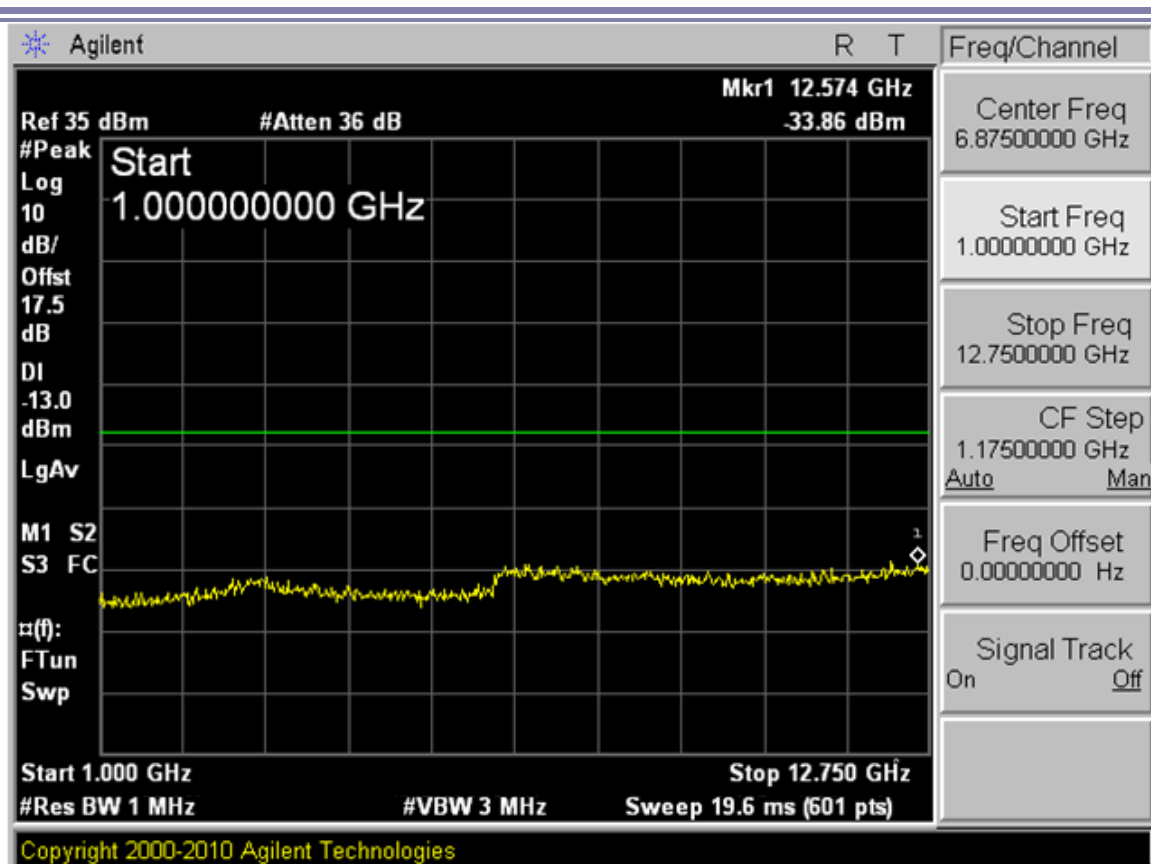





## TM2:EDGE Channel 128

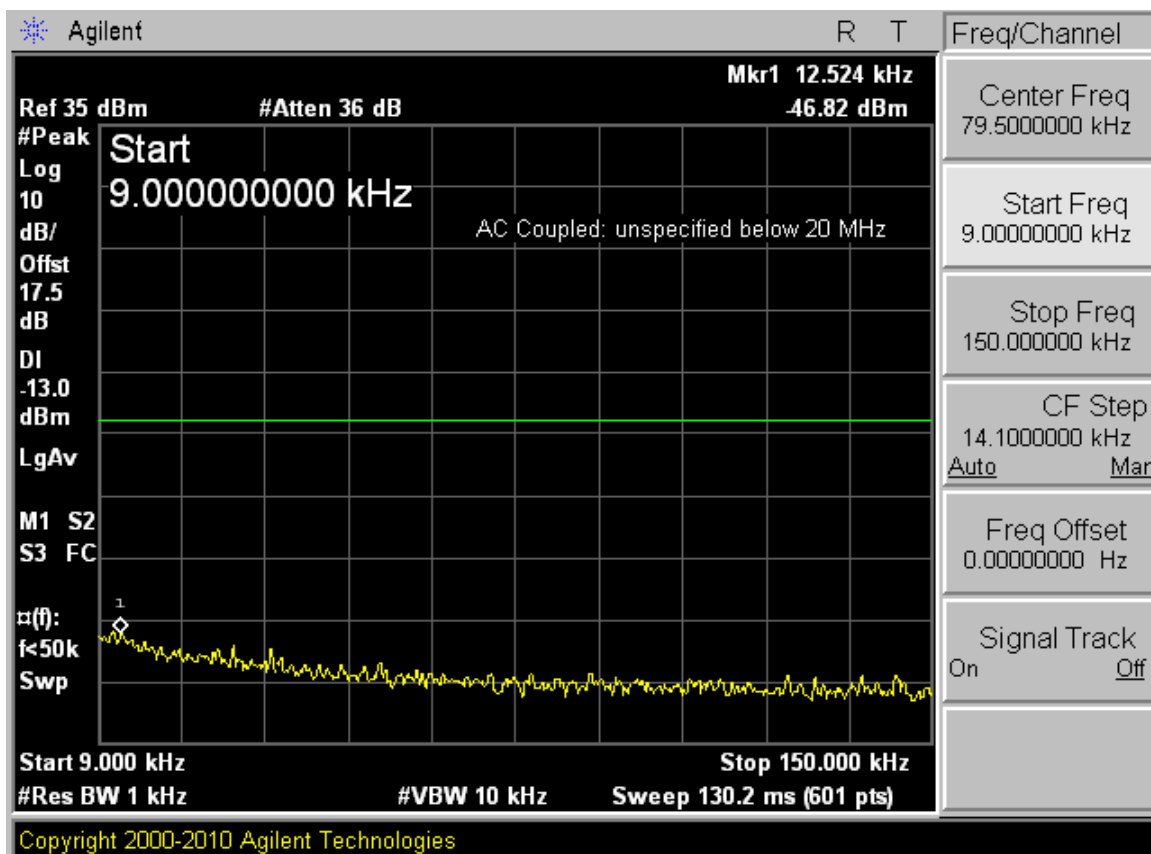

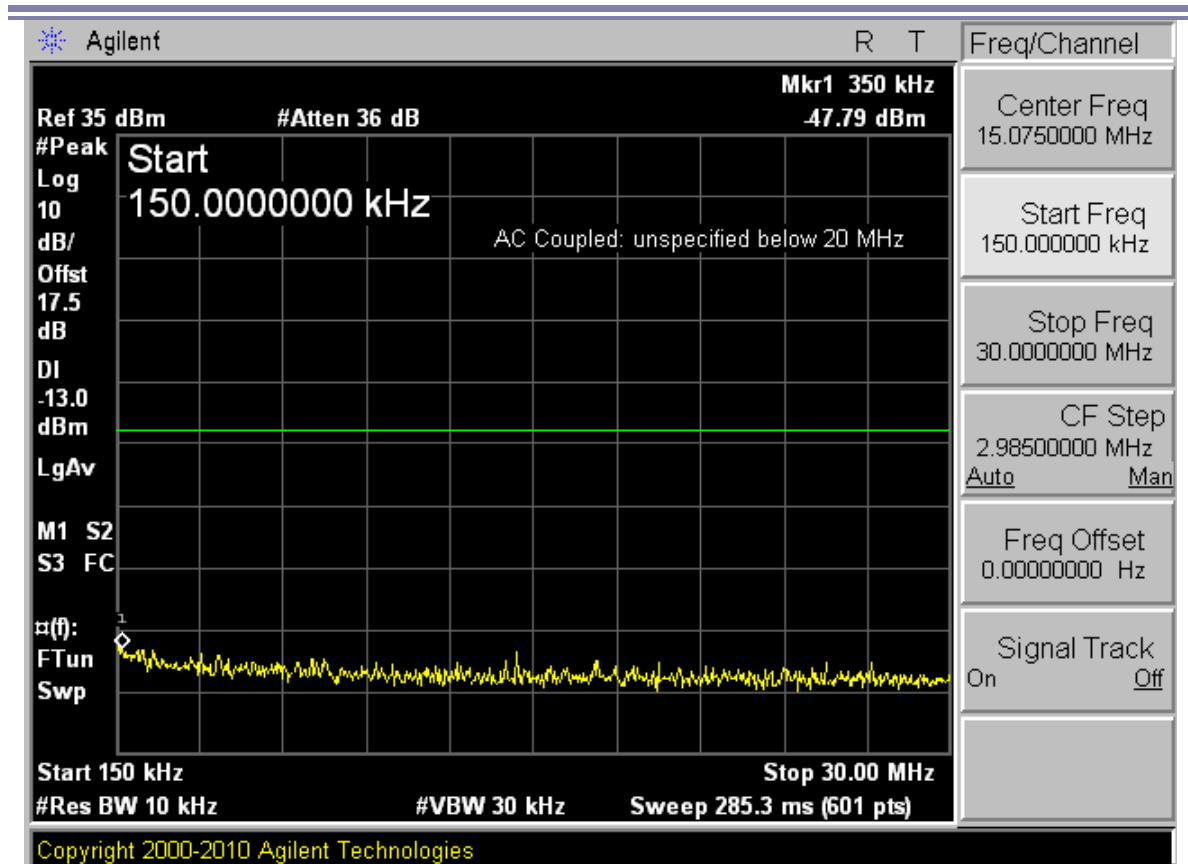

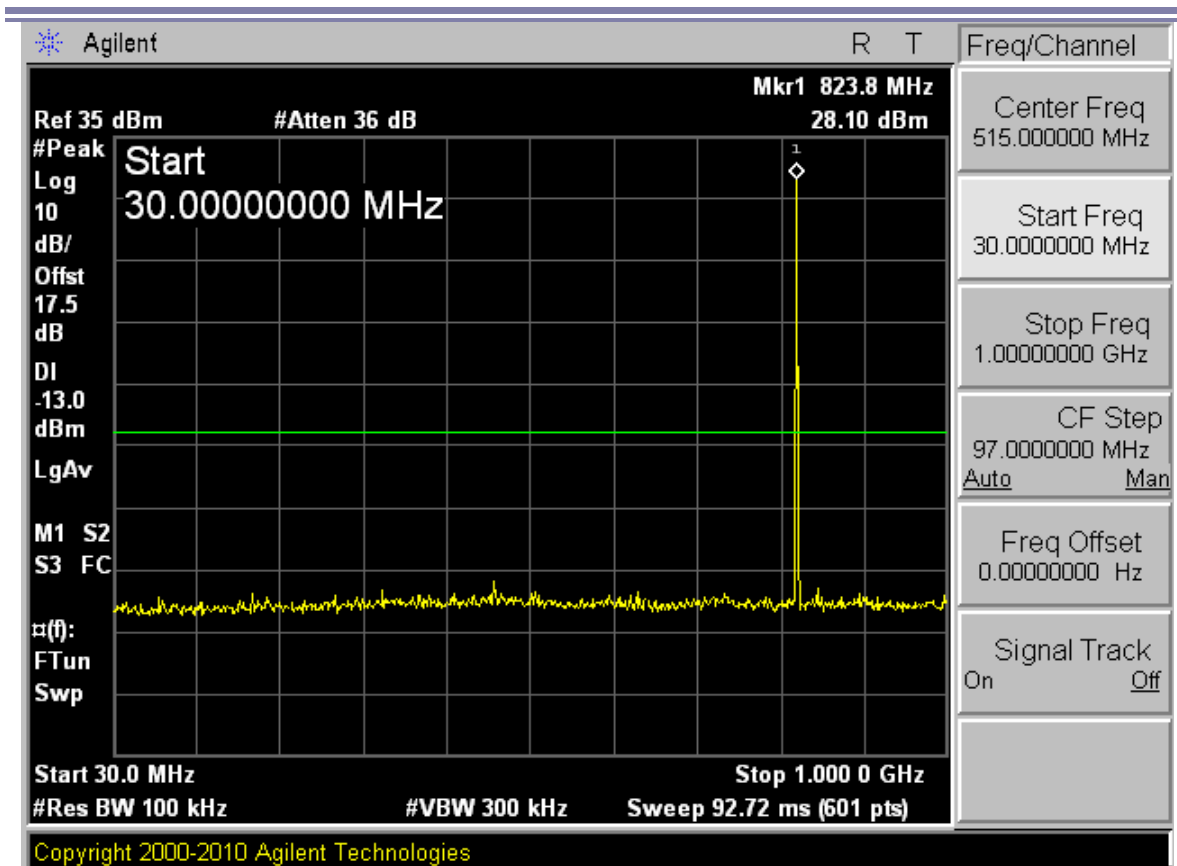


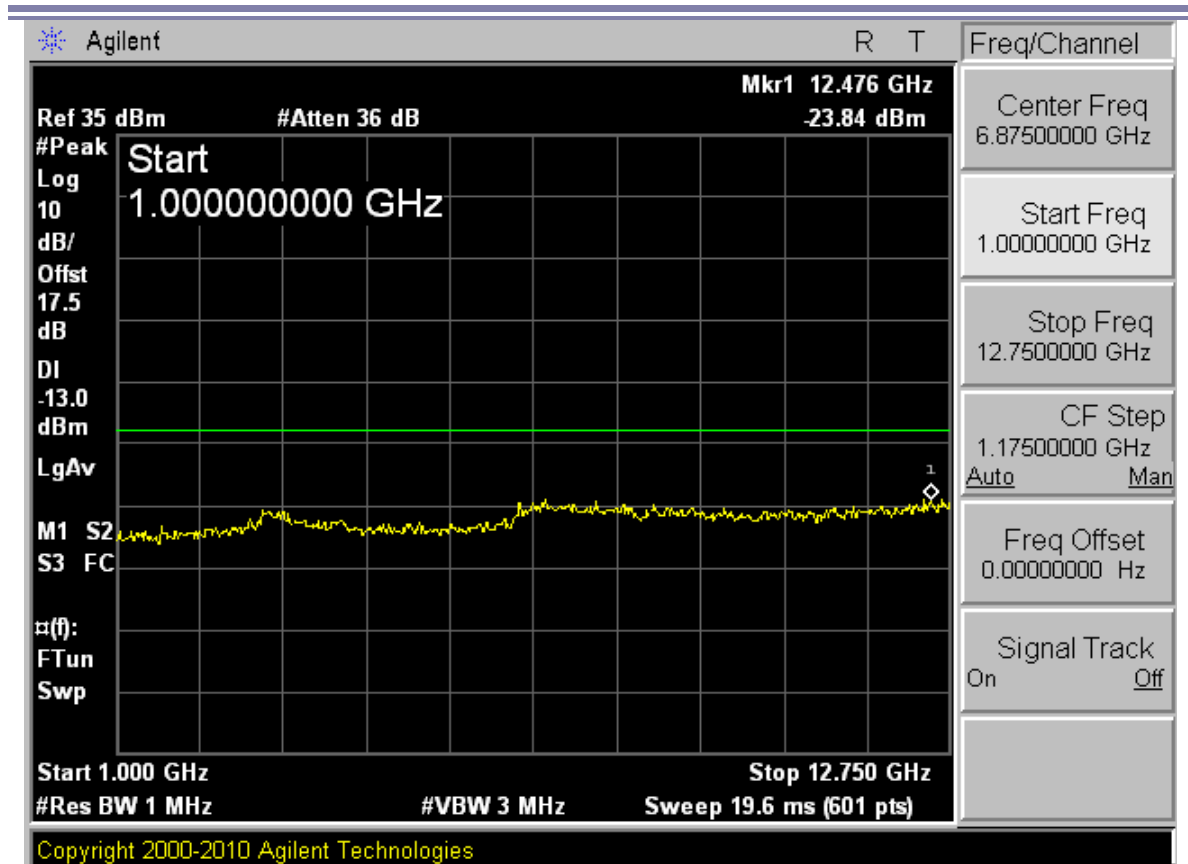








## Channel 192

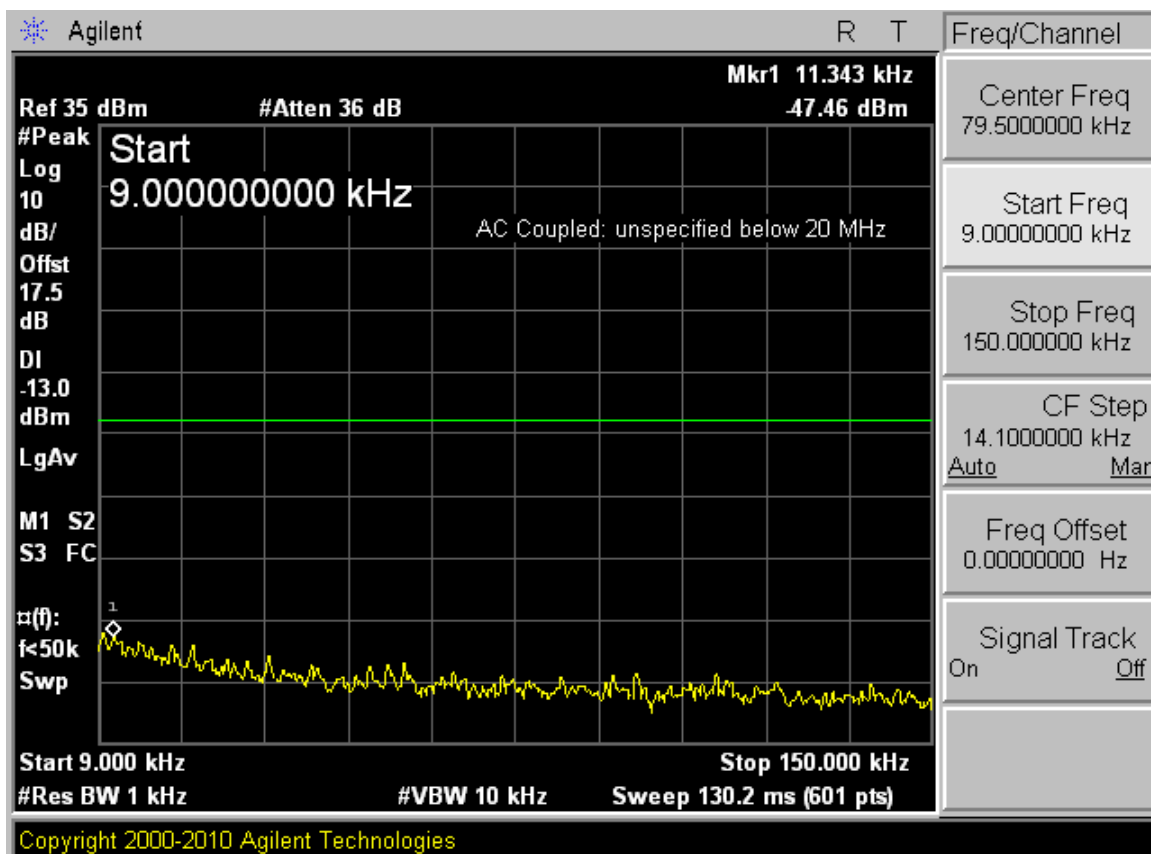

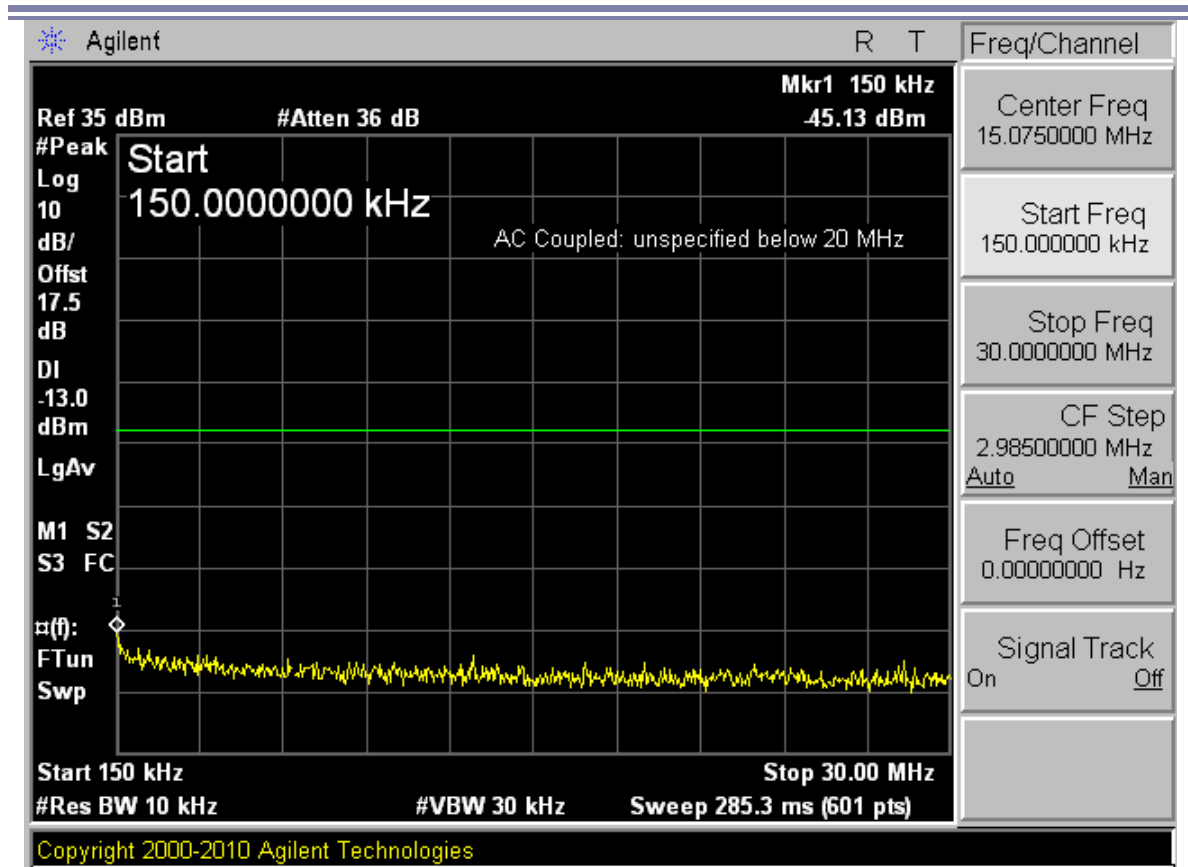


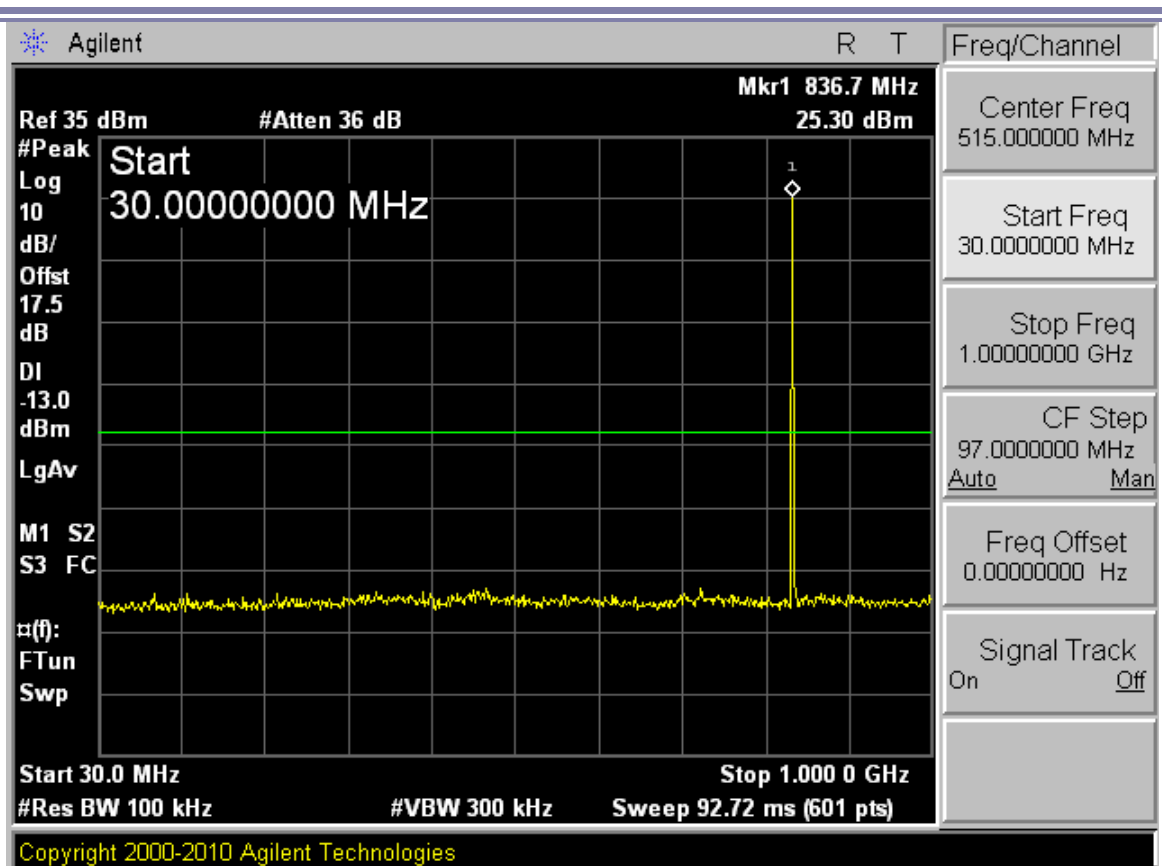


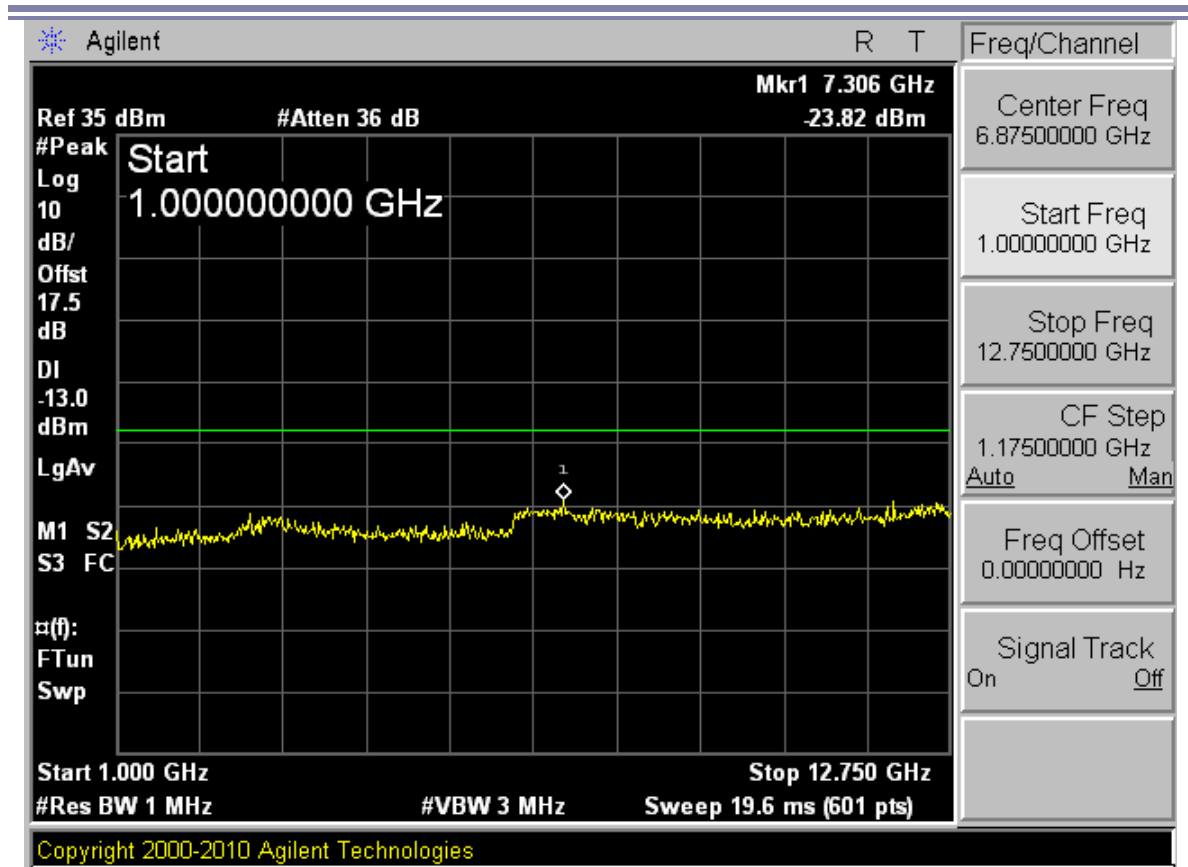





## Channel 251

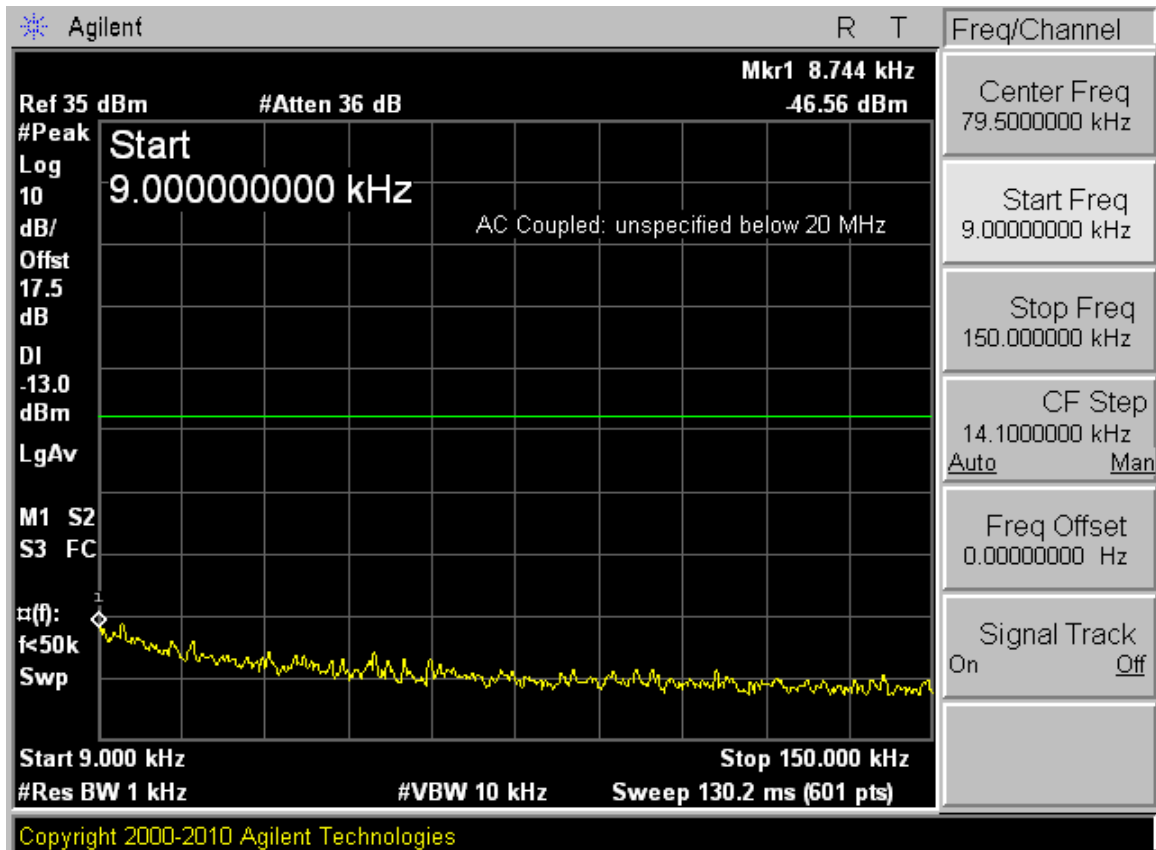

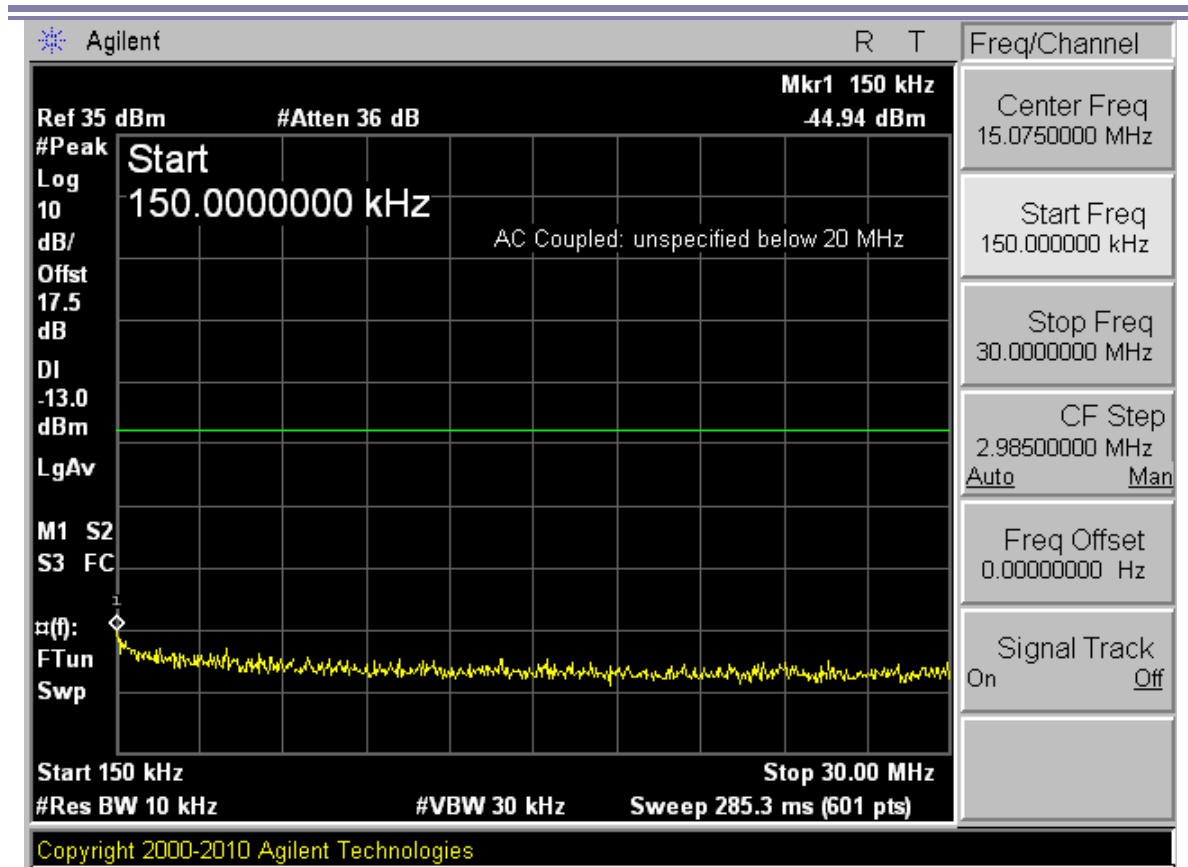

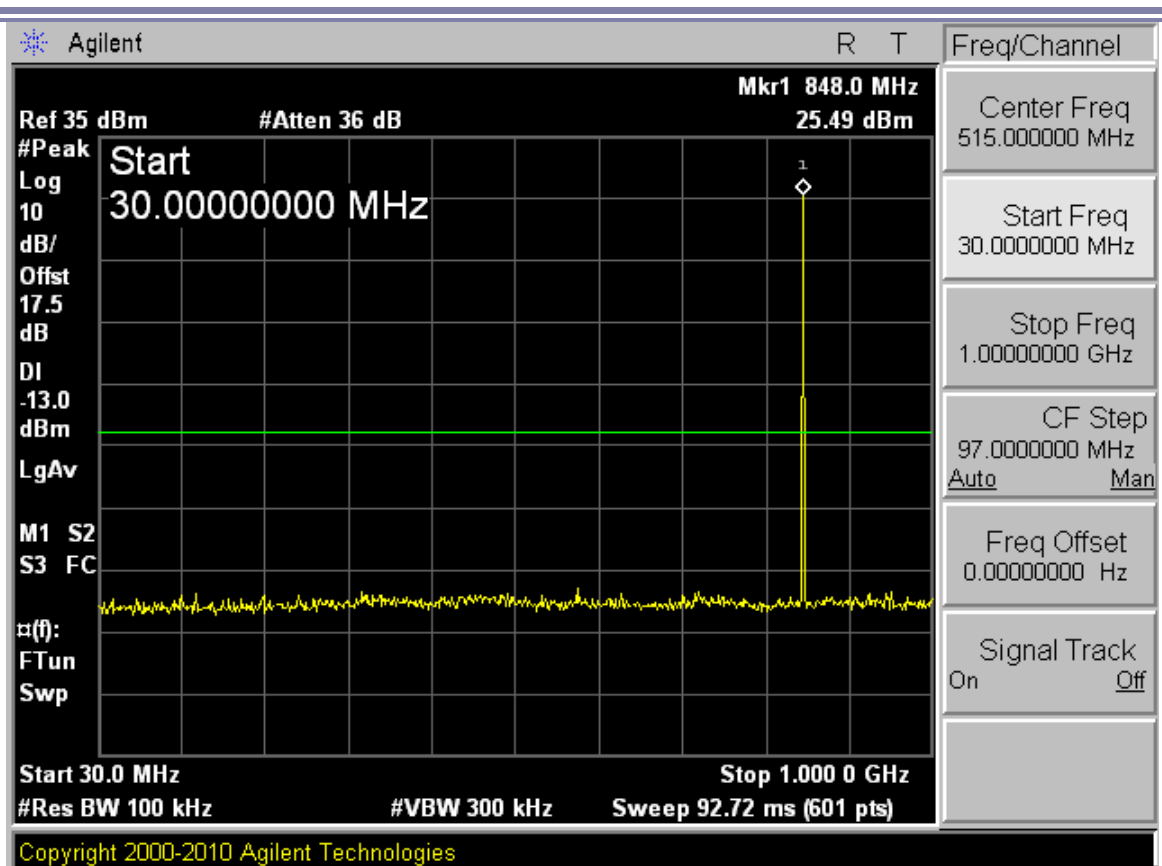


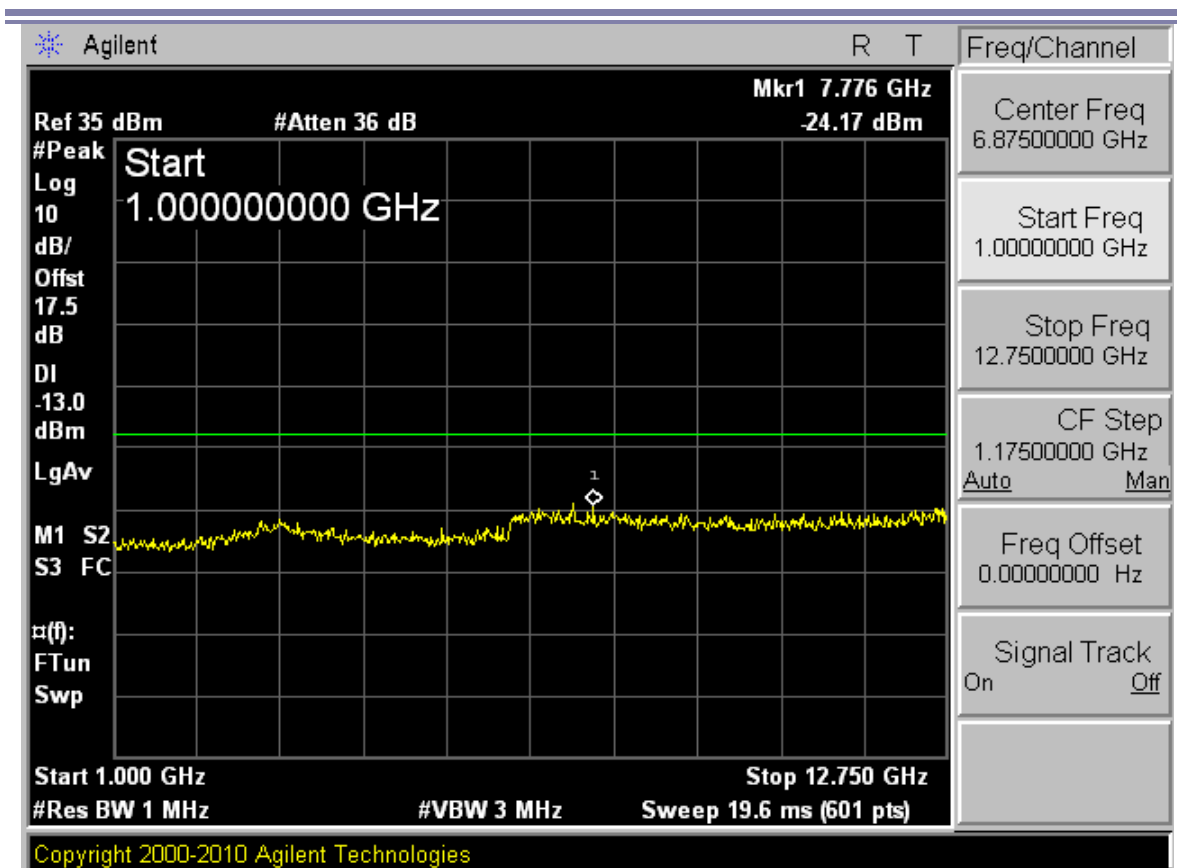








## TM2:WCDMA Channel 4132

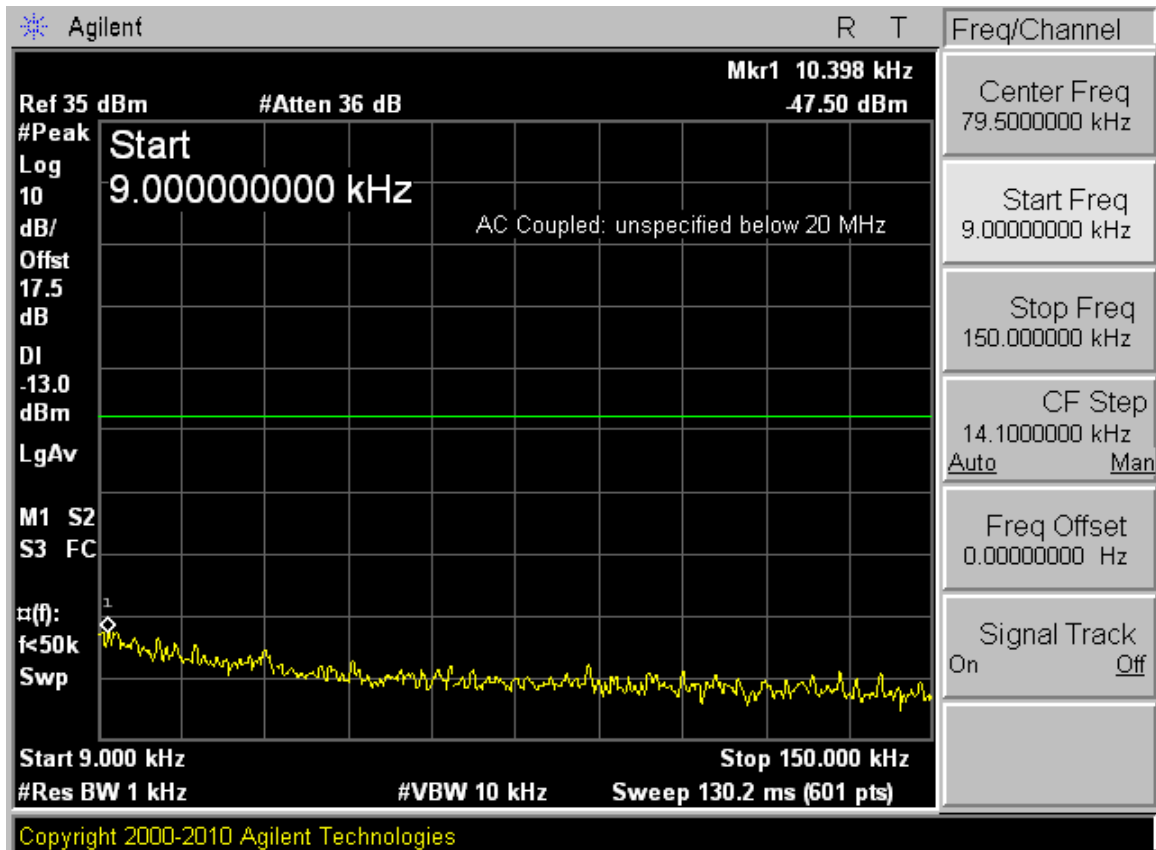

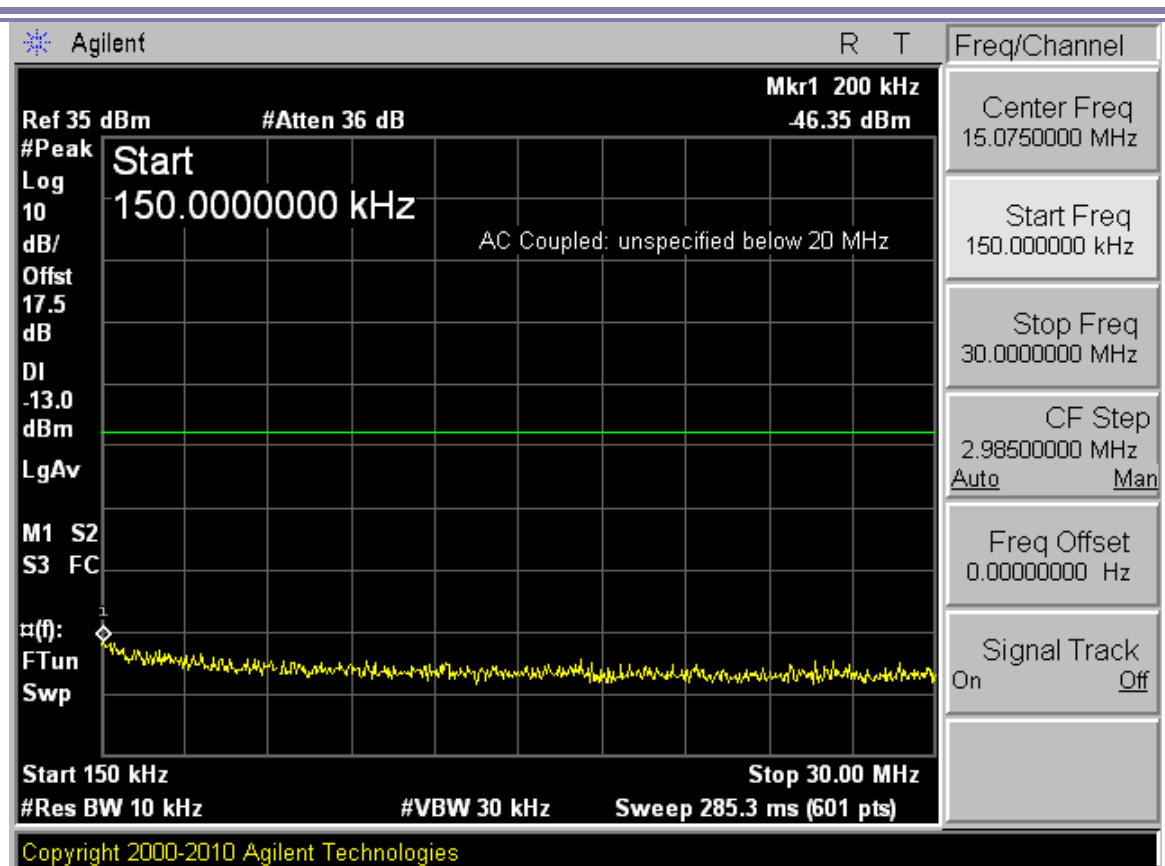


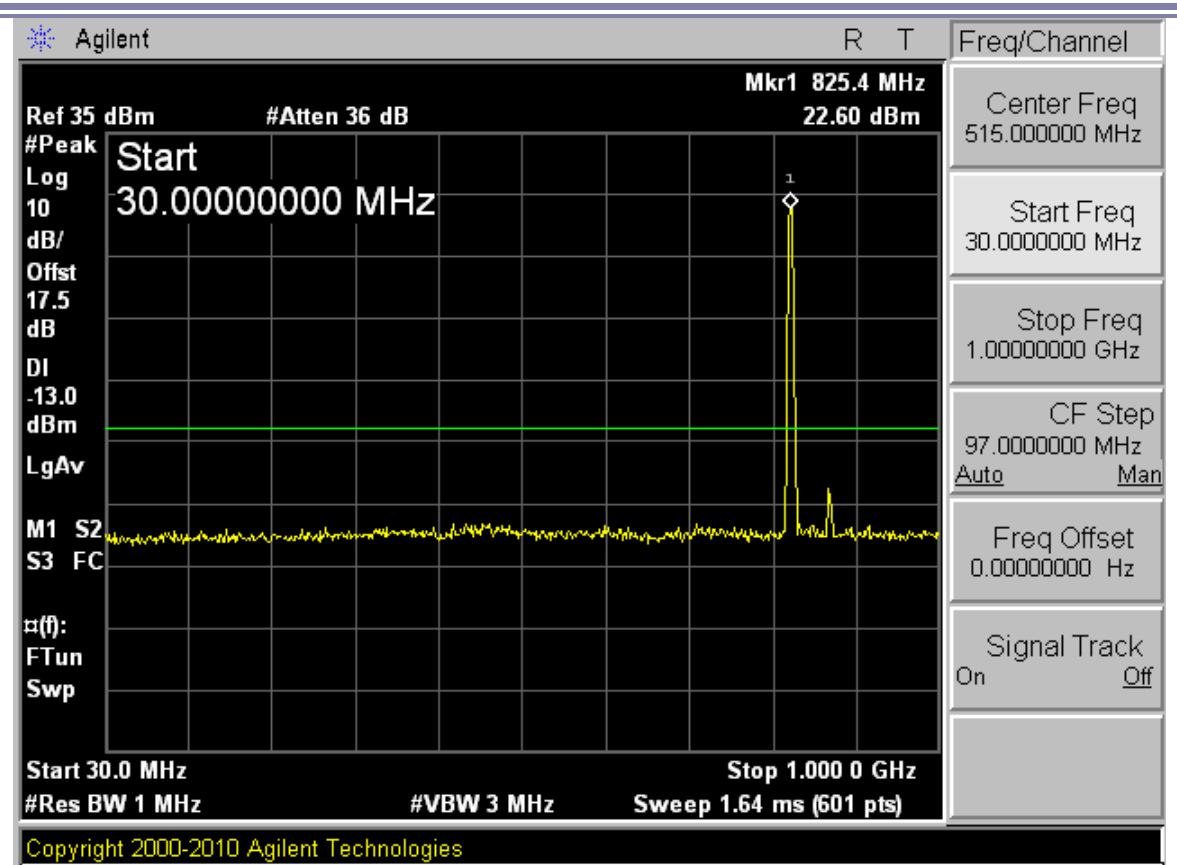


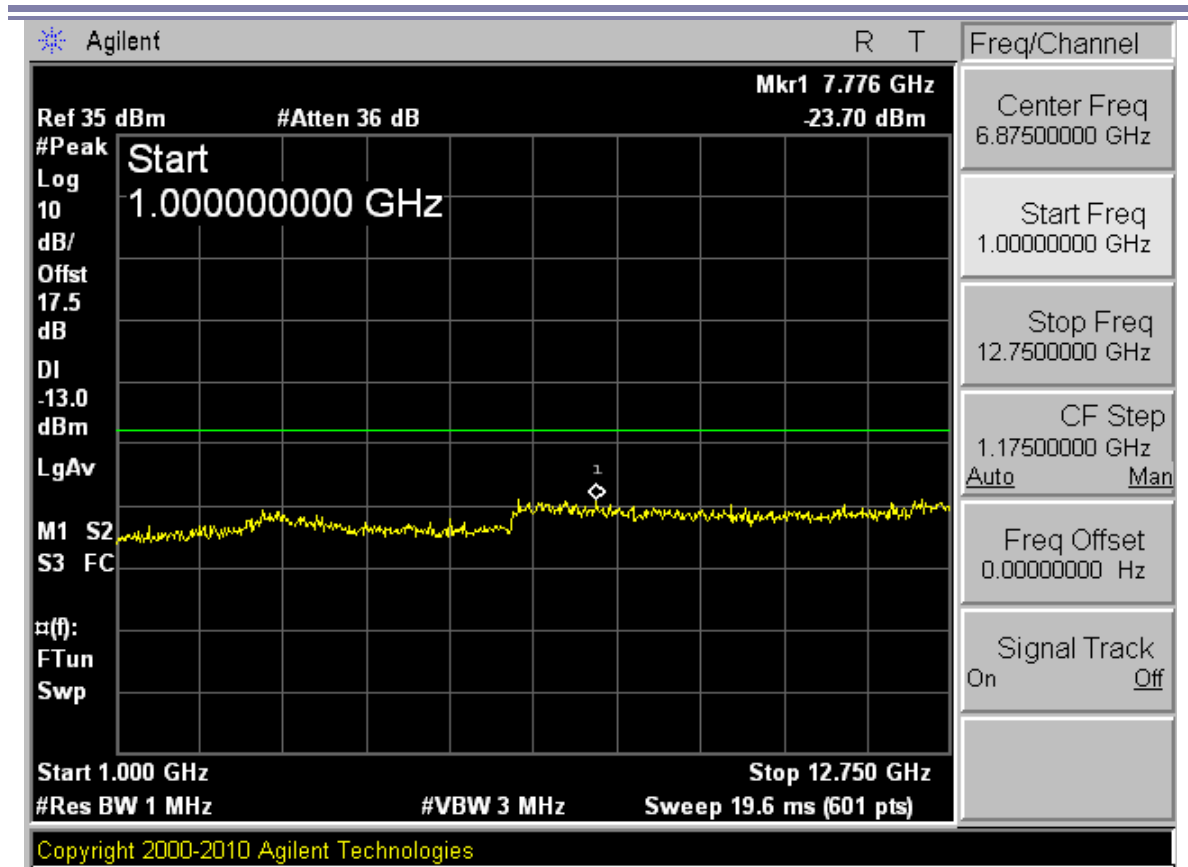





## Channel 4182

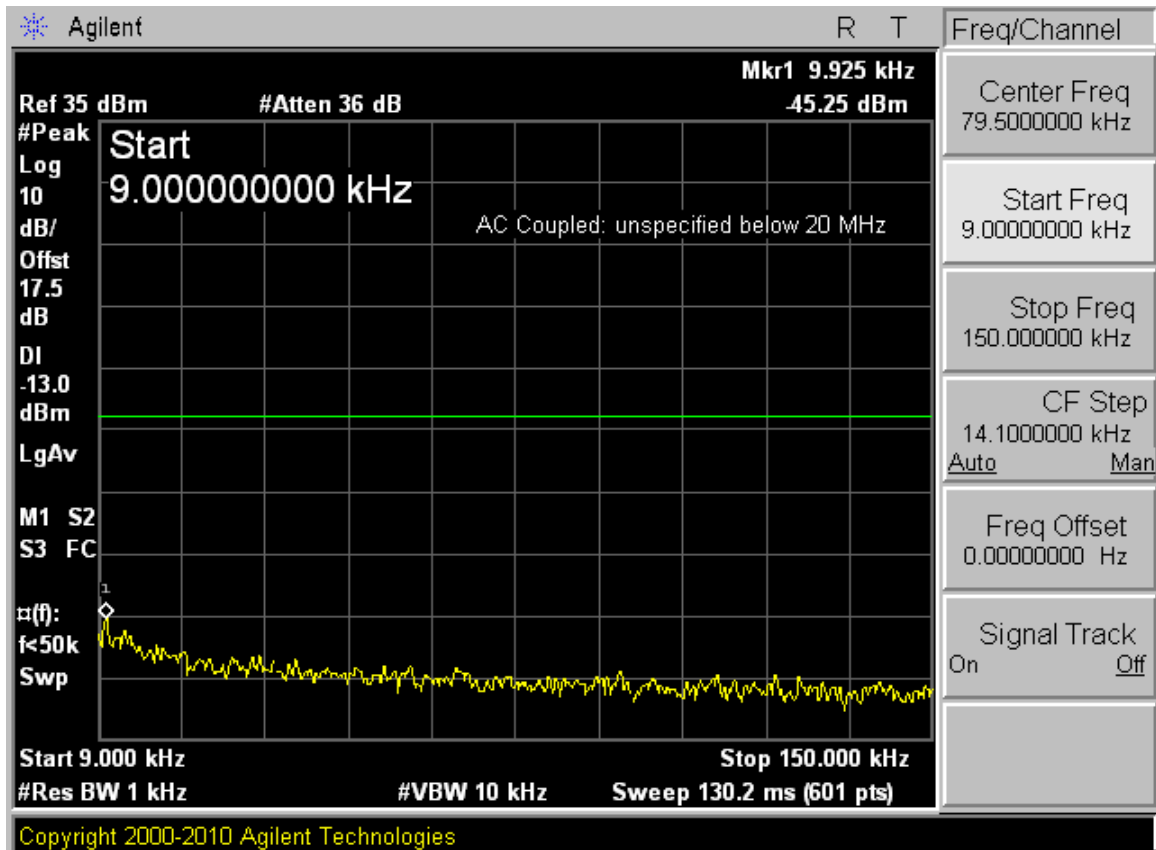

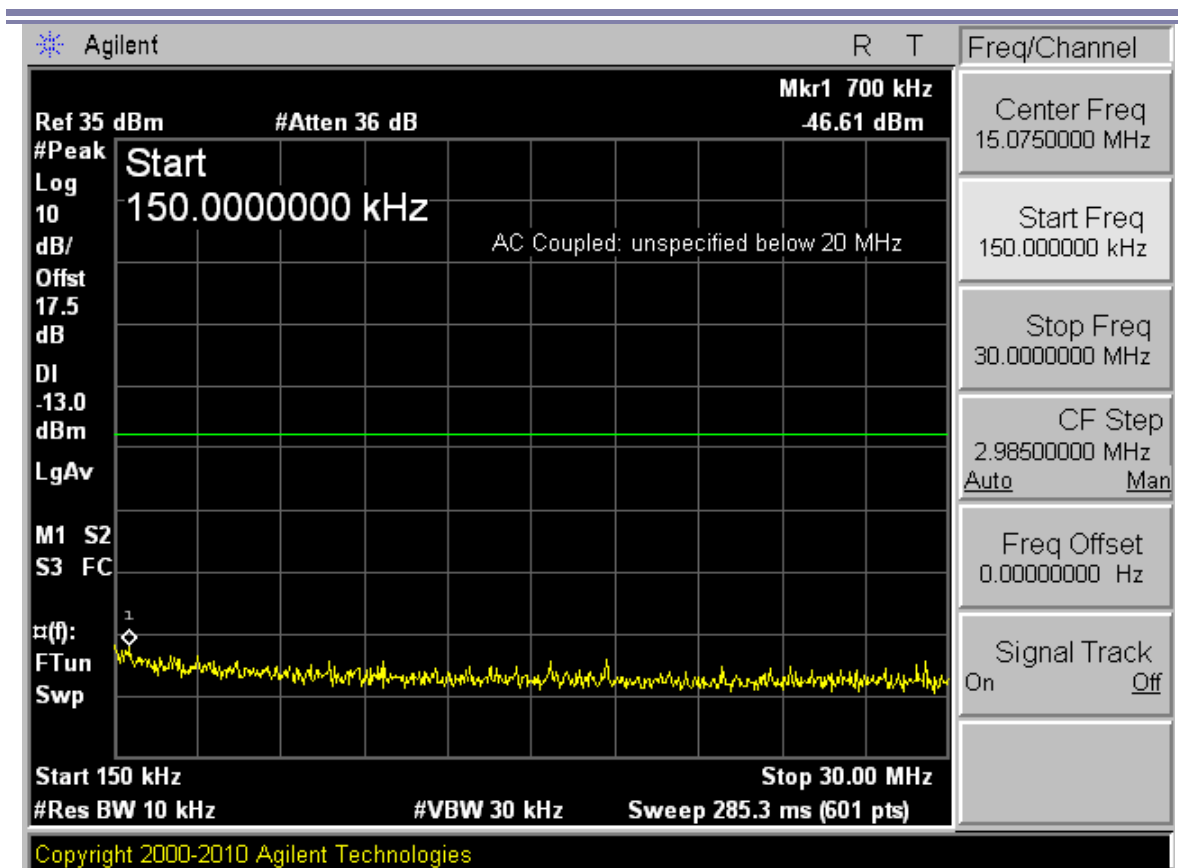

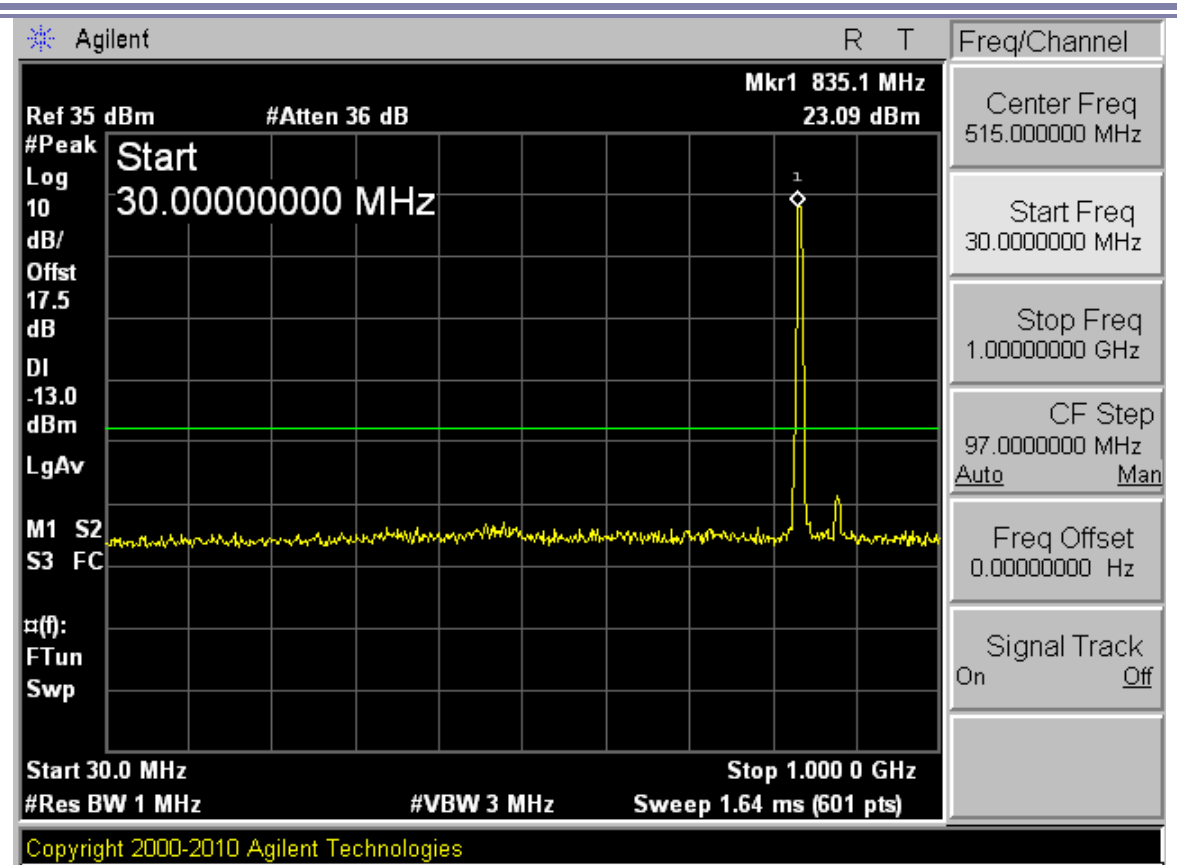

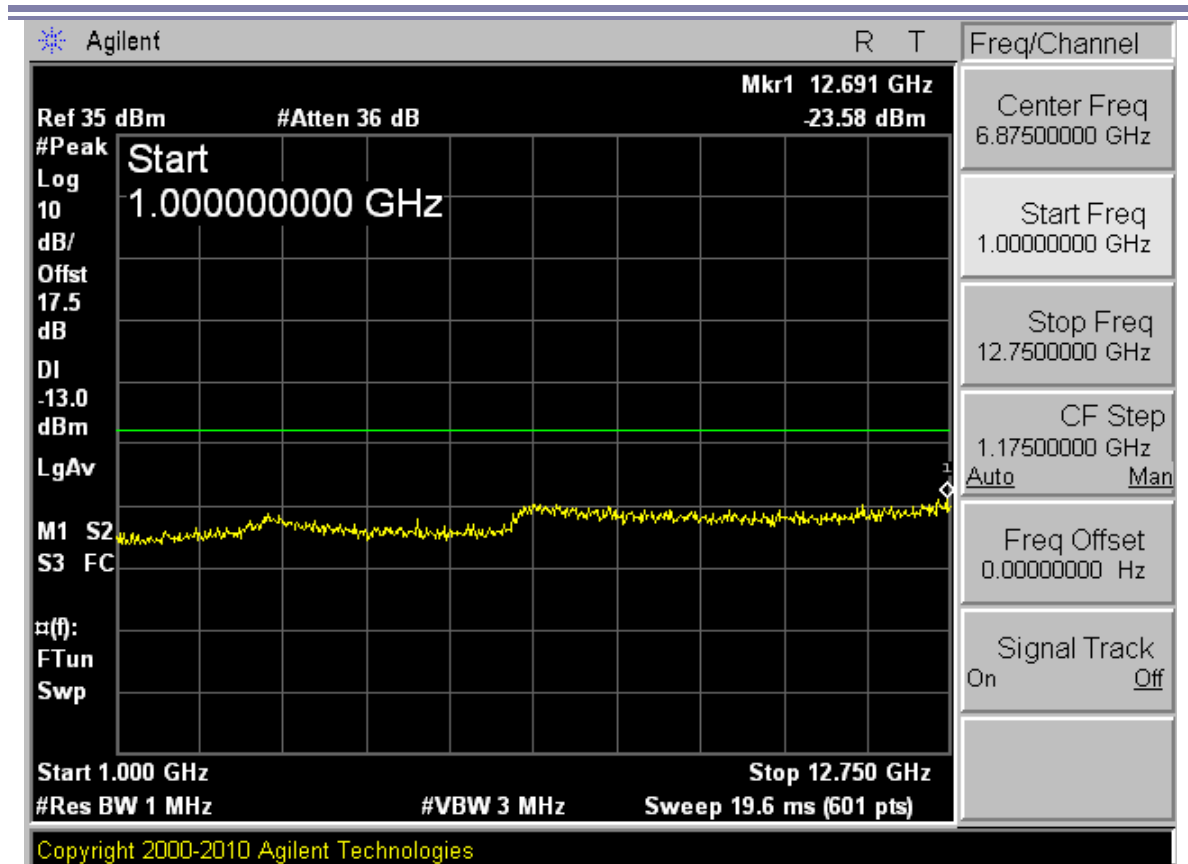





## Channel 4233

