



FCC RF Test Report

**Product Name1: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone
with Bluetooth; HUAWEI Ascend Y210**

Model Number1: HUAWEI Y210-0151, Y210-0151

**Product Name2: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone
with Bluetooth; HUAWEI Ascend Y210D**

Model Number2: HUAWEI Y210-0251, Y210-0251

Report No: SYBH(Z-RF)006092012-2002

FCC ID: QISY210-0151

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518



Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Applicant:	Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Receipt Test Item:	Oct., 11, 2012
Start Date of Test:	Oct., 14, 2012
End Date of Test:	Oct., 18, 2012
Test Result:	Pass

Approved By Senior Engineer Oct., 20, 2012 Dai Linjun
 Date Name Signature

Reviewed By Oct., 20, 2012 Cousy Xu
 Date Name Signature

Operated By Oct., 20, 2012 Huang Qiuliang
 Date Name Signature



Contents

1	<u>General Information</u>	5
1.1	APPLIED STANDARD.....	5
1.2	TEST LOCATION.....	5
1.3	TEST ENVIRONMENTAL CONDITION.....	5
2	<u>Summary</u>	6
3	<u>Product Description</u>	7
3.1	PRODUCT INFORMATION	7
4	<u>Test Description</u>	9
4.1	SUPPORTED FREQUENCY RANGE	9
4.2	TRANSMITTER / RECEIVER CHARACTERISTICS.....	9
4.3	ANTENNA GAIN.....	10
4.4	POWER SUPPLY	10
5	<u>General Test Conditions / Configurations</u>	11
5.1	RF CHANNELS UNDER TEST.....	11
5.2	TEST MODES.....	11
5.3	TEST ENVIRONMENT	11
5.4	TEST SETUP.....	12
5.5	TEST CONDITIONS	16
6	<u>Main Test Instruments</u>	18
7	<u>Test Results</u>	19
8	<u>Measurement Uncertainty</u>	19



1 General Information

1.1 Applied Standard	
Applied Rules:	47 CFR FCC Part 2:2011, Subpart J 47 CFR FCC Part 24:2011, Subpart E ANSI/TIA 603C:2004
1.2 Test Location	
Test Location 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
1.3 Test Environmental Condition	
Ambient Temperature:	20 – 25 °C
Ambient Relative Humidity:	45 – 55 %
Atmospheric Pressure:	101 kPa



2 Summary

Table 1 Summary of results

Test Case	FCC Part No.	Requirements	Result
PCS Band			
Transmitter Output Power	2.1046 & 24.232	peak or average EIRP < 2 W, in addition, when measuring as average power, PAR < 13 dBm	Pass
Modulation Characteristics	2.104	Digital modulation	Pass
Occupied Bandwidth	2.104	(Not specified)	Pass
Band Edges Compliance	2.1051 & 24.238	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 24.238	Below -43 dBm/1 kHz, 9 kHz to 150 kHz Below -33 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/1 MHz, 30 MHz to 10 th harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 24.238	Below -13 dBm/1 MHz	Pass
Frequency Stability	2.1055 & 24.235	Stay within the authorized frequency block	Pass

3 Product Description

3.1 Product Information

3.1.1 General Description

HUAWEI Y210-0151, Y210-0151, HUAWEI Y210-0251, Y210-0251 is subscriber equipment in the WCDMA/GSM system. The HSPA/UMTS frequency band is Band I and Band II and Band V. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only Band II and GSM1900 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port(to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

NOTE: Y210-0151 and Y210-0251 are HSDPA/UMTS/GPRS/GSM/EDGE mobile phones with Bluetooth, which supports GMS 850/900/1800/1900 and WCDMA 850/1900/2100, they are exactly the same except for the number of sim-card slot, Y210-0151 have one sim-card slot, while Y210-0251 have two.

3.1.2 Board Information

Table 2 Board Information

HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; HUAWEI Ascend Y210, HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; HUAWEI Ascend Y210D		
HUAWEI Y210-0151, Y210-0151, HUAWEI Y210-0251, Y210-0251		
Board and Module		
Hardware Version	Software Version	Description
HD1U8685M	Y210-0151V100R001C00B815(HUAWEI Y210-0151, Y210-0151); Y210-0251V100R001C00B801(HUAWEI Y210-0251, Y210-0251)	Main board of Mobile Phone

3.1.3 Adapter Technical Data

AC/DCAdapter Model	HS-050040U5
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  400mA
Rated Power	2W

AC/DCAdapter Model	HW-050100U1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

AC/DCAdapter Model	HW-050100E1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

AC/DCAdapter Model	HW-050100Z1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

3.1.4 Battery Technical Data

Name	Manufacture	Description
Rechargeable Li-ion	Huawei Technologies Co., Ltd.	Battery Model: HB4W1 Rated capacity: 1700mAh Nominal Voltage:  +3.7V Charging Voltage:  +4.2V

Name	Manufacture	Description
Rechargeable Li-ion	Huawei Technologies Co., Ltd.	Battery Model: HB4W1H Rated capacity: 1750mAh Nominal Voltage:  +3.7V Charging Voltage:  +4.2V



4 Test Description

4.1 Supported Frequency Range

Characteristics	Description
Downlink	1930 to 1990 MHz
Uplink	1850 to 1910 MHz

4.2 Transmitter / Receiver Characteristics

Characteristics	Description
System Type	GSM UMTS
TX Output Power (per Antenna Port)	GSM system: 30dBm; UMTS system: 23dBm
Channel Spacing(s) / Bandwidth(s)	GSM system: 200 kHz UMTS system: 5 MHz
Designation of Emissions	GSM system: 247KGXW (GMSK modulation), 252KG7W (8PSK modulation) UMTS system: 4M18F9W



4.3 Antenna Gain

Antenna Gain(dBi)	0.21
-------------------	------

4.4 Power Supply

Specification	Description
Power Supply Type	Directly Connected to DC /AC Power Supply
Input to EUT (DC power)	DC Voltage Nominal: \approx 3.7 V DC Voltage Range: \approx 3.6 V to 4.2 V
Input to EUT (AC power)	AC Voltage Nominal: ~ 120 V (50/60 Hz)



5 General Test Conditions / Configurations

5.1 RF Channels under Test

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
TM1/TM2	TX	Channel 512	Channel 661	Channel 810
		1850.2MHz	1880.0MHz	1909.8MHz
	RX	Channel 512	Channel 661	Channel 810
		1930.2 MHz	1960.0 MHz	1989.8 MHz
TM3/TM4/TM5	TX	Channel 9262	Channel9400	Channel9538
		1852.4MHz	1880.0MHz	1907.6MHz
	RX	Channel 9662	Channel 9800	Channel 9938
		1932.4 MHz	1960.0 MHz	1987.6 MHz

5.2 Test Modes

Test Mode	Test Modes Description
TM1	GSM/GPRS, GMSK modulation
TM2	EDGE, 8PSK modulation
TM3	WCDMA, QPSK modulation
TM4	HSDPA, QPSK modulation
TM5	HSUPA, QPSK modulation

5.3 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.6V
	VN	3.7V
	VH	4.2V


NOTE: VL= lower extreme test voltage
 VN= nominal voltage
 VH= upper extreme test voltage
 TN= normal temperature

5.4 Test Setup


5.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Ports	Until otherwise declared, all TX tests are ONLY performed at the main Transmitter antenna port (e.g. TRXA, TXA and so on) of the EUT, and all RX tests are ONLY performed at the main Receiver antenna port (e.g. TRXA, RXA and so on) of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

5.4.2 Test Setup 1

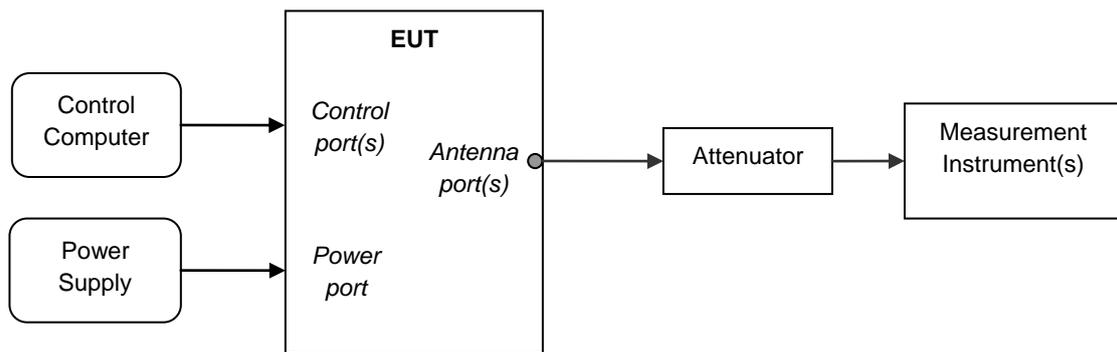

5.4.3 Test Setup 2

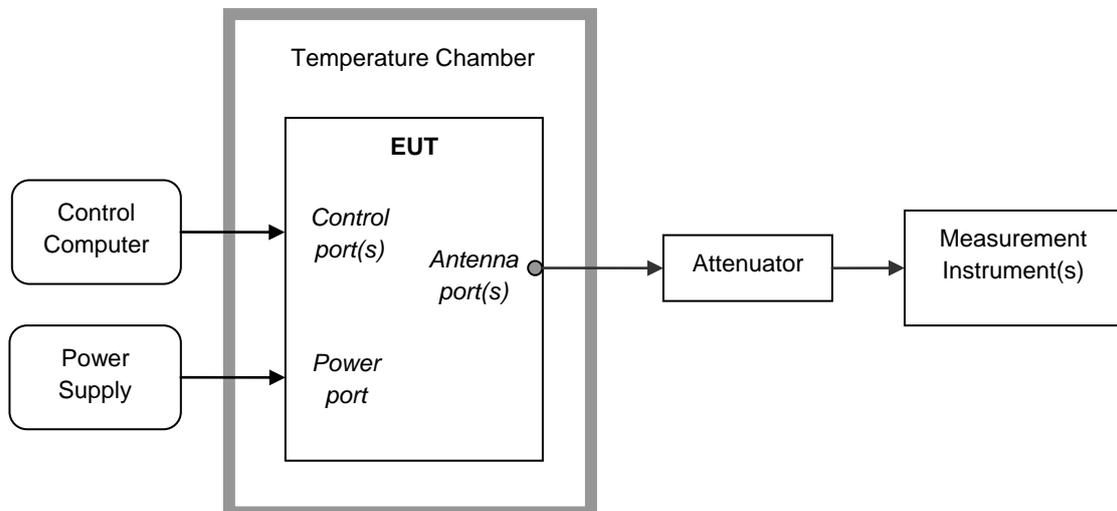


5.4.4 Test Setup 3

NOTE1: Effective radiated power (ERP) or Effective Isotropic radiated power (EIRP) refers to the EUT radiation power output, assuming all emissions are radiated from half-wave dipole antennas or horn antennas.

NOTE2: The EUT was set on insulator 80cm above the Ground Plane. The setup and test methods were according to ANSI-TIA-603C 2004. The measurements were carried through with a Rohde and Schwarz Test Receiver and control software.


Step 1: Pre-test to find the Maximum ERP or EIRP

1. Connect the test system according to the following figure. EUT is running for 30 minutes before test, and measurement instruments are warming-up for 30 minutes.
2. Set up communication link between Universal radio communication tester and EUT, set EUT working frequency, and control EUT to transmit at maximum power.
3. Set the center frequency of the signal analyzer or receiver to the EUT's operating frequency, the RBW is equal to the emission bandwidth of the signal. Set RMS detector for the test, and the span is equal to 2 times of emission bandwidth, the other settings should remain automatic. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°. The receiver antenna has two polarizations V and H. A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other non-metallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized. Measure the EUT maximum RF power and record the result.
4. Changing EUT working frequency and measuring the RF power at channel L, M, H respectively.
Complete the test data.

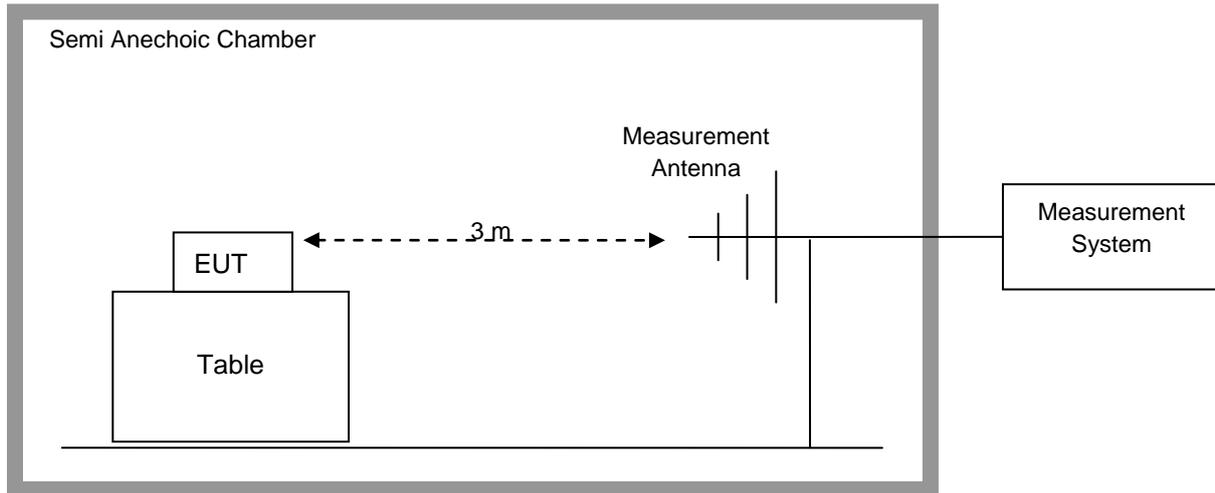

Step 2: Substitution method to verify the maximum ERP or EIRP

1. Measurement setup is according to the following figure. EUT was substituted by antenna, and the polarization is identical with the test antenna; the signal generator was connected to the substitution antenna.
2. The radiated output power, measured by signal analyzer set, is the same as recorded in above. Then this power level is matched by a signal from a calibrated signal generator which is substituted for EUT. The power supplied by the generator is then equal to the ERP or EIRP after corrected by the antenna gain and cable loss.

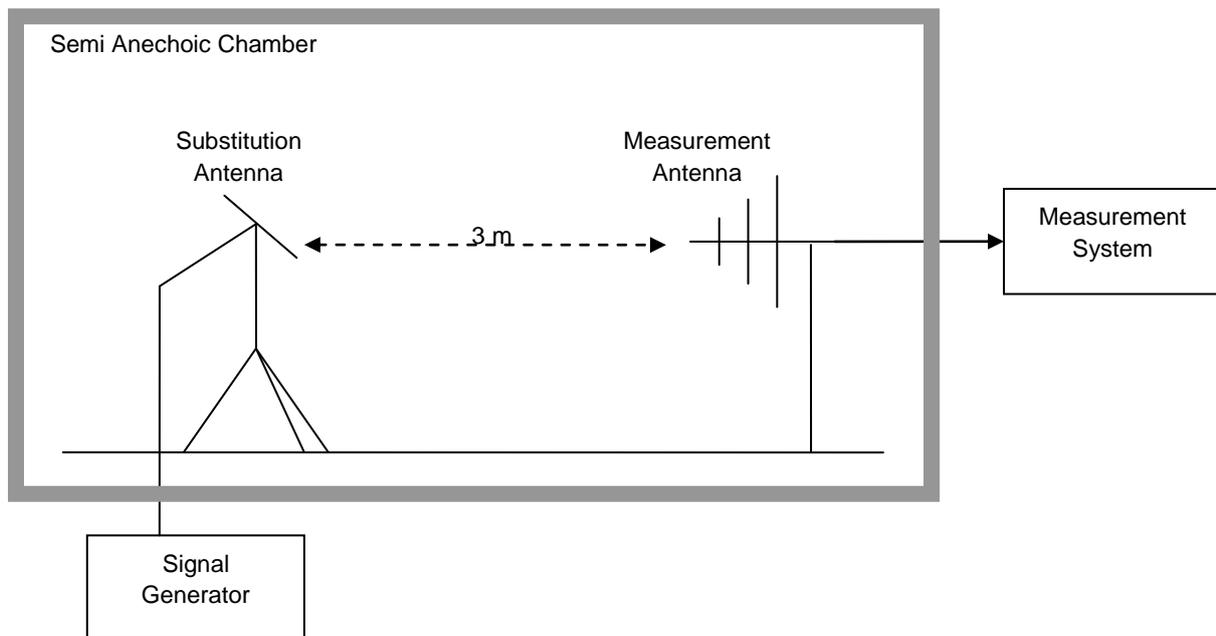

5.5 Test Conditions

Test Case	Test Conditions	
Transmitter Output Power	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1 & Test Setup 3
	Detector	RMS
	RF Channels (TX)	L, M, H
	Test Mode	TM1/TM2/TM3/TM4TM5
Modulation Characteristics	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	RF Channels (TX)	M
	Test Mode	TM1/TM2/TM3
Occupied Bandwidth	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	L, M, H
	Test Mode	TM1/TM2/TM3
Band Edges Compliance	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	L, H
	Test Mode	TM1/TM2/TM3
Spurious Emission at Antenna Terminals	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	L, M,H
	Test Mode	TM1/TM2/TM3
Field Strength of Spurious Radiation	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	PK
	RF Channels (TX)	M
	Test Mode	TM1/TM2/TM3/TM4TM5
Frequency Stability	Test Configuration	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VN and VH of Rated Voltage at Ambient Temperature.
	Test Setup	Test Setup 2
	RF Channels (TX)	M



Test Case	Test Conditions	
	Test Mode	TM1/TM2/TM3

6 Main Test Instruments

Table 3 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sept., 27,2013
Universal Radio Communication Tester	R&S	CMU200	117341	Jan., 12,2013
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug., 30,2013
Spectrum Analyzer	Agilent	E4440A	MY49420179	Jul., 17,2013
Signal Analyzer	R&S	FSQ31	200021	Sept., 27,2013
Temperature Chamber	WEISS	WKL64	24600294	Feb.,13,2013
Signal generator	Agilent	E8257D	MY49281095	Jul.,09,2013
Spectrum analyzer	R&S	FSU3	200474	Mar., 05, 2013
Spectrum analyzer	R&S	FSU43	100144	Mar., 05, 2013
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	Apr., 05, 2013
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100391	Apr., 05, 2013
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-521	Jul., 07, 2013
Pyramidal Horn Antenna(26GHz-40GHz)	ETS-Lindgren	3160-10	00123940	Feb., 27, 2013
Pyramidal Horn Antenna(18GHz-26.5GHz)	ETS-Lindgren	3160-09	00125912	Feb., 27, 2013

Note: All the equipments are calibrated once a year. When it's almost due, we will arrange calibration again before the calibration deadline.

7 Test Results

No.	Test Item	Test Result
1	Transmitter Output Power	Appendix A
2	Modulation Characteristics	Appendix B
3	Occupied Bandwidth	Appendix C
4	Band Edges Compliance	Appendix D
5	Spurious Emission at Antenna Terminals	Appendix E
6	Radiated spurious emission	Appendix F
7	Frequency Stability	Appendix G
8	Photos of Test Setup	Appendix H

NOTE: There is no test data in Appendix H, only Photos of Test Setup for Field Strength of Spurious Radiation.

8 Measurement Uncertainty

For a 95% confidence level (k=2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmitter Output Power	Power (dBm)	U =0.39 dB
Occupied Bandwidth	Magnitude (%)	U=0.2%
Band Edge Compliance	Disturbance Power (dBm)	U=2.0 dB
Conducted Spurious Emissions	Disturbance Power (dBm)	U=2.0 dB
Field Strength of Spurious Radiation	ERP (dBm)	U=4.6 dB (30 MHz – 1GHz) U=3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy (ppm)	U=0.21 ppm

-----The END-----



Appendix A

Transmitter Output Power According to FCC Part 2.1046 & Part24.232



Conducted Power of Transmitter

TEST CONDITIONS		RF Output Power (Conducted)					
		Channel512(L)		Channel661(M)		Channel810(H)	
		1850.2MHz		1880.0MHz		1909.8MHz	
		dBm		dBm		dBm	
T_{nom} / V_{nom}		Measured	Limit	Measured	Limit	Measured	Limit
TM1		29.35	33	29.38	33	29.27	33
TM2		26.13	33	26.07	33	25.97	33
TEST CONDITIONS		Channel9262(L)		Channel9400(M)		Channel9538(H)	
		1852.4MHz		1880.0MHz		1907.6MHz	
		dBm		dBm		dBm	
		T_{nom} / V_{nom}		Measured	Limit	Measured	Limit
TM3		22.37	33	21.88	33	22.25	33
TM4	Case1	22.23	33	21.81	33	22.22	33
	Case2	22.01	33	21.62	33	21.87	33
	Case3	21.42	33	20.98	33	21.27	33
	Case4	21.43	33	21.01	33	21.28	33
TM5	Case1	21.97	33	20.87	33	21.48	33
	Case2	20.14	33	19.84	33	20.34	33
	Case3	20.62	33	20.33	33	20.42	33
	Case4	20.73	33	20.46	33	20.37	33
	Case5	21.62	33	21.12	33	21.52	33

Note: RBW > emission bandwidth, VBW > 3 x RBW.



Peak-to-Average Ratio

TEST CONDITIONS		Peak-to-Average Ratio					
		Channel512(L)		Channel661(M)		Channel810(H)	
		1850.2MHz		1880.0MHz		1909.8MHz	
		dB		dB		dB	
T_{nom} / V_{nom}		Measured	Limit	Measured	Limit	Measured	Limit
TM1		0.2	13	0.3	13	0.3	13
TM2		3.3	13	3.2	13	3.4	13
TEST CONDITIONS		Channel9262(L)		Channel9400(M)		Channel9538(H)	
		1852.4MHz		1880.0MHz		1907.6MHz	
		dB		dB		dB	
		T_{nom} / V_{nom}		Measured	Limit	Measured	Limit
TM3		2.86	13	3.01	13	2.82	13
TM4	Case1	2.38	13	2.52	13	2.44	13
	Case2	2.24	13	2.35	13	2.30	13
	Case3	2.18	13	2.09	13	2.01	13
	Case4	2.02	13	2.21	13	2.15	13
TM5	Case1	2.36	13	2.44	13	2.46	13
	Case2	2.09	13	2.06	13	2.01	13
	Case3	2.21	13	2.29	13	2.17	13
	Case4	2.04	13	2.21	13	1.98	13
	Case5	2.33	13	2.37	13	2.31	13



Effective Isotropic Radiated Power of Transmitter (EIRP)

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBi]	Cable Loss [dB]	Substitution Level (EIRP)	FCC limit [dBm]	Result
							[dBm]		
TM1	1850.2	29.56	Horn Ant.	26.05	4.5	1	29.55	33	Pass
TM1	1880.0	29.59	Horn Ant.	26.05	4.5	1	29.55	33	Pass
TM1	1909.8	29.48	Horn Ant.	25.67	4.8	1	29.47	33	Pass
TM2	1850.2	26.34	Horn Ant.	22.82	4.5	1	26.32	33	Pass
TM2	1880.0	26.28	Horn Ant.	22.77	4.5	1	26.27	33	Pass
TM2	1909.8	26.18	Horn Ant.	22.31	4.8	1	26.11	33	Pass
TM3	1852.4	22.58	Horn Ant.	19.07	4.5	1	22.57	33	Pass
TM3	1880.0	22.09	Horn Ant.	18.51	4.5	1	22.01	33	Pass
TM3	1907.6	22.46	Horn Ant.	18.63	4.8	1	22.43	33	Pass

Note1: a, For getting the EIRP (Efficient Isotropic Radiated Power) in substitution method, the following formula should be taken to calculate it,

$$\text{EIRP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBi]}$$

b, SGP=Signal Generator Level

Note2: RBW > emission bandwidth, VBW > 3 x RBW.

-----The END-----




Appendix B

Modulation Characteristics

According to FCC Part 2.1047 & Part24 Subpart E




TM1:GPRS/GSM Channel 661

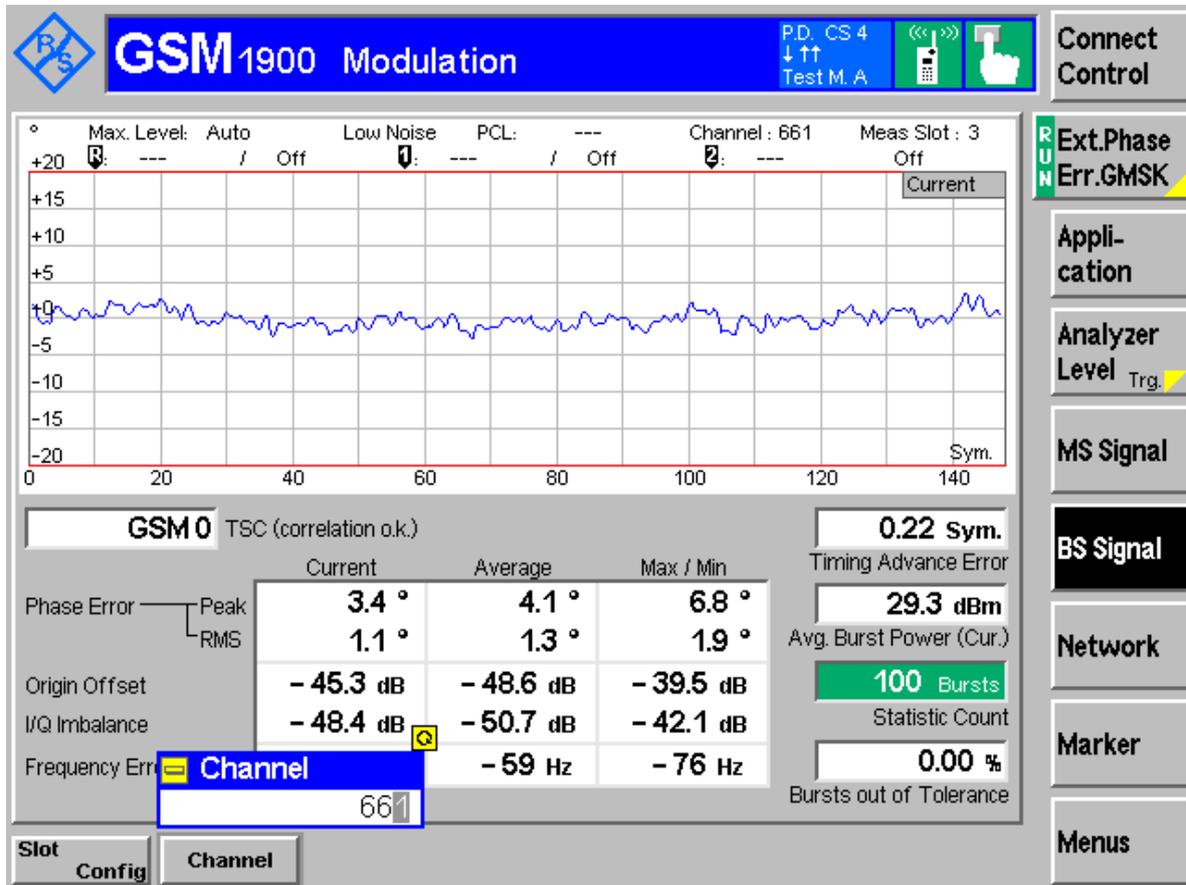




TM2:EDGE Channel 661

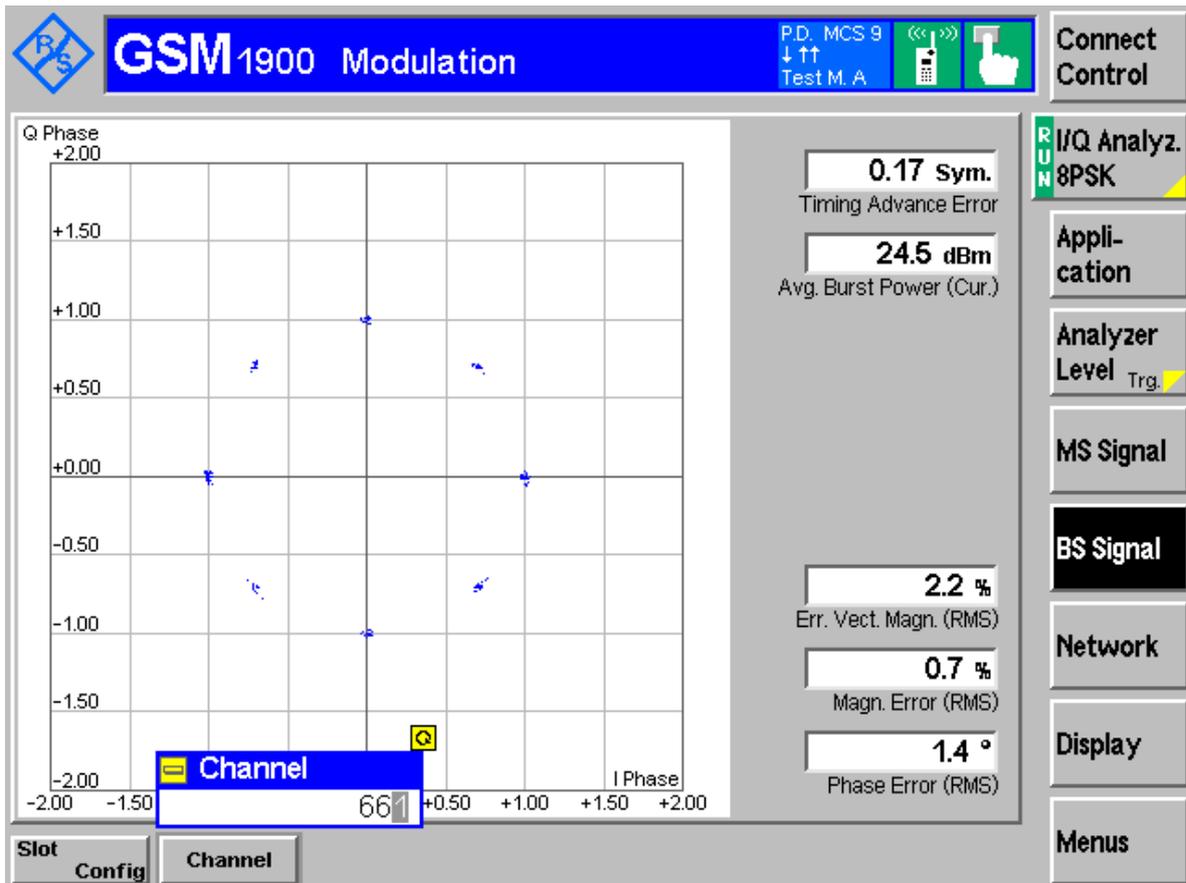



TM3: WCDMA Channel 9400

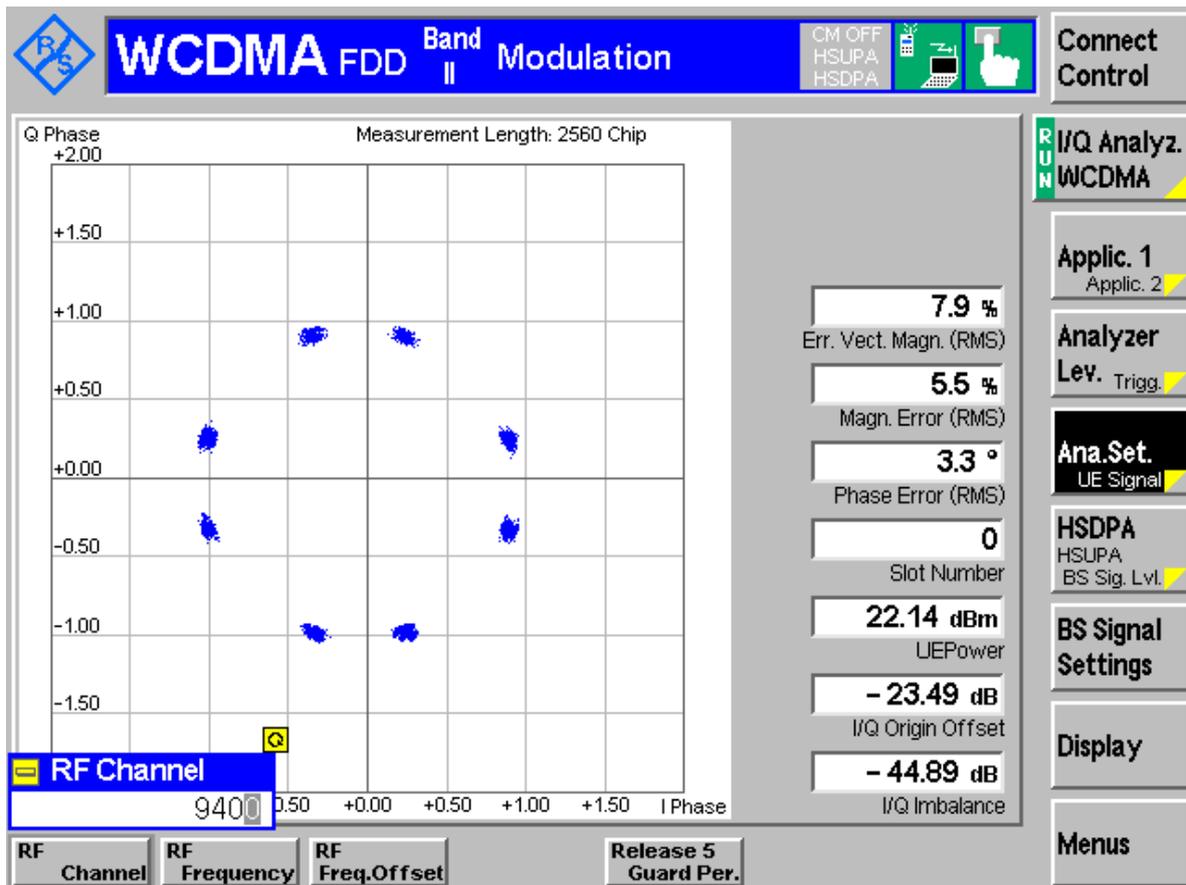

-----The END-----



Appendix C

Occupied Bandwidth According to FCC Part 2.1049 & Part24 Subpart E




Result Table

Table 1 Measurement Results

Test Mode	RF Channel	Occupied Bandwidth [kHz]	Verdict
TM1	512	245.19	Pass
	661	246.79	Pass
	810	246.79	Pass
TM2	512	251.60	Pass
	661	241.99	Pass
	810	243.59	Pass
Test Mode	RF Channel	Occupied Bandwidth [MHz]	Verdict
TM3	9262	4.18	Pass
	9400	4.18	Pass
	9538	4.18	Pass




TM1:GPRS/GSM Channel 512

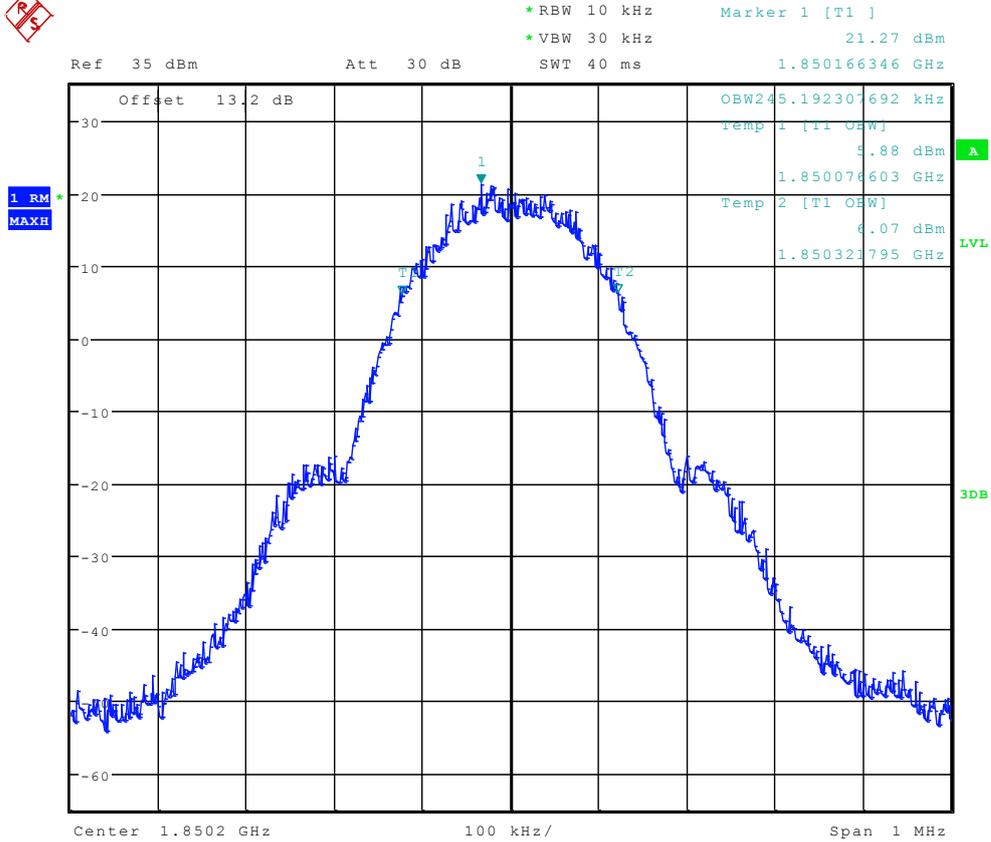

Date: 14.OCT.2012 10:48:58




TM2:EDGE Channel 512

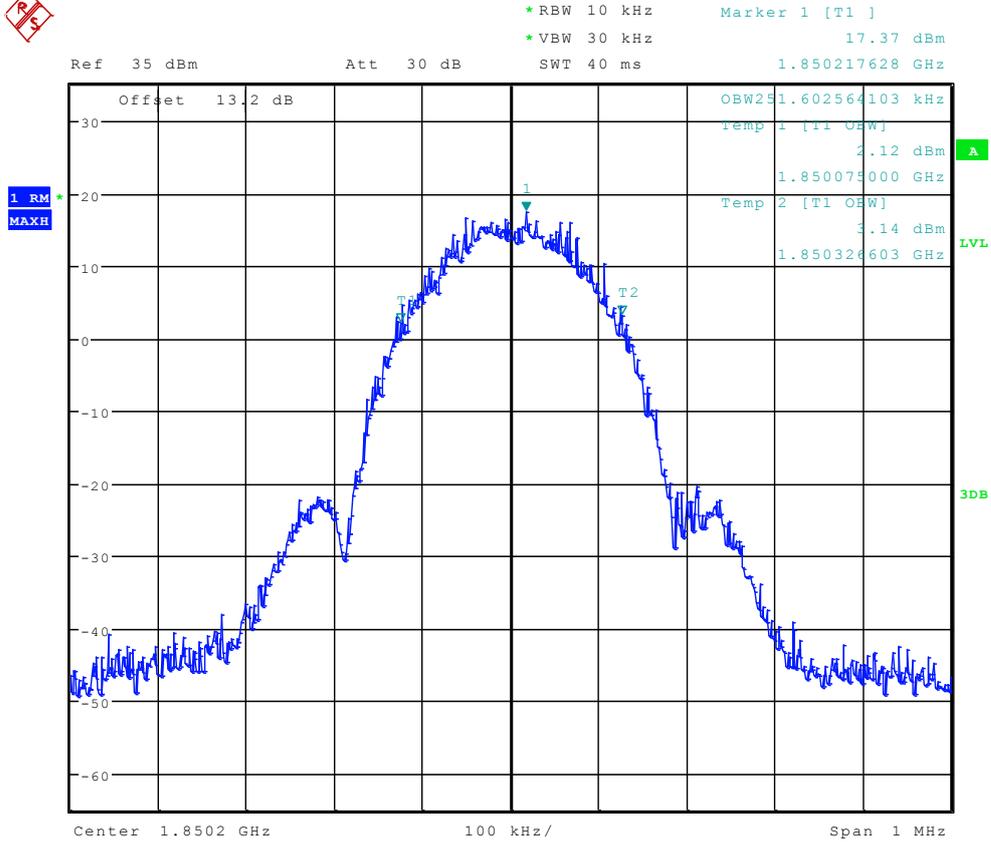

Date: 14.OCT.2012 10:55:20




TM3: WCDMA Channel 9400

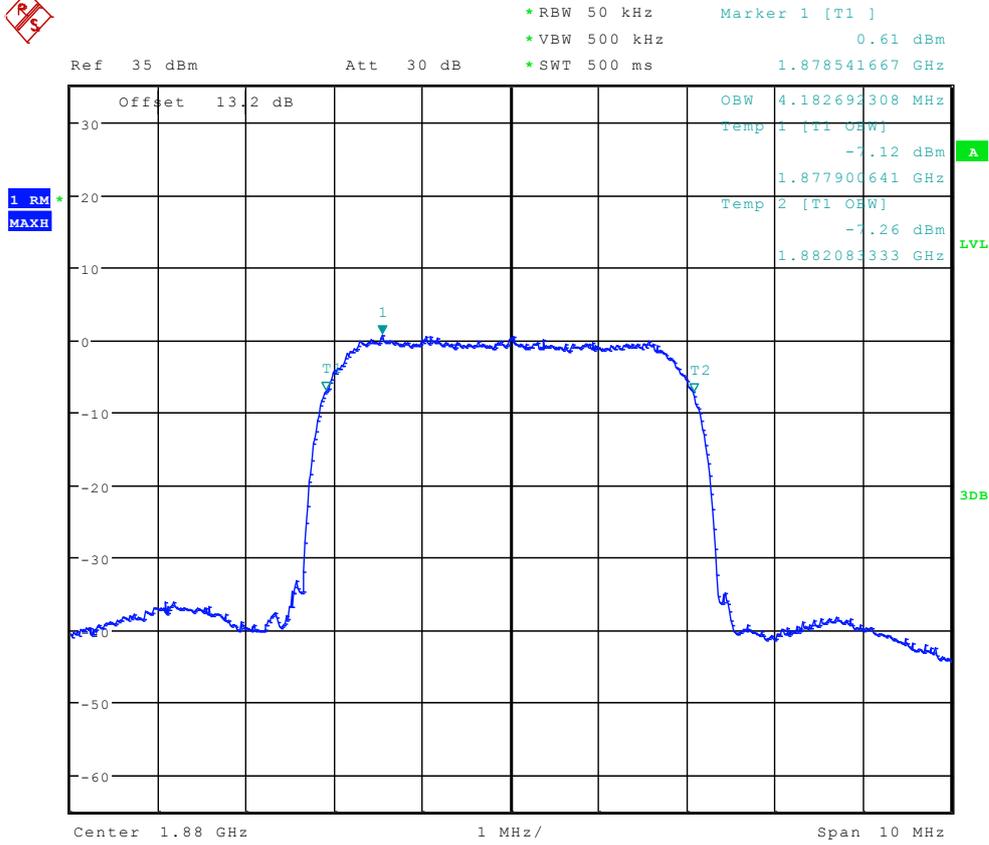

Date: 14.OCT.2012 10:59:44



TM1:GPRS/GSM Channel 810

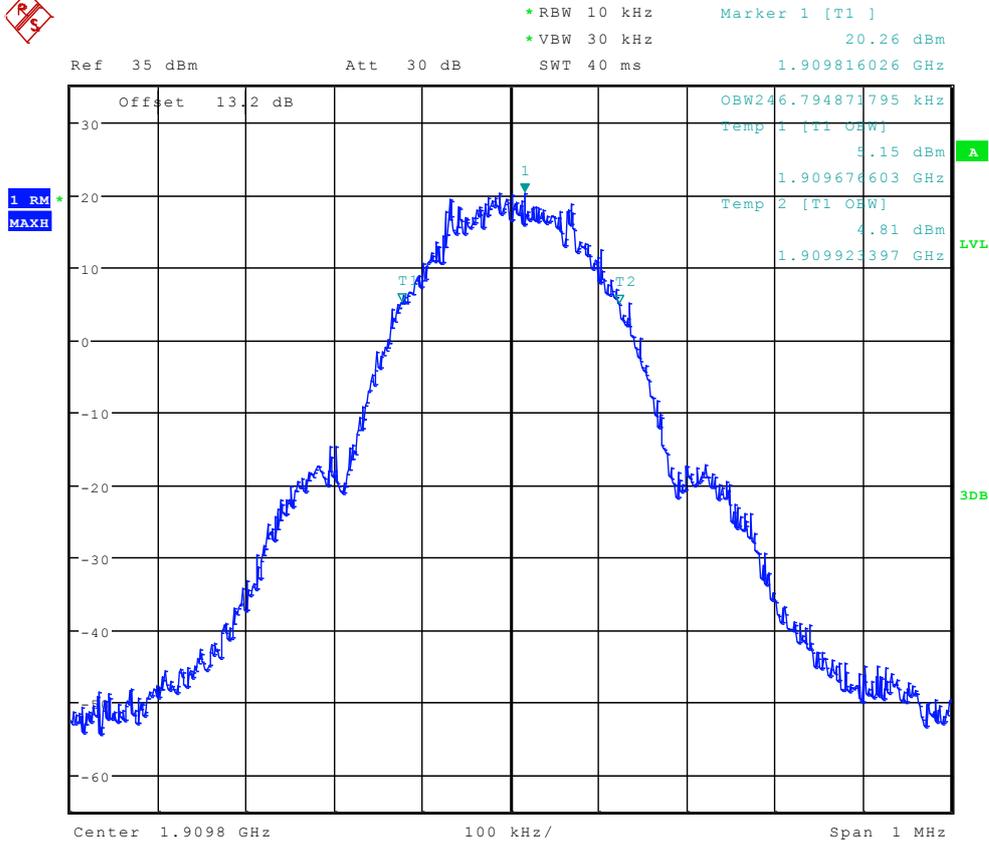


Date: 14.OCT.2012 10:49:25



TM2:EDGE Channel 810



Ref 35 dBm Att 30 dB SWT 40 ms
 *RBW 10 kHz Marker 1 [T1] 17.19 dBm
 *VBW 30 kHz 1.909814423 GHz

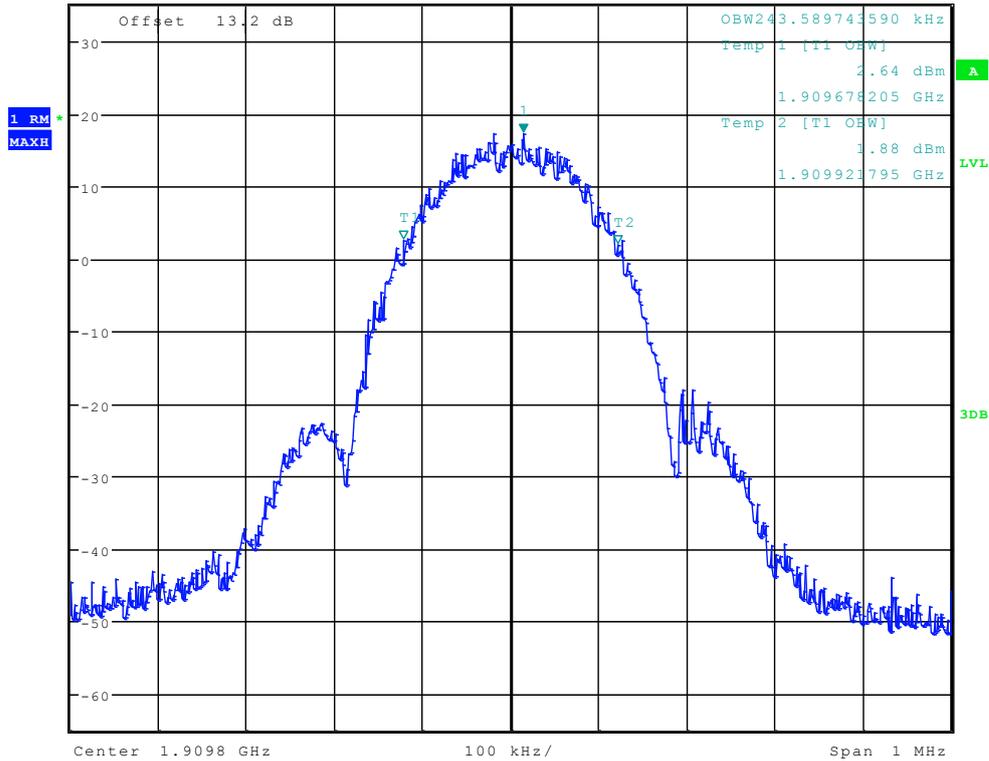


Date: 14.OCT.2012 10:55:48



TM3: WCDMA Channel 9538



Ref 35 dBm Att 30 dB *RBW 50 kHz Marker 1 [T1] 0.92 dBm
 *VBW 500 kHz 1.907616026 GHz
 *SWT 500 ms

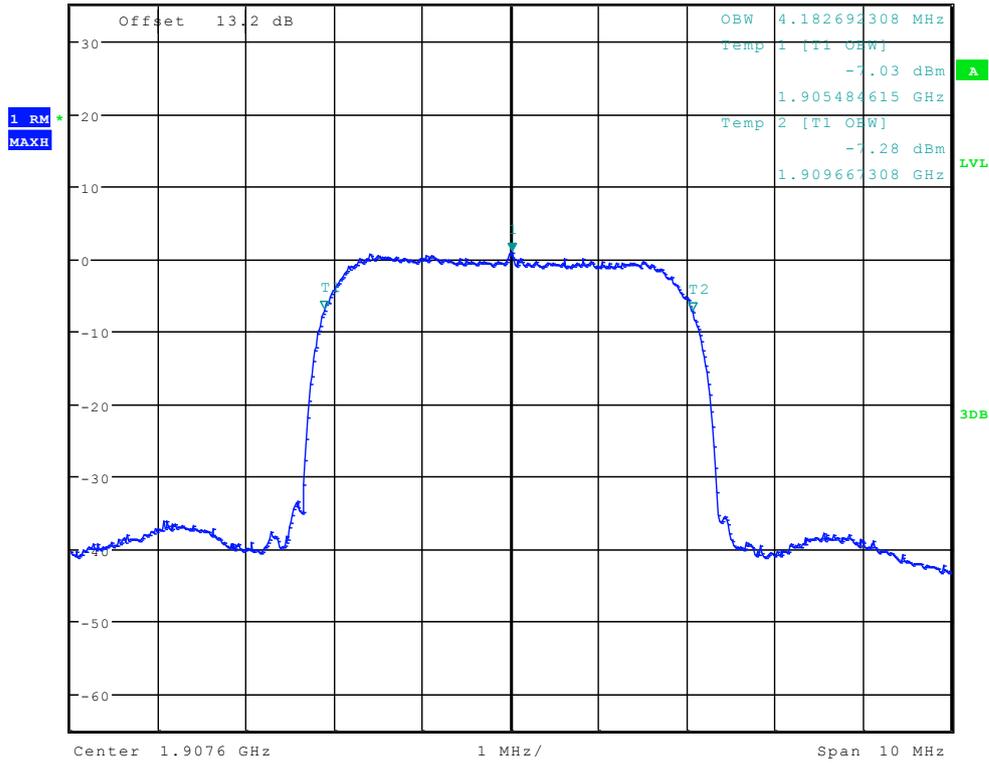

Date: 14.OCT.2012 10:59:58

The END



Appendix D


Band Edges Compliance According to FCC Part 2.1051 & Part24 Subpart E



TM1:GPRS/GSM

Left Edge

Channel 512

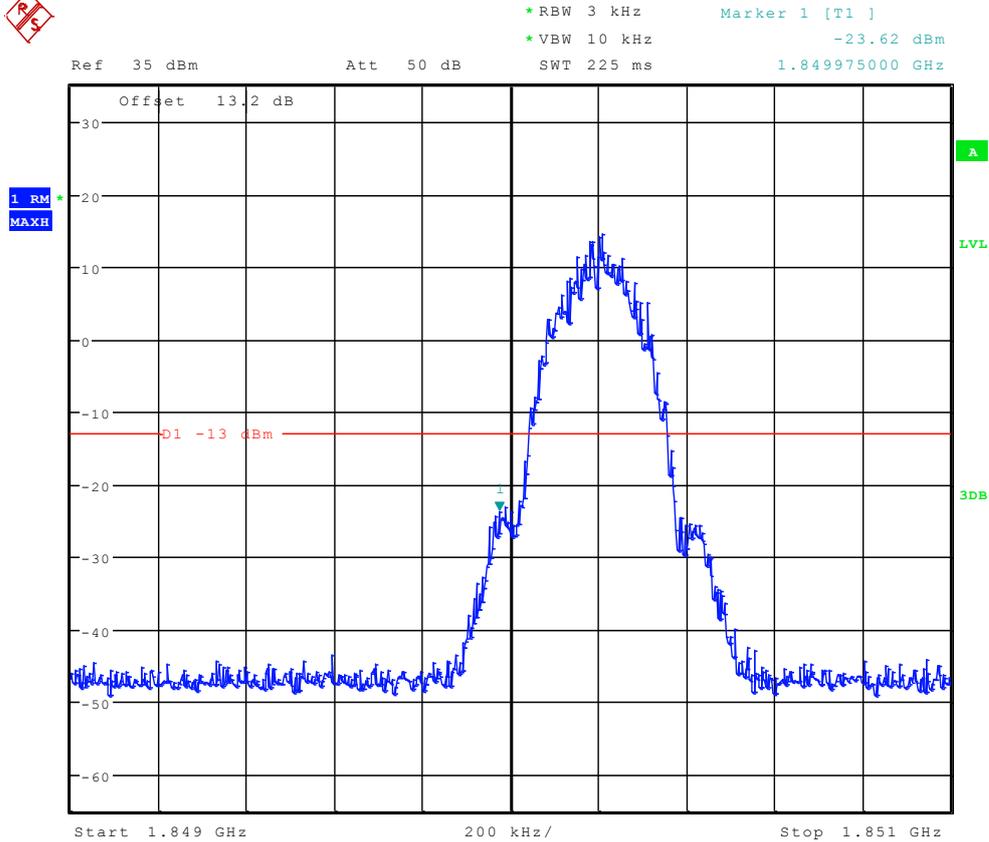


Date: 14.OCT.2012 10:52:04



Right Edge Channel 810



Ref 35 dBm Att 50 dB SWT 225 ms
*RBW 3 kHz *VBW 10 kHz
Marker 1 [T1] -22.25 dBm
1.910020000 GHz

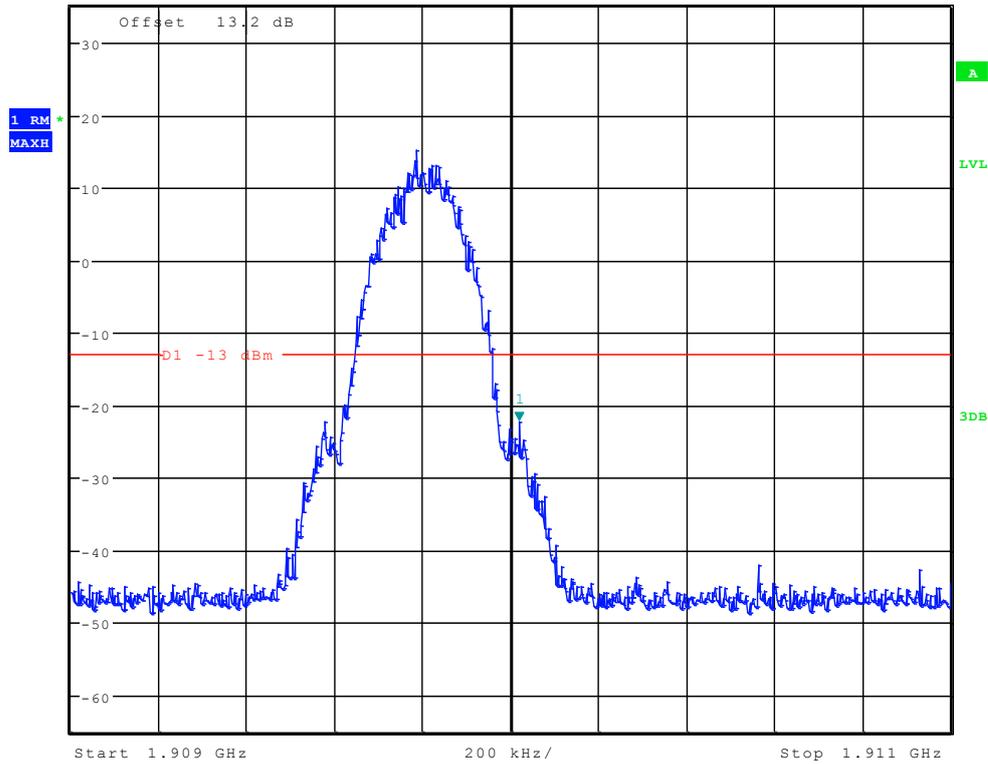


Date: 14.OCT.2012 10:52:32



TM2:EDGE

Left Edge

Channel 512

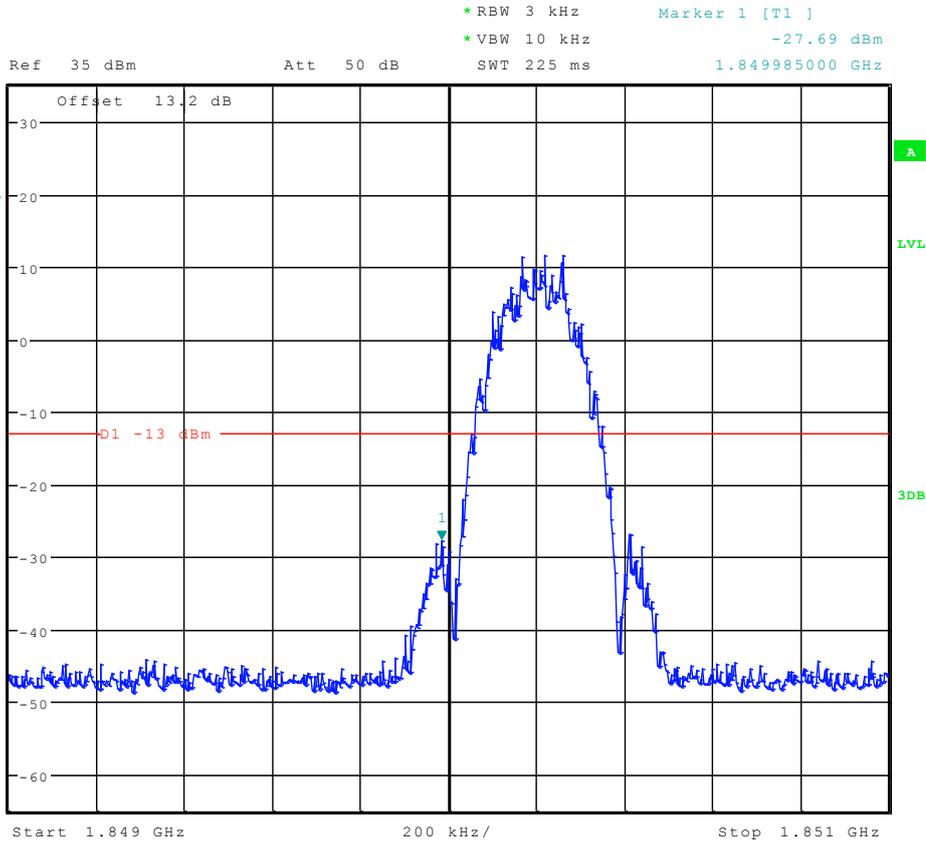


Date: 14.OCT.2012 10:54:31



Right Edge Channel 810



Ref 35 dBm Att 50 dB RBW 3 kHz Marker 1 [T1] -26.96 dBm
VBW 10 kHz SWT 225 ms 1.910035000 GHz

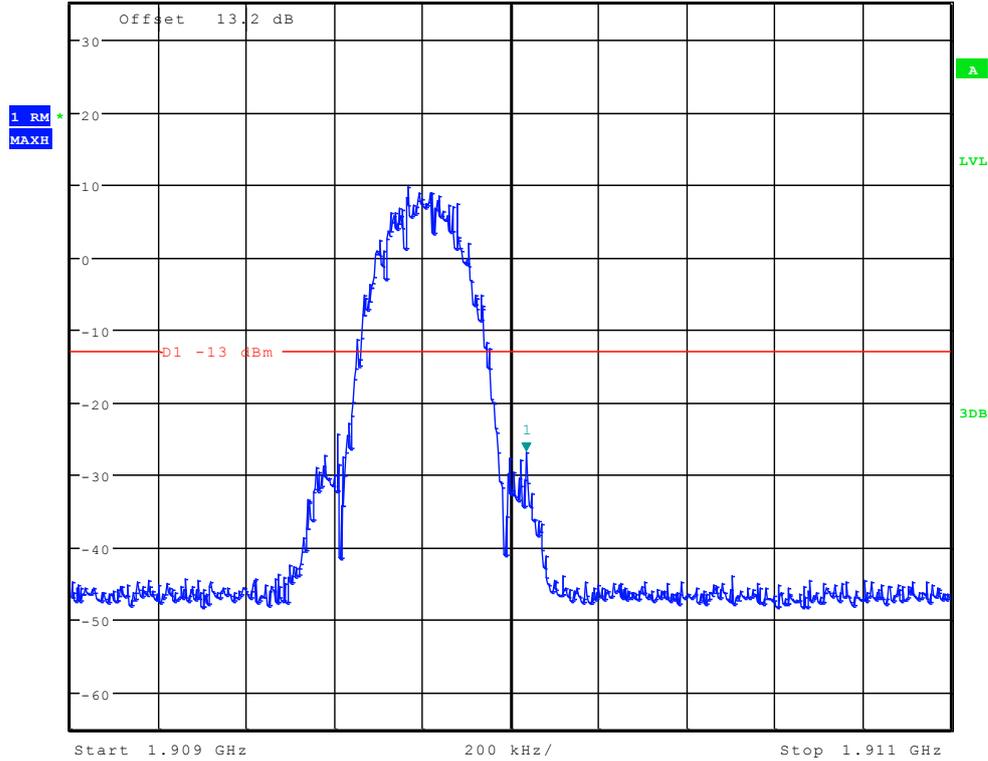


Date: 14.OCT.2012 10:55:06



TM3: WCDMA

Left Edge


Channel 9262

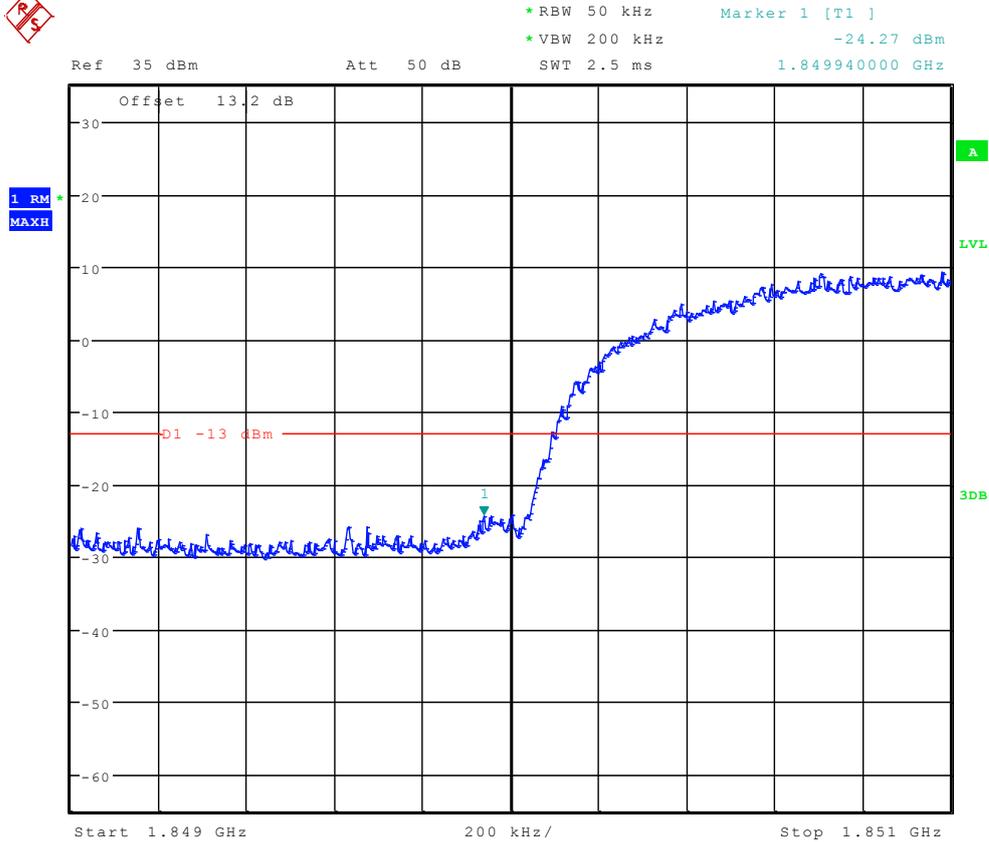

Date: 14.OCT.2012 11:00:12



Right Edge Channel 9538

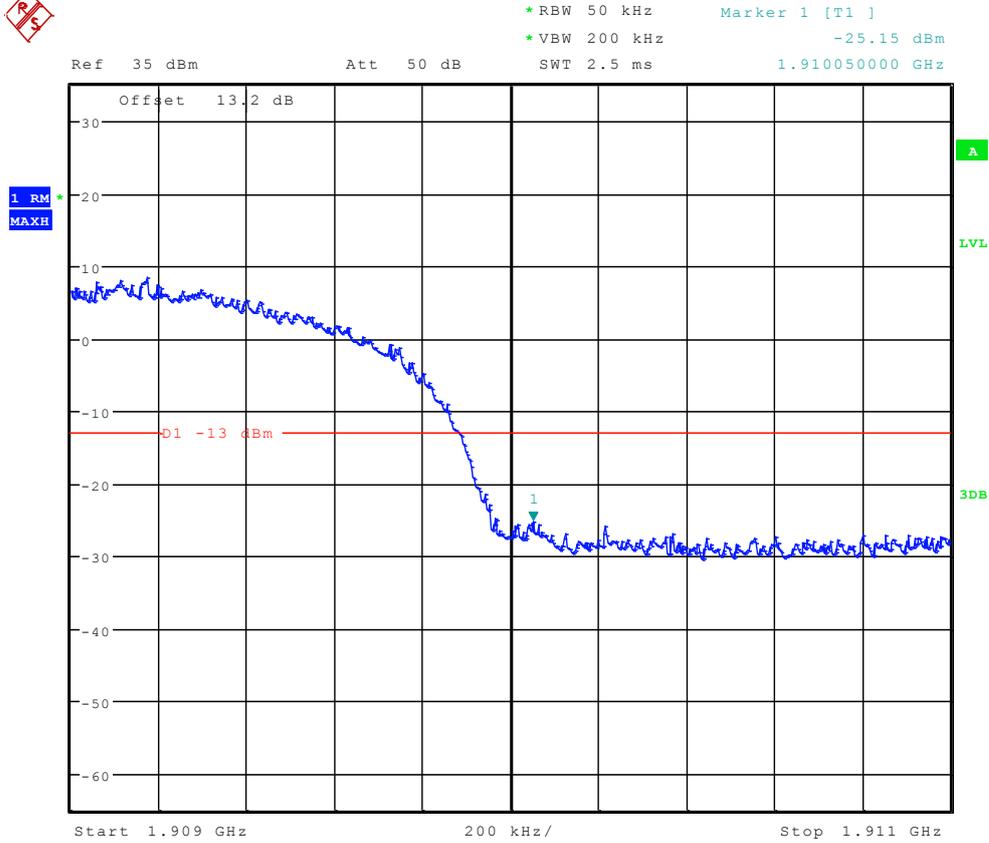

Date: 14.OCT.2012 11:00:26

The END



Appendix E

Spurious Emission at Antenna Terminal


According to FCC Part 2.1051 & Part24 Subpart E



TM1:GPRS/GSM Channel 512




*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -48.29 dBm
Ref 35 dBm *Att 35 dB SWT 145 ms 34.985576923 kHz

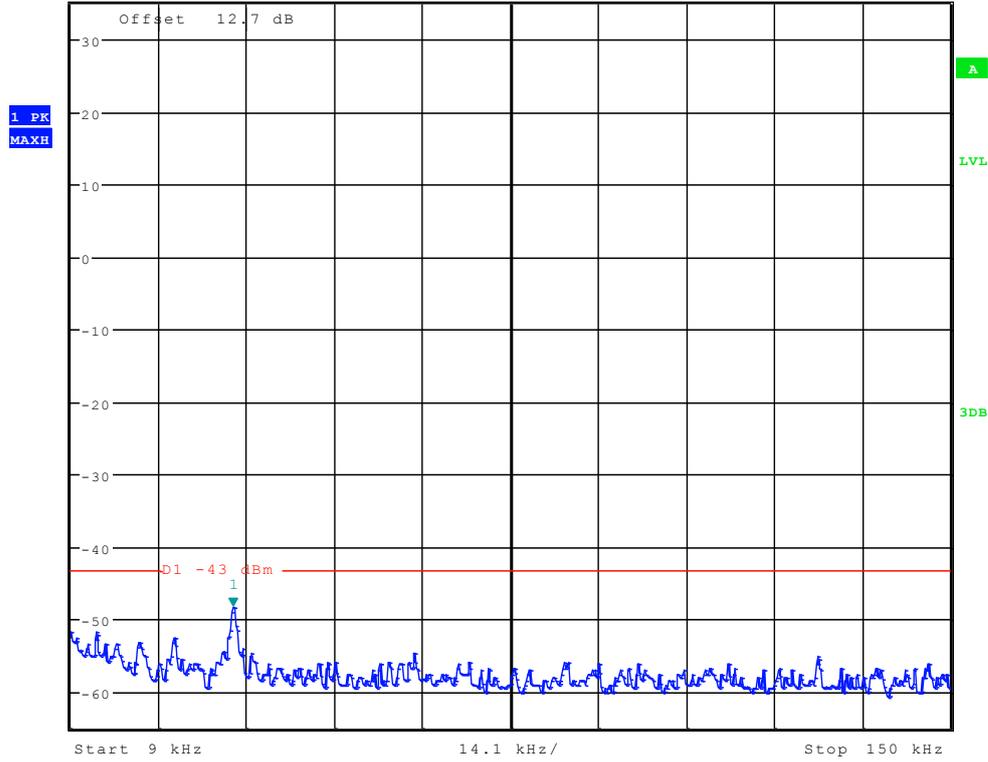

Date: 14.OCT.2012 10:49:40




* RBW 10 kHz Marker 1 [T1]
 * VBW 30 kHz -37.40 dBm
 Ref 35 dBm * Att 35 dB SWT 300 ms 915.384615385 kHz

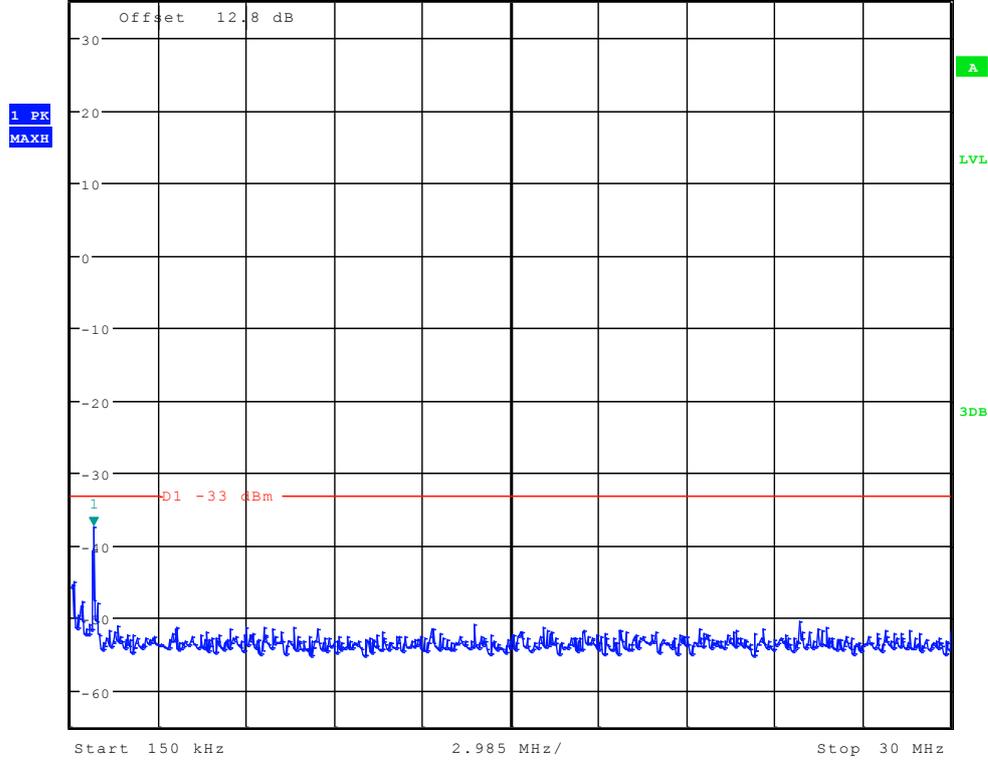

Date: 14.OCT.2012 10:50:24



Ref 35 dBm * Att 35 dB SWT 115 ms * RBW 1 MHz Marker 1 [T1] 24.56 dBm
* VBW 3 MHz 1.822179487 GHz

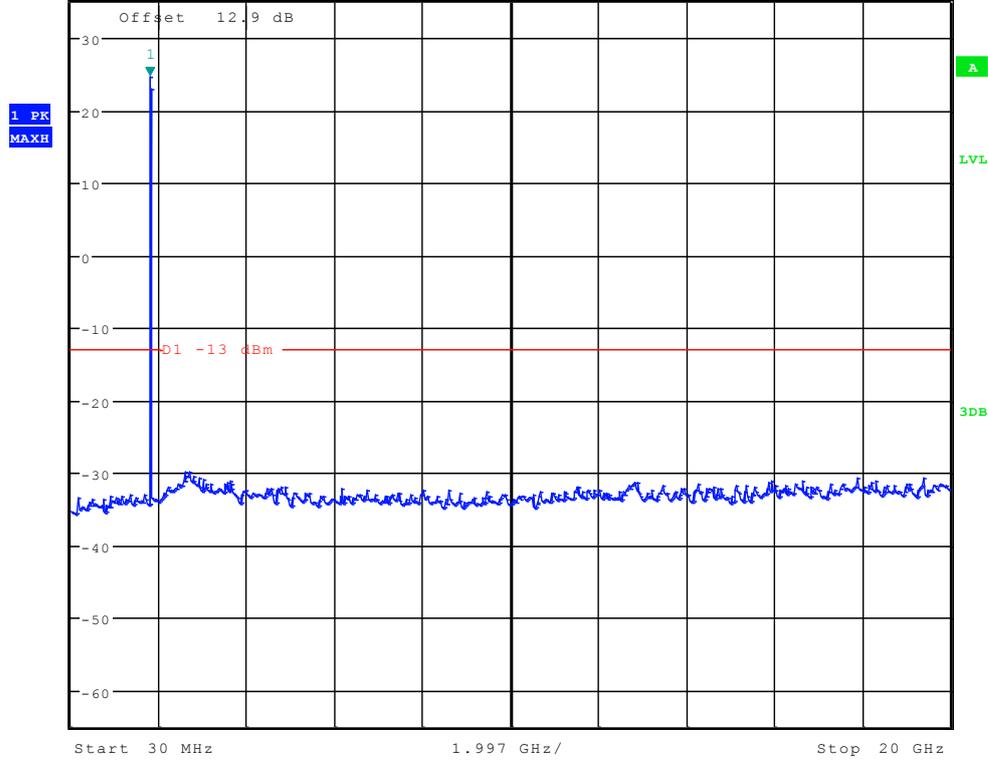


Date: 14.OCT.2012 10:51:08



Channel 661




Ref 35 dBm * Att 35 dB * RBW 1 kHz Marker 1 [T1] -48.96 dBm
 * VBW 10 kHz SWT 145 ms 34.985576923 kHz

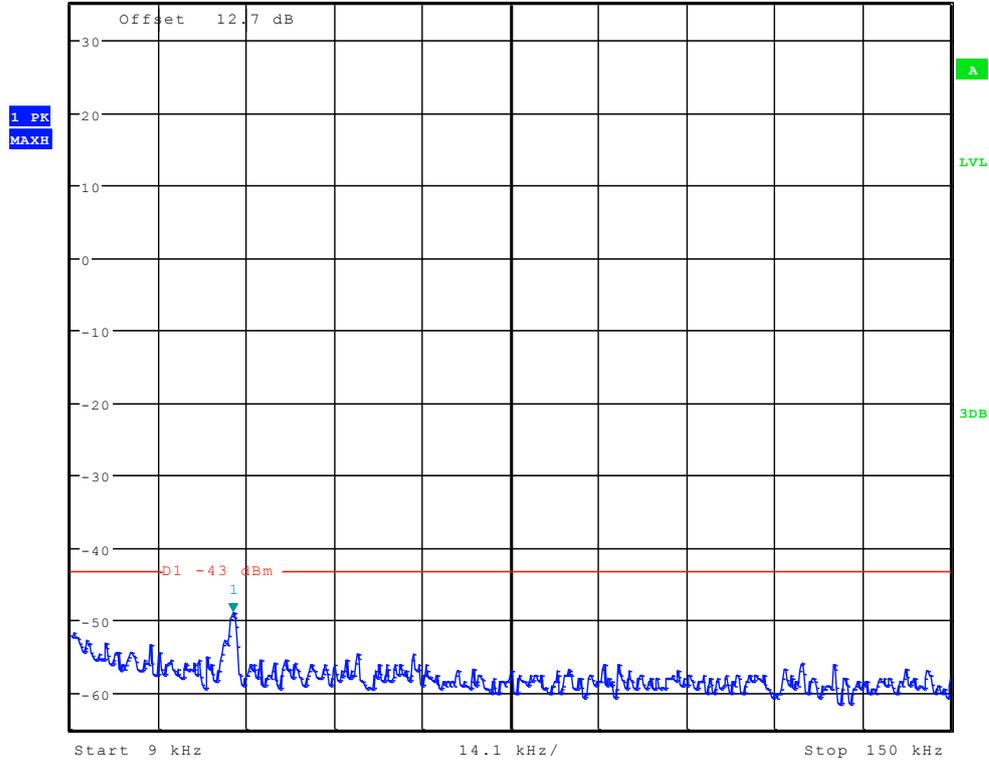

Date: 14.OCT.2012 10:49:54




* RBW 10 kHz Marker 1 [T1]
 * VBW 30 kHz -36.29 dBm
 Ref 35 dBm * Att 35 dB SWT 300 ms 915.384615385 kHz

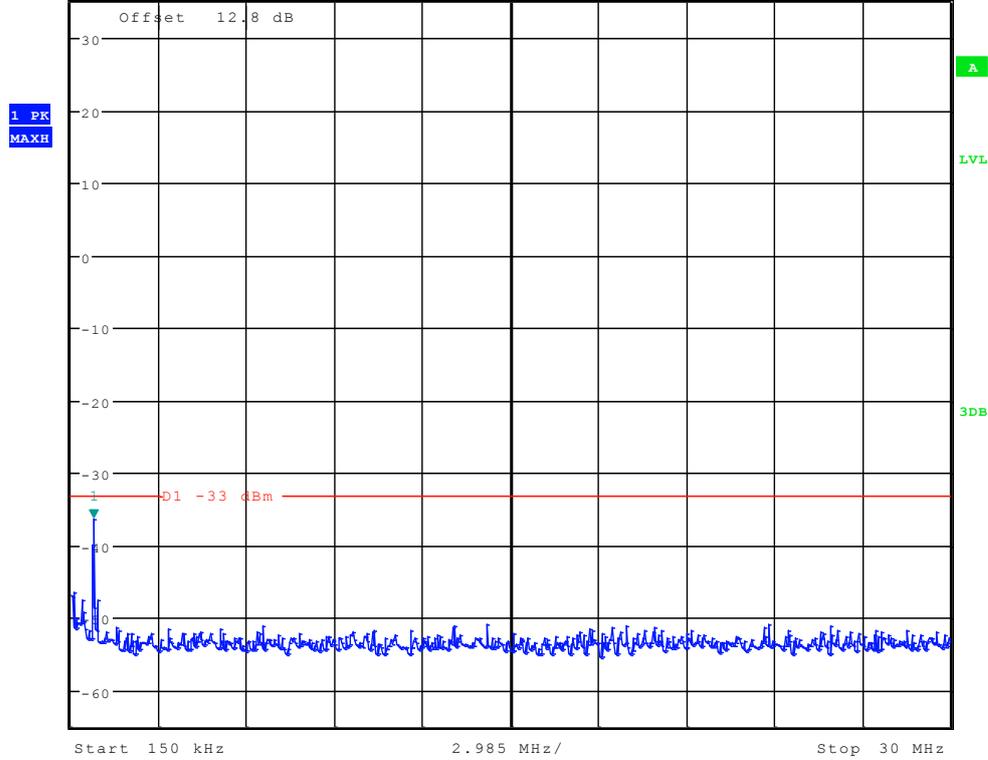

Date: 14.OCT.2012 10:50:38




Ref 35 dBm * Att 35 dB SWT 115 ms * RBW 1 MHz Marker 1 [T1] 24.12 dBm
* VBW 3 MHz 1.854182692 GHz

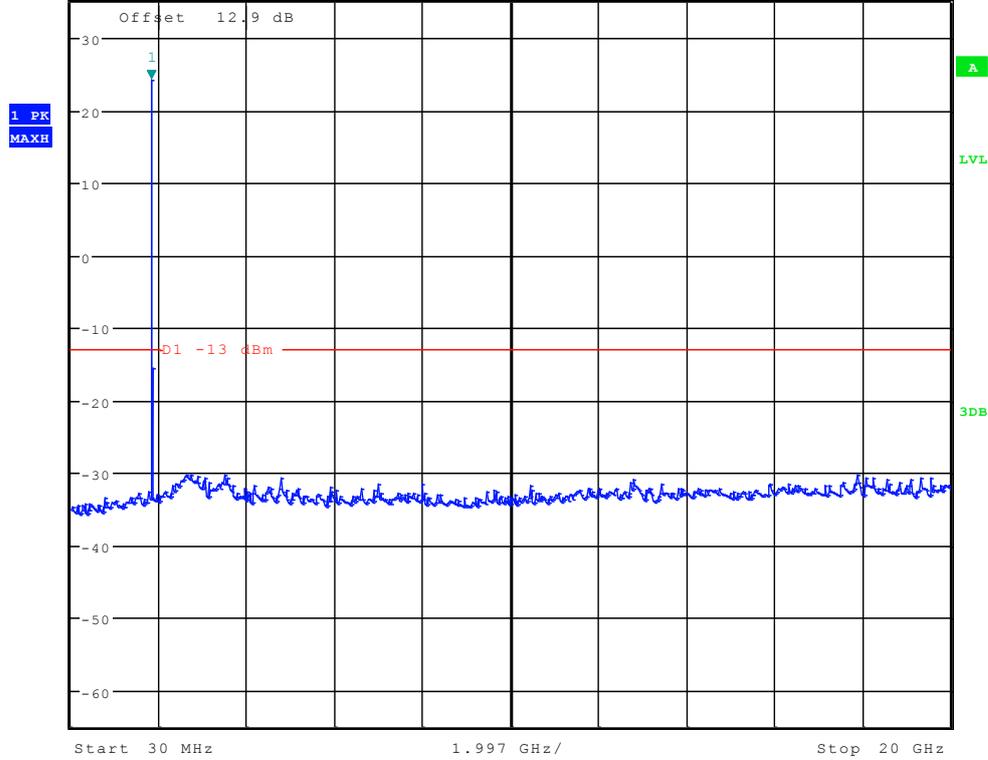

Date: 14.OCT.2012 10:51:22




Channel 810

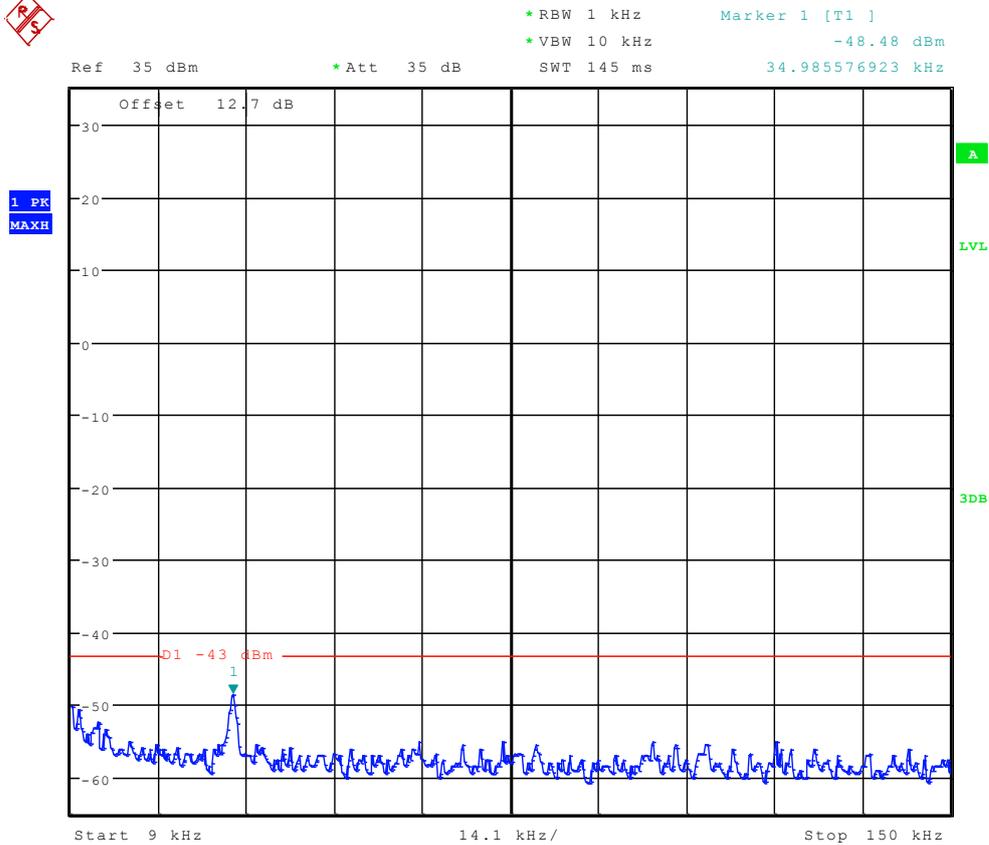

Date: 14.OCT.2012 10:50:09




* RBW 10 kHz Marker 1 [T1]
 * VBW 30 kHz -36.82 dBm
 Ref 35 dBm * Att 35 dB SWT 300 ms 915.384615385 kHz

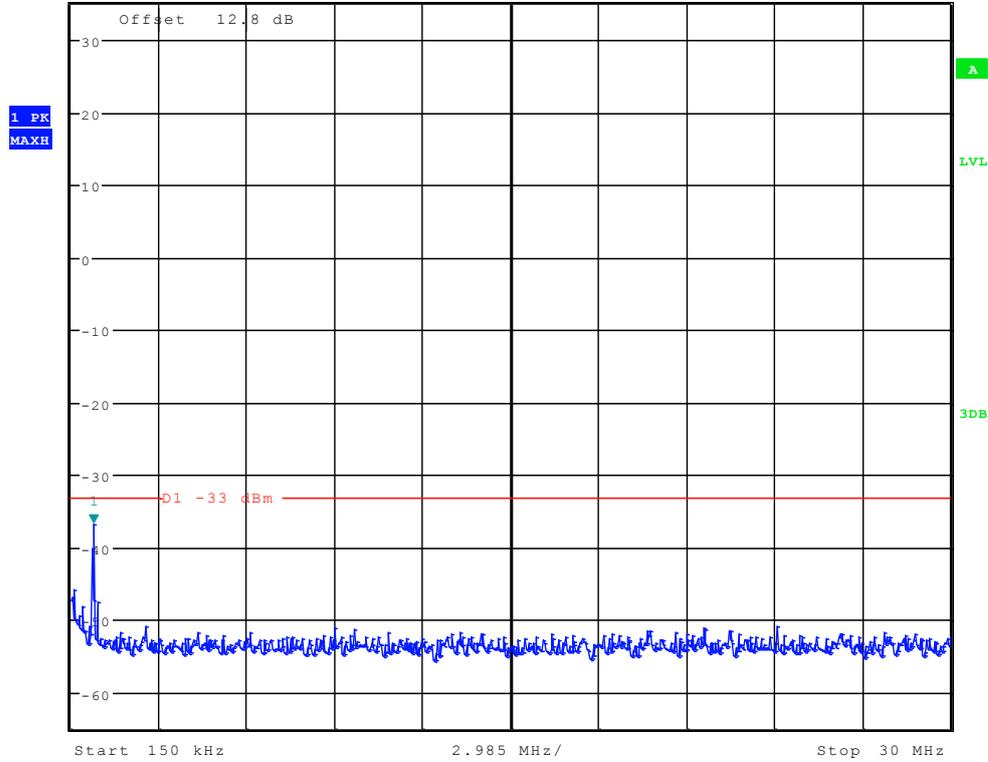

Date: 14.OCT.2012 10:50:53



Ref 35 dBm * Att 35 dB SWT 115 ms
 * RBW 1 MHz Marker 1 [T1] 24.14 dBm
 * VBW 3 MHz 1.886185897 GHz

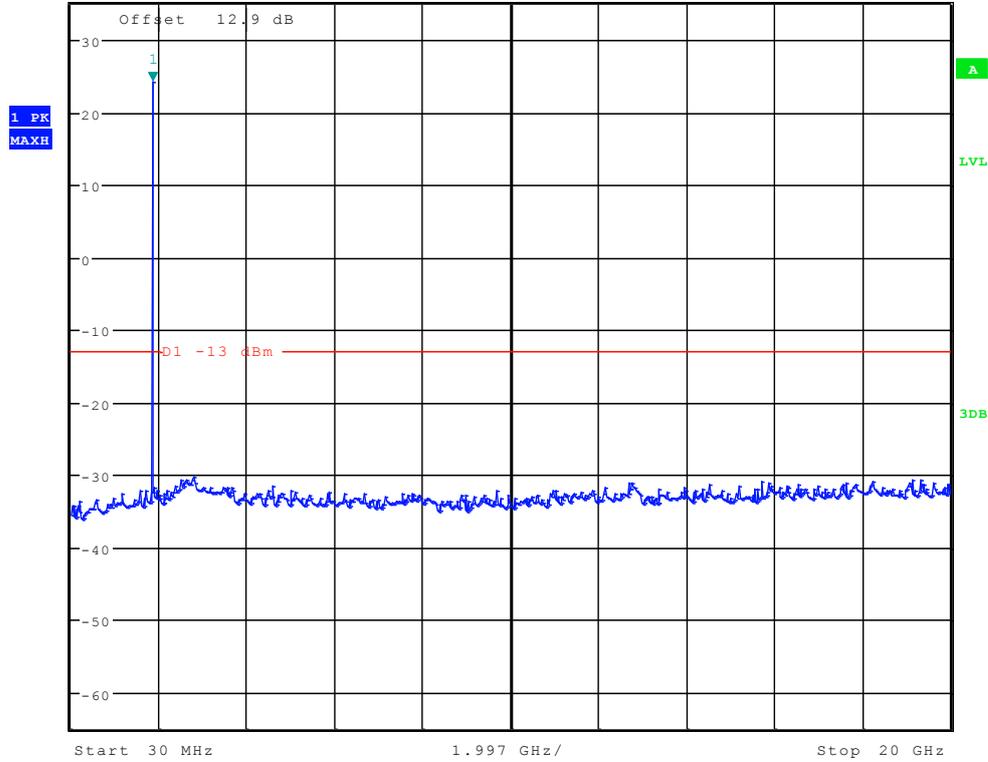


Date: 14.OCT.2012 10:51:36



TM2:EDGE Channel 512




*RBW 1 kHz Marker 1 [T1]
 *VBW 10 kHz -51.12 dBm
 Ref 35 dBm *Att 35 dB SWT 145 ms 9.225961538 kHz

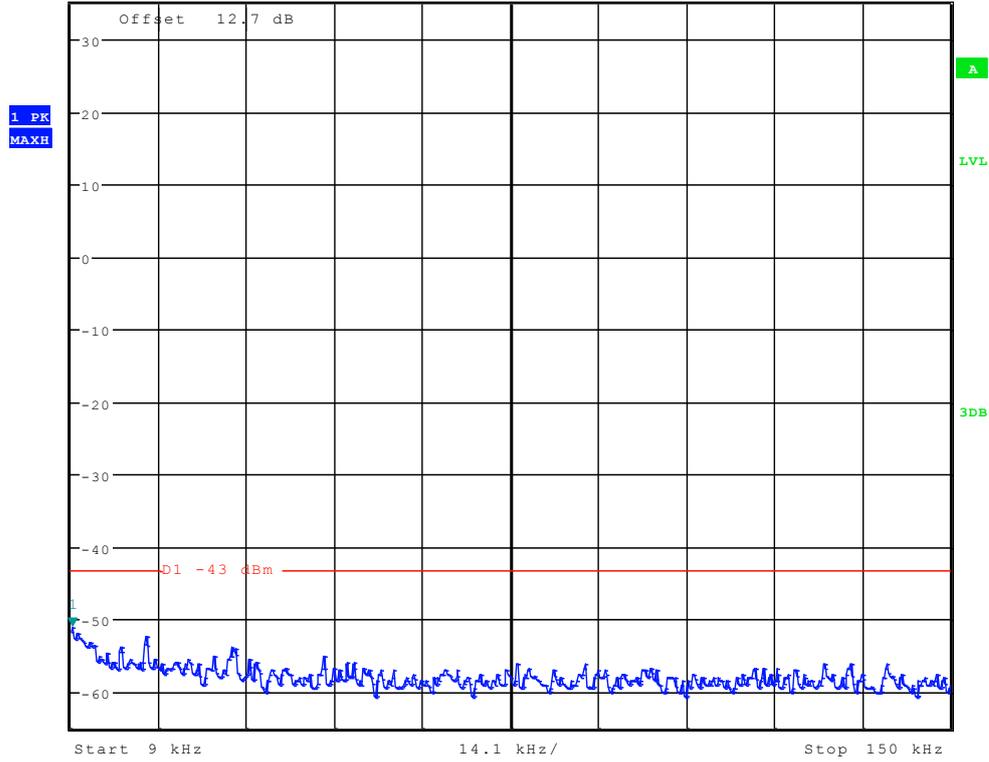

Date: 14.OCT.2012 10:56:02




* RBW 10 kHz Marker 1 [T1]
 * VBW 30 kHz -46.00 dBm
 Ref 35 dBm * Att 35 dB SWT 300 ms 197.836538462 kHz

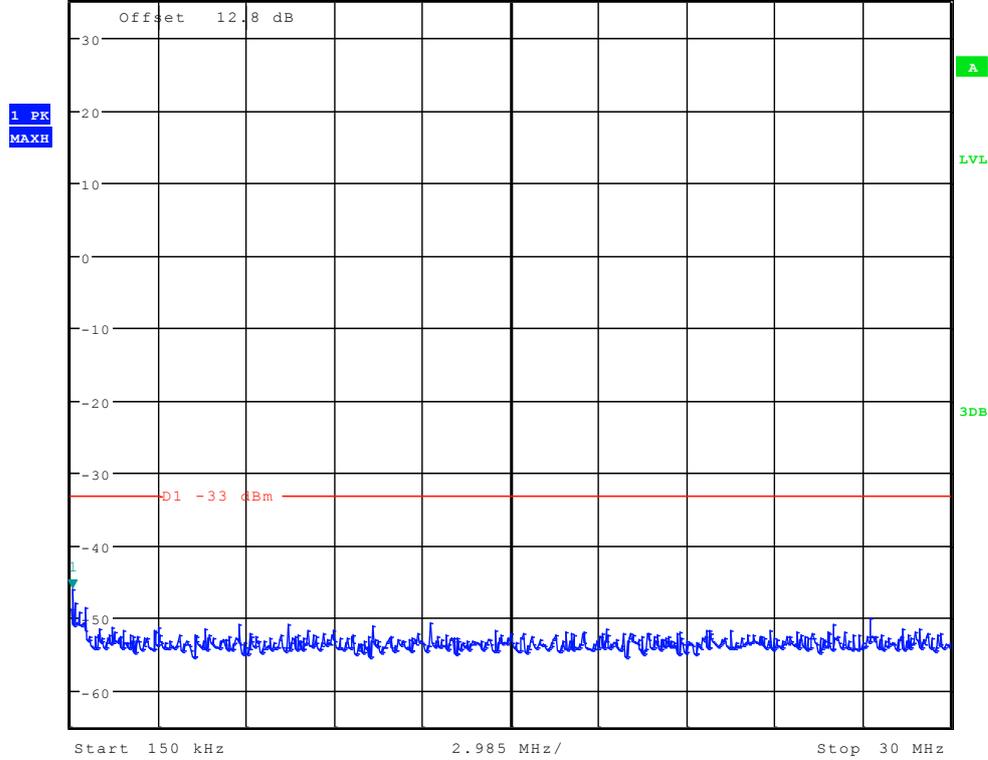

Date: 14.OCT.2012 10:56:46



Ref 35 dBm * Att 35 dB SWT 115 ms * RBW 1 MHz Marker 1 [T1] 23.71 dBm
* VBW 3 MHz 1.822179487 GHz

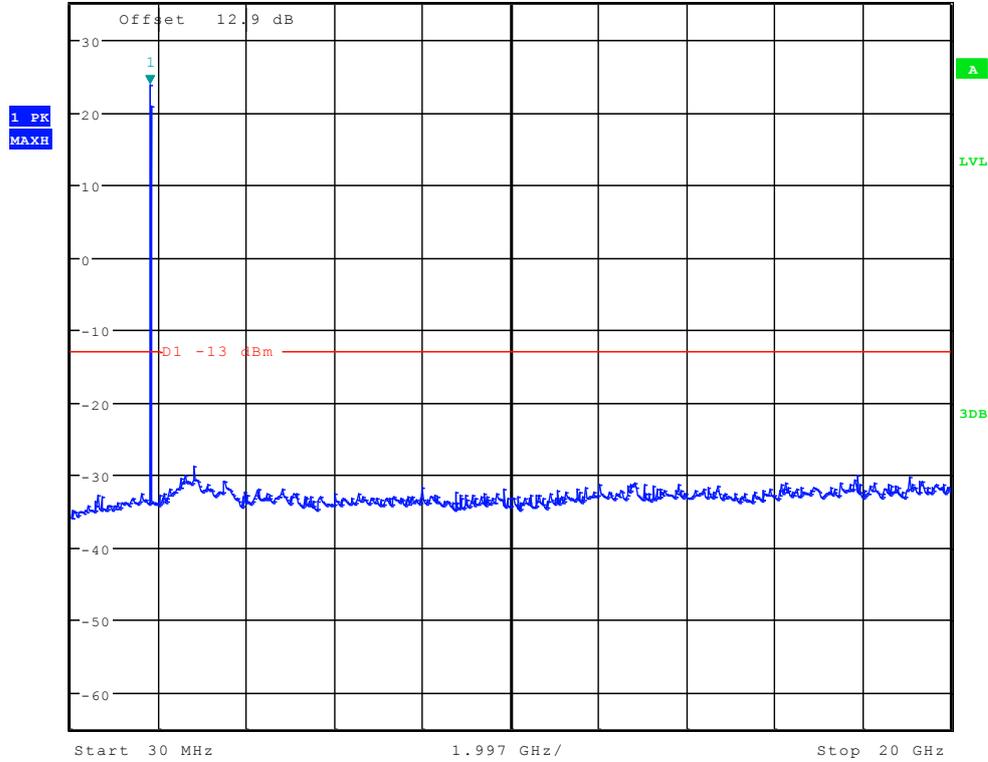


Date: 14.OCT.2012 10:57:30



Channel 661




Ref 35 dBm * Att 35 dB * RBW 1 kHz Marker 1 [T1] -49.47 dBm
 * VBW 10 kHz SWT 145 ms 11.937500000 kHz

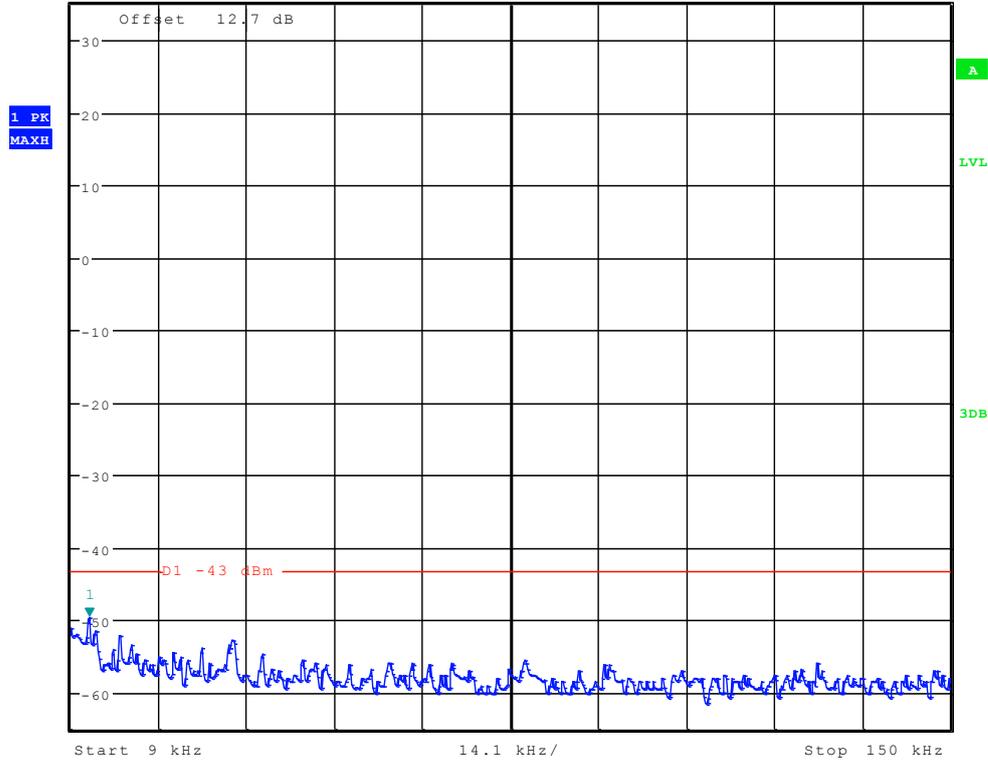

Date: 14.OCT.2012 10:56:17




* RBW 10 kHz Marker 1 [T1]
 * VBW 30 kHz -47.62 dBm
 Ref 35 dBm * Att 35 dB SWT 300 ms 150.00000000 kHz

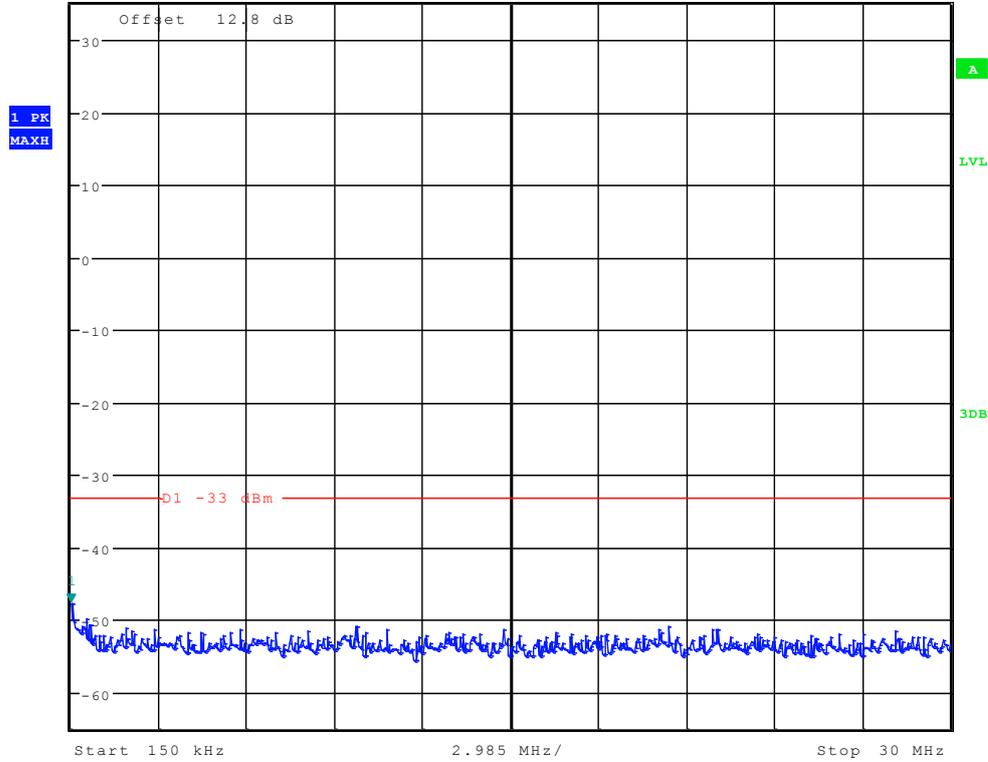

Date: 14.OCT.2012 10:57:00



Ref 35 dBm * Att 35 dB SWT 115 ms
 * RBW 1 MHz Marker 1 [T1] 21.97 dBm
 * VBW 3 MHz 1.854182692 GHz

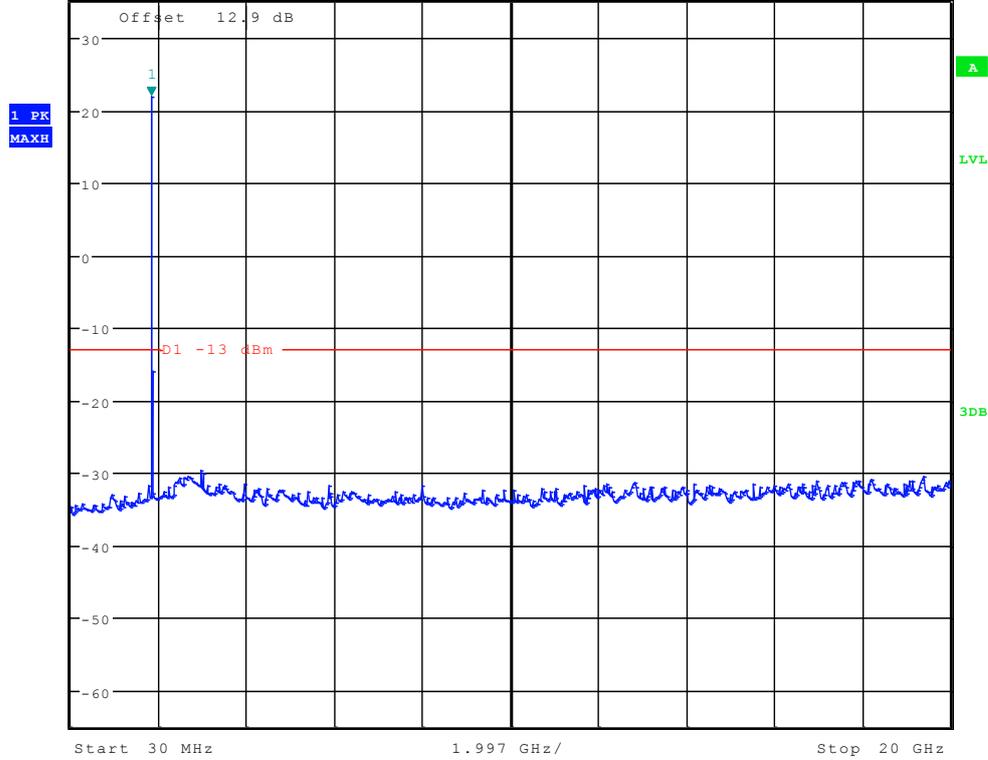


Date: 14.OCT.2012 10:57:44



Channel 810




* RBW 1 kHz Marker 1 [T1]
 * VBW 10 kHz -50.68 dBm
 Ref 35 dBm * Att 35 dB SWT 145 ms 10.807692308 kHz

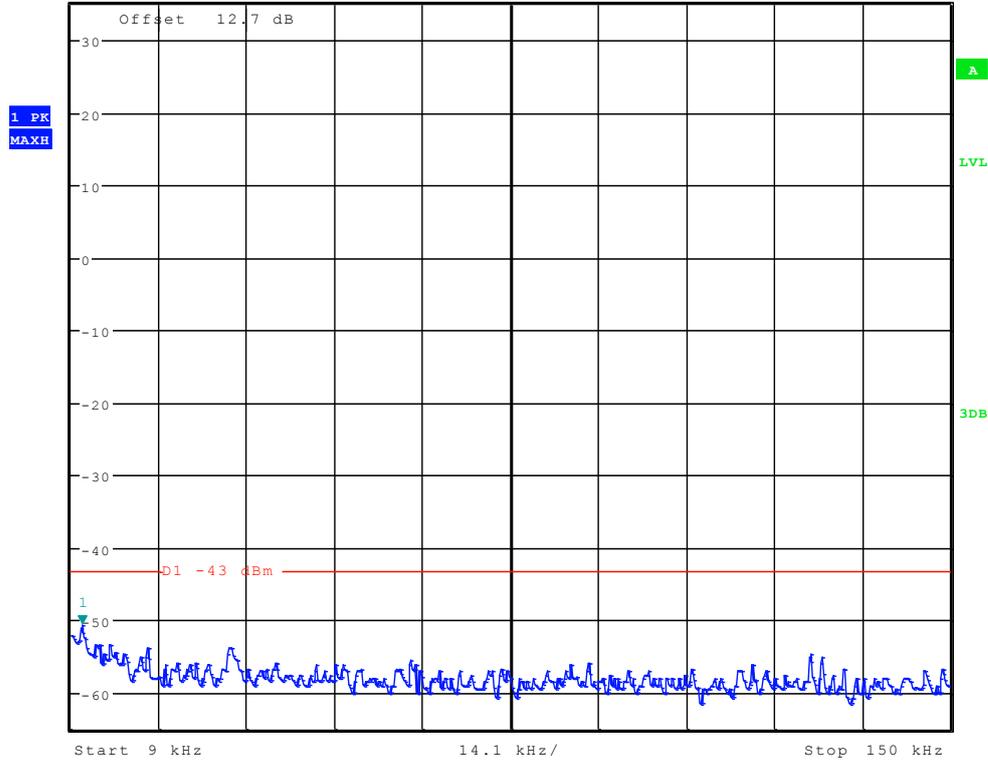

Date: 14.OCT.2012 10:56:31




* RBW 10 kHz Marker 1 [T1]
 * VBW 30 kHz -47.62 dBm
 Ref 35 dBm * Att 35 dB SWT 300 ms 197.836538462 kHz

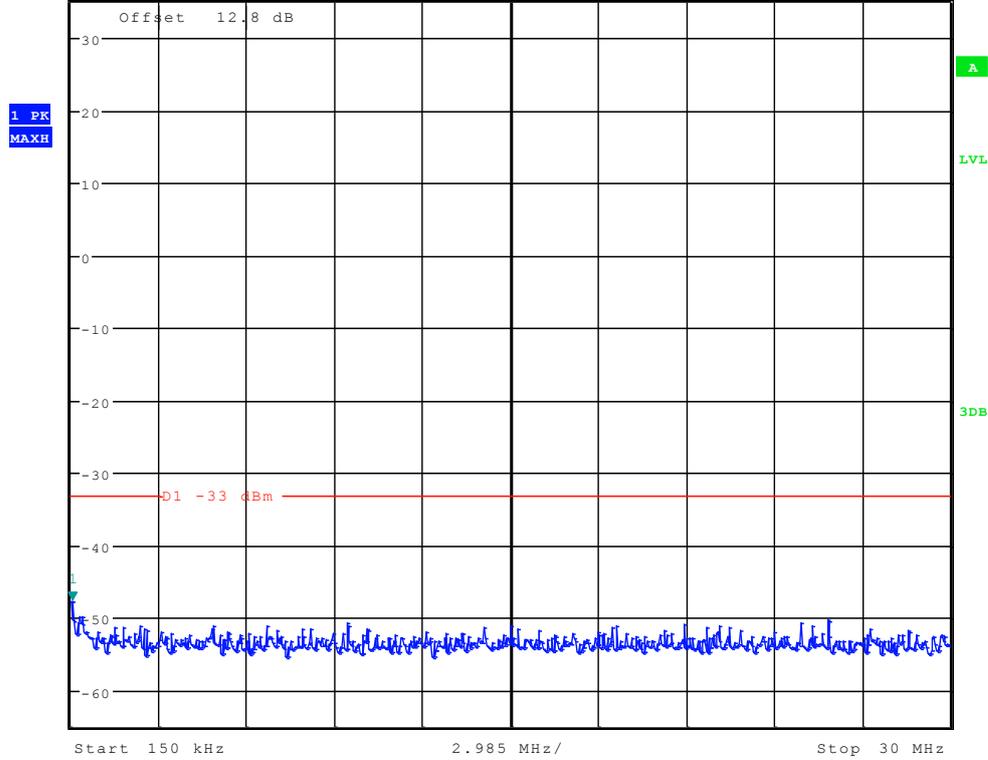

Date: 14.OCT.2012 10:57:15



Ref 35 dBm * Att 35 dB SWT 115 ms
* RBW 1 MHz Marker 1 [T1] 22.26 dBm
* VBW 3 MHz 1.886185897 GHz

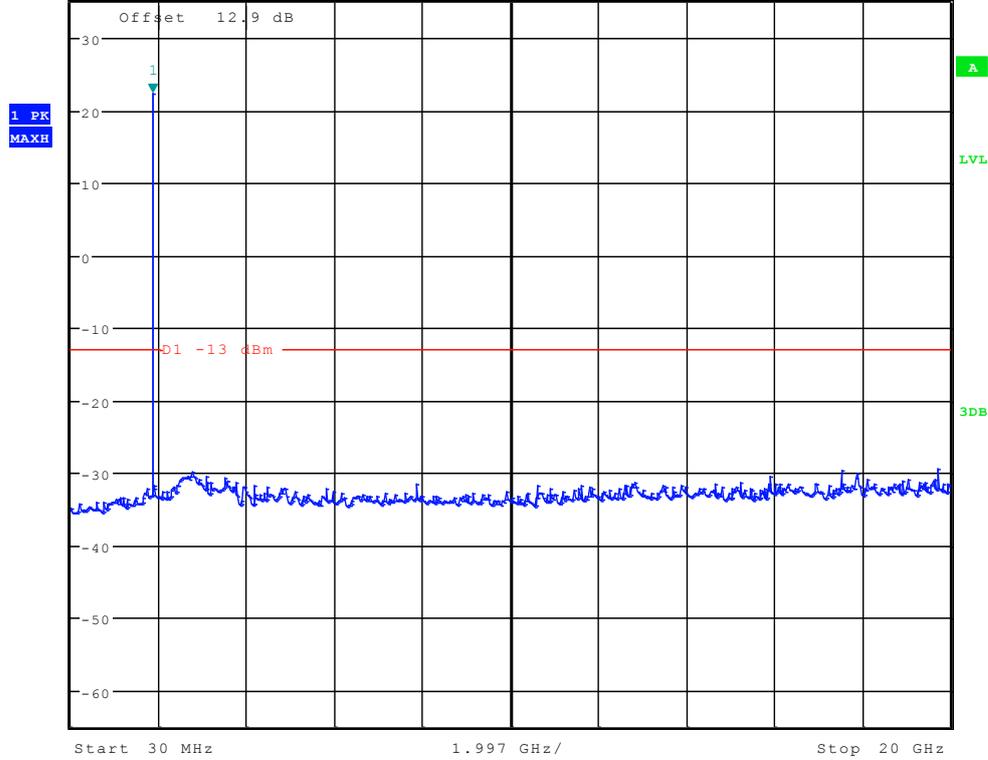

Date: 14.OCT.2012 10:57:59




TM3: WCDMA

Channel 9262




*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -50.94 dBm
Ref 35 dBm *Att 35 dB SWT 145 ms 9.451923077 kHz

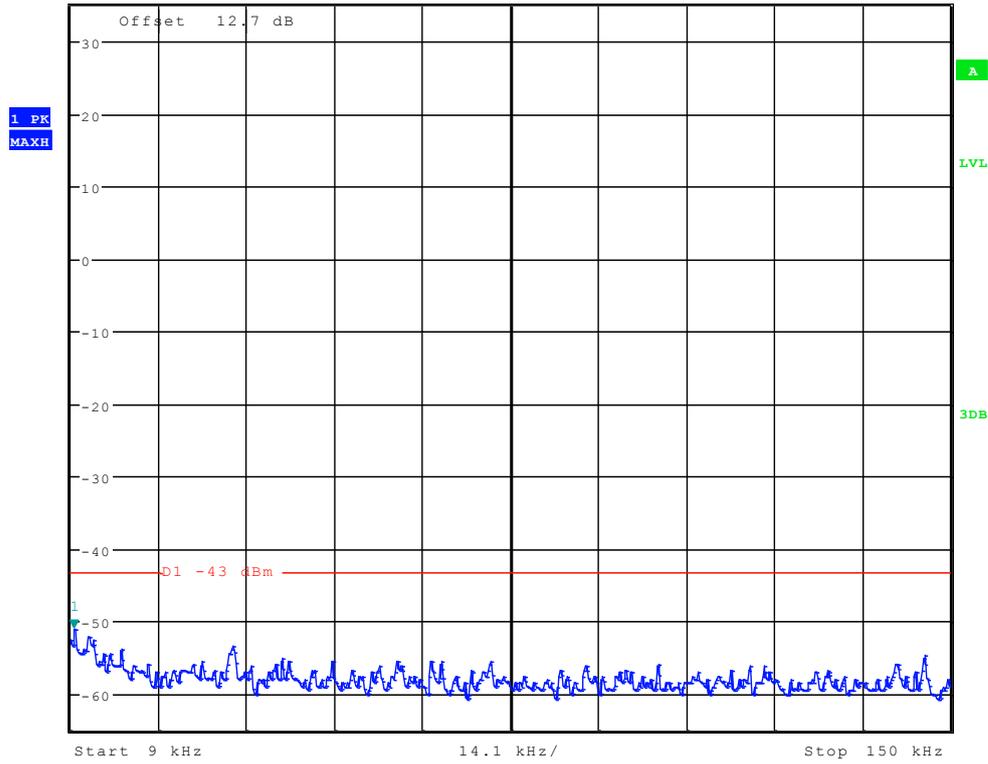

Date: 14.OCT.2012 11:00:41




*RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -47.14 dBm
 Ref 35 dBm *Att 35 dB SWT 300 ms 197.836538462 kHz

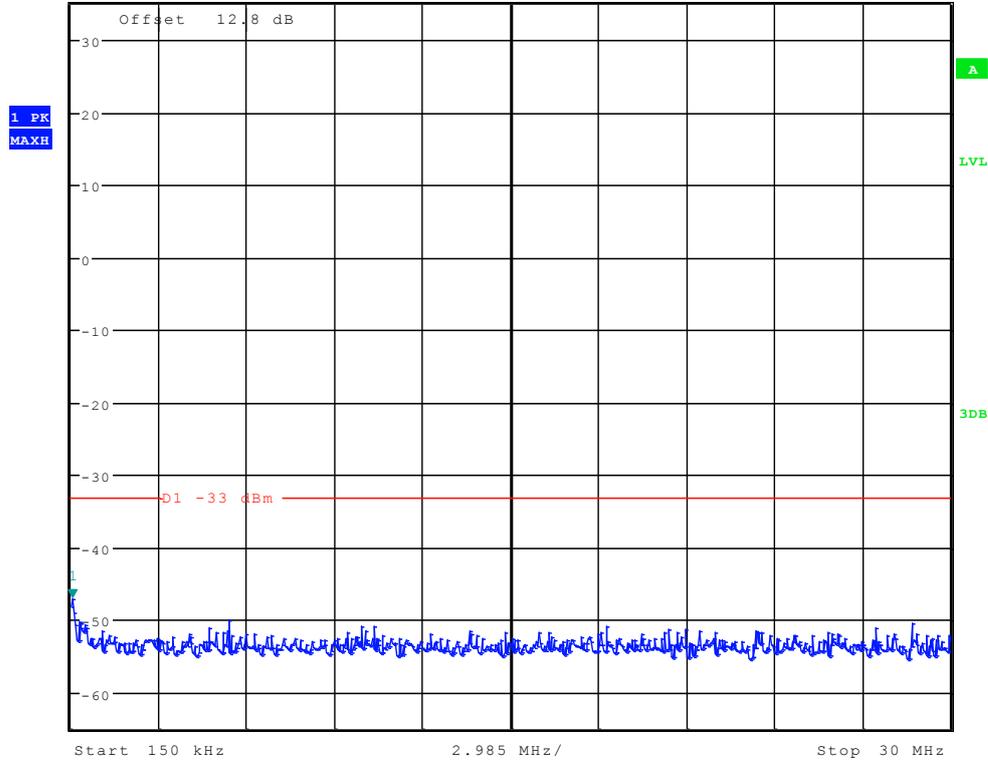

Date: 14.OCT.2012 11:01:24



Ref 35 dBm * Att 35 dB SWT 115 ms
* RBW 1 MHz Marker 1 [T1] 18.16 dBm
* VBW 3 MHz 1.854182692 GHz

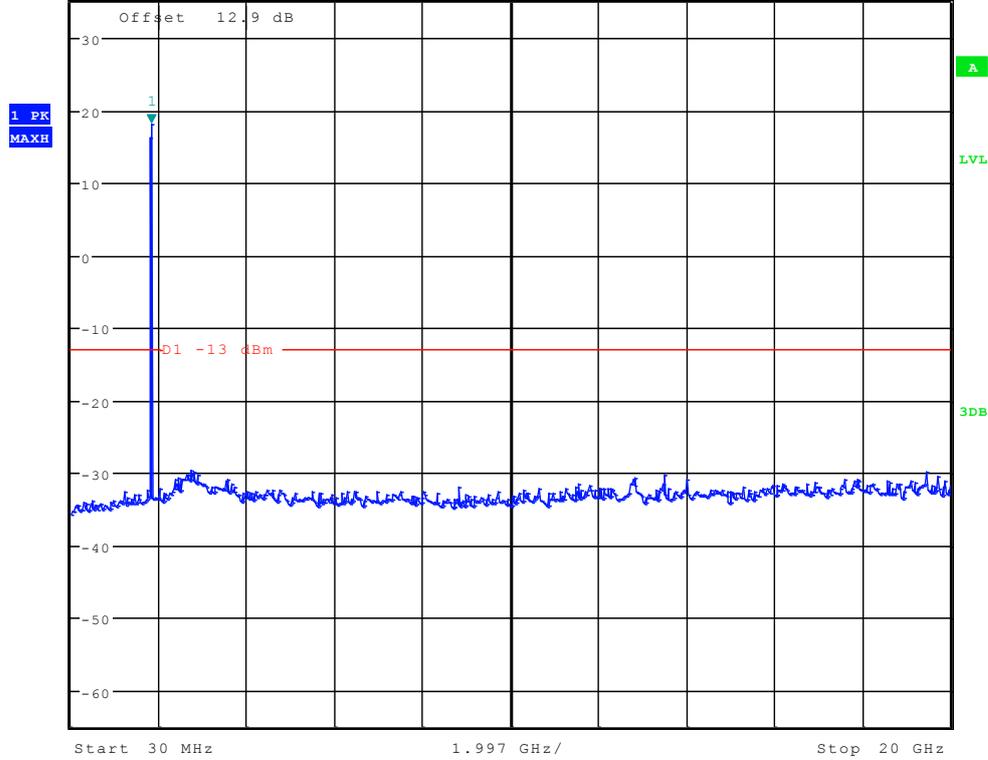


Date: 14.OCT.2012 11:02:08



Channel 9400




Ref 35 dBm * Att 35 dB * RBW 1 kHz Marker 1 [T1] -50.68 dBm
 * VBW 10 kHz SWT 145 ms 12.615384615 kHz

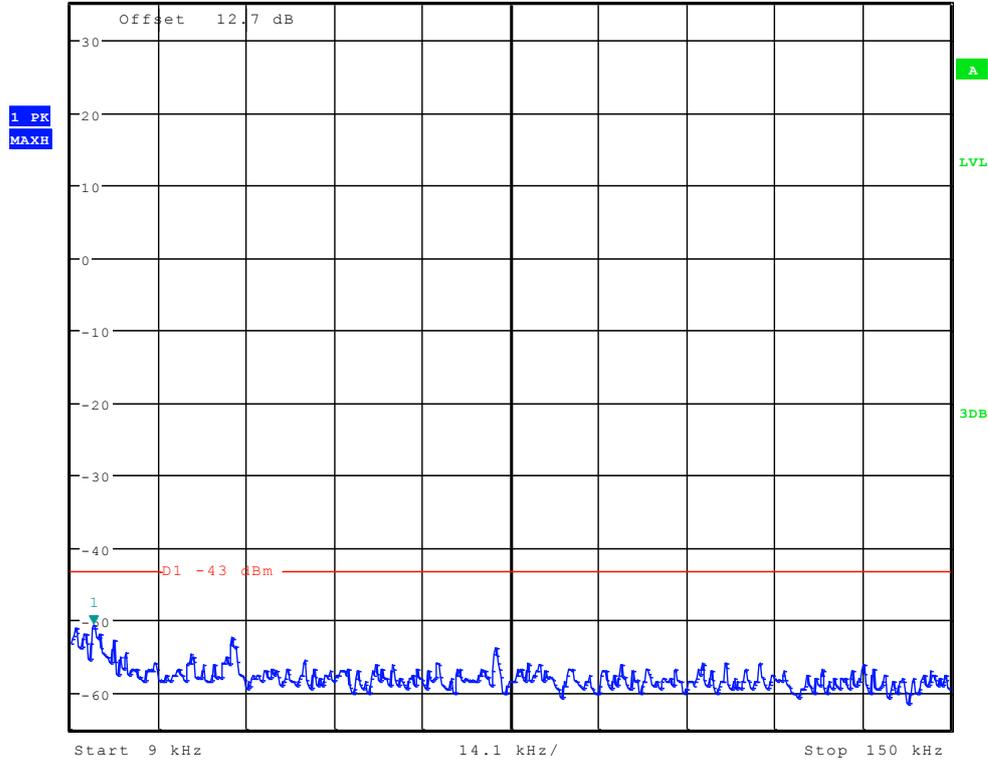

Date: 14.OCT.2012 11:00:55




Ref 35 dBm * Att 35 dB SWT 300 ms
* RBW 10 kHz Marker 1 [T1] -47.08 dBm
* VBW 30 kHz 197.836538462 kHz

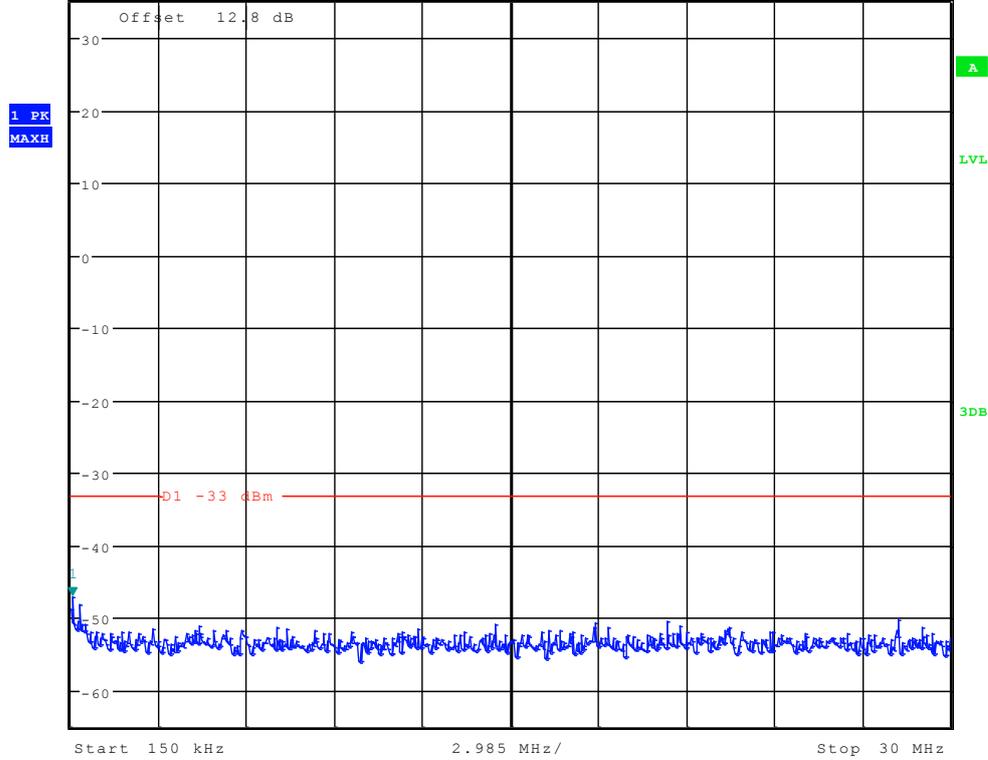

Date: 14.OCT.2012 11:01:39



Ref 35 dBm * Att 35 dB SWT 115 ms
 * RBW 1 MHz Marker 1 [T1] 17.41 dBm
 * VBW 3 MHz 1.854182692 GHz

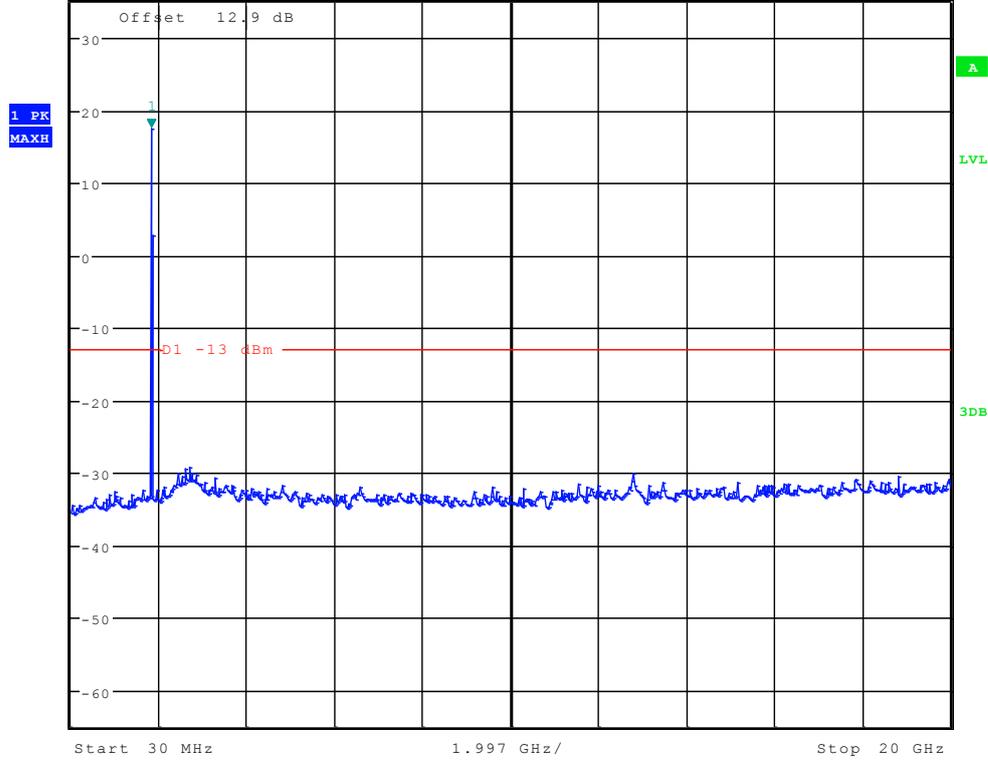


Date: 14.OCT.2012 11:02:23



Channel 9538




*RBW 1 kHz Marker 1 [T1]
 *VBW 10 kHz -51.39 dBm
 Ref 35 dBm *Att 35 dB SWT 145 ms 9.225961538 kHz

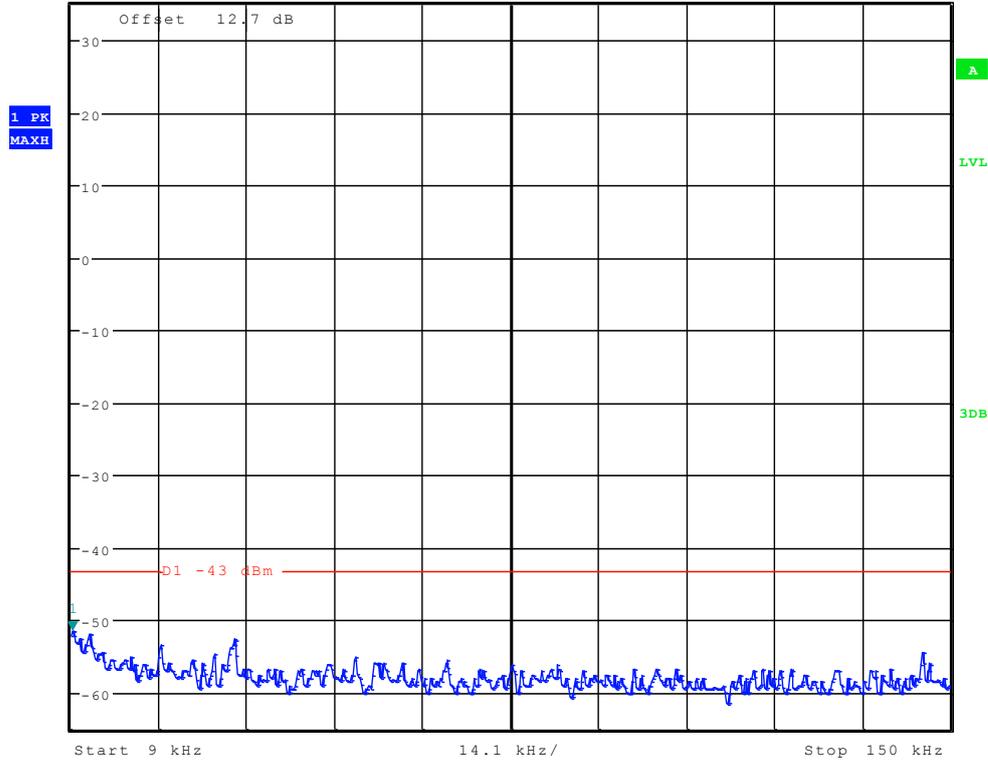

Date: 14.OCT.2012 11:01:10




* RBW 10 kHz Marker 1 [T1]
 * VBW 30 kHz -46.42 dBm
 Ref 35 dBm * Att 35 dB SWT 300 ms 197.836538462 kHz

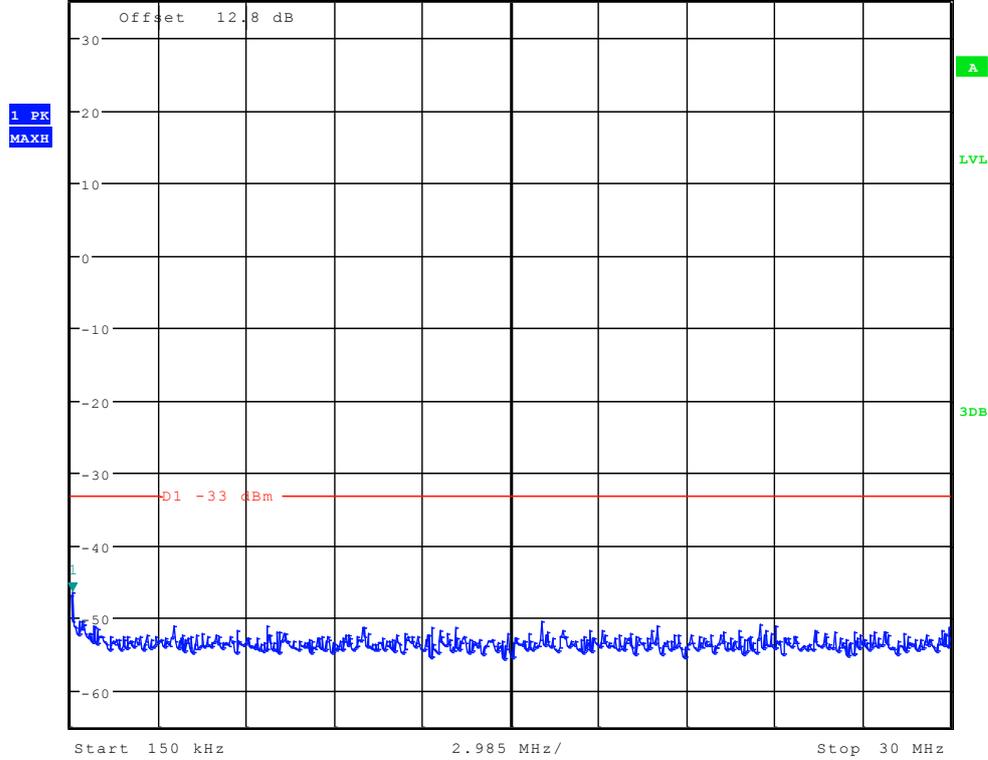

Date: 14.OCT.2012 11:01:53



Ref 35 dBm * Att 35 dB SWT 115 ms * RBW 1 MHz Marker 1 [T1] 17.26 dBm
 * VBW 3 MHz 1.886185897 GHz

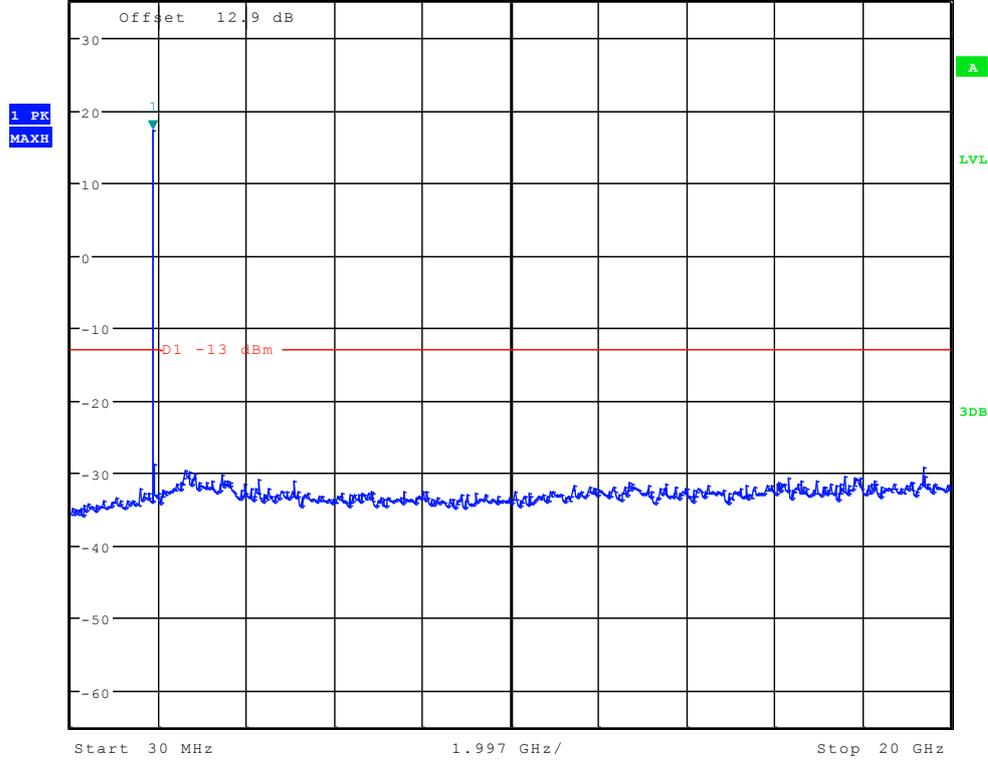

Date: 14.OCT.2012 11:02:37

The END




Appendix F

Radiated spurious emission


According to FCC Part 2.1053& Part 24.238

GSM 1900


(9 kHz-30MHz)

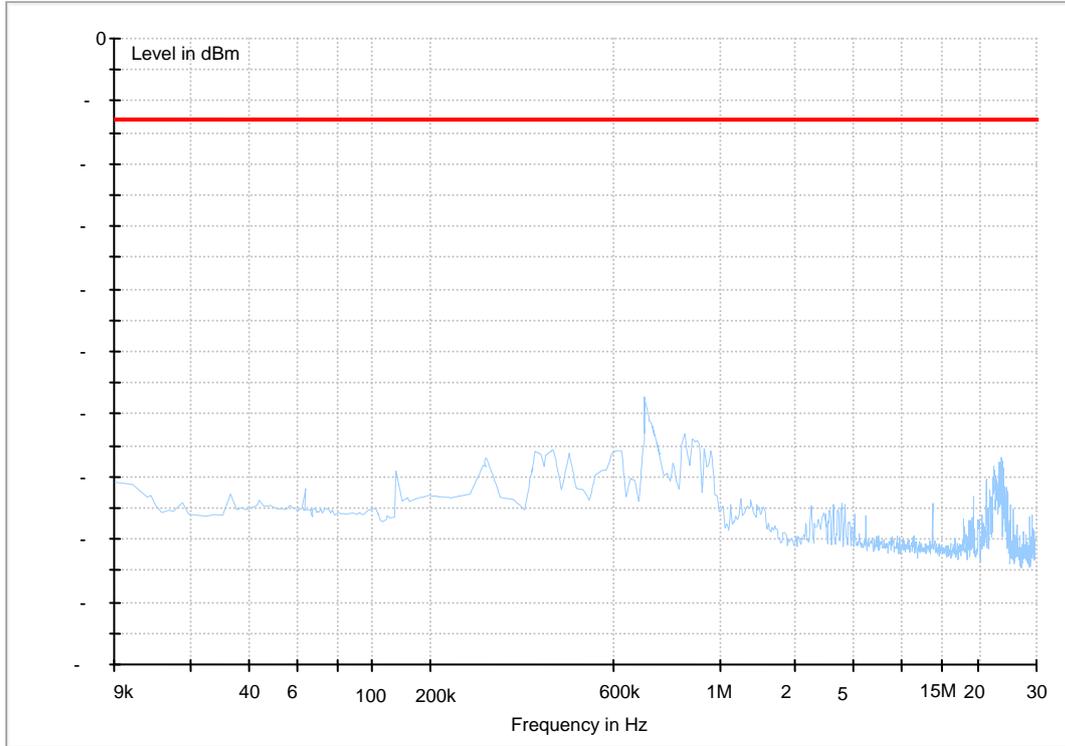


(30MHz~3GHz)

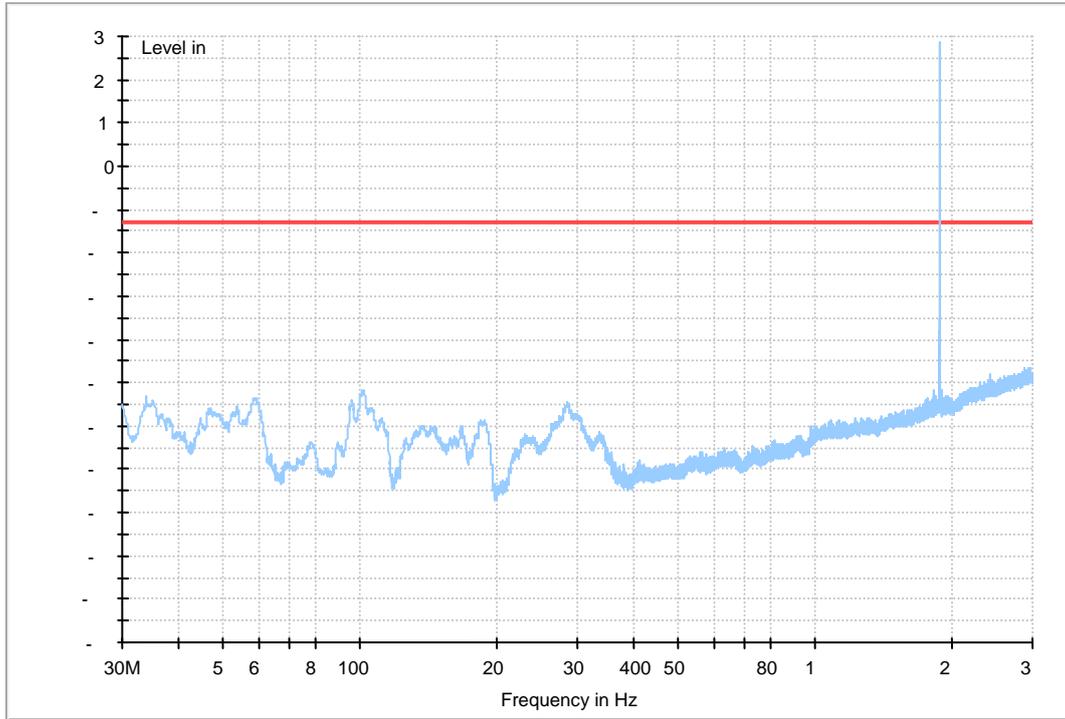

(3GHz~18GHz)

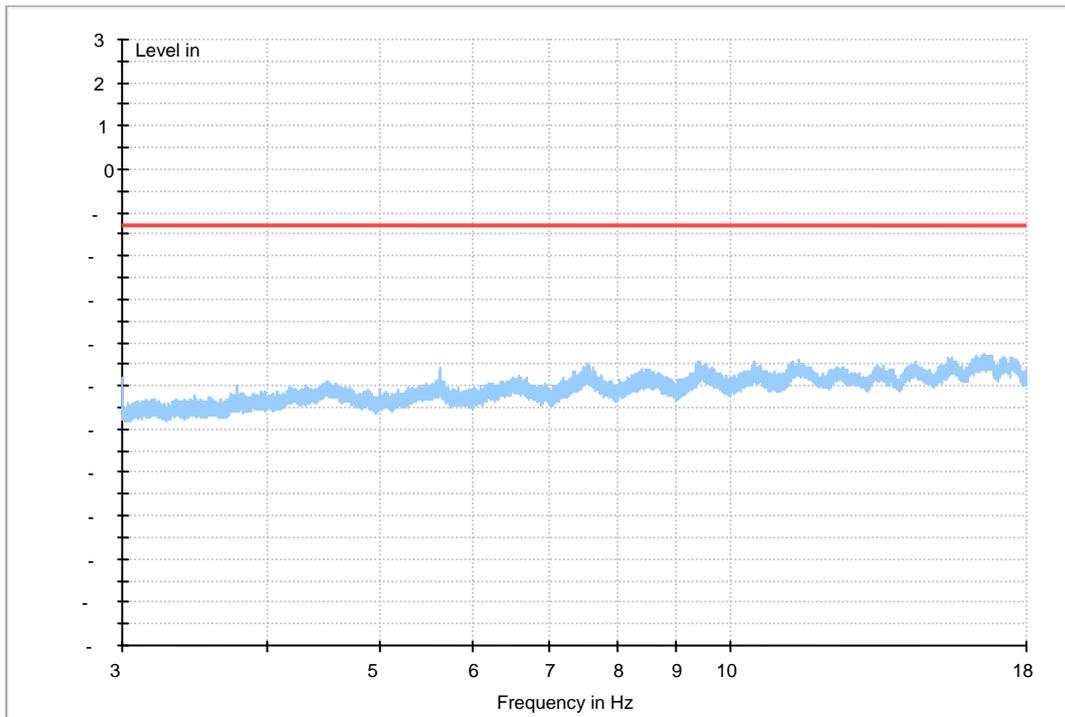


(18GHz-26.5GHz)

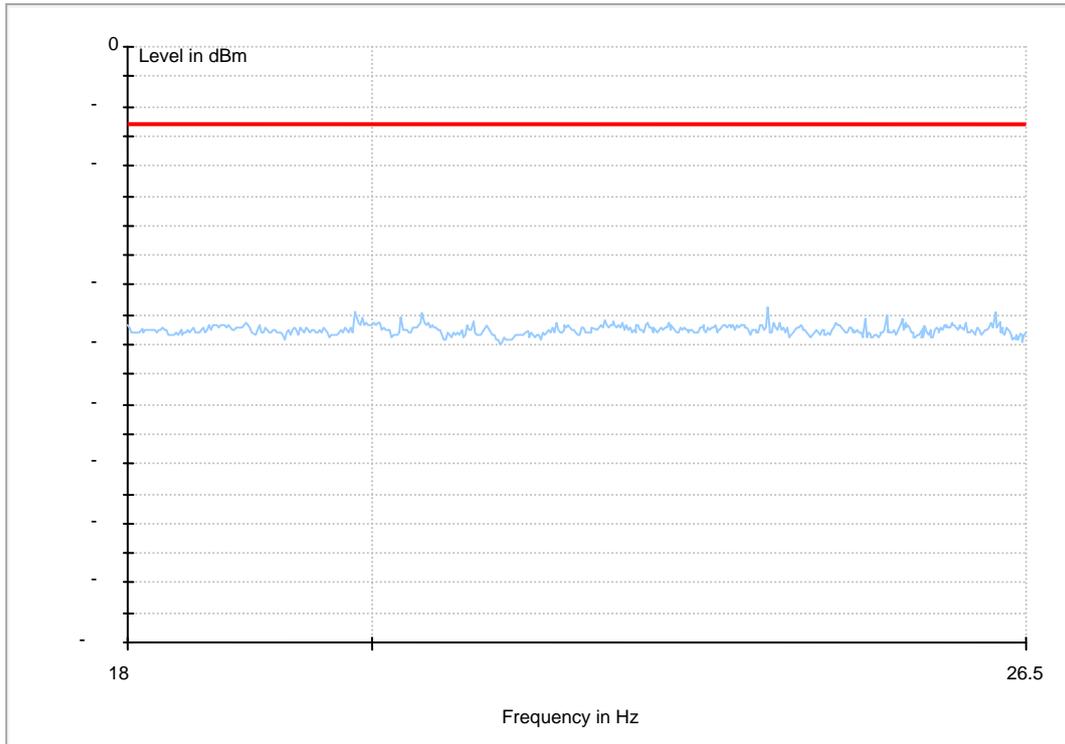


GPRS 1900


(9kHz-30MHz)

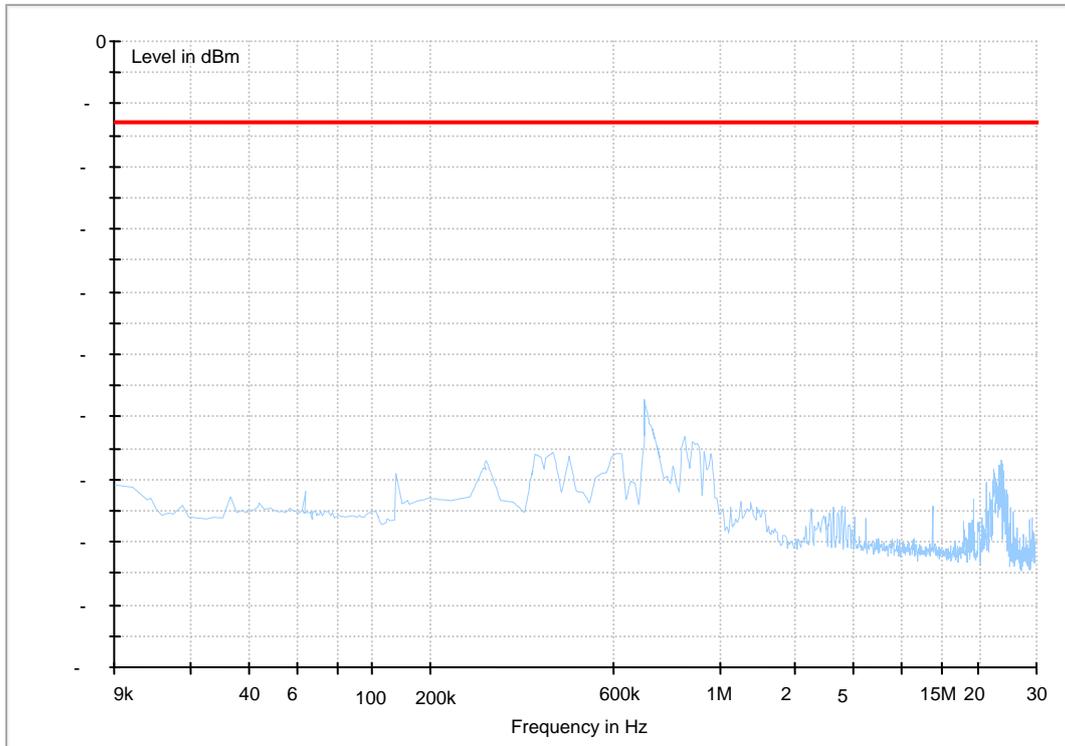


(30MHz~3GHz)

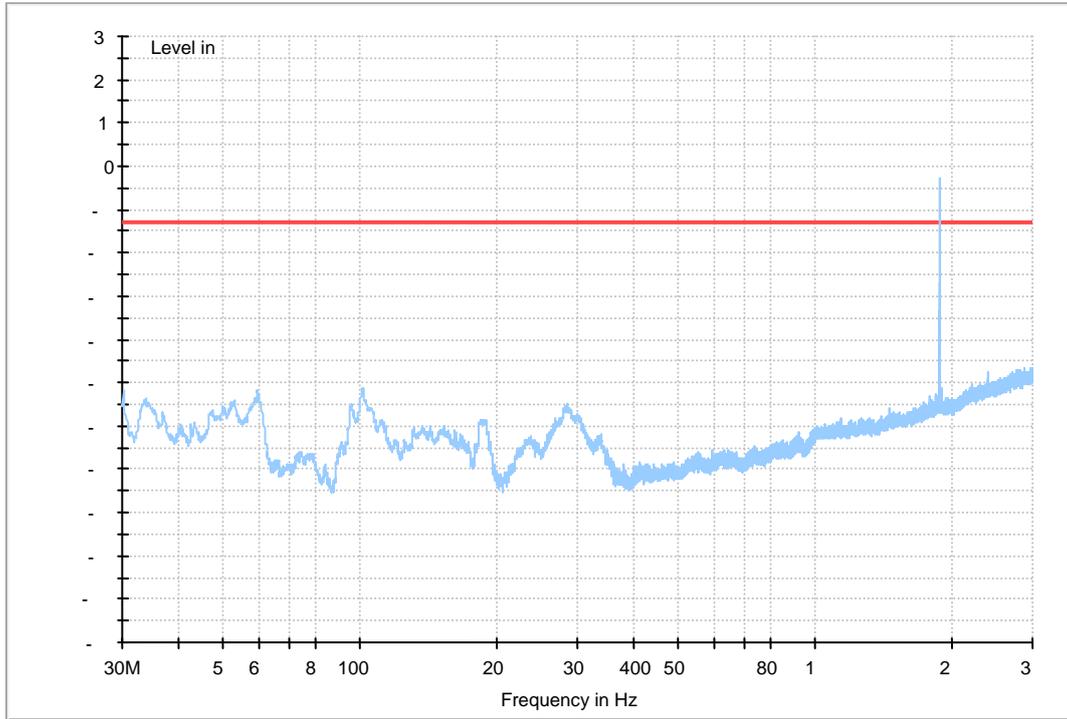

(3GHz~18GHz)

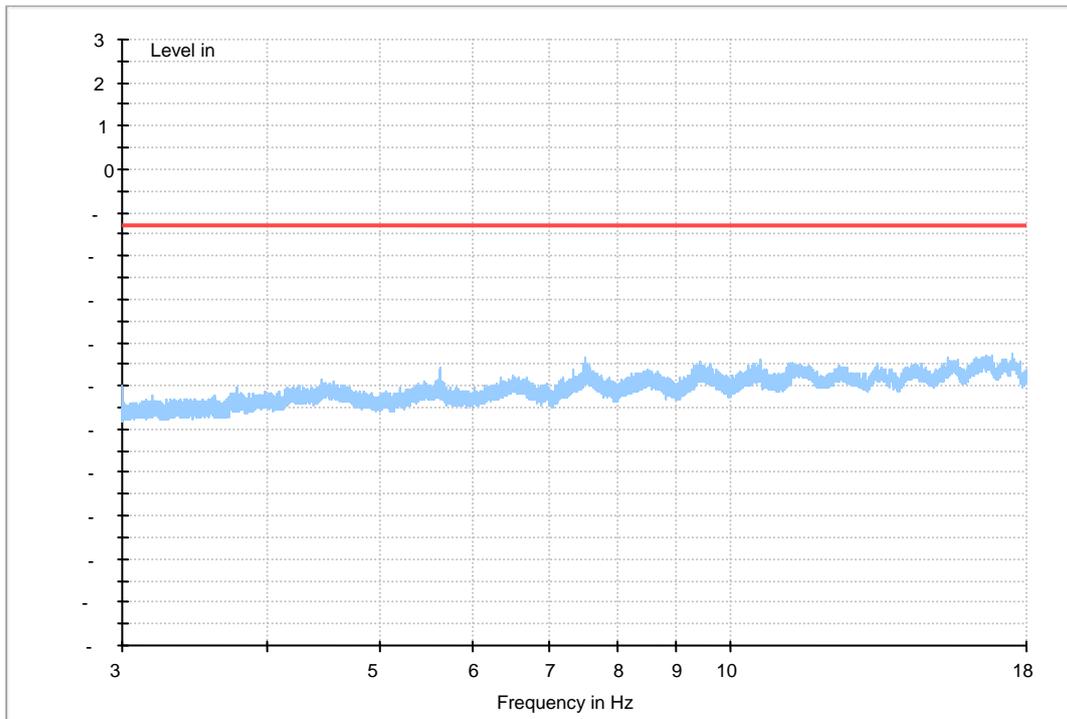


(18GHz-26.5GHz)

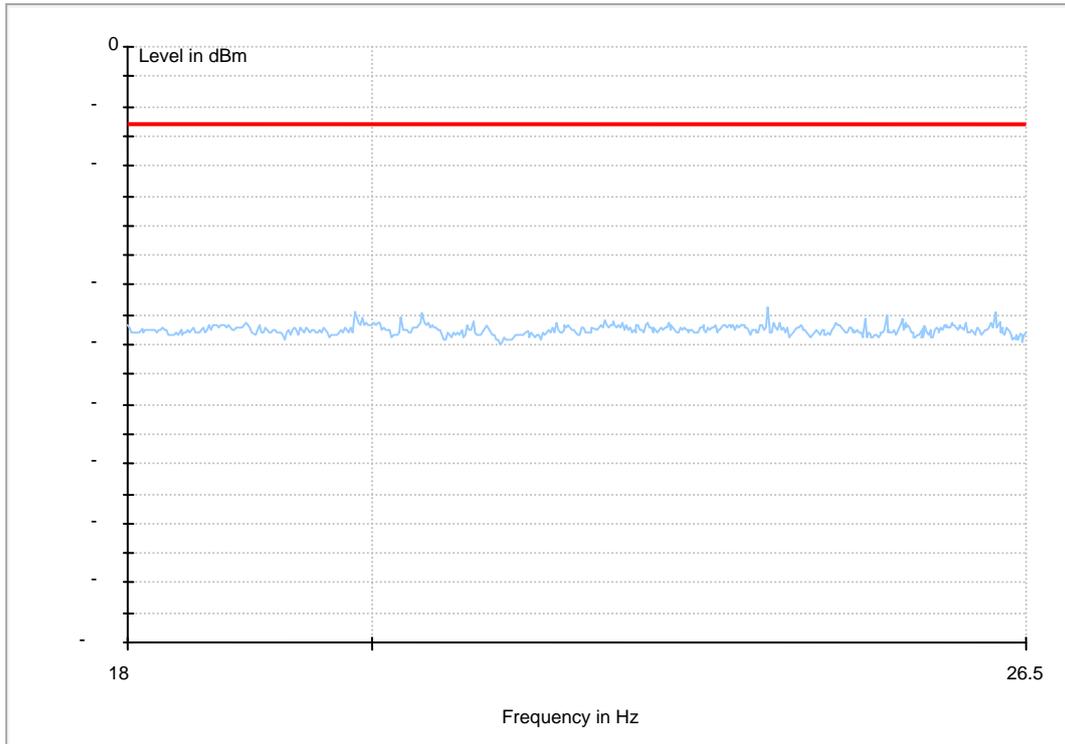


EDGE 1900


(9kHz-30MHz)

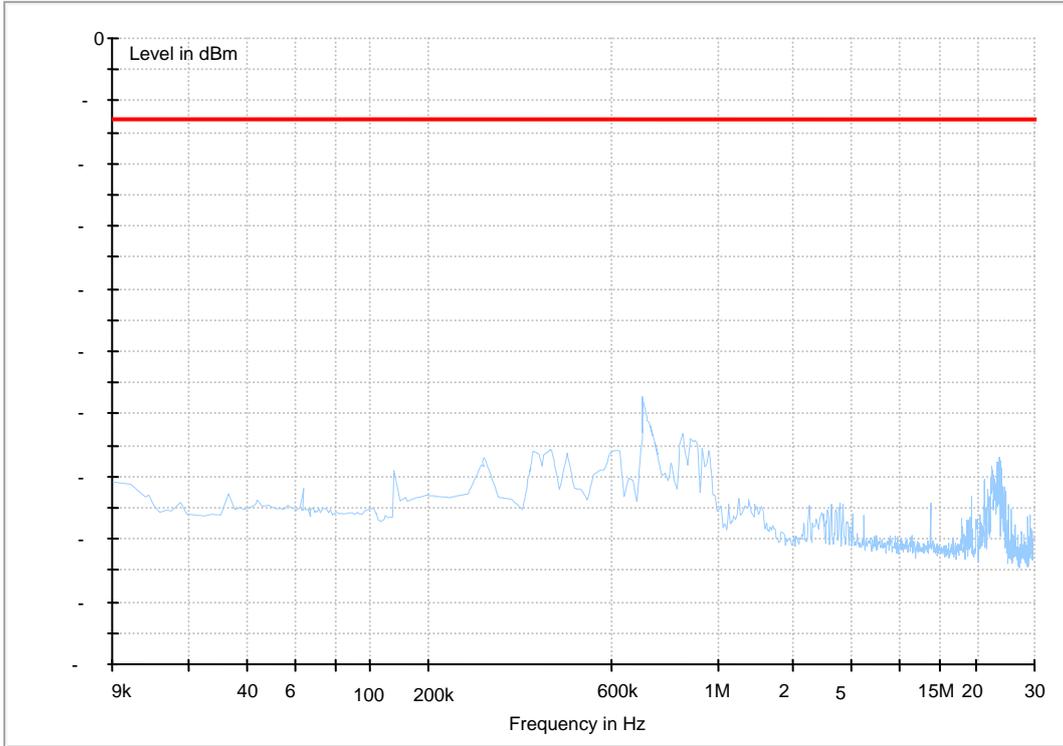


(30MHz~3GHz)

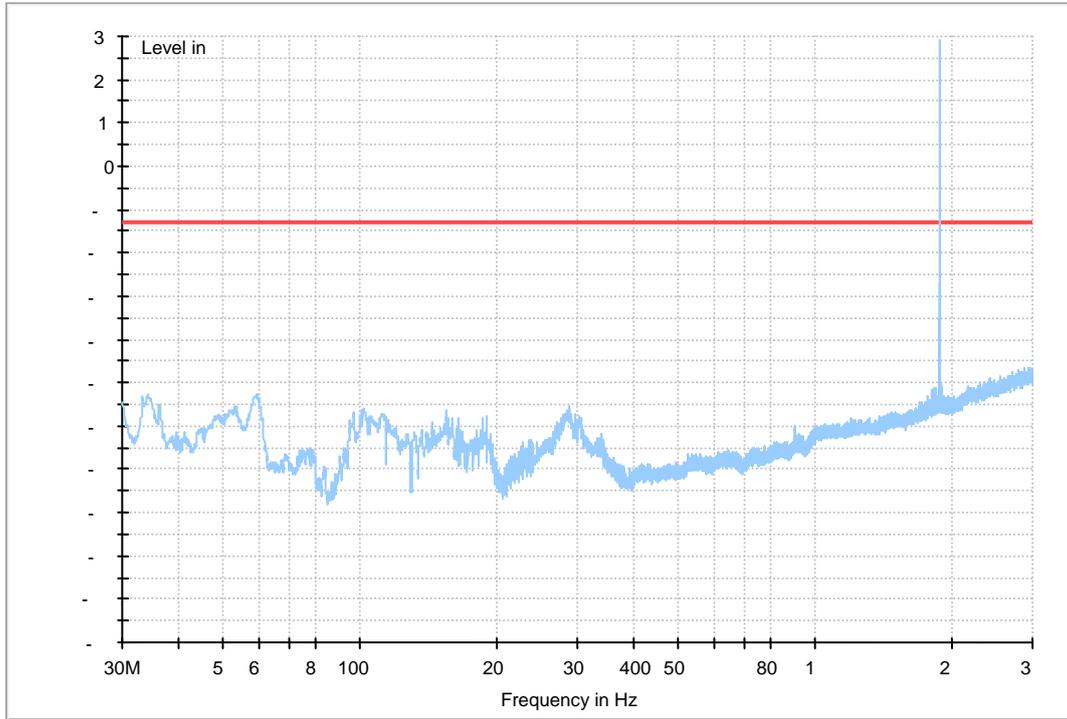

(3GHz~18GHz)

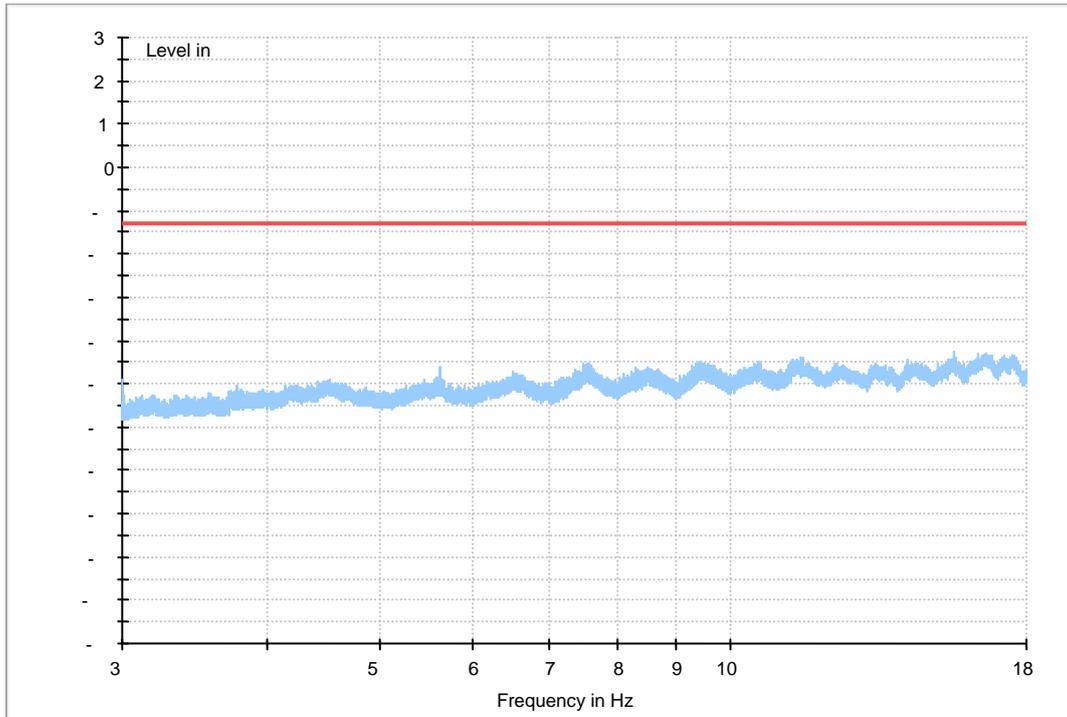


(18GHz-26.5GHz)

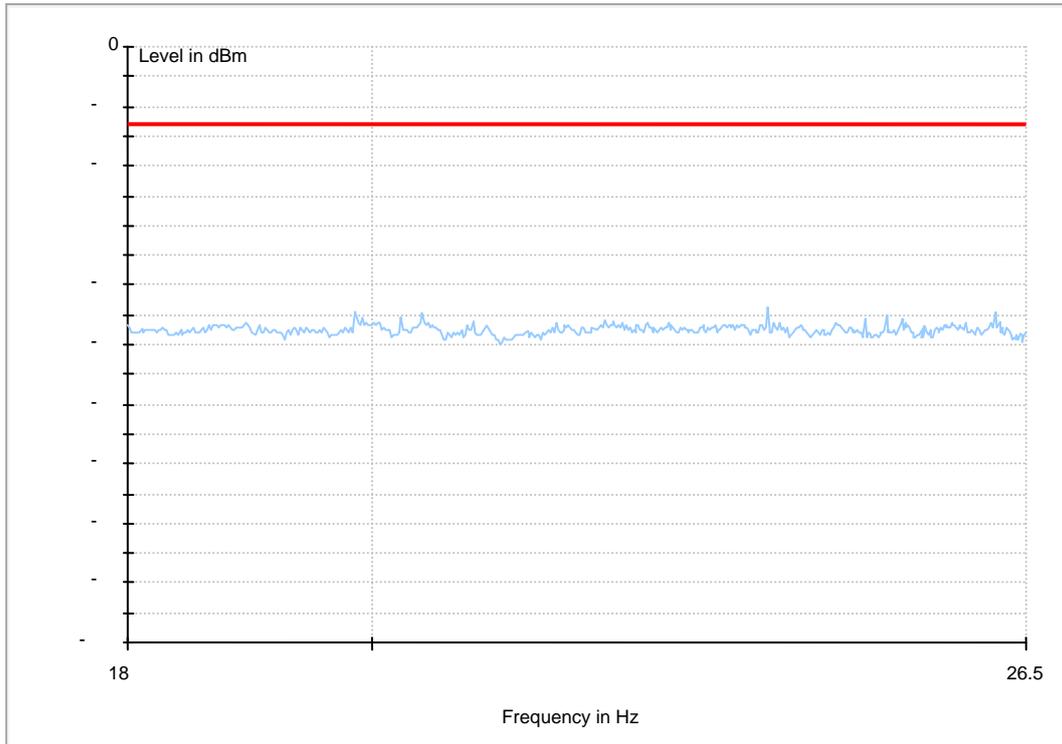


WCDMA Band II


(9KHz~30MHz)

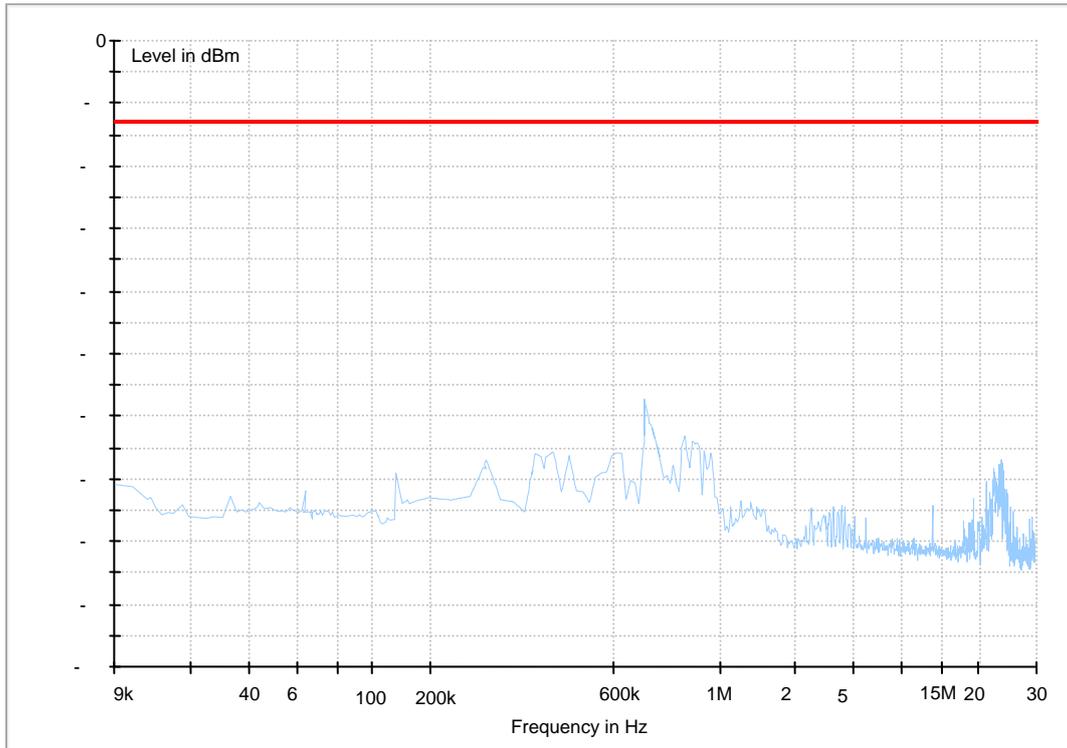


(30MHz~3GHz)

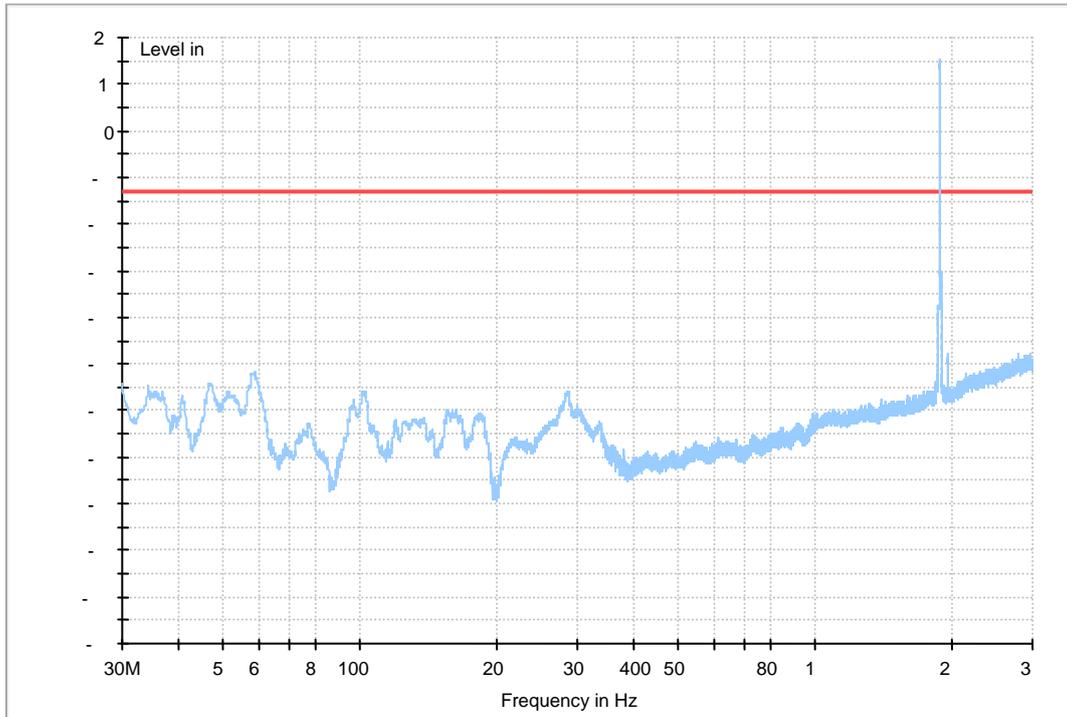

(3GHz~18GHz)

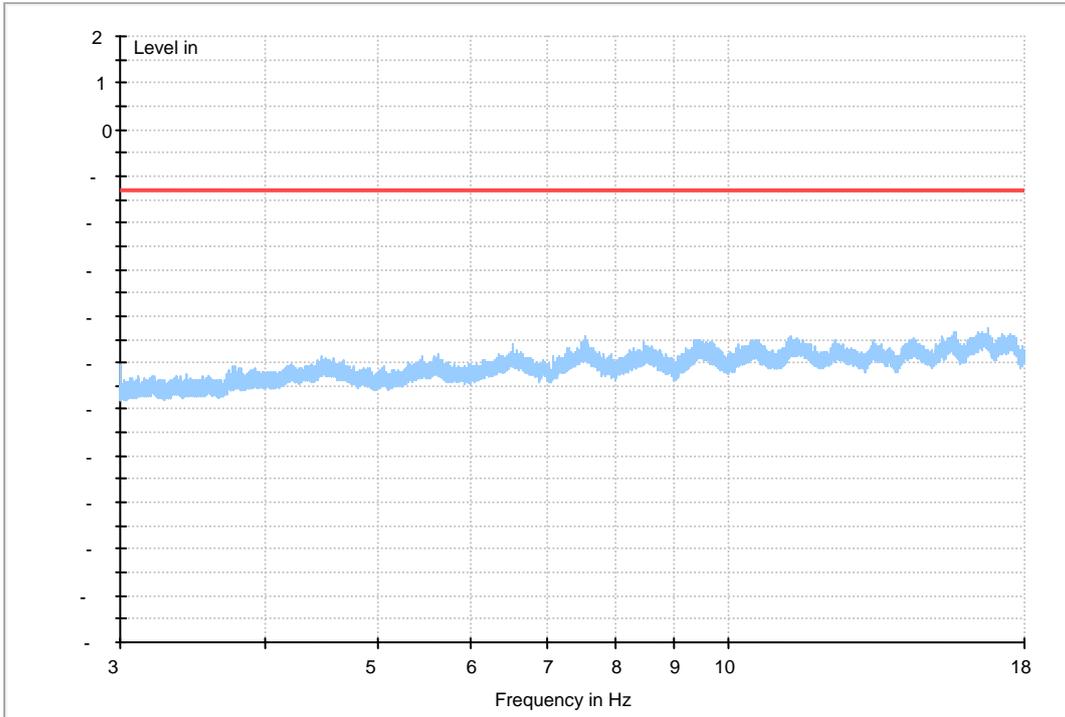


(18GHz~26.5GHz)

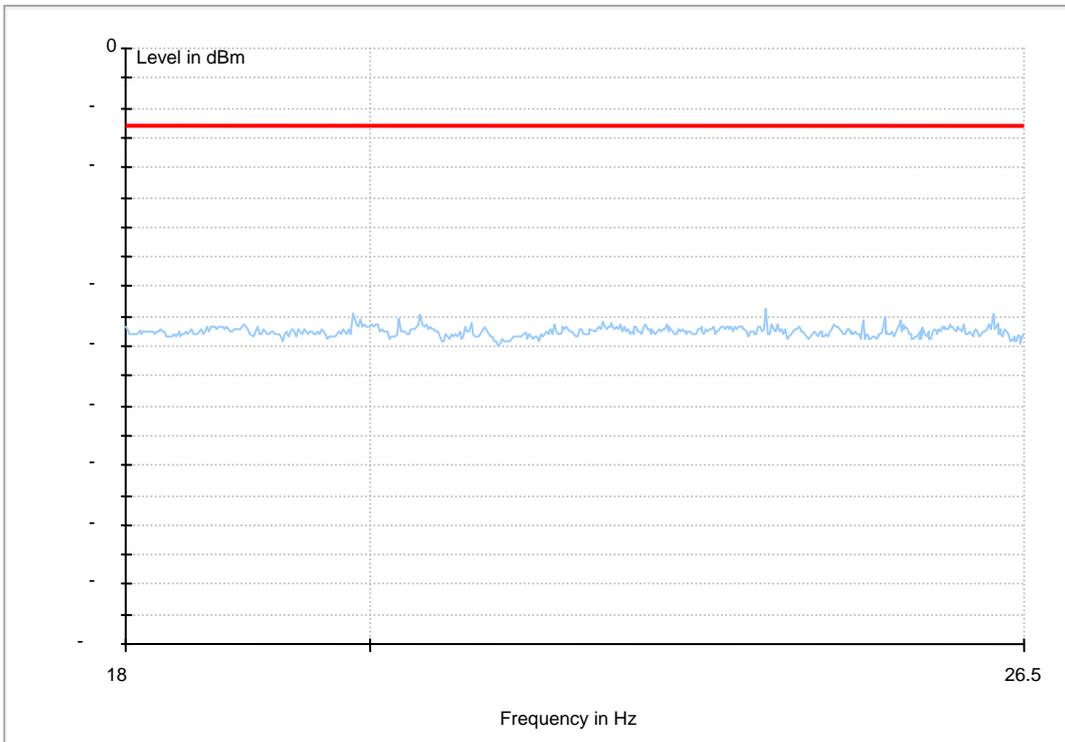




HSDPA Band II

(9KHz~30MHz)

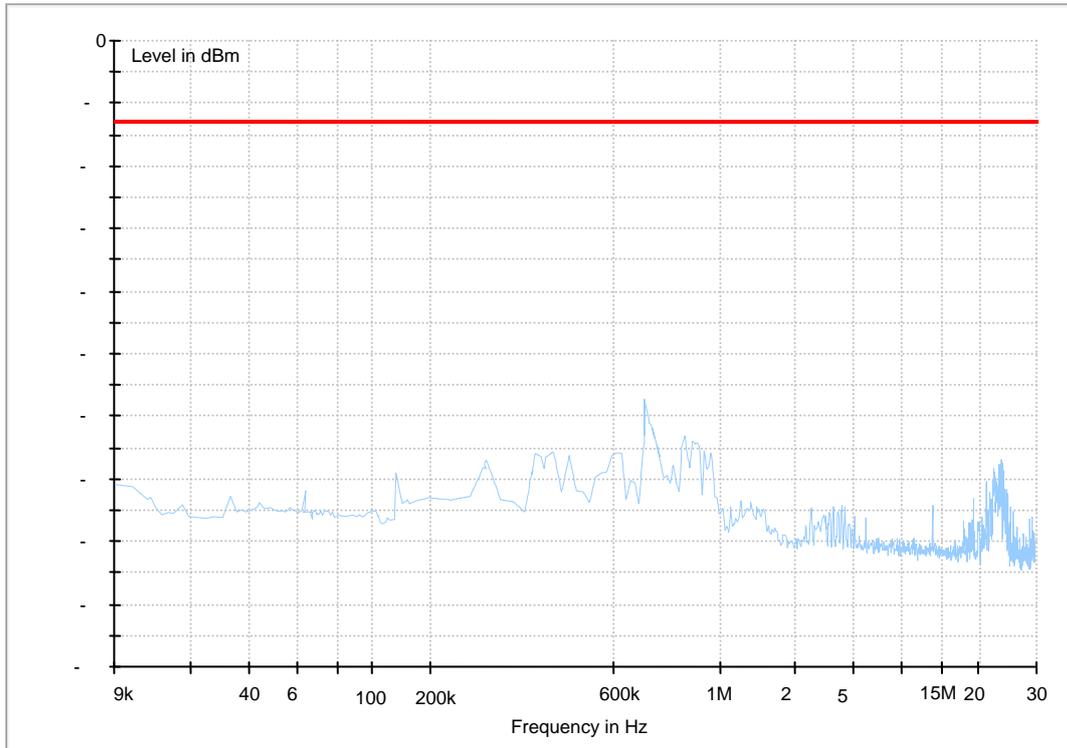


(30MHz ~3GHz)

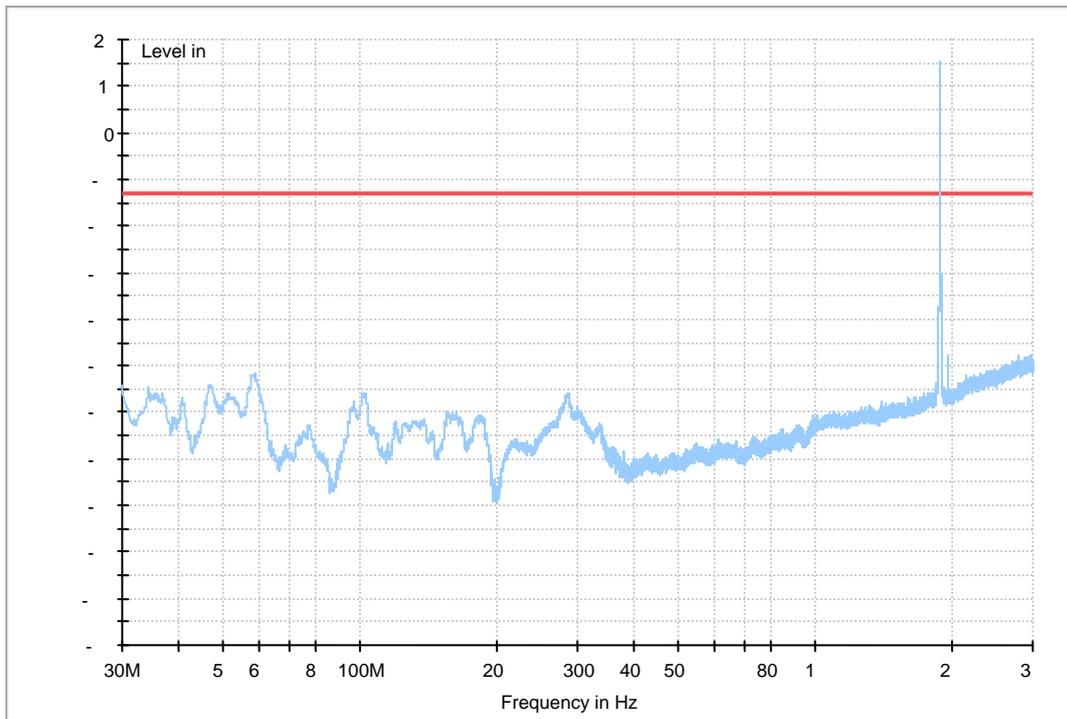




(3GHz~18GHz)

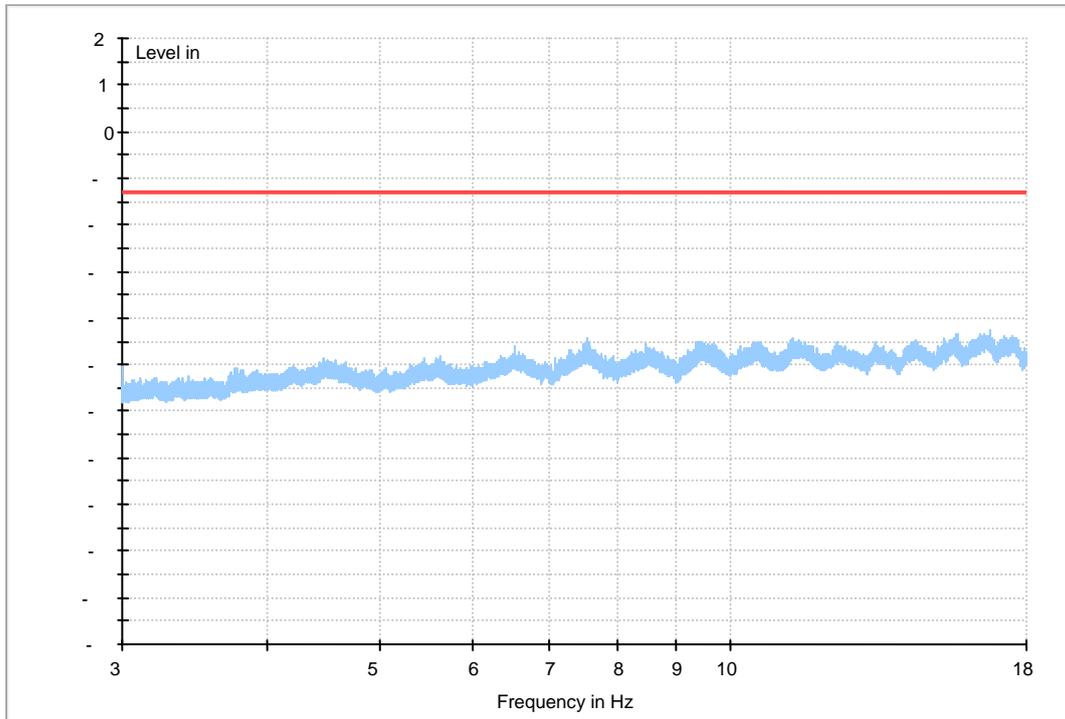


(18GHz~26.5GHz)

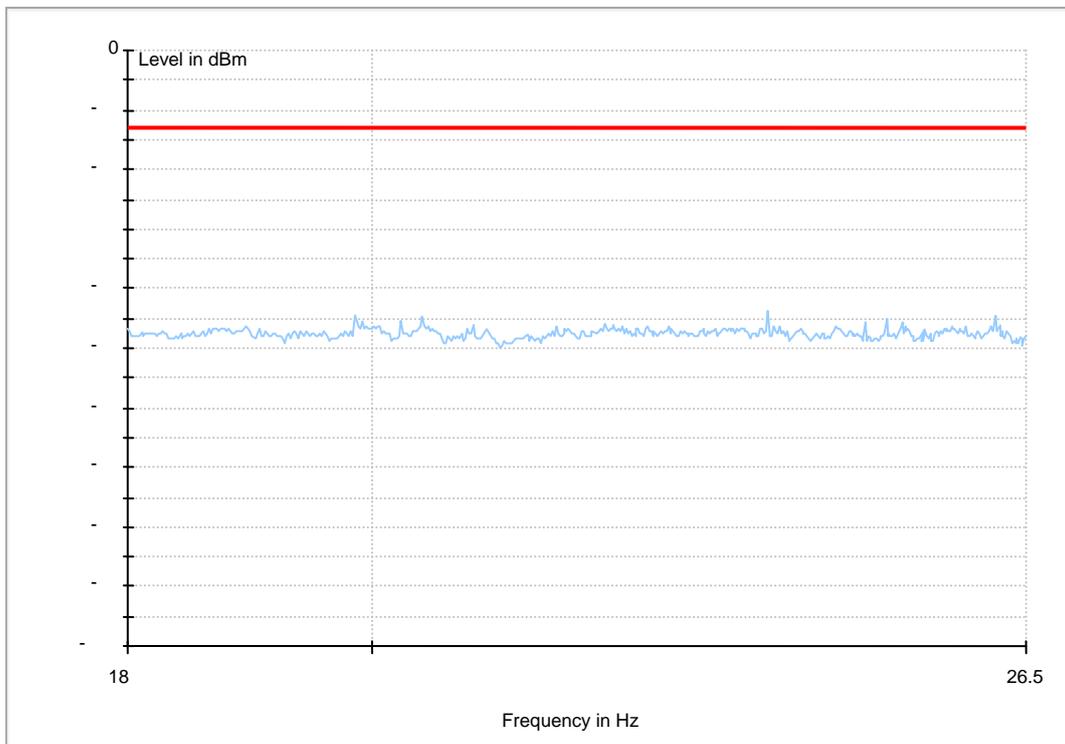




HSUPA Band II


(9KHz~30MHz)

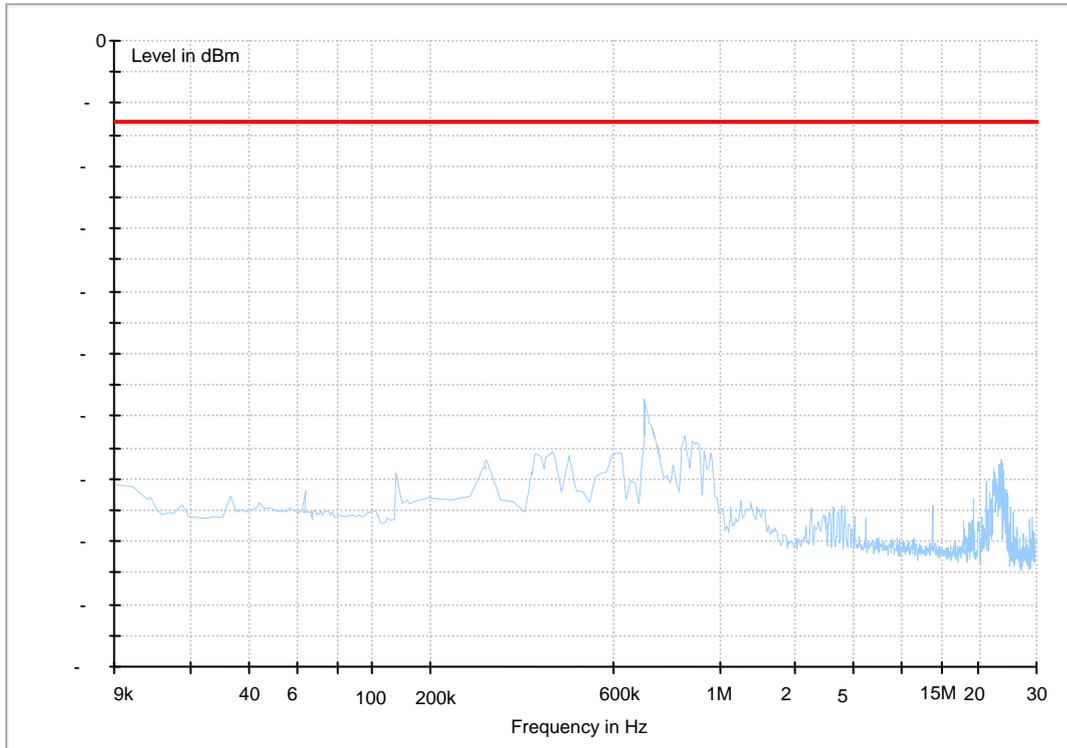


(30MHz~3GHz)

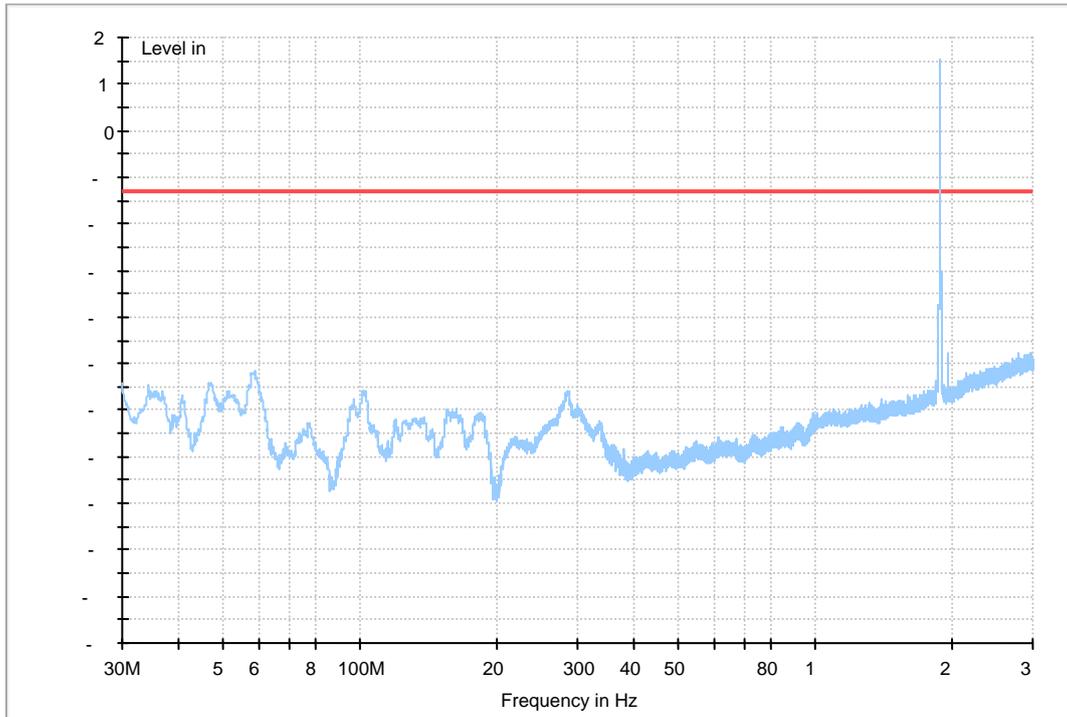

(3GHz~18GHz)

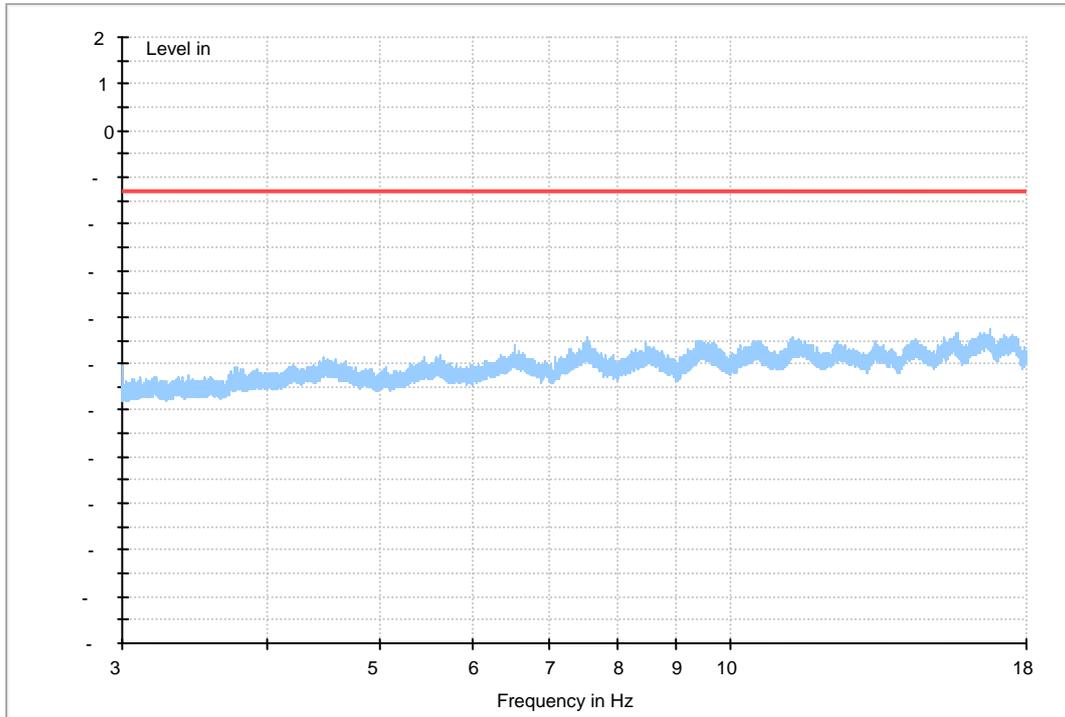

(18GHz~26.5GHz)

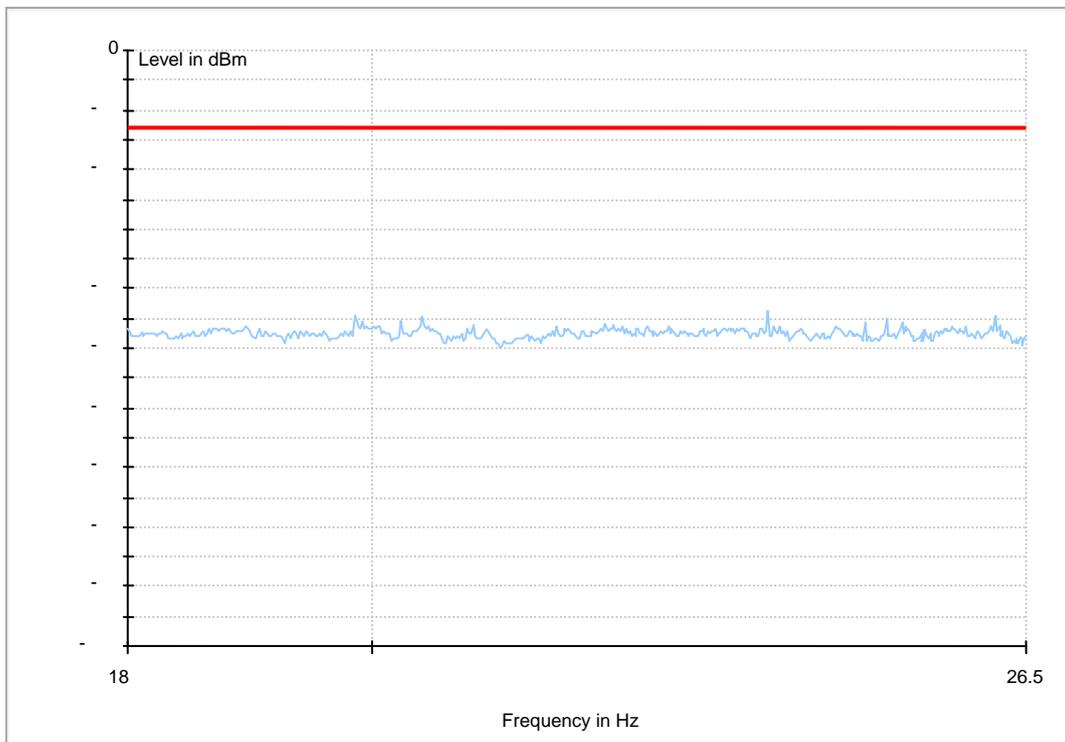

The END



Appendix G

Frequency Stability According to FCC Part 2.1055& Part 24.235



Frequency Error vs. Temperature:

Test Mode	RF Ch.	Volt.	Temp.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	VN	-30 °C	-23	-0.01223	---	±2.5	Pass
			-20 °C	24	0.01277	---	±2.5	Pass
			-10 °C	-8	-0.00426	---	±2.5	Pass
			0 °C	10	0.00532	---	±2.5	Pass
			10 °C	18	0.00957	---	±2.5	Pass
			20 °C	-16	-0.00851	---	±2.5	Pass
			30 °C	17	0.00904	---	±2.5	Pass
			40 °C	-16	-0.00851	---	±2.5	Pass
			50 °C	16	0.00851	---	±2.5	Pass
TM 2	M	VN	-30 °C	19	0.01011	---	±2.5	Pass
			-20 °C	26	0.01383	---	±2.5	Pass
			-10 °C	12	0.00638	---	±2.5	Pass
			0 °C	11	0.00585	---	±2.5	Pass
			10 °C	20	0.01064	---	±2.5	Pass
			20 °C	-16	-0.00851	---	±2.5	Pass
			30 °C	26	0.01383	---	±2.5	Pass
			40 °C	25	0.01330	---	±2.5	Pass
			50 °C	-22	-0.01170	---	±2.5	Pass
TM 3	M	VN	-30 °C	12	0.00638	---	±2.5	Pass
			-20 °C	12	0.00638	---	±2.5	Pass
			-10 °C	-11	-0.00585	---	±2.5	Pass
			0 °C	-14	-0.00745	---	±2.5	Pass
			10 °C	12	0.00638	---	±2.5	Pass
			20 °C	-11	-0.00585	---	±2.5	Pass
			30 °C	14	0.00745	---	±2.5	Pass
			40 °C	-24	-0.01277	---	±2.5	Pass
			50 °C	17	0.00904	---	±2.5	Pass



Frequency Error vs. Voltage:

Test Mode	RF Ch.	Temp.	Volt.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	TN	VL	-17	-0.00904	---	±2.5	Pass
			VN	21	0.01117	---	±2.5	Pass
			VH	19	0.01011	---	±2.5	Pass
TM 2	M	TN	VL	-7	-0.00372	---	±2.5	Pass
			VN	-19	-0.01011	---	±2.5	Pass
			VH	26	0.01383	---	±2.5	Pass
TM 3	M	TN	VL	-14	-0.00745	---	±2.5	Pass
			VN	-15	-0.00798	---	±2.5	Pass
			VH	10	0.00532	---	±2.5	Pass

-----The END-----