



Appendix B. SAR Measurement Plots

Table of contents
GSM850 Head
GSM850 Body
GSM1900 Head
GSM1900 Body
WiFi 2450 MHz Head
WiFi 2450 MHz Body

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 GSM850 190CH Right hand touch with battery 1#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 40.501$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.26, 6.26, 6.26); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.441 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.658 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.511 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.321 W/kg

Maximum value of SAR (measured) = 0.460 W/kg

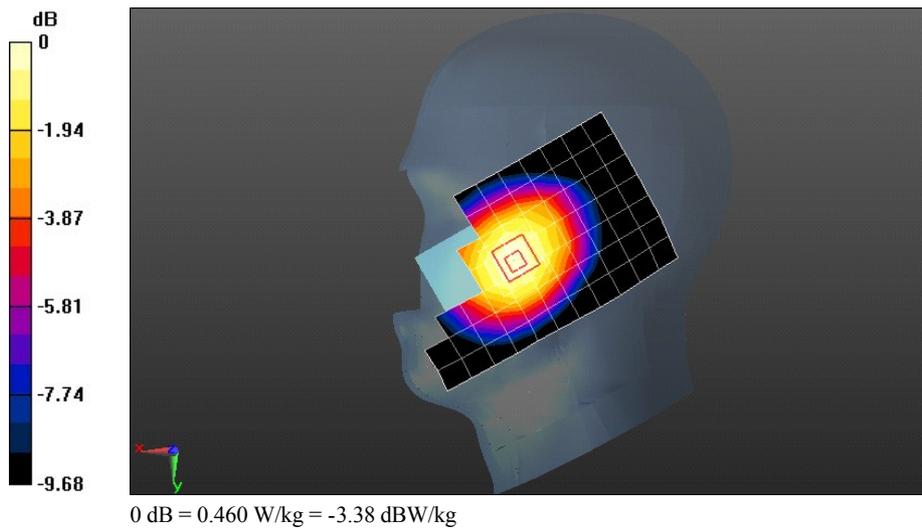

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 GSM850 190CH Right hand touch with battery 2#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 40.501$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.26, 6.26, 6.26); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.442 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.388 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.419 W/kg; SAR(10 g) = 0.320 W/kg

Maximum value of SAR (measured) = 0.458 W/kg

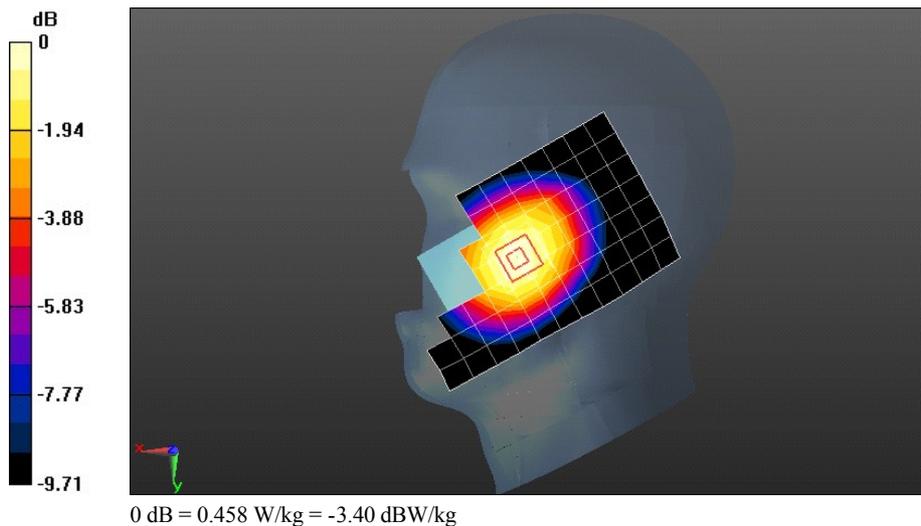

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 GSM850 190CH Back side 15mm with battery 1#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.958$ S/m; $\epsilon_r = 52.824$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.505 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.204 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.627 W/kg

SAR(1 g) = 0.481 W/kg; SAR(10 g) = 0.356 W/kg

Maximum value of SAR (measured) = 0.534 W/kg

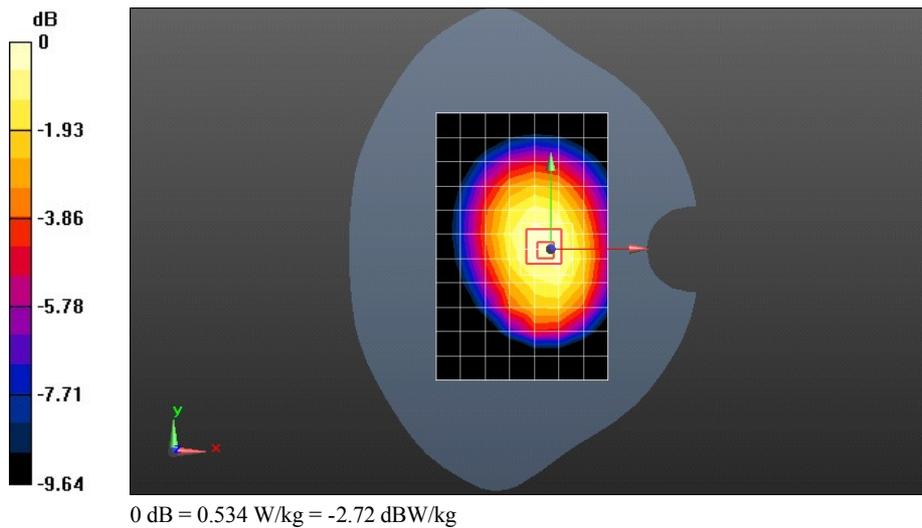

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 GSM850 190CH Back side 15mm with battery 2#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.958$ S/m; $\epsilon_r = 52.824$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.510 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.813 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.620 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.353 W/kg

Maximum value of SAR (measured) = 0.531 W/kg

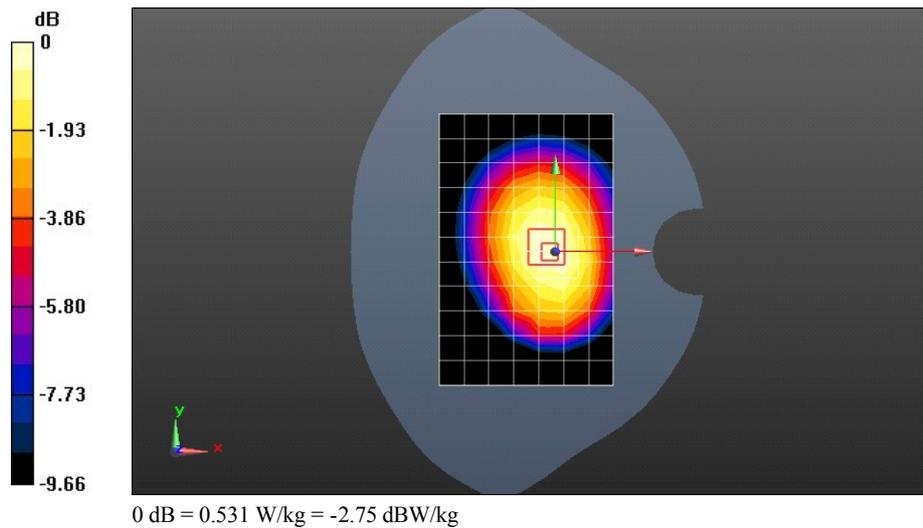

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 GSM850 GPRS 2TS 128CH Back side 10mm with battery 1#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-2TS (0); Frequency: 824.4 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated): $f = 824.4$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 53.372$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.834 W/kg

Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 27.277 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.938 W/kg

SAR(1 g) = 0.775 W/kg; SAR(10 g) = 0.614 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.839 W/kg

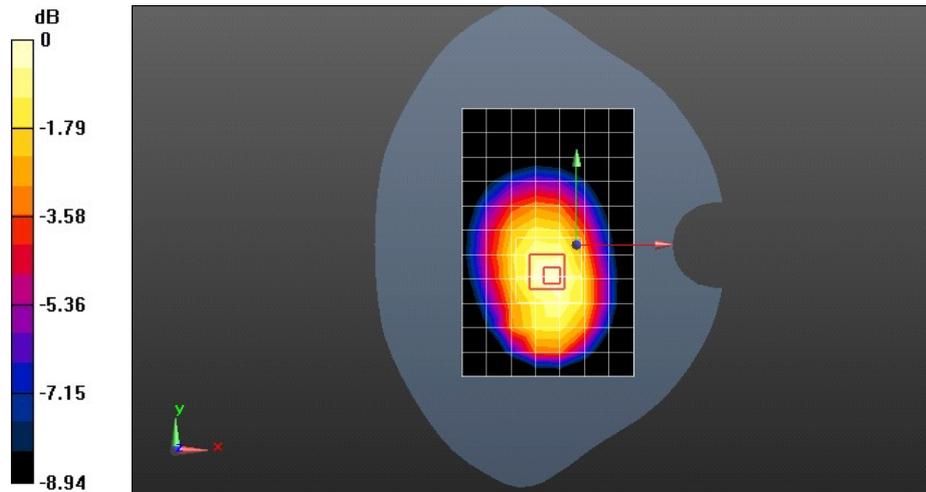

0 dB = 0.839 W/kg = -0.76 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 GSM850 GPRS 2TS 128CH Back side 10mm with battery 2#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-2TS (0); Frequency: 824.4 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated): $f = 824.4$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 53.372$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.824 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 27.293 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.934 W/kg

SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.609 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.831 W/kg

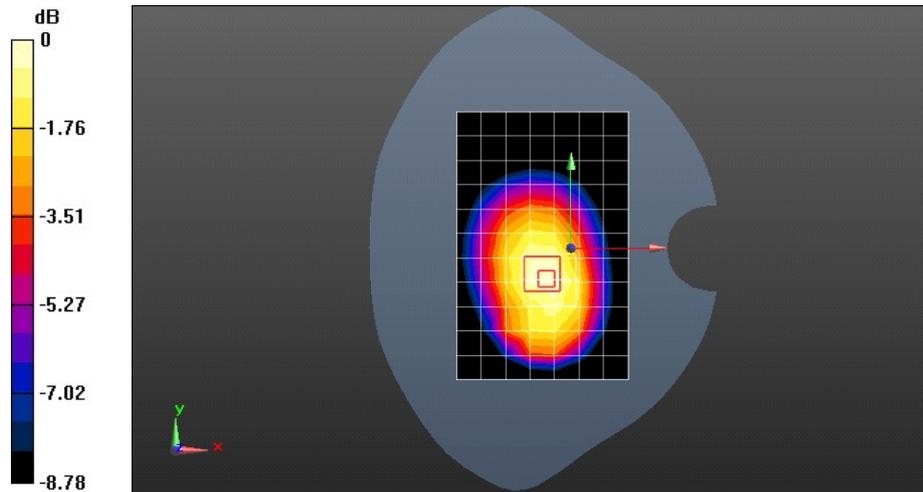

0 dB = 0.831 W/kg = -0.80 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 GSM1900 661CH Left hand touch with battery 1#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-ITS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 40.545$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.15, 5.15, 5.15); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.396 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.377 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.215 W/kg

Maximum value of SAR (measured) = 0.403 W/kg

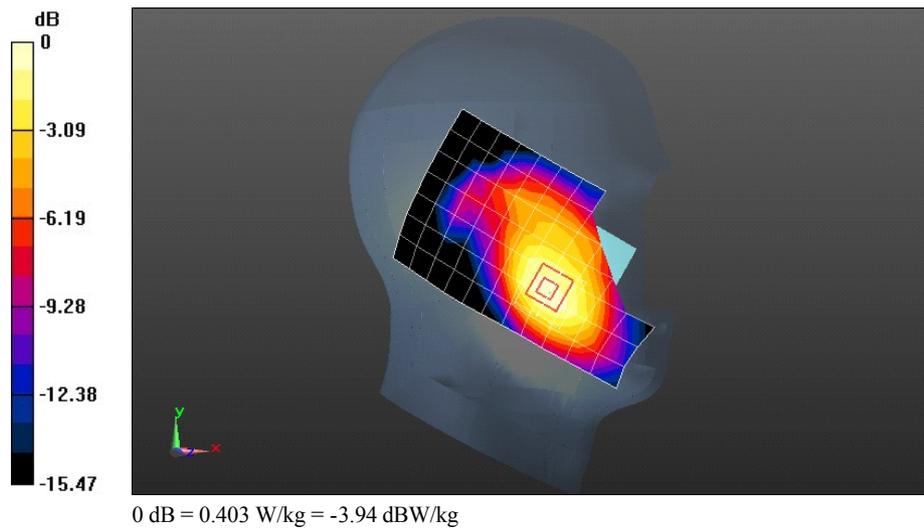

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 GSM1900 661CH Left hand touch with battery 2#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-ITS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 40.545$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.15, 5.15, 5.15); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.367 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.869 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.491 W/kg

SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 0.379 W/kg

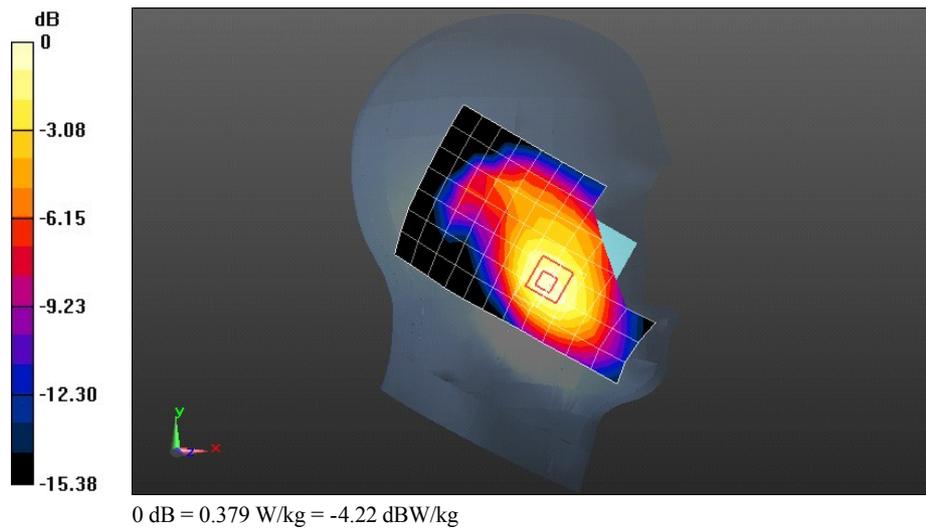

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 GSM1900 661CH Back side 15mm with battery 1#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-ITS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 52.446$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.536 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.839 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.737 W/kg

SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.288 W/kg

Maximum value of SAR (measured) = 0.569 W/kg

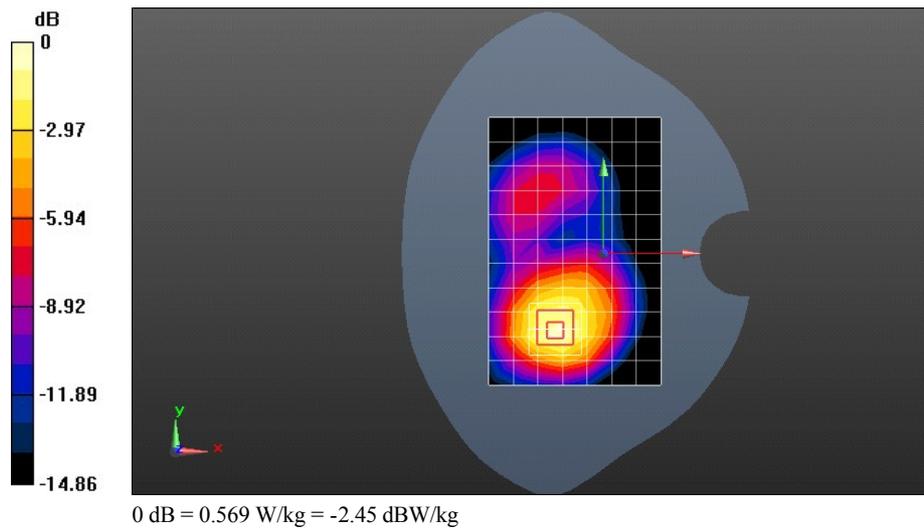

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 GSM1900 661CH Back side 15mm with battery 2#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 52.446$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.529 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.581 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.730 W/kg

SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.287 W/kg

Maximum value of SAR (measured) = 0.567 W/kg

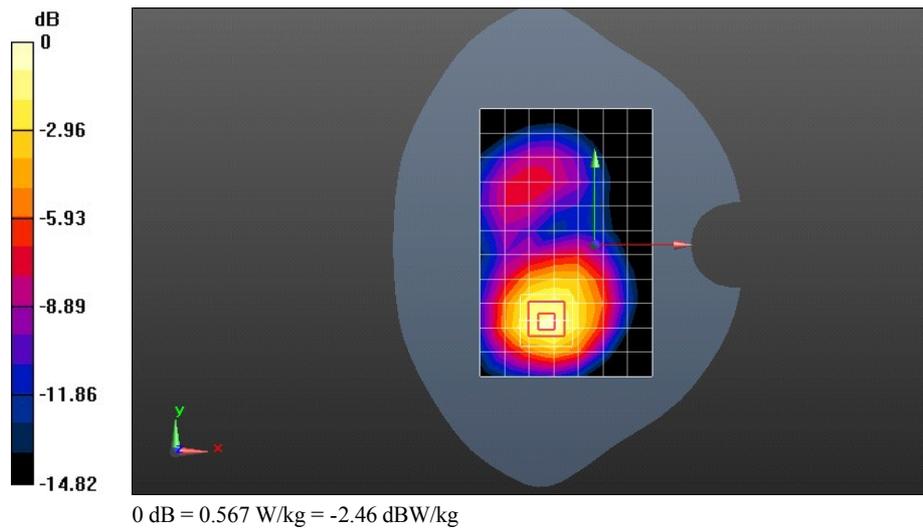

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 GSM1900 GPRS 2TS 512CH Back side 10mm with battery 1#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-2TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.478$ S/m; $\epsilon_r = 52.548$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.990 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 7.211 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.822 W/kg; SAR(10 g) = 0.479 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.991 W/kg

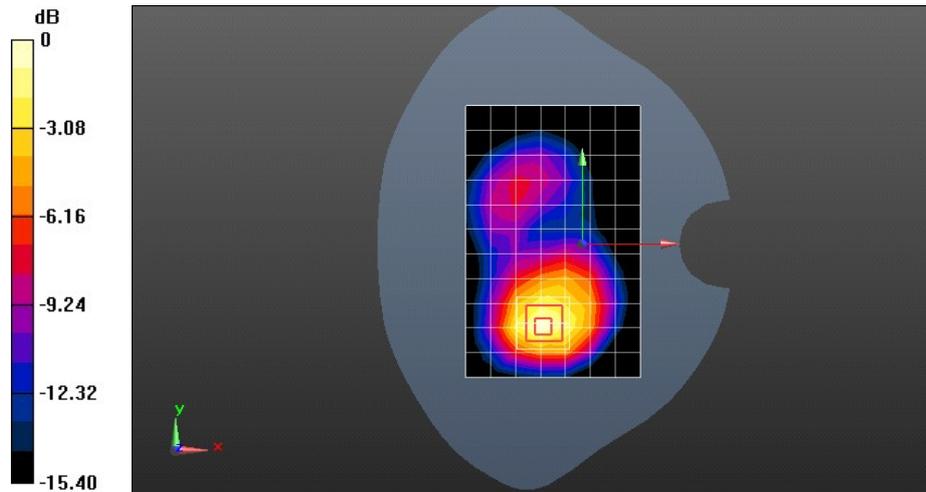

0 dB = 0.991 W/kg = -0.04 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 GSM1900 GPRS 2TS 512CH Back side 10mm with battery 1#-repeated

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-2TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.478$ S/m; $\epsilon_r = 52.548$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.951 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.757 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.798 W/kg; SAR(10 g) = 0.462 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.975 W/kg

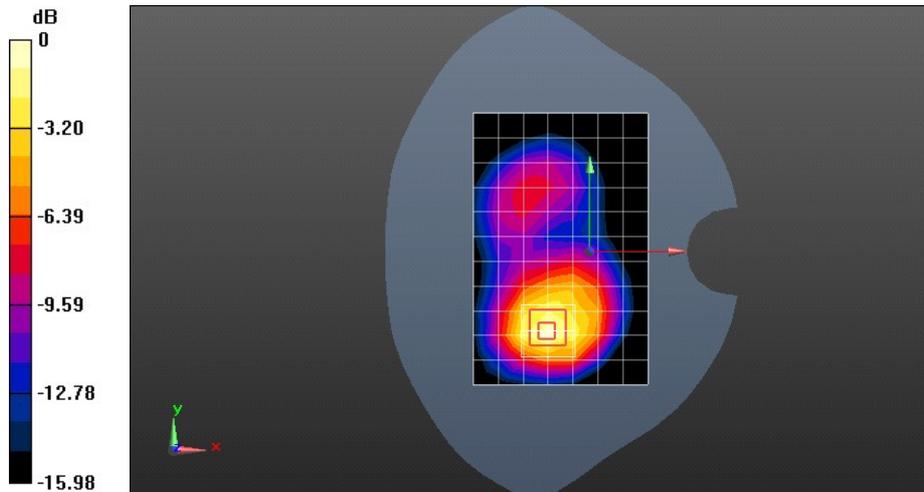

0 dB = 0.975 W/kg = -0.11 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 GSM1900 GPRS 2TS 512CH Back side 10mm with battery 2#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-2TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.478$ S/m; $\epsilon_r = 52.548$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.943 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 6.616 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.772 W/kg; SAR(10 g) = 0.452 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.926 W/kg

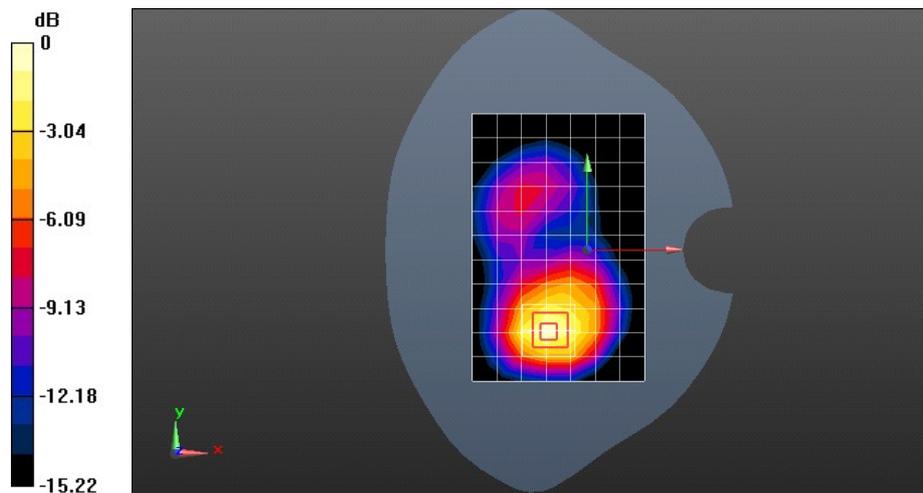

0 dB = 0.926 W/kg = -0.33 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 WiFi 802.11b 1CH Right hand touch cheek with battery 1#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.807$ S/m; $\epsilon_r = 39.47$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.52, 4.52, 4.52); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.289 W/kg


Configuration/Head/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.097 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.506 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.315 W/kg

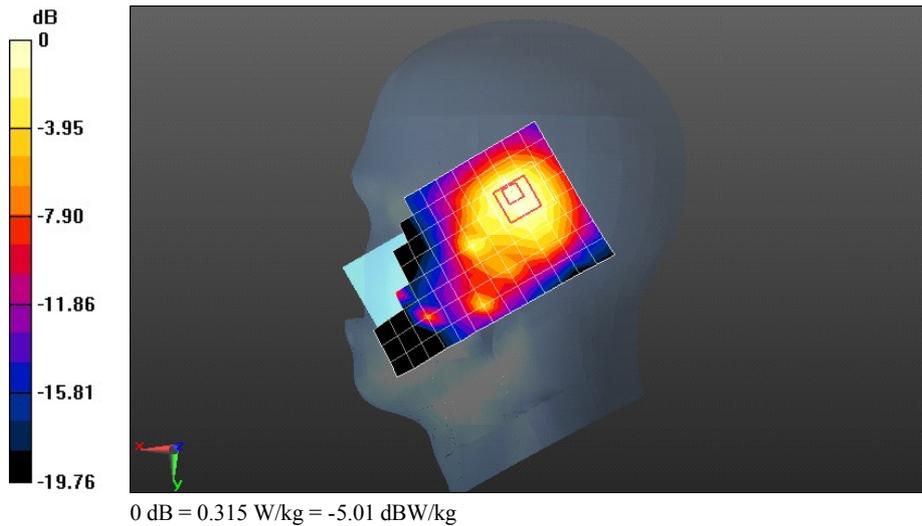

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 WiFi 802.11b 1CH Right hand touch cheek with battery 2#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.807$ S/m; $\epsilon_r = 39.47$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.52, 4.52, 4.52); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.288 W/kg


Configuration/Head/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.223 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.525 W/kg

SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.323 W/kg

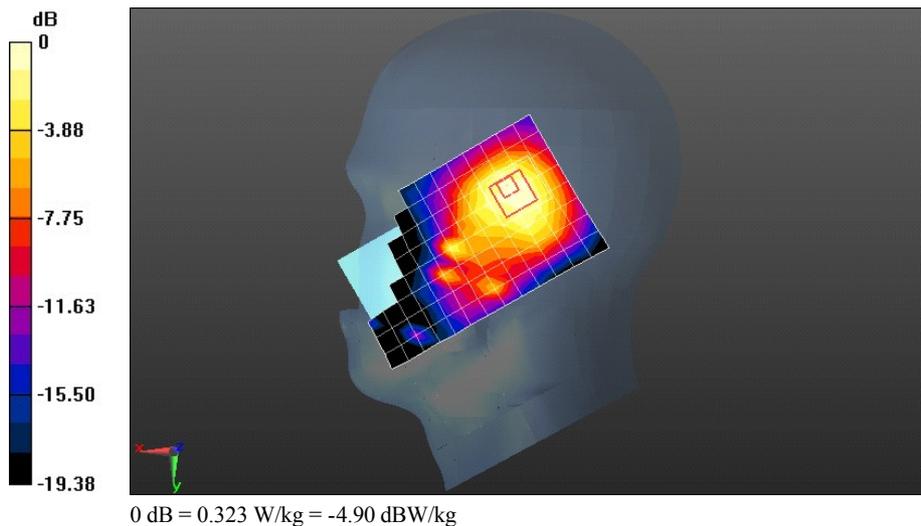

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 WiFi 802.11b 1CH Back Side 15mm with battery 1#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.25, 4.25, 4.25); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0942 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.488 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

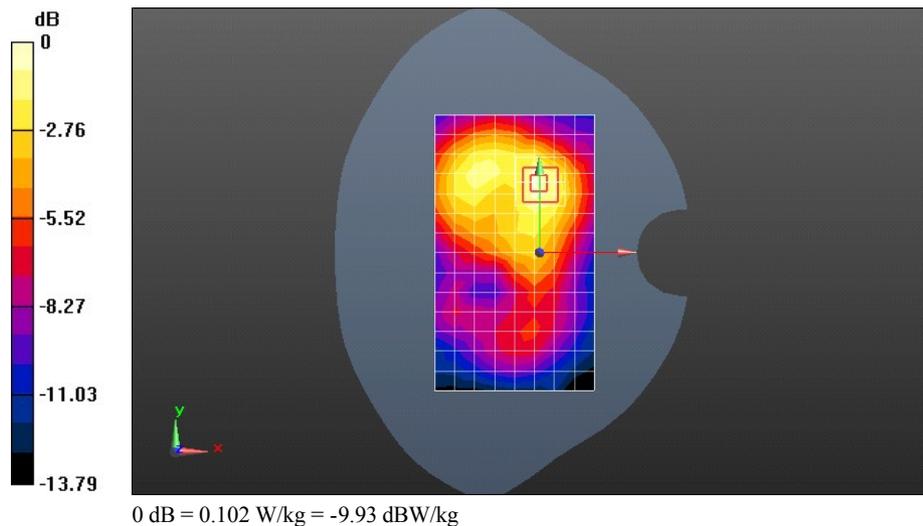

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 WiFi 802.11b 1CH Back Side 15mm with battery 2#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.25, 4.25, 4.25); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.101 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.700 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.104 W/kg

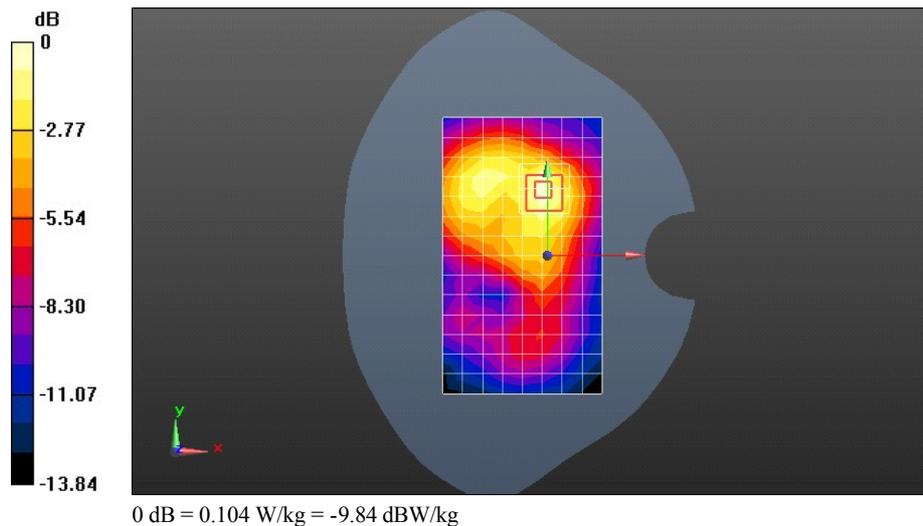

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 WiFi 802.11b 1CH Back Side 10mm with battery 1#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.25, 4.25, 4.25); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.208 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.976 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.213 W/kg

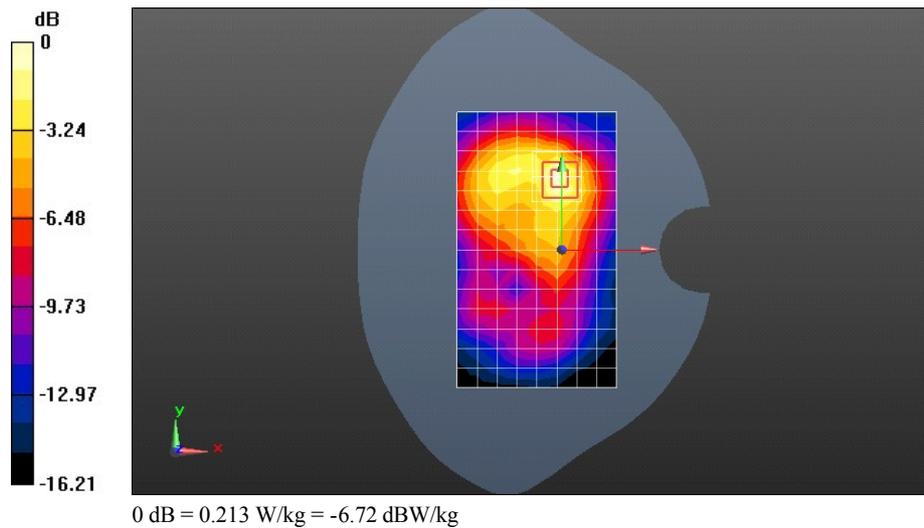

Test Laboratory: HUAWEI SAR/HAC Lab

Y330-U01 WiFi 802.11b 1CH Back Side 10mm with battery 2#

DUT: HUAWEI Y330-U01; Type: WCDMA Digital Mobile Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.25, 4.25, 4.25); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 2013-11-27
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.210 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.122 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.233 W/kg

