



SAR TEST REPORT

Product Name	WCDMA Digital Mobile Phone
Model Name	HUAWEI Y330-U15,Y330-U15
FCC ID	QISY330-U15
Client	Huawei Technologies Co., Ltd.
Manufacturer	Huawei Technologies Co., Ltd.
Date of issue	April 2, 2014

TA Technology (Shanghai) Co., Ltd.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 2 of 255

GENERAL SUMMARY

Reference Standard(s)	FCC 47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices ANSI C95.1, 1992: Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.(IEEE Std C95.1-1991) IEEE Std 1528™-2003: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques. RSS-102 Issue 4 March 2010: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03: SAR Measurement Requirements for 100 MHz to 6 GHz KDB 447498 D01 Mobile Portable RF Exposure v05r02: Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies KDB 648474 D04 Handset SAR v01r02: SAR Evaluation Considerations for Wireless Handsets. KDB 941225 D01 SAR test for 3G devices v02: SAR Measurement Procedures CDMA 20001x RTT, 1x Ev-Do, WCDMA, HSDPA/HSPA KDB 941225 D02 HSPA and 1x Advanced v02r02 SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced KDB 941225 D03 Test Reduction GSM_GPRS_EDGE v01:Recommended SAR Test Reduction Procedures for GSM/GPRS/EDGE KDB 941225 D06 Hotspot Mode SAR v01r01: SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities KDB 248227 D01 SAR meas for 802 11 a b g v01r02: SAR Measurement Procedures for 802.11a/b/g Transmitters.
Conclusion	This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 7 of this test report are below limits specified in the relevant standards for the tested bands only. General Judgment: Pass
Comment	The test result only responds to the measured sample.

Approved by Weizhong Yang
Weizhong Yang
Director

Revised by Minbao Ling
Minbao Ling
SAR Manager

Performed by Yi Zhang
Yi Zhang
SAR Engineer

TABLE OF CONTENT

1. General Information	5
1.1. Notes of the Test Report.....	5
1.2. Testing Laboratory	5
1.3. Applicant Information	6
1.4. Manufacturer Information	6
1.5. Information of EUT	7
1.6. The Maximum Reported SAR _{1g}	9
1.7. Maximum Conducted Power of each tested Mode.....	10
1.8. Test Date	10
2. SAR Measurements System Configuration	11
2.1. SAR Measurement Set-up	11
2.2. DASY5 E-field Probe System	12
2.2.1. EX3DV4 Probe Specification	12
2.2.2. E-field Probe Calibration	13
2.3. Other Test Equipment	13
2.3.1. Device Holder for Transmitters	13
2.3.2. Phantom	14
2.4. Scanning Procedure	14
2.5. Data Storage and Evaluation	16
2.5.1. Data Storage.....	16
2.5.2. Data Evaluation by SEMCAD	16
3. Laboratory Environment.....	18
4. Tissue-equivalent Liquid	19
4.1. Tissue-equivalent Liquid Ingredients.....	19
4.2. Tissue-equivalent Liquid Properties	21
5. System Check.....	22
5.1. Description of System Check.....	22
5.2. System Check Results.....	24
6. Operational Conditions during Test	25
6.1. General Description of Test Procedures	25
6.2. Test Positions.....	25
6.2.1. Against Phantom Head	25
6.2.2. Body Worn Configuration.....	25
6.3. Measurement Variability.....	27
6.4. Test Configuration	28
6.4.1. GSM Test Configuration.....	28
6.4.2. UMTS Test Configuration	29
6.4.3. HSDPA Test Configuration	29
6.4.4. HSUPA Test Configuration	31
6.4.5. WIFI Test Configuration	33

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 4 of 255

7.	Test Results	34
7.1.	Conducted Power Results	34
7.2.	Standalone SAR Test Exclusion Considerations	38
7.3.	SAR Test Results	39
7.3.1.	GSM 850 (GSM/GPRS).....	39
7.3.2.	GSM 1900 (GSM/GPRS).....	41
7.3.3.	UMTS Band II (WCDMA/HSDPA/HSUPA).....	43
7.3.4.	UMTS Band V (WCDMA/HSDPA/HSUPA)	46
7.3.5.	WIFI (802.11b, WIFI)	48
7.4.	Simultaneous Transmission Conditions	50
8.	700MHz to 3GHz Measurement Uncertainty.....	55
9.	Main Test Instruments	56
ANNEX A: Test Layout		57
ANNEX B: System Check Results		61
ANNEX C: Graph Results		67
ANNEX D: System Check Results		186
ANNEX E: Graph Results.....		192
ANNEX F: Probe Calibration Certificate		206
ANNEX G: D835V2 Dipole Calibration Certificate.....		217
ANNEX H: D1900V2 Dipole Calibration Certificate		225
ANNEX I: D2450V2 Dipole Calibration Certificate.....		233
ANNEX J: DAE4 Calibration Certificate		241
ANNEX K: The EUT Appearances and Test Configuration.....		244

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 5 of 255

1. General Information

1.1. Notes of the Test Report

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L2264.

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report alone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

If the electronic report is inconsistent with the printed one, it should be subject to the latter.

1.2. Testing Laboratory

Company:	TA Technology (Shanghai) Co., Ltd.
Address:	No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City:	Shanghai
Post code:	201201
Country:	P. R. China
Contact:	Yang Weizhong
Telephone:	+86-021-50791141/2/3
Fax:	+86-021-50791141/2/3-8000
Website:	http://www.ta-shanghai.com
E-mail:	yangweizhong@ta-shanghai.com

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 6 of 255

1.3. Applicant Information

Company: Huawei Technologies Co., Ltd.
Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian,
Longgang District
Address: Shenzhen
518129
P.R.China

1.4. Manufacturer Information

Company: Huawei Technologies Co., Ltd.
Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian,
Longgang District
Address: Shenzhen
518129
P.R.China

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 7 of 255

1.5. Information of EUT

General Information

Device Type:	Portable Device		
Exposure Category:	Uncontrolled Environment / General Population		
State of Sample:	Prototype Unit		
Product IMEI:	864225020000200		
Hardware Version:	HU1Y330TM2 Ver.A		
Software Version:	Y330-U15 V100R001C00B103		
Antenna Type:	Internal Antenna		
Device Operating Configurations :			
Tested Mode(s):	GSM 850/GSM 1900; UMTS Band II/UMTS Band V; WiFi (802.11b/g/n HT20); Bluetooth;		
Test Modulation:	(GSM)GMSK; (UMTS)QPSK;(WIFI)BPSK		
Device Class:	B		
HSDPA UE Category:	14		
HSUPA UE Category:	6		
GPRS Multislot Class(12):	Max Number of Timeslots in Uplink	4	
	Max Number of Timeslots in Downlink	4	
	Max Total Timeslot	5	
EGPRS:	Downlink Only		
Operating Frequency Range(s):	Mode	Tx (MHz)	Rx (MHz)
	GSM 850	824.2 ~ 848.8	869.2 ~ 893.8
	GSM 1900	1850.2 ~ 1909.8	1930.2 ~ 1989.8
	UMTS Band II	1852.4 ~ 1907.6	1932.4 ~ 1987.6
	UMTS Band V	826.4 ~ 846.6	871.4 ~ 891.6
	Bluetooth	2402 ~ 2480	2402 ~ 2480
	WIFI(2.4G)	2412 ~ 2462	2412 ~ 2462
Power Class:	GSM 850: 4		
	GSM 1900: 1		
	UMTS Band II: 3		
	UMTS Band V: 3		
Power Level	GSM 850: tested with power level 5		
	GSM 1900: tested with power level 0		
	UMTS Band II: tested with power control all up bits		
	UMTS Band V: tested with power control all up bits		
Test Channel: (Low - Middle - High)	128 - 190 - 251	(GSM 850)	
	512 - 661 - 810	(GSM 1900)	
	9262 - 9400 - 9538	(UMTS Band II)	
	4132 - 4183 - 4233	(UMTS Band V)	
	0-39-78	(Bluetooth)	
	1-6-11	(WIFI)	

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 8 of 255

Auxiliary Equipment Details

Name	Model	Capacity	Manufacturer	S/N	Name
Battery 1 (main battery)	HB5N1H	24021202	1500mAh	BYD	BAAD502A202B0562
Battery 2	HB5N1H	24021202	1500mAh	COSLIGHT	GAGE101Z20212289
Battery 3	HB5N1	24021158	1350mAh	COSLIGHT	GAGDB17L15834206
Battery 4	HB5N1H	24021218	1500mAh	SAMSUNG	UBDC204XXAS00908
Battery 5	HB5N1H	24021202	1500mAh	LISHEN	CAWC807XXXX00358
Battery 6	HB5N1H	24021218	1500mAh	SCUD	MLCC205997530708
Battery 7	HB5N1	24021158	1350mAh	BYD	BAADC05L15861218

Equipment under Test (EUT) has a GSM/UMTS antenna that is used for Tx/Rx, the second is BT/WIFI antenna that can be used for Tx/Rx. It consists of EUT and battery and the detail about these is in chapter 1.5 in this report. The EUT has two SIM cards that are SIM 1 and SIM 2. SIM 1 supports GSM/UMTS function and SIM 2 supports GSM function.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 9 of 255

1.6. The Maximum Reported SAR_{1g}

Head SAR Configuration

Mode	Test Position	Channel /Frequency(MHz)	Limit SAR _{1g} 1.6 W/kg	
			Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
GSM 850	Right, cheek	190/836.6	0.519	0.697
GSM 1900	Left, cheek	661/1880	0.388	0.478
UMTS Band II	Left, cheek	9400/1880	0.614	0.782
UMTS Band V	Left, cheek	4183/836.6	0.668	0.966
WiFi(802.11b)	Right, cheek	1/2412	0.171	0.189

Body Worn Configuration

Mode	Test Position	Channel /Frequency(MHz)	Limit SAR _{1g} 1.6 W/kg	
			Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
GSM 850	Back side	190/836.6	0.500	0.670
GSM 1900	Back side	661/1880	0.562	0.693
UMTS Band II	Back side	9262/1852.4	1.130	1.479
UMTS Band V	Back side	4183/836.6	0.690	0.997
WiFi(802.11b)	Back side	1/2412	0.139	0.154

Hotspot SAR Configuration

Mode	Test Position	Channel /Frequency(MHz)	Limit SAR _{1g} 1.6 W/kg	
			Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
2Txslots GPRS 850	Back side	190/836.6	0.582	0.676
2Txslots GPRS 1900	Back side	661/1880	0.631	0.778
UMTS Band II	Back side	9262/1852.4	1.130	1.479
UMTS Band V	Back side	4183/836.6	0.690	0.997
WiFi(802.11b)	Back side	1/2412	0.139	0.154

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 10 of 255

1.7. Maximum Conducted Power of each tested Mode

Mode		Max Burst Conducted Power (dBm)	Max Average Power (dBm)
GSM 850	GSM	32.22	23.19
	GPRS, 2Txslots	29.86	23.84
GSM 1900	GSM	29.65	20.62
	GPRS, 2Txslots	26.85	20.83

Mode	Maximum Conducted Power (dBm)
UMTS Band II	21.95
UMTS Band V	23.46
WiFi(802.11b)	16.56
BT	6.72

Note: The detail Power refer to Table 14 (Power Measurement Results).

1.8. Test Date

The test performed from March 13, 2014 to April 2, 2014.

2. SAR Measurements System Configuration

2.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

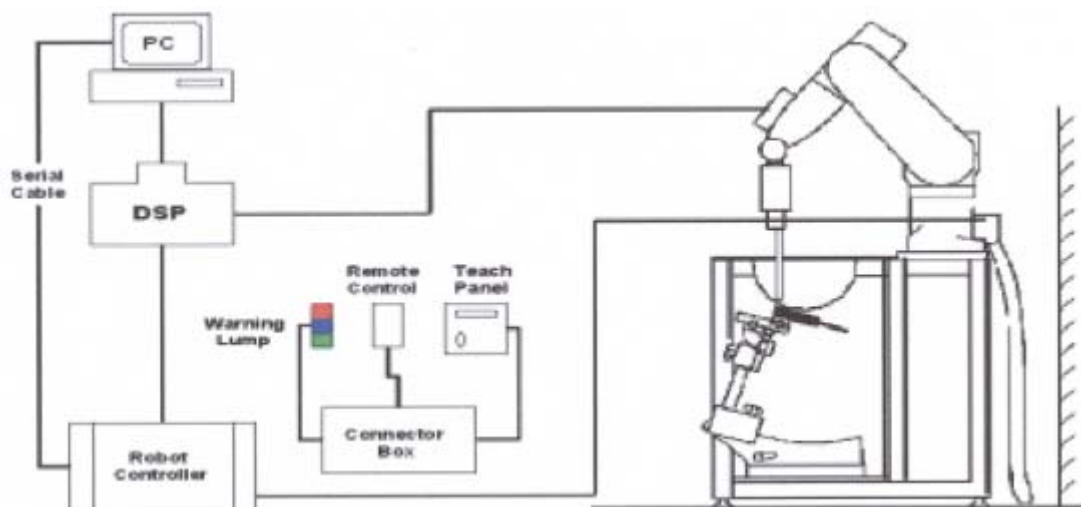


Figure 1 SAR Lab Test Measurement Set-up

2.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

2.2.1. EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



Figure 2.EX3DV4 E-field Probe



Figure 3. EX3DV4 E-field probe

2.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),
C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:
 σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m^3).

2.3. Other Test Equipment

2.3.1. Device Holder for Transmitters

The DASY device holder is designed to cope with the different positions given in the standard.

It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Figure 4 Device Holder

2.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W) Available Special



Figure 5 Generic Twin Phantom

2.4. Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. $\pm 5\%$.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- Area Scan
The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 15 of 255

spacing is set according to FCC KDB Publication 865664. During scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

Table 1: Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01

Frequency	Maximum Area Scan Resolution (mm) $(\Delta x_{\text{area}}, \Delta y_{\text{area}})$	Maximum Zoom Scan Resolution (mm) $(\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}})$	Maximum Zoom Scan Spatial Resolution (mm) $\Delta z_{\text{zoom}}(n)$	Minimum Zoom Scan Volume (mm) (x,y,z)
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≥ 22

2.5. Data Storage and Evaluation

2.5.1. Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

2.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	Dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	
	- Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 17 of 255

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$

With V_i = compensated signal of channel i (i = x, y, z)

$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot})^2 \cdot \sigma / (\rho \cdot 1000)$$

with **SAR** = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with **P_{pwe}** = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

3. Laboratory Environment

Table 2: The Requirements of the Ambient Conditions

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 19 of 255

4. Tissue-equivalent Liquid

4.1. Tissue-equivalent Liquid Ingredients

The liquid is consisted of water, salt, Glycol, Sugar, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The table 3 and table 4 show the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the KDB 865664 D01.

Table 3: Composition of the Head Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Brain) 835MHz
Water	41.45
Sugar	56
Salt	1.45
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=41.5$ $\sigma=0.9$

MIXTURE%	FREQUENCY(Brain) 1900MHz
Water	55.242
Glycol monobutyl	44.452
Salt	0.306
Dielectric Parameters Target Value	f=1900MHz $\epsilon=40.0$ $\sigma=1.40$

MIXTURE%	FREQUENCY(Brain) 2450MHz
Water	62.7
Glycol	36.8
Salt	0.5
Dielectric Parameters Target Value	f=2450MHz $\epsilon=39.20$ $\sigma=1.80$

Table 4: Composition of the Body Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Body) 835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 20 of 255

MIXTURE%	FREQUENCY (Body) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

MIXTURE%	FREQUENCY(Body) 2450MHz
Water	73.2
Glycol	26.7
Salt	0.1
Dielectric Parameters Target Value	f=2450MHz $\epsilon=52.70$ $\sigma=1.95$

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 21 of 255

4.2. Tissue-equivalent Liquid Properties

Table 5: Dielectric Performance of Tissue Simulating Liquid

Frequency	Test Date	Temp ℃	Measured Dielectric Parameters		Target Dielectric Parameters		Limit (Within ±5%)	
			ϵ_r	$\sigma(\text{s/m})$	ϵ_r	$\sigma(\text{s/m})$	Dev $\epsilon_r(\%)$	Dev $\sigma(\%)$
835MHz (head)	2014-03-13	21.5	41.4	0.93	41.5	0.90	-0.24	3.33
835MHz (head)	2014-04-01	21.5	41.4	0.92	41.5	0.90	-0.24	2.22
1900MHz (head)	2014-03-21	21.5	39.6	1.43	40.0	1.40	-1.00	2.14
1900MHz (head)	2014-04-01	21.5	40.5	1.33	40.0	1.40	1.25	-5.00
2450MHz (head)	2014-03-22	21.5	39.1	1.80	39.2	1.80	-0.26	0.00
2450MHz (head)	2014-04-02	21.5	39.1	1.80	39.2	1.80	-0.26	0.00
835MHz (body)	2014-03-15	21.5	55.1	0.99	55.2	0.97	-0.18	2.06
835MHz (body)	2014-04-01	21.5	55.1	0.98	55.2	0.97	-0.18	1.03
1900MHz (body)	2014-03-23	21.5	53.1	1.52	53.3	1.52	-0.38	0.00
1900MHz (body)	2014-04-01	21.5	53.1	1.53	53.3	1.52	-0.38	0.66
2450MHz (body)	2014-03-21	21.5	52.1	1.99	52.7	1.95	-1.14	2.05
2450MHz (body)	2014-04-01	21.5	52.1	1.97	52.7	1.95	-1.14	1.03

5. System Check

5.1. Description of System Check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulates, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 6 and table 7.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

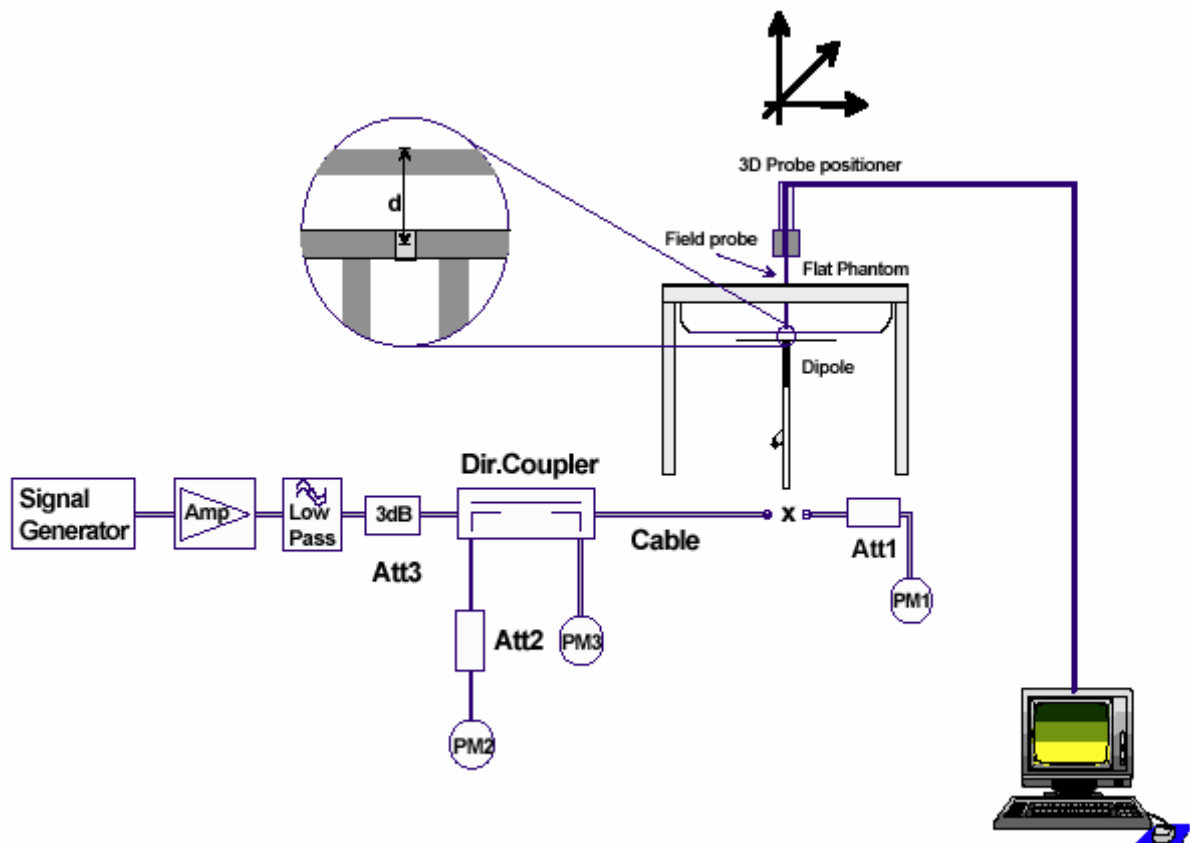


Figure 6 System Check Set-up

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 23 of 255

Justification for Extended SAR Dipole Calibrations

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (< -20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB 865664 D01:

Dipole D835V2 SN: 4d020				
Head Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	$\Delta\Omega$
8/26/2011	-27.7	/	52.9	/
8/25/2012	-29.1	5.0%	55.0	2.1 Ω
8/24/2013	-26.6	4.1%	55.3	2.4 Ω
Body Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	$\Delta\Omega$
8/26/2011	-25.1	/	48.7	/
8/25/2012	-24.3	3.2 %	50.6	1.9 Ω
8/24/2013	-24.7	1.6%	51.1	2.4 Ω

Dipole D1900V2 SN: 5d060				
Head Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	$\Delta\Omega$
8/31/2011	-22.3	/	52.6	/
8/30/2012	-21.7	2.7%	51.4	1.2 Ω
8/29/2013	-21.4	4.2%	50.5	2.1 Ω
Body Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	$\Delta\Omega$
8/31/2011	-21.3	/	47.3	/
8/30/2012	-20.9	1.9%	45.9	1.4 Ω
8/29/2013	-20.4	4.4%	44.8	2.5 Ω

Dipole D2450V2 SN: 786				
Head Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	$\Delta\Omega$
8/29/2011	-25.5	/	55.0	/
8/28/2012	-26.8	5.1%	56.5	1.5 Ω
8/27/2013	-26.4	3.5%	56.9	1.9 Ω
Body Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	$\Delta\Omega$
8/29/2011	-29.0	/	50.4	/
8/28/2012	-29.9	3.1%	52.1	1.7 Ω
8/27/2013	-28.2	2.8%	52.7	2.3 Ω

Page 24 of 255

Frequency	Test Date	Dielectric Parameters		Temp	250mW Measured SAR _{1g}	1W Normalized SAR _{1g}	1W Target SAR _{1g}	Limit (±10% Deviation)
		ε _r	σ(s/m)					
835MHz	2014-03-15	55.1	0.99	21.5	2.41	9.64	9.46	1.90%
835MHz	2014-04-01	55.1	0.98	21.5	2.42	9.68	9.46	2.33%
1900MHz	2014-03-23	53.1	1.52	21.5	9.93	39.72	41.70	-4.75%
1900MHz	2014-04-01	53.1	1.53	21.5	9.90	39.60	41.70	-5.04%
2450MHz	2014-03-21	52.1	1.99	21.5	12.50	50.00	51.70	-3.29%
2450MHz	2014-04-01	52.1	1.97	21.5	12.48	49.92	51.70	-3.44%

Note: 1. The graph results see ANNEX B.
2. Target Values used derive from the calibration certificate

6. Operational Conditions during Test

6.1. General Description of Test Procedures

A communication link is set up with a System Simulator (SS) by air link, and a call is established. The EUT is commanded to operate at maximum transmitting power.

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

6.2. Test Positions

6.2.1. Against Phantom Head

Measurements were made in "cheek" and "tilt" positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

6.2.2. Body Worn Configuration

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device, and the distance between the device and the phantom was kept 10mm for body worn.

Based upon KDB941225 D06 with a form factor > 9 cm x 5 cm, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested. The distance between the device and the phantom was kept 10mm of wireless routers.

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 26 of 255

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.3. Measurement Variability

Per FCC KDB Publication 865664 D01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

6.4. Test Configuration

6.4.1. GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using E5515C the power level is set to “5” for GSM 850, set to “0” for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

Output power of reductions:

Table 8: The allowed power reduction in the multi-slot configuration

Number of timeslots in uplink assignment	Permissible nominal reduction of maximum output power,(dB)
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

GSM 850

GPRS (GMSK) :

Number of timeslots in uplink assignment	reduction of maximum output power, (dB)
1	0
2	3
3	5
4	6

GSM 1900

GPRS (GMSK) :

Number of timeslots in uplink assignment	reduction of maximum output power, (dB)
1	0
2	3
3	5
4	6

6.4.2. UMTS Test Configuration

6.4.2.1. Output power Verification

Maximum output power is verified on the High, Middle and Low channel according to the procedures described in section 5.2 of 3GPP TS 34. 121, using the appropriate RMC or AMR with TPC(transmit power control) set to all up bits for WCDMA/HSDPA or applying the required inner loop power control procedures to the maximum output power while HSUPA is active. Results for all applicable physical channel configuration (DPCCH, DPDCH_n and spreading codes, HSDPA, HSPA) should be tabulated in the SAR report. All configuration that are not supported by the DUT or can not be measured due to technical or equipment limitations should be clearly identified

6.4.2.2. Head SAR Measurements

SAR for head exposure configurations in voice mode is measured using a 12.2kbps RMC with TPC bits configured to all up bits. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2kbps AMR is less than 1/4 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2kbps AMR with a 3.4 kbps SRB(Signaling radio bearer) using the exposure configuration that results in the highest SAR in 12.2kbps RMC for that RF channel.

6.4.2.3. Body SAR Measurements

SAR for body exposure configurations in voice and data modes is measured using 12.2kbps RMC with TPC bits configured to all up bits. SAR for other spreading codes and multiple DPDCH_n, when supported by the DUT, are not required when the maximum average output of each RF channel, for each spreading code and DPDCH_n configuration, are less than 1/4 dB higher than those measured in 12.2kbps RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCH_n using the exposure configuration that results in the highest SAR with 12.2 kbps RMC. When more than 2 DPDCH_n are supported by the DUT, it may be necessary to configure additional DPDCH_n for a DUT using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

6.4.3. HSDPA Test Configuration

SAR for body exposure configurations is measured according to the 'Body SAR Measurements' procedures of that section. In addition, body SAR is also measured for HSDPA when the maximum average output of each RF channel with HSDPA active is at least ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 30 of 255

be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors(β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Table 9: Subtests for UMTS Release 5 HSDPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude(EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 8$ ($A_{hs} = 30/15$) with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 7$ ($A_{hs} = 24/15$) with $\beta_{hs} = 24/15 * \beta_c$.

Note3: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Table 10: Settings of required H-Set 1 QPSK in HSDPA mode

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	534
Inter-TTI Distance	TTI's	3
Number of HARQ Processes	Processes	2
Information Bit Payload (N_{INF})	Bits	3202
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	4800
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	9600
Coding Rate	/	0.67
Number of Physical Channel Codes	Codes	5
Modulation	/	QPSK

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 31 of 255

Table 11: HSDPA UE category

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum Transport Bits/HS-DSCH	Total Channel
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

6.4.4. HSUPA Test Configuration

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.⁴⁰

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA should be configured according to the β values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of 3 G device.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 32 of 255

Table 12: Sub-Test 5 Setup for Release 6 HSUPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (2) (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-

DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the

signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the

signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Table 13: HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E- DCH TTI (ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	11484	5.76
	4	4	10		20000	2.00
7 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.
 UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM.
 (TS25.306-7.3.0)

6.4.5. WIFI Test Configuration

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal. This RF signal utilized in SAR measurement has almost 100% duty cycle and its crest factor is 1.

For the 802.11b/g/n SAR tests, a communication link is set up with the test mode software for WIFI mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate. Testing at higher data rates is not required when the maximum average output power is less than 0.25dB higher than those measured at the lowest data rate.

802.11b/g/n operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g/n modes are tested on the maximum average output channel;

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 34 of 255

7. Test Results

7.1. Conducted Power Results

Table 14: Conducted Power Measurement Results

GSM 850		Burst Conducted Power(dBm)			/	Average power(dBm)		
		Channel 128	Channel 190	Channel 251		Channel 128	Channel 190	Channel 251
GSM		32.15	32.22	32.21	-9.03dB	23.12	23.19	23.18
GPRS (GMSK)	1Txslot	32.13	32.24	32.25	-9.03dB	23.10	23.21	23.22
	2Txslots	29.75	29.85	29.86	-6.02dB	23.73	23.83	23.84
	3Txslots	27.85	27.93	27.95	-4.26dB	23.59	23.67	23.69
	4Txslots	26.74	26.83	26.85	-3.01dB	23.73	23.82	23.84
GSM 1900		Burst Conducted Power(dBm)			/	Average power(dBm)		
		Channel 512	Channel 661	Channel 810		Channel 512	Channel 661	Channel 810
GSM		29.65	29.59	29.56	-9.03dB	20.62	20.56	20.53
GPRS (GMSK)	1Txslot	29.37	29.55	29.79	-9.03dB	20.34	20.52	20.76
	2Txslots	26.36	26.59	26.85	-6.02dB	20.34	20.57	20.83
	3Txslots	24.32	24.58	24.91	-4.26dB	20.06	20.32	20.65
	4Txslots	23.30	23.52	23.75	-3.01dB	20.29	20.51	20.74

Note:

1) Division Factors

To average the power, the division factor is as follows:

1Txslot = 1 transmit time slot out of 8 time slots

=> conducted power divided by (8/1) => -9.03 dB

2Txslots = 2 transmit time slots out of 8 time slots

=> conducted power divided by (8/2) => -6.02 dB

3Txslots = 3 transmit time slots out of 8 time slots

=> conducted power divided by (8/3) => -4.26 dB

4Txslots = 4 transmit time slots out of 8 time slots

=> conducted power divided by (8/4) => -3.01 dB

2) Average power numbers

The maximum power numbers are marks in bold.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 35 of 255

UMTS Band II		Conducted Power (dBm)		
		Channel 9262	Channel 9400	Channel 9538
RMC	12.2kbps RMC	21.83	21.95	21.63
	64kbps RMC	21.82	21.93	21.62
	144kbps RMC	21.85	21.94	21.65
	384kbps RMC	21.83	21.94	21.68
HSDPA	Sub - Test 1	21.09	21.27	21.24
	Sub - Test 2	20.86	21.02	20.98
	Sub - Test 3	20.35	20.51	20.51
	Sub - Test 4	20.3	20.48	20.46
HSUPA	Sub - Test 1	18.97	19.17	19.17
	Sub - Test 2	19.02	19.2	19.23
	Sub - Test 3	19.98	20.14	20.16
	Sub - Test 4	18.49	18.64	18.66
	Sub - Test 5	20.46	20.42	20.57
UMTS Band V		Conducted Power (dBm)		
		Channel 4132	Channel 4183	Channel 4233
RMC	12.2kbps RMC	23.41	23.40	23.37
	64kbps RMC	23.44	23.46	23.39
	144kbps RMC	23.42	23.42	23.38
	384kbps RMC	22.58	22.75	22.61
HSDPA	Sub - Test 1	22.59	22.63	22.46
	Sub - Test 2	22.33	22.32	22.18
	Sub - Test 3	21.82	21.83	21.68
	Sub - Test 4	21.78	21.80	21.66
HSUPA	Sub - Test 1	20.46	20.50	20.35
	Sub - Test 2	20.44	20.51	20.31
	Sub - Test 3	21.45	21.50	21.31
	Sub - Test 4	19.86	19.91	19.75
	Sub - Test 5	20.96	21.00	20.83

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 36 of 255

The average output power of BT antenna is as following:

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz
GFSK(dBm)	5.76	6.72	5.82
$\pi/4$ DQPSK(dBm)	3.45	4.62	3.60
8DPSK(dBm)	3.59	4.53	3.52

The output power of WIFI antenna is as following:

Mode	Channel	Data rate (Mbps)	AV Power (dBm)
802.11b	1	1	16.56
		2	16.27
		5.5	16.02
		11	15.86
	6	1	16.35
		2	16.21
		5.5	16.15
		11	16.03
	11	1	16.54
		2	16.49
		5.5	16.37
		11	16.21
802.11g	1	6	13.93
		9	13.68
		12	13.25
		18	12.84
		24	12.46
		36	12.25
		48	11.89
		54	11.67
	6	6	16.11
		9	15.83
		12	15.67
		18	15.36
		24	14.93
		36	14.61
		48	14.25
		54	13.82
	11	6	14.36
		9	13.88
		12	13.56

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 37 of 255

802.11n HT20		18	13.27
		24	12.81
		36	12.58
		48	12.27
		54	12.06
	1	MCS0	13.89
		MCS1	13.56
		MCS2	13.22
		MCS3	12.79
		MCS4	12.37
		MCS5	12.09
		MCS6	11.73
		MCS7	11.41
	6	MCS0	15.12
		MCS1	14.76
		MCS2	14.48
		MCS3	13.96
		MCS4	13.59
		MCS5	13.23
		MCS6	12.87
		MCS7	12.59
	11	MCS0	14.21
		MCS1	13.84
		MCS2	13.37
		MCS3	12.95
		MCS4	12.62
		MCS5	12.48
		MCS6	12.21
		MCS7	11.89

7.2. Standalone SAR Test Exclusion Considerations

Per FCC KDB 447498 D01, the SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Based on the above equation, Bluetooth SAR was not required;

$$\text{Head Evaluation} = [10^{(8/10)}/5] * (2.480^{1/2}) = 1.99 < 3.0$$

$$\text{Body Evaluation} = [10^{(8/10)}/10] * (2.480^{1/2}) = 0.99 < 3.0$$

Based on the above equation, WIFI SAR was required;

$$\text{Head Evaluation} = [10^{(17/10)}/5] * (2.462^{1/2}) = 15.73 > 3.0$$

$$\text{Body Evaluation} = [10^{(17/10)}/10] * (2.462^{1/2}) = 7.86 > 3.0$$

Page 39 of 255

Table 15: SAR Values [GSM 850 (GSM/GPRS)]

[illegible]

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 40 of 255

Test Position	Channel/ Frequency (MHz)	Time slot	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift $\pm 0.21\text{dB}$	Limit SAR _{1g} 1.6 W/kg			
						Drift (dB)	Measured SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	Graph Results
Bottom Edge	190/836.6	2Txslots	1:4.15	30.5	29.85	0.100	0.101	1.16	0.117	Figure27
Worst Case Position of Body with Battery 2 (Distance 10mm)										
Back Side	190/836.6	2Txslots	1:4.15	30.5	29.85	0.040	0.582	1.16	0.676	Figure28
Worst Case Position of Body with Battery 3 (Distance 10mm)										
Back Side	190/836.6	2Txslots	1:4.15	30.5	29.85	-0.100	0.518	1.16	0.602	Figure29
Worst Case Position of Body with Battery 4 (Distance 10mm)										
Back Side	190/836.6	2Txslots	1:4.15	30.5	29.85	-0.110	0.544	1.16	0.632	Figure30
Worst Case Position of Body with Battery 5 (Distance 10mm)										
Back Side	190/836.6	2Txslots	1:4.15	30.5	29.85	-0.060	0.556	1.16	0.646	Figure31
Worst Case Position of Body with Battery 6 (Distance 10mm)										
Back Side	190/836.6	2Txslots	1:4.15	30.5	29.85	-0.010	0.558	1.16	0.648	Figure32
Worst Case Position of Body with Battery 7 (Distance 10mm)										
Back Side	190/836.6	2Txslots	1:4.15	30.5	29.85	0.037	0.541	1.16	0.628	Figure129
Worst Case Position of Body with SIM 2 (Distance 10mm)										
Back Side	190/836.6	2Txslots	1:4.15	30.5	29.85	-0.140	0.533	1.16	0.619	Figure33
Body worn (Distance 10mm)										
Back Side	190/836.6	GSM	1:8.3	33.5	32.22	-0.09	0.500	1.34	0.670	Figure130
Front Side	190/836.6	GSM	1:8.3	33.5	32.22	-0.01	0.443	1.34	0.595	Figure131

Note: 1. The value with blue color is the maximum SAR Value of each test band.

- Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).
- WWAN antenna is located at bottom edge; antenna-to-top edge distance is more than 2.5 cm (see ANNEX K). Based upon KDB941225 D06, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.
- Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was ≤ 1.2 W/kg, no additional SAR evaluations using a headset cable were required

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 41 of 255

7.3.2. GSM 1900 (GSM/GPRS)

Table 16: SAR Values [GSM 1900(GSM/GPRS)]

Test Position	Channel/ Frequency (MHz)	Time slot	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift ± 0.21dB	Limit SAR _{1g} 1.6 W/kg			
						Drift (dB)	Measured SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	Graph Results
Test Position of Head with Battery 1										
Left Cheek	661/1880	GSM	1:8.3	30.5	29.59	-0.049	0.380	1.23	0.469	Figure34
Left Tilt	661/1880	GSM	1:8.3	30.5	29.59	-0.070	0.163	1.23	0.201	Figure35
Right Cheek	661/1880	GSM	1:8.3	30.5	29.59	-0.070	0.259	1.23	0.319	Figure36
Right Tilt	661/1880	GSM	1:8.3	30.5	29.59	0.040	0.162	1.23	0.200	Figure37
Worst Case Position of Head with Battery 2										
Left Cheek	661/1880	GSM	1:8.3	30.5	29.59	0.110	0.363	1.23	0.448	Figure38
Worst Case Position of Head with Battery 3										
Left Cheek	661/1880	GSM	1:8.3	30.5	29.59	0.022	0.386	1.23	0.476	Figure39
Worst Case Position of Head with Battery 4										
Left Cheek	661/1880	GSM	1:8.3	30.5	29.59	0.056	0.354	1.23	0.437	Figure40
Worst Case Position of Head with Battery 5										
Left Cheek	661/1880	GSM	1:8.3	30.5	29.59	0.042	0.365	1.23	0.450	Figure41
Worst Case Position of Head with Battery 6										
Left Cheek	661/1880	GSM	1:8.3	30.5	29.59	-0.110	0.388	1.23	0.478	Figure42
Worst Case Position of Head with Battery 7										
Left Cheek	661/1880	GSM	1:8.3	30.5	29.59	0.041	0.371	1.23	0.457	Figure132
Worst Case Position of Head with SIM 2										
Left Cheek	661/1880	GSM	1:8.3	30.5	29.59	0.022	0.378	1.23	0.466	Figure43
Test position of Body with Battery 1 (Distance 10mm)										
Back Side	661/1880	2Txslots	1:4.15	27.5	26.59	-0.030	0.631	1.23	0.778	Figure44
Front Side	661/1880	2Txslots	1:4.15	27.5	26.59	0.180	0.343	1.23	0.423	Figure45
Left Edge	661/1880	2Txslots	1:4.15	27.5	26.59	-0.020	0.178	1.23	0.219	Figure46
Right Edge	661/1880	2Txslots	1:4.15	27.5	26.59	0.027	0.067	1.23	0.082	Figure47
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	661/1880	2Txslots	1:4.15	27.5	26.59	0.080	0.320	1.23	0.395	Figure48

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 42 of 255

Test Position	Channel/ Frequency (MHz)	Time slot	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift	Limit SAR _{1g} 1.6 W/kg			
						± 0.21dB	Measured SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	Graph Results
Drift (dB)										
Worst Case Position of Body with Battery 2 (Distance 10mm)										
Back Side	661/1880	2 Txslots	1:4.15	27.5	26.59	0.026	0.554	1.23	0.683	Figure49
Worst Case Position of Body with Battery 3 (Distance 10mm)										
Back Side	661/1880	2 Txslots	1:4.15	27.5	26.59	-0.070	0.575	1.23	0.709	Figure50
Worst Case Position of Body with Battery 4 (Distance 10mm)										
Back Side	661/1880	2 Txslots	1:4.15	27.5	26.59	-0.030	0.572	1.23	0.705	Figure51
Worst Case Position of Body with Battery 5 (Distance 10mm)										
Back Side	661/1880	2 Txslots	1:4.15	27.5	26.59	0.035	0.597	1.23	0.736	Figure52
Worst Case Position of Body with Battery 6 (Distance 10mm)										
Back Side	661/1880	2 Txslots	1:4.15	27.5	26.59	-0.050	0.554	1.23	0.683	Figure53
Worst Case Position of Body with Battery 7 (Distance 10mm)										
Back Side	661/1880	2 Txslots	1:4.15	27.5	26.59	-0.03	0.584	1.23	0.720	Figure133
Worst Case Position of Body with SIM 2 (Distance 10mm)										
Back Side	661/1880	2 Txslots	1:4.15	27.5	26.59	0.029	0.628	1.23	0.774	Figure54
Body Worn (Distance 10mm)										
Back Side	661/1880	GSM	1:8.3	30.5	29.59	0.04	0.562	1.23	0.693	Figure134
Front Side	661/1880	GSM	1:8.3	30.5	29.59	0.1	0.367	1.23	0.453	Figure135

Note: 1. The value with blue color is the maximum SAR Value of each test band.

- Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).
- WWAN antenna is located at bottom edge; antenna-to-top edge distance is more than 2.5 cm (see ANNEX K). Based upon KDB941225 D06, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.
- Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was ≤ 1.2 W/kg, no additional SAR evaluations using a headset cable were required.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 43 of 255

7.3.3. UMTS Band II (WCDMA/HSDPA/HSUPA)

Table 17: SAR Values [UMTS Band II (WCDMA/HSDPA/HSUPA)]

Test Position	Channel/ Frequency (MHz)	Channel Type	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift ± 0.21dB	Limit SAR _{1g} 1.6 W/kg			
						Drift (dB)	Measured SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	Graph Results
Test Position of Head with Battery 1										
Left Cheek	9400/1880	RMC 12.2k	1:1	23	21.95	0.051	0.585	1.27	0.745	Figure55
Left Tilt	9400/1880	RMC 12.2k	1:1	23	21.95	0.030	0.243	1.27	0.309	Figure56
Right Cheek	9400/1880	RMC 12.2k	1:1	23	21.95	0.050	0.373	1.27	0.475	Figure57
Right Tilt	9400/1880	RMC 12.2k	1:1	23	21.95	0.100	0.239	1.27	0.304	Figure58
Worst Case Position of Head with Battery 2										
Left Cheek	9400/1880	RMC 12.2k	1:1	23	21.95	0.036	0.604	1.27	0.769	Figure59
Worst Case Position of Head with Battery 3										
Left Cheek	9400/1880	RMC 12.2k	1:1	23	21.95	0.021	0.614	1.27	0.782	Figure60
Worst Case Position of Head with Battery 4										
Left Cheek	9400/1880	RMC 12.2k	1:1	23	21.95	0.110	0.601	1.27	0.765	Figure61
Worst Case Position of Head with Battery 5										
Left Cheek	9400/1880	RMC 12.2k	1:1	23	21.95	-0.030	0.600	1.27	0.764	Figure62
Worst Case Position of Head with Battery 6										
Left Cheek	9400/1880	RMC 12.2k	1:1	23	21.95	-0.010	0.565	1.27	0.720	Figure63
Worst Case Position of Head with Battery 7										
Left Cheek	9400/1880	RMC 12.2k	1:1	23	21.95	0.042	0.584	1.27	0.744	Figure136
Test position of Body with Battery 1 (Distance 10mm)										
Back Side	9538/1907.6	RMC 12.2k	1:1	23	21.63	0.041	0.827	1.37	1.134	Figure64
	9400/1880	RMC 12.2k	1:1	23	21.95	0.060	1.020	1.27	1.299	Figure65
	9262/1852.4	RMC 12.2k	1:1	23	21.83	0.028	1.050	1.31	1.375	Figure66
Front Side	9400/1880	RMC 12.2k	1:1	23	21.95	0.180	0.513	1.27	0.653	Figure67
Left Edge	9400/1880	RMC 12.2k	1:1	23	21.95	0.160	0.297	1.27	0.378	Figure68
Right Edge	9400/1880	RMC 12.2k	1:1	23	21.95	0.038	0.110	1.27	0.140	Figure69
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	9400/1880	RMC 12.2k	1:1	23	21.95	0.060	0.496	1.27	0.632	Figure70

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 44 of 255

Test Position	Channel/ Frequency (MHz)	Channel Type	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift ± 0.21dB	Limit SAR _{1g} 1.6 W/kg			
						Drift (dB)	Measured SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	Graph Results
Worst Case Position of Body with Battery 2 (Distance 10mm)										
Back Side	9262/1852.4	RMC 12.2k	1:1	23	21.83	-0.010	0.939	1.31	1.229	Figure71
Worst Case Position of Body with Battery 3 (Distance 10mm)										
Back Side	9262/1852.4	RMC 12.2k	1:1	23	21.83	-0.020	0.942	1.31	1.233	Figure72
Worst Case Position of Body with Battery 4 (Distance 10mm)										
Back Side	9262/1852.4	RMC 12.2k	1:1	23	21.83	0.180	0.939	1.31	1.229	Figure73
Worst Case Position of Body with Battery 5 (Distance 10mm)										
Back Side	9262/1852.4	RMC 12.2k	1:1	23	21.83	-0.040	0.943	1.31	1.235	Figure74
Worst Case Position of Body with Battery 6 (Distance 10mm)										
Back Side	9262/1852.4	RMC 12.2k	1:1	23	21.83	0.010	1.020	1.31	1.335	Figure75
Worst Case Position of Body with Battery 7 (Distance 10mm)										
Back Side	9262/1852.4	RMC 12.2k	1:1	23	21.83	0.06	0.978	1.31	1.280	Figure137
Worst Case Position of Body with Earphone (Distance 10mm)										
Back Side	9262/1852.4	RMC 12.2k	1:1	23	21.83	0.070	0.911	1.31	1.193	Figure76
Worst Case Position of Body with Battery 1 (1 st Repeated SAR, Distance 10mm)										
Back Side	9262/1852.4	RMC 12.2k	1:1	23	21.83	0.100	1.130	1.31	1.479	Figure77

Note: 1.The value with blue color is the maximum SAR Value of each test band.

- Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).
- WWAN antenna is located at bottom edge; antenna-to-top edge distance is more than 2.5 cm (see ANNEX K). Based upon KDB941225 D06, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- WCDMA mode were tested under RMC 12.2kbps without HSPA (HSDPA/HSUPA) inactive per KDB Publication 941225 D01. HSPA (HSDPA/HSUPA) SAR for body was not required since the average output power of the HSPA (HSDPA/HSUPA) subtests was not more than 0.25 dB higher than the RMC level and the maximum SAR for 12.2kbps RMC was less than 75% SAR limit.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 45 of 255

Table 18: SAR Measurement Variability Results [UMTS Band II (WCDMA/HSDPA/HSUPA)]

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 st Repeated SAR (1g)	Ratio	2 nd Repeated SAR (1g)	3 rd Repeated SAR (1g)
Back Side	9262/1852.4	1.050	1.130	1.08	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 46 of 255

7.3.4. UMTS Band V (WCDMA/HSDPA/HSUPA)

Table 19: SAR Values [UMTS Band V (WCDMA/HSDPA/HSUPA)]

Test Position	Channel/ Frequency (MHz)	Channel Type	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift ± 0.21dB	Limit SAR _{1g} 1.6 W/kg			
						Drift (dB)	Measured SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	Graph Results
Test Position of Head with Battery 1										
Left Cheek	4233/846.6	RMC 12.2k	1:1	25	23.37	0.110	0.595	1.46	0.866	Figure78
	4183/836.6	RMC 12.2k	1:1	25	23.4	0.045	0.668	1.45	0.966	Figure79
	4132/826.4	RMC 12.2k	1:1	25	23.41	0.033	0.608	1.44	0.877	Figure80
Left Tilt	4183/836.6	RMC 12.2k	1:1	25	23.4	0.030	0.316	1.45	0.457	Figure81
Right Cheek	4233/846.6	RMC 12.2k	1:1	25	23.37	0.022	0.633	1.46	0.921	Figure82
	4183/836.6	RMC 12.2k	1:1	25	23.4	0.160	0.618	1.45	0.893	Figure83
	4132/826.4	RMC 12.2k	1:1	25	23.41	0.029	0.640	1.44	0.923	Figure84
Right Tilt	4183/836.6	RMC 12.2k	1:1	25	23.4	0.023	0.301	1.45	0.435	Figure85
Worst Case Position of Head with Battery 2										
Left Cheek	4183/836.6	RMC 12.2k	1:1	25	23.4	0.044	0.649	1.45	0.938	Figure86
Worst Case Position of Head with Battery 3										
Left Cheek	4183/836.6	RMC 12.2k	1:1	25	23.4	0.022	0.622	1.45	0.899	Figure87
Worst Case Position of Head with Battery 4										
Left Cheek	4183/836.6	RMC 12.2k	1:1	25	23.4	0.020	0.654	1.45	0.945	Figure88
Worst Case Position of Head with Battery 5										
Left Cheek	4183/836.6	RMC 12.2k	1:1	25	23.4	0.026	0.652	1.45	0.942	Figure89
Worst Case Position of Head with Battery 6										
Left Cheek	4183/836.6	RMC 12.2k	1:1	25	23.4	0.026	0.636	1.45	0.919	Figure90
Worst Case Position of Head with Battery 7										
Left Cheek	4183/836.6	RMC 12.2k	1:1	25	23.4	-0.13	0.646	1.45	0.934	Figure138
Test position of Body with Battery 1 (Distance 10mm)										
Back Side	4233/846.6	RMC 12.2k	1:1	25	23.37	-0.060	0.602	1.46	0.876	Figure91
	4183/836.6	RMC 12.2k	1:1	25	23.4	-0.110	0.636	1.45	0.919	Figure92
	4132/826.4	RMC 12.2k	1:1	25	23.41	-0.090	0.632	1.44	0.911	Figure93
Front Side	4183/836.6	RMC 12.2k	1:1	25	23.4	-0.070	0.470	1.45	0.679	Figure94
Left Edge	4183/836.6	RMC 12.2k	1:1	25	23.4	-0.140	0.451	1.45	0.652	Figure95
Right Edge	4183/836.6	RMC 12.2k	1:1	25	23.4	-0.120	0.409	1.45	0.591	Figure96

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 47 of 255

Test Position	Channel/ Frequency (MHz)	Channel Type	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift ± 0.21dB	Limit SAR _{1g} 1.6 W/kg			
						Drift (dB)	Measured SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	Graph Results
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	4183/836.6	RMC 12.2k	1:1	25	23.4	0.070	0.109	1.45	0.158	Figure97
Worst Case Position of Body with Battery 2 (Distance 10mm)										
Back Side	4183/836.6	RMC 12.2k	1:1	25	23.4	-0.060	0.690	1.45	0.997	Figure98
Worst Case Position of Body with Battery 3 (Distance 10mm)										
Back Side	4183/836.6	RMC 12.2k	1:1	25	23.4	-0.026	0.673	1.45	0.973	Figure99
Worst Case Position of Body with Battery 4 (Distance 10mm)										
Back Side	4183/836.6	RMC 12.2k	1:1	25	23.4	-0.050	0.672	1.45	0.971	Figure100
Worst Case Position of Body with Battery 5 (Distance 10mm)										
Back Side	4183/836.6	RMC 12.2k	1:1	25	23.4	-0.100	0.650	1.45	0.940	Figure101
Worst Case Position of Body with Battery 6 (Distance 10mm)										
Back Side	4183/836.6	RMC 12.2k	1:1	25	23.4	-0.010	0.637	1.45	0.921	Figure102
Worst Case Position of Body with Battery 7 (Distance 10mm)										
Back Side	4183/836.6	RMC 12.2k	1:1	25	23.4	-0.01	0.674	1.45	0.974	Figure139

Note: 1.The value with blue color is the maximum SAR Value of each test band.

- Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).
- WWAN antenna is located at bottom edge; antenna-to-top edge distance is more than 2.5 cm (see ANNEX K). Based upon KDB941225 D06, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- WCDMA mode were tested under RMC 12.2kbps without HSPA (HSDPA/HSUPA) inactive per KDB Publication 941225 D01. HSPA (HSDPA/HSUPA) SAR for body was not required since the average output power of the HSPA (HSDPA/HSUPA) subtests was not more than 0.25 dB higher than the RMC level and the maximum SAR for 12.2kbps RMC was less than 75% SAR limit.
- Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was ≤ 1.2 W/kg, no additional SAR evaluations using a headset cable were required.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 48 of 255

7.3.5. WIFI (802.11b, WIFI)

Table 20: SAR Values (802.11b)

Test Position	Channel/ Frequency (MHz)	Mode	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift ± 0.21dB	Limit of SAR 1.6 W/kg			
						Drift (dB)	Measured SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	Graph Results
Test Position of Head with Battery 1										
Left Cheek	1/2412	DSSS	1:1	17	16.56	0.050	0.151	1.11	0.167	Figure103
Left Tilt	1/2412	DSSS	1:1	17	16.56	0.038	0.167	1.11	0.185	Figure104
Right Cheek	1/2412	DSSS	1:1	17	16.56	0.067	0.171	1.11	0.189	Figure105
Right Tilt	1/2412	DSSS	1:1	17	16.56	0.020	0.153	1.11	0.169	Figure106
Worst Case Position of Head with Battery 2										
Right Cheek	1/2412	DSSS	1:1	17	16.56	0.026	0.163	1.11	0.180	Figure107
Worst Case Position of Head with Battery 3										
Right Cheek	1/2412	DSSS	1:1	17	16.56	0.030	0.161	1.11	0.178	Figure108
Worst Case Position of Head with Battery 4										
Right Cheek	1/2412	DSSS	1:1	17	16.56	0.043	0.170	1.11	0.188	Figure109
Worst Case Position of Head with Battery 5										
Right Cheek	1/2412	DSSS	1:1	17	16.56	0.020	0.160	1.11	0.177	Figure110
Worst Case Position of Head with Battery 6										
Right Cheek	1/2412	DSSS	1:1	17	16.56	0.087	0.166	1.11	0.184	Figure111
Worst Case Position of Head with Battery 7										
Right Cheek	1/2412	DSSS	1:1	17	16.56	0.021	0.17	1.11	0.188	Figure140
Test position of Body with Battery 1 (Distance 10mm)										
Back Side	1/2412	DSSS	1:1	17	16.56	0.035	0.139	1.11	0.154	Figure112
Front Side	1/2412	DSSS	1:1	17	16.56	-0.12	0.050	1.11	0.055	Figure113
Left Edge	1/2412	DSSS	1:1	17	16.56	0.061	0.064	1.11	0.070	Figure114
Right Edge	N/A	N/A	1:1	17	16.56	0.117	0.022	1.11	0.024	Figure115
Top Edge	1/2412	DSSS	1:1	17	16.56	0.021	0.103	1.11	0.114	Figure116
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Worst Case Position of Body with Battery 2 (Distance 10mm)										
Back Side	1/2412	DSSS	1:1	17	16.56	-0.021	0.126	1.11	0.139	Figure117

Page 49 of 255

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).
3. WLAN antenna is located at top edge, near to left edge ; antenna-to- Bottom/Right edge distance is more than 2.5 cm (see ANNEX K). Based upon KDB941225 D06, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
4. KDB 248227-SAR is not required for 802.11g/n channels when the maximum average output power is less than $\frac{1}{4}$ dB higher than measured on the corresponding 802.11b channels.
5. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was ≤ 1.2 W/kg, no additional SAR evaluations using a headset cable were required.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 50 of 255

7.4. Simultaneous Transmission Conditions


Air-Interface	Band (MHz)	Type	Simultaneous Transmissions Note: Not to be tested	Voice Over Digital Transport (Data)
GSM	850	VO	Yes WIFI and BT	NA
	1900	VO		
	GPRS	DT	Yes WIFI and BT	NA
WCDMA	UMTS Band II	VO	Yes WIFI and BT	NA
	UMTS Band V	VO	Yes WIFI and BT	NA
	RMC	DT	Yes WIFI and BT	NA
	HSDPA	DT	Yes WIFI and BT	NA
	HSUPA	DT	Yes WIFI and BT	NA
WIFI	2.4G	DT	Yes GSM,GPRS, WCDMA, BT	Yes
Bluetooth (BT)	2.4G	DT	Yes GSM,GPRS, WCDMA, WIFI	NA
Note: VO Voice Service only DT Digital Transport				

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RHA1402-0029SAR01R3

Page 51 of 255

The location of the antennas inside EUT is shown in ANNEX K:

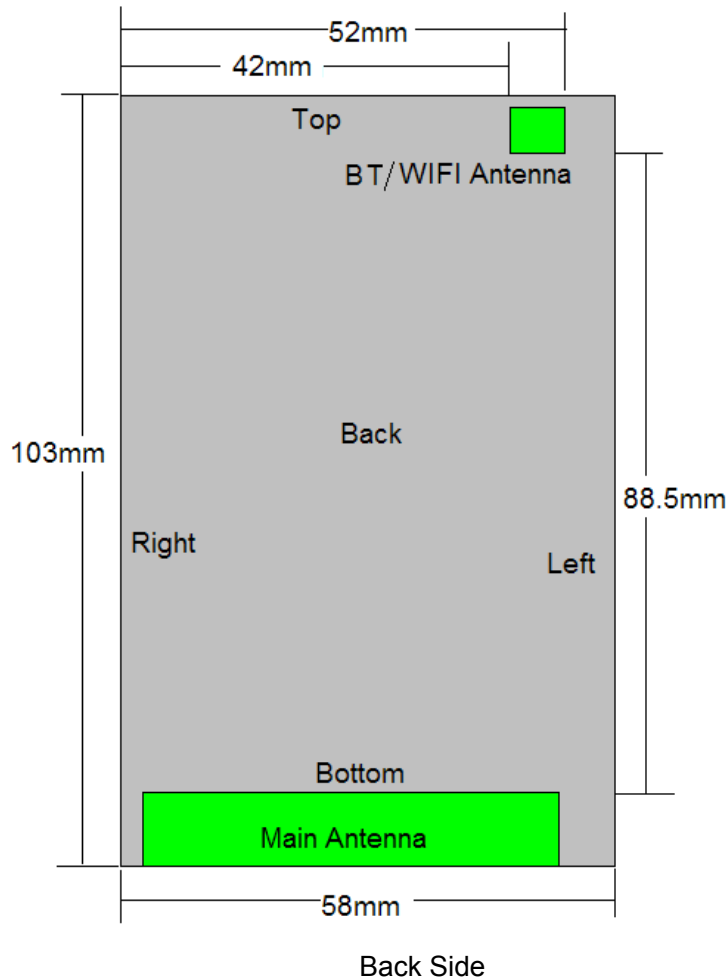

When standalone SAR is not required to be measured per FCC KDB 447498 D01, the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} * \frac{\sqrt{f \text{ (GHz)}}}{7.5}$$

So, Head Estimated SAR_{Max.BT} = $[10^{(8/10)}/5] * (2.480^{1/2}/7.5) = 0.26 \text{ W/kg}$

Body worn Estimated SAR_{Max.BT} = $[10^{(8/10)}/10] * (2.480^{1/2}/7.5) = 0.13 \text{ W/kg}$

Per FCC KDB 447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is $\leq 1.6 \text{ W/kg}$. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

$$\text{Ratio} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{(\text{peak location separation, mm})} < 0.04$$

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 52 of 255

GSM/UMTS & WIFI Mode

Reported SAR _{1g} (W/kg) Test Position	GSM 850	GSM 1900	UMTS Band II	UMTS Band V	WIFI	BT	MAX. Σ SAR _{1g}
Left hand, Touch cheek	0.626	0.478	0.782	0.966	0.167	0.26	1.393
Left hand, Tilt 15 Degree	0.426	0.201	0.309	0.457	0.185	0.26	0.902
Right hand, Touch cheek	0.697	0.319	0.475	0.923	0.189	0.26	1.372
Right hand, Tilt 15 Degree	0.424	0.200	0.304	0.435	0.169	0.26	0.864
Body, Back Side	0.676	0.778	1.479	0.997	0.154	0.13	1.763
Body, Front Side	0.595	0.453	0.653	0.679	0.055	0.13	0.864
Body, Left Edge	0.547	0.219	0.378	0.652	0.070	0.13	0.852
Body, Right Edge	0.477	0.082	0.140	0.591	0.024	0.13	0.745
Body, Top Edge	0.400	0.400	0.400	0.400	0.114	0.13	0.644
Body, Bottom Edge	0.117	0.395	0.632	0.158	0.400	0.13	1.162
Note: 1.The value with blue color is the maximum ΣSAR _{1g} Value. 2. MAX. ΣSAR _{1g} = Reported SAR _{Max.WIFI/BT} + Reported SAR _{Max.GSM/UMTS}							

MAX. ΣSAR_{1g} = 1.763 W/kg > 1.6 W/kg, so the SAR to peak location separation ratio should be considered

Reported SAR _{1g} (W/kg) Test Position	GSM 850	GSM 1900	UMTS Band II	UMTS Band V	WIFI	BT	MAX. Σ SAR _{1g}
Body, Back Side	0.676	/	/	/	0.154	0.13	0.960
	/	0.778	/	/	0.154	0.13	1.062
	/	/	1.479	/	0.154	0.13	1.763
	/	/	/	0.997	0.154	0.13	1.281

Note: 1.The value with red color is the SAR_{1g} > 1.6 W/kg.

2. when the MAX. Σ SAR_{1g} potio > 1.6 W/kg in a position, simultaneous transmission conditions of other bands also need consideration in this position.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 53 of 255


Pair Simultaneous Transmission for UMTS Band II and Wifi

Reported SAR _{1g} (W/kg)	GSM 850	GSM 1900	UMTS Band II	UMTS Band V	WIFI	MAX. Σ SAR _{1g}
Test Position						
Body, Back Side	/	/	1.479	/	0.154	1.633

The position SAR_{UMTS band II} is ($x_1 = -15.5$, $y_1 = -43.5$, $z_1 = -205.7$),

The position SAR_{Max.WIFI} is ($x_2 = -0.5$, $y_2 = 39$, $z_2 = -205.7$)

so the distance between the SAR_{Max.UMTS} and SAR_{Max.WIFI} is 83.85mm.

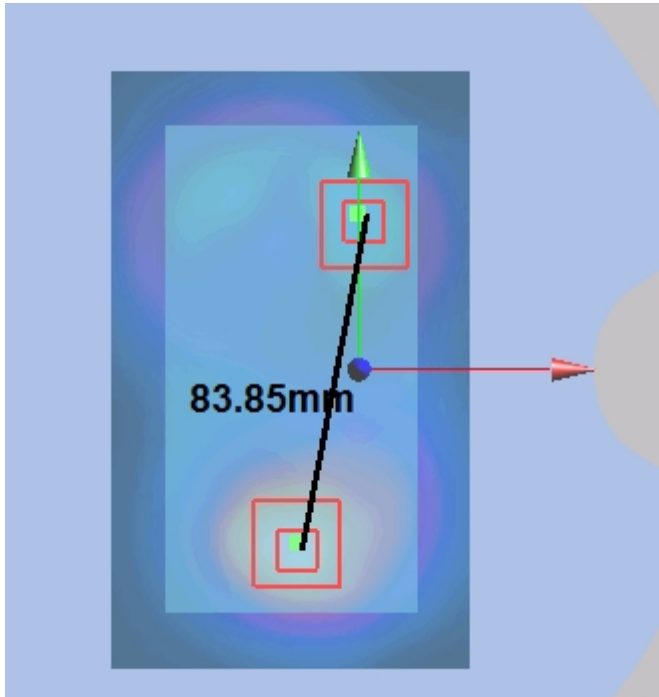

Ratio = $[(\text{Reported SAR}_{\text{Max.GSM/UMTS}}) 1.479\text{W/kg} + (\text{Reported SAR}_{\text{Max.WIFI}}) 0.154\text{W/kg}]^{3/2} / \text{Peak SAR}$

Location Separation = $1.633^{3/2} / 83.85 = 0.02 < 0.04$

So Simultaneous SAR testing for UMTS Band II and Wifi is not required.

TA Technology (Shanghai) Co., Ltd.

Test Report


Report No.: RHA1402-0029SAR01R3

Page 54 of 255

Pair Simultaneous Transmission for UMTS Band II and BT

Reported SAR _{1g} (W/kg)	GSM 850	GSM 1900	UMTS Band II	UMTS Band V	BT	MAX. Σ SAR _{1g}
Test Position						
Body, Back Side	/	/	1.479	/	0.13	1.609

The position SAR_{UMTS band II} is ($x_1 = -15.5$, $y_1 = -43.5$, $z_1 = -205.7$),

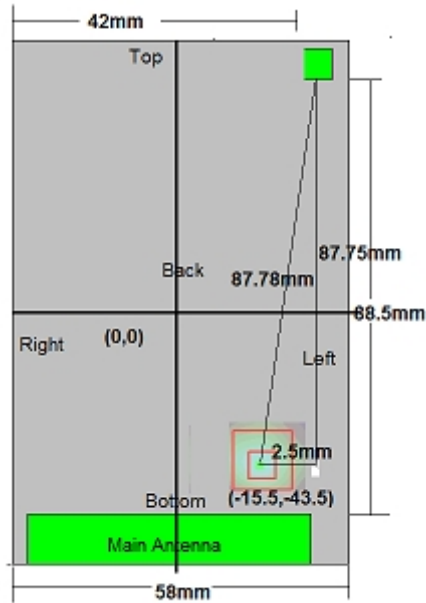

so the distance between the SAR_{Max.UMTS} and SAR_{Max.BT} is 87.78mm

Ratio = $\left[(\text{Reported SAR}_{\text{Max.GSM/UMTS}}) 1.479\text{W/kg} + (\text{Reported SAR}_{\text{Max.BT}}) 0.13\text{W/kg} \right]^{3/2} / \text{Peak SAR}$

Location Separation = $1.609^{3/2} / 87.78 = 0.02 < 0.04$

So Simultaneous SAR testing for UMTS Band II and BT is not required.

8. 700MHz to 3GHz Measurement Uncertainty

The measured SAR were <1.5 W/kg for all frequency bands, therefore per KDB Publication 865664 D01v01r03, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2003 is not required in SAR reports

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 56 of 255

9. Main Test Instruments

Table 21: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 10, 2013	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 9, 2014	One year
04	Power sensor	Agilent N8481H	MY50350004	September 23, 2013	One year
05	Power sensor	E9327A	US40441622	January 1, 2014	One year
06	Signal Generator	HP 8341B	2730A00804	September 9, 2013	One year
07	Dual directional coupler	778D-012	50519	March 25, 2013	One year
08	Dual directional coupler	778D-012	50519	March 25, 2014	One year
09	Dual directional coupler	777D	50146	March 25, 2013	One year
10	Dual directional coupler	777D	50146	March 25, 2014	One year
11	Amplifier	IXA-020	0401	No Calibration Requested	
12	BTS	E5515C	MY48360988	November 26, 2013	One year
13	E-field Probe	EX3DV4	3677	November 28, 2013	One year
14	DAE	DAE4	1317	January 16, 2014	One year
15	Validation Kit 835MHz	D835V2	4d020	August 26, 2011	Three years
16	Validation Kit 1900MHz	D1900V2	5d060	August 31, 2011	Three years
17	Validation Kit 2450MHz	D2450V2	786	August 29, 2011	Three years
18	Temperature Probe	JM222	AA1009129	March 10, 2014	One year
19	Hygrothermograph	WS-1	64591	September 26, 2013	One year
20	BT Base Station Simulator	CBT	100271	June 29, 2013	One year

*****END OF REPORT *****

ANNEX A: Test Layout



Picture 1: Specific Absorption Rate Test Layout


TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 58 of 255



Picture 2: Liquid depth in the flat Phantom (835MHz, 15.4cm depth)

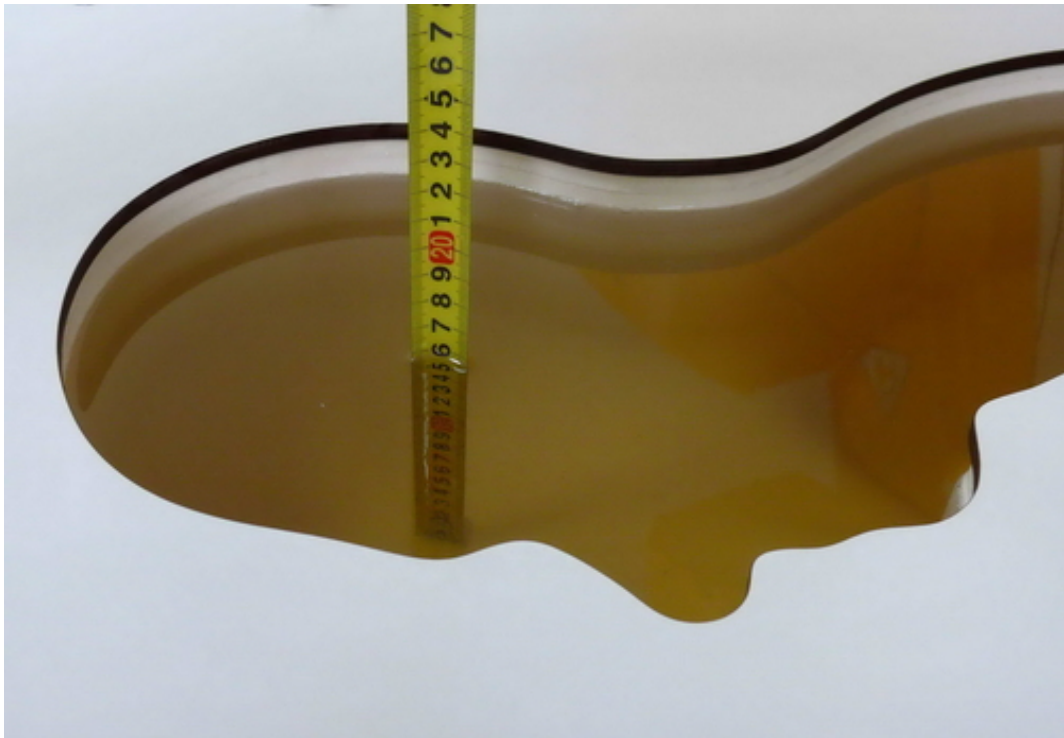


Picture 3: Liquid depth in the head Phantom (835MHz, 15.3cm depth)

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 59 of 255

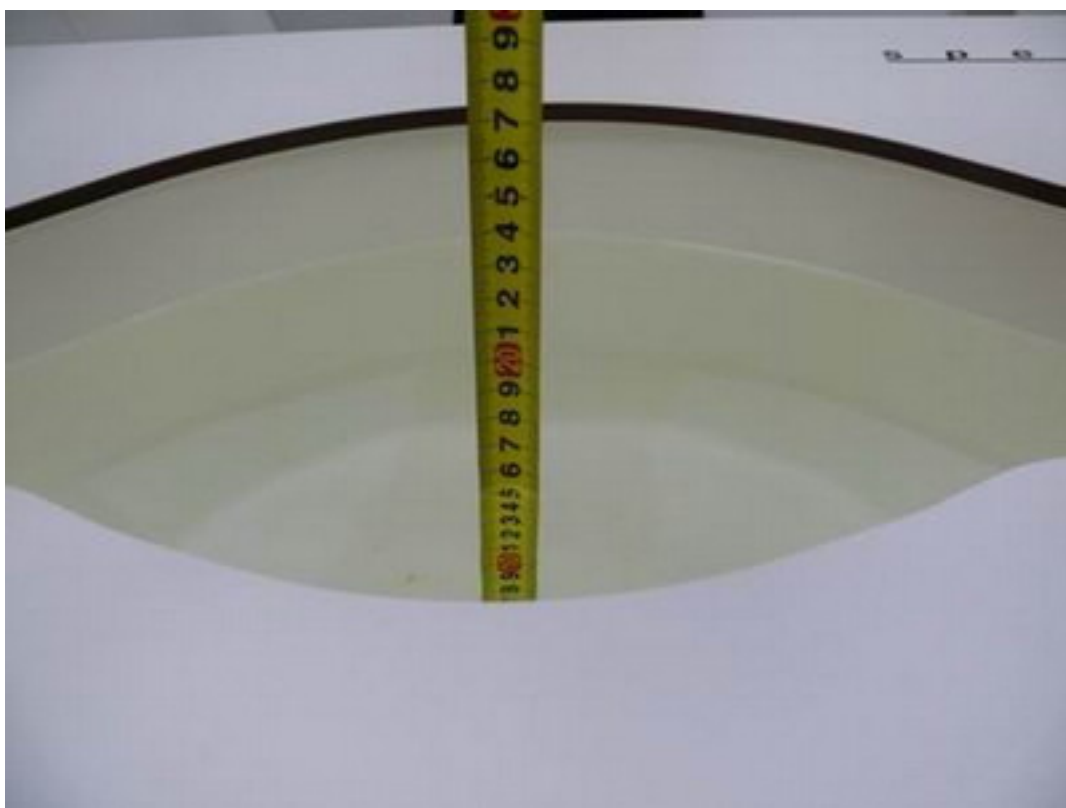

Picture 4: Liquid depth in the flat Phantom (1900 MHz, 15.2cm depth)




Picture 5: liquid depth in the head Phantom (1900 MHz, 15.3cm depth)

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 60 of 255

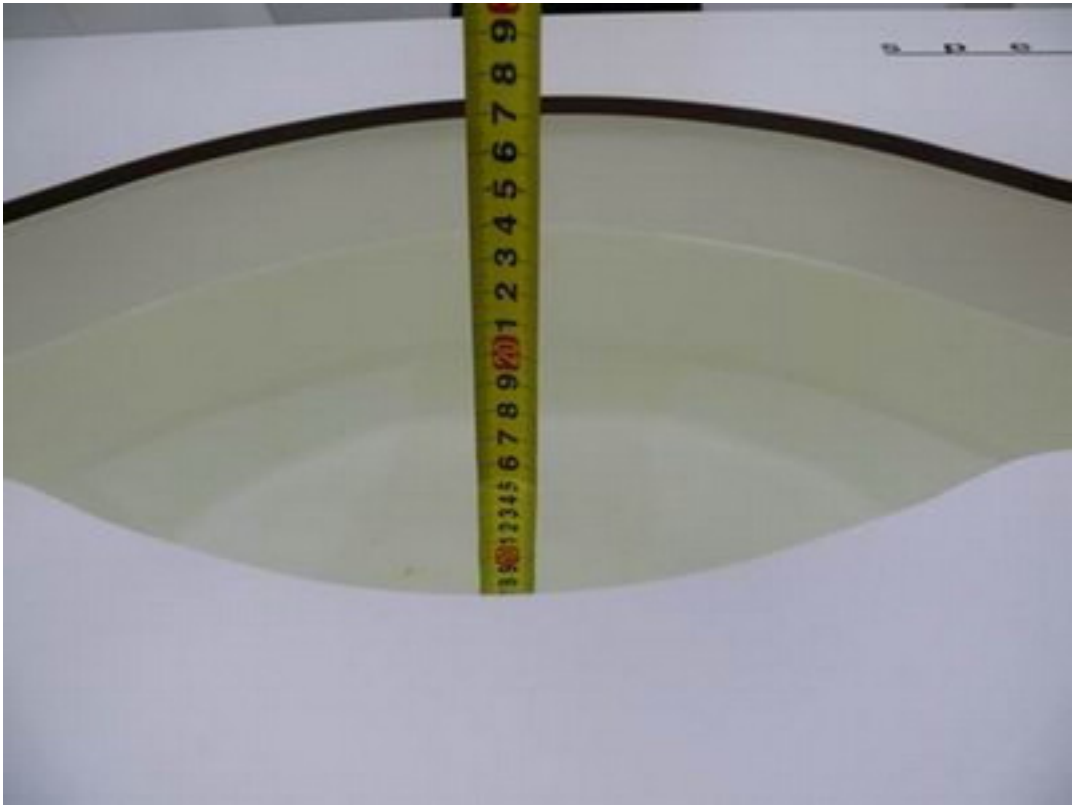

Picture 6: Liquid depth in the flat Phantom (2450 MHz, 15.3cm depth)



Picture 7: Liquid depth in the head Phantom (2450 MHz, 15.4cm depth)

ANNEX B: System Check Results

System Performance Check at 835 MHz Head TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d020

Date/Time: 2014-3-13 19:48:38

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 41.4$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

d=15mm, Pin=250mW/Area Scan (41x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.64 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.4 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.6 mW/g

Maximum value of SAR (measured) = 2.64 mW/g

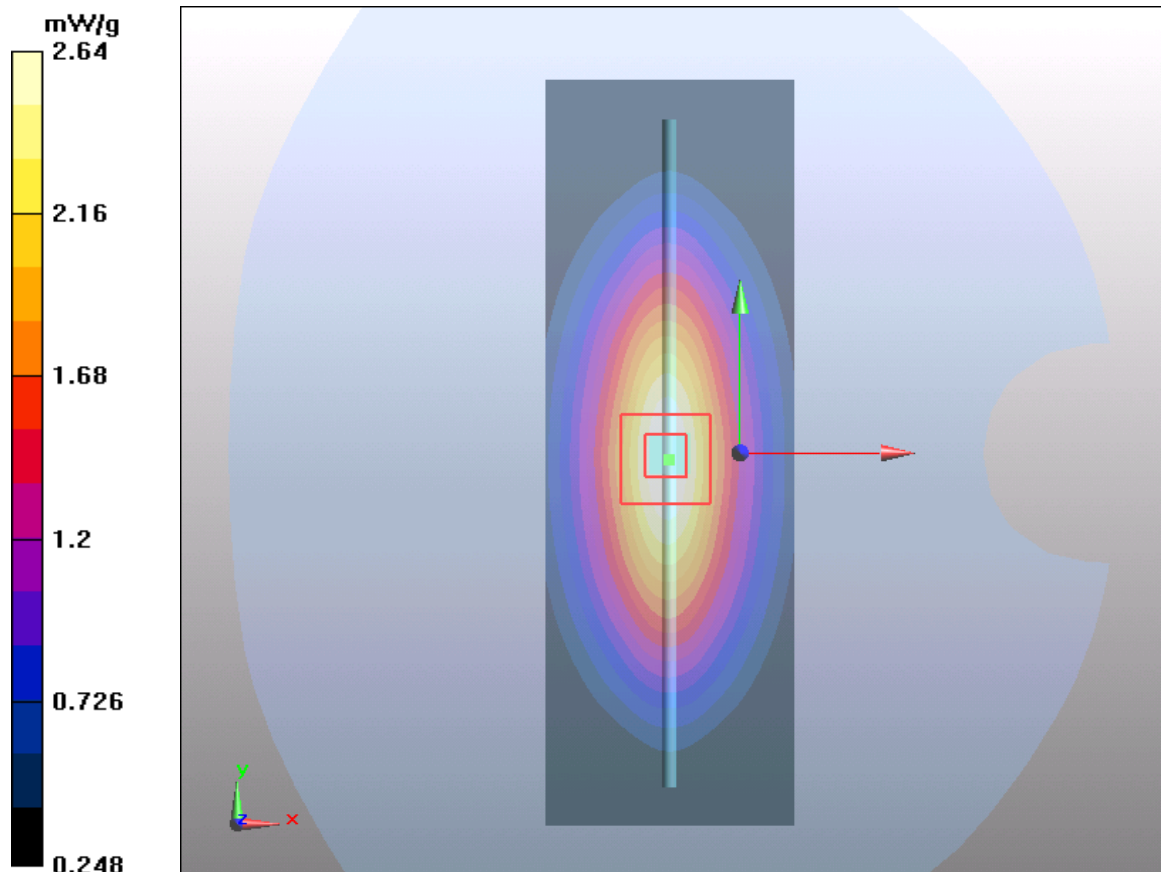


Figure 7 System Performance Check 835MHz 250mW

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 62 of 255

System Performance Check at 835 MHz Body TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d020

Date/Time: 2014-3-15 19:49:37

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 55.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

d=15mm, Pin=250mW/Area Scan (41x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.58 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 51.9 V/m ; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 3.5 W/kg

SAR(1 g) = 2.41 mW/g ; SAR(10 g) = 1.6 mW/g

Maximum value of SAR (measured) = 2.6 mW/g

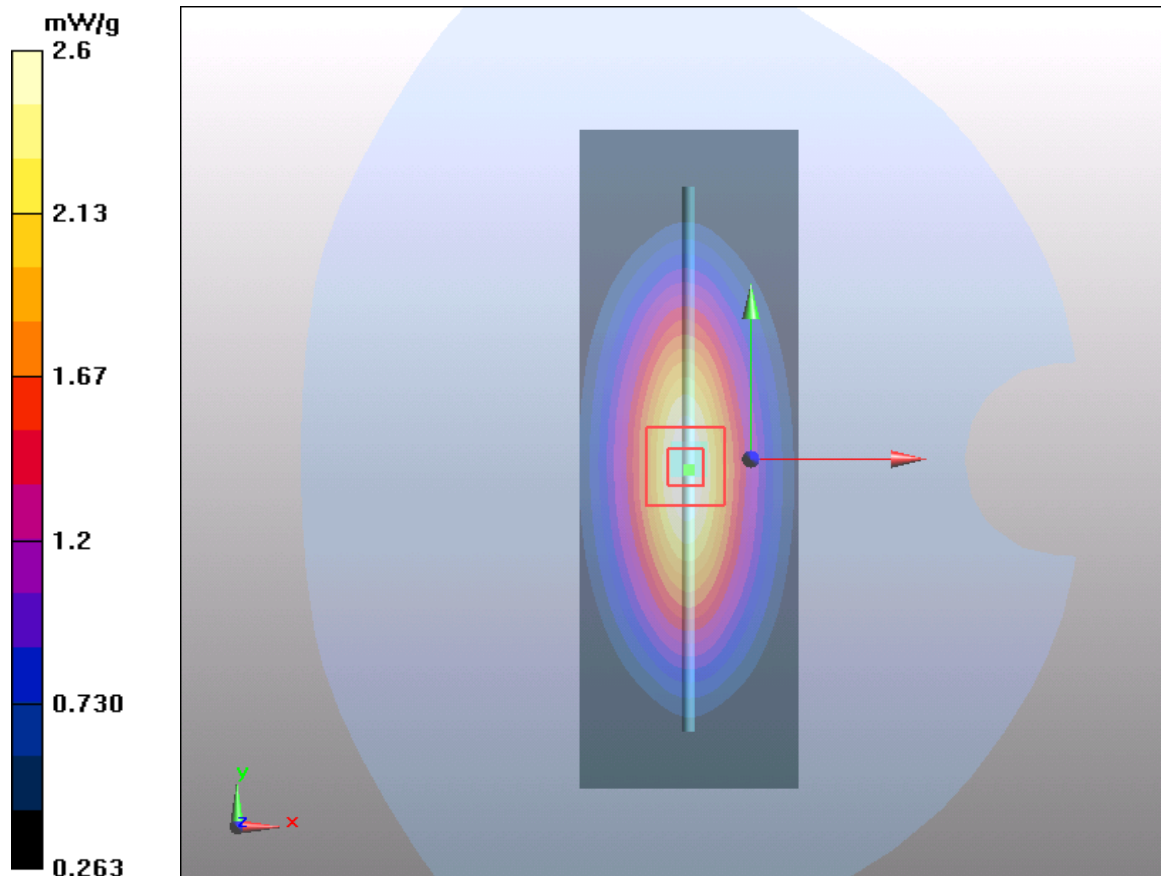


Figure 8 System Performance Check 835MHz 250mW

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 63 of 255

System Performance Check at 1900 MHz Head TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d060

Date/Time: 2014-3-21 00:02:55

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

d=10mm, Pin=250mW/Area Scan (41x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.3 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 85.5 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 9.48 mW/g; SAR(10 g) = 4.9 mW/g

Maximum value of SAR (measured) = 10.7 mW/g

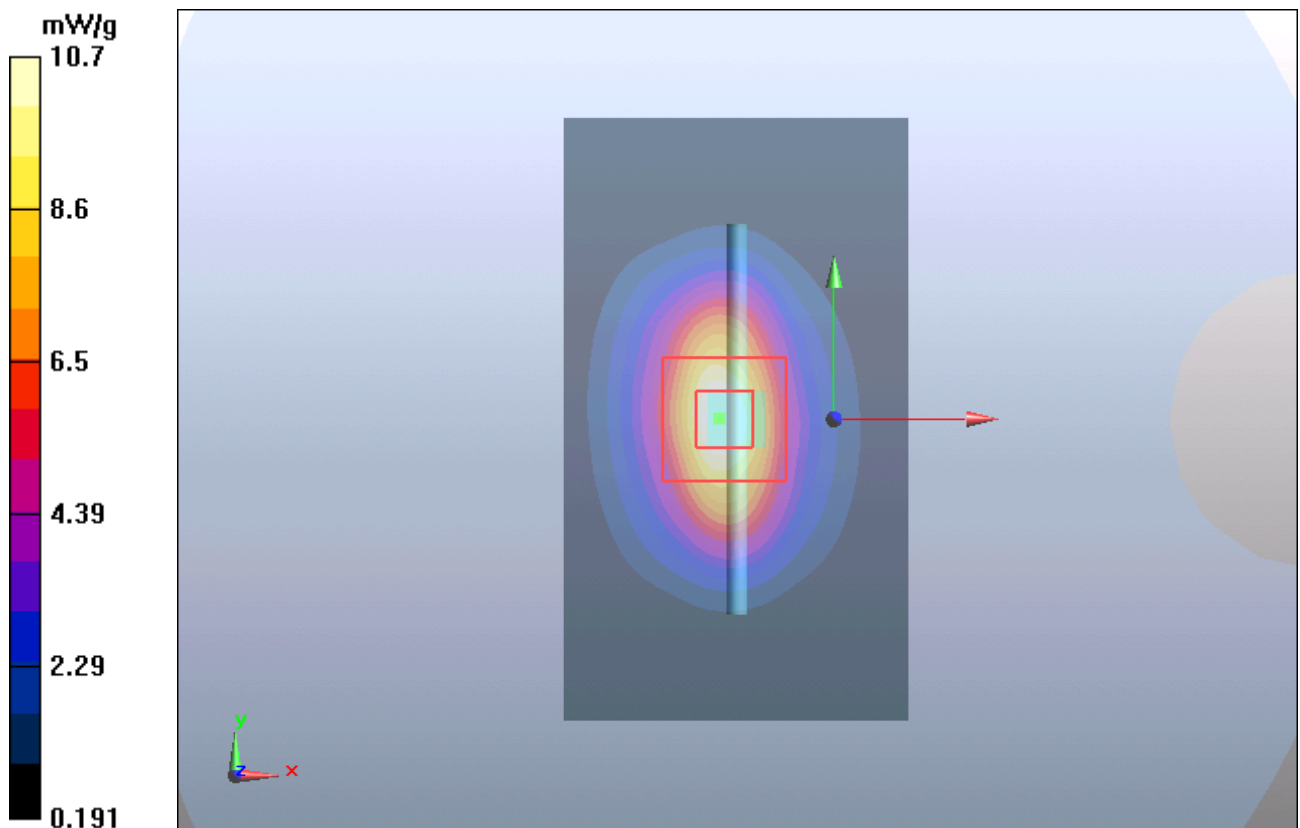


Figure 9 System Performance Check 1900MHz 250mW

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 64 of 255

System Performance Check at 1900 MHz Body TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d060

Date/Time: 2014-3-23 01:14:25

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

d=10mm, Pin=250mW/Area Scan (41x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.2 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 82.3 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 9.93 mW/g; SAR(10 g) = 5.25 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

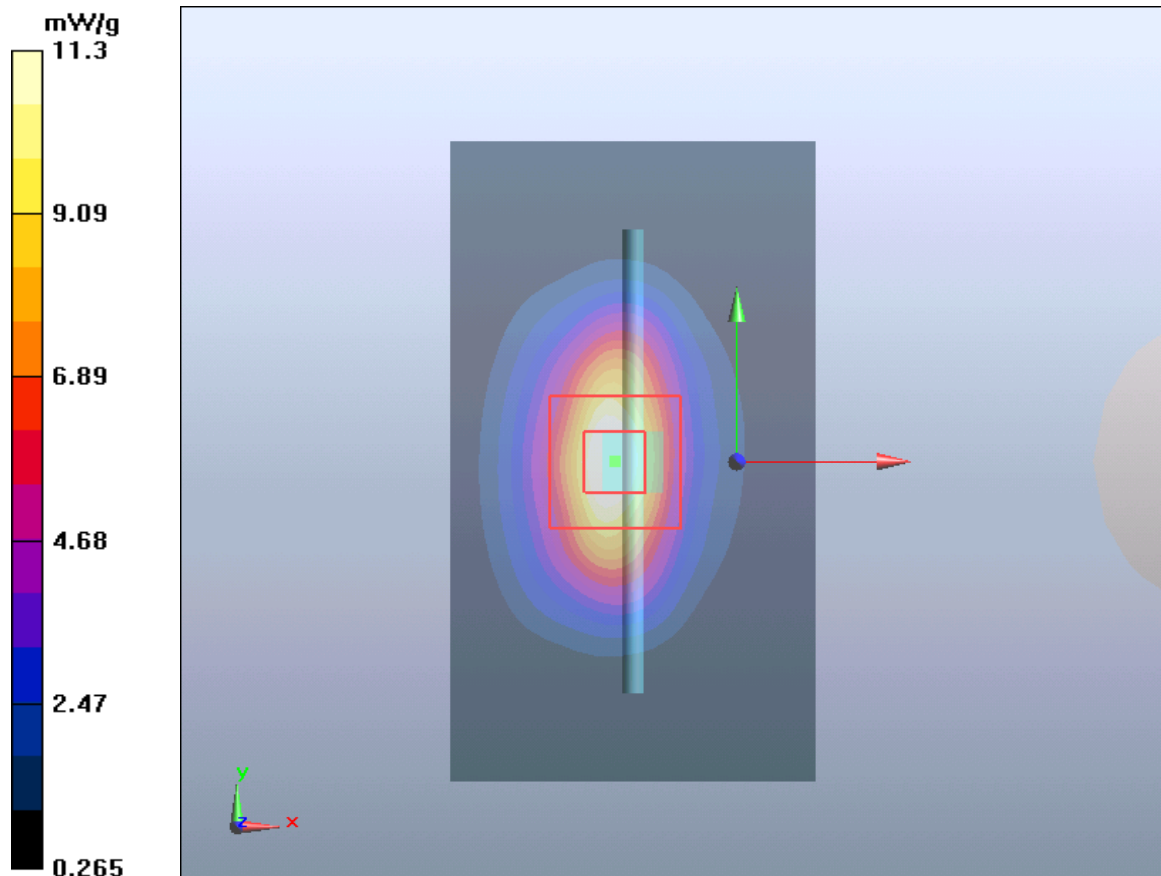


Figure 10 System Performance Check 1900MHz 250mW

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 65 of 255

System Performance Check at 2450 MHz Head TSL

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 786

Date/Time: 2014-3-22 16:32:12

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.80$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.64, 7.64, 7.64); Calibrated: 2013-11-28

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

d=10mm, Pin=250mW/Area Scan (41x71x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 18.2 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.8 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 30 W/kg

SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.22 mW/g

Maximum value of SAR (measured) = 15.9 mW/g

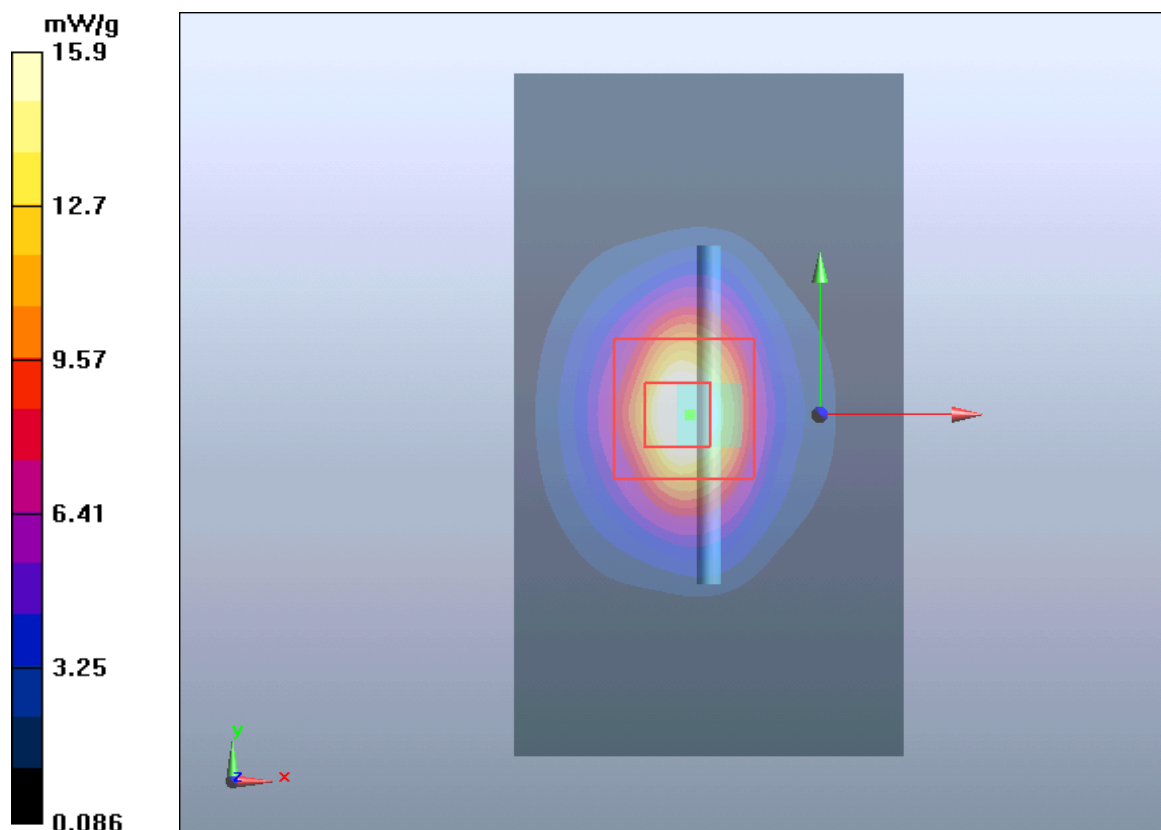


Figure 11 System Performance Check 2450MHz 250mW

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 66 of 255

System Performance Check at 2450 MHz Body TSL

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 786

Date/Time: 2014-3-21 17:25:59

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.61, 7.61, 7.61); Calibrated: 2013-11-28

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

d=10mm, Pin=250mW/Area Scan (41x71x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 16 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 81.2 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 25.4 W/kg

SAR(1 g) = 12.5 mW/g; SAR(10 g) = 6.20 mW/g

Maximum value of SAR (measured) = 14.4 mW/g

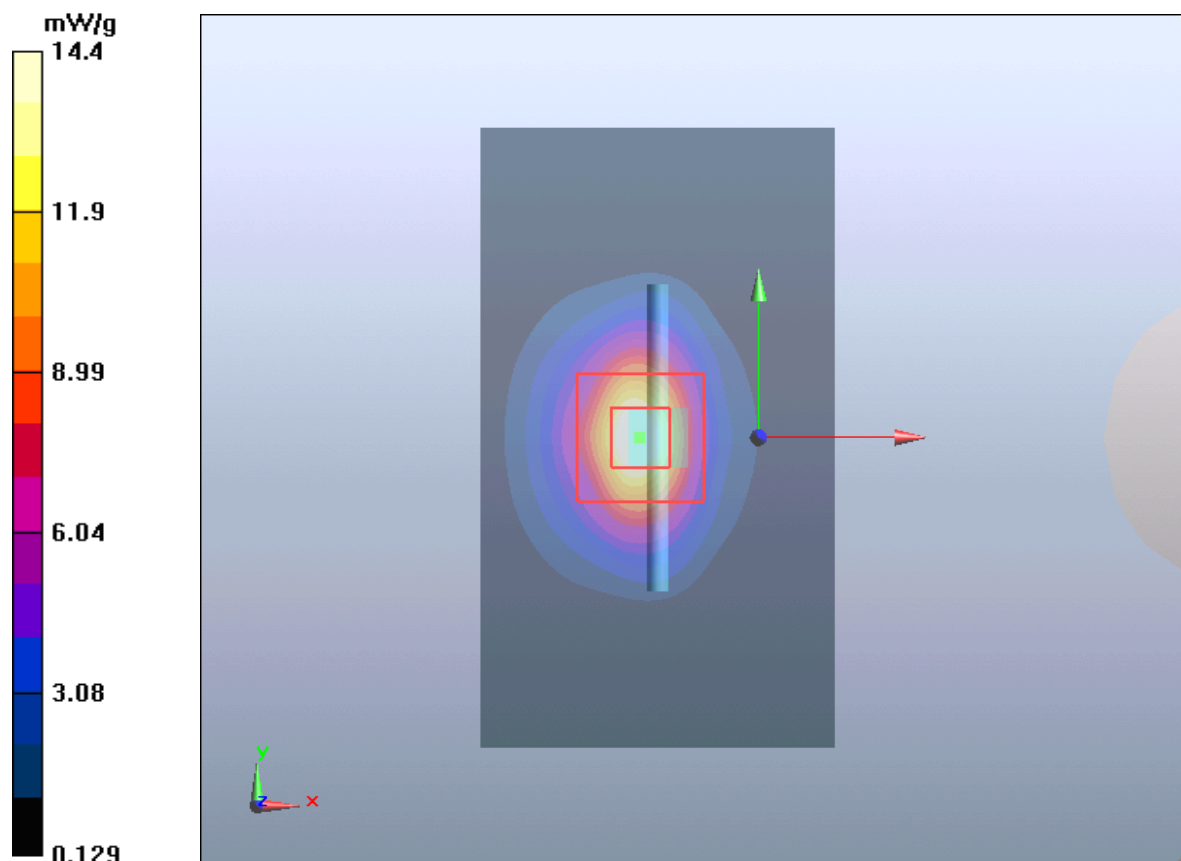


Figure 12 System Performance Check 2450MHz 250mW

ANNEX C: Graph Results

GSM 850 Left Cheek Middle (Battery 1)

Date/Time: 2014-03-13 23:00:30

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.479 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.771 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.599 W/kg

SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.345 W/kg

Maximum value of SAR (measured) = 0.491 W/kg

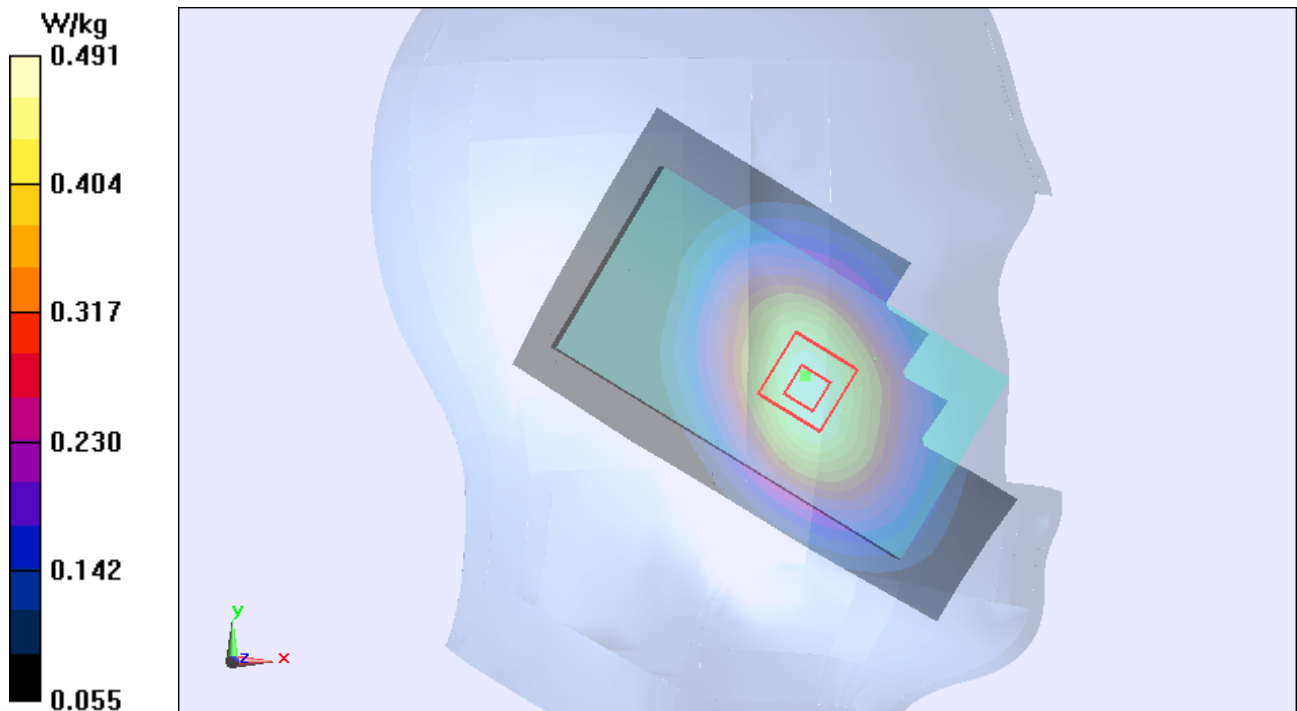


Figure 13 Left Hand Touch Cheek GSM 850 Channel 190

GSM 850 Left Tilt Middle (Battery 1)

Date/Time: 2014-03-13 21:32:47

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Tilt Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.341 W/kg

Left Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.472 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.388 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.245 W/kg

Maximum value of SAR (measured) = 0.331 W/kg

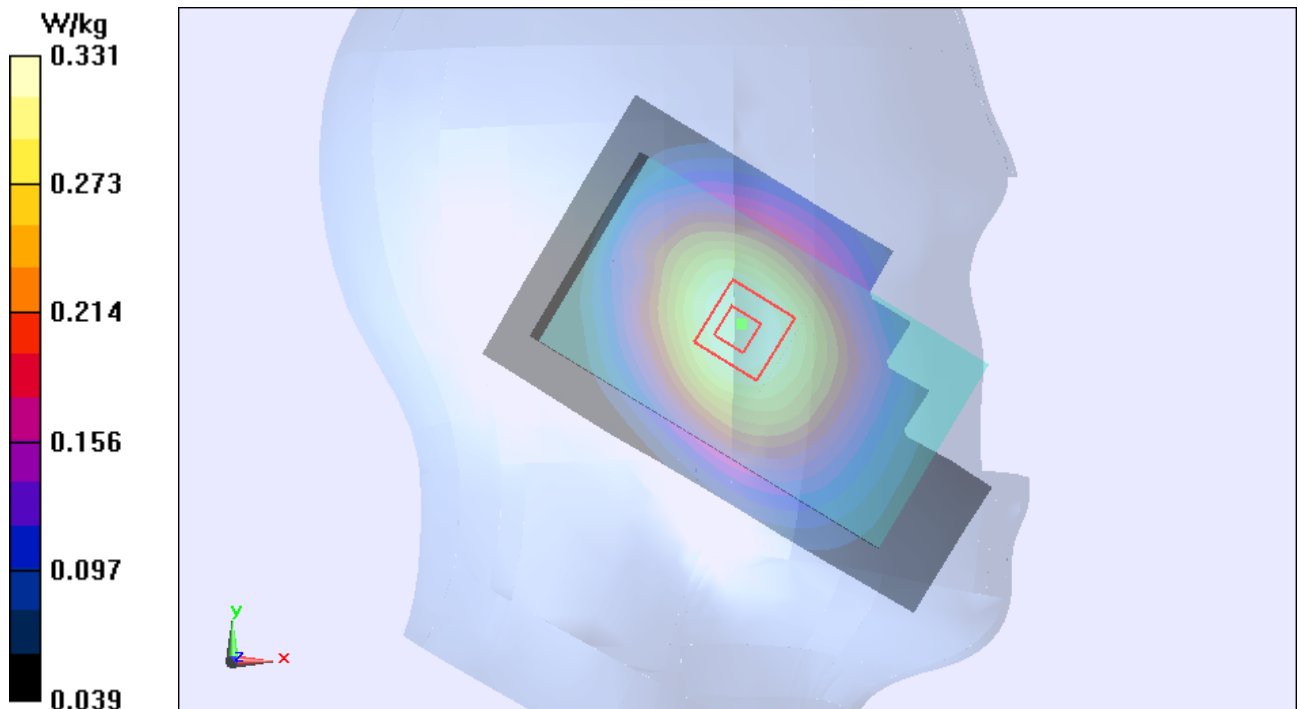


Figure 14 Left Hand Tilt 15° GSM 850 Channel 190

GSM 850 Right Cheek Middle (Battery 1)

Date/Time: 2014-03-13 23:20:37

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.508 W/kg

Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.273 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.362 W/kg

Maximum value of SAR (measured) = 0.497 W/kg

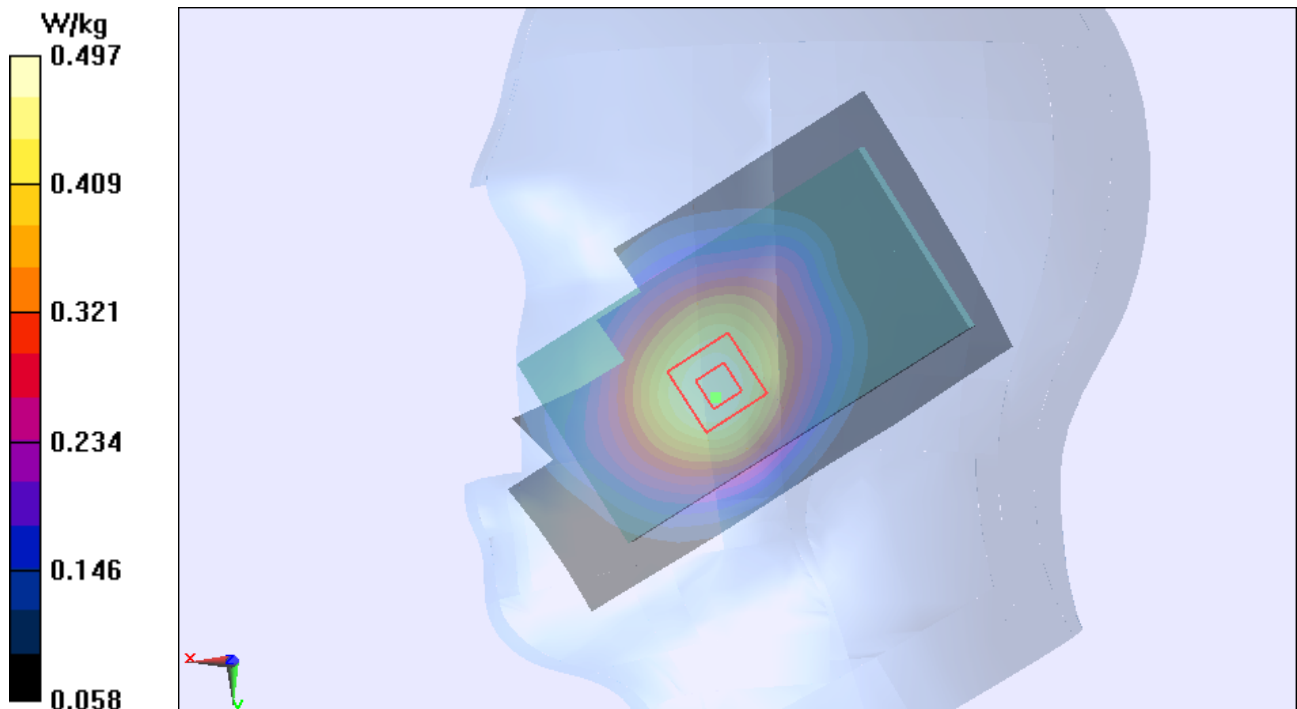


Figure 15 Right Hand Touch Cheek GSM 850 Channel 190

GSM 850 Right Tilt Middle (Battery 1)

Date/Time: 2014-03-13 22:08:24

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Tilt Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.335 W/kg

Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.248 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.387 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 0.330 W/kg

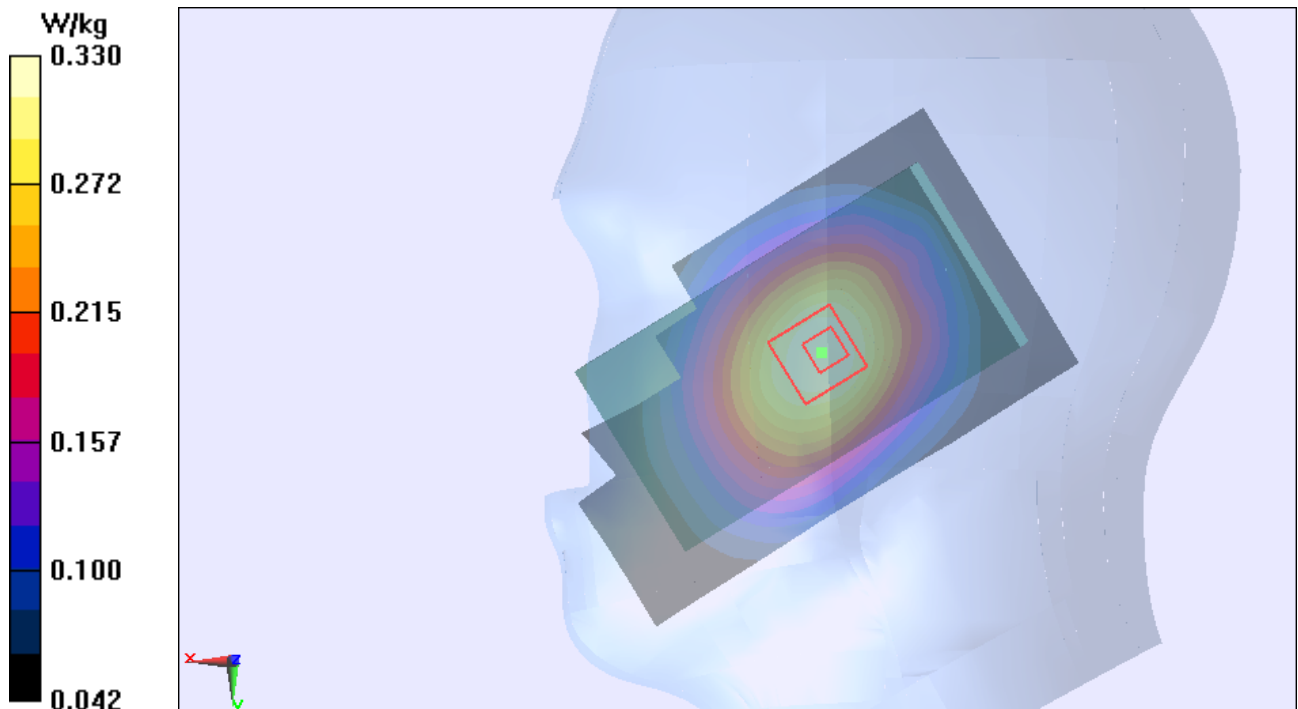


Figure 16 Right Hand Tilt 15° GSM 850 Channel 190

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 71 of 255

GSM 850 Right Cheek Middle (Battery 2)

Date/Time: 2014-03-13 21:47:32

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.534 W/kg


Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.148 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.392 W/kg

Maximum value of SAR (measured) = 0.543 W/kg

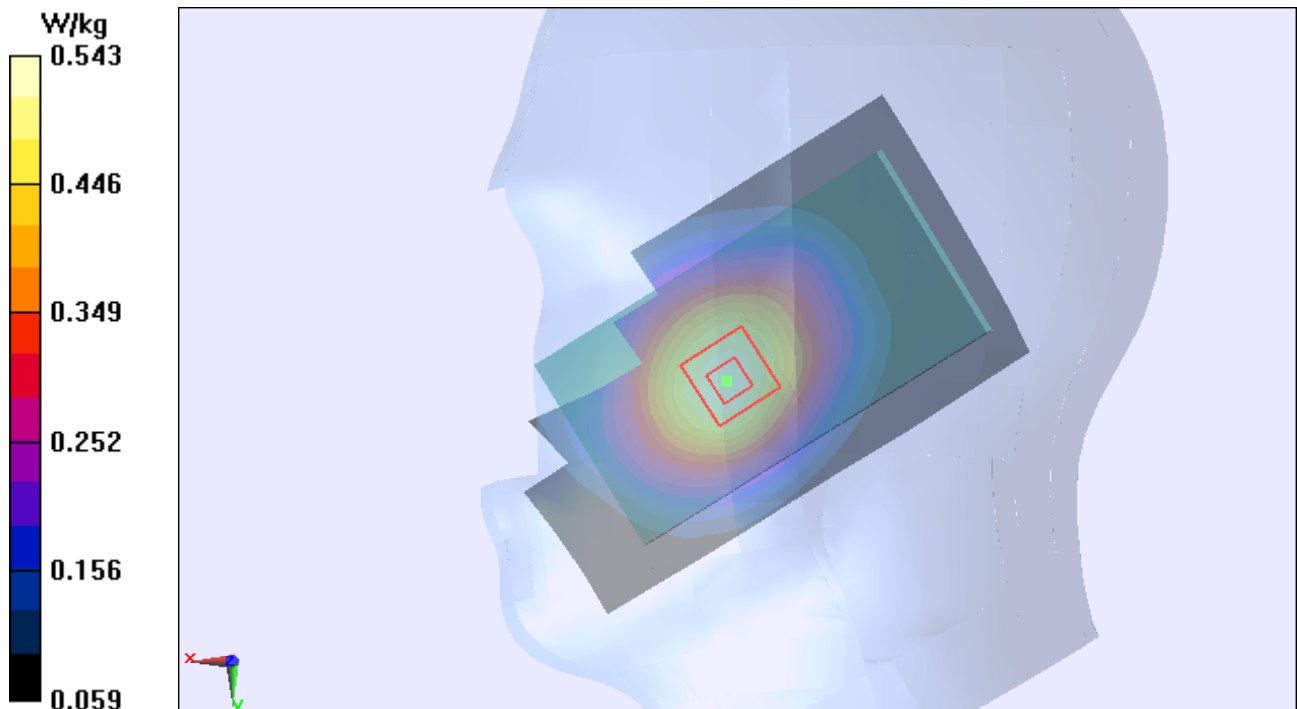

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 72 of 255

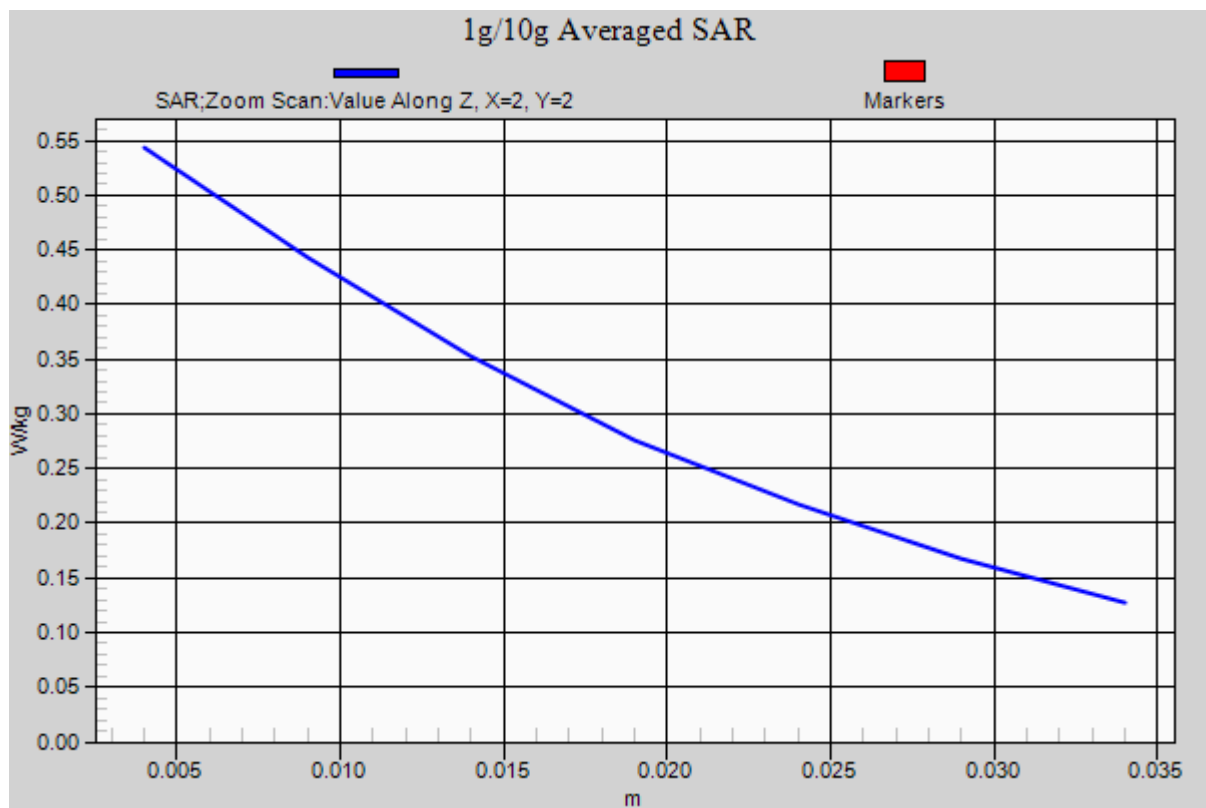


Figure 17 Right Touch Cheek GSM 850 Channel 190

GSM 850 Right Cheek Middle (Battery 3)

Date/Time: 2014-03-14 00:33:07

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.483 W/kg

Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.223 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.350 W/kg

Maximum value of SAR (measured) = 0.478 W/kg

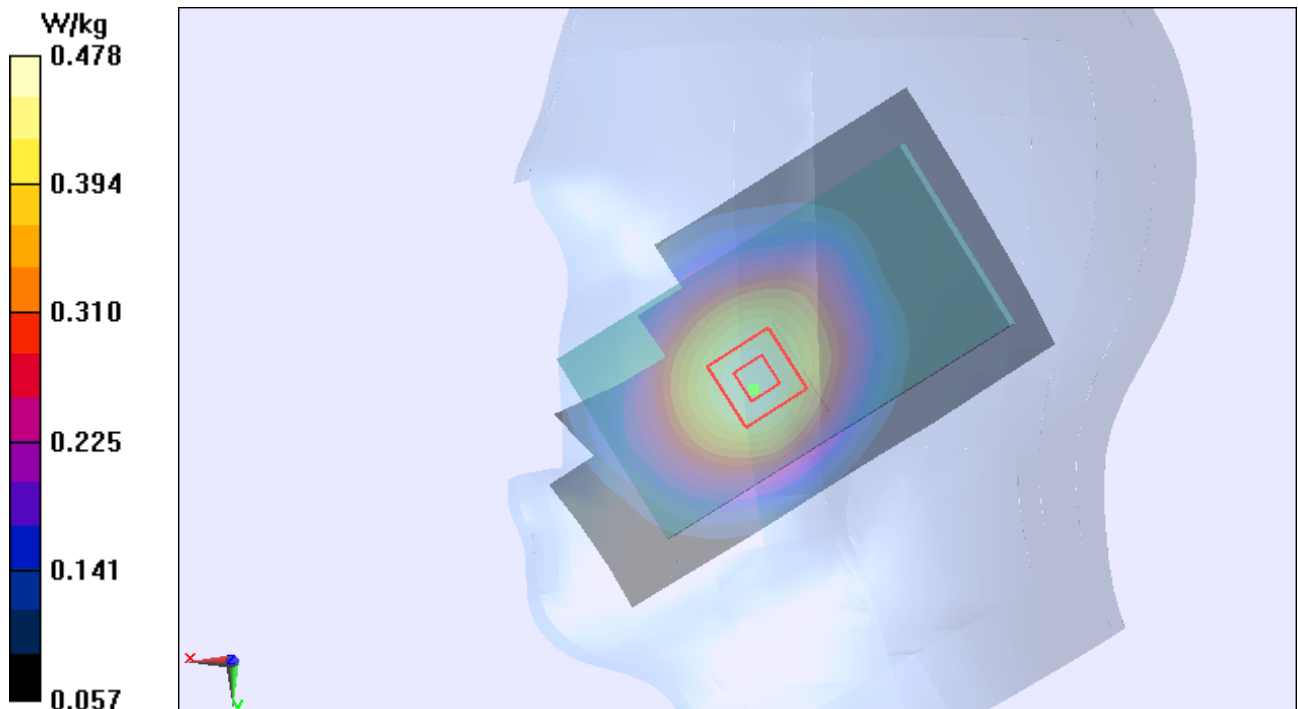


Figure 18 Right Touch Cheek GSM 850 Channel 190

GSM 850 Right Cheek Middle (Battery 4)

Date/Time: 2014-03-14 00:50:21

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.458 W/kg

Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.889 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.530 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.336 W/kg

Maximum value of SAR (measured) = 0.456 W/kg

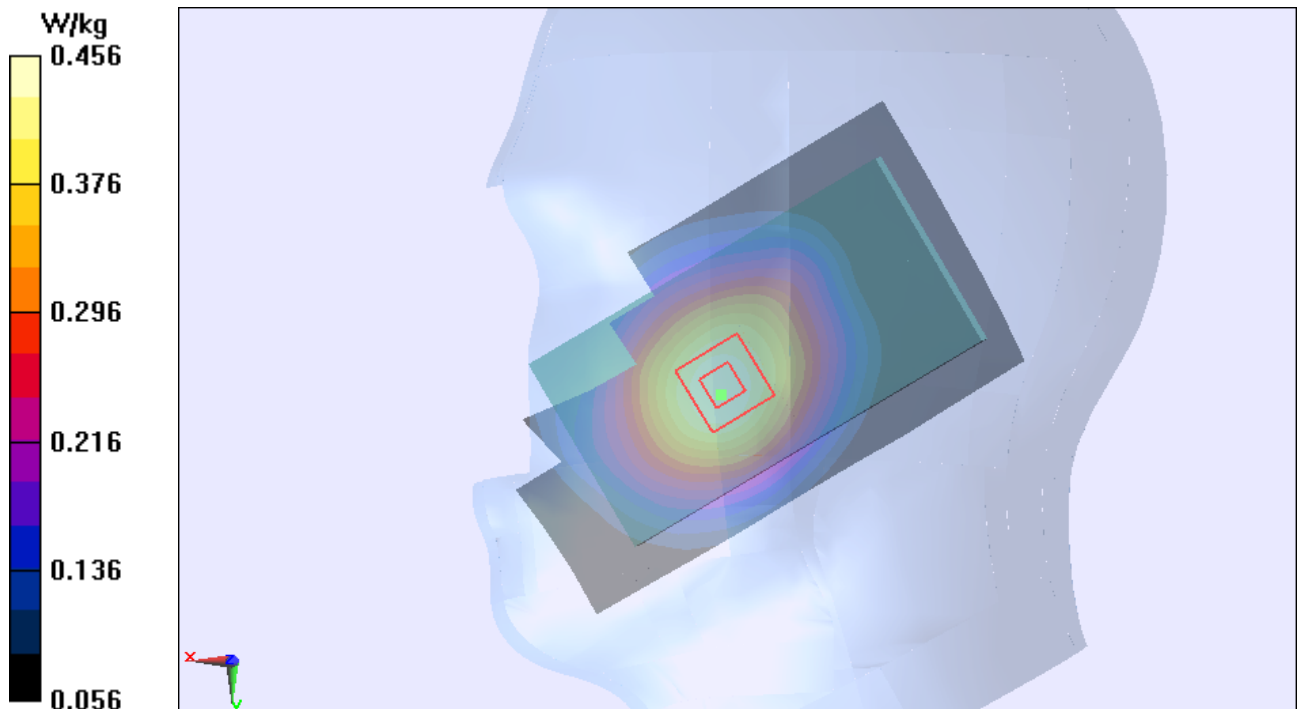


Figure 19 Right Touch Cheek GSM 850 Channel 190

GSM 850 Right Cheek Middle (Battery 5)

Date/Time: 2014-03-13 23:55:13

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.484 W/kg

Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.138 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.560 W/kg

SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.350 W/kg

Maximum value of SAR (measured) = 0.476 W/kg

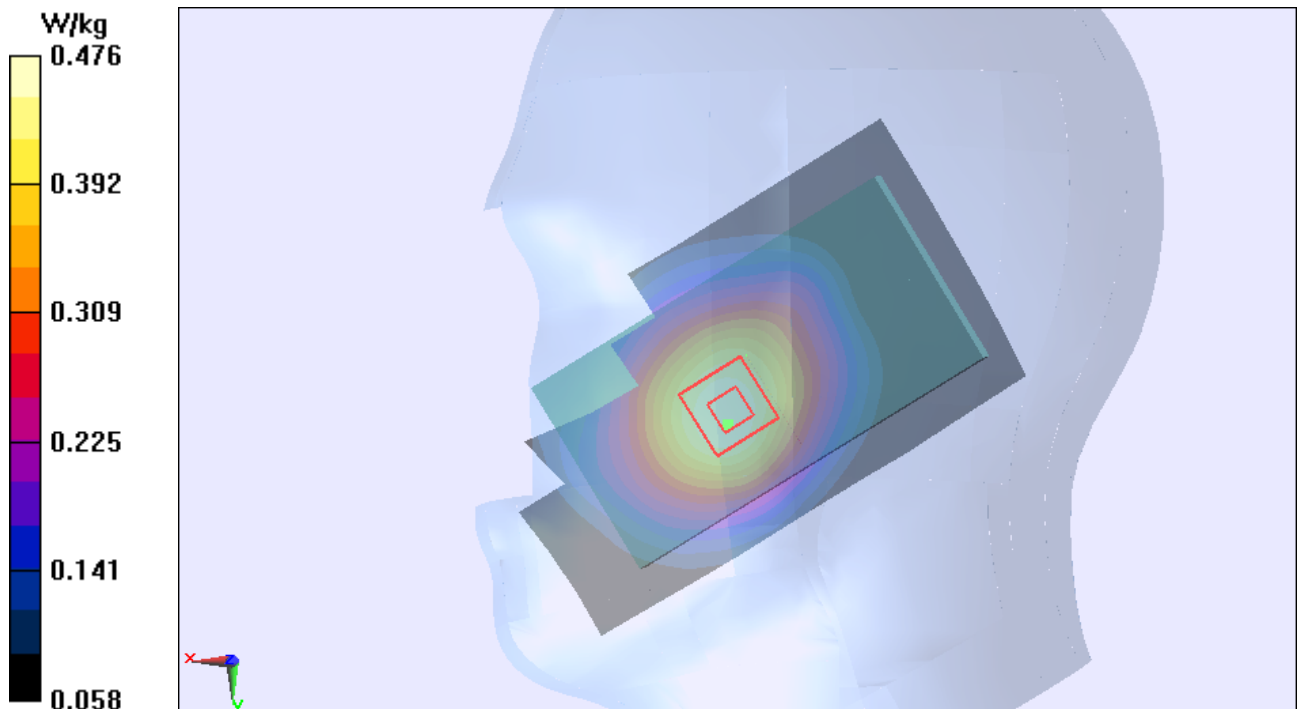


Figure 20 Right Touch Cheek GSM 850 Channel 190

GSM 850 Right Cheek Middle (Battery 6)

Date/Time: 2014-03-14 00:12:33

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.484 W/kg

Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.044 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.457 W/kg; SAR(10 g) = 0.348 W/kg

Maximum value of SAR (measured) = 0.476 W/kg

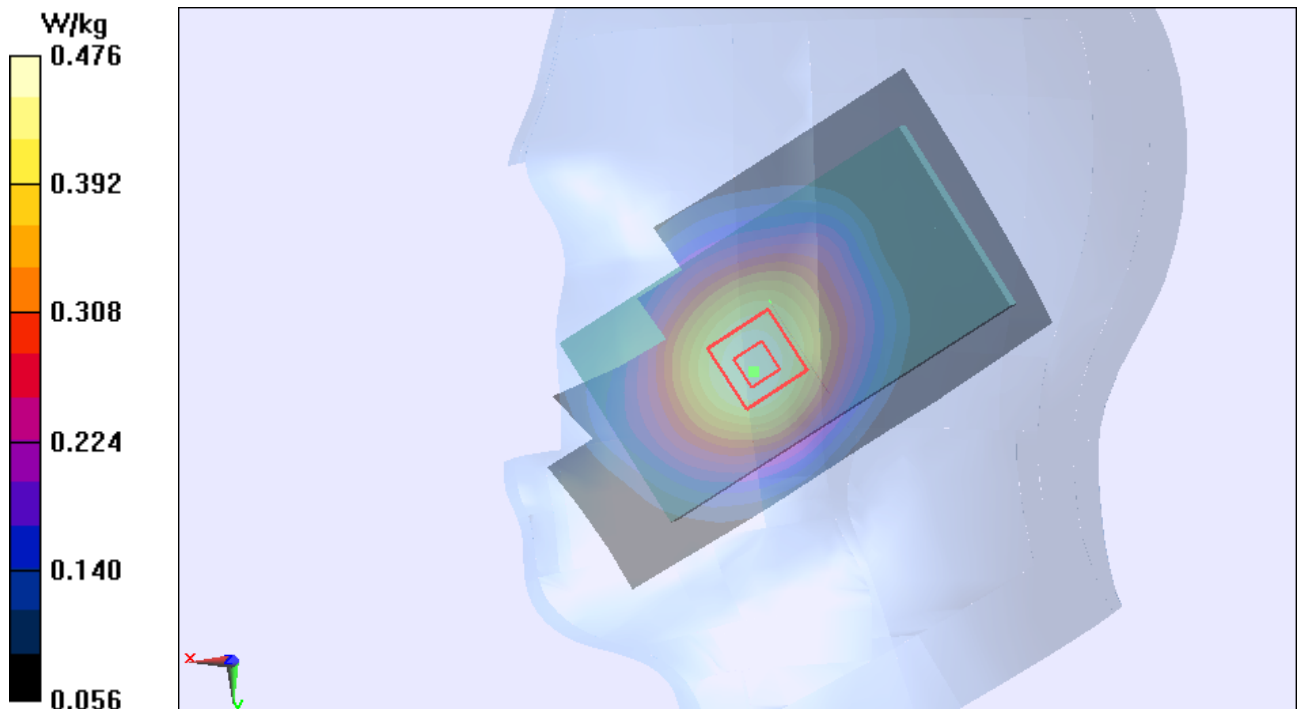


Figure 21 Right Touch Cheek GSM 850 Channel 190

GSM 850 Right Cheek Middle (SIM 2)

Date/Time: 2014-03-13 23:37:35

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.501 W/kg

Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.883 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.577 W/kg

SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.357 W/kg

Maximum value of SAR (measured) = 0.489 W/kg

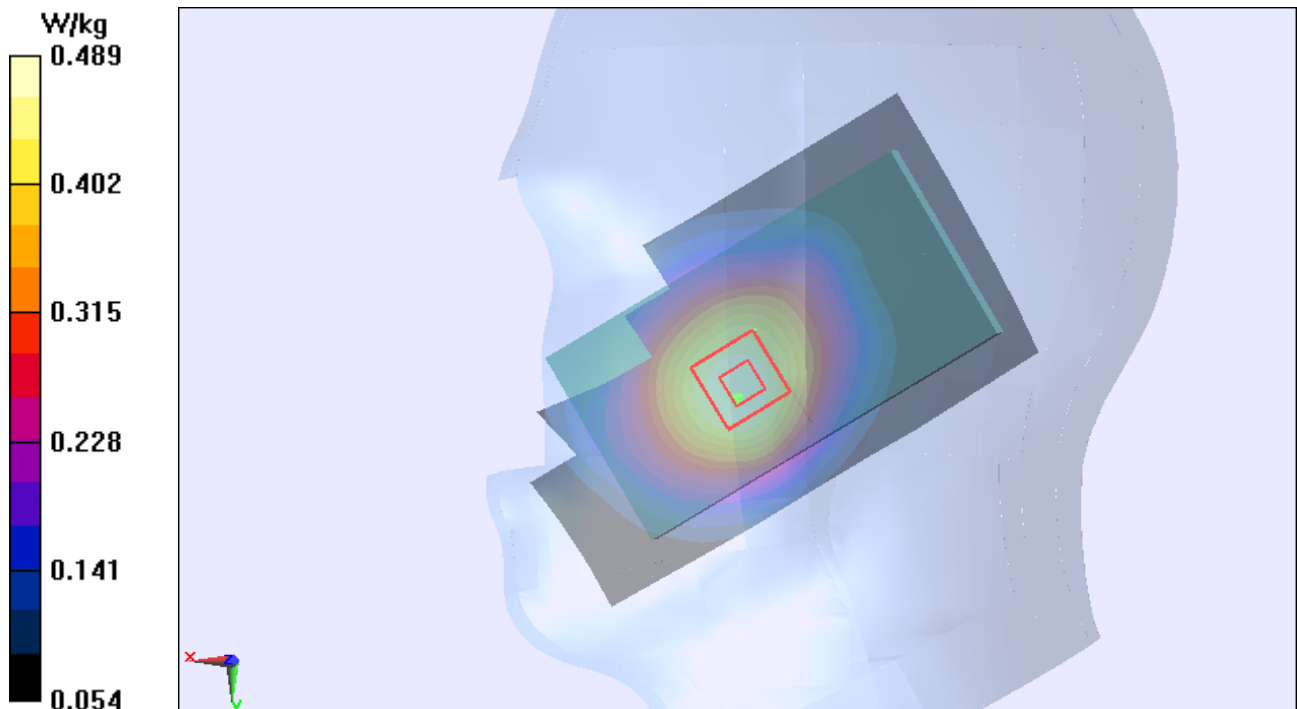


Figure 22 Right Touch Cheek GSM 850 Channel 190

GSM 850 GPRS (2Txslots) Back Side Middle (Battery 1)

Date/Time: 2014-03-16 00:07:01

Communication System: GPRS(2UP); Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.599 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.296 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.716 W/kg

SAR(1 g) = 0.564 W/kg; SAR(10 g) = 0.417 W/kg

Maximum value of SAR (measured) = 0.594 W/kg

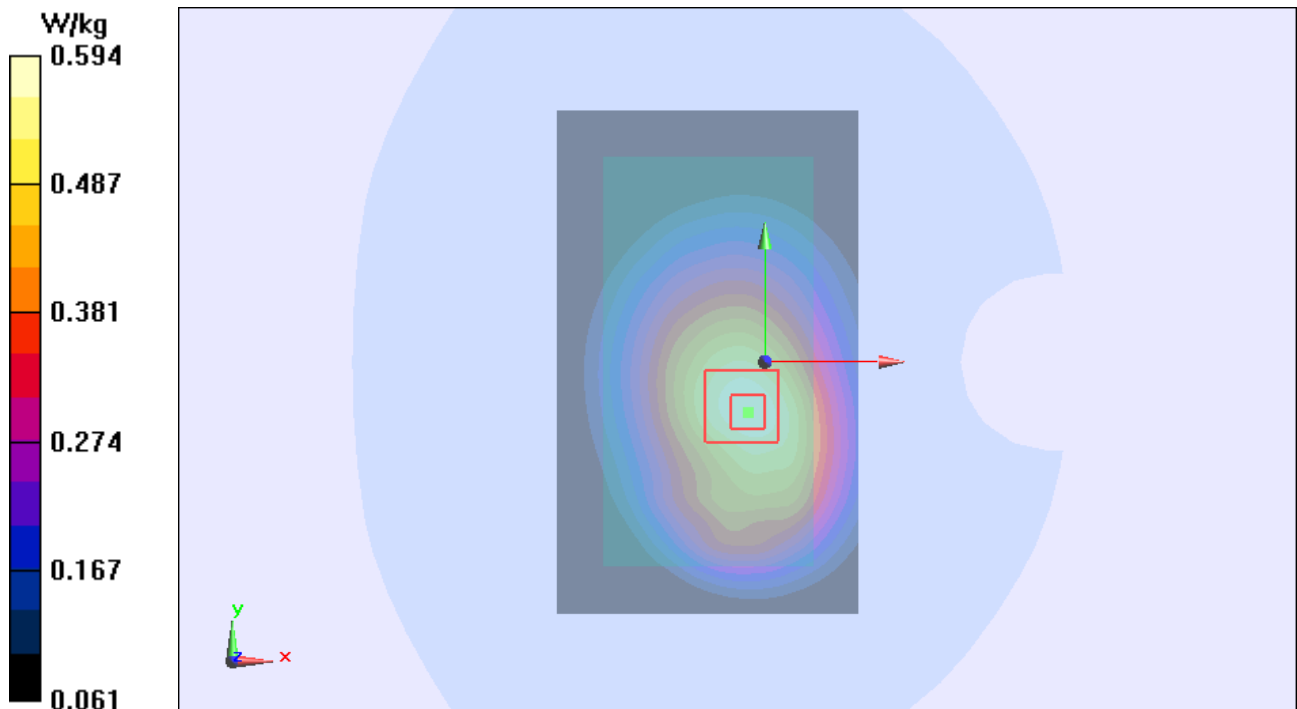


Figure 23 Body, Back Side, GSM 850 GPRS (2Txslots) Channel 190

GSM 850 GPRS (2Txslots)Front Side Middle (Battery 1)

Date/Time: 2014-03-16 00:27:57

Communication System: GPRS(2UP); Frequency: 836.6 MHz;Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Front Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.448 W/kg

Front Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.280 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.503 W/kg

SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.322 W/kg

Maximum value of SAR (measured) = 0.439 W/kg

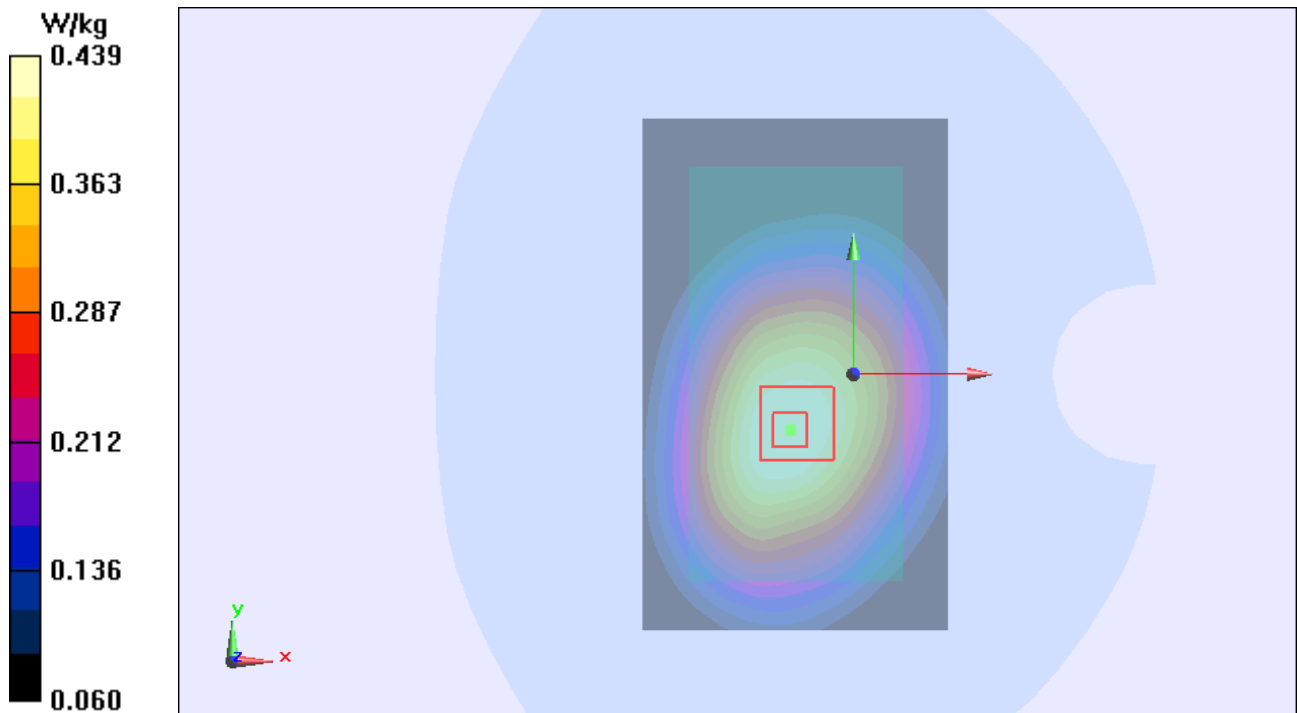


Figure 24 Body, Front Side, GSM 850 GPRS (2Txslots)Channel 190

GSM 850 GPRS (2Txslots)Left Edge Middle (Battery 1)

Date/Time: 2014-03-16 00:47:19

Communication System: GPRS(2UP); Frequency: 836.6 MHz;Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Edge Middle/Area Scan (31x101x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.510 W/kg

Left Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.611 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.331 W/kg

Maximum value of SAR (measured) = 0.504 W/kg

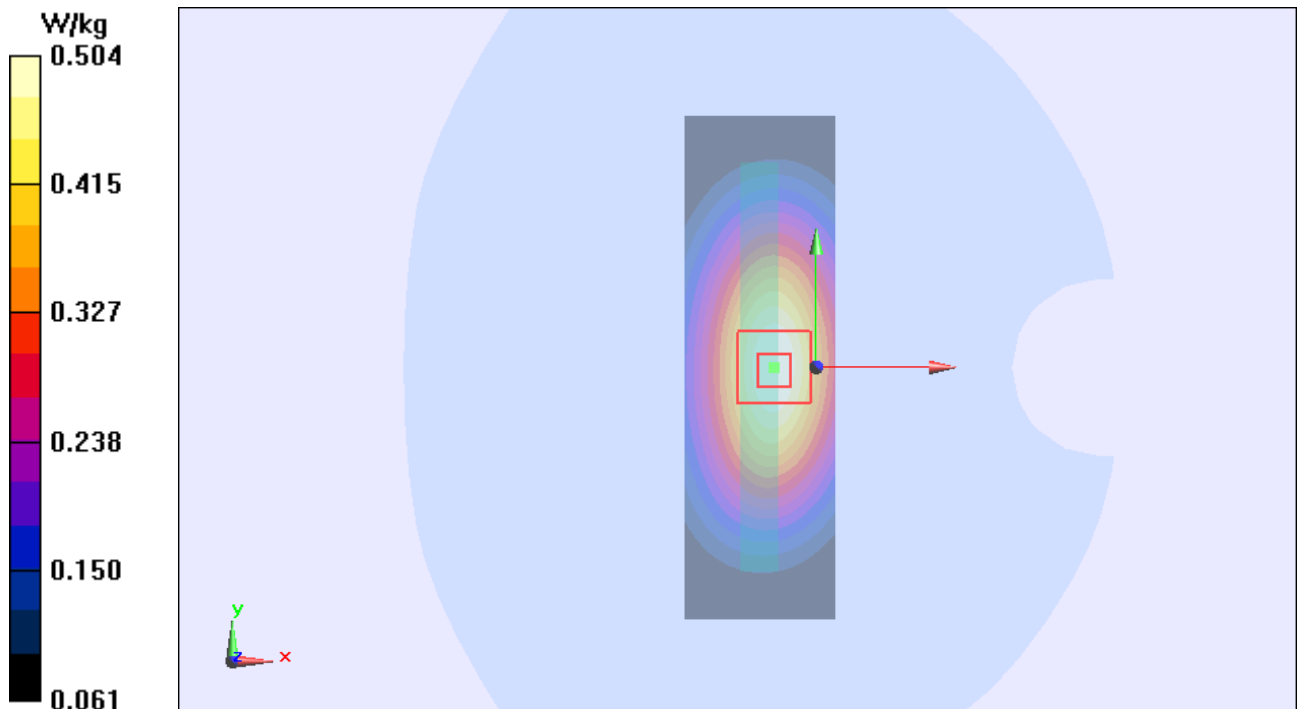


Figure 25 Body, Left Edge, GSM 850 GPRS (2Txslots)Channel 190

GSM 850 GPRS (2Txslots)Right Edge Middle (Battery 1)

Date/Time: 2014-03-16 01:01:24

Communication System: GPRS(2UP); Frequency: 836.6 MHz;Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Edge Middle/Area Scan (31x101x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.436 W/kg

Right Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.598 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.540 W/kg

SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 0.439 W/kg

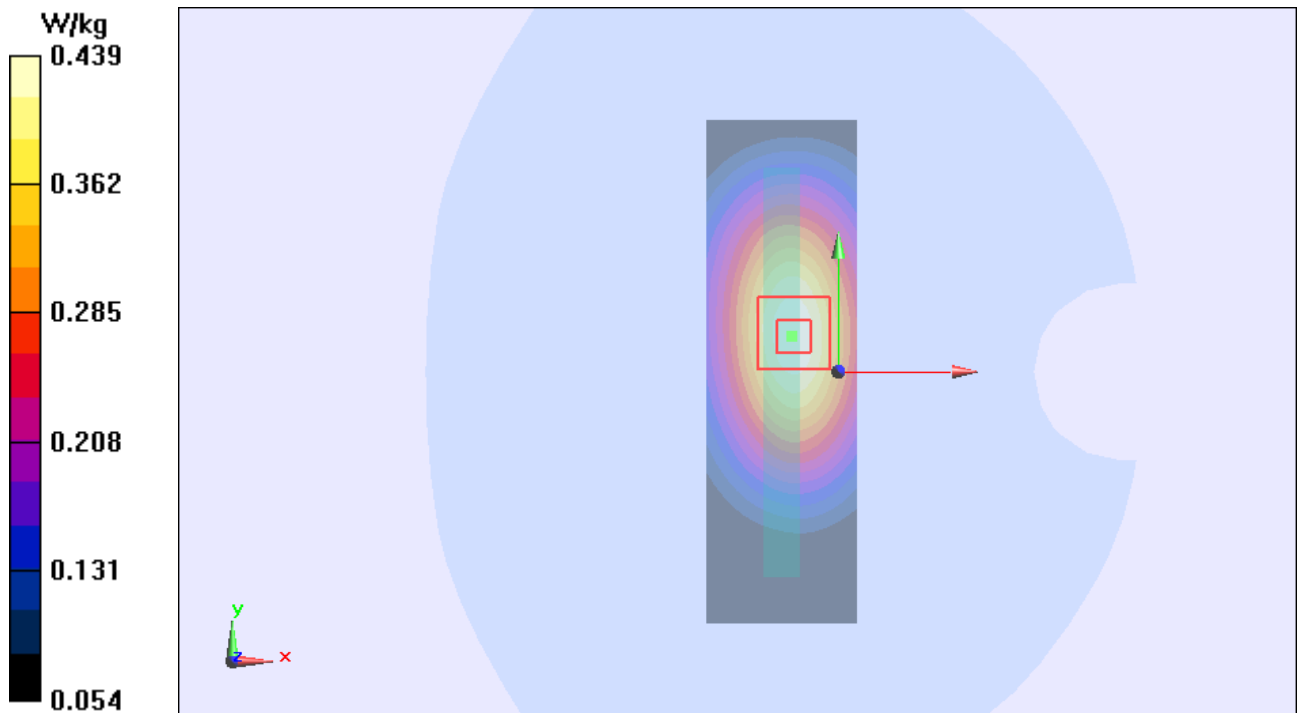


Figure 26 Body, Right Edge, GSM 850 GPRS (2Txslots)Channel 190

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 82 of 255

GSM 850 GPRS (2Txslots)Bottom Edge Middle (Battery 1)

Date/Time: 2014-03-16 01:17:11

Communication System: GPRS(2UP); Frequency: 836.6 MHz;Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Bottom Edge Middle/Area Scan (31x61x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.118 W/kg

Bottom Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.327 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.112 W/kg

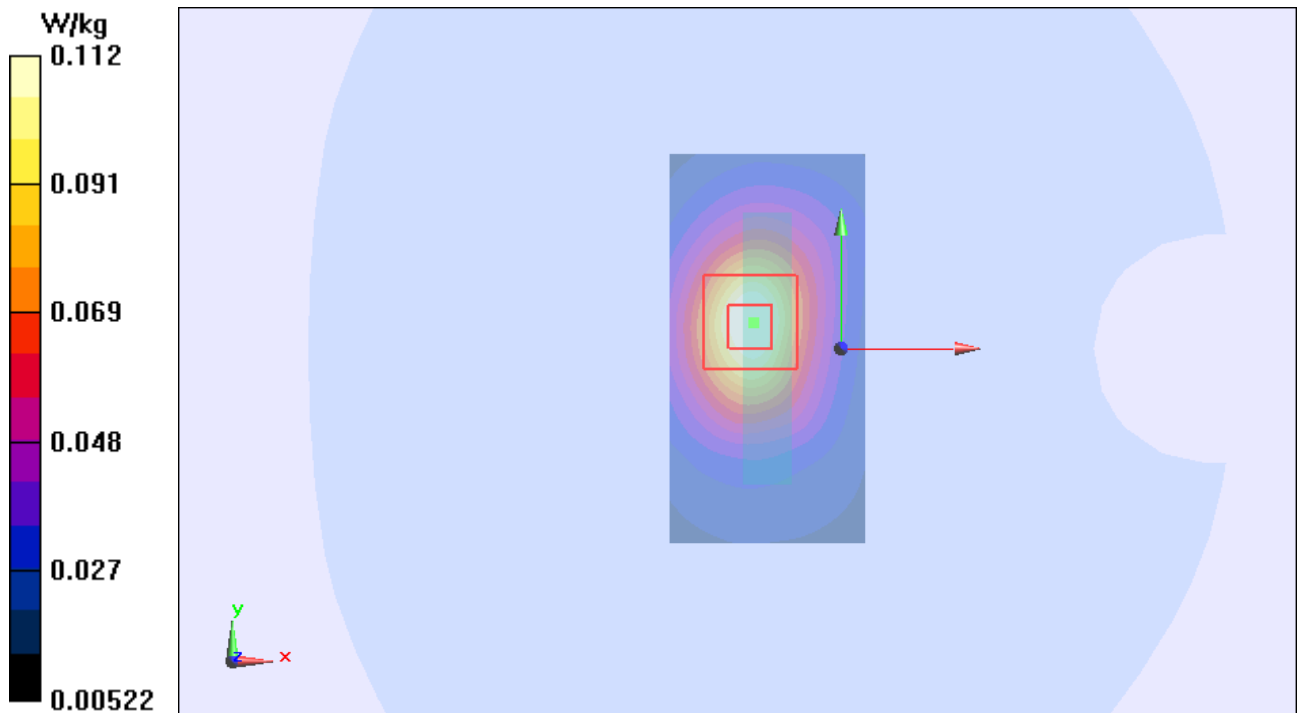


Figure 27 Body, Bottom Edge, GSM 850 GPRS (2Txslots)annel 190

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 83 of 255

GSM 850 GPRS (2Txslots) Back Side Middle (Battery 2)

Date/Time: 2014-03-16 01:49:18

Communication System: GPRS(2UP); Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.618 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.161 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.753 W/kg

SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.425 W/kg

Maximum value of SAR (measured) = 0.616 W/kg

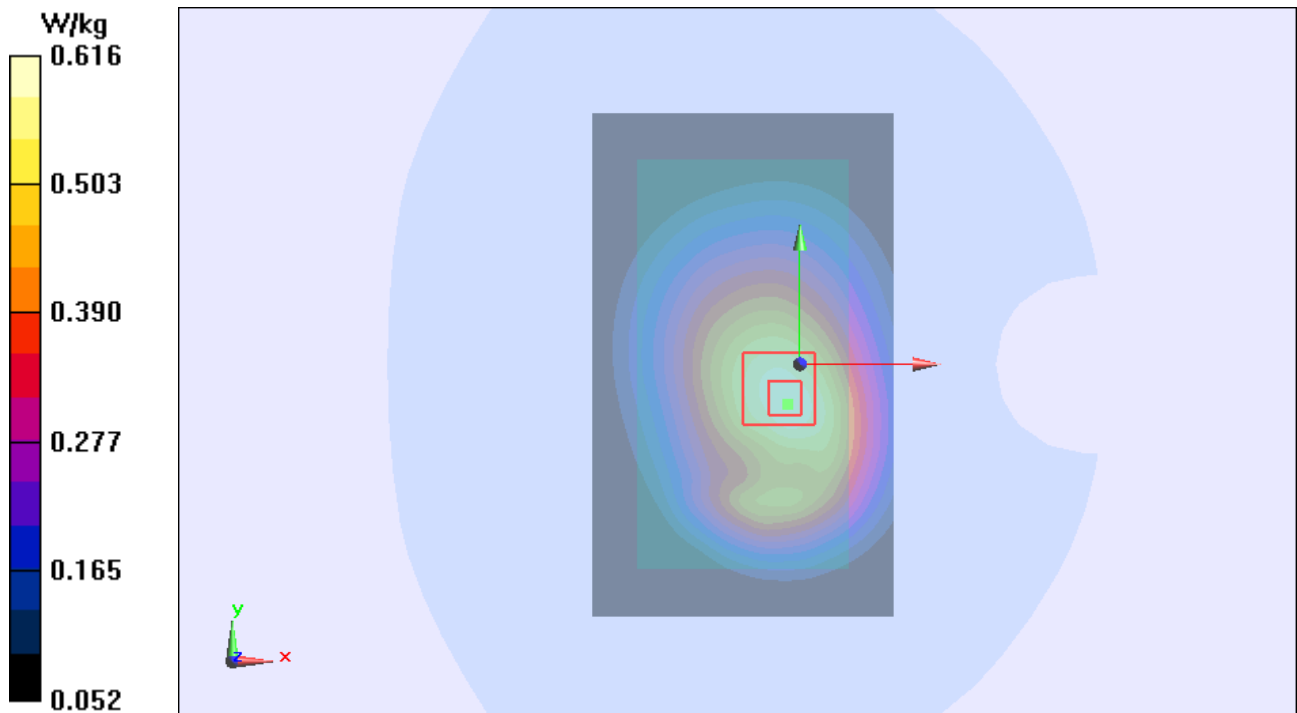

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 84 of 255

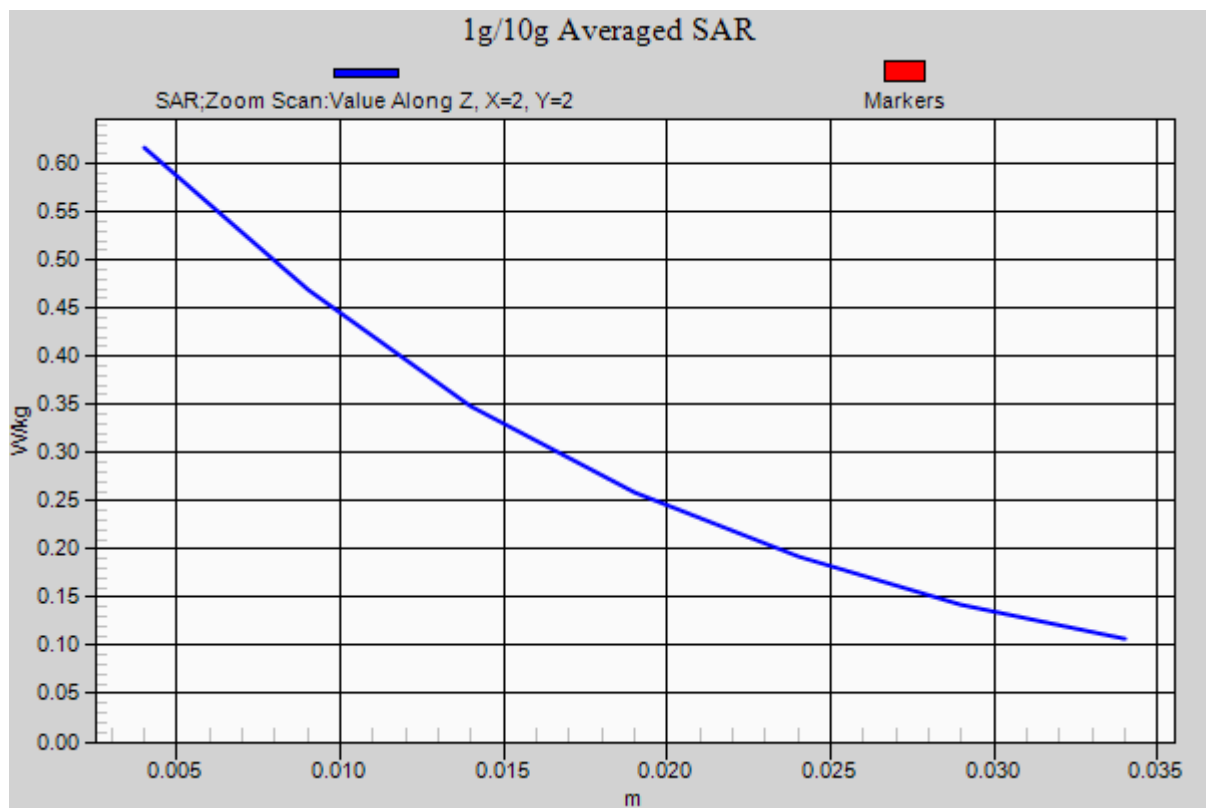


Figure 28 Body, Back Side, GSM 850 GPRS (2Txslots) Channel 190

GSM 850 GPRS (2Txslots) Back Side Middle (Battery 3)

Date/Time: 2014-03-16 02:01:32

Communication System: GPRS(2UP); Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.544 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.277 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.668 W/kg

SAR(1 g) = 0.518 W/kg; SAR(10 g) = 0.376 W/kg

Maximum value of SAR (measured) = 0.544 W/kg

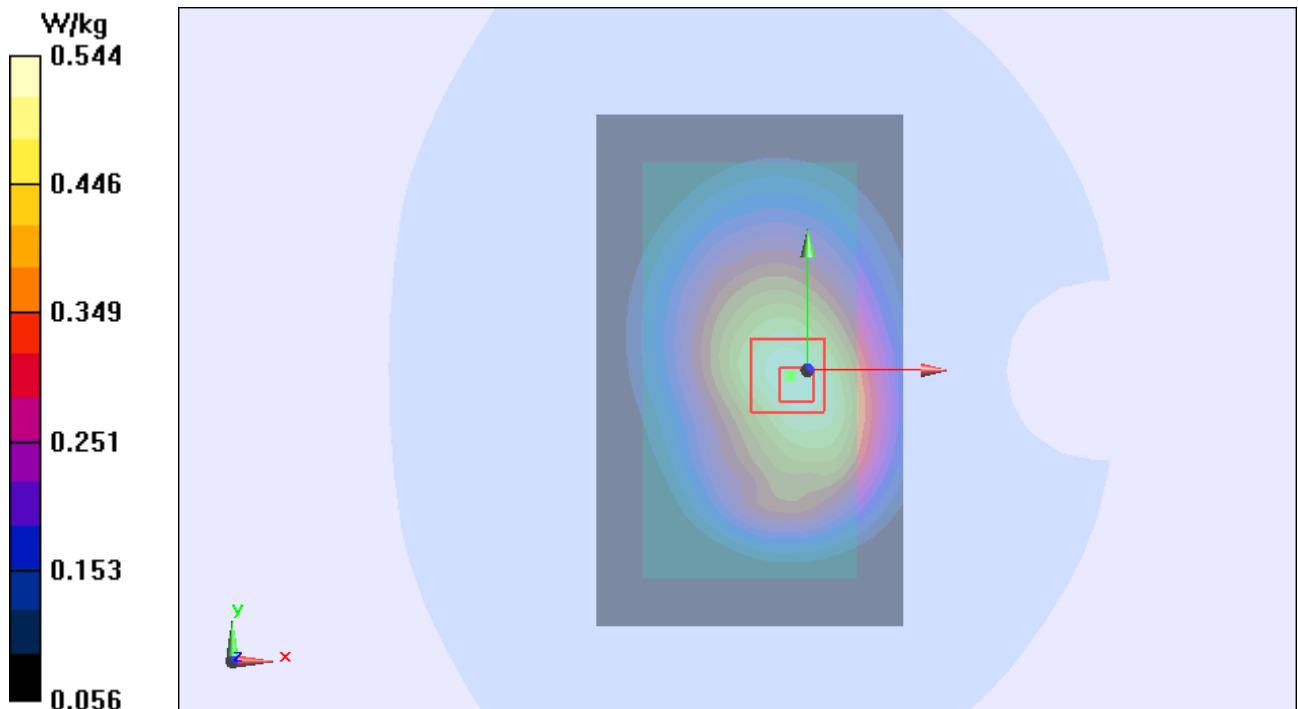


Figure 29 Body, Back Side, GSM 850 GPRS (2Txslots) Channel 190

GSM 850 GPRS (2Txslots) Back Side Middle (Battery 4)

Date/Time: 2014-03-16 03:37:16

Communication System: GPRS(2UP); Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.576 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.872 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.700 W/kg

SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.397 W/kg

Maximum value of SAR (measured) = 0.578 W/kg

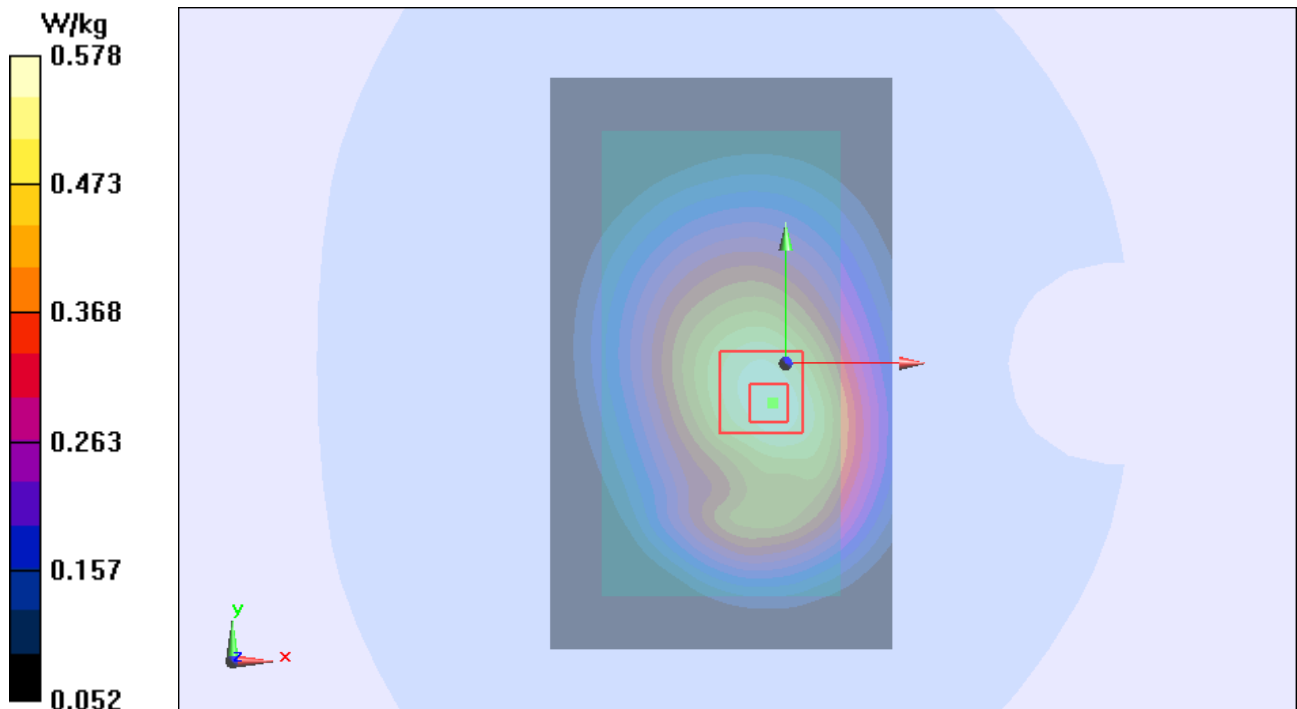


Figure 30 Body, Back Side, GSM 850 GPRS (2Txslots) Channel 190

GSM 850 GPRS (2Txslots) Back Side Middle (Battery 5)

Date/Time: 2014-03-16 02:25:18

Communication System: GPRS(2UP); Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.585 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.967 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.723 W/kg

SAR(1 g) = 0.556 W/kg; SAR(10 g) = 0.402 W/kg

Maximum value of SAR (measured) = 0.587 W/kg

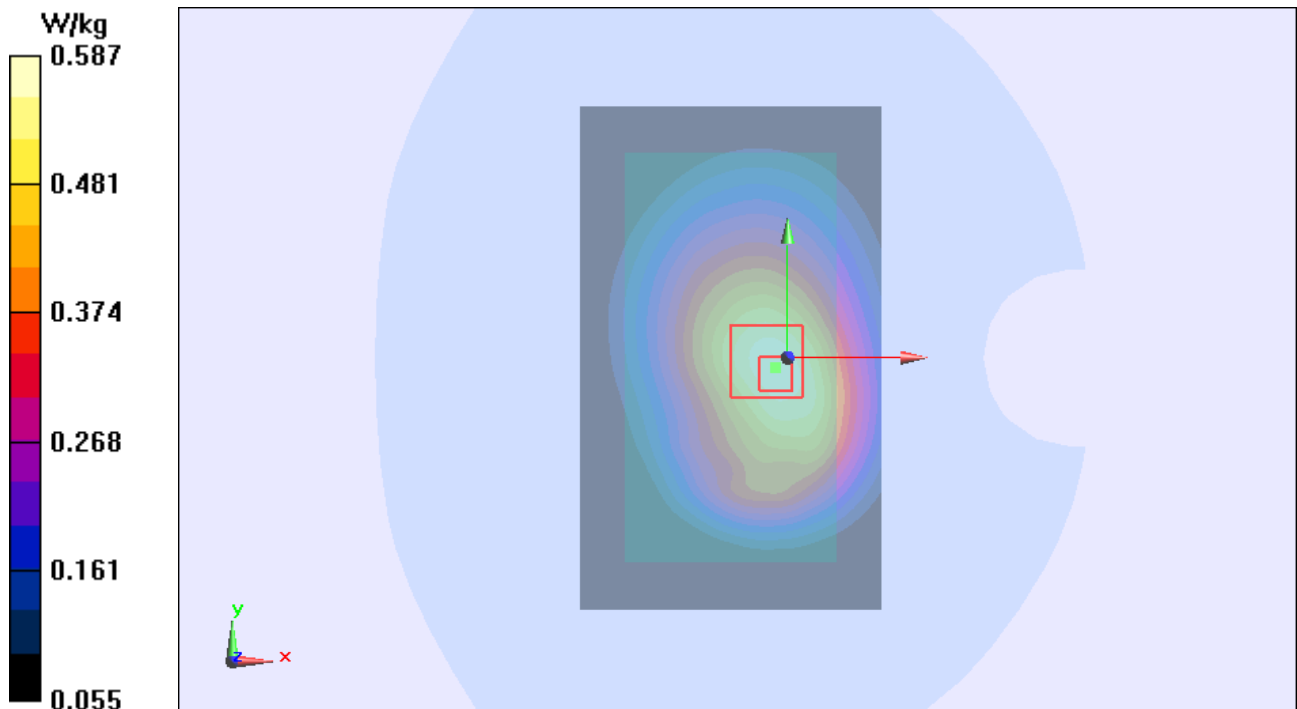


Figure 31 Body, Back Side, GSM 850 GPRS (2Txslots) Channel 190

GSM 850 GPRS (2Txslots) Back Side Middle (Battery 6)

Date/Time: 2014-03-16 03:19:10

Communication System: GPRS(2UP); Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.590 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.874 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.734 W/kg

SAR(1 g) = 0.558 W/kg; SAR(10 g) = 0.404 W/kg

Maximum value of SAR (measured) = 0.587 W/kg

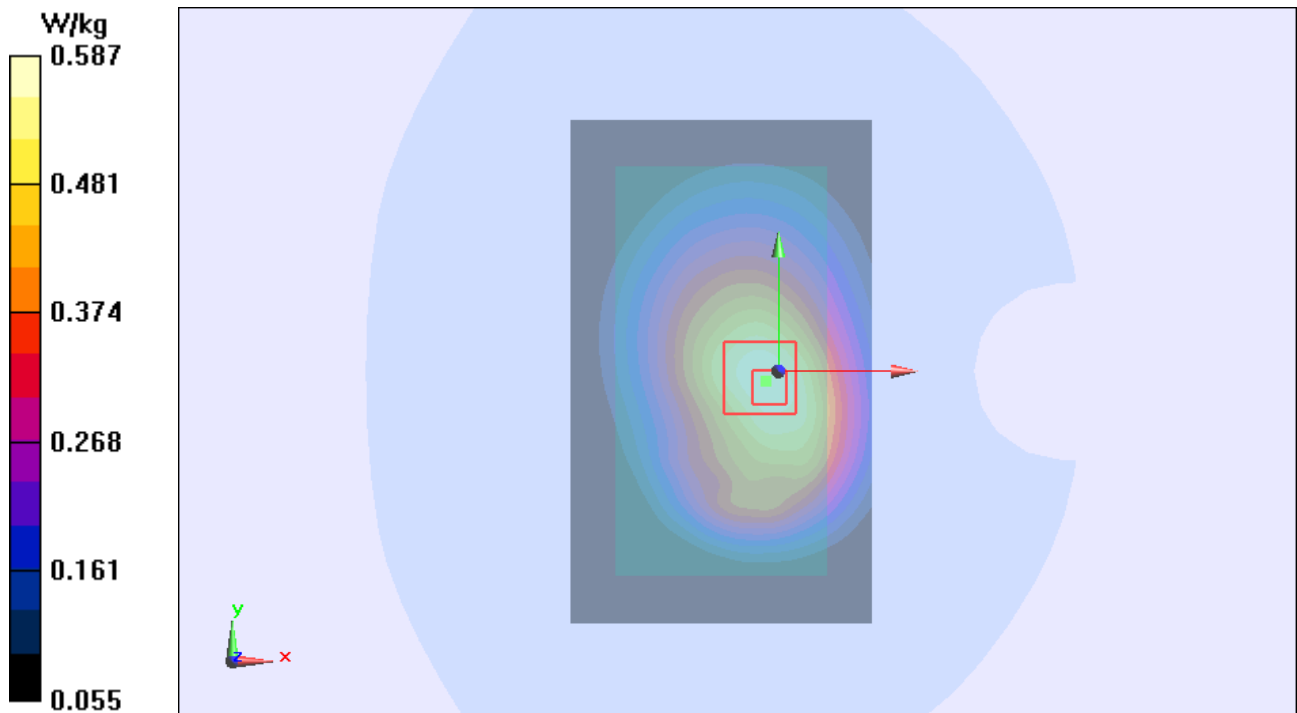


Figure 32 Body, Back Side, GSM 850 GPRS (2Txslots) Channel 190

GSM 850 GPRS (2Txslots) Back Side Middle (SIM 2)

Date/Time: 2014-03-16 01:30:30

Communication System: GPRS(2UP); Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.578 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.207 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.675 W/kg

SAR(1 g) = 0.533 W/kg; SAR(10 g) = 0.391 W/kg

Maximum value of SAR (measured) = 0.562 W/kg

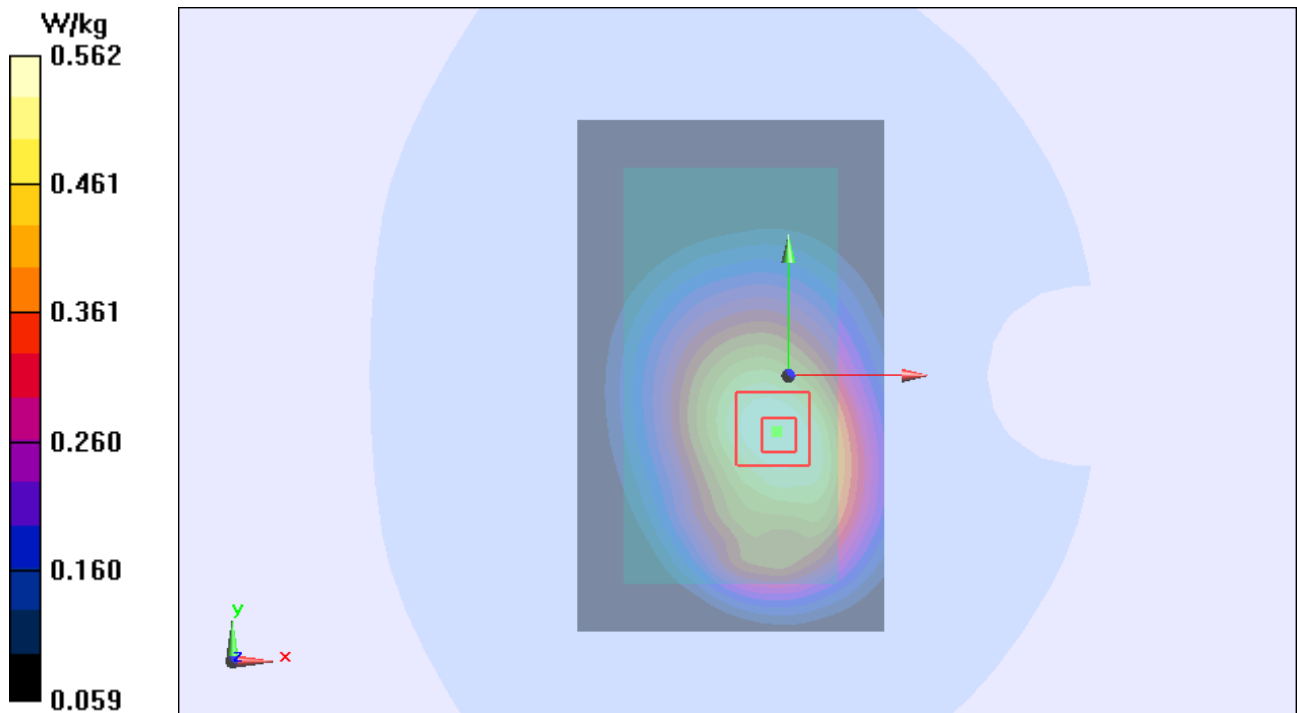


Figure 33 Body, Back Side, GSM 850 GPRS (2Txslots) Channel 190

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 90 of 255

GSM 1900 Left Cheek Middle (Battery 1)

Date/Time: 2014-03-21 02:28:04

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.421 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.643 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.603 W/kg

SAR(1 g) = 0.380 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 0.414 W/kg

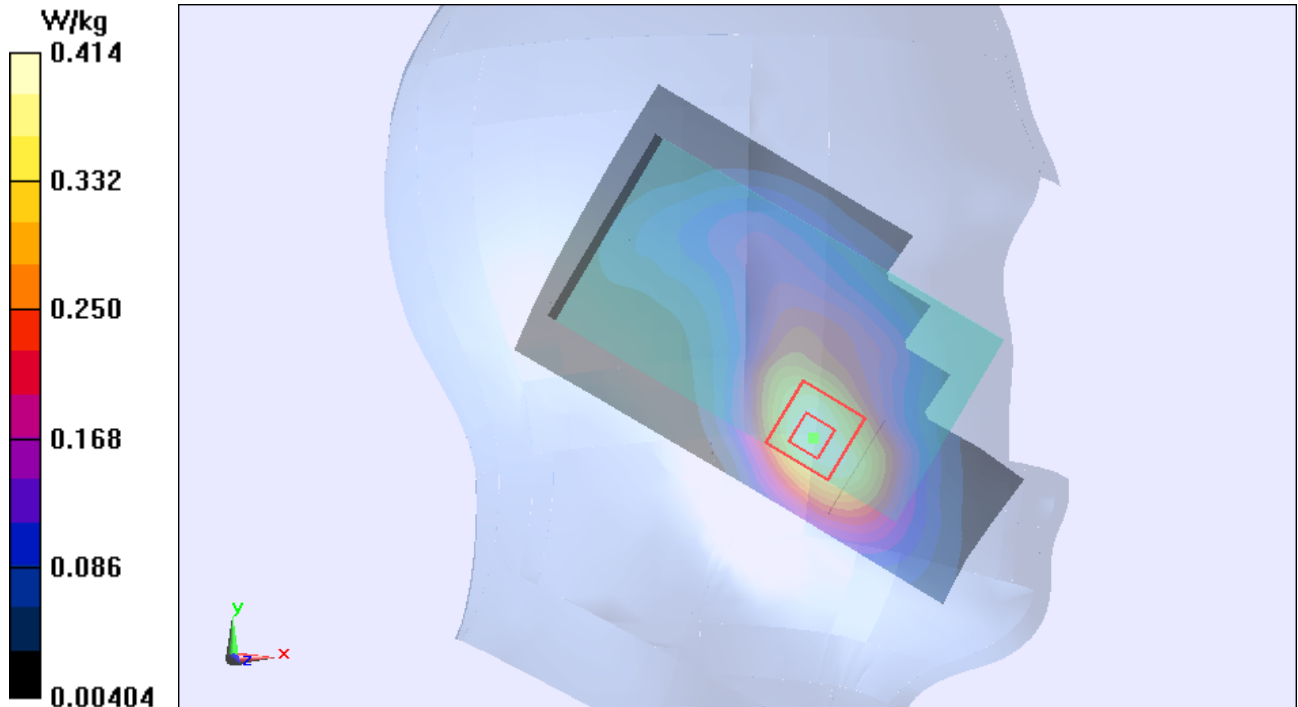


Figure 34 Left Hand Touch Cheek GSM 1900 Channel 661

GSM 1900 Left Tilt Middle (Battery 1)

Date/Time: 2014-03-21 01:38:50

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Tilt Middle/Area Scan (61x101x1): Interpolated grid: dx=5mm, dy=15mm

Maximum value of SAR (interpolated) = 0.191 W/kg

Left Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.905 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.174 W/kg

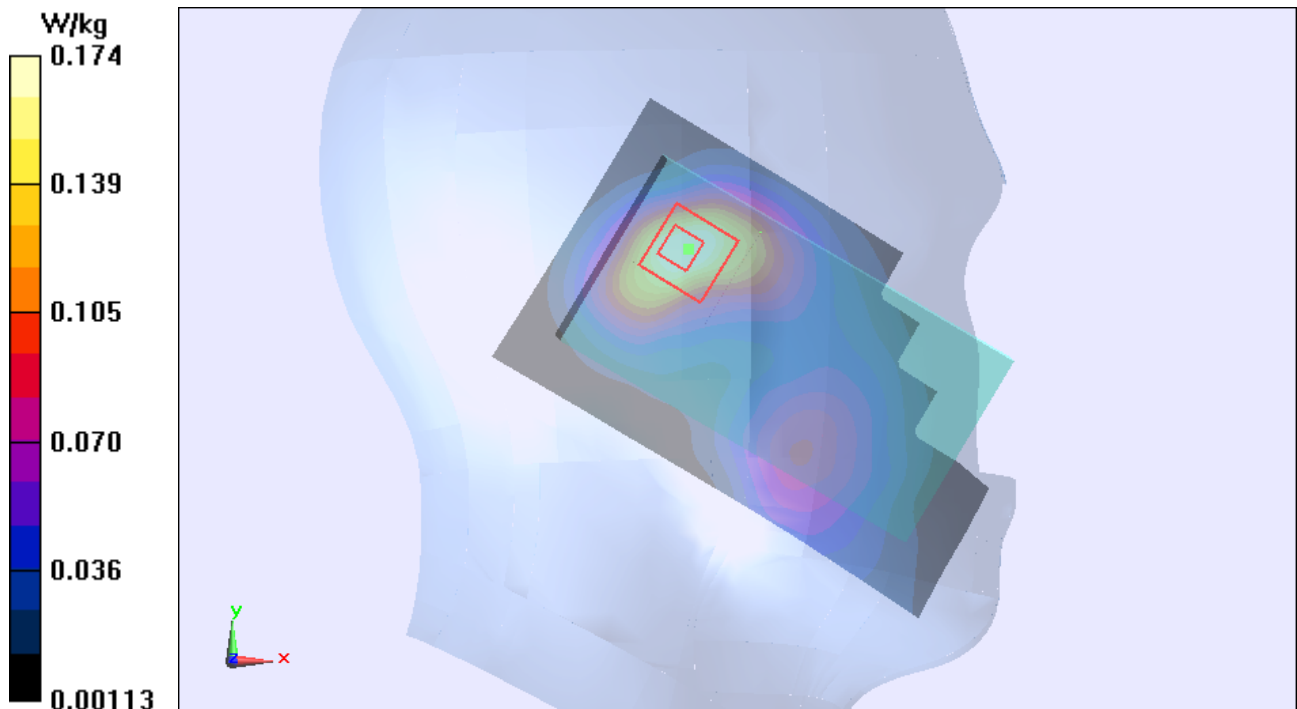


Figure 35 Left Hand Tilt 15° GSM 1900 Channel 661

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 92 of 255

GSM 1900 Right Cheek Middle (Battery 1)

Date/Time: 2014-03-21 01:53:39

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.295 W/kg

Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.200 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.170 W/kg

Maximum value of SAR (measured) = 0.277 W/kg

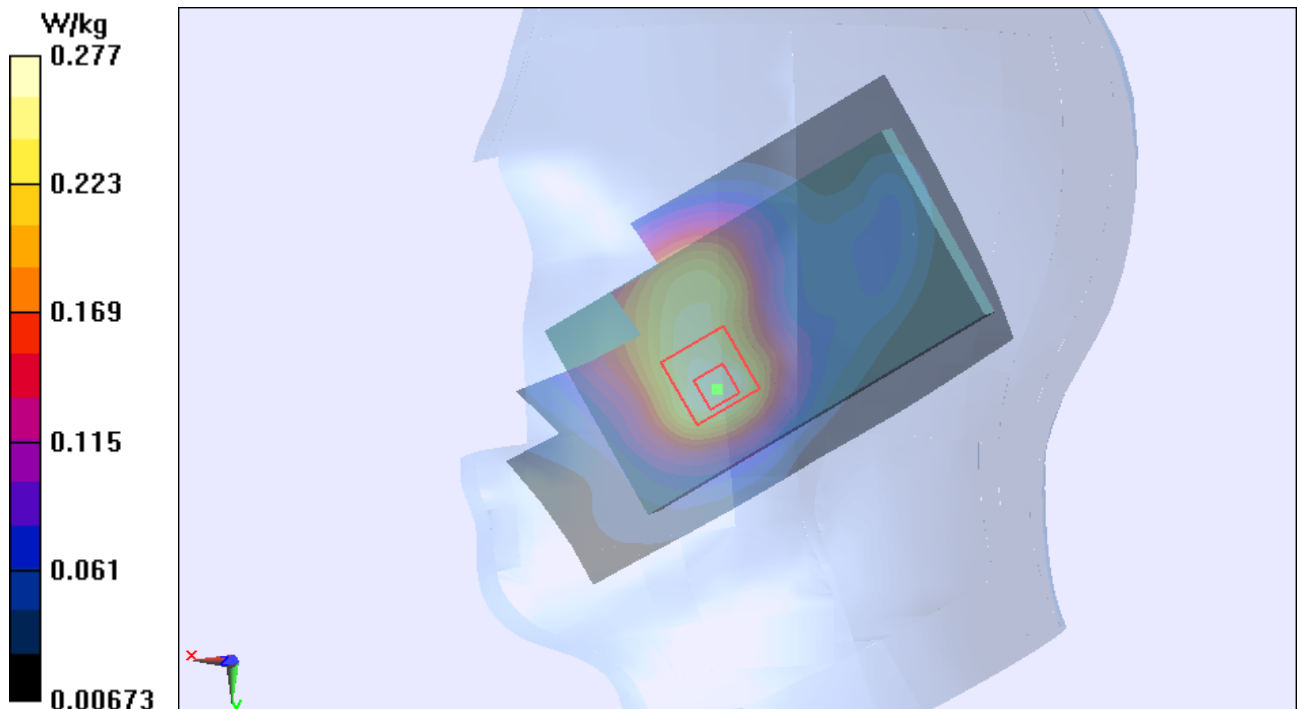


Figure 36 Right Hand Touch Cheek GSM 1900 Channel 661

GSM 1900 Right Tilt Middle (Battery 1)

Date/Time: 2014-03-21 02:10:23

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Tilt Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.181 W/kg

Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.792 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.267 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.180 W/kg

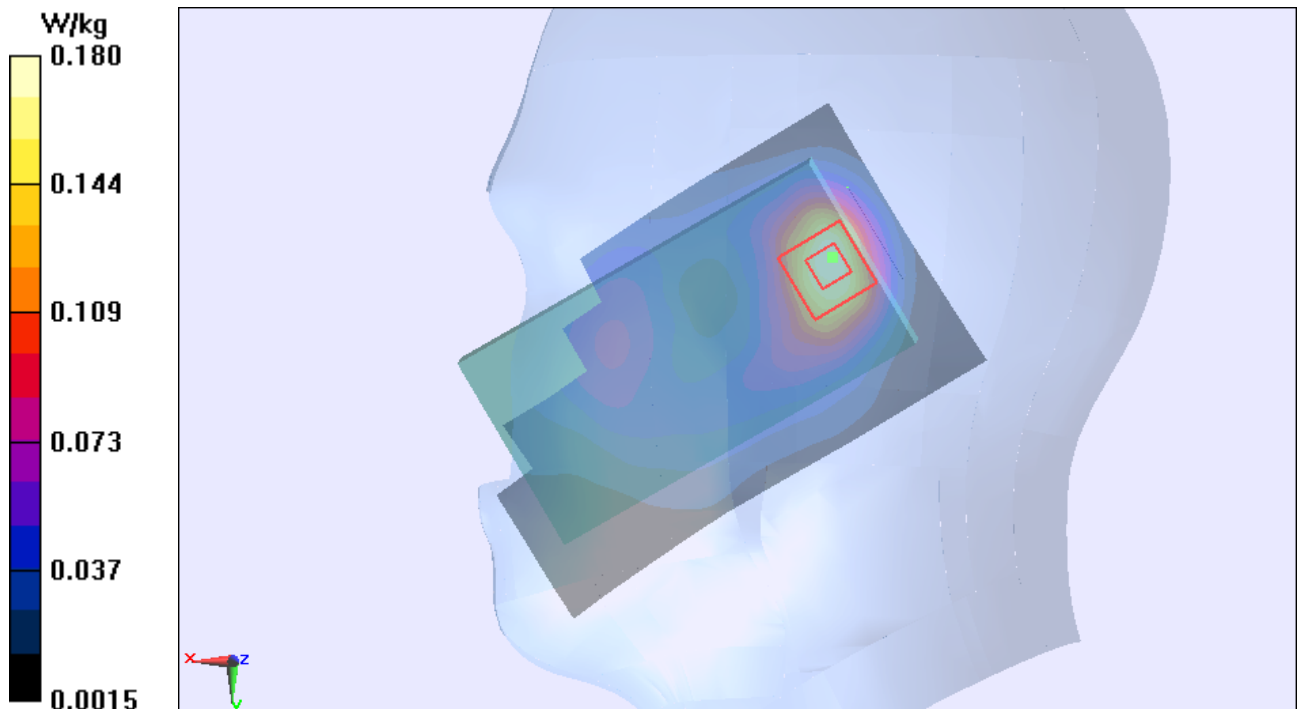


Figure 37 Right Hand Tilt 15° GSM 1900 Channel 661

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 94 of 255

GSM 1900 Left Cheek Middle (Battery 2)

Date/Time: 2014-03-21 08:03:42

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.394 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.694 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.575 W/kg

SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.392 W/kg

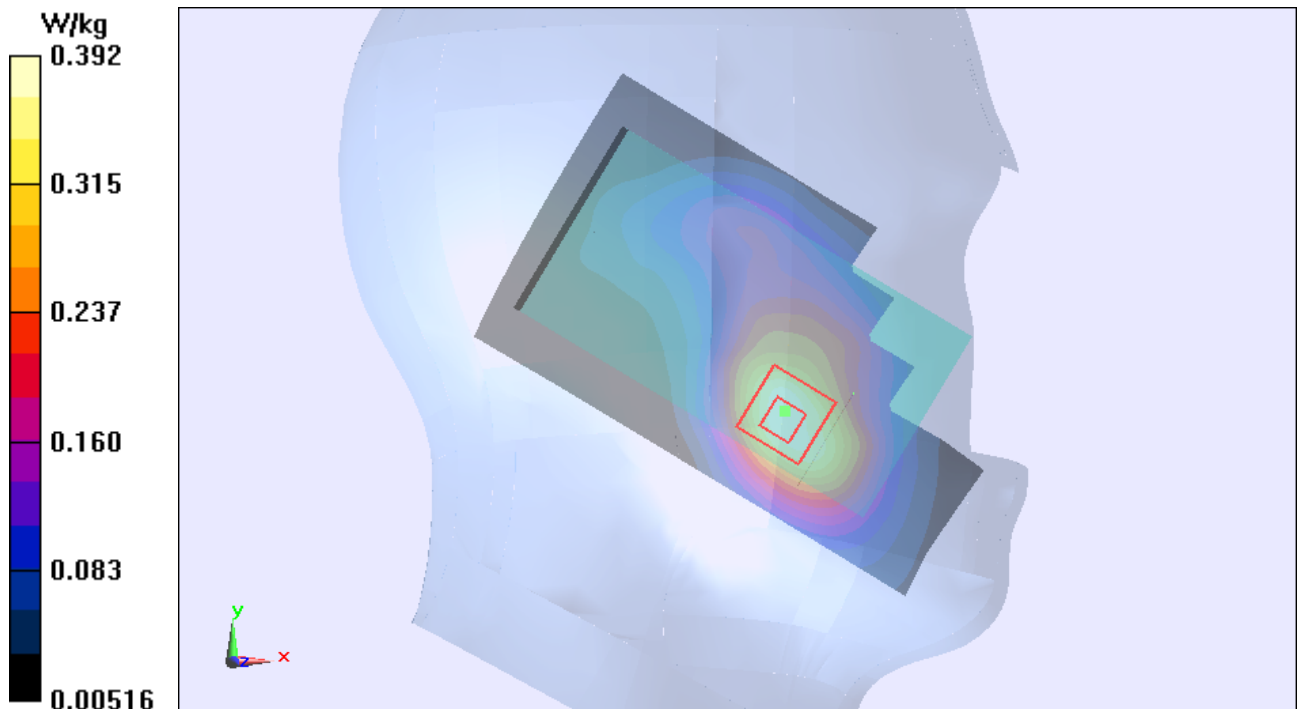


Figure 38 Left Hand Touch Cheek GSM 1900 Channel 661

GSM 1900 Left Cheek Middle (Battery 3)

Date/Time: 2014-03-21 07:46:06

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.415 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.559 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.420 W/kg

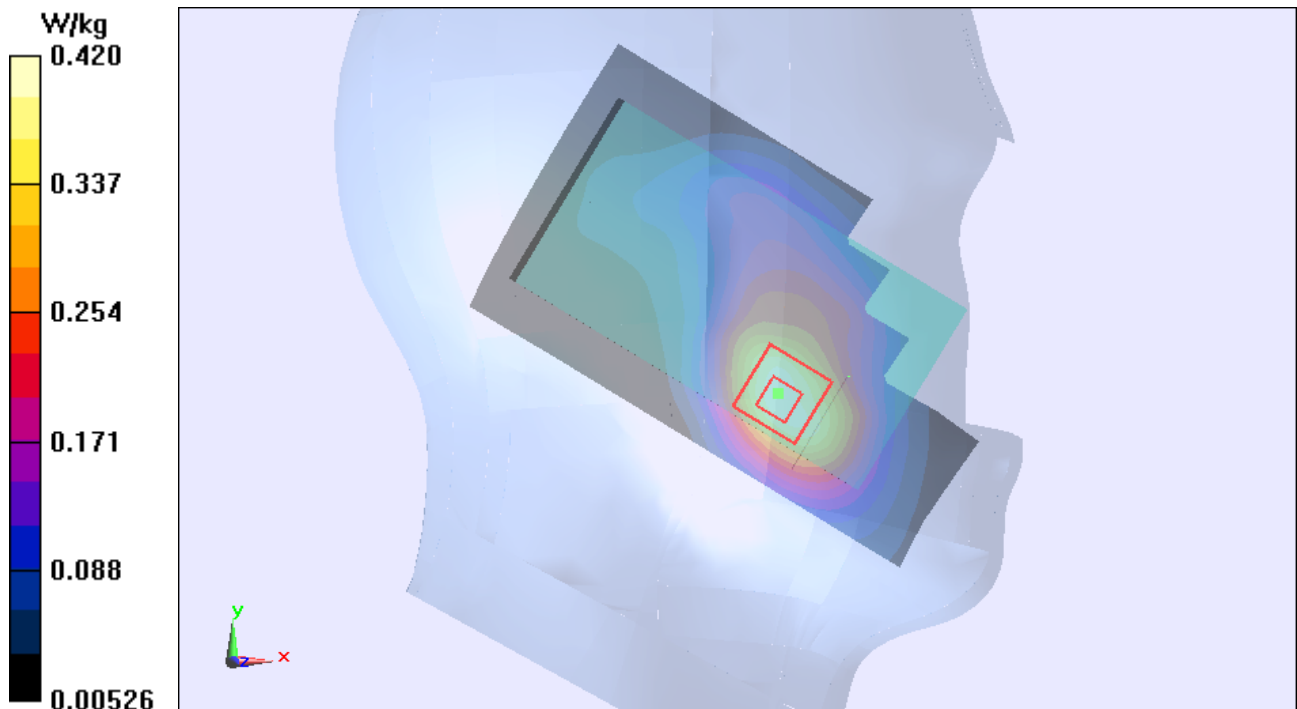


Figure 39 Left Hand Touch Cheek GSM 1900 Channel 661

GSM 1900 Left Cheek Middle (Battery 4)

Date/Time: 2014-03-21 06:38:34

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.390 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.524 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.382 W/kg

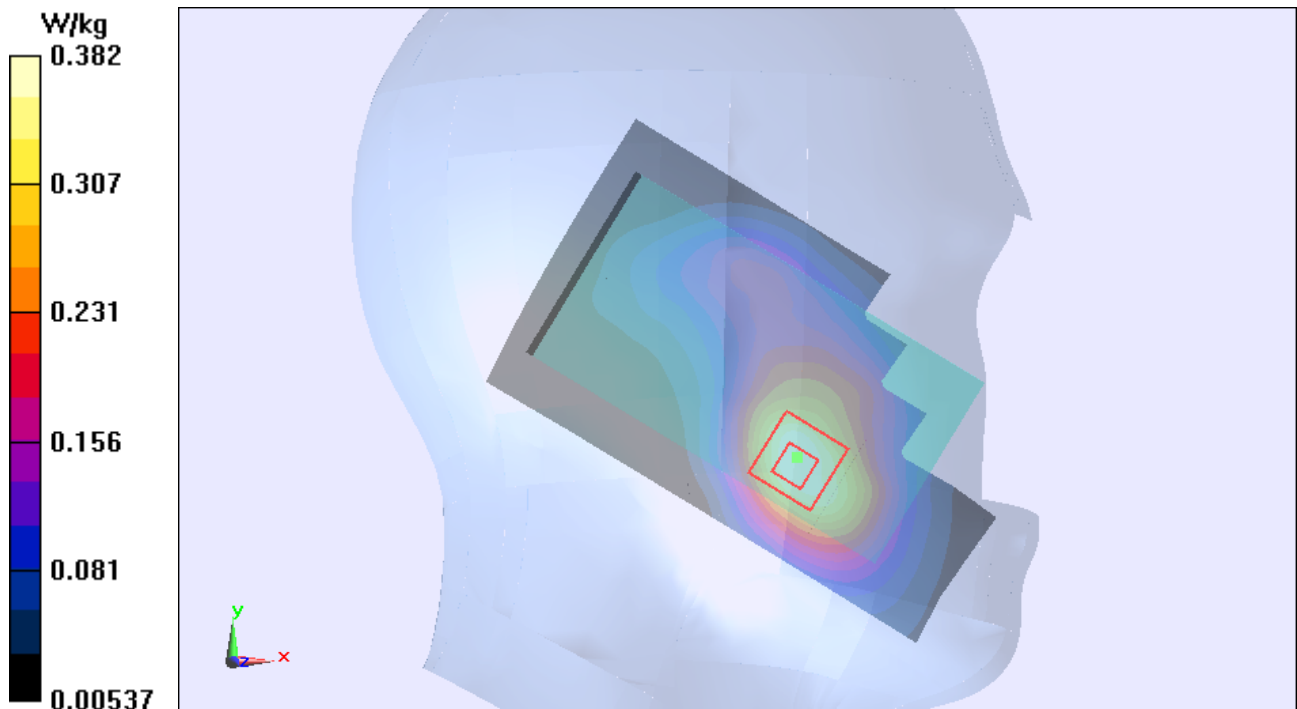


Figure 40 Left Hand Touch Cheek GSM 1900 Channel 661

GSM 1900 Left Cheek Middle (Battery 5)

Date/Time: 2014-03-21 06:20:49

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.395 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.486 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.586 W/kg

SAR(1 g) = 0.365 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.391 W/kg

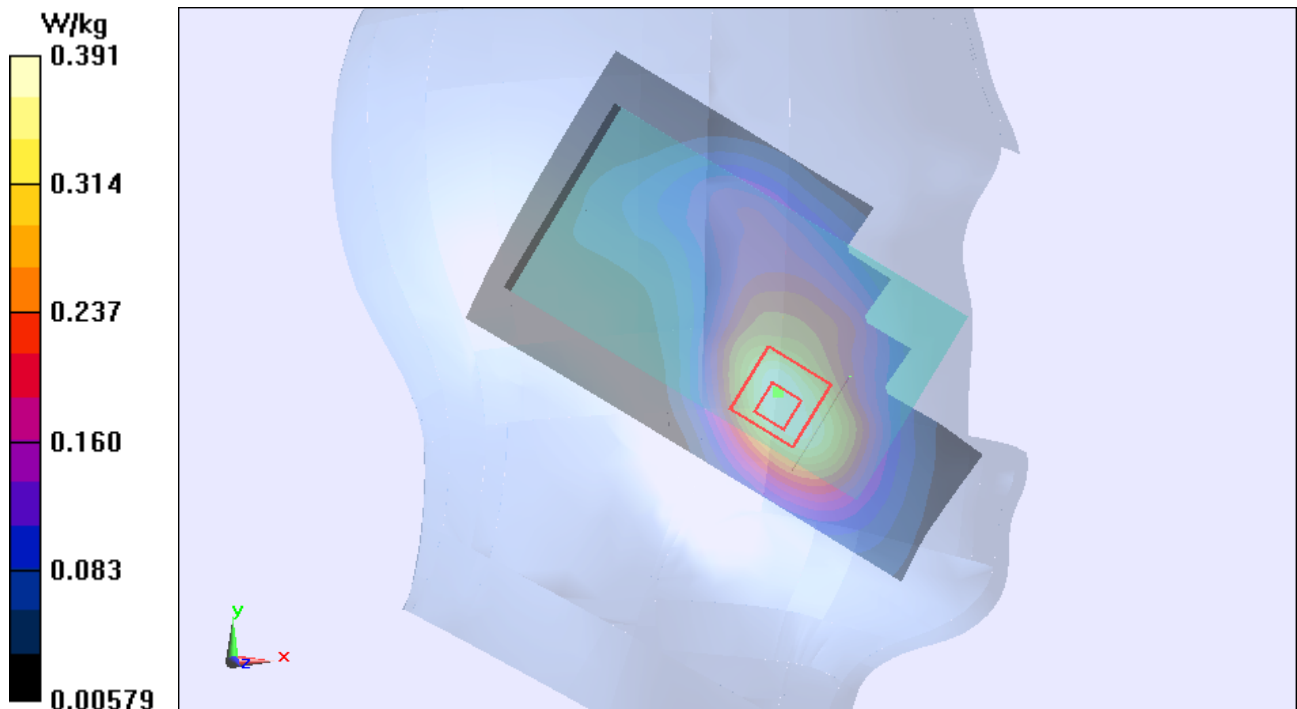


Figure 41 Left Hand Touch Cheek GSM 1900 Channel 661

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 98 of 255

GSM 1900 Left Cheek Middle (Battery 6)

Date/Time: 2014-03-21 07:09:44

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.415 W/kg


Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.938 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.625 W/kg

SAR(1 g) = 0.388 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.423 W/kg

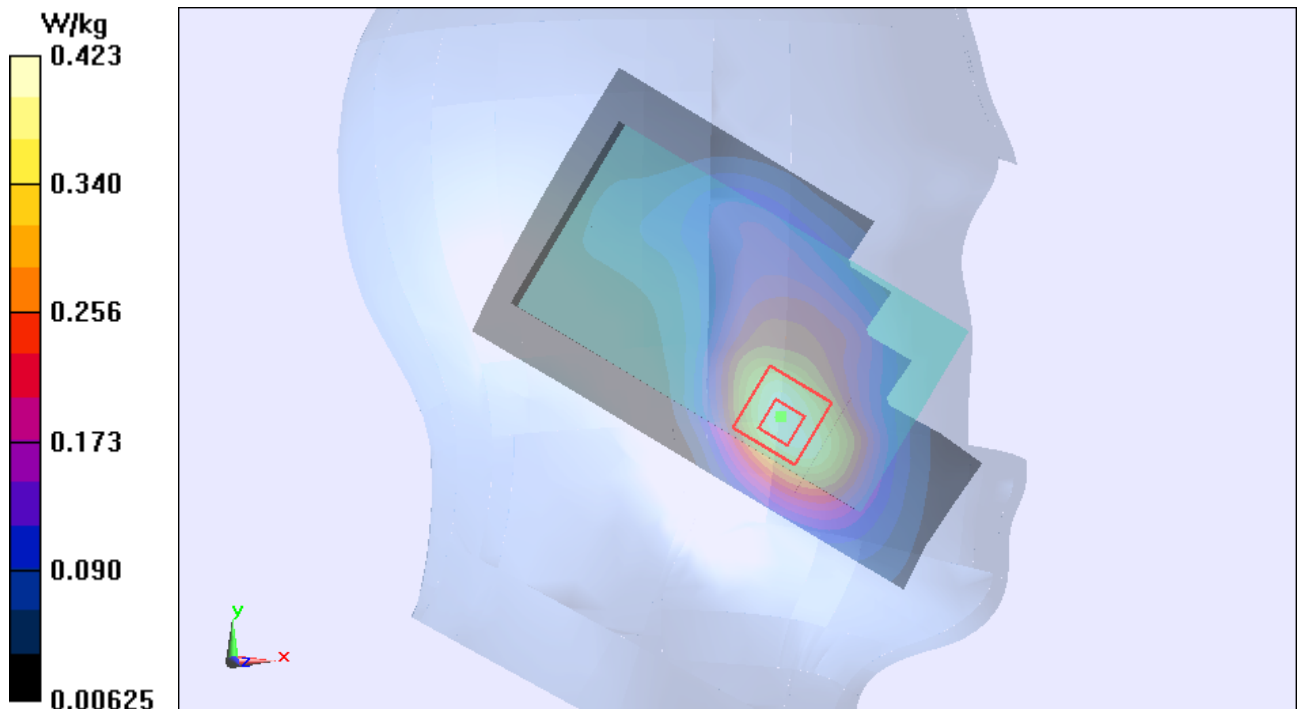

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 99 of 255

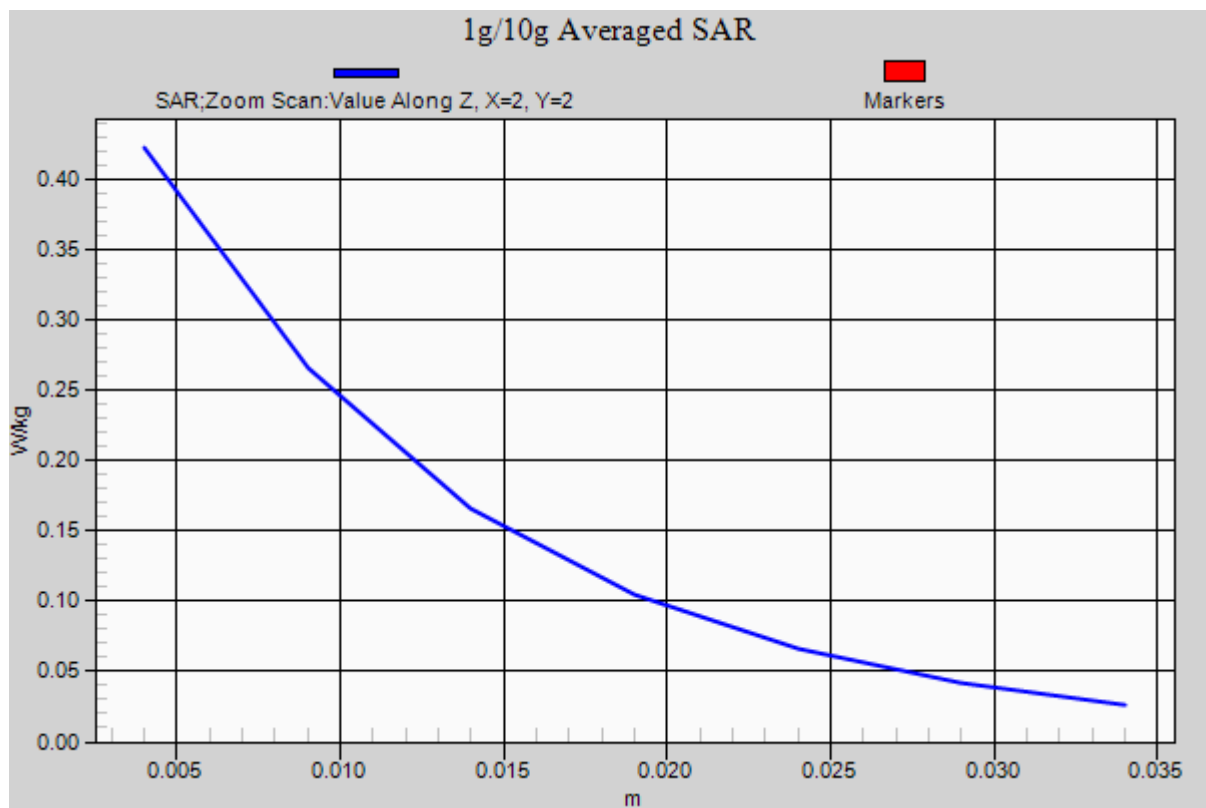


Figure 42 Left Hand Touch Cheek GSM 1900 Channel 661

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 100 of 255

GSM 1900 Left Cheek Middle (SIM 2)

Date/Time: 2014-03-21 02:45:10

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.414 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.115 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.596 W/kg

SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.234 W/kg

Maximum value of SAR (measured) = 0.411 W/kg

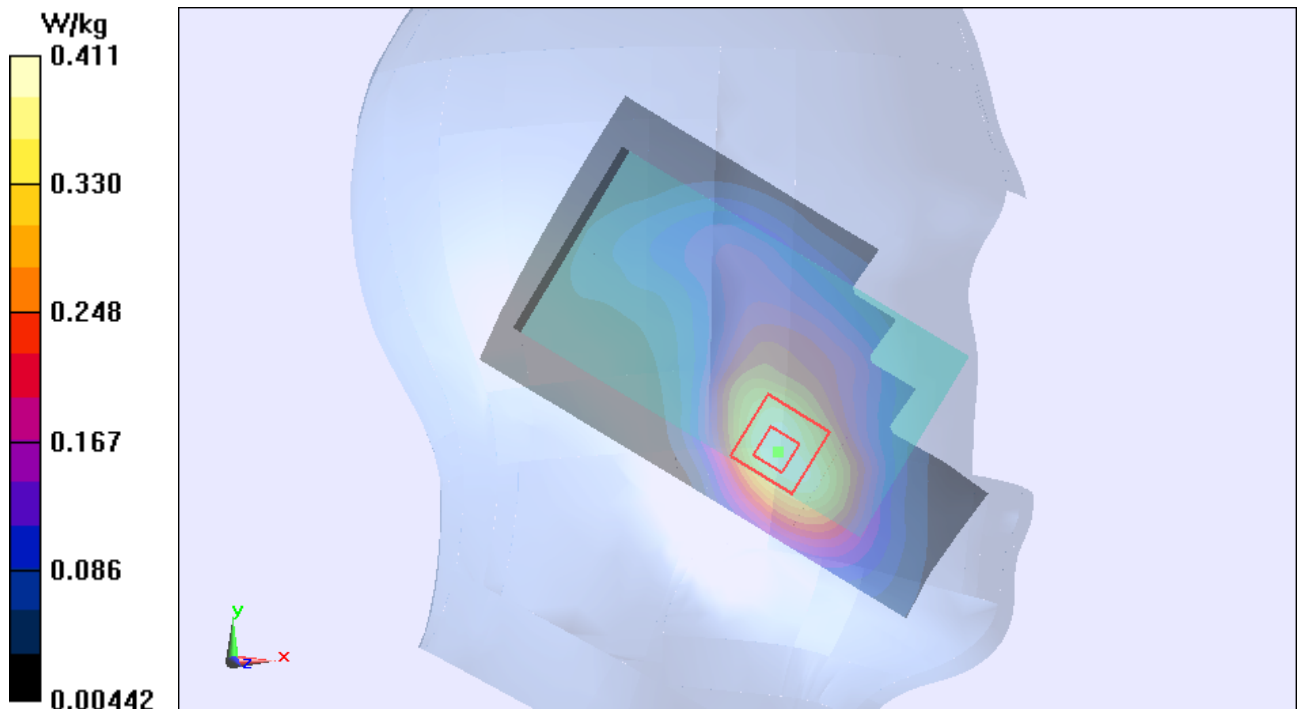


Figure 43 Left Hand Touch Cheek GSM 1900 Channel 661

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 101 of 255

GSM 1900 GPRS (2Txslots) Back Side Middle (Battery 1)

Date/Time: 2014-03-23 13:20:31

Communication System: GPRS(2UP); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.703 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.935 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.631 W/kg; SAR(10 g) = 0.365 W/kg

Maximum value of SAR (measured) = 0.692 W/kg

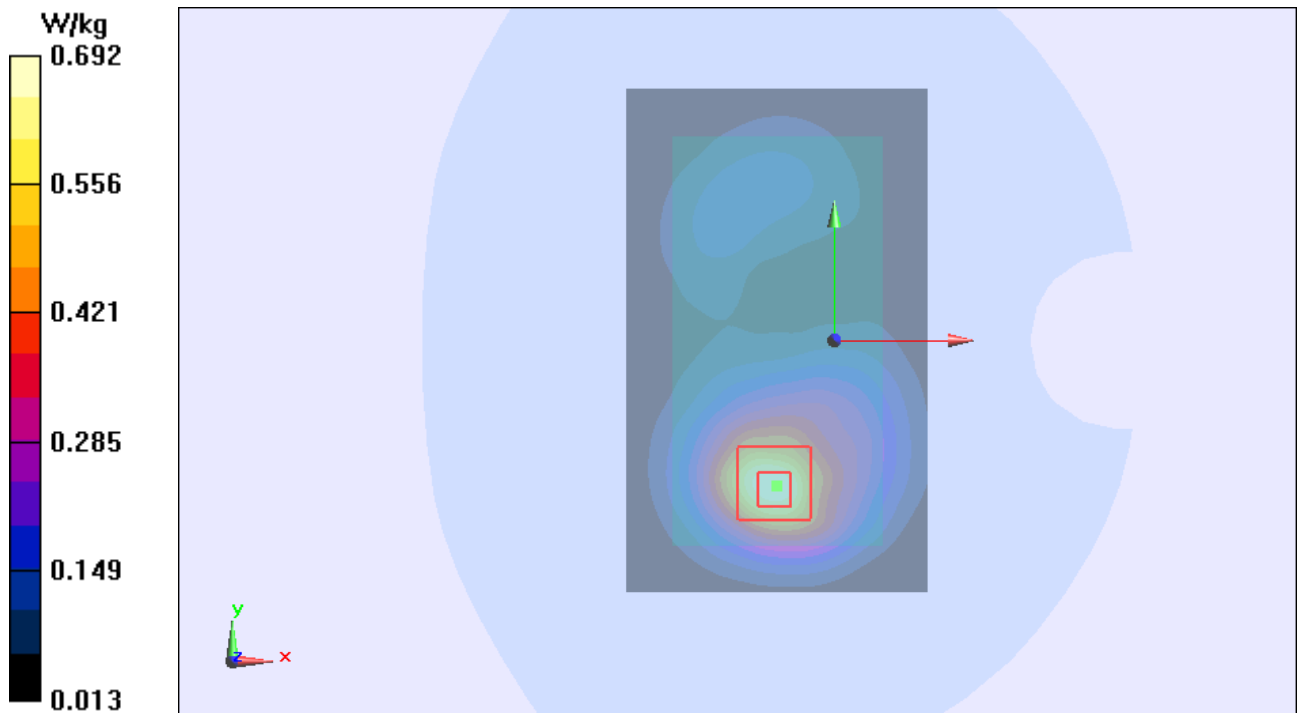

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 102 of 255

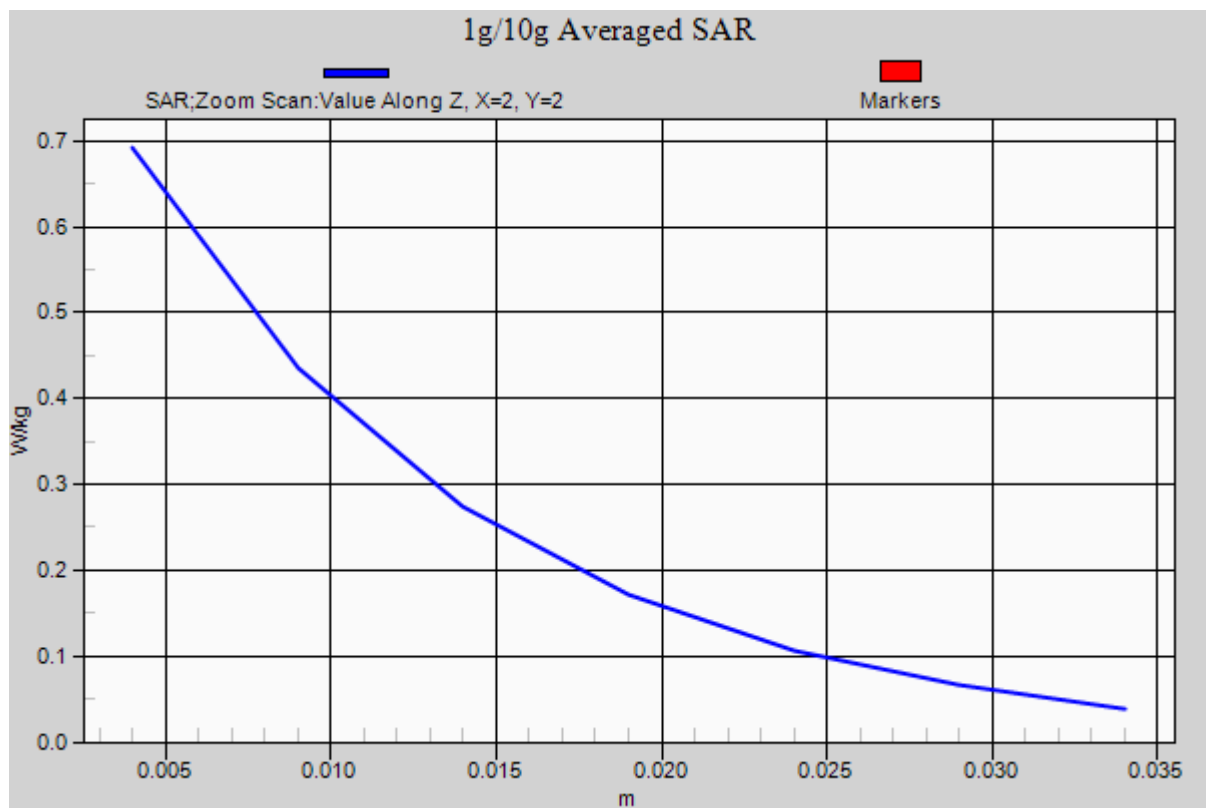


Figure 44 Body, Back Side, GSM 1900 GPRS (2Txslots) Channel 661

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 103 of 255

GSM 1900 GPRS (2Txslot) Front Side Middle (Battery 1)

Date/Time: 2014-03-23 13:45:42

Communication System: GPRS(2UP); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Front Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.383 W/kg

Front Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.505 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.534 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.366 W/kg

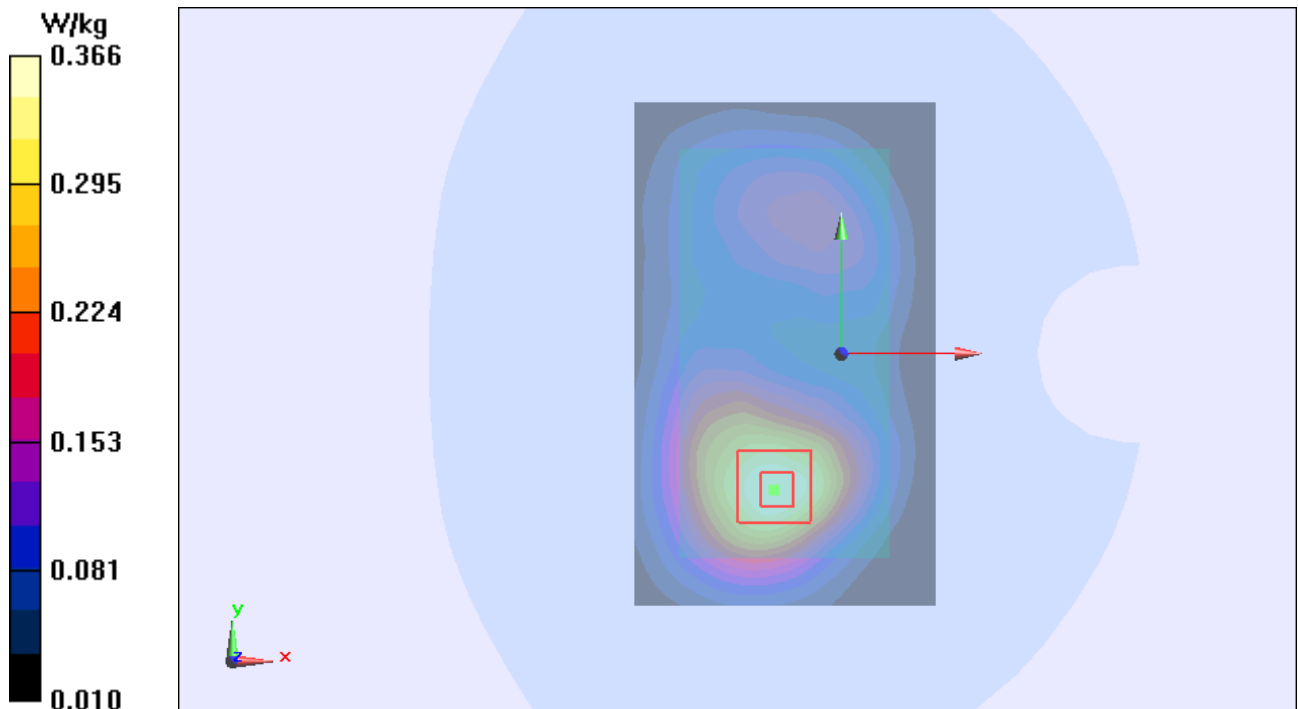


Figure 45 Body, Front Side, GSM 1900 GPRS (2Txslots) Channel 661

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 104 of 255

GSM 1900 GPRS (2Txslots) Left Edge Middle (Battery 1)

Date/Time: 2014-03-23 18:48:40

Communication System: GPRS(2UP); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Edge Middle/Area Scan (31x101x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.204 W/kg

Left Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.601 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.197 W/kg

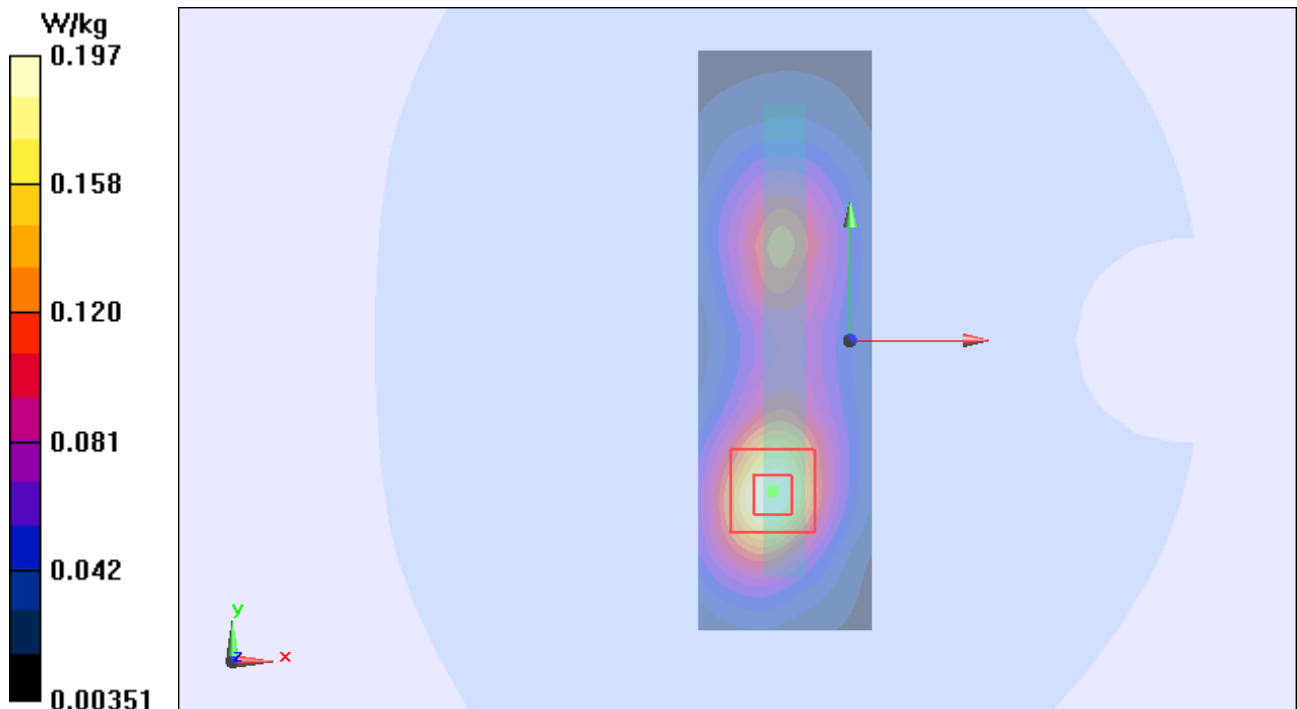


Figure 46 Body, Left Edge, GSM 1900 GPRS (2Txslots) Channel 661

GSM 1900 GPRS (2Txslots) Right Edge Middle (Battery 1)

Date/Time: 2014-03-23 19:03:36

Communication System: GPRS(2UP); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Edge Middle/Area Scan (31x101x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0844 W/kg

Right Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.989 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0724 W/kg

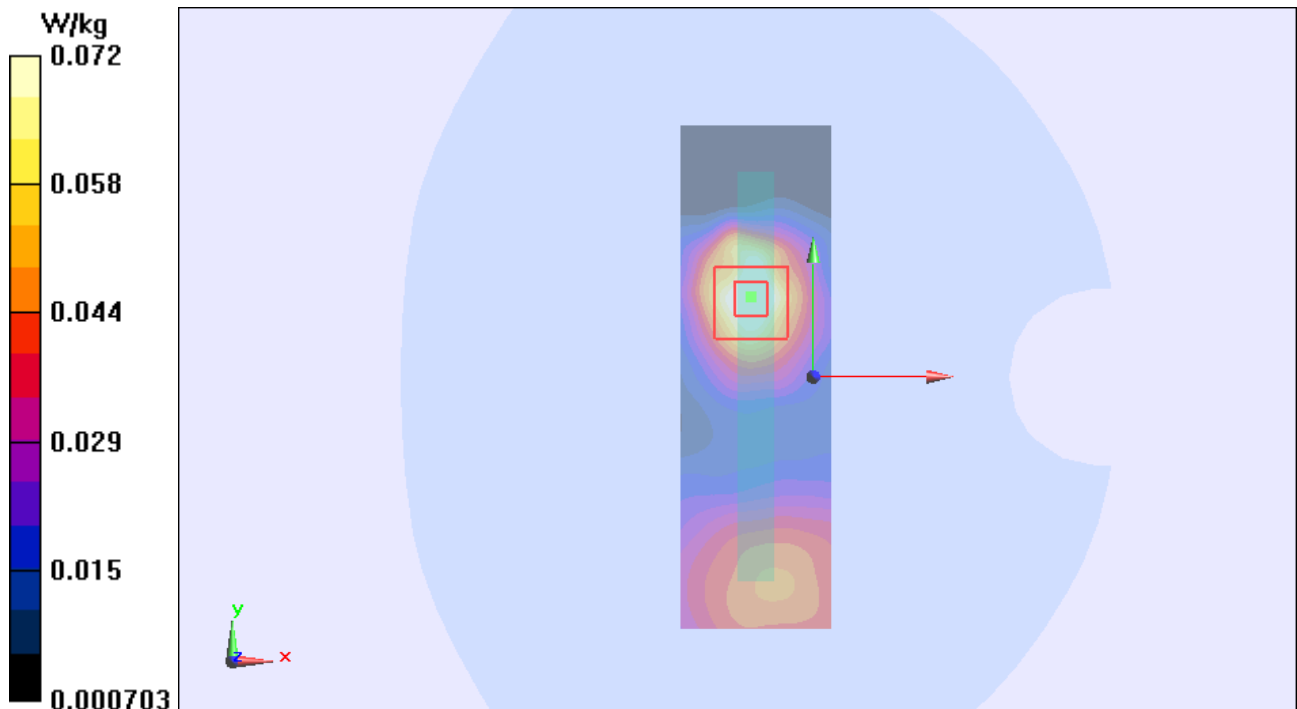


Figure 47 Body, Right Edge, GSM 1900 GPRS (2Txslots) Channel 661

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 106 of 255

GSM 1900 GPRS (2Txslots) Bottom Edge Middle (Battery 1)

Date/Time: 2014-03-23 19:49:50

Communication System: GPRS(2UP); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Bottom Edge Middle/Area Scan (31x61x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.358 W/kg

Bottom Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.787 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.517 W/kg

SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.350 W/kg

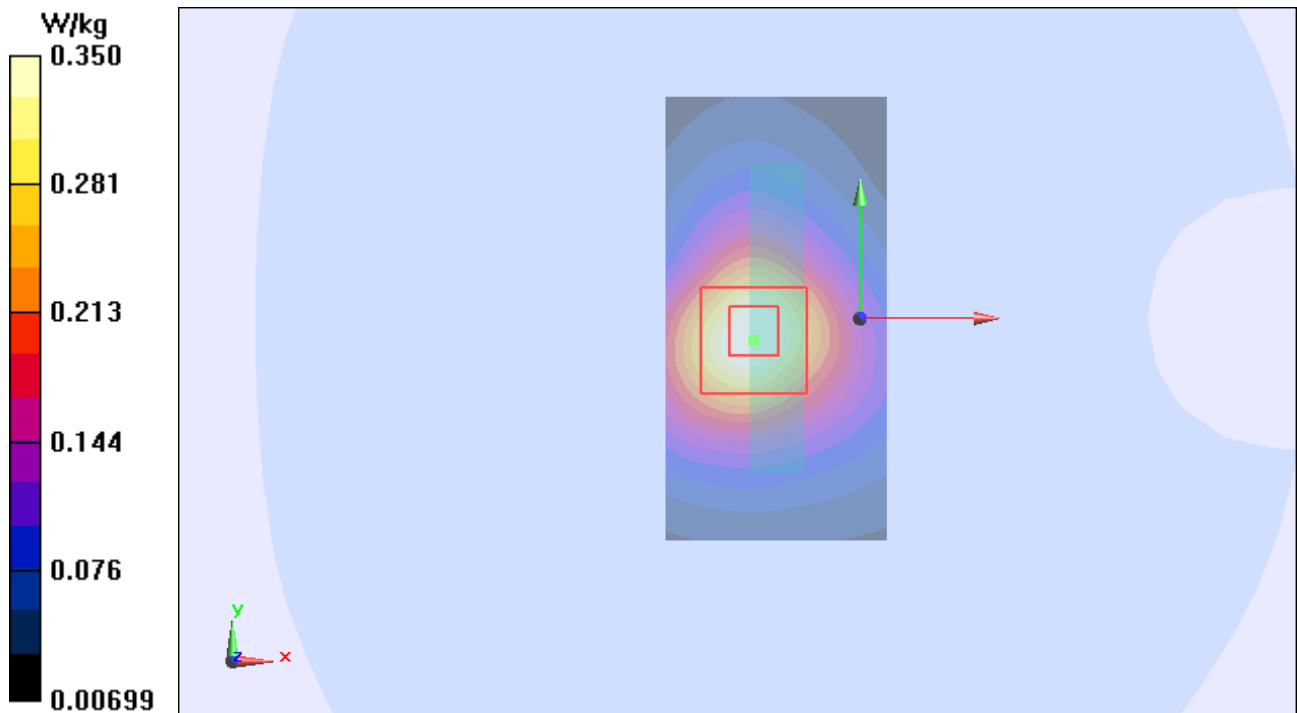


Figure 48 Body, Bottom Edge, GSM 1900 GPRS (2Txslots) Channel 661

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 107 of 255

GSM 1900 GPRS (2Txslots) Back Side Middle (Battery 2)

Date/Time: 2014-03-23 04:09:42

Communication System: GPRS(2UP); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.592 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.129 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.912 W/kg

SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.321 W/kg

Maximum value of SAR (measured) = 0.597 W/kg

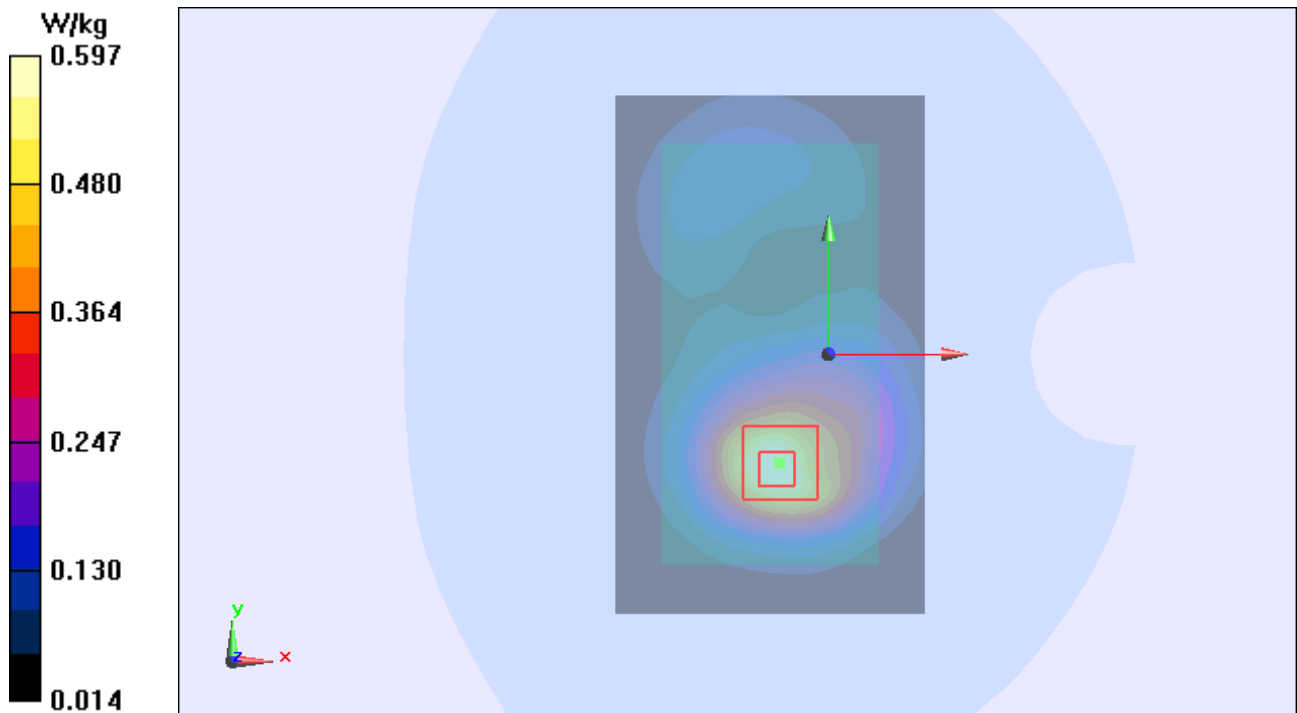


Figure 49 Body, Back Side, GSM 1900 GPRS (2Txslots) Channel 661

GSM 1900 GPRS (2Txslots) Back Side Middle (Battery 3)

Date/Time: 2014-03-23 03:17:22

Communication System: GPRS(2UP); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.644 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.699 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.947 W/kg

SAR(1 g) = 0.575 W/kg; SAR(10 g) = 0.335 W/kg

Maximum value of SAR (measured) = 0.634 W/kg

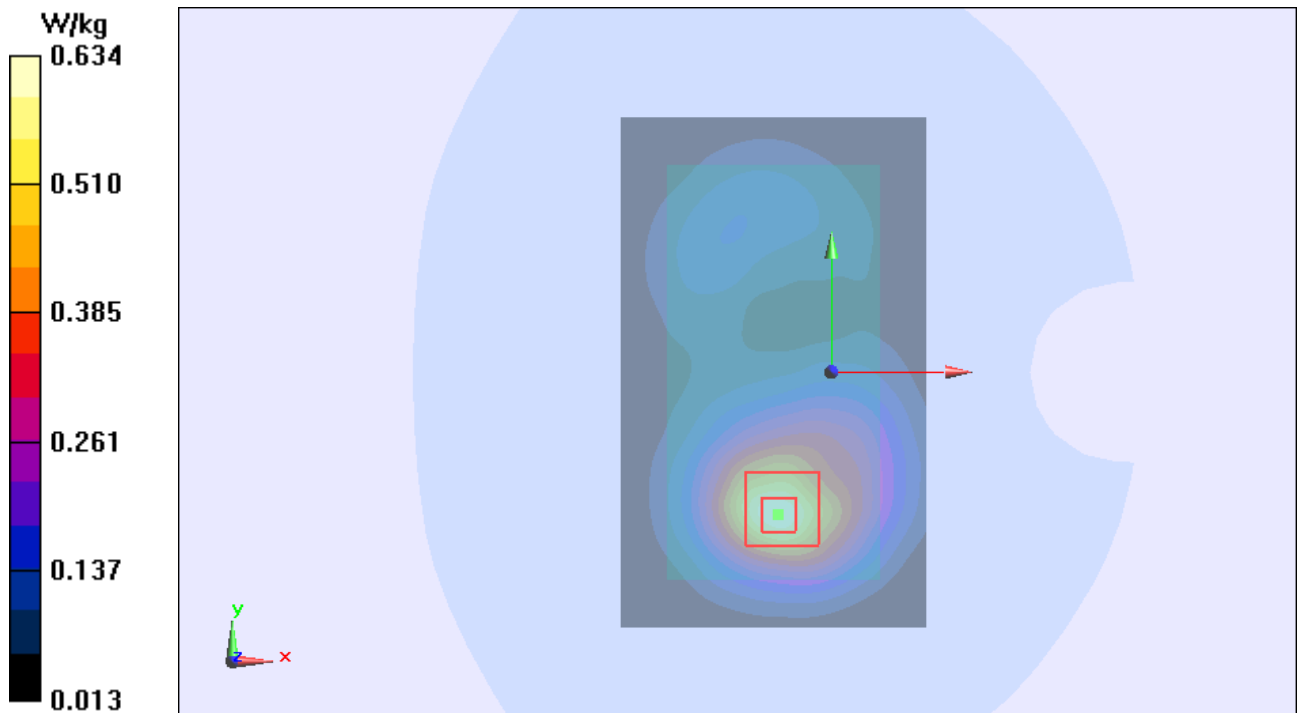


Figure 50 Body, Back Side, GSM 1900 GPRS (2Txslots) Channel 661

GSM 1900 GPRS (2Txslots) Back Side Middle (Battery 4)

Date/Time: 2014-03-23 03:34:42

Communication System: GPRS(2UP); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.646 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.867 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.943 W/kg

SAR(1 g) = 0.572 W/kg; SAR(10 g) = 0.334 W/kg

Maximum value of SAR (measured) = 0.630 W/kg

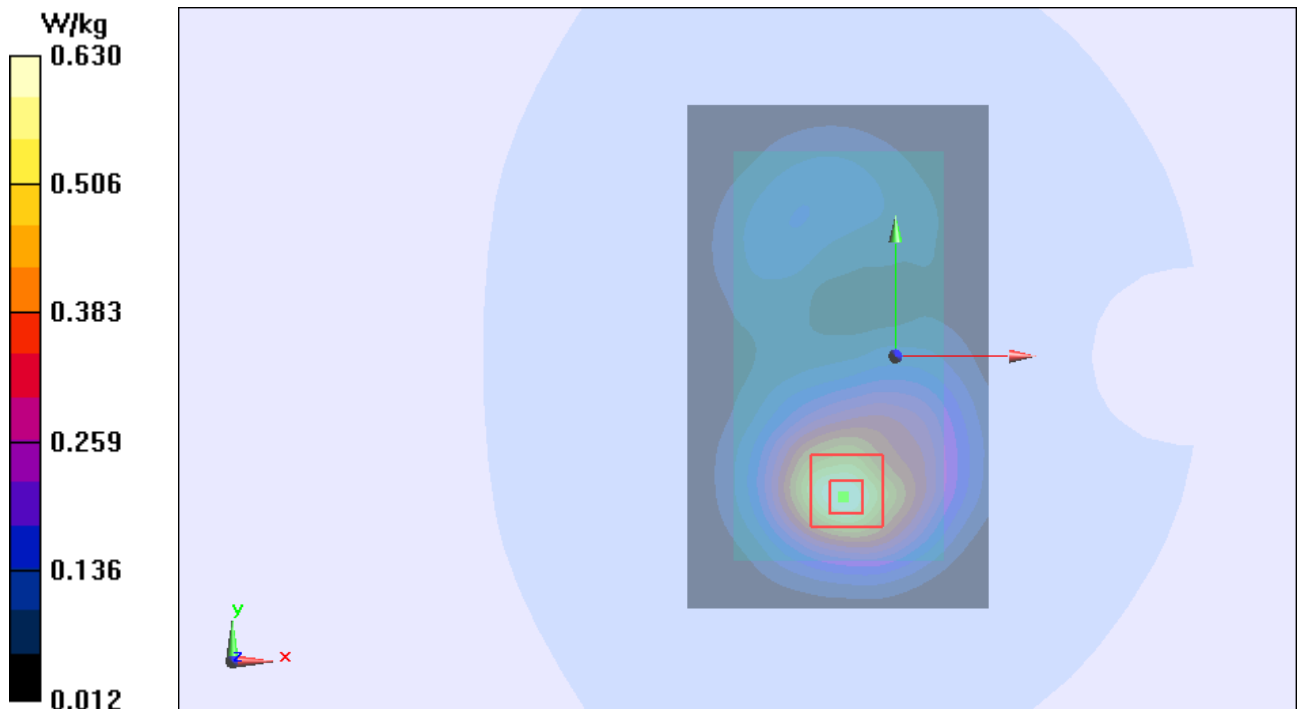


Figure 51 Body, Back Side, GSM 1900 GPRS (2Txslots) Channel 661

GSM 1900 GPRS (2Txslots) Back Side Middle (Battery 5)

Date/Time: 2014-03-23 03:52:11

Communication System: GPRS(2UP); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.648 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.784 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.982 W/kg

SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 0.654 W/kg

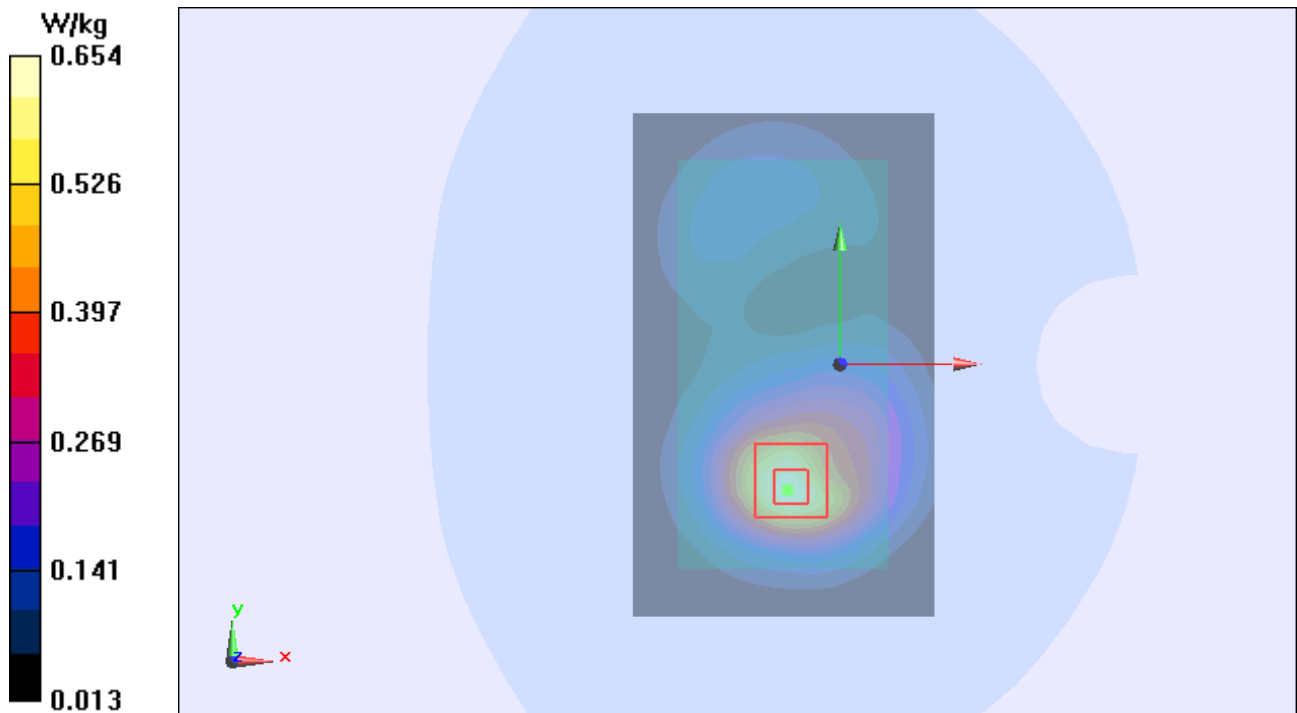


Figure 52 Body, Back Side, GSM 1900 GPRS (2Txslots) Channel 661

GSM 1900 GPRS (2Txslots) Back Side Middle (Battery 6)

Date/Time: 2014-03-23 04:27:03

Communication System: GPRS(2UP); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.592 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.898 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.913 W/kg

SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.321 W/kg

Maximum value of SAR (measured) = 0.597 W/kg

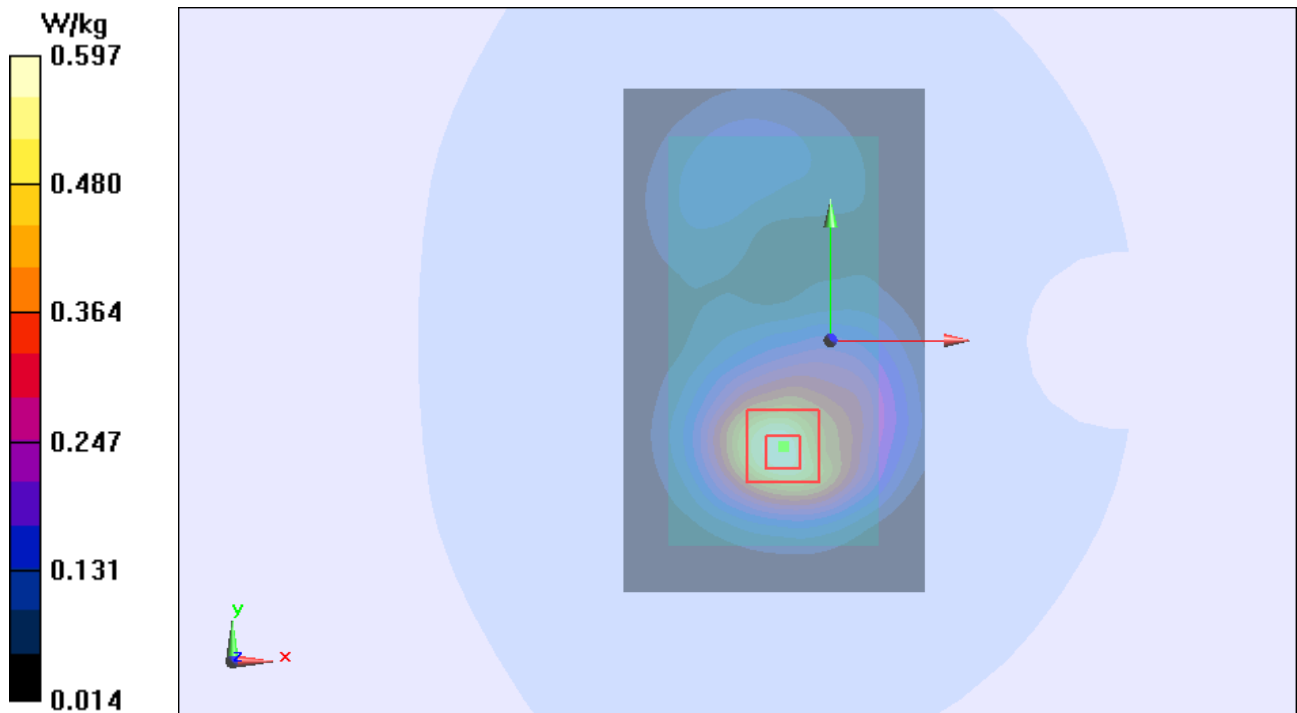


Figure 53 Body, Back Side, GSM 1900 GPRS (2Txslots) Channel 661

GSM 1900 GPRS (2Txslots) Back Side Middle (SIM 2)

Date/Time: 2014-03-23 20:04:42

Communication System: GPRS(2UP); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.668 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.165 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.628 W/kg; SAR(10 g) = 0.369 W/kg

Maximum value of SAR (measured) = 0.692 W/kg

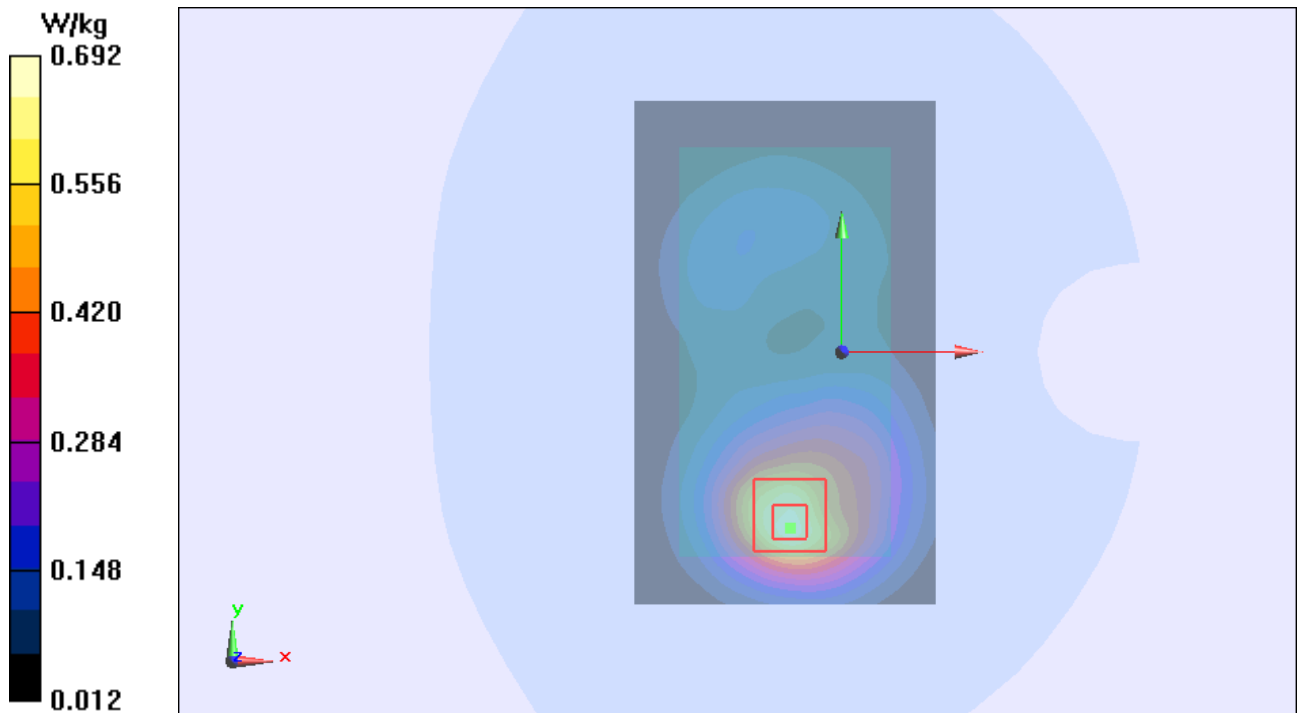


Figure 54 Body, Back Side, GSM 1900 GPRS (2Txslots) Channel 661

UMTS Band II Left Cheek Middle (Battery 1)

Date/Time: 2014-03-21 03:21:49

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.627 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.842 V/m; Power Drift = 0.051 dB

Peak SAR (extrapolated) = 0.938 W/kg

SAR(1 g) = 0.585 W/kg; SAR(10 g) = 0.359 W/kg

Maximum value of SAR (measured) = 0.637 W/kg

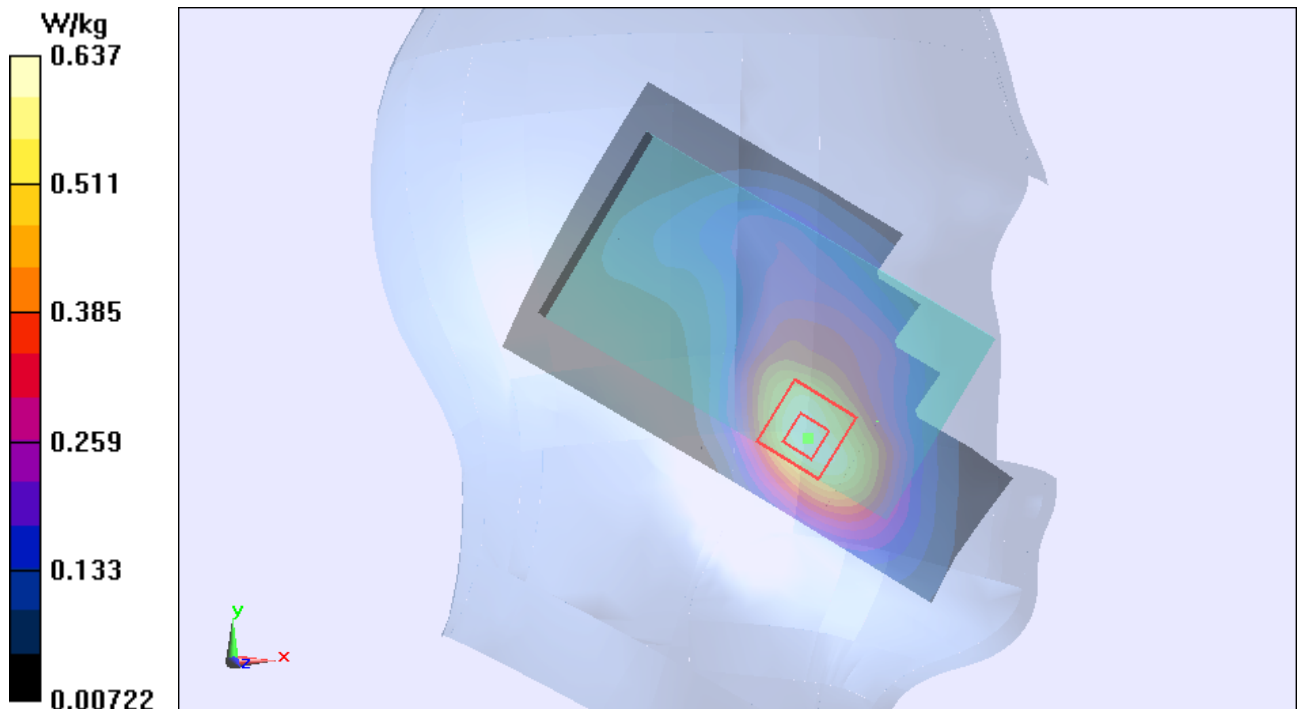


Figure 55 Left Hand Touch Cheek UMTS Band II Channel 9400

UMTS Band II Left Tilt Middle (Battery 1)

Date/Time: 2014-03-21 03:38:17

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Tilt Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.283 W/kg

Left Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.582 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.397 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.262 W/kg

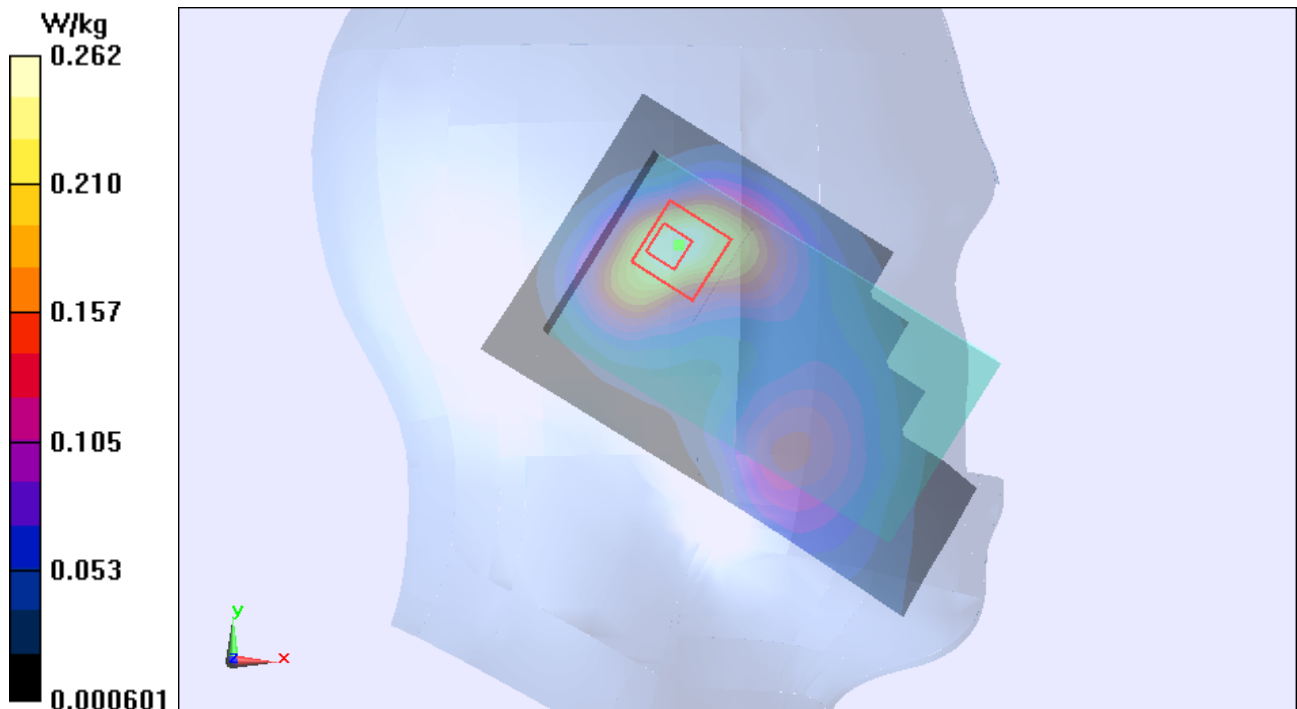


Figure 56 Left Hand Tilt 15° UMTS Band II Channel 9400

UMTS Band II Right Cheek Middle (Battery 1)

Date/Time: 2014-03-21 03:55:41

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.414 W/kg

Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.331 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.525 W/kg

SAR(1 g) = 0.373 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 0.393 W/kg

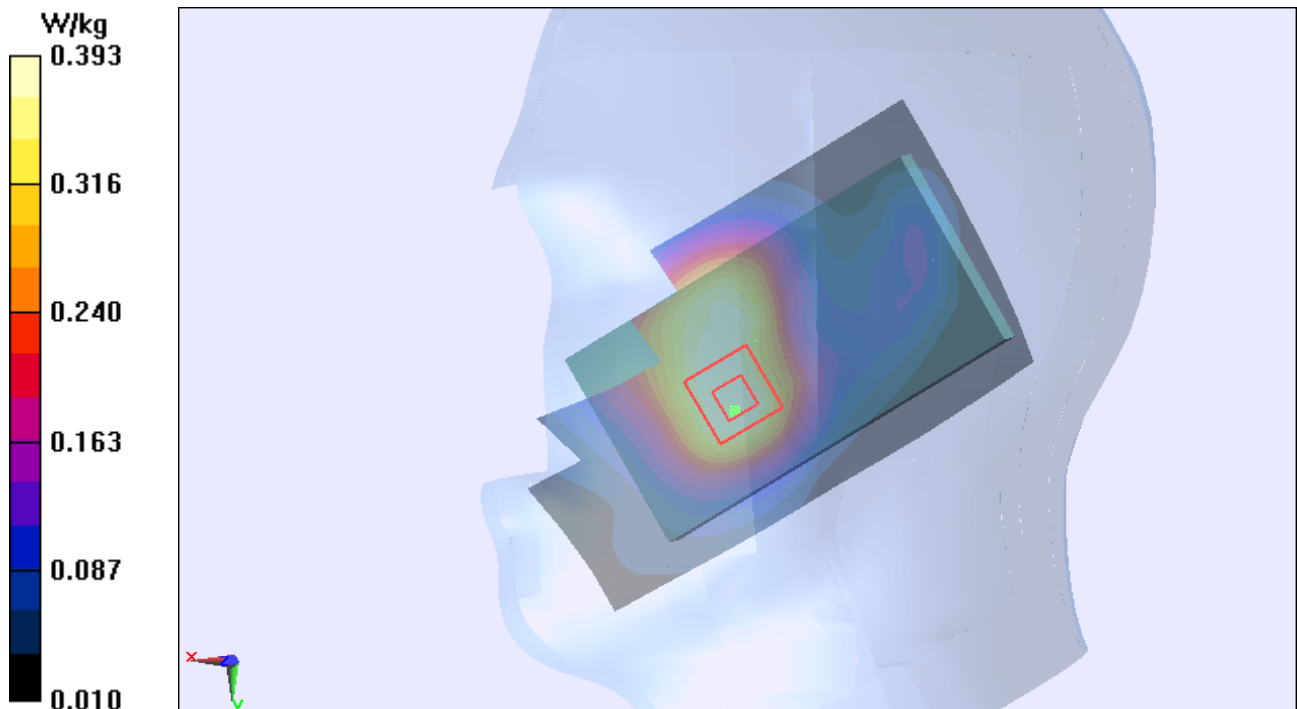


Figure 57 Right Hand Touch Cheek UMTS Band II Channel 9400

UMTS Band II Right Tilt Middle (Battery 1)

Date/Time: 2014-03-21 04:11:55

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Tilt Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.270 W/kg

Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.442 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.392 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.267 W/kg

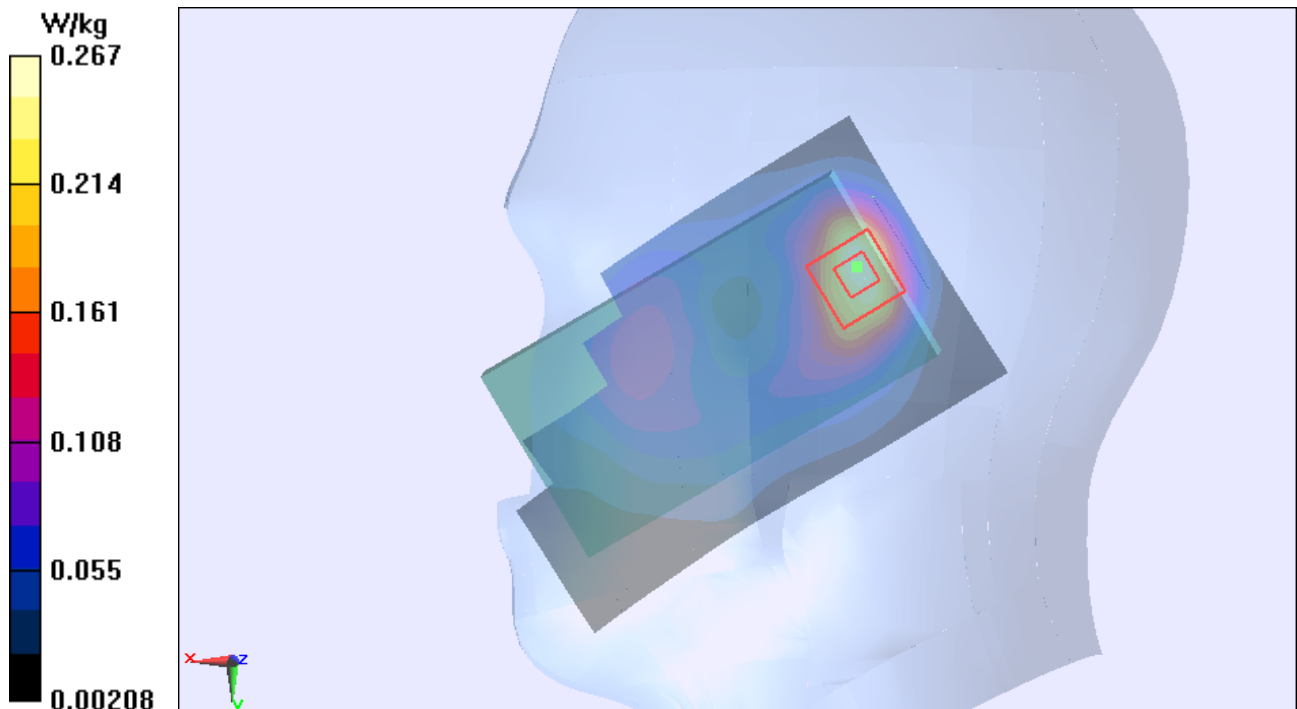


Figure 58 Right Hand Tilt 15° UMTS Band II Channel 9400

UMTS Band II Left Cheek Middle (Battery 2)

Date/Time: 2014-03-21 07:46:04

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.413 \text{ S/m}$; $\epsilon_r = 39.689$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.664 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.924 V/m ; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.978 W/kg

SAR(1 g) = 0.604 W/kg ; SAR(10 g) = 0.362 W/kg

Maximum value of SAR (measured) = 0.649 W/kg

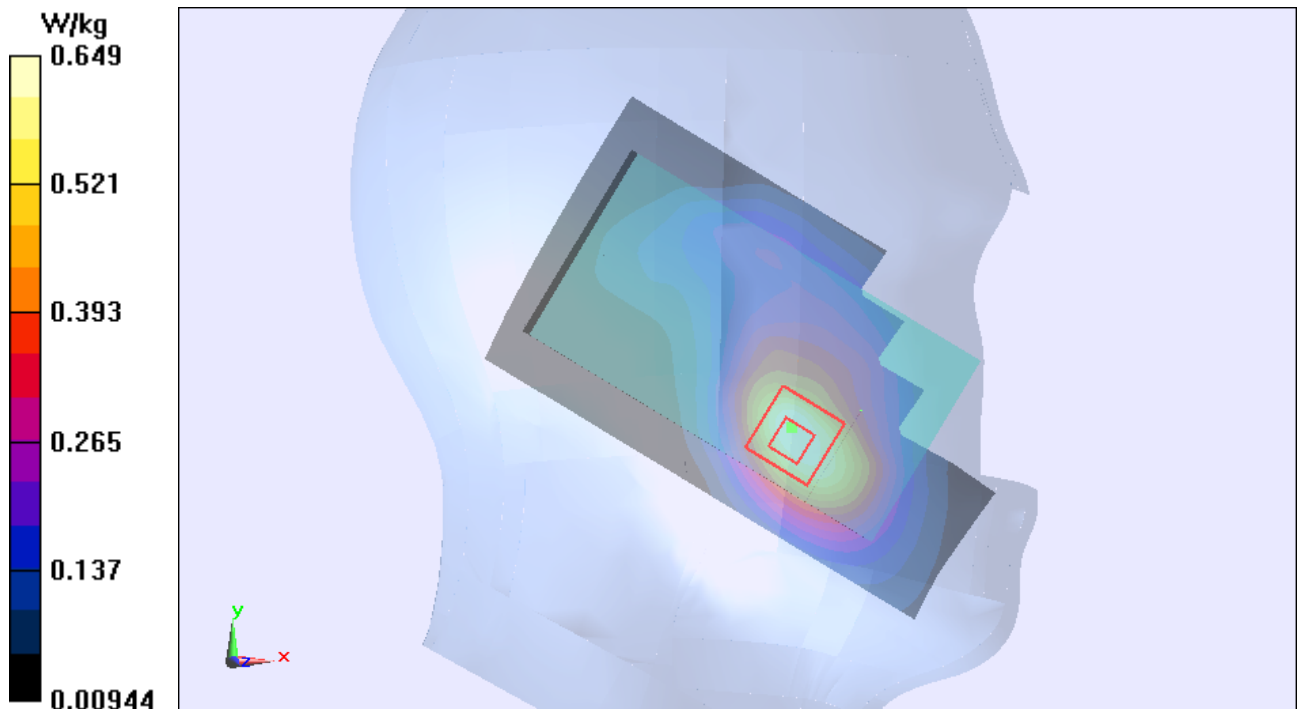


Figure 59 Left Hand Touch Cheek UMTS Band II Channel 9400

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 118 of 255

UMTS Band II Left Cheek Middle (Battery 3)

Date/Time: 2014-03-21 05:40:24

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.666 W/kg


Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.671 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.366 W/kg

Maximum value of SAR (measured) = 0.669 W/kg

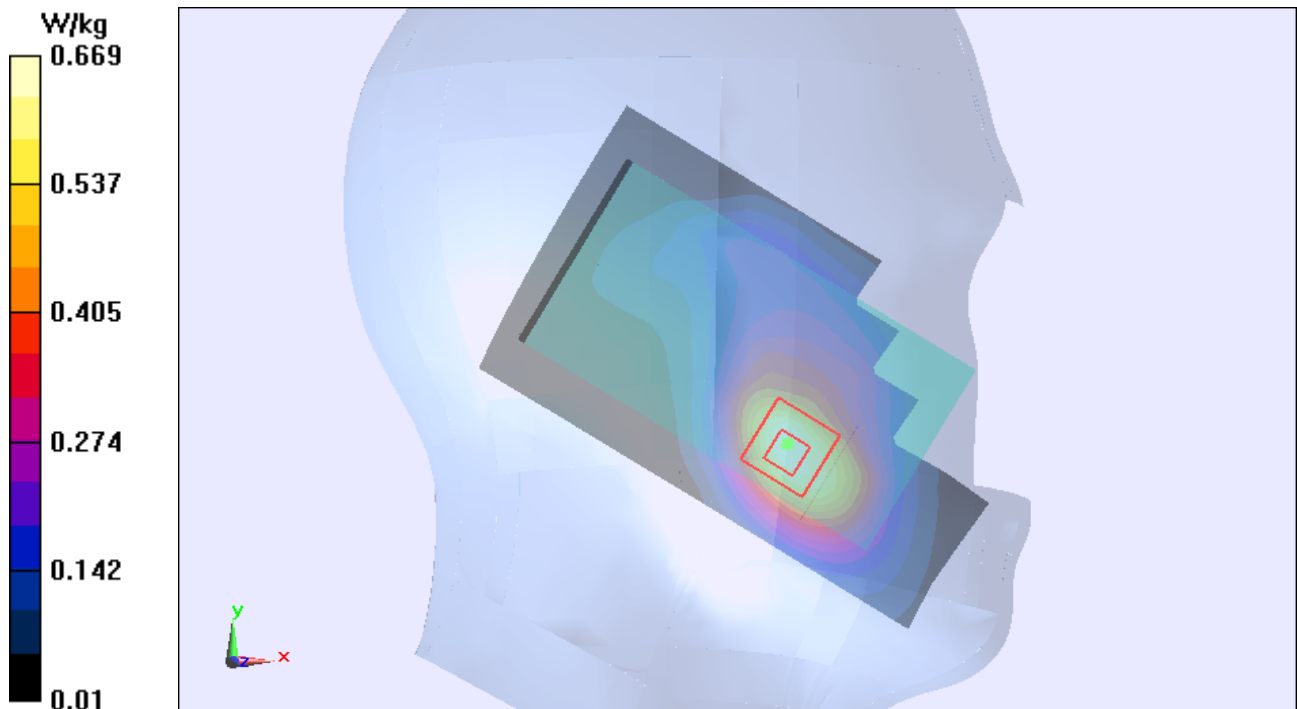

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 119 of 255

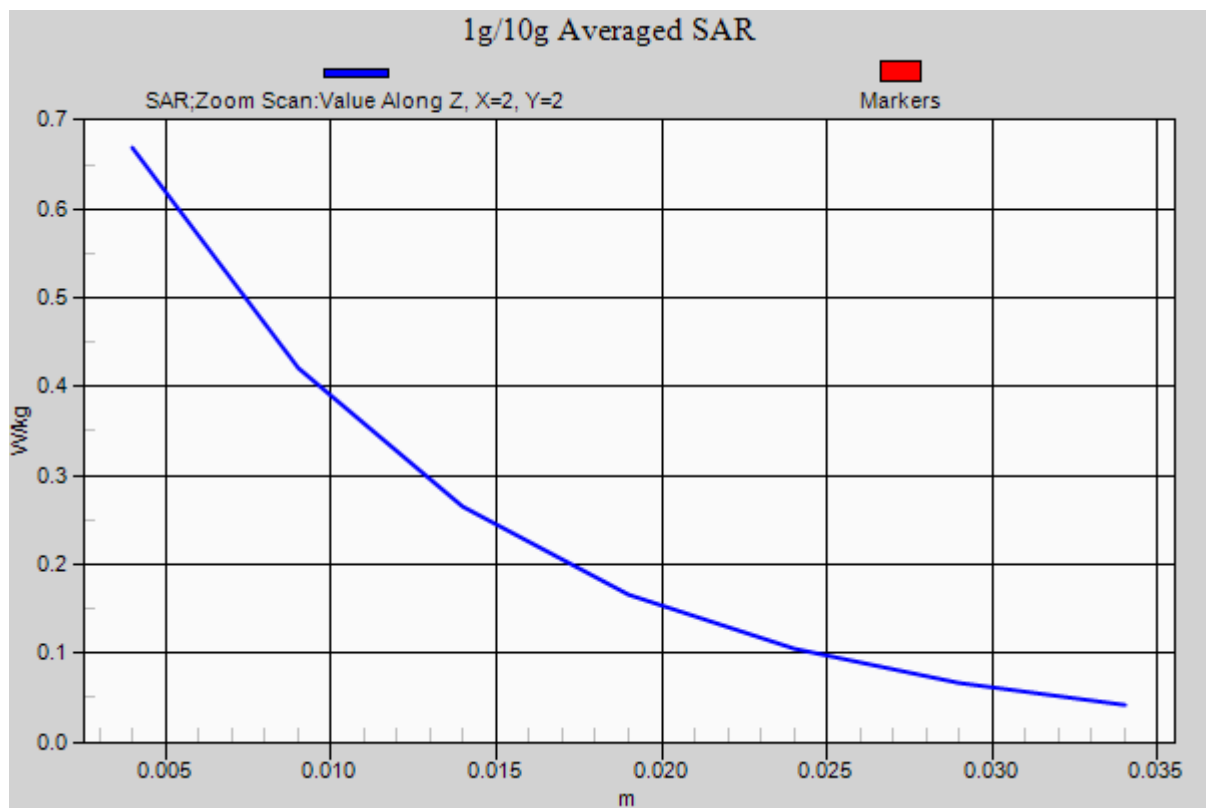


Figure 60 Left Hand Touch Cheek UMTS Band II Channel 9400

UMTS Band II Left Cheek Middle (Battery 4)

Date/Time: 2014-03-21 06:00:48

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.657 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.527 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.969 W/kg

SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.361 W/kg

Maximum value of SAR (measured) = 0.649 W/kg

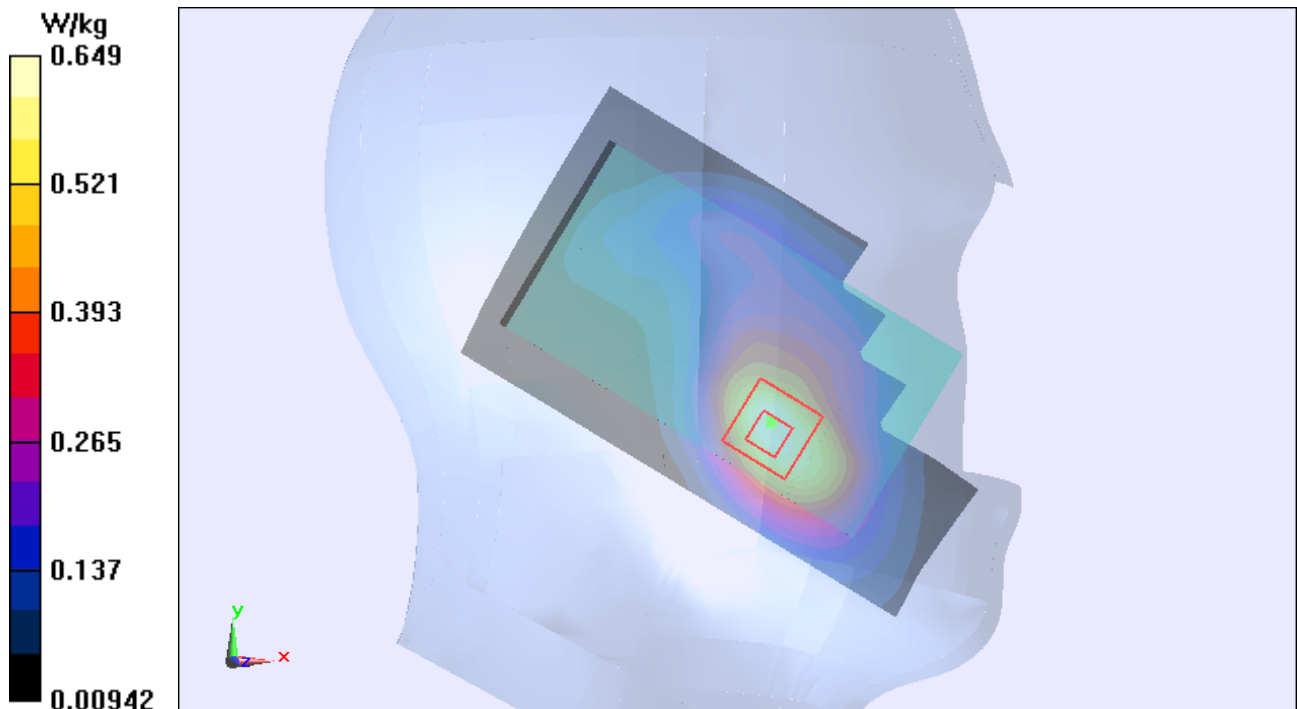


Figure 61 Left Hand Touch Cheek UMTS Band II Channel 9400

UMTS Band II Left Cheek Middle (Battery 5)

Date/Time: 2014-03-21 07:11:17

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.660 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.639 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.967 W/kg

SAR(1 g) = 0.600 W/kg; SAR(10 g) = 0.361 W/kg

Maximum value of SAR (measured) = 0.647 W/kg

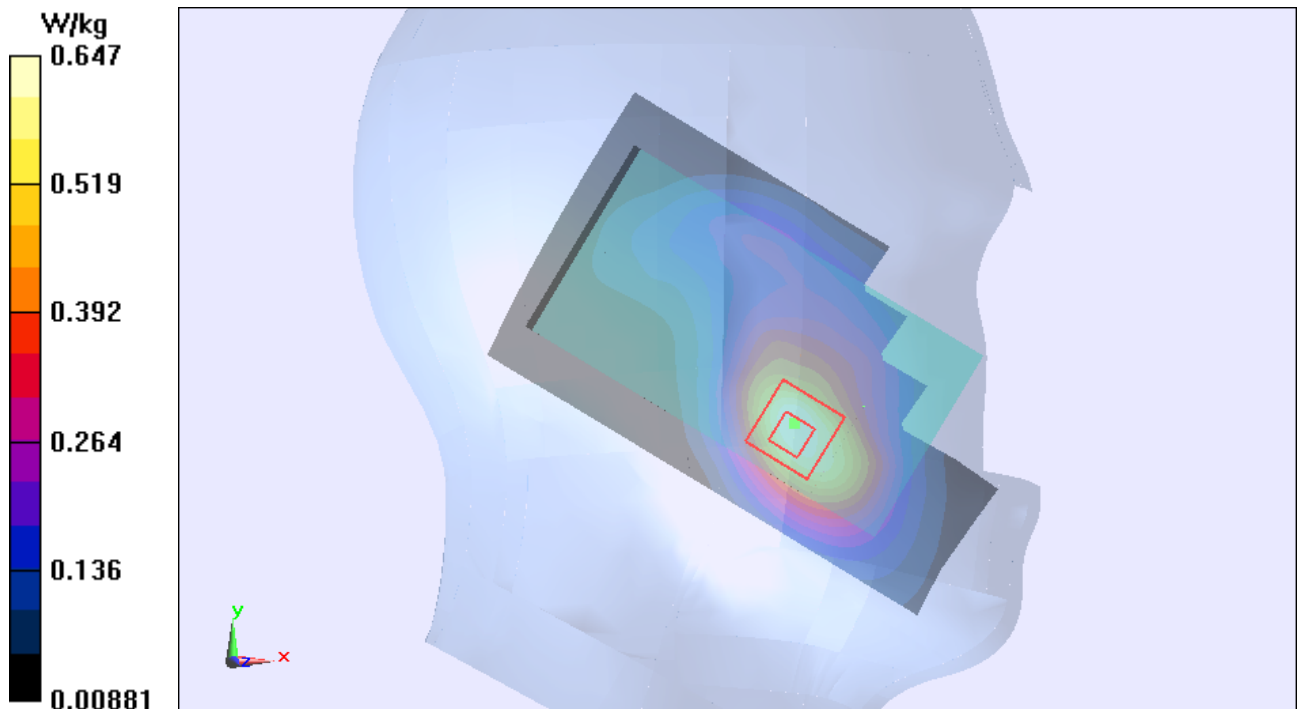


Figure 62 Left Hand Touch Cheek UMTS Band II Channel 9400

UMTS Band II Left Cheek Middle (Battery 6)

Date/Time: 2014-03-21 05:21:30

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.15, 8.15, 8.15); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.625 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.262 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.906 W/kg

SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.342 W/kg

Maximum value of SAR (measured) = 0.611 W/kg

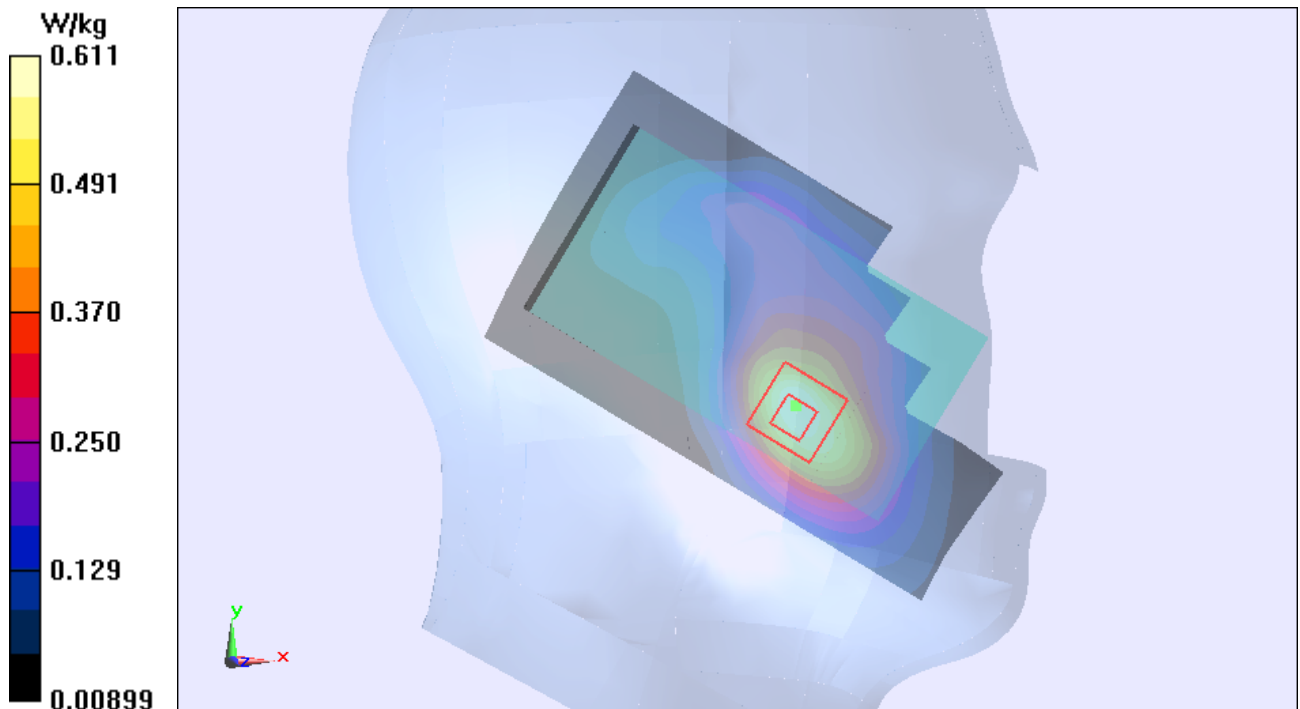


Figure 63 Left Hand Touch Cheek UMTS Band II Channel 9400

UMTS Band II Back Side High (Battery 1)

Date/Time: 2014-03-23 11:42:23

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.532$ S/m; $\epsilon_r = 53.111$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side High/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.906 W/kg

Back Side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.013 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.827 W/kg; SAR(10 g) = 0.479 W/kg

Maximum value of SAR (measured) = 0.895 W/kg

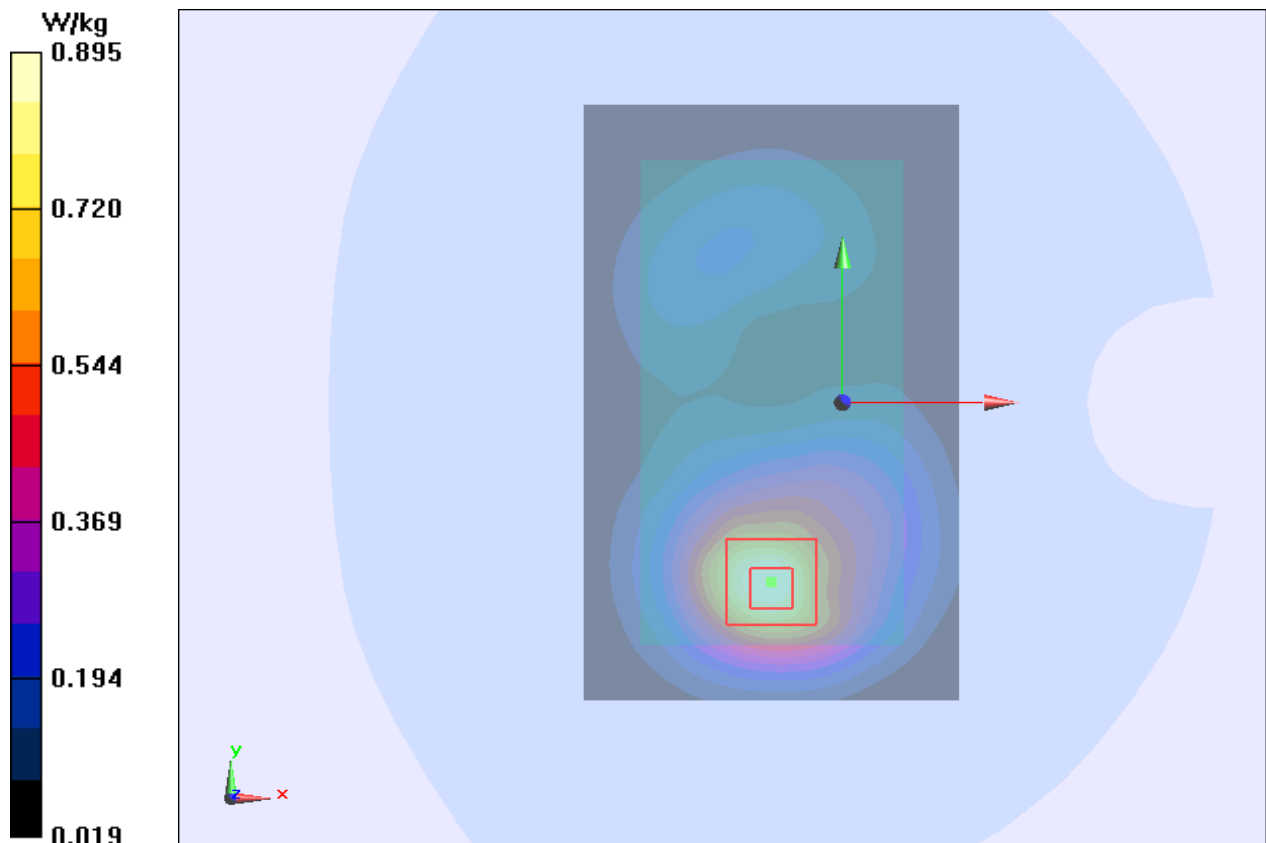


Figure 64 Body, Back Side, UMTS Band II Channel 9538

UMTS Band II Back Side Middle (Battery 1)

Date/Time: 2014-03-23 11:25:37

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.362 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.590 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

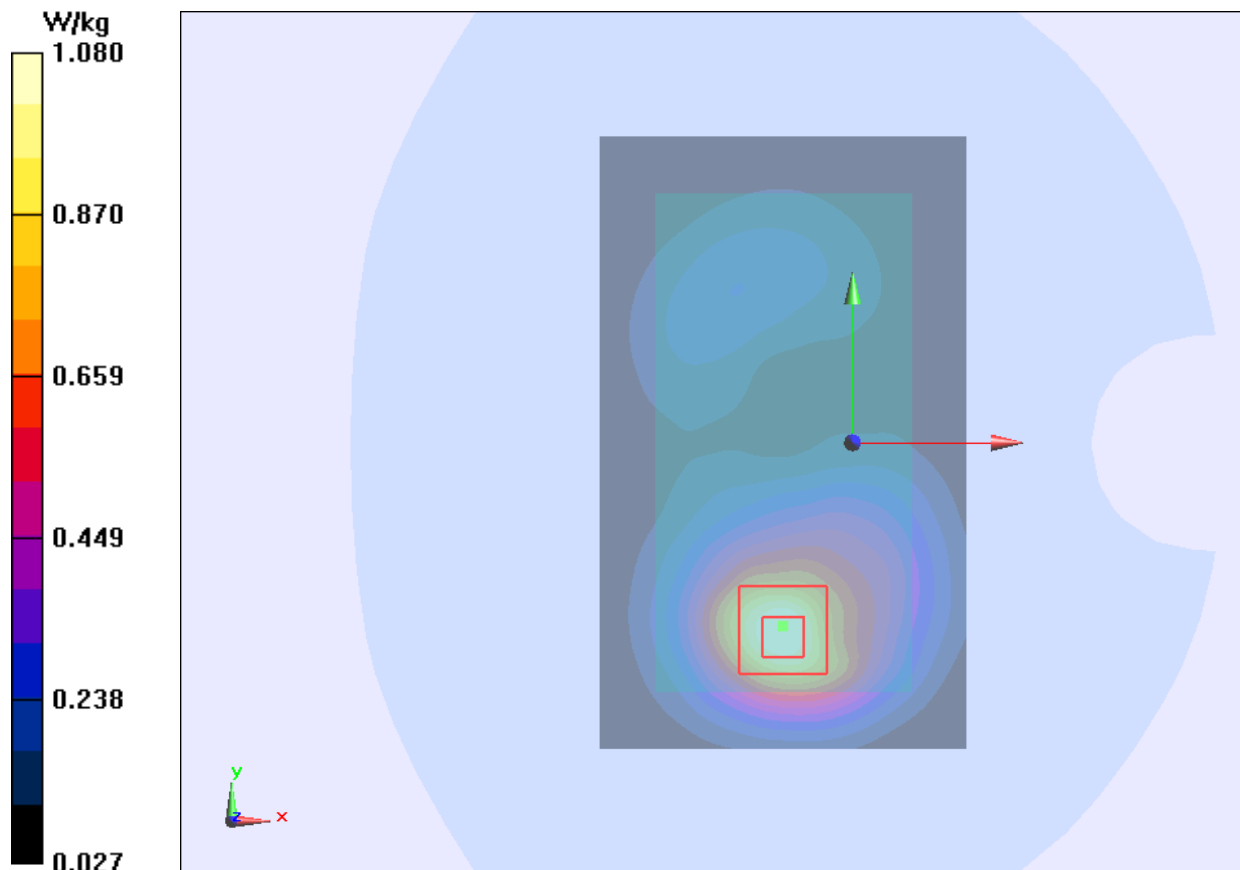


Figure 65 Body, Back Side, UMTS Band II Channel 9400

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 125 of 255

UMTS Band II Back Side Low (Battery 1)

Date/Time: 2014-03-23 12:01:25

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.477$ S/m; $\epsilon_r = 53.168$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Low/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.12 W/kg

Back Side Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.147 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.612 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

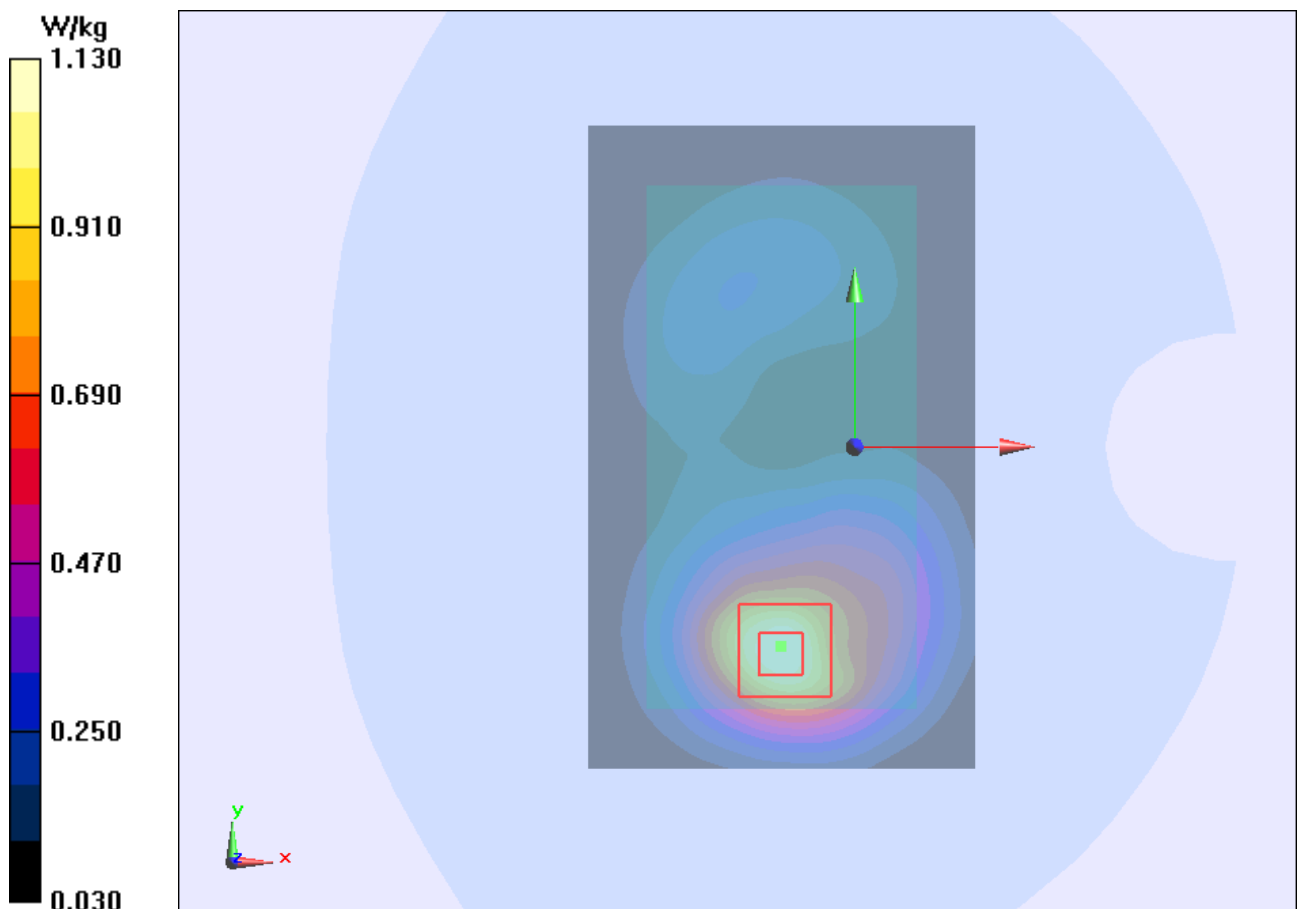


Figure 66 Body, Back Side, UMTS Band II Channel 9262

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 126 of 255

UMTS Band II Front Side Middle (Battery 1)

Date/Time: 2014-03-23 12:23:19

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Front Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.563 W/kg

Front Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.216 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.799 W/kg

SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.318 W/kg

Maximum value of SAR (measured) = 0.554 W/kg

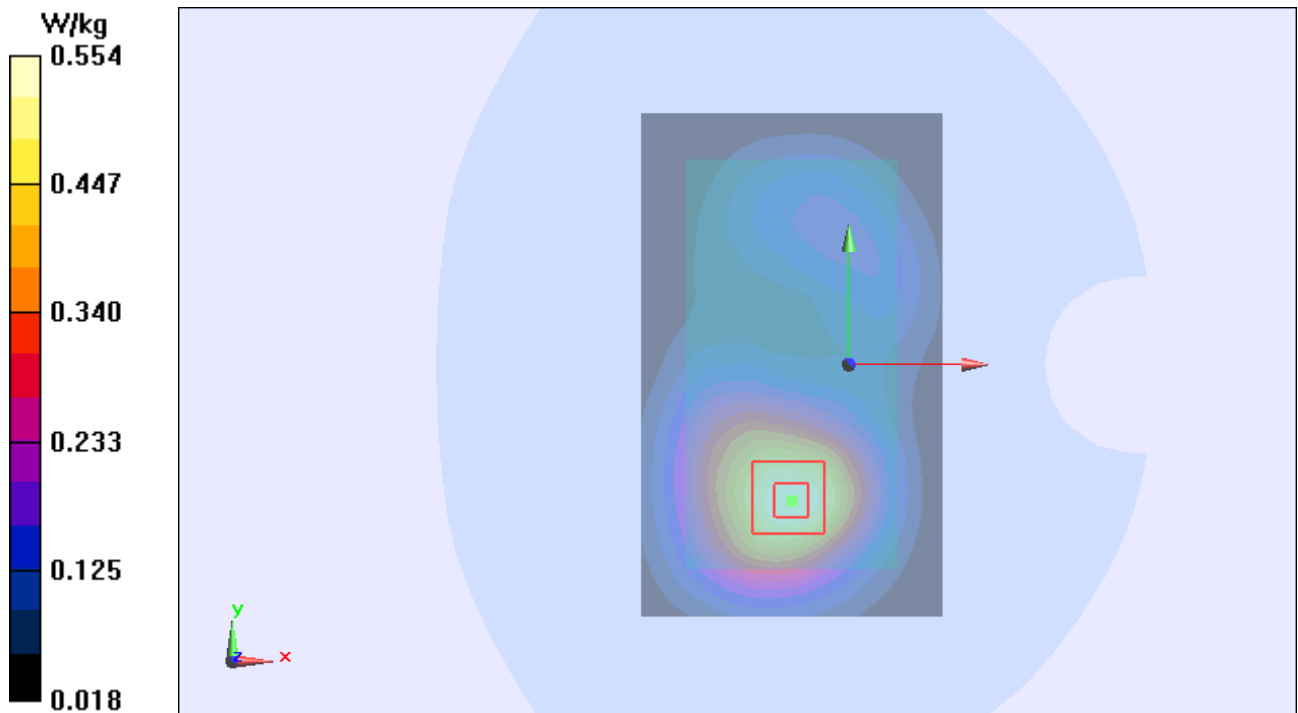


Figure 67 Body, Front Side, UMTS Band II Channel 9400

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 127 of 255

UMTS Band II Left Edge Middle (Battery 1)

Date/Time: 2014-03-23 18:03:26

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Edge Middle/Area Scan (31x101x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.337 W/kg

Left Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.672 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.509 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.324 W/kg

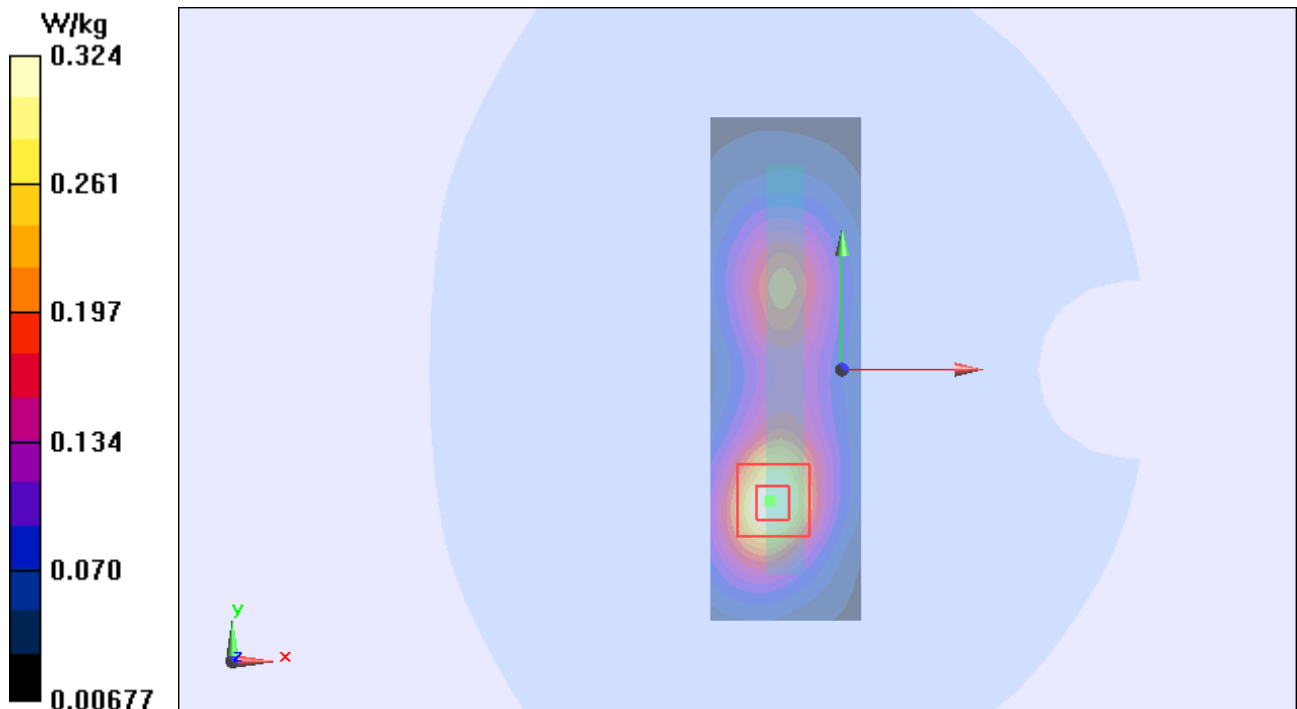


Figure 68 Body, Left Edge, UMTS Band II Channel 9400

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 128 of 255

UMTS Band II Right Edge Middle (Battery 1)

Date/Time: 2014-03-23 19:19:18

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Edge Middle/Area Scan (31x101x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.122 W/kg

Right Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.349 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 0.177 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

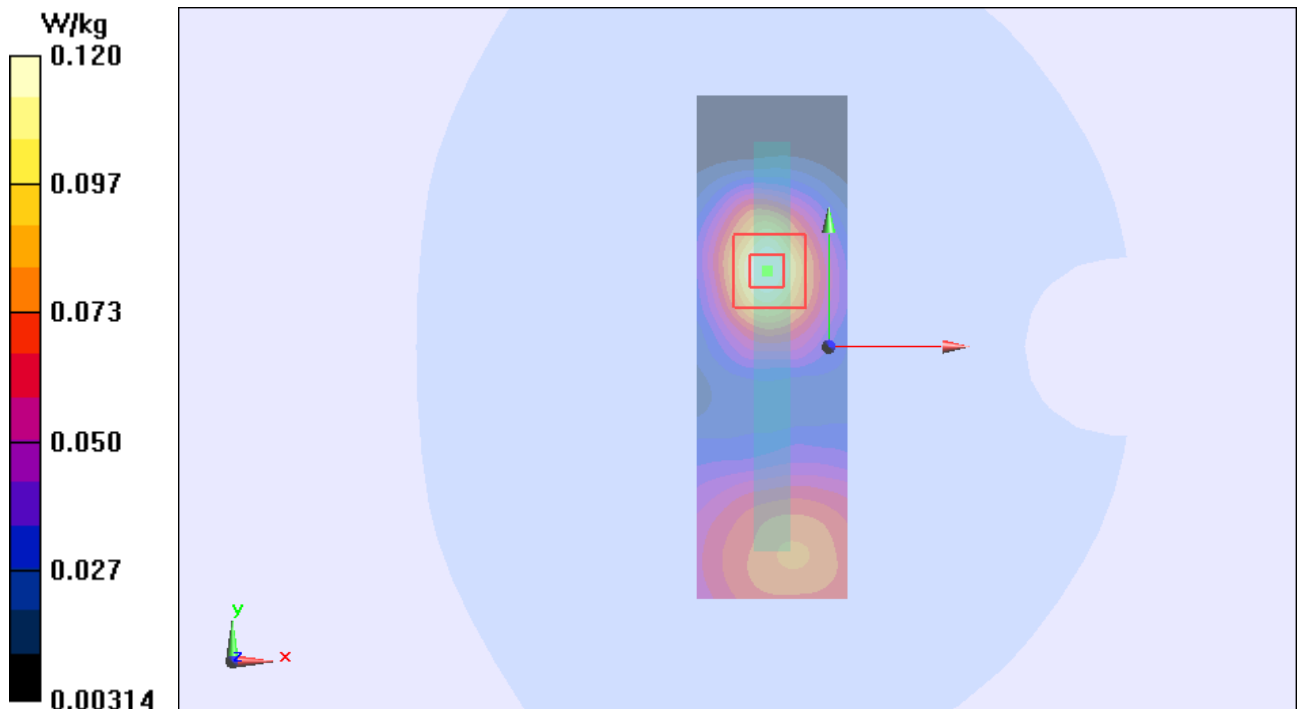


Figure 69 Body, Right Edge, UMTS Band II Channel 9400

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 129 of 255

UMTS Band II Bottom Edge Middle (Battery 1)

Date/Time: 2014-03-23 19:36:01

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.137$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Bottom Edge Middle/Area Scan (31x61x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.552 W/kg

Bottom Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.381 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.805 W/kg

SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.290 W/kg

Maximum value of SAR (measured) = 0.542 W/kg

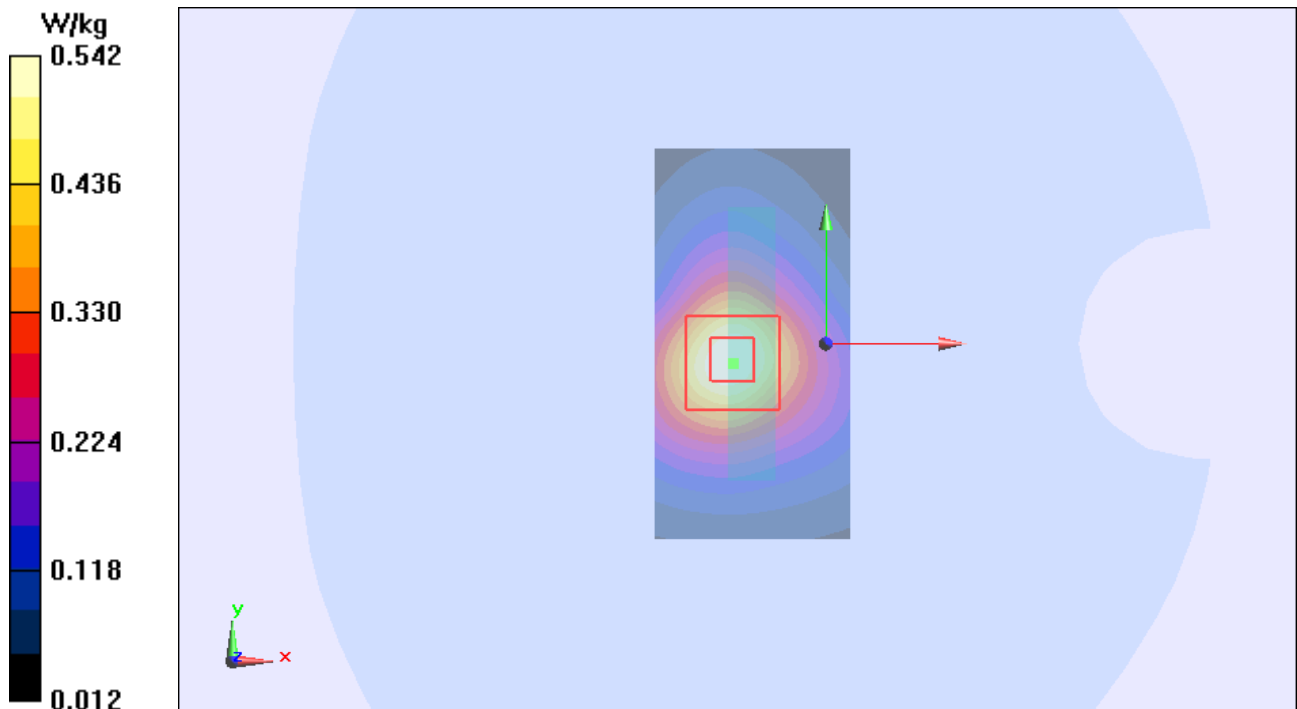


Figure 70 Body, Bottom Edge, UMTS Band II Channel 9400

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 130 of 255

UMTS Band II Back Side Low (Battery 2)

Date/Time: 2014-03-23 06:23:00

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.477$ S/m; $\epsilon_r = 53.168$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Low/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.05 W/kg

Back Side Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.545 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.939 W/kg; SAR(10 g) = 0.551 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

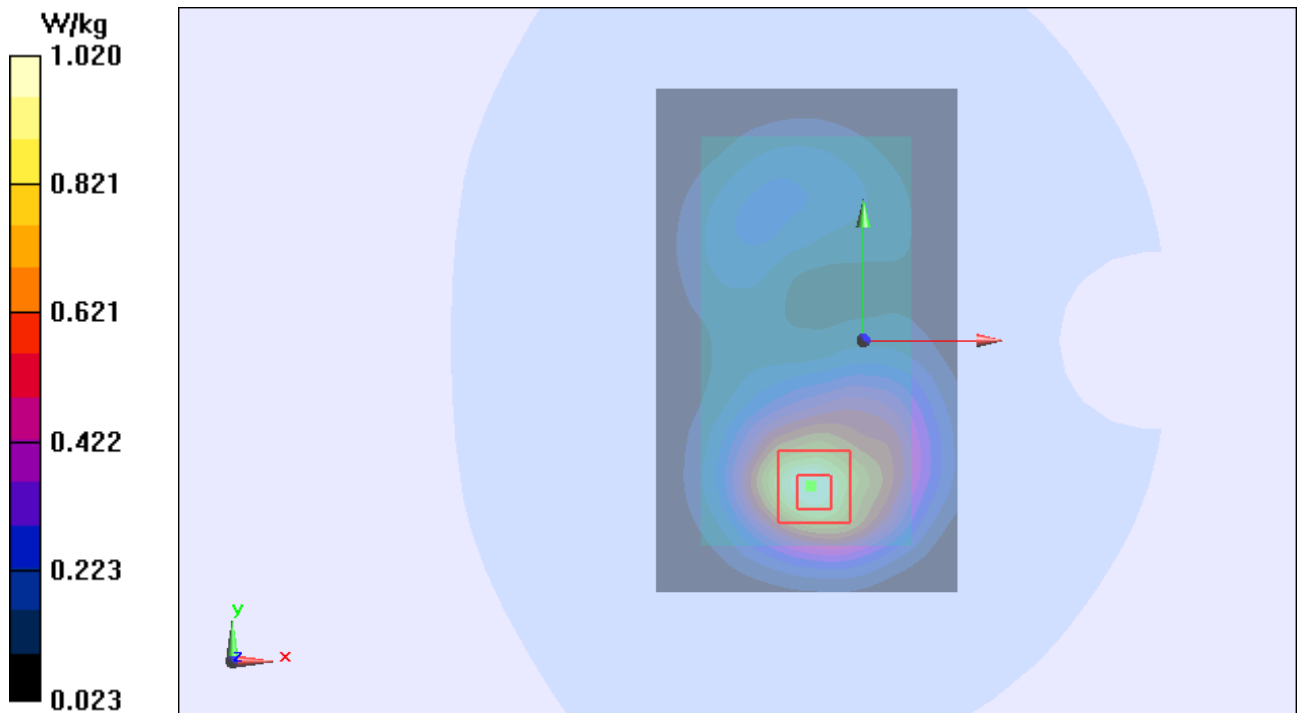


Figure 71 Body, Back Side, UMTS Band II Channel 9262

UMTS Band II Back Side Low (Battery 3)

Date/Time: 2014-03-23 05:48:10

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.477$ S/m; $\epsilon_r = 53.168$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Low/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.06 W/kg

Back Side Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.951 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.942 W/kg; SAR(10 g) = 0.552 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

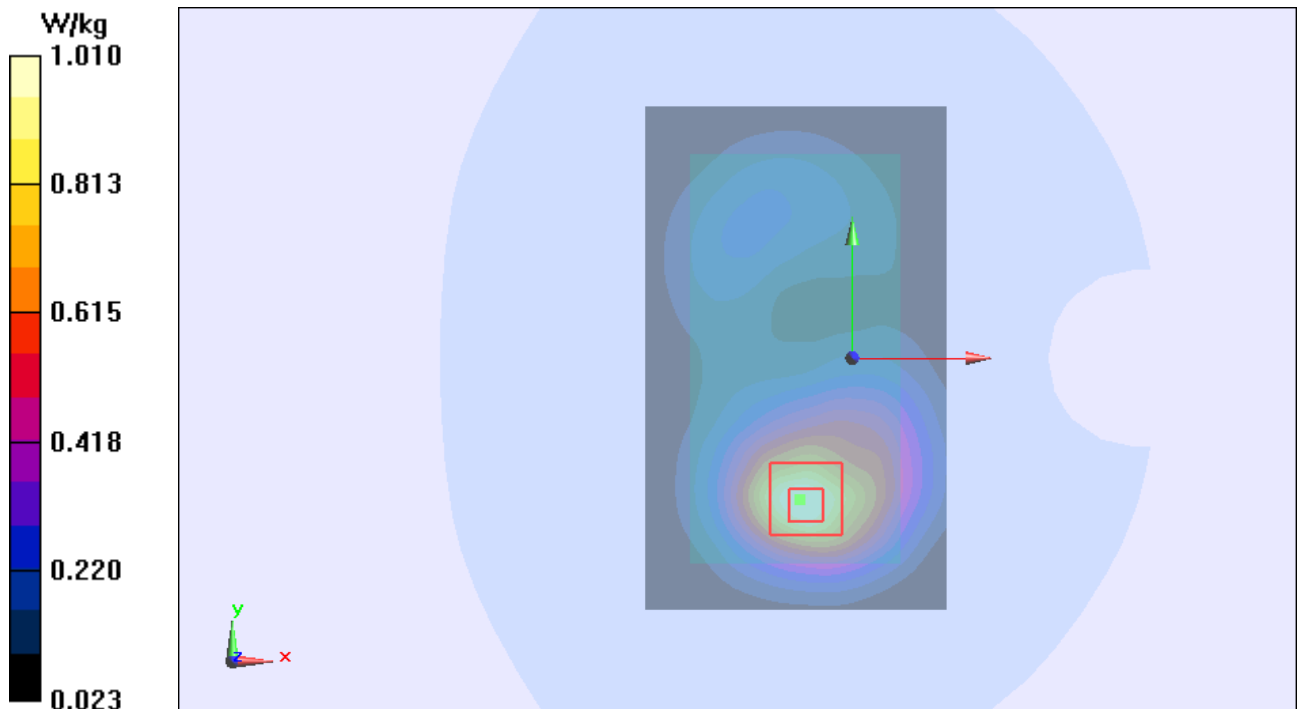


Figure 72 Body, Back Side, UMTS Band II Channel 9262

UMTS Band II Back Side Low (Battery 4)

Date/Time: 2014-03-23 06:05:42

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.477$ S/m; $\epsilon_r = 53.168$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Low/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.05 W/kg

Back Side Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.362 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.939 W/kg; SAR(10 g) = 0.552 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

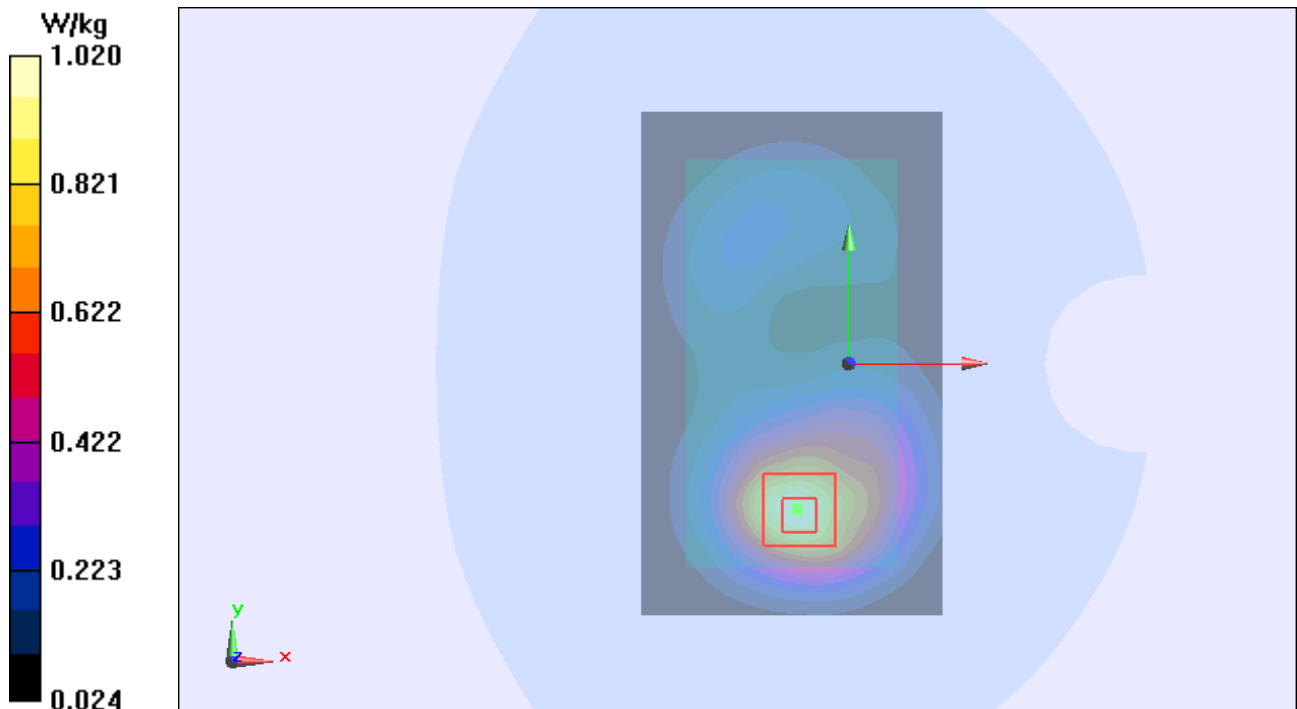


Figure 73 Body, Back Side, UMTS Band II Channel 9262

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 133 of 255

UMTS Band II Back Side Low (Battery 5)

Date/Time: 2014-03-23 04:51:23

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.477$ S/m; $\epsilon_r = 53.168$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Low/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.01 W/kg

Back Side Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.319 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.943 W/kg; SAR(10 g) = 0.549 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

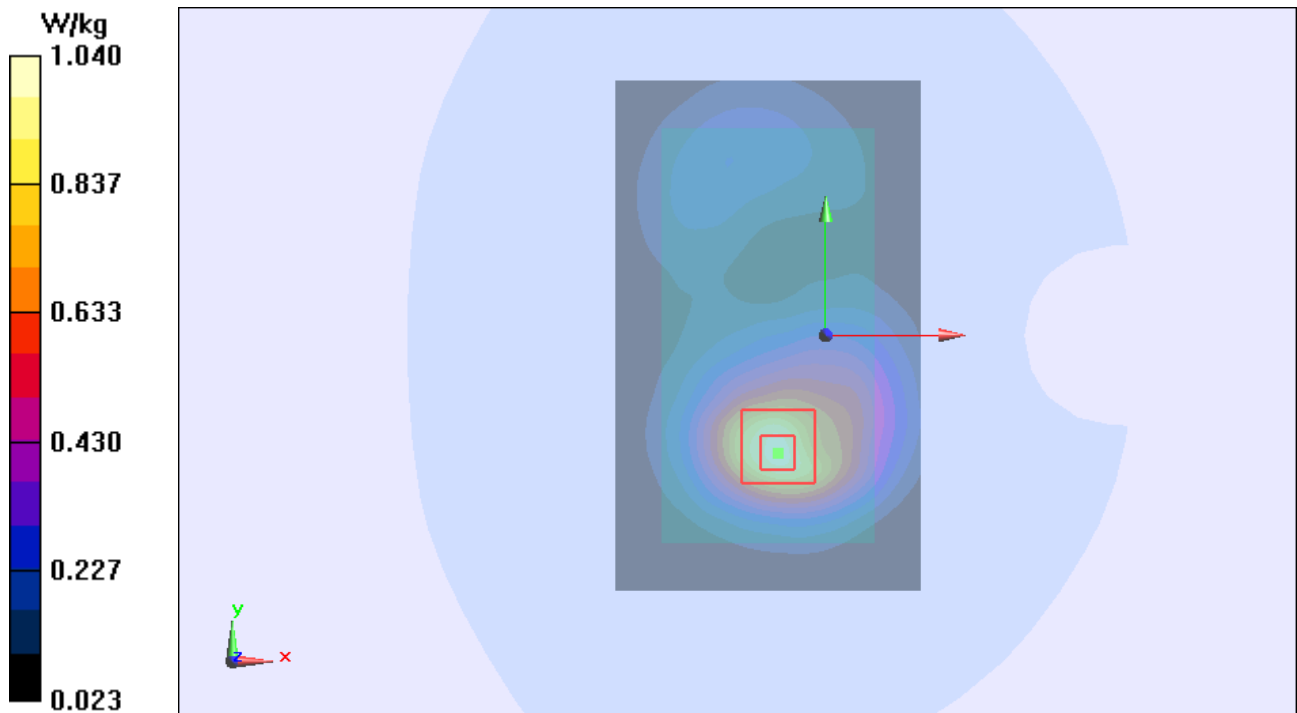


Figure 74 Body, Back Side, UMTS Band II Channel 9262

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 134 of 255

UMTS Band II Back Side Low (Battery 6)

Date/Time: 2014-03-23 05:12:45

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.477$ S/m; $\epsilon_r = 53.168$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Low/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 W/kg

Back Side Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.852 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.597 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

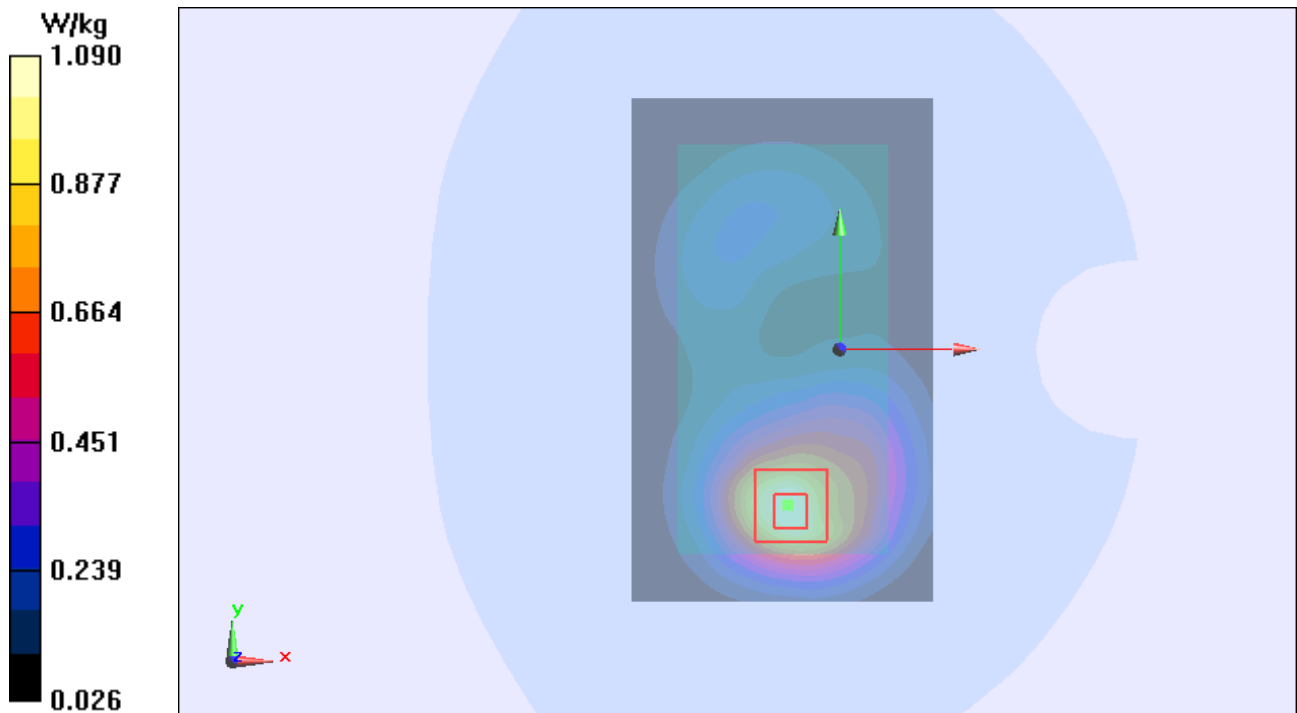


Figure 75 Body, Back Side, UMTS Band II Channel 9262

UMTS Band II Back Side Low (Earphone)

Date/Time: 2014-03-23 12:42:58

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.477$ S/m; $\epsilon_r = 53.168$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Low/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.974 W/kg

Back Side Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.630 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.911 W/kg; SAR(10 g) = 0.532 W/kg

Maximum value of SAR (measured) = 0.983 W/kg

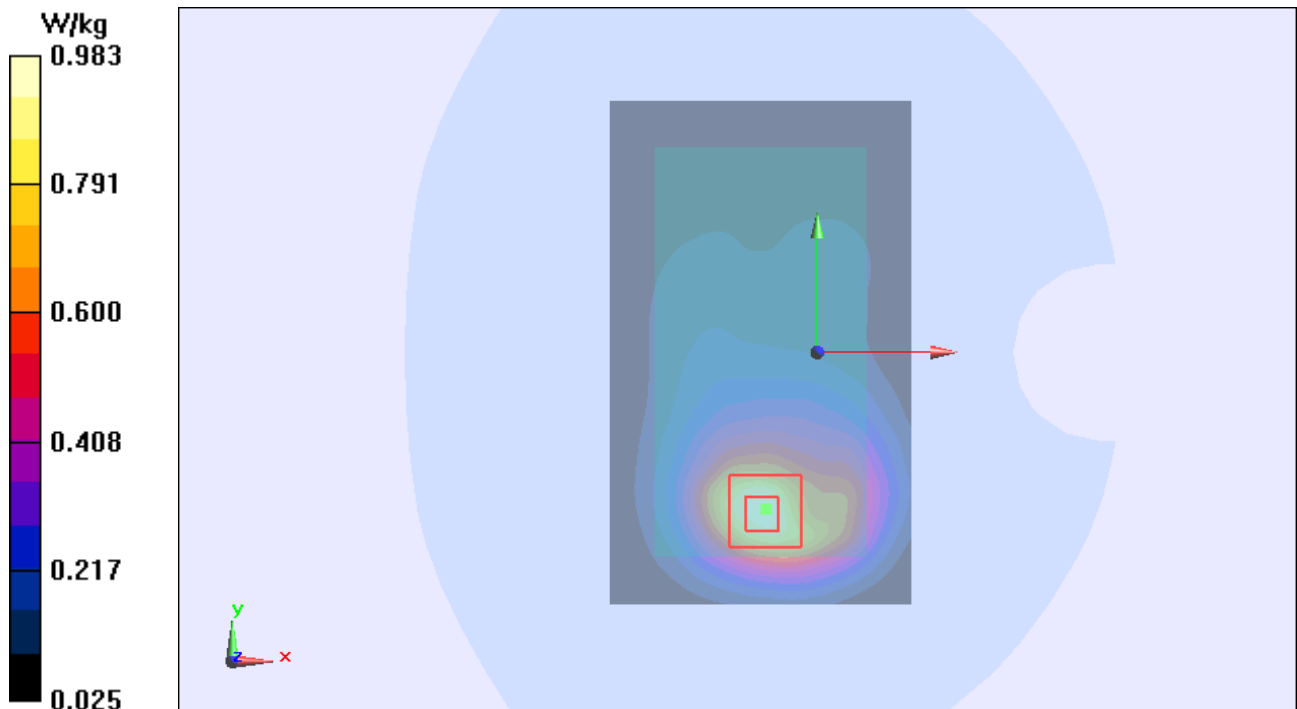


Figure 76 Body, Back Side, UMTS Band II Channel 9262

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 136 of 255

UMTS Band II Back Side Low (1st repeated SAR, Battery 1)

Date/Time: 2014-03-23 20:52:09

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.477$ S/m; $\epsilon_r = 53.168$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.63, 7.63, 7.63); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Low/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.26 W/kg


Back Side Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.487 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.656 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

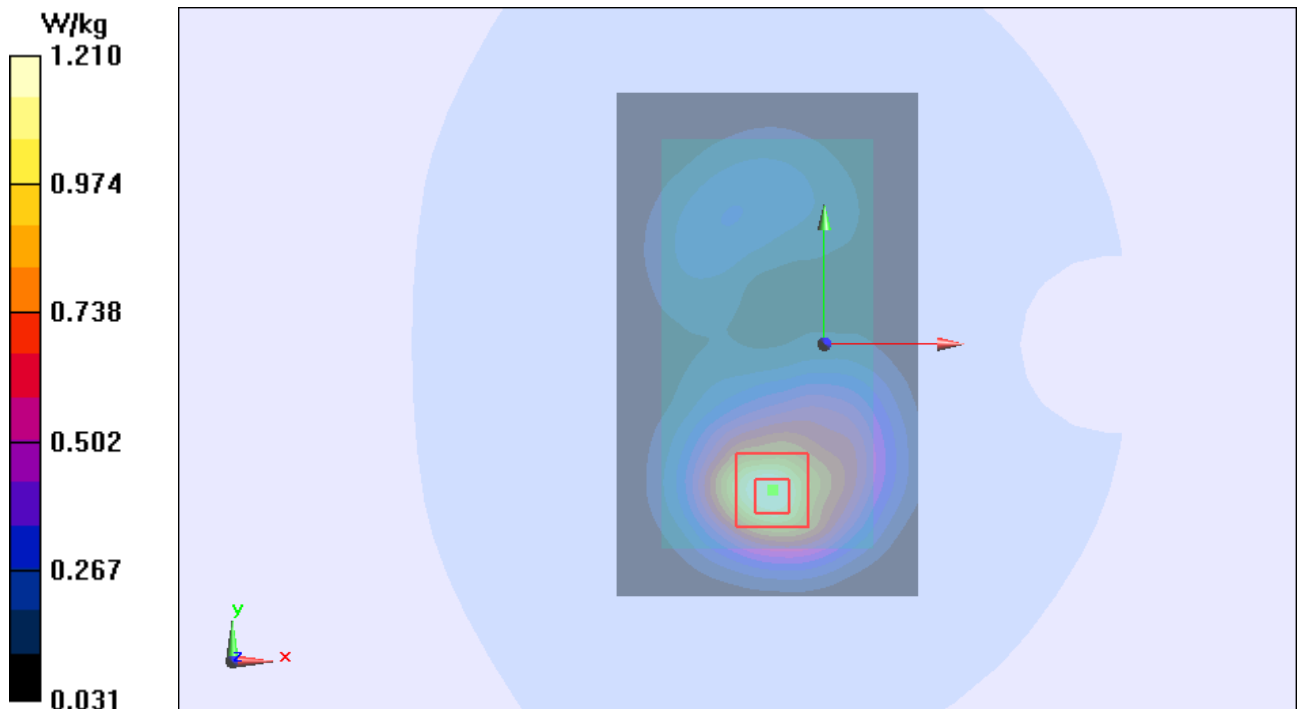

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 137 of 255

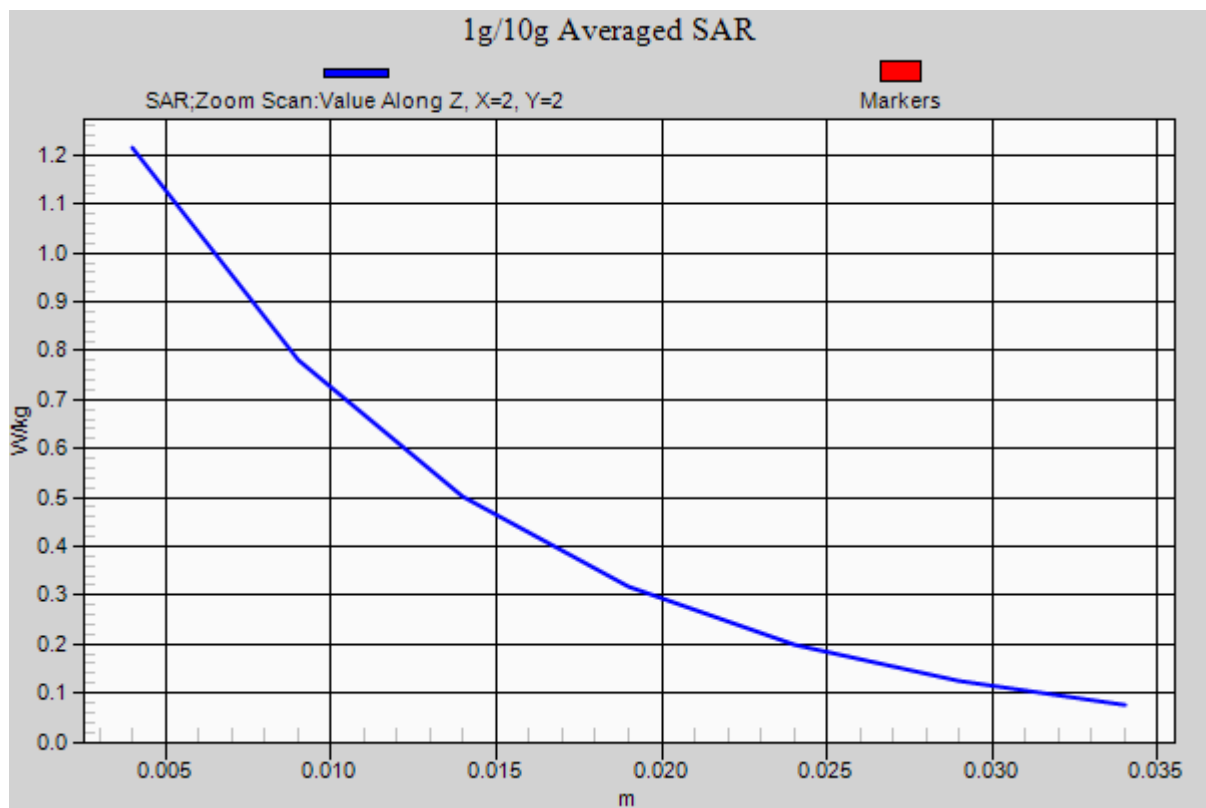


Figure 77 Body, Back Side, UMTS Band II Channel 9262

UMTS Band V Left Cheek High (Battery 1)

Date/Time: 2014-03-14 01:23:14

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.323$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek High/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.624 W/kg

Left Cheek High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.417 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.762 W/kg

SAR(1 g) = 0.595 W/kg; SAR(10 g) = 0.443 W/kg

Maximum value of SAR (measured) = 0.627 W/kg

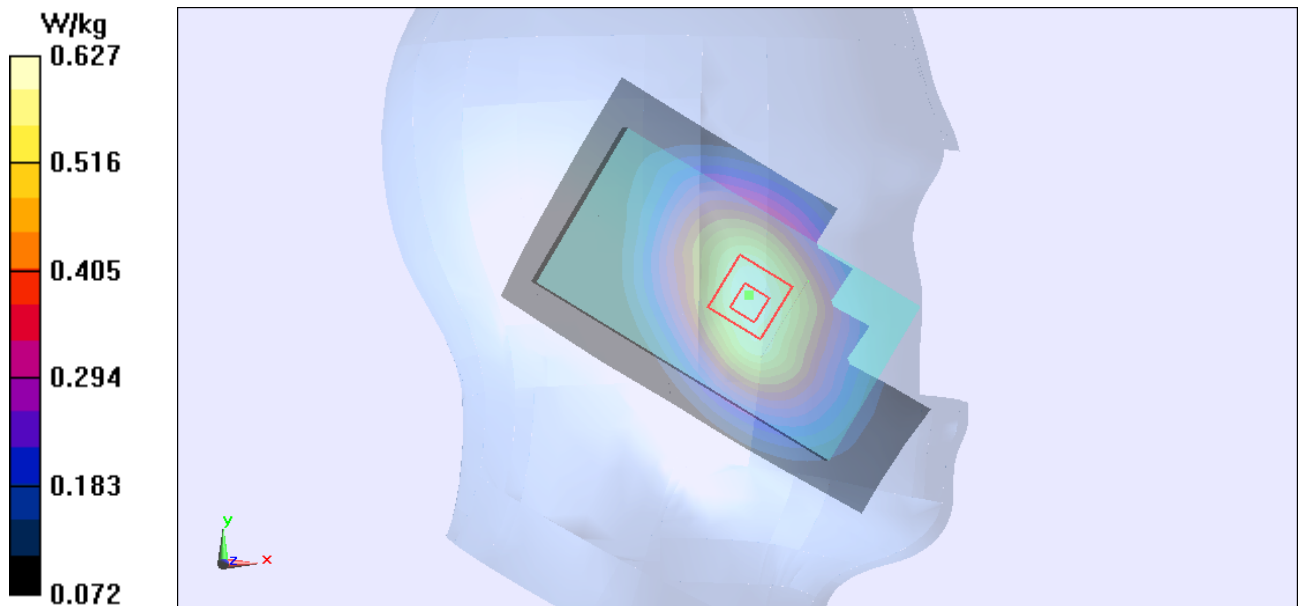


Figure 78 Left Hand Touch Cheek UMTS Band V Channel 4233

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 139 of 255

UMTS Band V Left Cheek Middle (Battery 1)

Date/Time: 2014-03-14 02:11:04

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.693 W/kg


Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.058 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 0.872 W/kg

SAR(1 g) = 0.668 W/kg; SAR(10 g) = 0.488 W/kg

Maximum value of SAR (measured) = 0.701 W/kg

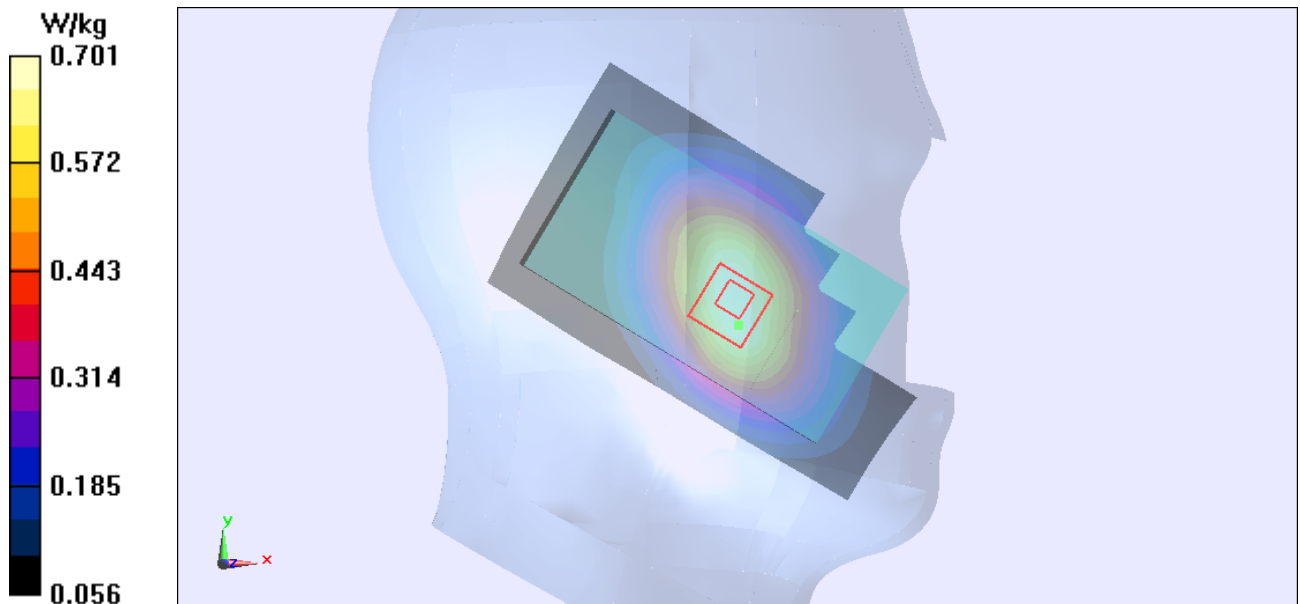

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 140 of 255

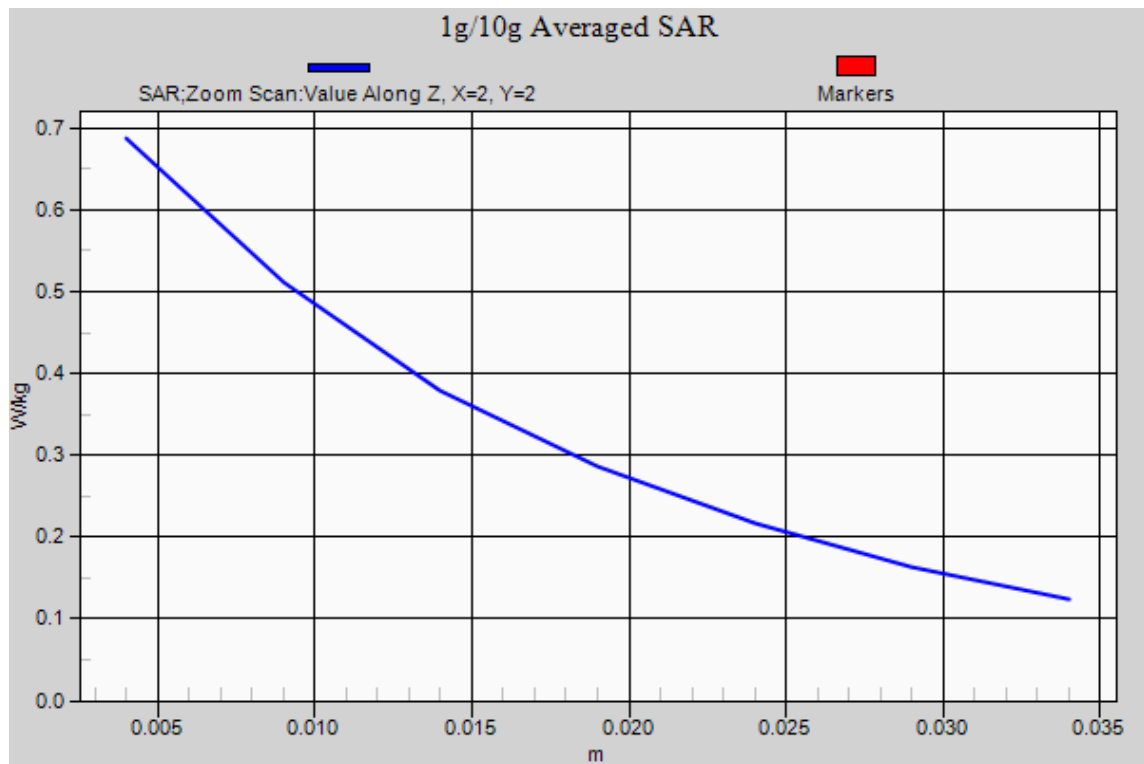


Figure 79 Left Hand Touch Cheek UMTS Band V Channel 4183

UMTS Band V Left Cheek Low (Battery 1)

Date/Time: 2014-03-14 01:40:53

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.437$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Low/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.626 W/kg

Left Cheek Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.415 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.780 W/kg

SAR(1 g) = 0.608 W/kg; SAR(10 g) = 0.454 W/kg

Maximum value of SAR (measured) = 0.640 W/kg

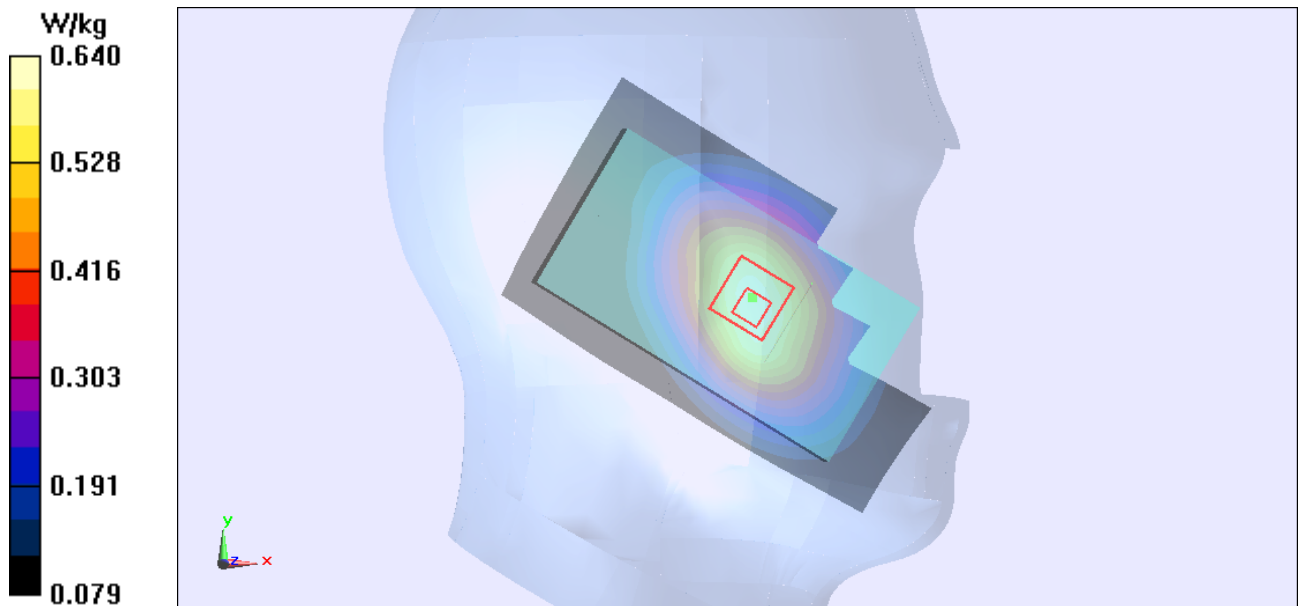


Figure 80 Left Hand Touch Cheek UMTS Band V Channel 4132

UMTS Band V Left Tilt Middle (Battery 1)

Date/Time: 2014-03-14 02:28:01

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Tilt Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.344 W/kg

Left Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.035 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.387 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.243 W/kg

Maximum value of SAR (measured) = 0.331 W/kg

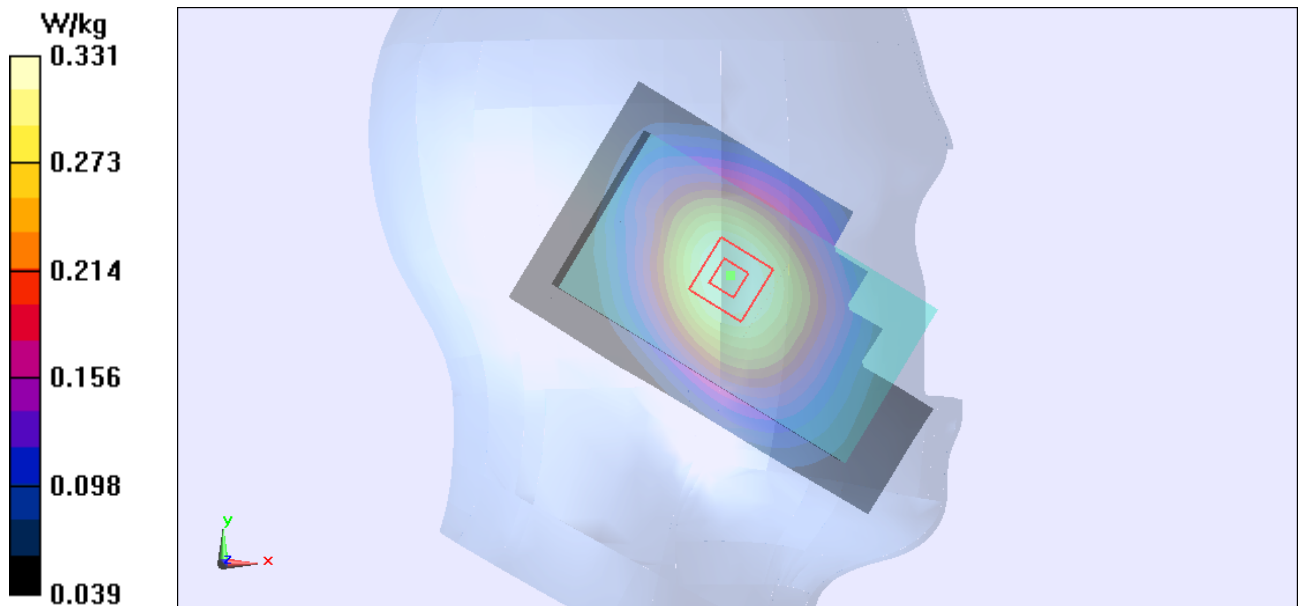


Figure 81 Left Hand Tilt 15° UMTS Band V Channel 4183

UMTS Band V Right Cheek High (Battery 1)

Date/Time: 2014-03-14 03:49:14

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.323$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Cheek High/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.658 W/kg

Right Cheek High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.949 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.783 W/kg

SAR(1 g) = 0.633 W/kg; SAR(10 g) = 0.478 W/kg

Maximum value of SAR (measured) = 0.665 W/kg

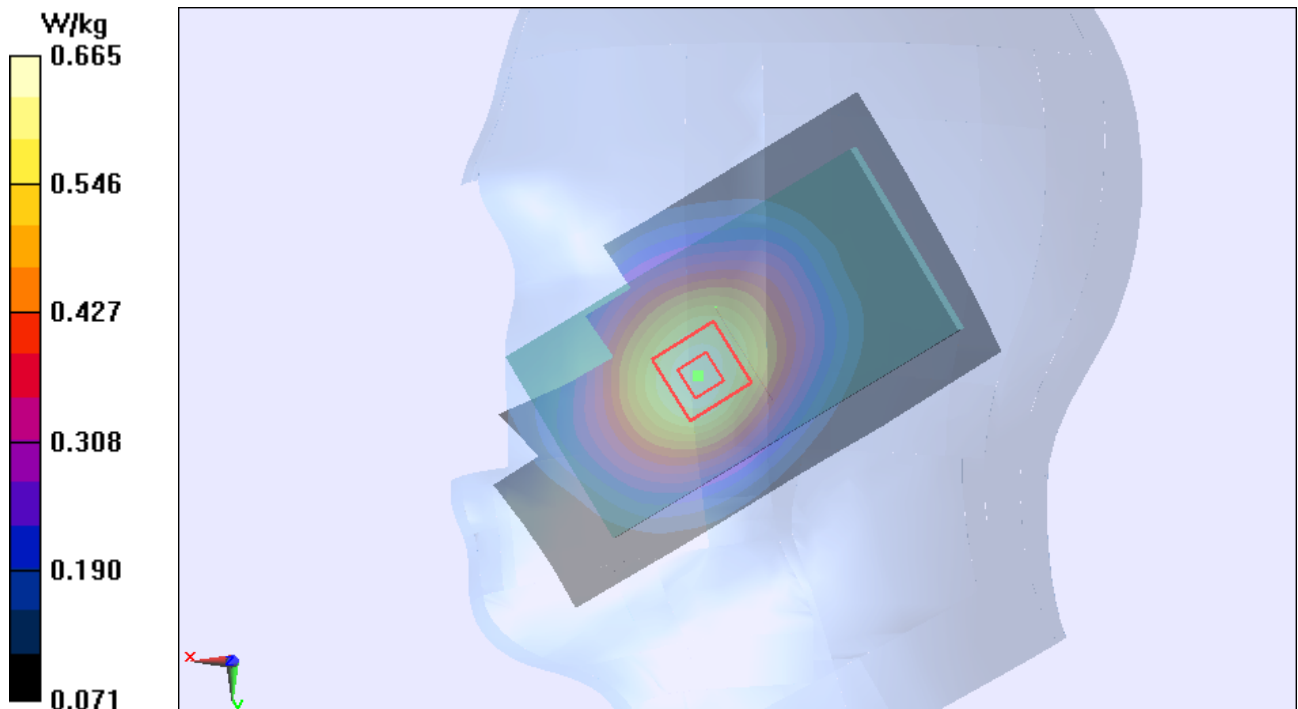


Figure 82 Right Hand Touch Cheek UMTS Band V Channel 4233

UMTS Band V Right Cheek Middle (Battery 1)

Date/Time: 2014-03-14 03:05:32

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.639 W/kg

Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.639 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.766 W/kg

SAR(1 g) = 0.618 W/kg; SAR(10 g) = 0.465 W/kg

Maximum value of SAR (measured) = 0.639 W/kg

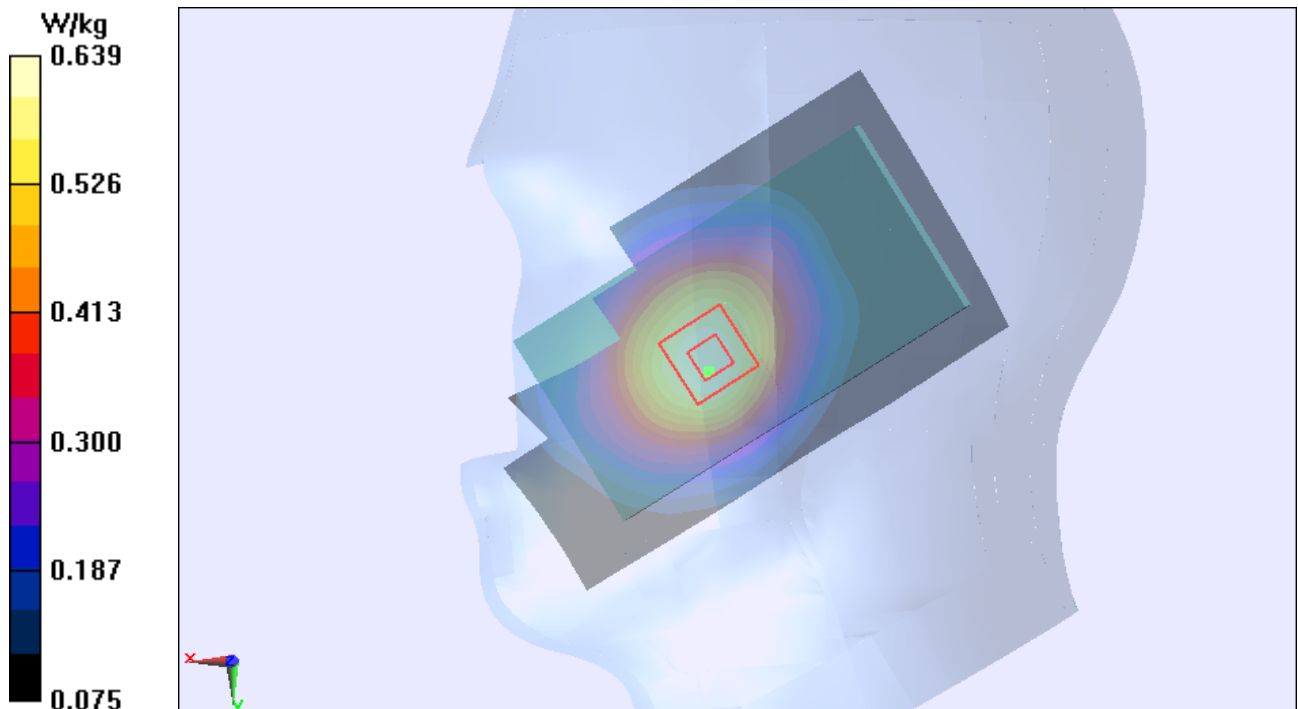


Figure 83 Right Hand Touch Cheek UMTS Band V Channel 4183

UMTS Band V Right Cheek Low (Battery 1)

Date/Time: 2014-03-14 03:32:16

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.437$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Cheek Low/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.670 W/kg

Right Cheek Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.264 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.640 W/kg; SAR(10 g) = 0.487 W/kg

Maximum value of SAR (measured) = 0.671 W/kg

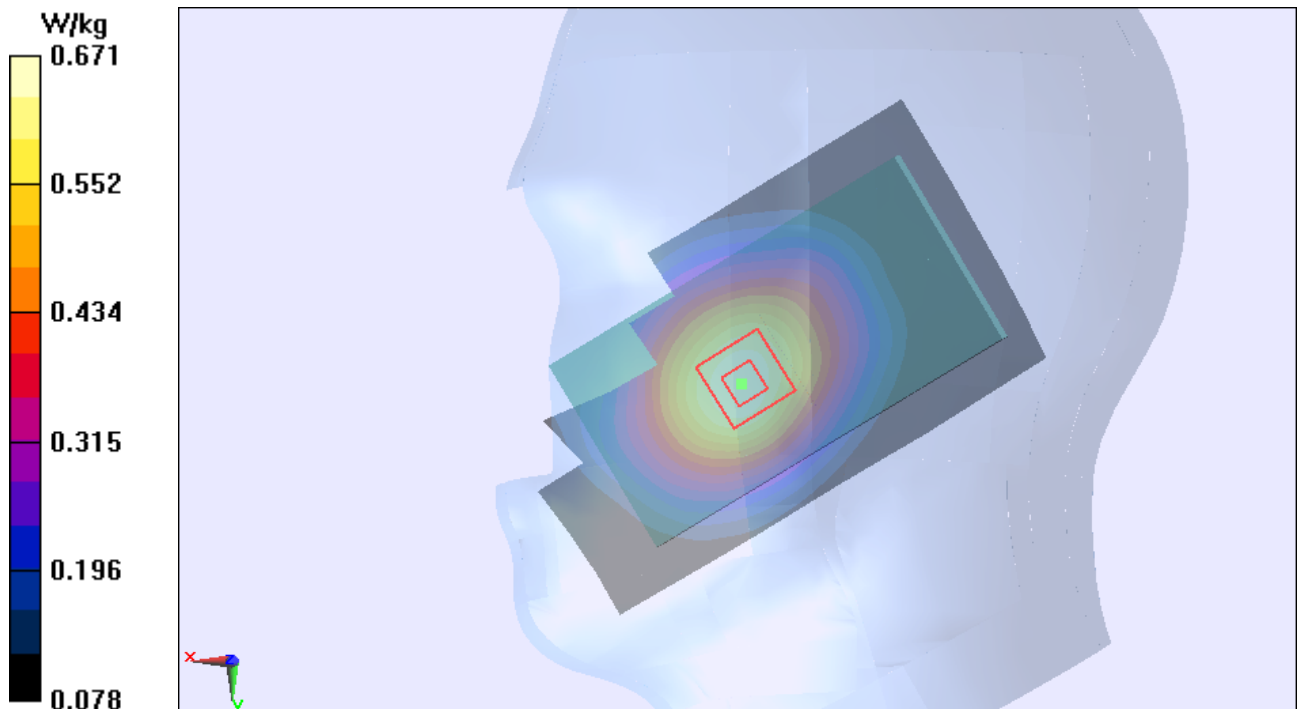


Figure 84 Right Hand Touch Cheek UMTS Band V Channel 4132

UMTS Band V Right Tilt Middle (Battery 1)

Date/Time: 2014-03-14 01:54:44

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Tilt Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.316 W/kg

Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.816 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 0.315 W/kg

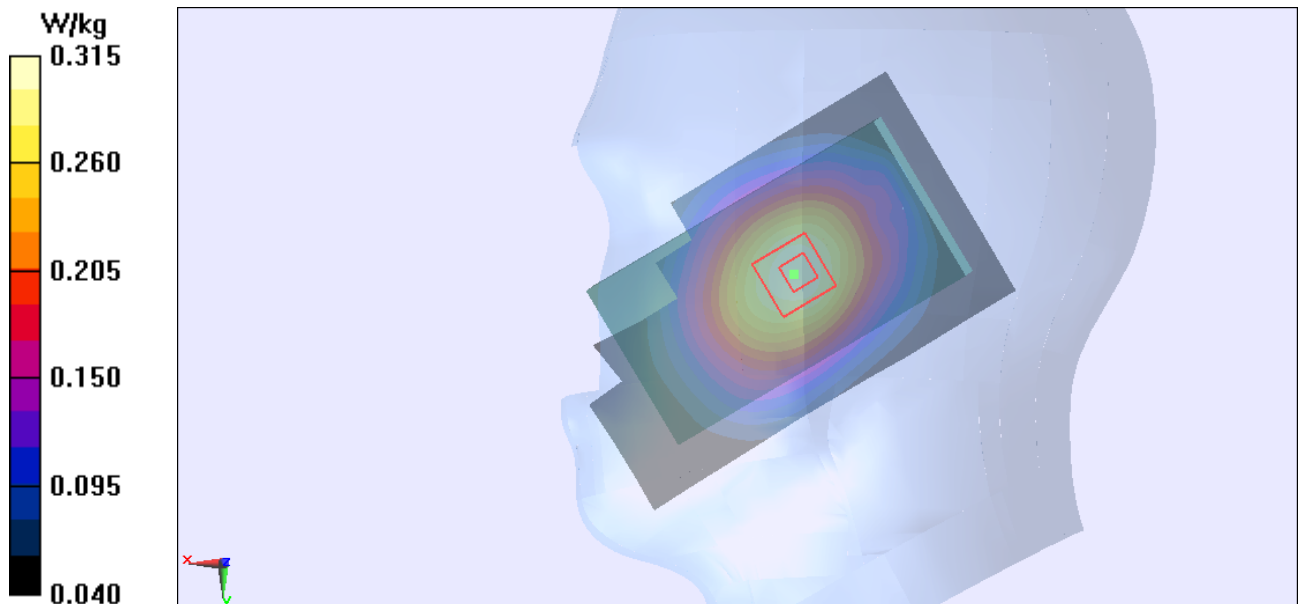


Figure 85 Right Hand Tilt 15° UMTS Band V Channel 4183

UMTS Band V Left Cheek Middle (Battery 2)

Date/Time: 2014-03-14 05:06:27

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.661 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.290 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.831 W/kg

SAR(1 g) = 0.649 W/kg; SAR(10 g) = 0.481 W/kg

Maximum value of SAR (measured) = 0.691 W/kg

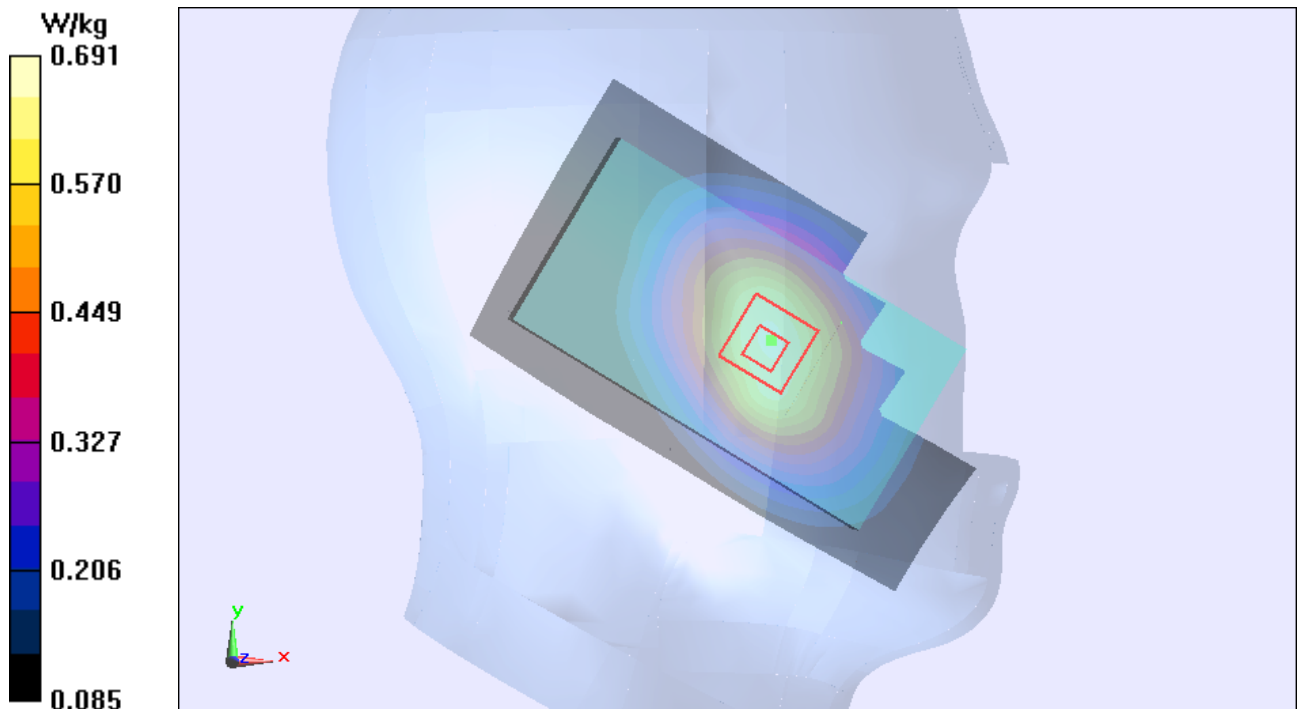


Figure 86 Left Touch Cheek UMTS Band V Channel 4183

UMTS Band V Left Cheek Middle (Battery 3)

Date/Time: 2014-03-14 04:47:29

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.641 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.736 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.787 W/kg

SAR(1 g) = 0.622 W/kg; SAR(10 g) = 0.468 W/kg

Maximum value of SAR (measured) = 0.656 W/kg

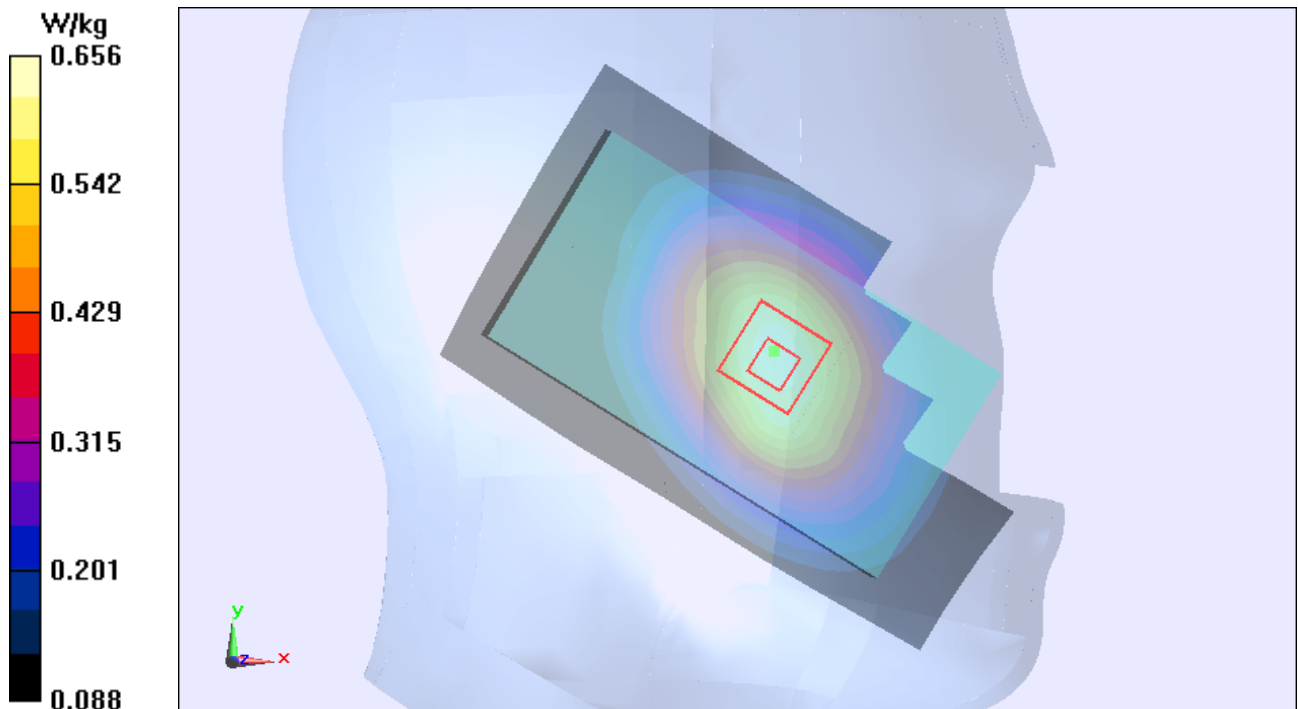


Figure 87 Left Touch Cheek UMTS Band V Channel 4183

UMTS Band V Left Cheek Middle (Battery 4)

Date/Time: 2014-03-14 05:46:50

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.673 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.444 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.838 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.487 W/kg

Maximum value of SAR (measured) = 0.694 W/kg

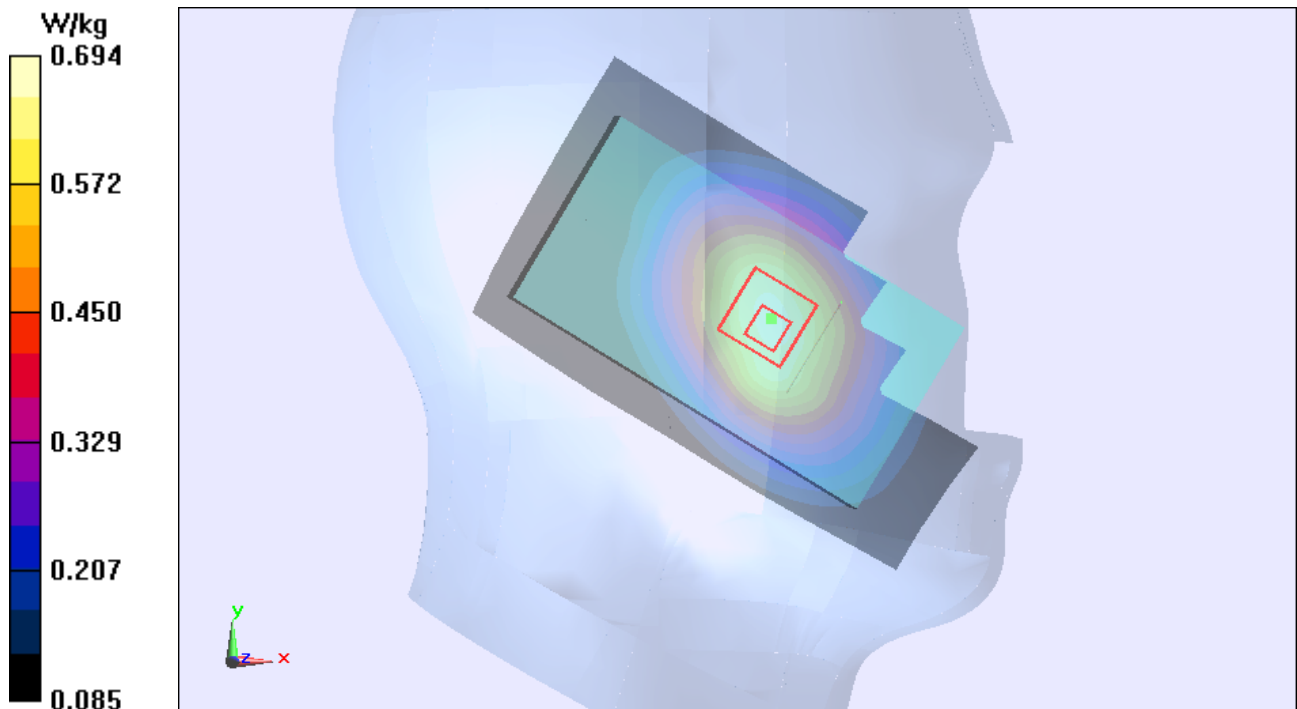


Figure 88 Left Touch Cheek UMTS Band V Channel 4183

UMTS Band V Left Cheek Middle (Battery 5)

Date/Time: 2014-03-14 05:28:26

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.672 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.420 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.834 W/kg

SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.486 W/kg

Maximum value of SAR (measured) = 0.692 W/kg

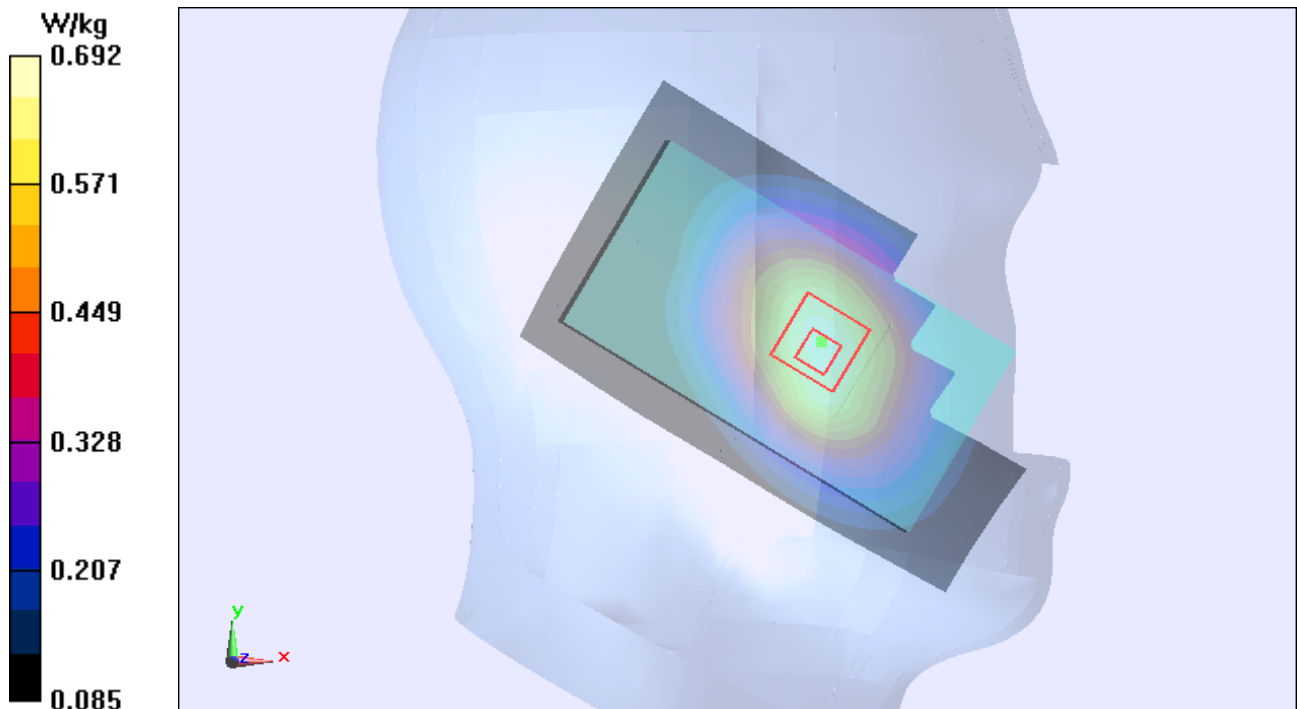


Figure 89 Left Touch Cheek UMTS Band V Channel 4183

UMTS Band V Left Cheek Middle (Battery 6)

Date/Time: 2014-03-14 06:05:44

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.357$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.659 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.605 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.817 W/kg

SAR(1 g) = 0.636 W/kg; SAR(10 g) = 0.476 W/kg

Maximum value of SAR (measured) = 0.672 W/kg

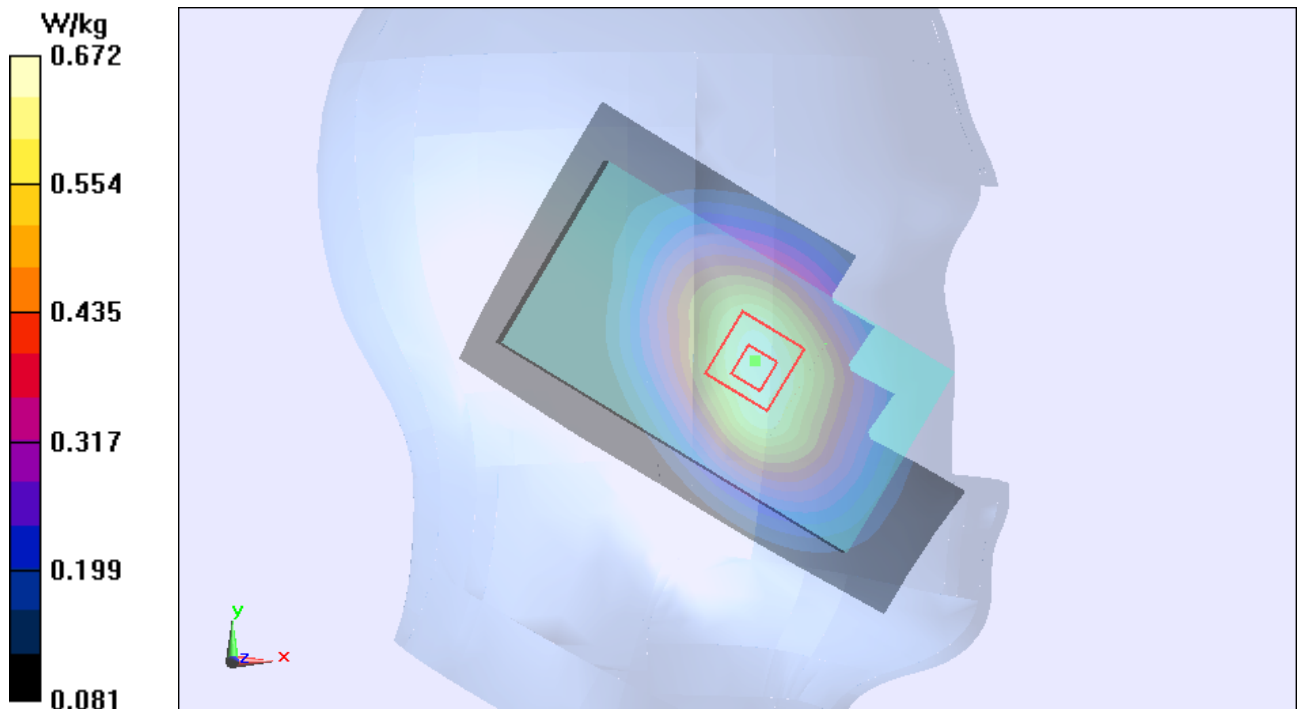


Figure 90 Left Touch Cheek UMTS Band V Channel 4183

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 152 of 255

UMTS Band V Back Side High (Battery 1)

Date/Time: 2014-03-15 22:10:57

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 1.005$ S/m; $\epsilon_r = 54.978$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side High/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.637 W/kg

Back Side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.511 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.754 W/kg

SAR(1 g) = 0.602 W/kg; SAR(10 g) = 0.448 W/kg

Maximum value of SAR (measured) = 0.633 W/kg

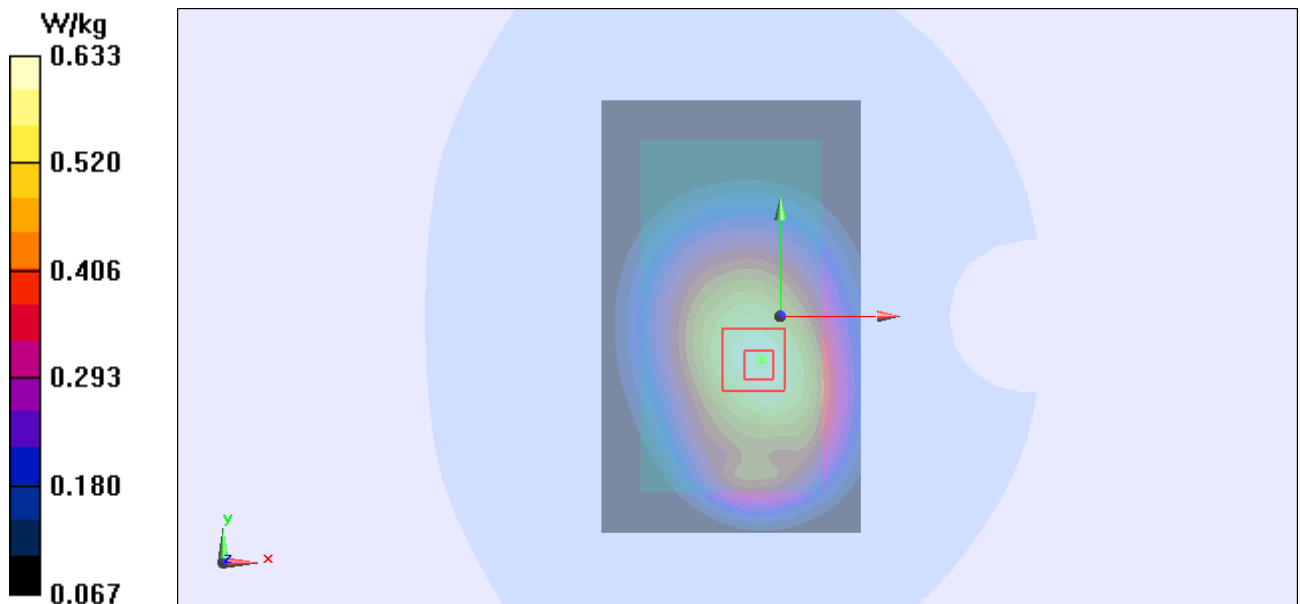


Figure 91 Body, Back Side, UMTS Band V Channel 4233

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 153 of 255

UMTS Band V Back Side Middle (Battery 1)

Date/Time: 2014-03-15 21:34:19

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.677 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.957 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.814 W/kg

SAR(1 g) = 0.636 W/kg; SAR(10 g) = 0.468 W/kg

Maximum value of SAR (measured) = 0.673 W/kg

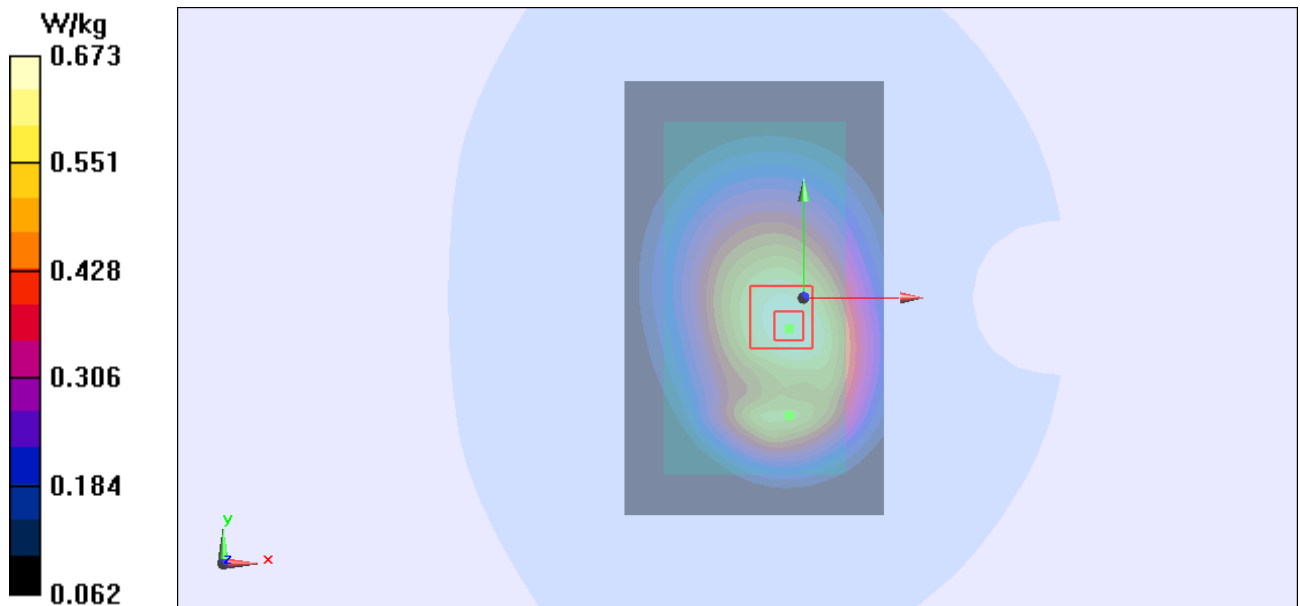


Figure 92 Body, Back Side, UMTS Band V Channel 4183

UMTS Band V Back Side Low (Battery 1)

Date/Time: 2014-03-15 22:28:15

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.985$ S/m; $\epsilon_r = 55.173$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Low/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.667 W/kg

Back Side Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.959 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.795 W/kg

SAR(1 g) = 0.632 W/kg; SAR(10 g) = 0.469 W/kg

Maximum value of SAR (measured) = 0.664 W/kg

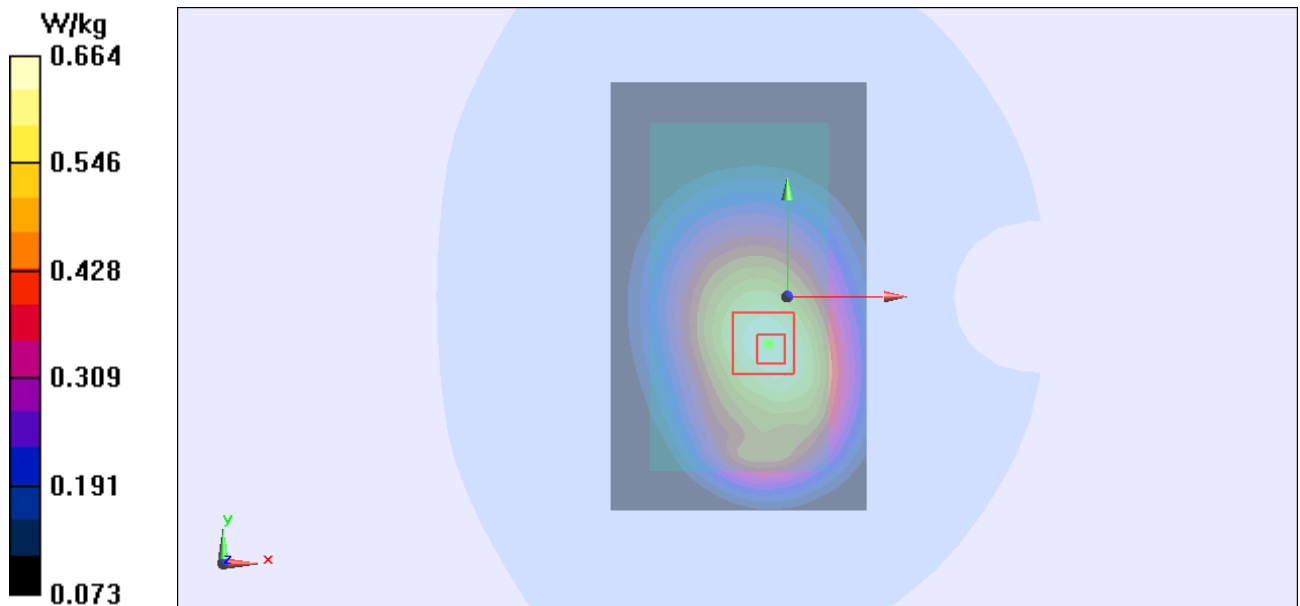


Figure 93 Body, Back Side, UMTS Band V Channel 4132

UMTS Band V Front Side Middle (Battery 1)

Date/Time: 2014-03-15 21:52:47

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Front Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.495 W/kg

Front Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.150 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.359 W/kg

Maximum value of SAR (measured) = 0.492 W/kg

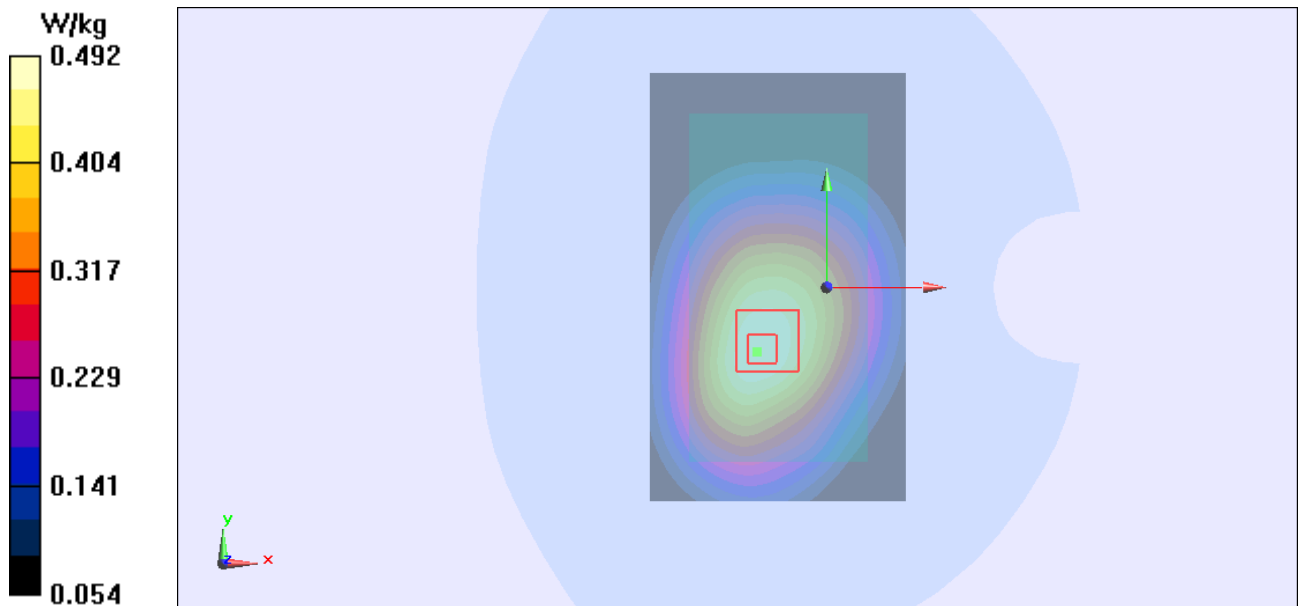


Figure 94 Body, Front Side, UMTS Band V Channel 4183

UMTS Band V Left Edge Middle (Battery 1)

Date/Time: 2014-03-15 22:49:35

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Edge Middle/Area Scan (31x101x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.479 W/kg

Left Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.874 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.610 W/kg

SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.310 W/kg

Maximum value of SAR (measured) = 0.484 W/kg

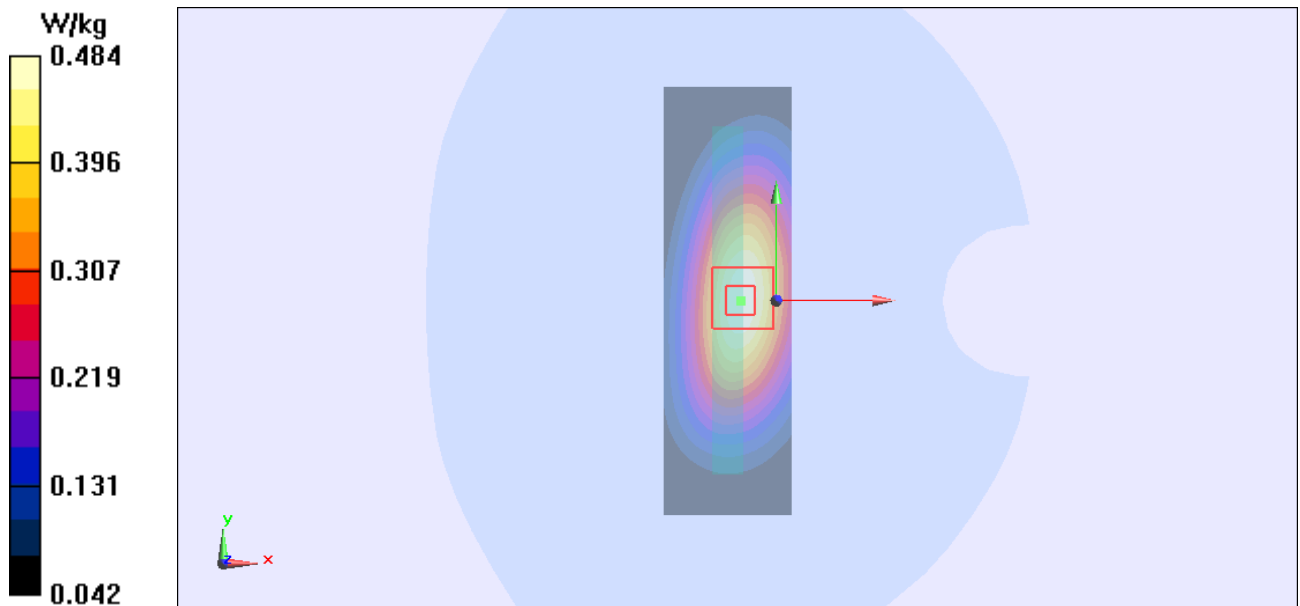


Figure 95 Body, Left Edge, UMTS Band V Channel 4183

UMTS Band V Right Edge Middle (Battery 1)

Date/Time: 2014-03-15 23:04:47

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Right Edge Middle/Area Scan (31x101x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.436 W/kg

Right Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.521 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.541 W/kg

SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.288 W/kg

Maximum value of SAR (measured) = 0.437 W/kg

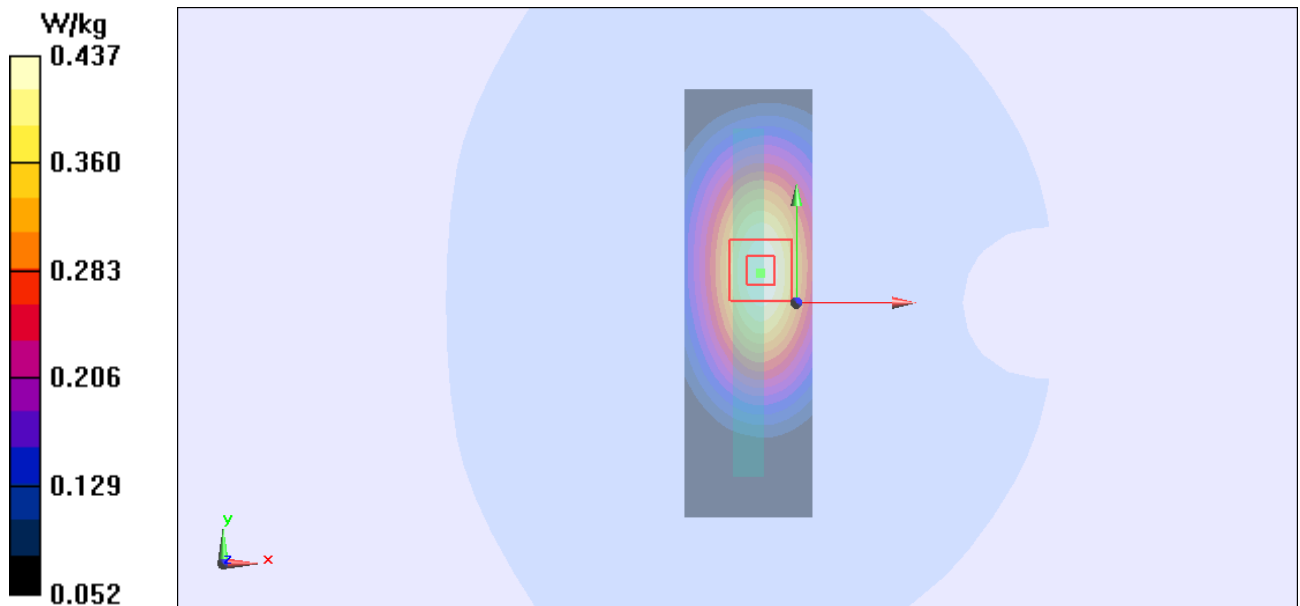


Figure 96 Body, Right Edge, UMTS Band V Channel 4183

UMTS Band V Bottom Edge Middle (Battery 1)

Date/Time: 2014-03-15 23:20:27

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Bottom Edge Middle/Area Scan (31x61x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.122 W/kg

Bottom Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.757 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.164 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

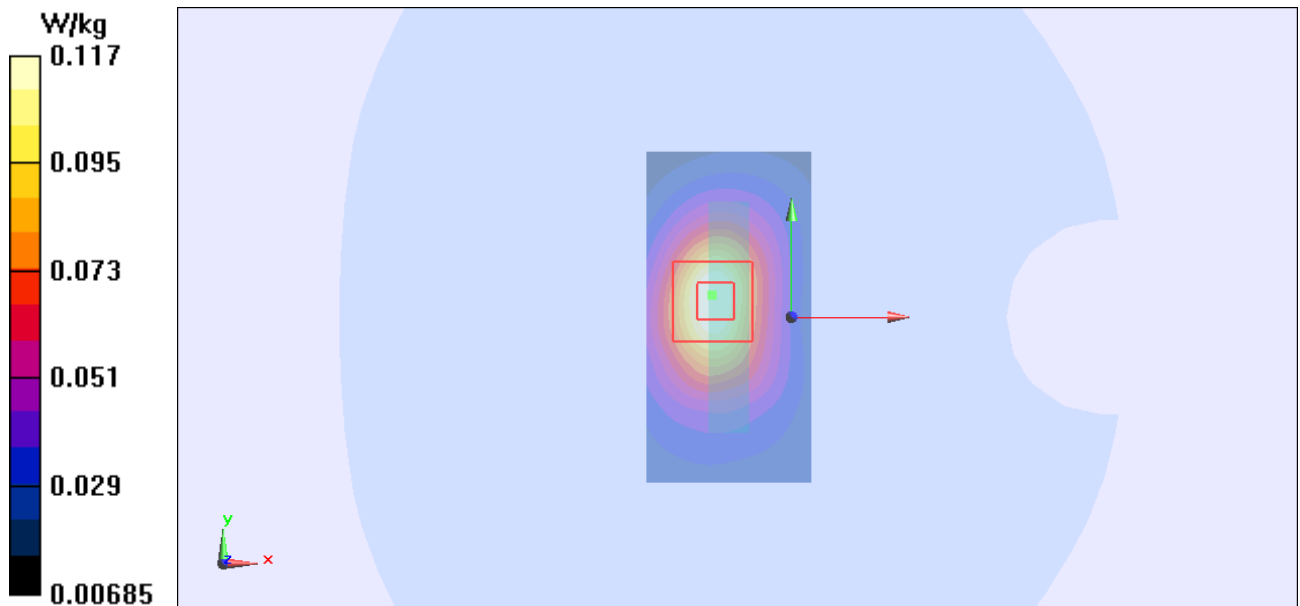


Figure 97 Body, Bottom Edge, UMTS Band V Channel 4183

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RHA1402-0029SAR01R3

Page 159 of 255

UMTS Band V Back Side Middle (Battery 2)

Date/Time: 2014-03-16 05:26:08

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.715 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.645 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.888 W/kg

SAR(1 g) = 0.690 W/kg; SAR(10 g) = 0.503 W/kg

Maximum value of SAR (measured) = 0.733 W/kg

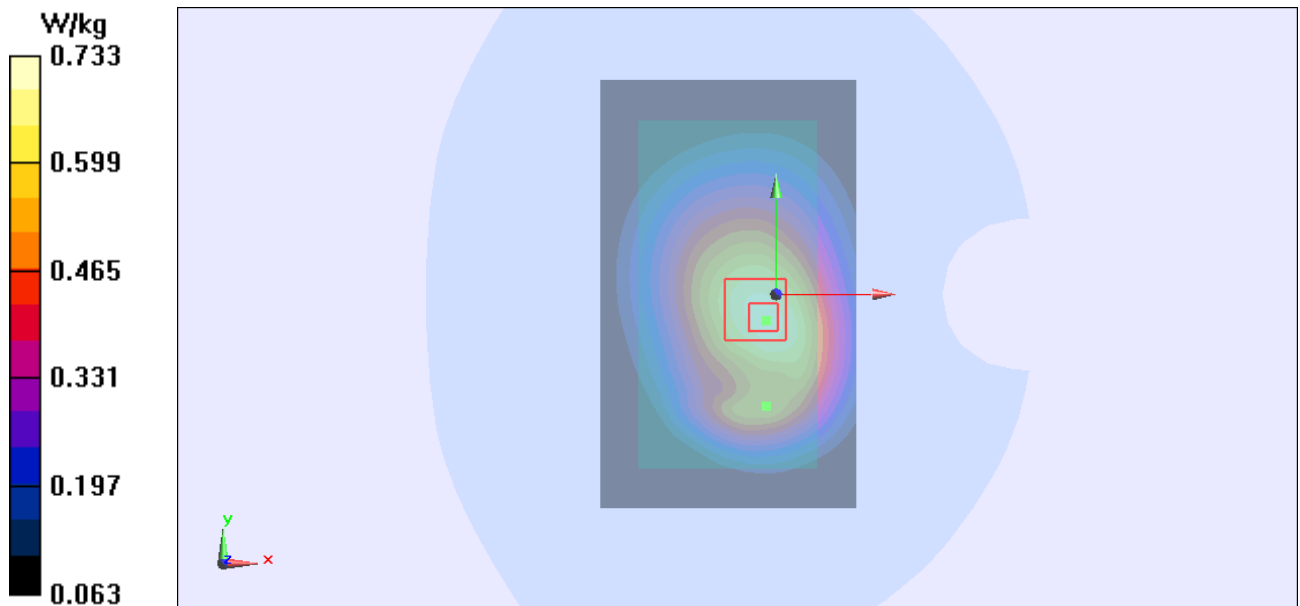

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RHA1402-0029SAR01R3

Page 160 of 255

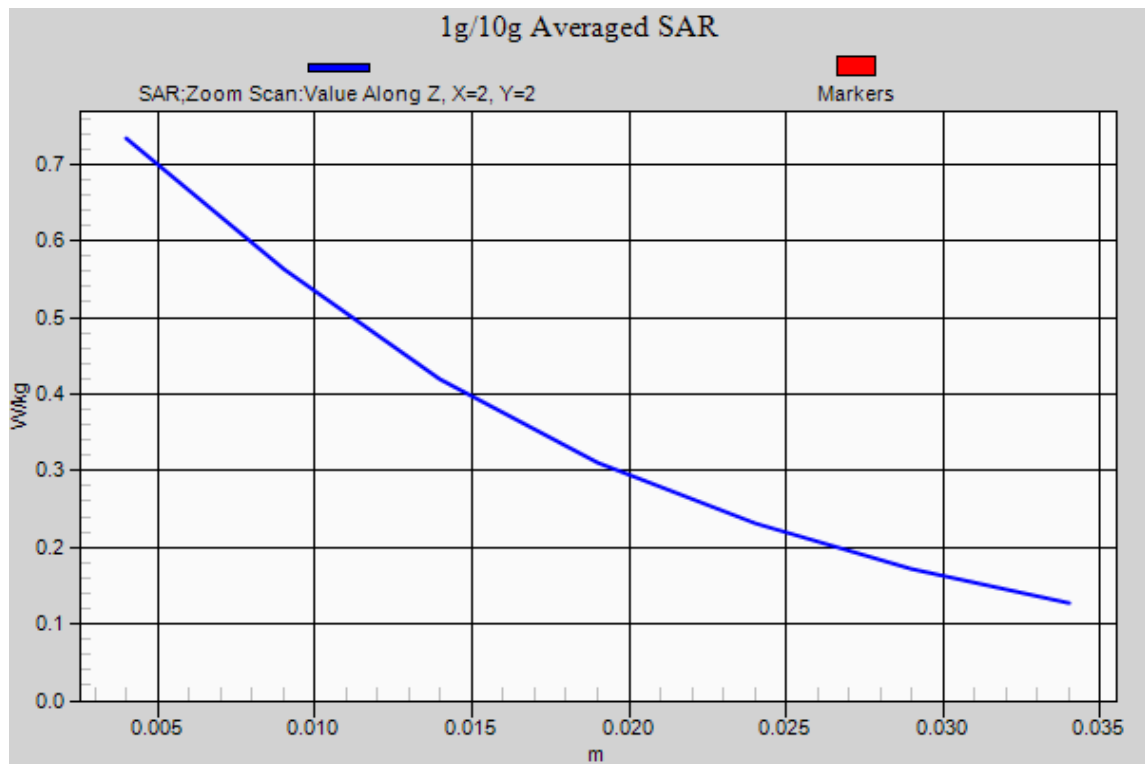


Figure 98 Body, Back Side, UMTS Band V Channel 4183

UMTS Band V Back Side Middle (Battery 3)

Date/Time: 2014-03-16 05:43:24

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.735 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.589 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.860 W/kg

SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.493 W/kg

Maximum value of SAR (measured) = 0.712 W/kg

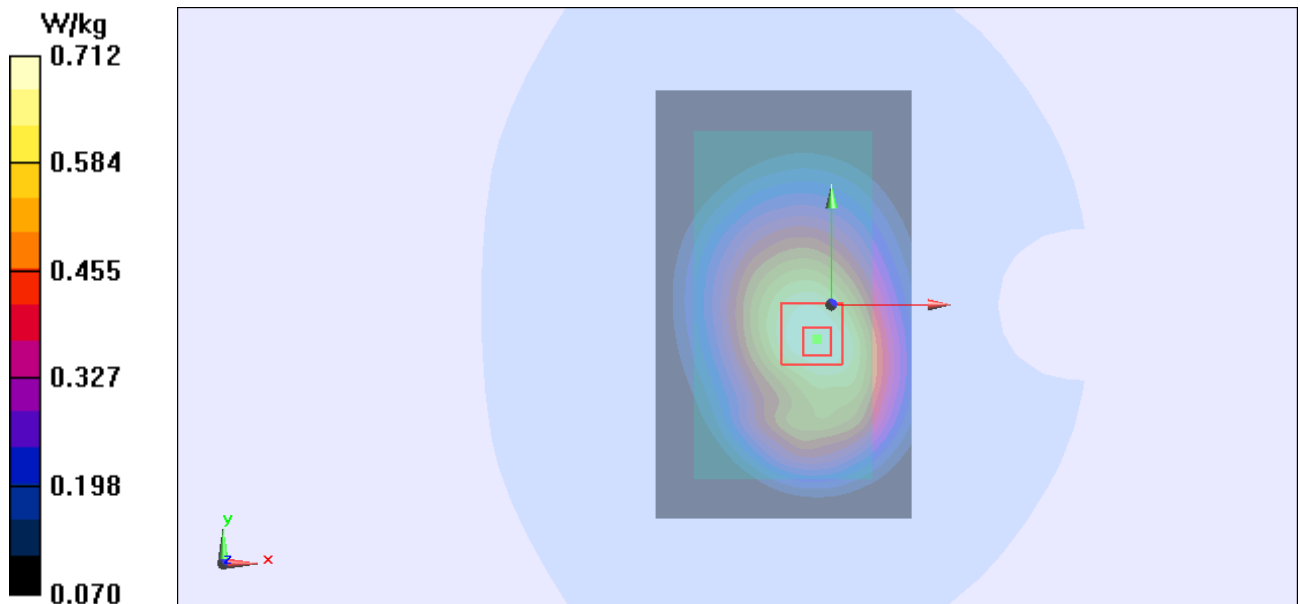


Figure 99 Body, Back Side, UMTS Band V Channel 4183

UMTS Band V Back Side Middle (Battery 4)

Date/Time: 2014-03-16 04:52:30

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.718 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.147 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.861 W/kg

SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.492 W/kg

Maximum value of SAR (measured) = 0.710 W/kg

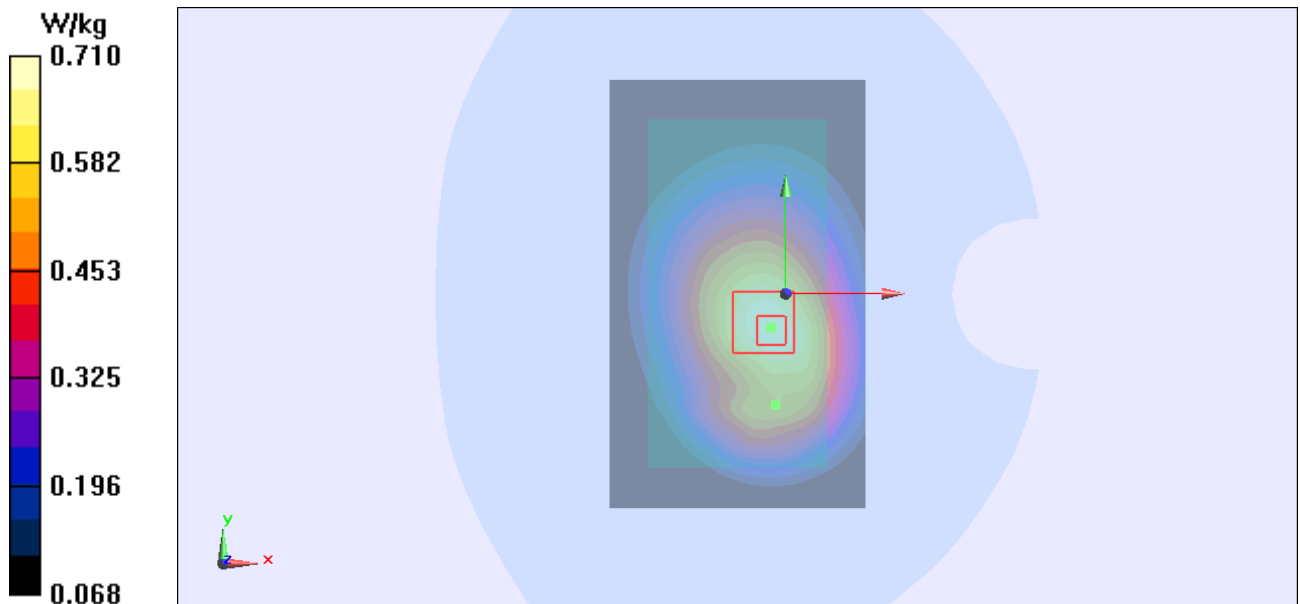


Figure 100 Body, Back Side, UMTS Band V Channel 4183

UMTS Band V Back Side Middle (Battery 5)

Date/Time: 2014-03-16 04:35:48

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.696 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.561 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.834 W/kg

SAR(1 g) = 0.650 W/kg; SAR(10 g) = 0.475 W/kg

Maximum value of SAR (measured) = 0.690 W/kg

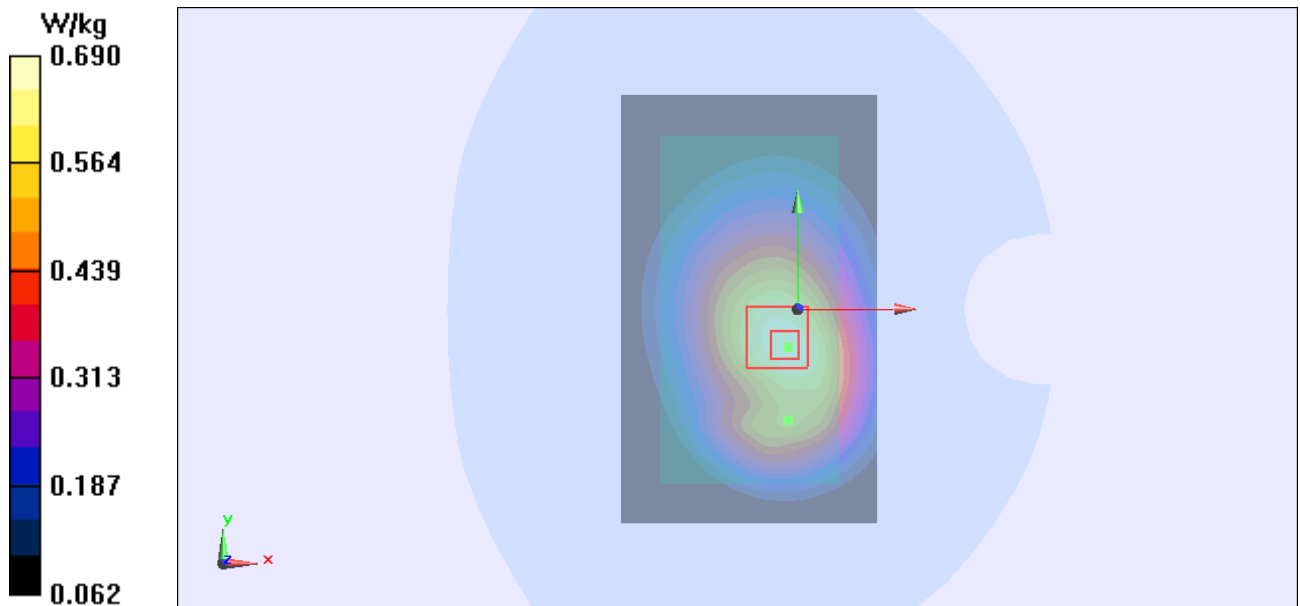


Figure 101 Body, Back Side, UMTS Band V Channel 4183

UMTS Band V Back Side Middle (Battery 6)

Date/Time: 2014-03-16 03:58:37

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 55.073$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.51, 9.51, 9.51); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Back Side Middle/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.678 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.906 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.821 W/kg

SAR(1 g) = 0.637 W/kg; SAR(10 g) = 0.464 W/kg

Maximum value of SAR (measured) = 0.677 W/kg

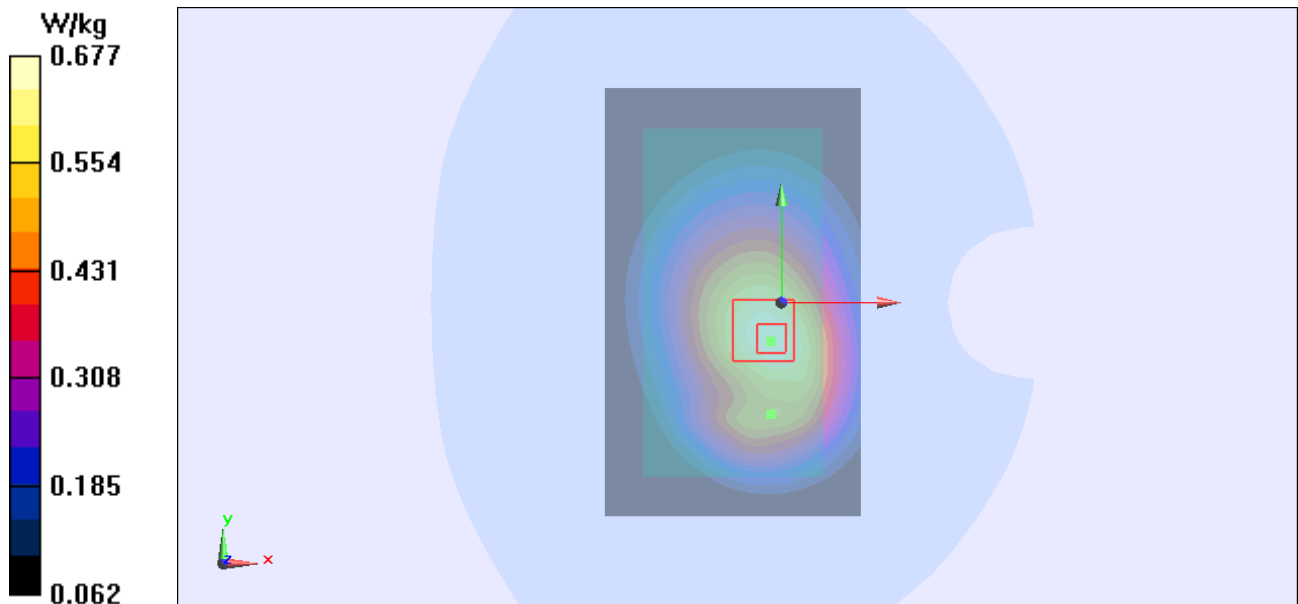


Figure 102 Body, Back Side, UMTS Band V Channel 4183

802.11b Left Cheek Low (Battery 1)

Date/Time: 2014-03-22 18:24:43

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.759$ S/m; $\epsilon_r = 39.353$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.64, 7.64, 7.64); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Cheek Low/Area Scan (61x101x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.167 W/kg

Left Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.127 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.284 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.162 W/kg

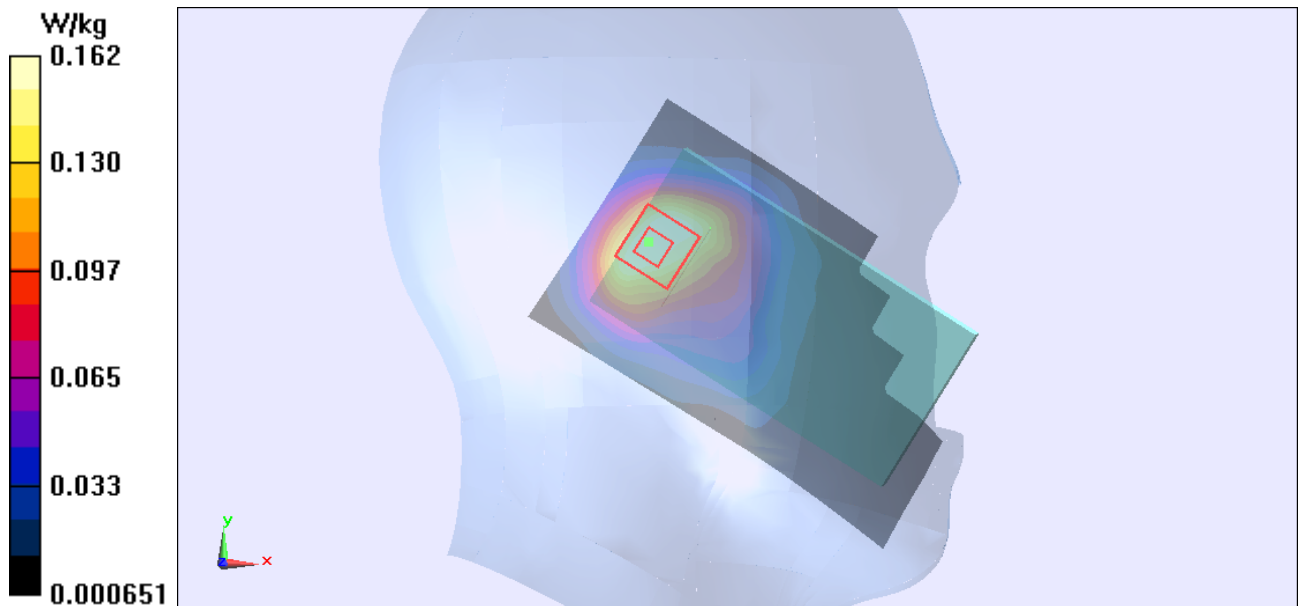


Figure 103 Left Hand Touch Cheek 802.11b Channel 1

802.11b Left Tilt Low (Battery 1)

Date/Time: 2014-03-22 18:45:12

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.759$ S/m; $\epsilon_r = 39.353$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.64, 7.64, 7.64); Calibrated: 2013-11-28;

Electronics: DAE4 Sn1317; Calibrated: 2014-01-16

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Left Tilt Low/Area Scan (61x101x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.183 W/kg

Left Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.535 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 0.313 W/kg

SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.176 W/kg

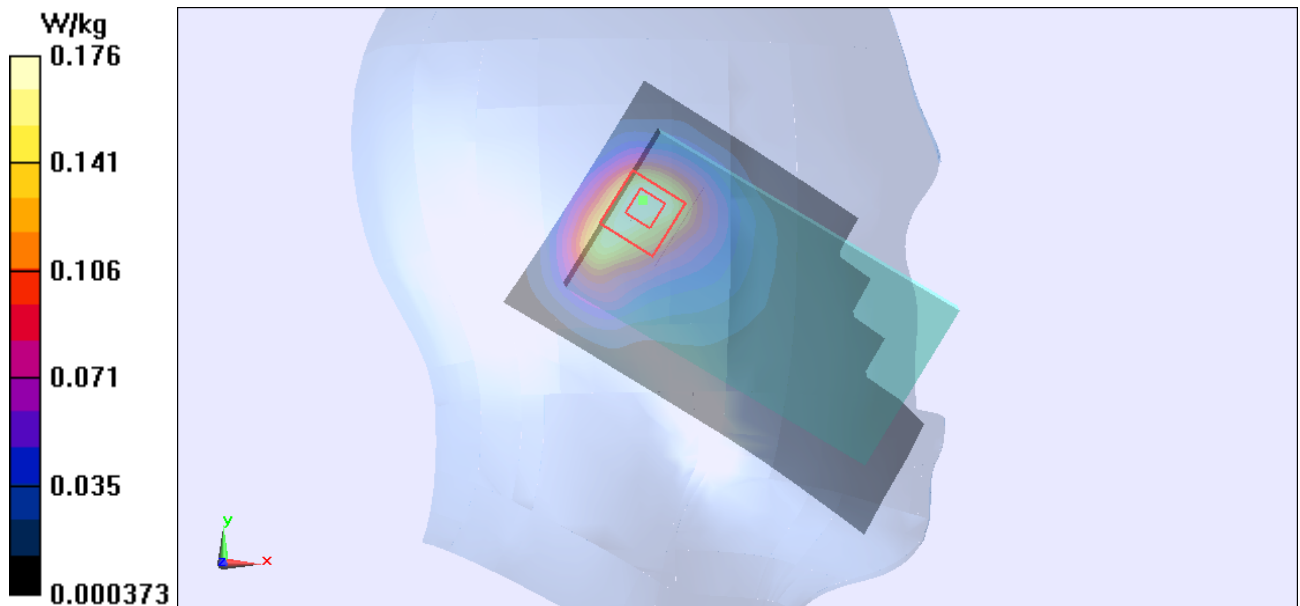


Figure 104 Left Hand Tilt 15° 802.11b Channel 1