

# FCC RF Test Report

**Product Name: UMTS Smart Phone**

**Product Model: HUAWEI Y340-U081, Y340-U081**

**Report Number: SYBH(Z-RF)024072013-2003**

**FCC ID: QISY340-U081**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,  
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808

Fax: +86 755 89652518



## Notice

1. The laboratory has Passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has Passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory has been listed by the US Federal Communications Commission to perform electromagnetic emission measurements. The site recognition number is 97456.
4. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-1 and 6369A-3.
5. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. The test report is only valid for the test samples.
8. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.



**Applicant:** Huawei Technologies Co., Ltd.  
**Address:** Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
 Bantian, Longgang District, Shenzhen, 518129, P.R.C  
**Product Name:** UMTS Smart Phone  
**Product Model:** HUAWEI Y340-U081, Y340-U081

**Date of Receipt Sample:** 2013-07-25  
**Start Date of Test:** 2013-07-26  
**End Date of Test:** 2013-07-31

**Test Result:** Pass

<b>Approved by Senior Engineer:</b>	2013-08-05	Dai Linjun	
	Date	Name	Signature

<b>Prepared by:</b>	2013-08-05	Zhong Yaning	
	Date	Name	Signature



### Modification Record

No.	Last Report No.	Modification Description
		First Report



**CONTENT**

1 General Information .....6  
1.1 Applied Standard.....6  
1.2 Test Location.....6  
1.3 Test Environment Condition.....6  
2 Test Summary .....7  
3 Description of the Equipment under Test (EUT) .....8  
3.1 General Description .....8  
3.2 EUT Identity .....8  
3.3 Technical Description..... 10  
4 General Test Conditions / Configurations ..... 11  
4.1 Test Modes ..... 11  
4.2 EUT Configurations..... 12  
4.3 Test Environments ..... 13  
4.4 Antenna requirements..... 13  
4.5 Test Setups..... 14  
4.6 Test Conditions ..... 17  
5 Main Test Instruments ..... 19



## 1 General Information

### 1.1 Applied Standard

Applied Rules: 47 CFR FCC Part 2, Subpart J 2012  
47 CFR FCC Part 15, Subpart C 2012

Test Method: FCC KDB 558074 D01 DTS Meas Guidance v03r01  
ANSI C63.10-2009, American National Standard for Testing Unlicensed  
Wireless Devices.

### 1.2 Test Location

Test Location 1: Reliability Laboratory of Huawei Technologies Co., Ltd.  
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C

### 1.3 Test Environment Condition

Ambient Temperature: 19.5to 25 °C  
Ambient Relative Humidity: 40 to 55 %  
Atmospheric Pressure: Not applicable



## 2 Test Summary

Test Item	FCC Part No.	Requirements	Test Result	Verdict (NOTE 2)
DTS (6 dB) Bandwidth	15.247(a)(2)	≥ 500 kHz.	Appendix A	Pass
Maximum Peak Conducted Output Power	15.247(b)(3)	For directional gain: < 30 dBm – (G[dBi] – 6 [dB]), peak; Otherwise: < 30 dBm, peak.	Appendix B	Pass
Maximum Power Spectral Density Level	15.247(e)	For directional gain: < 8 dBm/3 kHz – (G[dBi] – 6 [dB]), peak. Otherwise: < 8 dBm/3 kHz, peak.	Appendix C	Pass
Band Edges Compliance	15.247(d)	< -20 dBm/100 kHz if total peak power ≤ power limit.	Appendix D	Pass
Unwanted Emissions into Non-Restricted Frequency Bands			Appendix E	Pass
Unwanted Emissions into Restricted Frequency Bands (Radiated)	15.247(d) 15.209 (NOTE 1)	FCC Part 15.209 field strength limit;	Appendix F	Pass
AC Power Line Conducted Emissions	15.207	FCC Part 15.207 conducted limit;	Appendix G	Pass



### 3 Description of the Equipment under Test (EUT)

#### 3.1 General Description

HUAWEI Y340-U081, Y340-U081 is subscriber equipment in the WCDMA/GSM system. The HSPA/UMTS frequency band is Band II and Band IV and Band V. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port(to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

**NOTE: Only WLAN test case include in this report**

#### 3.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

##### 3.2.1 Board

Board		
Software Version	Hardware Version	Description
V100R001USAC189B129	HU1Y340U081M	Main board of Mobile Phone

##### 3.2.2 Sub-Assembly

Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
AC/DC Adapter	HW-05010 0U2W	Huawei Technologies Co., Ltd.	Input voltage: ~100-240V 50/60Hz 0.2A Output voltage: 5V $\overline{\overline{\overline{\quad}}}$ 1A Rate power: 5W
AC/DC Adapter	HW-05010 0E2W	Huawei Technologies Co., Ltd.	Input voltage: ~100-240V 50/60Hz 0.2A Output voltage: 5V $\overline{\overline{\overline{\quad}}}$ 1A Rate power: 5W
AC/DC Adapter	HW-05010 0Z2W	Huawei Technologies Co., Ltd.	Input voltage: ~100-240V 50/60Hz 0.2A Output voltage: 5V $\overline{\overline{\overline{\quad}}}$ 1A Rate power: 5W
AC/DC Adapter	SC1418H WD	Huawei Technologies Co., Ltd.	Input voltage: ~100-240V 50/60Hz 0.2A Output voltage: 5V $\overline{\overline{\overline{\quad}}}$ 1A Rate power: 5W



Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
Rechargeable Li-ion Battery	HB5V1HV	Huawei Technologies Co., Ltd.	Rated capacity: 1950mAh Nominal Voltage: $\text{---} +3.8\text{V}$ Charging Voltage: $\text{---} +4.35\text{V}$



### 3.3 Technical Description

Characteristics	Description		
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11b (20 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11g (20 MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n (20 MHz channel bandwidth),		
TX/RX Operating Range	2412-2462 MHz band	$f_c = 2407 \text{ MHz} + N * 5 \text{ MHz}$ , where: - $f_c$ = "Operating Frequency" in MHz, - $N$ = "Channel Number" with the range from 1 to 11 for the 20 MHz channel bandwidth.	
Data Rate	802.11b	1 Mbps, 2 Mbps, 5.5 Mbps, 11 Mbps	
	802.11g	6 Mbps, 9 Mbps, 12 Mbps, 18 Mbps, 24 Mbps, 36 Mbps, 48 Mbps, 54 Mbps	
	802.11n (SISO)	MCS 0 to MCS 7	
Modulation Type	DBPSK/DQPSK/CCK (DSSS), BPSK/QPSK/16QAM/64QAM (OFDM).		
Emission Designator	8M97G1D (for 802.11b mode), 16M5G7D (for 802.11g mod), 17M7G7D (for 802.11n mode)		
TX Power Control	<input checked="" type="checkbox"/> Supported, <input type="checkbox"/> Not Supported		
Standby Mode	<input type="checkbox"/> Supported, <input checked="" type="checkbox"/> Not Supported		
Equipment Type	<input type="checkbox"/> Stand-alone equipment, <input type="checkbox"/> Plug-in radio device, <input checked="" type="checkbox"/> Combined equipment		
Antenna	Description	Isotropic Antenna	
	Type	<input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated	
	Ports	<input checked="" type="checkbox"/> Ant 1, <input type="checkbox"/> Ant 2, <input type="checkbox"/> Ant 3	
	Smart System	<input checked="" type="checkbox"/> SISO (for 802.11b/g/n), <input type="checkbox"/> MIMO (for 802.11n): 2 Tx & 2 Rx, <input type="checkbox"/> Diversity (for 802.11b/g) :        Tx        Rx	
	Gain	-0.8 dBi (per antenna port, max.)	
	Remark	When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.	
Power Supply	Type	<input checked="" type="checkbox"/> AC/DC Adapter	<input type="checkbox"/> PoE: <input type="checkbox"/> Other:



## 4 General Test Conditions / Configurations

### 4.1 Test Modes

NOTE: Worst cases for each IEEE 802.11 mode are selected to perform tests.

Test Mode	Test Modes Description
11B	IEEE 802.11b with data rate of 1 Mbps using SISO mode.
11G	IEEE 802.11g with data rate of 6 Mbps using SISO mode.
11N20	IEEE 802.11n with data rate of MCS0 and bandwidth of 20 MHz using SISO mode.



## 4.2 EUT Configurations

### 4.2.1 General Configurations

Configuration	Description
Test Antenna Ports	Until otherwise specified, <ul style="list-style-type: none"><li>- All TX tests are performed at all TX antenna ports of the EUT, and</li><li>- All RX tests are performed at all RX antenna ports of the EUT.</li></ul>
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

### 4.2.2 Customized Configurations

Test Mode	RF Ch.	Antenna Port	TX Freq. [MHz]	RX Freq. [MHz]	Ch. BW [MHz]	Power Conf., per Port
11B	L	Ant 1	Ch No. 1 / 2412 MHz	---	20	15
11B	M	Ant 1	Ch No. 6 / 2437 MHz	---	20	15
11B	H	Ant 1	Ch No. 11 / 2462 MHz	---	20	15
11G	L	Ant 1	Ch No. 1 / 2412 MHz	---	20	13
11G	M	Ant 1	Ch No. 6 / 2437 MHz	---	20	13
11G	H	Ant 1	Ch No. 11 / 2462 MHz	---	20	13
11N20	L	Ant 1	Ch No. 1 / 2412 MHz	---	20	10
11N20	M	Ant 1	Ch No. 6 / 2437 MHz	---	20	10
11N20	H	Ant 1	Ch No. 11 / 2462 MHz	---	20	10



### 4.3 Test Environments

NOTE: The values used in the test report may be stringent than the declared.

Environment Parameter	Selected Values During Tests		
	Temperature	Voltage	Relative Humidity
NTNV	Ambient	3.8 VDC	Ambient

### 4.4 Antenna requirements

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

The antennas of the UMTS Smart Phone are **permanently attached**.  
There are no provisions for connection to an external antenna.

**Conclusion:**

The **UMTS Smart Phone FCC ID: QISY340-U081** unit complies with the requirement of §15.203.

**Ch. Frequency (MHz)**


Ch.	Frequency (MHz)
<b>01</b>	<b>2412</b>
.	.
.	.
<b>06</b>	<b>2437</b>
.	.
.	.
<b>11</b>	<b>2462</b>

**Frequency/ Channel Operations**

## 4.5 Test Setups

### 4.5.1 Test Setup 1


The WLAN component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

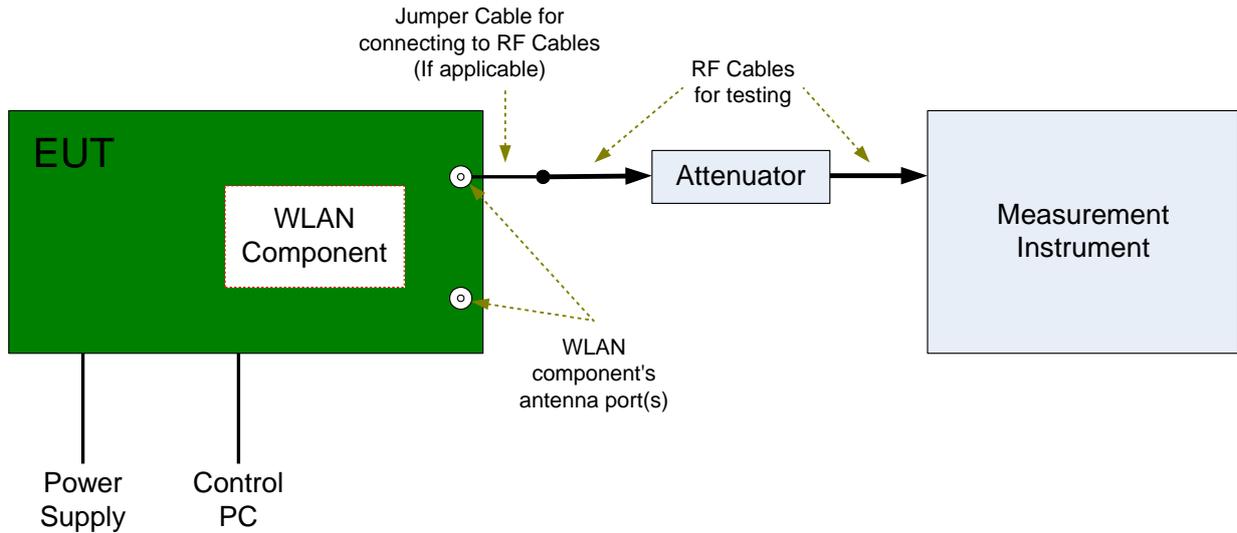


### 4.5.2 Test Setup 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3m. The setup is according to ANSI C63.4 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

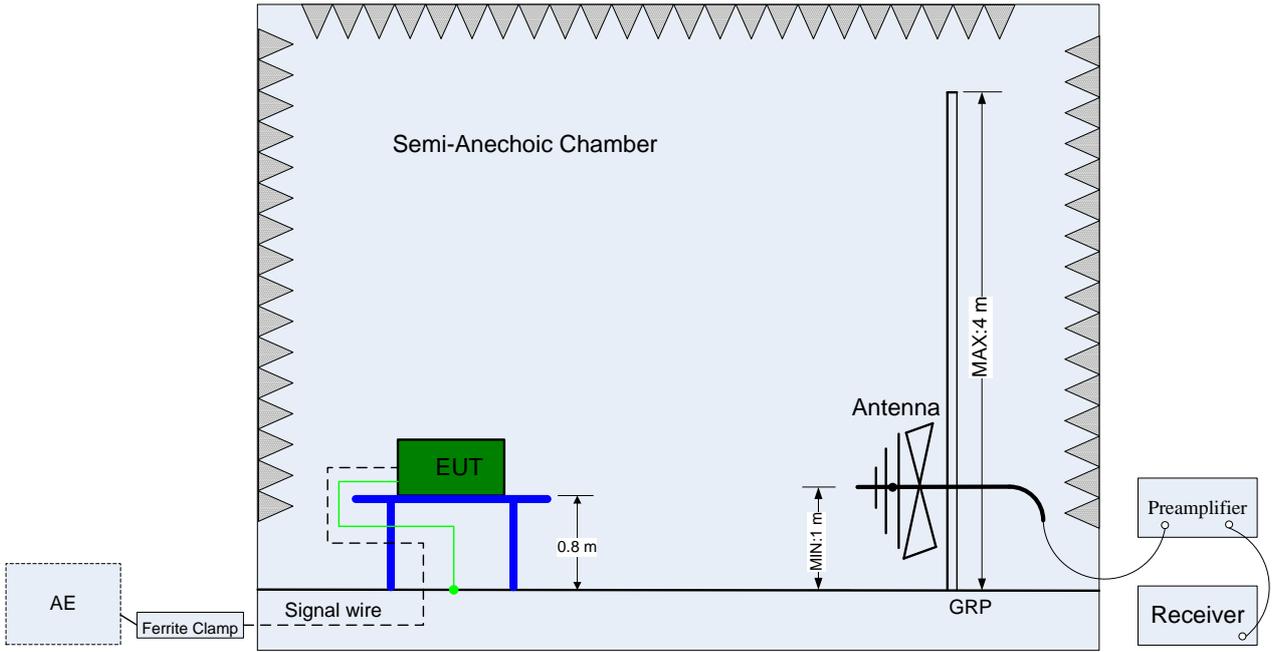

(Below 1 GHz)

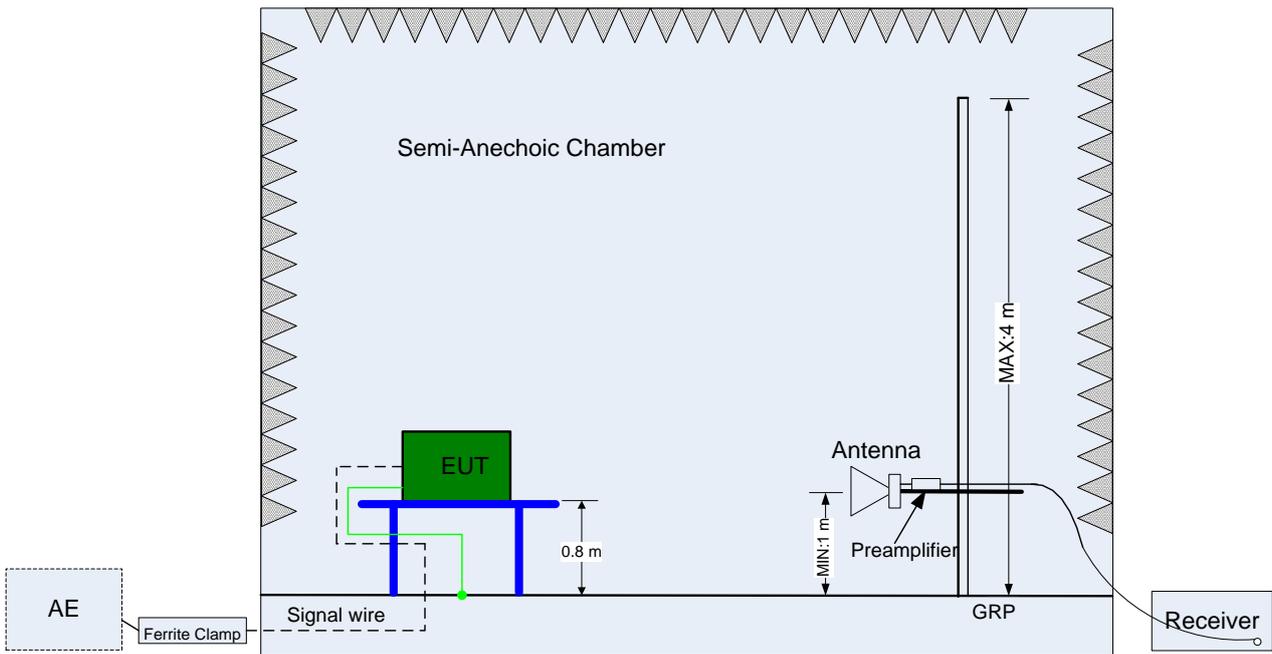


(Above 1 GHz)

### 4.5.3 Test Setup 3

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

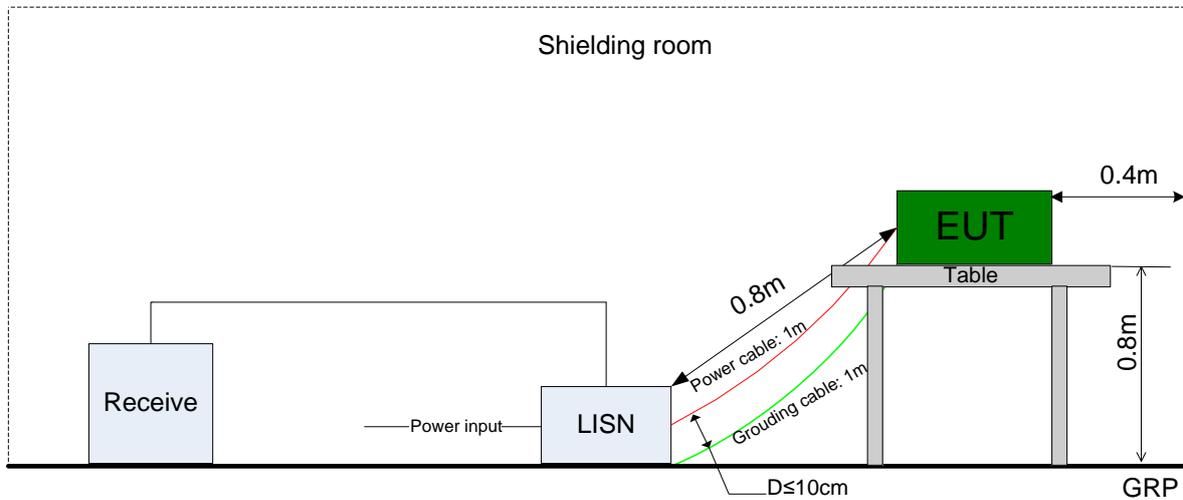



#### 4.6 Test Conditions

Test Case	Test Conditions	
	Configuration	Description
DTS (6 dB) Bandwidth	Measurement Method	FCC KDB 558074 §8.2 Option 2.
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H
Occupied Bandwidth (Only for IC requirement)	Measurement Method	RSS-Gen, 4.6.1.
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H
Maximum Peak Conducted Output Power	Measurement Method	FCC KDB 558074 §9.1 .2 (integrated band power method).
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H
Maximum Power Spectral Density Level	Measurement Method	FCC KDB 558074 §10.2 (peak PSD).
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H
Band Edges Compliance	Measurement Method	FCC KDB 558074 §13.0.
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_H 11G_L, 11G_H 11N20_L, 11 N20_H
Unwanted Emissions into Non-Restricted Frequency Bands	Measurement Method	FCC KDB 558074 §11.0
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H
Unwanted Emissions into	Measurement Method	ANSI C63.10; FCC KDB 558074 §12.1, Radiated
	Test Environment	NTNV



Test Case	Test Conditions	
	Configuration	Description
Restricted Frequency Bands (Radiated)	Test Setup	Test Setup 2
	EUT Placement	<input type="checkbox"/> Flatwise, <input type="checkbox"/> Upright, <input type="checkbox"/> Hung
	EUT Configuration	(1) 30 MHz to 1 GHz: 11B_L (Worst Conf.). (2) 1 GHz to 3 GHz: 11B_L, 11B_H 11G_L, 11G_H 11N20_L, 11 N20_H (3) 3 GHz to 18 GHz: 11B_L (Worse Conf.), 11B_H (Worse Conf.). (4) 18 GHz to 26.5 GHz: 11B_L (Worse Conf.), 11B_H (Worse Conf.).
AC Power Line Conducted Emissions	Measurement Method	AC mains conducted.
	Test Environment	NTNV
	Test Setup	Test Setup 3
	EUT Configuration	11B_L(Worst Conf.).

**5 Main Test Instruments**

Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal- Due
Power supply	KEITHLEY	2303	1288003	2012-11-19	2014-11-18
Spectrum Analyzer	Agilent	E4440A	MY48250119	2012-08-20	2013-08-19
Signal Analyzer	R&S	FSQ31	200021	2012-11-09	2013-11-08
Spectrum Analyzer	Agilent	N9030A	MY49431698	2012-11-09	2013-11-08
Temperature Chamber	WEISS	WKL64	56246002940010	2013-01-29	2014-01-28
Signal generator	Agilent	E8257D	MY49281095	2012-09-14	2013-09-13
Spectrum analyzer	R&S	FSU3	200474	2013-01-29	2014-01-28
Test receiver	R&S	ESU26	100150	2013-05-15	2014-05-14
Spectrum analyzer	R&S	FSU43	100144	2013-01-29	2014-01-28
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	2013-02-02	2014-02-01
Trilog Broadband Antenna (30M~3GHz)	SCHWARZB ECK	VULB 9163	9163-521	2011-12-09	2013-12-08
Pyramidal Horn Antenna(18GHz-26-5GHz)	ETS-Lindgren	3160-09	00091989	2011-10-20	2013-10-19

END



# Appendix for Test report

## Appendix A: DTS (6 dB) Bandwidth

In this document, the "DTS6dBBW" refers to the measured "DTS (6 dB) Bandwidth" value. In this Appendix, the "fc(DTS6dBBW)" refers to the centre of the measured "DTS6dBBW". The introduction of the "fc(DTS6dBBW)" is due to that other measurements use it as the spectrum analyzer setting.


For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain, and used as respective results for each chain.

### Part I - Test Results


Test Mode	Test Channel	Frequency[MHz]	DTS6dBBW[MHz]	Verdict
11B	L	2412	8.18	pass
11B	M	2437	8.97	pass
11B	H	2462	8.80	pass
11G	L	2412	16.54	pass
11G	M	2437	16.53	pass
11G	H	2462	16.51	pass
11N20	L	2412	17.62	pass
11N20	M	2437	17.66	pass
11N20	H	2462	17.72	pass

## Part II - Test Plots


### 2.1 11B\_L

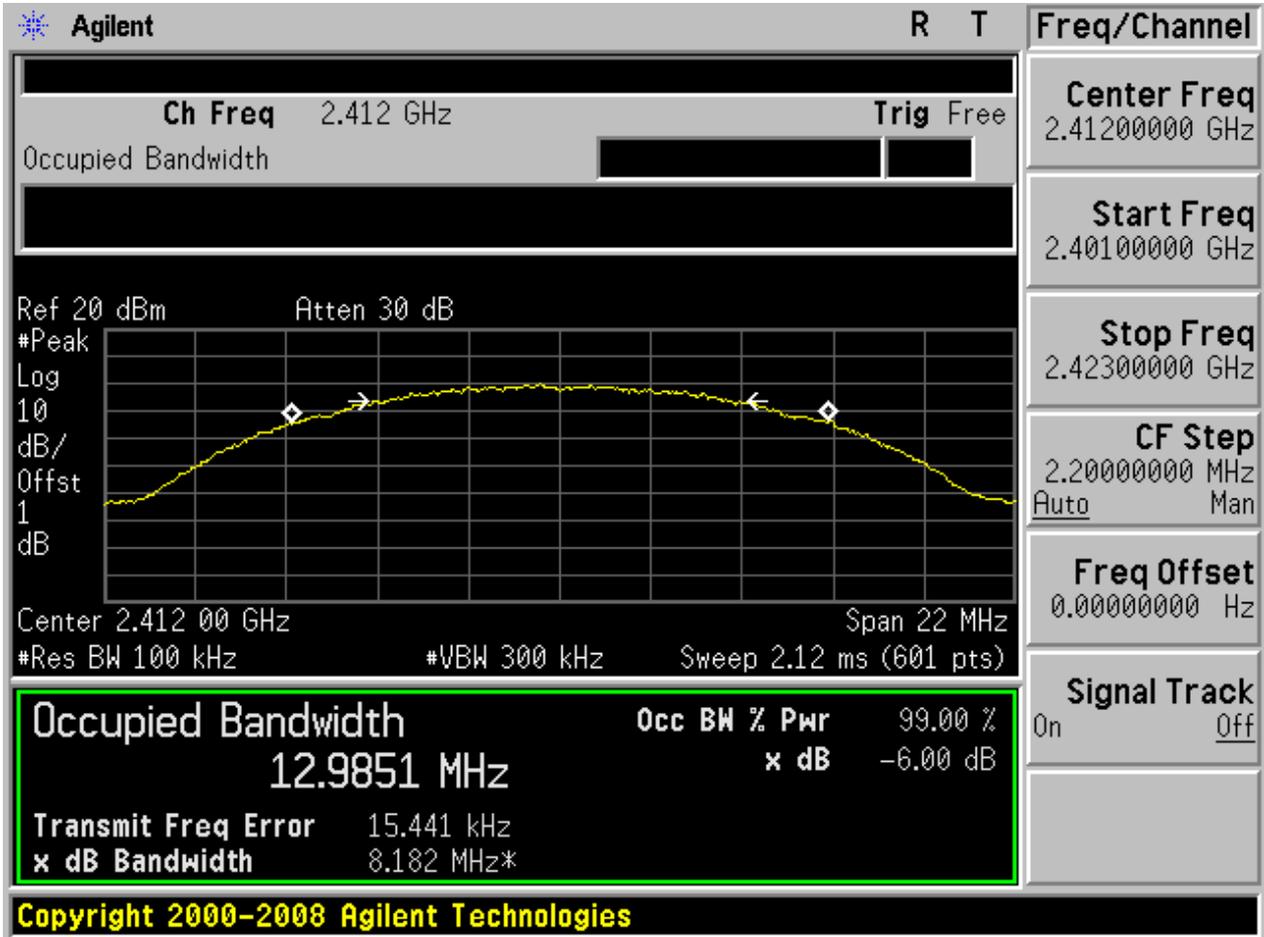

2.2 11B\_M

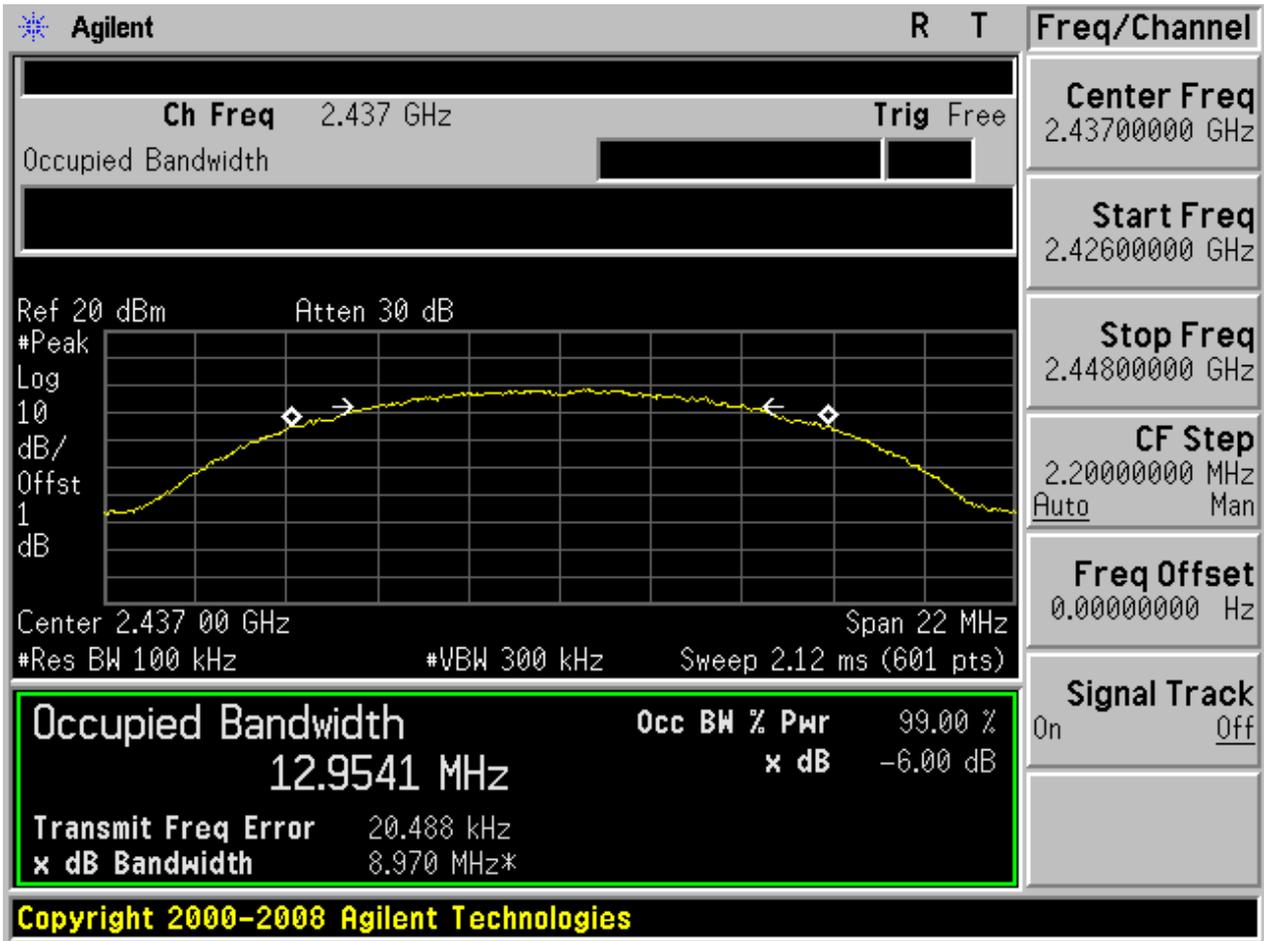

## 2.3 11B\_H

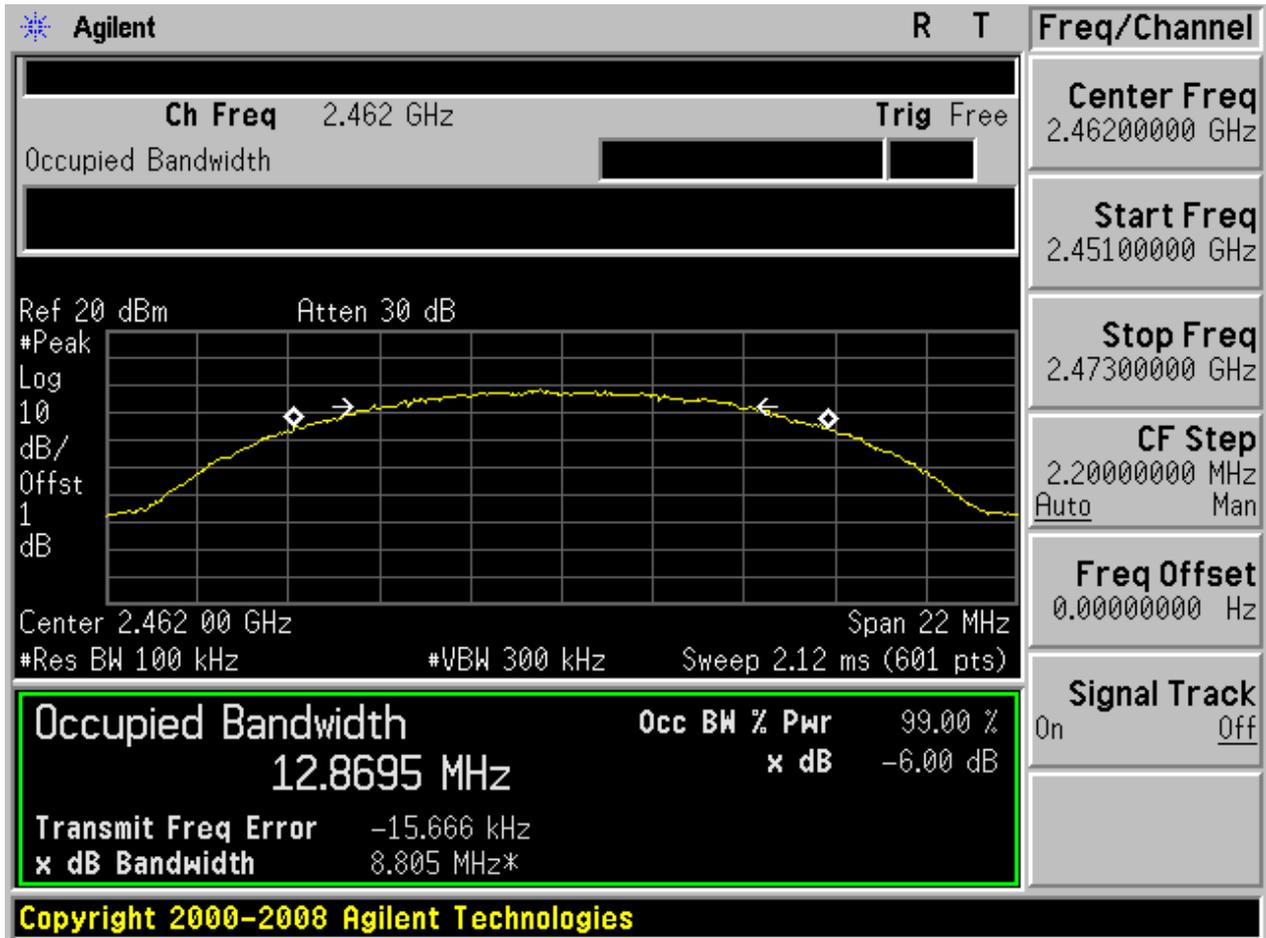



### 2.4 11G\_L

Agilent		R	T	Freq/Channel	
Ch Freq 2.412 GHz		Trig Free		Center Freq 2.41200000 GHz	
Occupied Bandwidth				Start Freq 2.40100000 GHz	
Ref 20 dBm		Atten 30 dB		Stop Freq 2.42300000 GHz	
				CF Step 2.20000000 MHz Auto Man	
Center 2.412 00 GHz		Span 22 MHz		Freq Offset 0.00000000 Hz	
#Res BW 100 kHz		#VBW 300 kHz		Sweep 2.12 ms (601 pts)	
<b>Occupied Bandwidth</b> <b>16.4274 MHz</b>		<b>Occ BW % Pwr</b> <b>99.00 %</b>		<b>Signal Track</b> On Off	
<b>Transmit Freq Error</b> <b>-3.488 kHz</b>		<b>x dB</b> <b>-6.00 dB</b>			
<b>x dB Bandwidth</b> <b>16.538 MHz*</b>					
Copyright 2000-2008 Agilent Technologies					



### 2.5 11G\_M

Agilent		R	T	Freq/Channel	
Ch Freq 2.437 GHz		Trig Free		Center Freq 2.43700000 GHz	
Occupied Bandwidth				Start Freq 2.42600000 GHz	
Ref 20 dBm		Atten 30 dB		Stop Freq 2.44800000 GHz	
				CF Step 2.20000000 MHz Auto Man	
Center 2.437 00 GHz		Span 22 MHz		Freq Offset 0.00000000 Hz	
#Res BW 100 kHz		#VBW 300 kHz		Signal Track On Off	
Sweep 2.12 ms (601 pts)					
<b>Occupied Bandwidth</b> <b>16.4247 MHz</b>		<b>Occ BW % Pwr</b> <b>99.00 %</b>			
<b>Transmit Freq Error</b> <b>8.560 kHz</b>		<b>x dB</b> <b>-6.00 dB</b>			
<b>x dB Bandwidth</b> <b>16.534 MHz*</b>					
Copyright 2000-2008 Agilent Technologies					



### 2.6 11G\_H


Agilent		R	T	Freq/Channel	
Ch Freq 2.462 GHz		Trig Free		Center Freq 2.46200000 GHz	
Occupied Bandwidth				Start Freq 2.45100000 GHz	
Ref 20 dBm		Atten 30 dB		Stop Freq 2.47300000 GHz	
				CF Step 2.20000000 MHz Auto Man	
Center 2.462 00 GHz		Span 22 MHz		Freq Offset 0.00000000 Hz	
#Res BW 100 kHz		#VBW 300 kHz		Signal Track On Off	
Sweep 2.12 ms (601 pts)					
<b>Occupied Bandwidth</b> <b>16.4224 MHz</b>		<b>Occ BW % Pwr</b> <b>99.00 %</b>			
<b>Transmit Freq Error</b> <b>-2.144 kHz</b>		<b>x dB</b> <b>-6.00 dB</b>			
<b>x dB Bandwidth</b> <b>16.514 MHz*</b>					
Copyright 2000-2008 Agilent Technologies					




### 2.7 11N20\_L

Agilent		R	T	Freq/Channel	
Ch Freq 2.412 GHz		Trig Free		Center Freq 2.41200000 GHz	
Occupied Bandwidth				Start Freq 2.40100000 GHz	
Ref 20 dBm		Atten 30 dB		Stop Freq 2.42300000 GHz	
				CF Step 2.20000000 MHz Auto Man	
Center 2.412 00 GHz		Span 22 MHz		Freq Offset 0.00000000 Hz	
#Res BW 100 kHz		#VBW 300 kHz		Signal Track On Off	
Sweep 2.12 ms (601 pts)					
<b>Occupied Bandwidth</b> <b>17.5853 MHz</b>		<b>Occ BW % Pwr</b> <b>99.00 %</b>			
<b>Transmit Freq Error</b> <b>-10.882 kHz</b>		<b>x dB</b> <b>-6.00 dB</b>			
<b>x dB Bandwidth</b> <b>17.621 MHz*</b>					
Copyright 2000-2008 Agilent Technologies					

2.8 11N20\_M

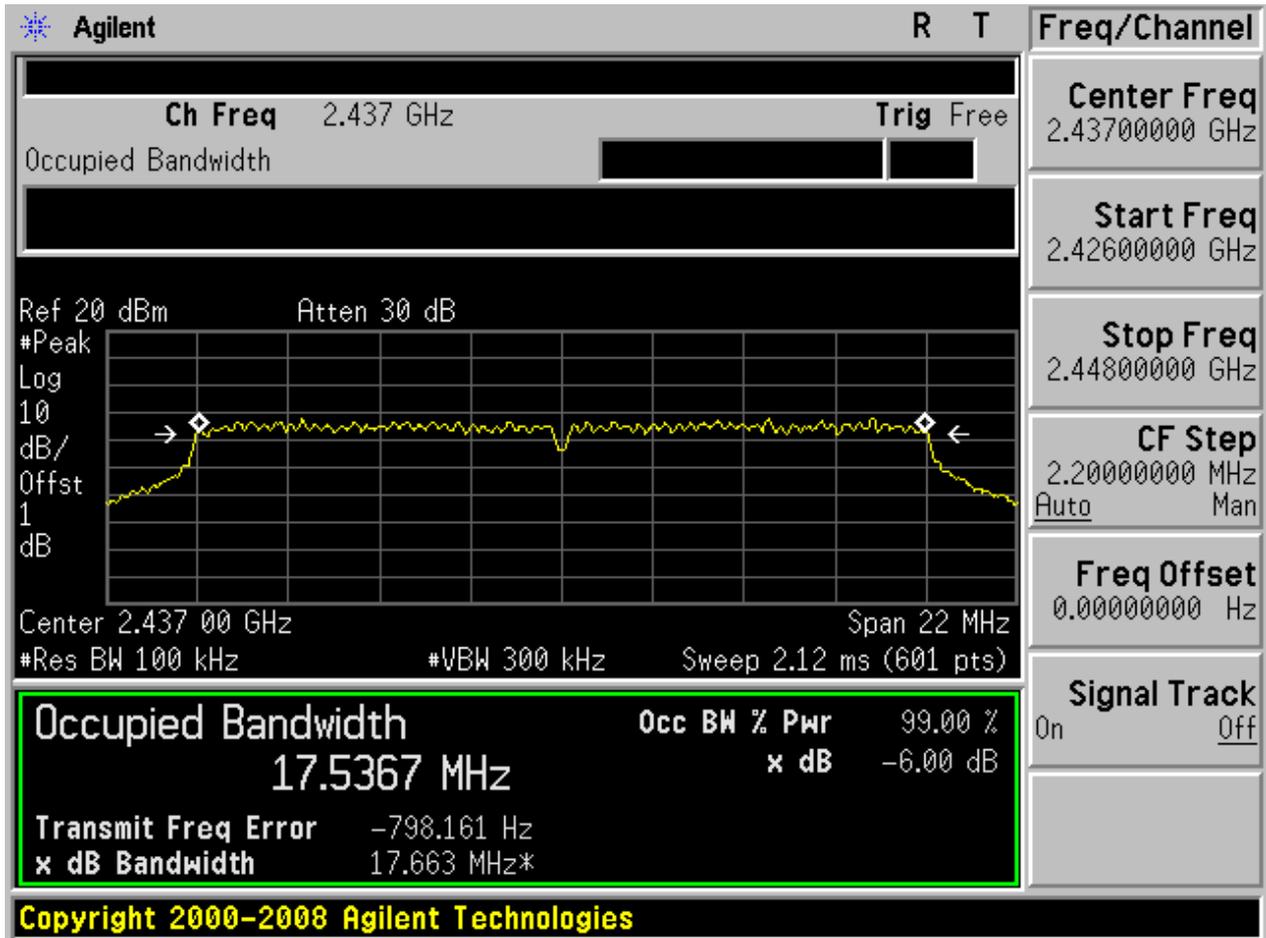

## 2.9 11N20\_H

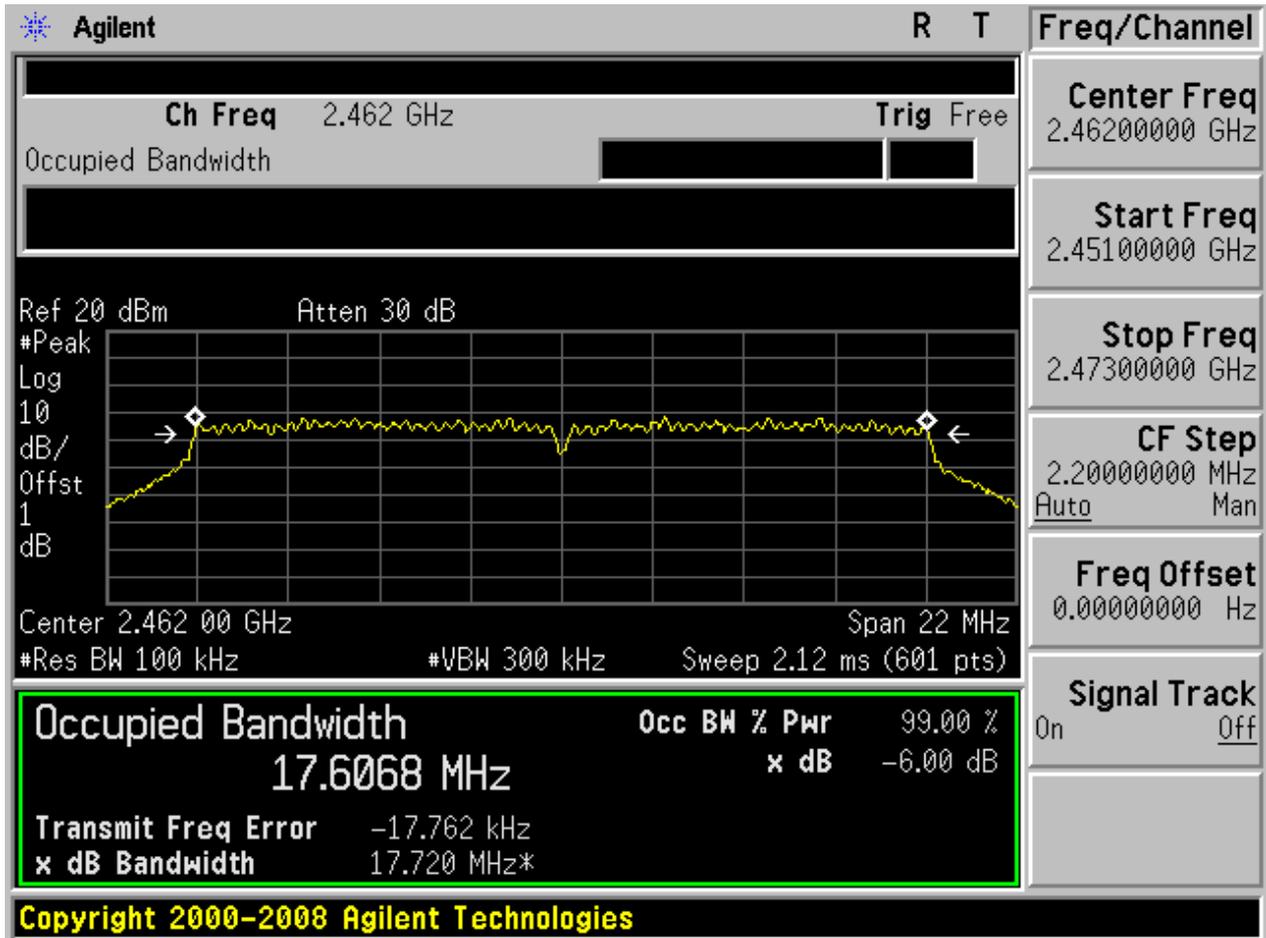

## Appendix B: Maximum Peak Conducted Output Power

### Test Results

Test Mode	Test Channel	Frequency[MHz]	Meas. Level (Cond.) [dBm]	Verdict
11B	L	2412	23.15	pass
11B	M	2437	22.32	pass
11B	H	2462	21.57	pass
11G	L	2412	22.01	pass
11G	M	2437	21.15	pass
11G	H	2462	20.71	pass
11N20	L	2412	19.42	pass
11N20	M	2437	19.21	pass
11N20	H	2462	18.82	pass




## Appendix C: Maximum Power Spectral Density Level

### Part I - Test Results


Test Mode	Test Channel	Frequency[MHz]	PD[MHz]	Verdict
11B	L	2412	-1.17	pass
11B	M	2437	-2.57	pass
11B	H	2462	-2.42	pass
11G	L	2412	-6.34	pass
11G	M	2437	-8.37	pass
11G	H	2462	-8.31	pass
11N20	L	2412	-9.26	pass
11N20	M	2437	-9.94	pass
11N20	H	2462	-10.54	pass

## Part II - Test Plots


### 2.1 11B\_L

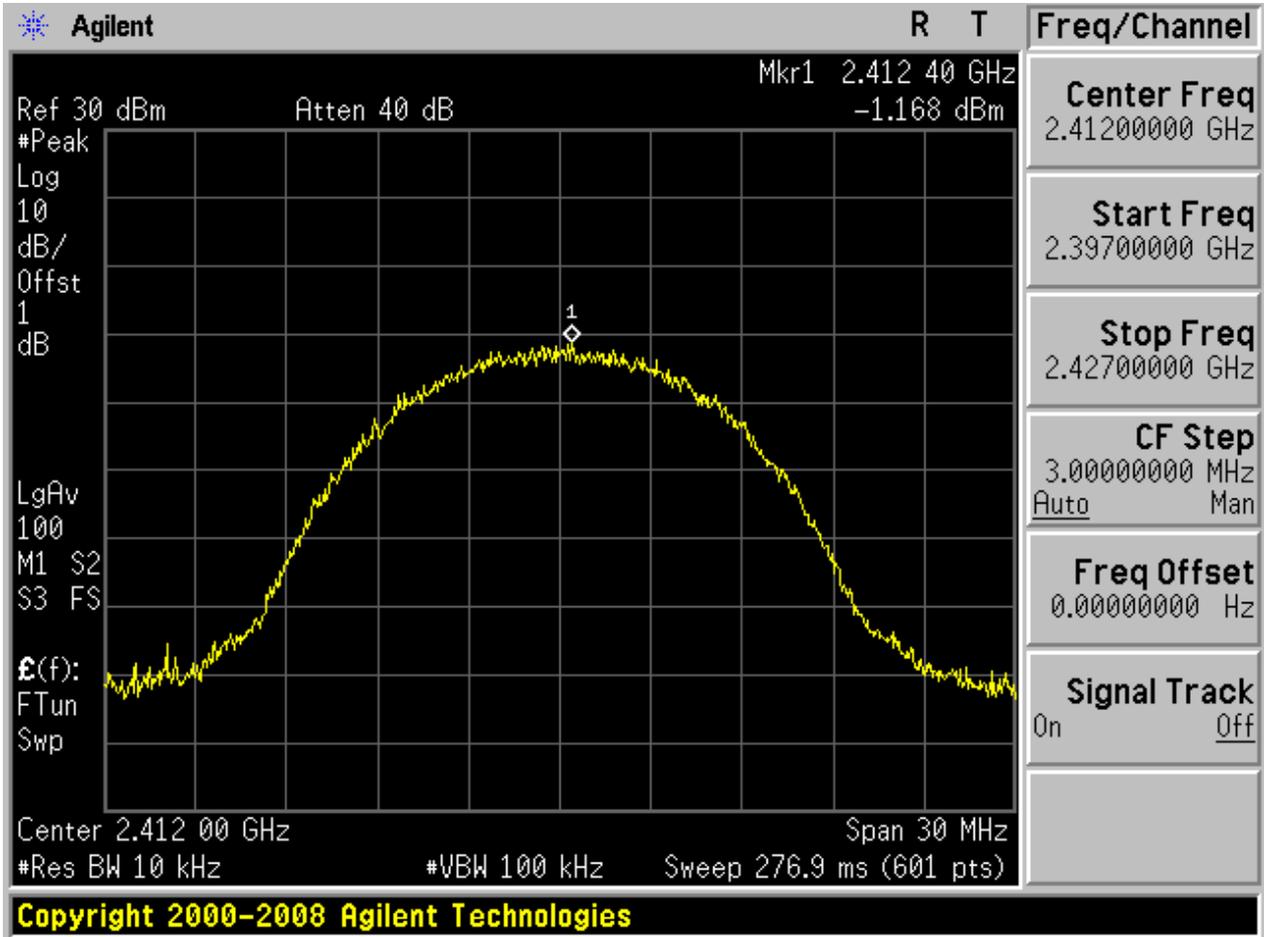


2.2 11B\_M

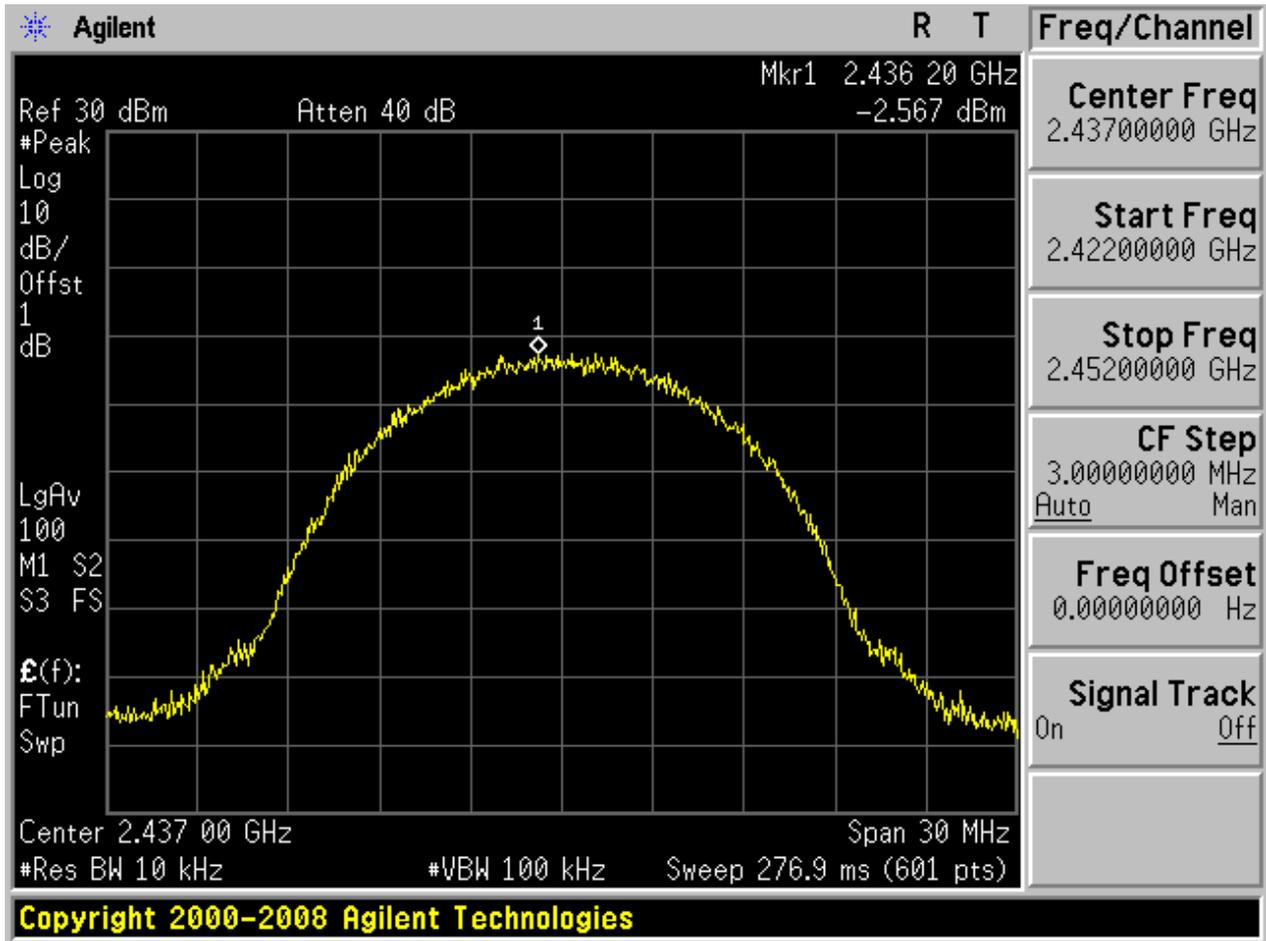


### 2.3 11B\_H

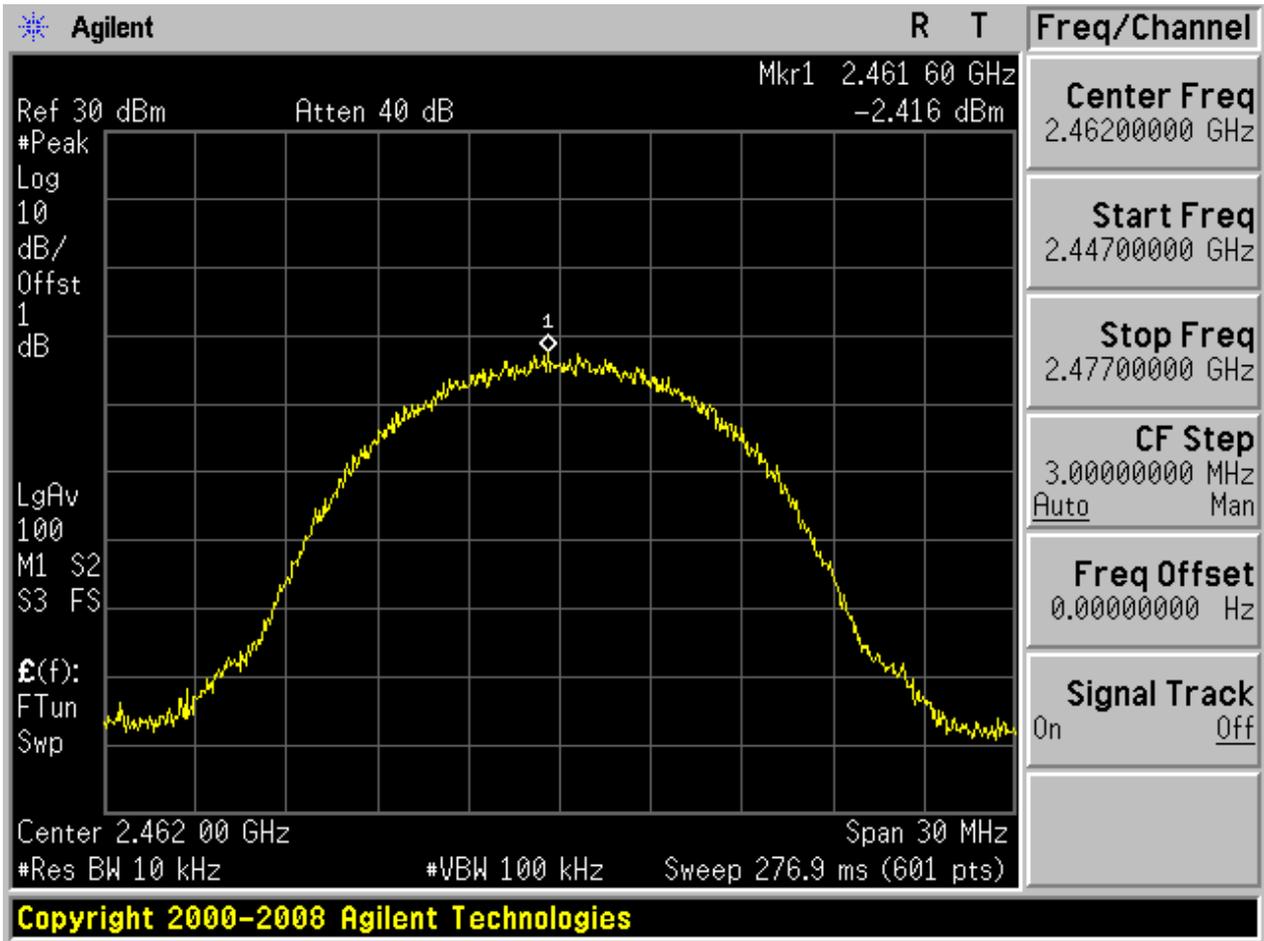


## 2.4 11G\_L

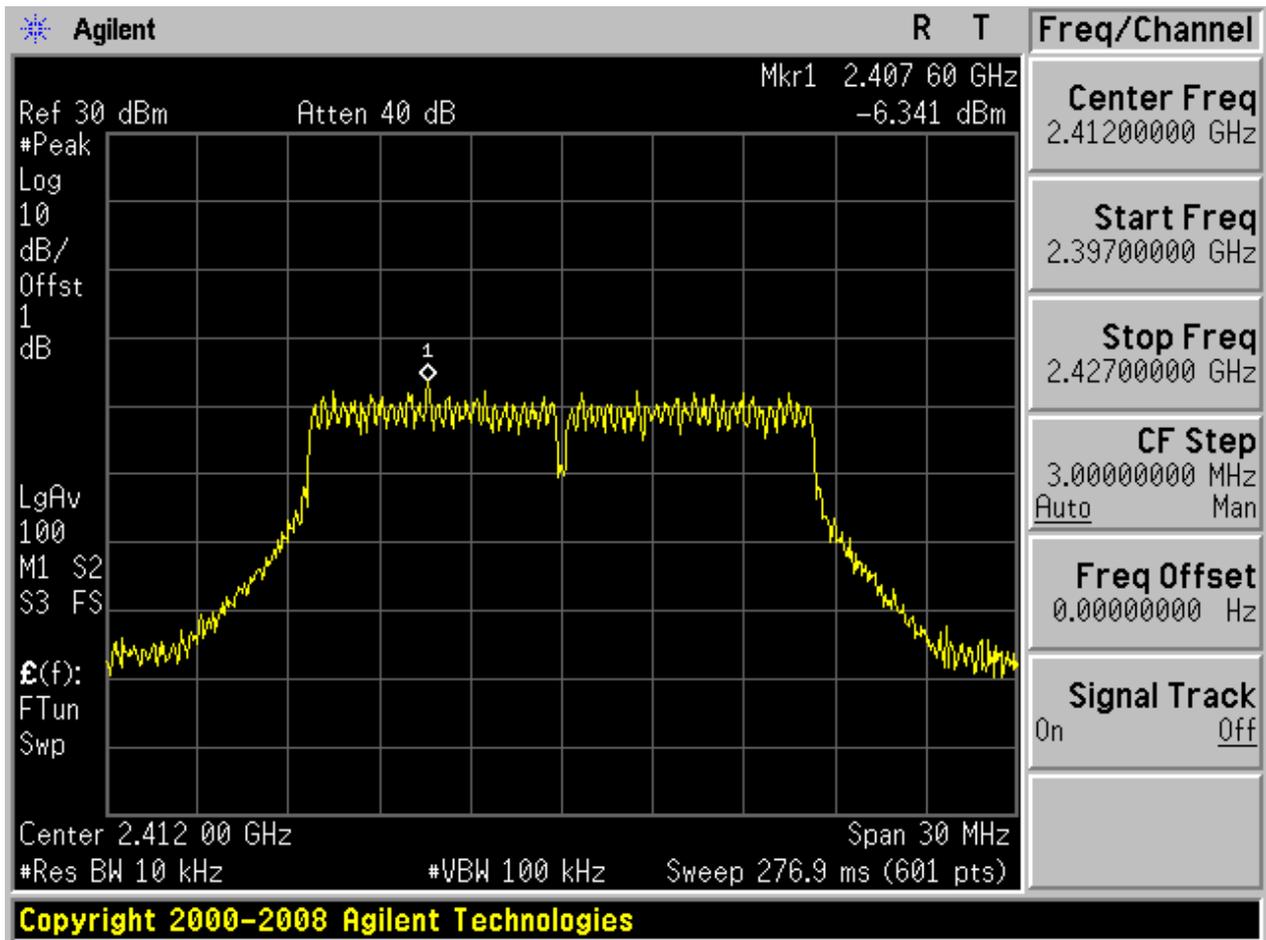


## 2.5 11G\_M

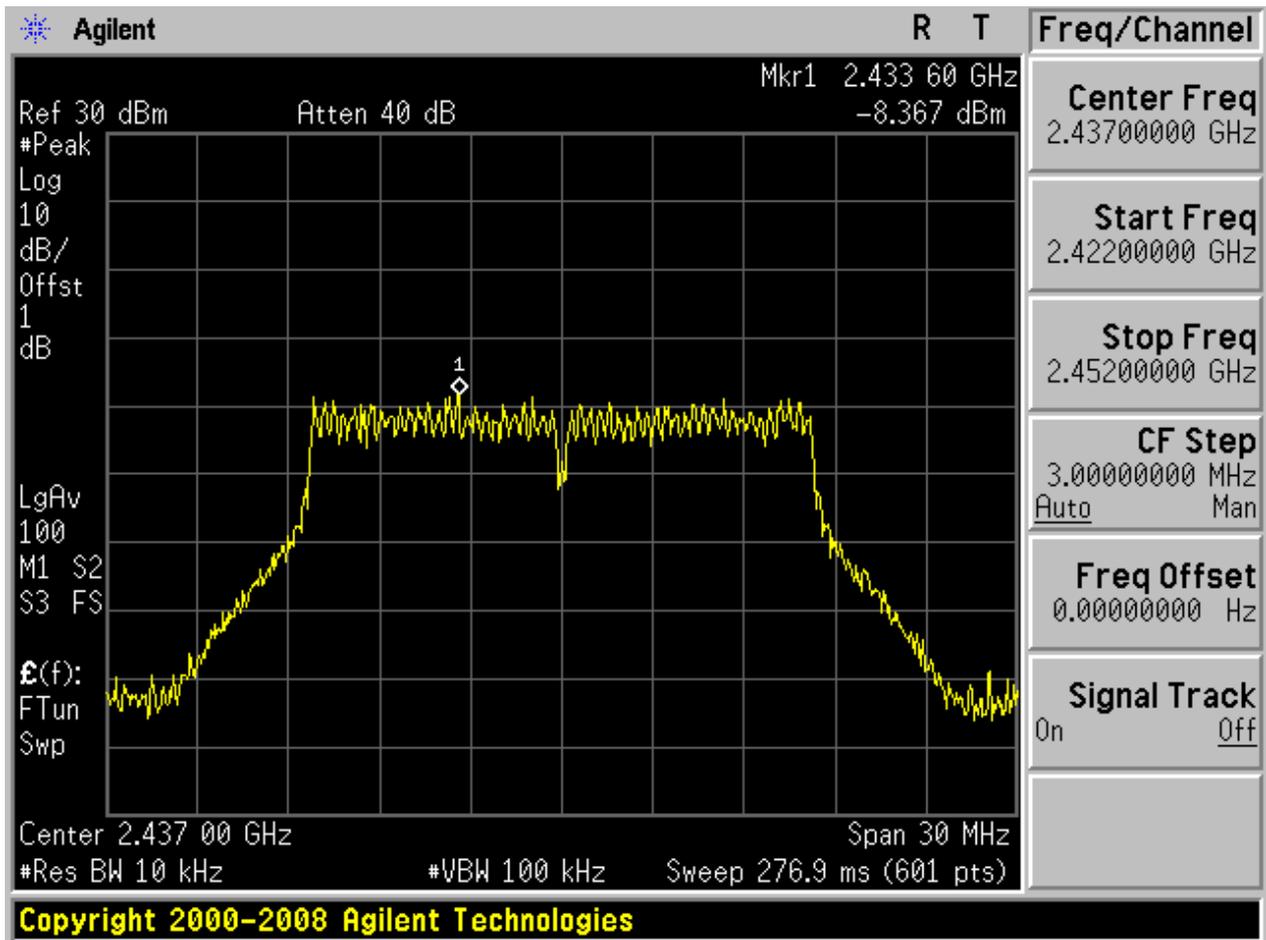


## 2.6 11G\_H

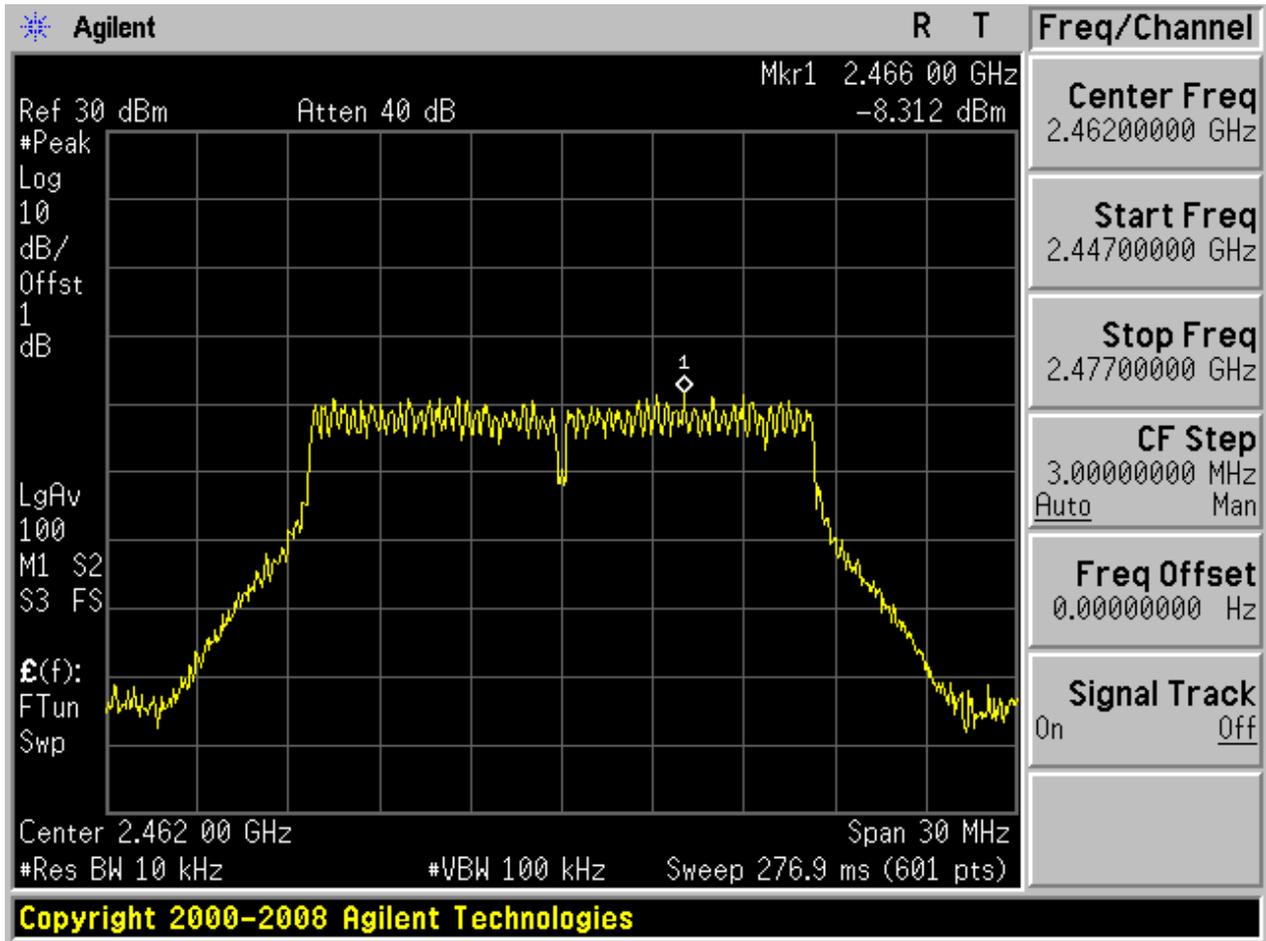

### 2.7 11N20\_L

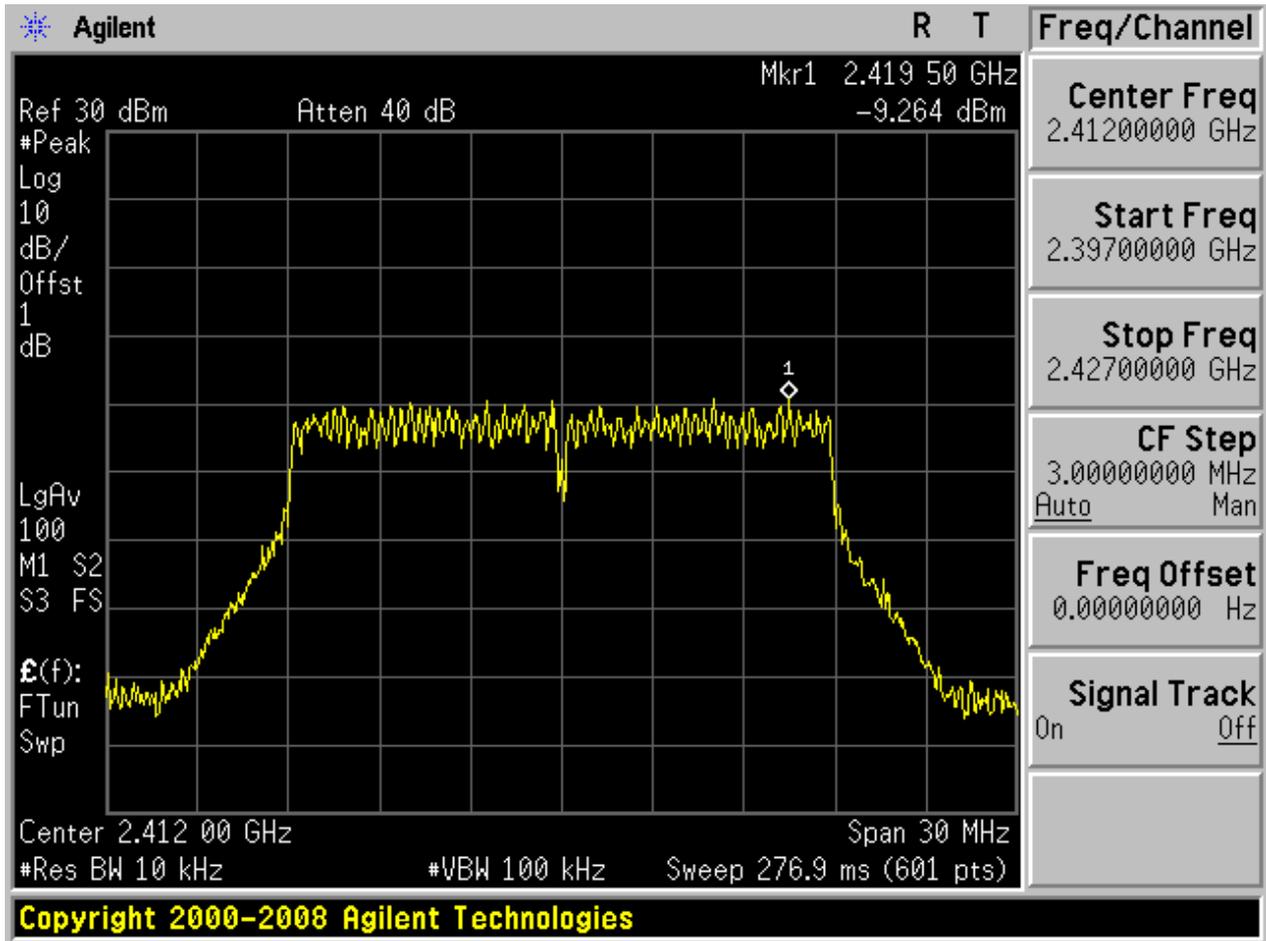


## 2.8 11N20\_M

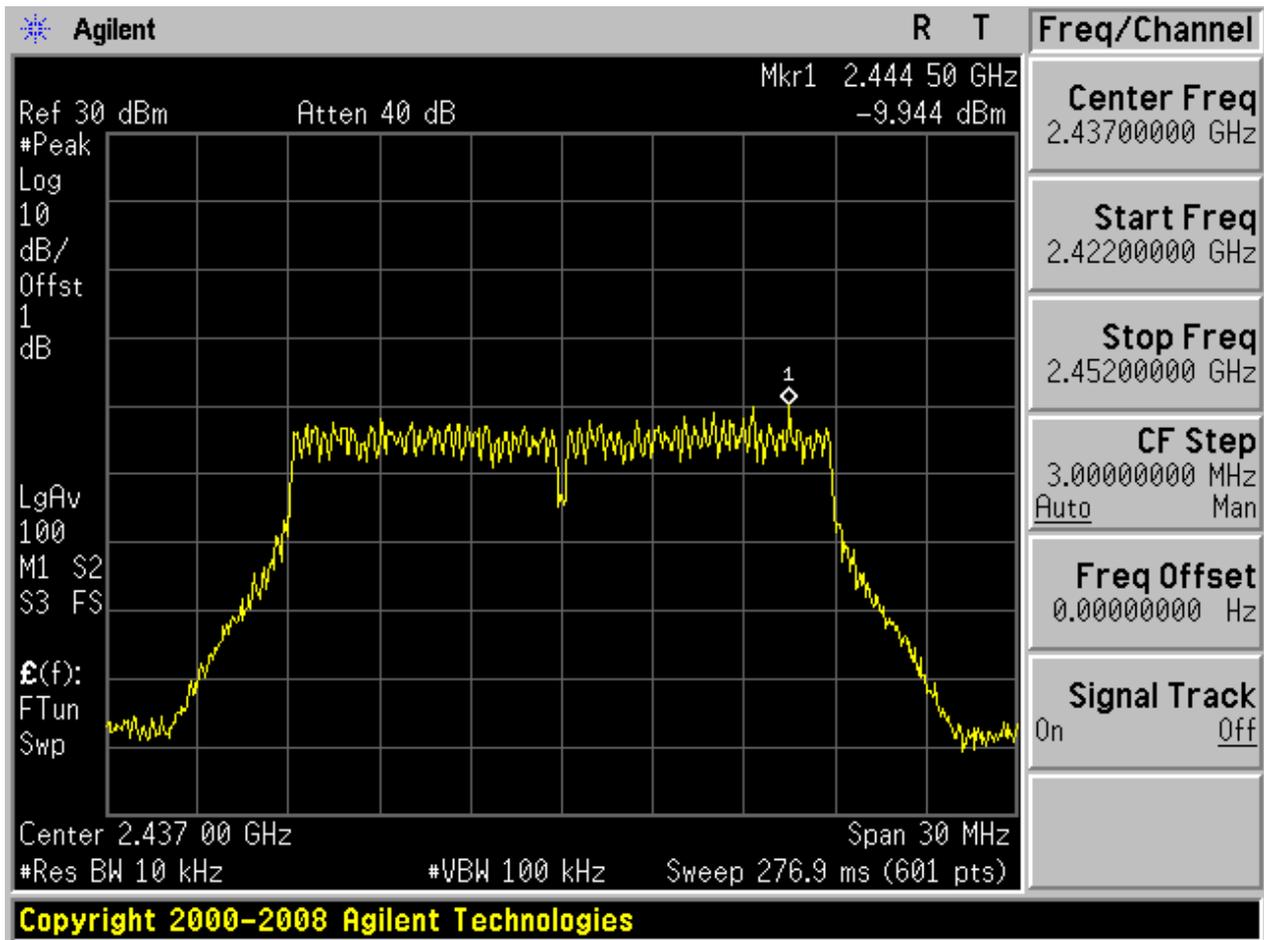



### 2.9 11N20\_H

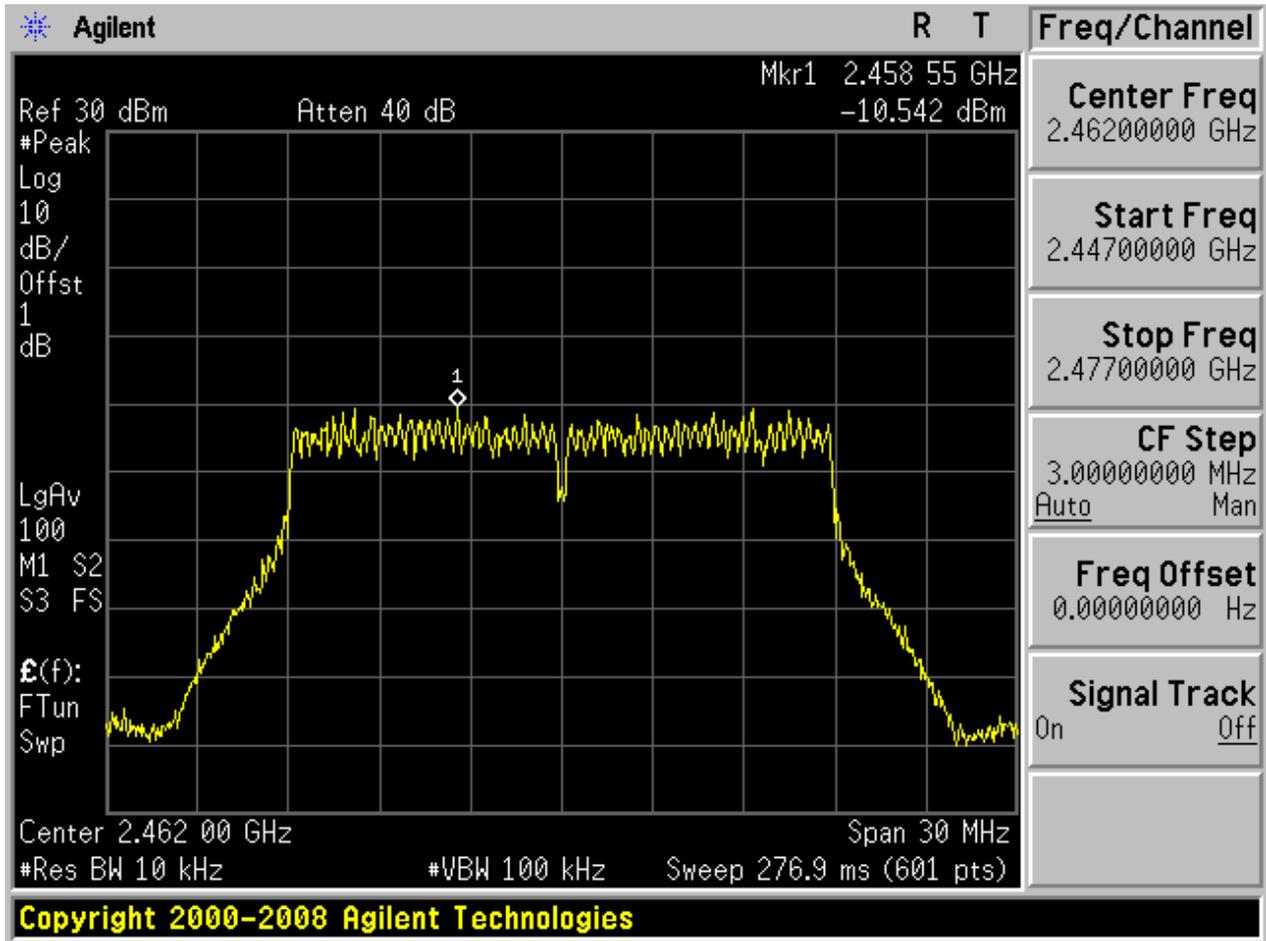




## Appendix D: Band Edges Compliance

### Part I - Test Results


Test Mode	Test Channel	Frequency[MHz]	Carrier Power[dBm]	Max.Spurious Level[dBm]	Verdict
11B	L	2412	6.63	-37.69	pass
11B	H	2462	5.90	-51.89	pass
11G	L	2412	1.53	-33.07	pass
11G	H	2462	0.35	-52.21	pass
11N20	L	2412	-0.41	-39.79	pass
11N20	H	2462	-0.55	-53.89	pass

## Part II - Test Plots


### 2.1 11B\_L

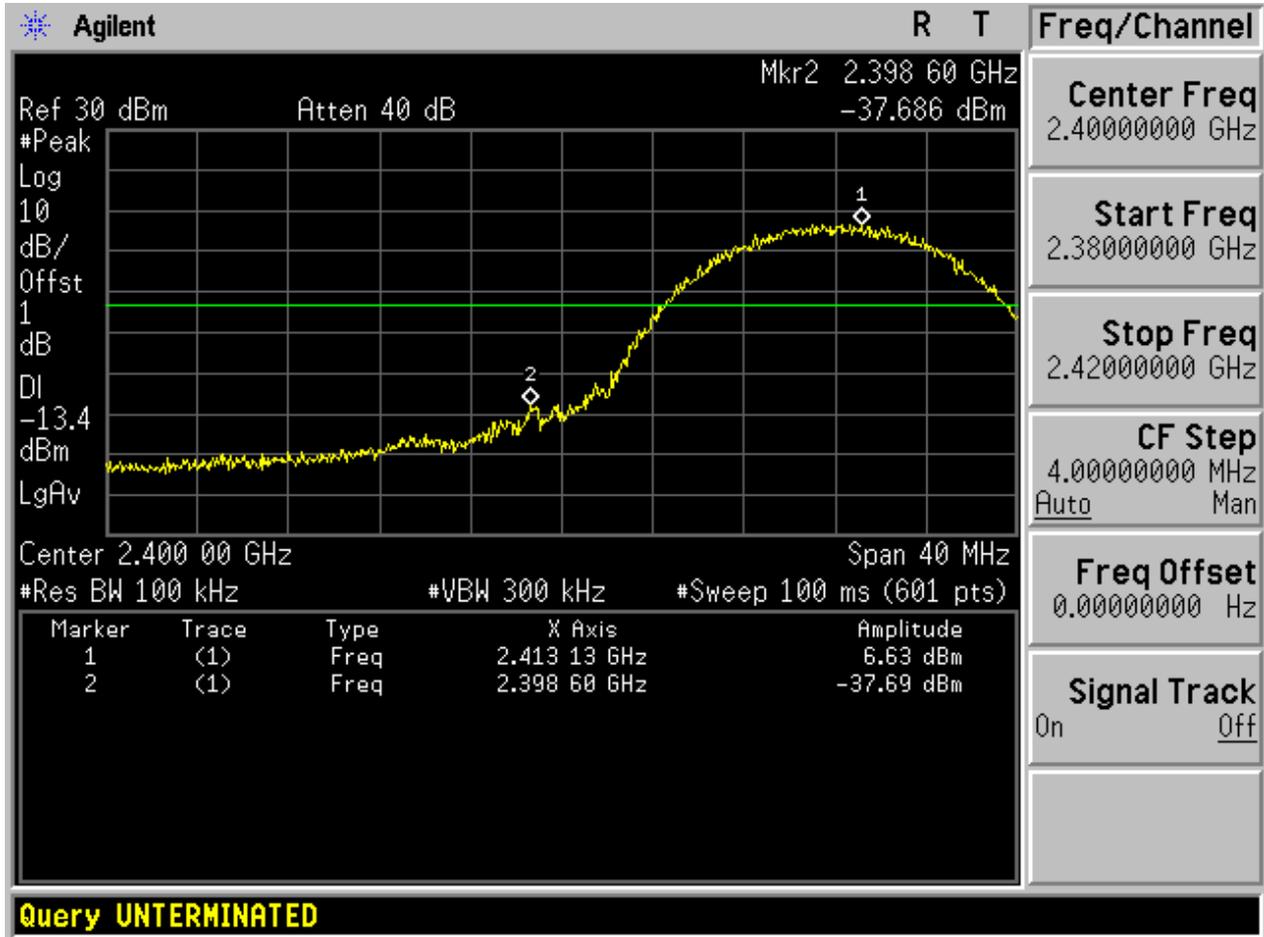


## 2.2 11B\_H

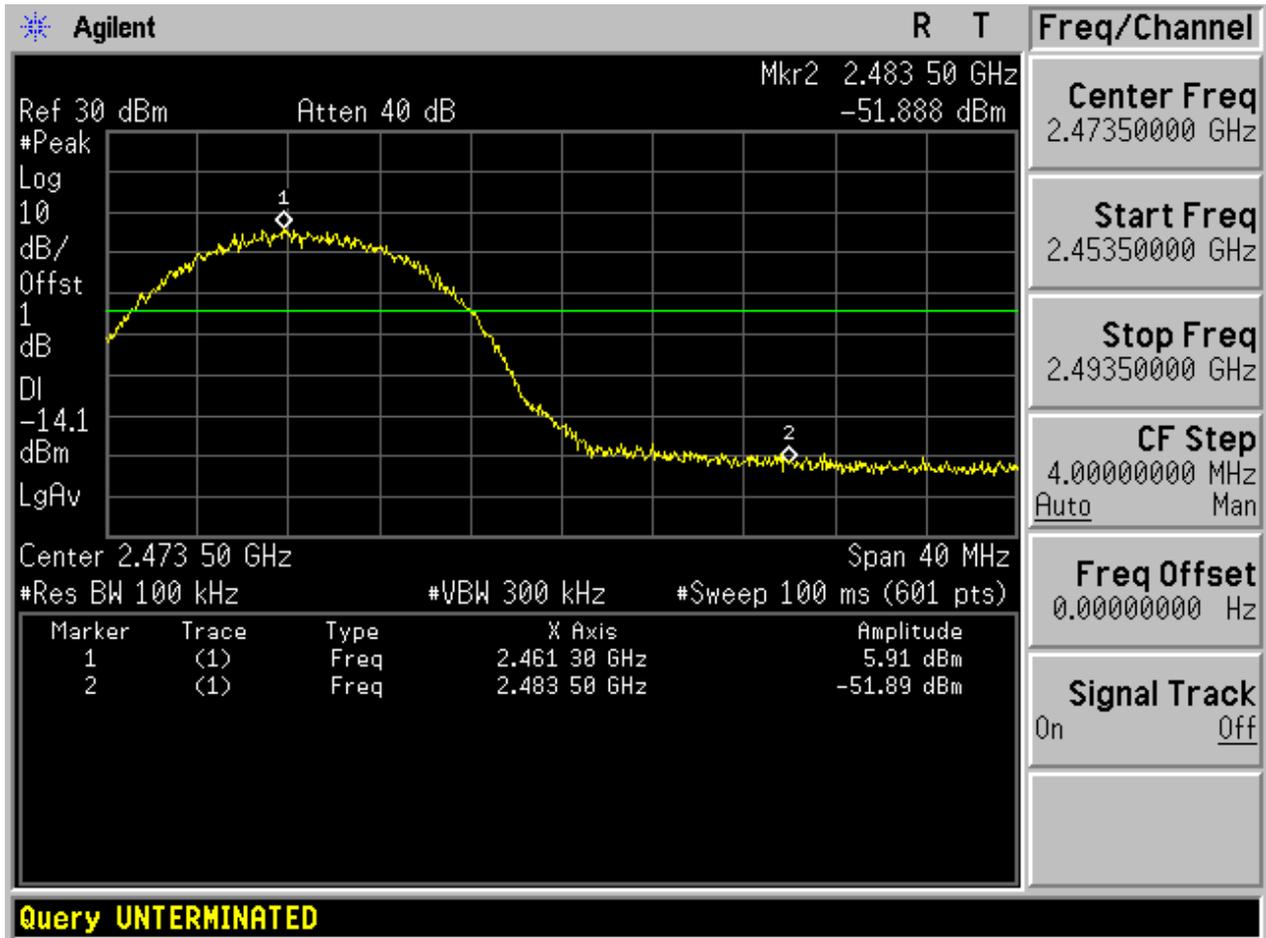


## 2.3 11G\_L

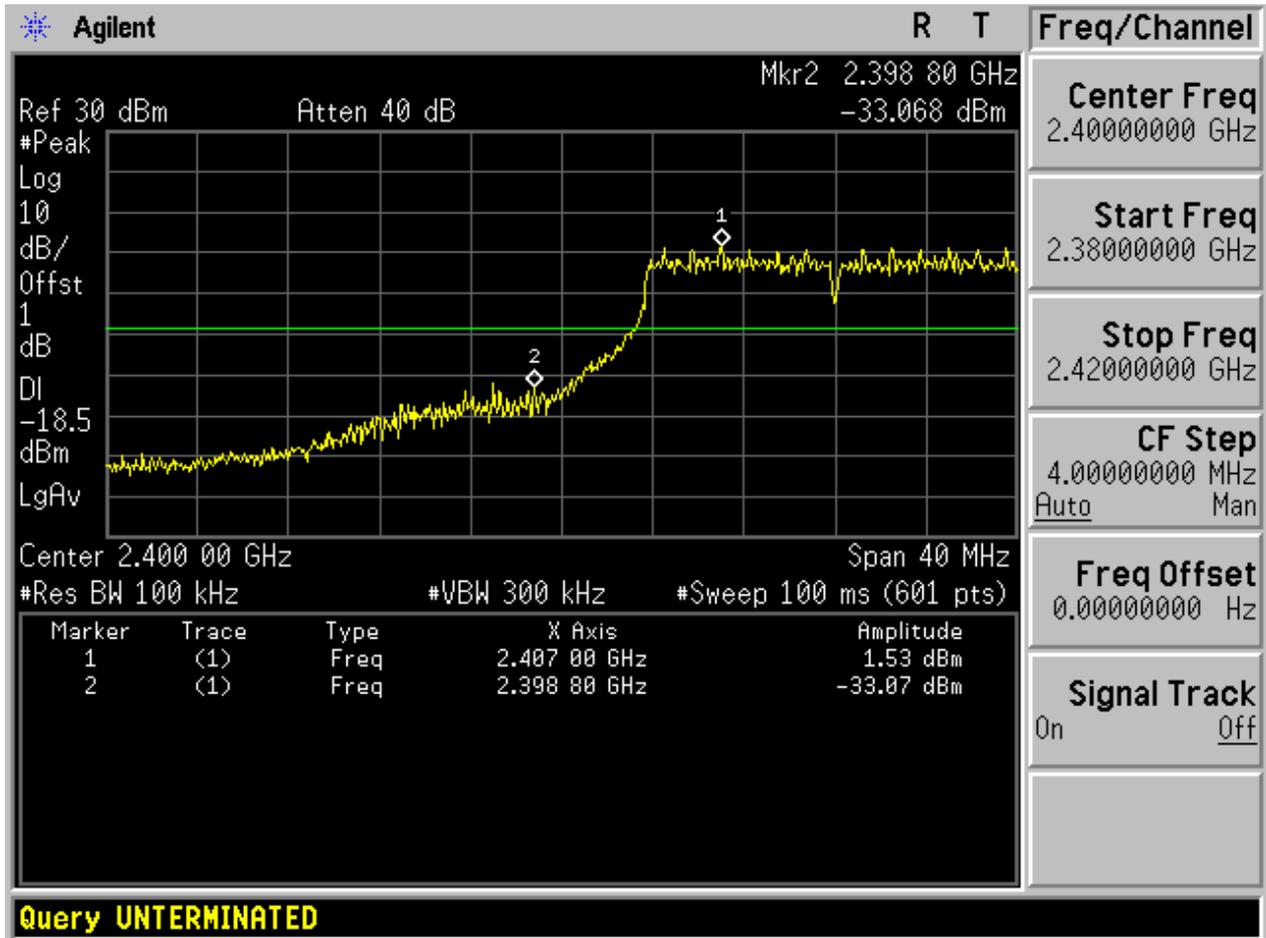


## 2.4 11G\_H

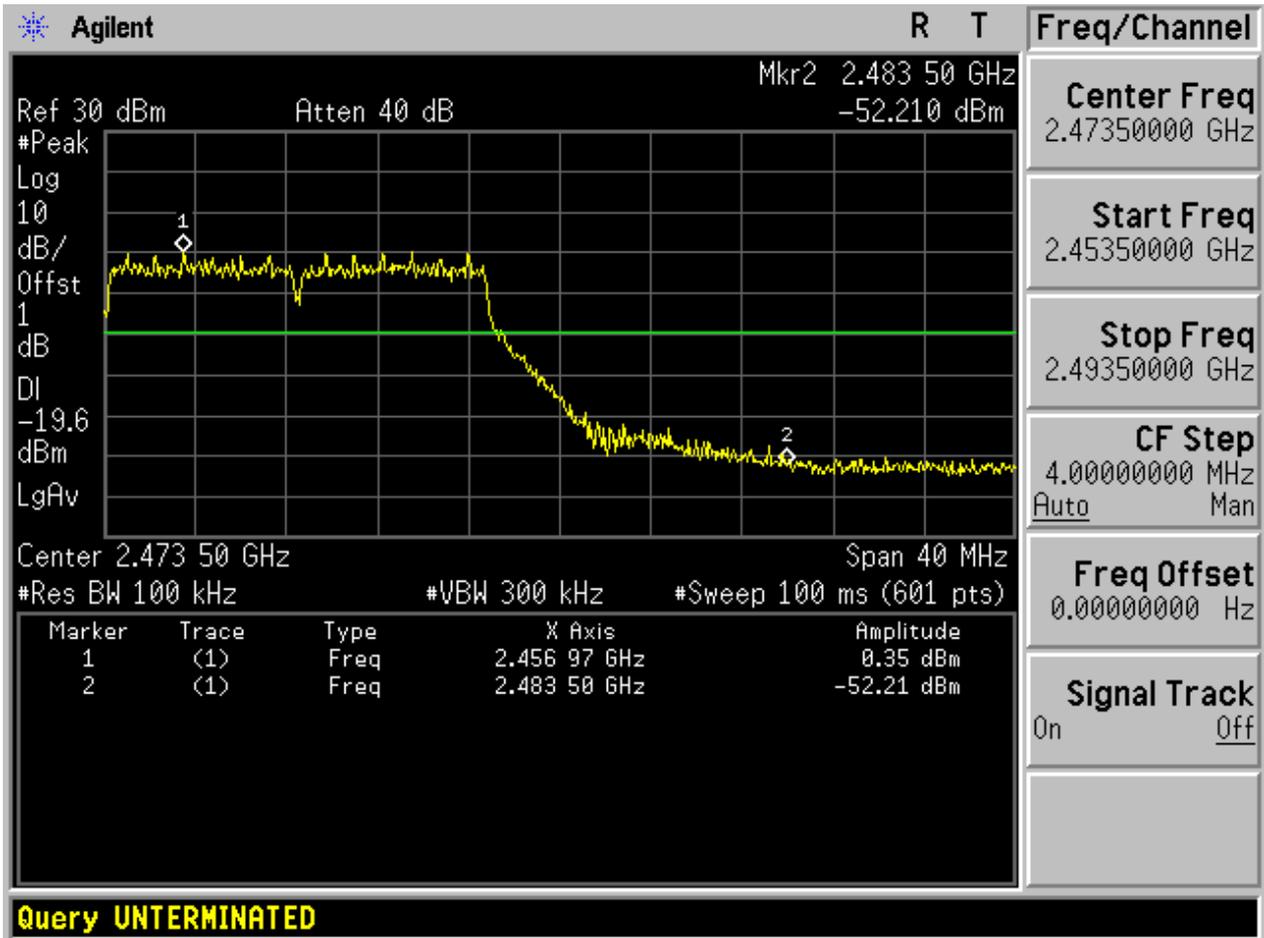

## 2.5 11N20\_L

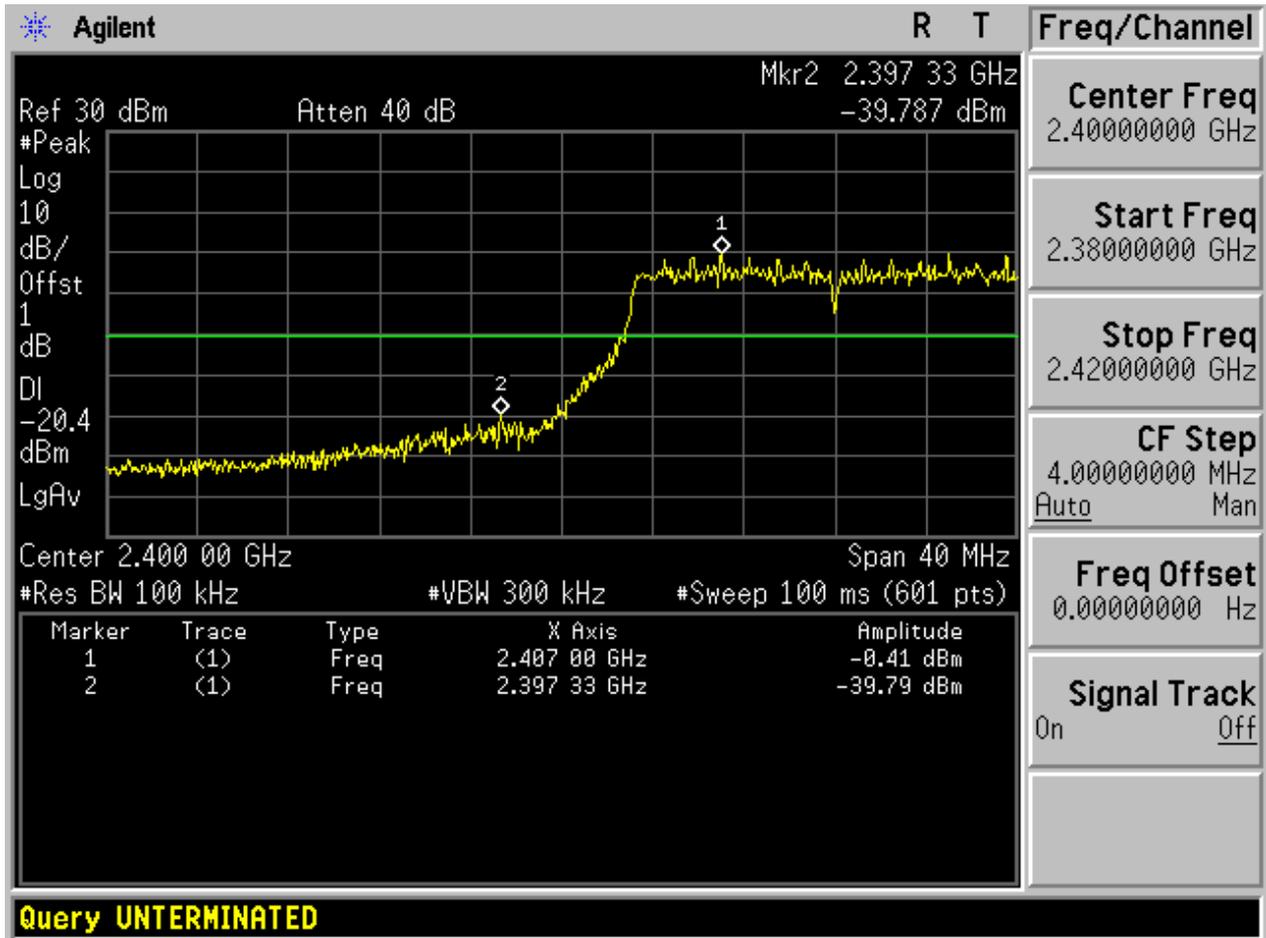

## 2.6 11N20\_H

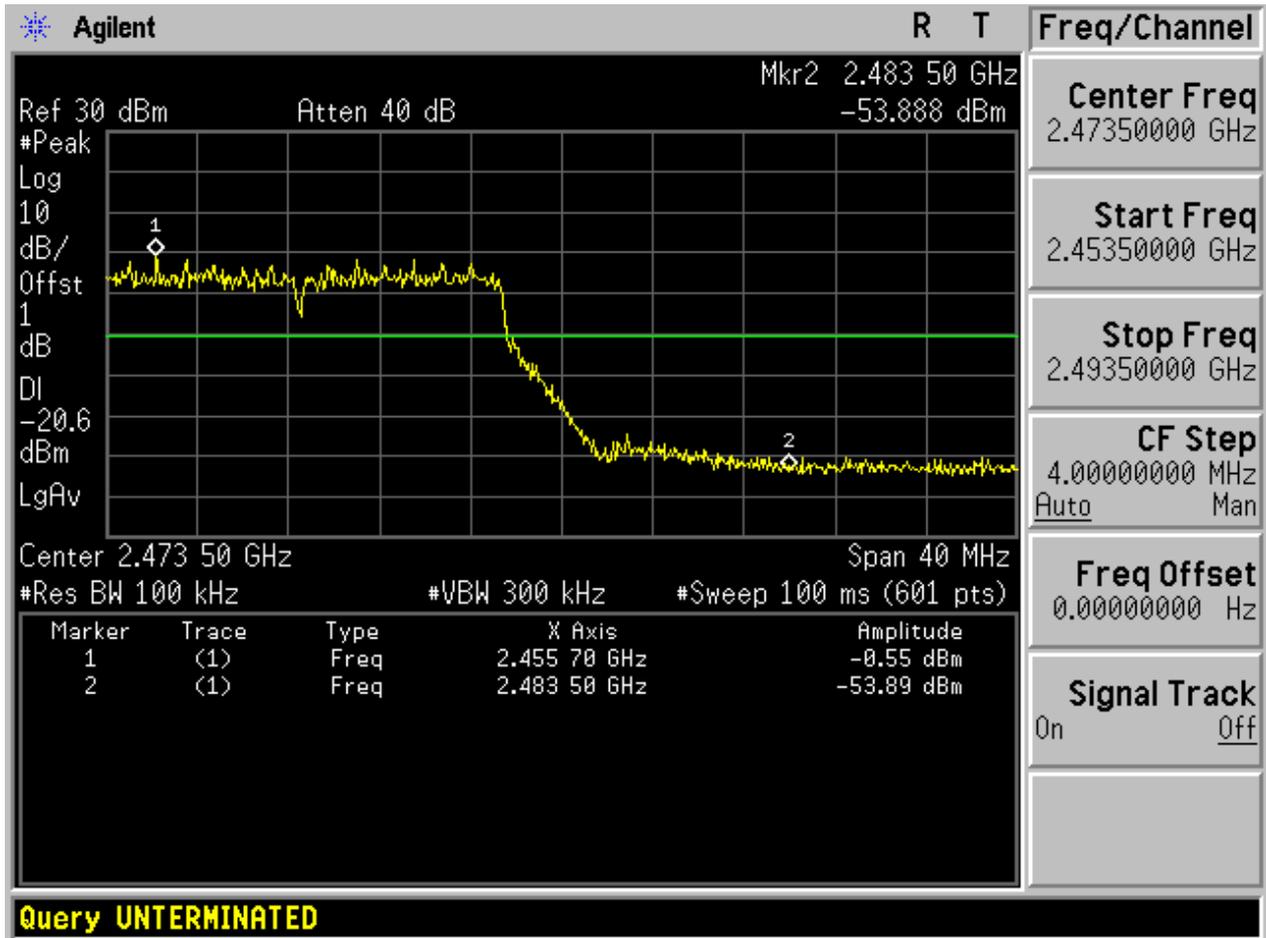

## Appendix E: Unwanted Emissions into Non-Restricted Frequency

### Bands

In this Appendix, the "Pref", which is used as the reference level, refers to the peak power level in any 100 kHz bandwidth within the fundamental emission, the "Puw" refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW [kHz]})$ . As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain and used as respective results for each chain, due to the relative-limit requirement.

In the result table, the "< Limit" denotes that "The Puw [dBm] is less than Pref[dBm]-20[dBm], see test plots for detailed".


### Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Pref[dBm]	Puw[dBm]	Verdict
11B	L	2412	8.32	<limit	pass
11B	M	2437	6.74	<limit	pass
11B	H	2462	6.65	<limit	pass
11G	L	2412	2.72	<limit	pass
11G	M	2437	0.76	<limit	pass
11G	H	2462	0.87	<limit	pass
11N20	L	2412	-0.11	<limit	pass
11N20	M	2437	-1.24	<limit	pass
11N20	H	2462	-1.31	<limit	pass


## Part II - Test Plots


### 2.1 11B\_L


Pref:

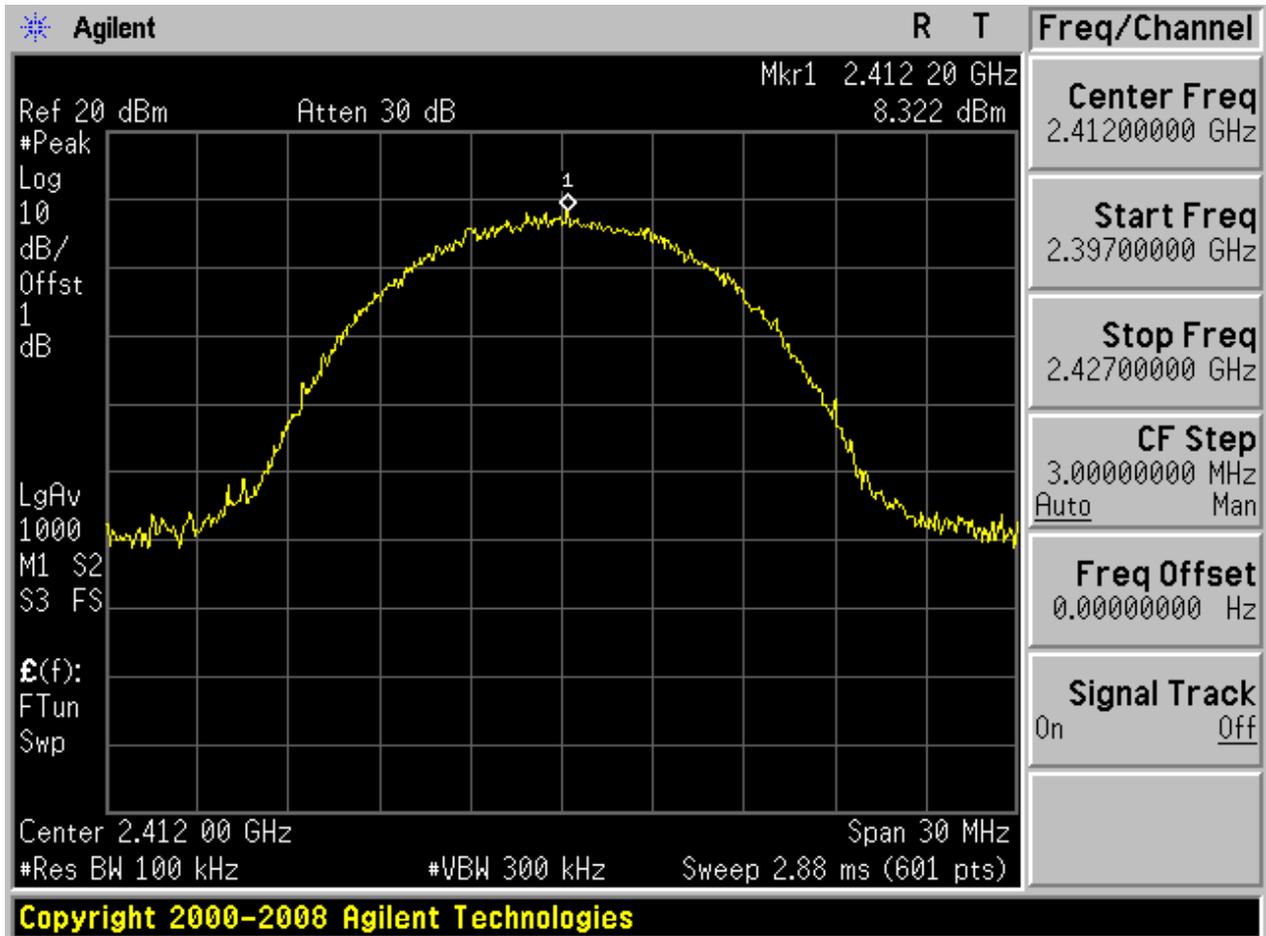



Puw:

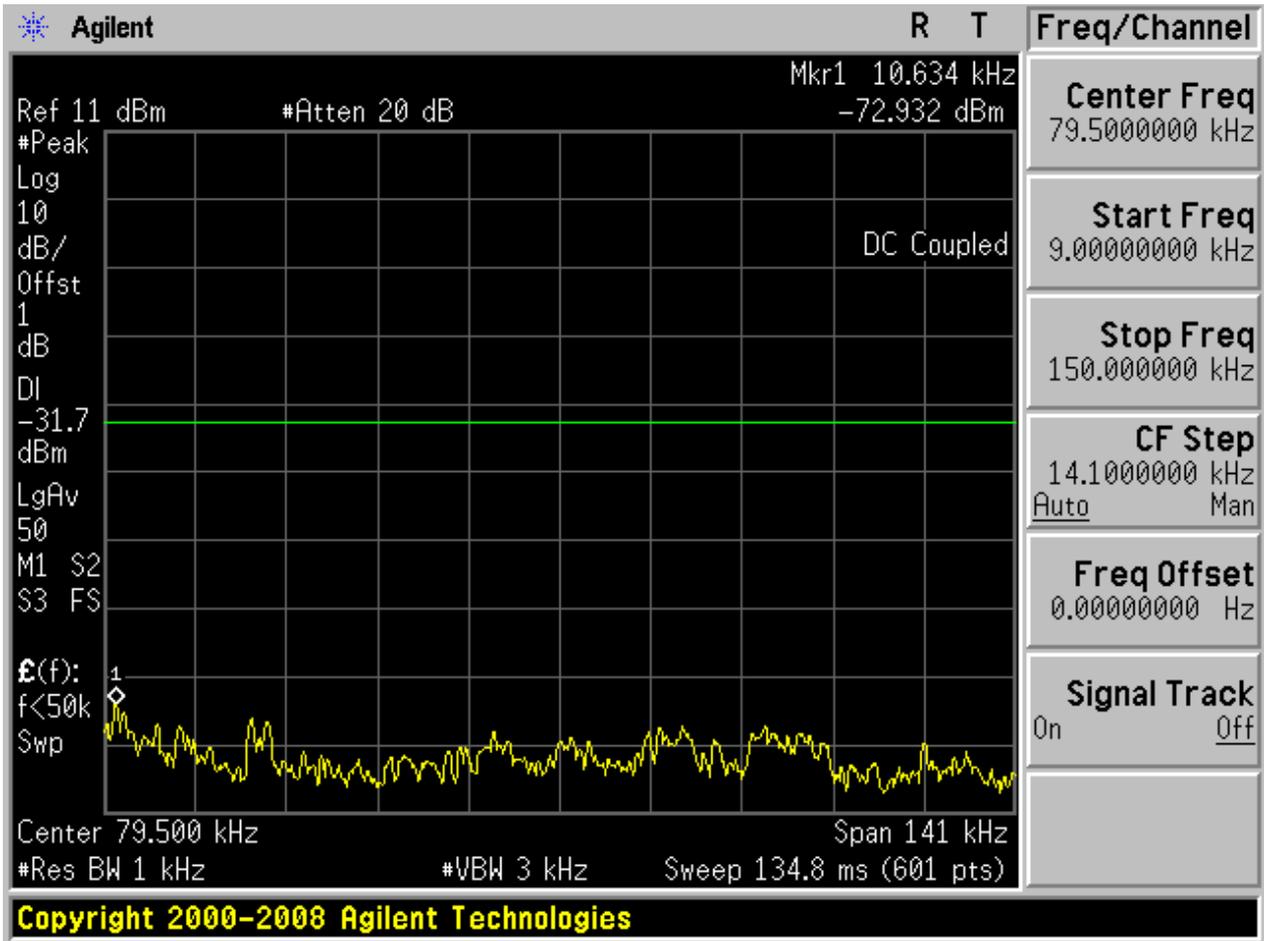


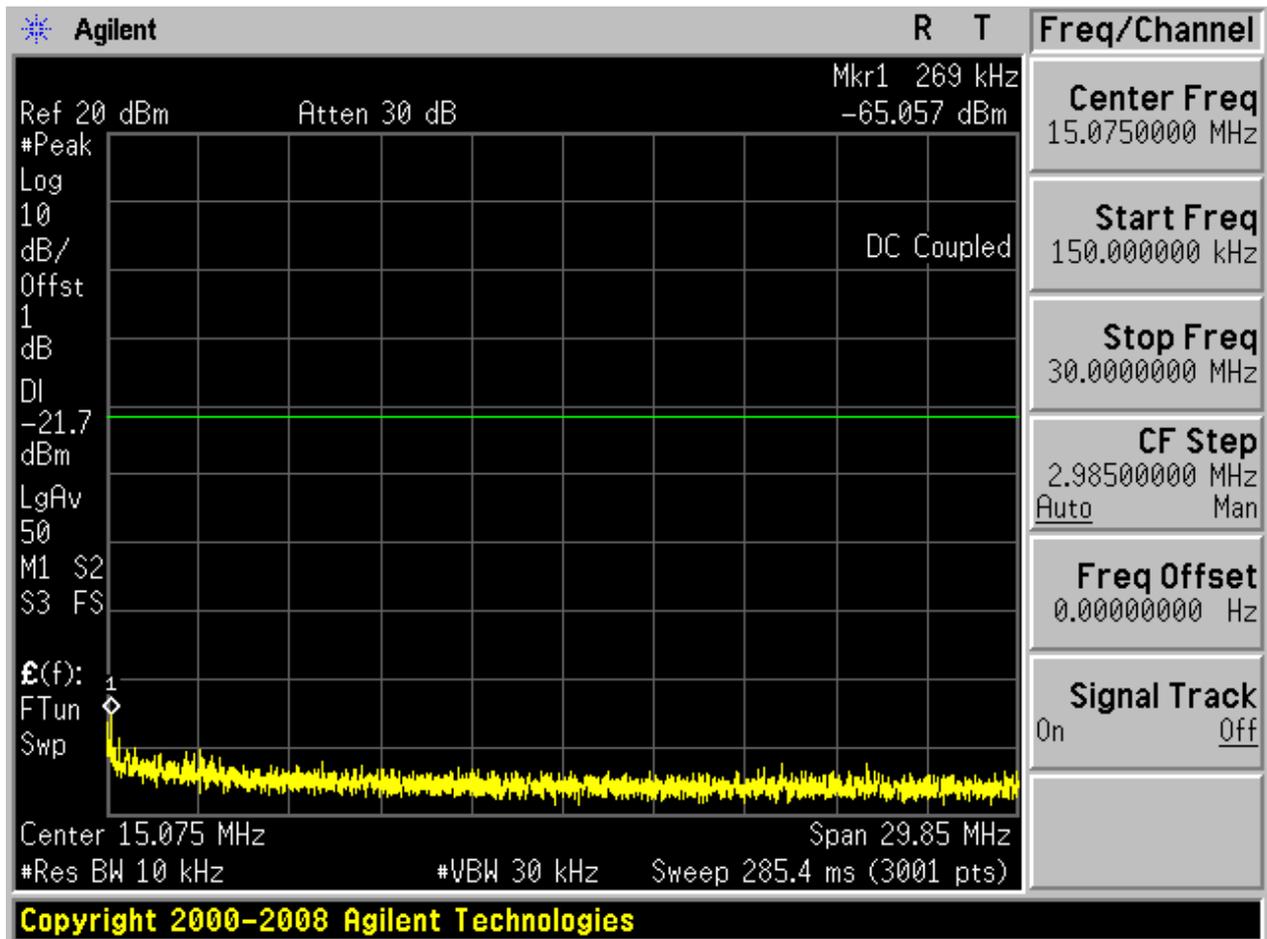

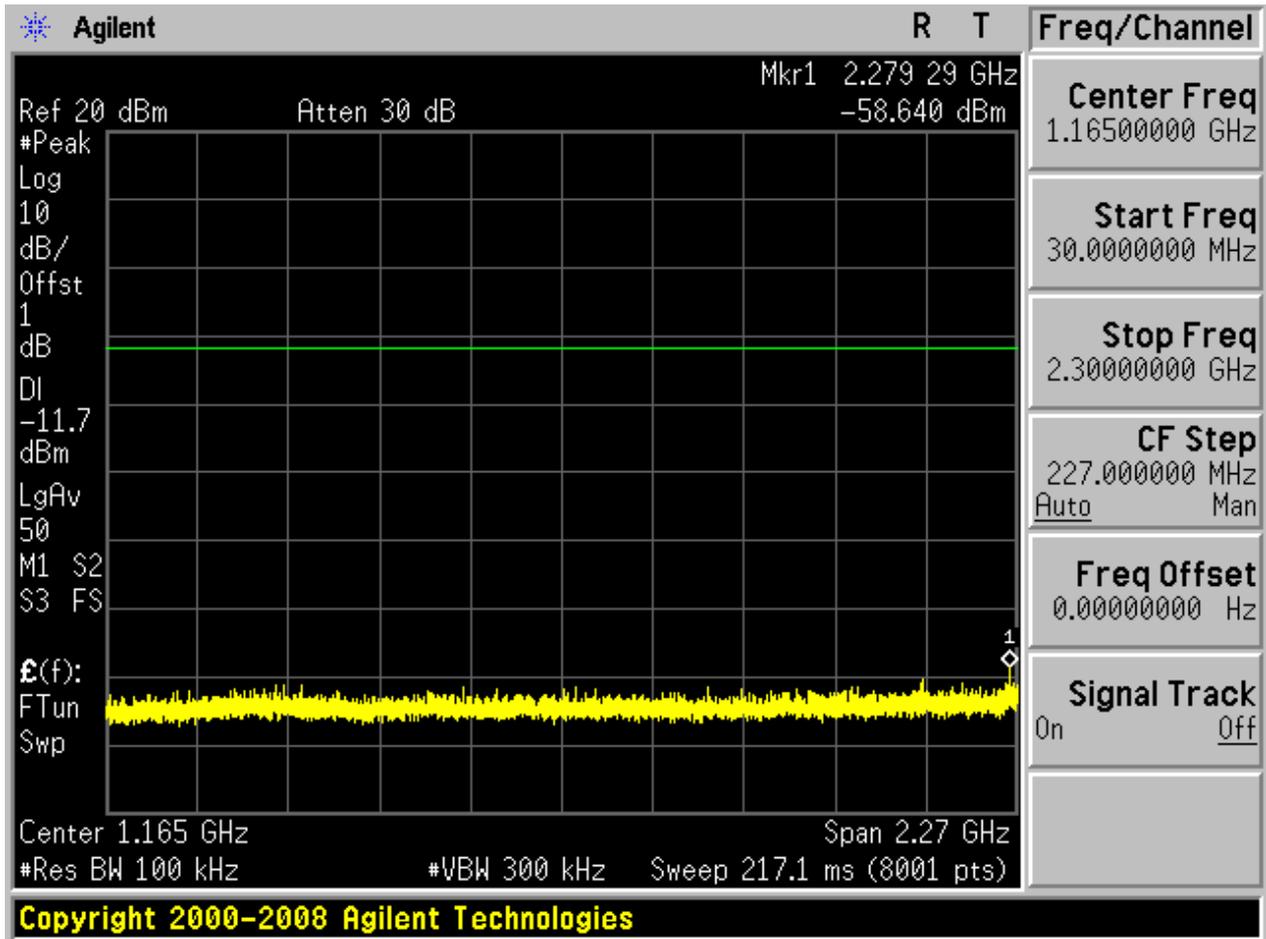

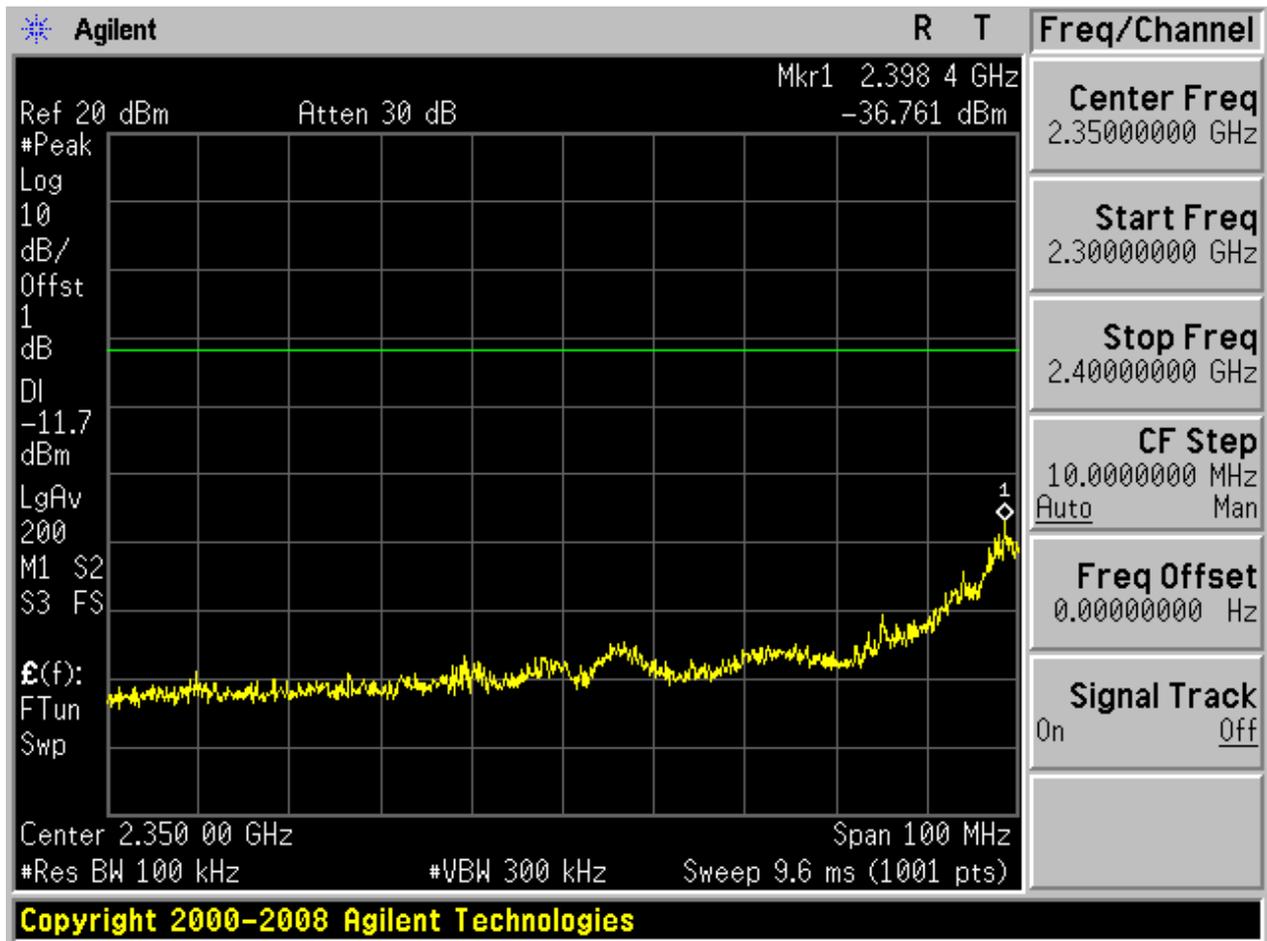


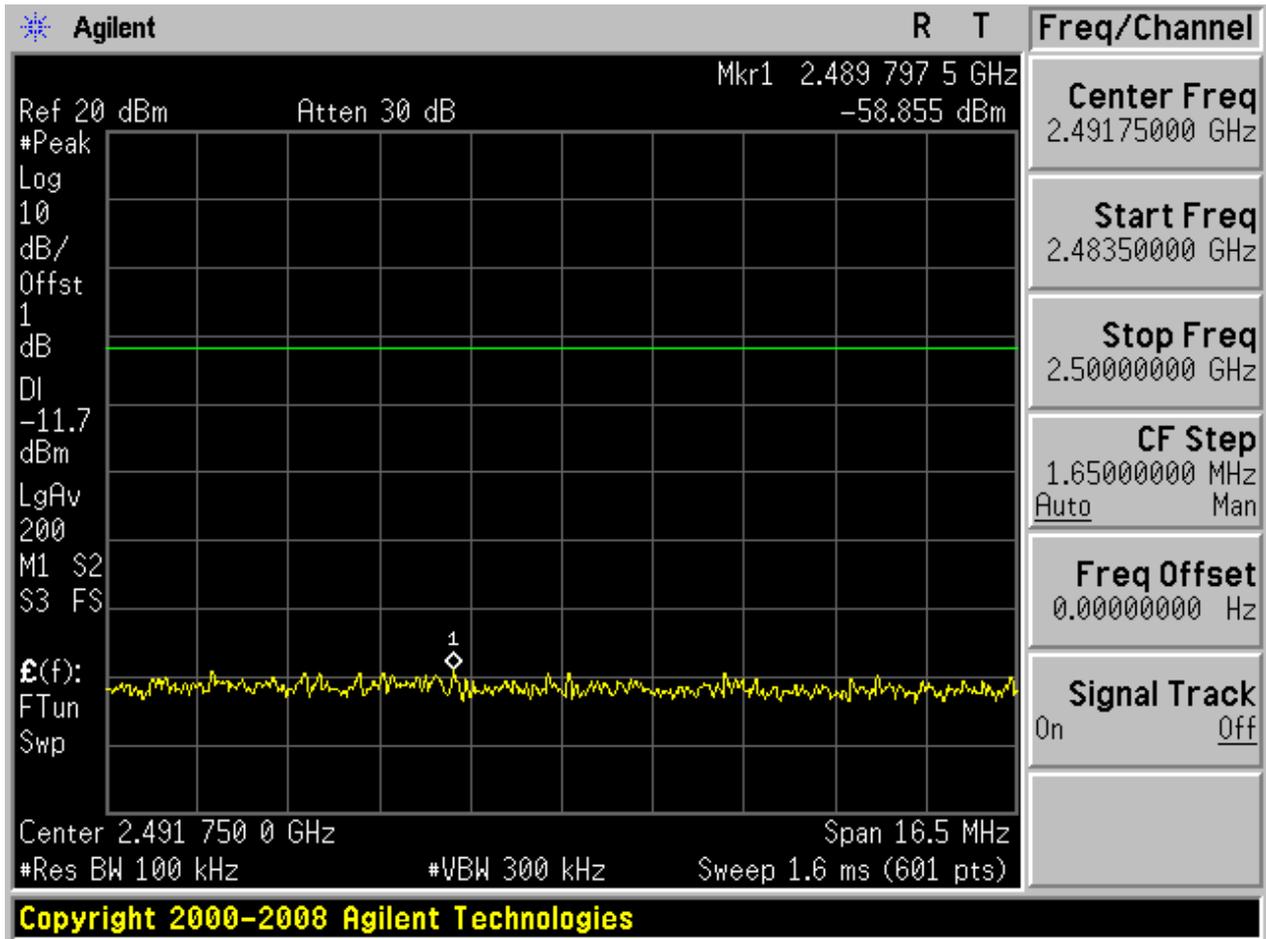

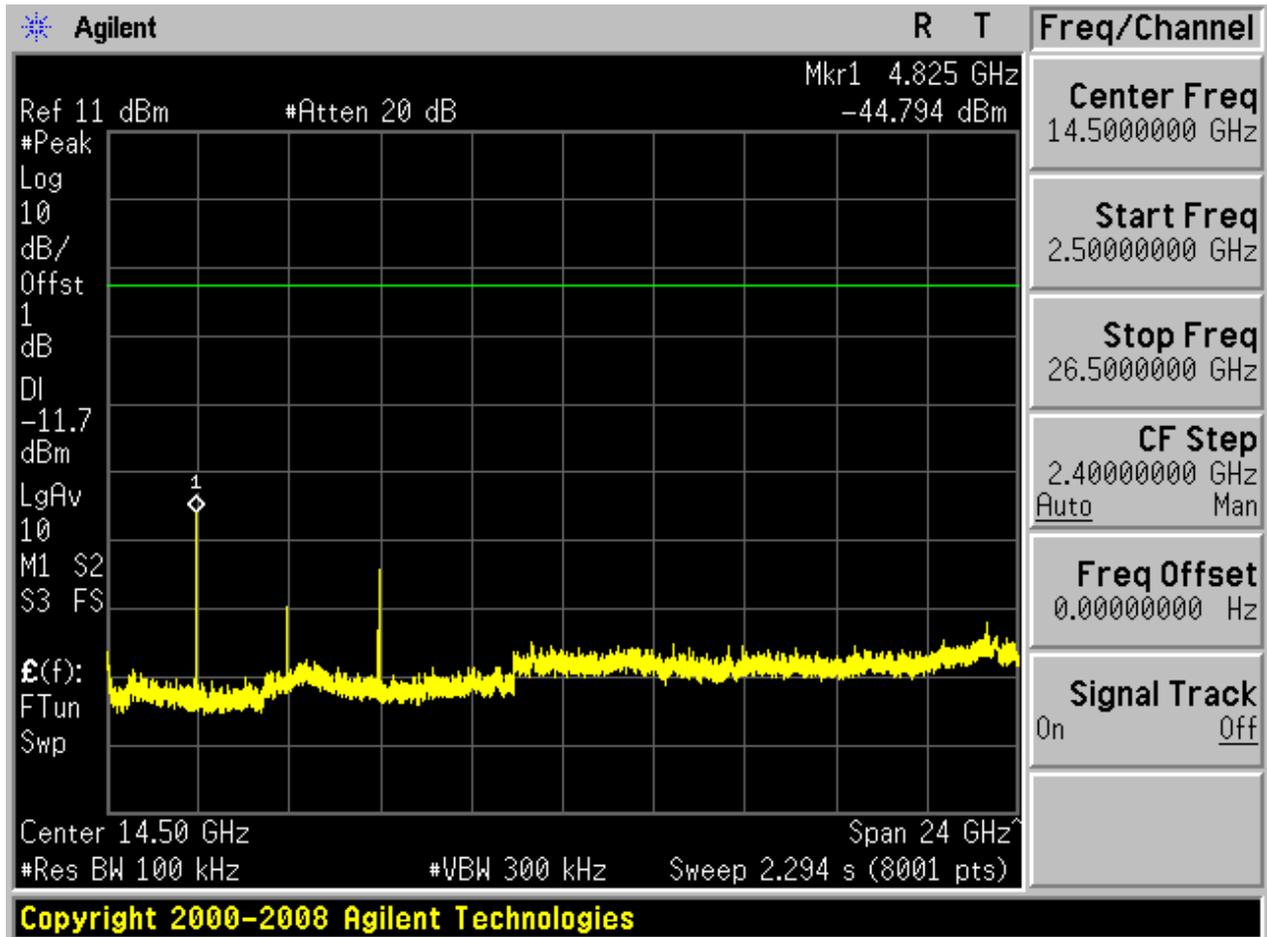



## 2.2 11B\_M


Pref:

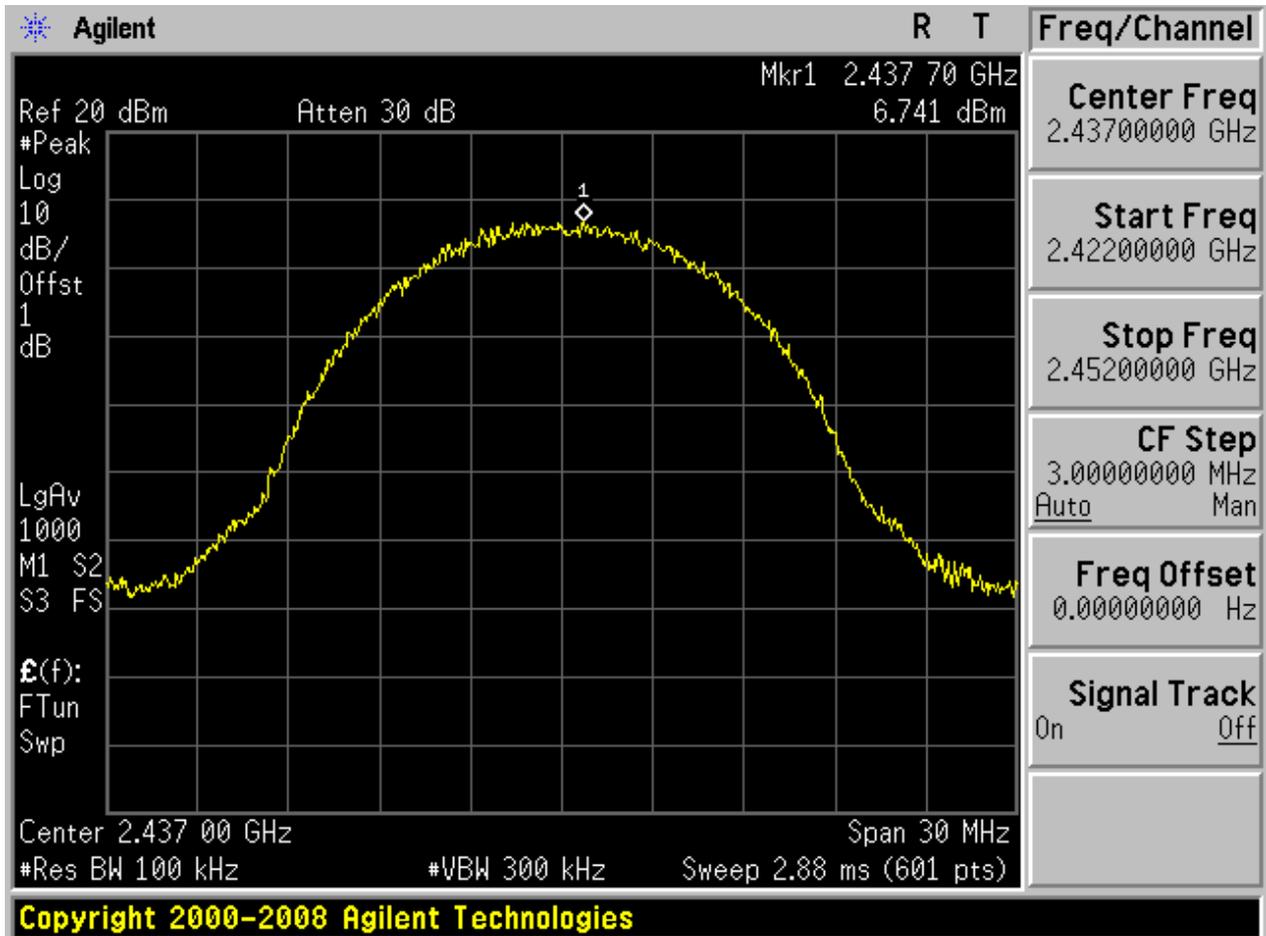


Puw:

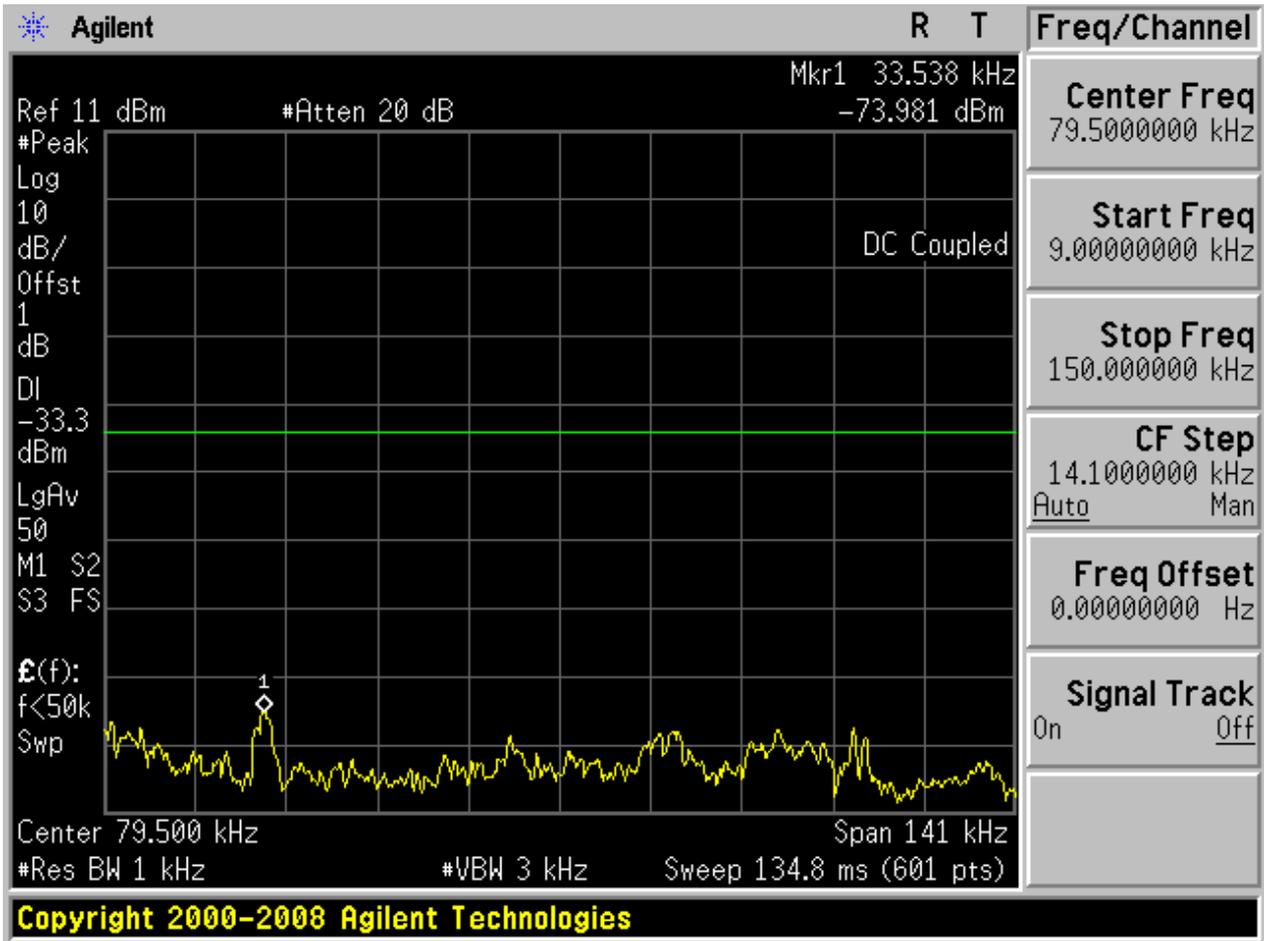


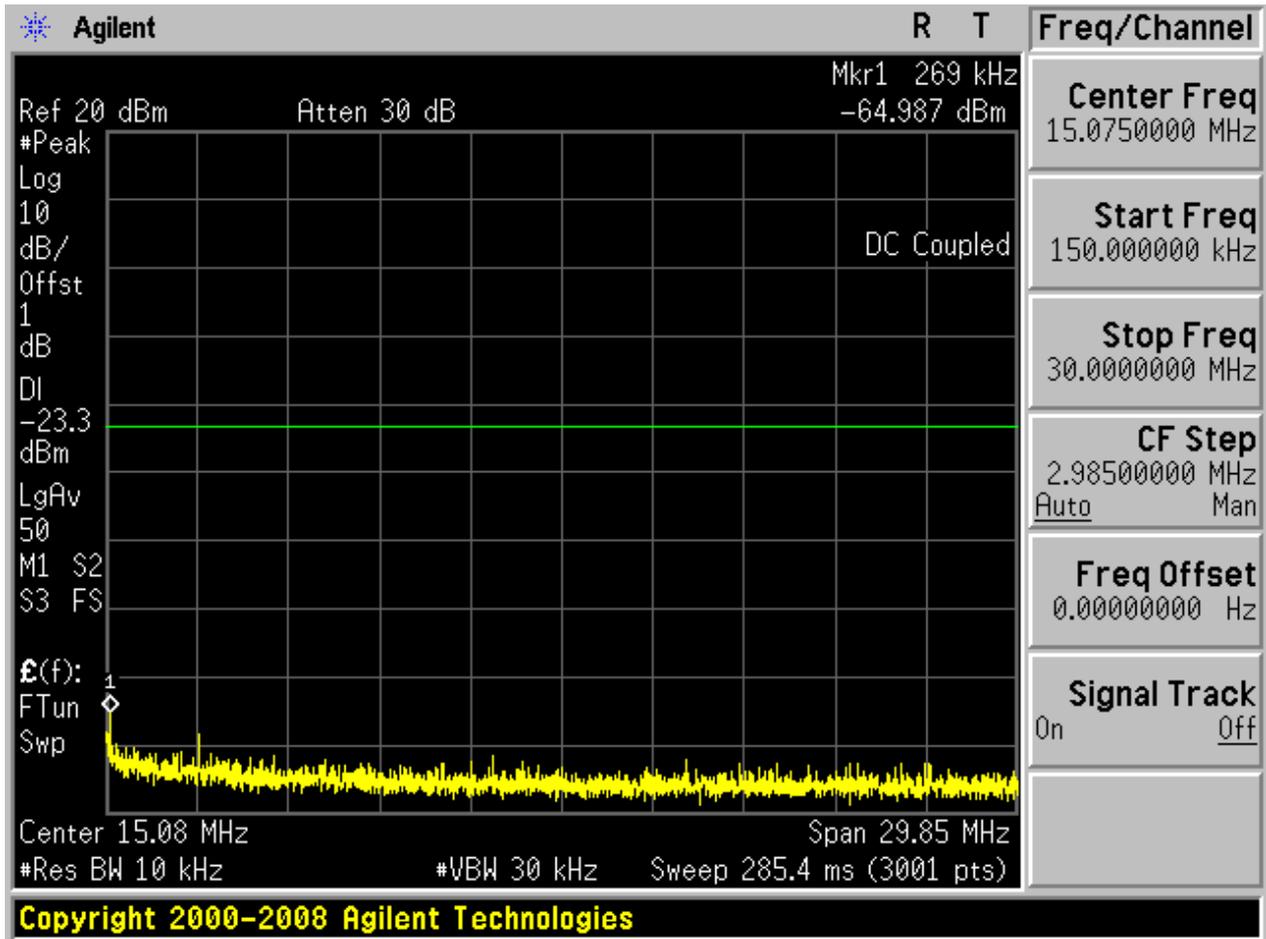

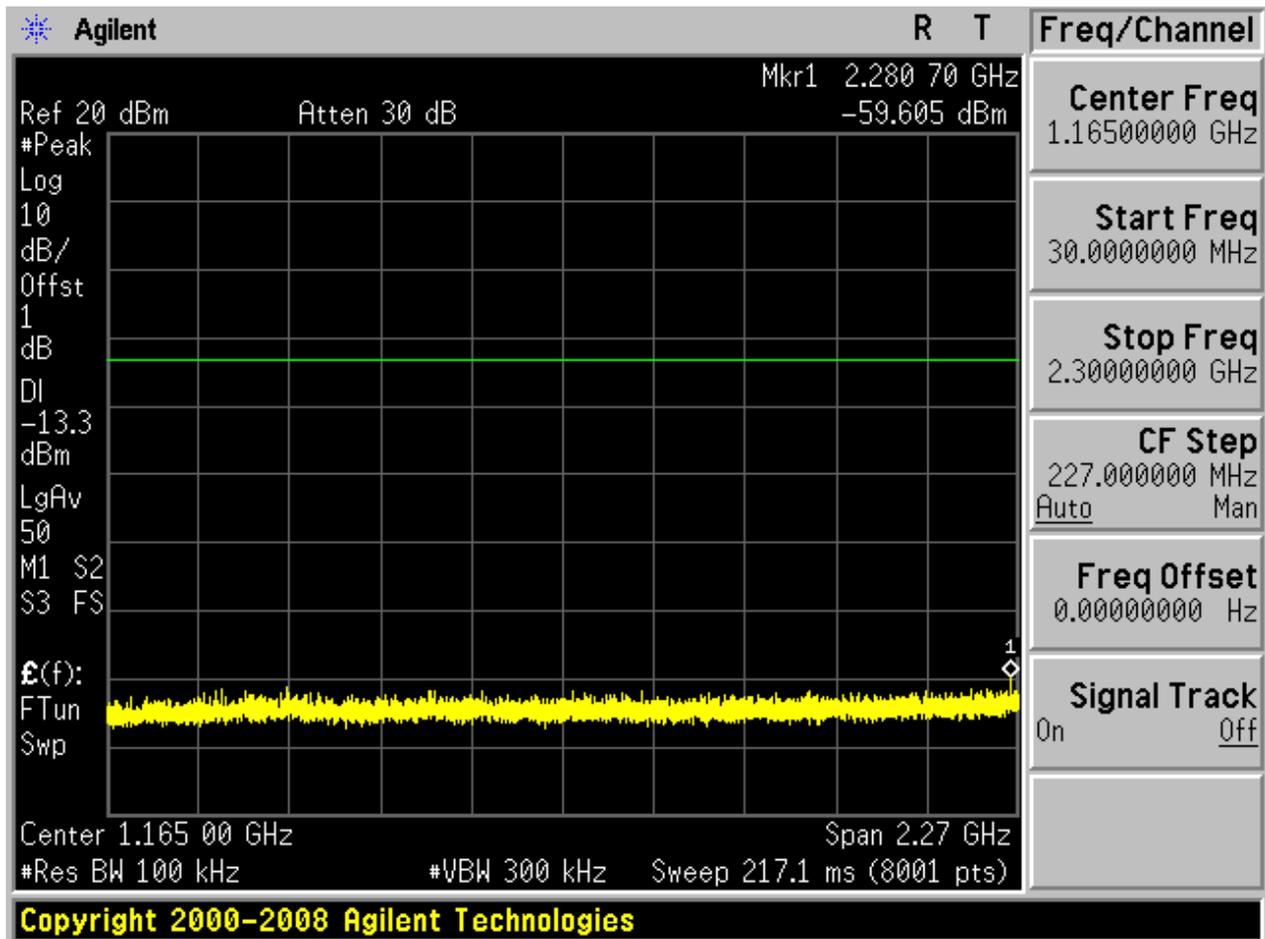

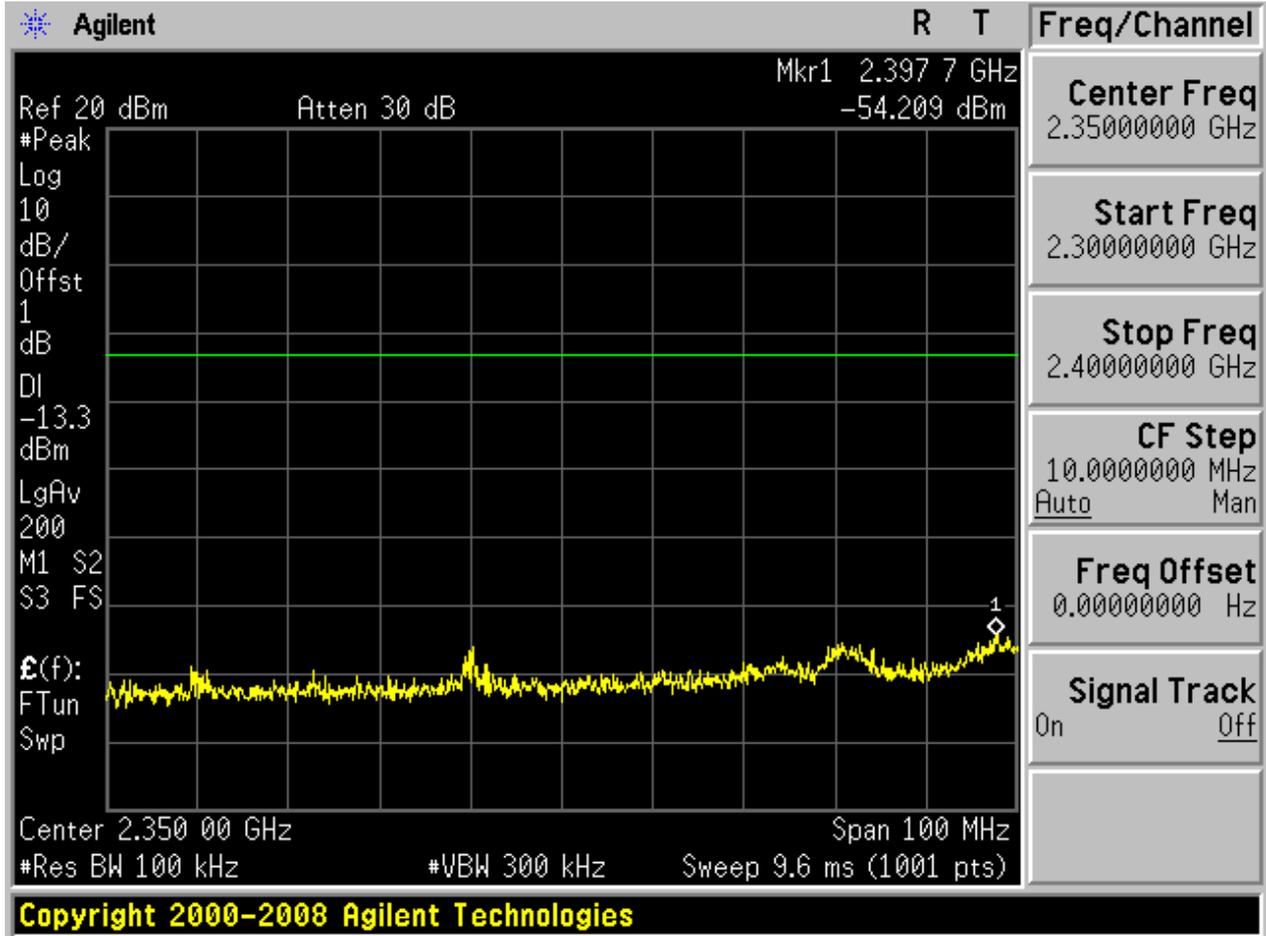




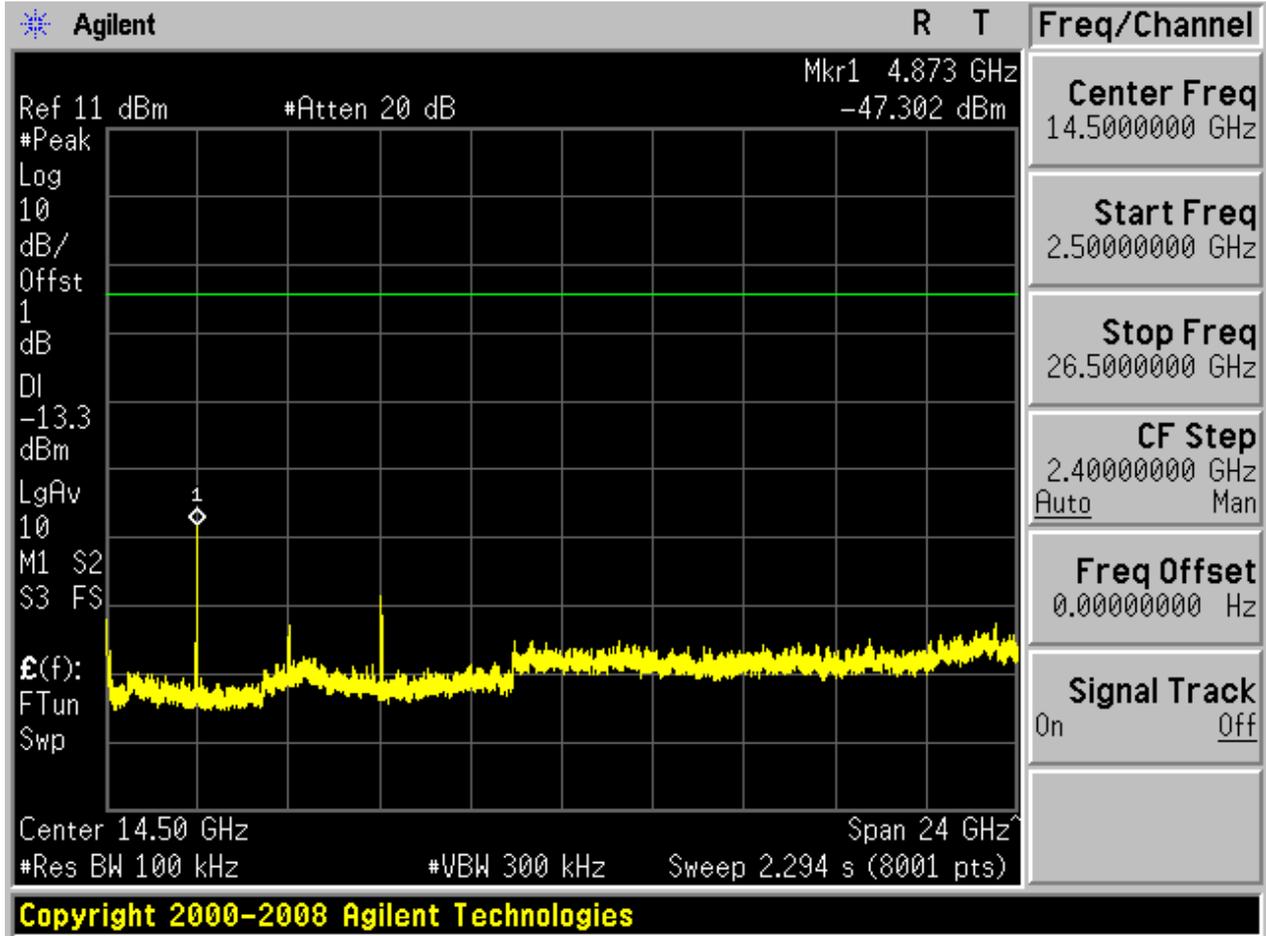



## 2.3 11B\_H


Pref:

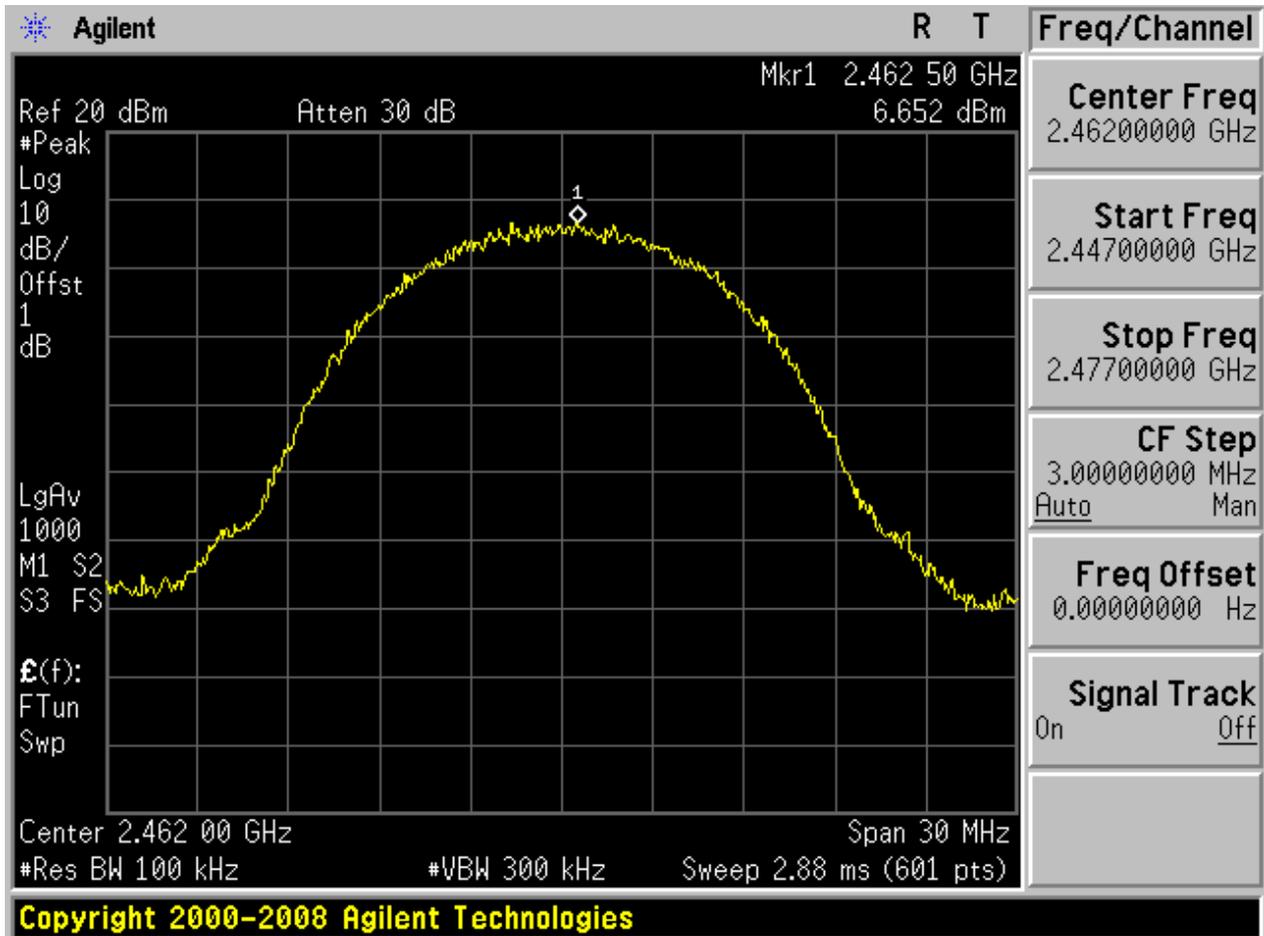



Puw:

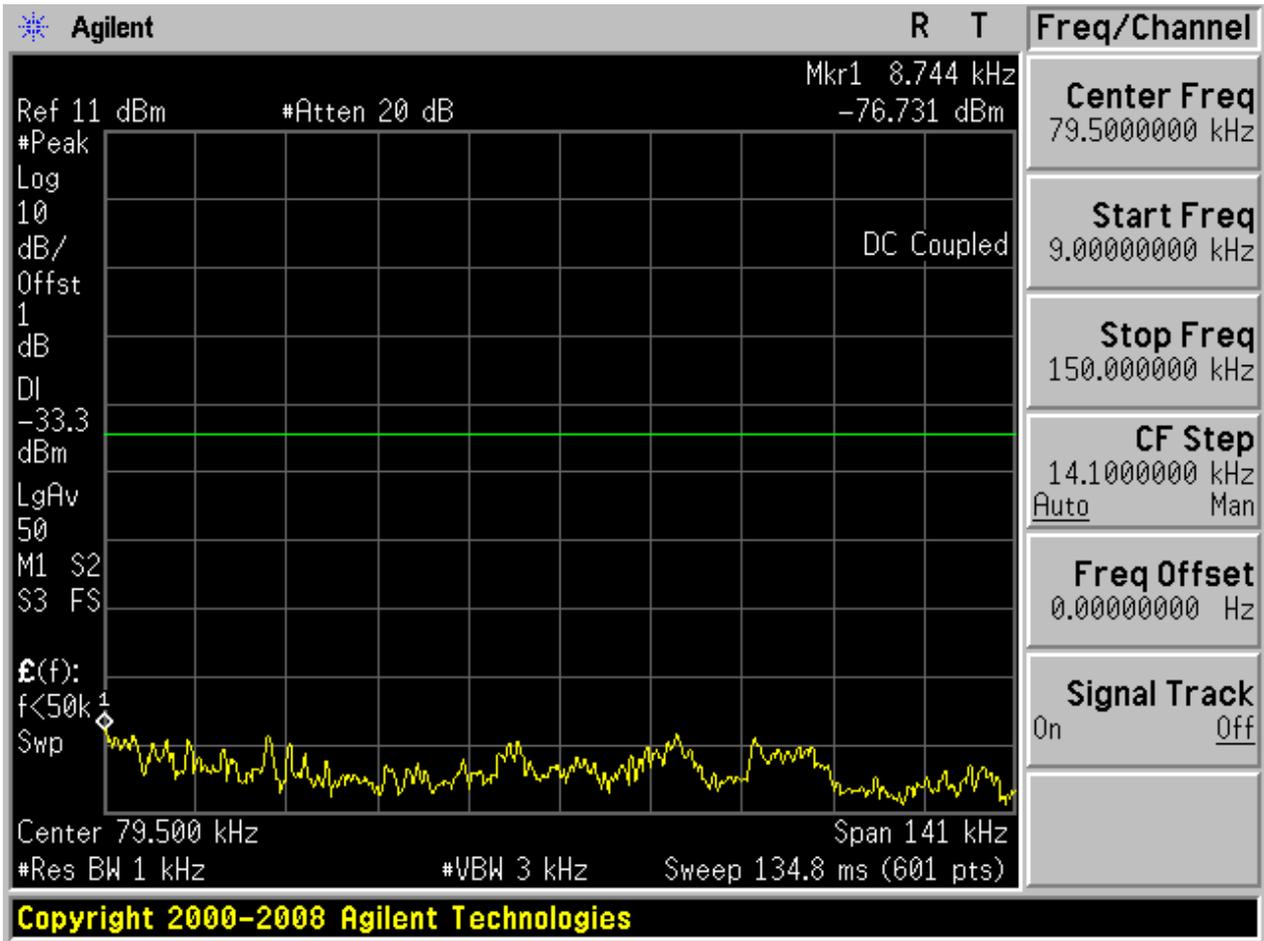


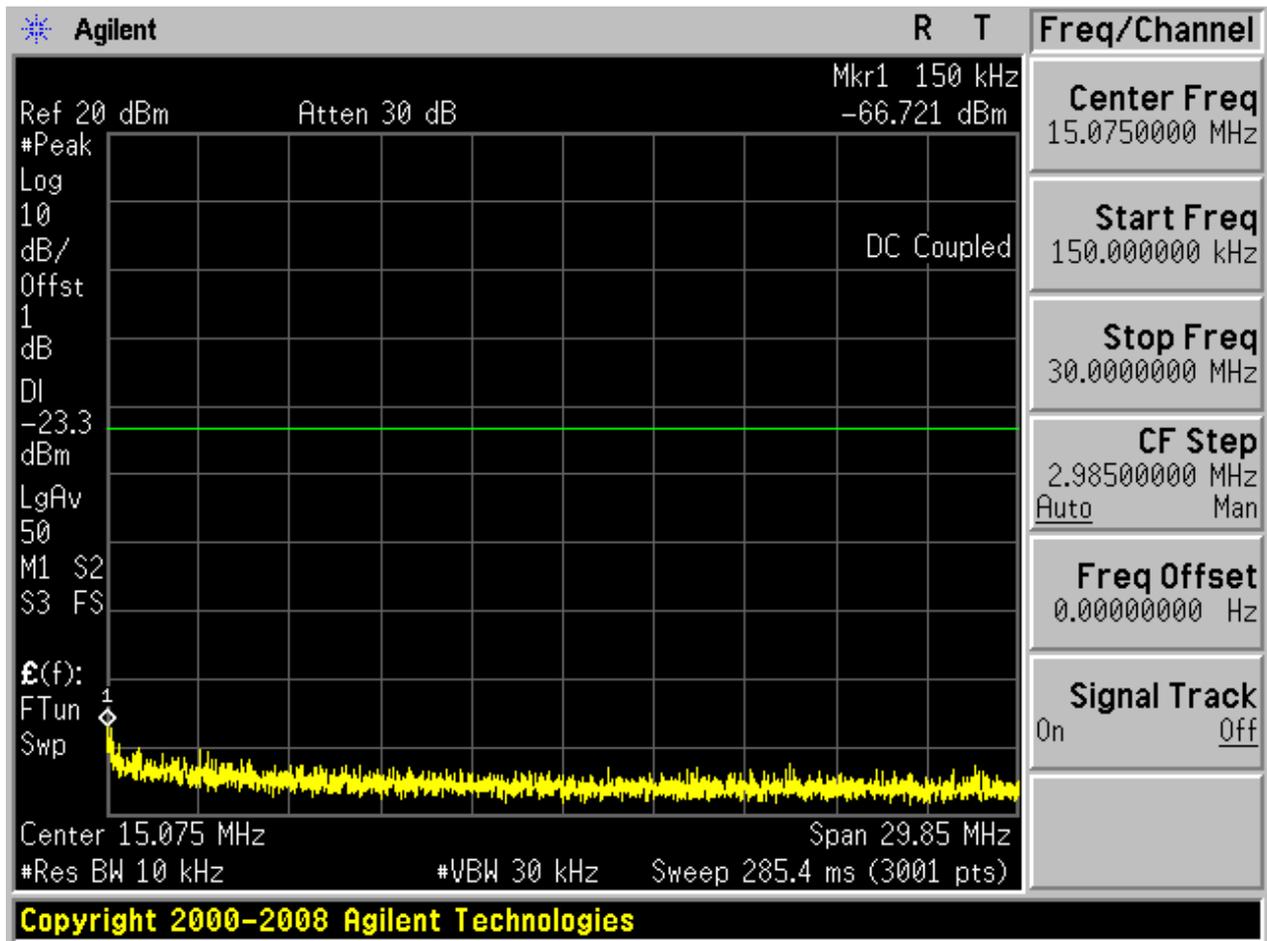

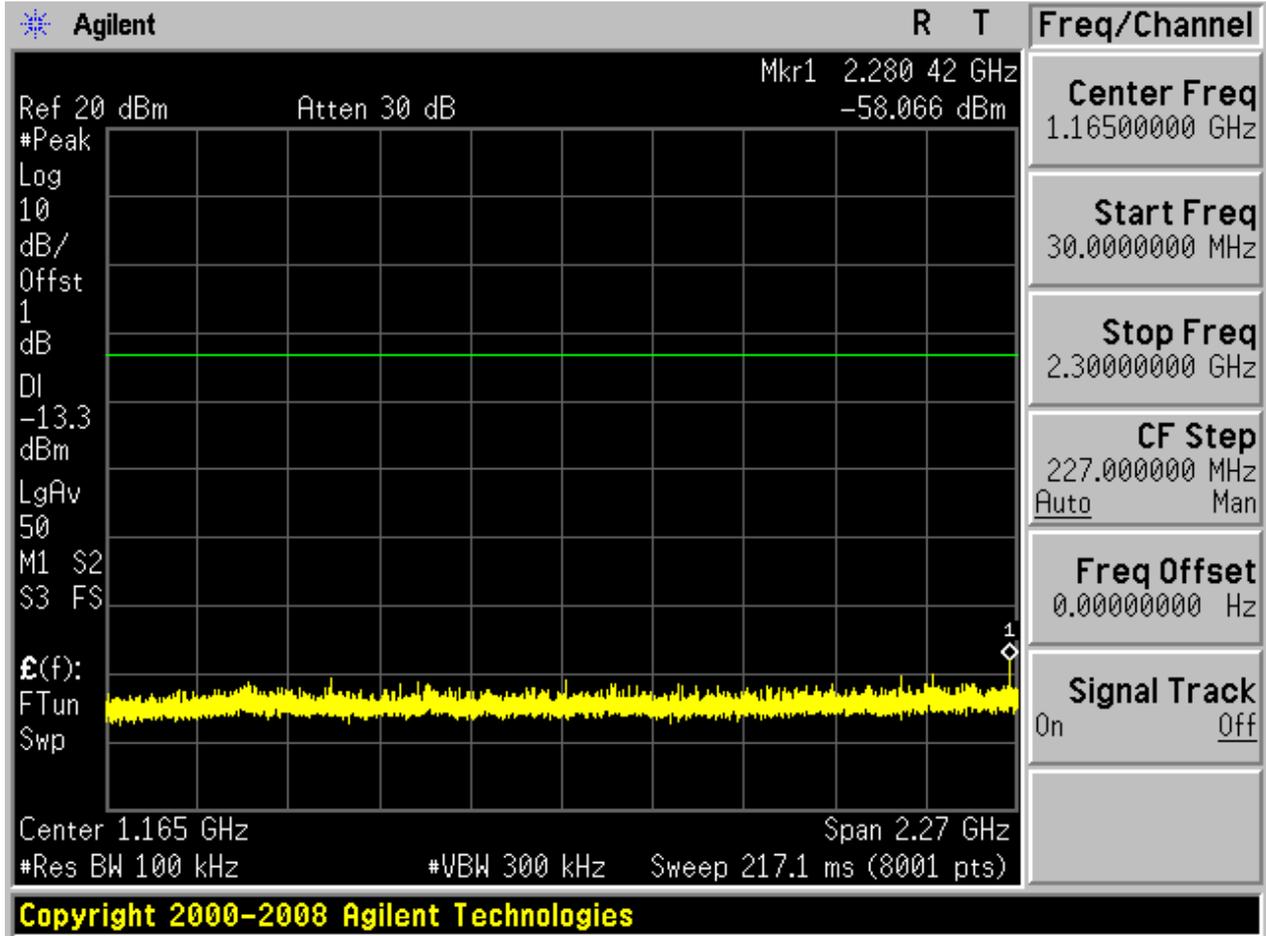

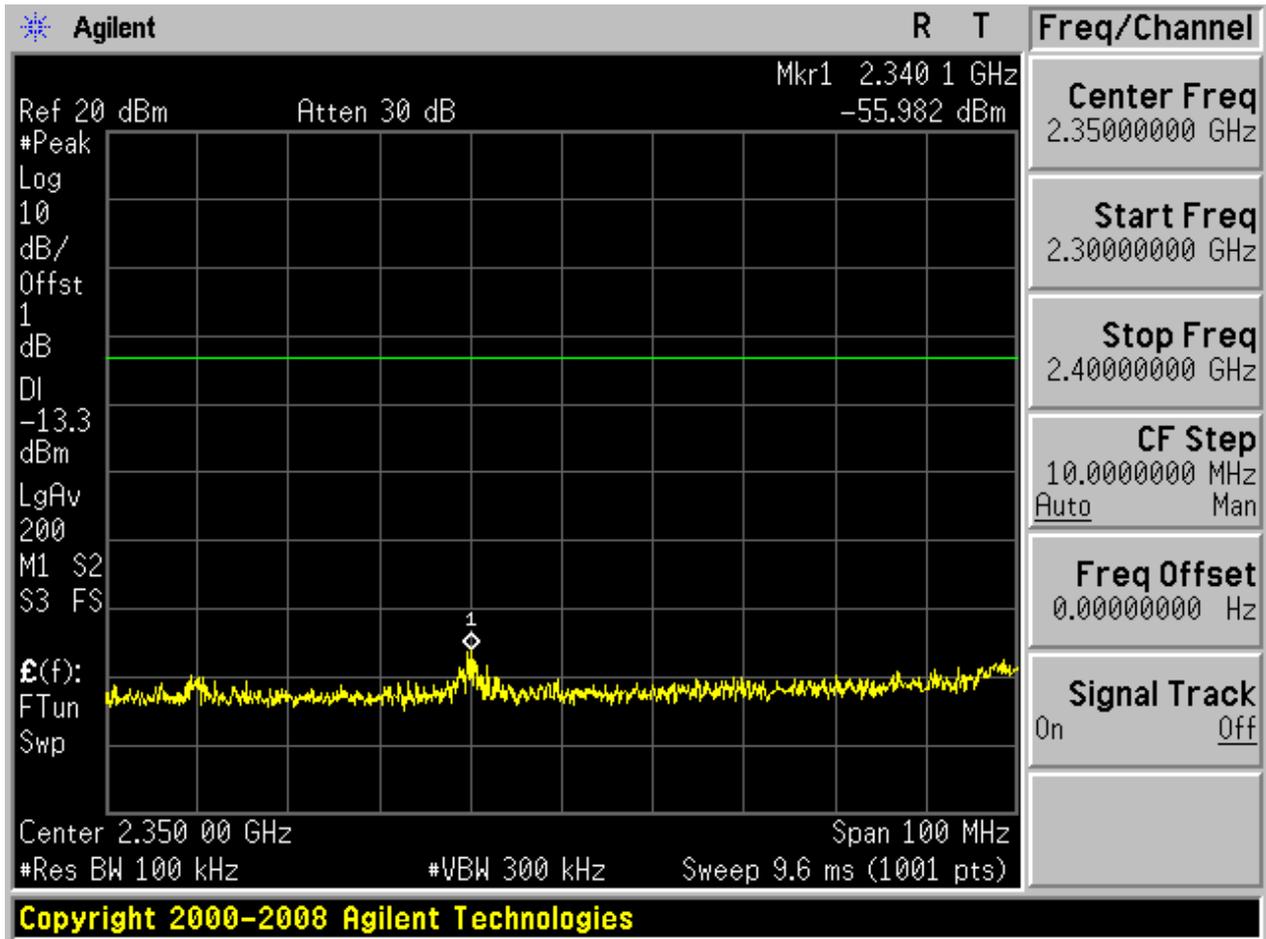


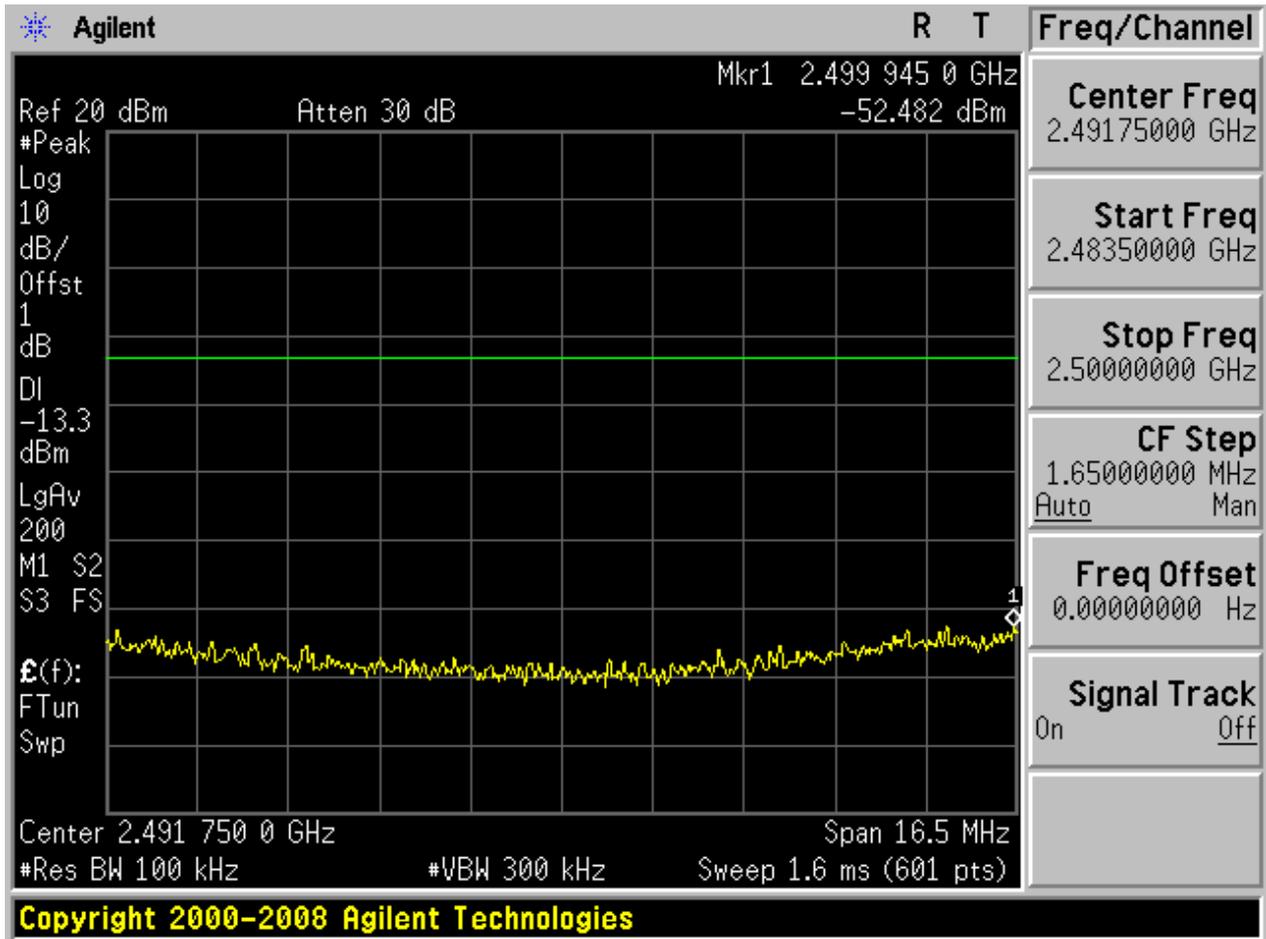

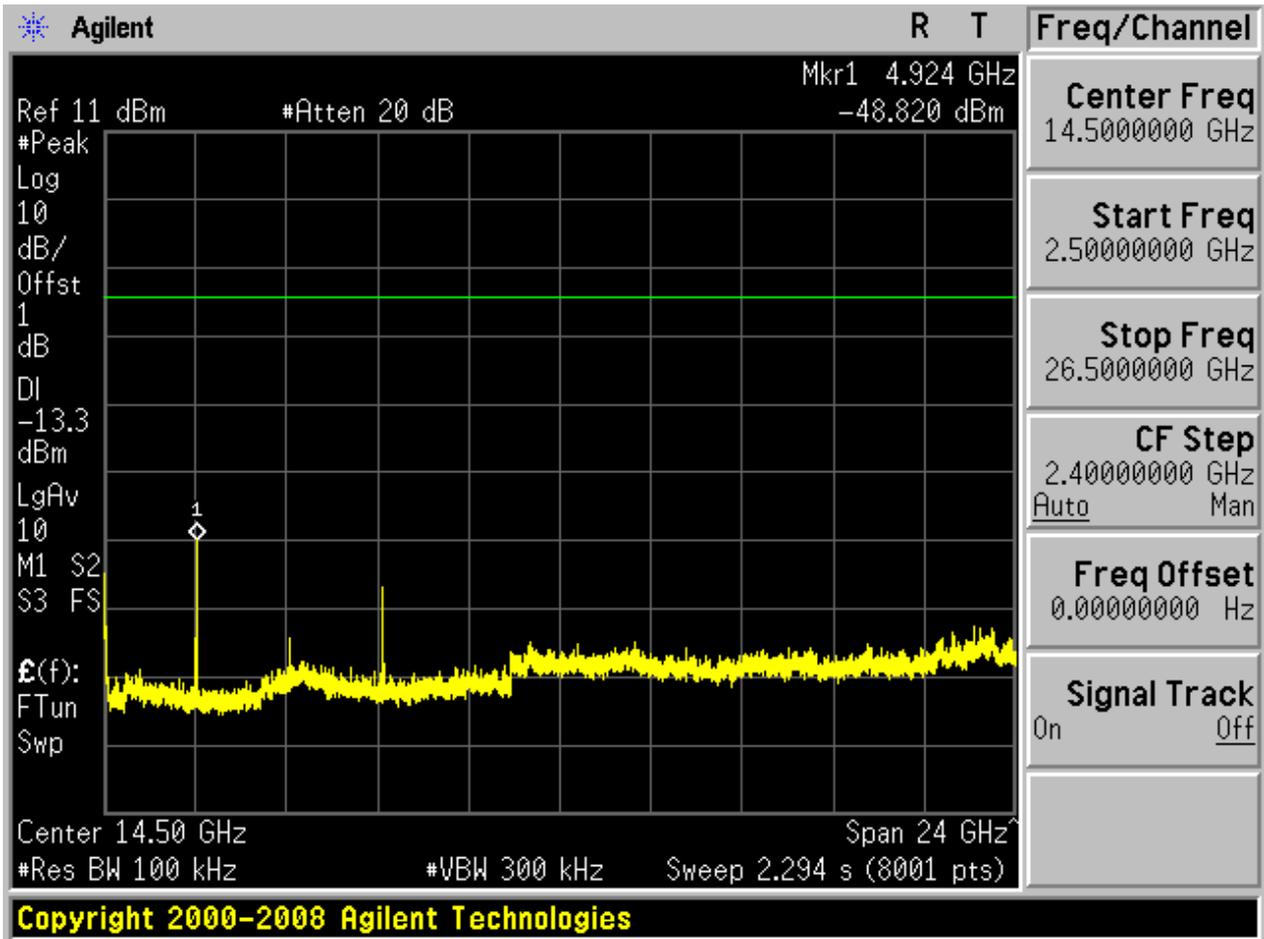



## 2.4 11G\_L


Pref:

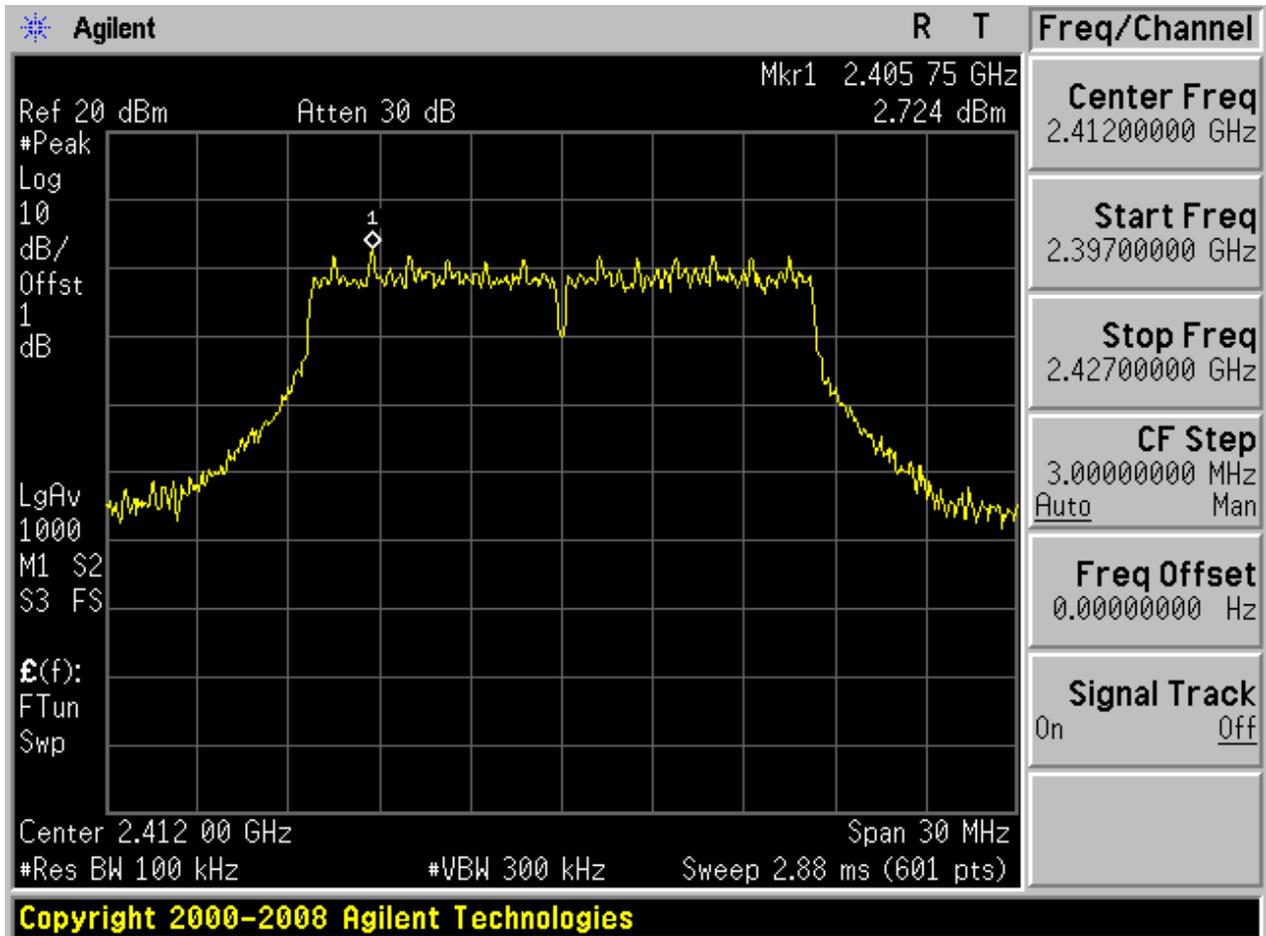


Puw:

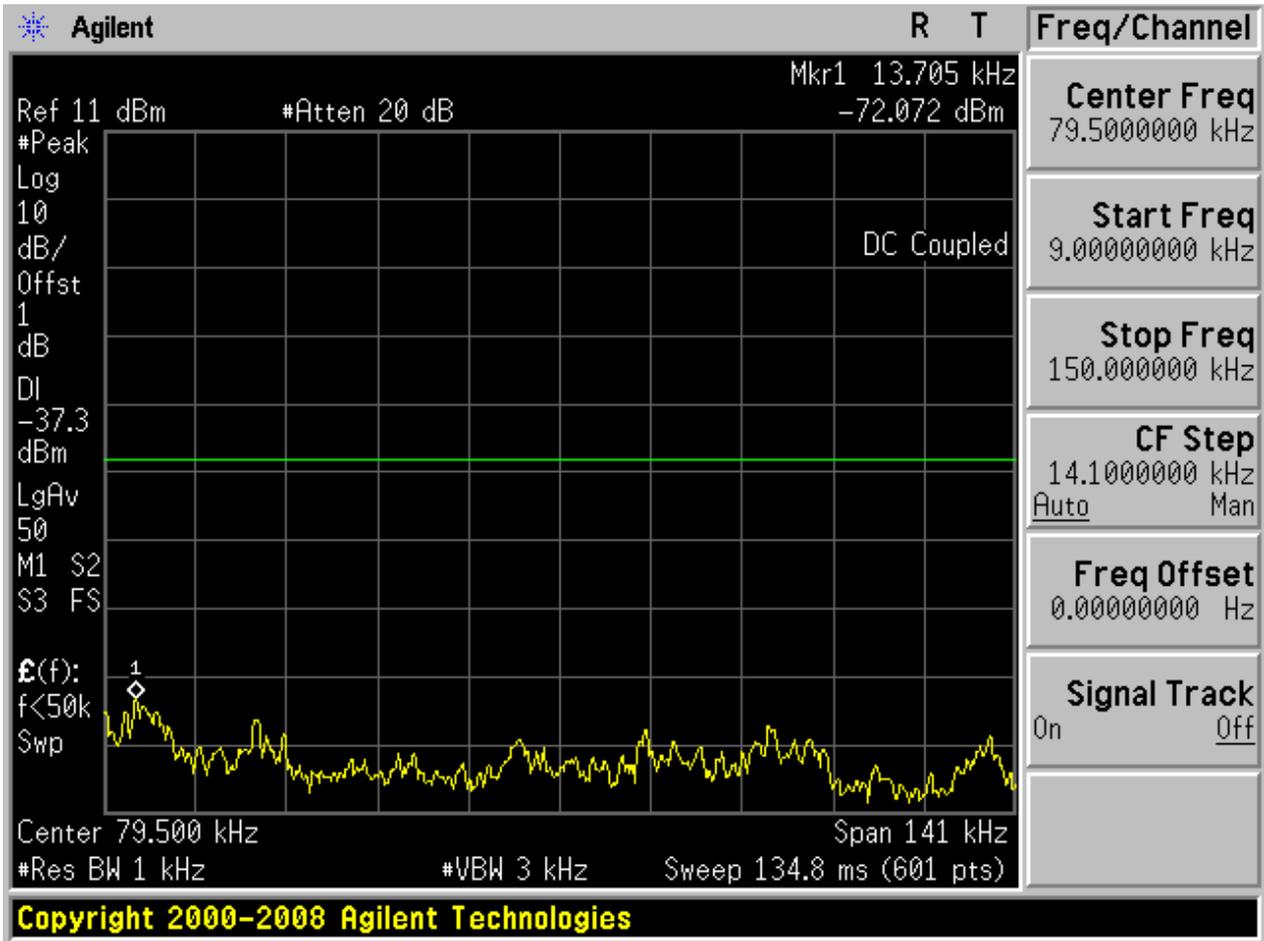


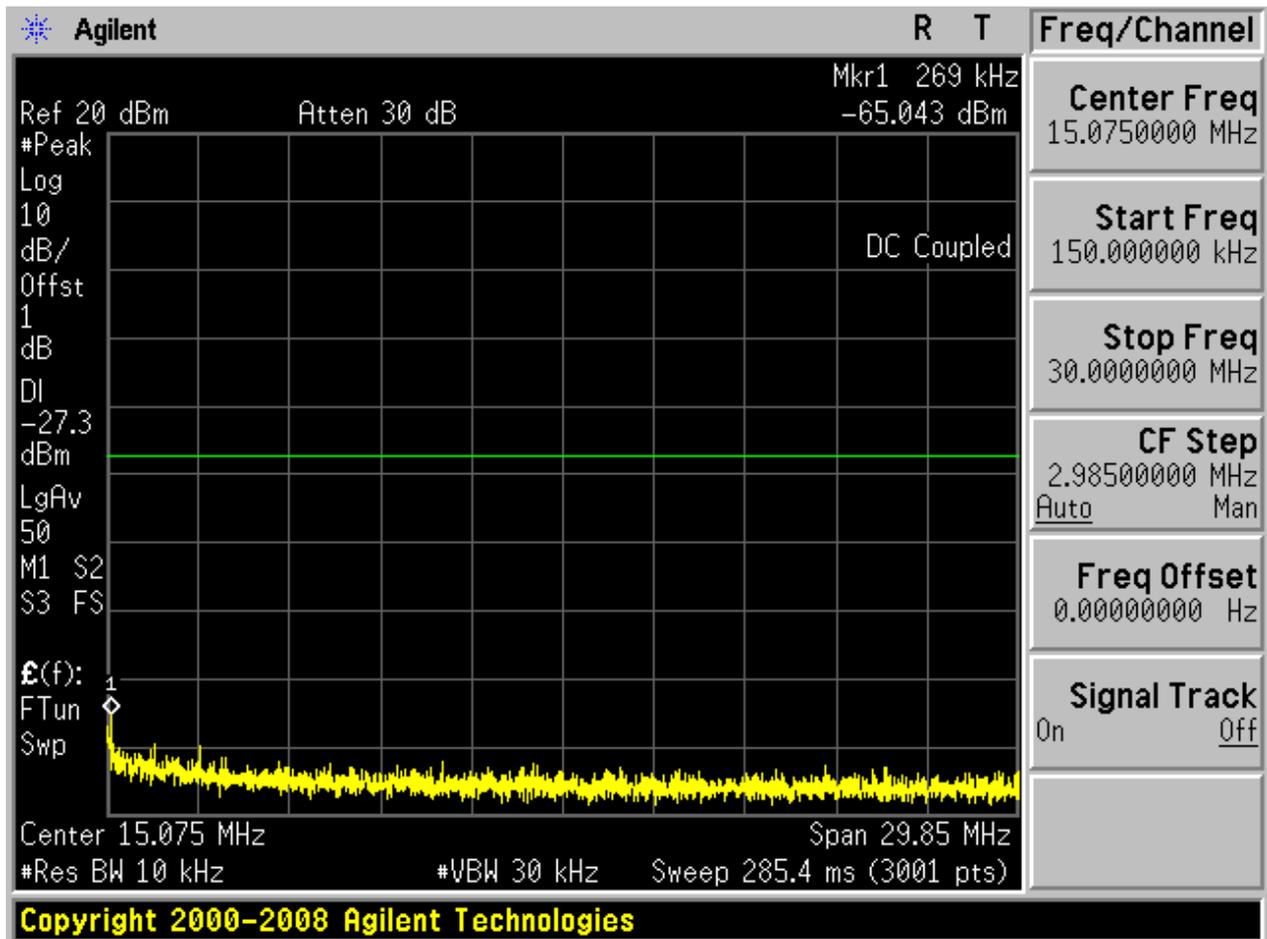


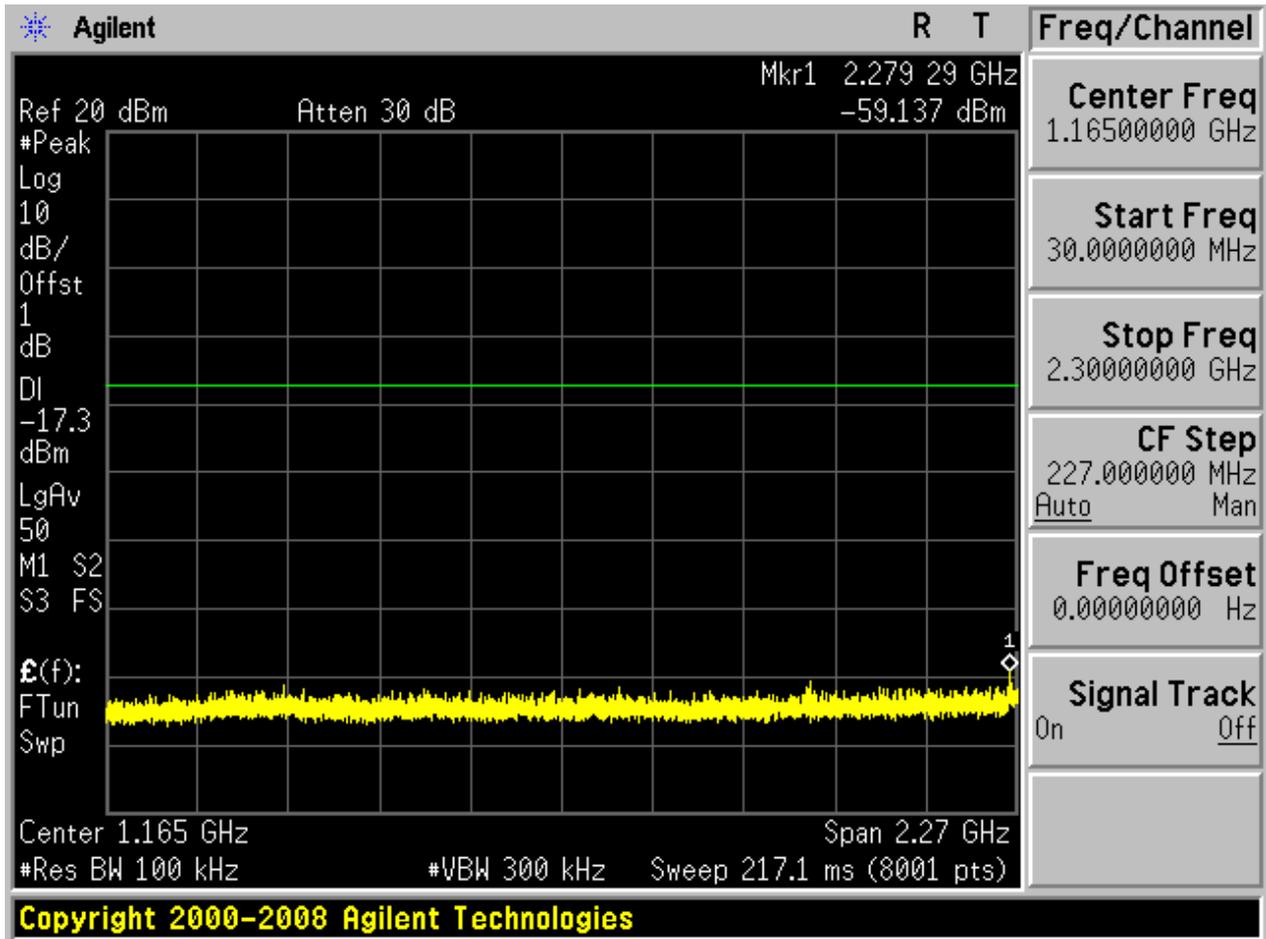

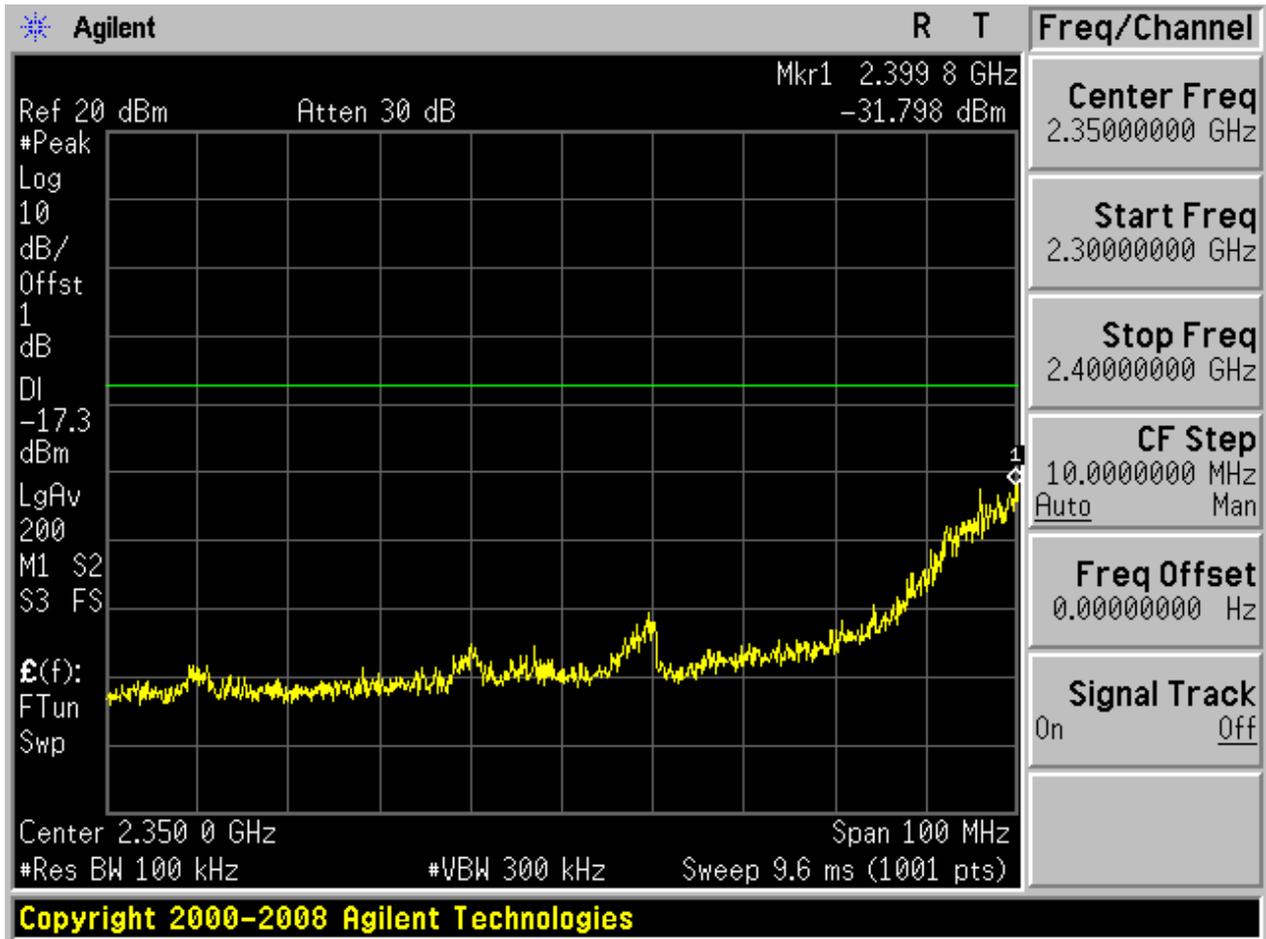


Copyright 2000-2008 Agilent Technologies

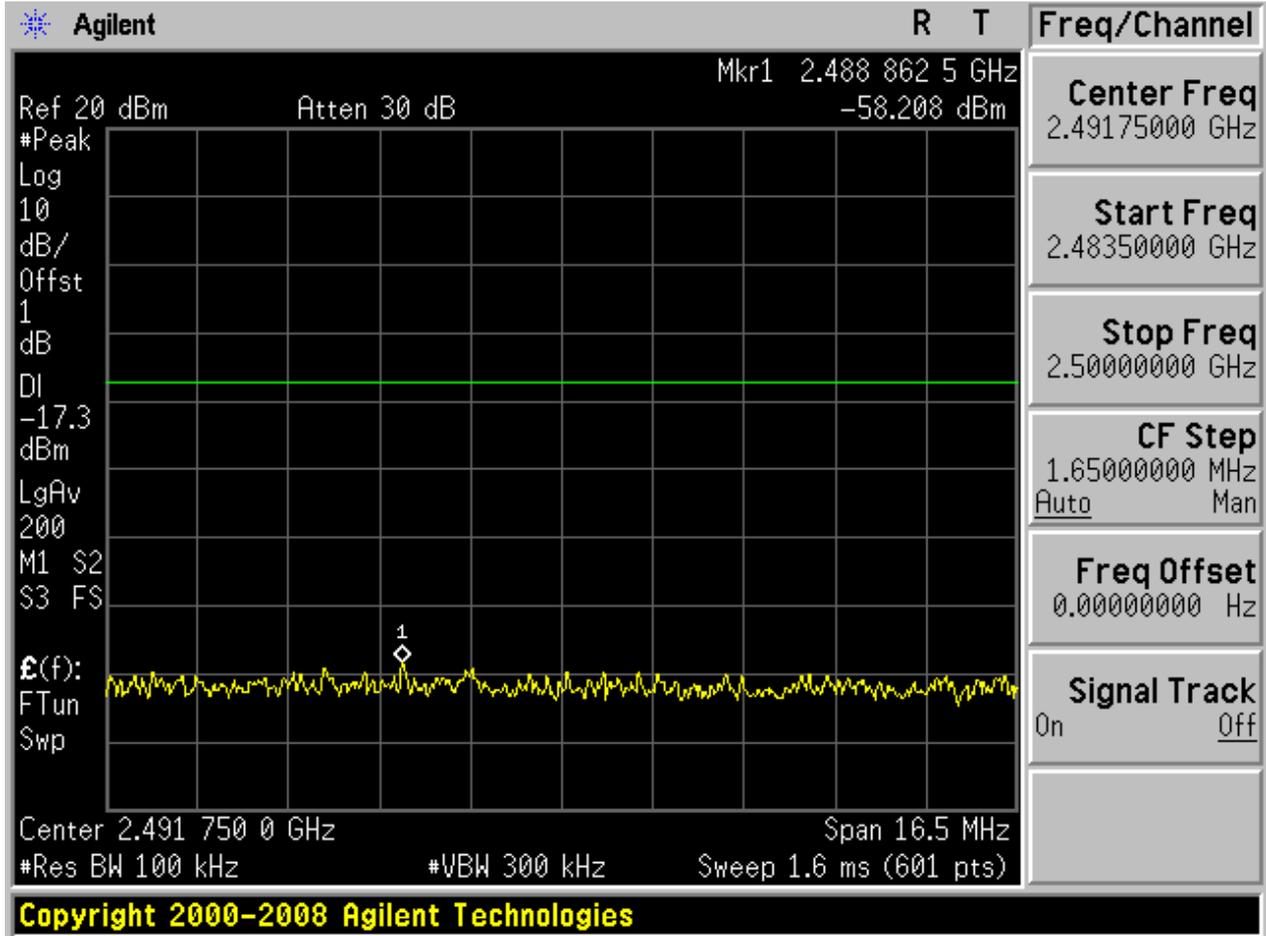

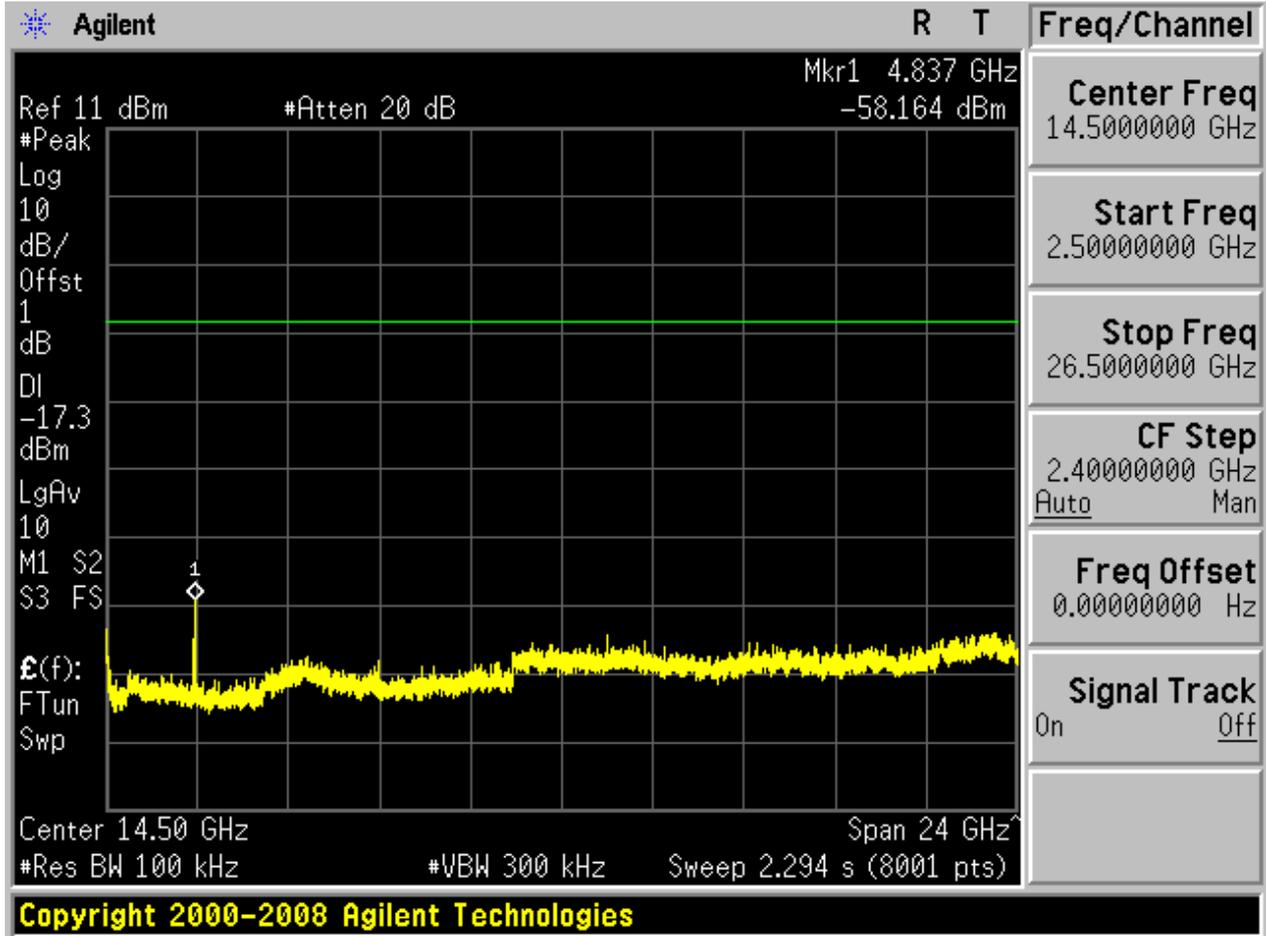



## 2.5 11G\_M

Pref:

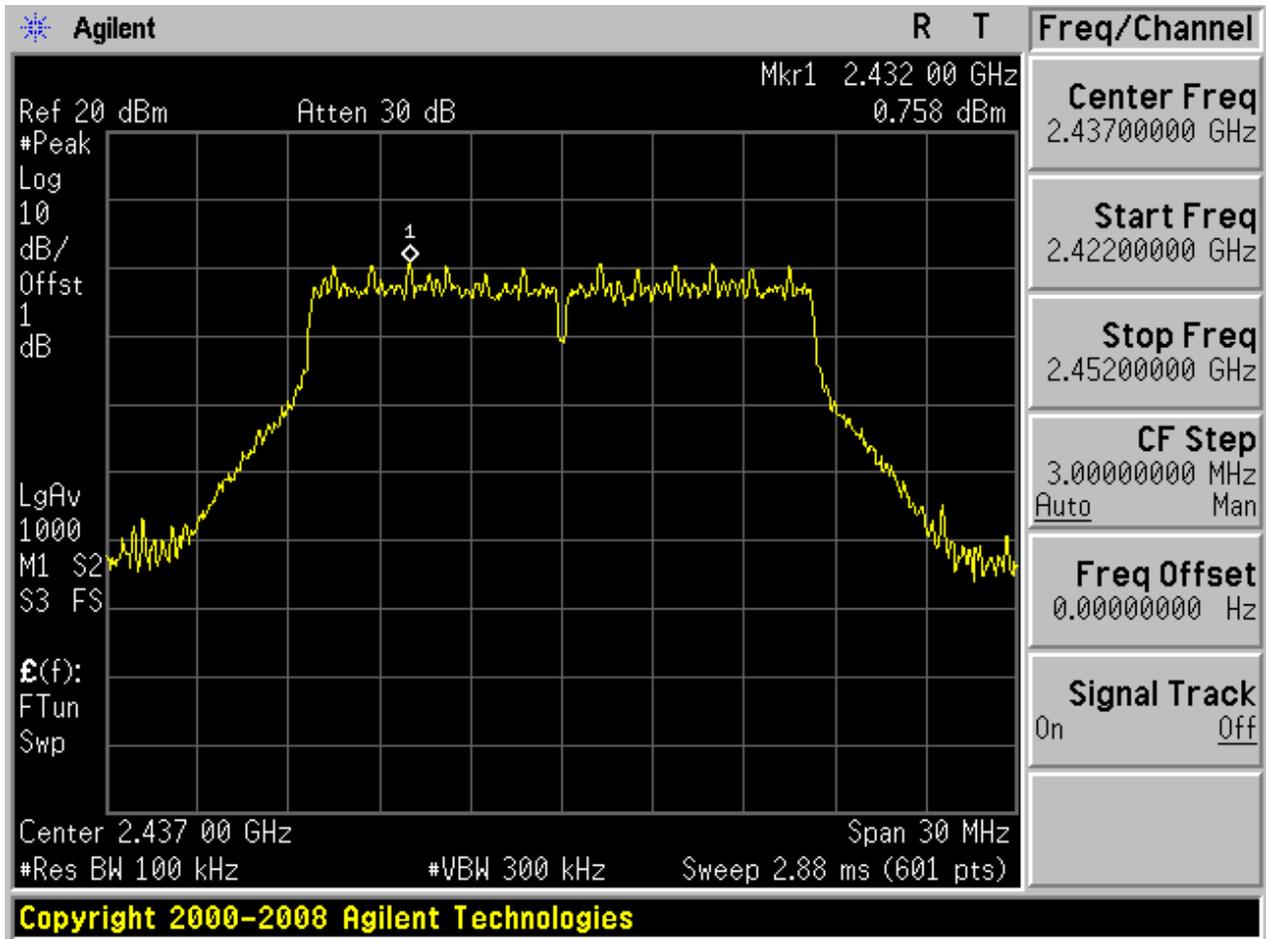



Puw:

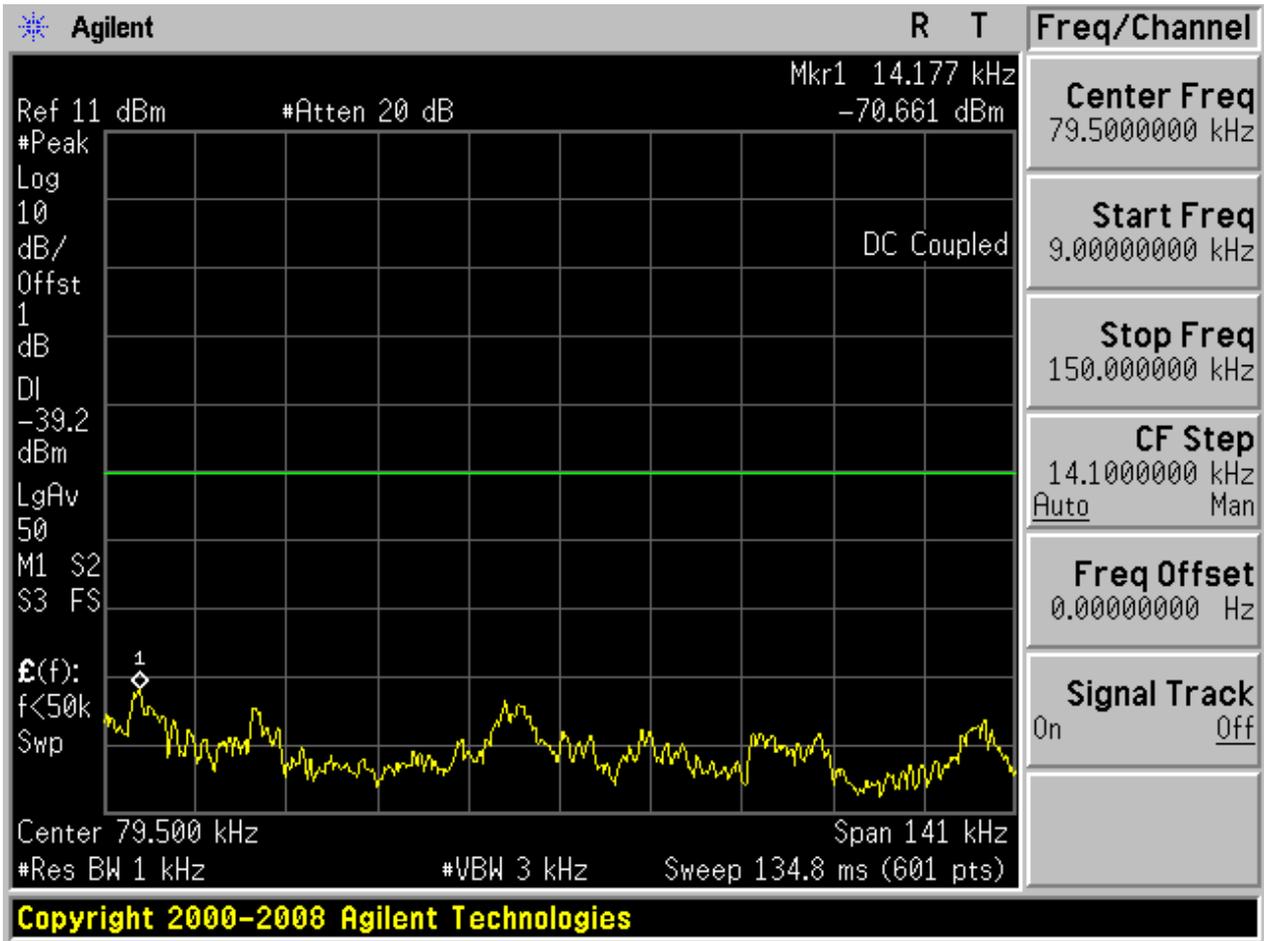


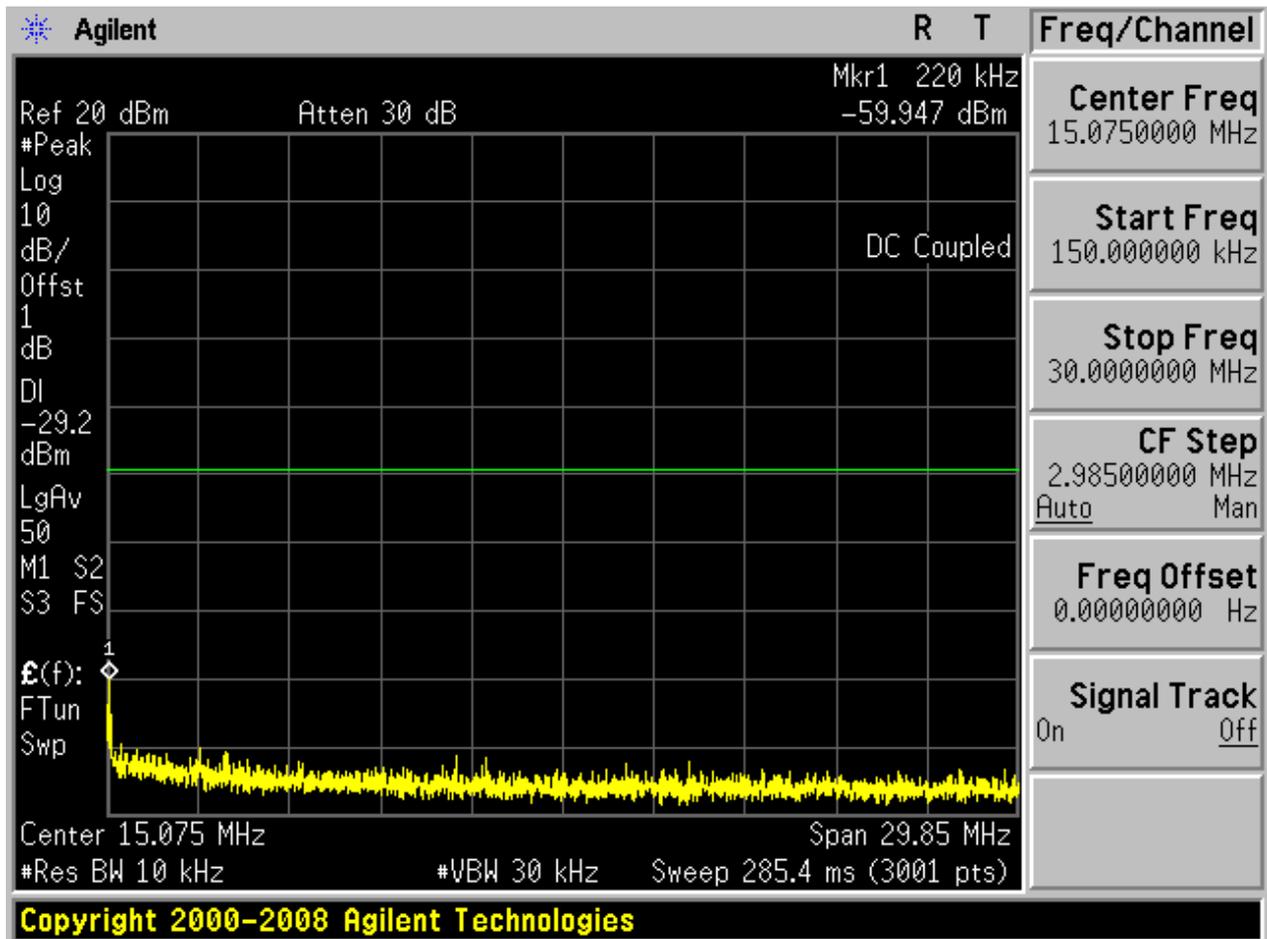



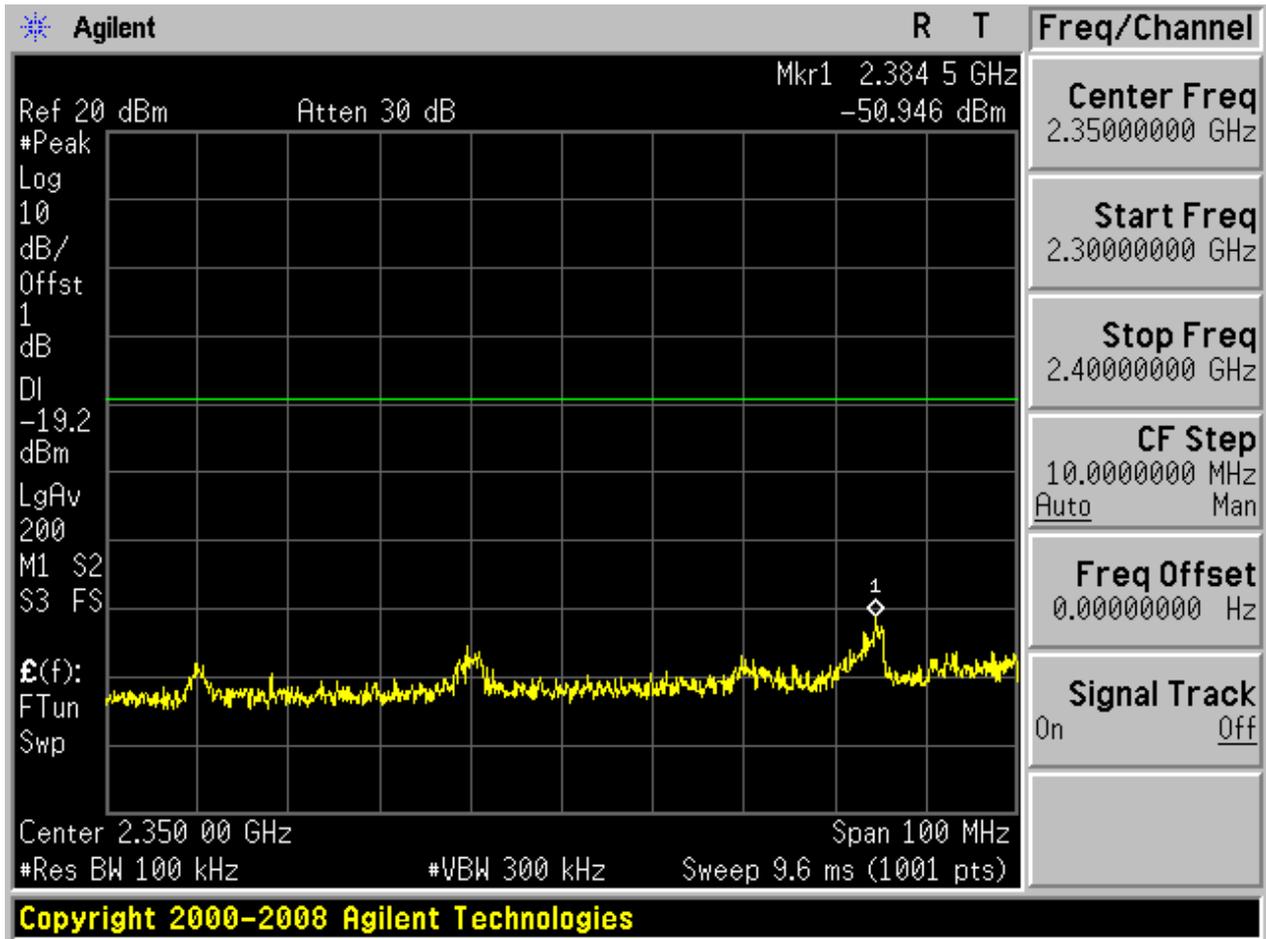


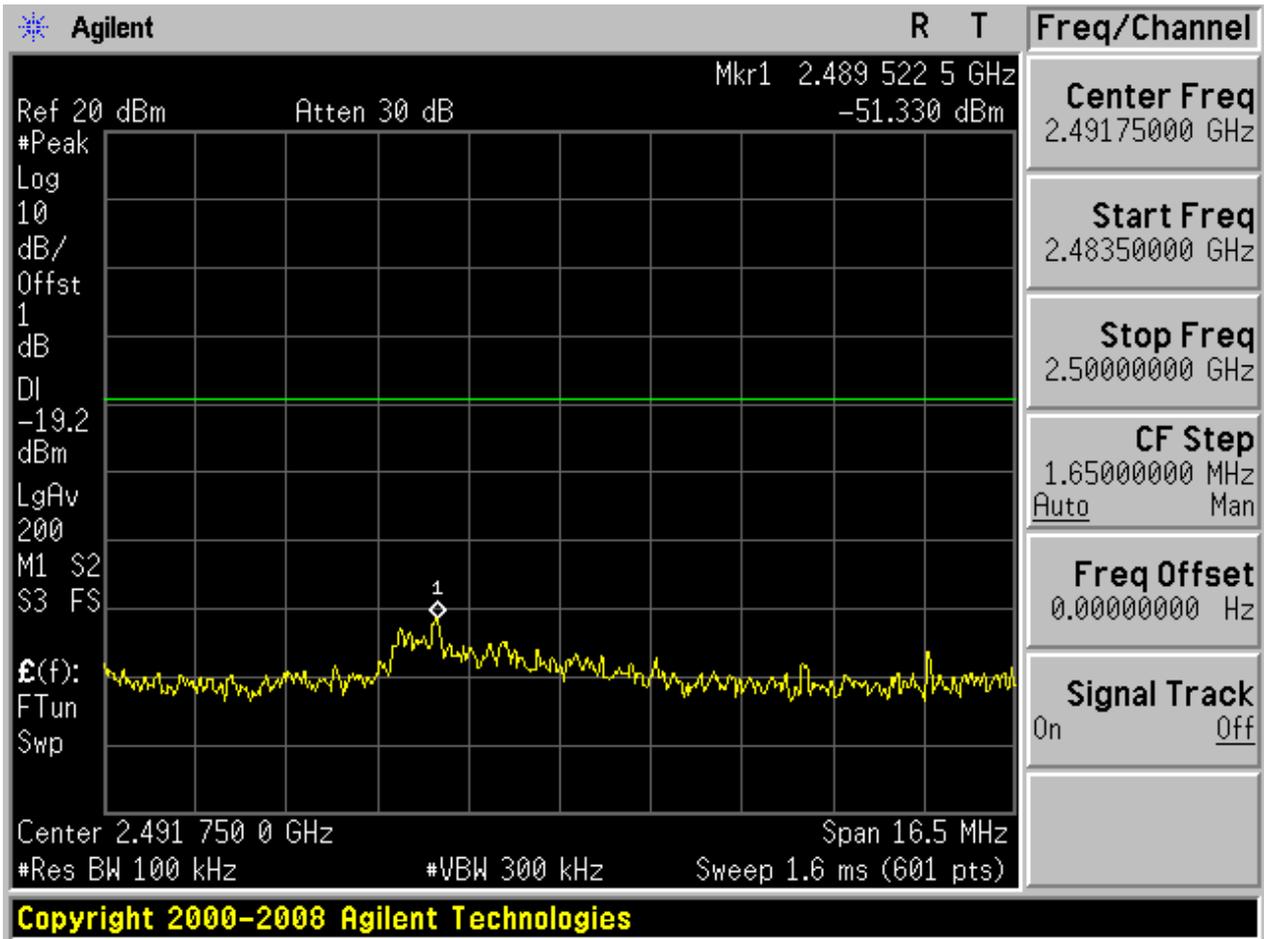

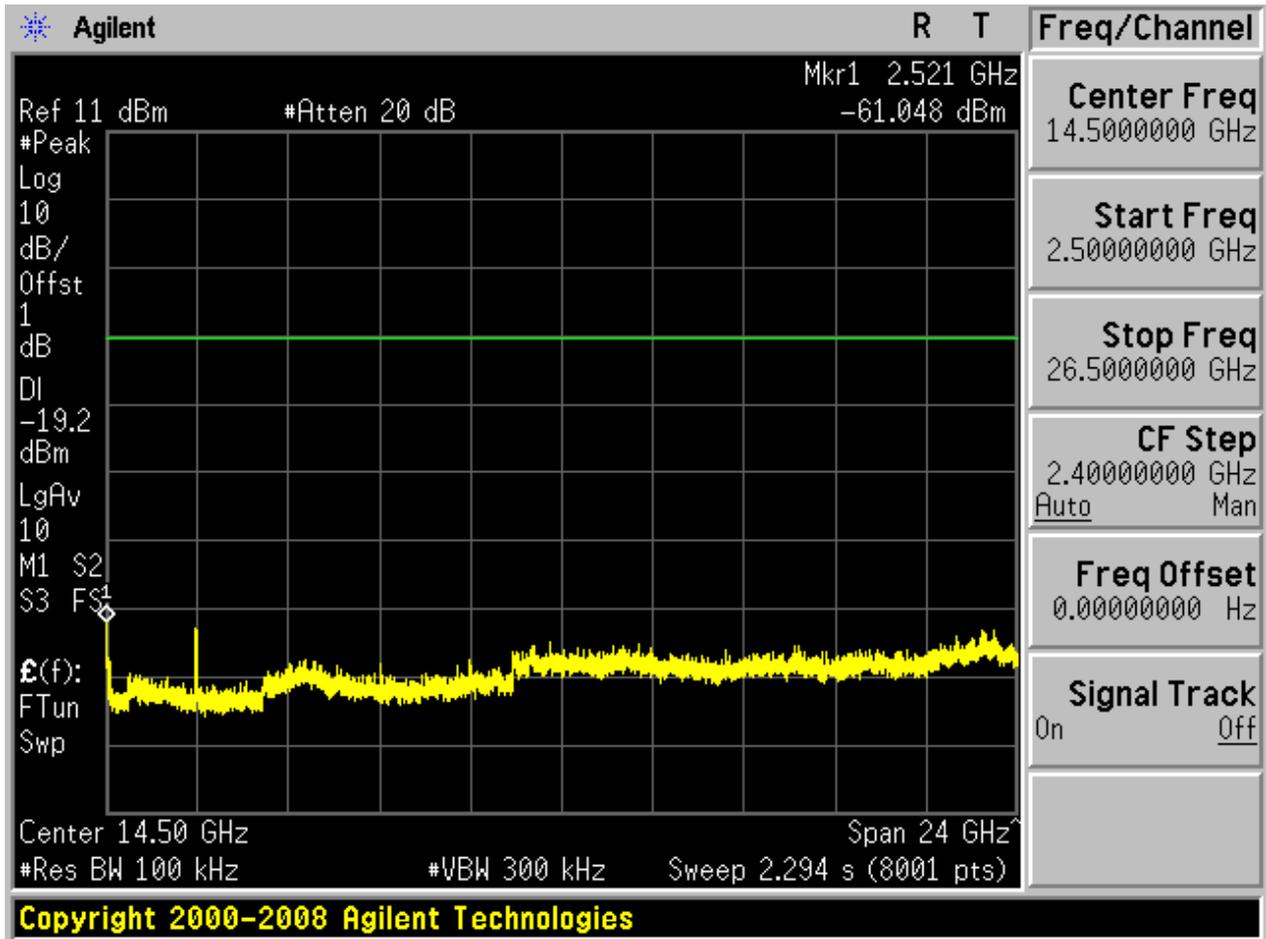



## 2.6 11G\_H


Pref:

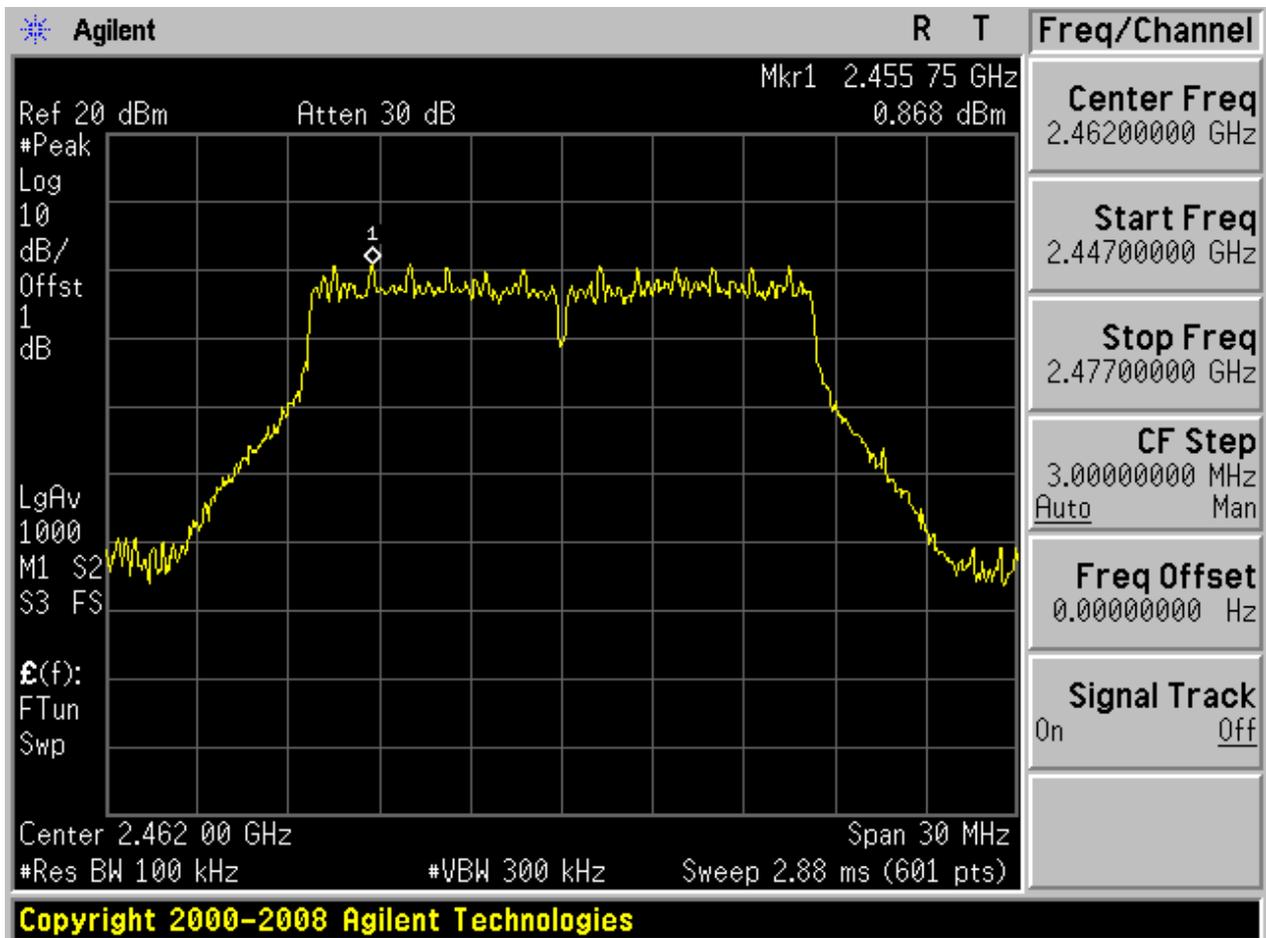



Puw:

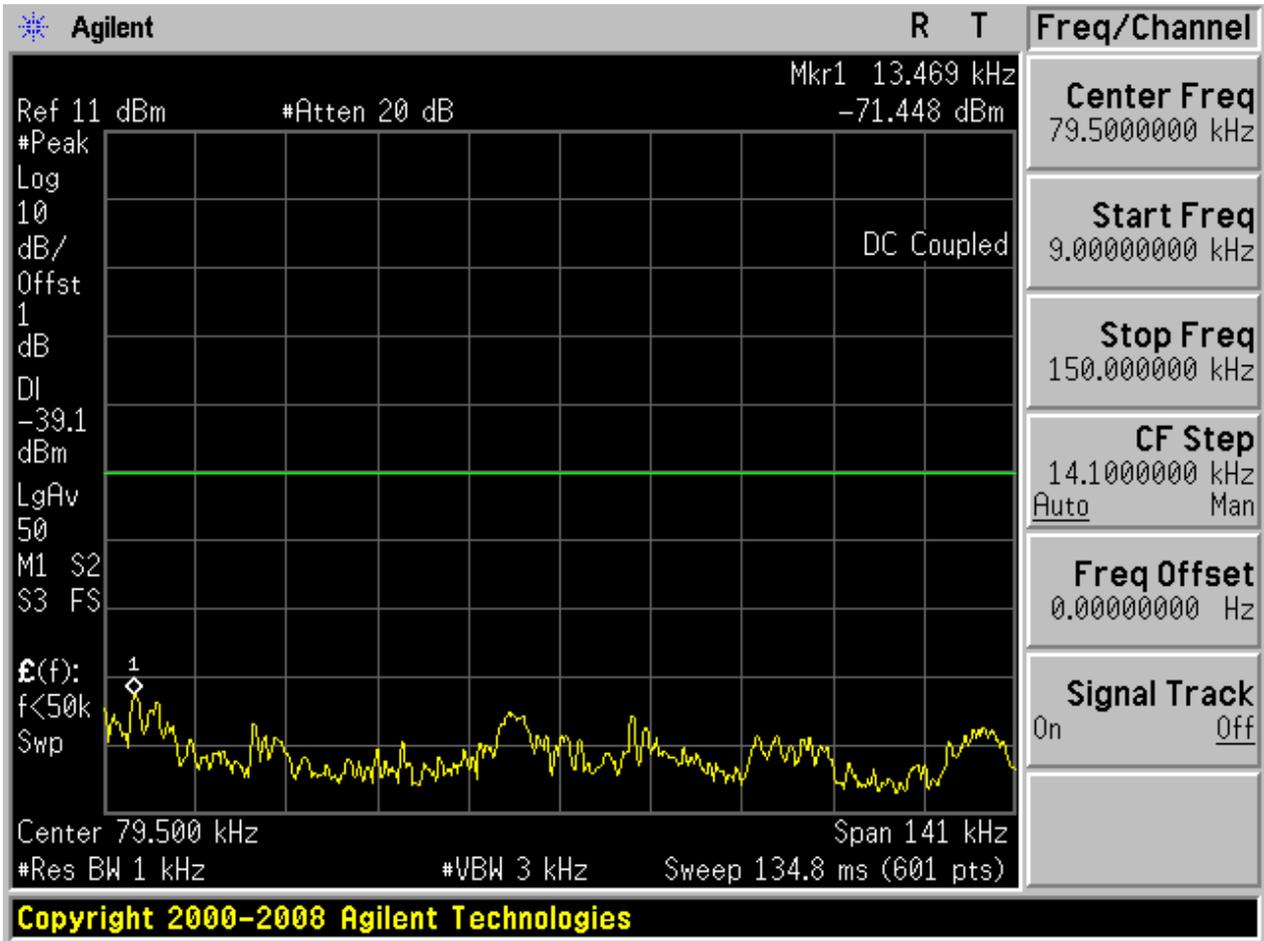


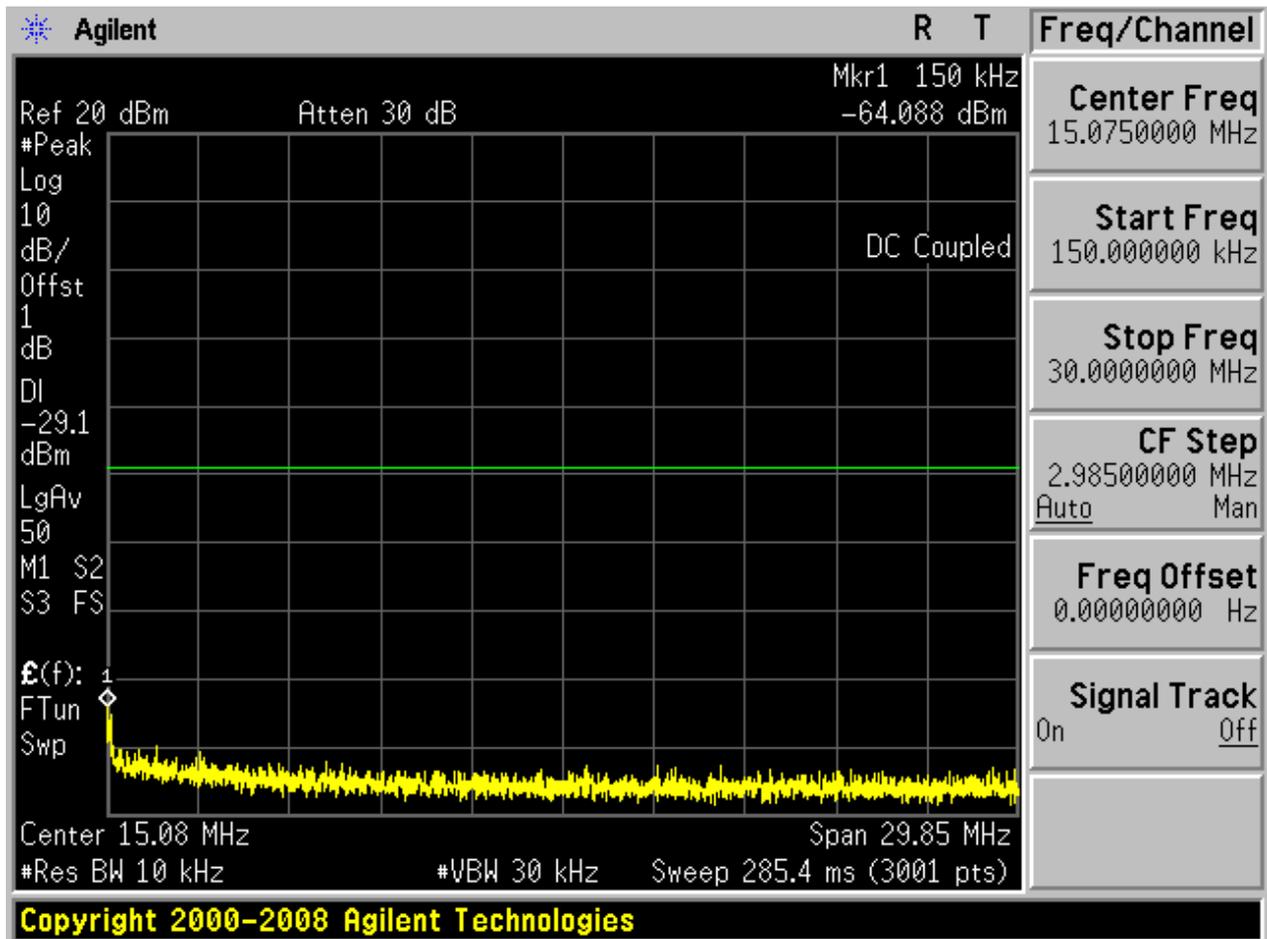

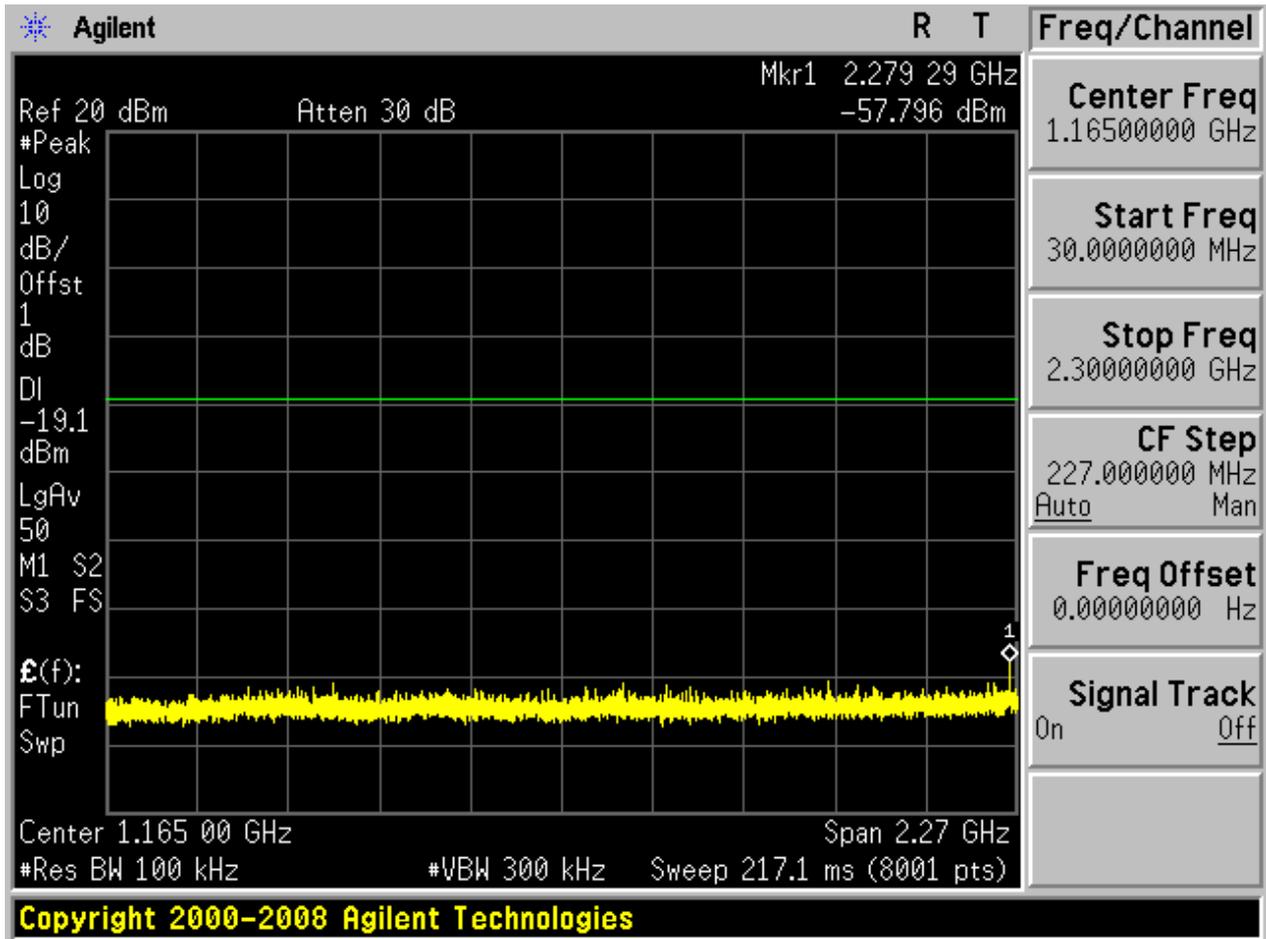

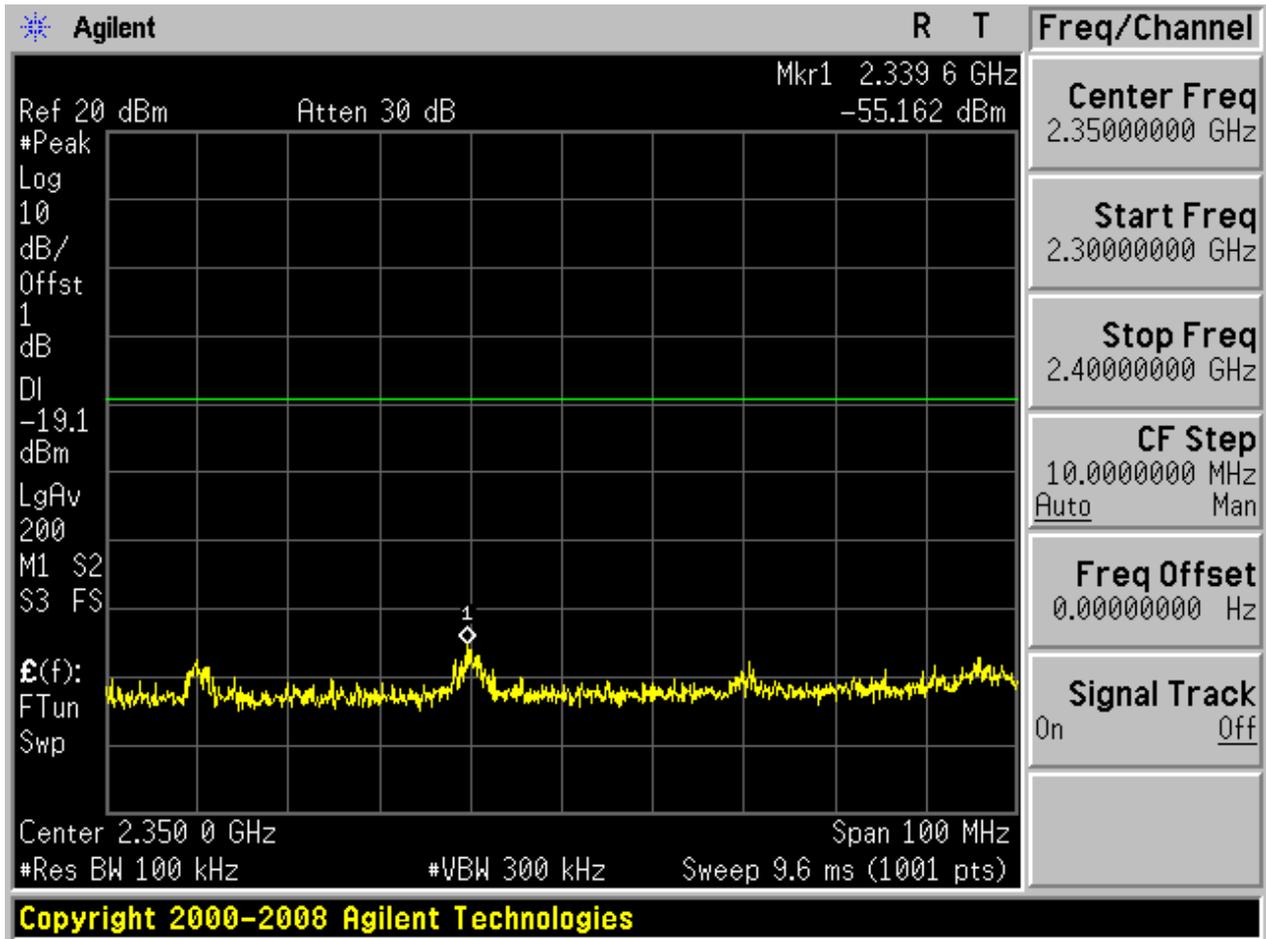


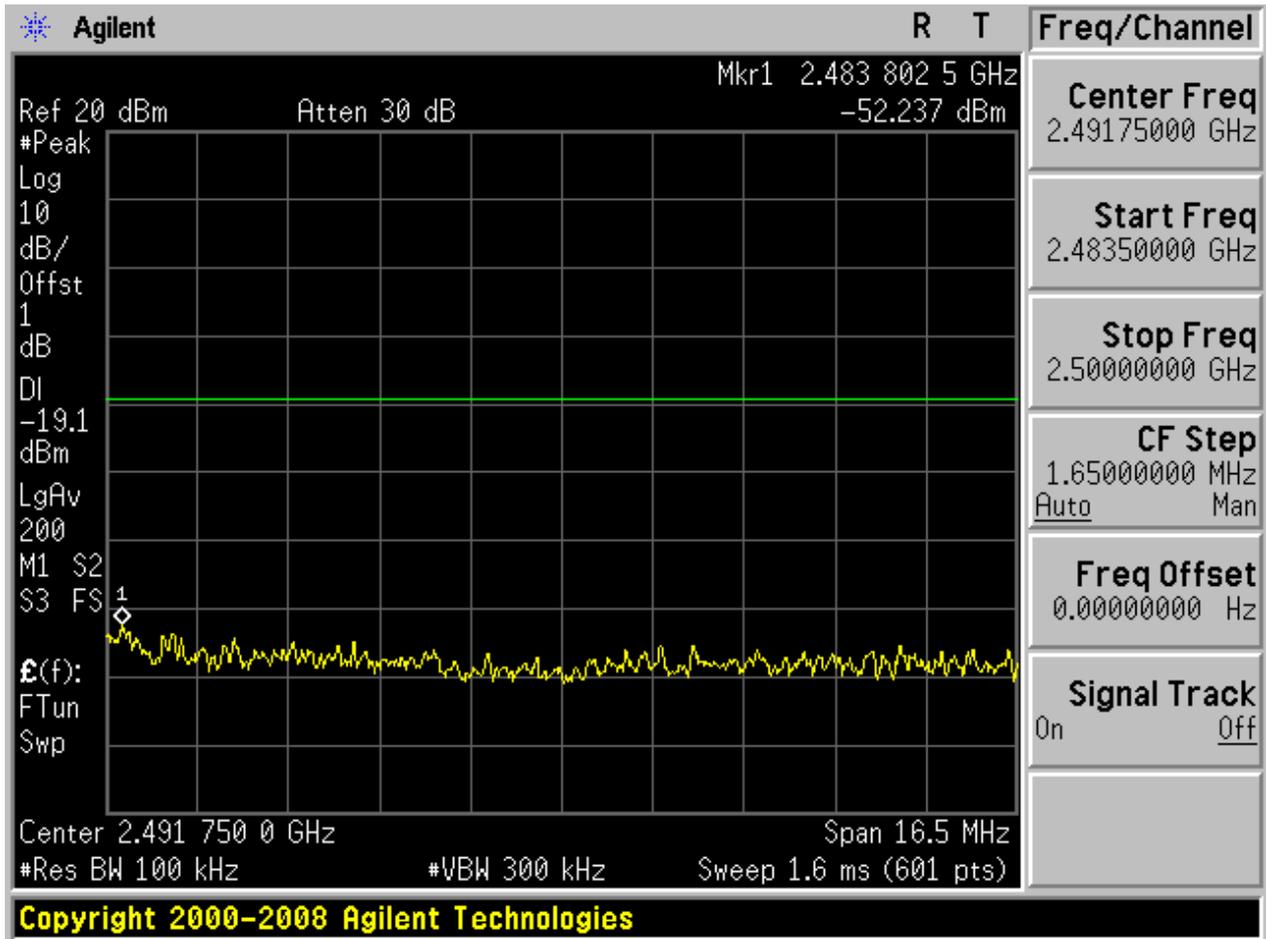

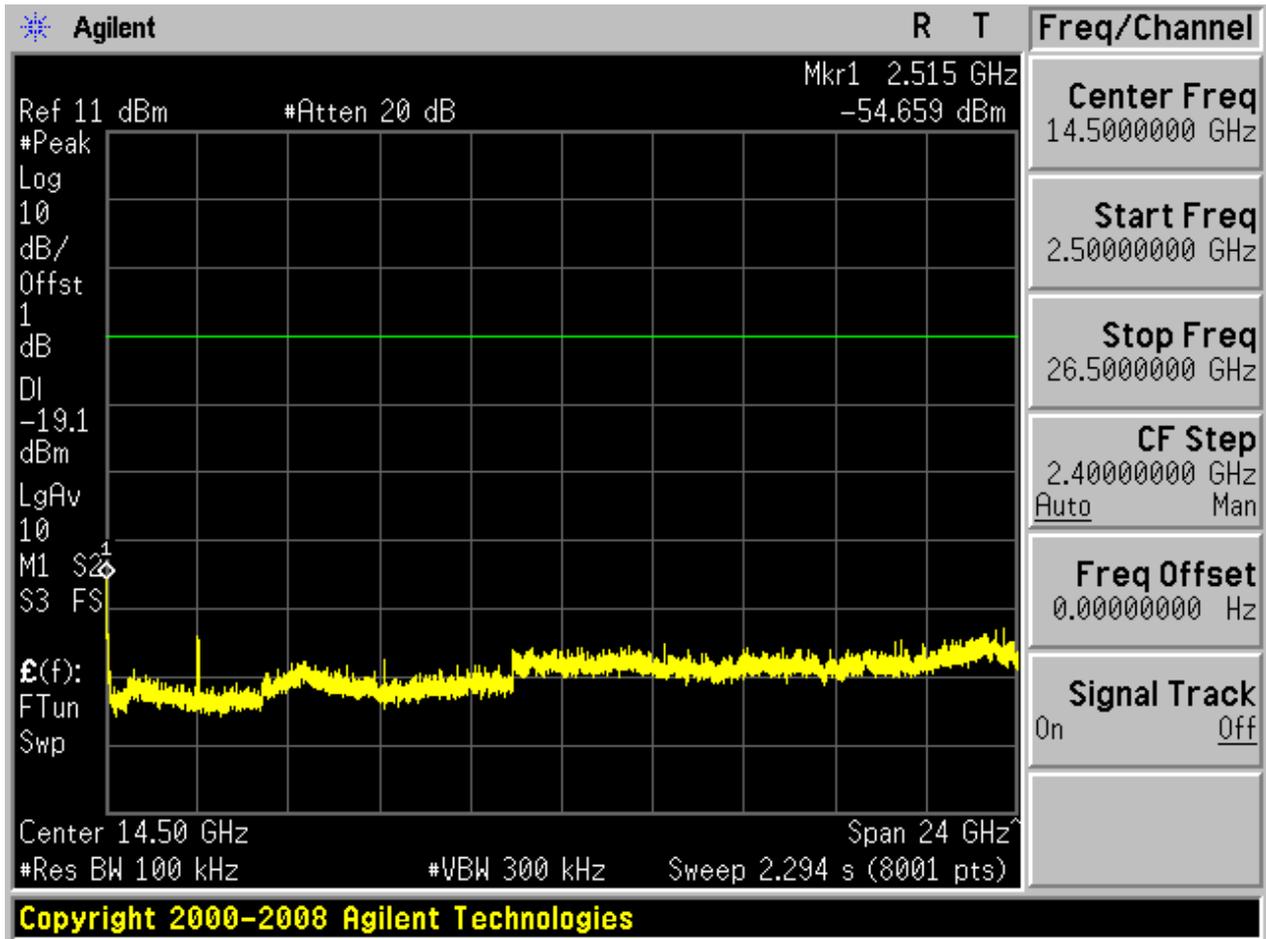



## 2.7 11N20\_L


Pref:

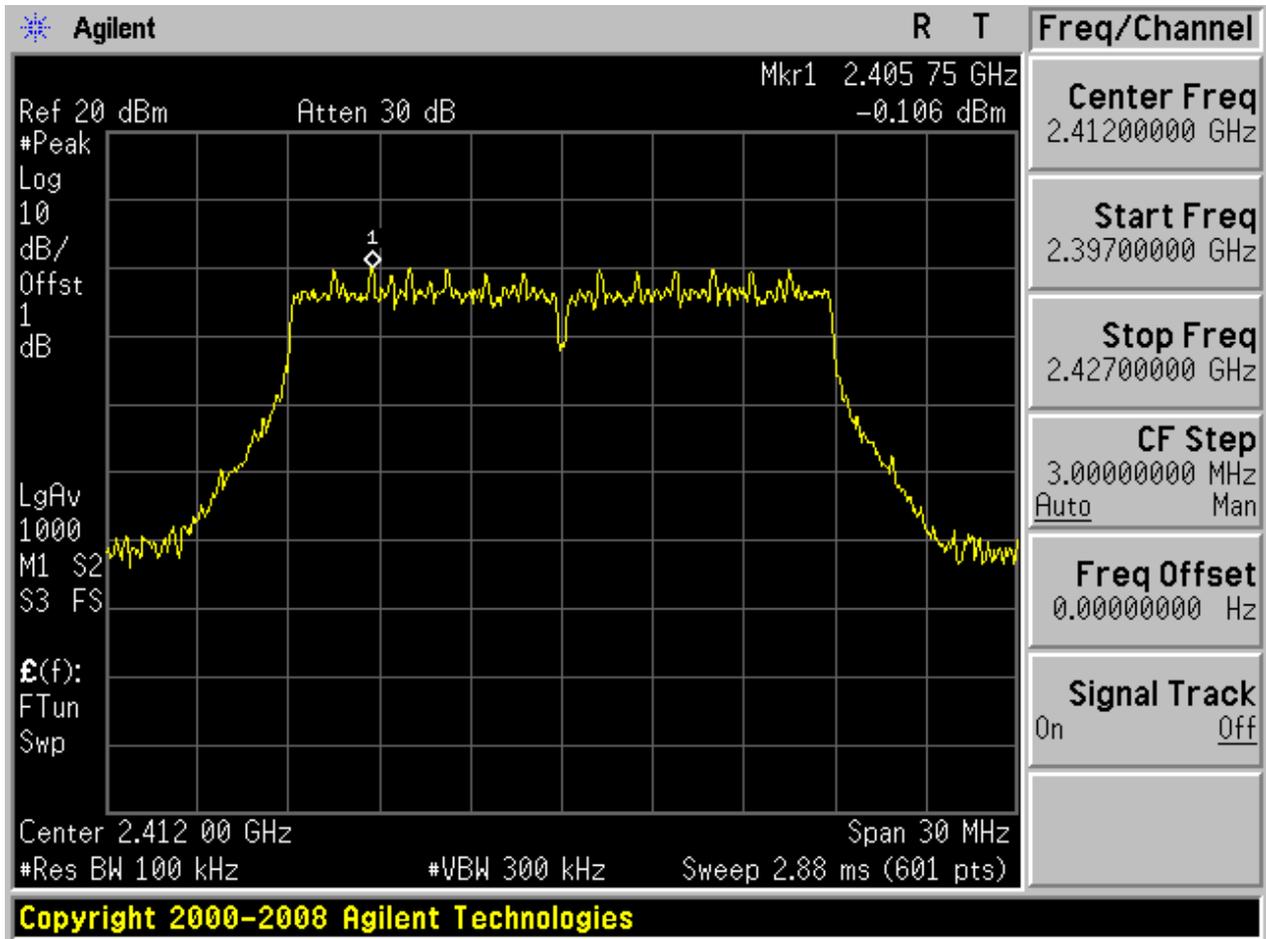



Puw:

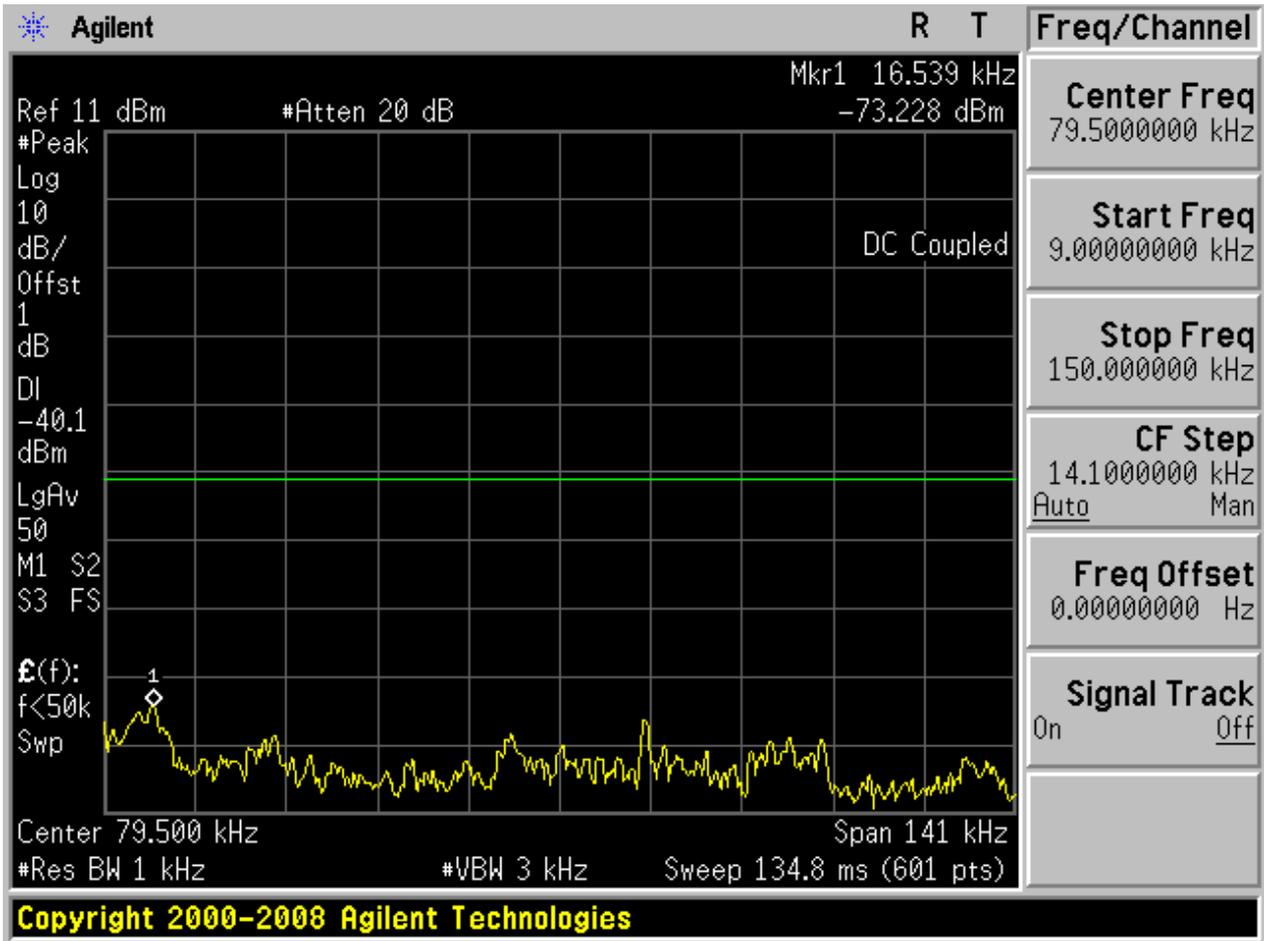


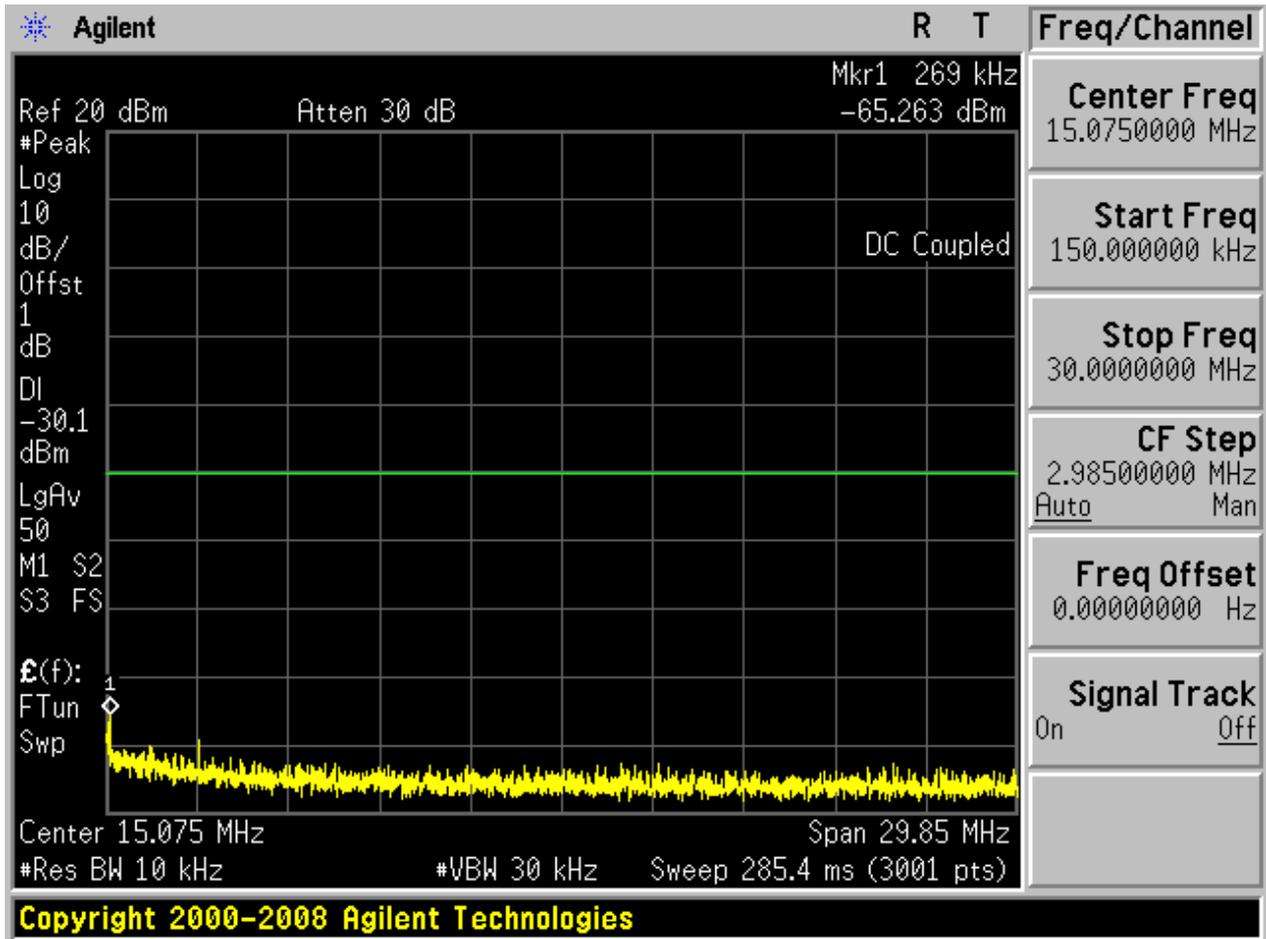

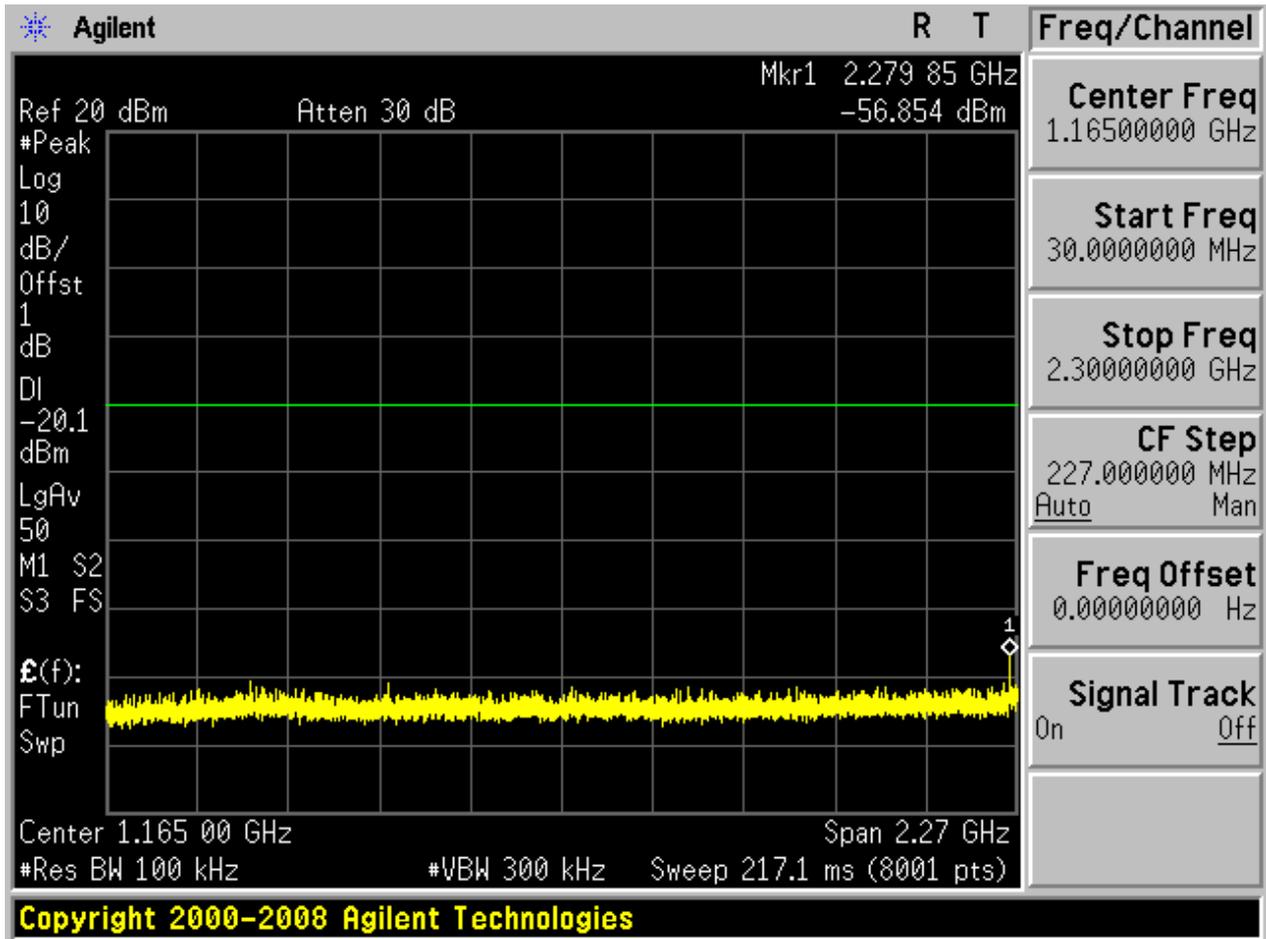

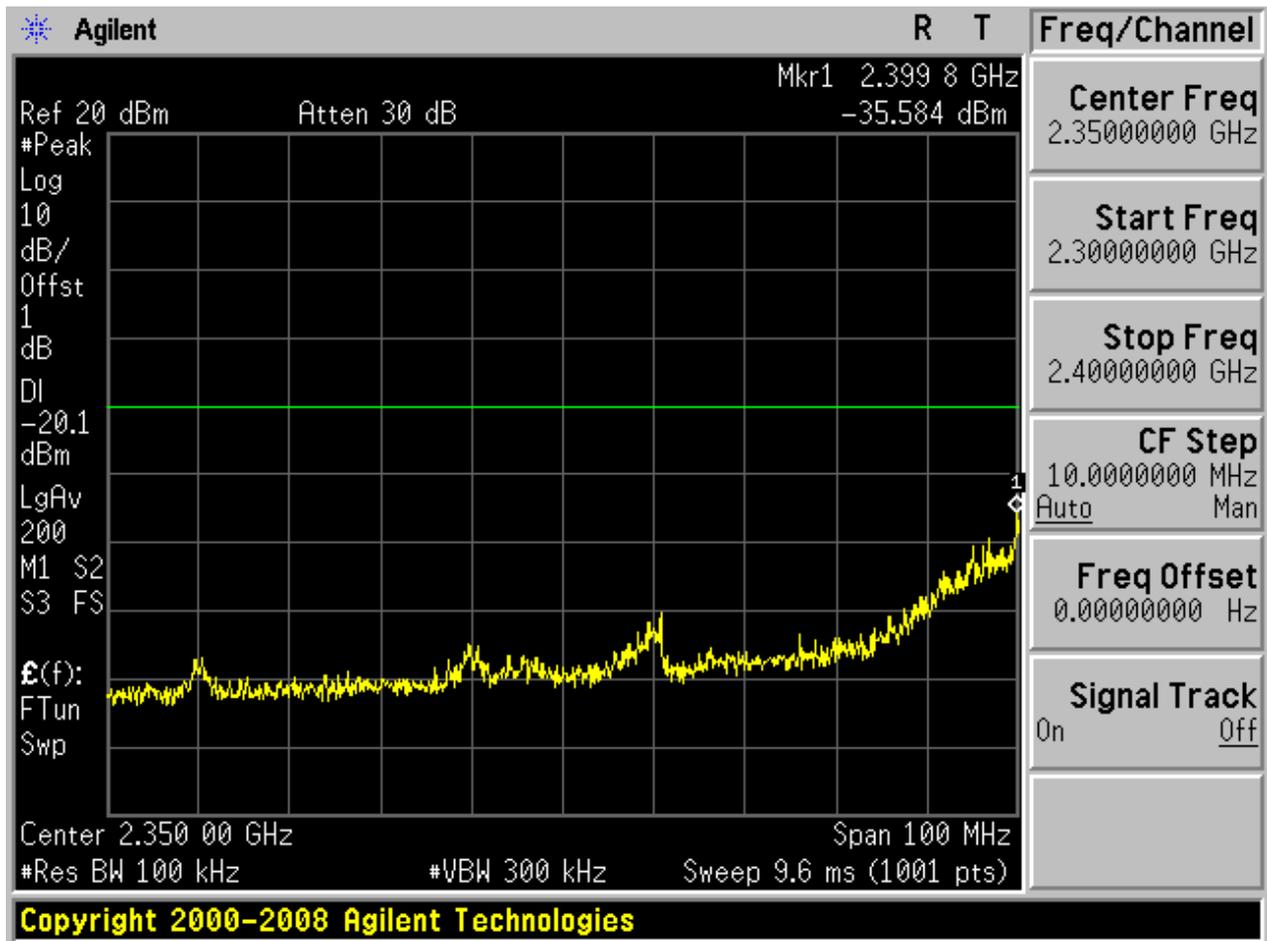


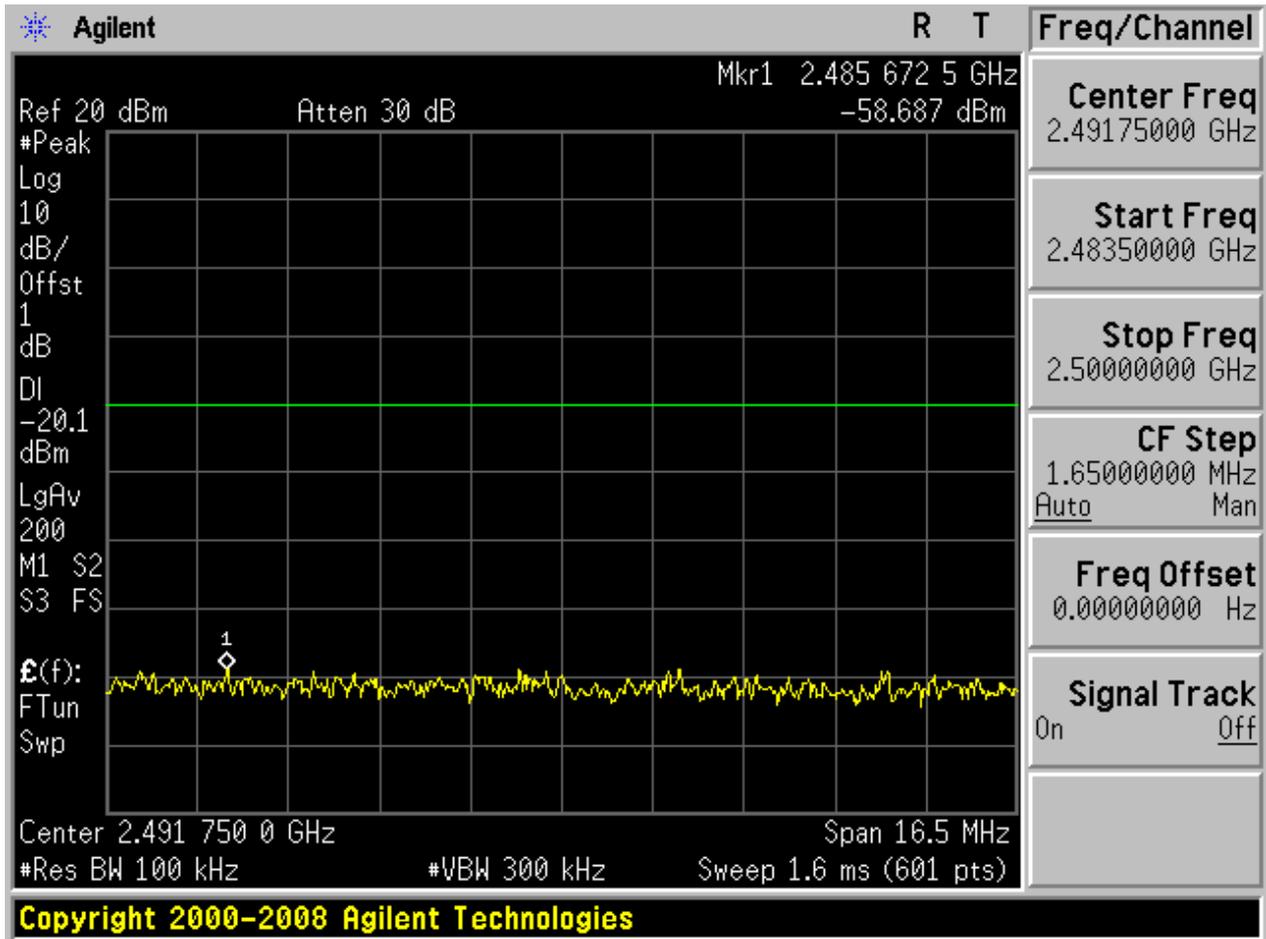

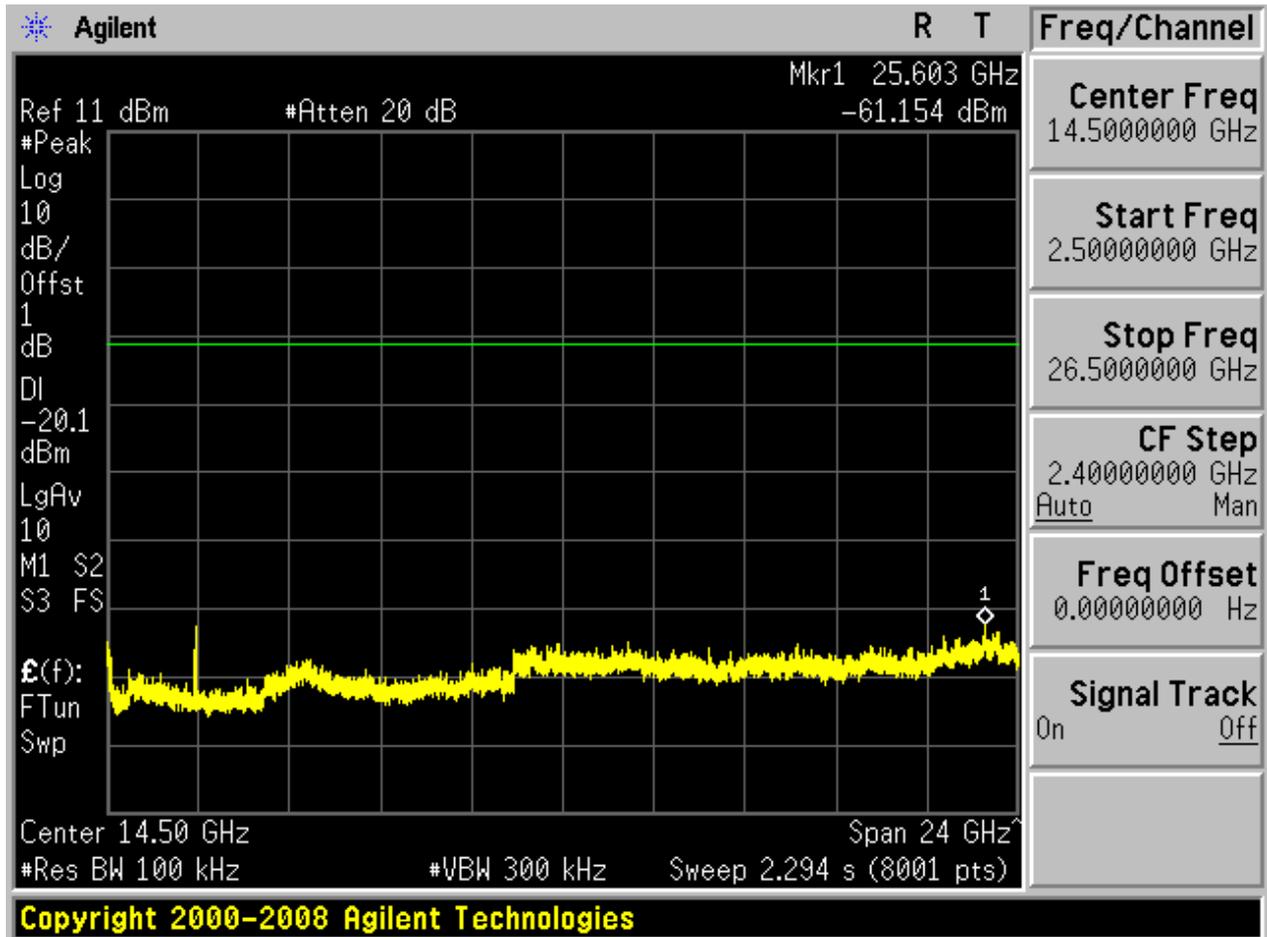



## 2.8 11N20\_M


Pref:

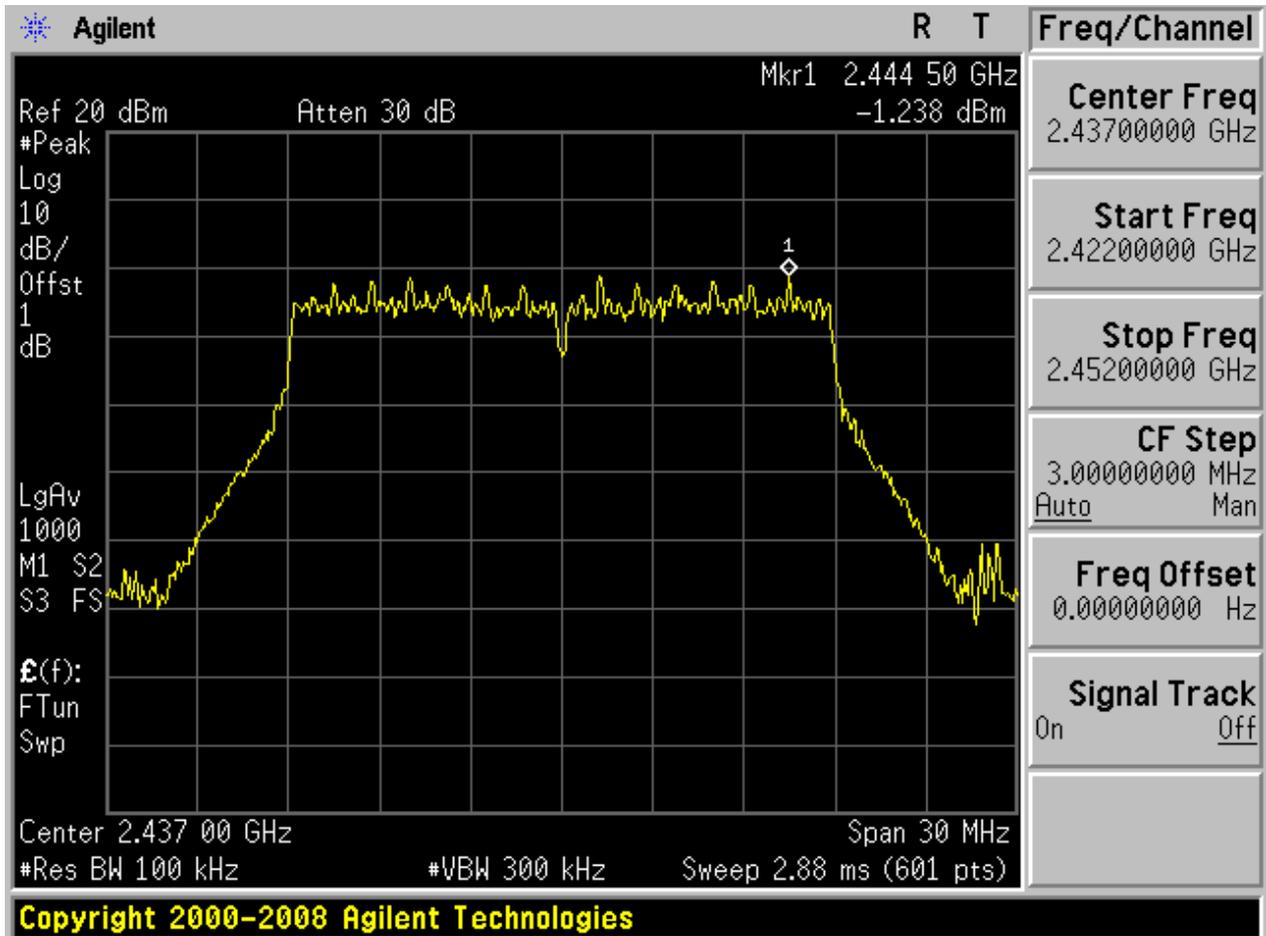



Puw:

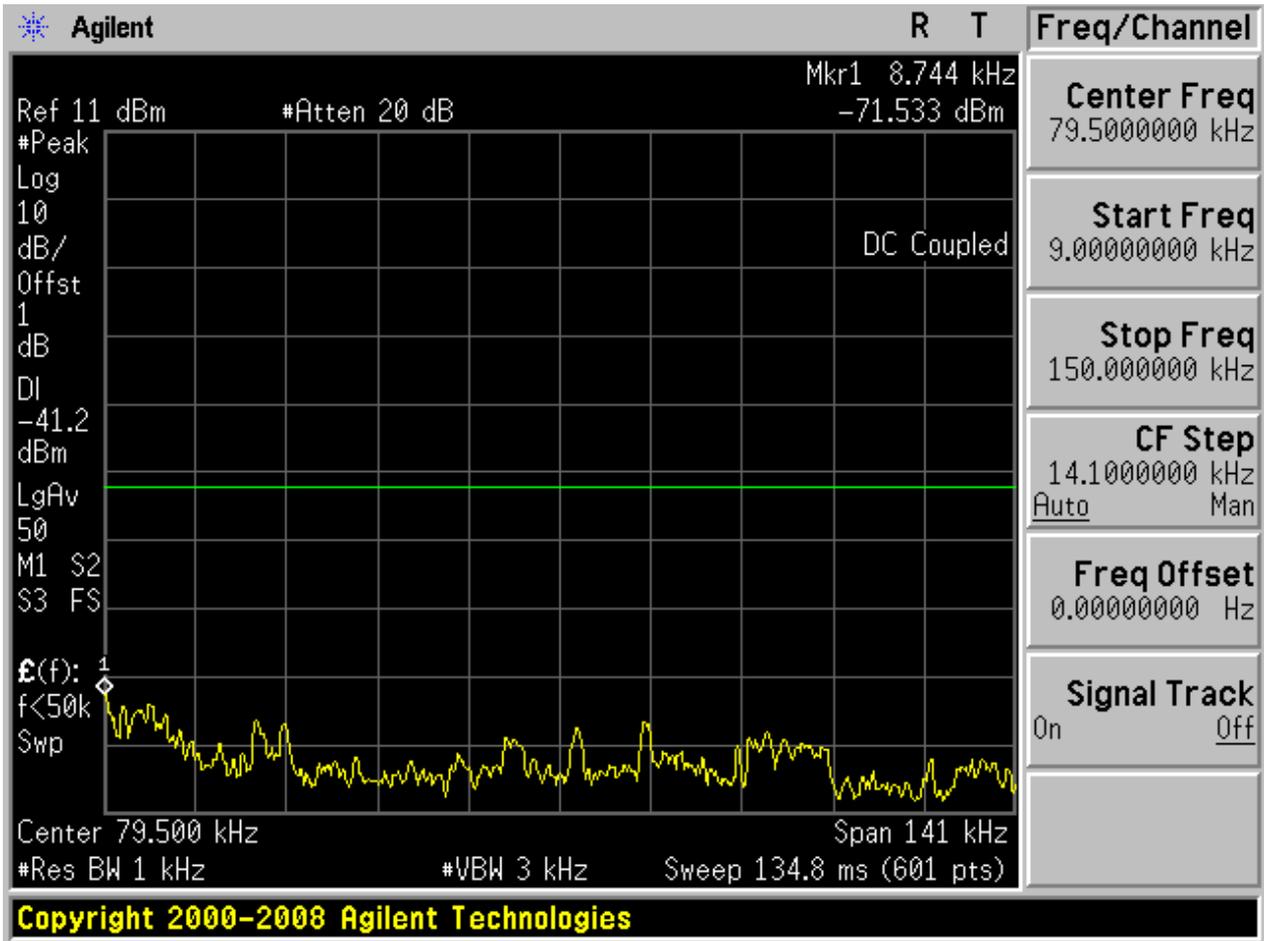


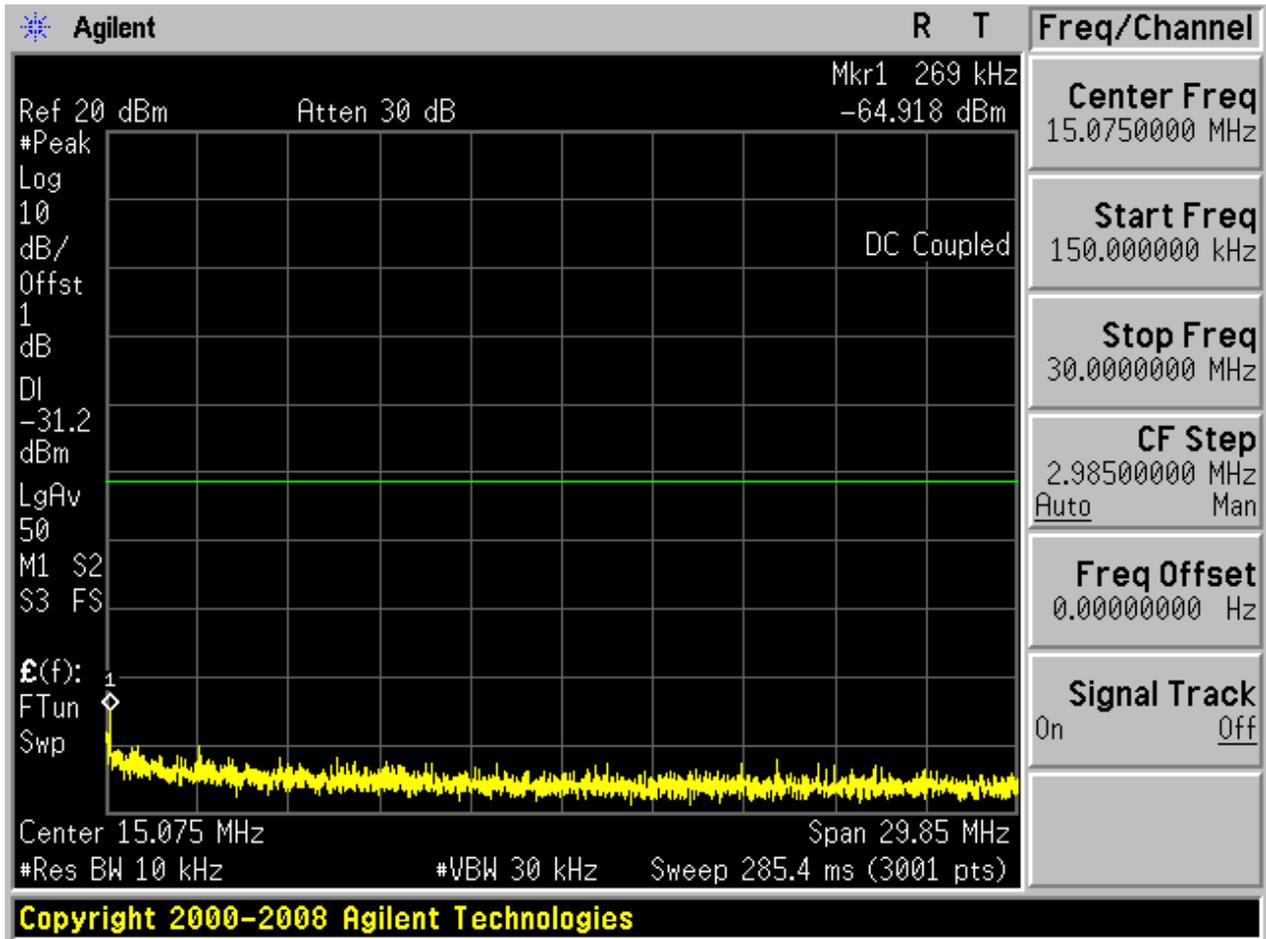

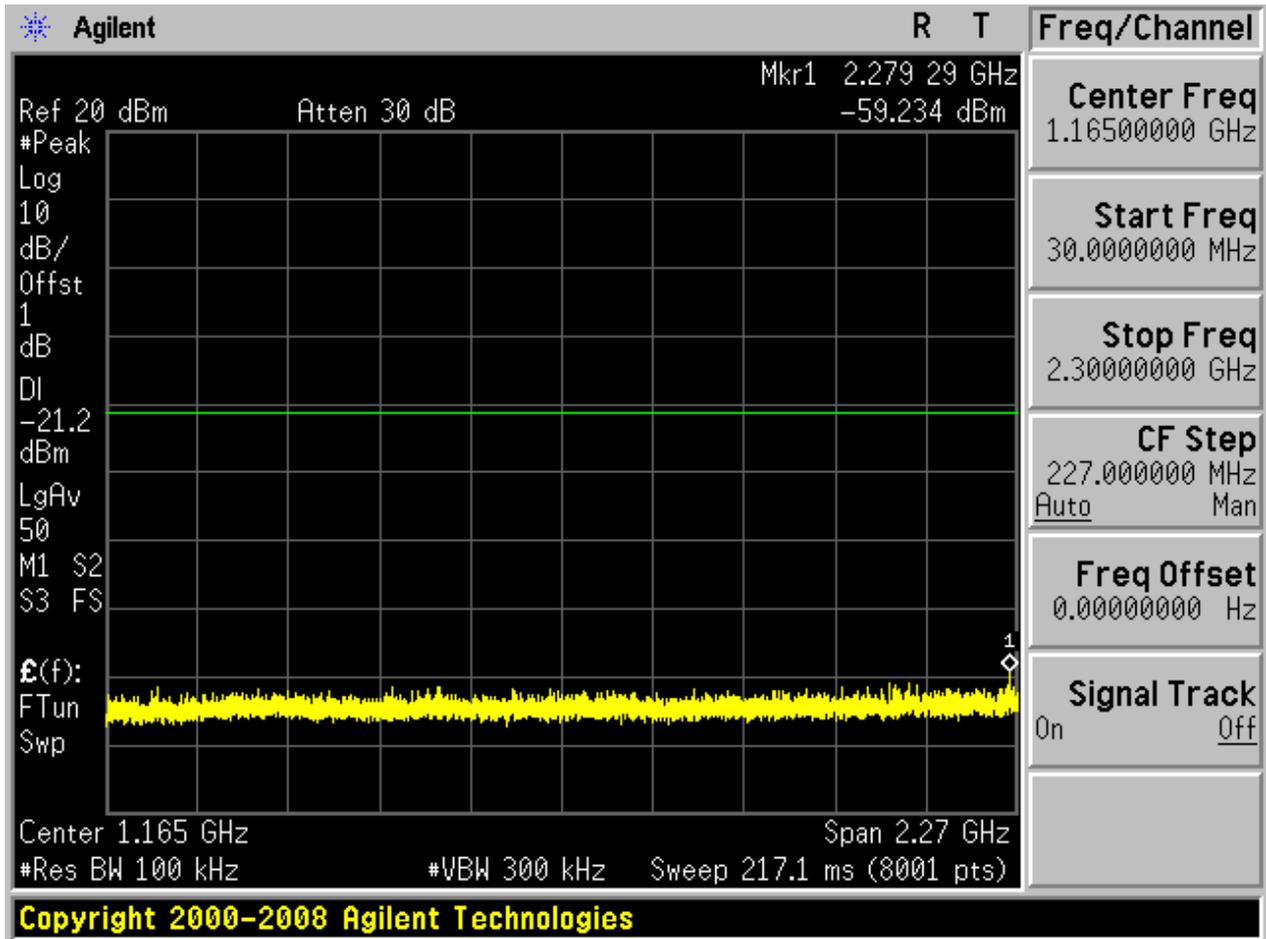

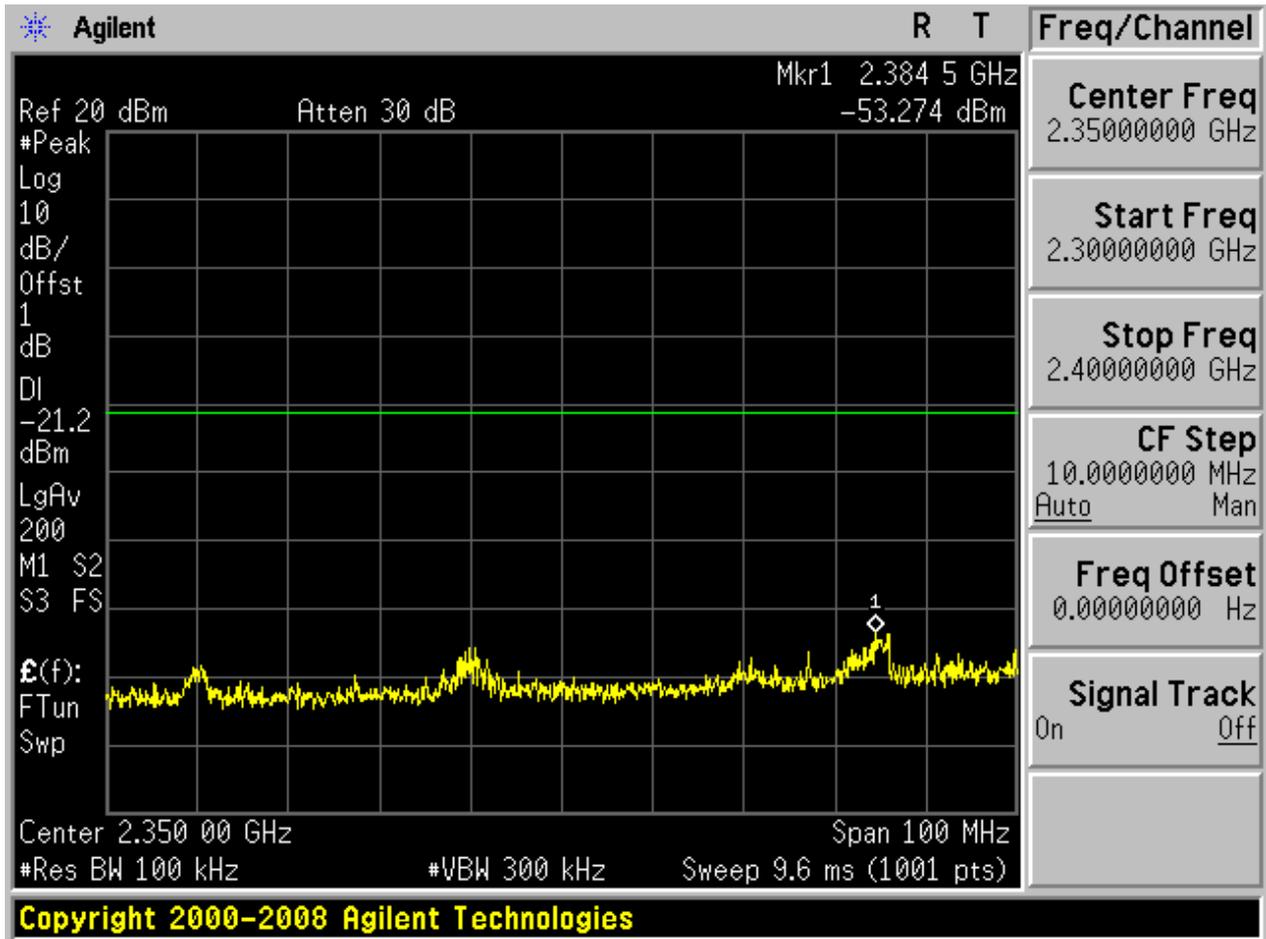


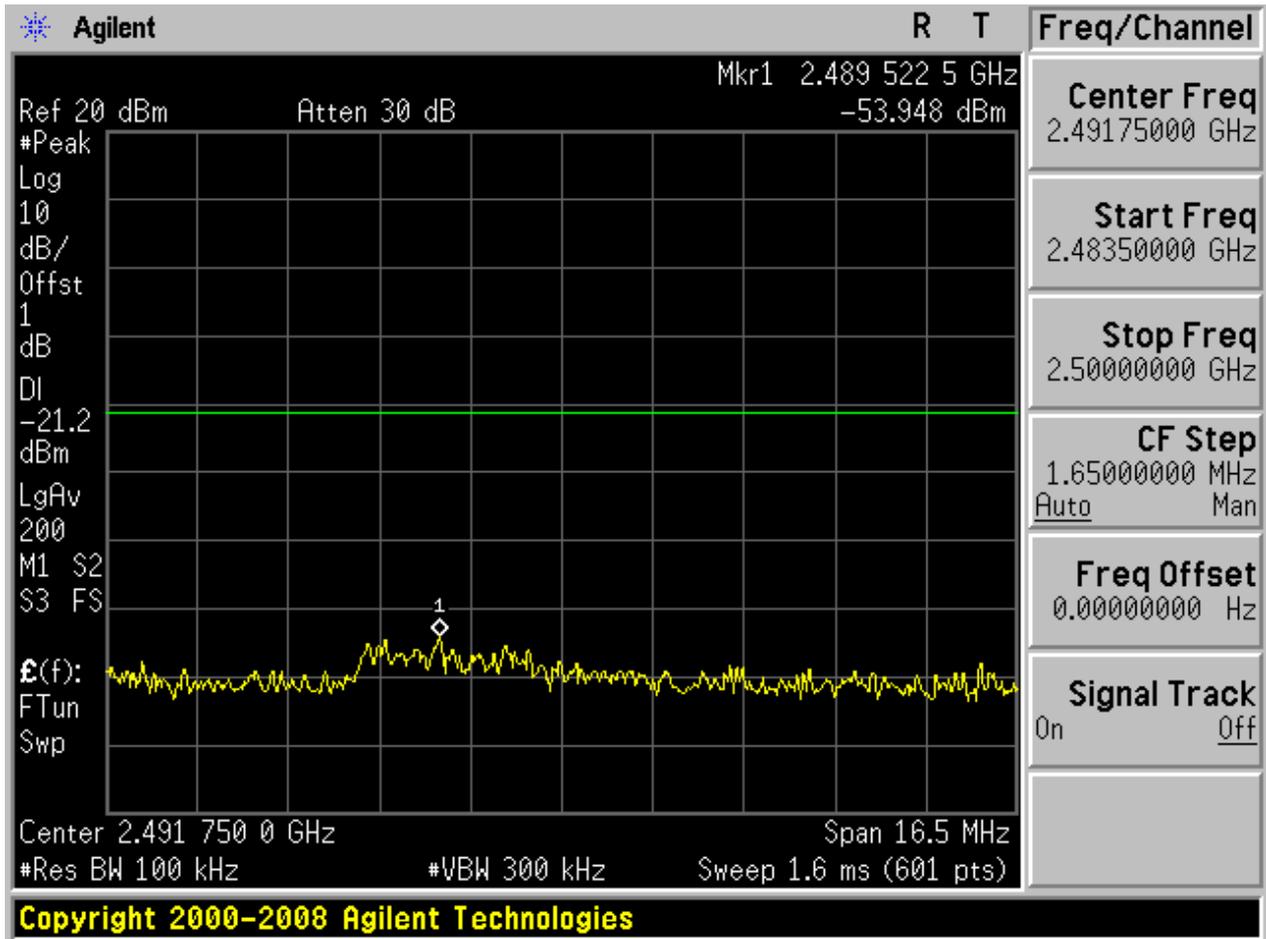

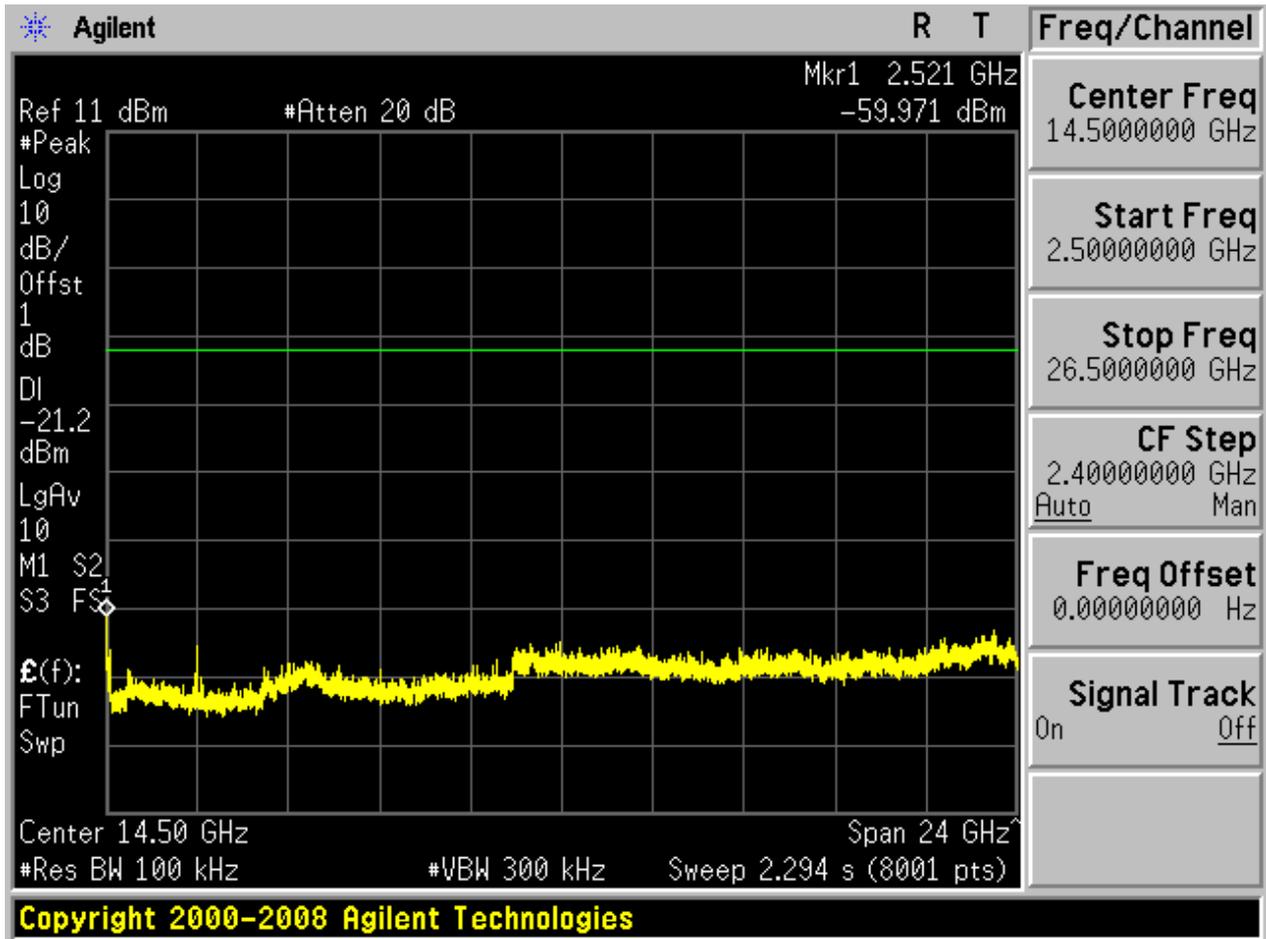



## 2.9 11N20\_H


Pref:

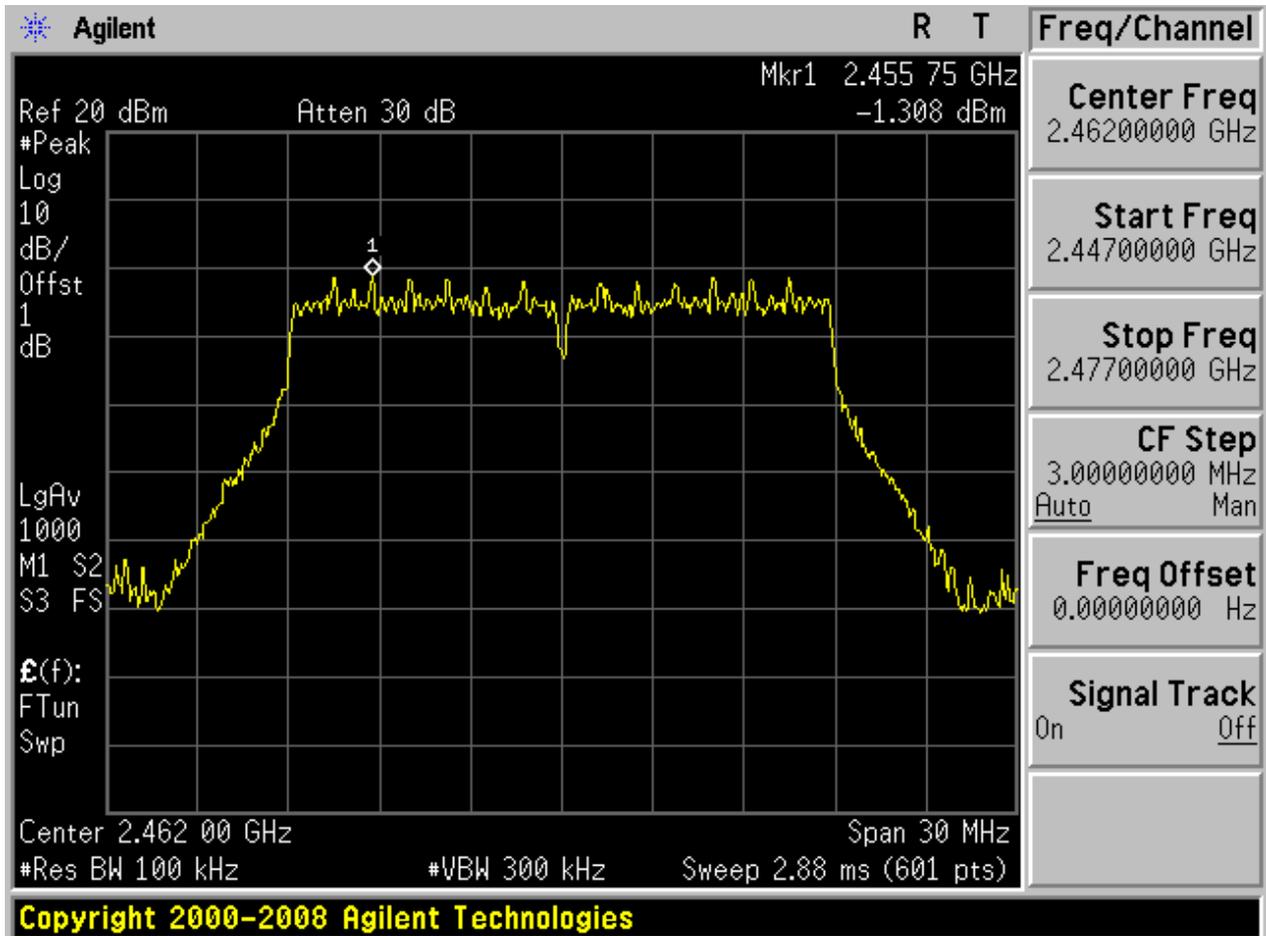



Puw:

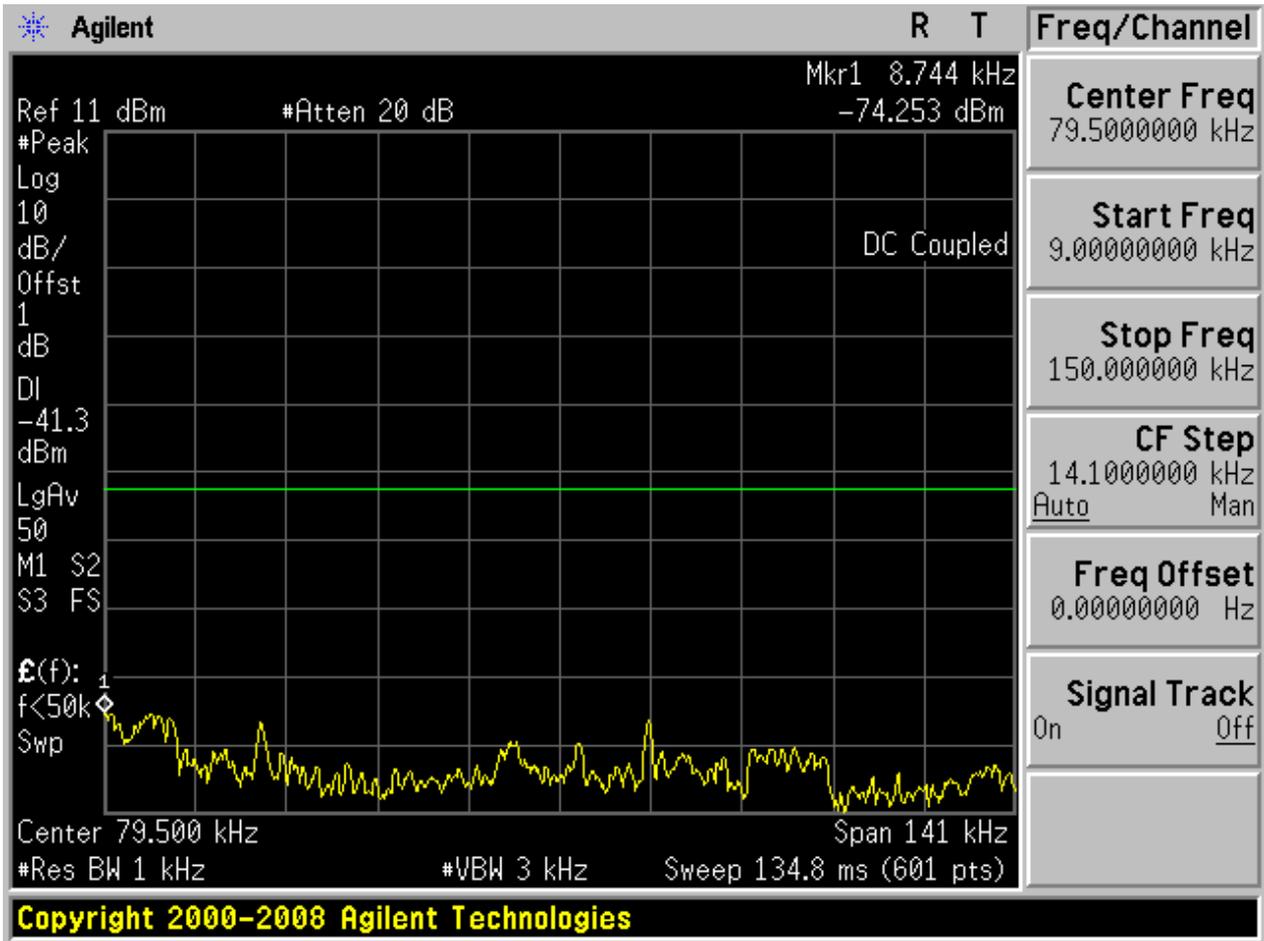


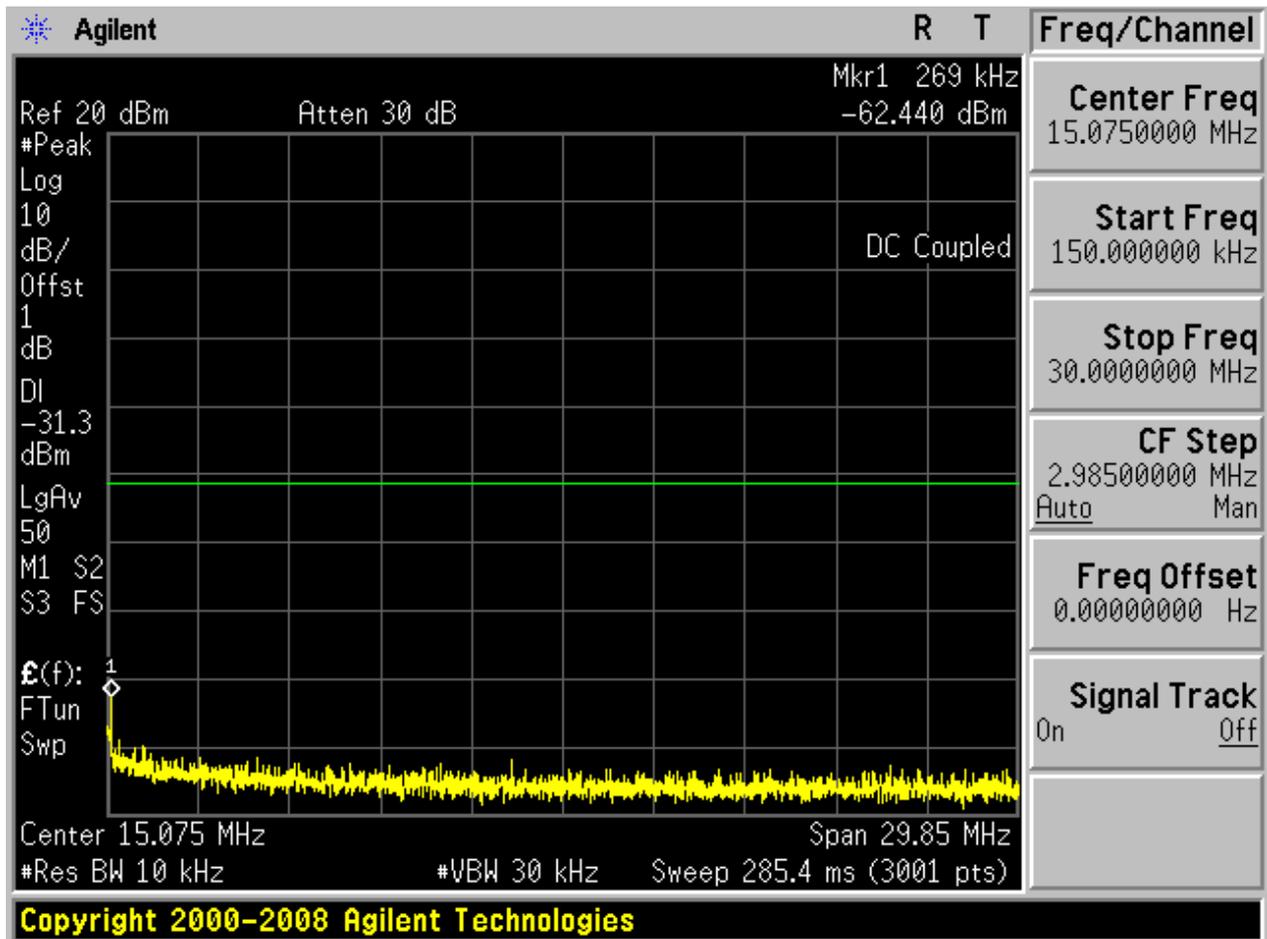

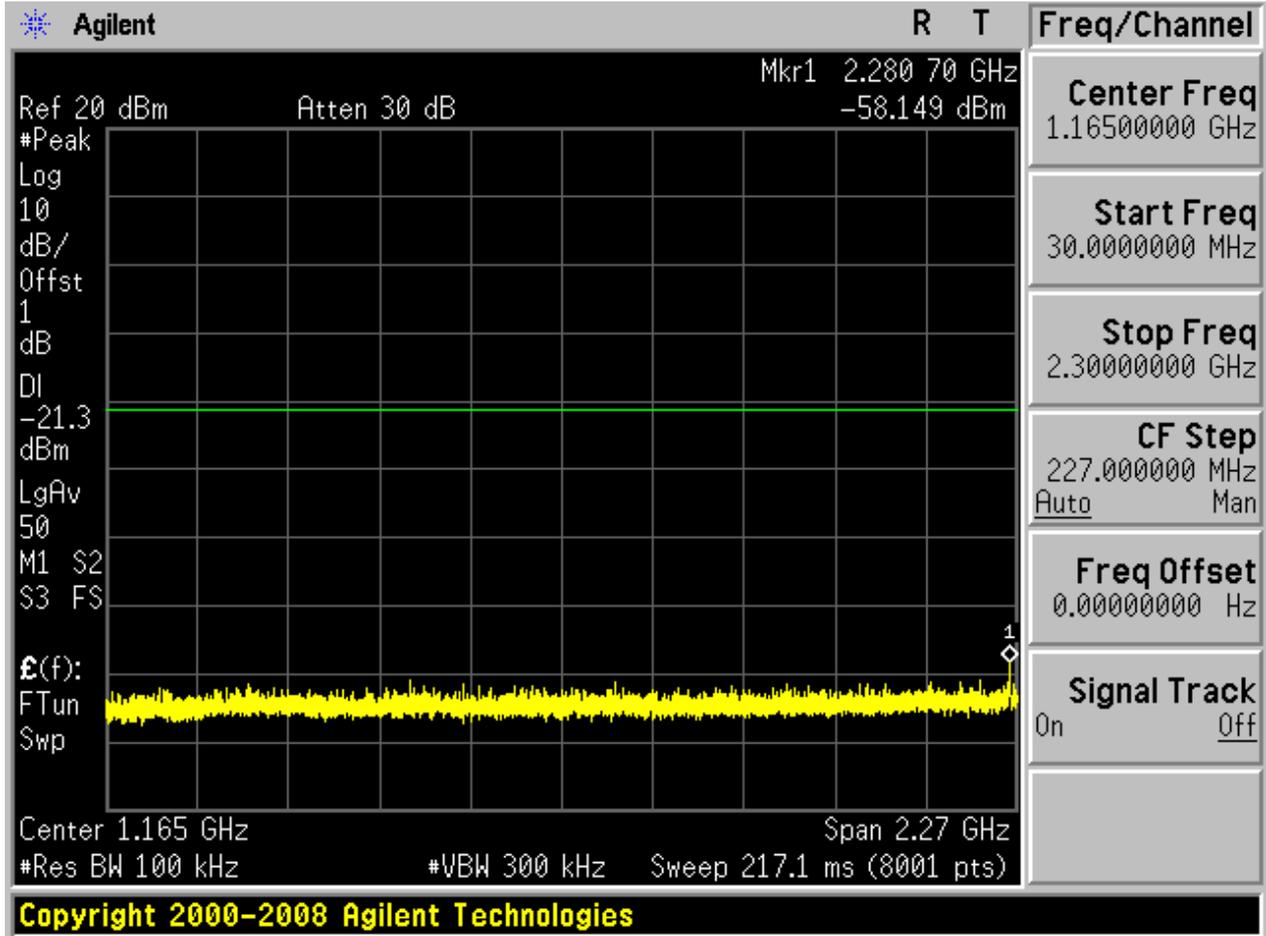

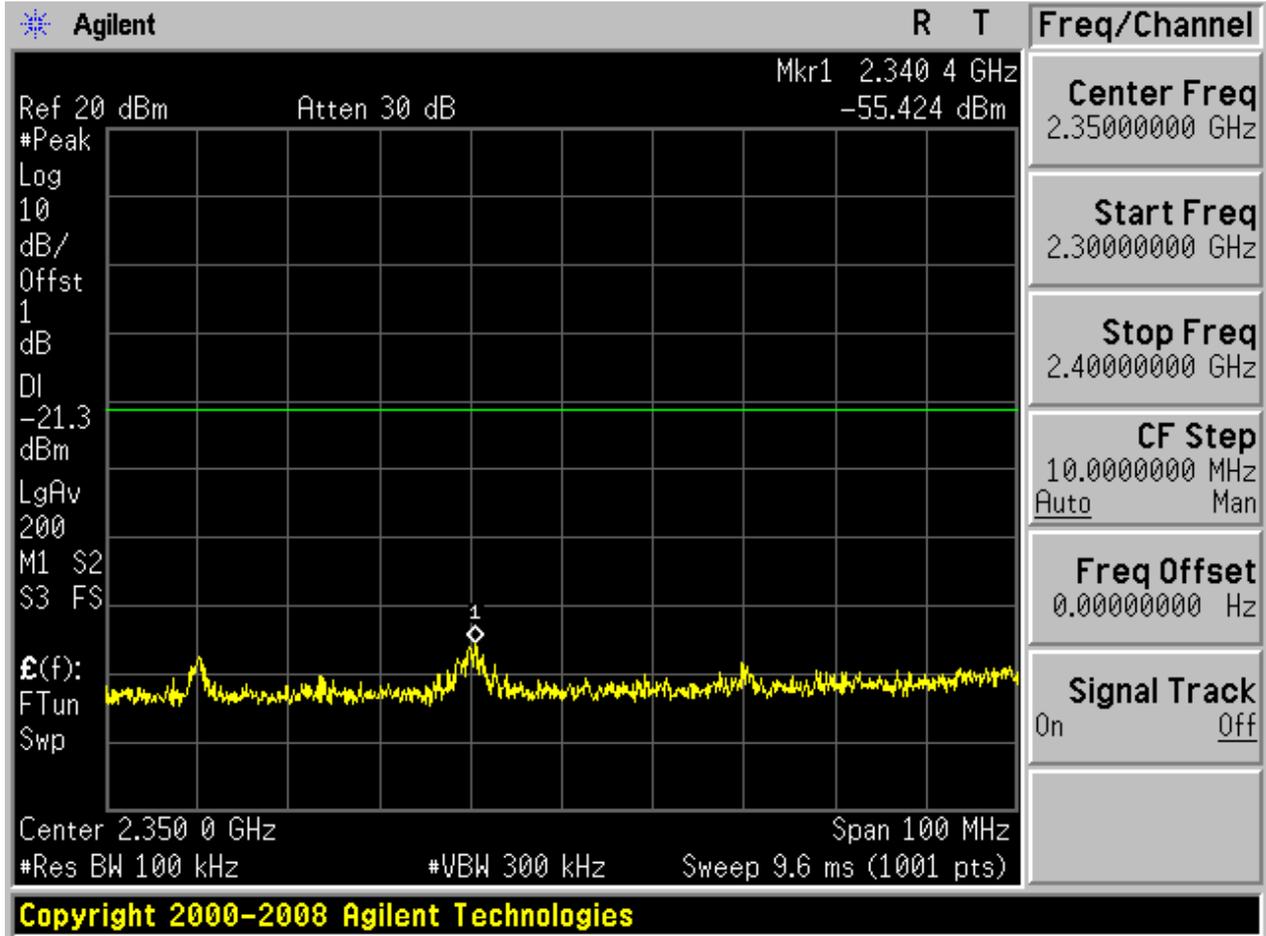

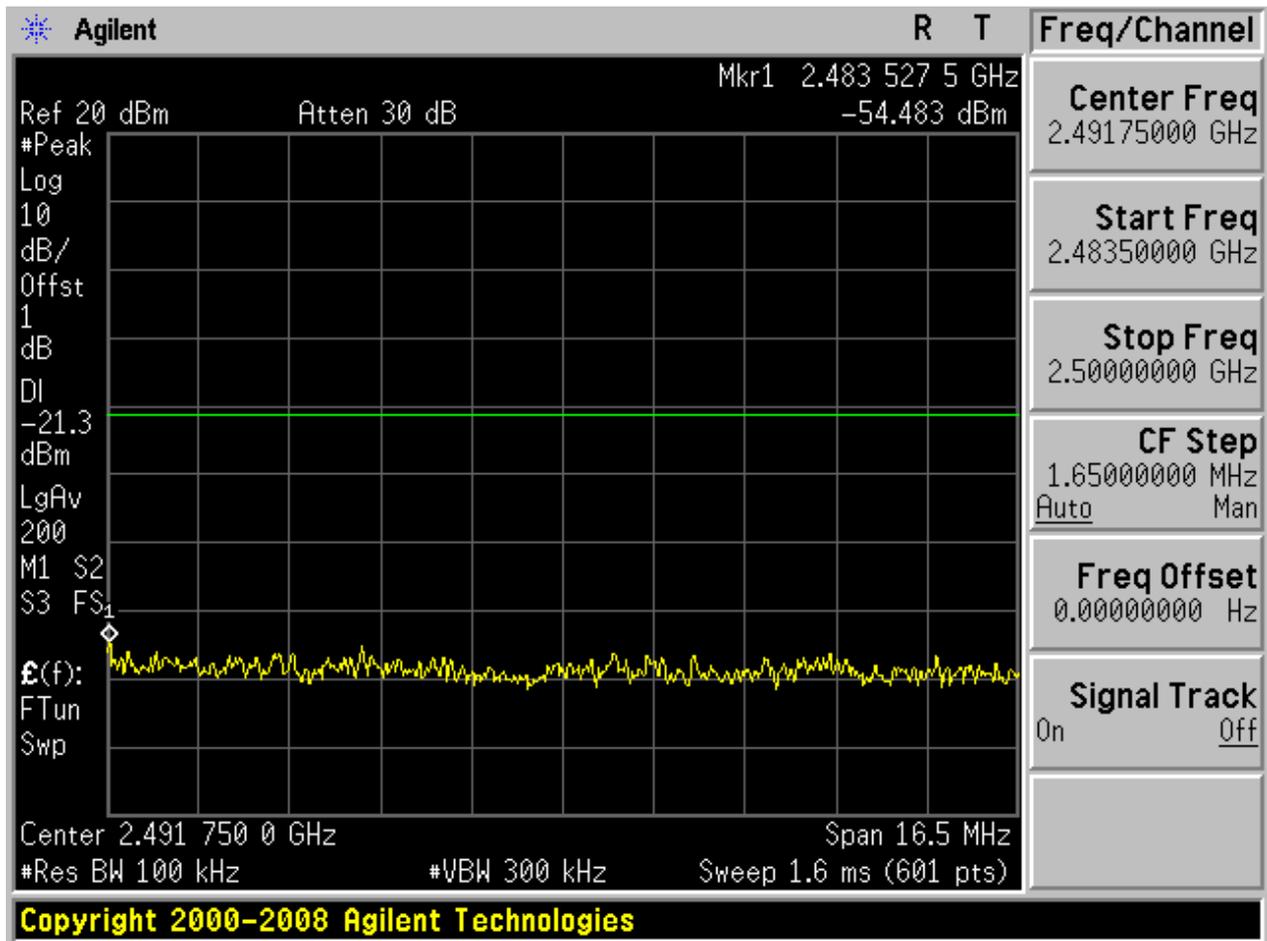

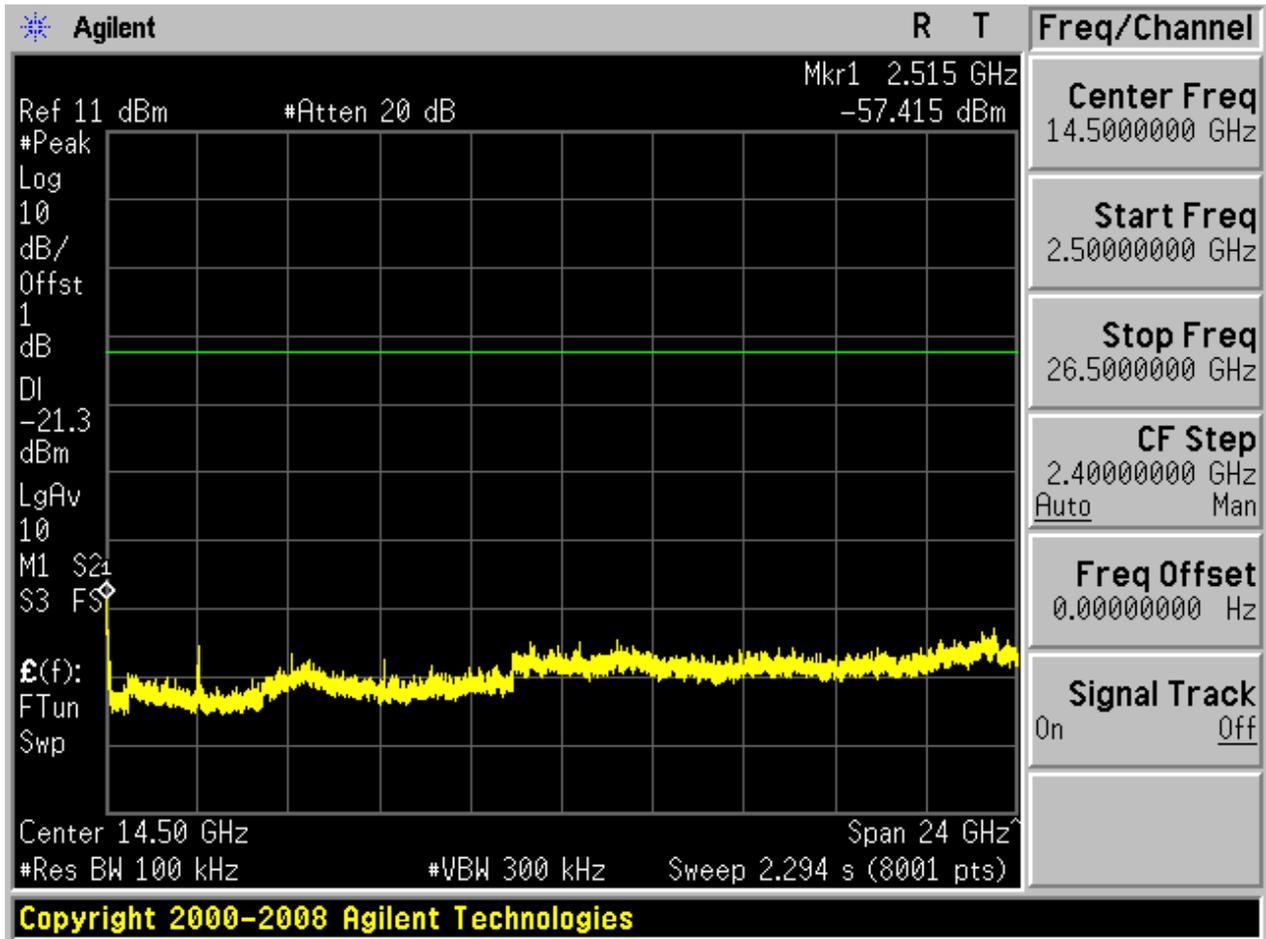




## **Appendix F: Radiated Spurious Emission & Spurious in Restricted Band**

**(According to FCC Part 15.247(d) & 15.205 & 15.209)**

Part 1: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is **the WORST case for all Test Modes and Channels**. This range will not be presented for each Test Mode and each Channel.


Note 2: **The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).**

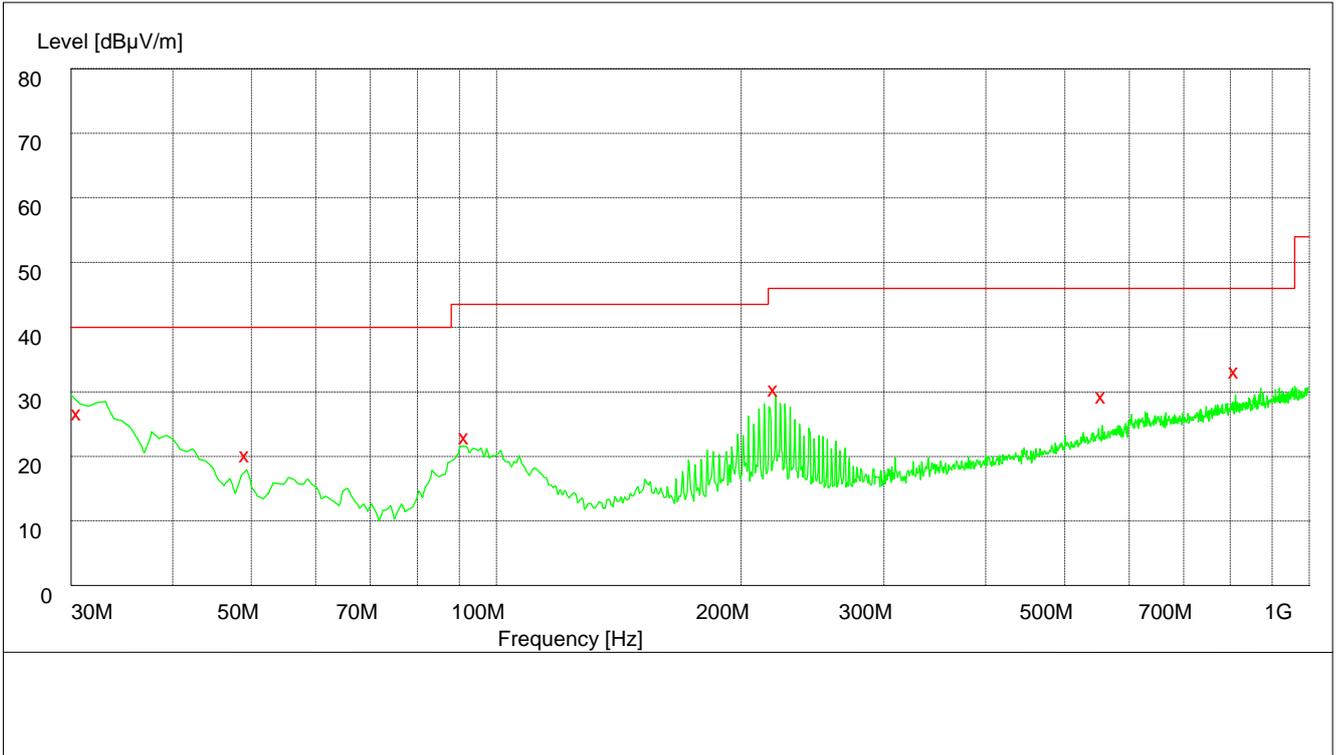

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Plarization
30.660000	26.50	11.8	40.0	13.5	142.0	204.00	VERTICAL
49.380000	19.90	12.9	40.0	20.1	100.0	45.00	VERTICAL
91.920000	22.70	12.2	43.5	20.8	134.0	170.00	VERTICAL
220.800000	30.20	13.0	46.0	15.8	122.0	293.00	HORIZONTAL
557.700000	29.20	21.7	46.0	16.8	181.0	177.00	VERTICAL
813.060000	33.00	25.1	46.0	13.0	100.0	349.00	VERTICAL

## Part 2: Testing Range of "18 GHz to 26.5 GHz"

Note: No peak found in pre- test.

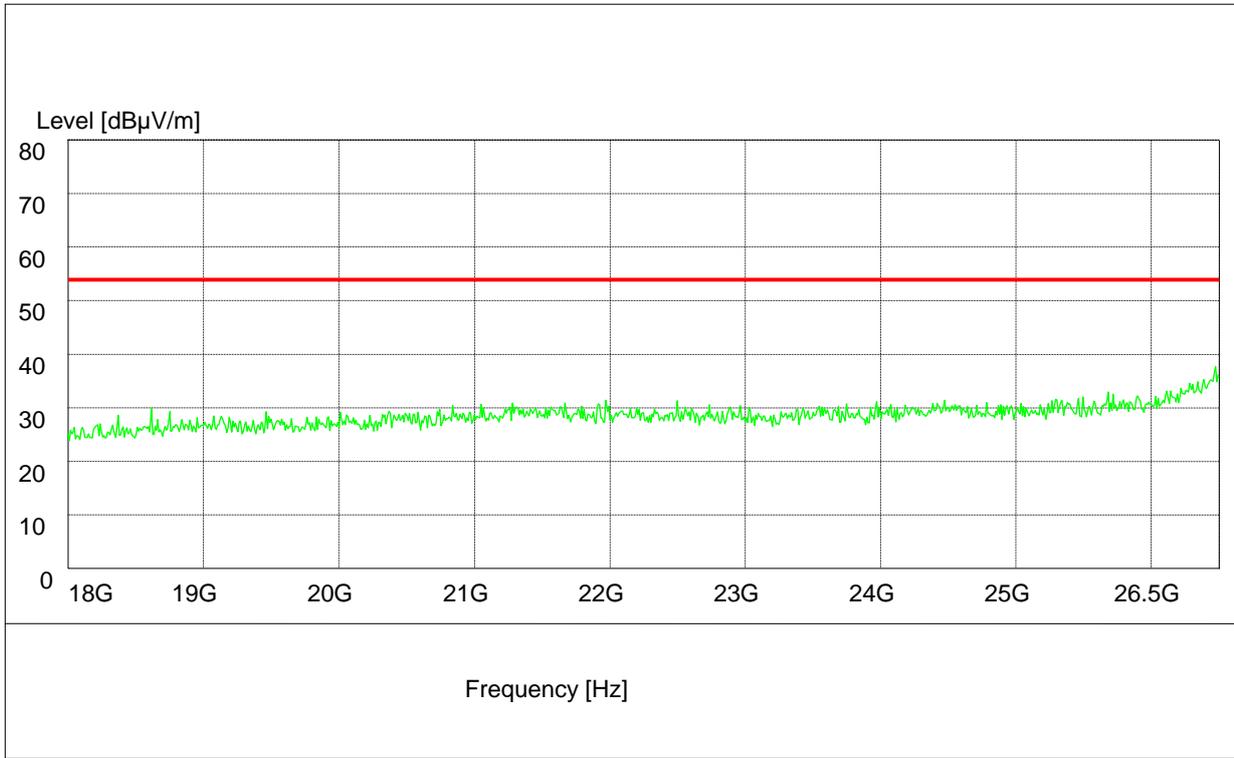


## Part 3: Testing Range of "2.3GHz to 2.5GHz"

- Note 1: The testing range of “2.3 GHz to 2.5 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.
- Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).
- Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

## Test Mode: 11b

### Channel 01

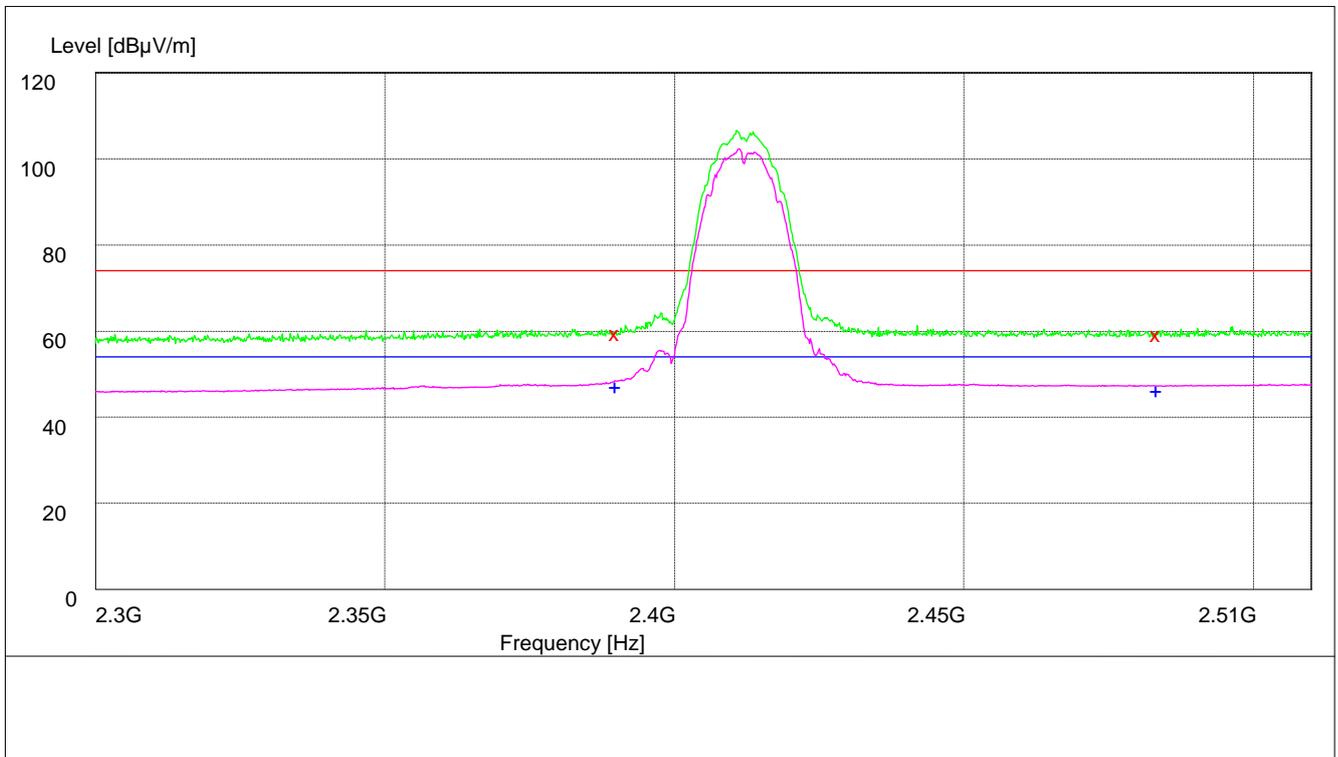

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	60.00	34.8	74.0	14.0	150.0	13.00	HORIZONTAL
2483.500000	59.70	35.1	74.0	14.3	100.0	275.00	HORIZONTAL


MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Polarization



2390.000000	47.70	34.8	54.0	6.3	122.0	26.00	HORIZONTAL
2483.500000	46.70	35.1	54.0	7.3	102.0	108.00	HORIZONTAL

## Channel 11

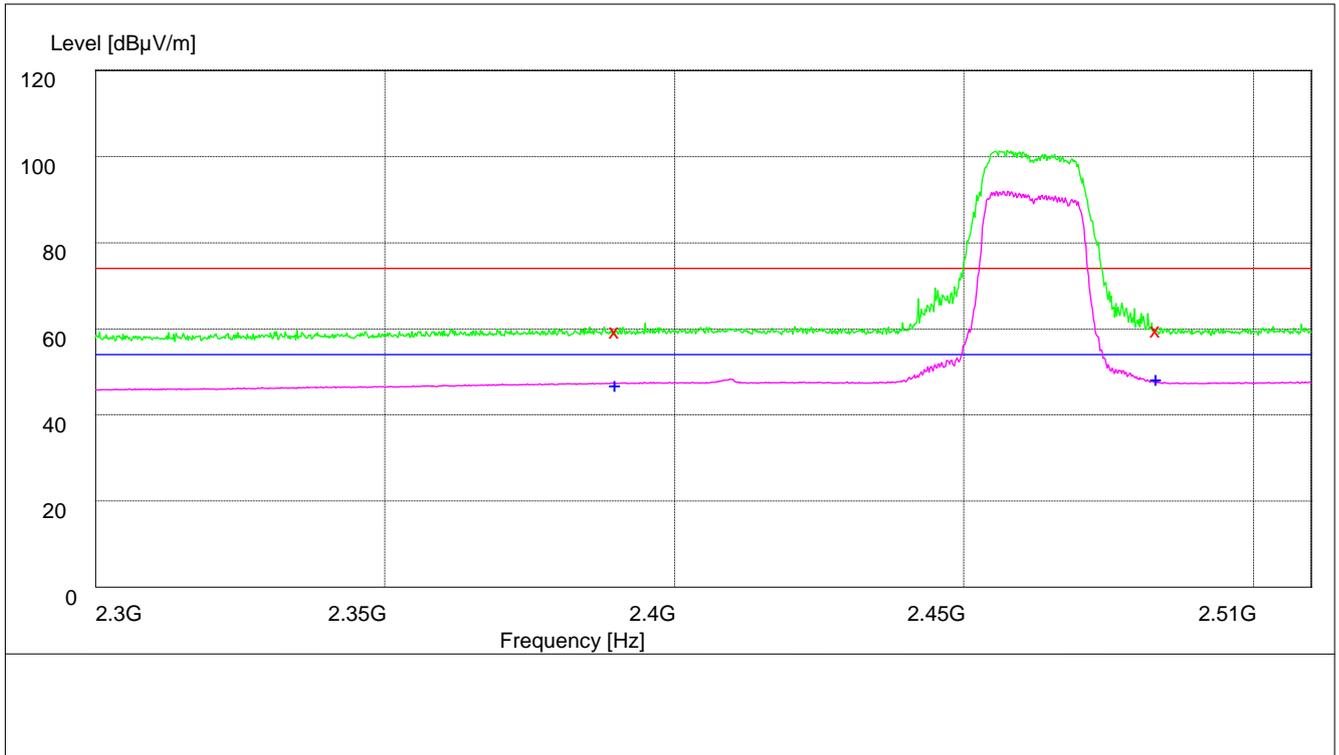

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	59.50	34.8	74.0	14.5	113.0	100.00	HORIZONTAL
2483.500000	59.80	35.1	74.0	14.2	140.0	77.00	HORIZONTAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	47.10	34.8	54.0	6.9	100.0	36.00	HORIZONTAL
2483.500000	48.50	35.1	54.0	5.5	119.0	267.00	HORIZONTAL

# Test Mode: 11g

## Channel 01

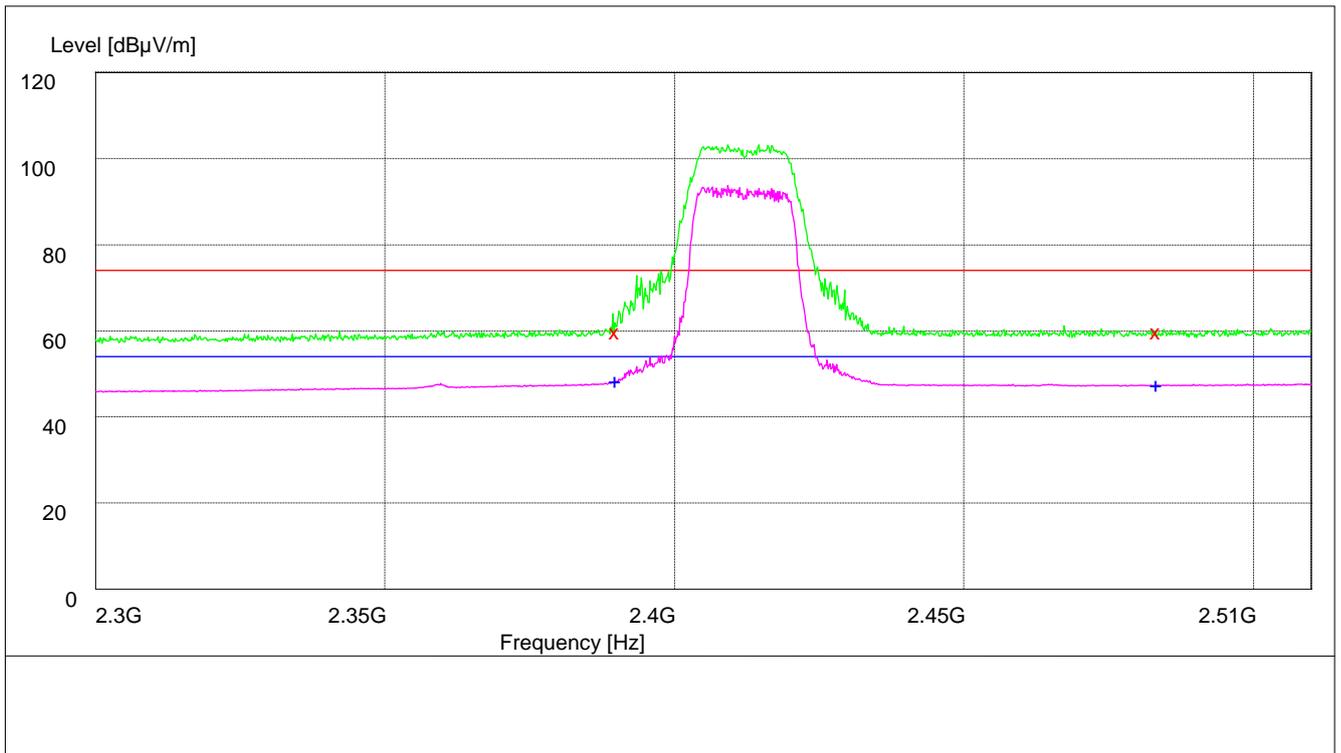

Note: The peak exceeds the limit line is carrier frequency.


MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	59.00	34.8	74.0	15.0	107.0	358.00	VERTICAL
2483.500000	58.80	35.1	74.0	15.2	100.0	159.00	HORIZONTAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	47.60	34.8	54.0	6.4	124.0	27.00	HORIZONTAL
2483.500000	46.80	35.1	54.0	7.2	100.0	14.00	HORIZONTAL

## Channel 11

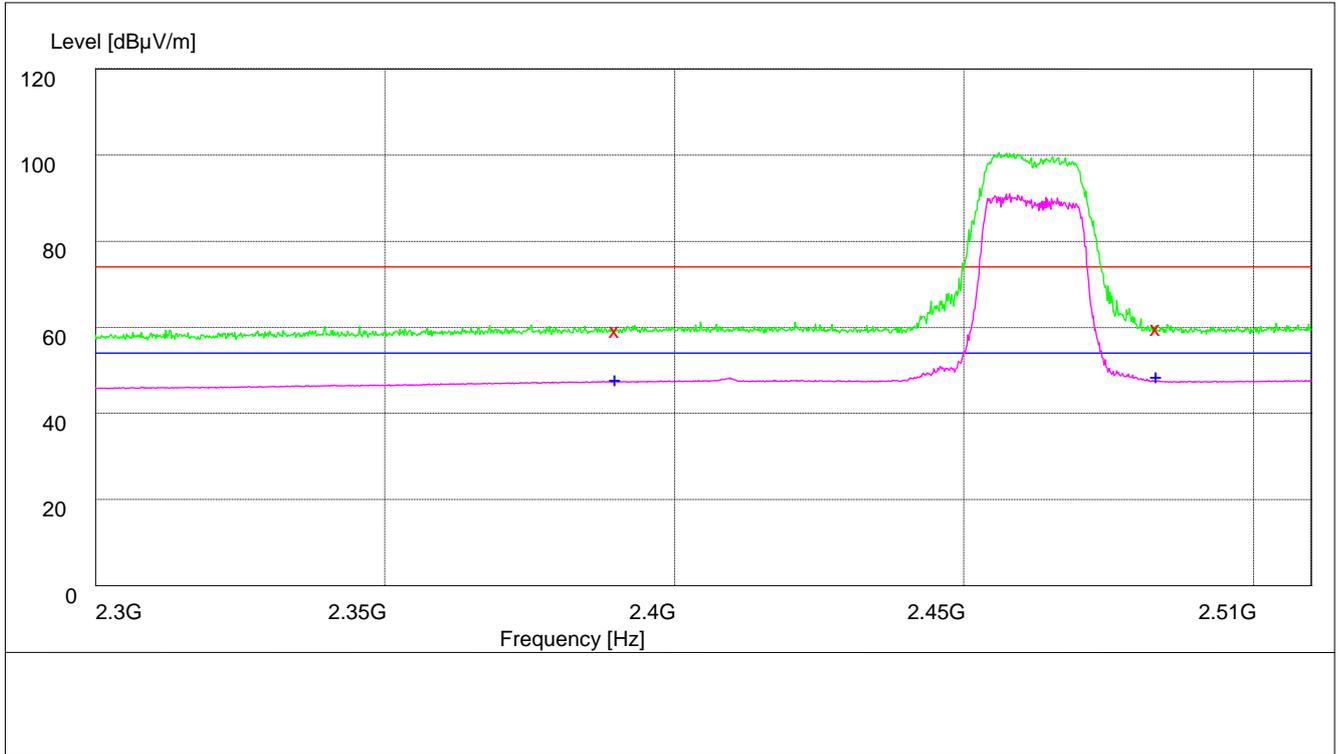

Note: The peak exceeds the limit line is carrier frequency.

### MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	58.80	34.8	74.0	15.2	100.0	58.00	VERTICAL
2483.500000	59.40	35.1	74.0	14.6	148.0	63.00	VERTICAL

### MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	47.60	34.8	54.0	6.4	125.0	322.00	VERTICAL
2483.500000	48.30	35.1	54.0	5.7	124.0	124.00	VERTICAL

# Test Mode: 11n

## Channel 01

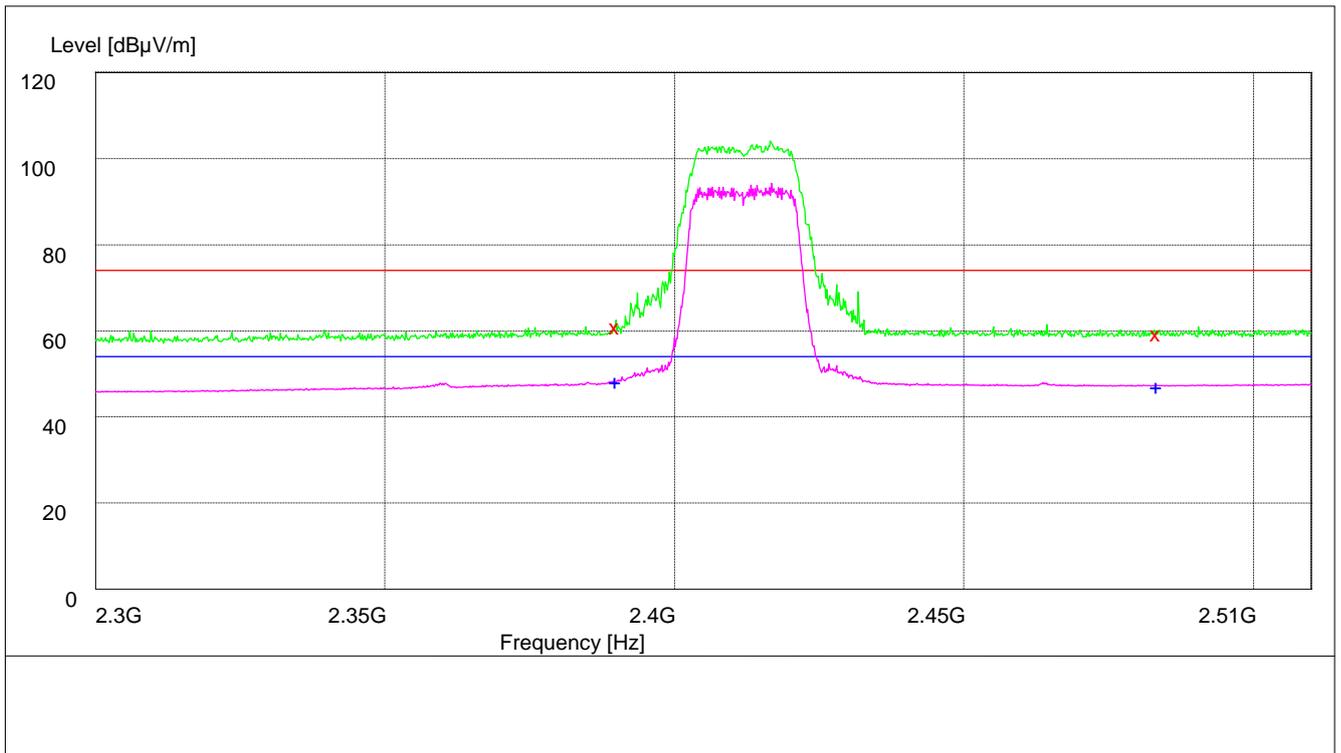

Note: The peak exceeds the limit line is carrier frequency.


MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	60.70	34.8	74.0	13.3	100.0	258.00	HORIZONTAL
2483.500000	58.80	35.1	74.0	15.2	107.0	1.00	VERTICAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	47.80	34.8	54.0	6.2	120.0	31.00	HORIZONTAL
2483.500000	46.70	35.1	54.0	7.3	119.0	277.00	HORIZONTAL

## Channel 11

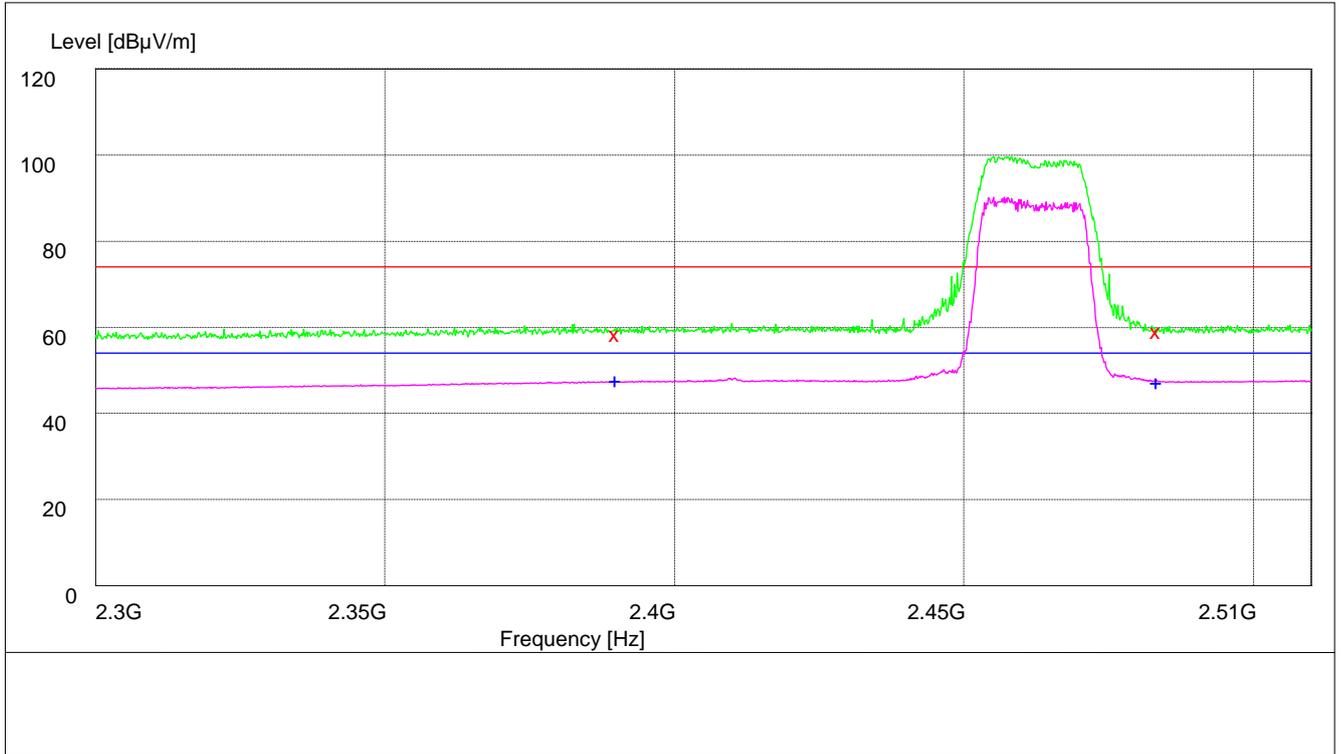

Note: The peak exceeds the limit line is carrier frequency.

### MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	58.50	34.8	74.0	15.5	142.0	324.00	HORIZONTAL
2483.500000	59.10	35.1	74.0	14.9	100.0	56.00	HORIZONTAL

### MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	47.80	34.8	54.0	6.2	150.0	178.00	HORIZONTAL
2483.500000	47.30	35.1	54.0	6.7	112.0	51.00	HORIZONTAL

## Part 4: Testing Range of “1 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “1 GHz to 18 GHz” showed as below is **the WORST case for all Test Modes and Channels**. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “1 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).

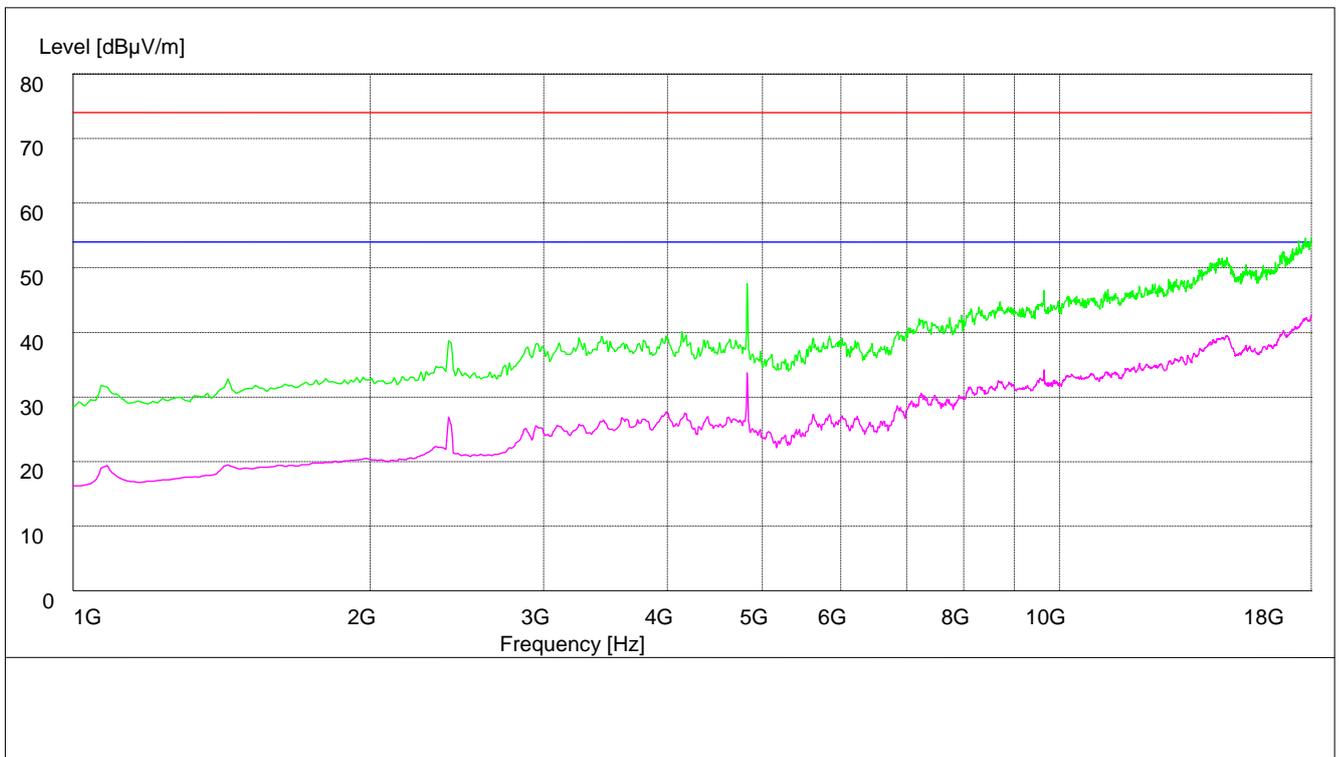




## **Appendix G: Conducted Emission at Power Port**

According to FCC Part 15.207

# Channel 6

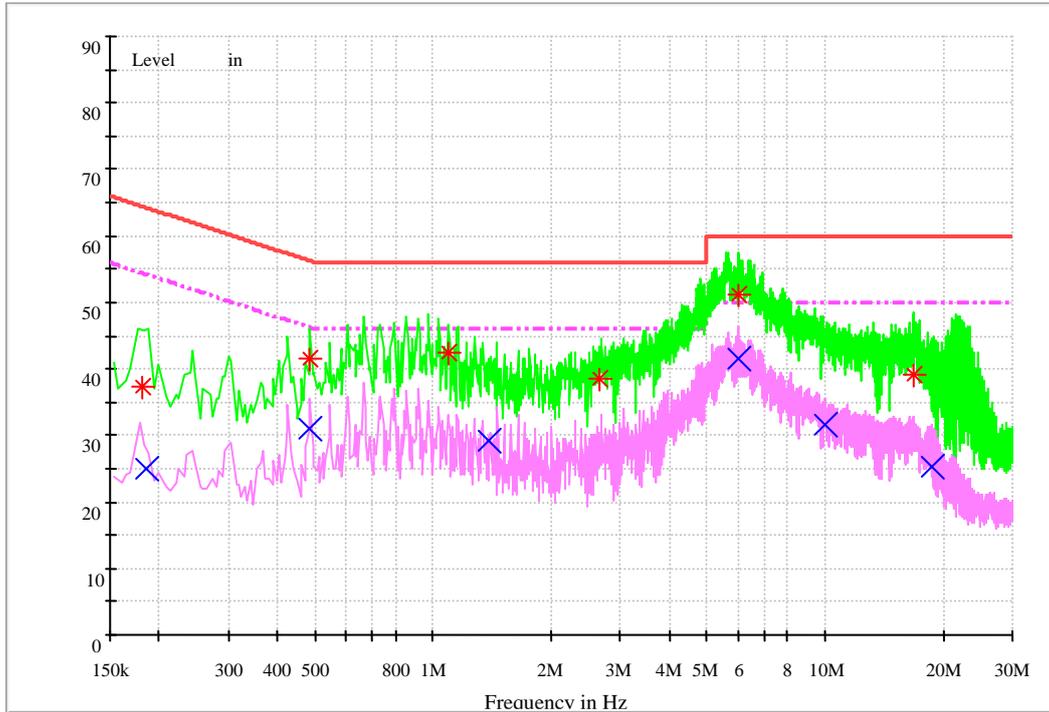

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.181064	37.2	9.7	64.4	27.2	L1	FLO
0.485047	41.4	9.7	56.3	14.9	N	FLO
1.092191	42.5	9.7	56.0	13.5	N	FLO
2.667300	38.5	9.7	56.0	17.5	N	FLO
6.036544	51.3	9.8	60.0	8.7	N	FLO
16.820456	39.2	10.1	60.0	20.8	L1	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.186135	24.9	9.7	54.2	29.3	N	FLO
0.485002	30.9	9.7	46.3	15.4	N	FLO
1.390576	29.1	9.7	46.0	16.9	N	FLO
6.010556	41.7	9.8	50.0	8.3	N	FLO
9.999630	31.7	9.9	50.0	18.3	N	FLO
18.720372	25.2	10.1	50.0	24.8	N	FLO

END