



Appendix A: 20dB Emission Bandwidth (EBW)




1 Result Table


EUT Conf.	EBW [MHz]	Verdict
TM1_DH5_Ch0	0.944	Pass
TM1_DH5_Ch39	0.945	Pass
TM1_DH5_Ch78	0.945	Pass
TM2_2DH5_Ch0	1.285	Pass
TM2_2DH5_Ch39	1.284	Pass
TM2_2DH5_Ch78	1.284	Pass
TM3_3DH5_Ch0	1.276	Pass
TM3_3DH5_Ch39	1.278	Pass
TM3_3DH5_Ch78	1.277	Pass

2 Test Plot


2.1 TM1_DH5_Ch0

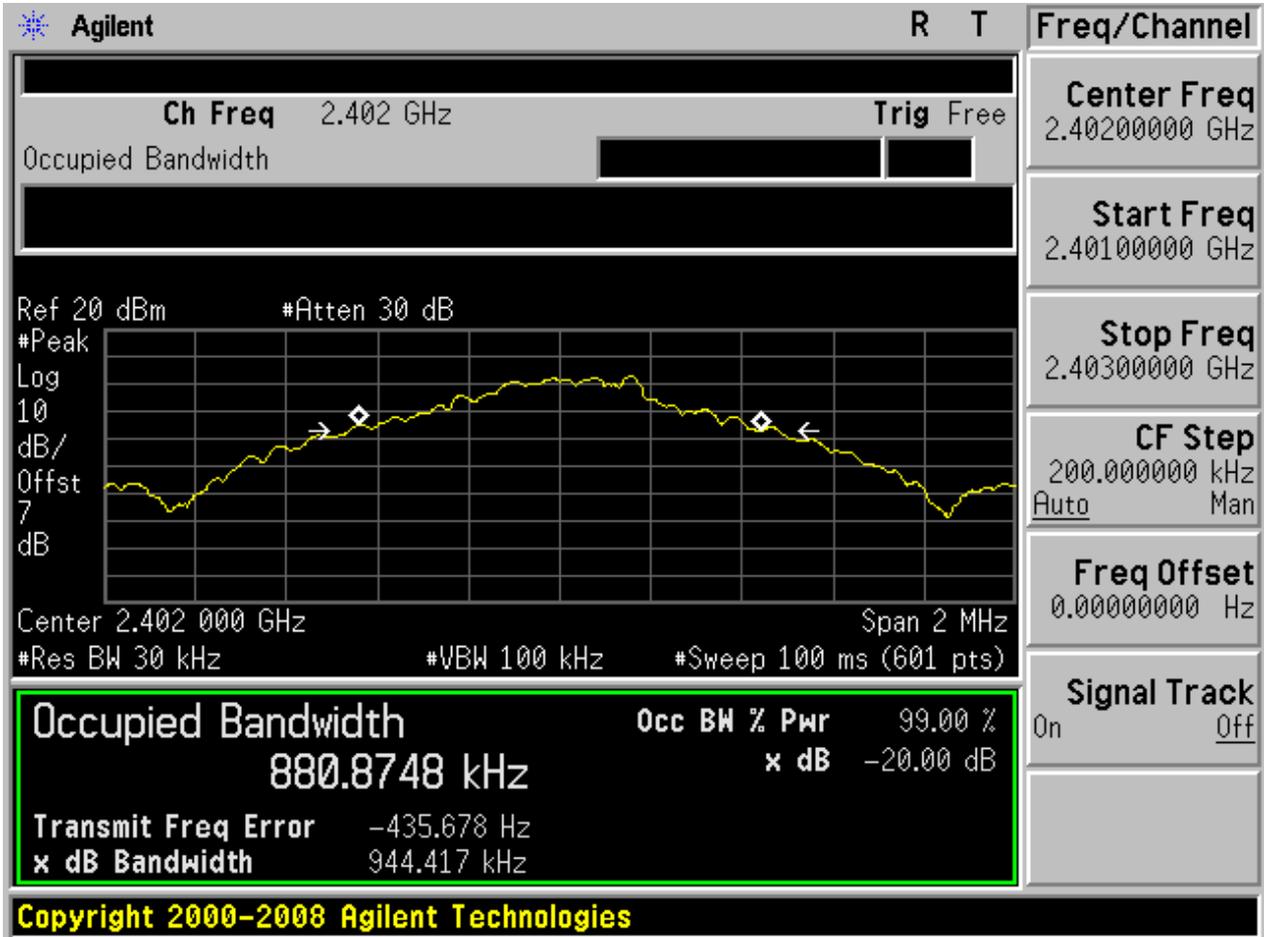

2.2 TM1_DH5_Ch39

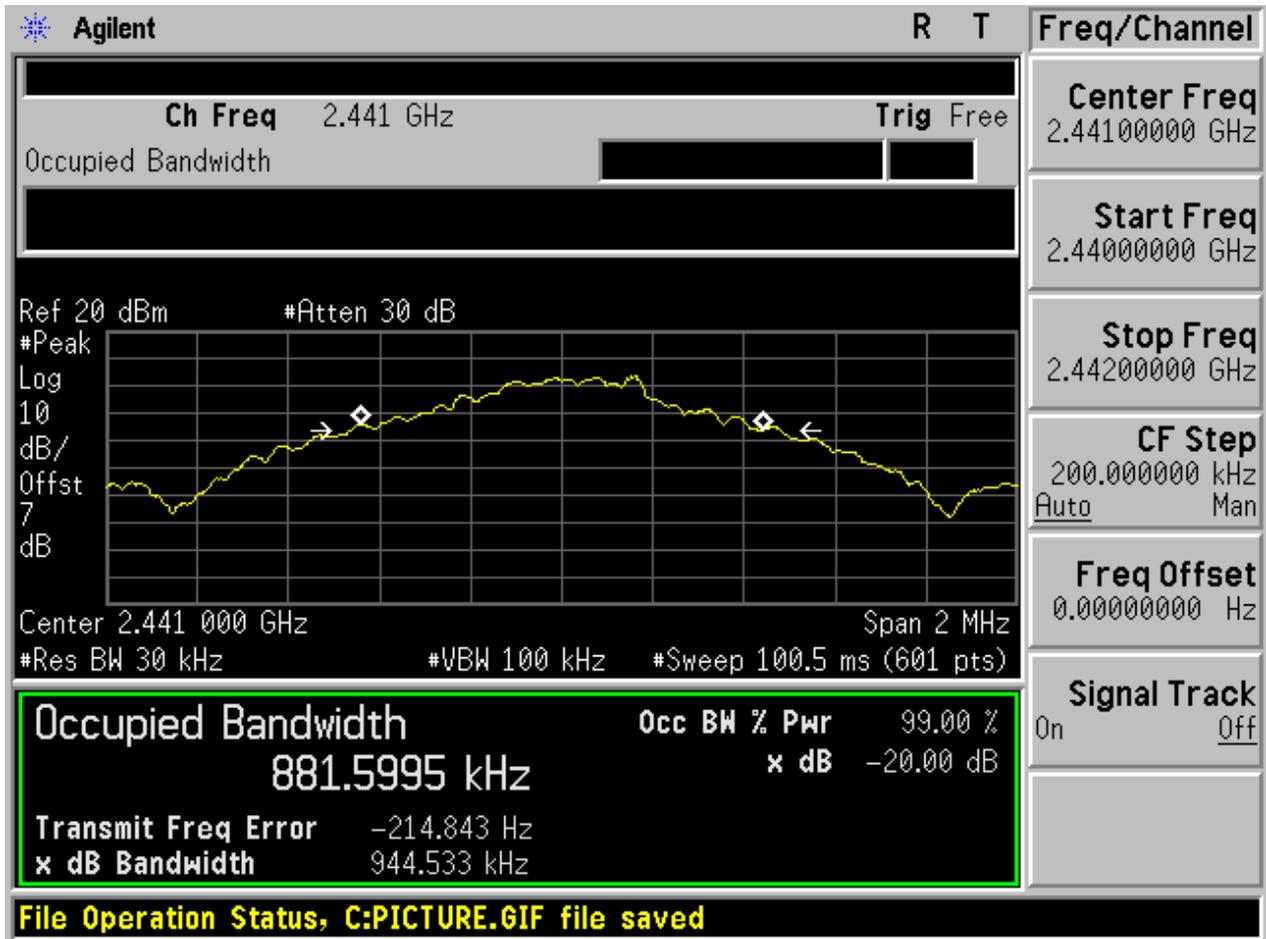


2.3 TM1_DH5_Ch78

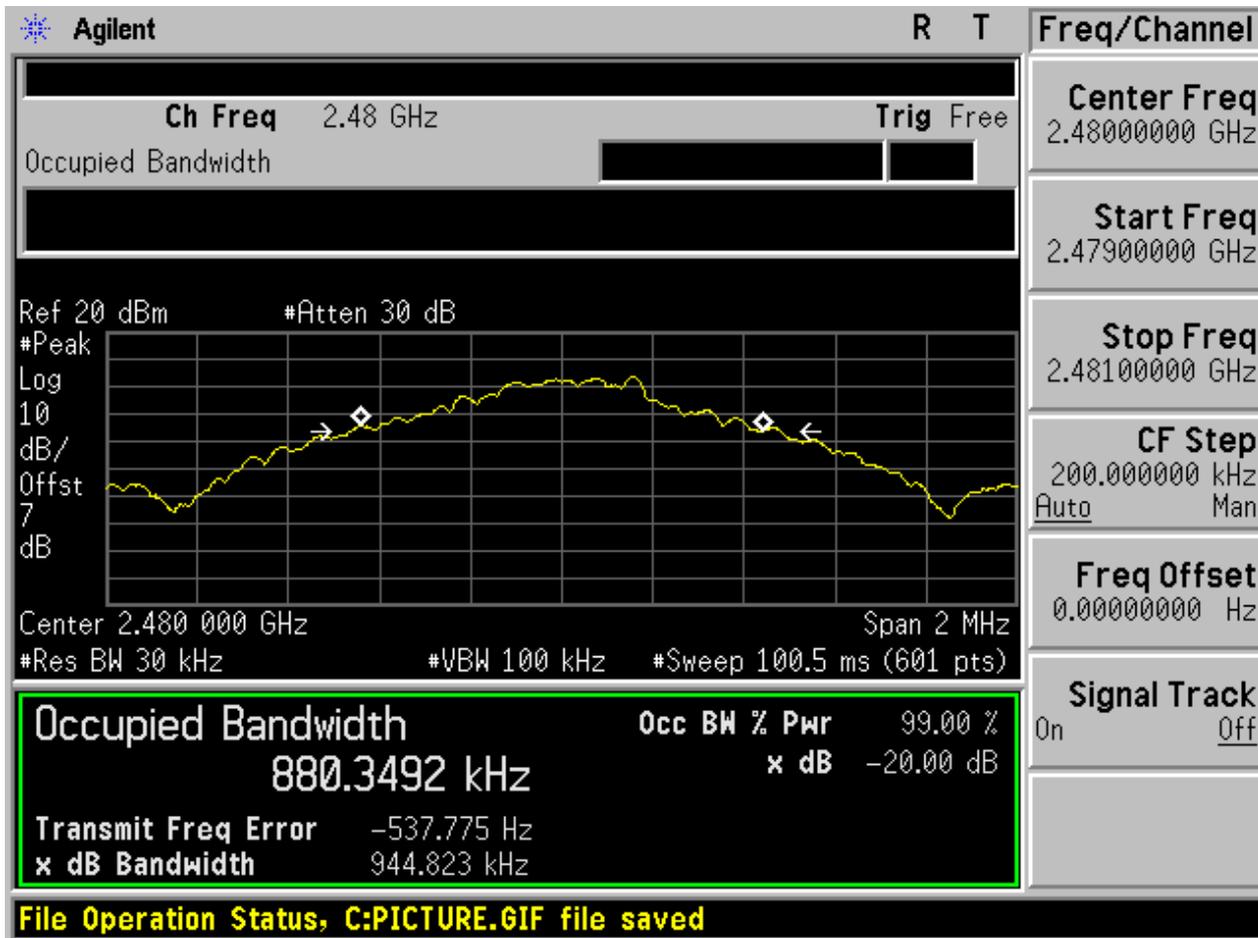


2.4 TM2_2DH5_Ch0




2.5 TM2_2DH5_Ch39

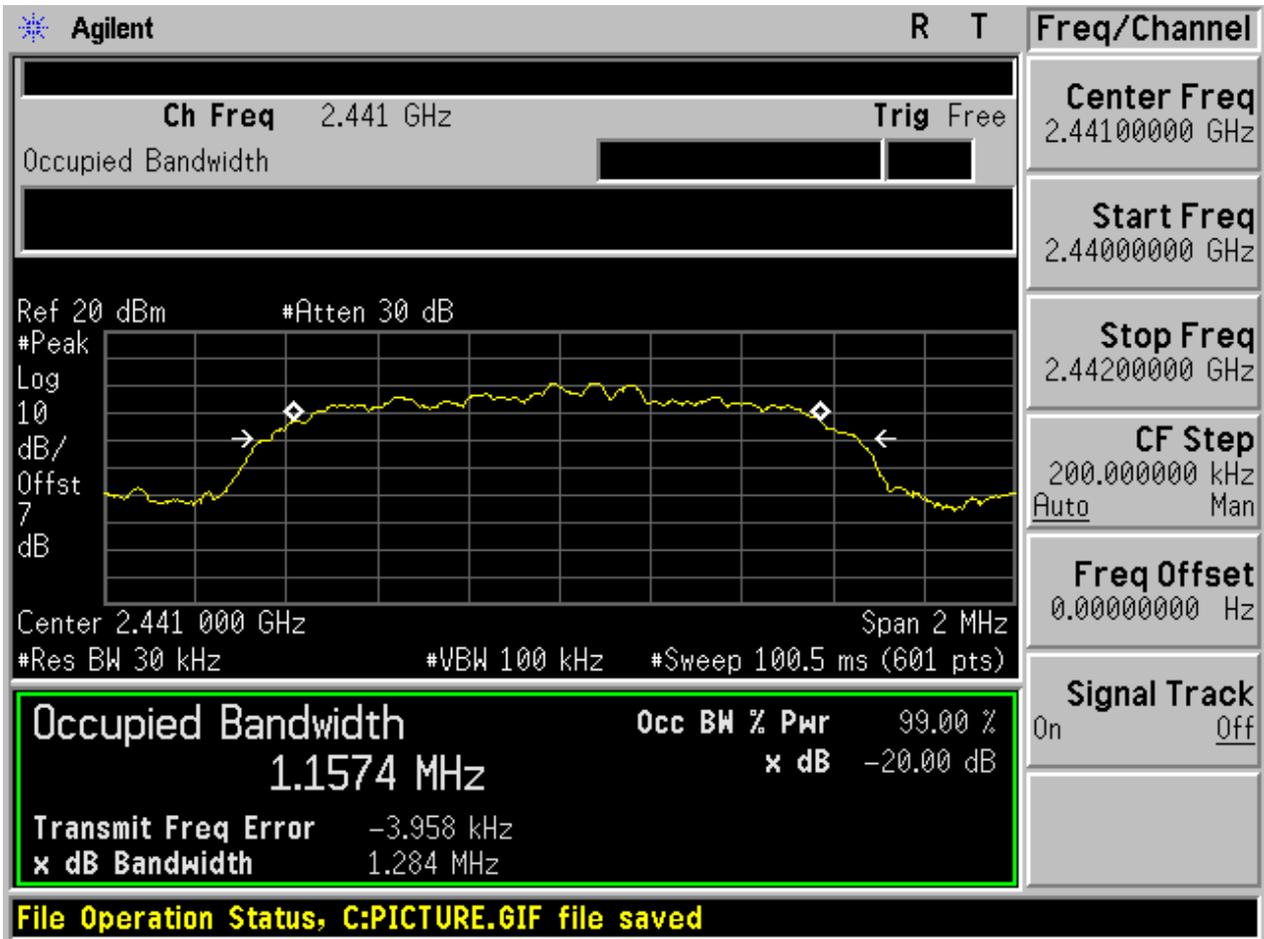

2.6 TM2_2DH5_Ch78

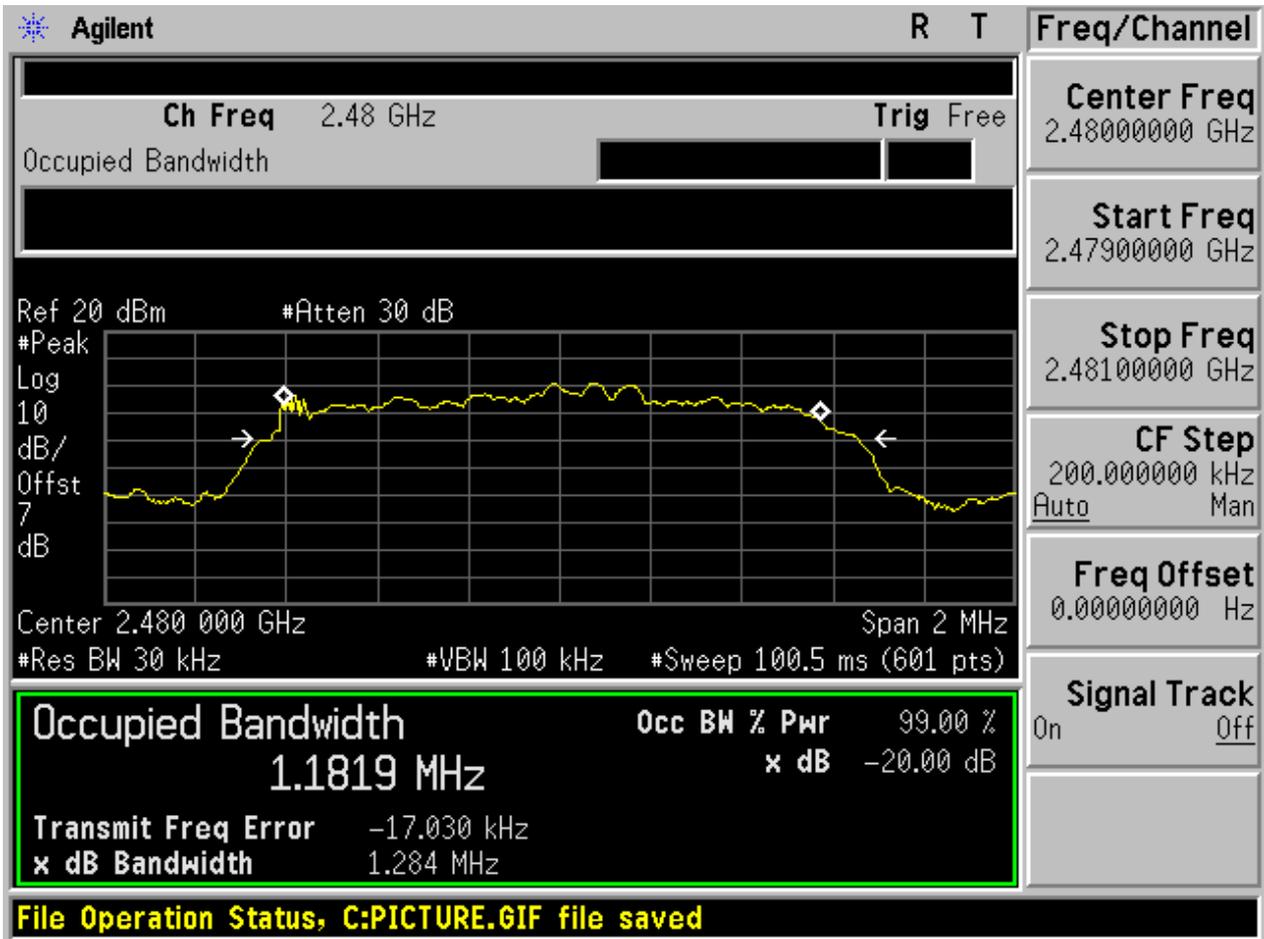

2.8 TM3_3DH5_Ch39

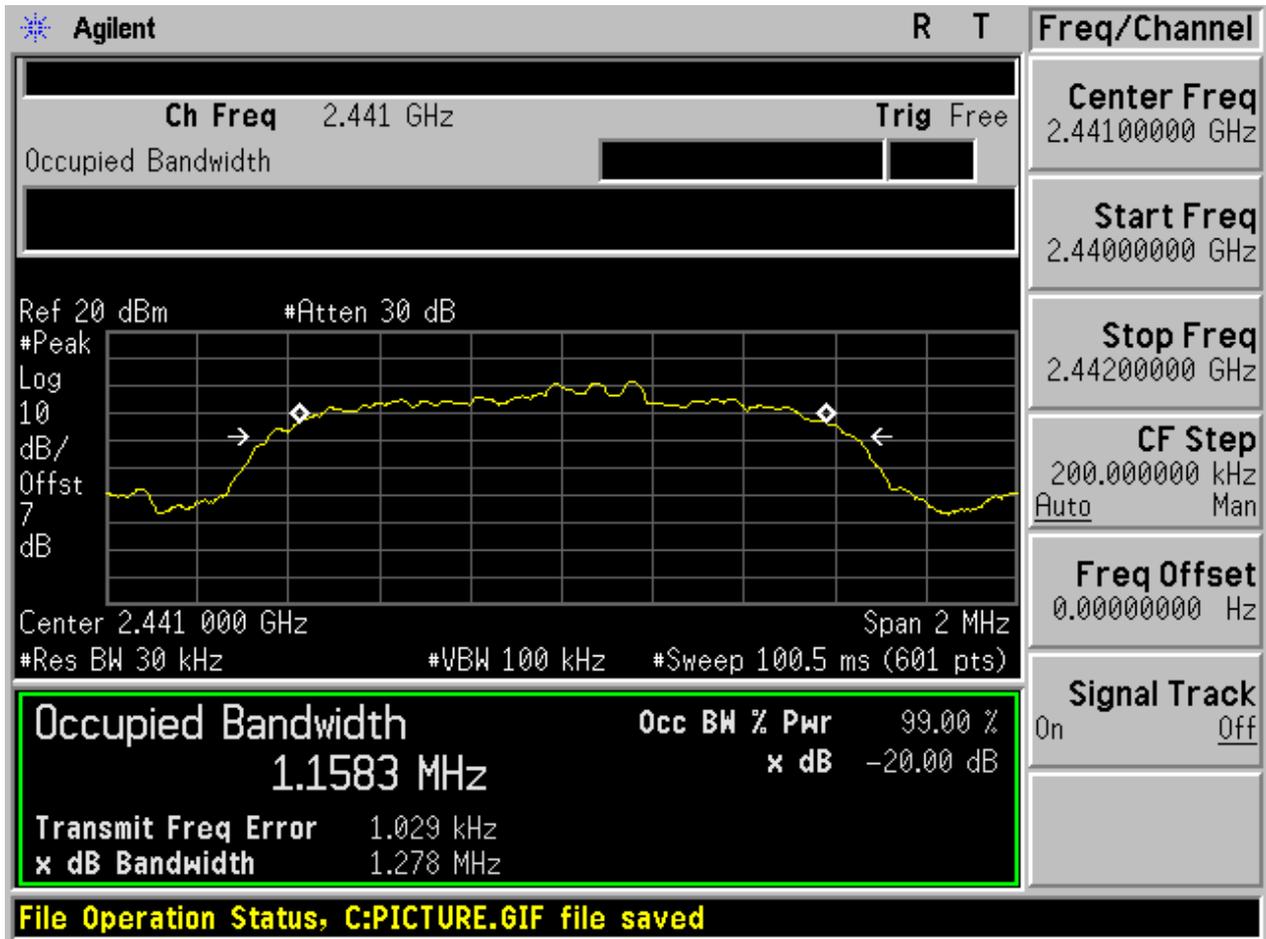

2.9 TM3_3DH5_Ch78





Appendix B: Carrier Frequency Separation




1 Result Table


EUT Conf.	Carrier Frequency Separation [MHz]	Verdict
TM1_DH5_Hop	1.150	Pass
TM2_2DH5_Hop	1.100	Pass
TM3_3DH5_Hop	1.050	Pass

2 Test Plot


2.1 TM1_DH5_Hop

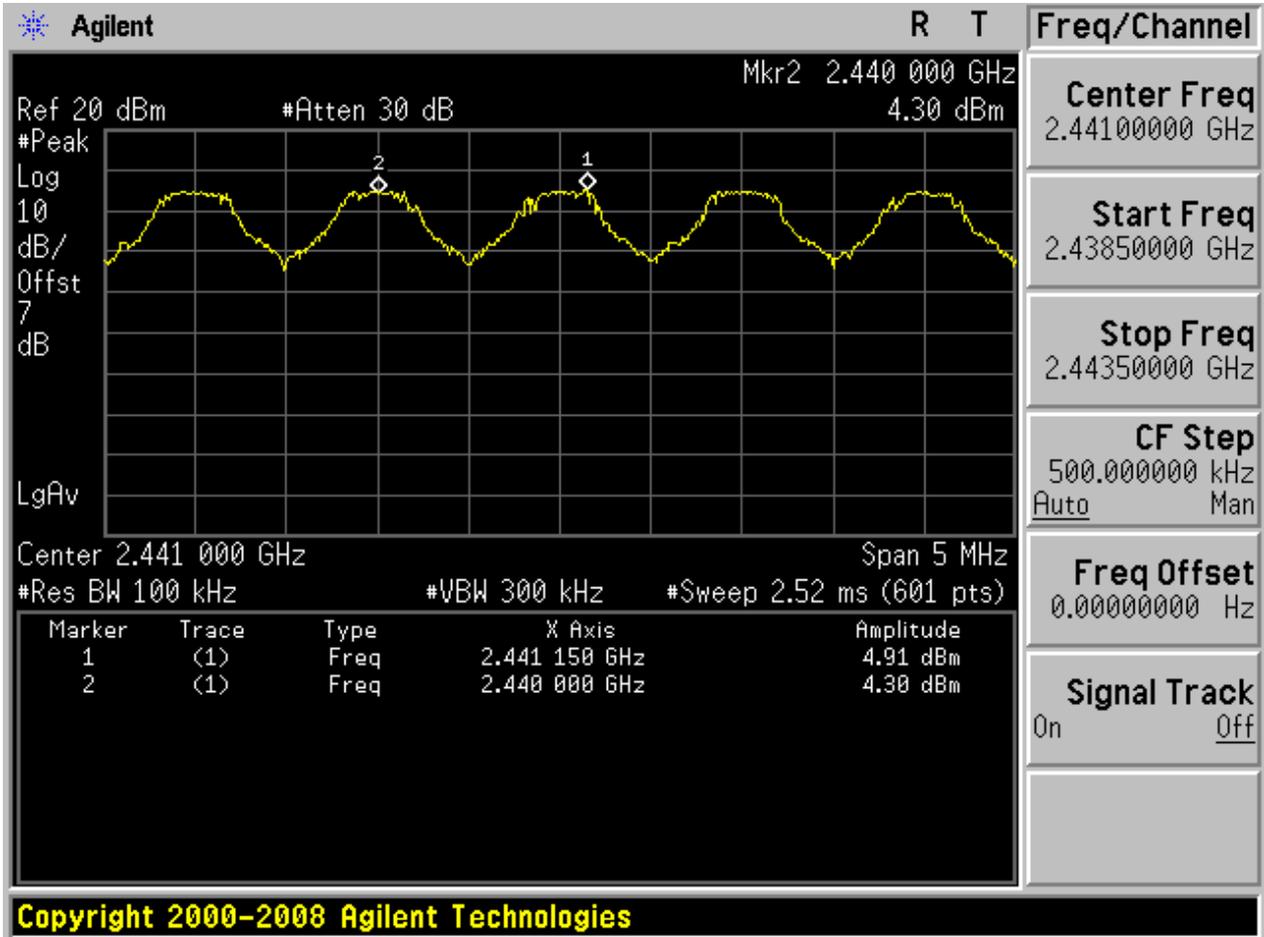

2.2 TM2_2DH5_Hop

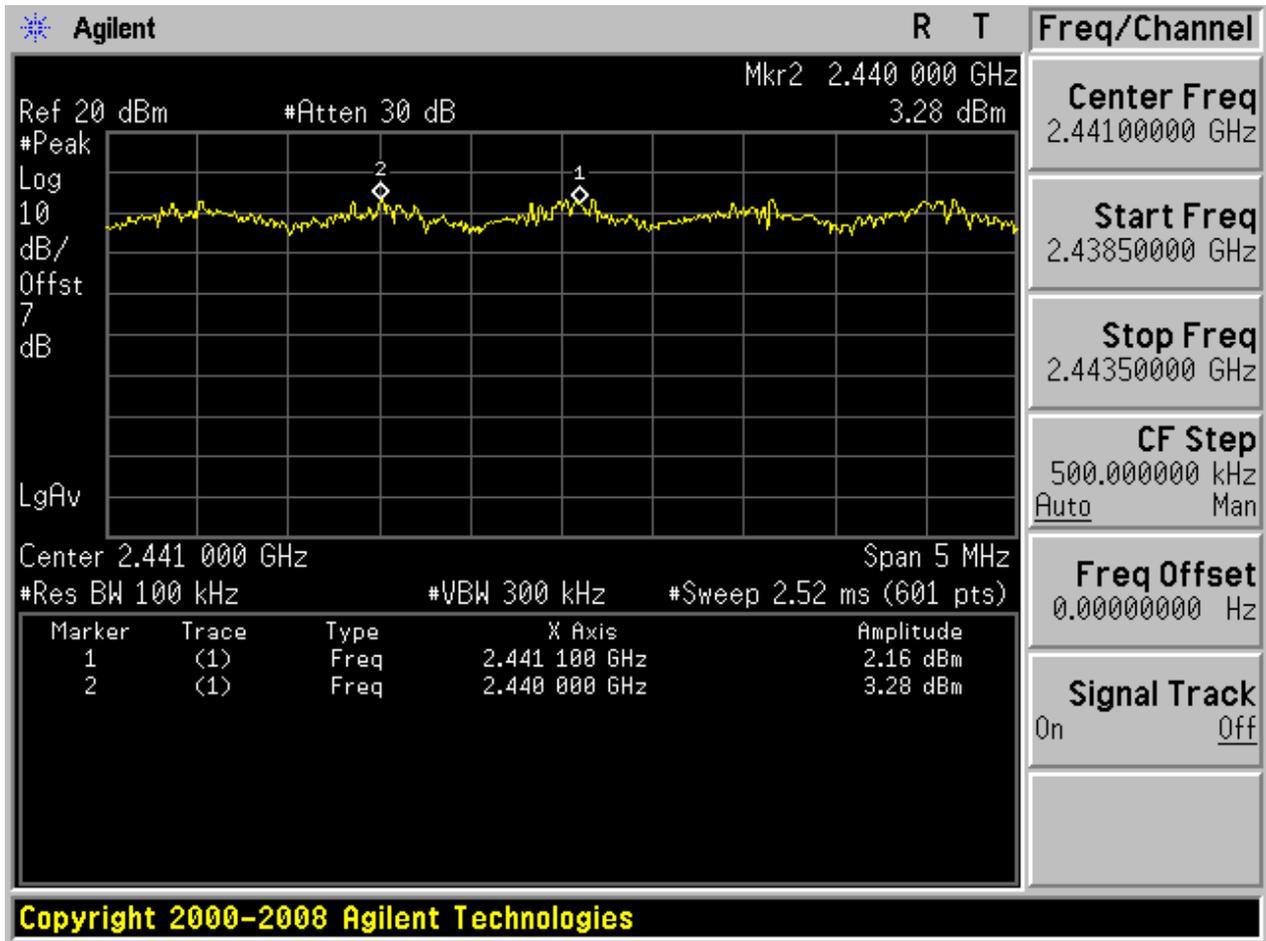

2.3 TM3_3DH5_Hop

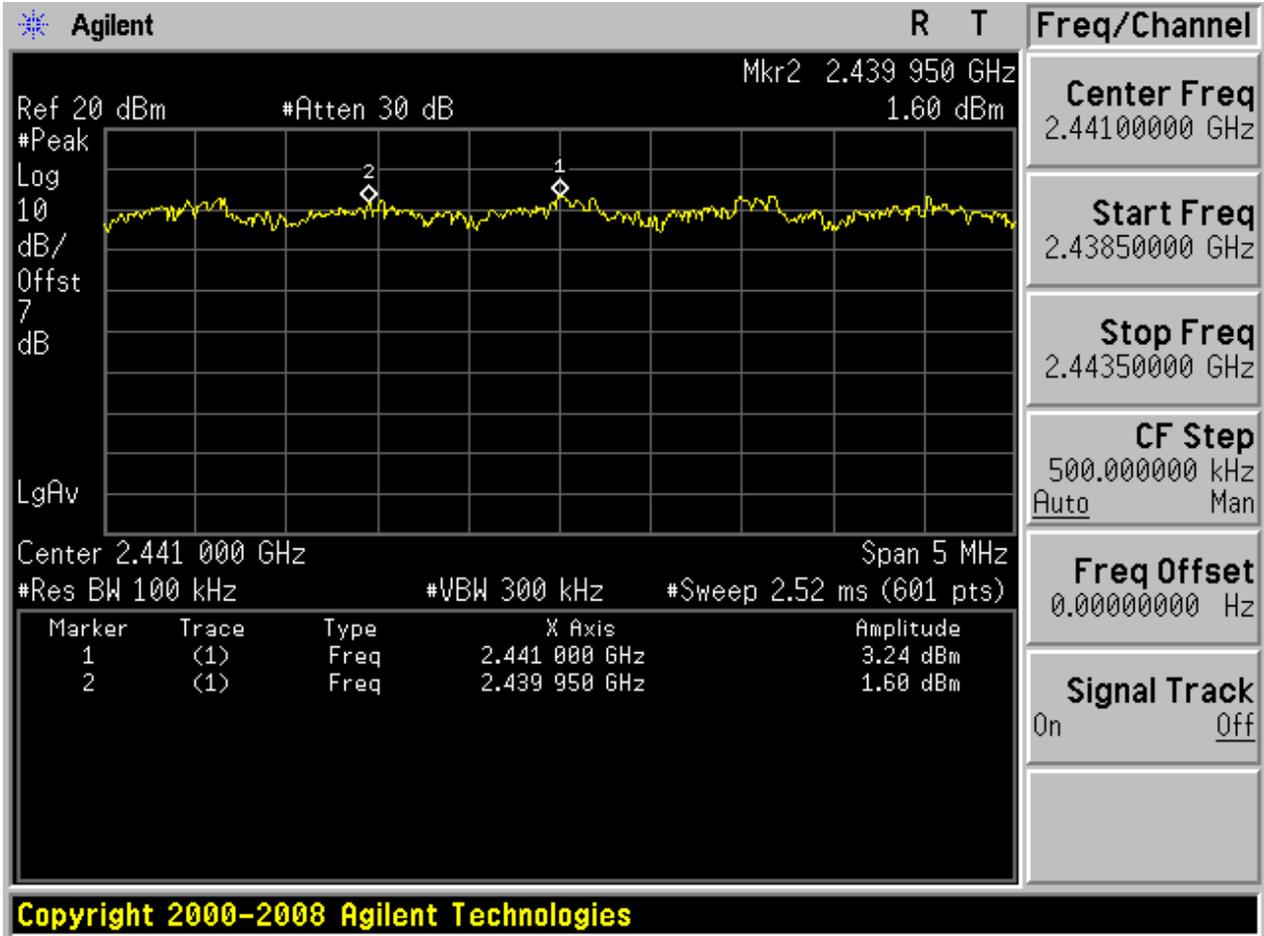



Appendix C: Number of Hopping Channel




1 Result Table


EUT Conf.	Number of Hopping Channel	Verdict
TM1_DH5_Hop	79	Pass
TM2_2DH5_Hop	79	Pass
TM3_3DH5_Hop	79	Pass

2 Test Plot


2.1 TM1_DH5_Hop

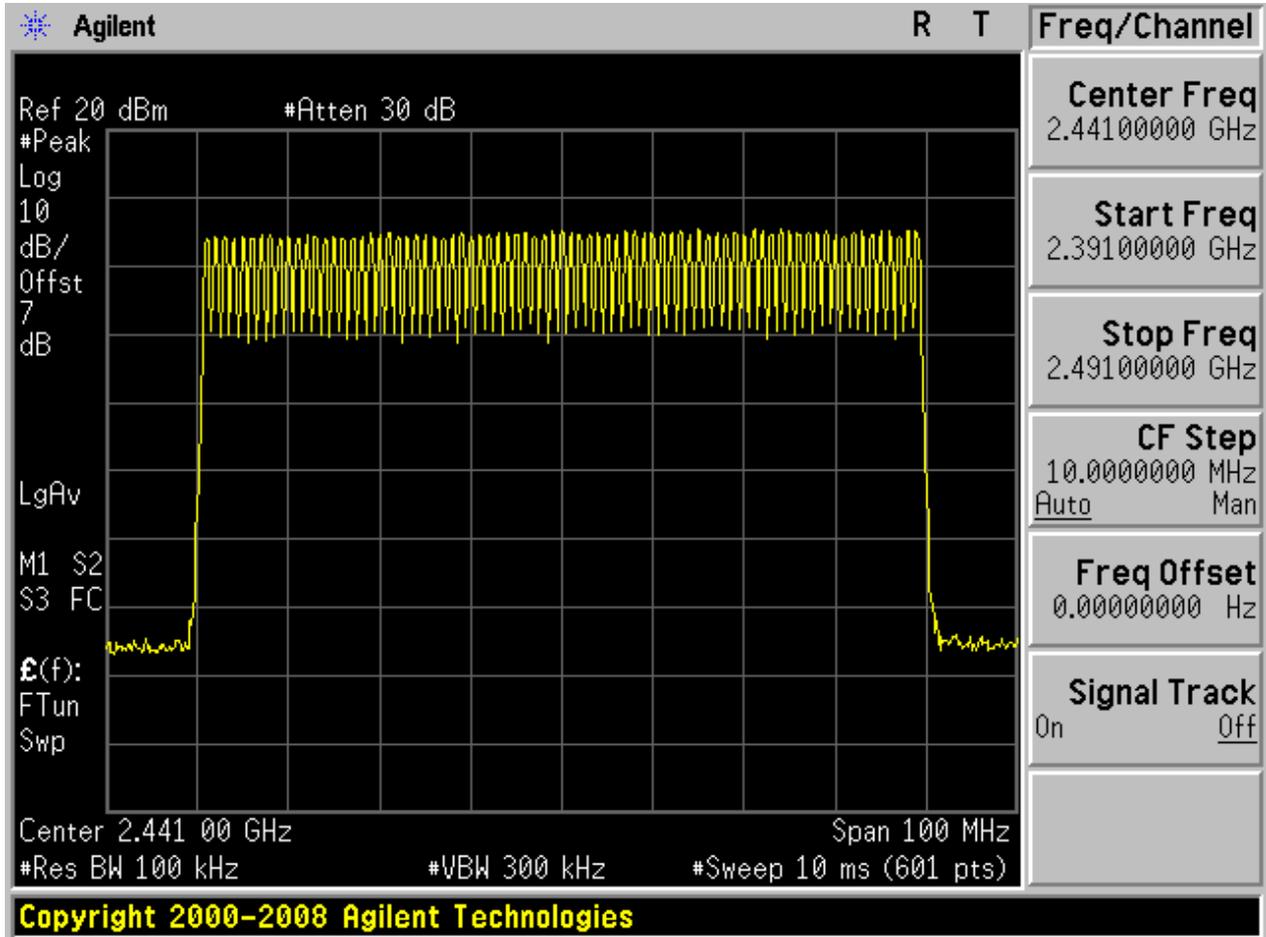

2.2 TM2_2DH5_Hop

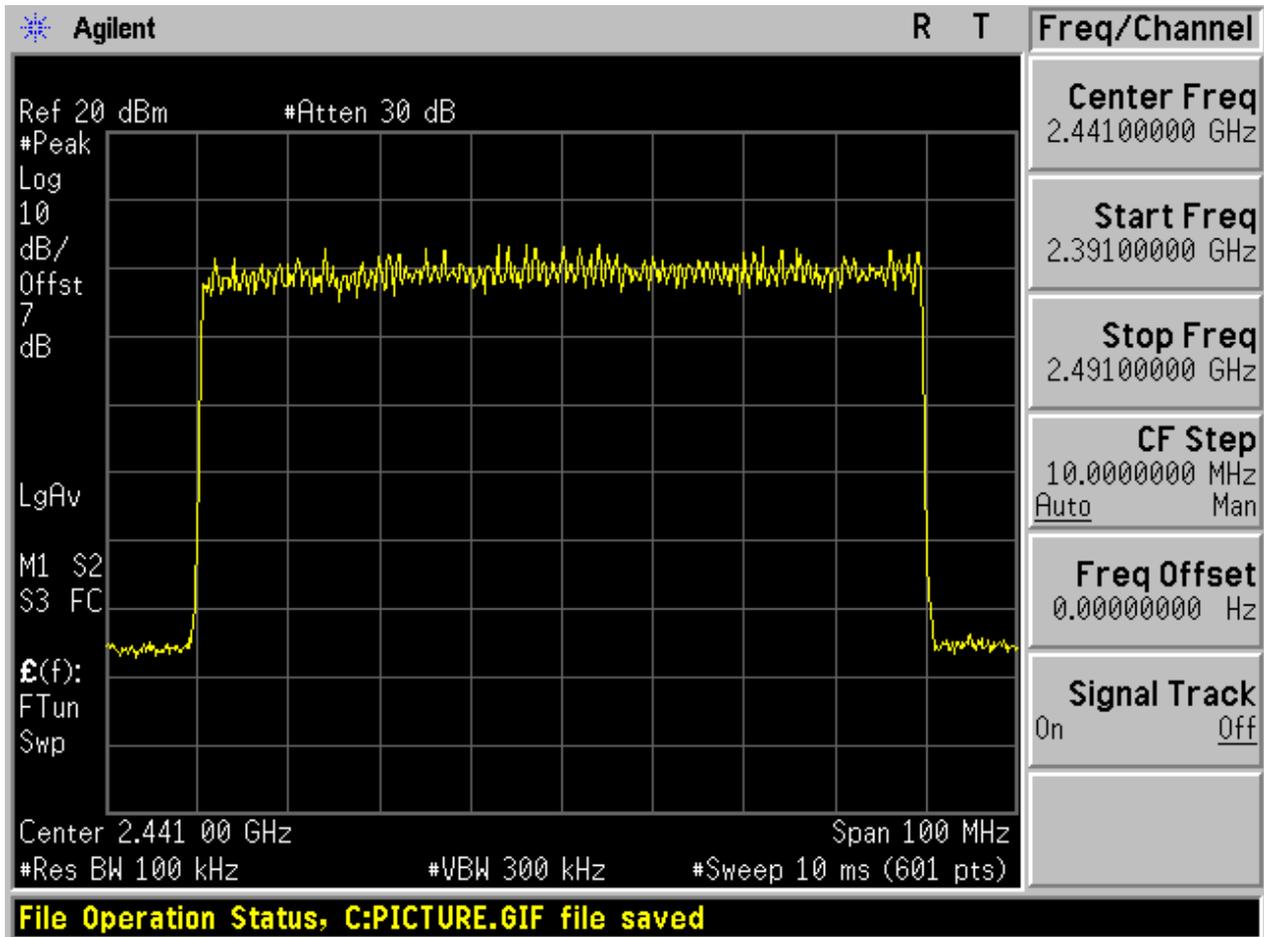

2.3 TM3_3DH5_Hop

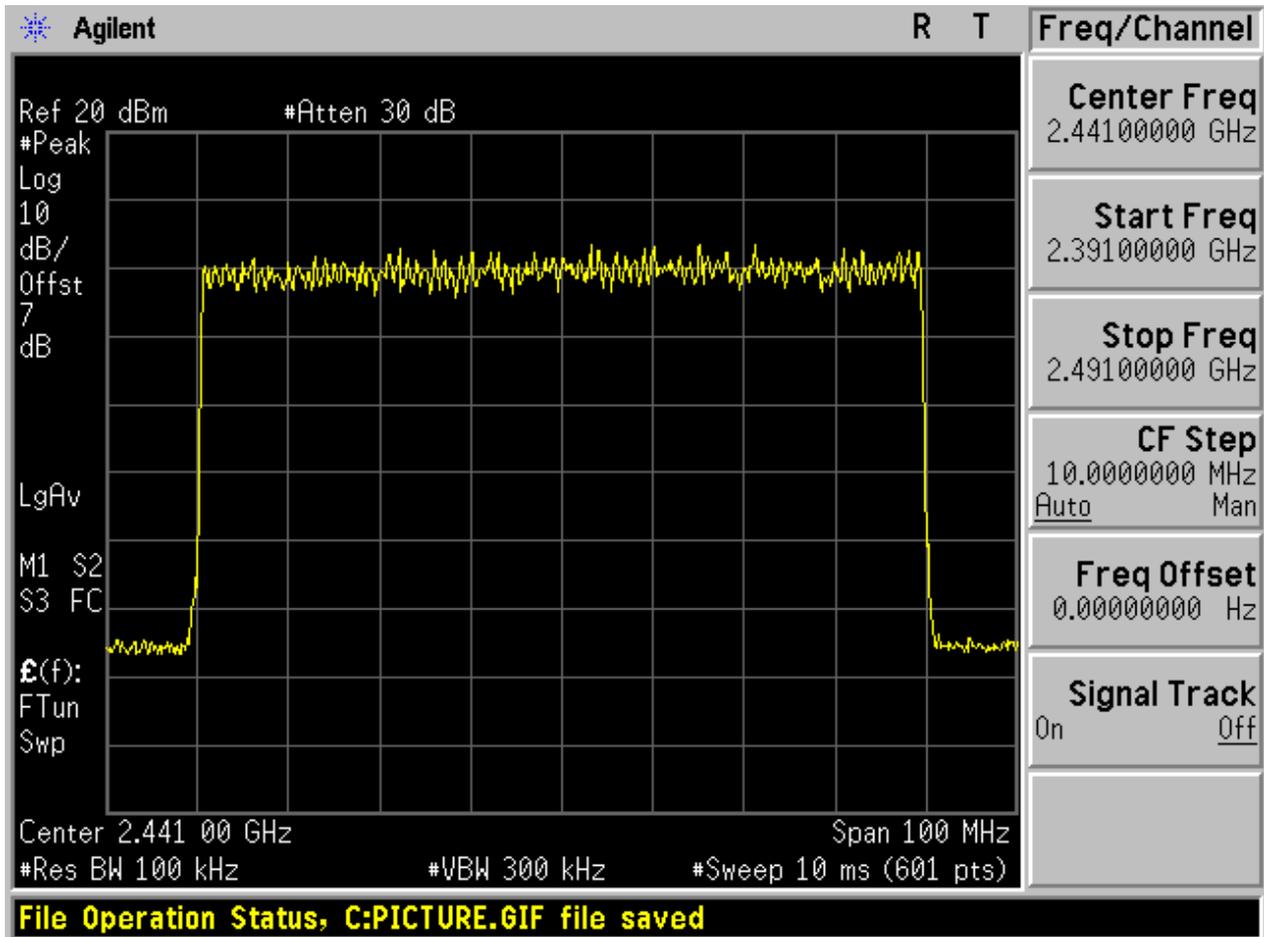



Appendix D: Time of Occupancy (Dwell Time)

1 Result Table

The Dwell Time = Burst Width * Total Hops. The detailed calculations are showed as follows:


- The duration for dwell time calculation: $0.4 \text{ [s]} * \text{hopping number} = 0.4 \text{ [s]} * 79 \text{ [ch]} = 31.6 \text{ [s*ch]}$;
- The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.
- The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch*hop/s] for all channels. So the final hopping rate for all channels is $1600 / 6 = 266.67 \text{ [ch*hop/s]}$;
- The hops per second on one channel: $266.67 \text{ [ch*hop/s]} / 79 \text{ [ch]} = 3.38 \text{ [hop/s]}$;
- The total hops for all channels within the dwell time calculation duration: $3.38 \text{ [hop/s]} * 31.6 \text{ [s*ch]} = 106.67 \text{ [hop*ch]}$;
- The dwell time for all channels hopping: $106.67 \text{ [hop*ch]} * \text{Burst Width [ms/hop/ch]}$.

EUT Conf.	Burst Width [ms/hop/ch]	Total Hops [hop*ch]	Dwell Time [ms]	Verdict
TM1_DH5_Ch39	2.884	106.67	0.308	Pass
TM2_2DH5_Ch39	2.867	106.67	0.306	Pass
TM3_3DH5_Ch39	2.884	106.67	0.308	Pass

2 Test Plot


NOTE: The test plots are only for Burst Width measurements.

2.1 TM1_DH5_Ch39

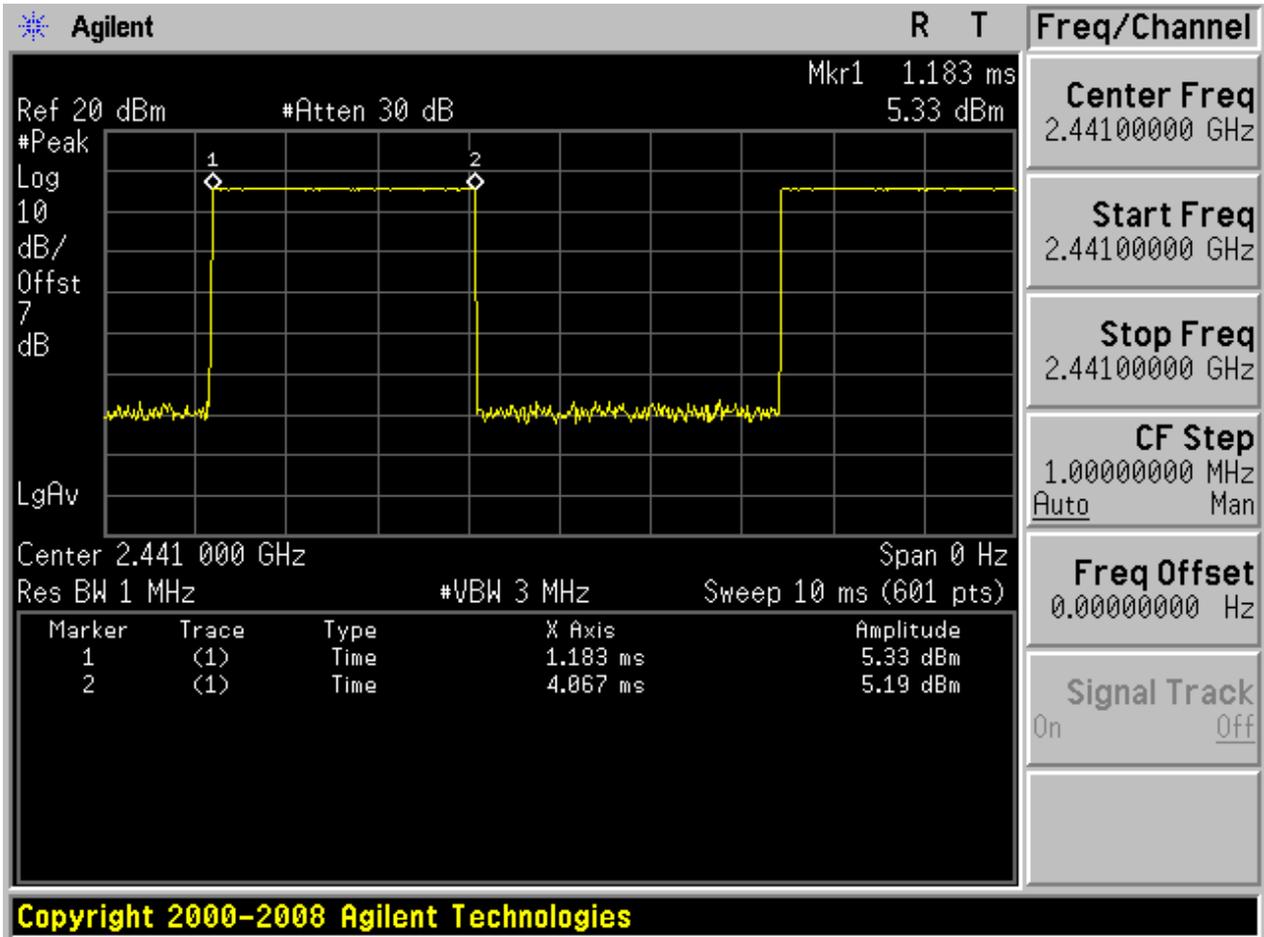


Copyright 2000-2008 Agilent Technologies

2.2 TM2_2DH5_Ch39

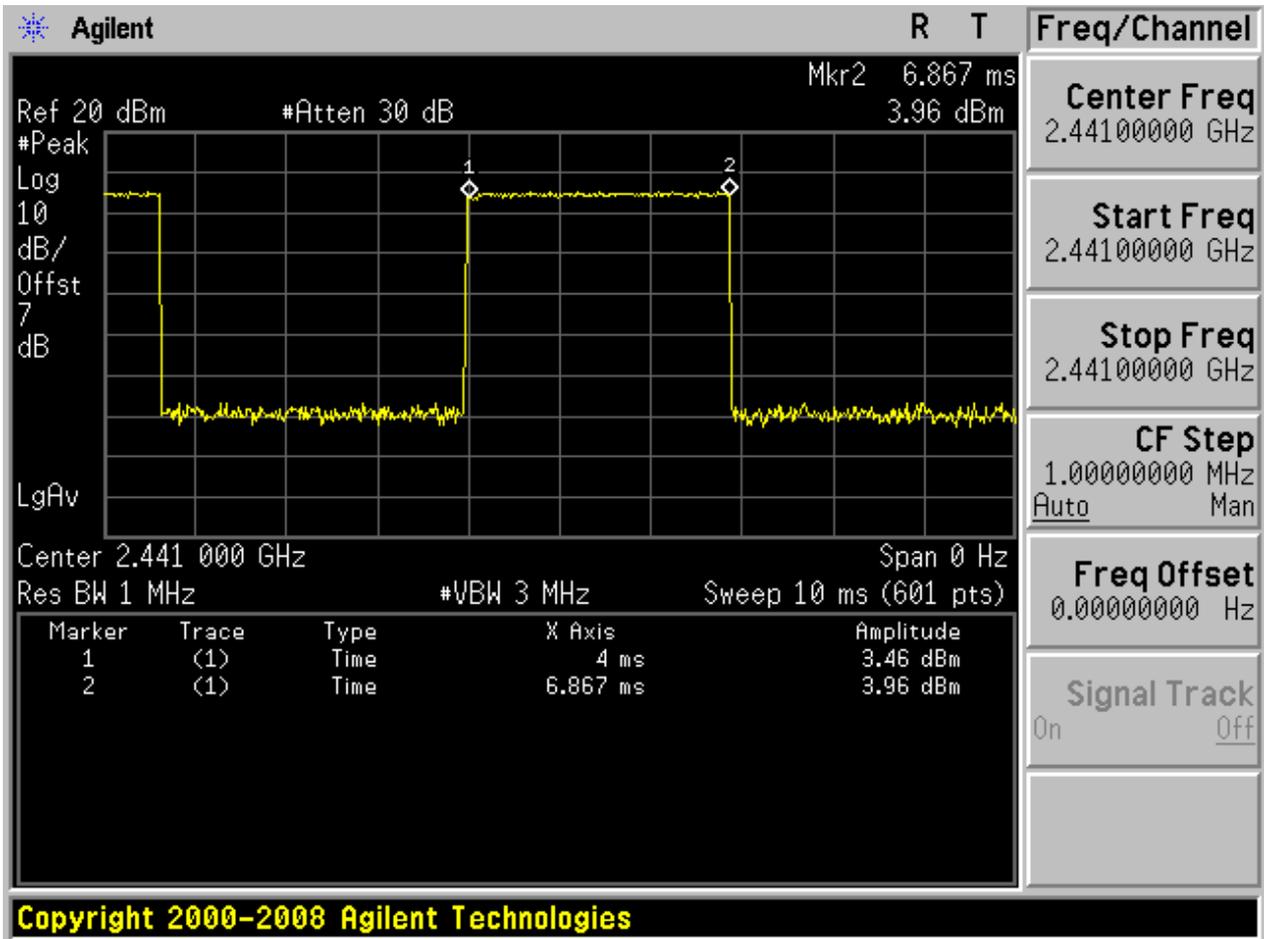

2.3 TM3_3DH5_Ch39

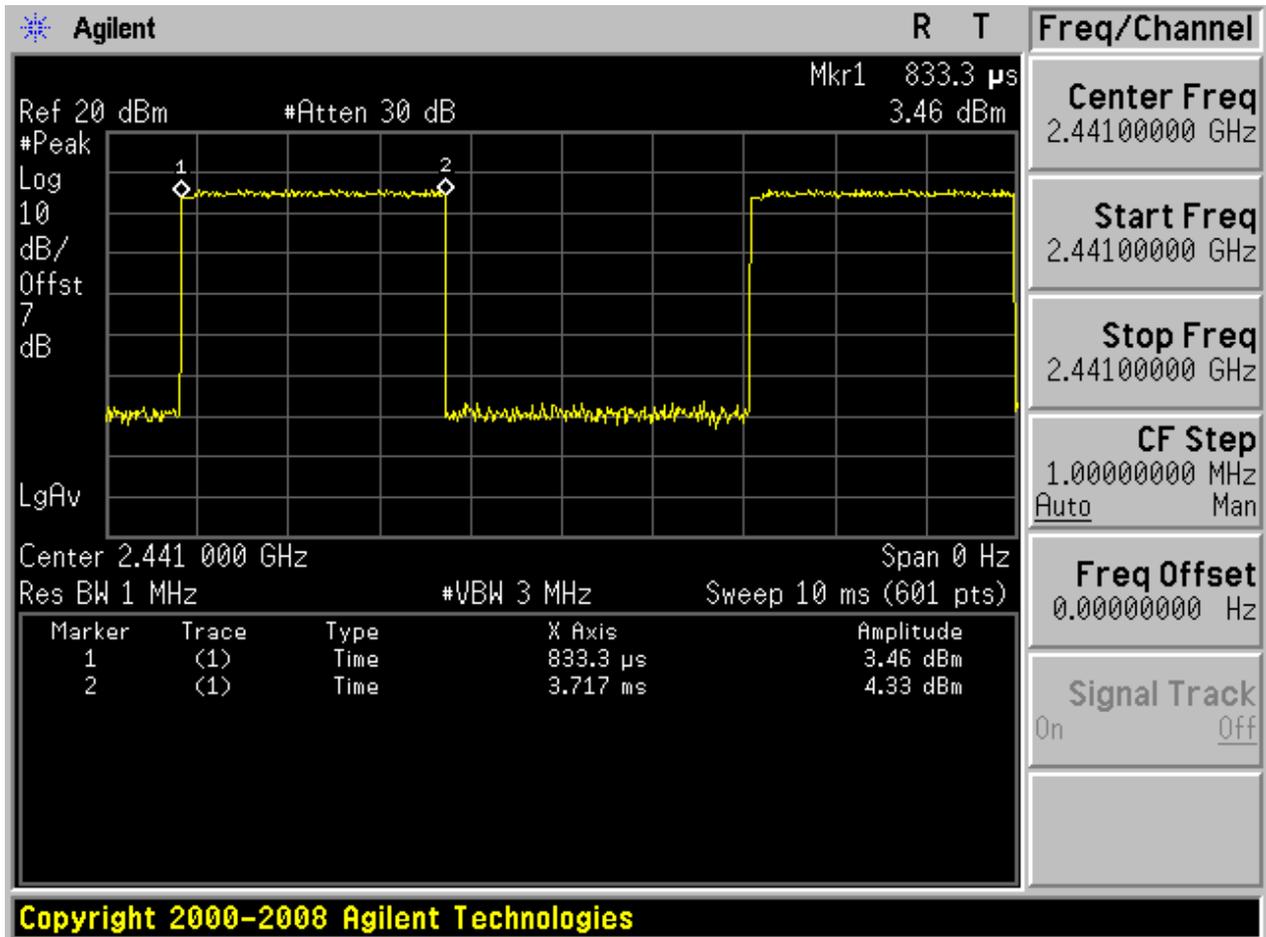



Appendix E: Maximum Peak Conducted Output Power




1 Result Table


EUT Conf.	Max. Peak Power [dBm]	Verdict
TM1_DH5_Ch0	4.81	Pass
TM1_DH5_Ch39	5.56	Pass
TM1_DH5_Ch78	5.52	Pass
TM2_2DH5_Ch0	4.76	Pass
TM2_2DH5_Ch39	5.52	Pass
TM2_2DH5_Ch78	5.47	Pass
TM3_3DH5_Ch0	5.1	Pass
TM3_3DH5_Ch39	5.84	Pass
TM3_3DH5_Ch78	5.8	Pass

2 Test Plot


2.1 TM1_DH5_Ch0

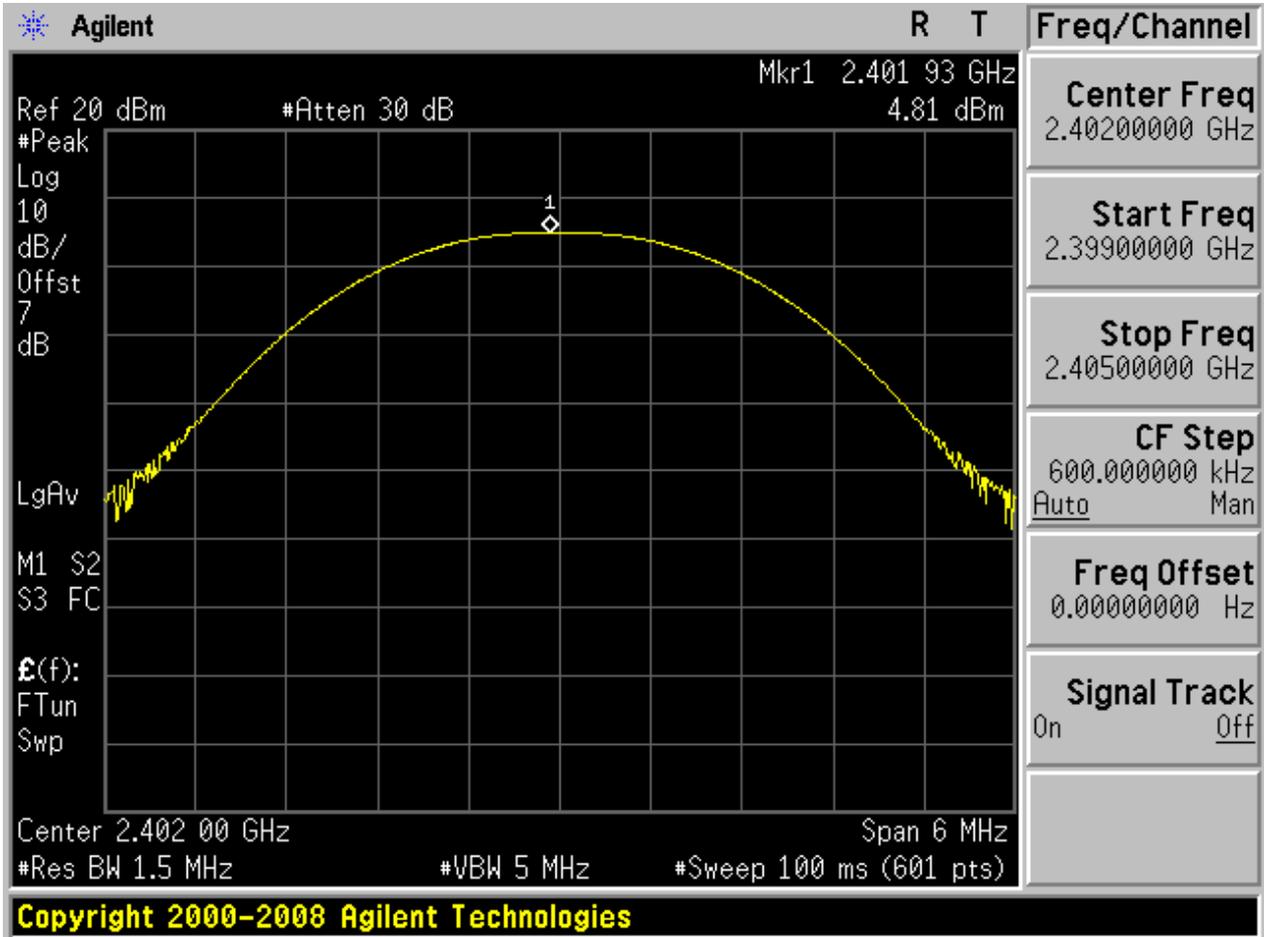


2.2 TM1_DH5_Ch39

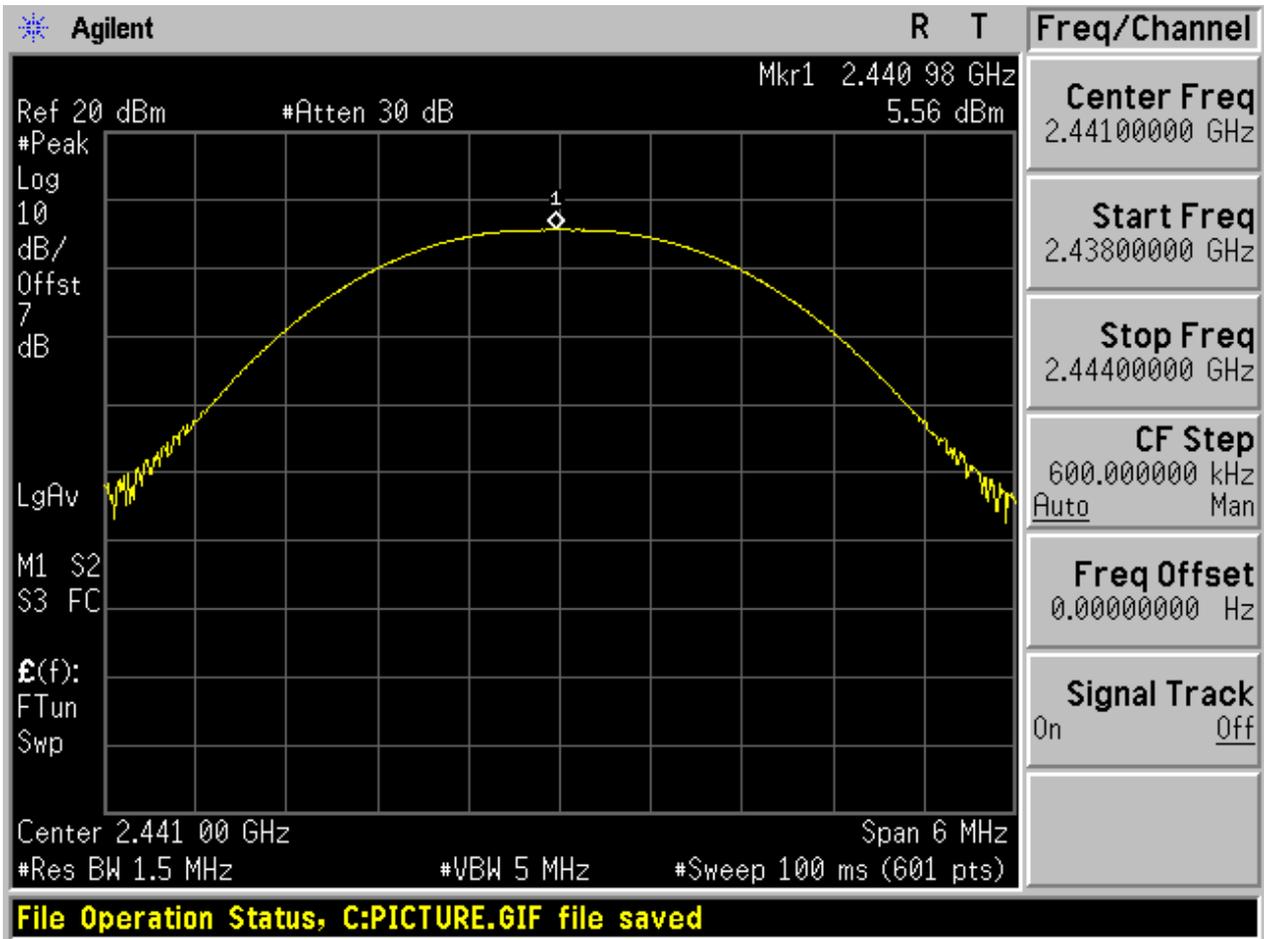


2.3 TM1_DH5_Ch78

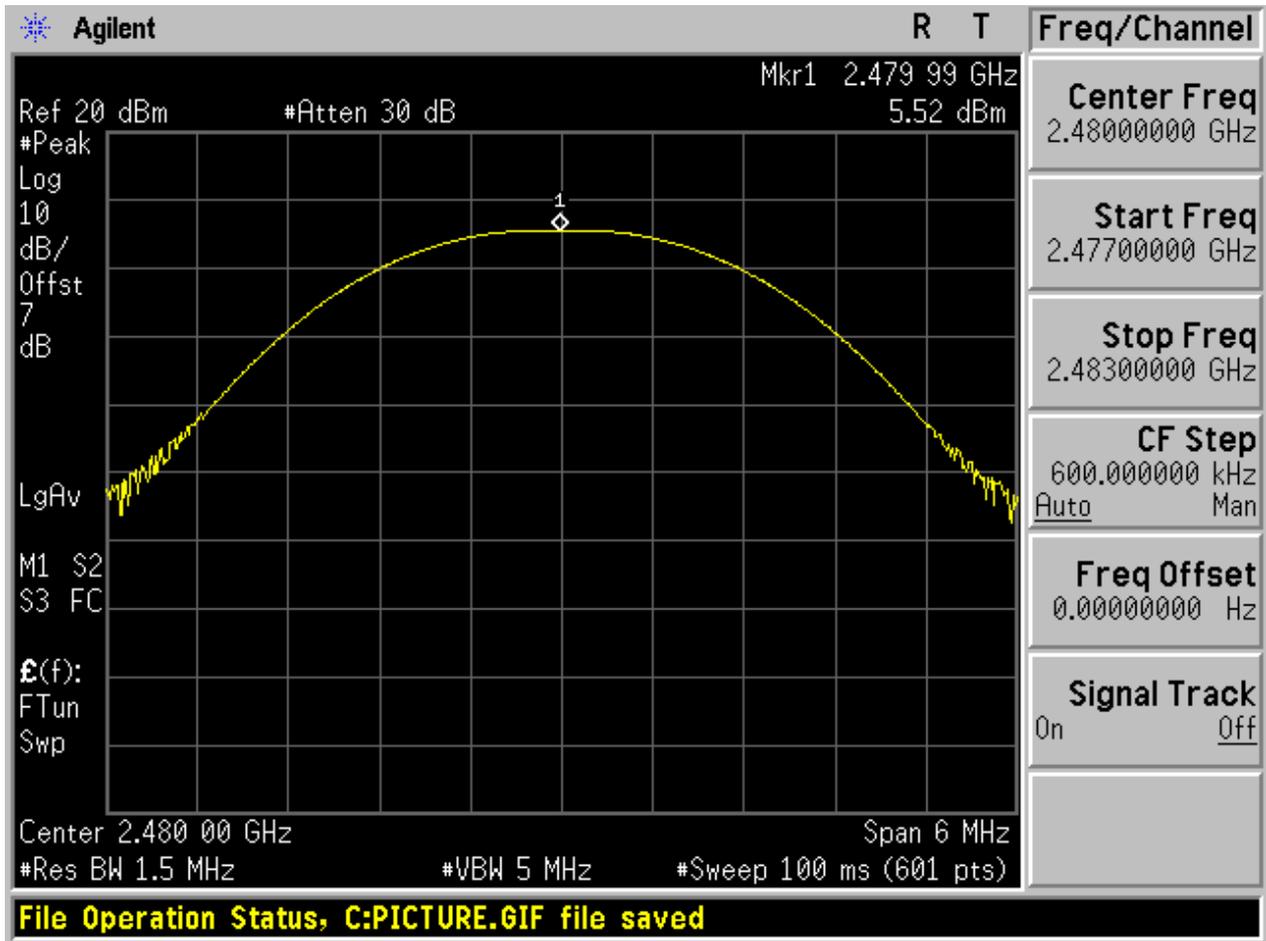


2.4 TM2_2DH5_Ch0

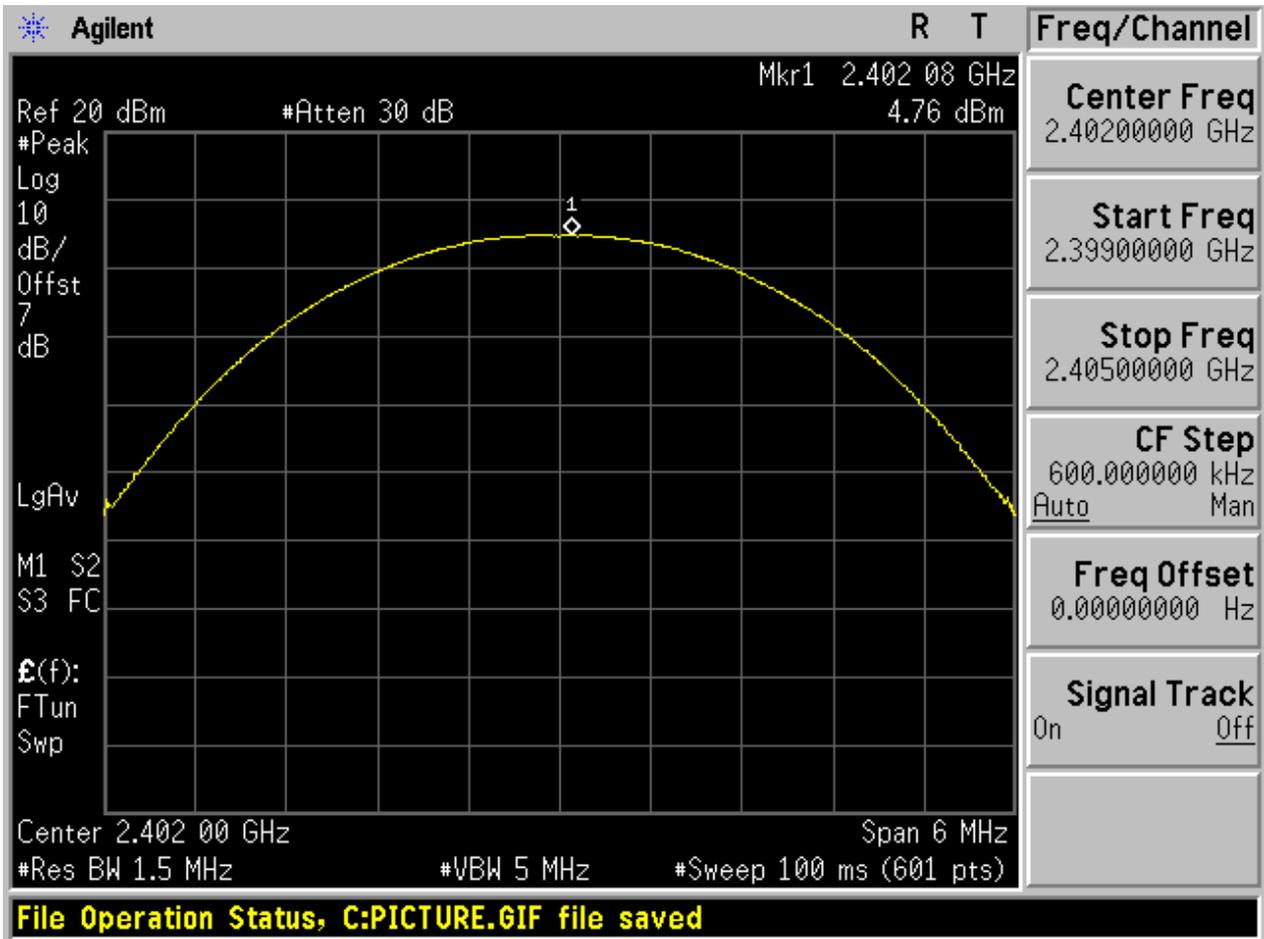


2.5 TM2_2DH5_Ch39

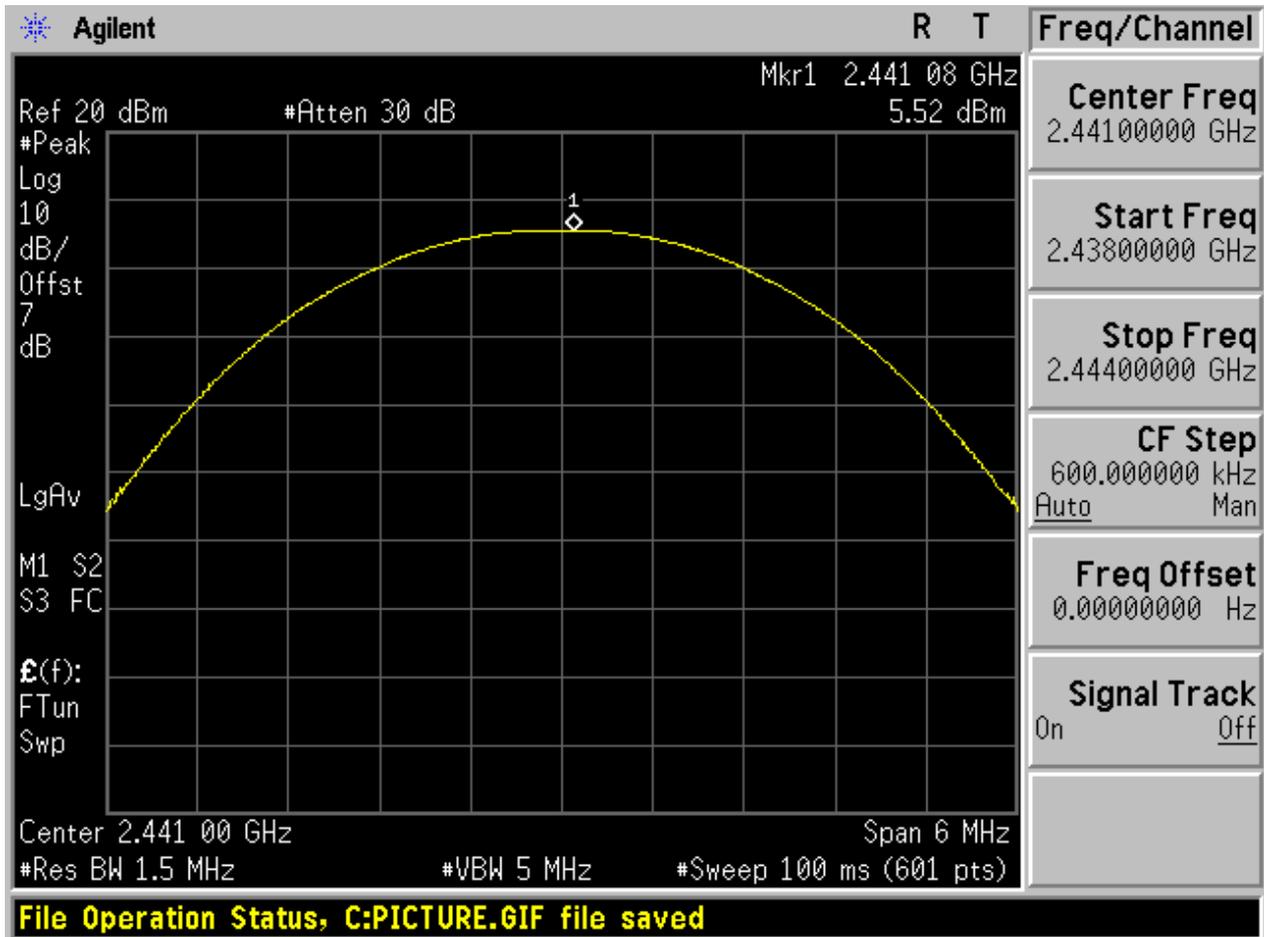


2.6 TM2_2DH5_Ch78

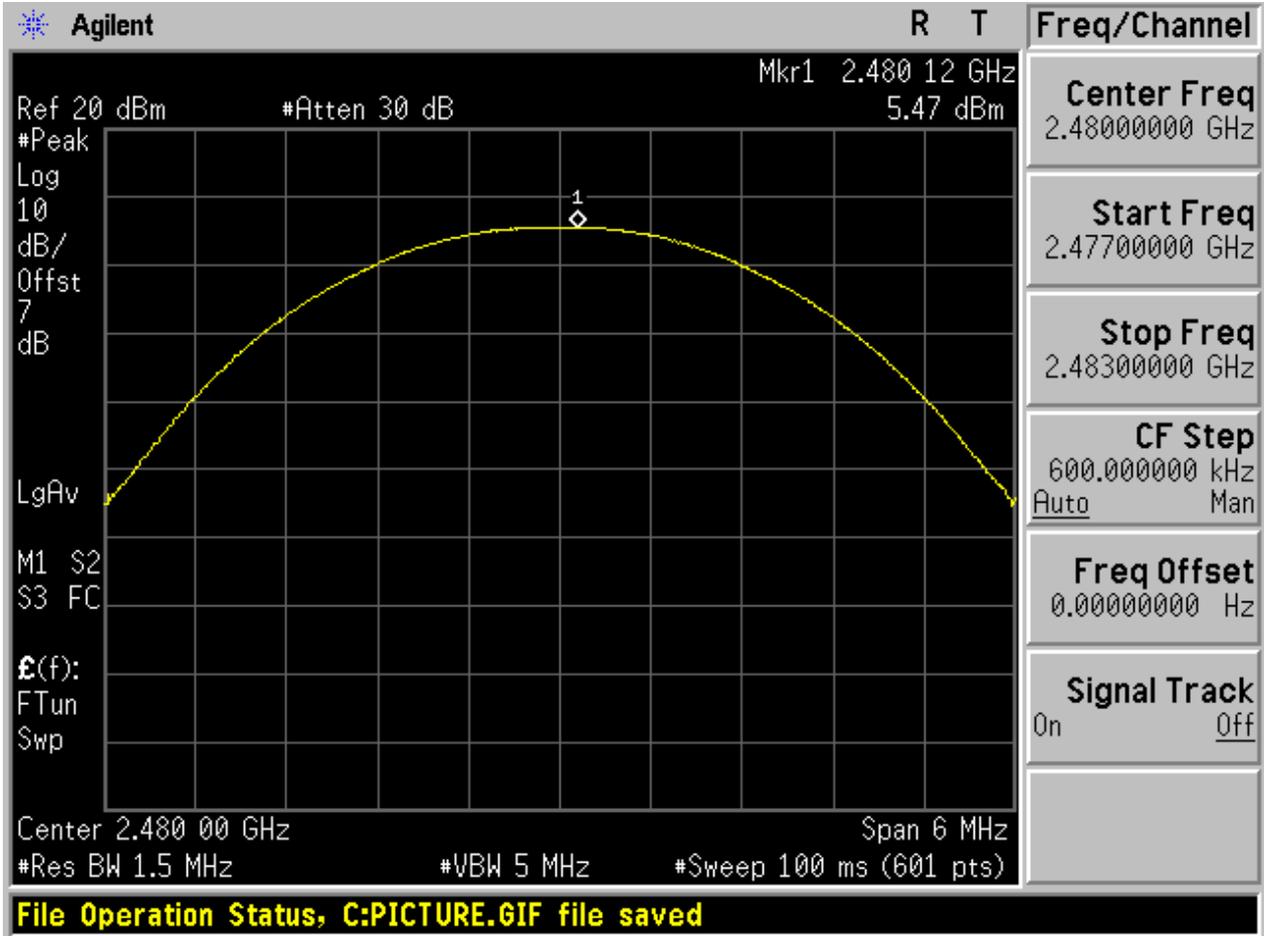


2.7 TM3_3DH5_Ch0

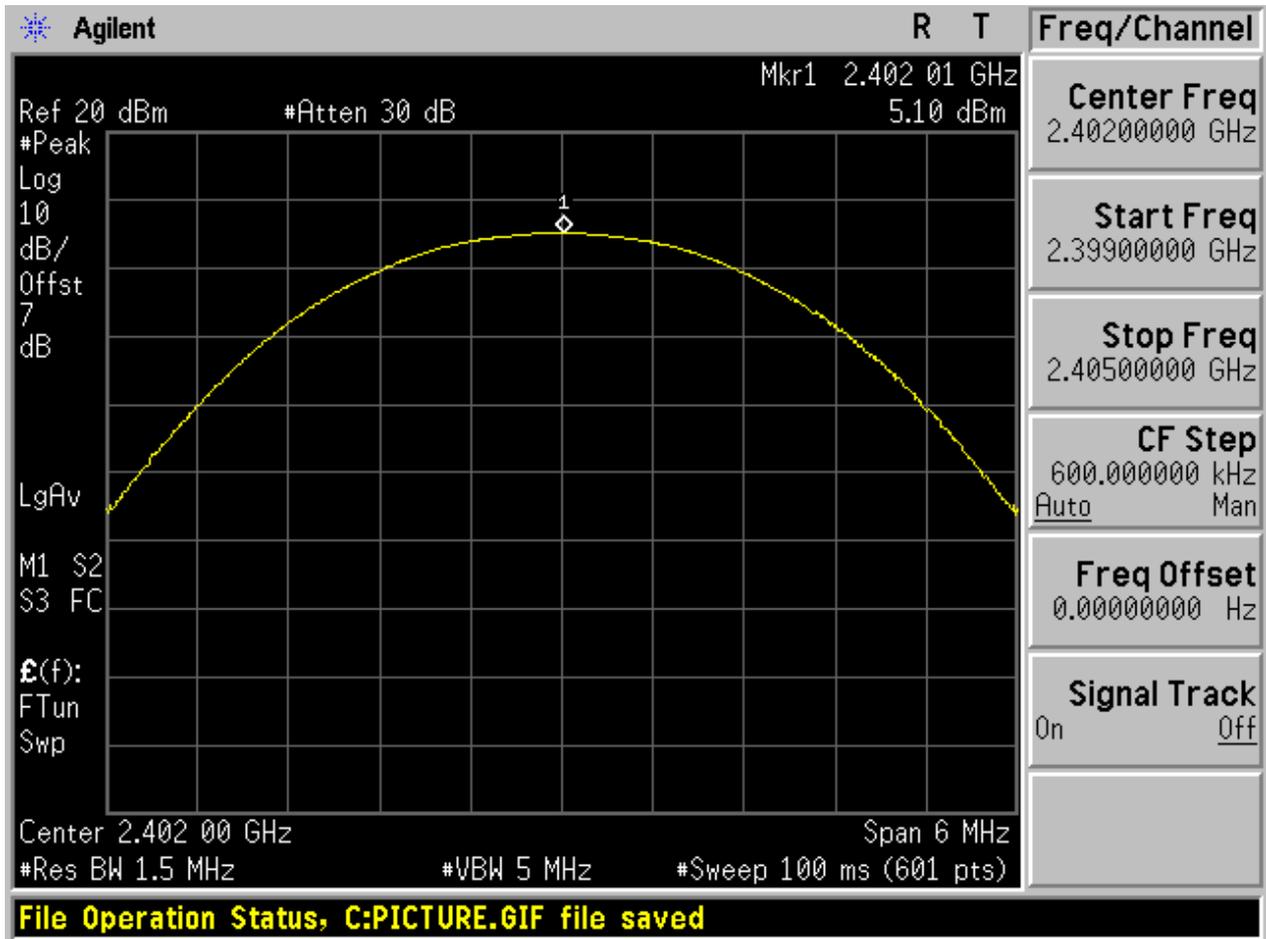

2.8 TM3_3DH5_Ch39

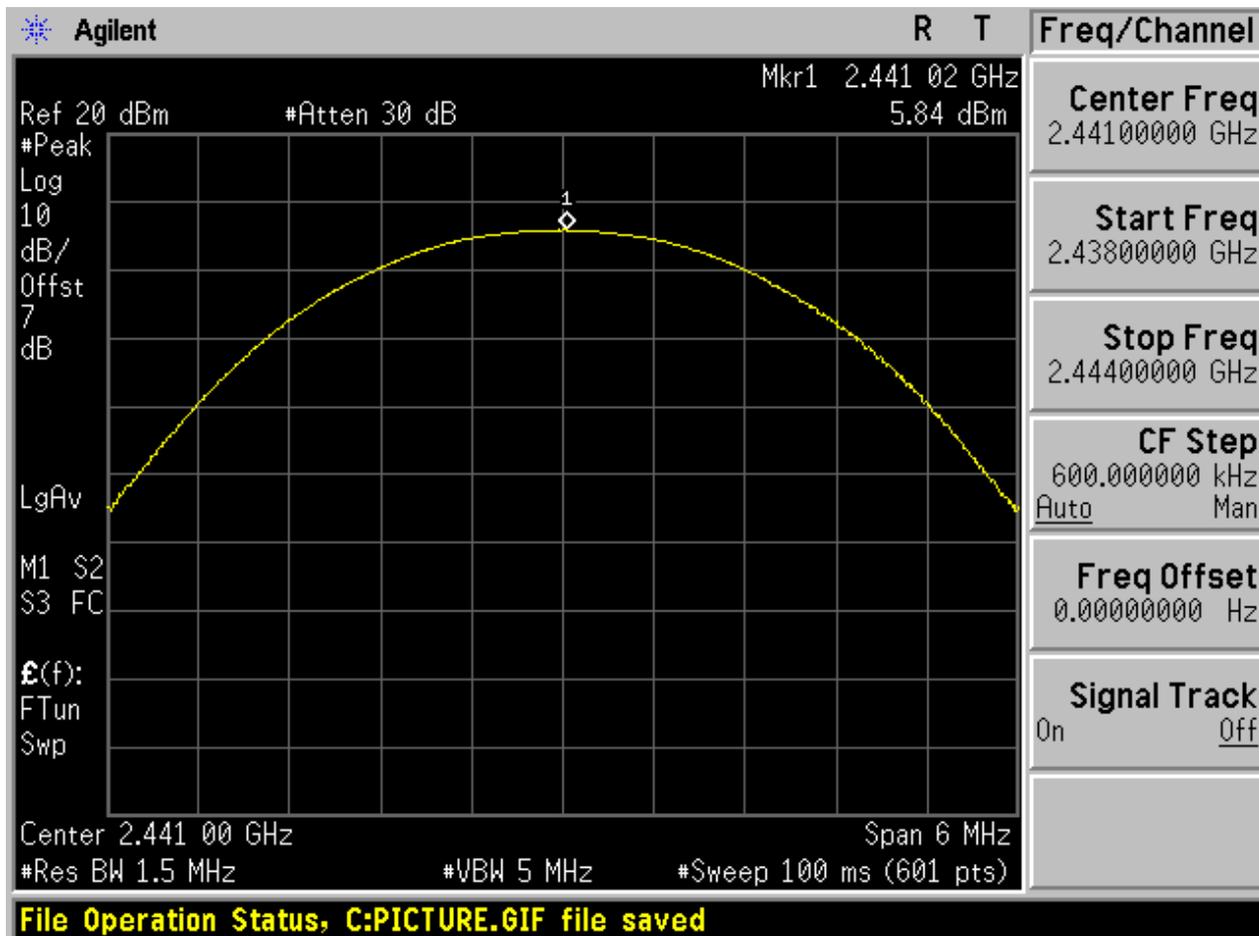

2.9 TM3_3DH5_Ch78

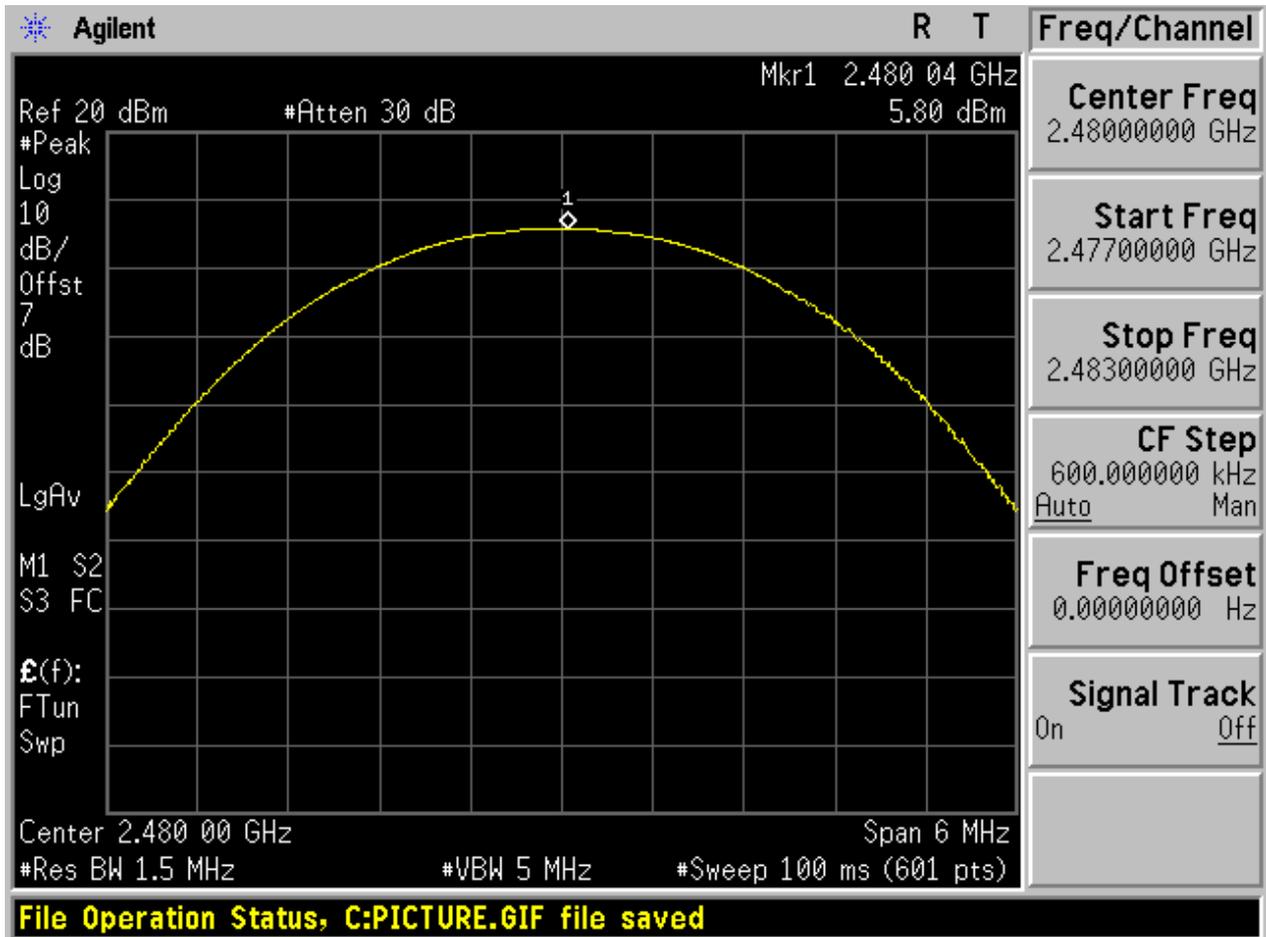



Appendix F: Band edge spurious emission




1 Result Table

EUT Conf.	Channel No.	Carrier Frequency [MHz]	Max. Spurious Level [dBm]	Frequency Hopping	Carrier Power [dBm]	Limit [dBm]	Result
TM1_DH5 _Ch0	0	2402	-53.08	Off	4.69	-15.31	Pass
	-	-	-54.85	On	4.41	-15.59	Pass
TM1_DH5 _Ch78	78	2480	-54.42	Off	5.33	-14.67	Pass
	-	-	-54.22	On	5.30	-14.7	Pass
TM2_2DH 5_Ch0	0	2402	-52.26	Off	2.72	-17.28	Pass
	-	-	-54.99	On	2.25	-17.75	Pass
TM2_2DH 5_Ch78	78	2480	-54.72	Off	3.43	-16.57	Pass
	-	-	-53.68	On	1.90	-18.1	Pass
TM3_3DH 5_Ch0	0	2402	-54.02	Off	2.72	-17.28	Pass
	-	-	-54.82	On	2.48	-17.52	Pass
TM3_3DH 5_Ch78	78	2480	-54.47	Off	3.44	-16.56	Pass
	-	-	-53.88	On	0.11	-19.89	Pass


2 Test Plot

2.1 TM1_DH5_Ch0

No hopping

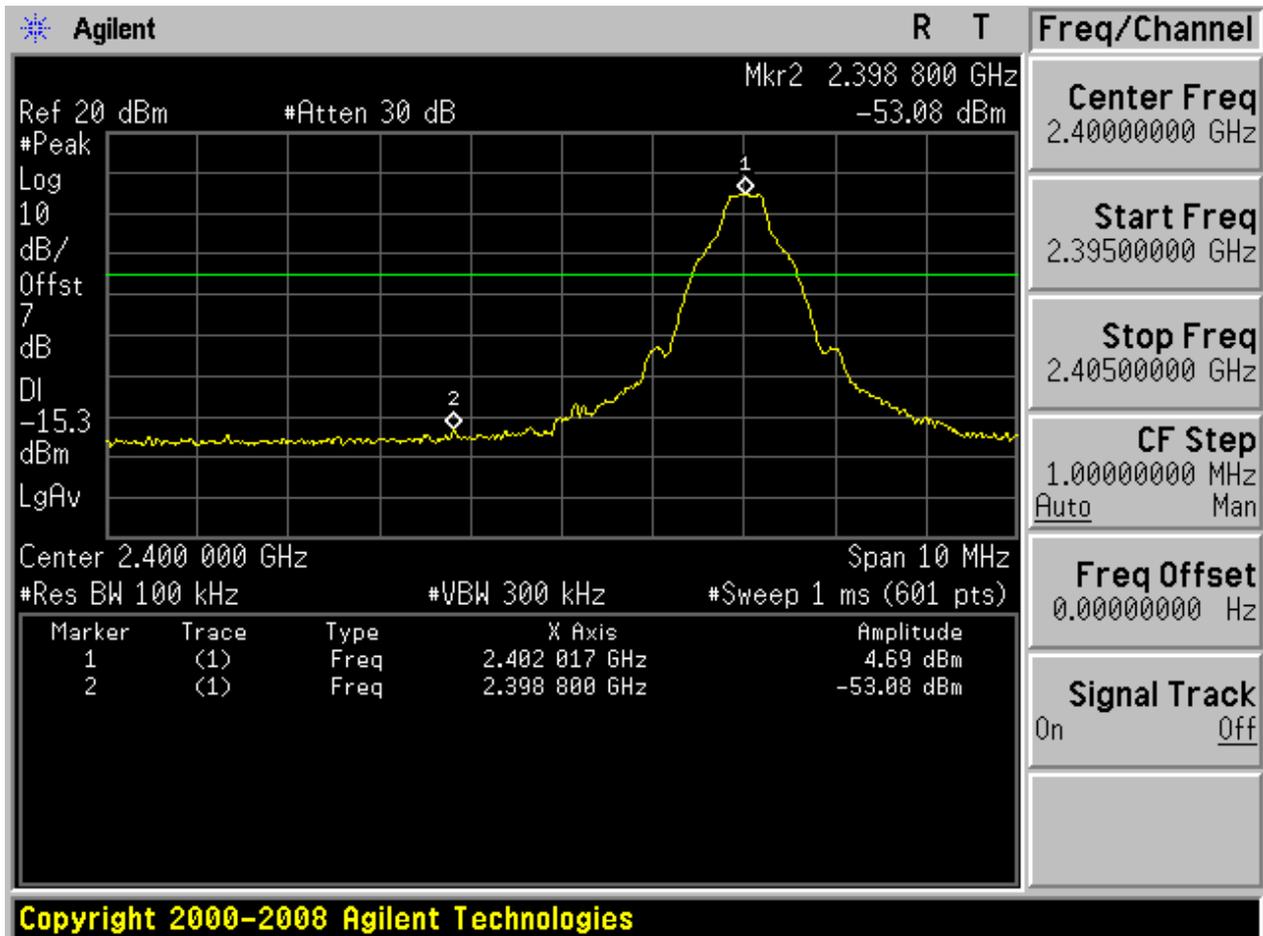


With hopping

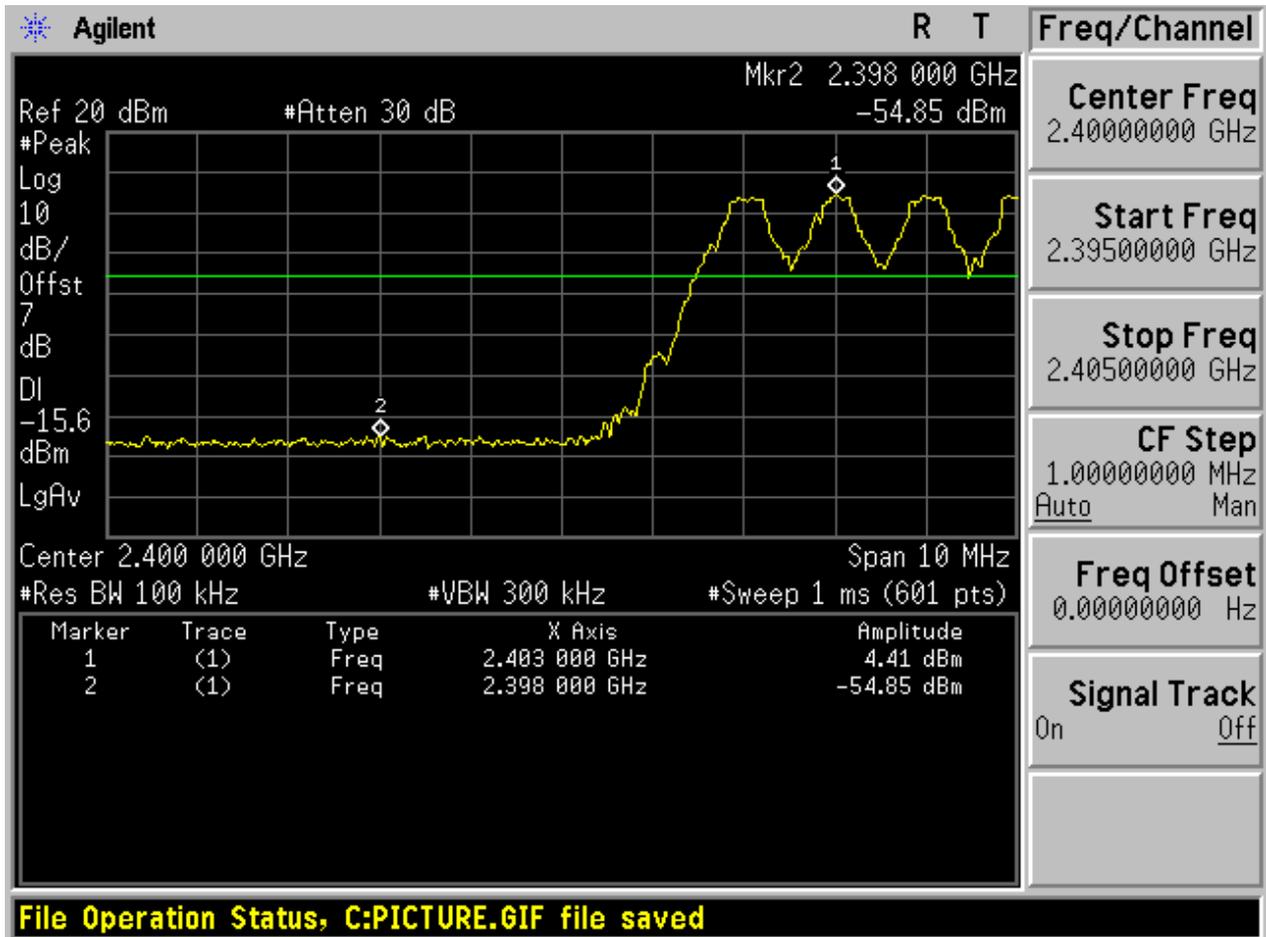


2.2 TM1_DH5_Ch78

No hopping

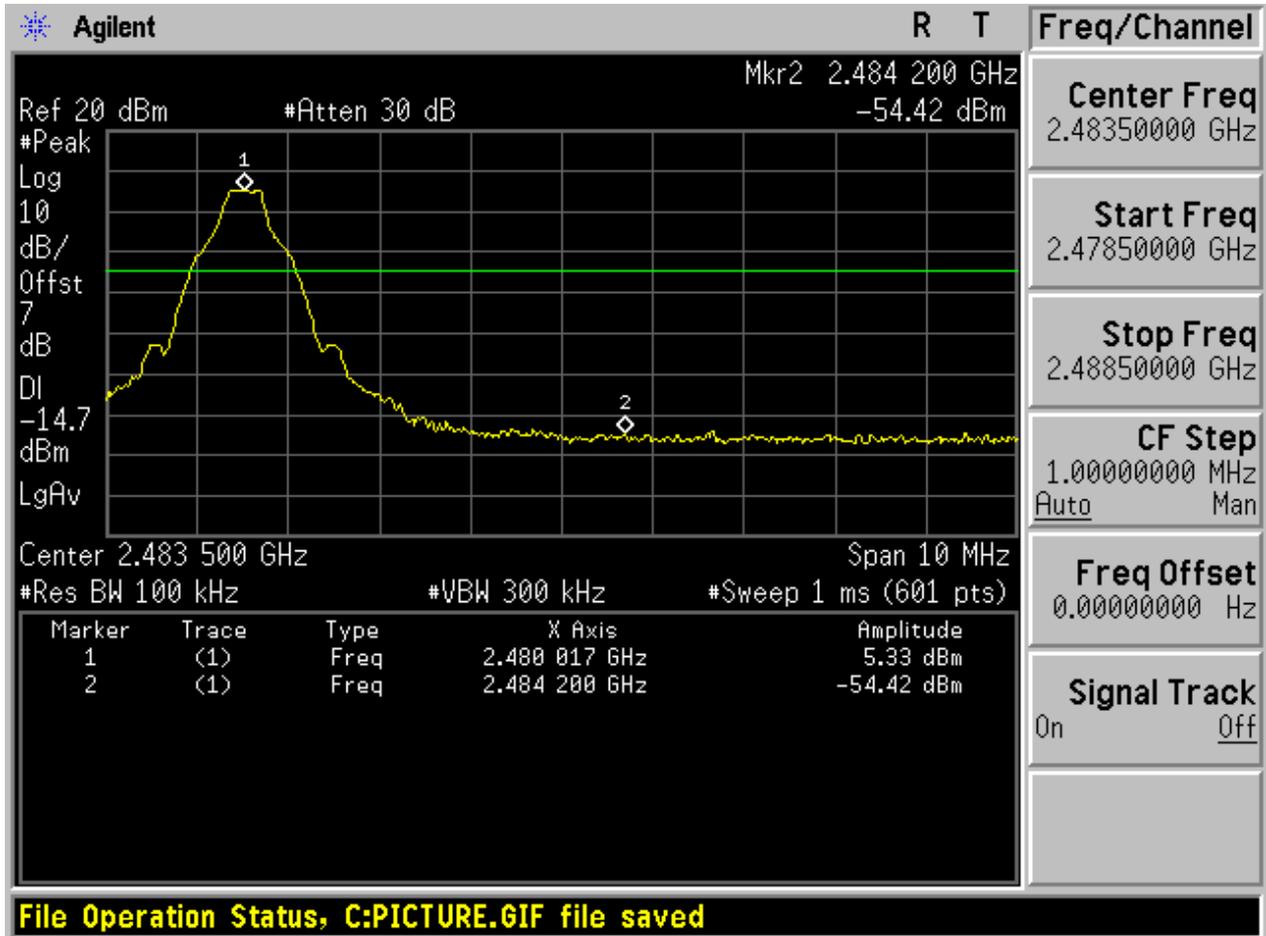


With hopping

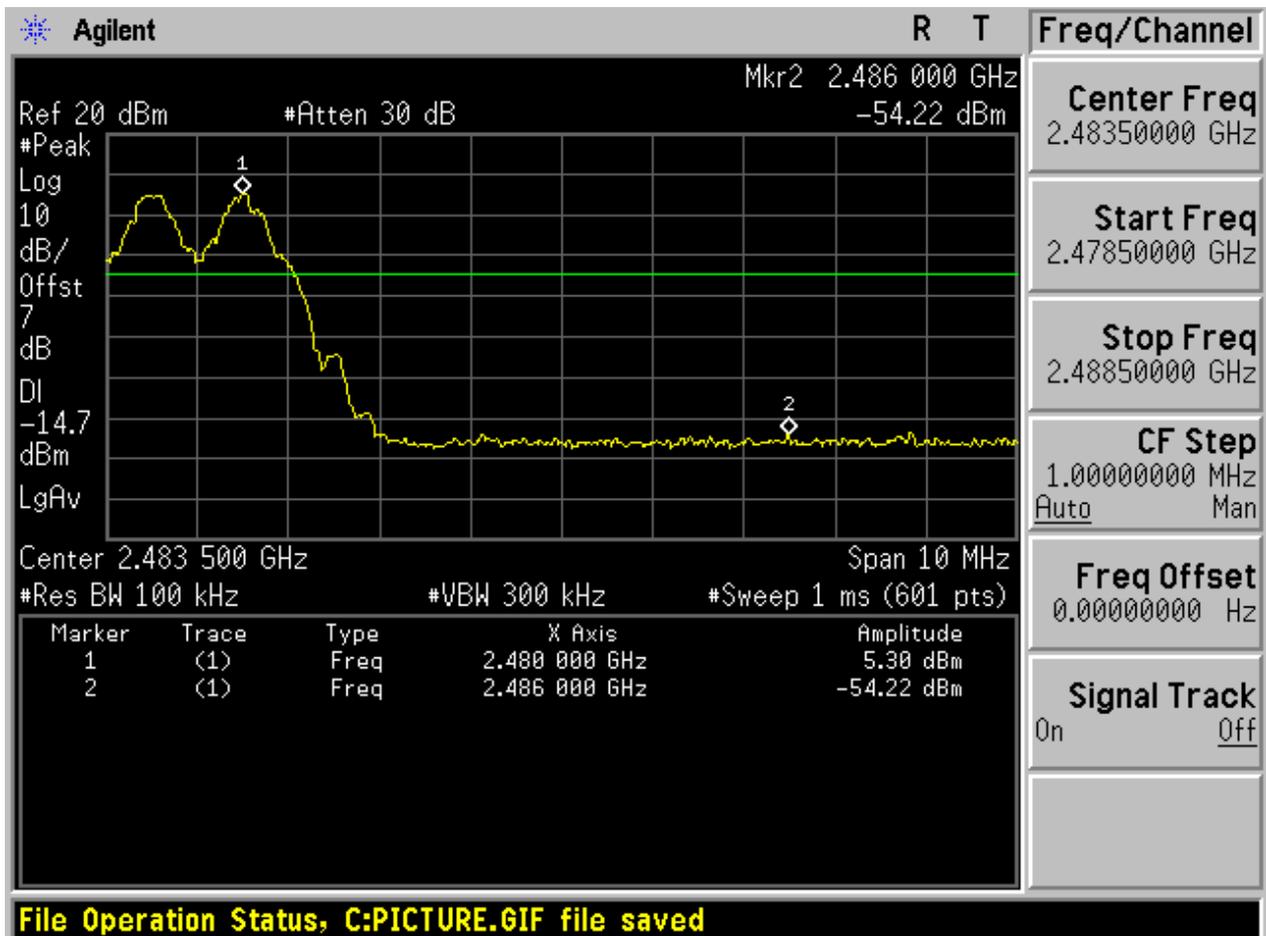


2.3 TM2_2DH5_Ch0

No hopping

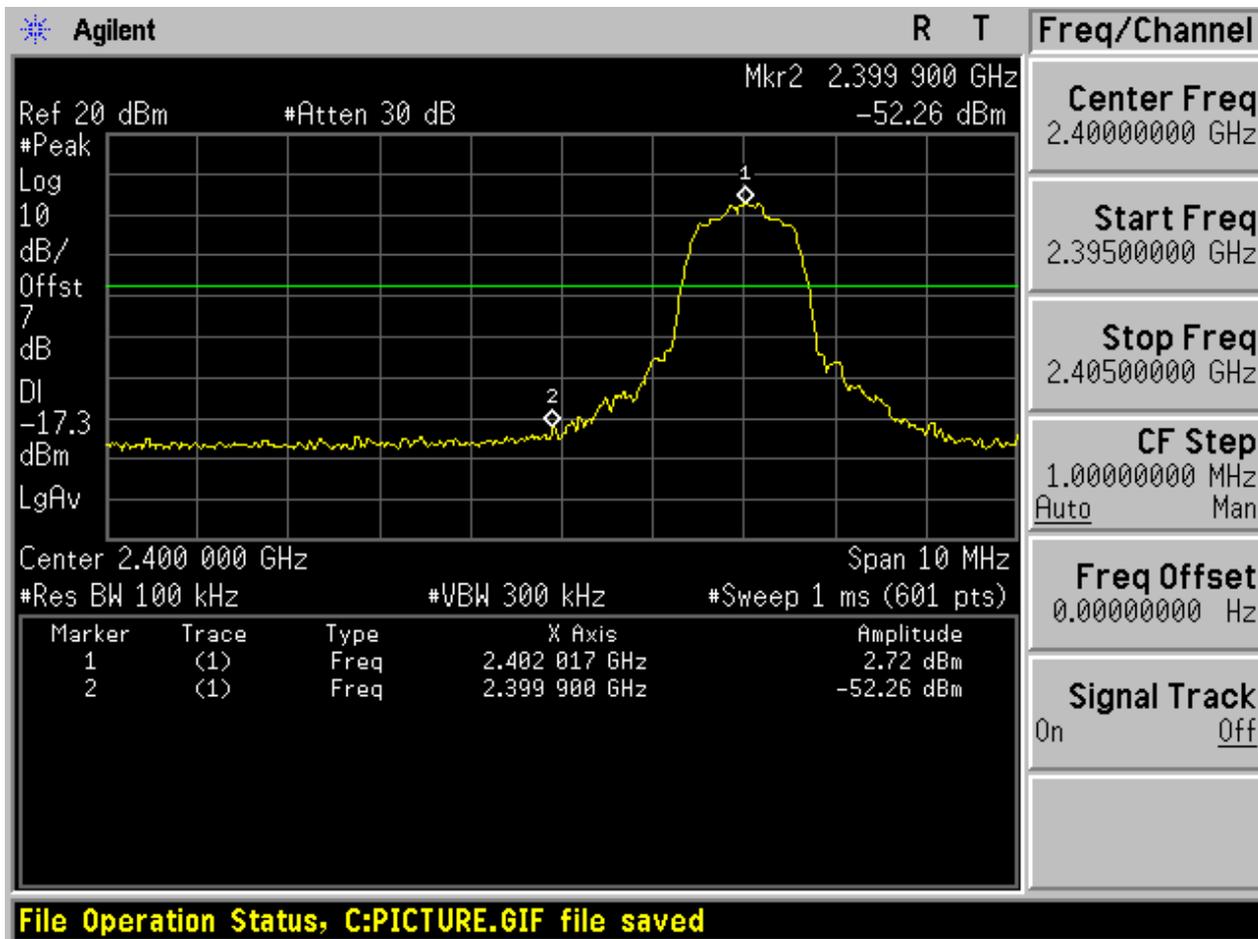


With hopping

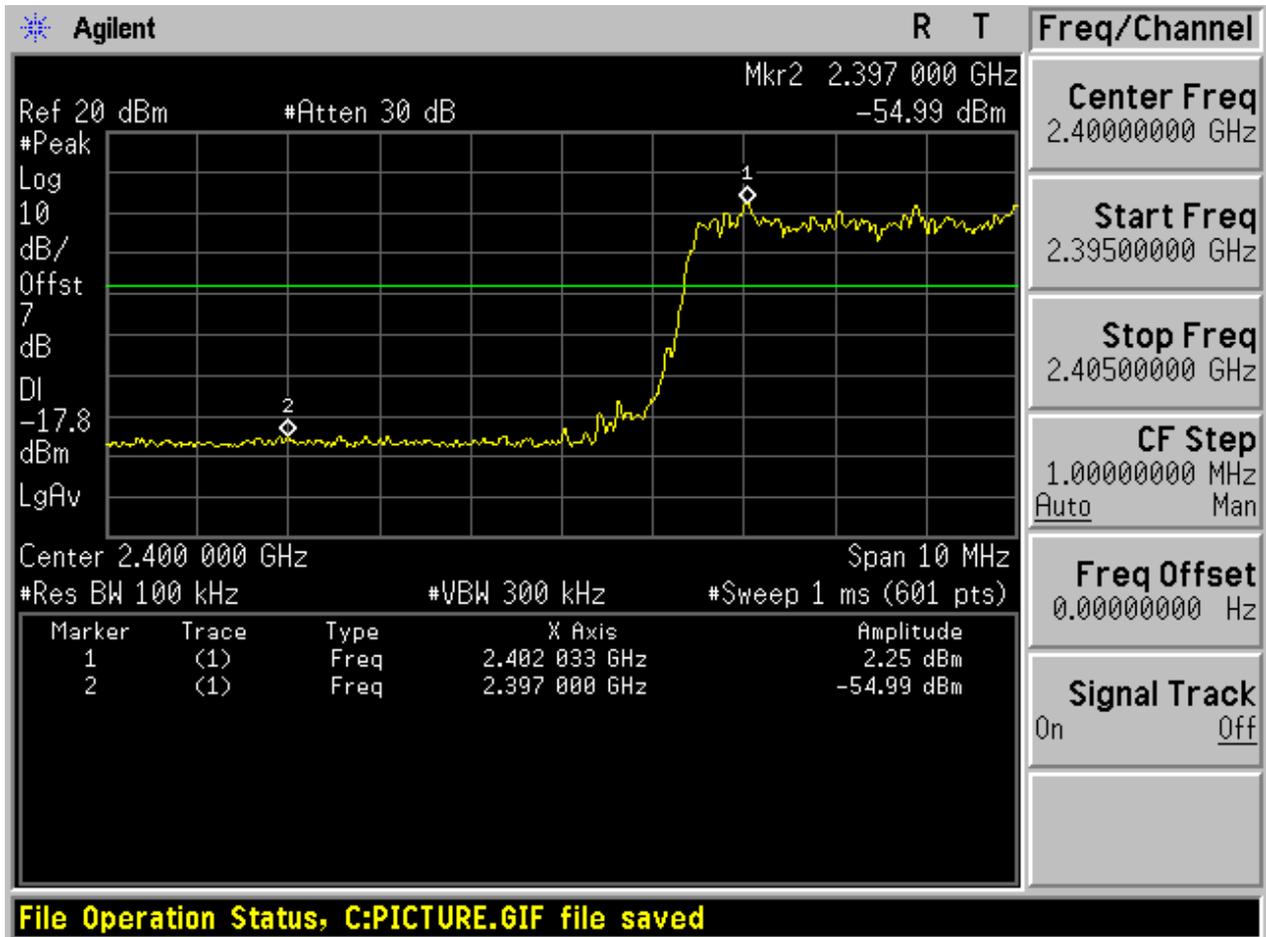


2.4 TM2_2DH5_Ch78

No hopping

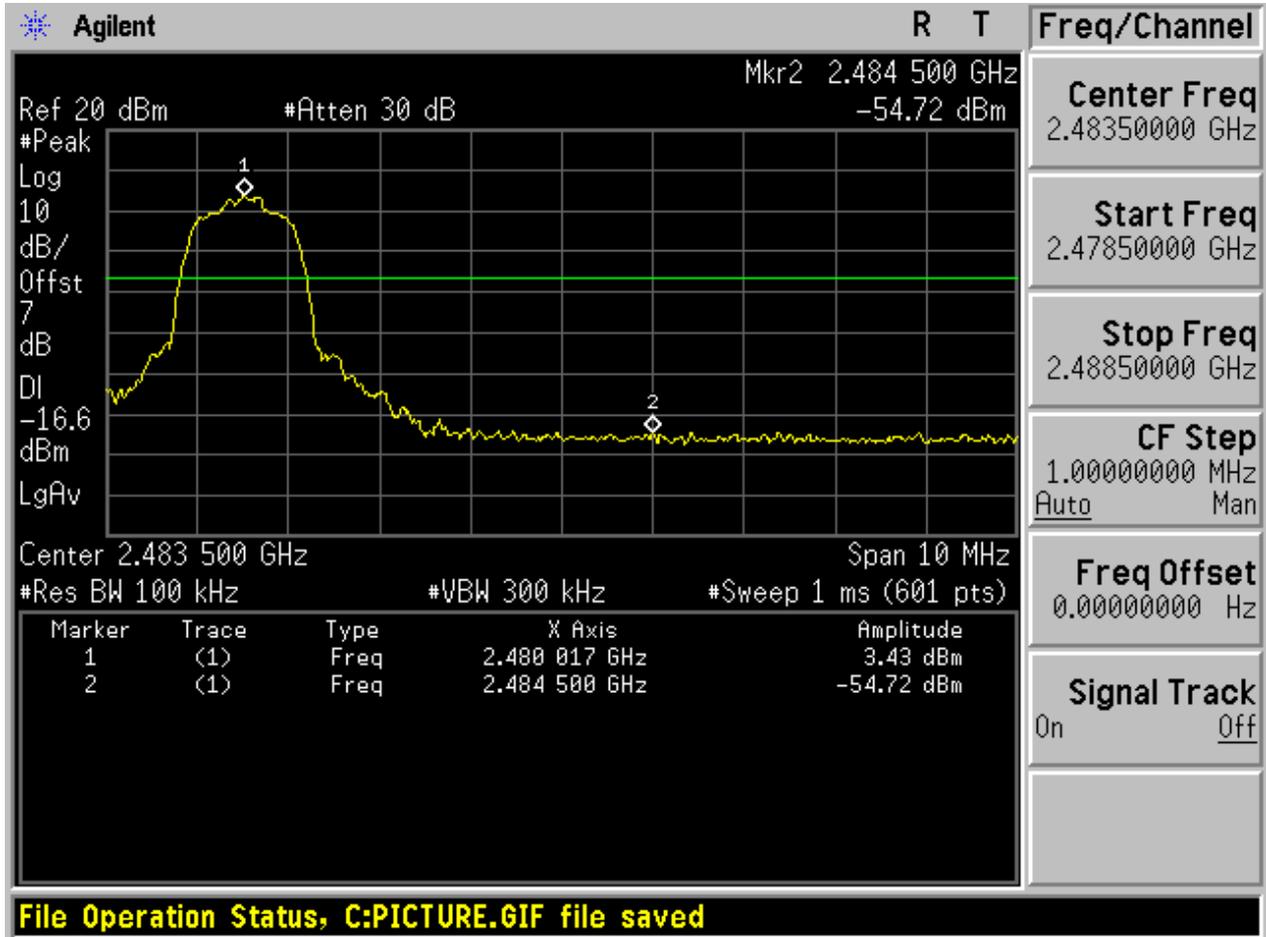


With hopping

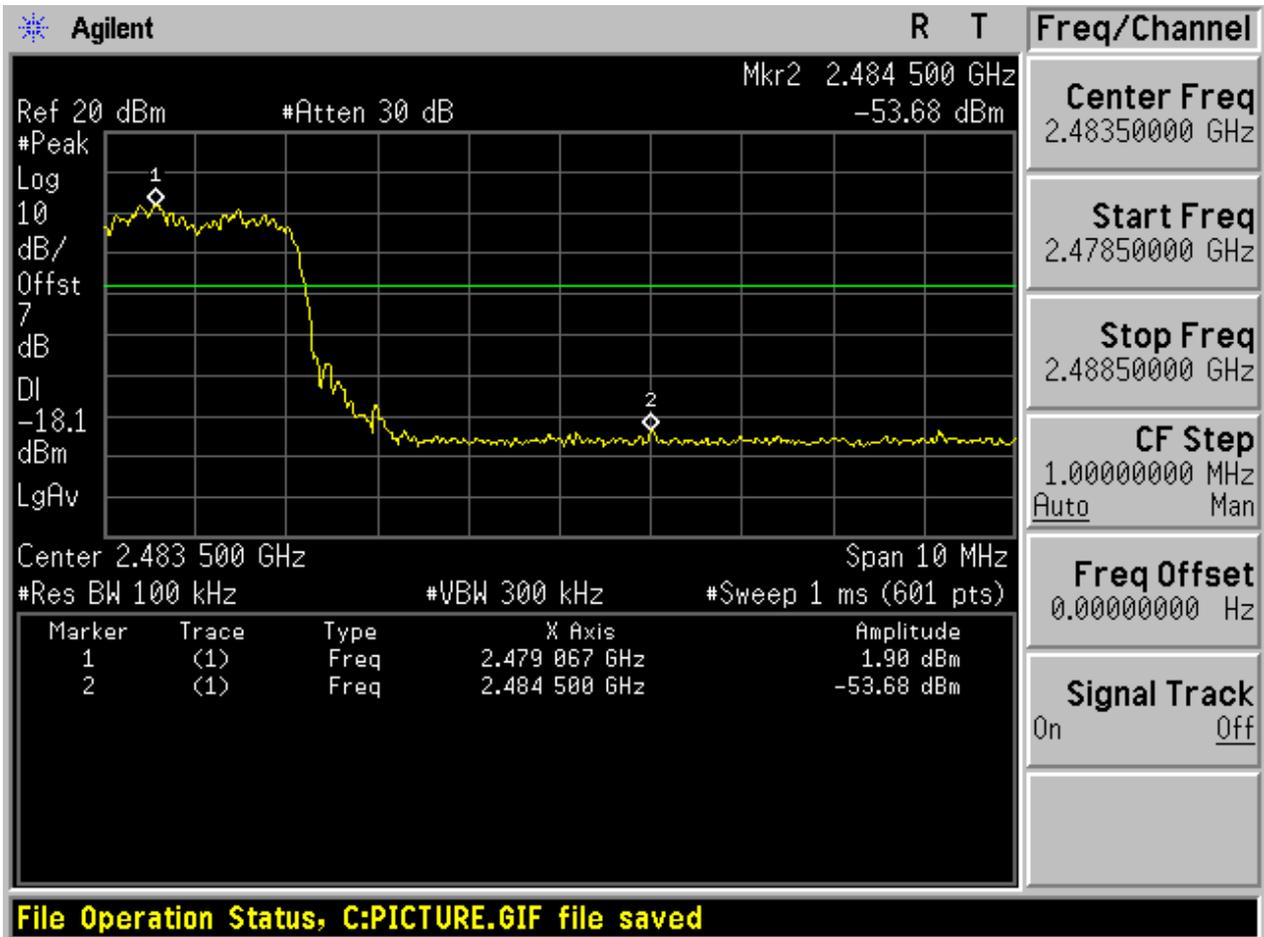


2.5 TM3_3DH5_Ch0

No hopping

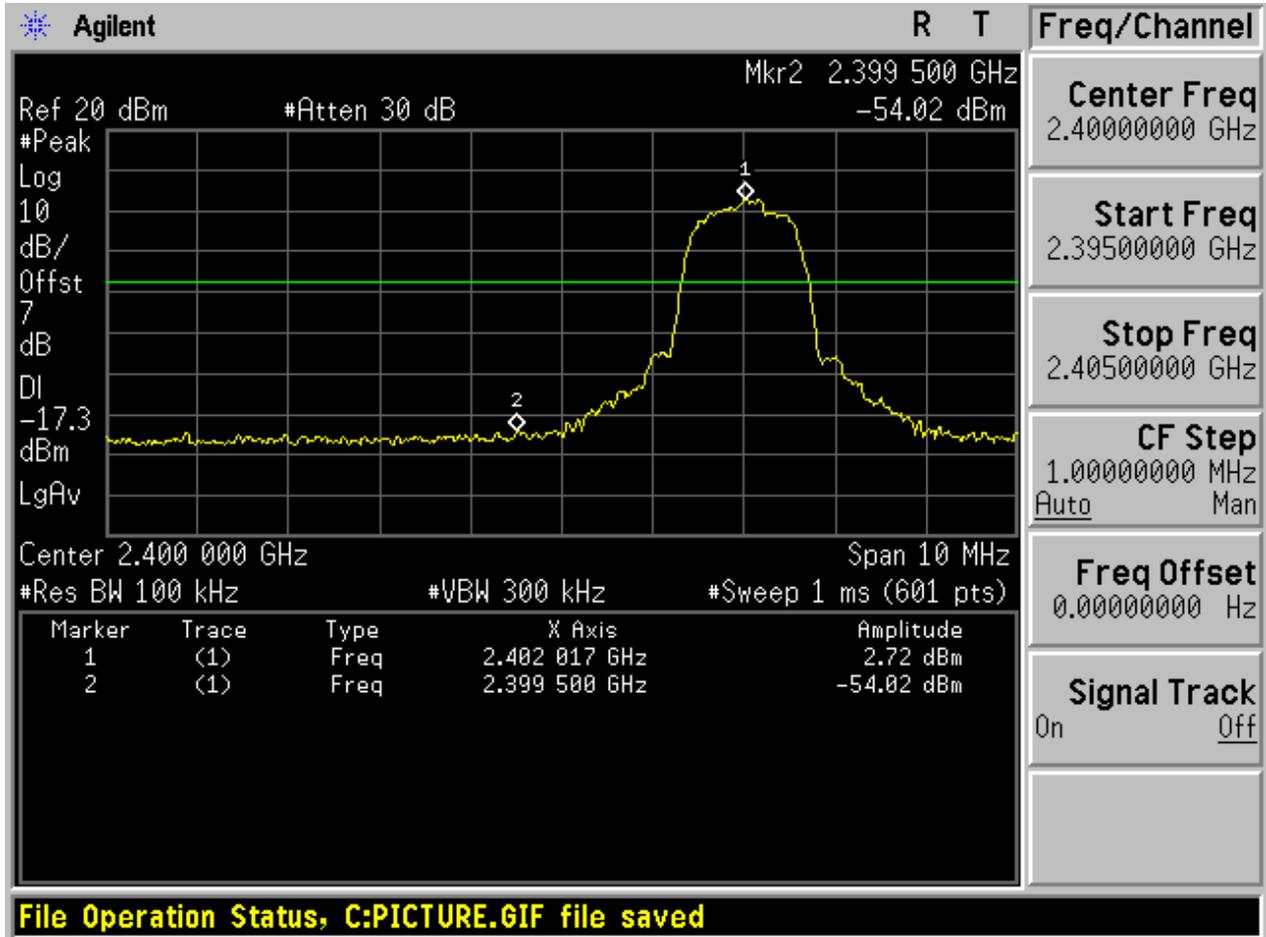


With hopping

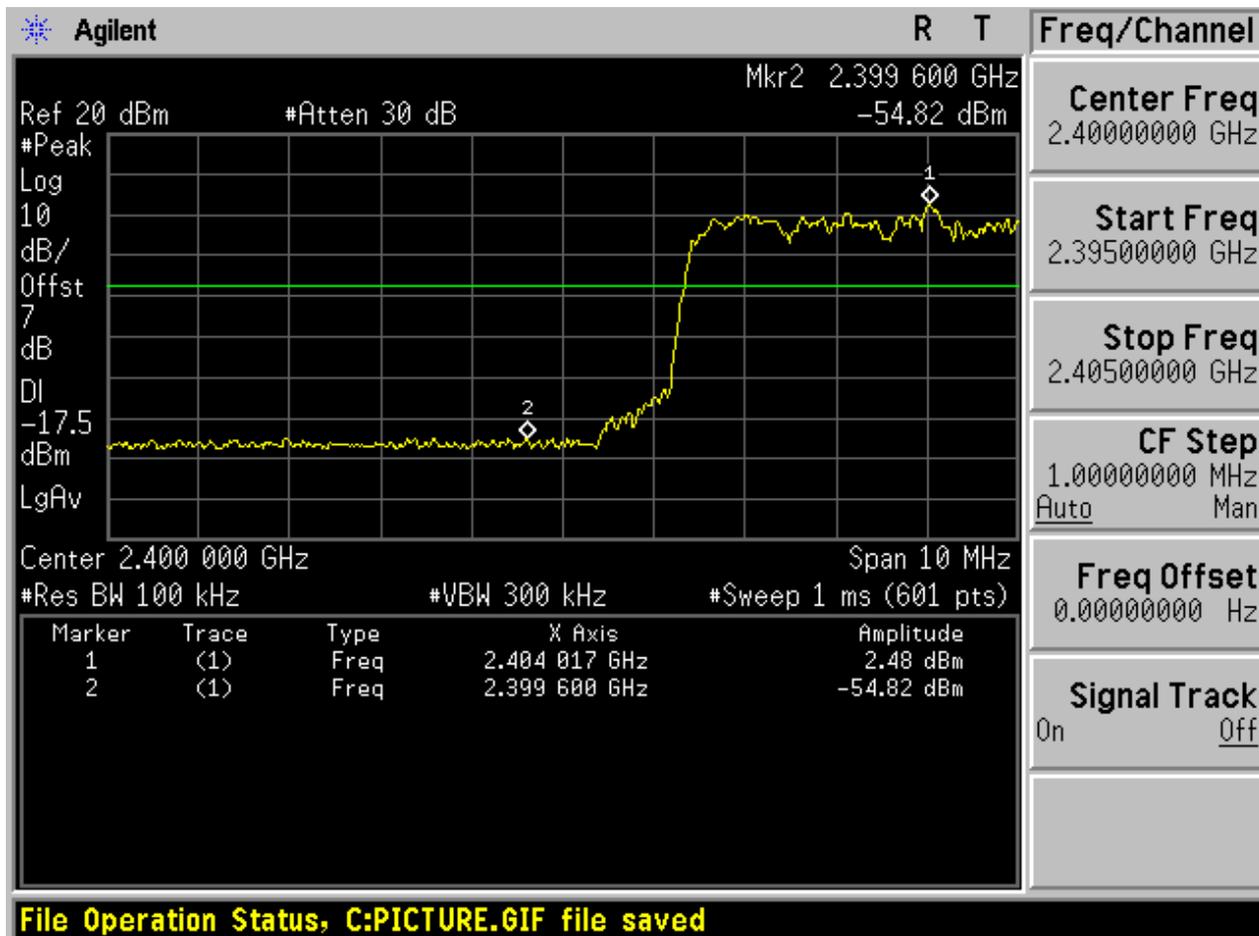


2.6 TM3_3DH5_Ch78

No hopping

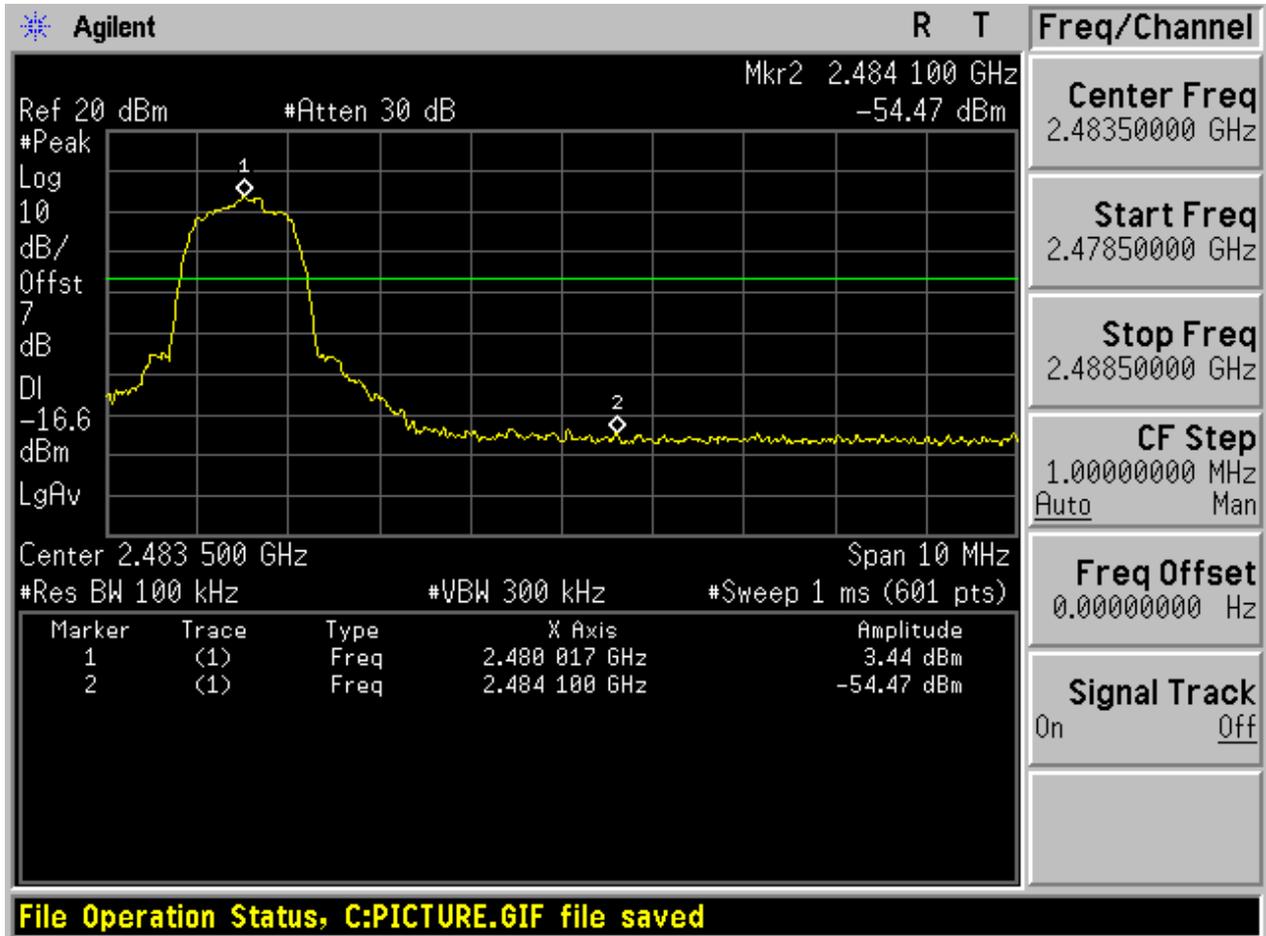

With hopping

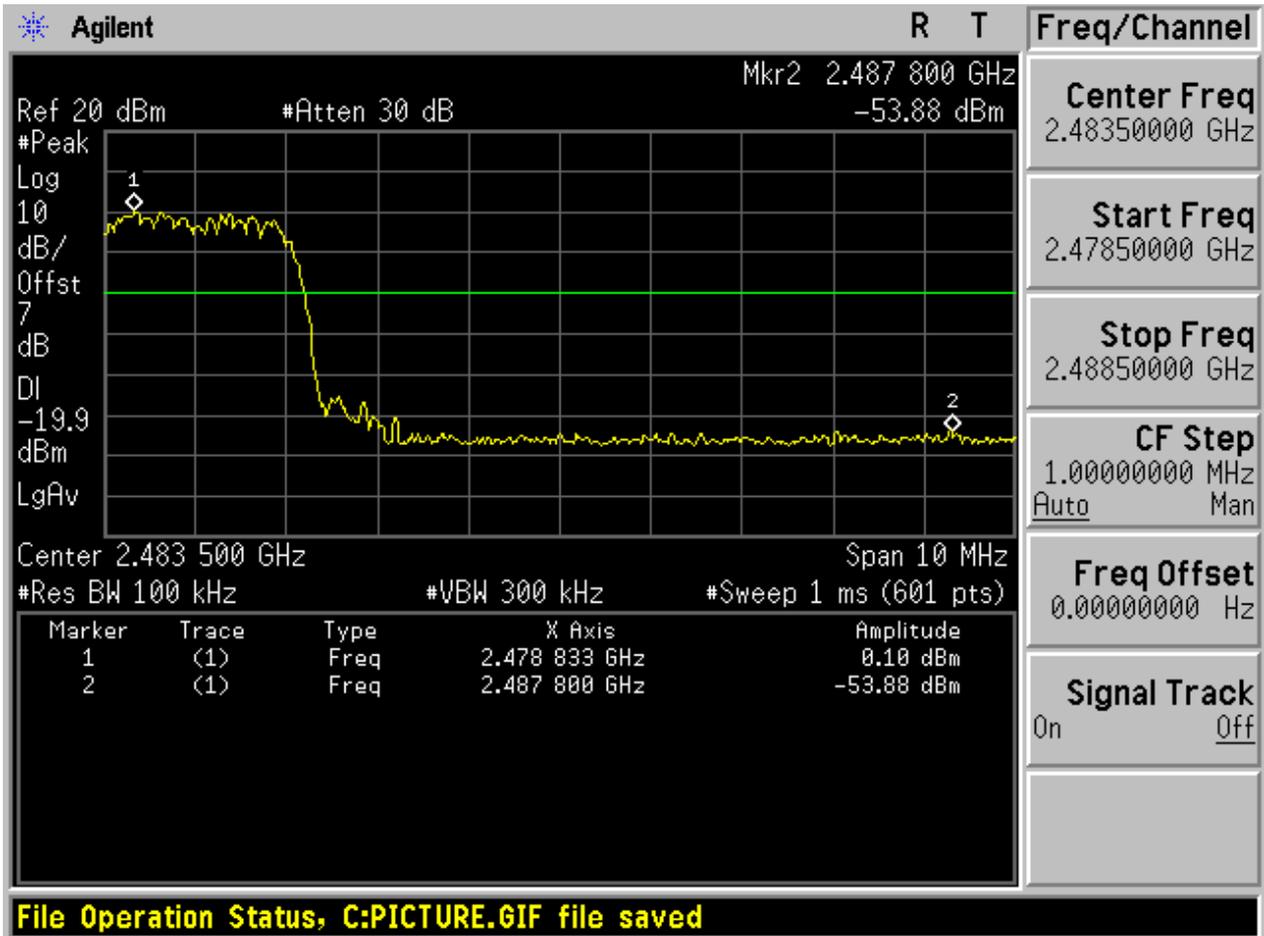



Appendix G: Conducted RF Spurious Emission

1 Result Table

In this Appendix, the “Pref” refers to the peak power level in any 100 kHz bandwidth within the fundamental emission which is used as the reference level, the “Puw” refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW [kHz]})$. As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.


In the result table, the “< Limit” denotes that “The Puw [dBm] is less than Pref [dBm] - 20 [dB], see test plots for detailed”.

EUT Conf.	Pref [dBm/100 kHz]	Puw [dBm/100 kHz]	Verdict
TM1_DH5_Ch0	4.55	< Limit	Pass
TM1_DH5_Ch39	5.28	< Limit	Pass
TM1_DH5_Ch78	5.21	< Limit	Pass
TM2_2DH5_Ch0	2.63	< Limit	Pass
TM2_2DH5_Ch39	3.35	< Limit	Pass
TM2_2DH5_Ch78	3.30	< Limit	Pass
TM3_3DH5_Ch0	2.63	< Limit	Pass
TM3_3DH5_Ch39	3.36	< Limit	Pass
TM3_3DH5_Ch78	3.32	< Limit	Pass


2 Test Plot


2.1 TM1_DH5_Ch0


2.1.1 Pref

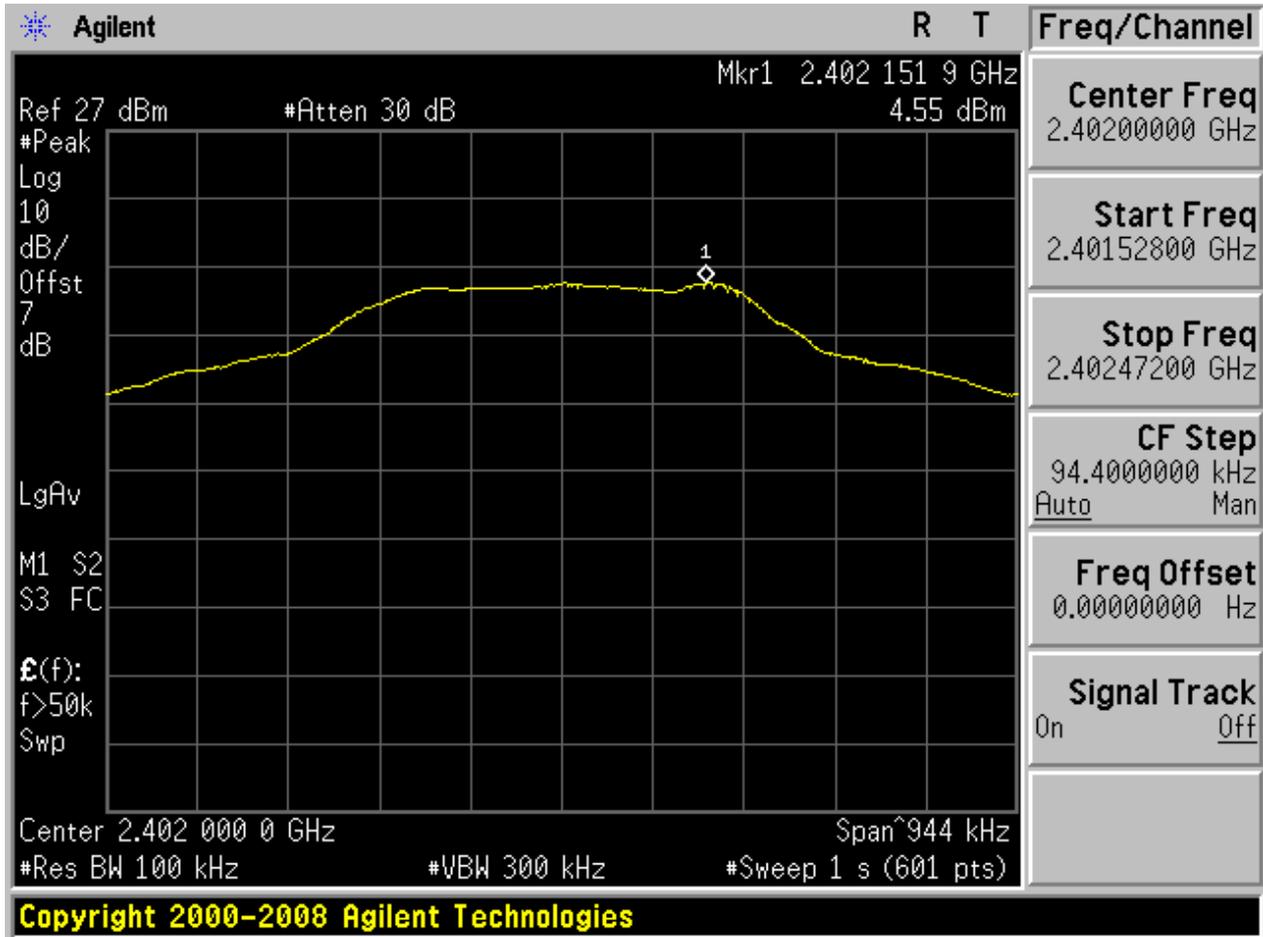



2.1.2 Puw

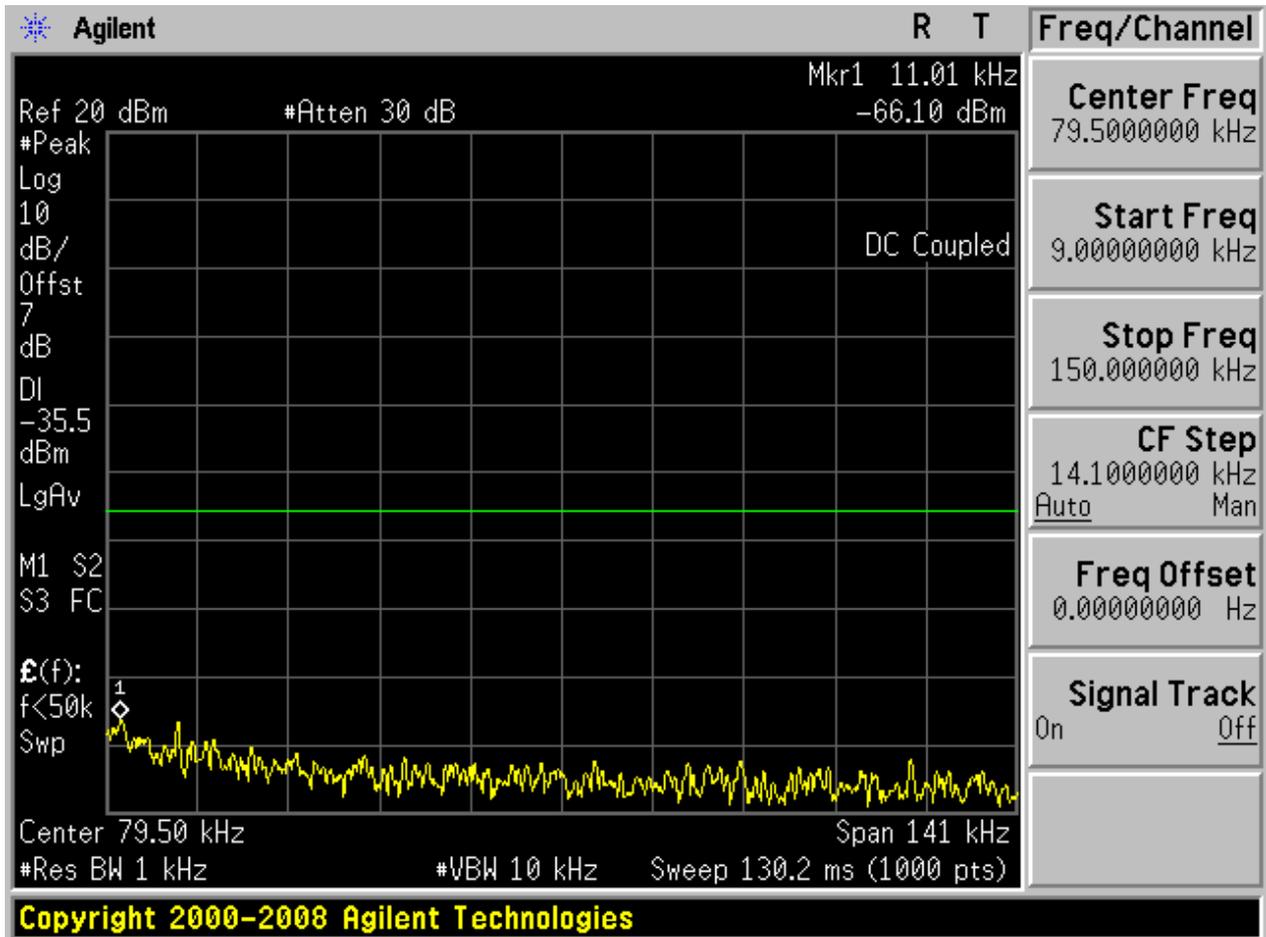


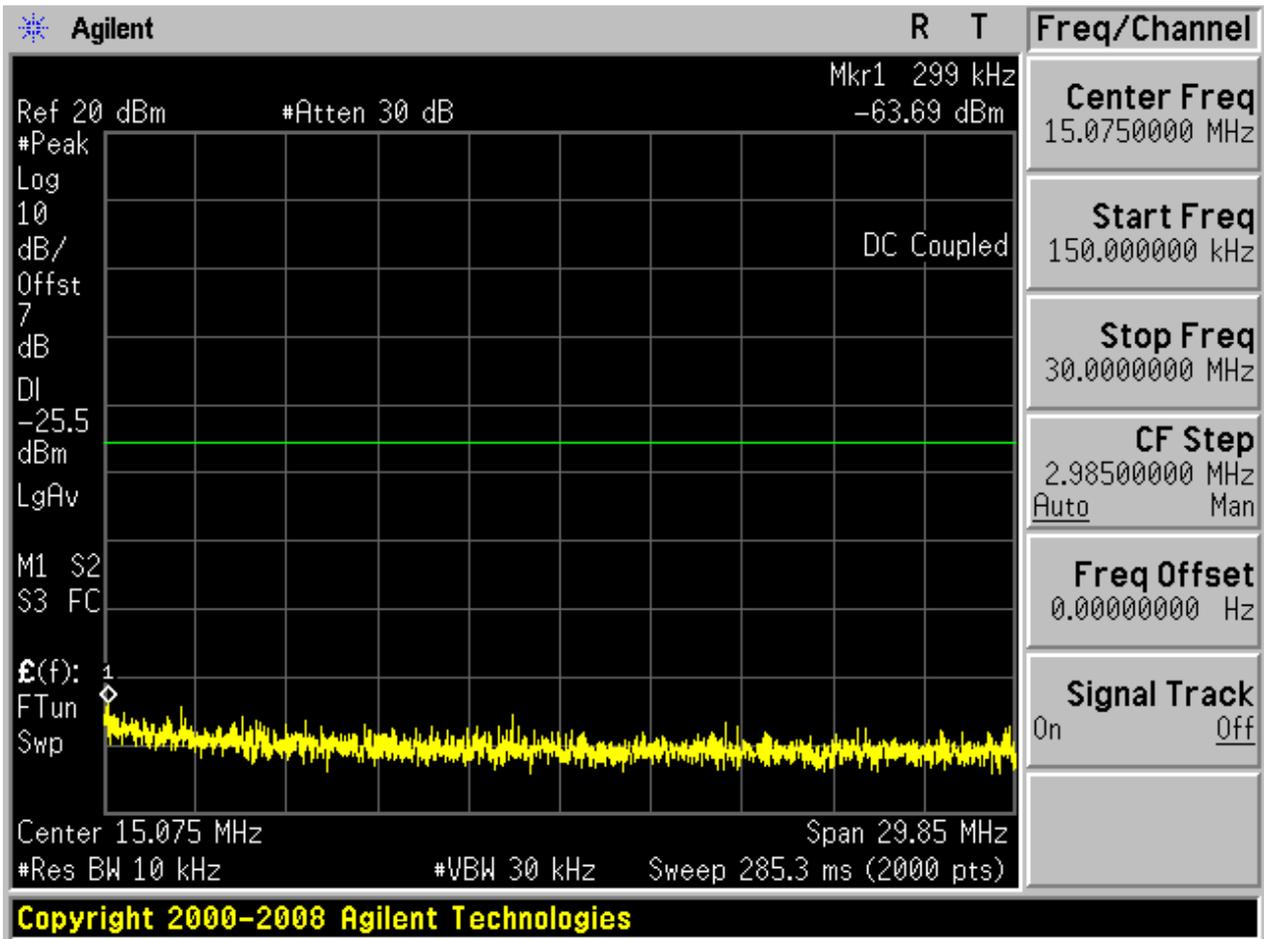

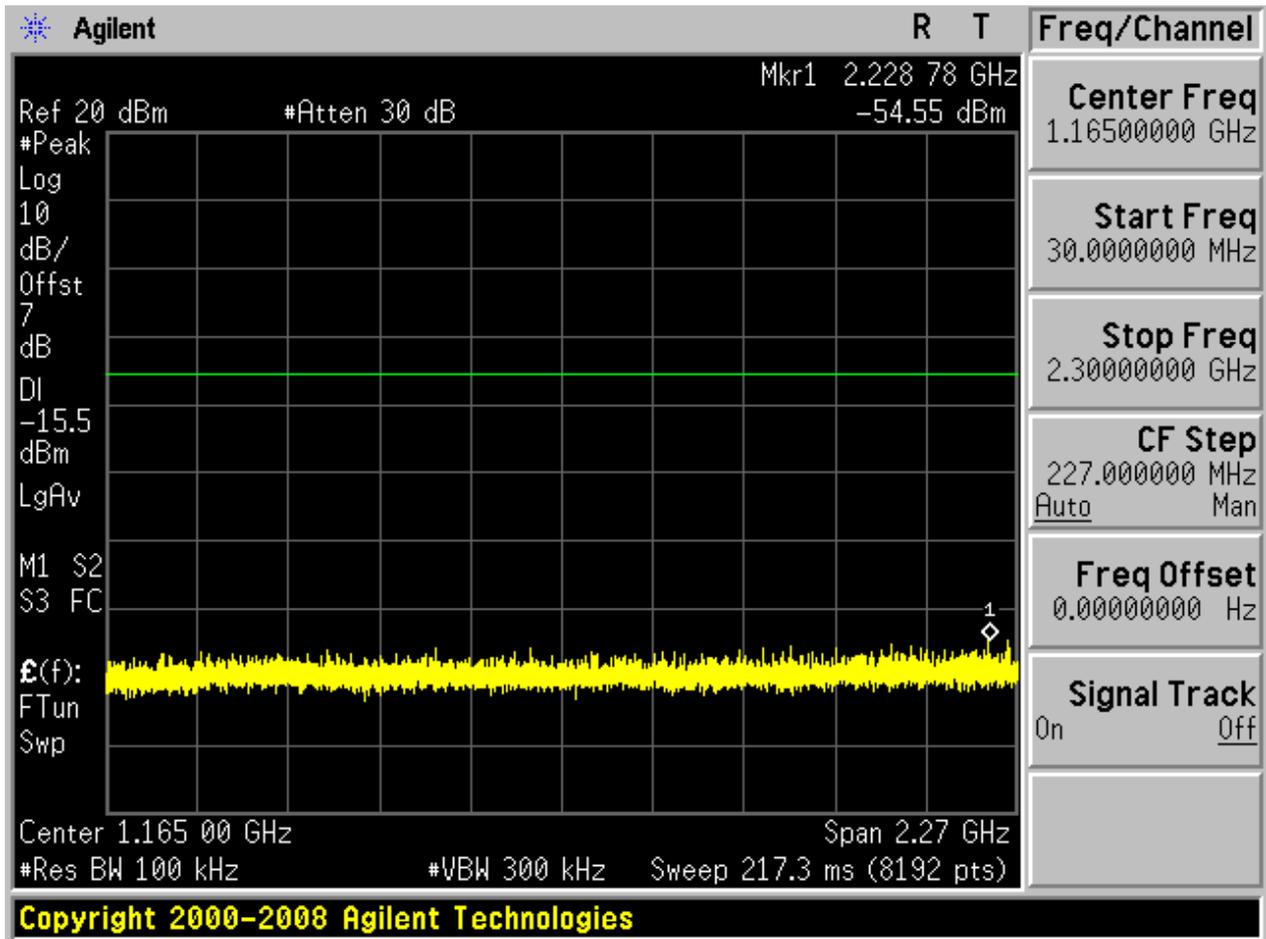

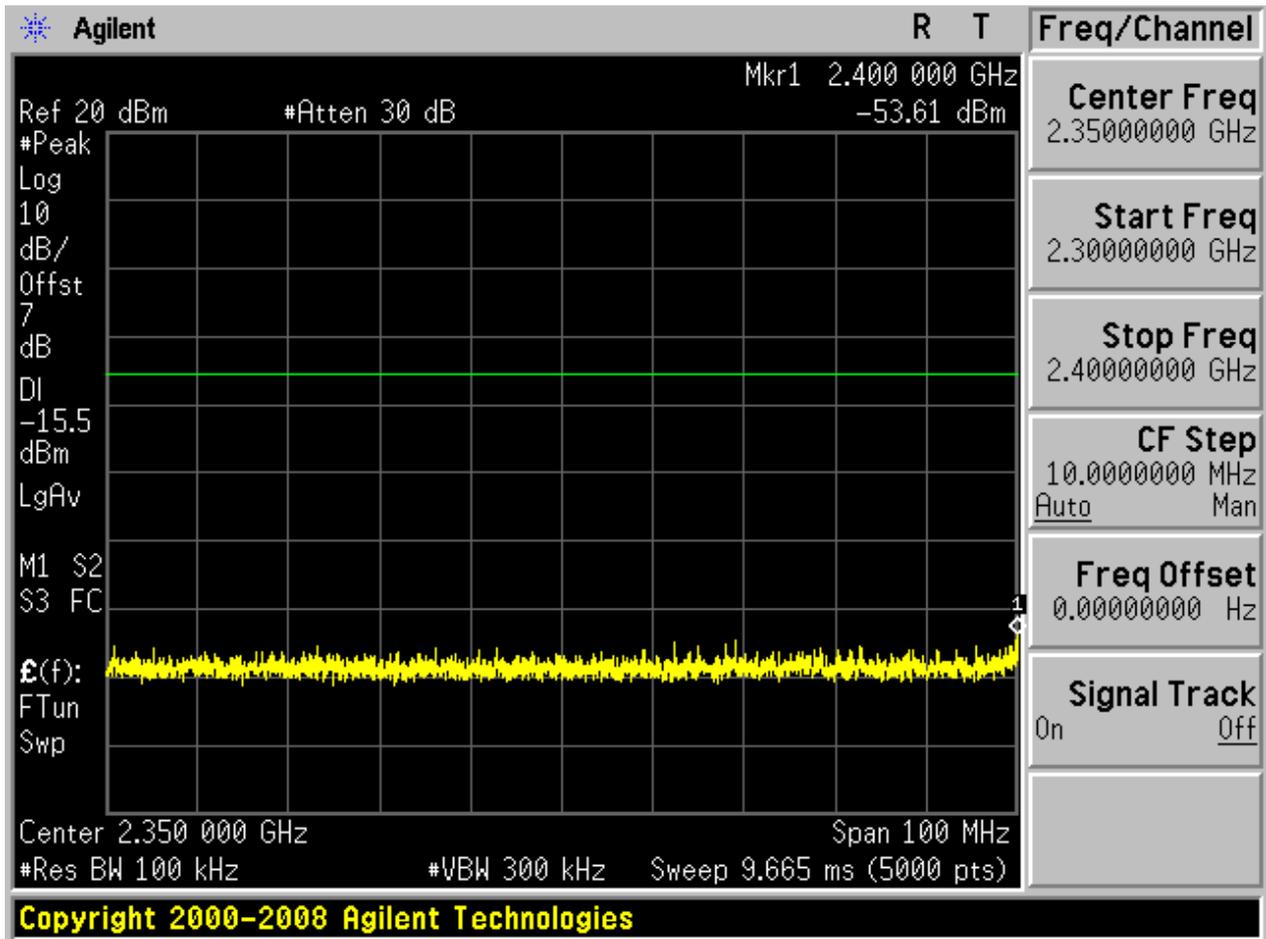


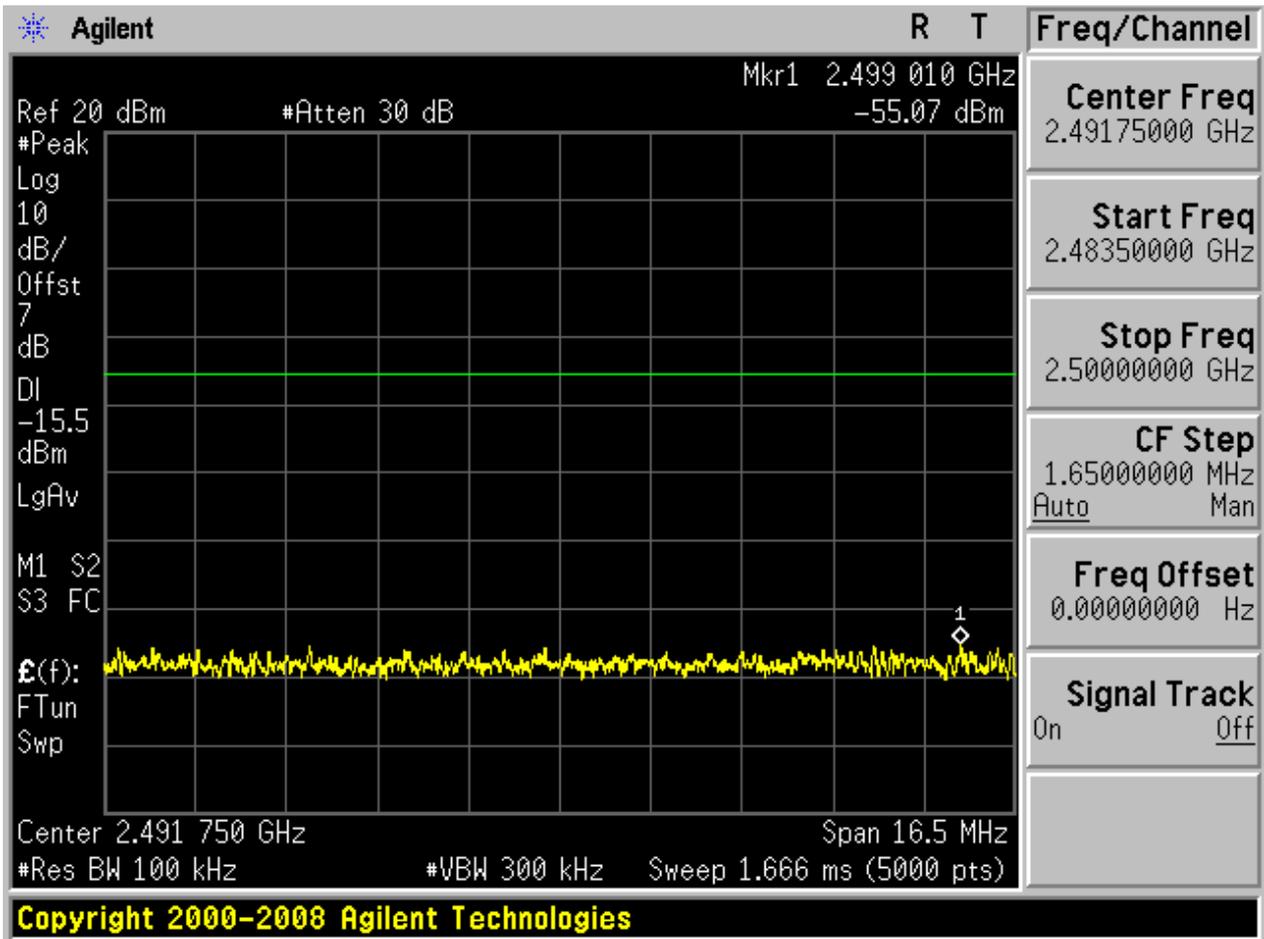

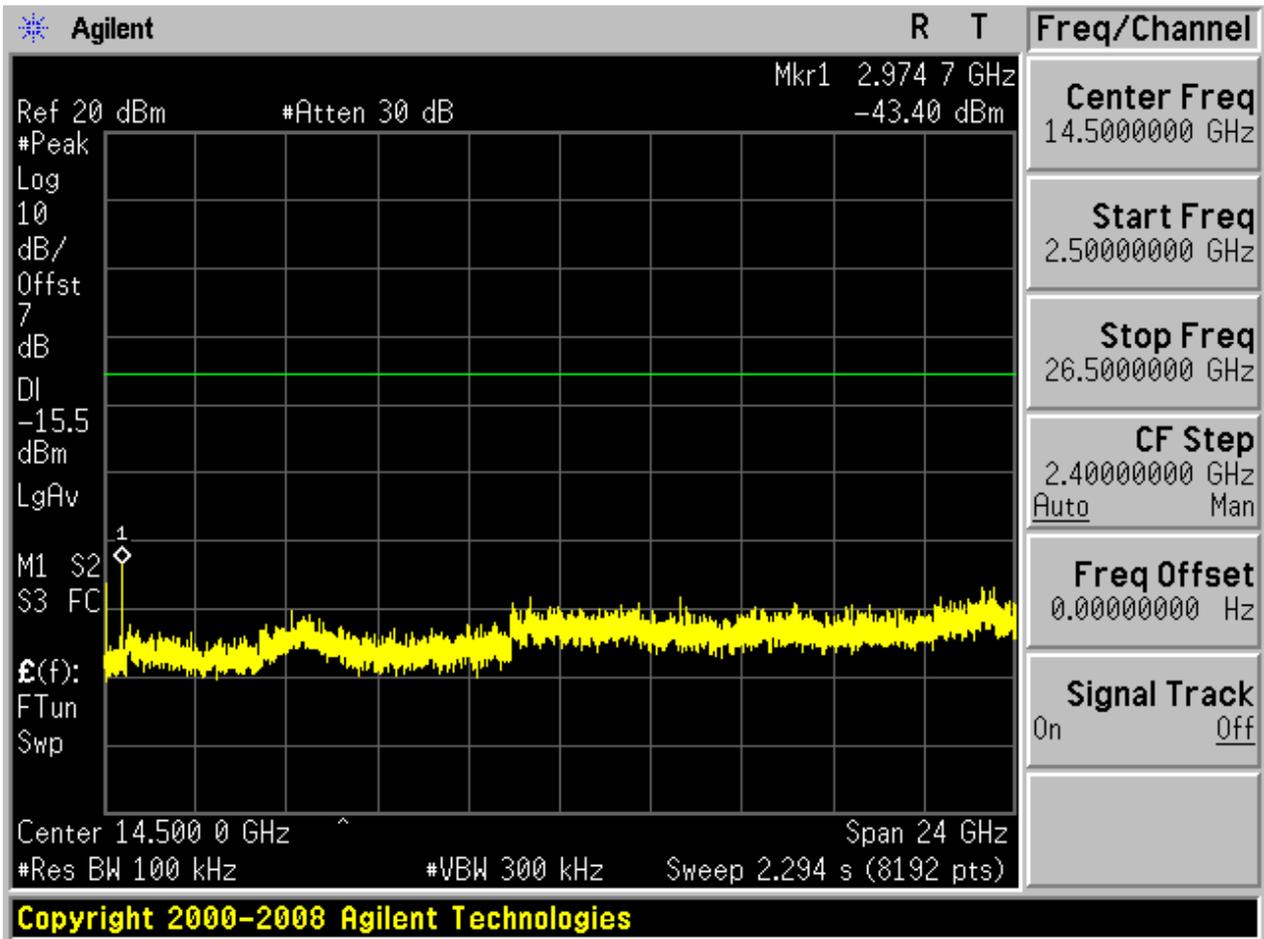



2.2 TM1_DH5_Ch39


2.2.1 Pref

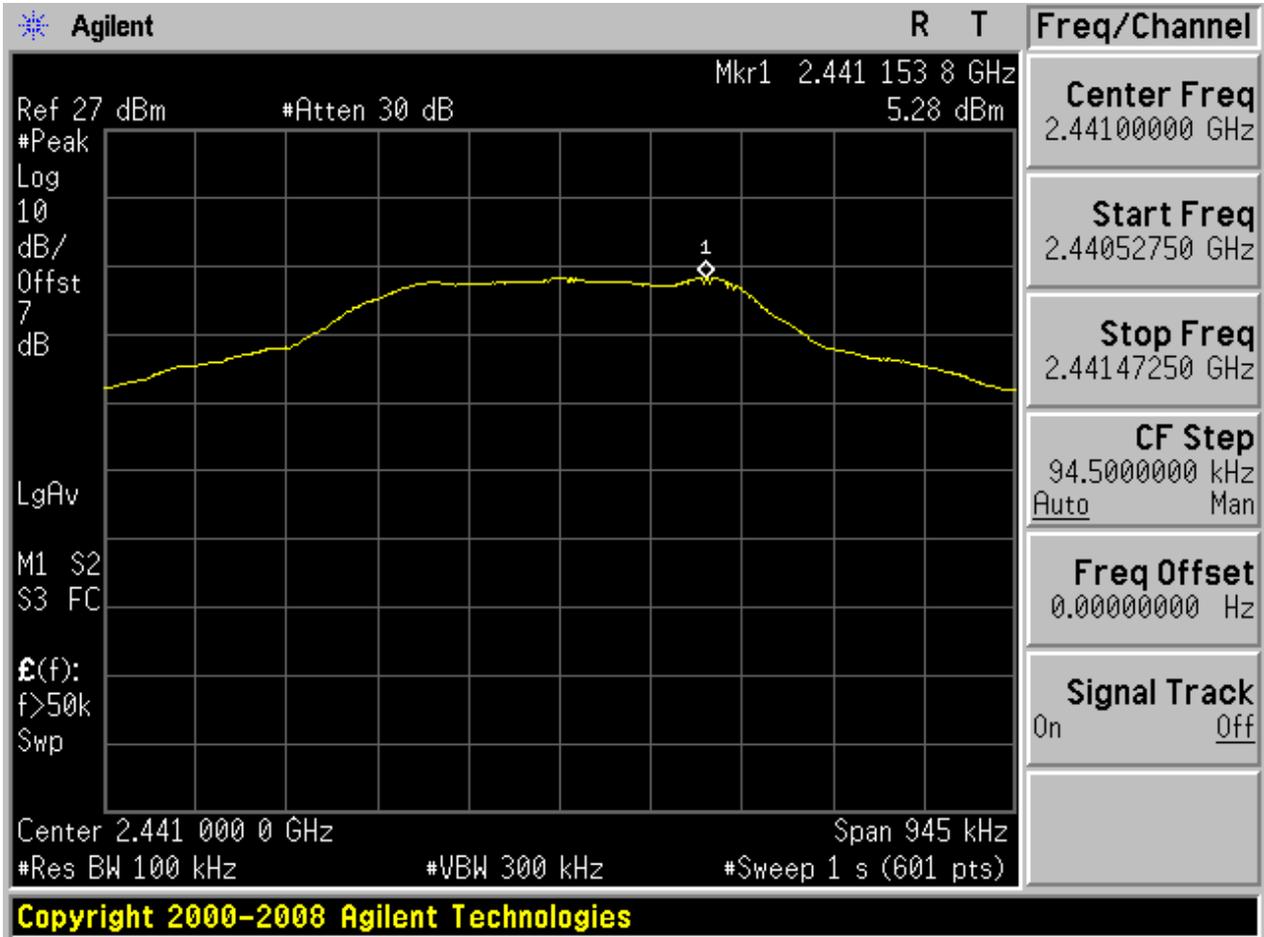



2.2.2 Puw

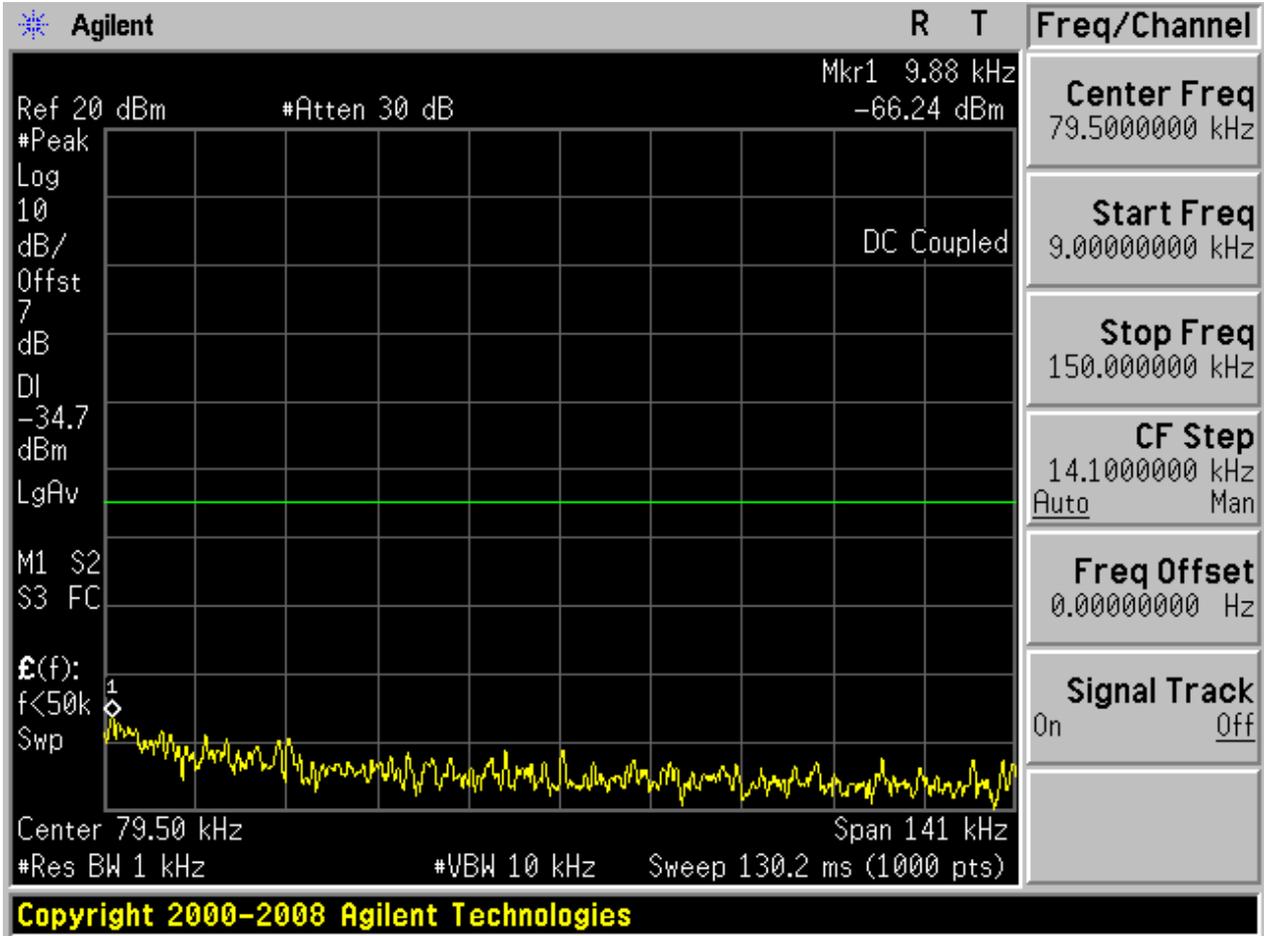


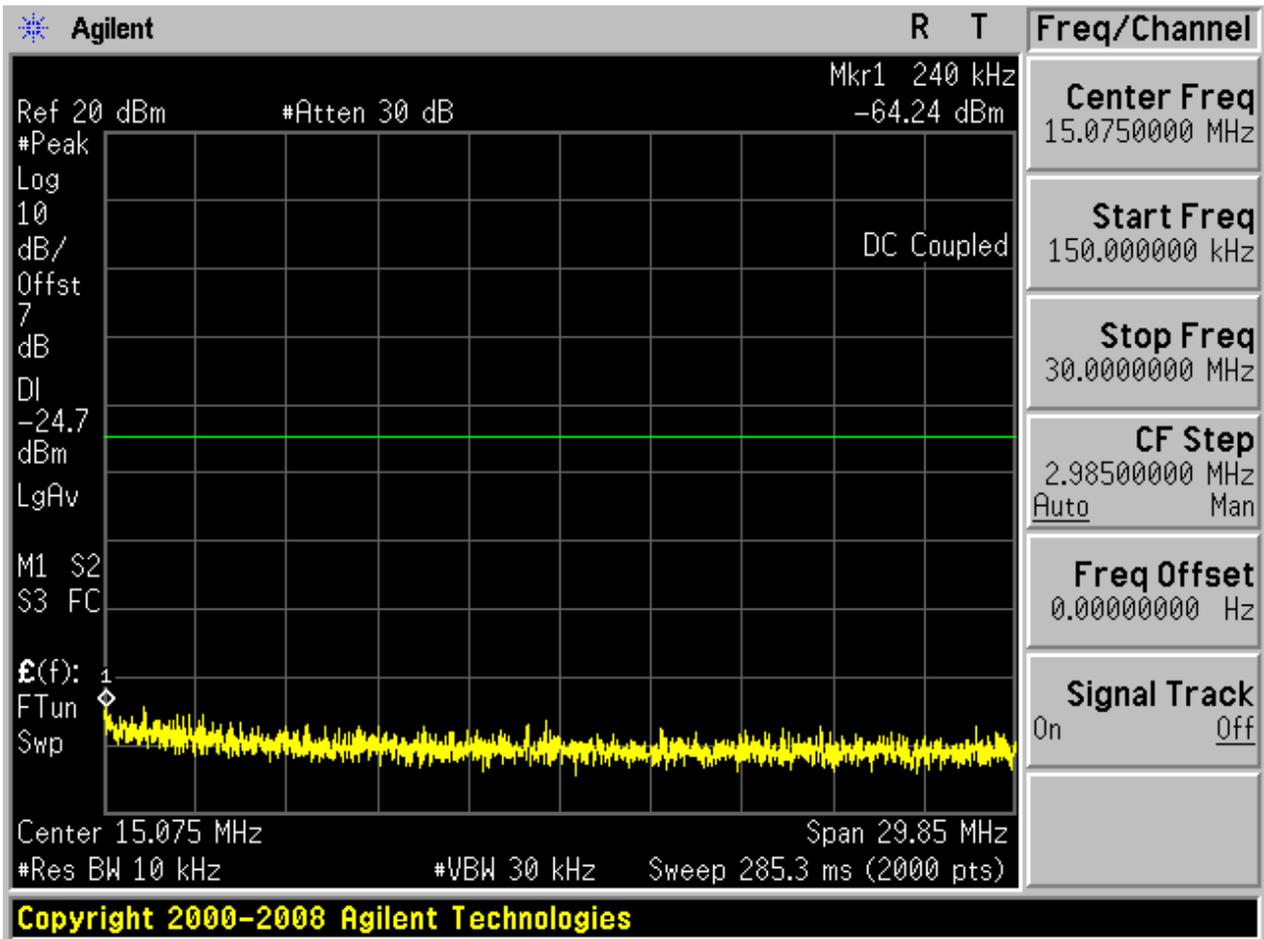

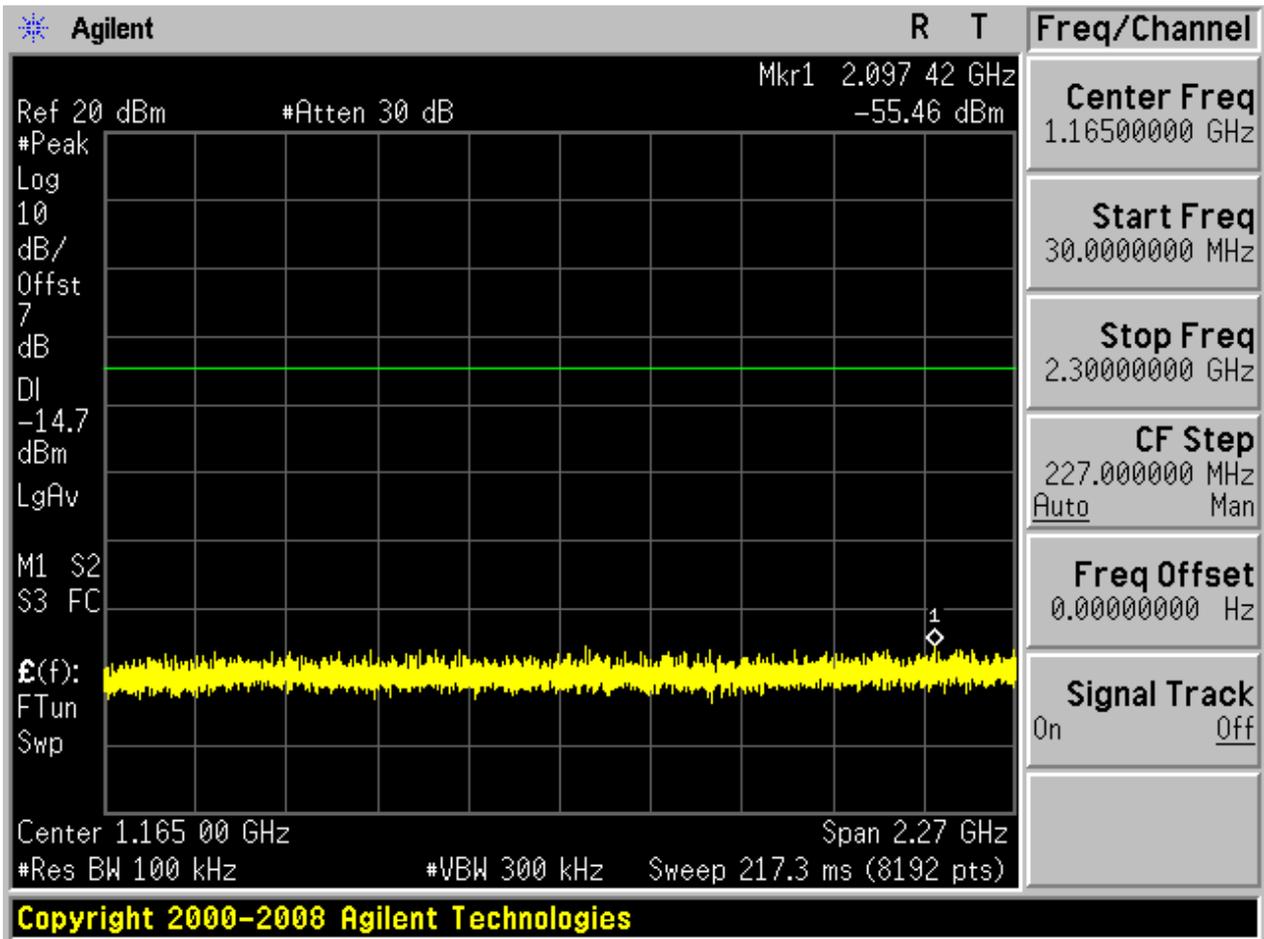

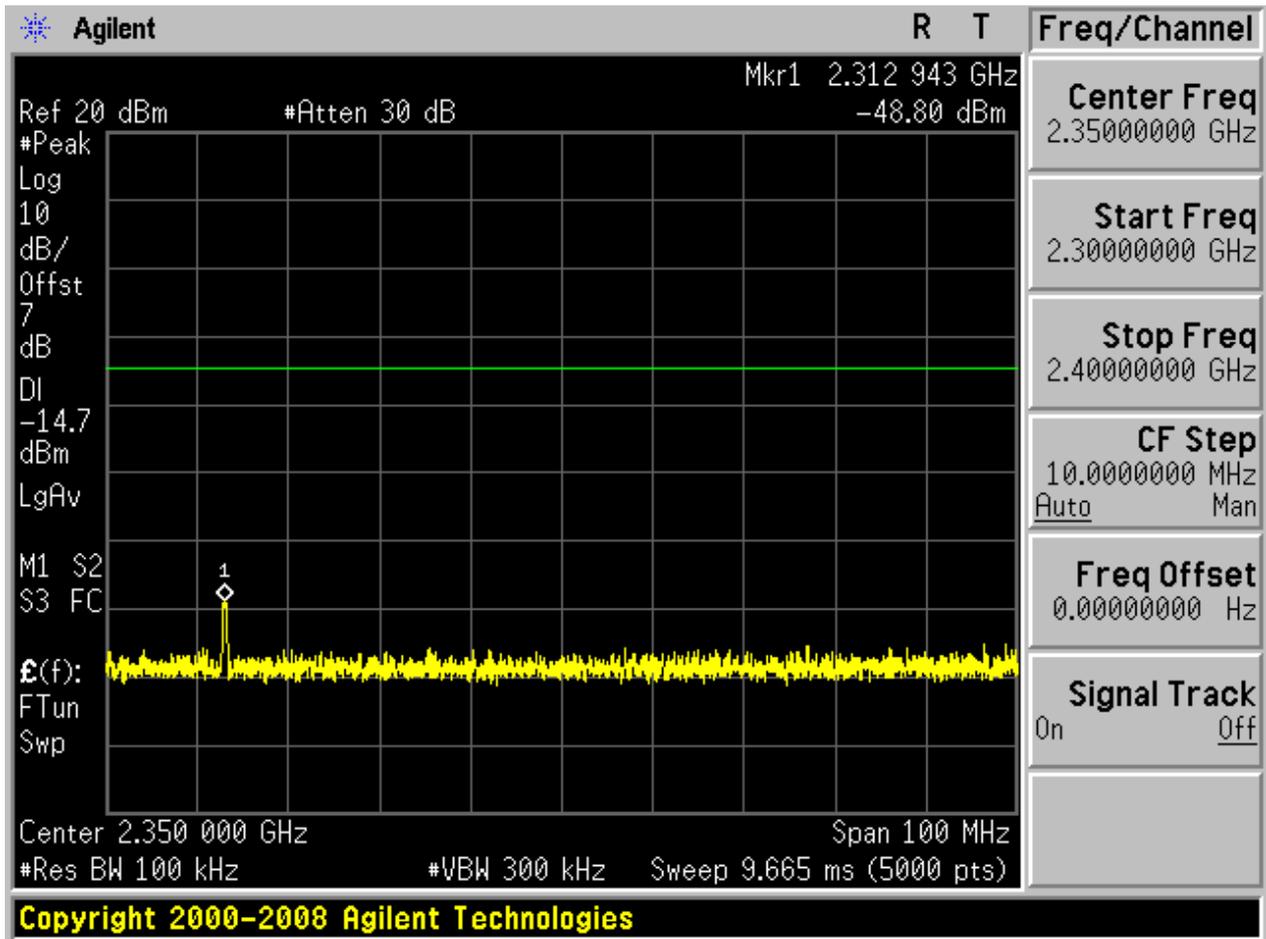

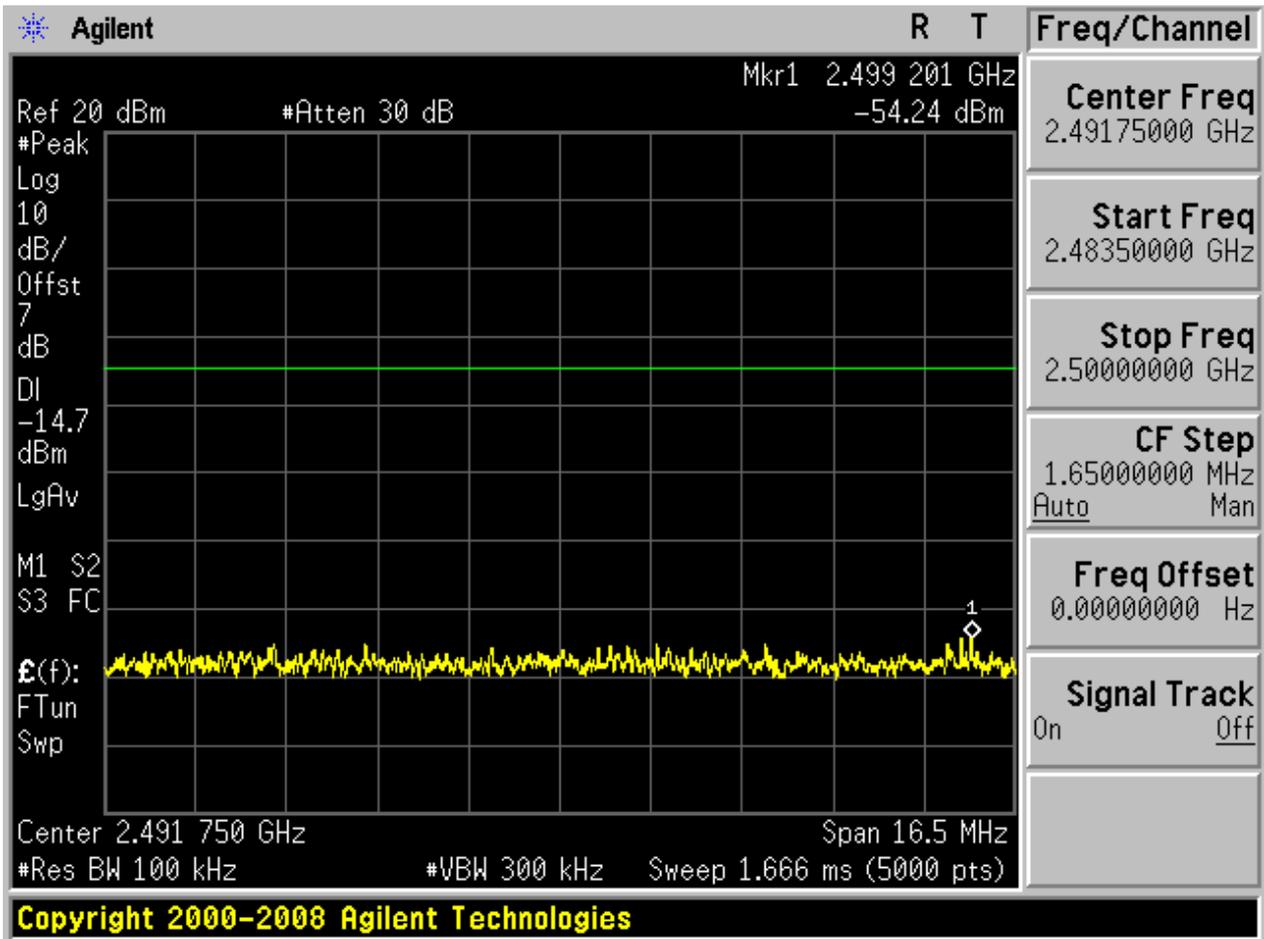


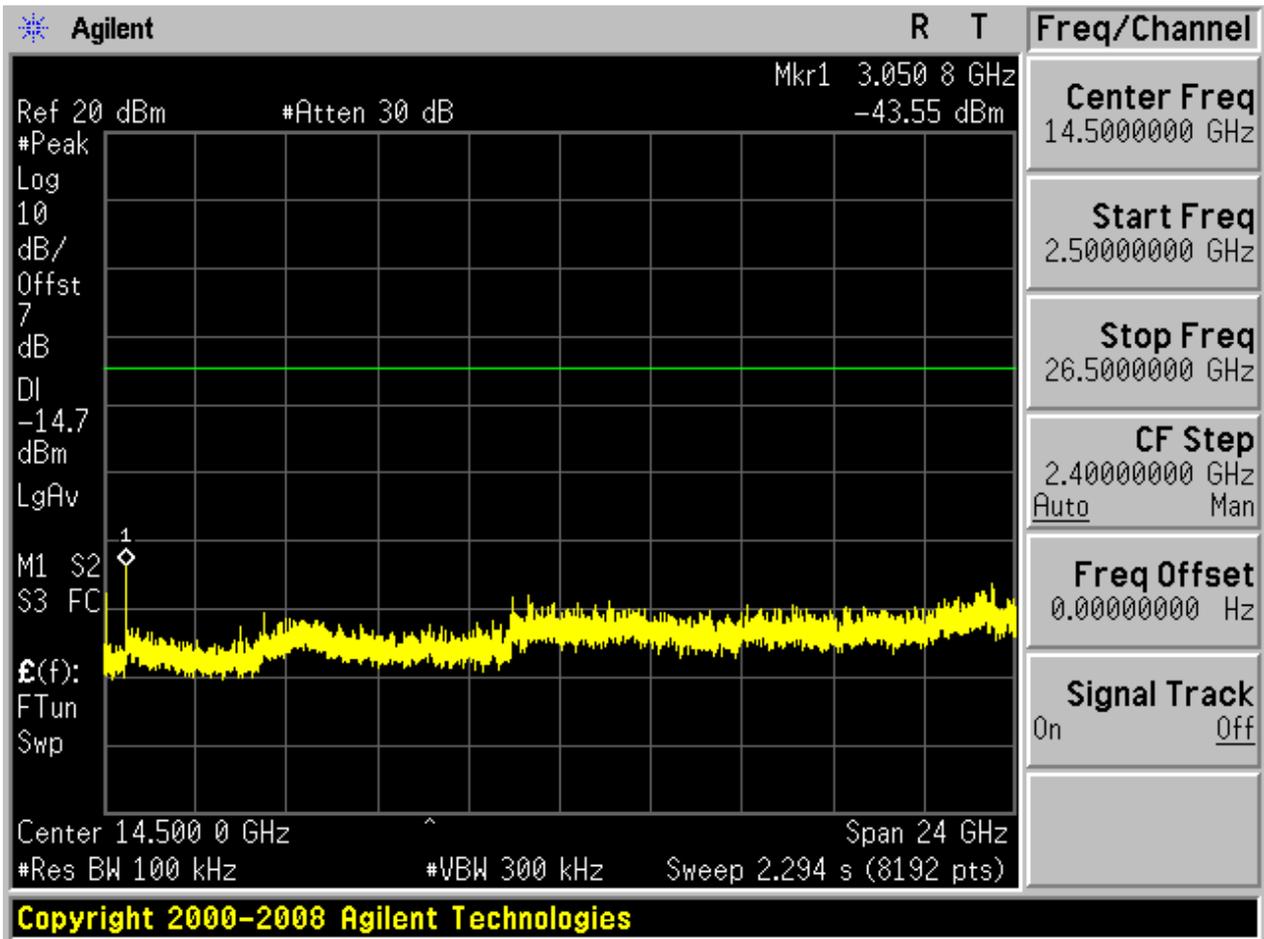


Copyright 2000-2008 Agilent Technologies


2.3 TM1_DH5_Ch78


2.3.1 Pref

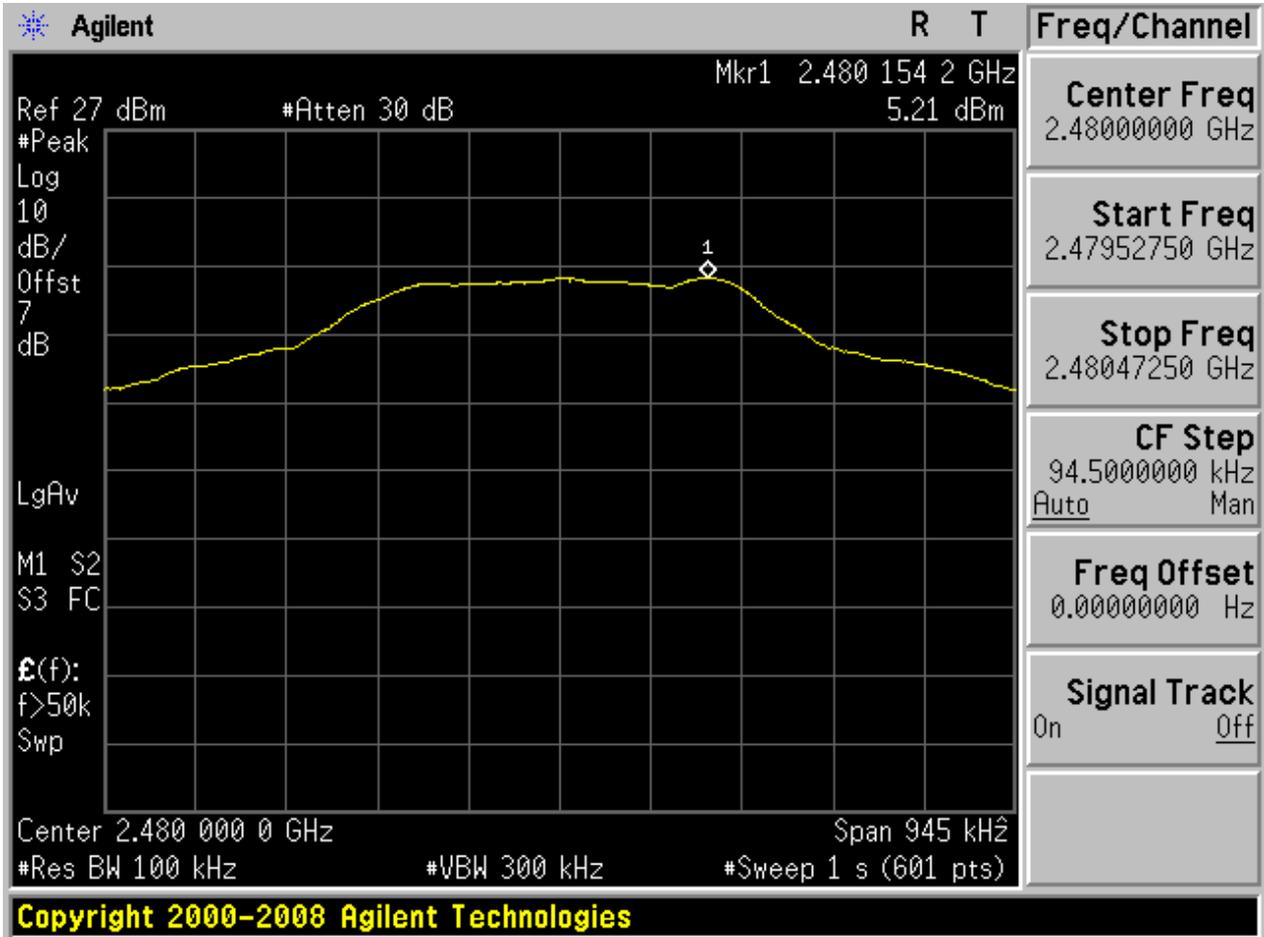



2.3.2 Puw

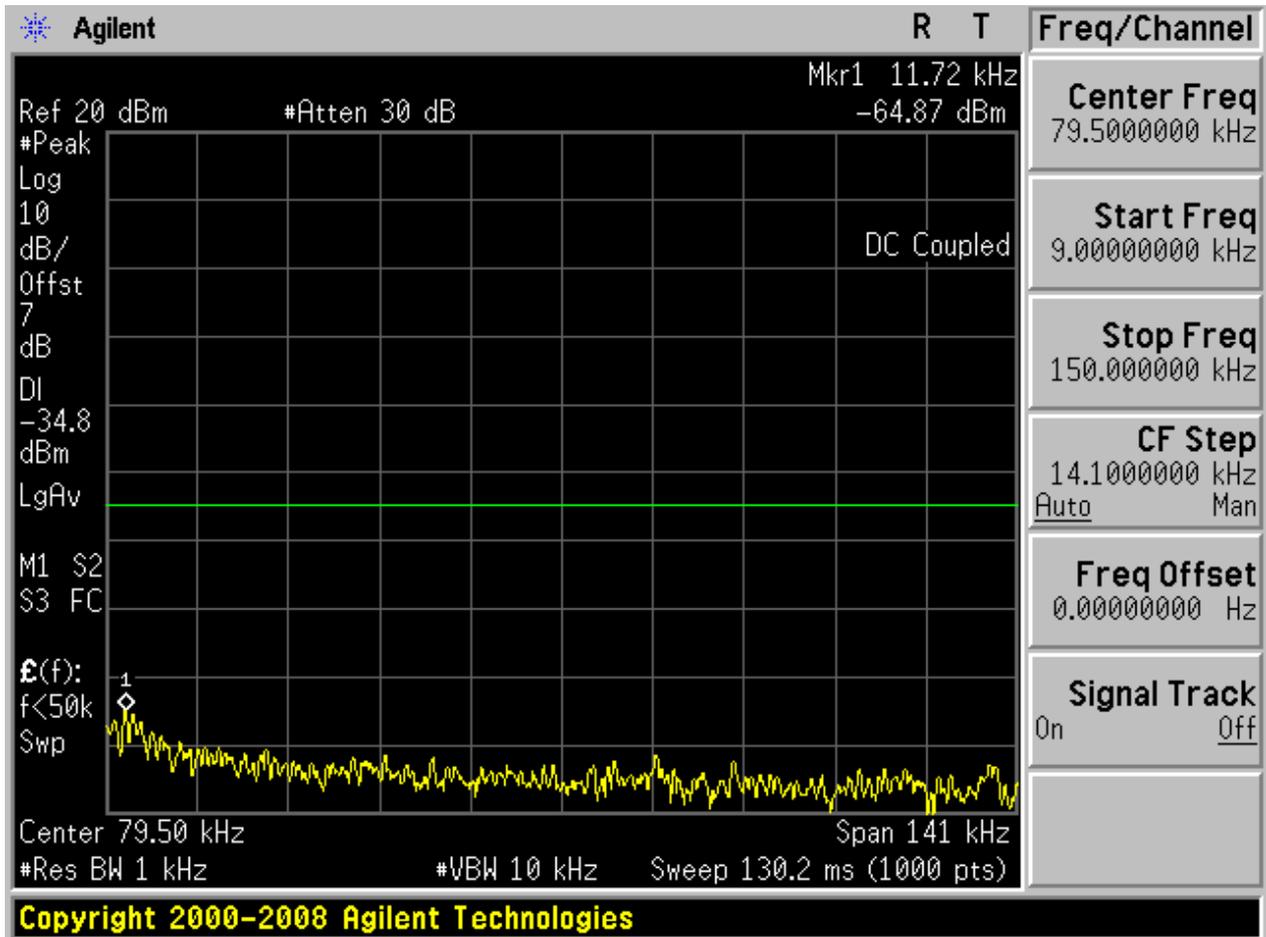


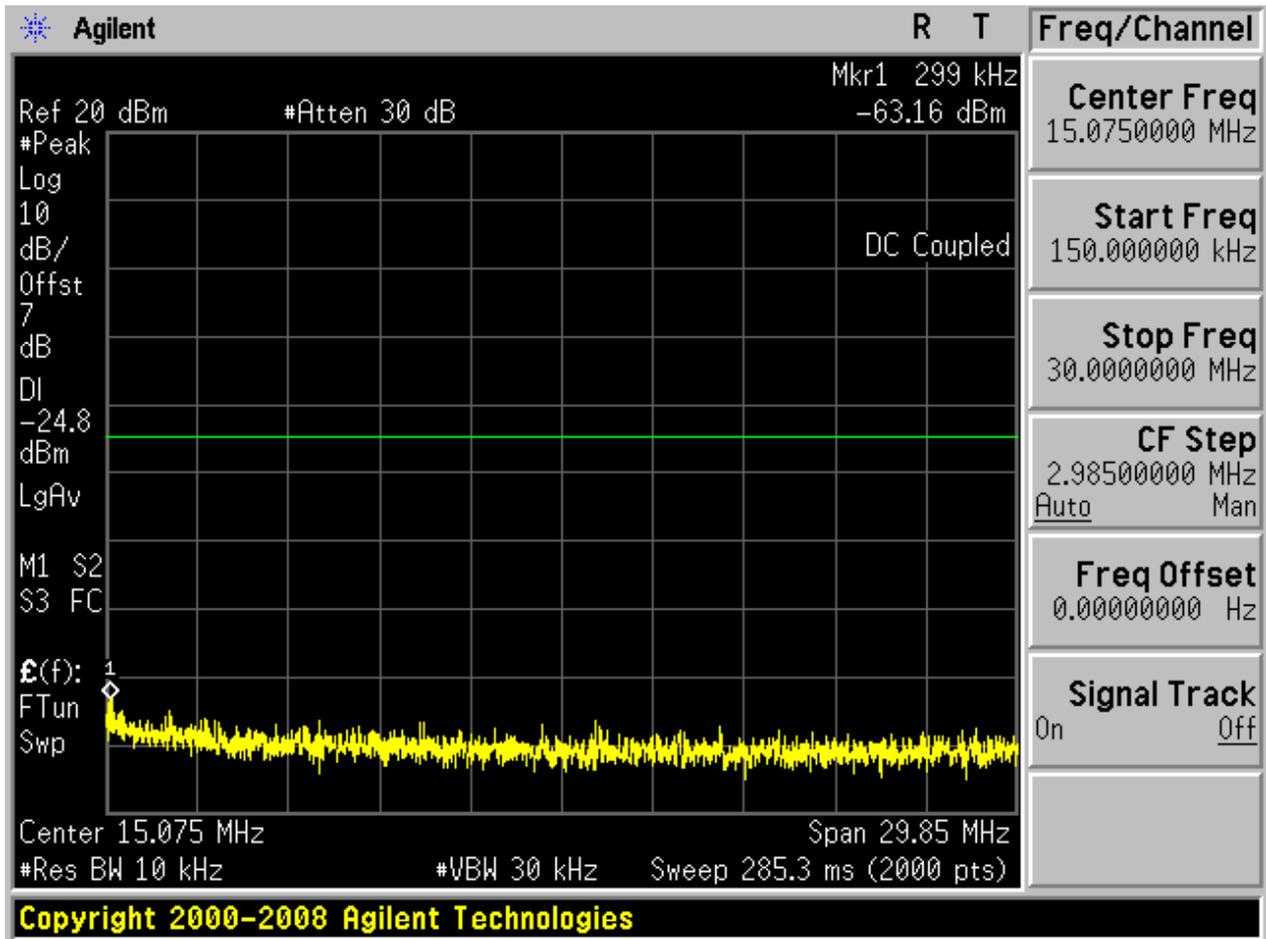

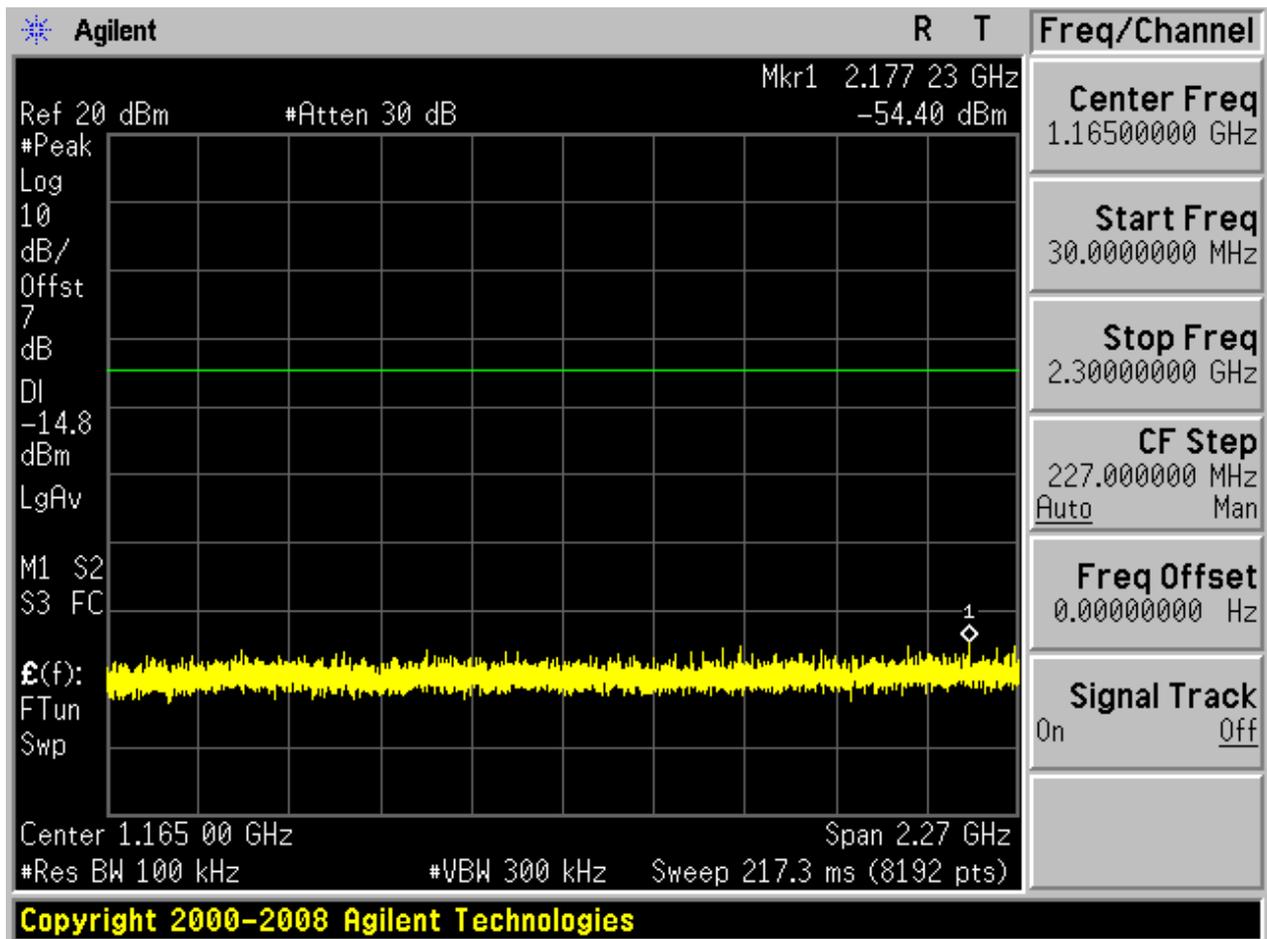

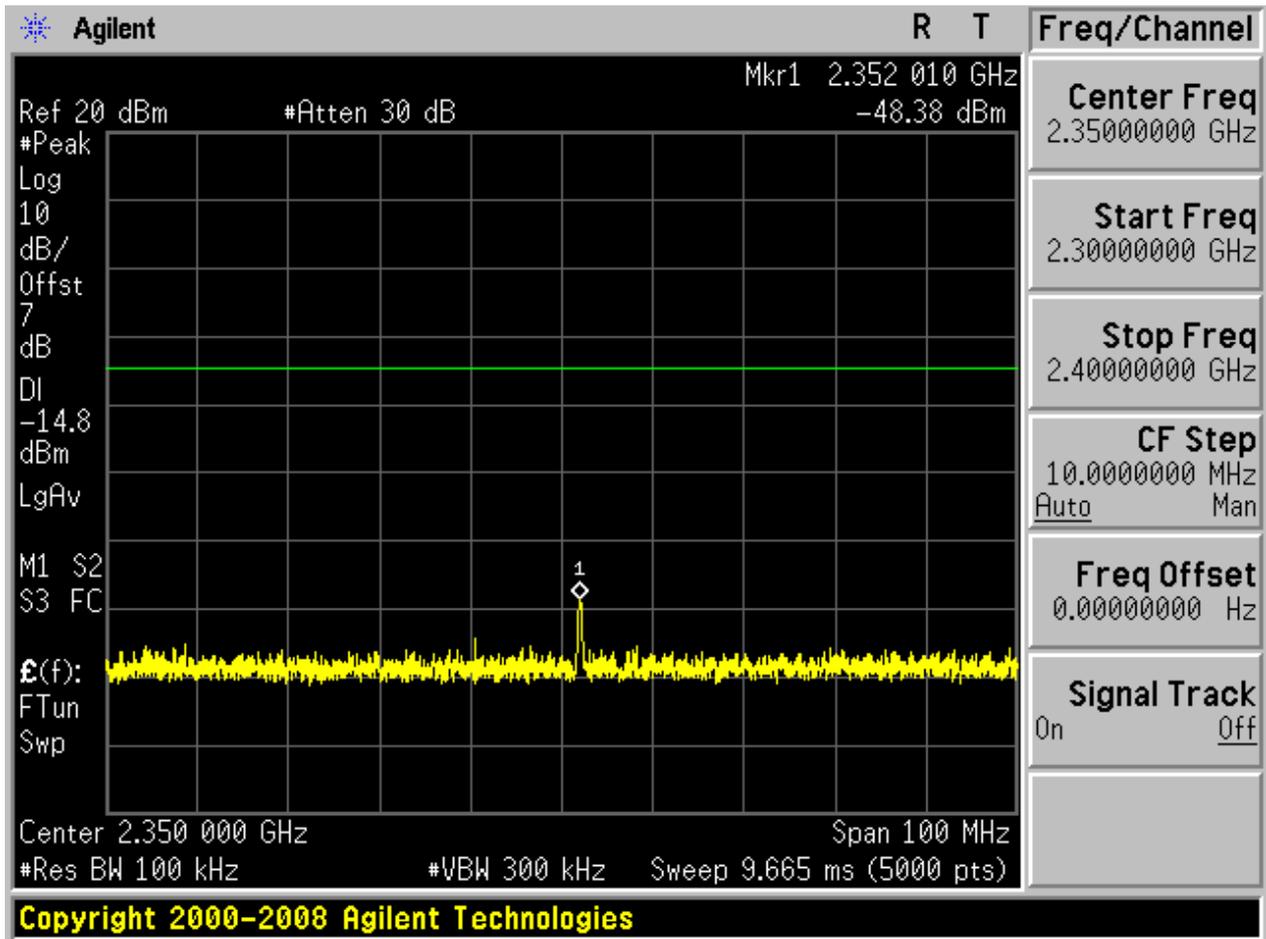


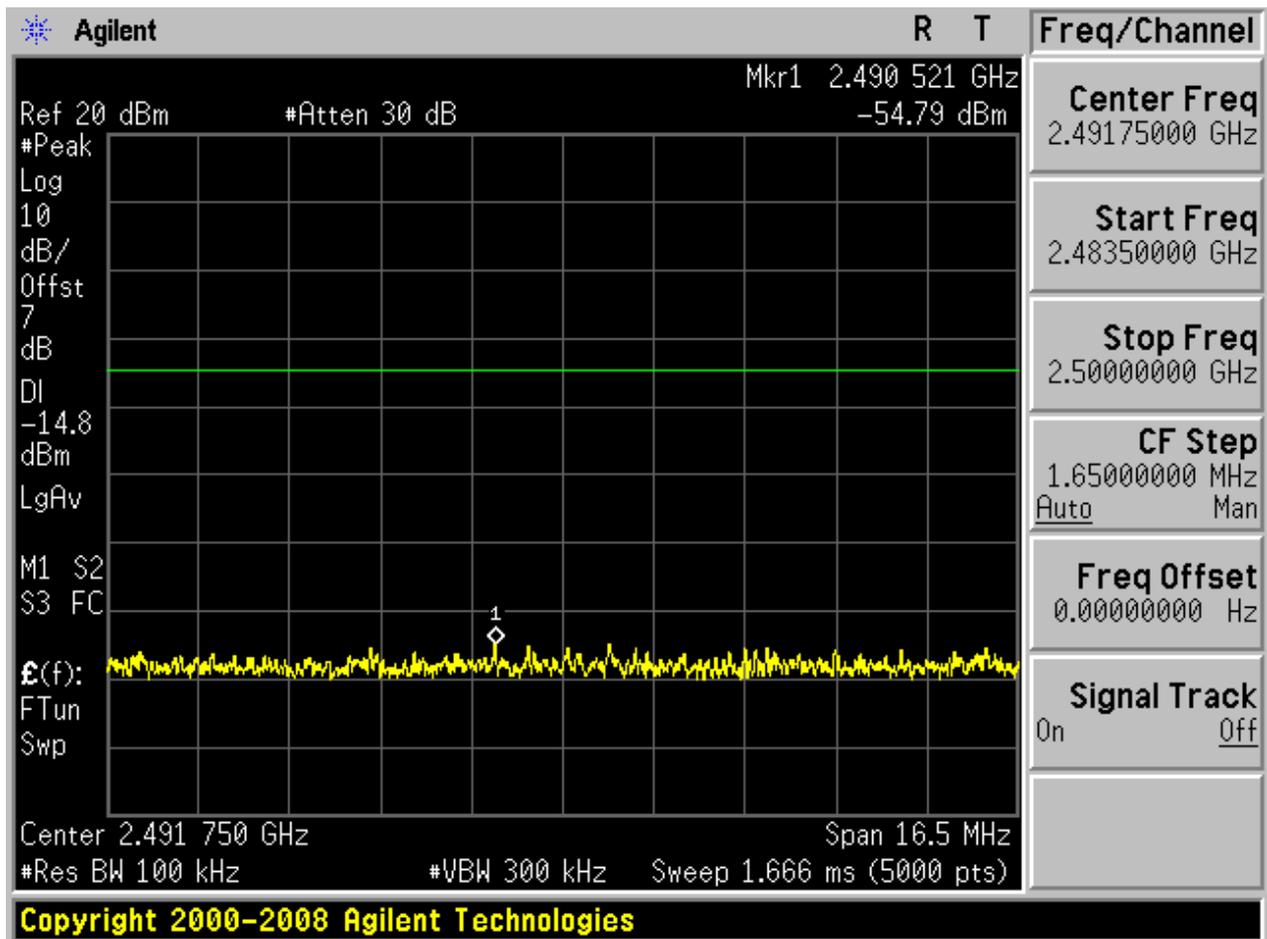

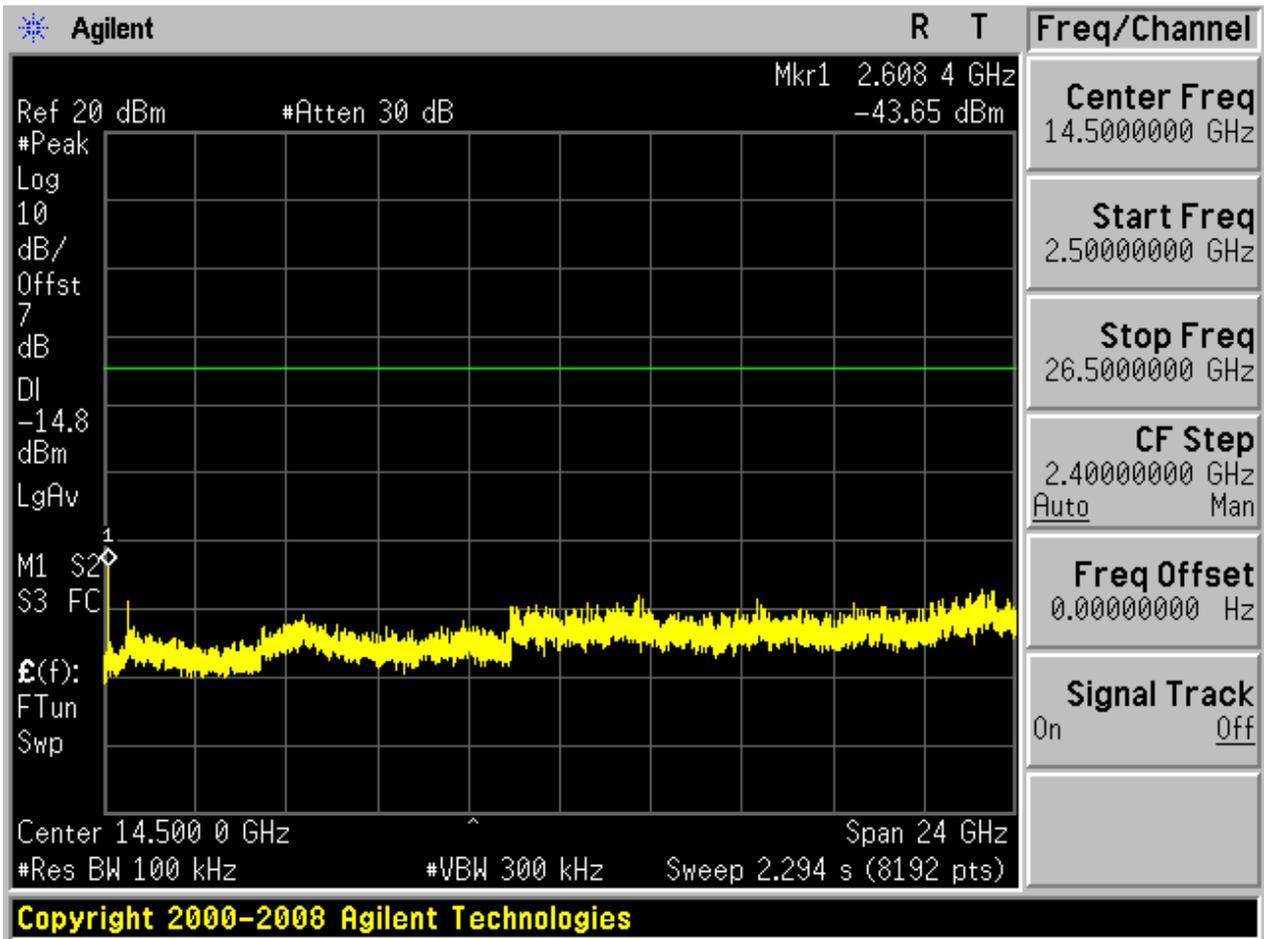



2.4 TM2_2DH5_Ch0


2.4.1 Pref

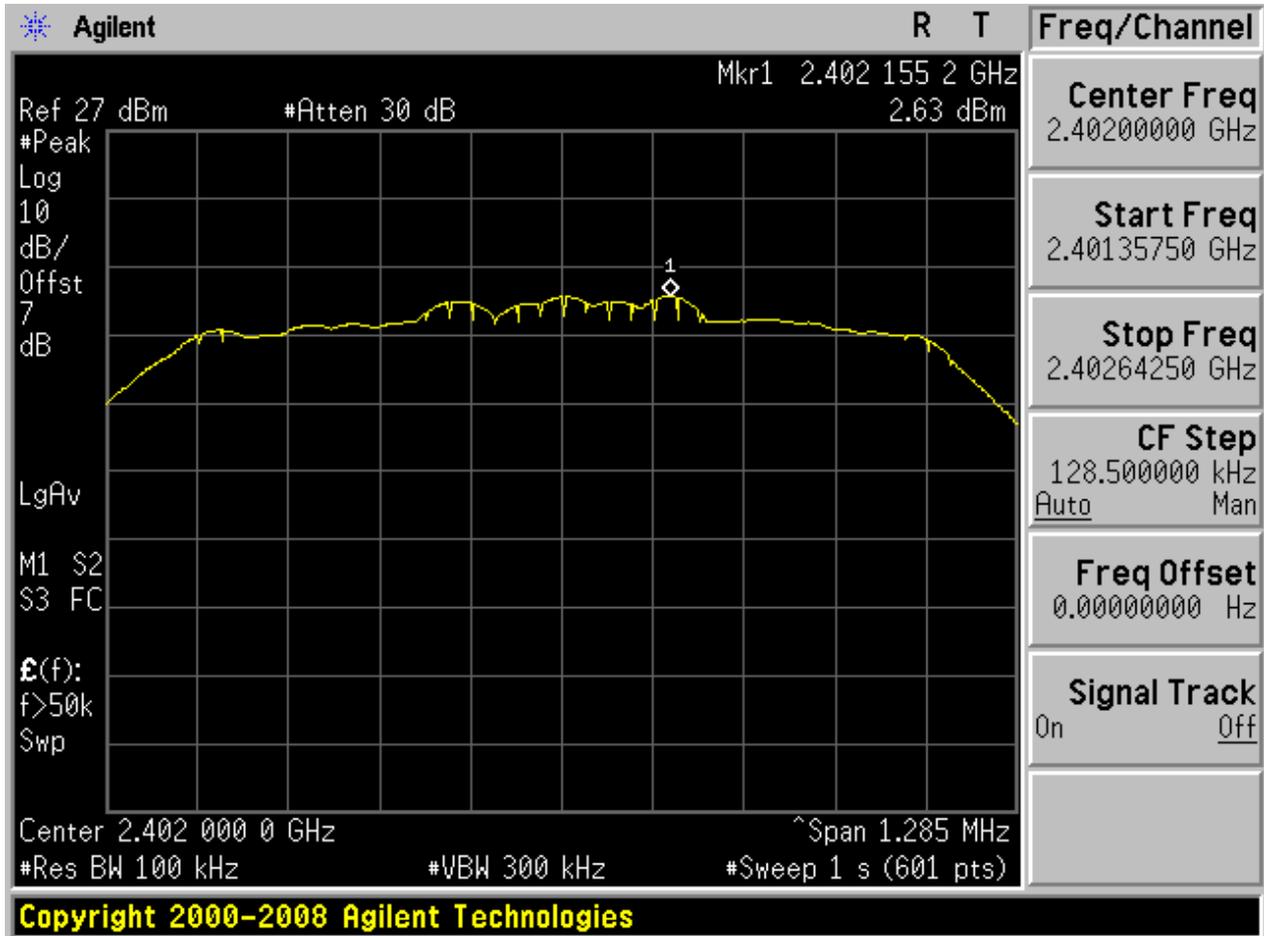



2.4.2 Puw

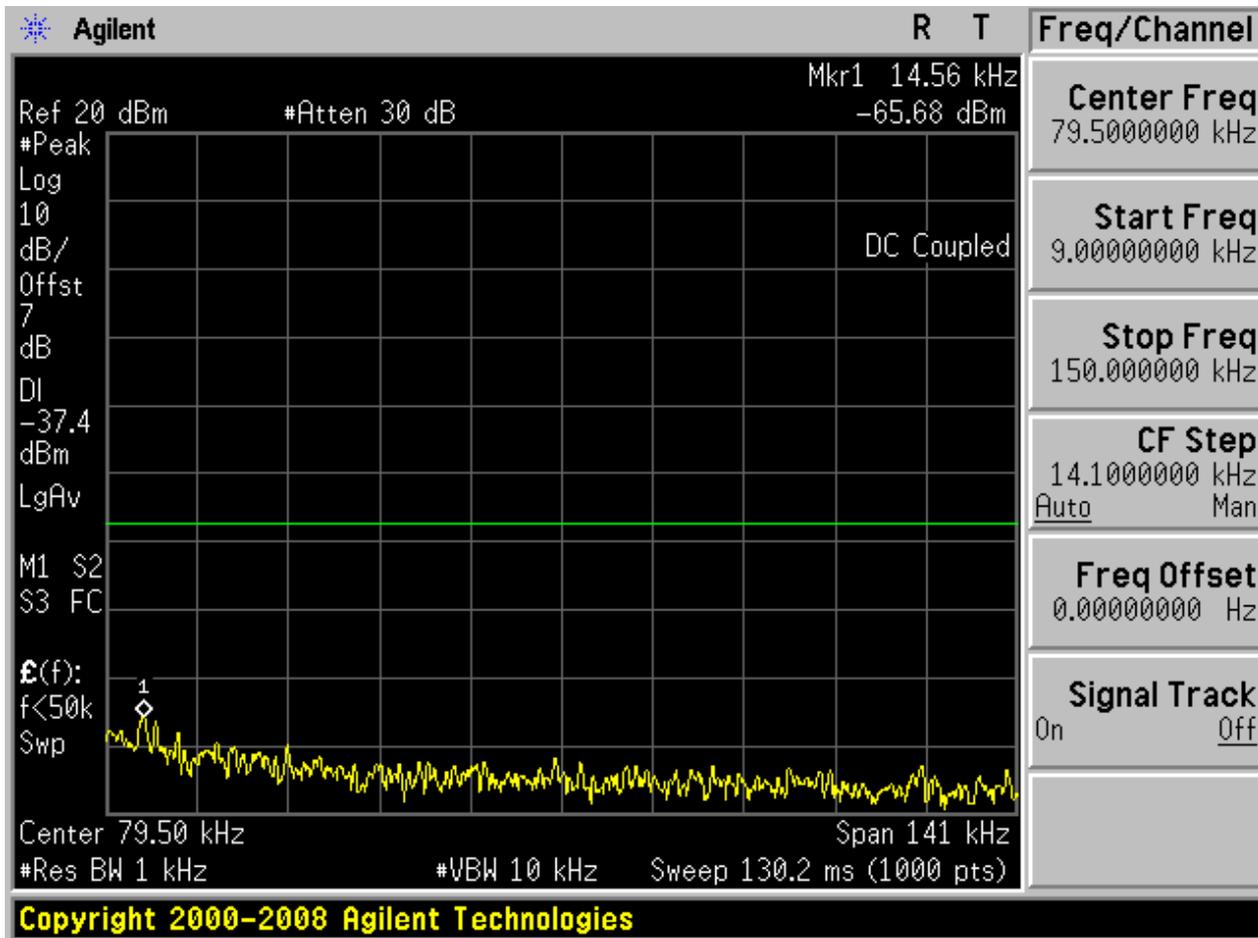


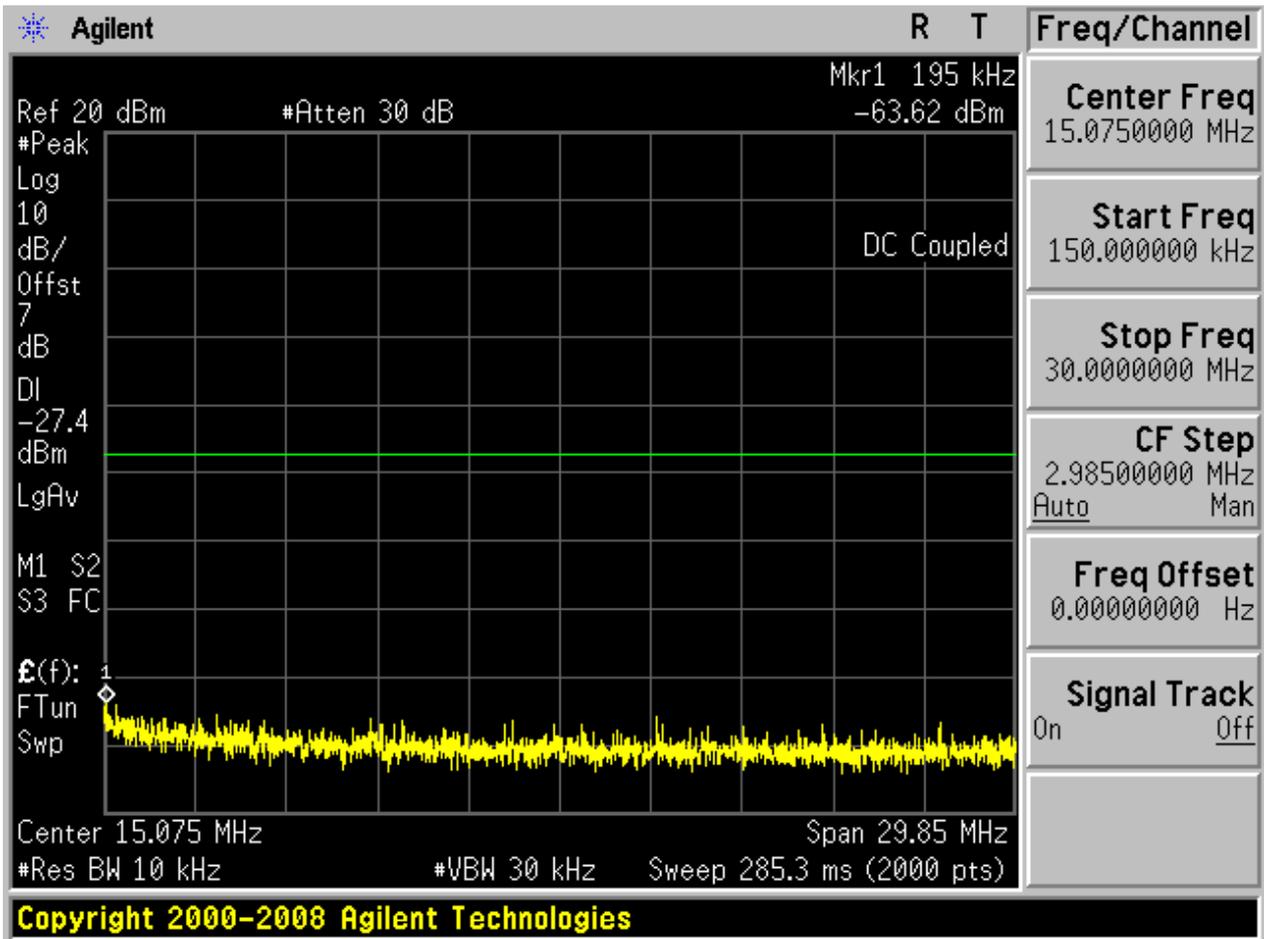

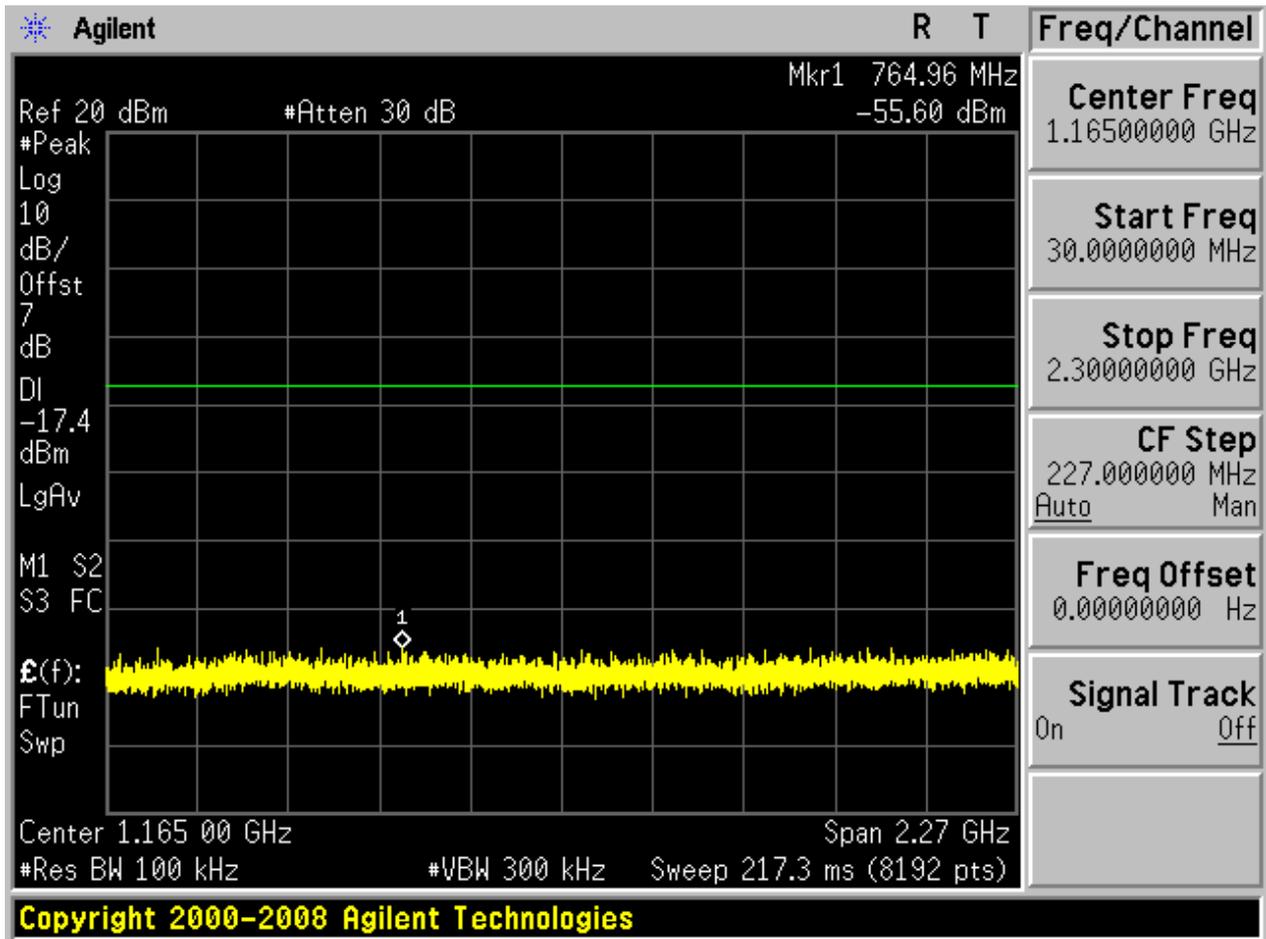

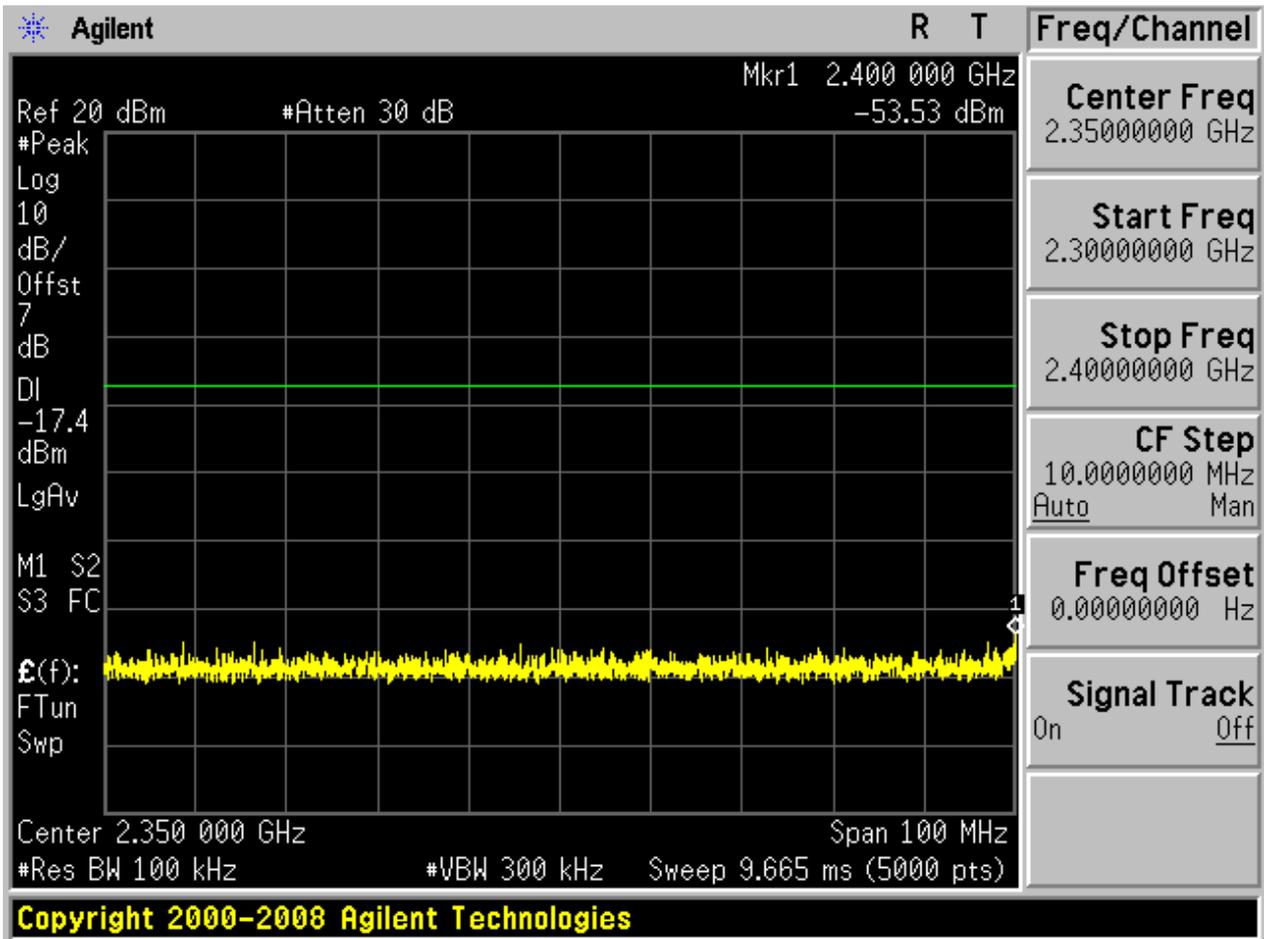


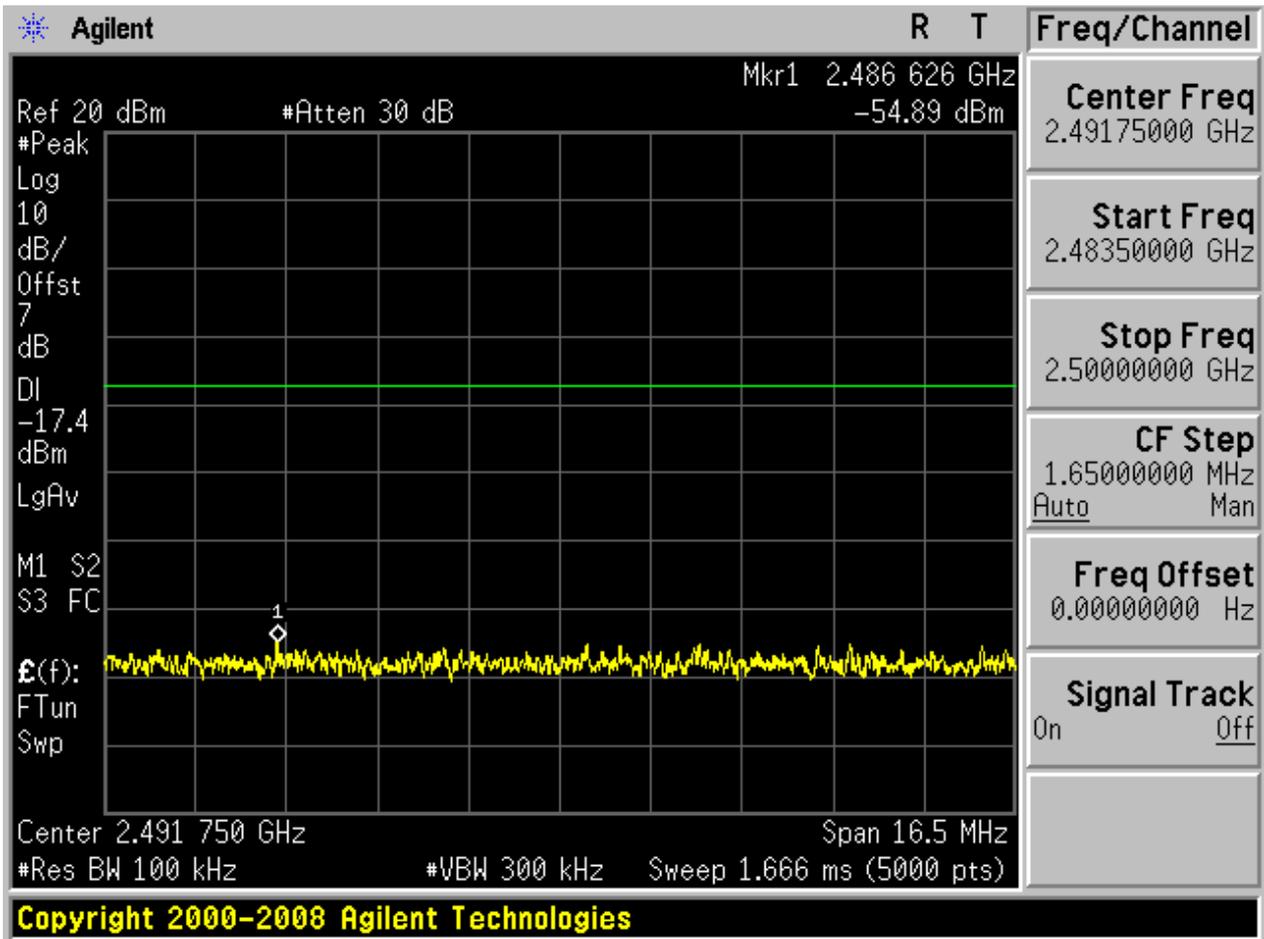

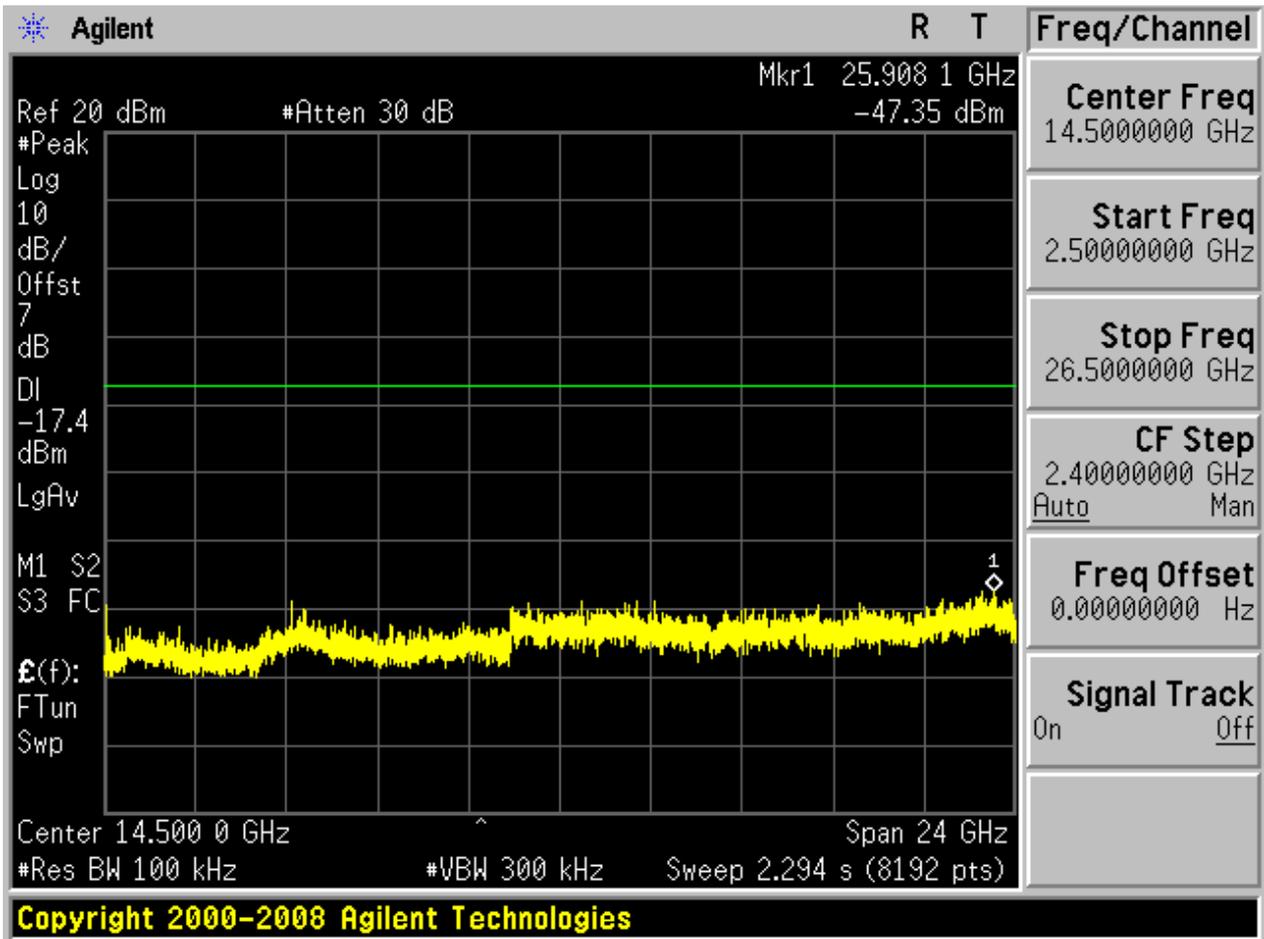



2.5 TM2_2DH5_Ch39


2.5.1 Pref

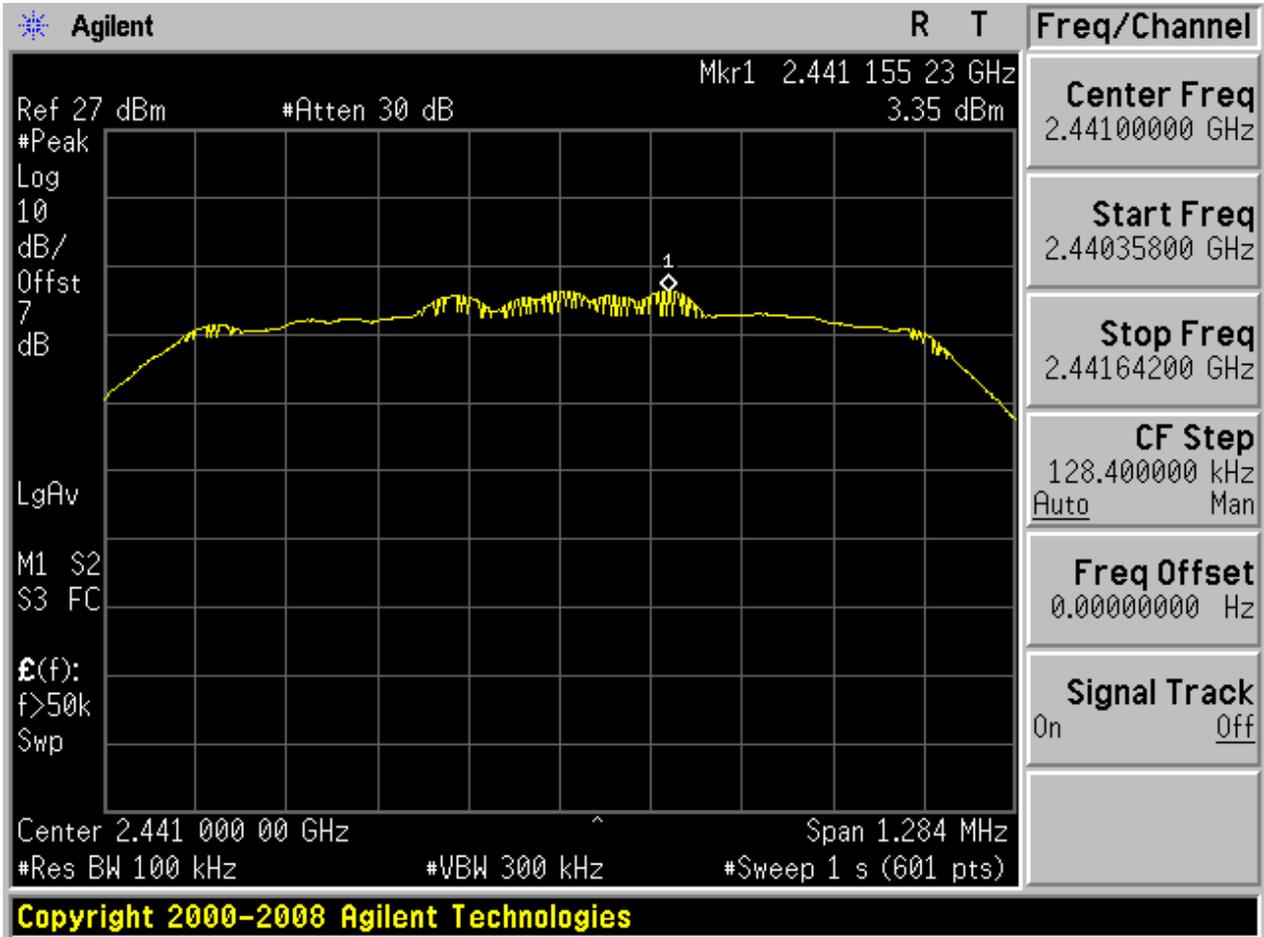



2.5.2 Puw

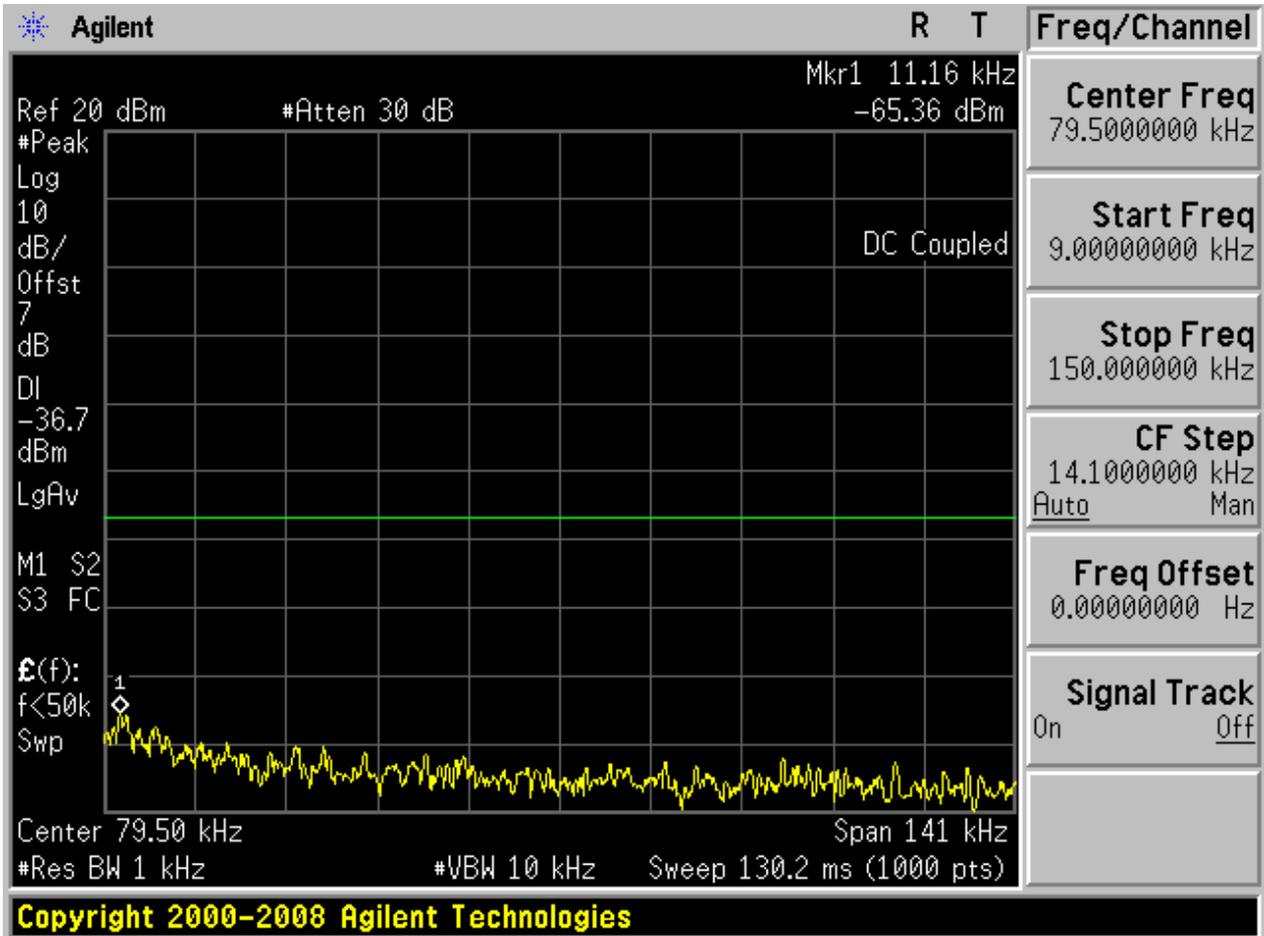


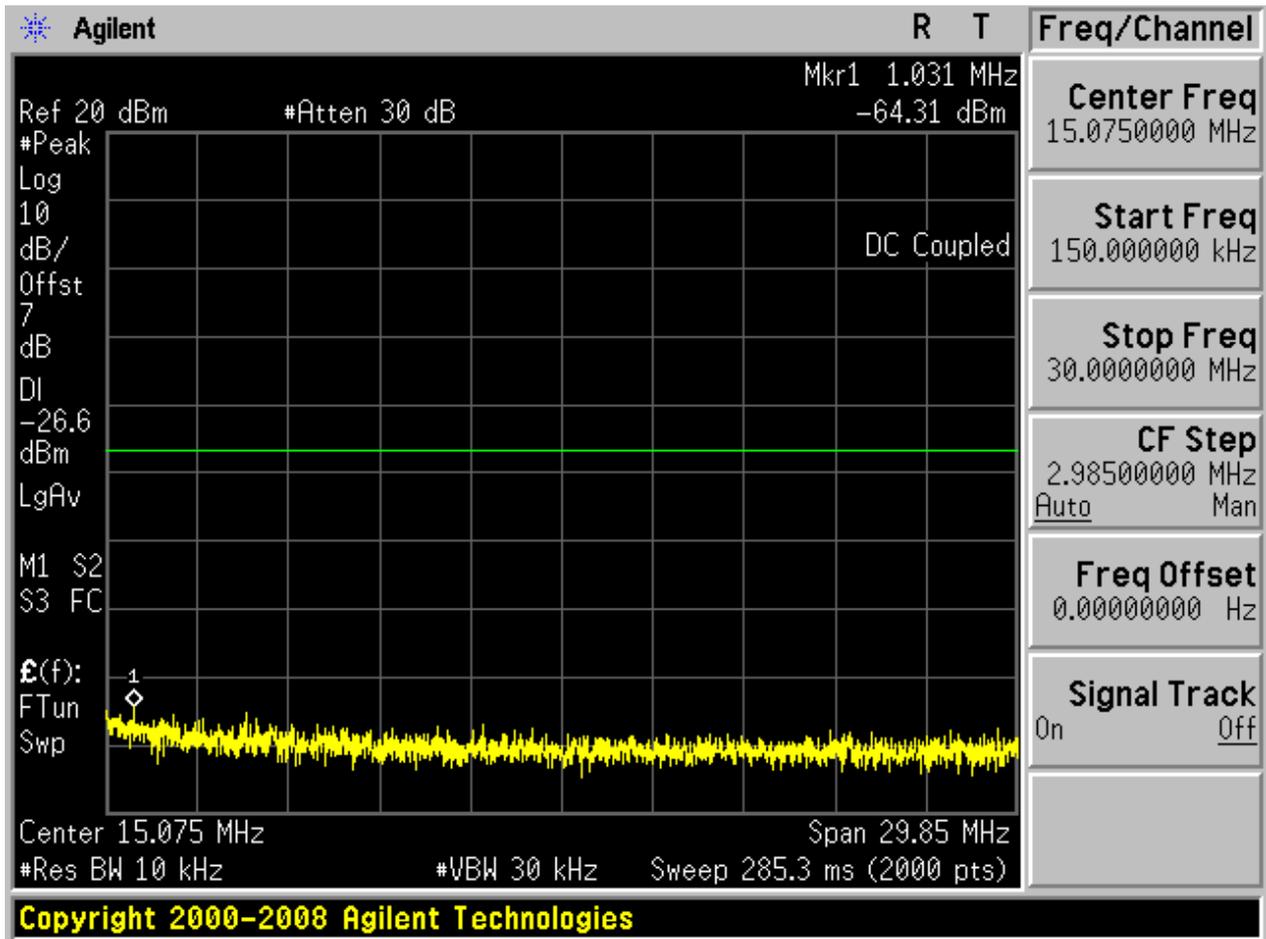

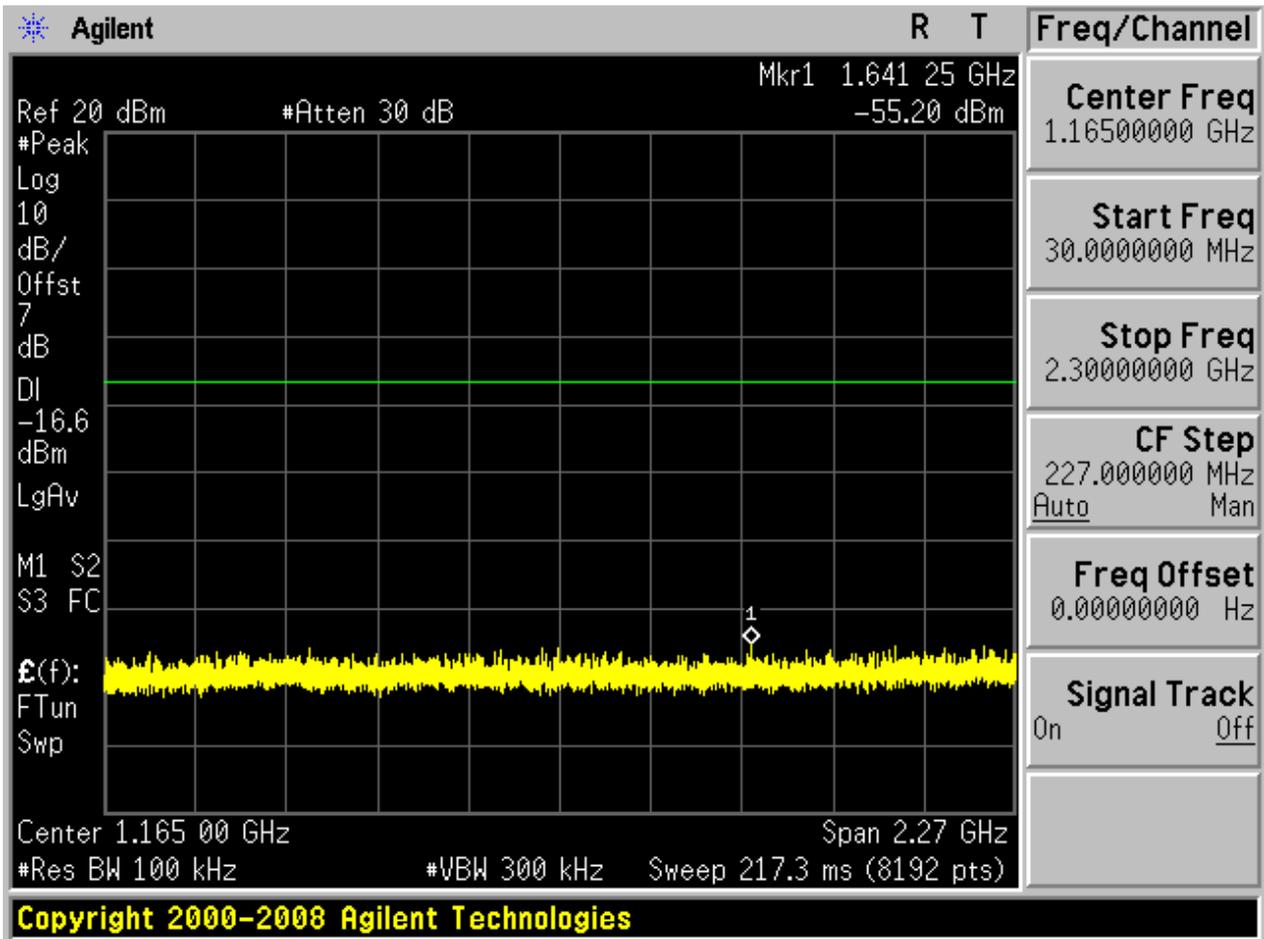

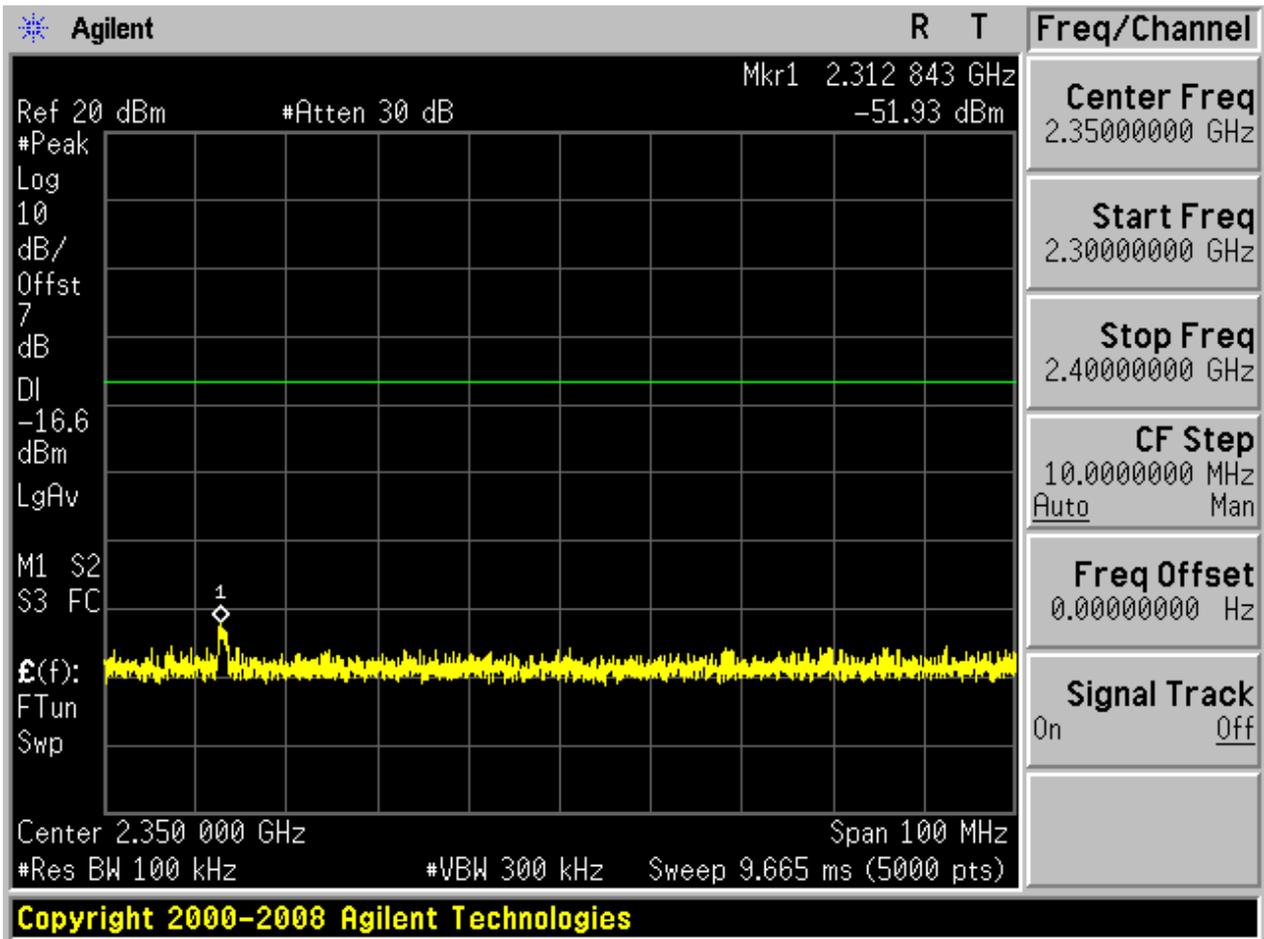


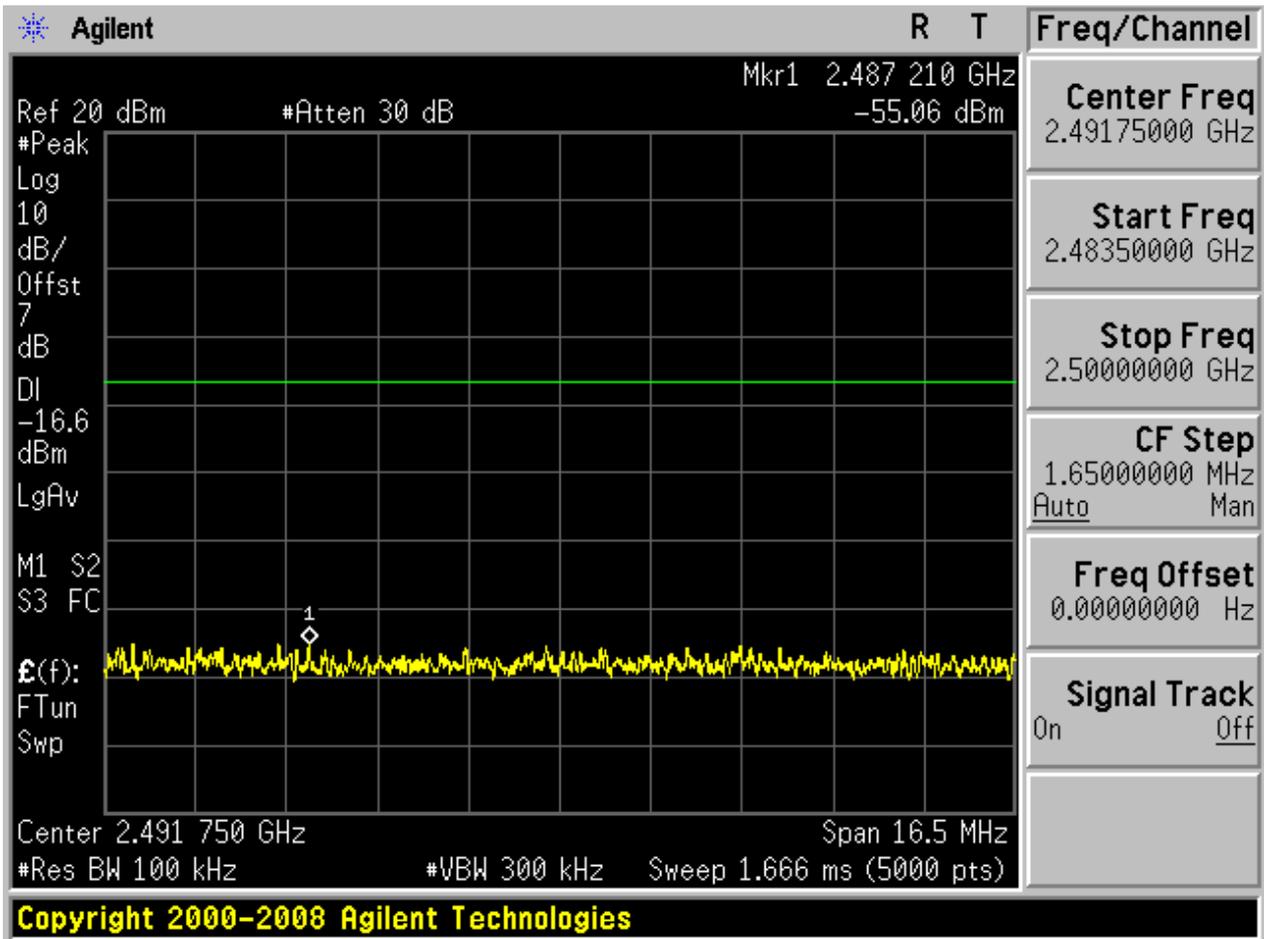

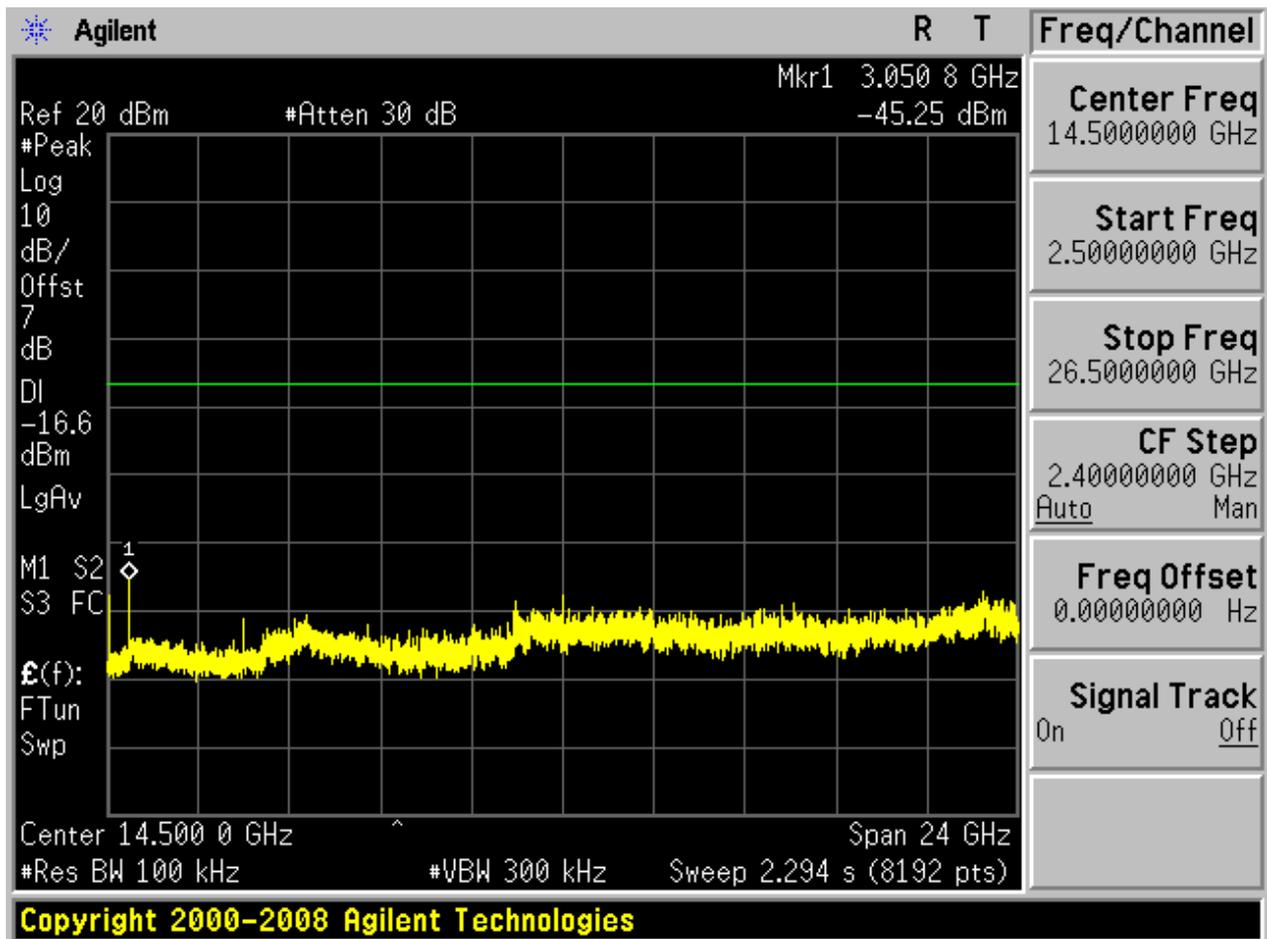



2.6 TM2_2DH5_Ch78


2.6.1 Pref

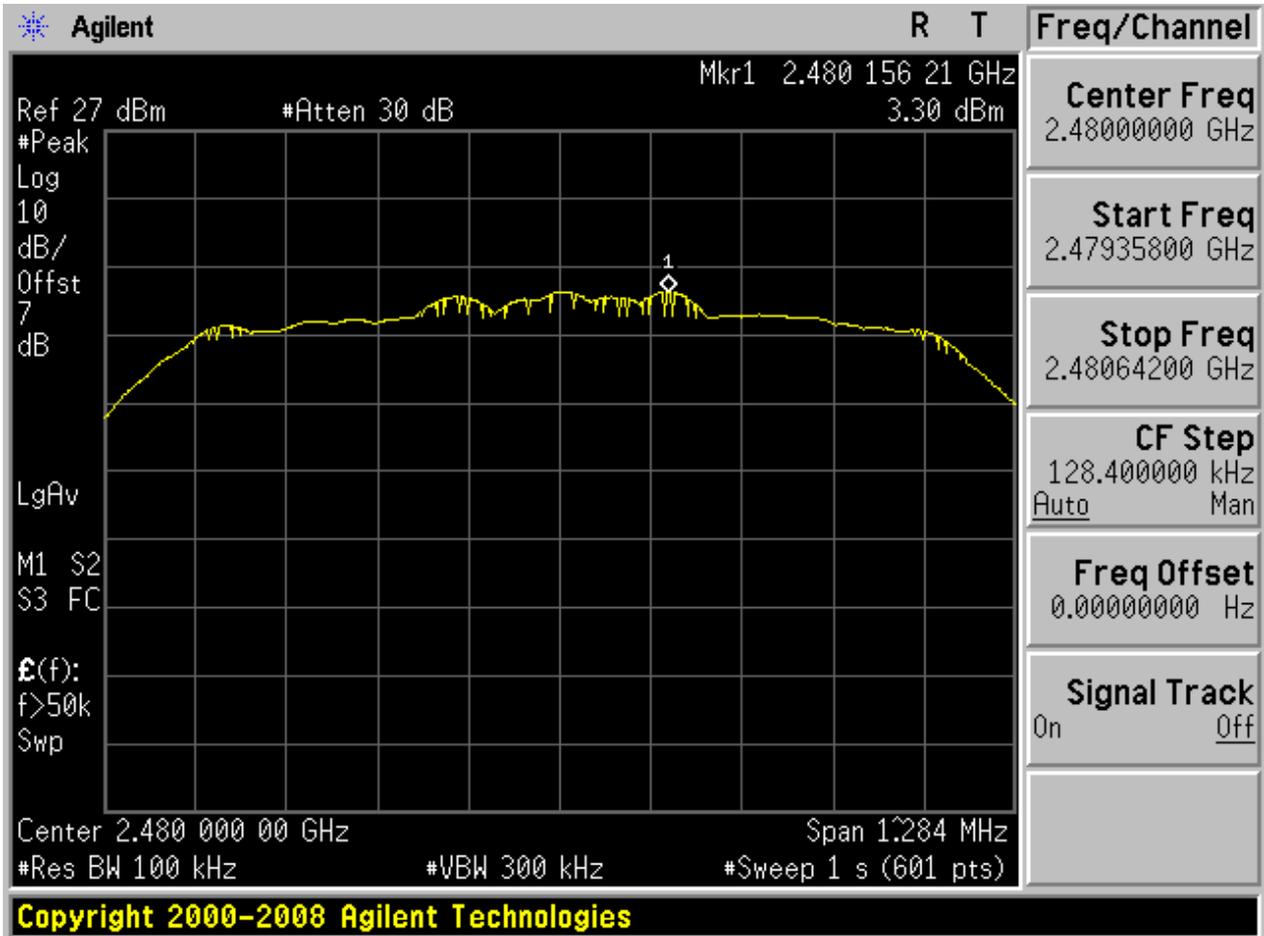



2.6.2 Puw

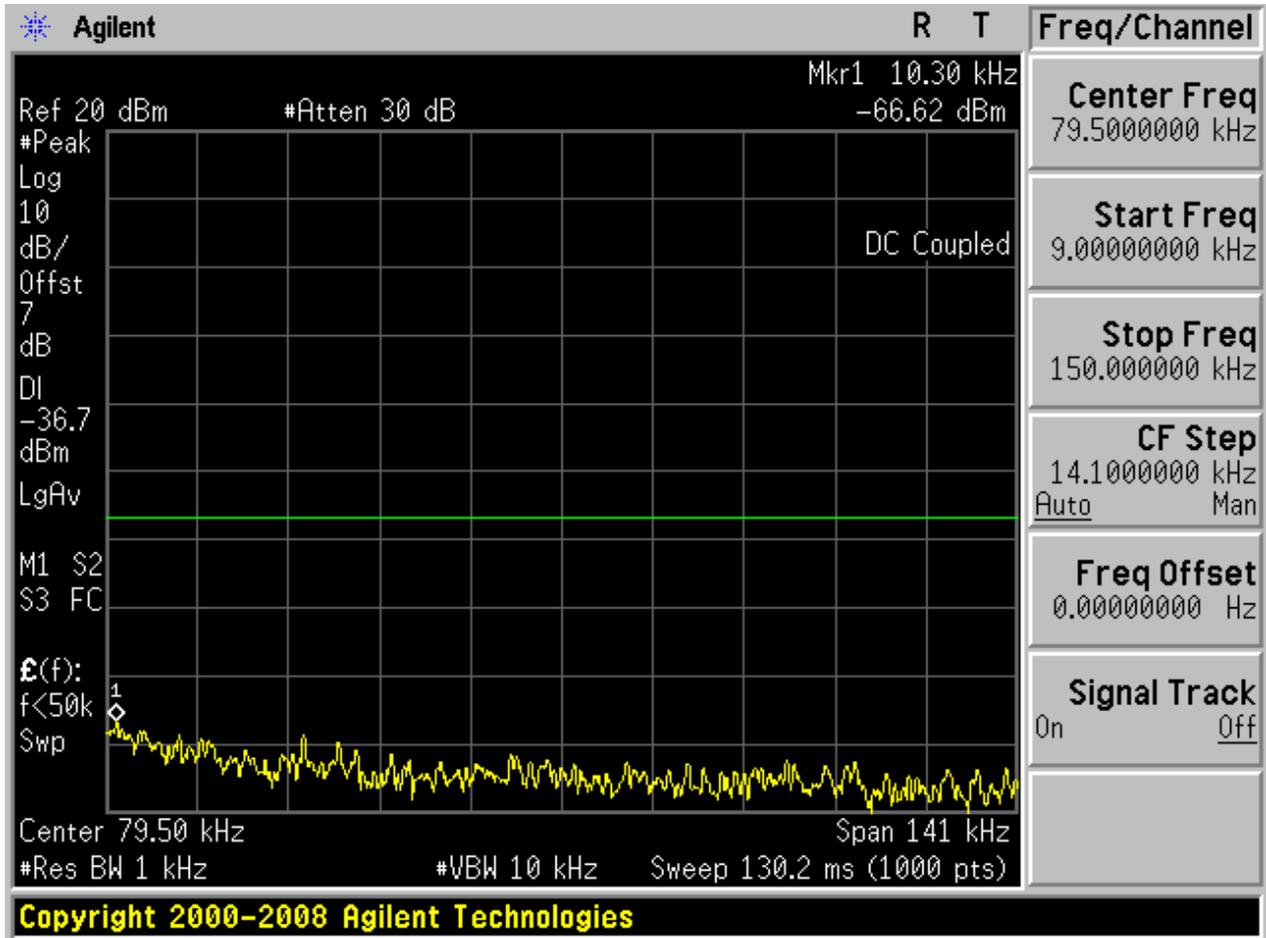


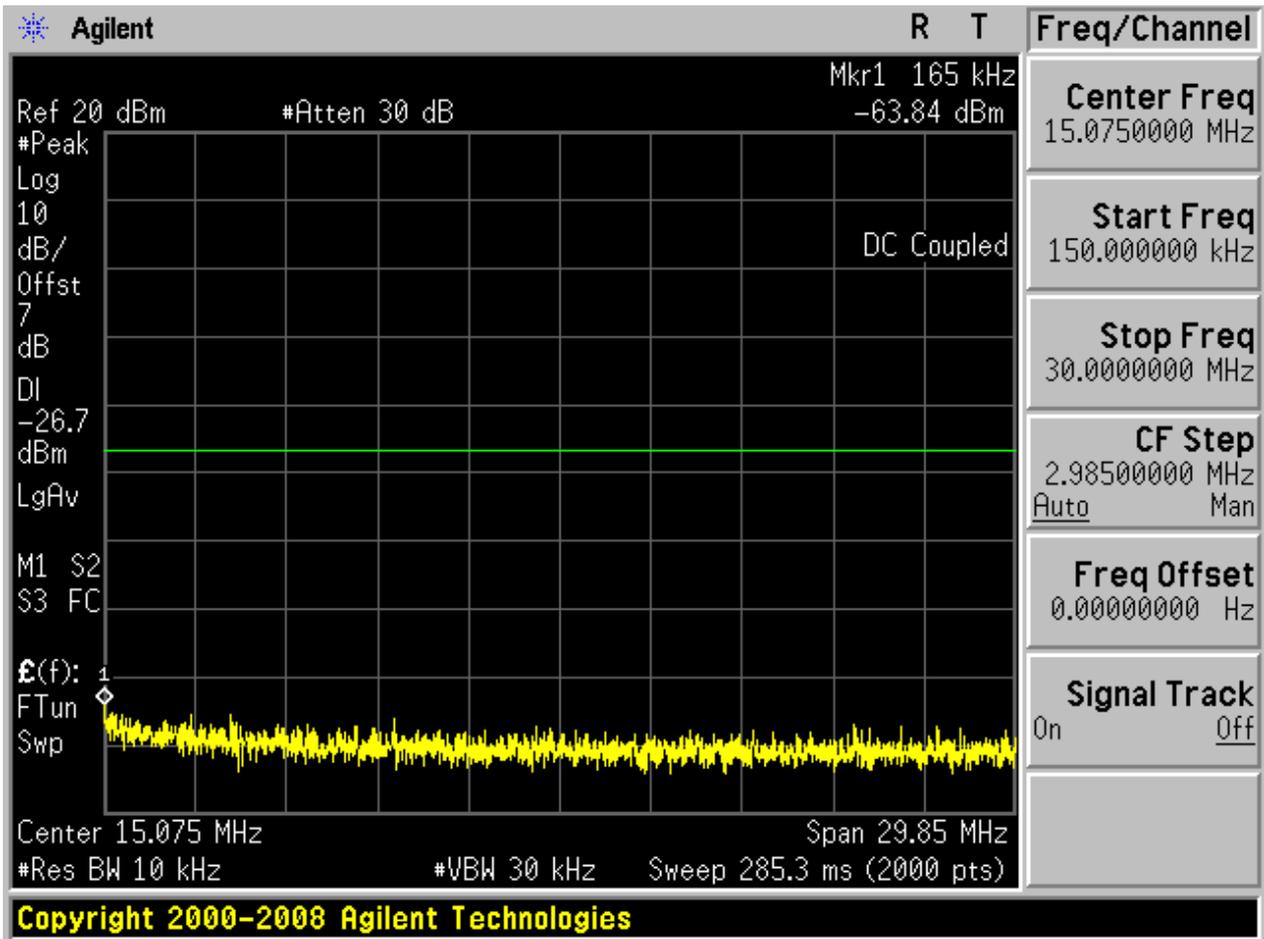

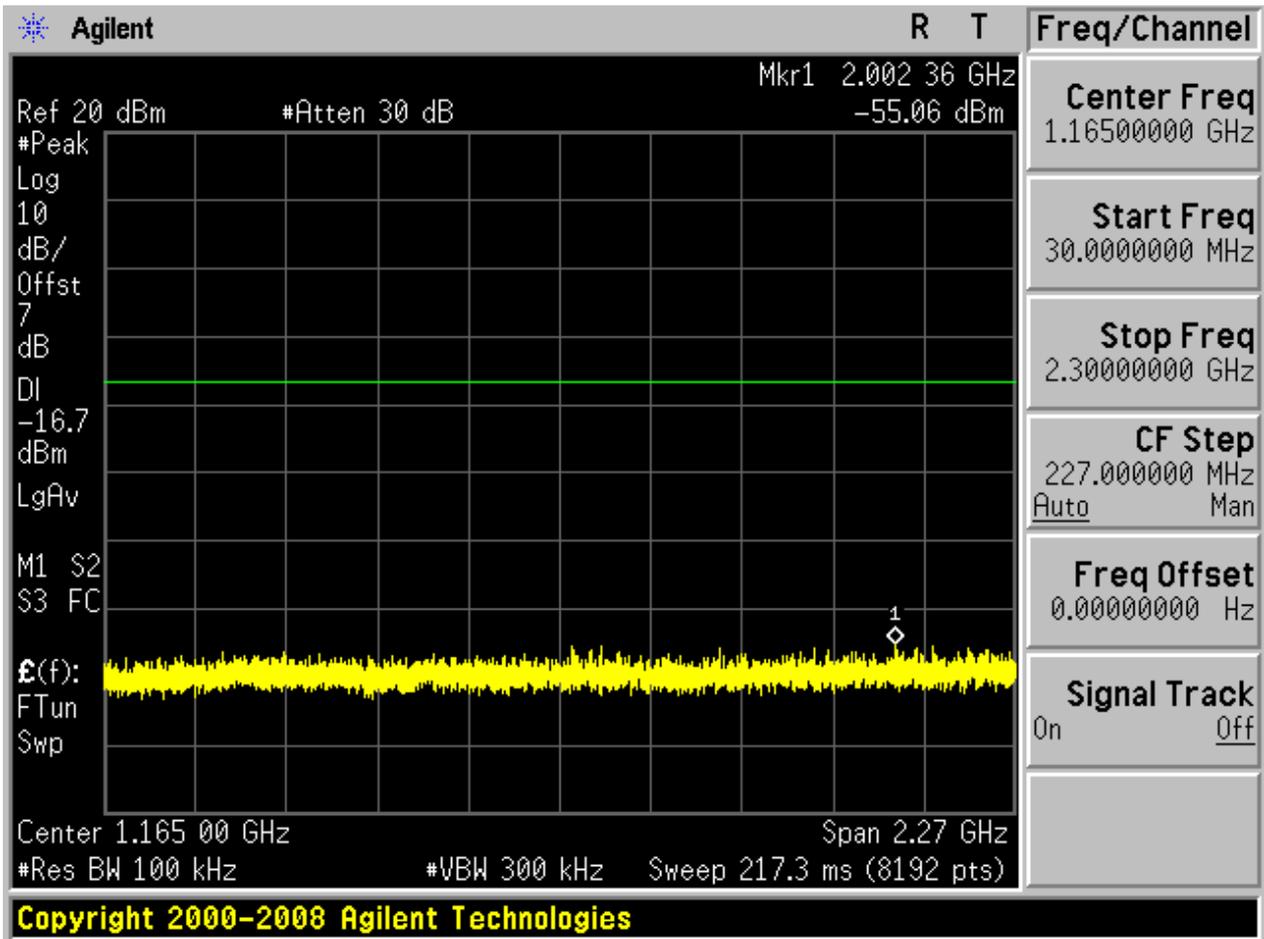

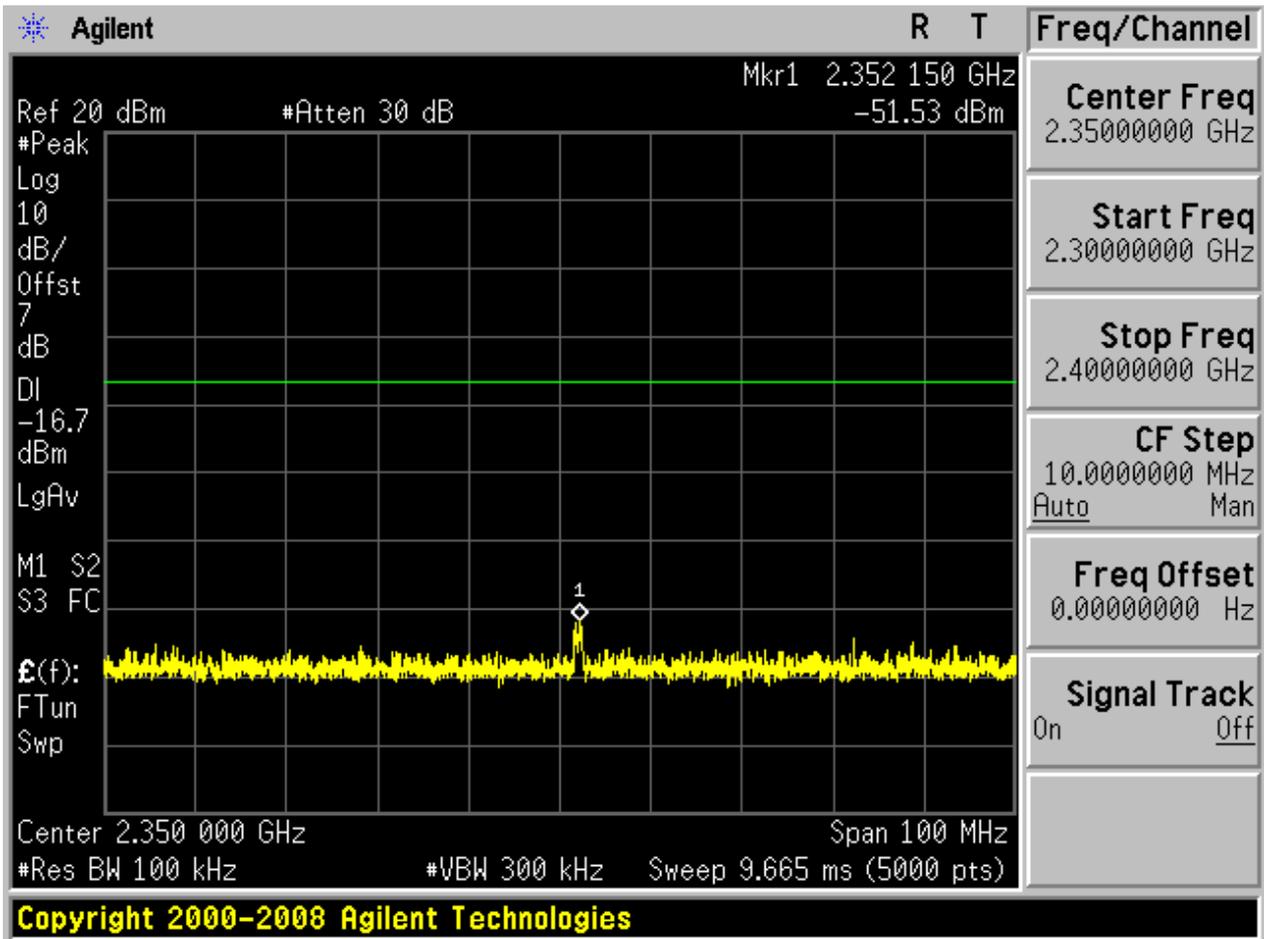


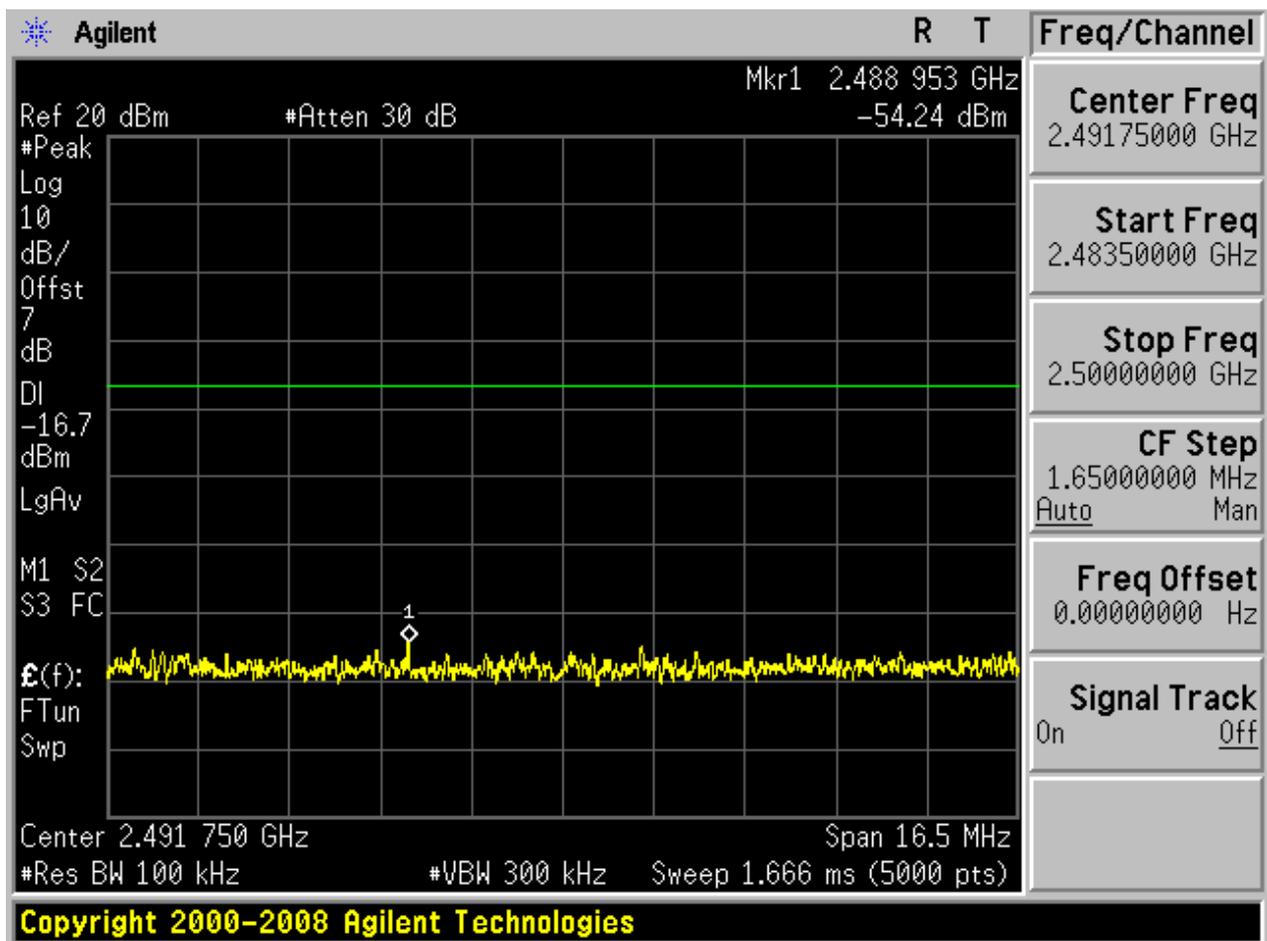

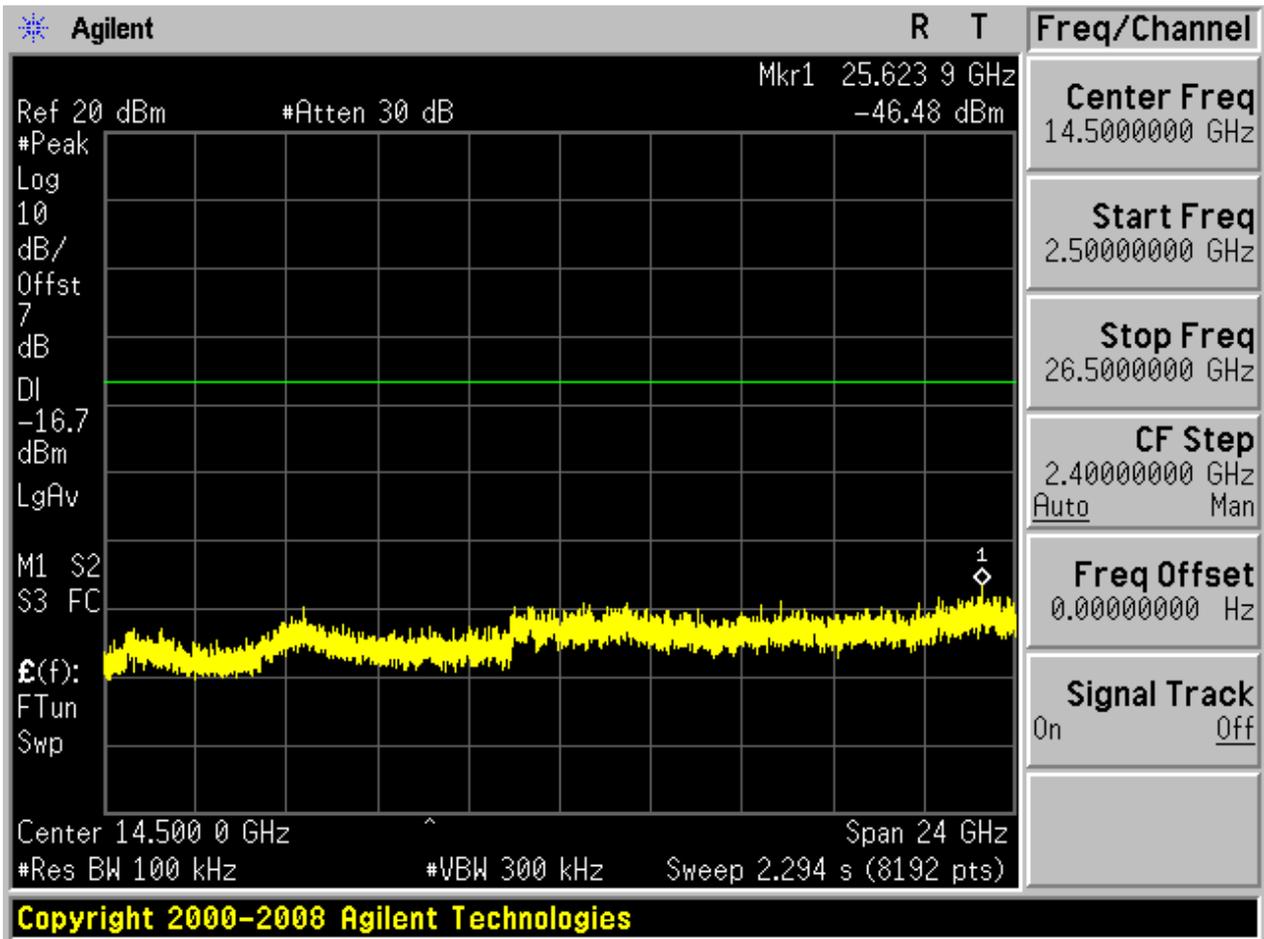



2.7 TM3_3DH5_Ch0

2.7.1 Pref

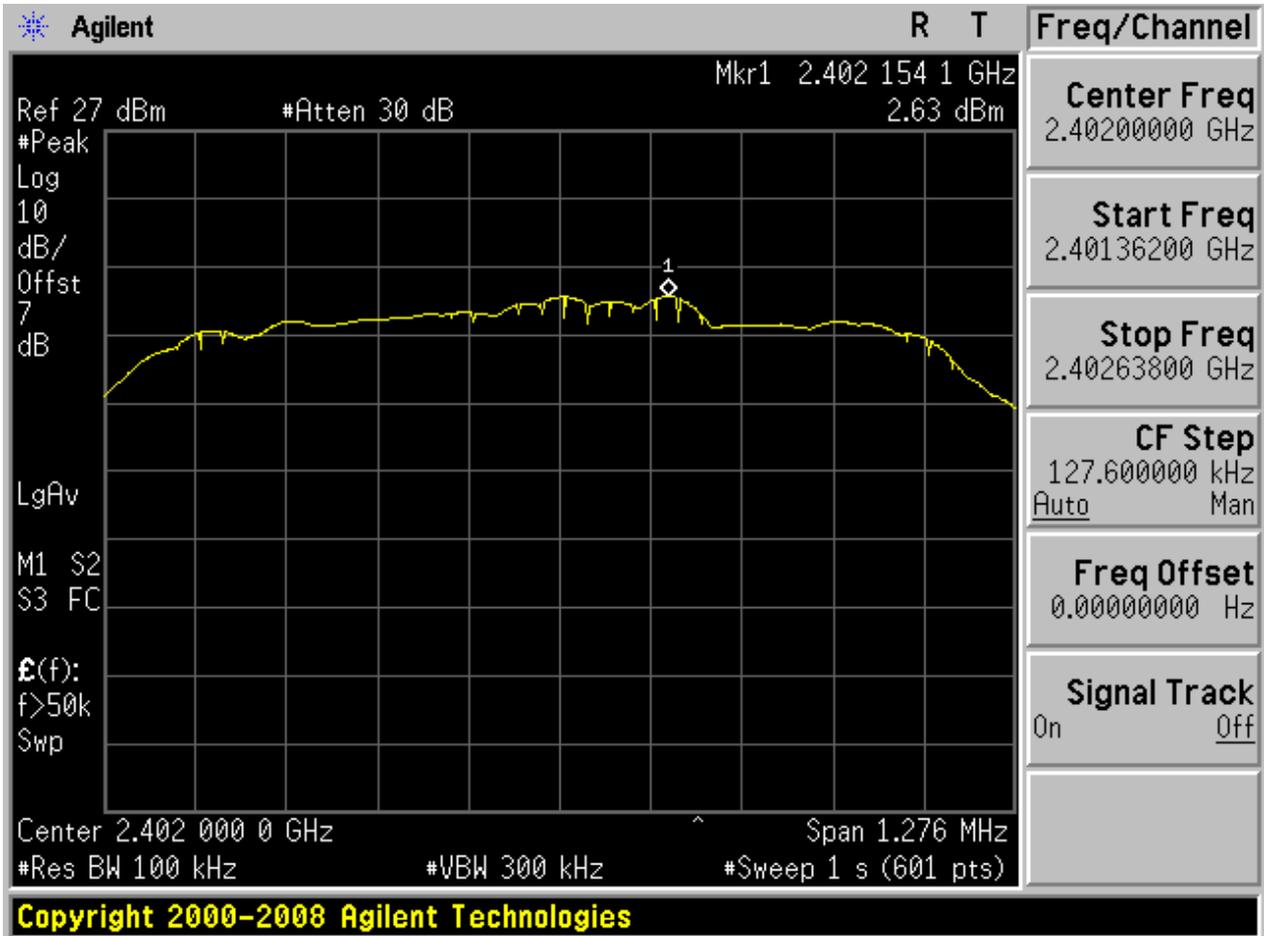



2.7.2 Puw

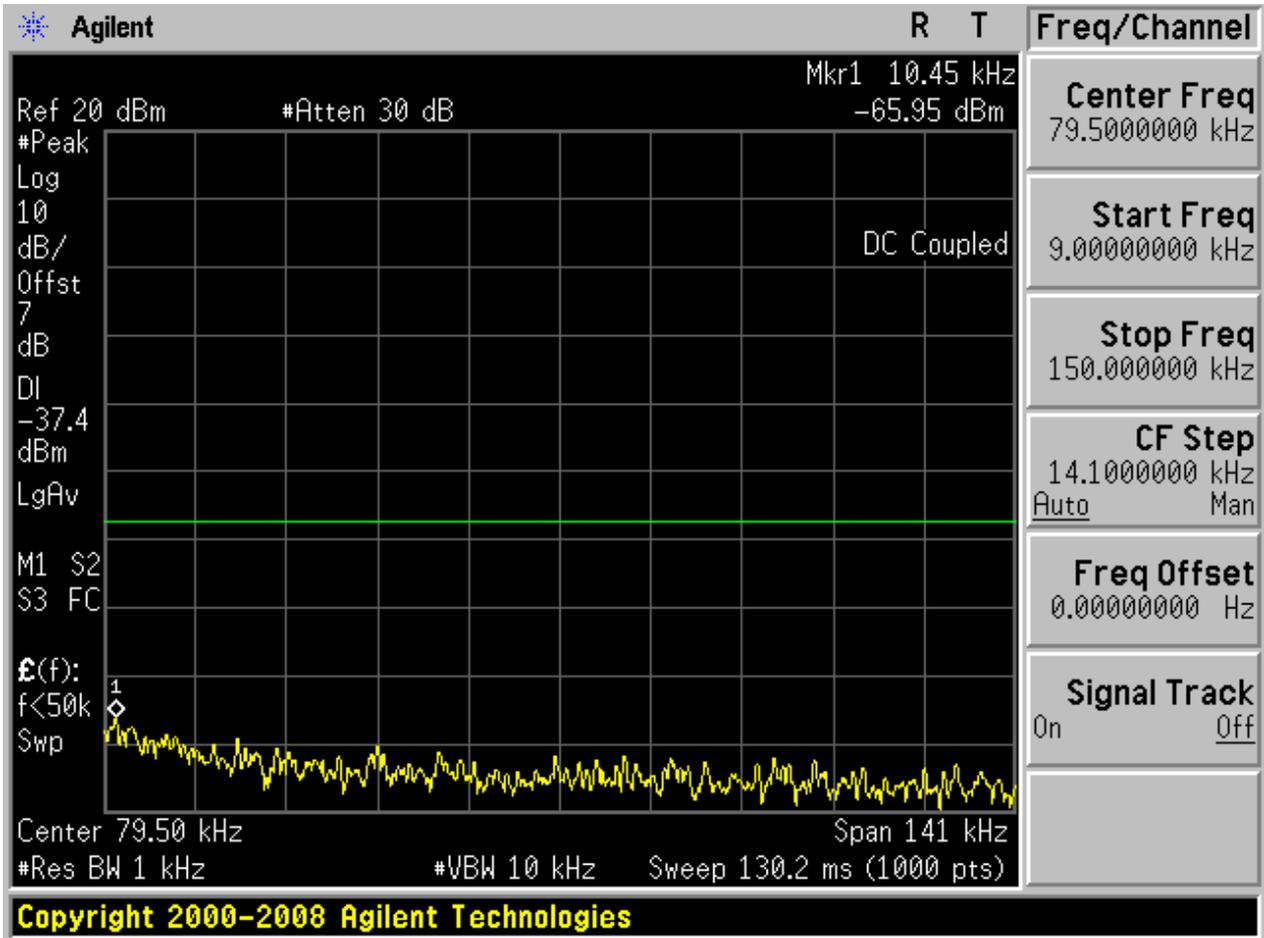


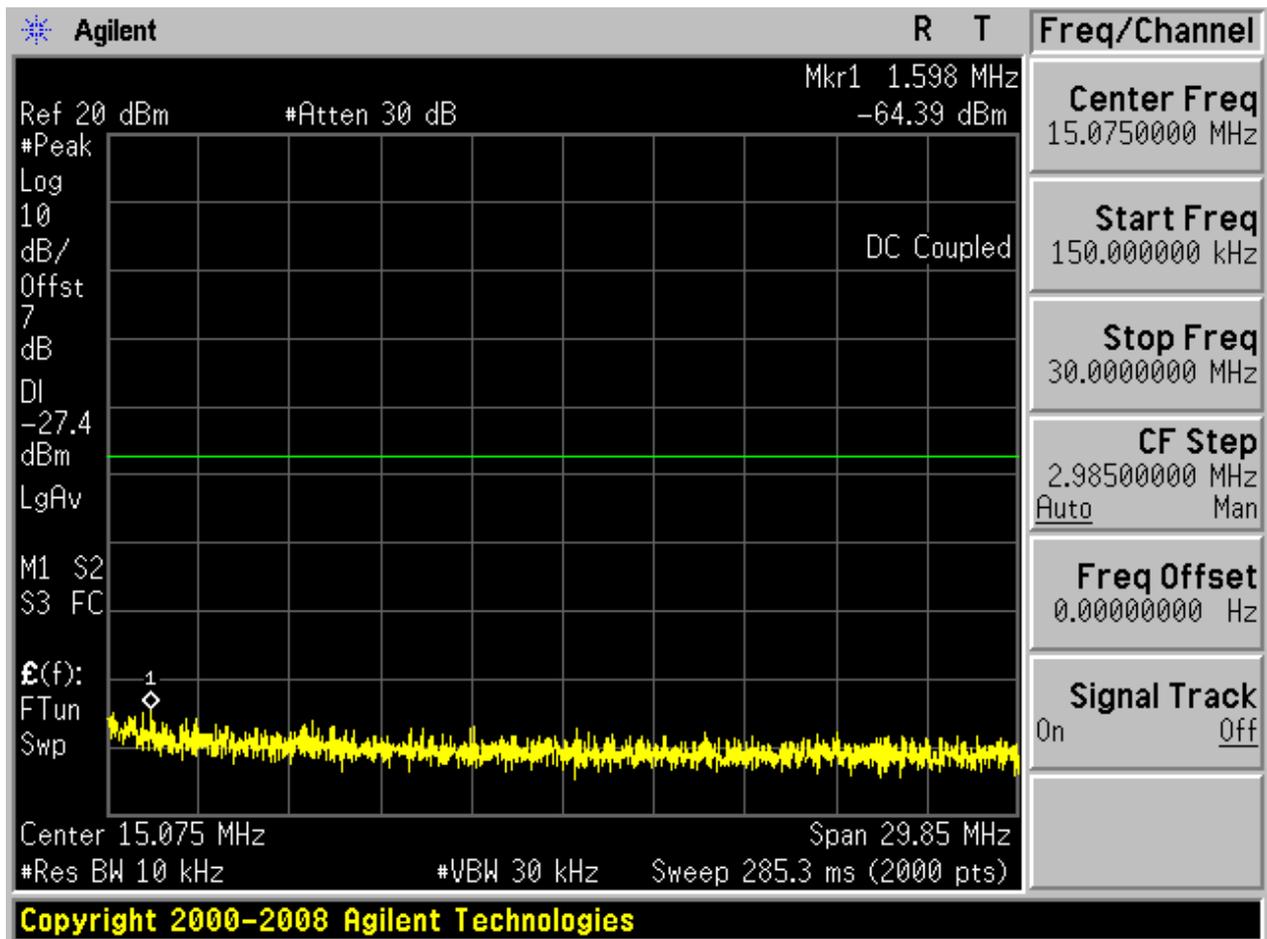


Copyright 2000-2008 Agilent Technologies

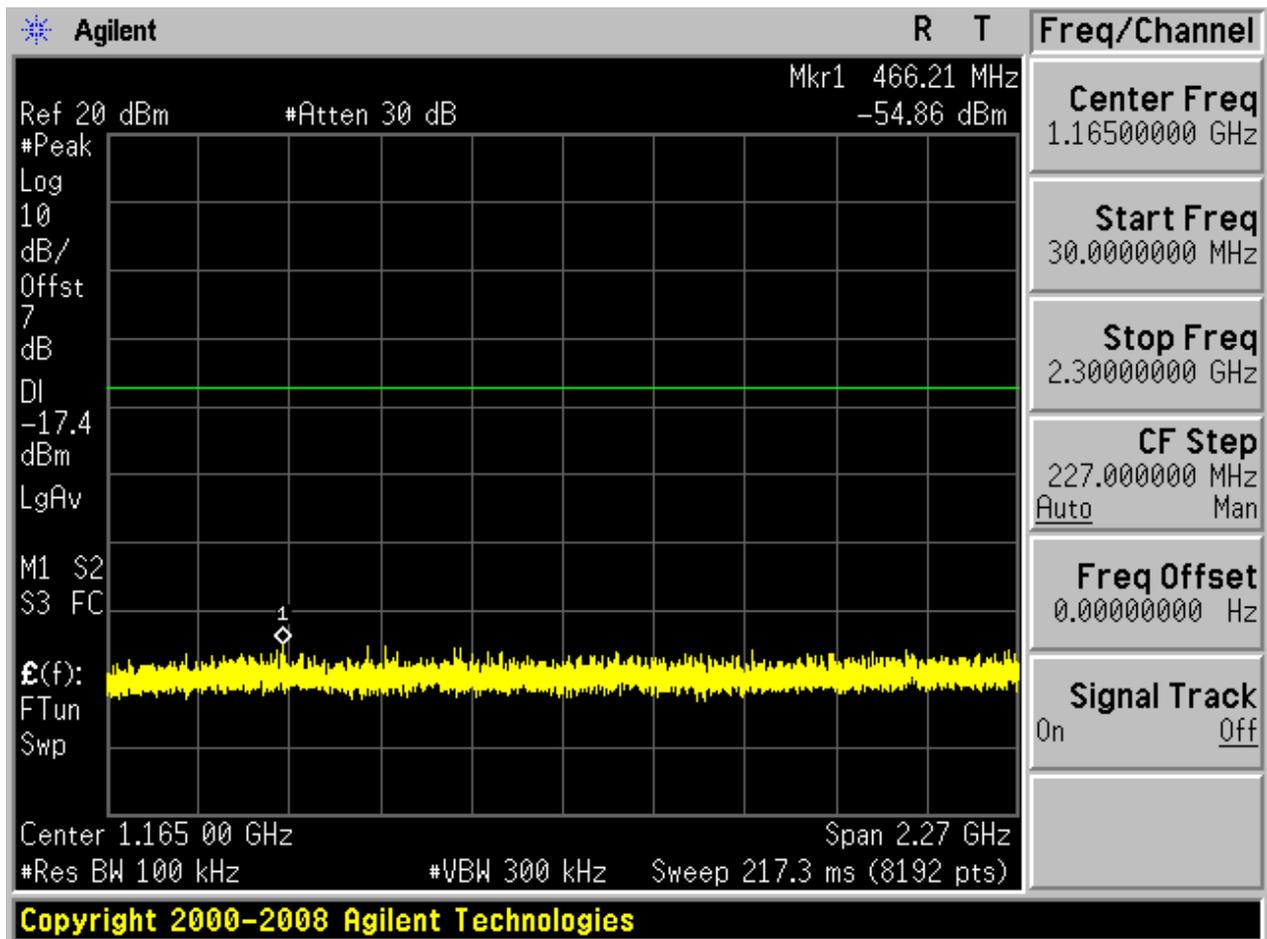

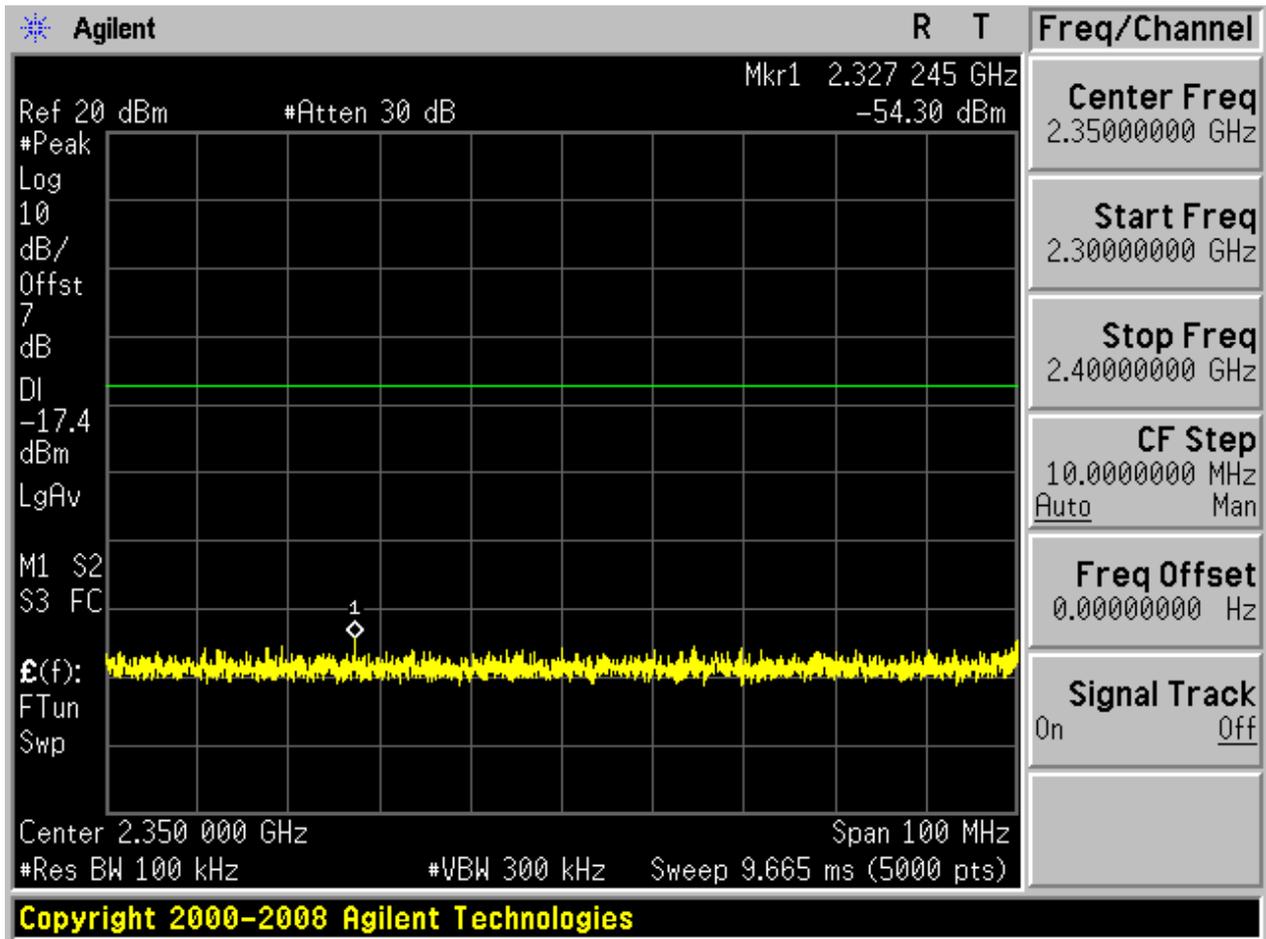


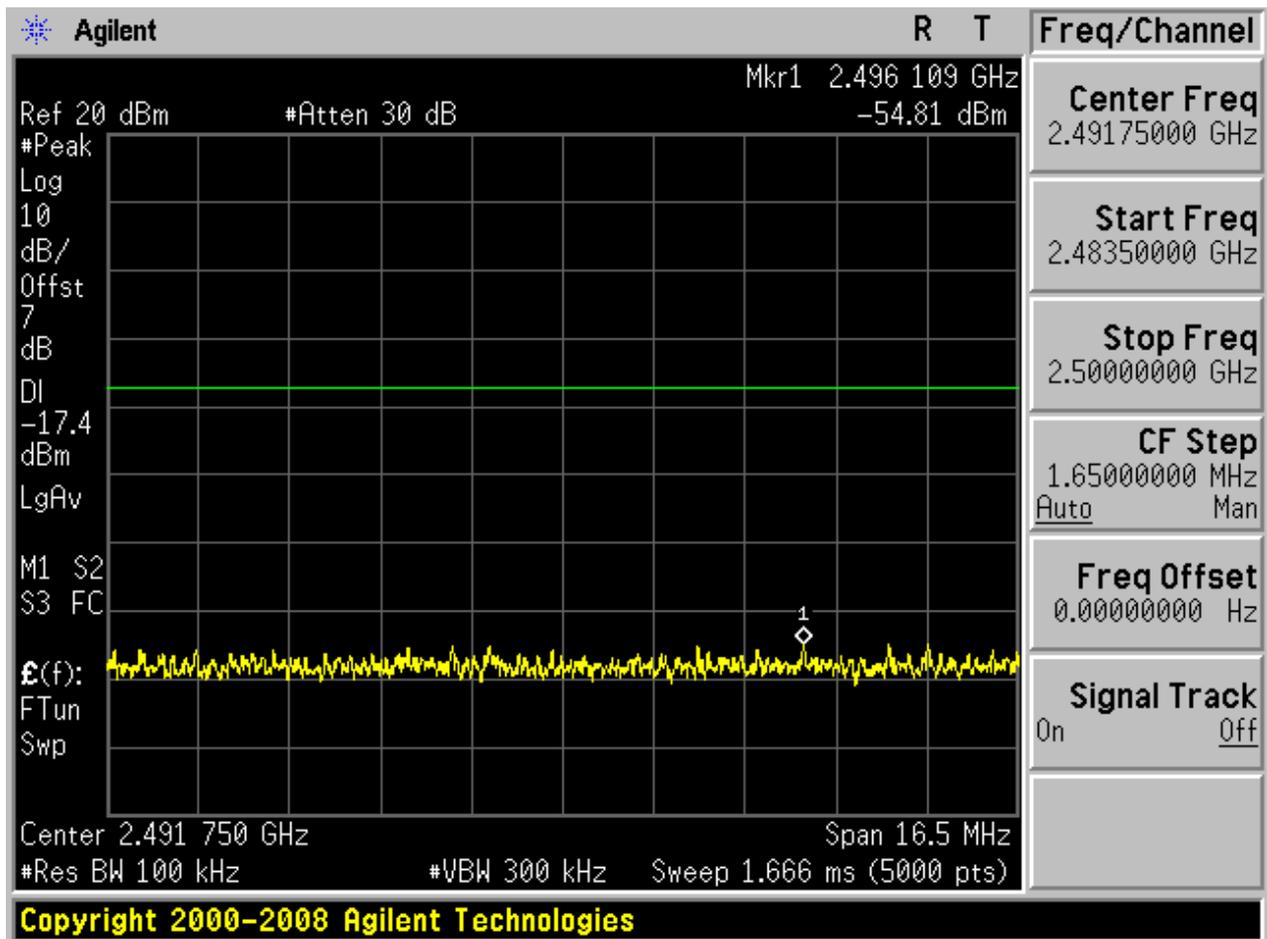

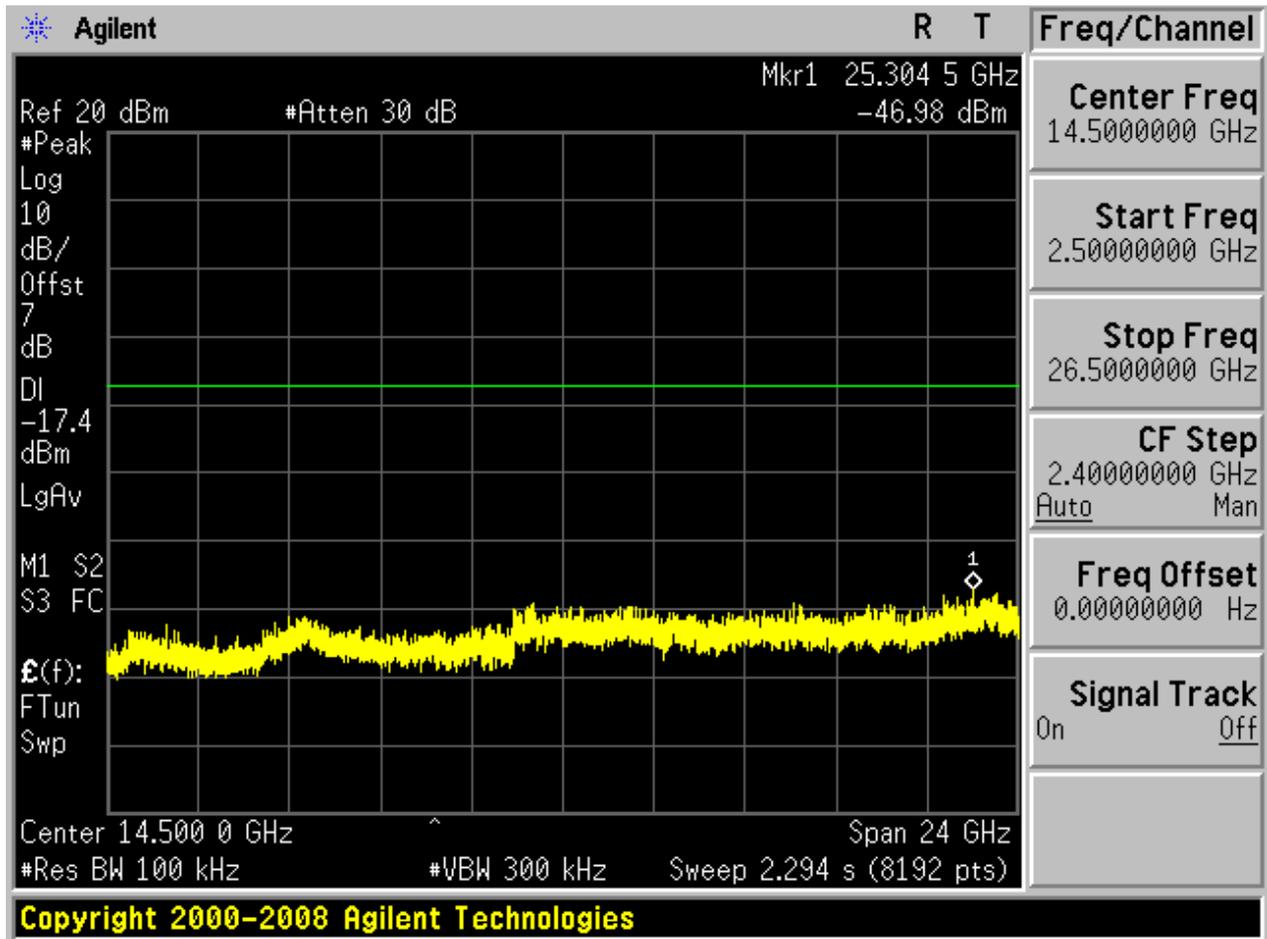



2.8 TM3_3DH5_Ch39


2.8.1 Pref

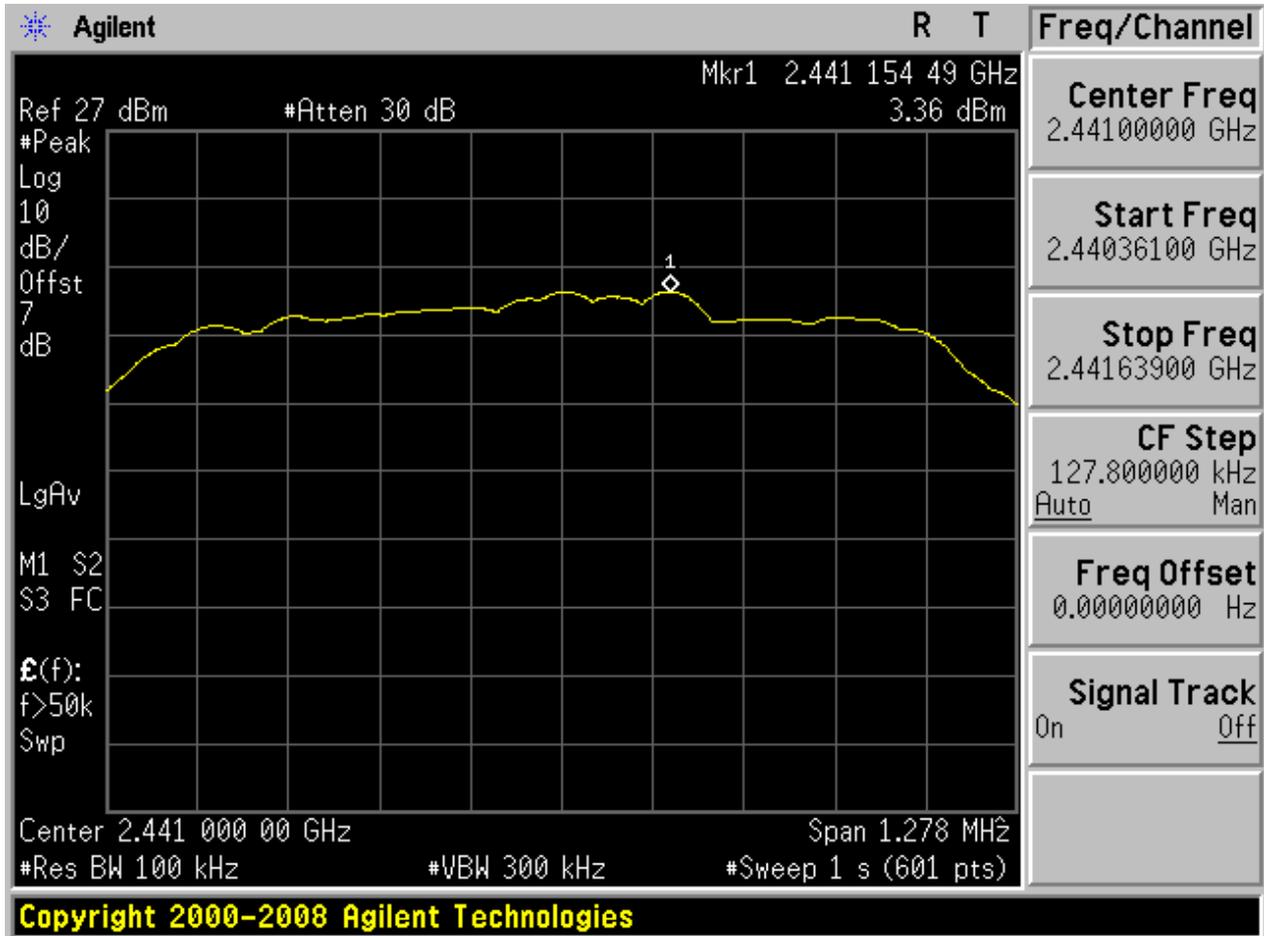



2.8.2 Puw

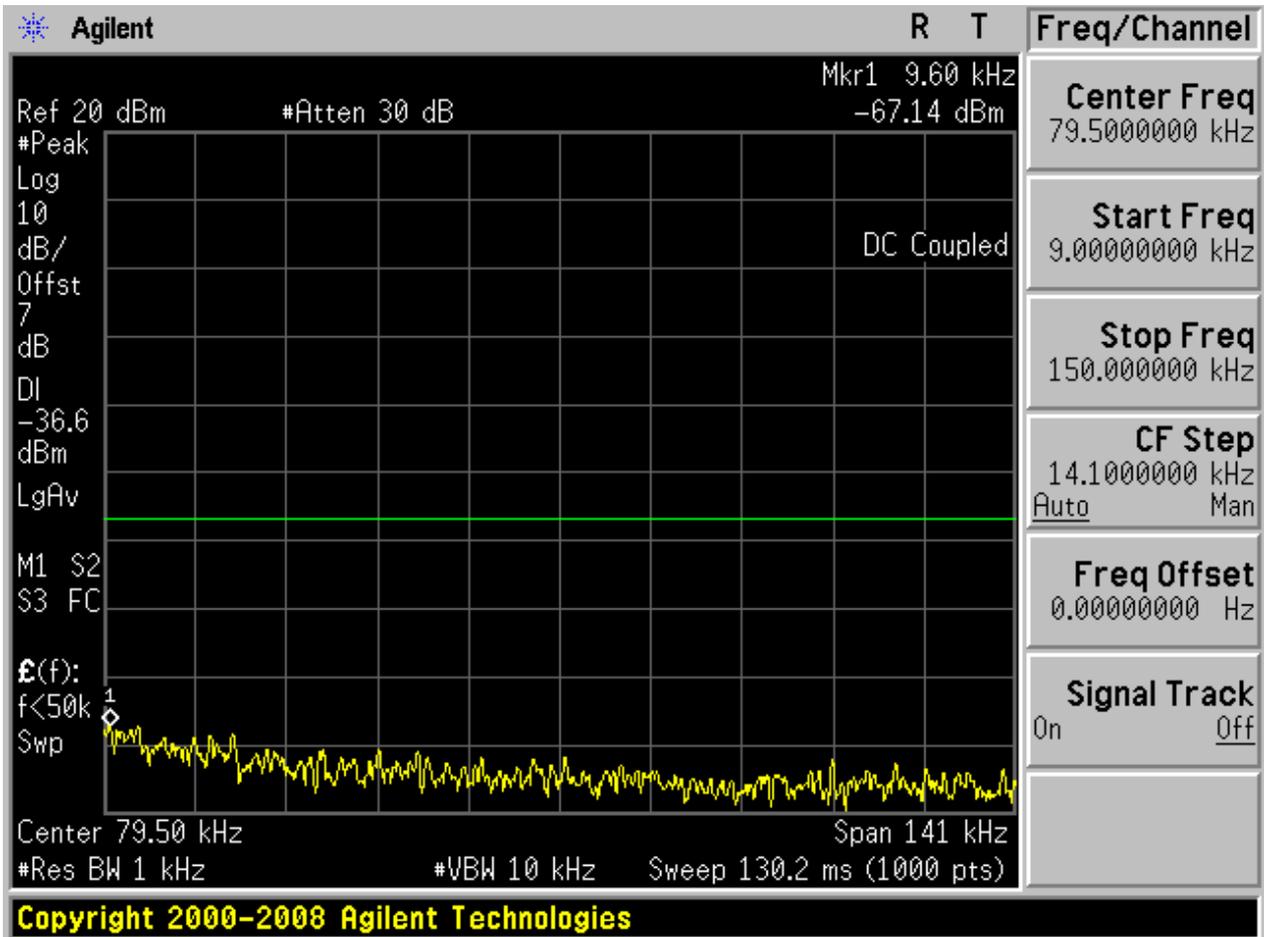


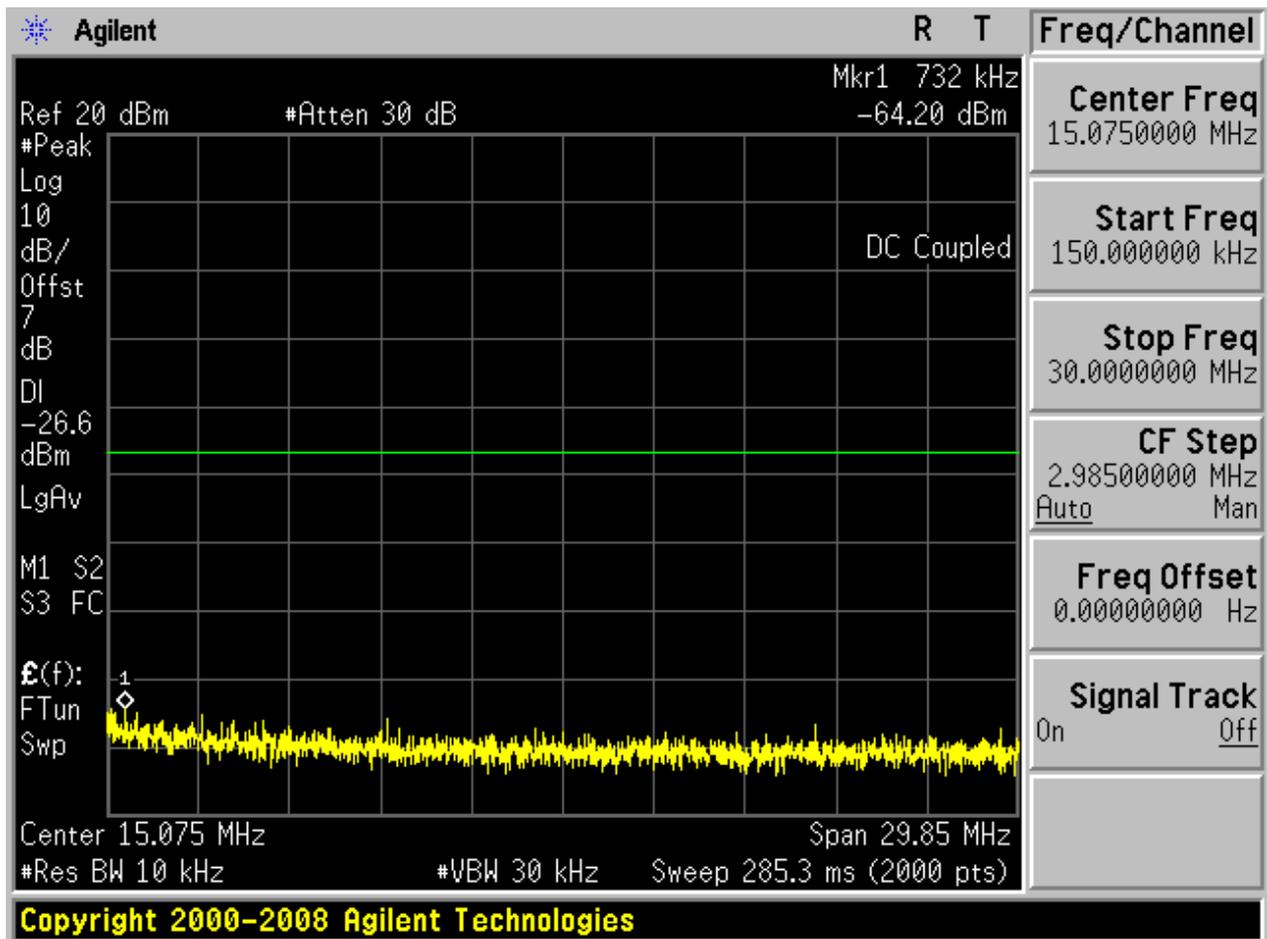

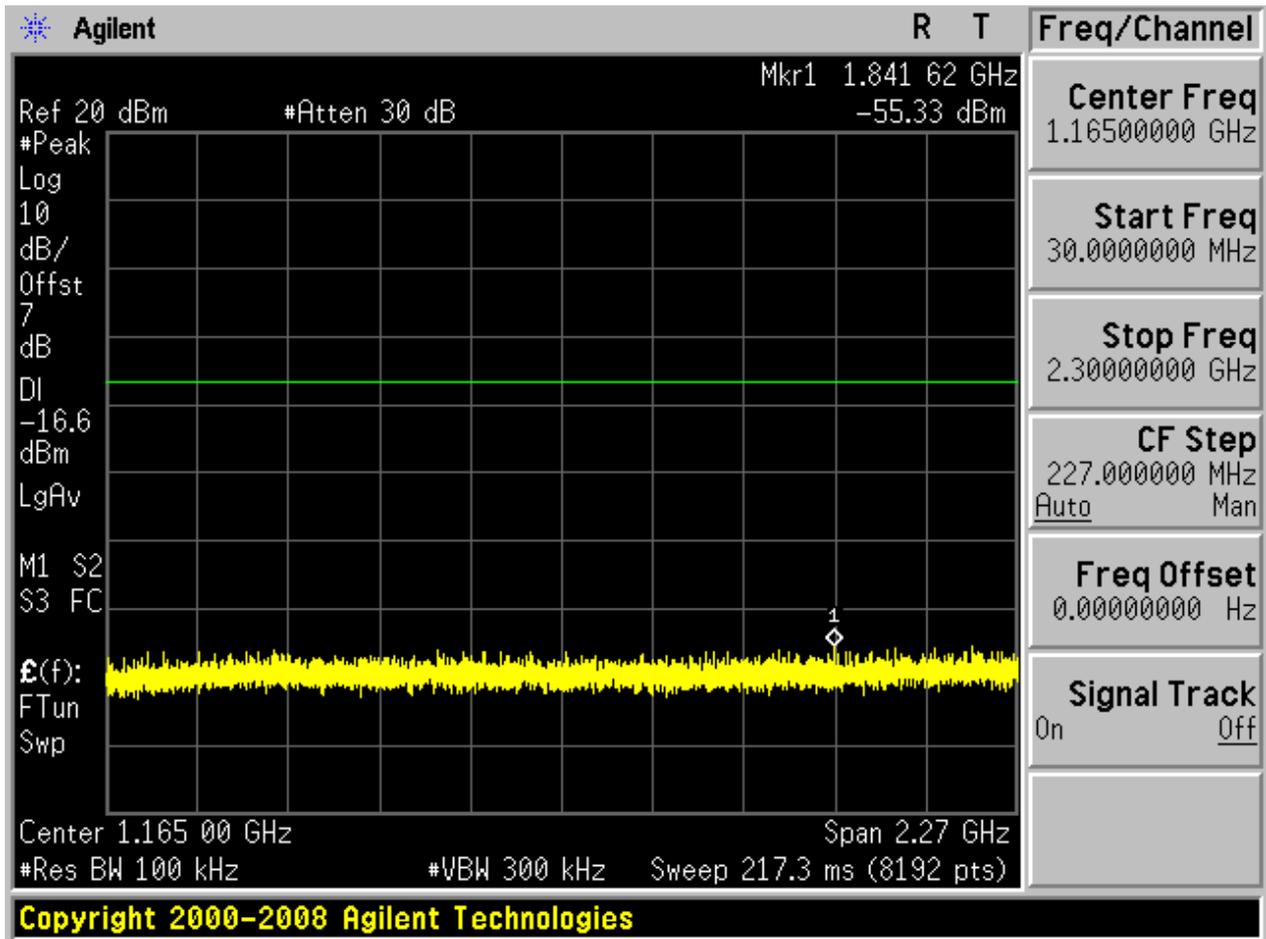

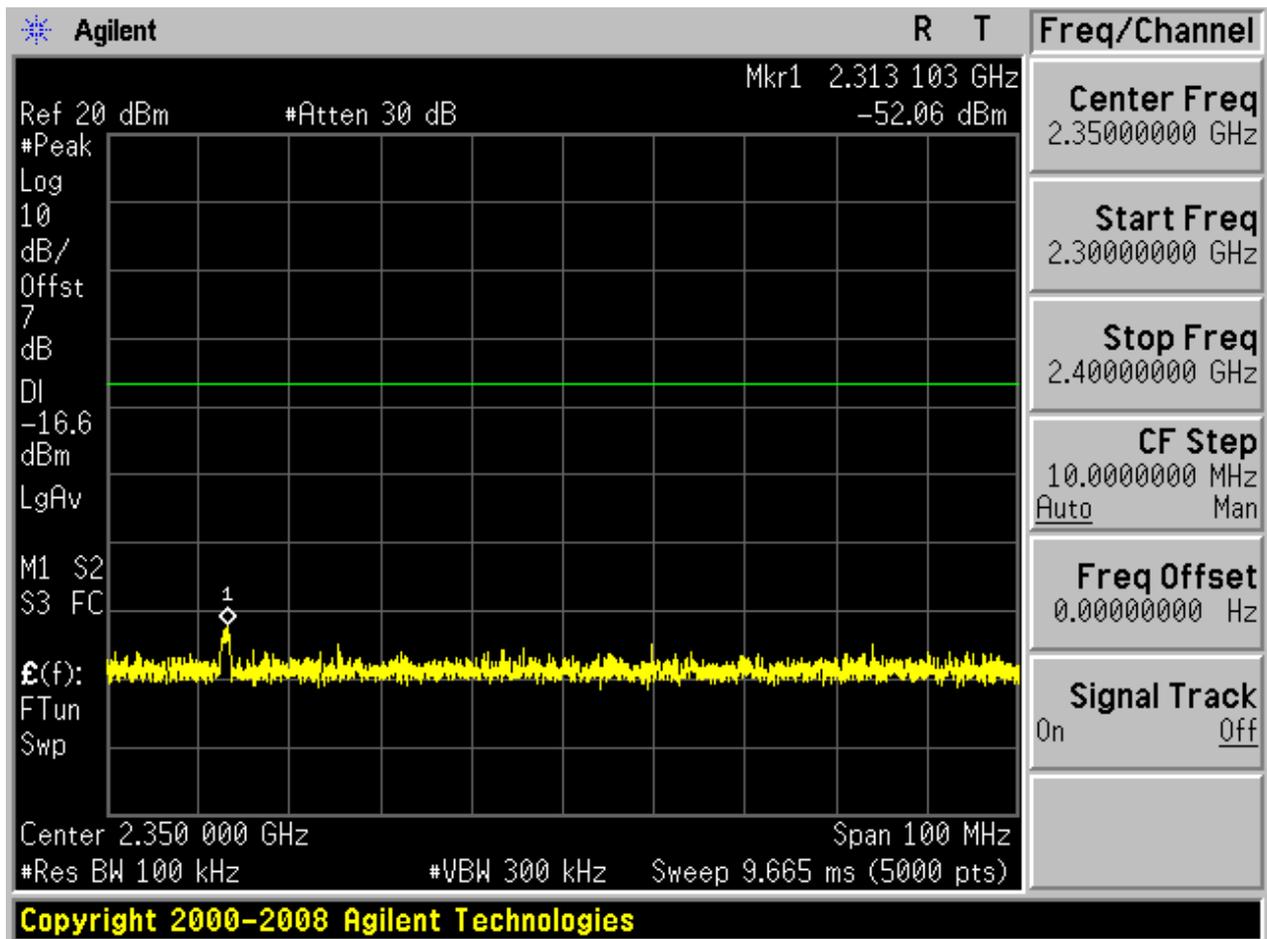


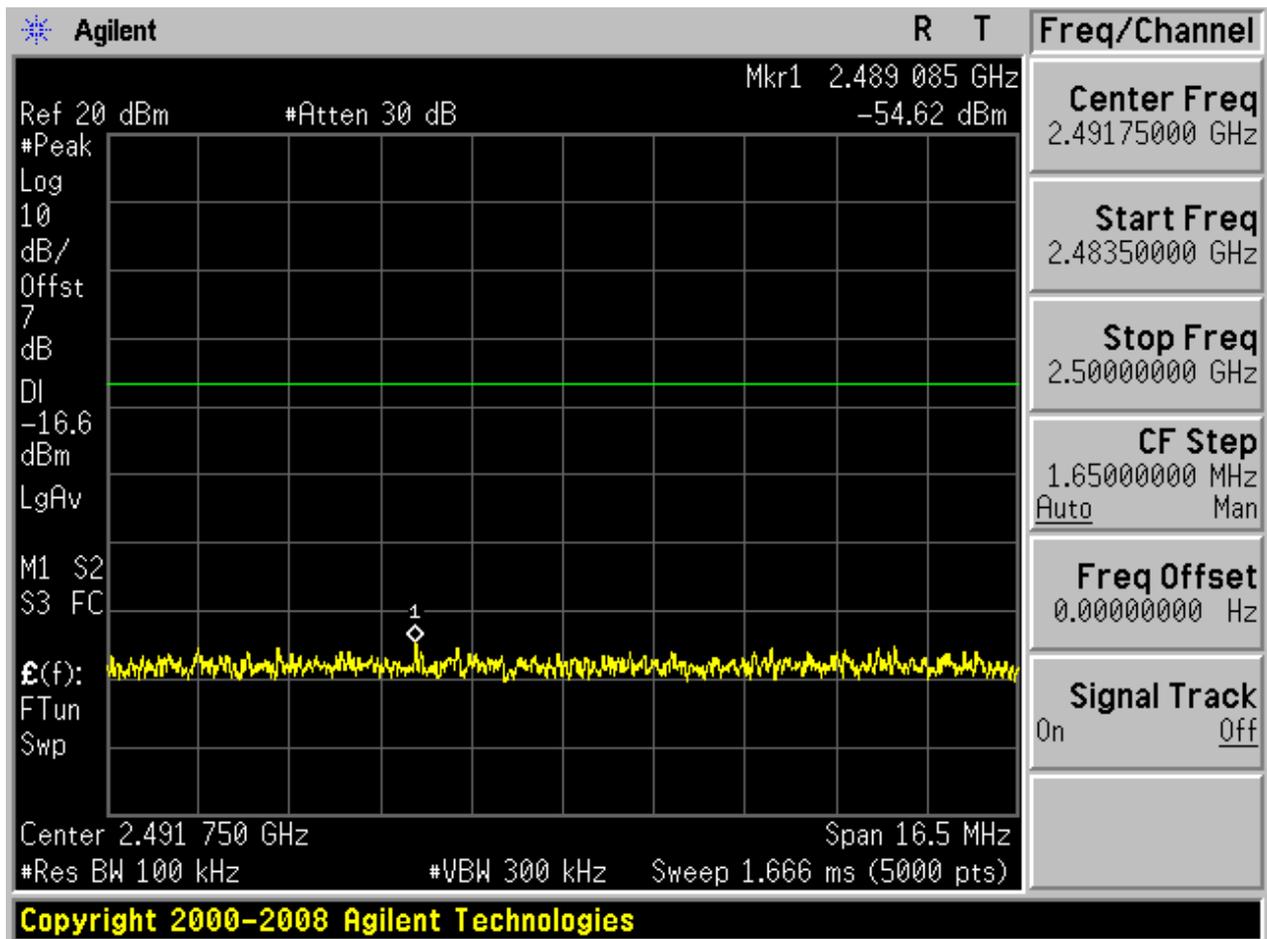

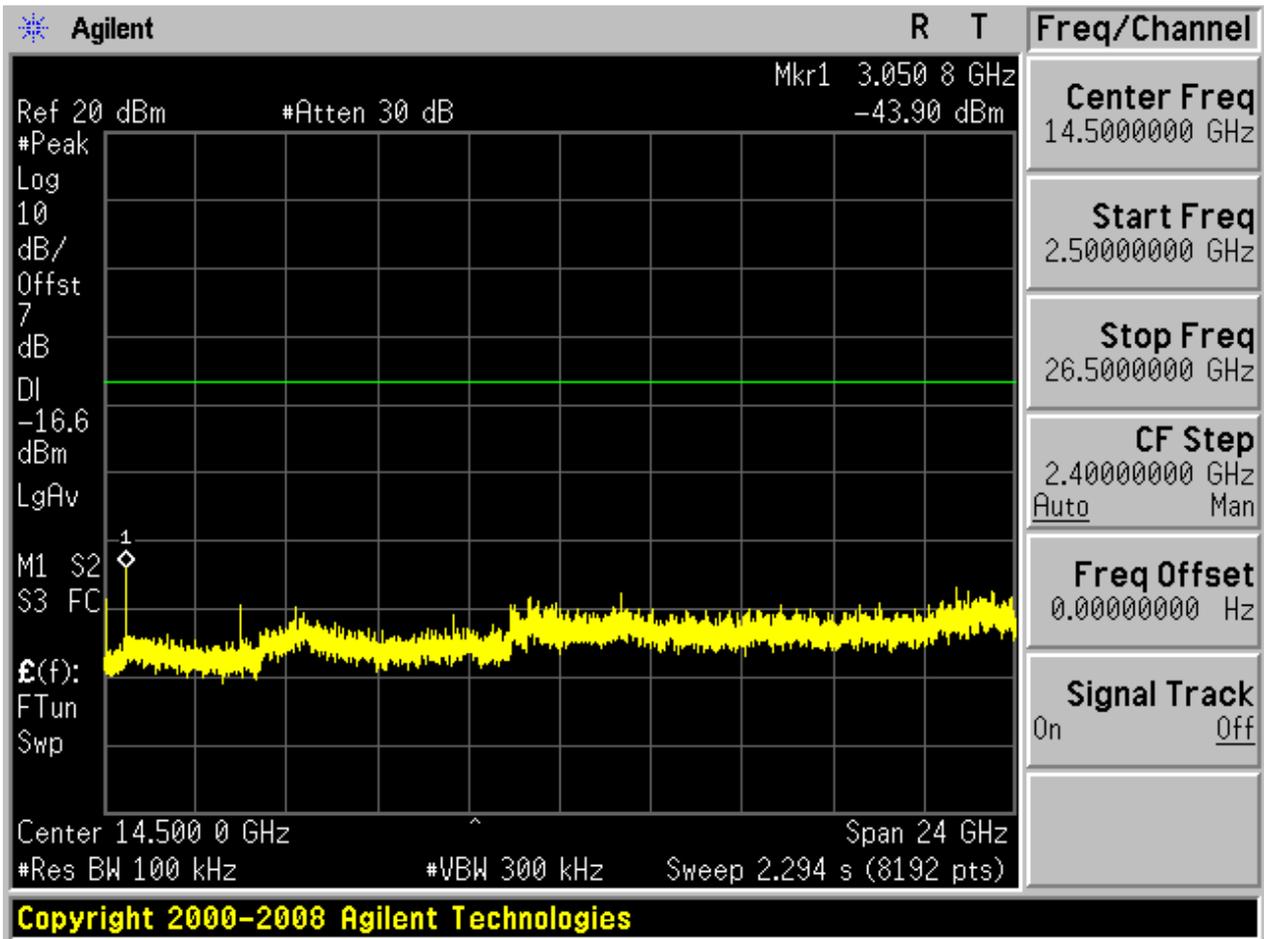



2.9 TM3_3DH5_Ch78


2.9.1 Pref

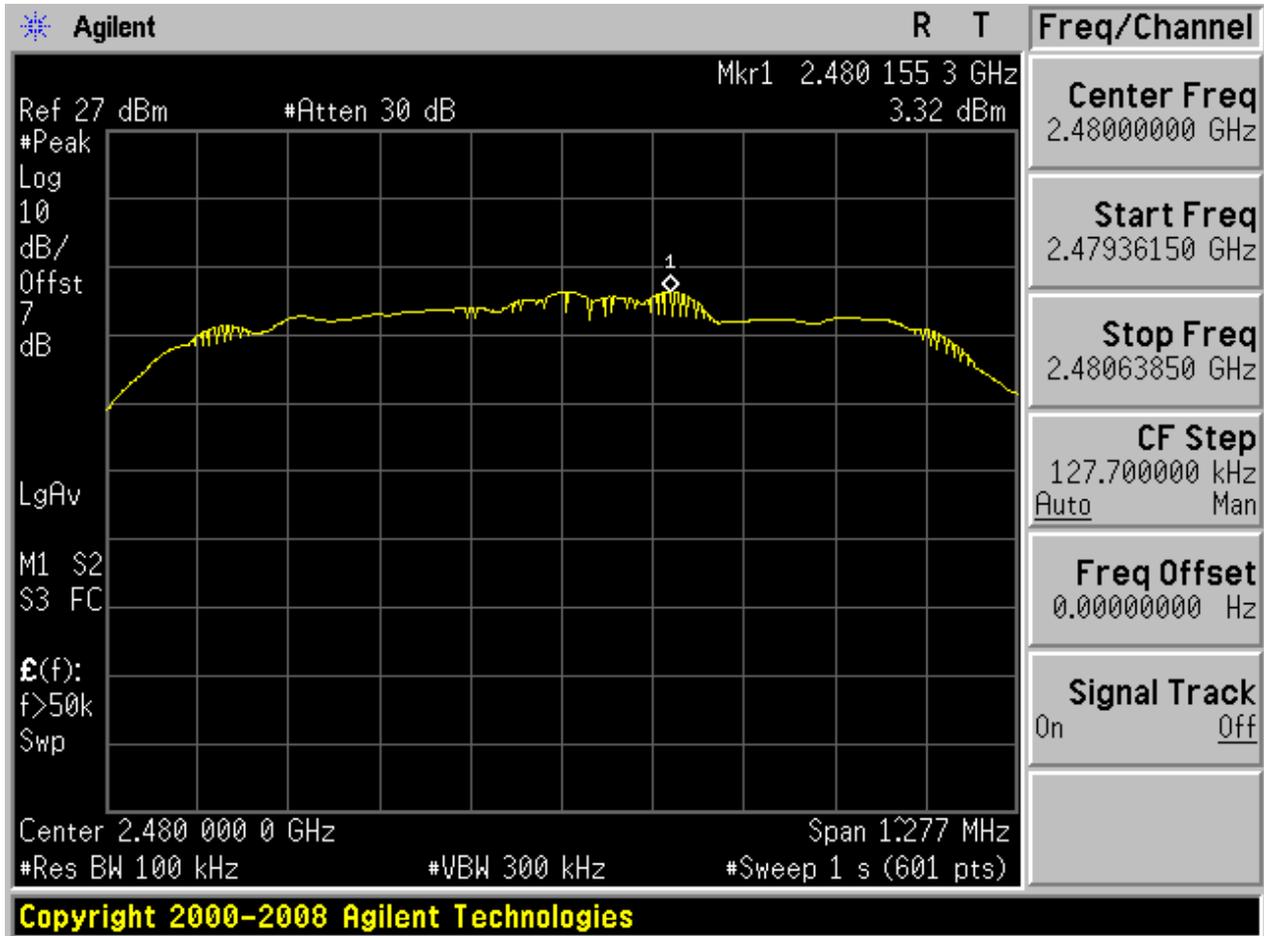



2.9.2 Puw

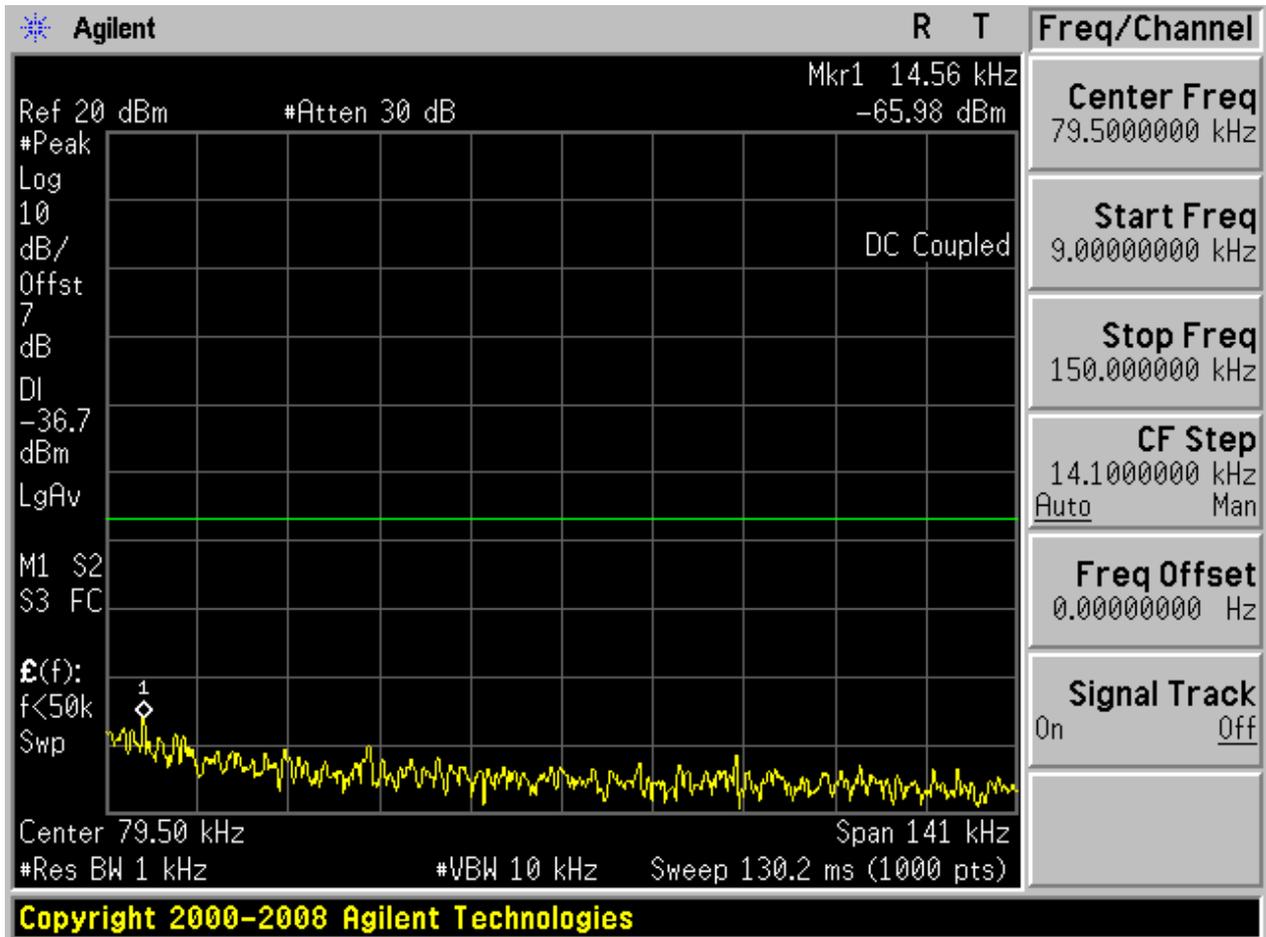


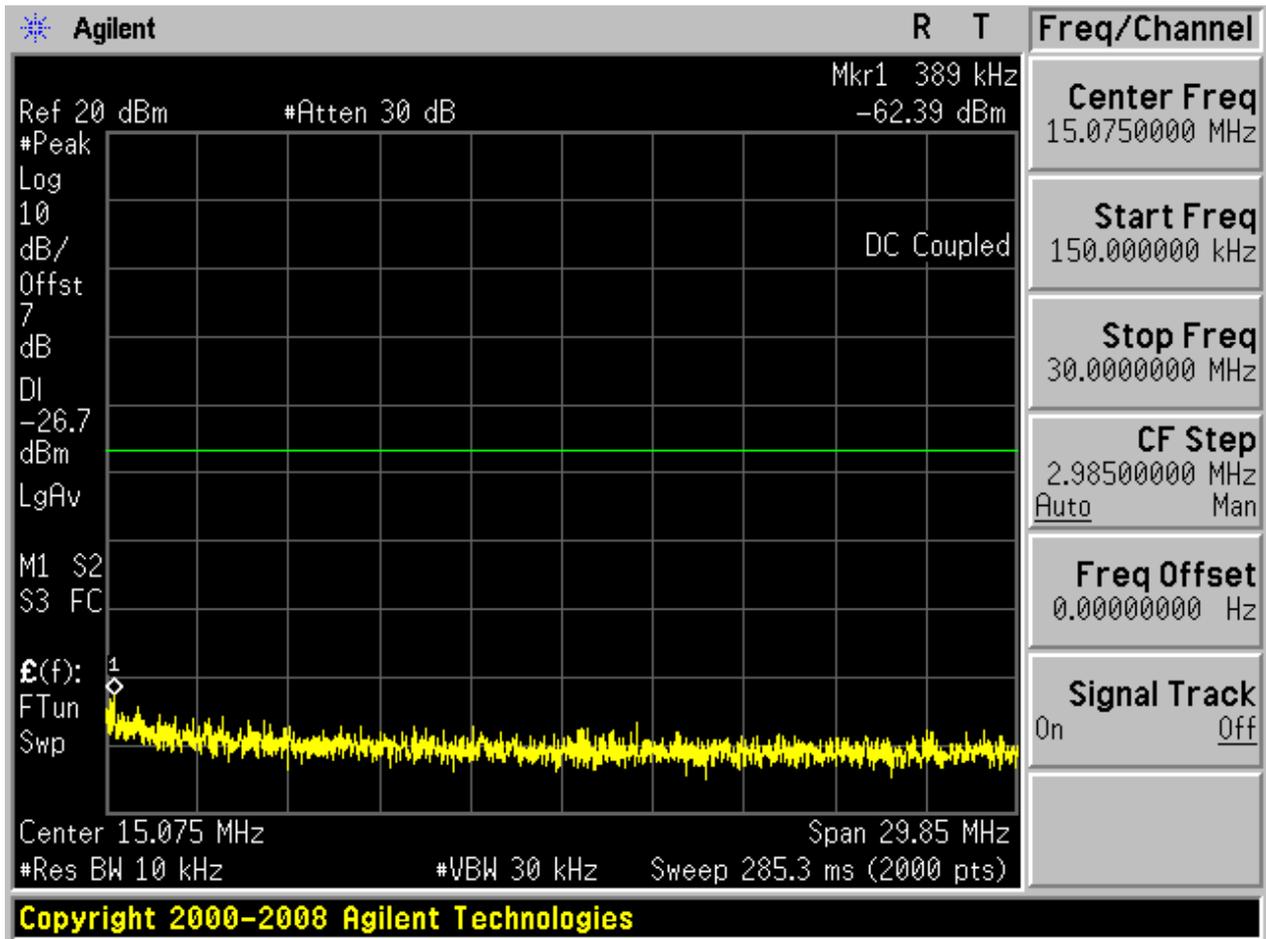

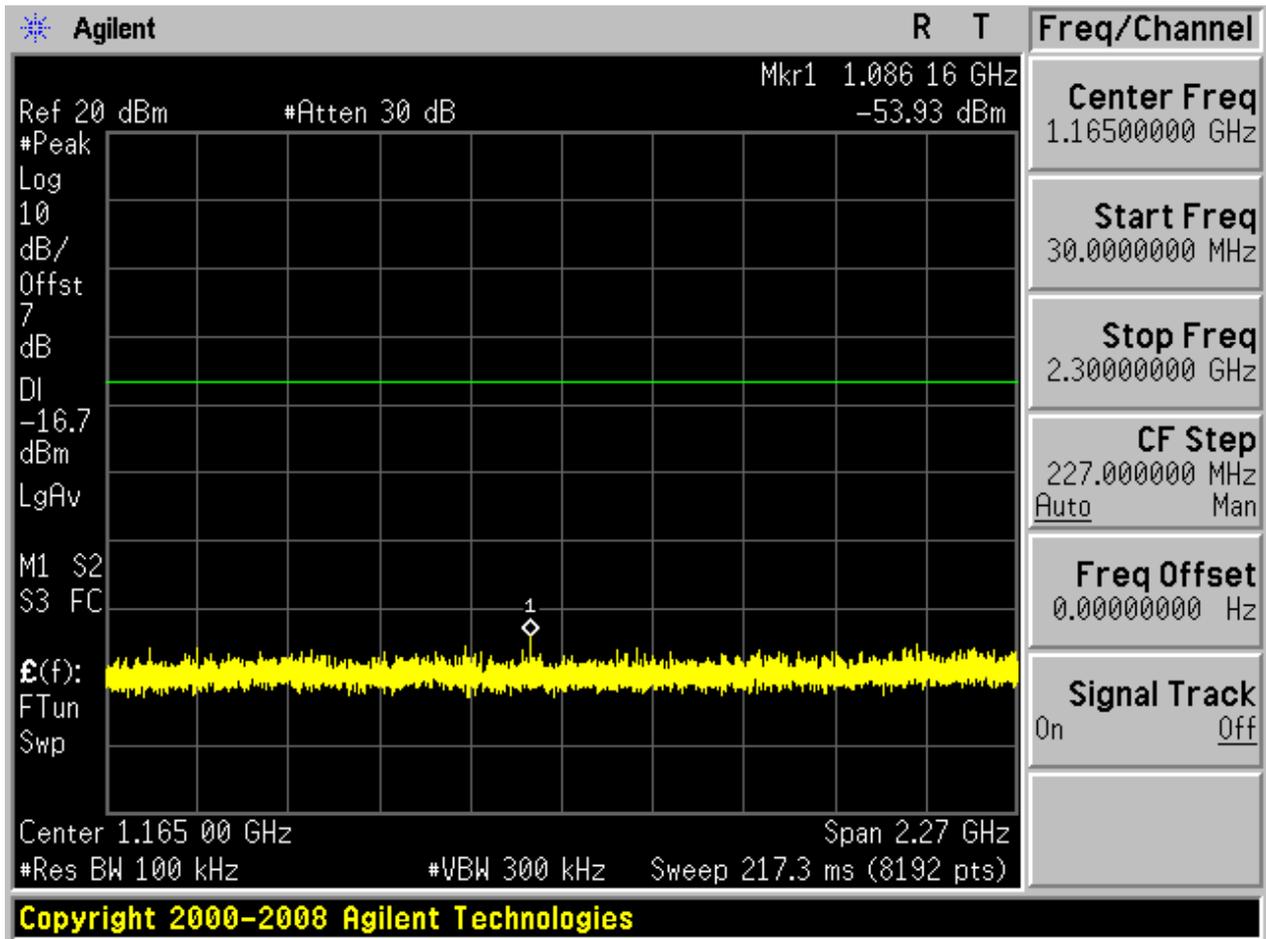

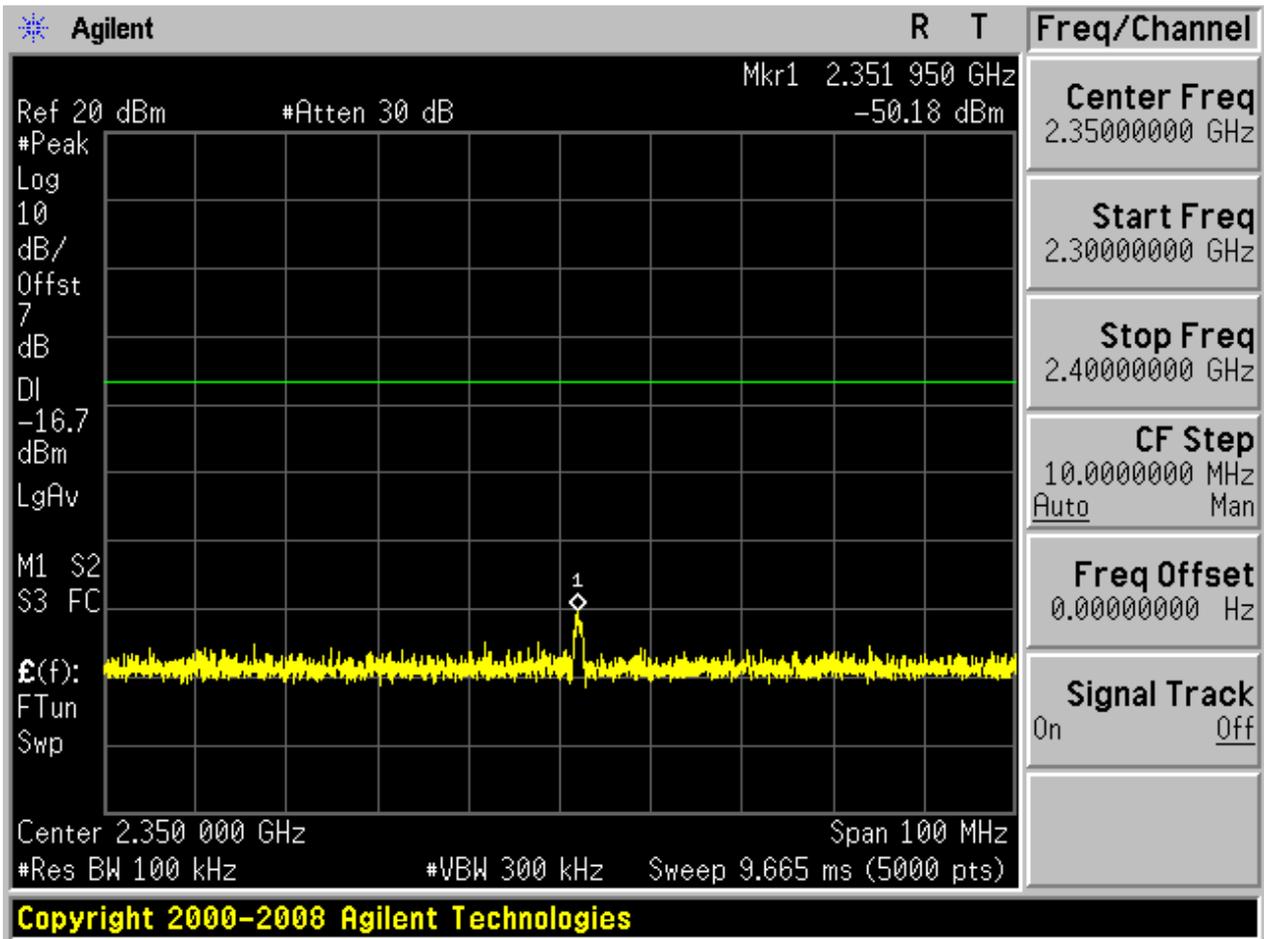

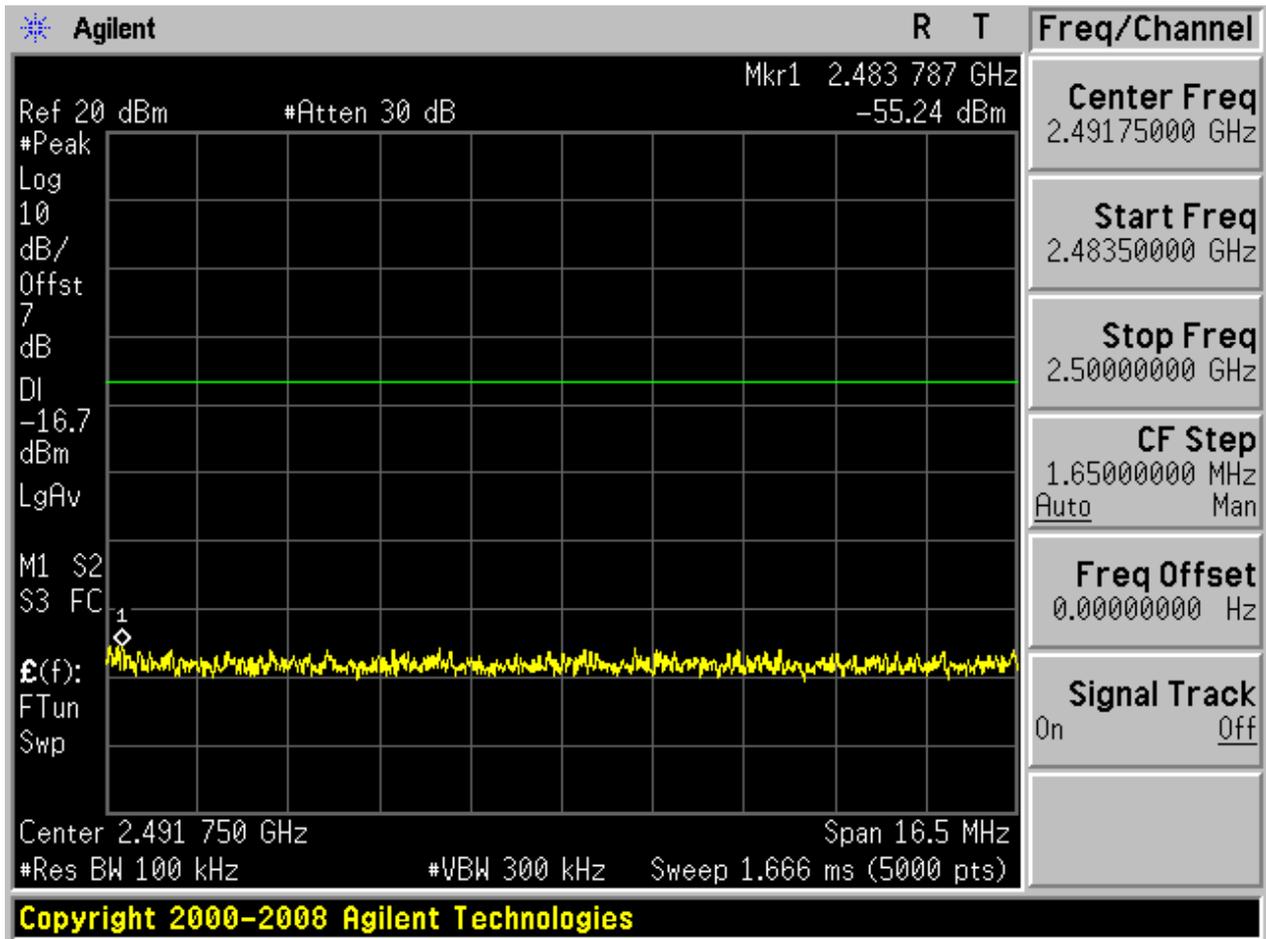

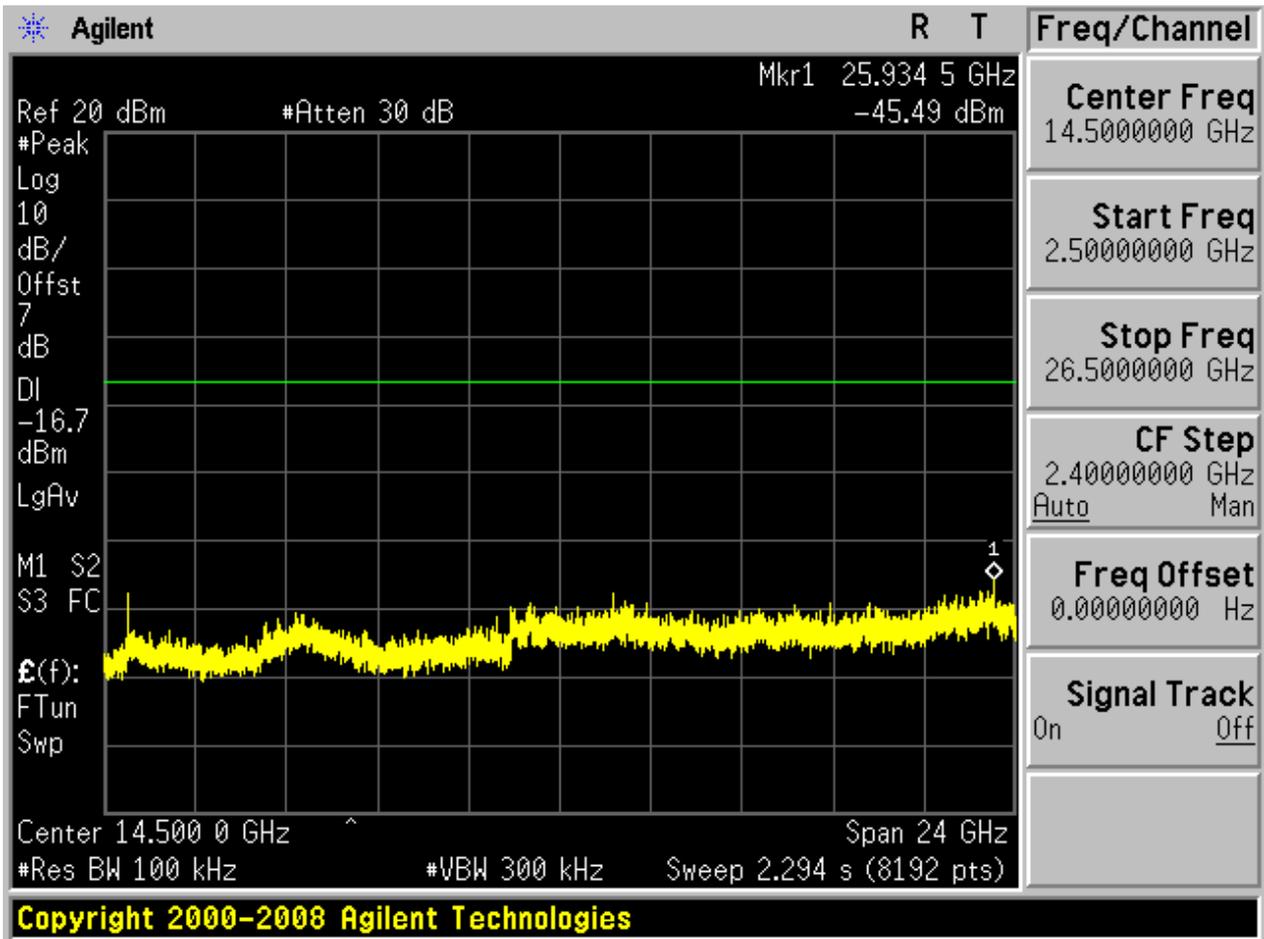



Appendix H: Radiated Emissions in the Restricted Bands

1 Result Table

The whole testing range is from “30 MHz to 26.5 GHz (10th harmonics)” is divided into 4 parts according to the test site settings, which are:

- (Part 1): Test range of “30 MHz to 1 GHz”,
- (Part 2): Test range of “18 GHz to 26.5 GHz”.
- (Part 3): Test range of “2.3 GHz to 2.5 GHz”, and
- (Part 4): Test range of “1 GHz to 18 GHz”.

In this Appendix, only the test results and plots under the worst case can be reported. In the result table, the “< Limit” denotes that “Not found obvious spikes or see marked spikes on plots and listed emissions records”.

Test Range	EUT Conf.	Emissions	Verdict
30 MHz to 1 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass
2.3 GHz to 2.5 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass
	TM1_DH5_Ch78 (Worst Conf.)	< Limit	Pass
1 GHz to 18 GHz	TM1_DH5_Ch0 (Worse Conf.)	< Limit	Pass
18 GHz to 26.5 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass


2 Result Plot

2.1 Test range of “30 MHz to 1 GHz”

2.1.1 TM1_DH5_Ch0 (Worst Conf.)

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.


Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

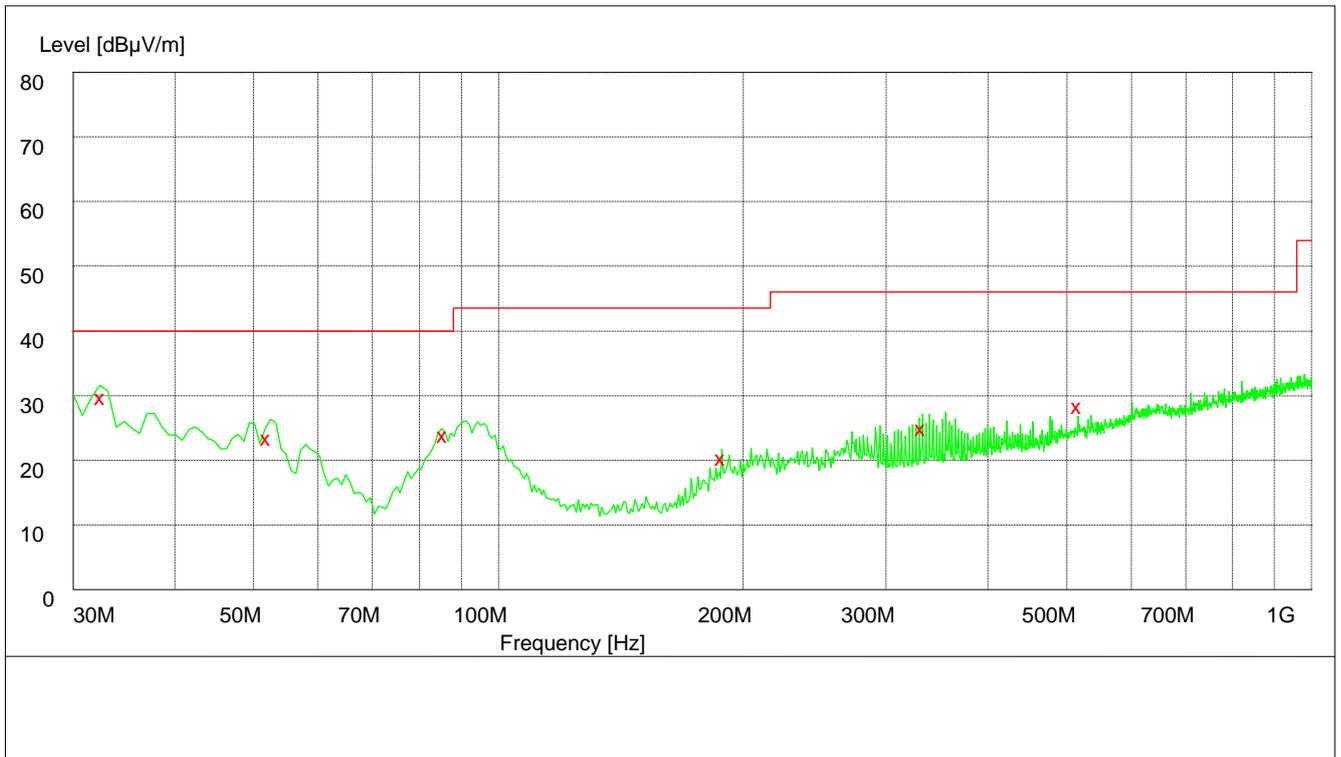

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Plarization
32.580000	29.50	11.8	40.0	10.5	100.0	236.00	VERTICAL
52.080000	23.20	12.8	40.0	16.8	100.0	267.00	VERTICAL
85.860000	23.70	10.5	40.0	16.3	128.0	82.00	VERTICAL
188.820000	20.10	11.9	43.5	23.4	166.0	0.00	HORIZONTAL
332.820000	24.80	16.6	46.0	21.2	100.0	326.00	HORIZONTAL
517.380000	28.20	20.7	46.0	17.8	200.0	315.00	HORIZONTAL

2.2 Test range of “18 GHz to 26.5 GHz”

Note: No peak found in pre- test.

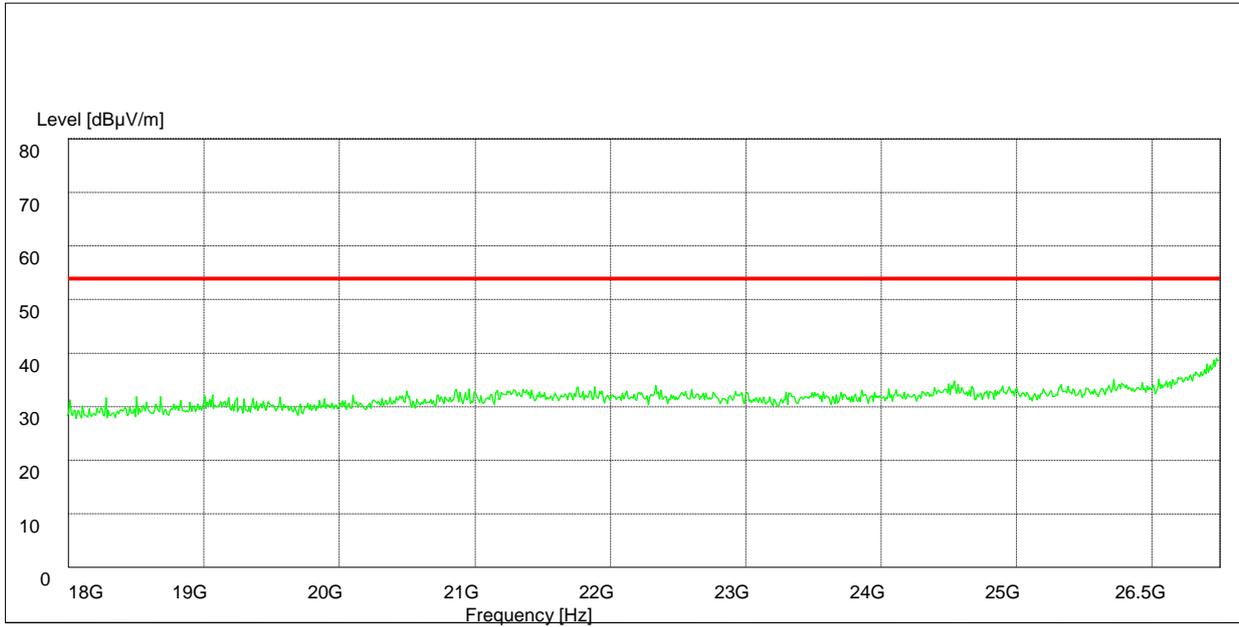

2.3 Test range of “2.3 GHz to 2.5 GHz”

2.3.1 TM1_DH5_Ch0 (Worst Conf.)


Note 1: The testing range of “2.3 GHz to 2.5 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.

Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

2.3.1.1 Test Mode:

2.3.1.1.1 Channel 00

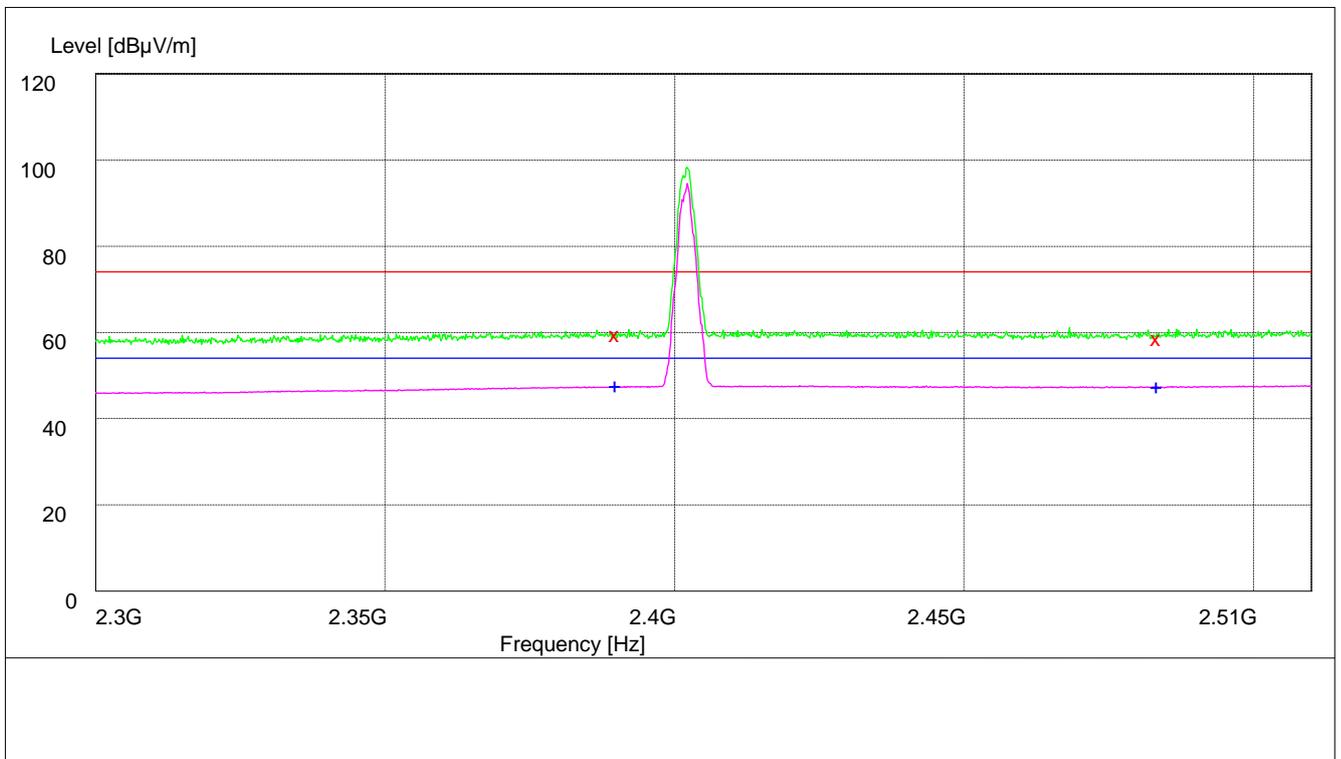

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	59.40	34.8	74.0	14.6	110.0	42.00	HORIZONTAL
2483.500000	58.50	35.1	74.0	15.5	102.0	201.00	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Height cm	Azimuth deg	Polarization

2390.000000	47.80	34.8	54.0	6.2	104.0	14.00	HORIZONTAL
2483.500000	47.60	35.1	54.0	6.4	101.0	315.00	VERTICAL

2.3.1.1.2 Channel 78

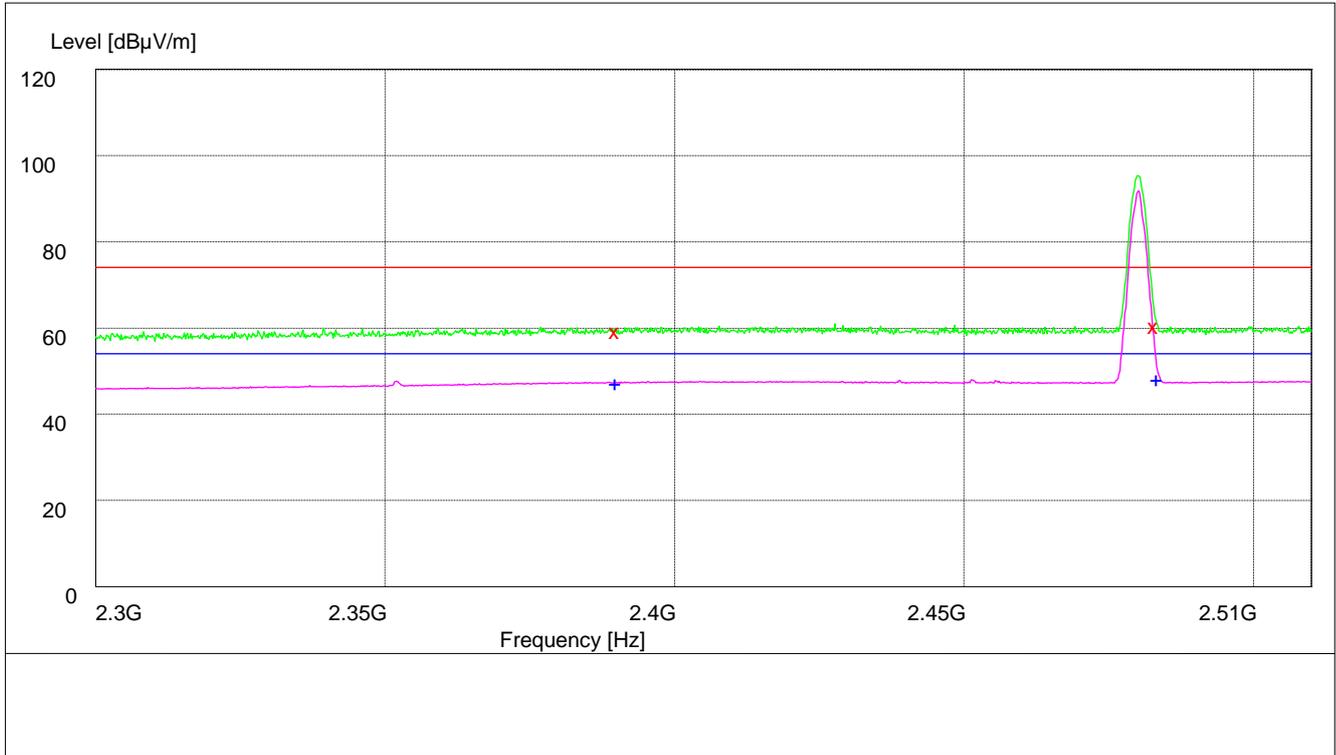

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	59.60	34.8	74.0	14.4	182.0	75.00	HORIZONTAL
2483.000000	60.90	35.1	74.0	13.1	107.0	107.00	HORIZONTAL


MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	47.60	34.8	54.0	6.4	107.0	260.00	VERTICAL
2483.500000	48.90	35.1	54.0	5.1	101.0	47.00	HORIZONTAL

2.4 Test range of “1 GHz to 18 GHz”

2.4.1 TM1_DH5_Ch0 (Worst Conf.)

- Note 1: The test results and plot for testing range of “1 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “1 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

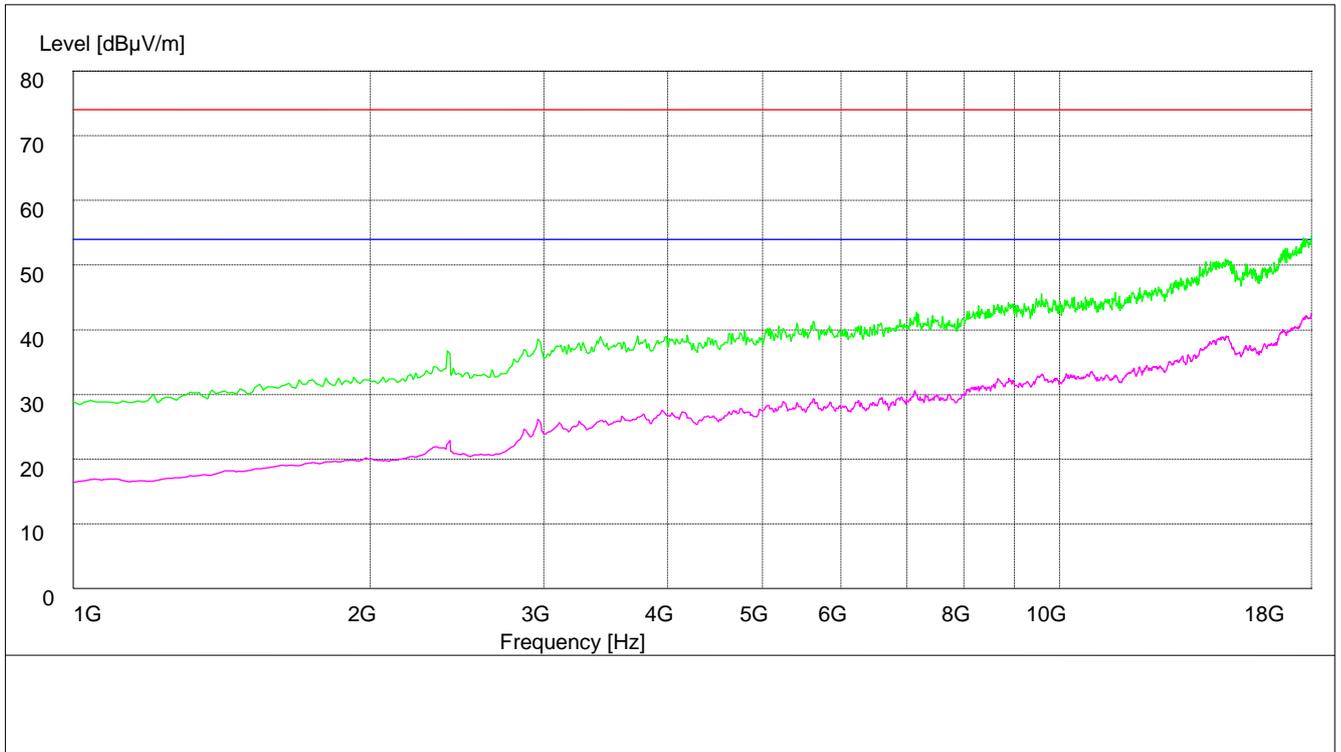



Appendix I: AC Power Line Conducted Emissions



1 Result Table


In this Appendix, only the test results and plots under the worst case can be reported.

EUT Conf.	Maximum Emissions	Verdict
TM1_DH5_Ch39	Not found obvious spikes or see marked spikes on plots and listed emissions records.	Pass

2 Result Plot

2.1 TM1_DH5_Ch39

Channel 39

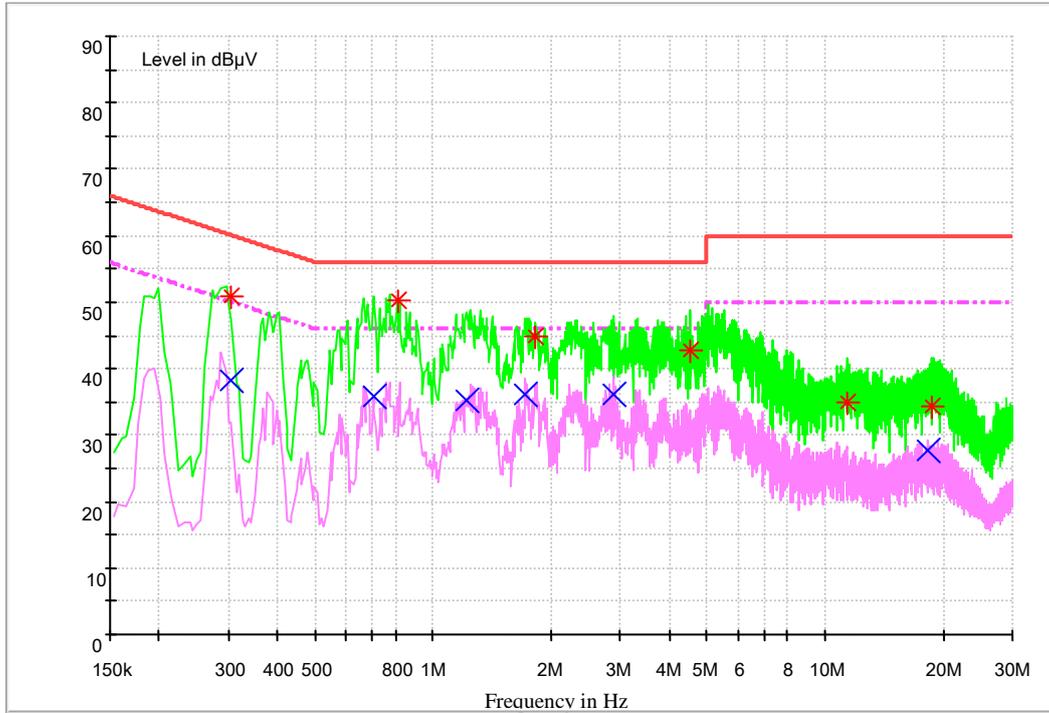

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.305505	50.8	9.7	60.1	9.3	N	FLO
0.812472	50.1	9.7	56.0	5.9	L1	FLO
1.822758	45.0	9.7	56.0	11.0	L1	FLO
4.536225	42.7	9.8	56.0	13.3	L1	FLO
11.394412	35.0	10.0	60.0	25.0	L1	FLO
18.766264	34.2	10.1	60.0	25.8	L1	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.303784	38.1	9.7	50.1	12.0	L1	FLO
0.709842	35.7	9.7	46.0	10.3	L1	FLO
1.218342	35.2	9.7	46.0	10.8	L1	FLO
1.723466	36.0	9.7	46.0	10.0	L1	FLO
2.896526	36.1	9.7	46.0	9.9	N	FLO
18.271590	27.6	10.1	50.0	22.4	L1	FLO

END