FCC TEST REPORT

Application No.:	HR/2019/40008
Applicant:	Huawei Technologies Co., Ltd.
Address of Applicant	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Manufacturer:	Huawei Technologies Co., Ltd.
Address of Manufacturer	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
EUT Description:	Mobile Phone
Model No.:	YAL-L21
Trade Mark:	Honor
FCC ID:	QISYAL-L21
Standards:	47 CFR FCC Part 2, Subpart J 47 CFR Part 15, Subpart C
Test Method	ANSI C63.10 (2013)
Date of Receipt:	2019/4/10
Date of Test:	2019/4/10 to 2019/4/24
Date of Issue:	2019/4/25
Test Result:	**PASS ***

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Derek Yang
Wireless Laboratory Manager

1 Version

Revision Record				
Version	**Chapter**	**Date**	**Modifier**	**Remark**
00		2019/4/25		Original

Authorized for issue by:				
Tested By		Mike Hu **(Mike Hu) /Project Engineer**		2019/4/25 **Date**
Checked By		David Chen **(David Chen) /Reviewer**		2019/4/25 **Date**

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Test Item	Test Requirement	Test method	Test Result	Result
AC Power Line Conducted Emission	15.207	ANSI C63.10 (2013)	Clause 4.3	PASS
Conducted Peak Output Power	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 4.4	PASS
20dB Emission Bandwidth & 99% Occupied Bandwidth	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 4.5	PASS
Carrier Frequencies Separation	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 4.6	PASS
Hopping Channel Number	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 4.7	PASS
Dwell Time	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 4.8	PASS
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10 (2013)	Clause 4.9	PASS
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10 (2013)	Clause 4.10	PASS
Radiated Spurious emissions	15.247(d) ;15.205/15.209	ANSI C63.10 (2013)	Clause 4.11	PASS
Restricted bands around fundamental frequency (Radiated Emission)	15.247(d) ;15.205/15.209	ANSI C63.10 (2013)	Clause 4.12	PASS

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Contents

3 General Information

3.1 Client Information

Applicant:	Huawei Technologies Co., Ltd.
Address of Applicant:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Manufacturer:	Huawei Technologies Co., Ltd.
Address of Manufacturer:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057
Telephone:	+86 (0) 755 2601 2053
Fax:	+86 (0) 755 2671 0594
E-mail:	ee.shenzhen@sgs.com

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

3.4 General Description of EUT

EUT Description::	Mobile Phone
Model No.:	YAL-L21
Trade Mark:	Honor
Hardware Version:	HL2YALEM01
Software Version:	9.1.0.101（SP1C900E101R1P2）
Operation Frequency:	2400MHz~2483.5MHz fc = 2402 MHz + N * 1 MHz, where: -fc = “Operating Frequency” in MHz, -N = “Channel Number” with the range from 0 to 78.
Bluetooth Version:	Bluetooth V3.0 +EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	☒ Portable Device, ☐Module
Antenna Type:	☐ External, ☒ Integrated
Antenna Gain:	-1.5dBi
Power Supply	☒ AC/DC Adapter; ☐ Battery ☐ PoE:; ☐ Other:
Accsessories	Model：HW-050450E01 Manufacturer：Huawei Technologies Co.,Ltd. Input Voltage：100-240V ~50/60Hz 0.75A Output Voltage：5V ⎓ 2A OR 4.5V ⎓ 5A OR 5V ⎓ 4.5A Model：HW-050450A01 Manufacturer：Huawei Technologies Co.,Ltd. Input Voltage：100-240V ~50/60Hz 0.75A Output Voltage：5V ⎓ 2A OR 4.5V ⎓ 5A OR 5V ⎓ 4.5A Model：HW-050450E00 Manufacturer：Huawei Technologies Co.,Ltd. Input Voltage：100-240V ~50/60Hz 0.75A Output Voltage：5V ⎓ 2A OR 4.5V ⎓ 5A OR 5V ⎓ 4.5A Model：HW-050450A00 Manufacturer：Huawei Technologies Co.,Ltd. Input Voltage：100-240V ~50/60Hz 0.75A Output Voltage：5V ⎓ 2A OR 4.5V ⎓ 5A OR 5V ⎓ 4.5A Model：HW-050450B00 Manufacturer：Huawei Technologies Co.,Ltd. Input Voltage：100-240V ~50/60Hz 0.75A

	Output Voltage：5V ⎓ 2A OR 4.5V ⎓ 5A OR 5V ⎓ 4.5A Model：HW-050450U00 Manufacturer：Huawei Technologies Co.,Ltd. Input Voltage：100-240V ~50/60Hz 0.75A Output Voltage：5V ⎓ 2A OR 4.5V ⎓ 5A OR 5V ⎓ 4.5A

Operation Frequency each of channel							
Channel	**Frequency**	**Channel**	**Frequency**	**Channel**	**Frequency**	**Channel**	**Frequency**
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle

frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3.5 Test Environment

Operating Environment	
Temperature:	24.0 °C
Humidity:	55 % RH
Atmospheric Pressure:	101.30 KPa

3.6 Description of Support Units

The EUT has been tested independent unit.

4 Test results and Measurement Data

4.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -1.5dBi.	

4.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

4.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

4.2.2 Conclusion

Standard Requirement:
The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.
Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.
The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.
Compliance for section 15.247(a)(1):
According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

> Number of shift register stages: 9
> Length of pseudo-random sequence: 29 -1 = 511 bits
> Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the RF system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels. The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

4.3 AC Power Line Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		

Test Setup:	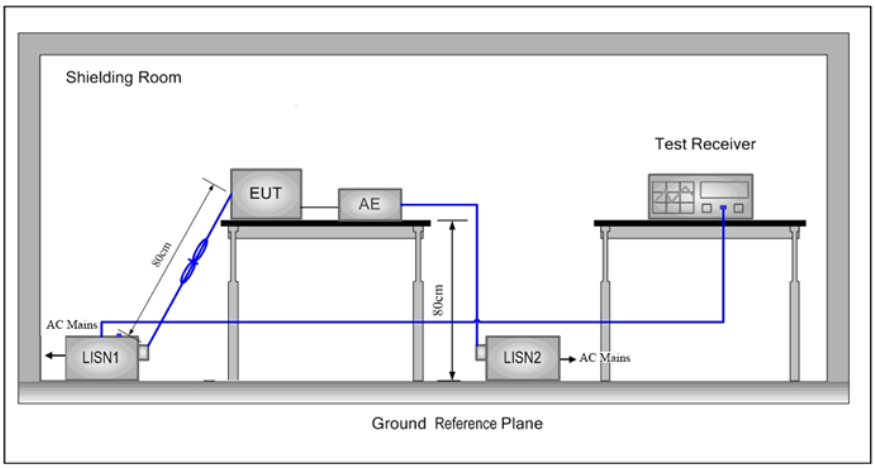
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel. Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation at the lowest channel is the worst case. Charge + Transmitting mode Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

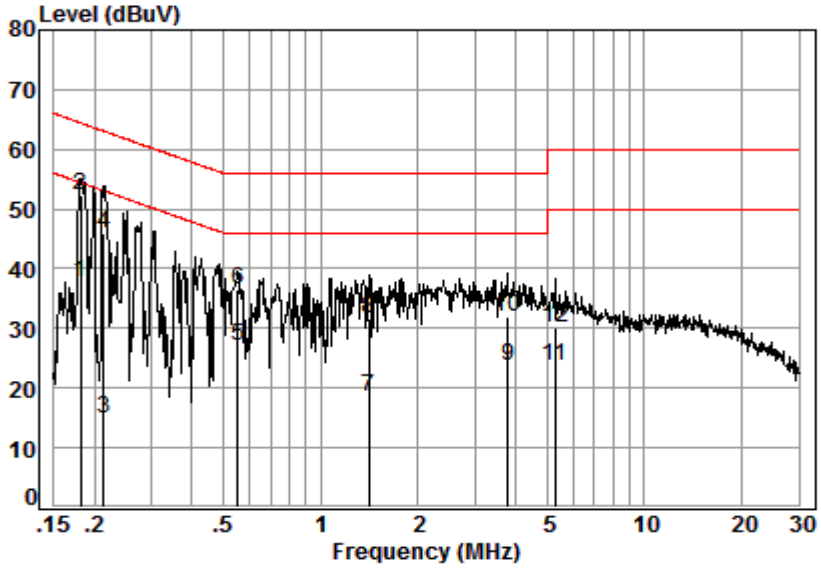

Site : Shielding Room
Condition: Line
Job No. : 12626CR
Test mode: b

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.18	0.02	9.66	28.15	37.83	54.42	-16.59	Average
2	0.18	0.02	9.66	42.50	52.18	64.42	-12.24	QP
3	0.21	0.02	9.66	5.26	14.94	53.10	-38.16	Average
4	0.21	0.02	9.66	36.30	45.98	63.10	-17.12	QP
5	0.56	0.06	9.67	17.25	26.98	46.00	-19.02	Average
6	0.56	0.06	9.67	26.75	36.48	56.00	-19.52	QP
7	1.41	0.12	9.73	8.84	18.69	46.00	-27.31	Average
8	1.41	0.12	9.73	21.67	31.52	56.00	-24.48	QP
9	3.78	0.16	9.72	13.70	23.58	46.00	-22.42	Average
10	3.78	0.16	9.72	22.18	32.06	56.00	-23.94	QP
11	5.28	0.17	9.75	13.75	23.67	50.00	-26.33	Average
12	5.28	0.17	9.75	20.31	30.23	60.00	-29.77	QP

Neutral line:

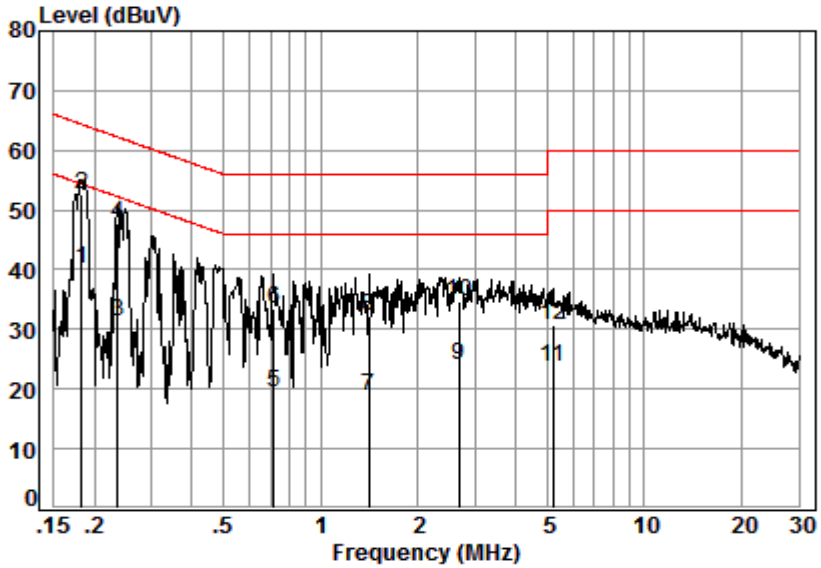

Site : Shielding Room
Condition: Neutral
Job No. : 12626CR
Test mode: b

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.18	0.02	9.64	30.38	40.04	54.37	-14.33	Average
2	0.18	0.02	9.64	42.89	52.55	64.37	-11.82	QP
3	0.24	0.03	9.64	21.75	31.42	52.22	-20.80	Average
4	0.24	0.03	9.64	38.05	47.72	62.22	-14.50	QP
5	0.72	0.08	9.66	9.83	19.57	46.00	-26.43	Average
6	0.72	0.08	9.66	23.84	33.58	56.00	-22.42	QP
7	1.41	0.12	9.70	8.89	18.71	46.00	-27.29	Average
8	1.41	0.12	9.70	22.42	32.24	56.00	-23.76	QP
9	2.68	0.16	9.68	14.09	23.93	46.00	-22.07	Average
10	2.68	0.16	9.68	24.89	34.73	56.00	-21.27	QP
11	5.22	0.17	9.72	13.85	23.74	50.00	-26.26	Average
12	5.22	0.17	9.72	20.95	30.84	60.00	-29.16	QP

Remarks:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

4.4 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.5
Test Setup:	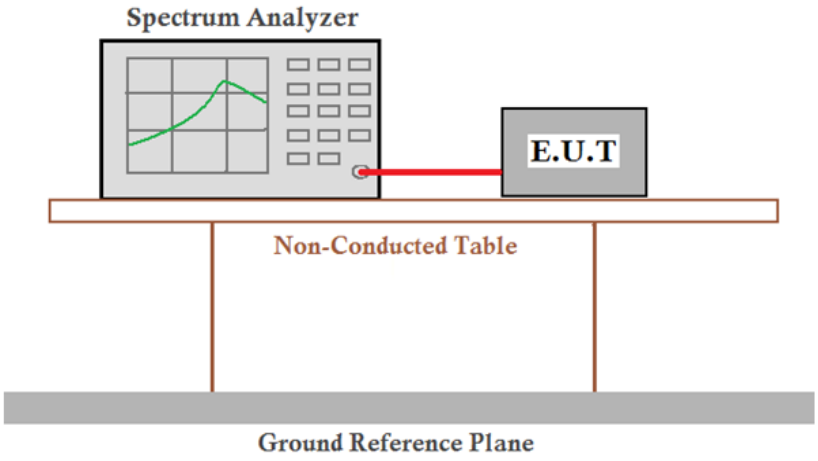
Limit:	(20.97dBm) 125mW
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of π/4DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

4.4.1 Test Results

Measurement Data of Average power:

GFSK mode		
Test channel	**Average Output Power (dBm)**	**Result**
Lowest	14.49	Report purpose only
Middle	15.12	Report purpose only
Highest	14.23	Report purpose only
π/4DQPSK mode		
Test channel	**Average Output Power (dBm)**	**Result**
Lowest	12.61	Report purpose only
Middle	12.98	Report purpose only
Highest	11.47	Report purpose only
8DPSK mode		
Test channel	**Average Output Power (dBm)**	**Result**
Lowest	12.61	Report purpose only
Middle	12.98	Report purpose only
Highest	11.49	Report purpose only

Measurement Data of Peak power:

GFSK mode			
Test channel	**Peak Output Power (dBm)**	**Limit (dBm)**	**Result**
Lowest	16.25	20.97	Pass
Middle	17.51	20.97	Pass
Highest	15.06	20.97	Pass
π/4DQPSK mode			
Test channel	**Peak Output Power (dBm)**	**Limit (dBm)**	**Result**
Lowest	16.92	20.97	Pass
Middle	18.19	20.97	Pass
Highest	15.78	20.97	Pass
8DPSK mode			
Test channel	**Peak Output Power (dBm)**	**Limit (dBm)**	**Result**
Lowest	17.19	20.97	Pass
Middle	18.43	20.97	Pass
Highest	16.02	20.97	Pass

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.4.2 Test plots

Test mode:	GFSK	Test channel:	Lowest

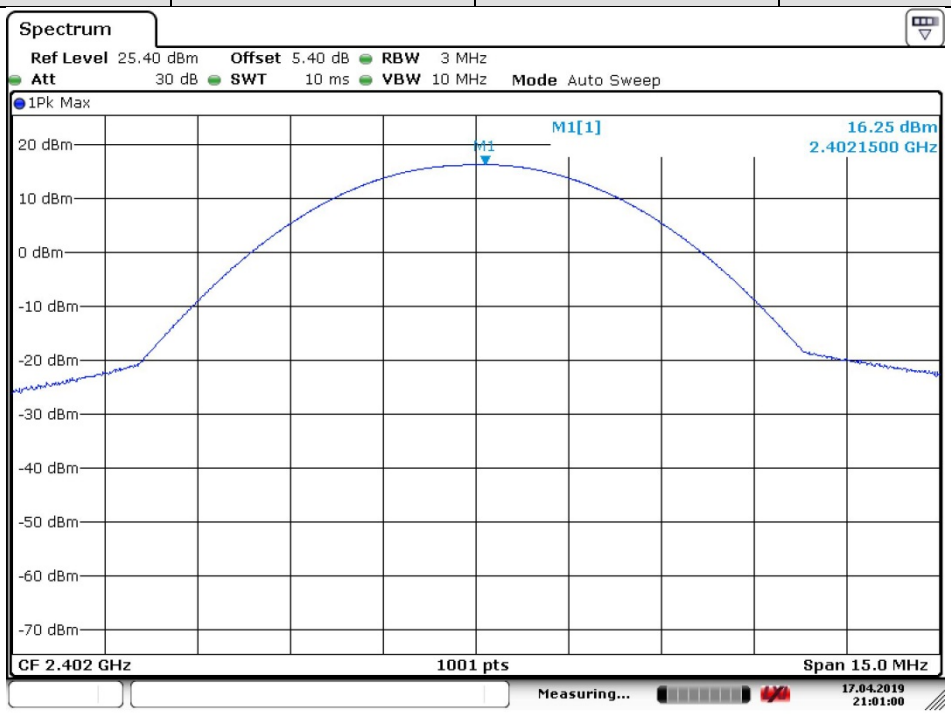

Date: 17.APR.2019 21:01:01

Test mode:	GFSK	Test channel:	Middle

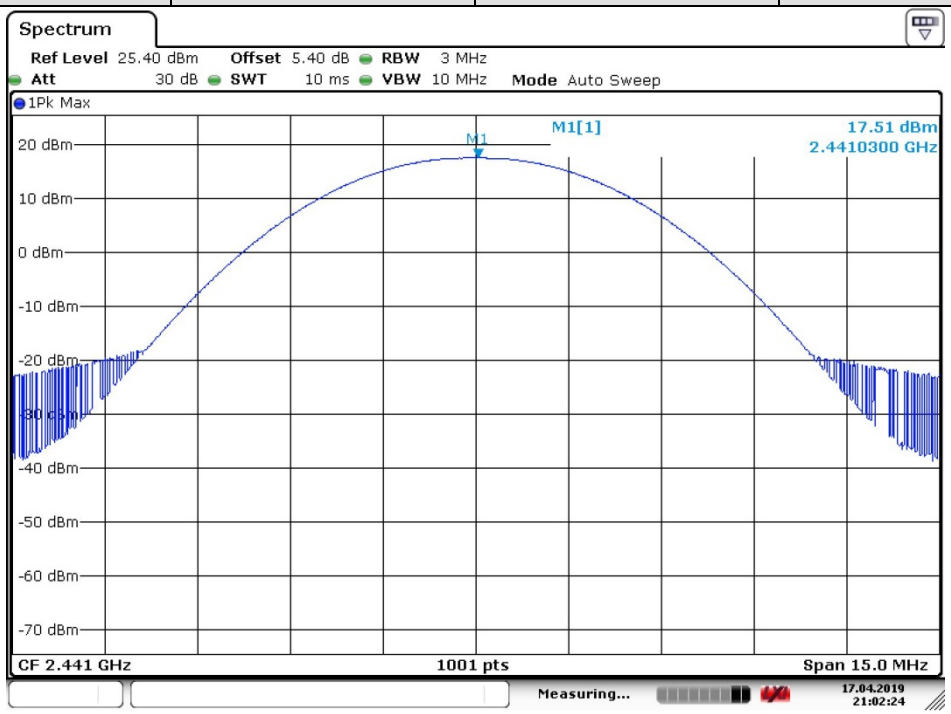

Date: 17.APR.2019 21:02:24

Test mode:	GFSK	Test channel:	Highest

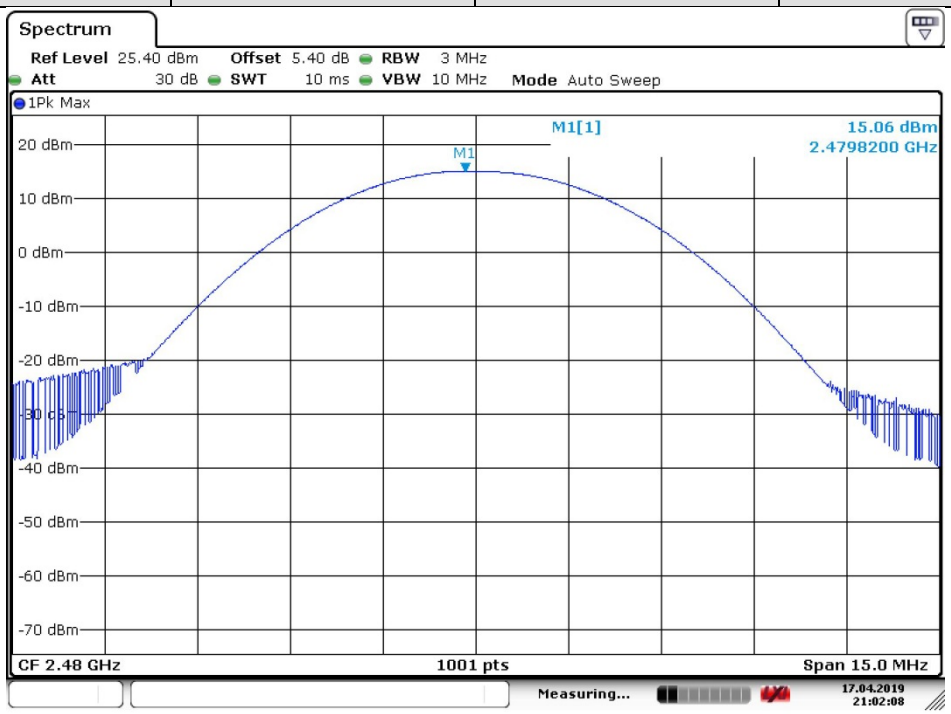

Date: 17.APR.2019 21:02:08

Test mode:	π/4DQPSK	Test channel:	Lowest

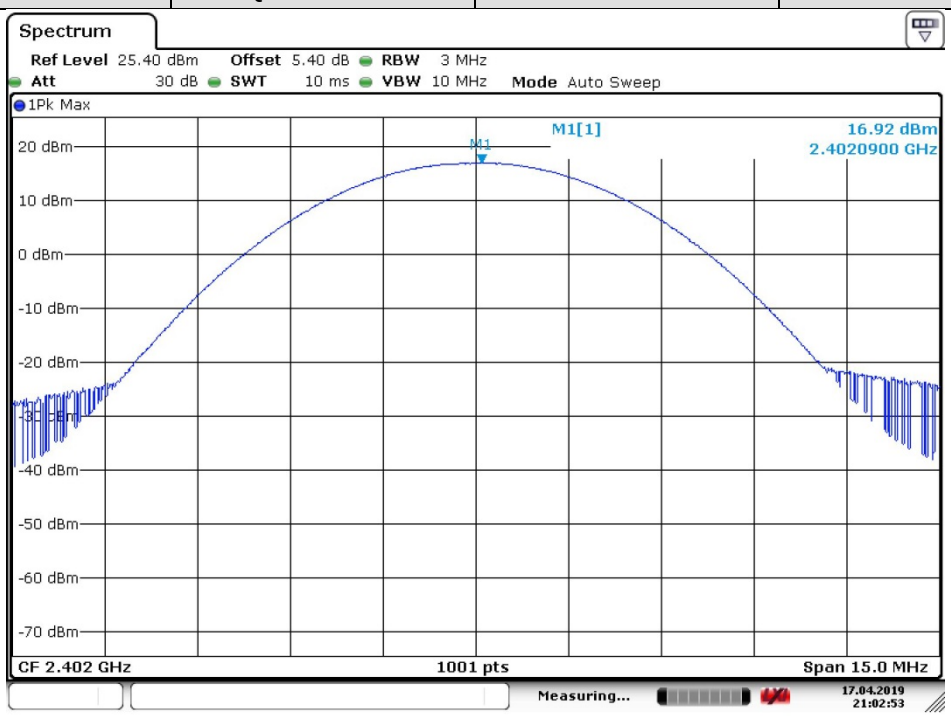

Date: 17.APR.2019 21:02:53

Test mode:	π/4DQPSK	Test channel:	Middle

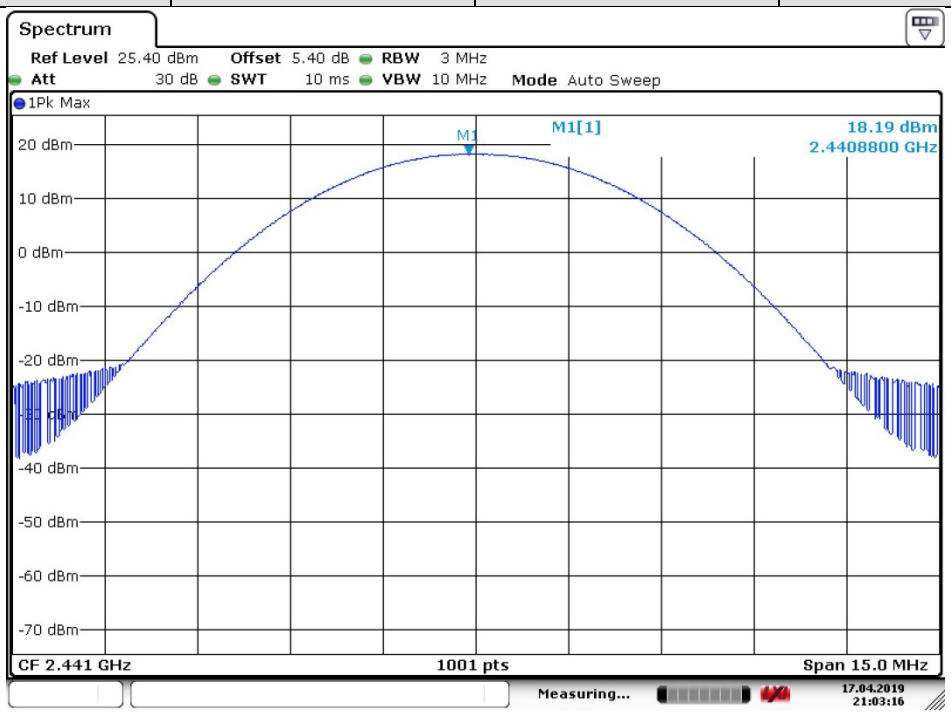

Date: 17.APR.2019 21:03:17

Test mode:	π/4DQPSK	Test channel:	Highest

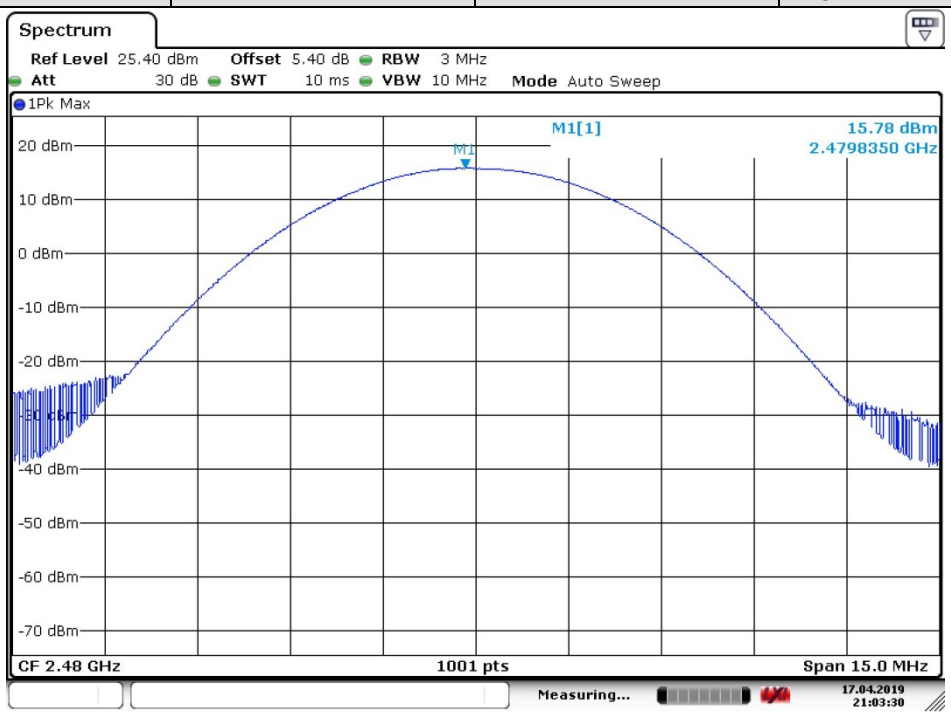

Date: 17.APR.2019 21:03:30

Test mode:	8DPSK	Test channel:	Lowest

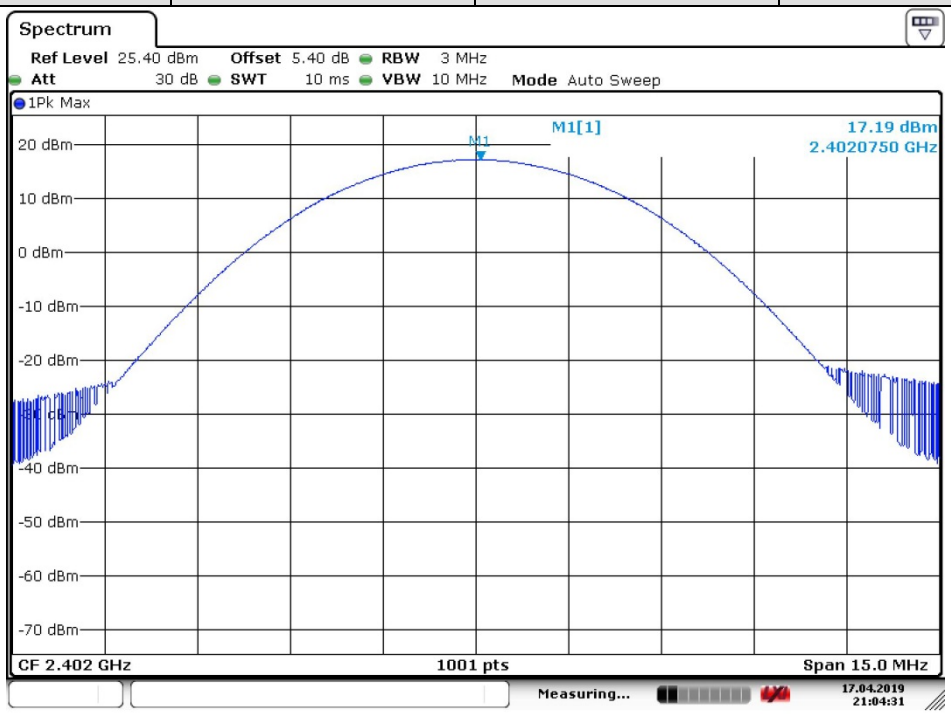

Date: 17.APR.2019 21:04:32

Test mode:	8DPSK	Test channel:	Middle

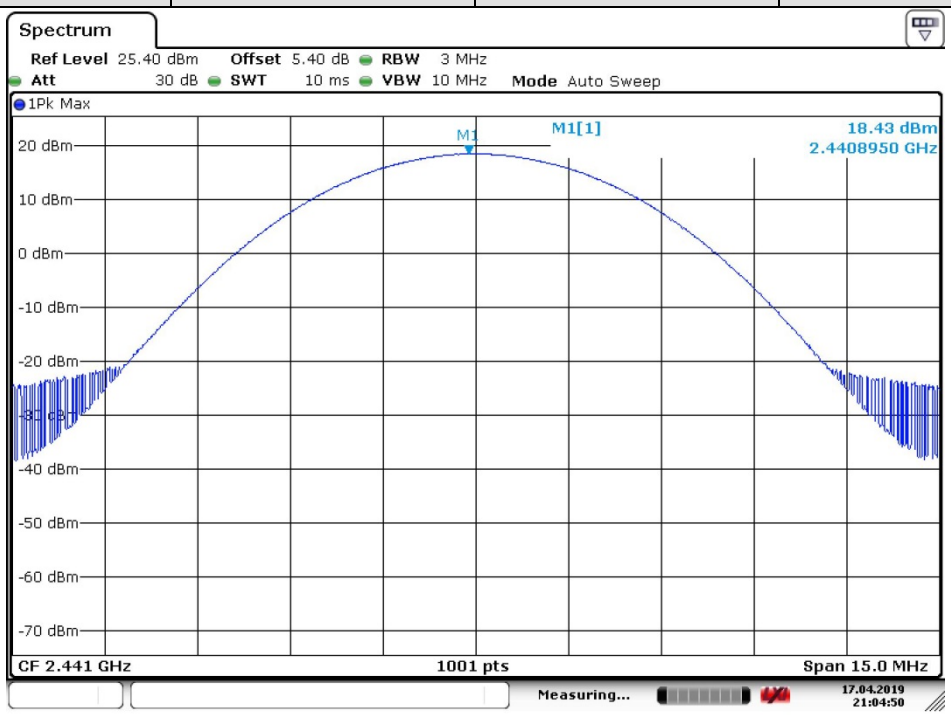

Date: 17.APR.2019 21:04:50

Test mode:	8DPSK	Test channel:	Highest

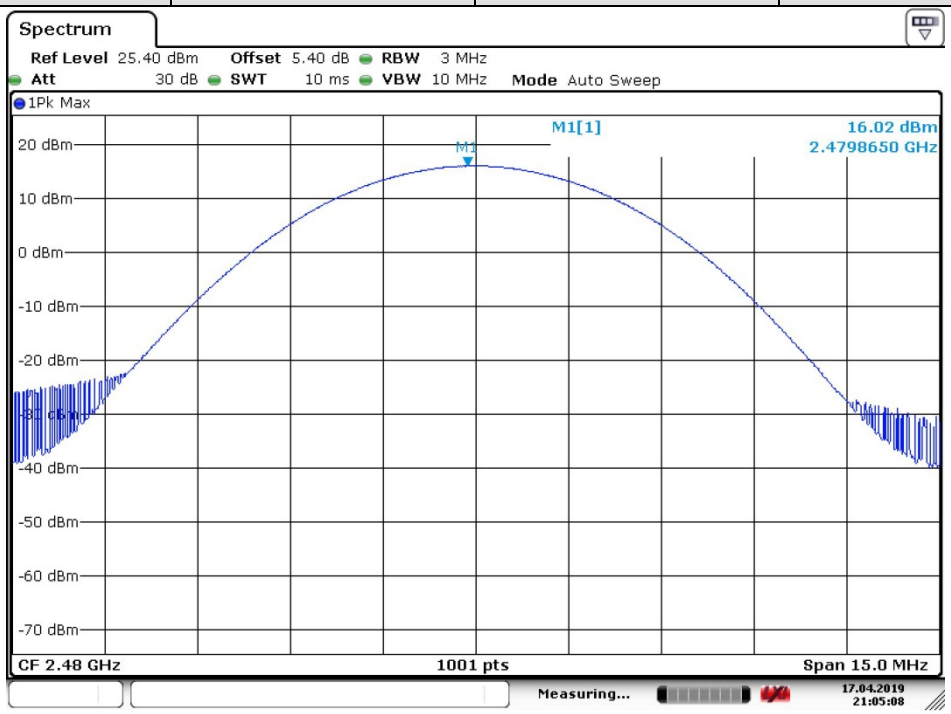

Date: 17.APR.2019 21:05:08

4.5 20dB Emission Bandwidth & 99% Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.7
Test Setup:	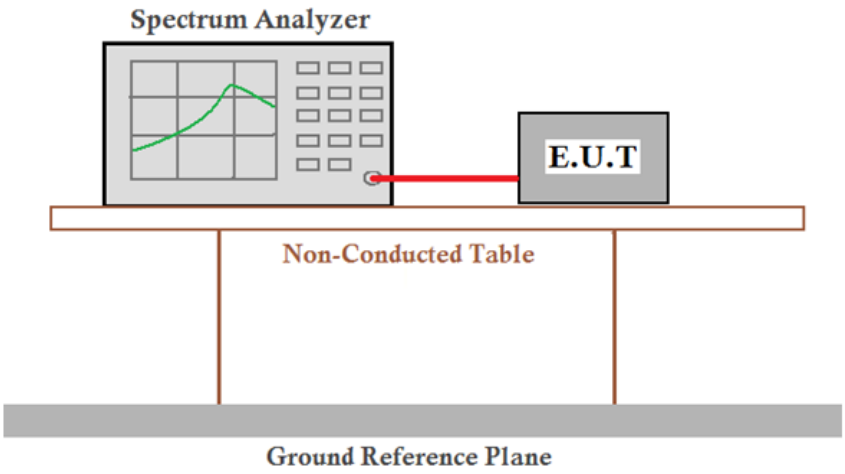
Limit:	NA
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of π/4DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

4.5.1 Test Results

Mode	Test Channel	99% Occupied Bandwidth (KHz)	20dB Emission Bandwidth (KHz)	Result
GFSK	Lowest	881.1	962.0	Pass
	Middle	872.1	956.0	Pass
	Highest	875.1	956.0	Pass
π/4DQPSK	Lowest	1183.8	1318.7	Pass
	Middle	1183.8	1315.7	Pass
	Highest	1180.8	1318.7	Pass
8DPSK	Lowest	1180.8	1306.7	Pass
	Middle	1186.8	1303.7	Pass
	Highest	1186.8	1306.7	Pass

4.5.2 Test plots

4.5.2.1 GFSK _Lowest Channel

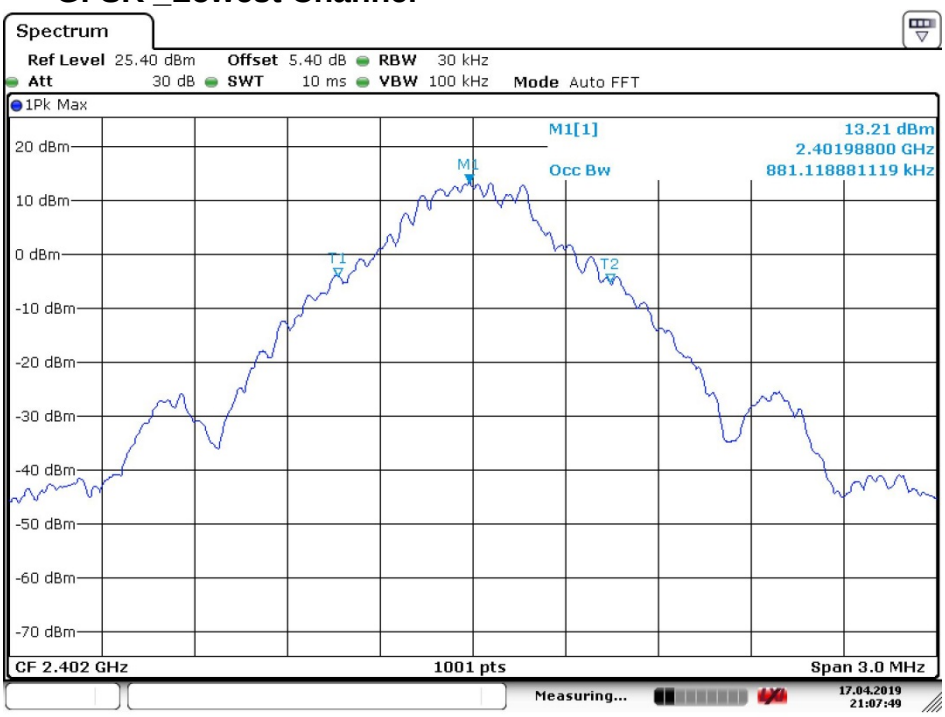

Date: 17.APR.2019 21:07:49

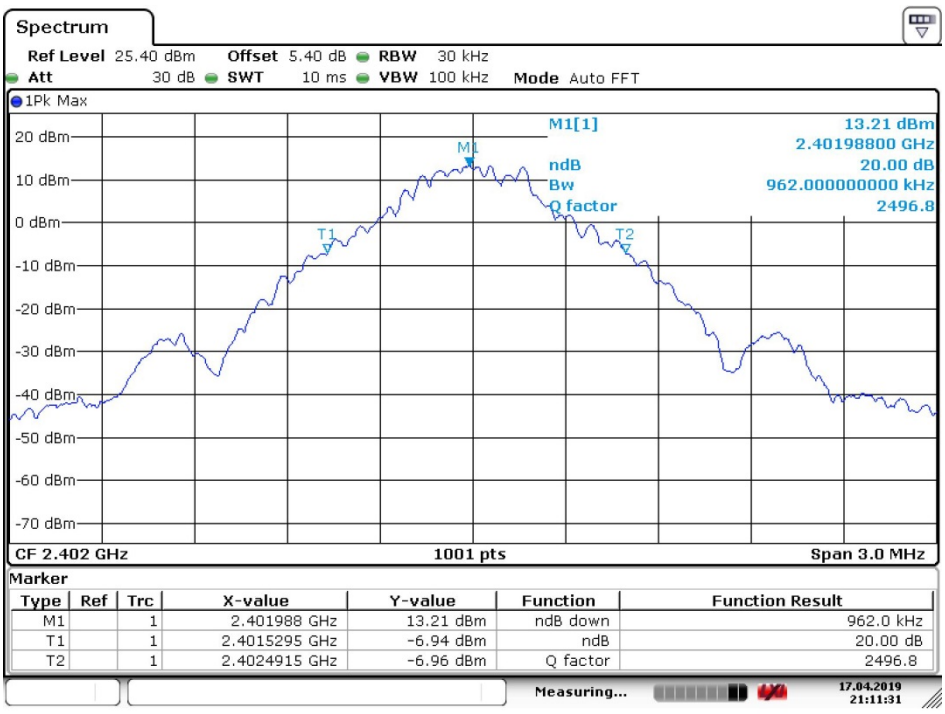

Date: 17.APR.2019 21:11:31

4.5.2.2 GFSK _Middle Channel

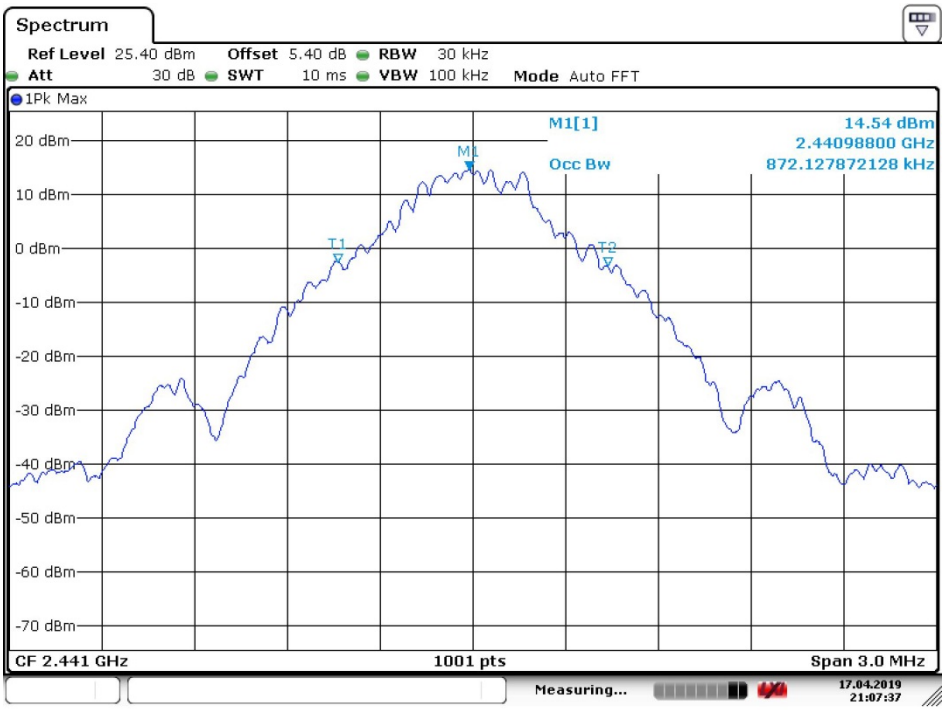

Date: 17.APR.2019 21:07:37

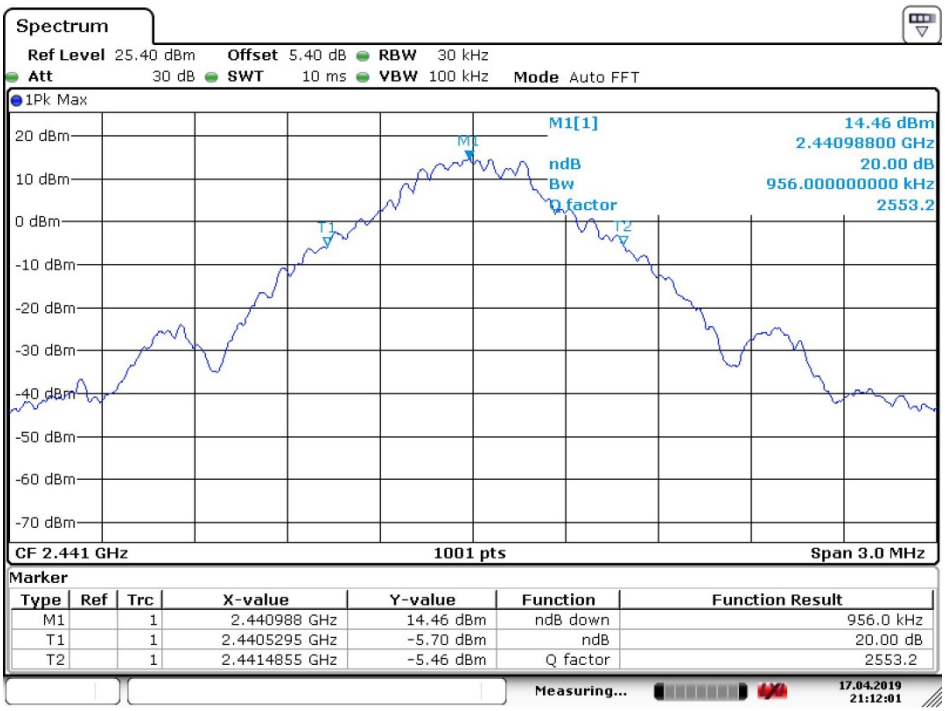

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.440988 GHz	14.46 dBm	ndB down	956.0 kHz
T1		1	2.4405295 GHz	-5.70 dBm	ndB	20.00 dB
T2		1	2.4414855 GHz	-5.46 dBm	Q factor	2553.2

Date: 17.APR.2019 21:12:02

4.5.2.3 GFSK _Highest Channel

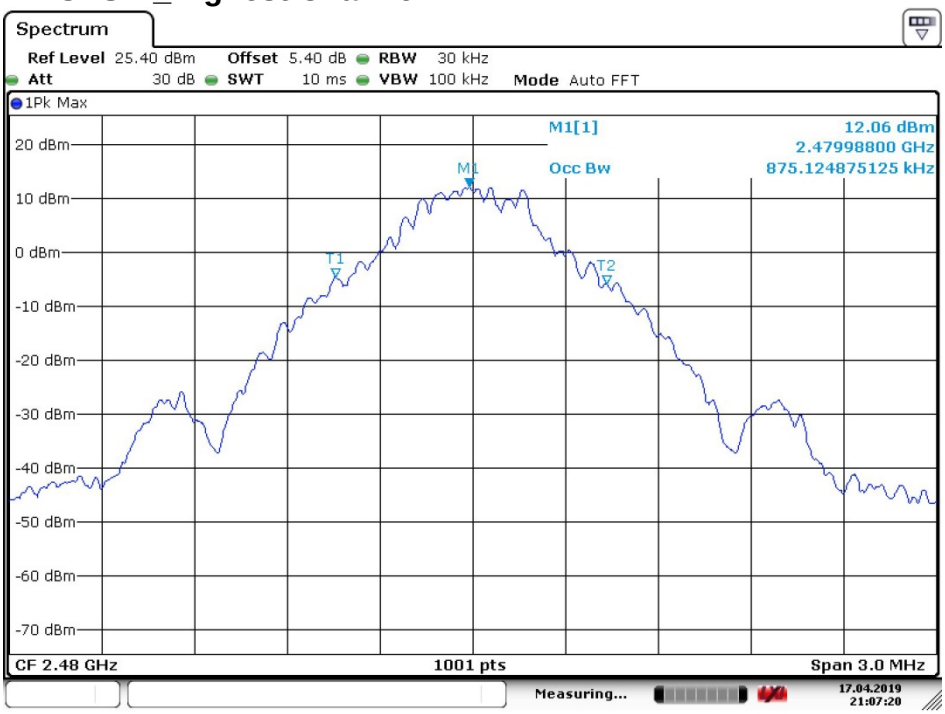

Date: 17.APR.2019 21:07:20

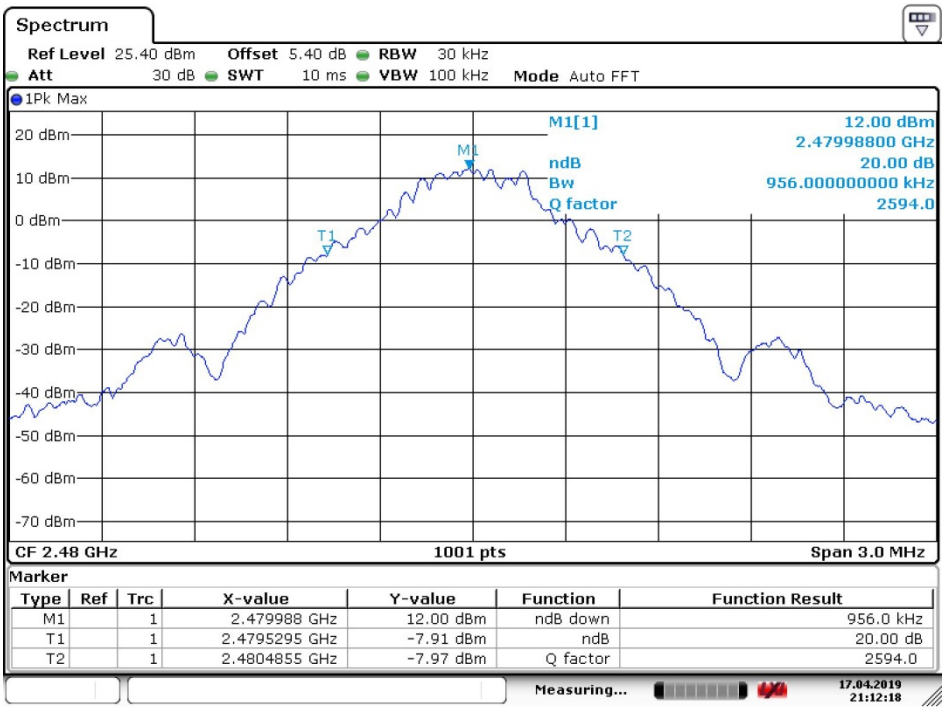

Date: 17.APR.2019 21:12:18

4.5.2.4 π/4DQPSK _Lowest Channel

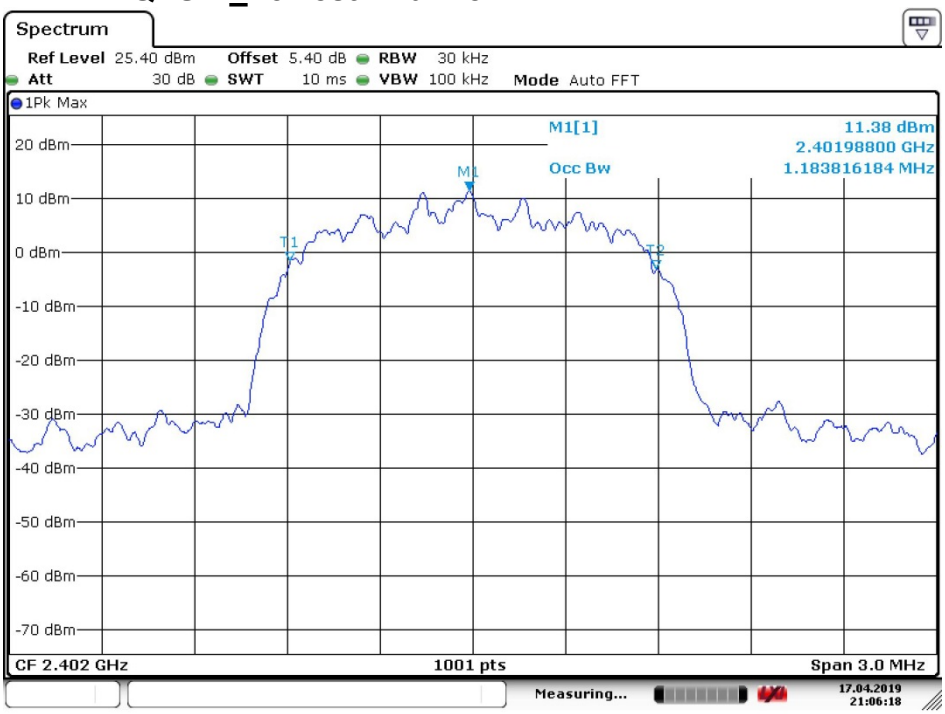

Date: 17.APR.2019 21:06:18

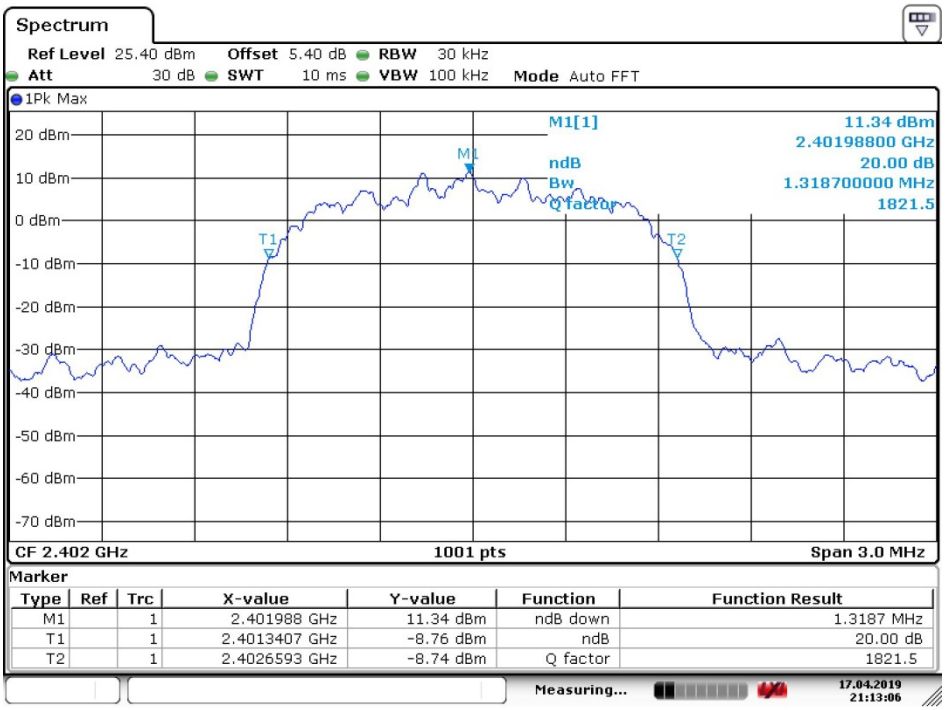

Date: 17.APR.2019 21:13:06

4.5.2.5 π/4DQPSK _Middle Channel

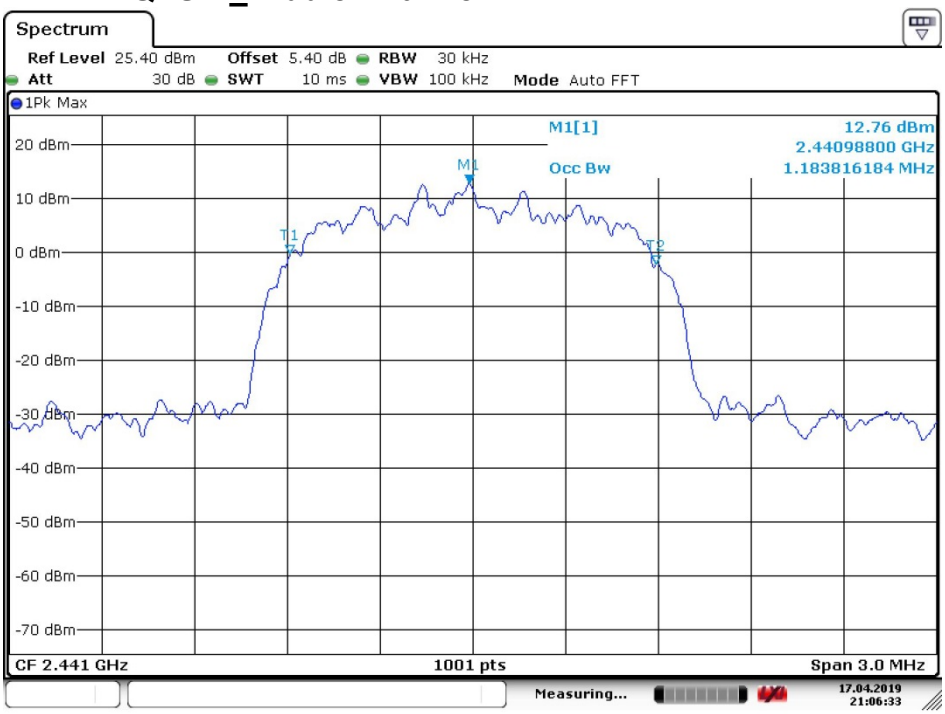

Date: 17.APR.2019 21:06:34

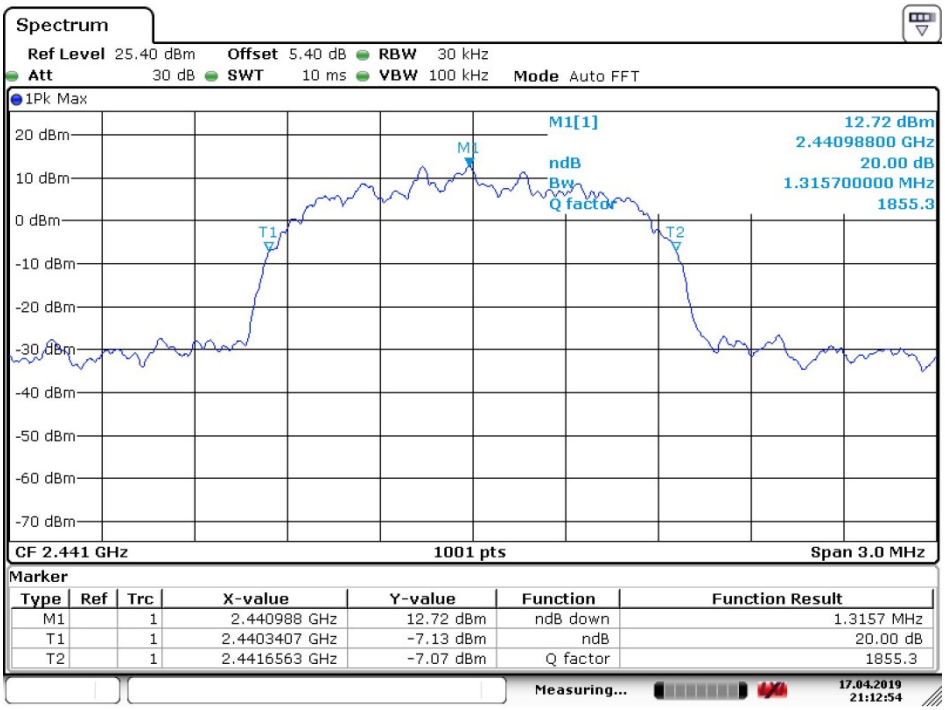

Date: 17.APR.2019 21:12:55

4.5.2.6 π/4DQPSK _Highest Channel

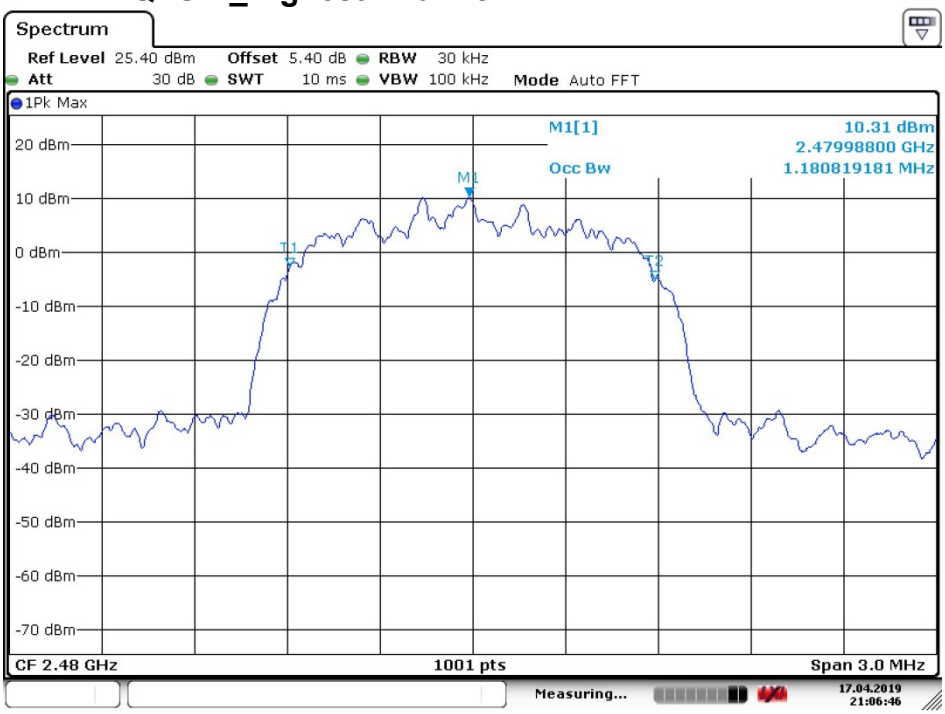

Date: 17.APR.2019 21:06:46

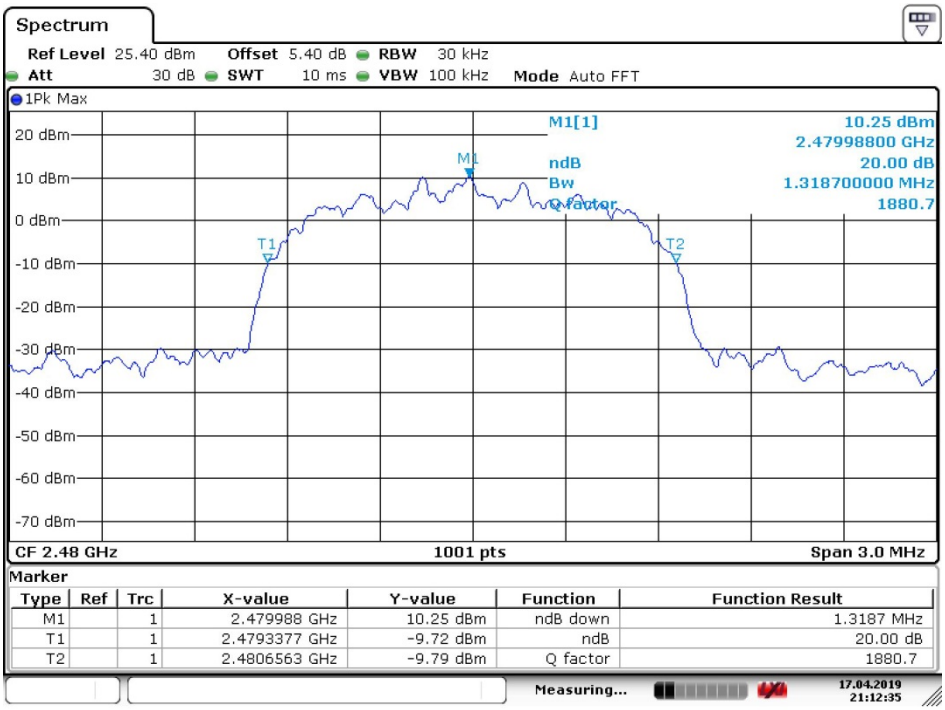

Date: 17.APR.2019 21:12:35

4.5.2.7 8DPSK_Lowest Channel

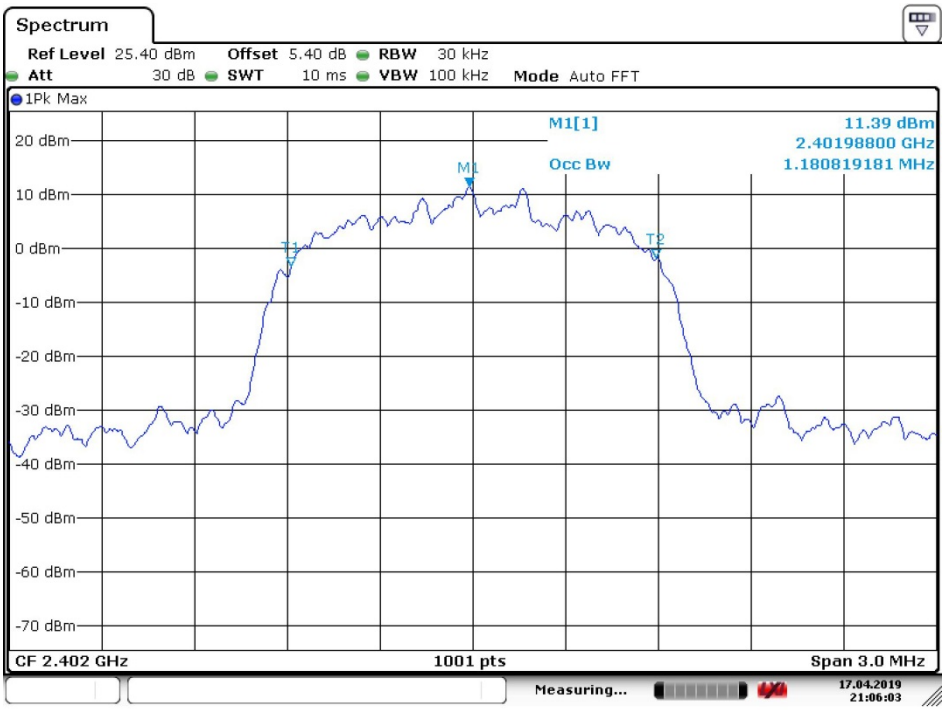

Date: 17.APR.2019 21:06:03

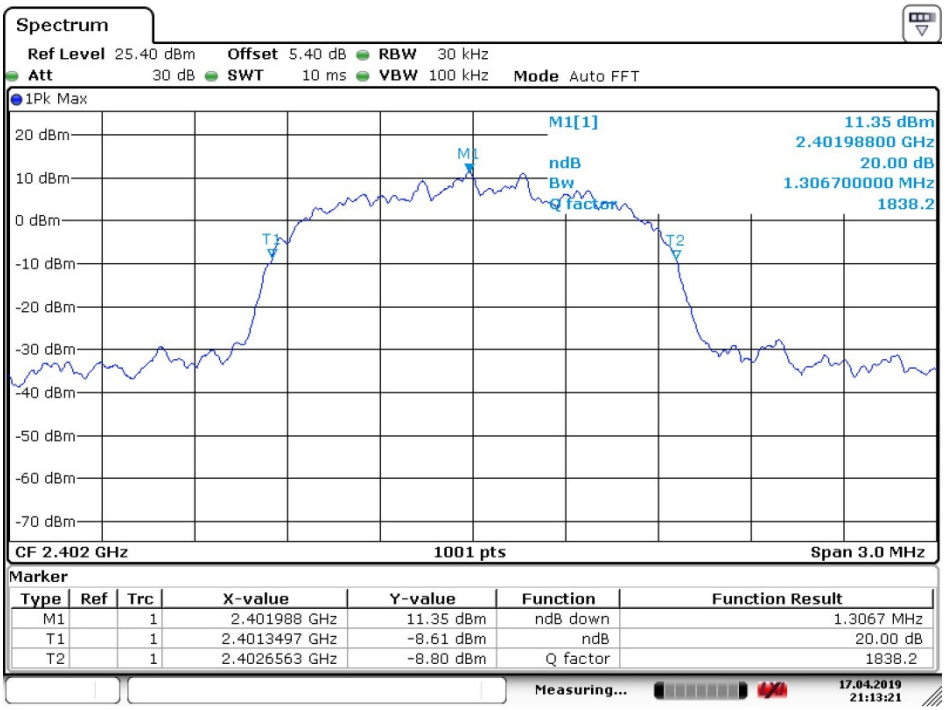

Date: 17.APR.2019 21:13:21

4.5.2.8 8DPSK _Middle Channel

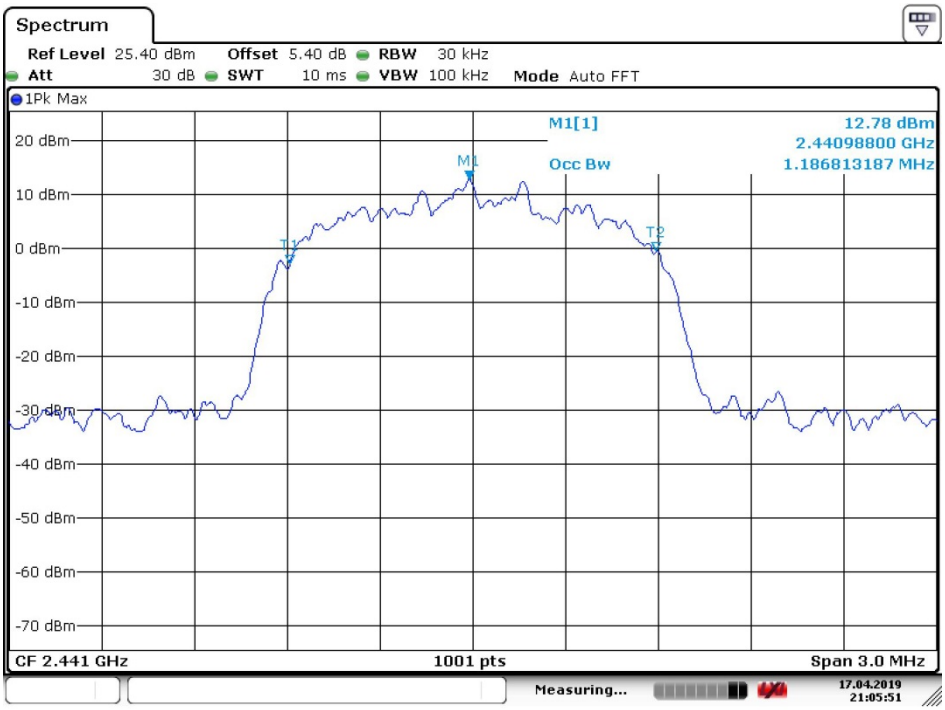

Date: 17.APR.2019 21:05:52

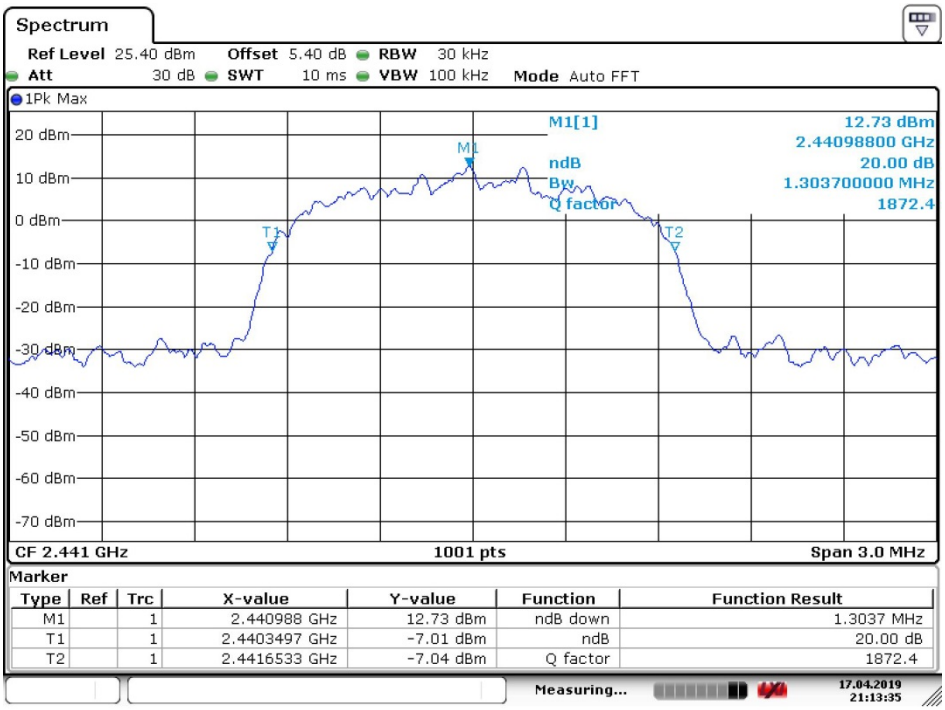

Date: 17.APR.2019 21:13:35