



6 dB Bandwidth Measurement


Tx frequency: 2402MHz

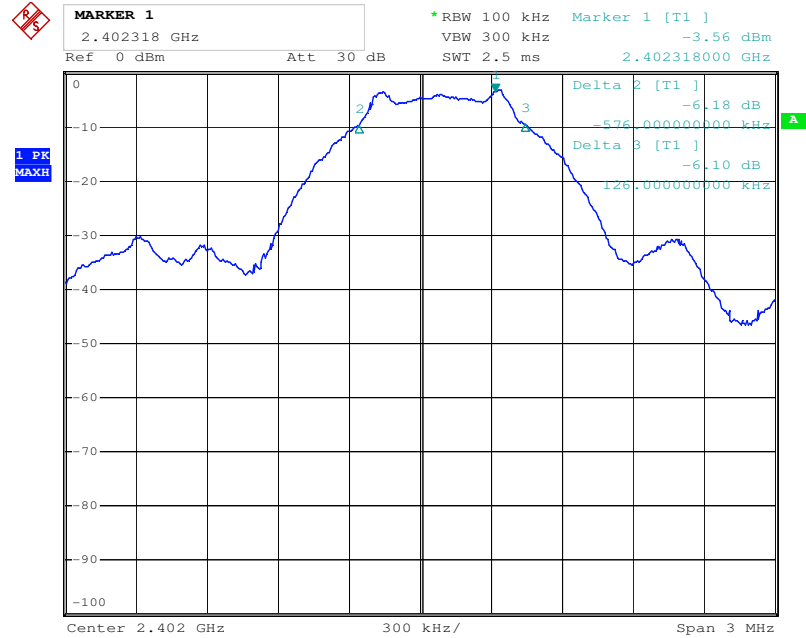

Tx frequency: 2440MHz

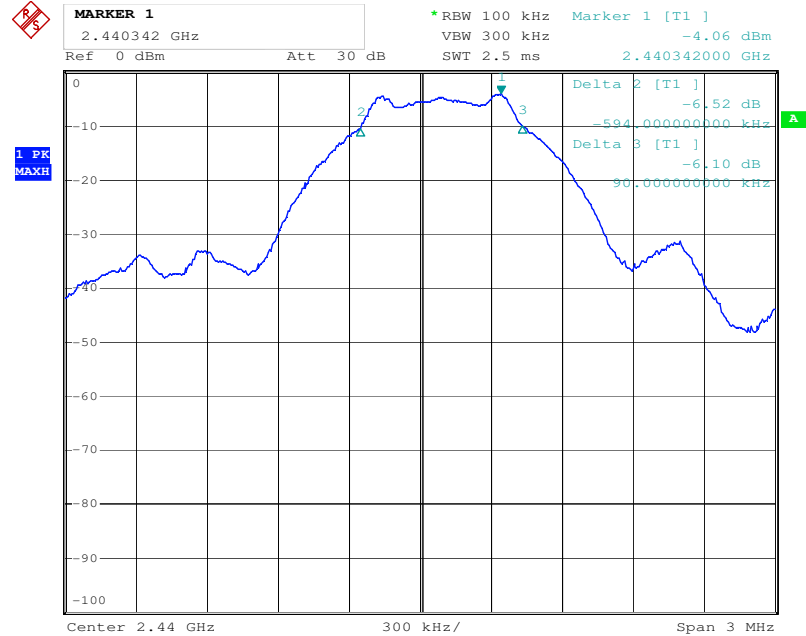


Tx frequency: 2480MHz

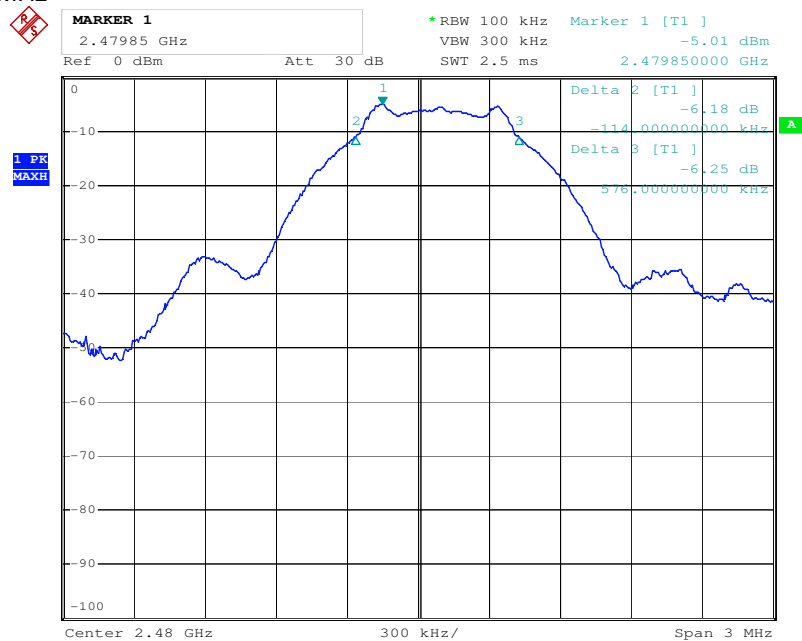


Peak Output Power

BLE Mode


Tx frequency: 2402MHz

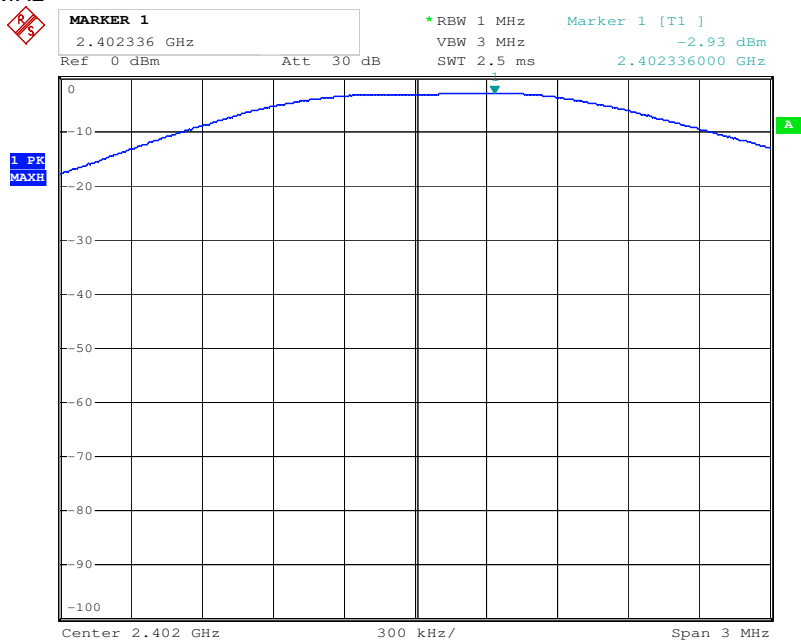

Tx frequency: 2440MHz

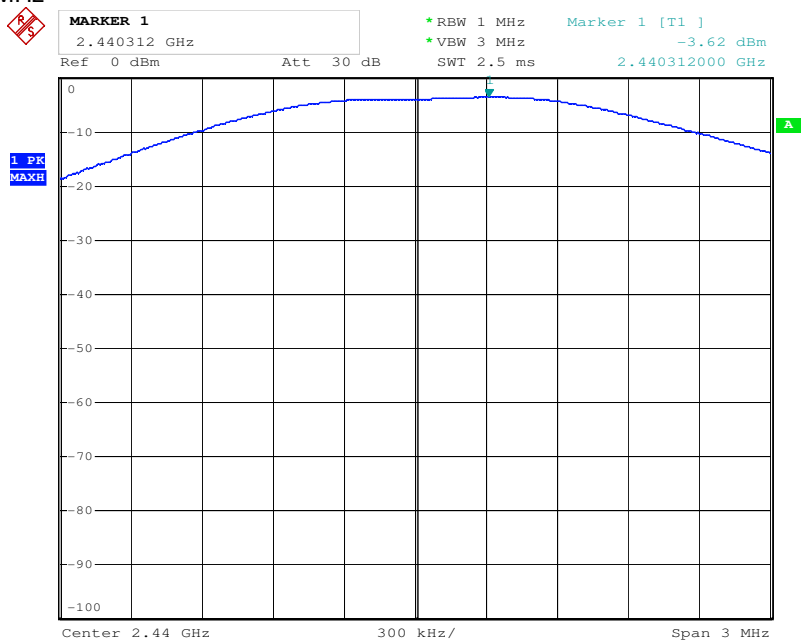


Tx frequency: 2480MHz

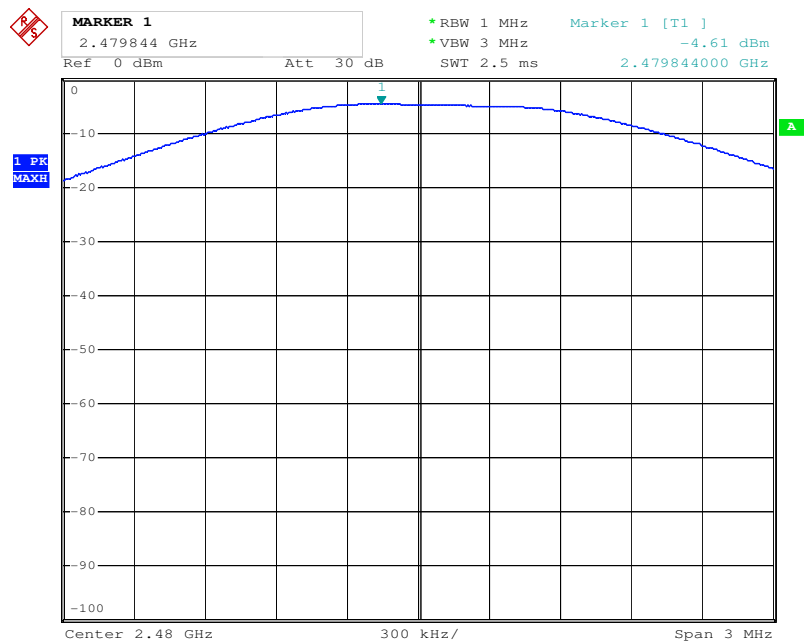


Spurious Conducted Emissions

BLE mode


Tx frequency: 2402MHz

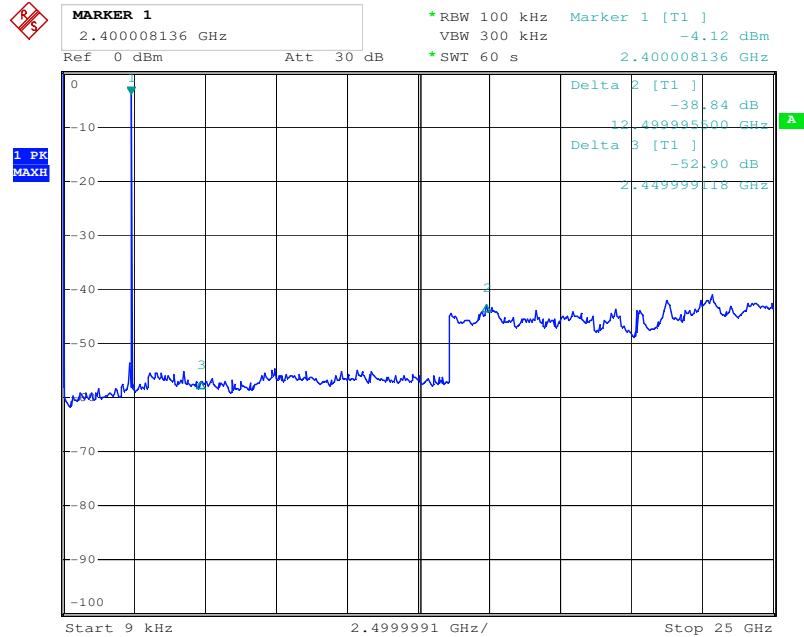

Tx frequency: 2440MHz

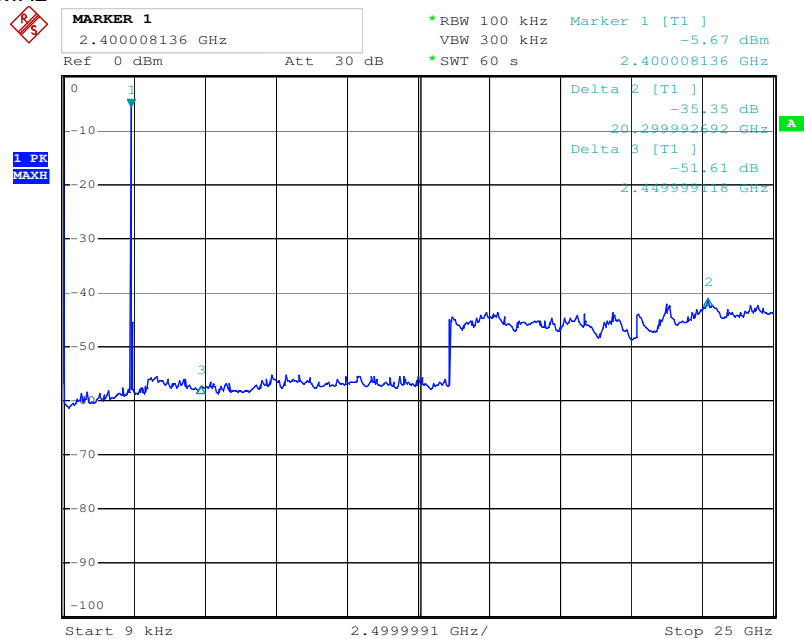


Tx frequency: 2480MHz

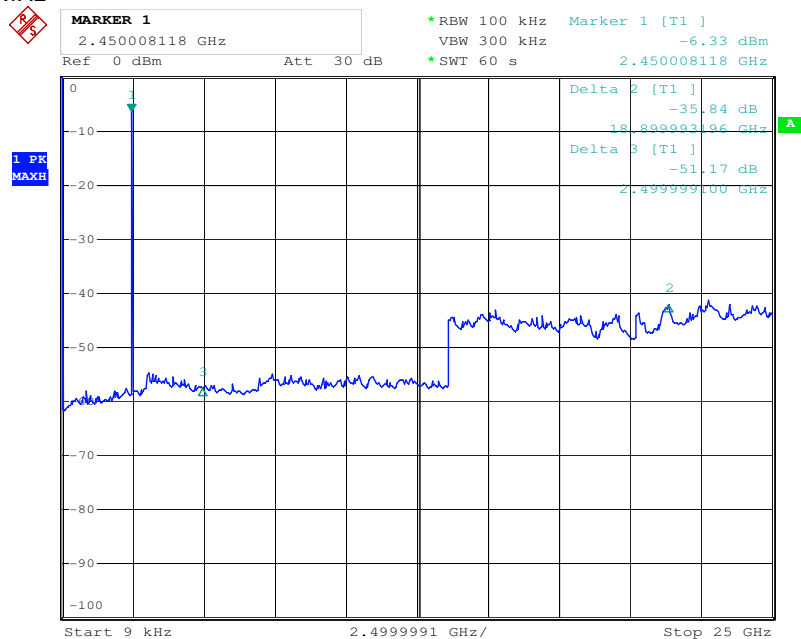


Band Edge Compliance

BLE mode

Tx frequency: 2402MHz (conducted measurement)

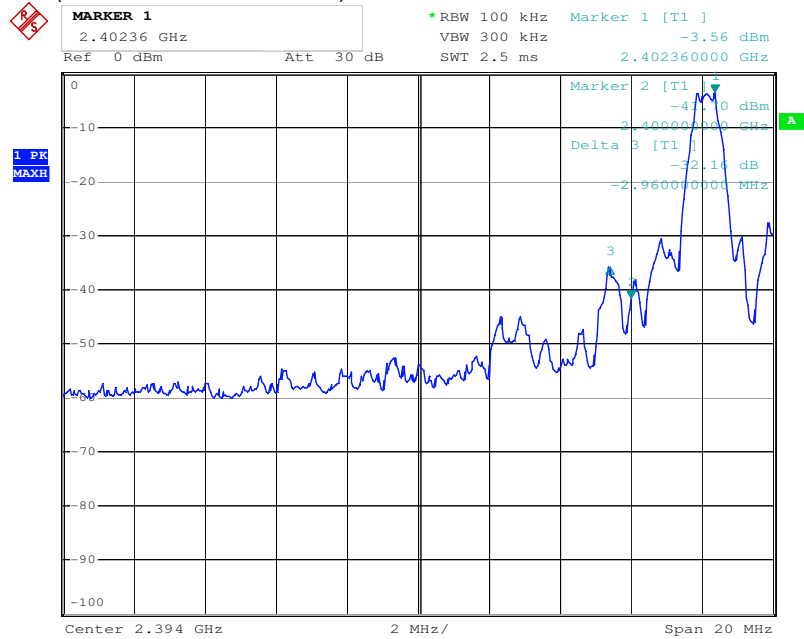


Tx frequency: 2480MHz (conducted measurement)

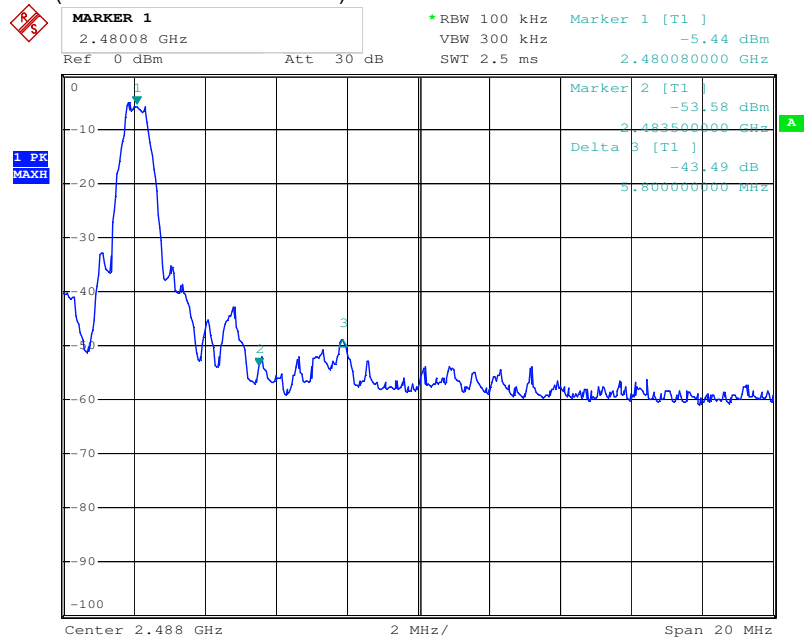

Restricted Bands Next to The Band Edge

BLE mode

Tx frequency: 2402MHz (radiated measurement)

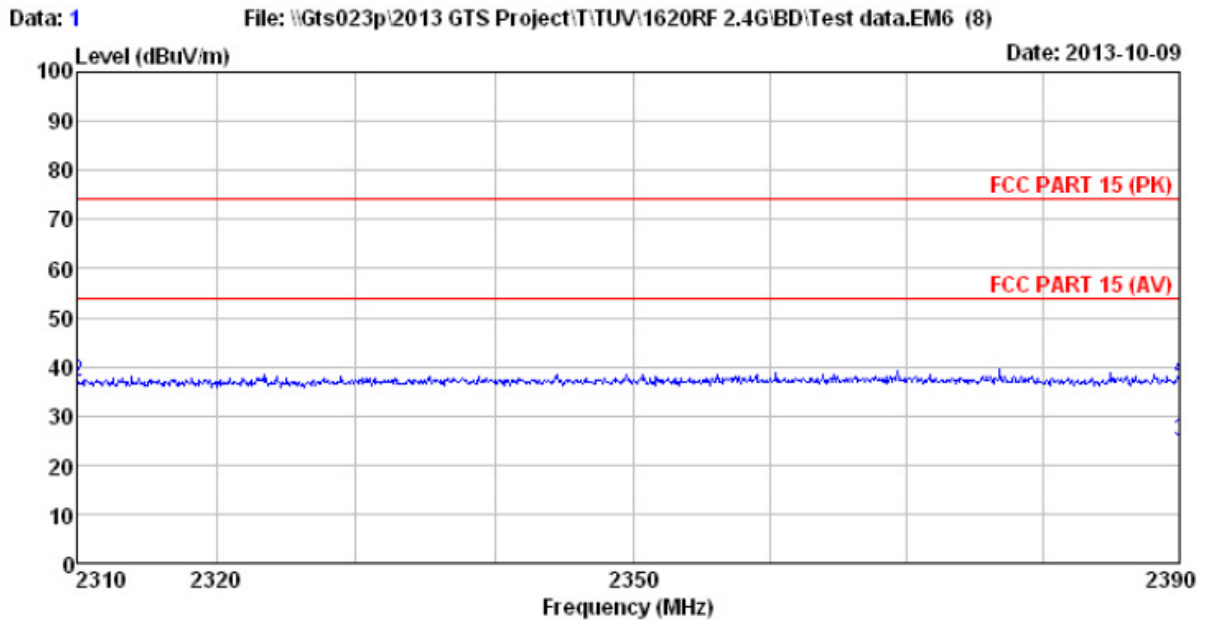

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120D(>1G)-2013 VERTICAL
 EUT : Bluetooth LE Watch
 Model No. : COOK00
 Sample No. : 00130916268-001
 TUV Order No: 144008321
 Test Mode : TX on mode
 Remark : 2402MHz


	Freq	ReadAntenna Level	Cable Factor	Preamp Loss Factor	Limit Level	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB
1	2310.000	26.18	27.03	5.30	34.11	24.40	54.00 -29.60 Average
2	2310.000	38.54	27.03	5.30	34.11	36.76	74.00 -37.24 Peak
3	2390.000	26.23	27.29	5.38	34.01	24.89	54.00 -29.11 Average
4	2390.000	38.69	27.29	5.38	34.01	37.35	74.00 -36.65 Peak

Vertical Polarization

Data: 3

File: \\Gts023p\2013 GTS Project\T\TUV\1620RF 2.4G\BD\Test data.EM6 (8)

Date: 2013-10-09

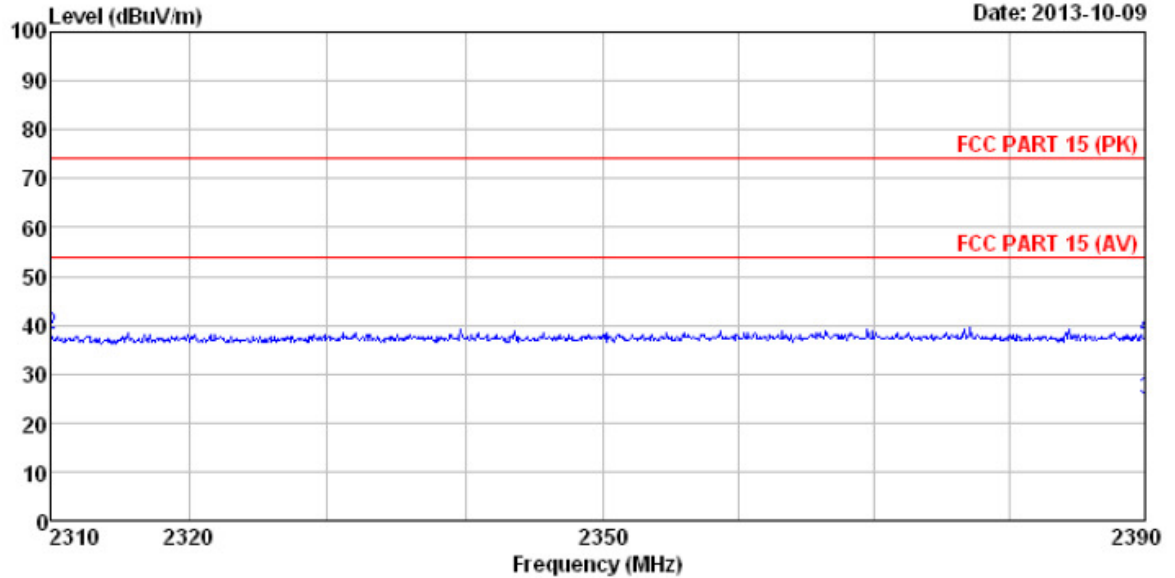


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120D(>1G)-2013 HORIZONTAL
 EUT : Bluetooth LE Watch
 Model No. : COOK00
 Sample No. : 00130916268-001
 TUV Order No: 144008321
 Test Mode : TX on mode
 Remark : 2402MHz

	Read	Antenna	Cable	Preamp	Level	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	26.11	27.03	5.30	34.11	24.33	54.00	-29.67 Average
2	2310.000	39.62	27.03	5.30	34.11	37.84	74.00	-36.16 Peak
3	2390.000	26.19	27.29	5.38	34.01	24.85	54.00	-29.15 Average
4	2390.000	38.73	27.29	5.38	34.01	37.39	74.00	-36.61 Peak

Horizontal Polarization

Tx frequency: 2480MHz (radiated measurement)

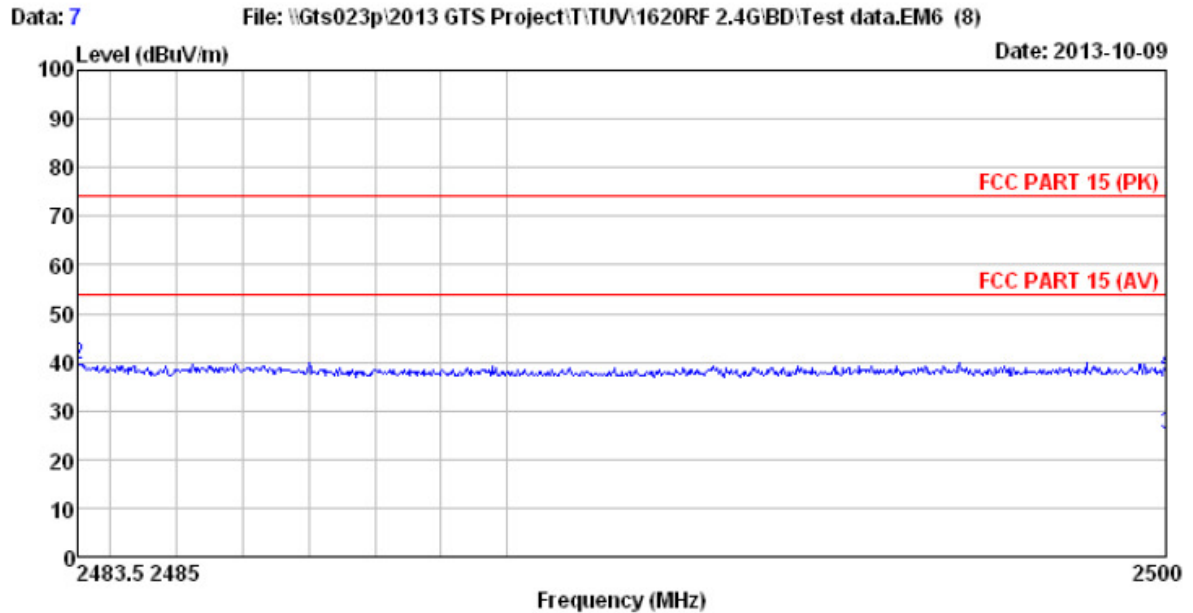

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120D(>1G)-2013 VERTICAL
 EUT : Bluetooth LE Watch
 Model No. : COOK00
 Sample No. : 00130916268-001
 TUV Order No: 144008321
 Test Mode : TX on mode
 Remark : 2480MHz


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	28.81	27.55	5.47	33.92	27.91	54.00	-26.09	Average
2	2483.500	40.44	27.55	5.47	33.92	39.54	74.00	-34.46	Peak
3	2500.000	25.92	27.60	5.49	33.90	25.11	54.00	-28.89	Average
4	2500.000	38.62	27.60	5.49	33.90	37.81	74.00	-36.19	Peak

Vertical Polarization

Data: 5

File: \\Gts023p\2013 GTS Project\TUV\1620RF 2.4G\BD\Test data.EM6 (8)

Date: 2013-10-11

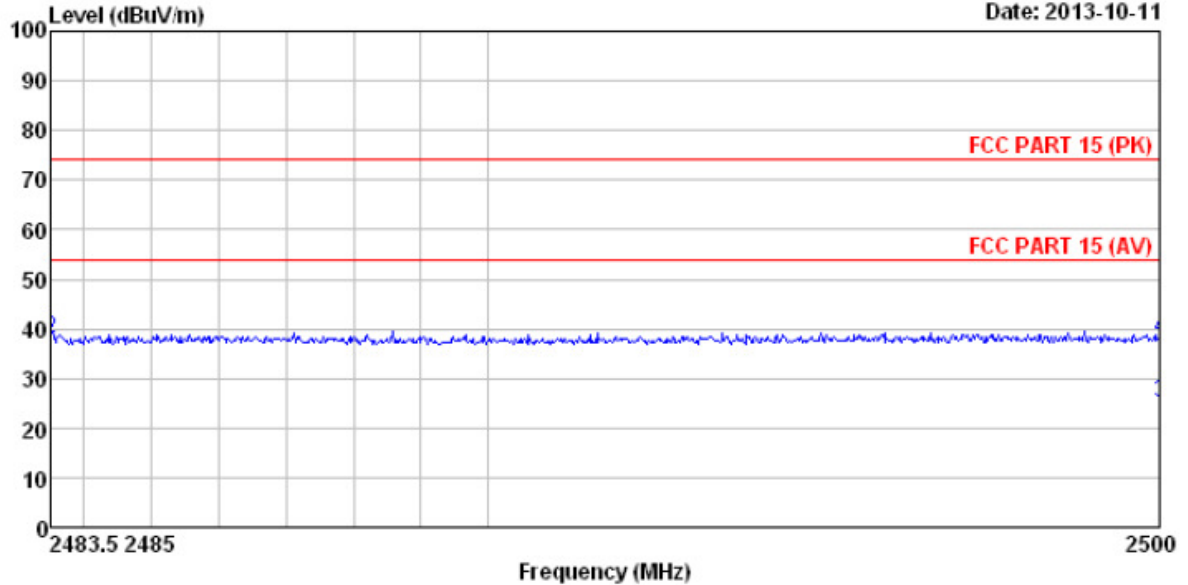


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120D(>1G)-2013 HORIZONTAL
 EUT : Bluetooth LE Watch
 Model No. : C00K00
 Sample No. : 00130916268-001
 TUV Order No: 144008321
 Test Mode : TX on mode
 Remark : 2480MHz

	Freq	ReadAntenna	Cable Preamp	Limit	Over	
	Level	Factor	Loss Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m
1	2483.500	28.94	27.55	5.47	33.92	28.04
2	2483.500	38.96	27.55	5.47	33.92	38.06
3	2500.000	25.95	27.60	5.49	33.90	25.14
4	2500.000	38.75	27.60	5.49	33.90	37.94


Horizontal Polarization

Power Spectral Density

Tx frequency: 2402MHz

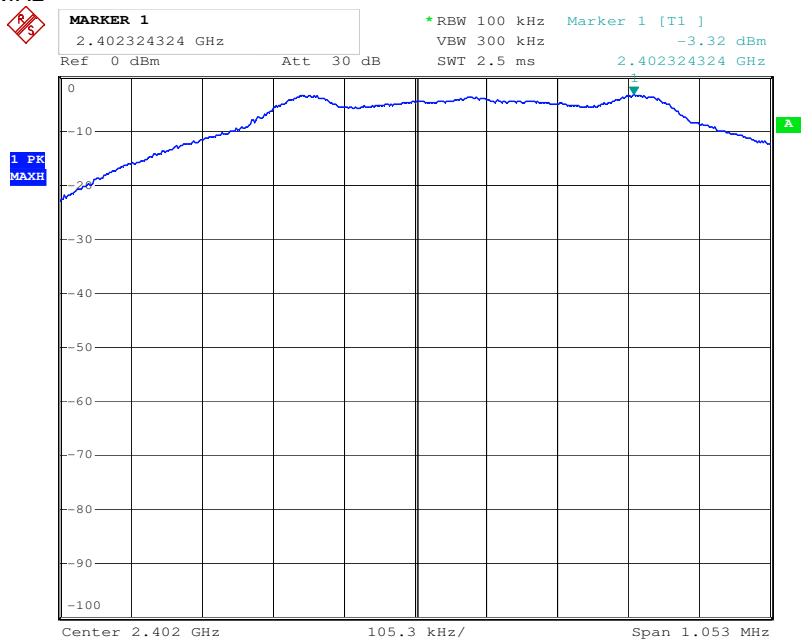

Tx frequency: 2440MHz

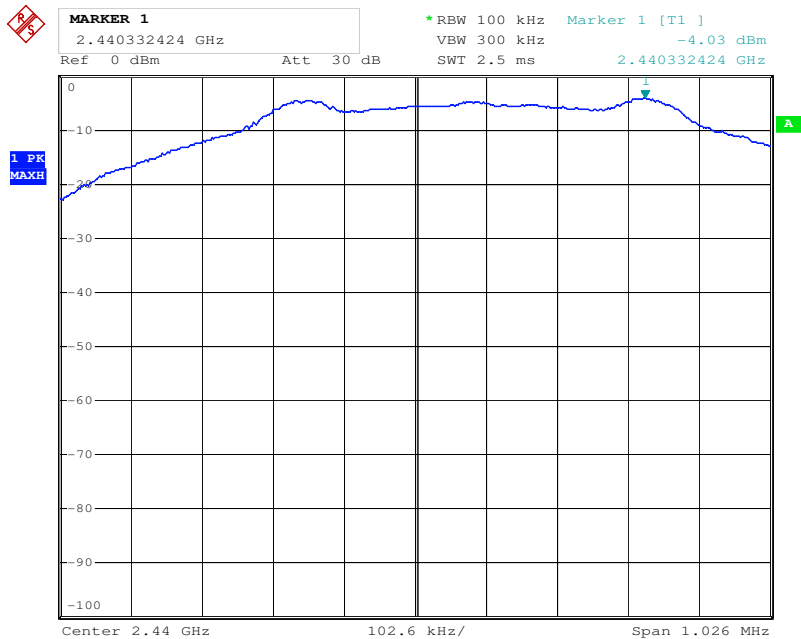

Tx frequency: 2480MHz

