

Broadband over Power Lines (BPL) FCC Emissions Compliance Guidelines

Access-Underground Emissions testing to FCC Report & Order 04-245 (FCC Method)

Access-Underground BPL component being tested: Repeater

Applicable Standards for this test:

STANDARD	TITLE
ANSI C63.4 - 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

EUT CONFIGURATION

Product Type	BPL medium voltage (MV) Access Gateway
Serial Number	7353125931/6401625558/6938020727/6284826266
Model Number	CXP-MVA-GWY (T3B)
Marketing Designation	Corinex NR – MV Gateway
Chassis Revision Number	MV-Gateway V1
Firmware Revision Number	ac_CXP_GNR_GWY_A2_hv1_0_0_sv3_4_8_2_0_0
ECO Number (if applicable)	
ID #	QIU-CXP-MVA-GNR

EUT OPERATING PARAMETERS

Modulation type	OFDM
Number of carriers	1536
Carrier spacing	Medium Voltage, mode 1, Spacing 6.51 kHz Medium Voltage, mode 2, Spacing 4.56 kHz Medium Voltage, mode 3, Spacing 6.51 kHz Low Voltage, Spacing 18.23 kHz
Channel bandwidth	Mode 1:10MHz; Mode 2 :7MHz; Mode 3 :10MHz
Lowest external frequency used	3MHz
Highest external frequency used	32MHz
Notching depth capability (dB)	30dB by default; 40dB maximum
Carrier On-Off remotely? (yes/no)	Yes
Power Setting mechanism	Default is power setting mask and notches active.
Maximum power setting	50mW/mode, 150mW total.
Range of duty factors (rep rates)	95%
Highest internal frequency	Crystal: 80MHz
Description of operation	The Corinex MV Access Gateway has 3 Powerline modules, an Ethernet switch between the modules, a power supply, and an industrial case that acts as a heat sink to the environment. The Gateway is attached to a utility pole via a bracket, typically located 20' or higher on the pole. Two of the 3 outputs of the device used for Medium Voltage communications with one being used for Low Voltage Communications. The MV outputs are connected to an MV Capacitive and Inductive Coupler and then attached to the MV line, the connector on the MV Gateway is an TNC type coaxial connector. The 2 MV outputs allow for connection to additional MV Gateway devices either "before" or "after" the device. The power cord for the device is also used for signal transmission on the Low Voltage lines and is internally coupled. The Ethernet switch within the device allows for inter-module communications. Finally, a grounding lug is

	provided on the device that is attached to the grounding wire on the pole. The MV Access Gateway uses orthogonal frequency-division multiplexing for modulation, which is a complex modulation technique for transmission based upon the idea of frequency-division multiplexing (FDM) where each frequency channel is modulated with a simpler modulation. We use 1536 carriers in our transmission. In each transmission, its normal operation mode will result in 20-25 pulse per second. Signaling type used is RF signals transmitted on MV powerlines with a frequency of 3-32 MHz. Unlike some MV Access devices, Corinex only uses Frequency Division Duplexing to communicate. The device is IP based and as such any IP packet can be transmitted over the network. Typical applications of the device include broadband internet access and the transmission of utility asset information.
--	---

Rationale for selection of test site:

This site was chosen as one of three representative installations for this component because it is free of obstructions and has a low ambient.


OBJECT

This test procedure outlines the specific electromagnetic compatibility (EMC) emissions testing requirements applicable to Access BPL Underground installations. This procedure will be used for the testing and comparison of results from various locations and system architectures.

EUT PASS CRITERIA			
Location	Test	Frequency Range	Limits
“In situ”	Radiated Emissions	9 kHz – 30 MHz	29.5 dB(μV/m) measured at 30 meters ¹
		30 MHz - 88 MHz	39.1 dB(μV/m) measured at 10 meters ¹
		88 MHz – 216 MHz	43.5 dB(μV/m) measured at 10 meters ¹
		216 MHz – 960 MHz	56.4 dB(μV/m) measured at 10 meters ¹
		Above 960 MHz	49.5 dB(μV/m) measured at 10 meters ¹
Note 1: Installations will be measured at <u>slant-range distances</u> other than those listed above. The formulas to find the dB value to subtract from the measured values when data are taken at distances other than those indicated are: 40log ₁₀ 30m/d _n for frequencies below 30MHz 20log ₁₀ 10m/d _n for frequencies above 30MHz			

RADIATED EMISSIONS LIMITS (above 30 MHz)

FCC Radiated Emissions Limits for CLASS A Equipment

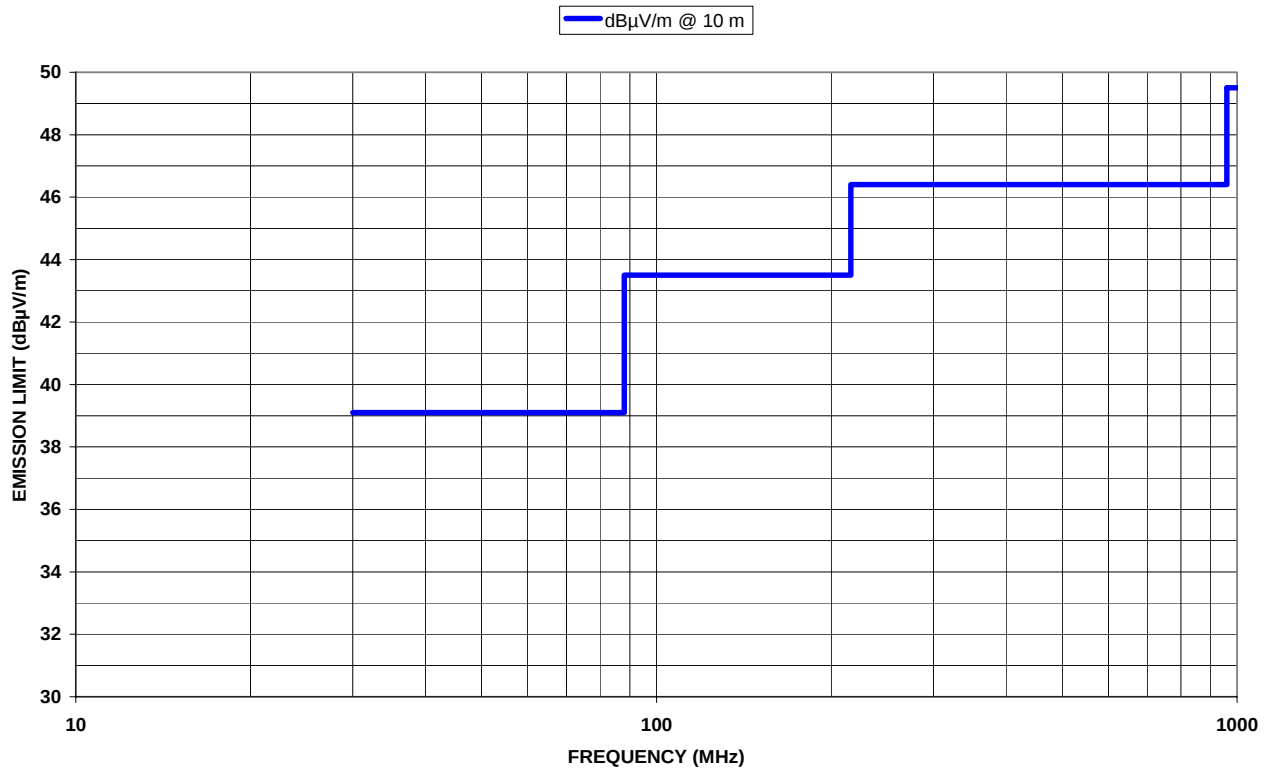

Unintentional Radiator Upper Frequency Range of Measurement	
Highest frequency used in the device (MHz)	Upper Frequency of Measurement (MHz)
1.705-108MHz	1,000MHz
108-500MHz	2,000MHz
500-1,000MHz	5,000MHz
Above 1,000MHz	5 th Harmonic <40GHz

The upper frequency of measurement for this test is 1000 MHz.

Antennas are specific to the frequency range being measured, and are summarized in this table.

Typical antennas for BPL Certification testing	
Frequency Range	Antenna
9kHz-30MHz	Active Loop (corrected to E-field by adding 51.2dB)
30-1000MHz	Bilog

Enter the correct equipment information into the Equipment List. (Samples are shown below, replace with actual data)

EQUIPMENT LIST



Buried Site 2 Medium Voltage


Professional Testing



Manufacturer	Description	Model Number	Serial Number	Cal Due
PTI	1.9 MHz High Pass Filter		1182	15 Aug. 2008
Hewlett Packard	EMC Spectrum Analyzer	8591EM	3322A09711	0410
Hewlett Packard	Preamplifier	8447A	2439A09711	1260
Miteq	Preamplifier	4888		1453
Tektronix	Preselector	2706	B010106	0746
ETS	Passive loop antenna	6512	Prototype	0351
AH Systems	Bilog Antenna	SAS-521-2 2662	436	
ETS	Non-metallic tripod	4-TR	N/A	0944
Pasternak	RG-214, 150 ft.			
Lufkin	Tape measure	30'	N/A	

Attach supporting equipment documentation to the test report as indicated below.

SUPPORTING EQUIPMENT DOCUMENTATION CHECKLIST			✓
Preamplifier gain VS frequency curve		Attached to test report	✓
Type N Cable insertion loss VS frequency curve		Attached to test report	✓
Antenna factor VS frequency curves for all antennas used in this test		Attached to test report	✓

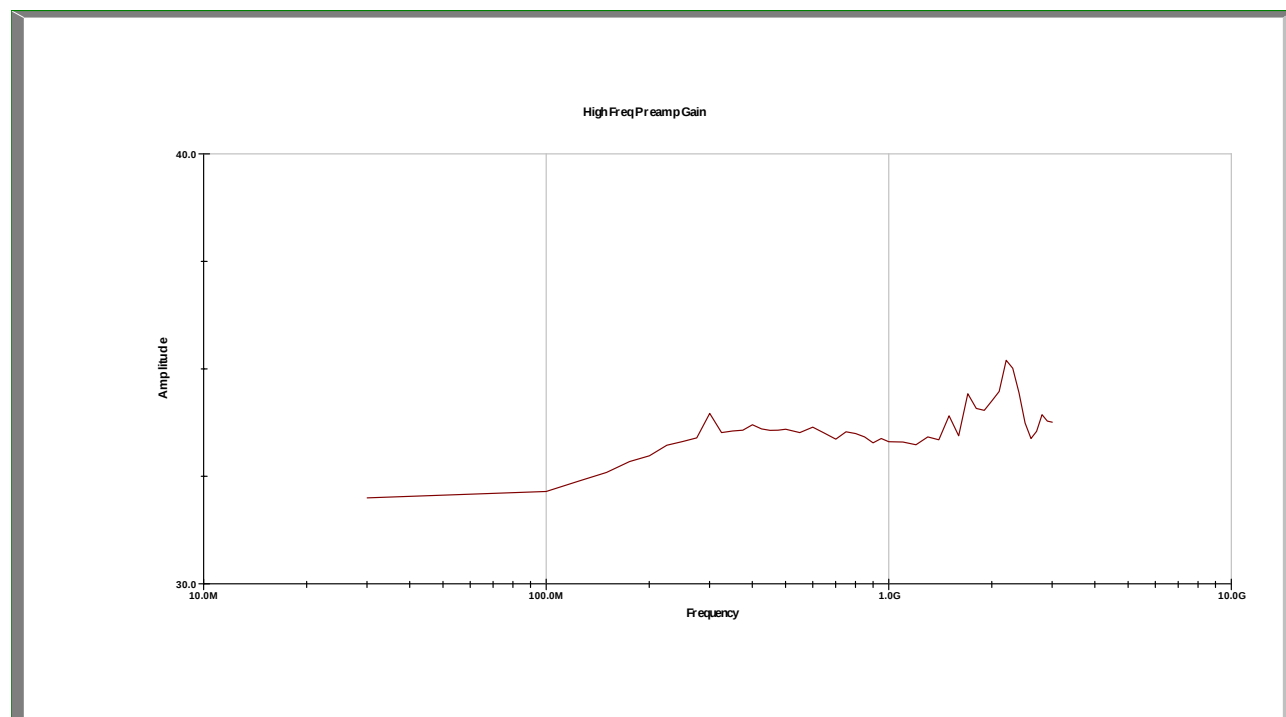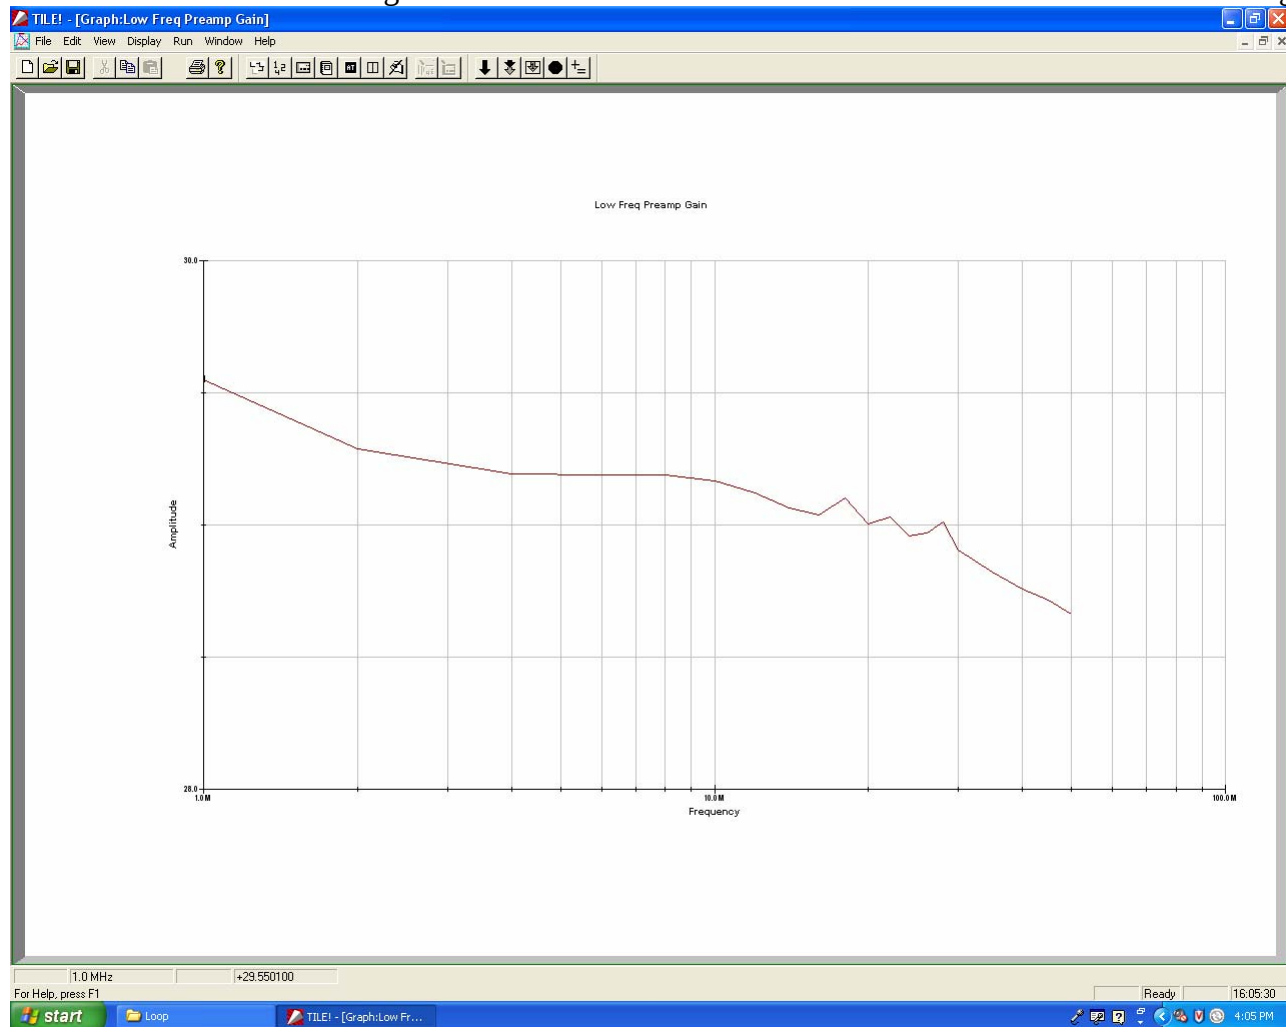

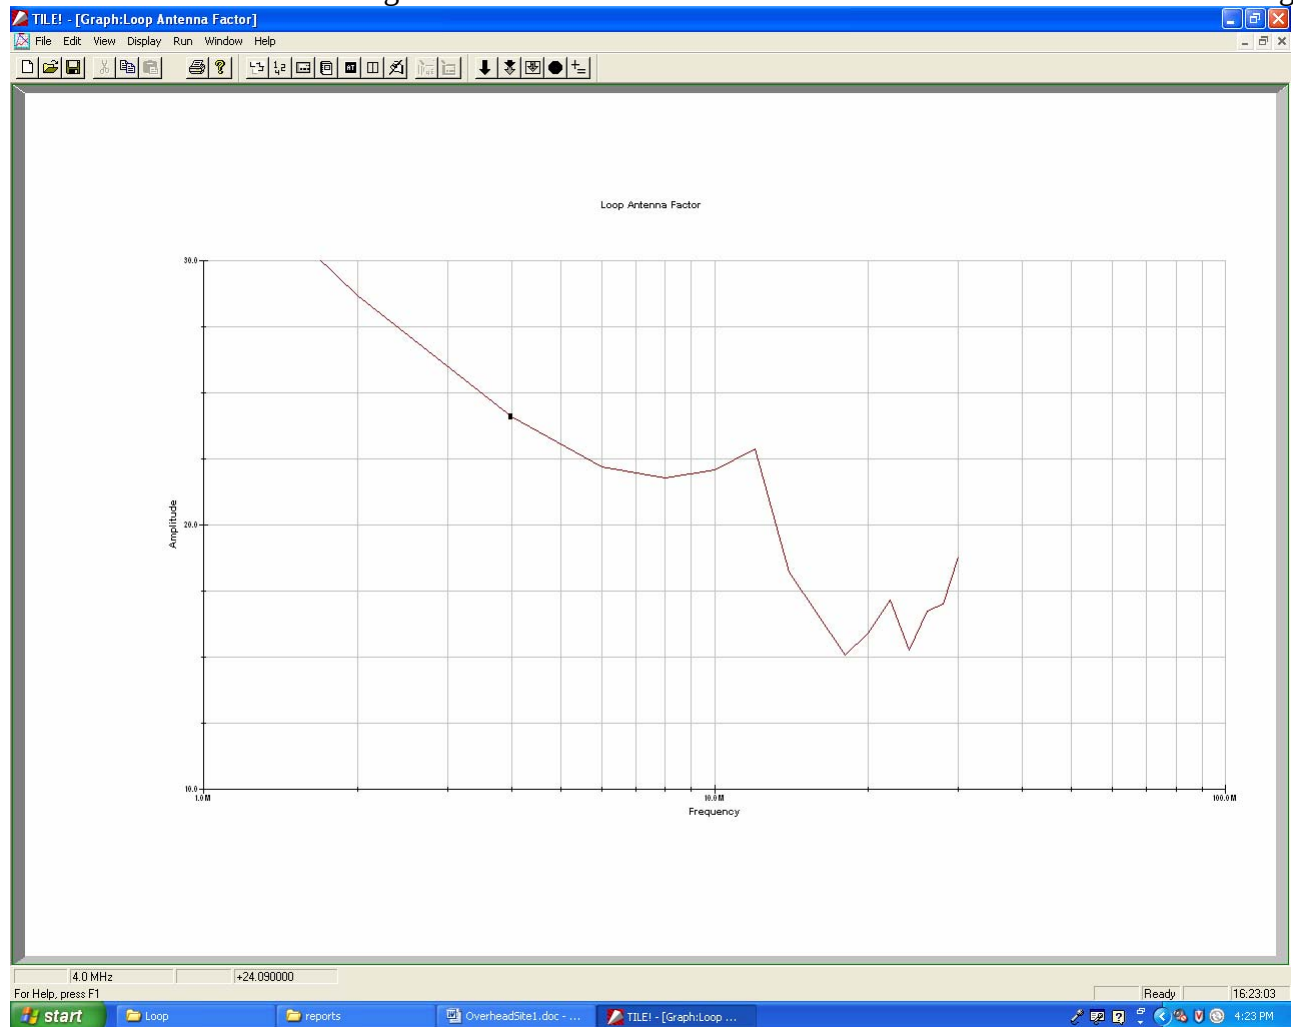

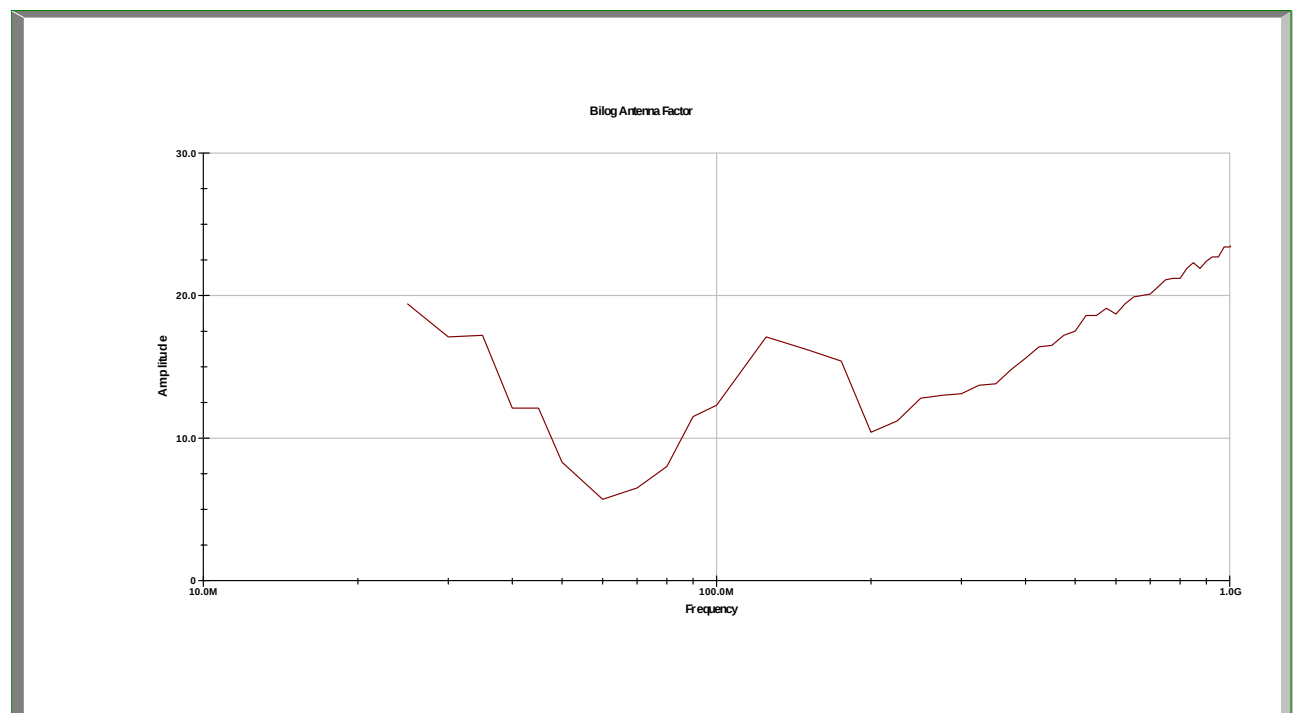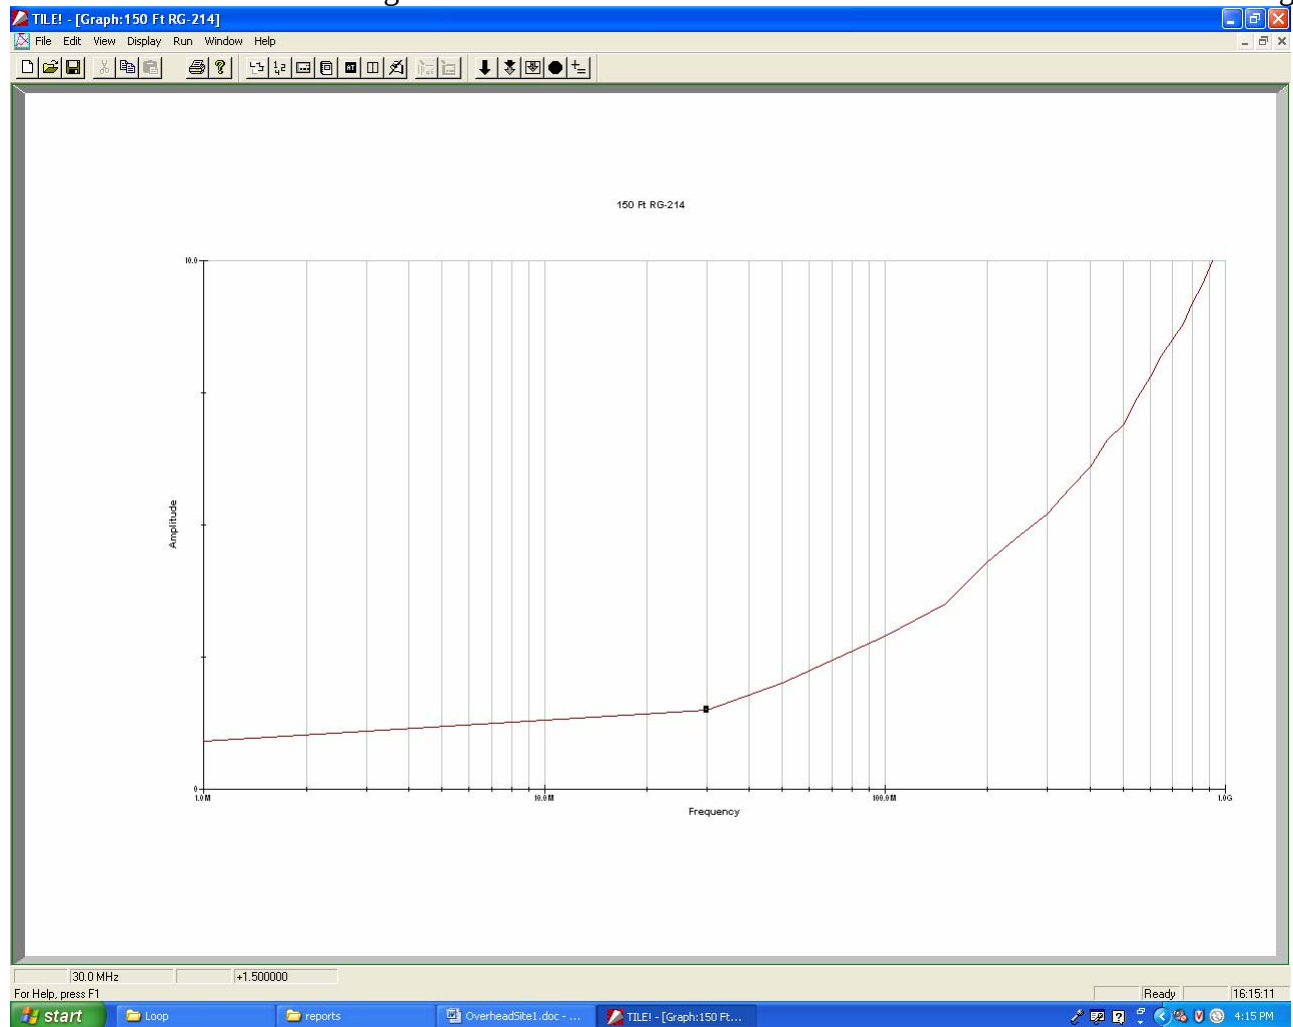



MEASUREMENT POSITIONS

Underground line installations are those in which the BPL device is mounted on a pad-mounted transformer housing or junction box and couples only onto underground cables. Access BPL Underground installations require measuring radiated fields along 16 radials at 10 meters distance from the edge of the above ground transformer where the Access BPL equipment is located to find the maximum emissions. For consistency, set the radials to compass settings so that North is facing towards the top of the page. (12:00 Noon) Number measurement points clockwise from 1 to 16.

If necessary, due to ambient emissions, measurements can be performed at a distance of 3 meters. Slant-range distance corrections are made in accordance with Section 15.31(f) of the Rules. Measurements are made at positions around the perimeter of the in-ground power transformer where the maximum emissions occur. If directional radiation patterns are detected, additional azimuth angles should be investigated.

Example of Access BPL Underground Measurements

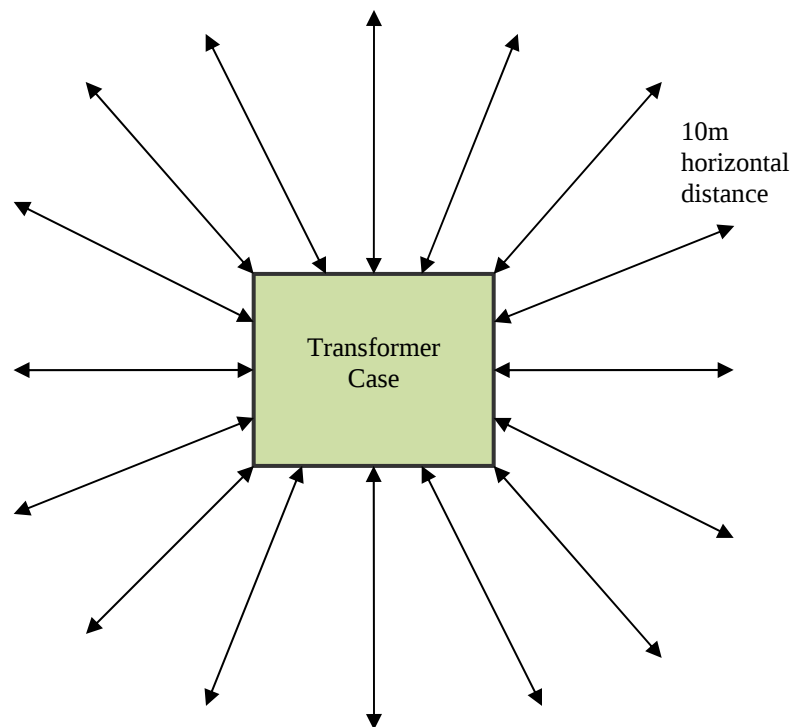

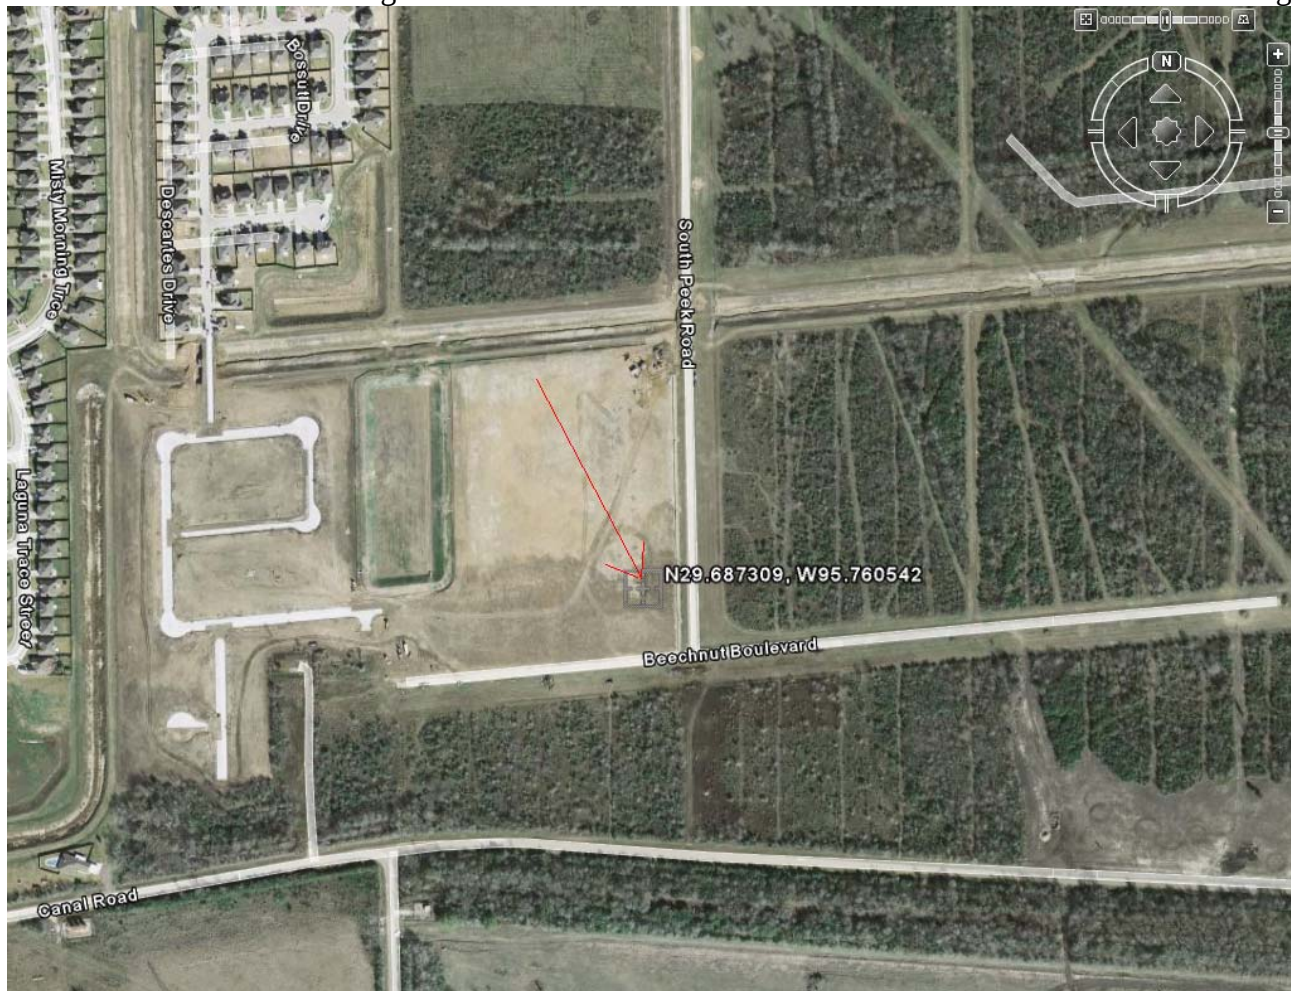

**TESTING BELOW 30 MHz**

1.705 MHz (or lowest frequency generated) to 30 MHz



1. Contact the BPL system operator and set the EUT for MAXIMUM power and MAXIMUM burst rate before **Certification** testing. If **Validation** testing is performed there is no need for MAXIMUM power testing and only COMPLIANCE (operating) power is used.
2. Set the EMI Receiver or Spectrum Analyzer to 9 kHz IF bandwidth and PEAK detection. Set the frequency step size for 4.5 kHz (half the IF bandwidth) and scan the spectra from the lowest frequency generated (but never below 1.705 MHz) to 30 MHz for BPL emissions. When using spectrum analyzers, scan smaller sub-ranges to allow at least three pixels on the analyzer's screen to fit within the 9 kHz bandwidth. EXAMPLE: (400 pixels/3) x 9 kHz restricts scan widths to 1.2 MHz (100 kHz/div maximum) Covering 2-30 MHz would require 28 sub-ranges each 1MHz wide. (100 kHz/div x 10 div on-screen)
3. Orient the loop antenna broadside to the transformer. Identify the six highest BPL emissions. (validate these choices by AM demodulating them and listening for voice or music)
4. Rotate the magnetic loop at least 180 degrees about its vertical axis to maximize each of these readings prior to measurement.
5. Validate that the OVERLOAD indicator on the active loop antenna is not illuminated and that the Spectrum Analyzer does not use a pre-amplifier and is not being overloaded. Increase the analyzer's input attenuation to verify that the instrument is not in amplitude compression by making sure all signals move in 10dB increments with the attenuator setting.
6. Ensure that the data repetition rate is at least 20 Hz by demodulating the audio on each of the six signals. If so, use Quasi-Peak detection on just those six loudest BPL signals and enter the receiver voltages

(dB μ V) into the worksheet below. If the burst rate is less than 20 Hz enter the Peak voltages into the worksheet below and indicate which detector was used. (P or QP)



7. If voice, non-BPL data or music is demodulated that candidate emission is eliminated and the Receiver is tuned to the next loudest emission for demodulation and identification to find the six highest BPL emissions.
8. Validate that the calculations employed are the same as shown in the worksheet if software is used for this measurement.
9. Capture a complete spectrum of this frequency range for inclusion into the Test Report. (from more than one scan)
10. For **Certification** testing, contact the BPL system operator and set the EUT down to its COMPLIANCE power setting. Tell the operator how many dB the system needs to be attenuated for compliance with the FCC limits on field strengths (or below them).

Field Strengths (location 1) 1.705 MHz– 30 MHz



Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.006	26.8	29.2	28.7	0.3	19.1	7.5	29.5	-22.0	P
2.183	25.9	29.2	28.4	0.3	19.1	6.3	29.5	-23.2	P
3.551	23.3	29.2	26.9	0.3	19.1	2.2	29.5	-27.3	P
5.096	26.2	29.2	23.7	0.3	19.1	1.9	29.5	-27.6	P
24.827	34.2	28.9	15.6	0.5	19.1	2.3	29.5	-27.2	P
26.707	33.5	28.8	17.1	0.5	19.1	3.1	29.5	-26.4	P

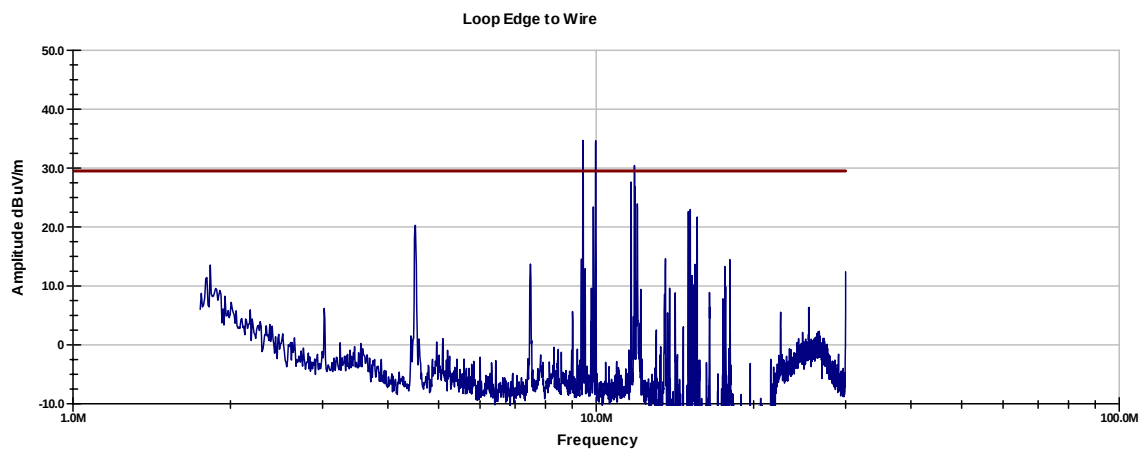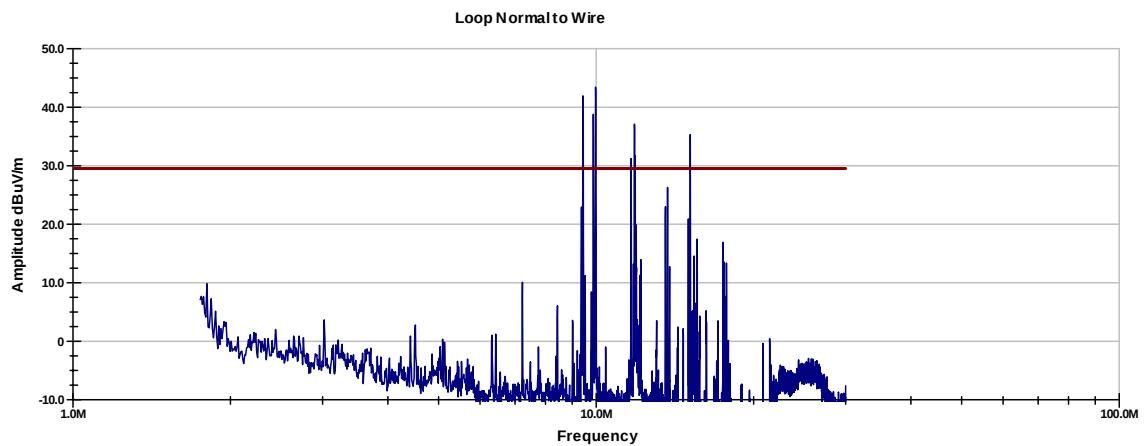



Field Strengths (location 2) 1.705 MHz– 30 MHz									
Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.015	23.5	29.2	28.7	0.3	19.1	4.2	29.5	-25.3	P
2.174	23.4	29.2	28.4	0.3	19.1	3.8	29.5	-25.7	P
2.465	23.2	29.2	27.9	0.3	19.1	3.1	29.5	-26.4	P
3.586	23.1	29.2	26.9	0.3	19.1	2.0	29.5	-27.5	P
24.376	26.9	29.0	15.4	0.5	19.1	-5.3	29.5	-34.8	P
27.051	28.4	28.8	17.3	0.5	19.1	-1.8	29.5	-31.3	P

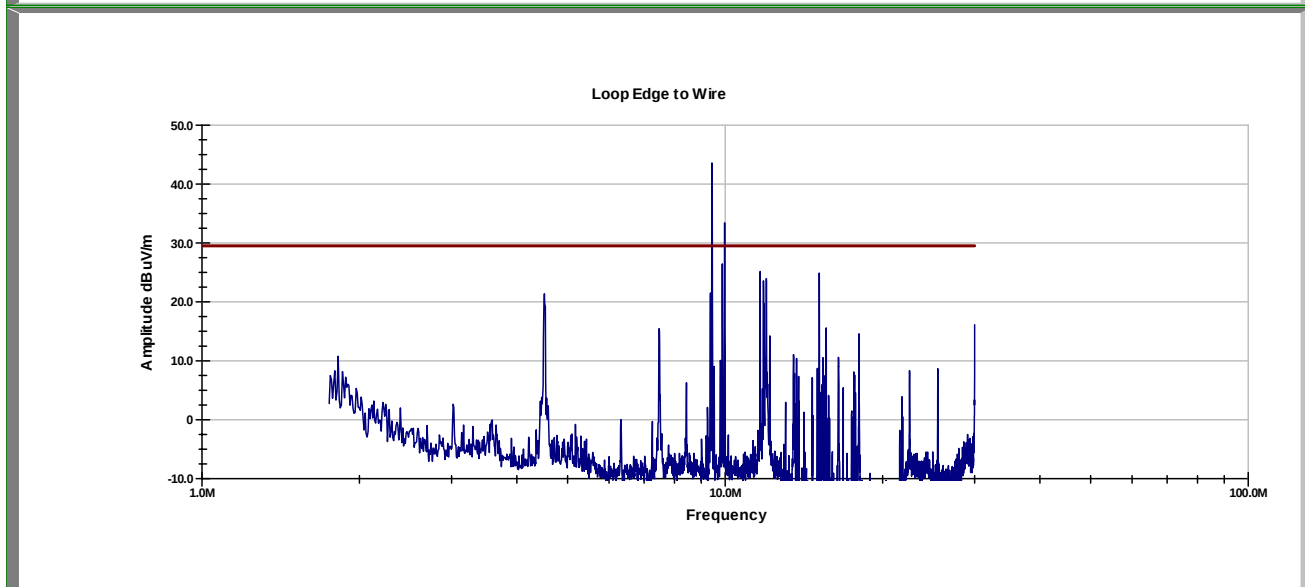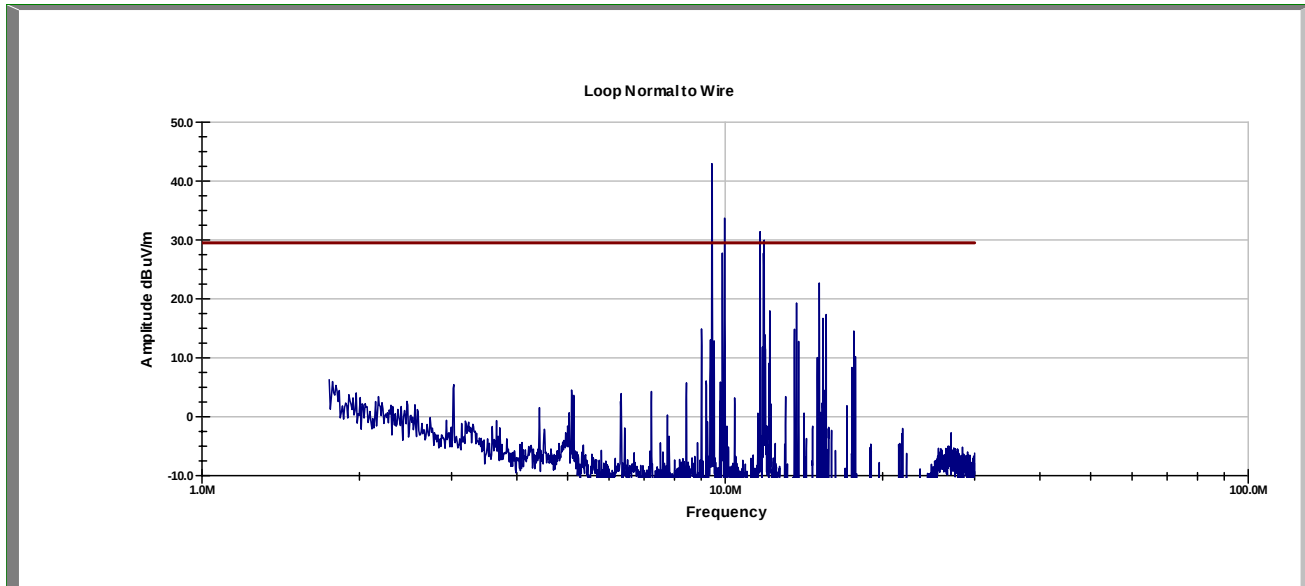



Field Strengths (location 3) 1.705 MHz– 30 MHz									
Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.024	25.2	29.2	28.6	0.3	19.1	5.8	29.5	-23.7	P
2.218	24.4	29.2	28.3	0.3	19.1	4.7	29.5	-24.8	P
2.598	21.4	29.2	27.7	0.3	19.1	1.1	29.5	-28.4	P
5.131	25.1	29.2	23.7	0.3	19.1	0.8	29.5	-28.7	P
23.909	25.1	29.0	17.1	0.5	19.1	-5.4	29.5	-34.9	P
29.073	32.3	28.6	18.0	0.5	19.1	3.0	29.5	-26.5	P

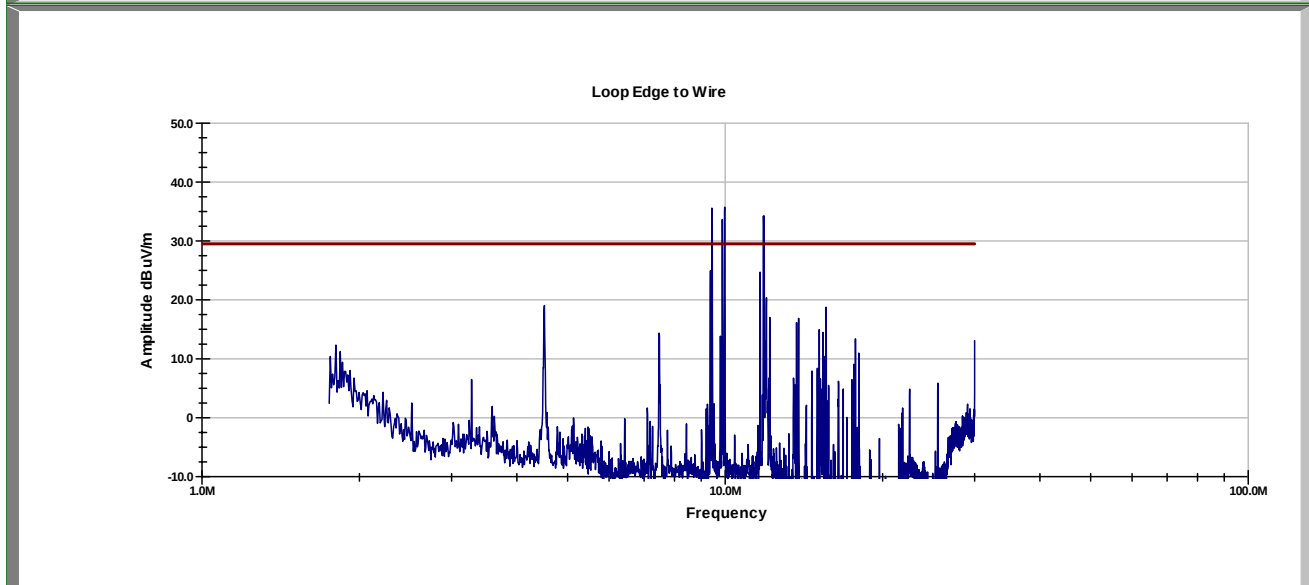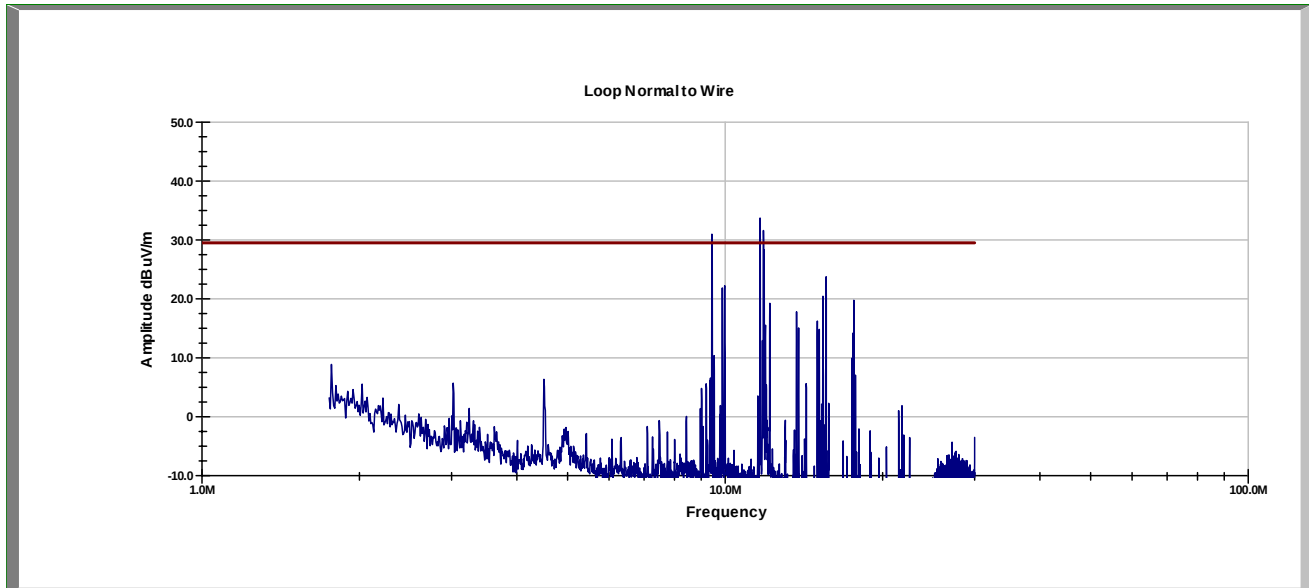

Field Strengths (location 4) 1.705 MHz– 30 MHz									
Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.015	25.6	29.2	28.7	0.3	19.1	6.3	29.5	-23.2	P
2.138	25.5	29.2	28.5	0.3	19.1	6.0	29.5	-23.5	P
3.251	22.9	29.2	27.2	0.3	19.1	2.1	29.5	-27.4	P
3.613	24.4	29.2	26.8	0.3	19.1	3.2	29.5	-26.3	P
23.909	25.1	29.0	17.1	0.5	19.1	-5.4	29.5	-34.9	P
29.073	35	28.6	18.0	0.5	19.1	5.7	29.5	-23.8	P

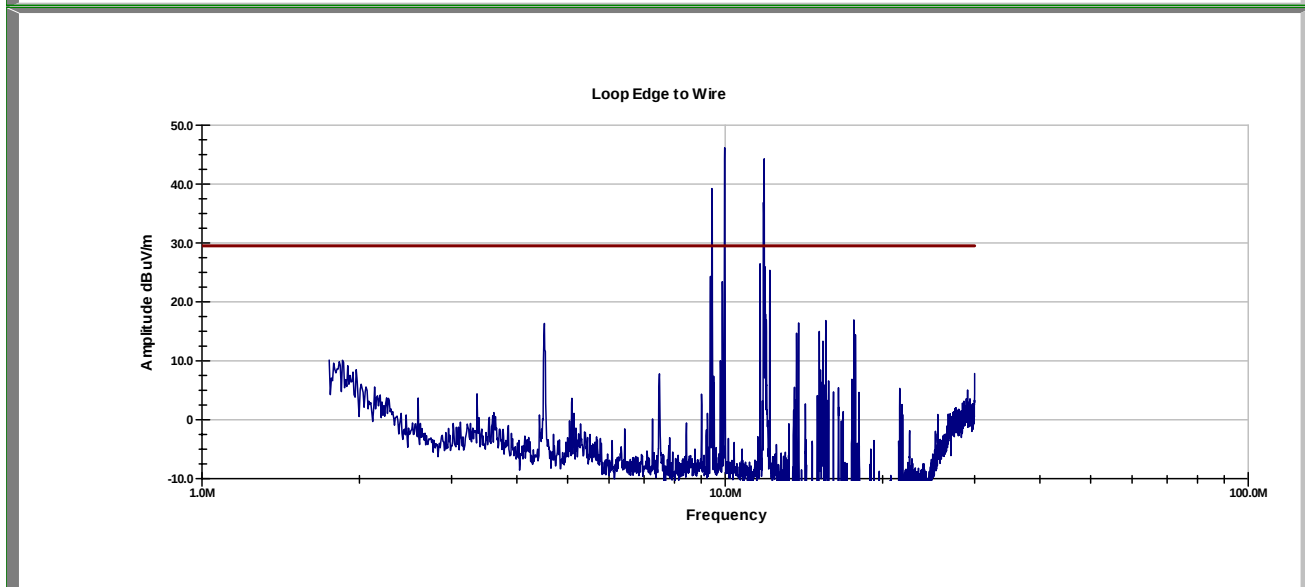
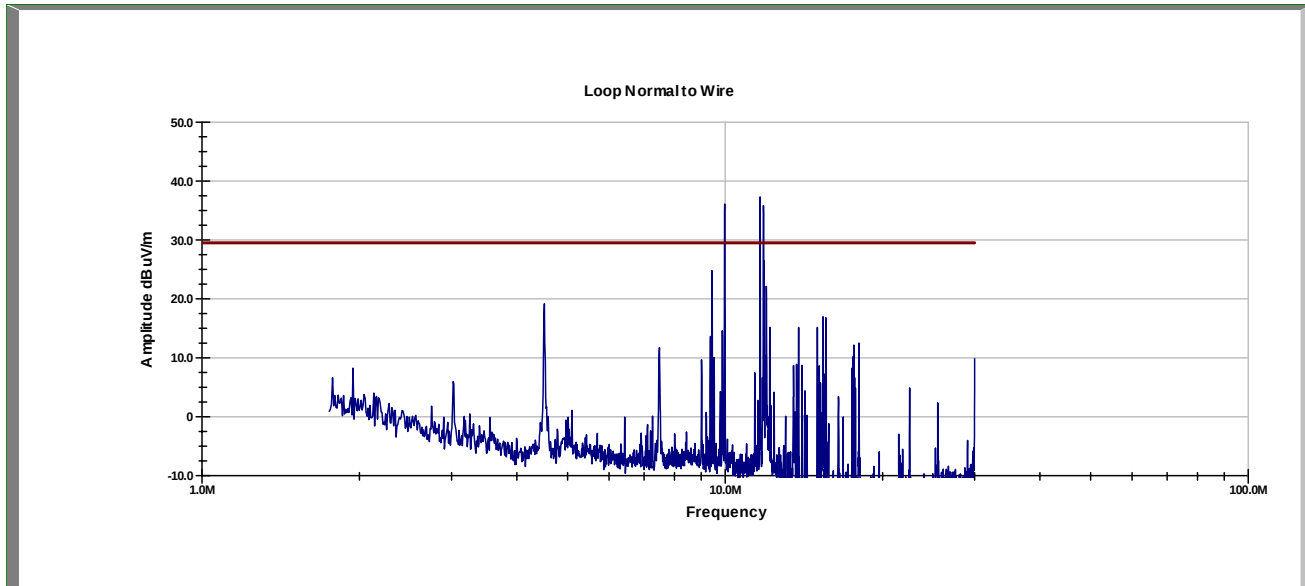


Field Strengths (location 5) 1.705 MHz– 30 MHz									
Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.262	25.6	29.2	28.3	0.3	19.1	5.9	29.5	-23.6	P
2.439	24.6	29.2	28.0	0.3	19.1	4.6	29.5	-24.9	P
3.604	25	29.2	26.8	0.3	19.1	3.8	29.5	-25.7	P
5.449	24.5	29.2	23.6	0.3	19.1	0.1	29.5	-29.4	P
6.941	24.4	29.2	22.2	0.3	19.1	-1.4	29.5	-30.9	P
29.073	36.2	28.6	18.0	0.5	19.1	6.9	29.5	-22.6	P

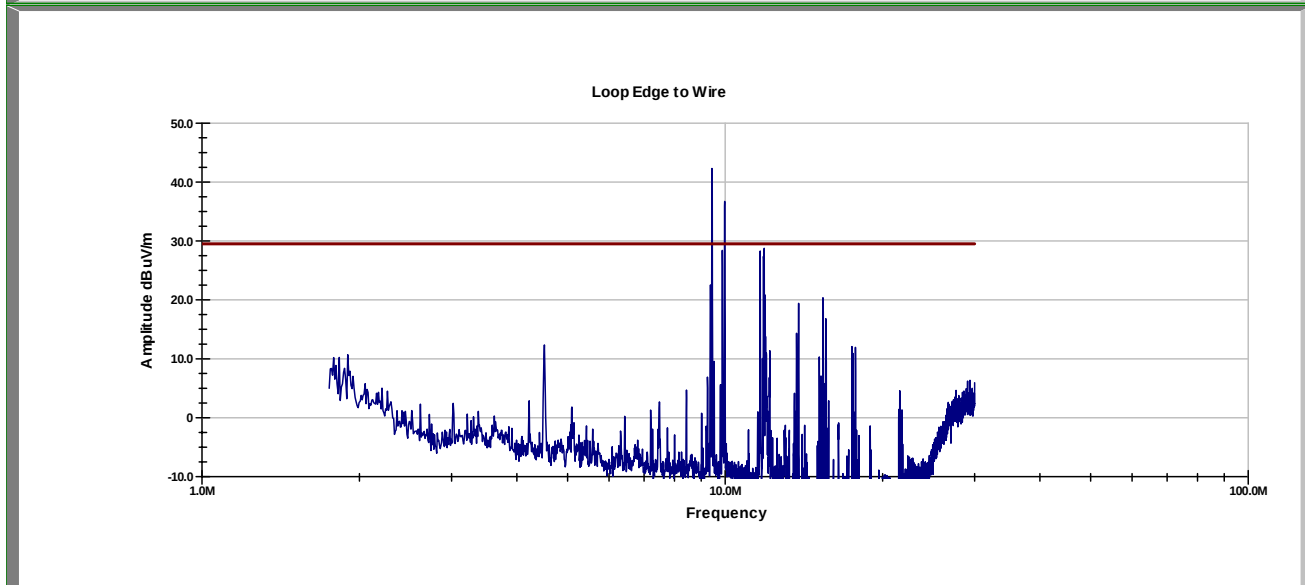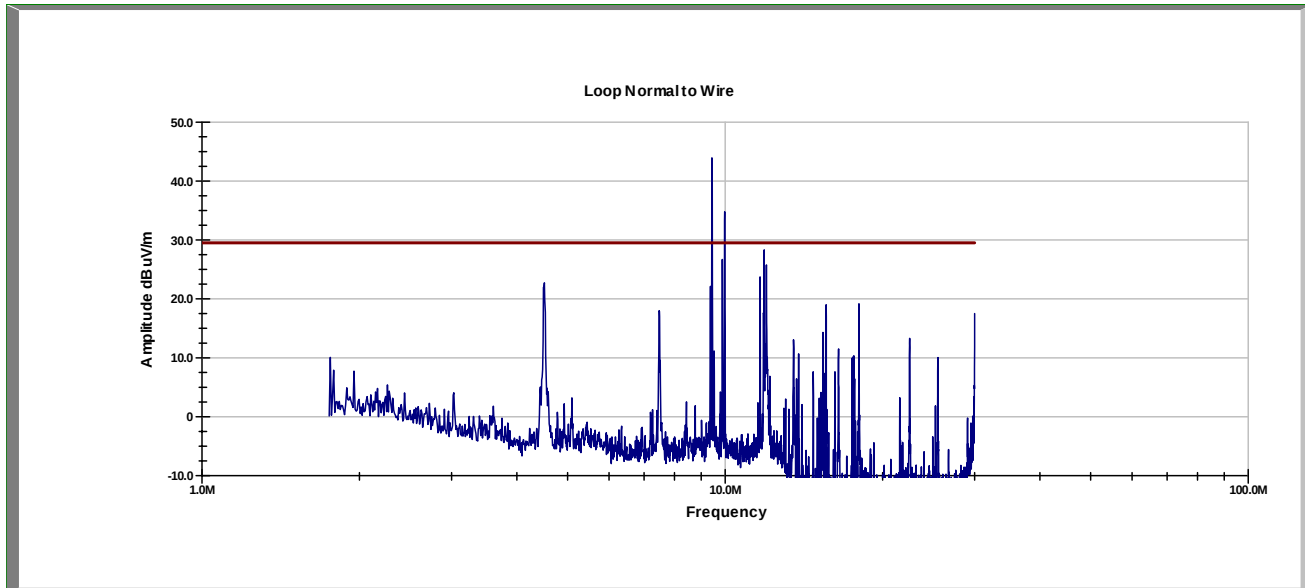



Field Strengths (location 6) 1.705 MHz – 30 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.174	25.1	29.2	28.4	0.3	19.1	5.5	29.5	-24.0	P
2.5	23.2	29.2	27.9	0.3	19.1	3.1	29.5	-26.4	P
3.577	28	29.2	26.9	0.3	19.1	6.9	29.5	-22.6	P
5.096	25.2	29.2	23.7	0.3	19.1	0.9	29.5	-28.6	P
23.909	25.1	29.0	17.1	0.5	19.1	-5.4	29.5	-34.9	P
29.965	36	28.6	18.8	0.5	19.1	7.6	29.5	-21.9	P

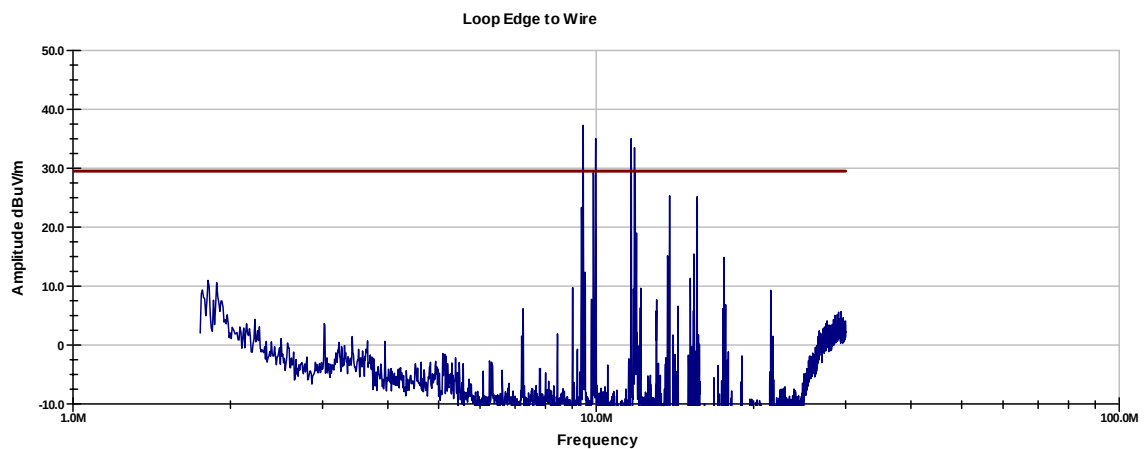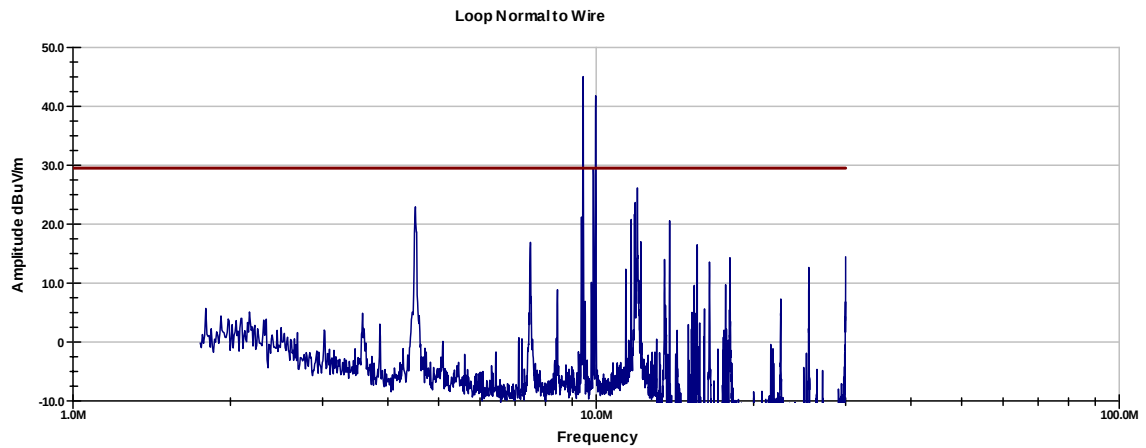



Field Strengths (location 7) 1.705 MHz– 30 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.094	24.2	29.2	28.5	0.3	19.1	4.7	29.5	-24.8	P
2.58	23.9	29.2	27.7	0.3	19.1	3.6	29.5	-25.9	P
3.569	24.3	29.2	26.9	0.3	19.1	3.2	29.5	-26.3	P
5.096	26.8	29.2	23.7	0.3	19.1	2.5	29.5	-27.0	P
20.633	23.8	29.2	15.8	0.4	19.1	-8.3	29.5	-37.8	P
29.082	36.3	28.6	18.0	0.5	19.1	7.0	29.5	-22.5	P

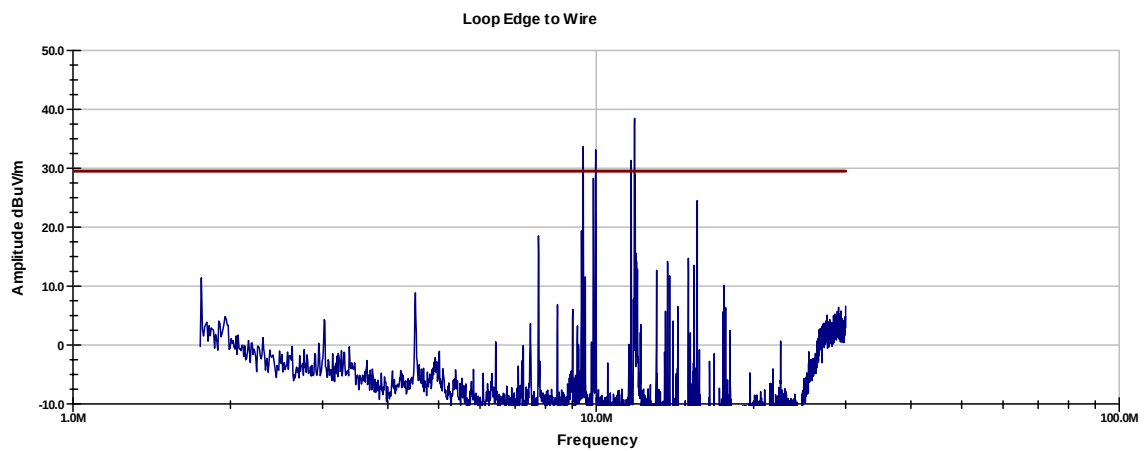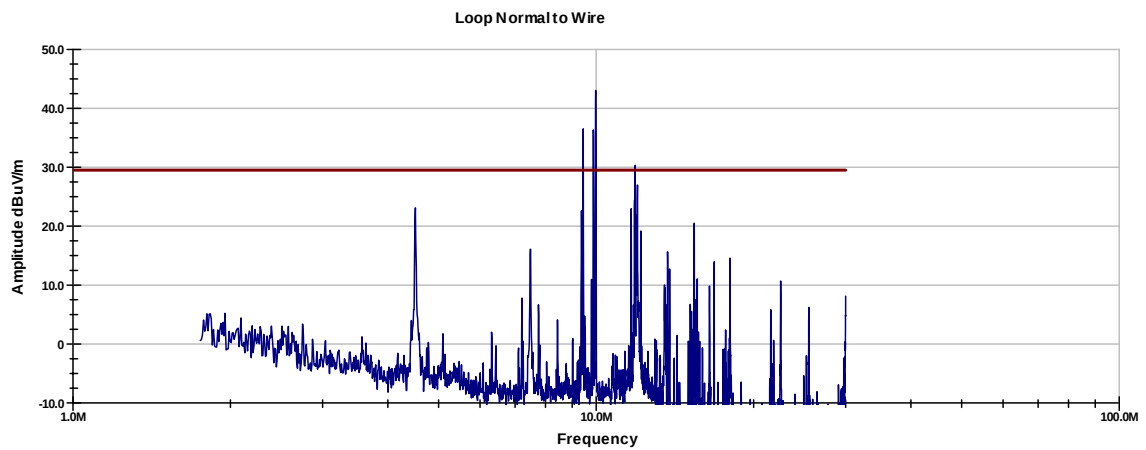



Field Strengths (location 8) 1.705 MHz– 30 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.236	22.6	29.2	28.3	0.3	19.1	2.9	29.5	-26.6	P
2.439	22.9	29.2	28.0	0.3	19.1	2.9	29.5	-26.6	P
2.606	24.8	29.2	27.7	0.3	19.1	4.5	29.5	-25.0	P
5.37	22.7	29.2	23.6	0.3	19.1	-1.6	29.5	-31.1	P
20.227	26.2	29.2	15.9	0.4	19.1	-5.8	29.5	-35.3	P
29.073	36.7	28.6	18.0	0.5	19.1	7.4	29.5	-22.1	P

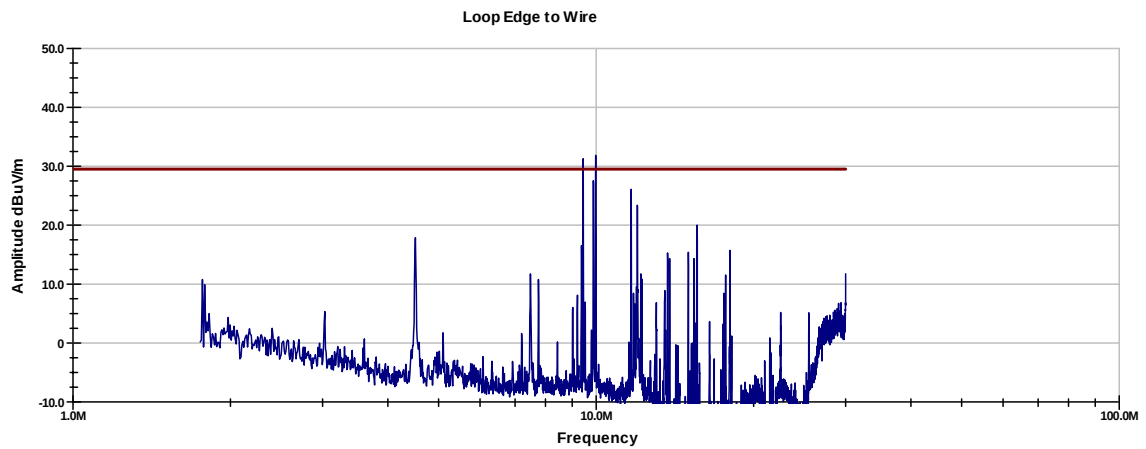
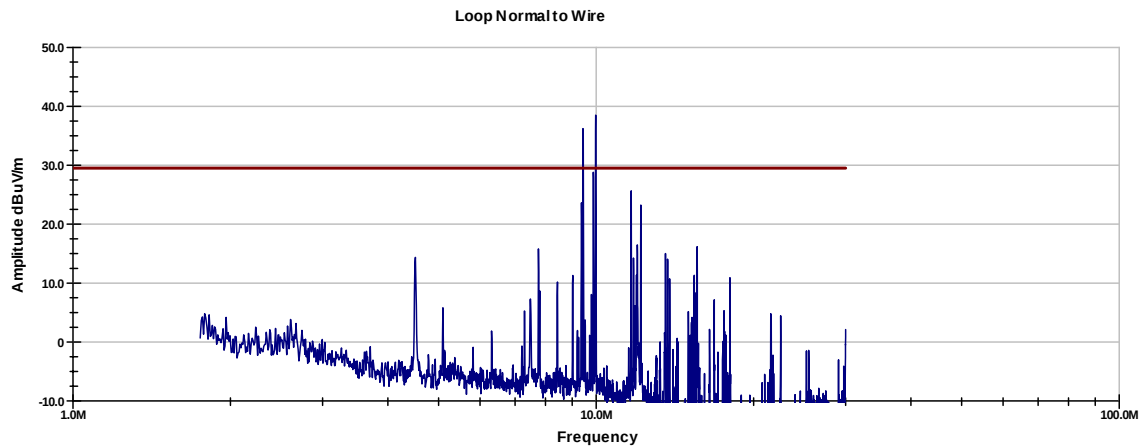


Field Strengths (location 9) 1.705 MHz– 30 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.183	22.6	29.2	28.4	0.3	19.1	3.0	29.5	-26.5	P
2.659	25.3	29.2	27.6	0.3	19.1	4.9	29.5	-24.6	P
3.63	25.8	29.2	26.8	0.3	19.1	4.6	29.5	-24.9	P
5.361	23.4	29.2	23.6	0.3	19.1	-0.9	29.5	-30.4	P
18.956	27.8	29.2	15.6	0.4	19.1	-4.5	29.5	-34.0	P
29.073	36.3	28.6	18.0	0.5	19.1	7.0	29.5	-22.5	P

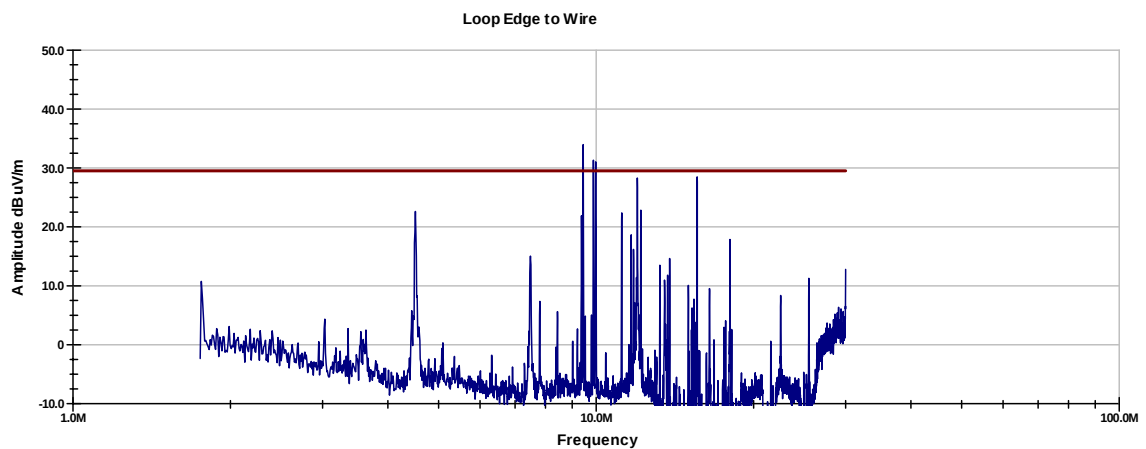
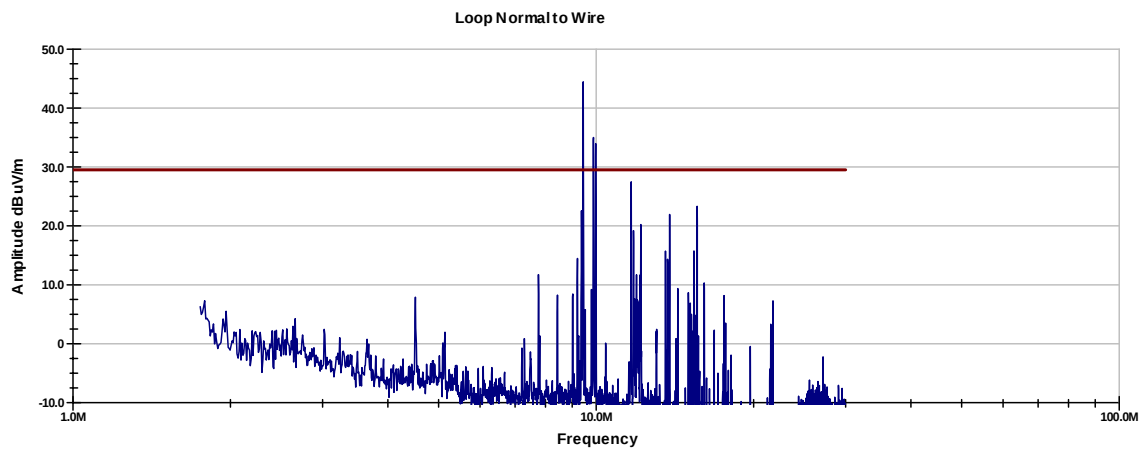


Field Strengths (location 10) 1.705 MHz – 30 MHz									
Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.033	25.5	29.2	28.6	0.3	19.1	6.1	29.5	-23.4	P
3.586	25.8	29.2	26.9	0.3	19.1	4.7	29.5	-24.8	P
6.323	23.7	29.2	22.2	0.3	19.1	-2.1	29.5	-31.6	P
20.086	27.1	29.2	15.9	0.4	19.1	-4.9	29.5	-34.4	P
24.376	29.4	29.0	15.4	0.5	19.1	-2.8	29.5	-32.3	P
29.223	33.7	28.6	18.1	0.5	19.1	4.5	29.5	-25.0	P

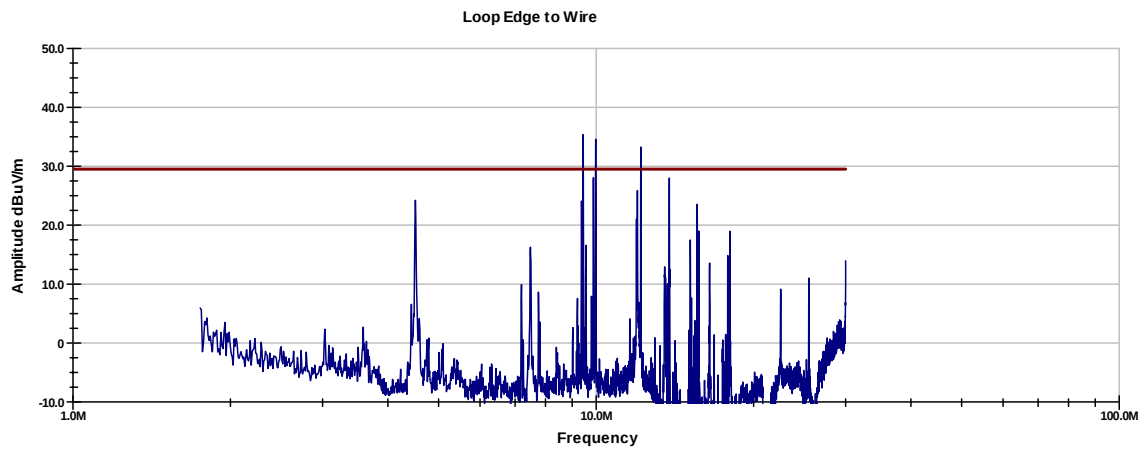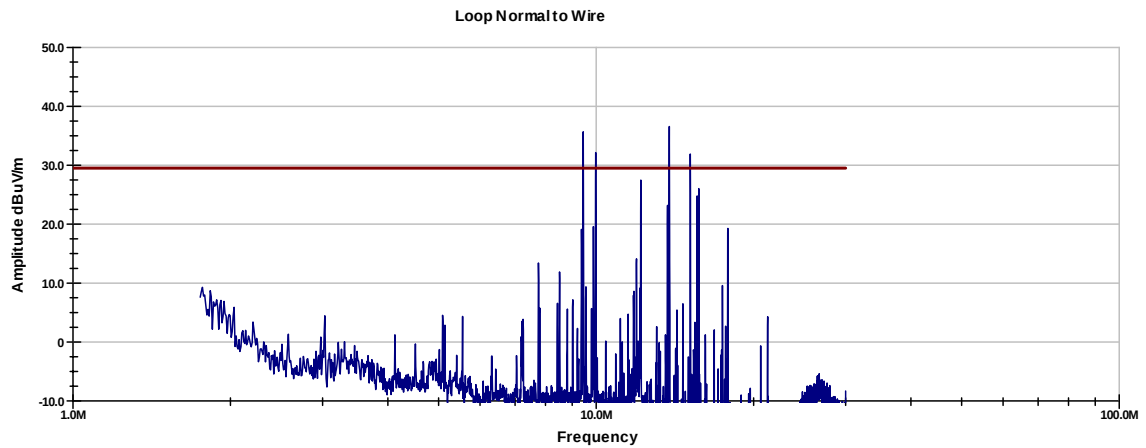



Field Strengths (location 11) 1.705 MHz – 30 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.059	23.4	29.2	28.6	0.3	19.1	4.0	29.5	-25.5	P
2.545	22.5	29.2	27.8	0.3	19.1	2.3	29.5	-27.2	P
6.332	22.1	29.2	22.2	0.3	19.1	-3.7	29.5	-33.2	P
20.369	27.1	29.2	15.8	0.4	19.1	-4.9	29.5	-34.4	P
24.385	32.5	29.0	15.4	0.5	19.1	0.3	29.5	-29.2	P
29.965	33.2	28.6	18.8	0.5	19.1	4.8	29.5	-24.7	P

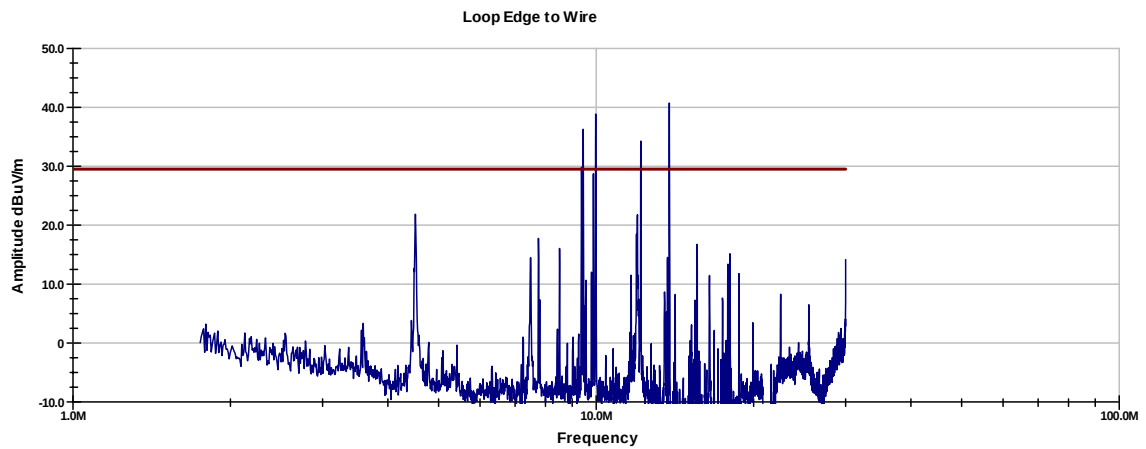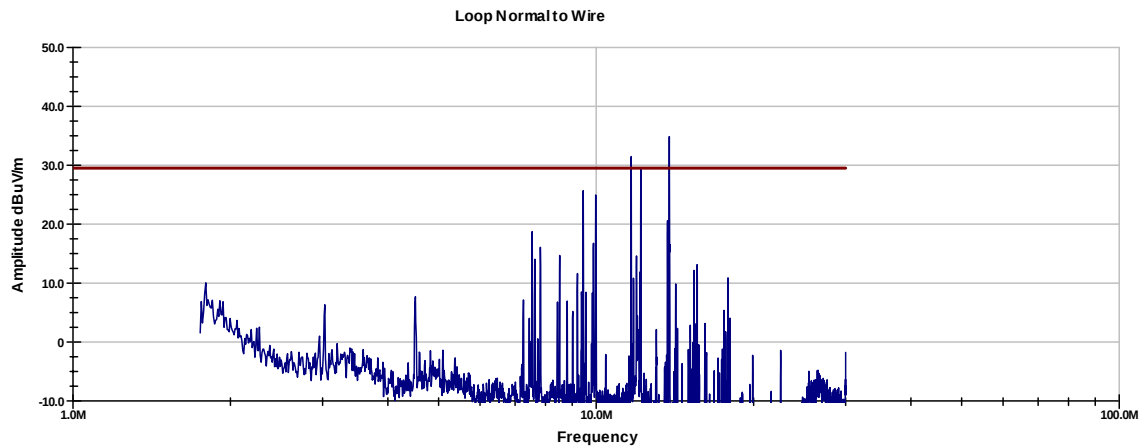



Field Strengths (location 12) 1.705 MHz– 30 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.297	24.4	29.2	28.2	0.3	19.1	4.6	29.5	-24.9	P
2.642	25.1	29.2	27.6	0.3	19.1	4.7	29.5	-24.8	P
3.321	23.4	29.2	27.2	0.3	19.1	2.6	29.5	-26.9	P
5.308	23.7	29.2	23.7	0.3	19.1	-0.6	29.5	-30.1	P
20.316	28.2	29.2	15.8	0.4	19.1	-3.8	29.5	-33.3	P
25.506	36.5	28.9	16.1	0.5	19.1	5.1	29.5	-24.4	P

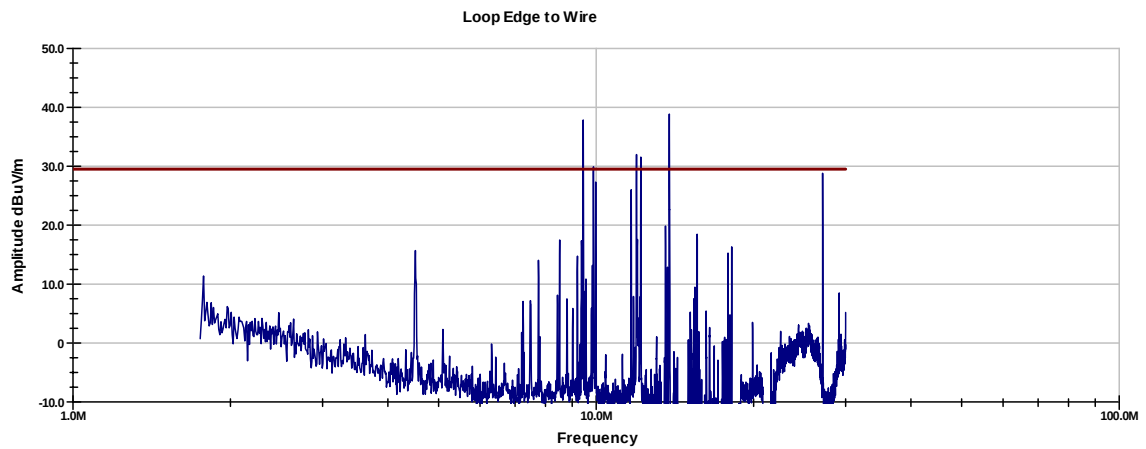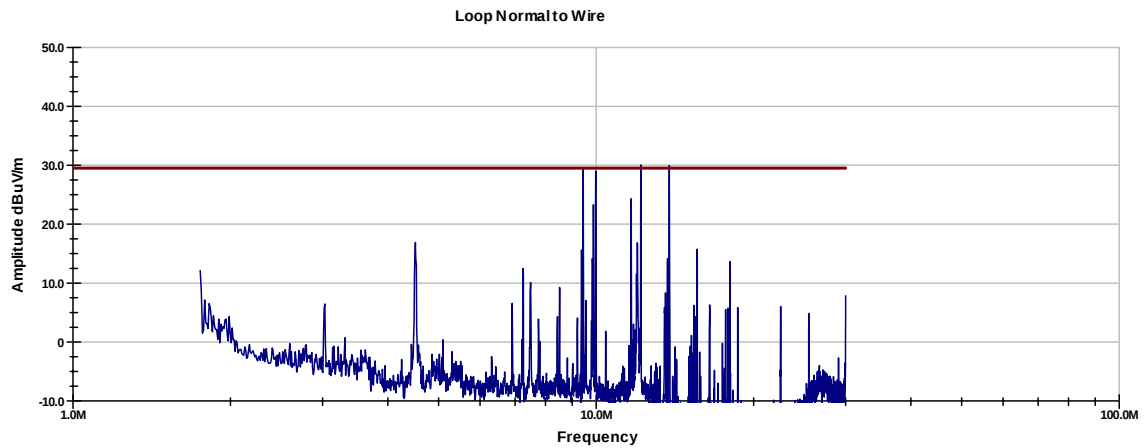



Field Strengths (location 13) 1.705 MHz– 30 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.2	25.2	29.2	28.4	0.3	19.1	5.6	29.5	-23.9	P
2.624	23	29.2	27.7	0.3	19.1	2.7	29.5	-26.8	P
3.586	26.1	29.2	26.9	0.3	19.1	5.0	29.5	-24.5	P
5.361	24.6	29.2	23.6	0.3	19.1	0.3	29.5	-29.2	P
20.316	26.4	29.2	15.8	0.4	19.1	-5.6	29.5	-35.1	P
25.568	36.2	28.9	16.2	0.5	19.1	4.9	29.5	-24.6	P

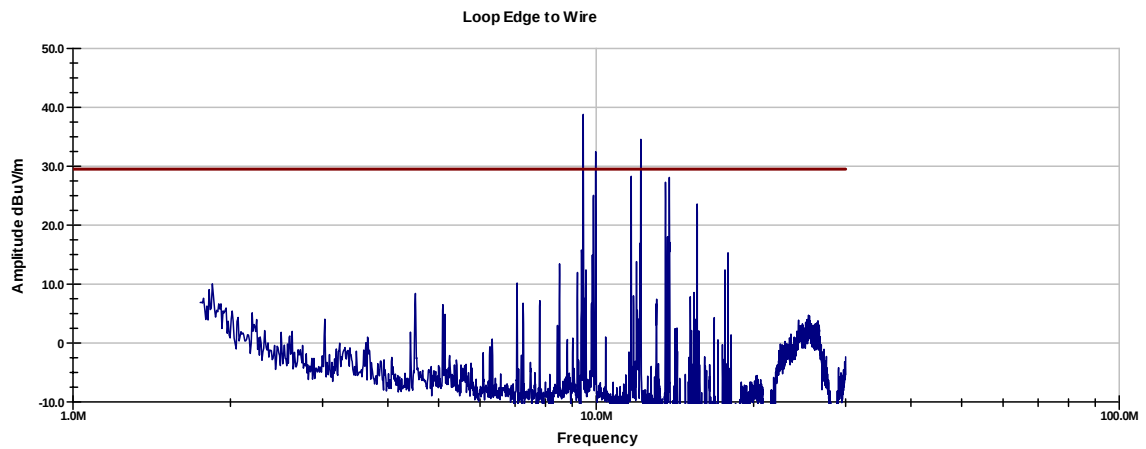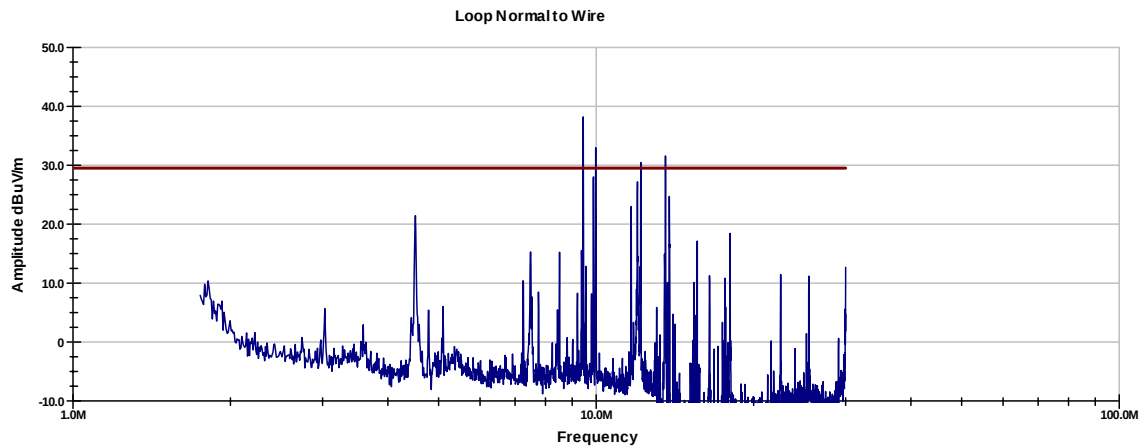



Field Strengths (location 14) 1.705 MHz– 30 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.059	23.5	29.2	28.6	0.3	19.1	4.1	29.5	-25.4	P
2.227	22.6	29.2	28.3	0.3	19.1	2.9	29.5	-26.6	P
2.615	25.1	29.2	27.7	0.3	19.1	4.8	29.5	-24.7	P
3.657	24.4	29.2	26.8	0.3	19.1	3.2	29.5	-26.3	P
19.724	25.9	29.1	15.1	0.4	19.1	-6.8	29.5	-36.3	P
25.506	37.8	28.9	16.1	0.5	19.1	6.4	29.5	-23.1	P

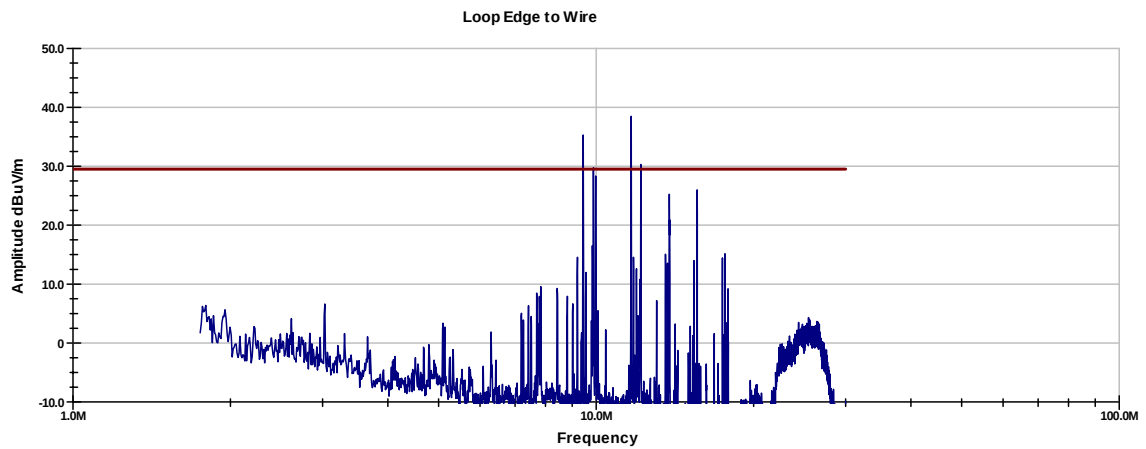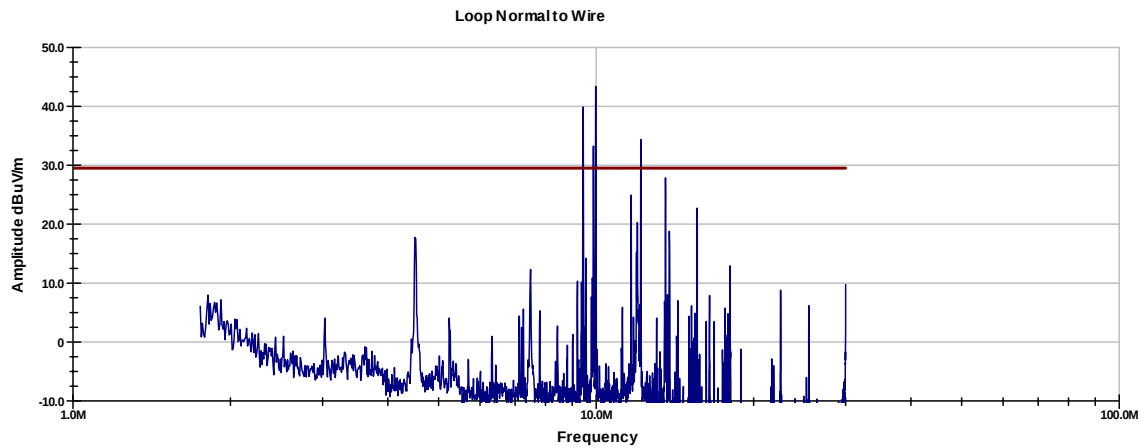



Field Strengths (location 15) 1.705 MHz– 30 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.006	25.5	29.2	28.7	0.3	19.1	6.2	29.5	-23.3	P
2.695	27.5	29.2	27.6	0.3	19.1	7.1	29.5	-22.4	P
3.586	27.1	29.2	26.9	0.3	19.1	6.0	29.5	-23.5	P
5.096	24.9	29.2	23.7	0.3	19.1	0.6	29.5	-28.9	P
6.322	23.4	29.2	22.2	0.3	19.1	-2.4	29.5	-31.9	P
25.312	35	28.9	16.0	0.5	19.1	3.5	29.5	-26.0	P

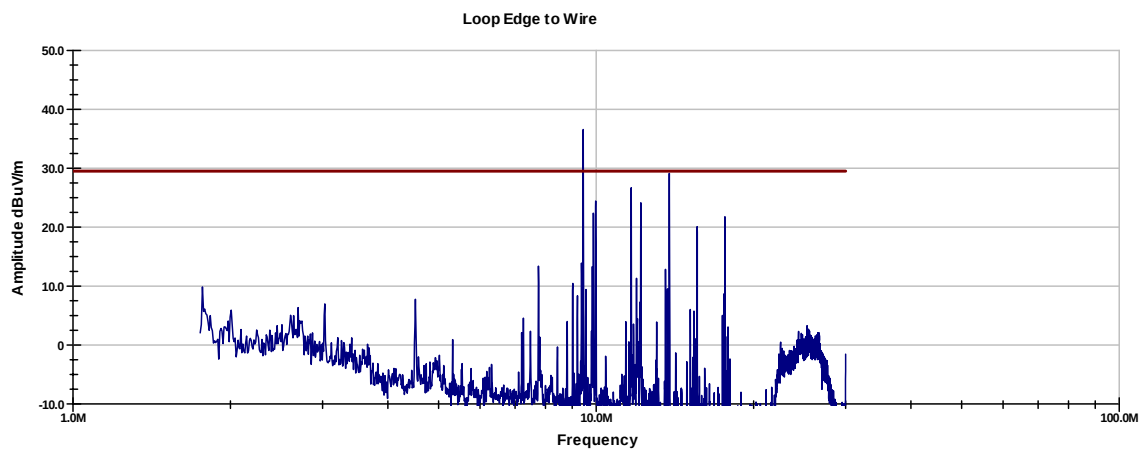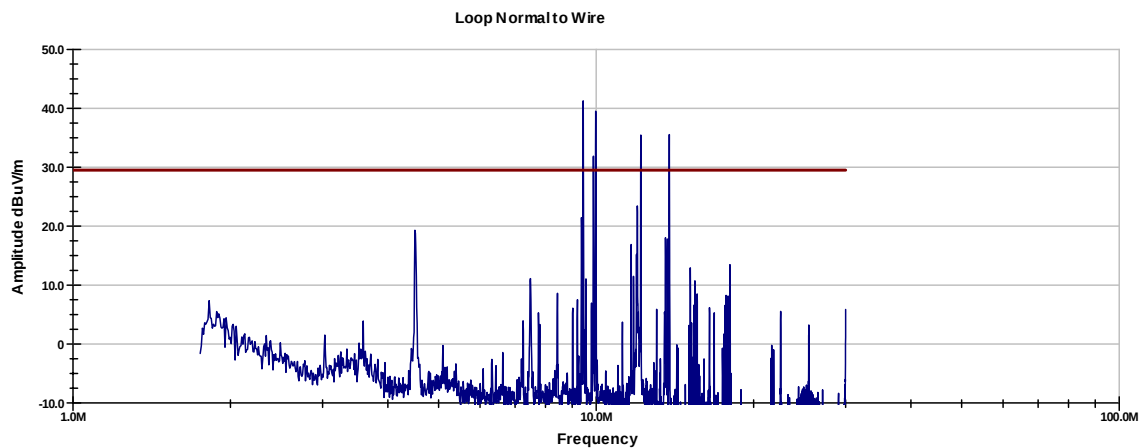

Field Strengths (location 16) 1.705 MHz– 30 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
2.183	26.4	29.2	28.4	0.3	19.1	6.8	29.5	-22.7	P
2.668	23.4	29.2	27.6	0.3	19.1	3.0	29.5	-26.5	P
3.586	23.7	29.2	26.9	0.3	19.1	2.6	29.5	-26.9	P
5.087	28.8	29.2	23.7	0.3	19.1	4.5	29.5	-25.0	P
20.316	22.3	29.2	15.8	0.4	19.1	-9.7	29.5	-39.2	P
25.506	36.8	28.9	16.1	0.5	19.1	5.4	29.5	-24.1	P

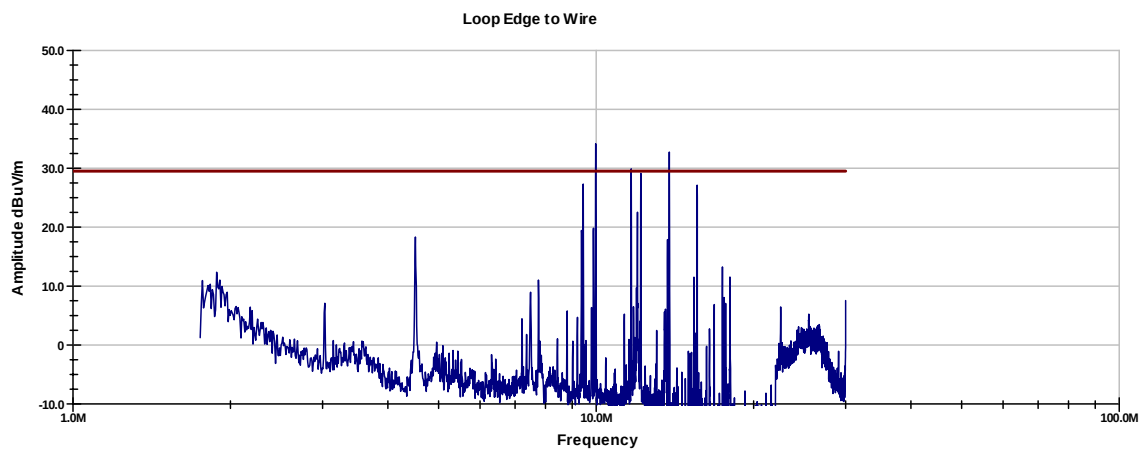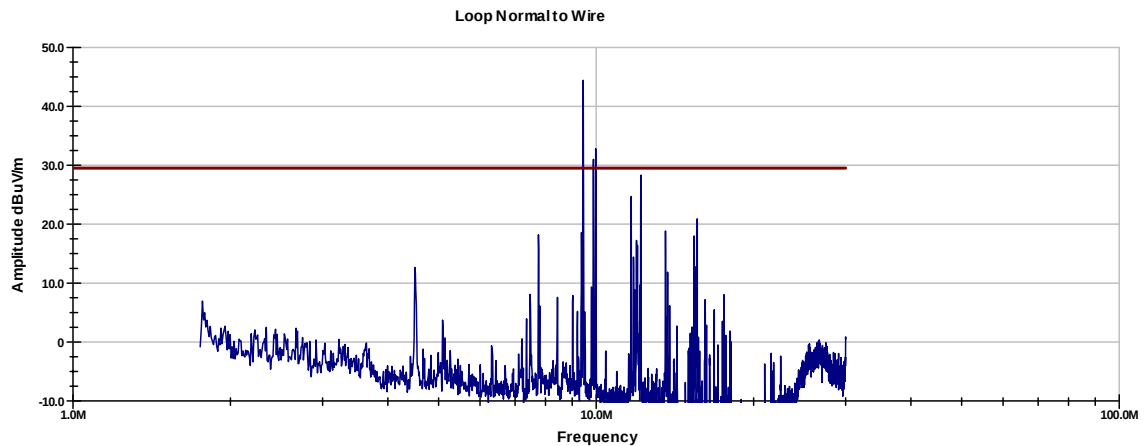

Examine all the data taken in this test sequence and enter the worst case corrected field strengths recorded regardless of location in the tables below for inclusion in the Test Report. (Indicate whether Peak or Quasi-Peak detection was used on each reading)

Field Strengths (all locations) 1.705 MHz– 30 MHz									
Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
29.965	36	28.6	18.8	0.5	19.1	7.6	29.5	-21.9	P
2.006	26.8	29.2	28.7	0.3	19.1	7.5	29.5	-22	P
29.073	36.7	28.6	18	0.5	19.1	7.4	29.5	-22.1	P
2.695	27.5	29.2	27.6	0.3	19.1	7.1	29.5	-22.4	P
3.577	28	29.2	26.9	0.3	19.1	6.9	29.5	-22.6	P
25.506	37.8	28.9	16.1	0.5	19.1	6.4	29.5	-23.1	P

TESTING ABOVE 30 MHz

30 MHz – 1,000 MHz

1. Contact the BPL system operator and set the EUT for MAXIMUM power and MAXIMUM burst rate before **Certification** testing. If **Validation** testing is performed there is no need for MAXIMUM power testing and only COMPLIANCE (operating) power is used.
2. Set the EMI Receiver or Spectrum Analyzer to 120 kHz IF bandwidth and PEAK detection. Set the frequency step size for 60 kHz (half the IF bandwidth) and scan the spectra from 30 MHz – 1,000 MHz for BPL emissions. For spectrum analyzers, scan smaller sub-ranges to allow at least three pixels on the analyzer's screen to fit within the 120 kHz bandwidth. EXAMPLE: (400 pixels/3) x 120 kHz restricts scan widths to 16 MHz (1 MHz/div maximum) Covering 30-1,000 MHz would require 97 sub-ranges each 10 MHz wide. (1 MHz/div x 10 div on-screen)
3. Orient the E-field antenna vertically and then horizontally to record data at both polarizations.
4. Identify the six highest BPL emissions in each polarization. (validate these choices by demodulating them and listening for voice or music)
5. Validate that the Spectrum Analyzer is using a pre-amplifier and it is not being overloaded. Increase the analyzer's input attenuation to verify that the instrument is not in amplitude compression by making sure all signals move in 10dB increments with the attenuator setting. Use the same technique with a fixed 10dB attenuator before the preamplifier to ensure that it is not being compressed
6. Validate that the repetition rate is at least 20 Hz by demodulating the audio on each of the six signals. If so, use Quasi-Peak detection on just those six loudest BPL signals and enter the receiver voltage into the worksheet below. If the burst rate is less than 20 Hz enter the Peak voltage into the worksheet below and indicate which detector was used.
7. If voice, non-BPL data or music is demodulated that candidate emission is eliminated and the Receiver is tuned to the next loudest emission for demodulation and identification to find the six highest BPL emissions.
8. Validate that the calculations employed are the same as shown in the worksheet if software is used for this measurement.
9. Capture a complete spectrum showing both polarizations for inclusion into the Test Report.
10. For **Certification** testing, contact the BPL system operator and set the EUT down to its COMPLIANCE power setting. Tell the operator how many dB the system needs to be attenuated for compliance with the FCC limits on field strengths (or below them).



Buried Site 2 Medium Voltage

Professional Testing

Enter the required variables from the test sequence above into the field strength calculations shown in this worksheet.



Field Strengths (location 1) 30 MHz– 1,000 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	40	33.5	17.1	1.0	0.0	24.6	39	-14.4	QP
31.1	37.2	33.5	17.1	1.0	0.0	21.8	39	-17.2	QP
31.9	39	33.5	17.1	1.0	0.0	23.6	39	-15.4	QP

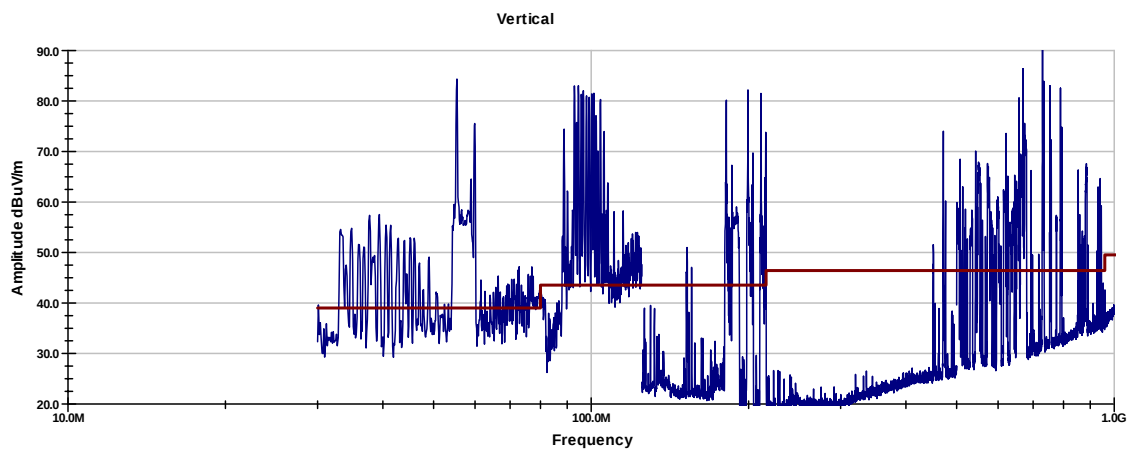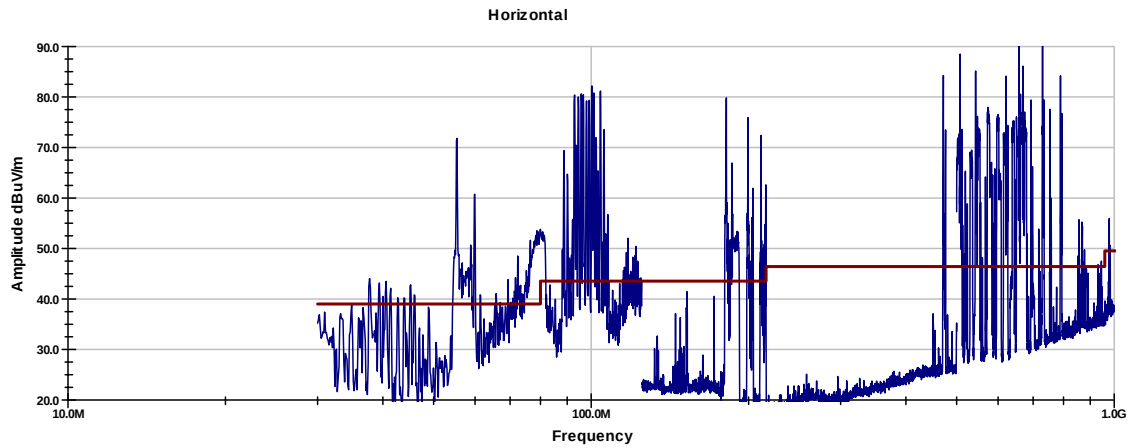



Field Strengths (location 2) 30 MHz– 1,000 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	41.2	33.5	17.1	1.0	0.0	25.8	39	-13.2	QP
31.1	41.5	33.5	17.1	1.0	0.0	26.1	39	-12.9	QP
31.9	39.8	33.5	17.1	1.0	0.0	24.4	39	-14.6	QP

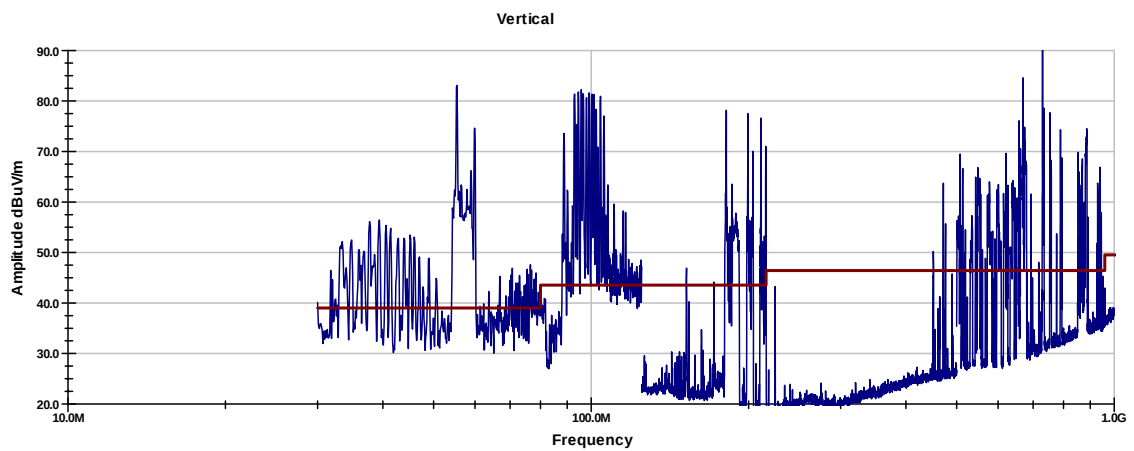
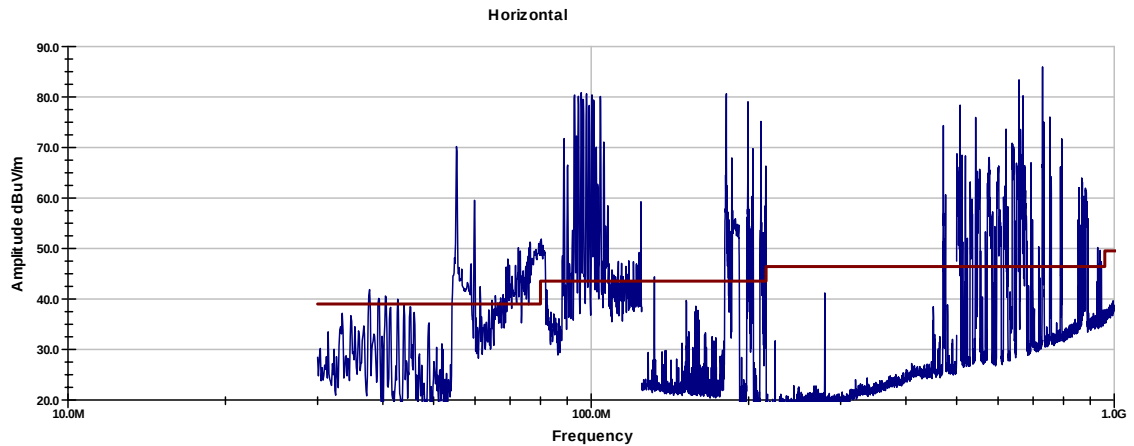


Field Strengths (location 3) 30 MHz– 1,000 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	41.8	33.5	17.1	1.0	0.0	26.4	39	-12.6	QP
31.1	42.7	33.5	17.1	1.0	0.0	27.3	39	-11.7	QP
31.9	44.3	33.5	17.1	1.0	0.0	28.9	39	-10.1	QP

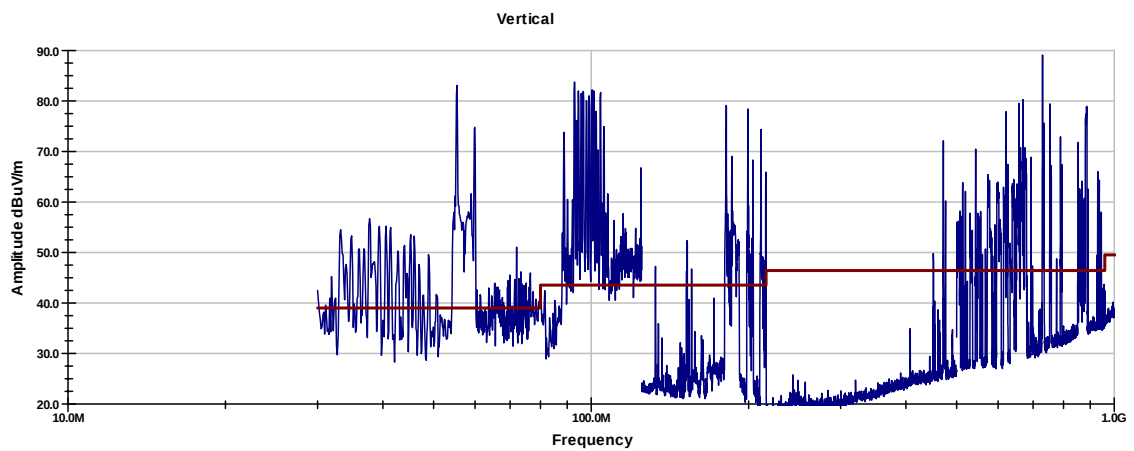
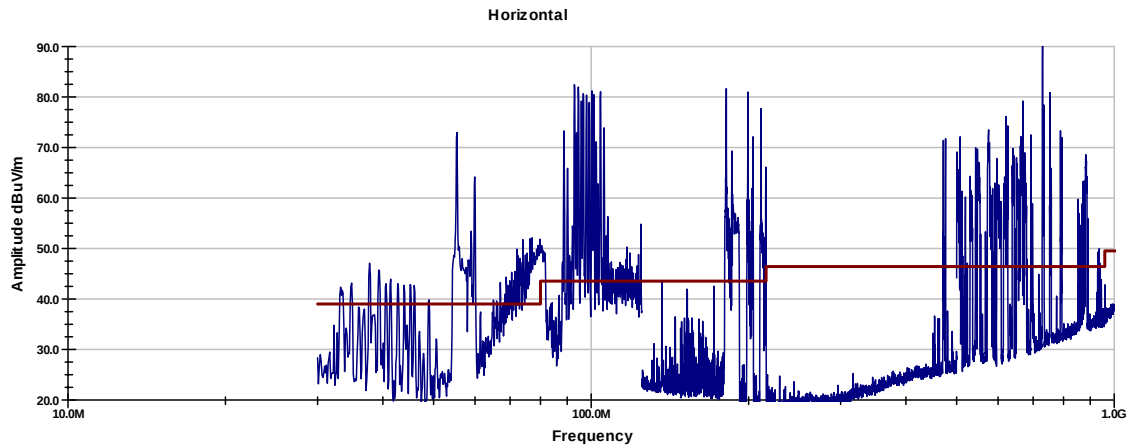


Field Strengths (location 4) 30 MHz– 1,000 MHz									
Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	42.3	33.5	17.1	1.0	0.0	26.9	39	-12.1	QP
31.1	43.4	33.5	17.1	1.0	0.0	28.0	39	-11.0	QP
31.9	42.5	33.5	17.1	1.0	0.0	27.1	39	-11.9	QP

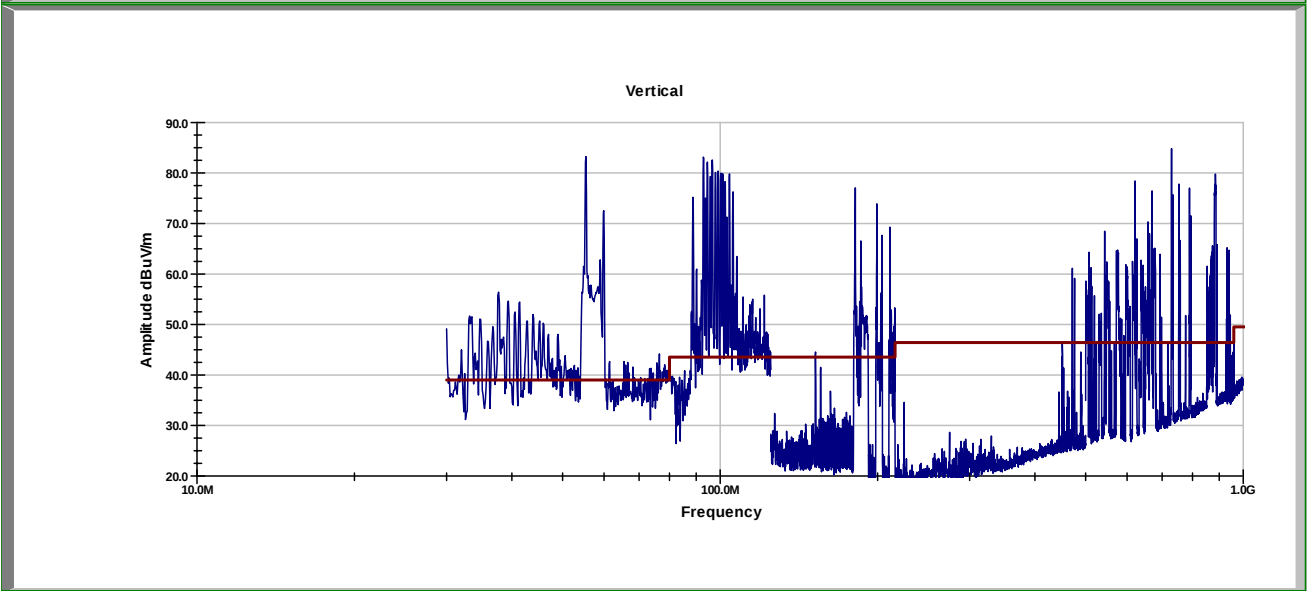
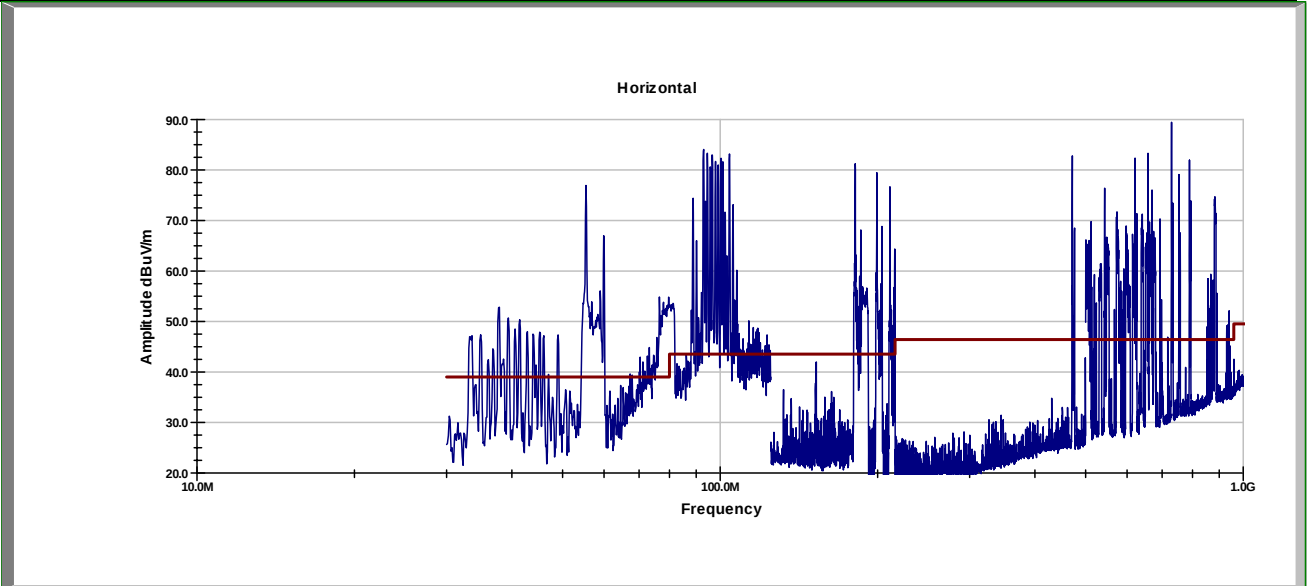


Field Strengths (location 5) 30 MHz– 1,000 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	44.3	33.5	17.1	1.0	0.0	28.9	39	-10.1	QP
31.1	45.2	33.5	17.1	1.0	0.0	29.8	39	-9.2	QP
31.9	43.1	33.5	17.1	1.0	0.0	27.7	39	-11.3	QP

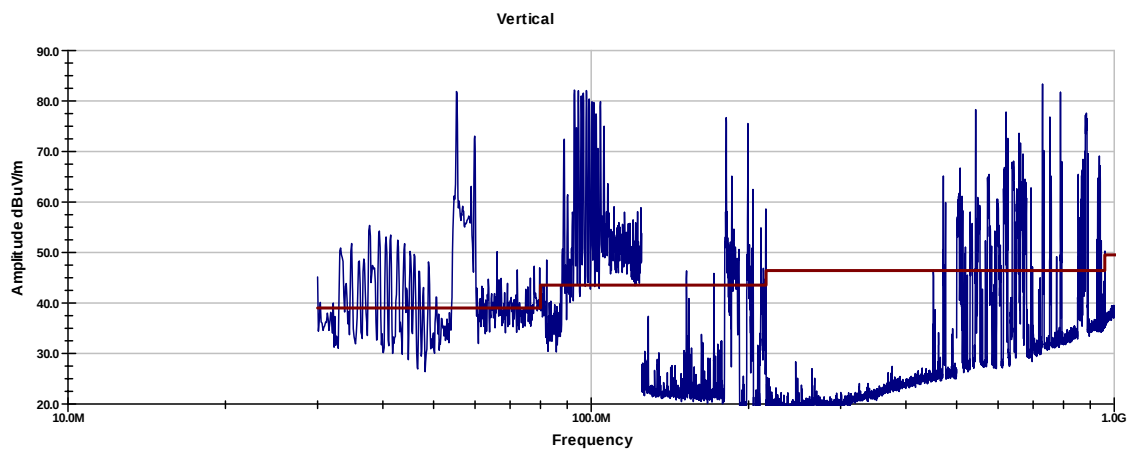
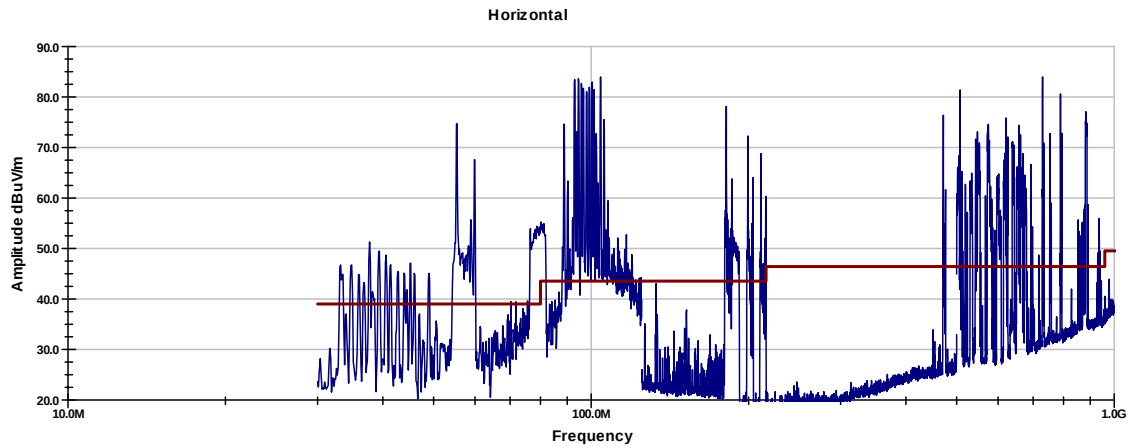


Field Strengths (location 6) 30 MHz– 1,000 MHz									
Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	45.2	33.5	17.1	1.0	0.0	29.8	39	-9.2	QP
31.1	45.2	33.5	17.1	1.0	0.0	29.8	39	-9.2	QP
31.9	43.2	33.5	17.1	1.0	0.0	27.8	39	-11.2	QP

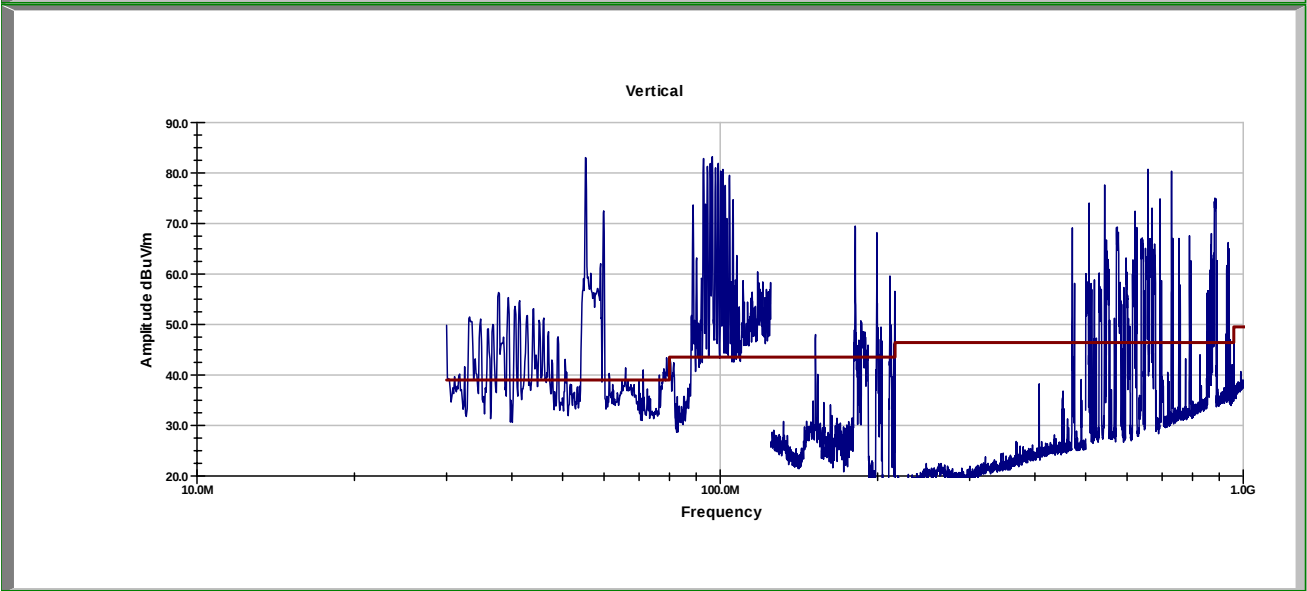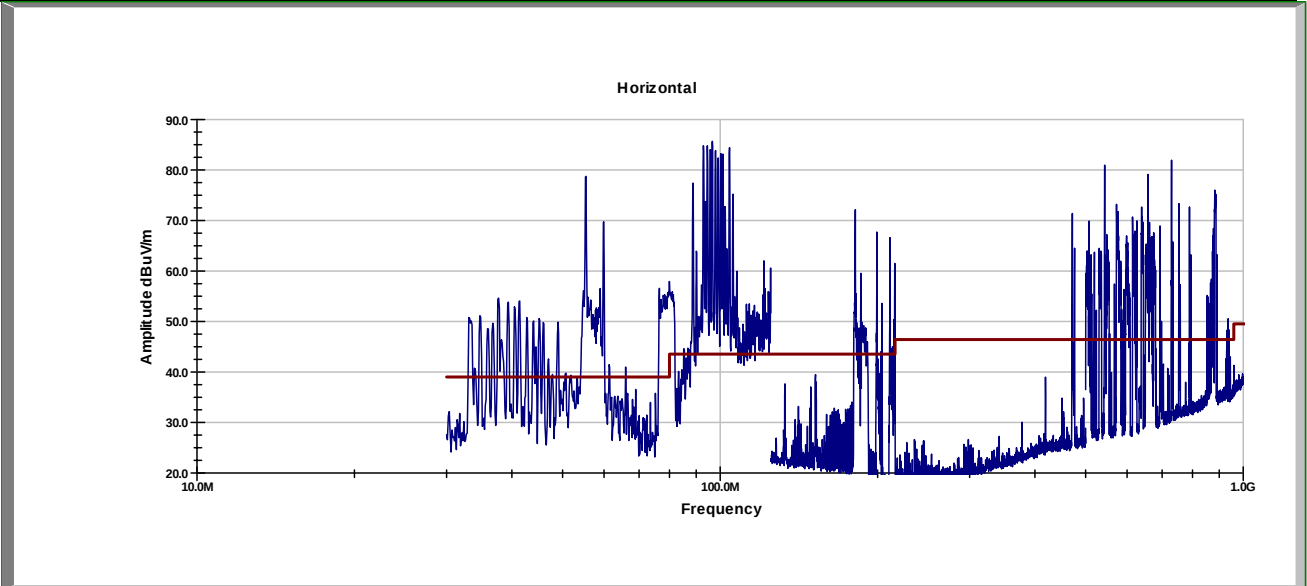



Field Strengths (location 7) 30 MHz– 1,000 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	44.6	33.5	17.1	1.0	0.0	29.2	39	-9.8	QP
31.1	44.5	33.5	17.1	1.0	0.0	29.1	39	-9.9	QP
31.9	42.8	33.5	17.1	1.0	0.0	27.4	39	-11.6	QP

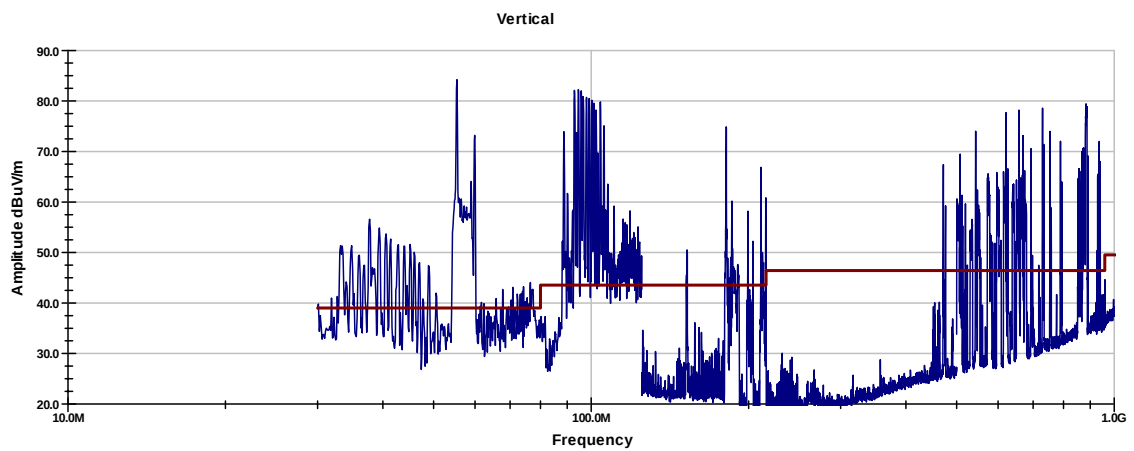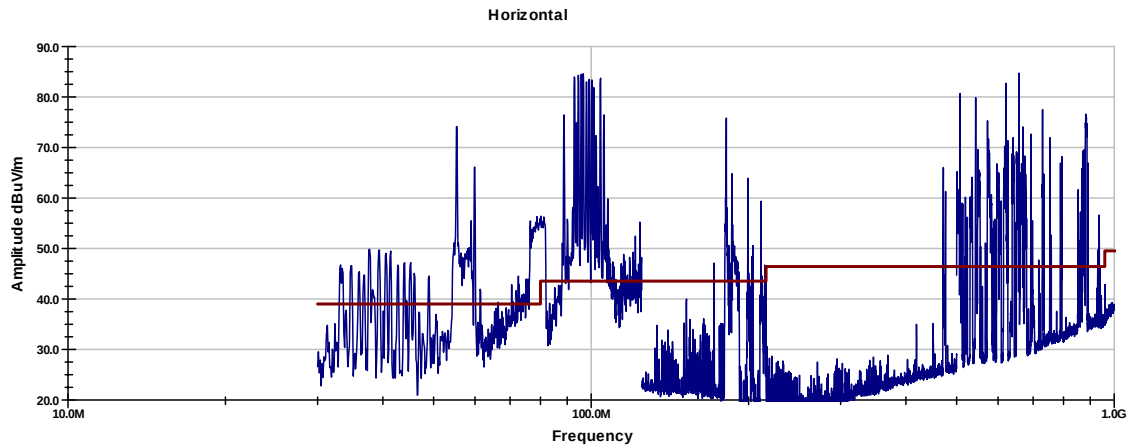



Field Strengths (location 8) 30 MHz– 1,000 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	44.1	33.5	17.1	1.0	0.0	28.7	39	-10.3	QP
31.1	44.4	33.5	17.1	1.0	0.0	29.0	39	-10.0	QP
31.9	43.3	33.5	17.1	1.0	0.0	27.9	39	-11.1	QP

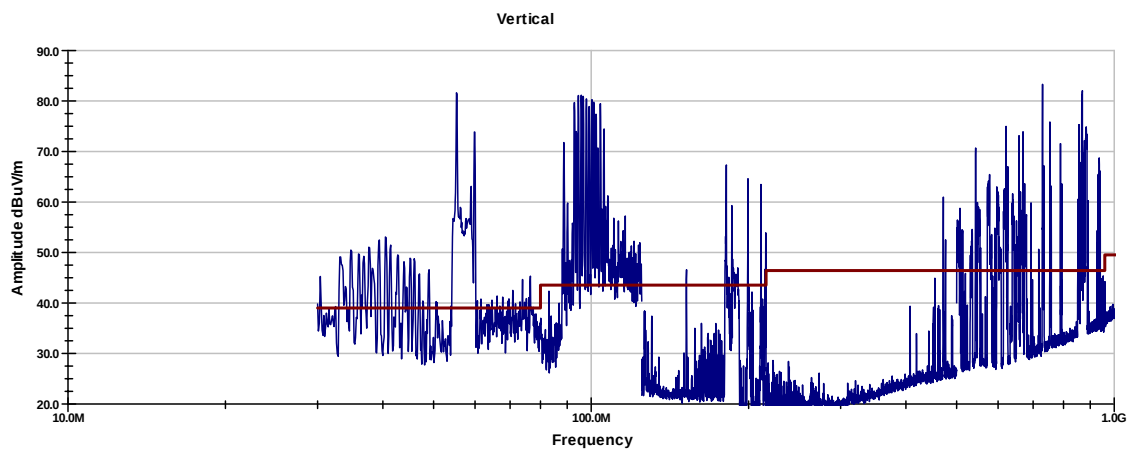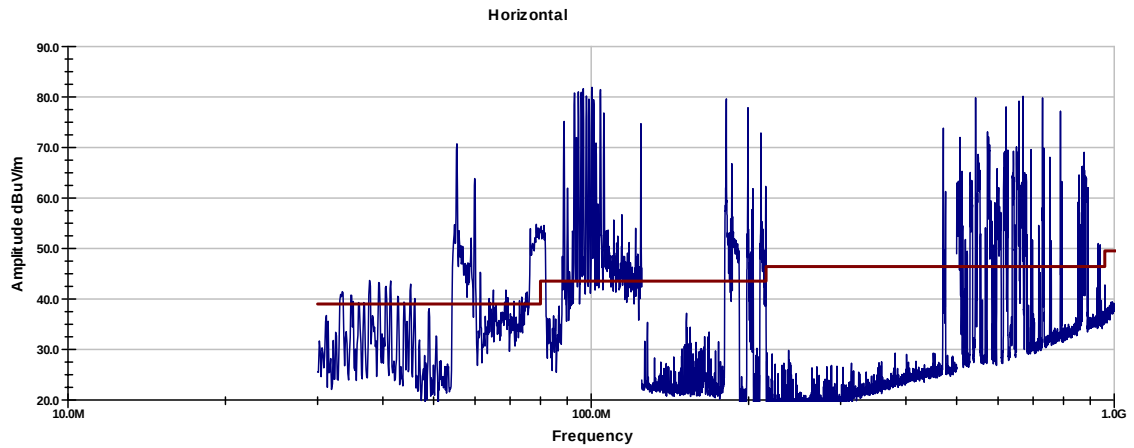



Field Strengths (location 9) 30 MHz– 1,000 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	43.1	33.5	17.1	1.0	0.0	27.7	39	-11.3	QP
31.1	44.1	33.5	17.1	1.0	0.0	28.7	39	-10.3	QP
31.9	43.6	33.5	17.1	1.0	0.0	28.2	39	-10.8	QP

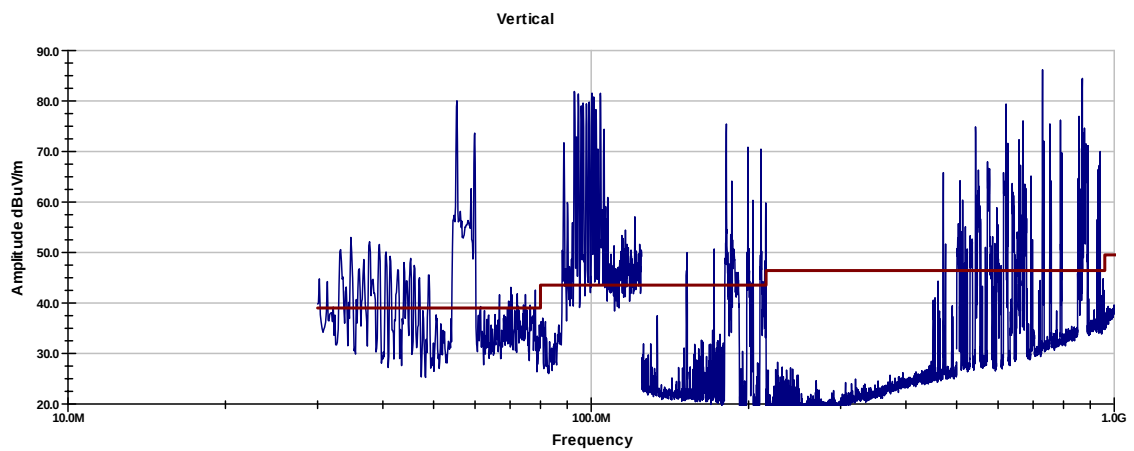
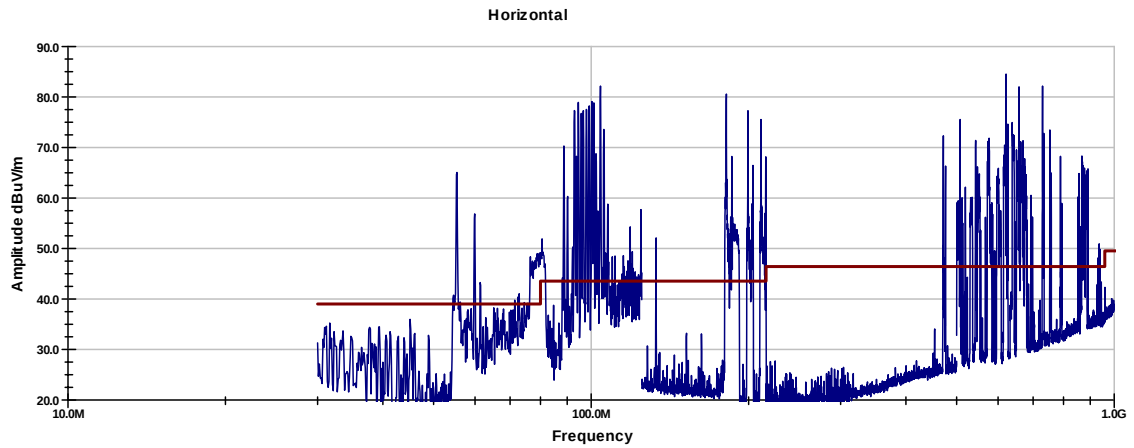


Field Strengths (location 10) 30 MHz– 1,000 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	44.3	33.5	17.1	1.0	0.0	28.9	39	-10.1	QP
31.1	45.9	33.5	17.1	1.0	0.0	30.5	39	-8.5	QP
31.9	46.1	33.5	17.1	1.0	0.0	30.7	39	-8.3	QP

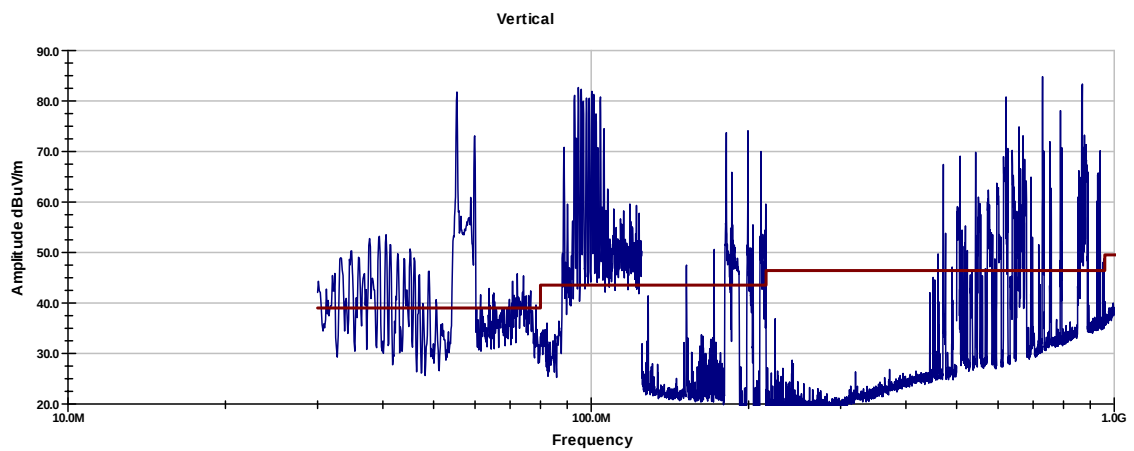
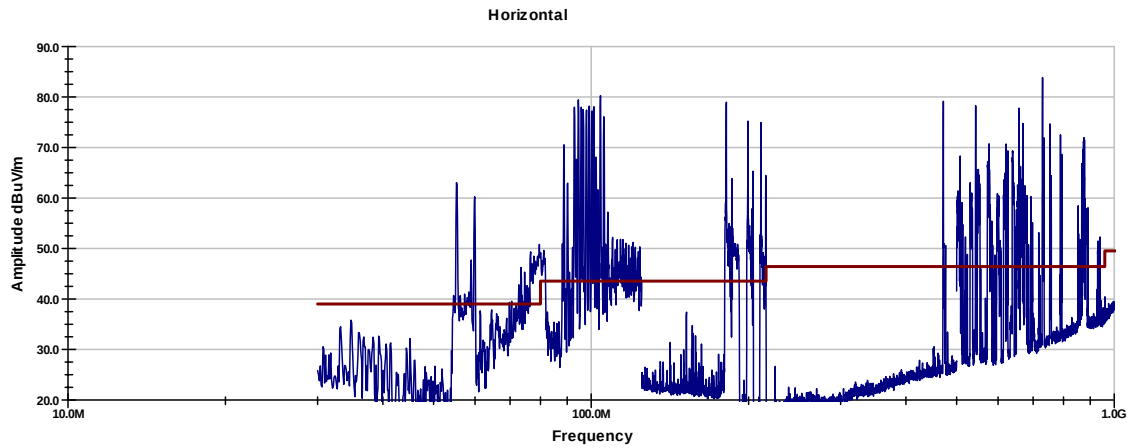


Field Strengths (location 11) 30 MHz– 1,000 MHz									
Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	44.5	33.5	17.1	1.0	0.0	29.1	39	-9.9	QP
31.1	46.5	33.5	17.1	1.0	0.0	31.1	39	-7.9	QP
31.9	47.2	33.5	17.1	1.0	0.0	31.8	39	-7.2	QP

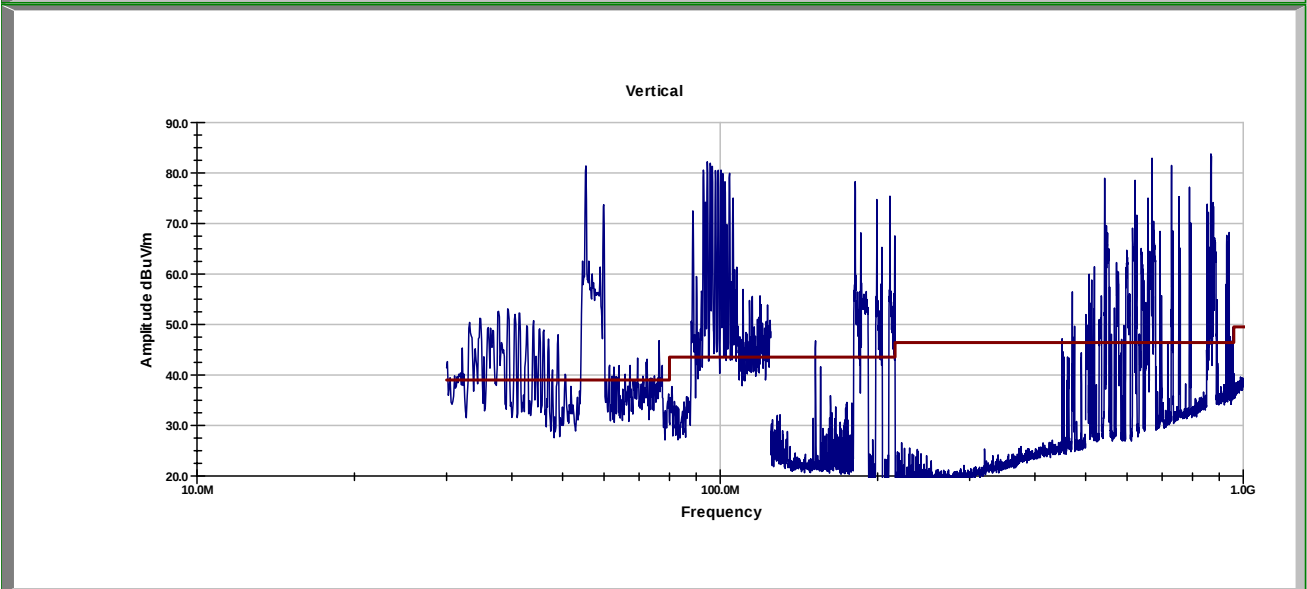
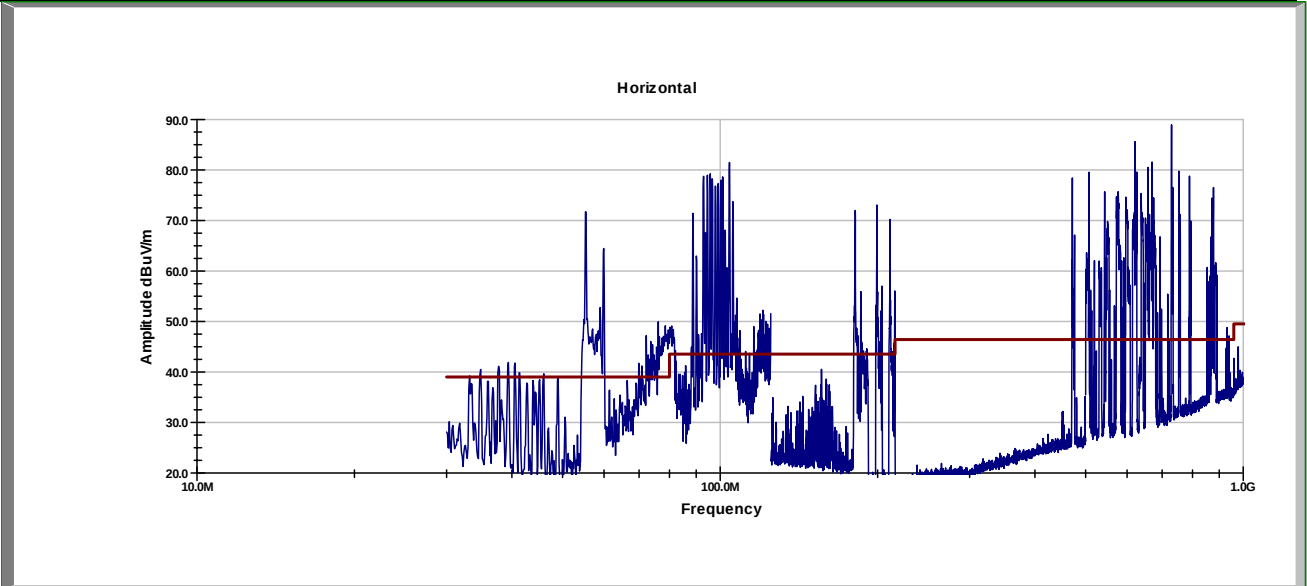


Field Strengths (location 12) 30 MHz– 1,000 MHz



Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	42.8	33.5	17.1	1.0	0.0	27.4	39	-11.6	QP
31.1	46.5	33.5	17.1	1.0	0.0	31.1	39	-7.9	QP
31.9	47.7	33.5	17.1	1.0	0.0	32.3	39	-6.7	QP

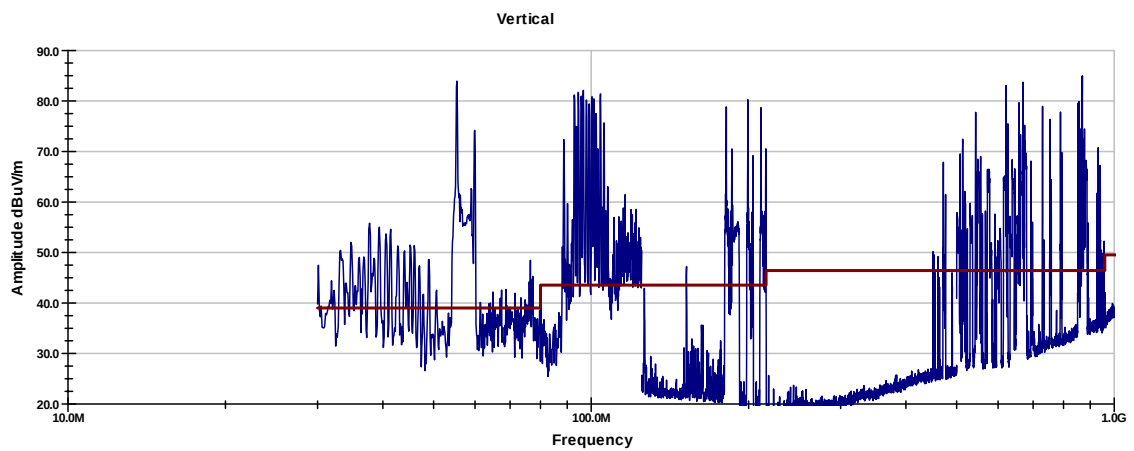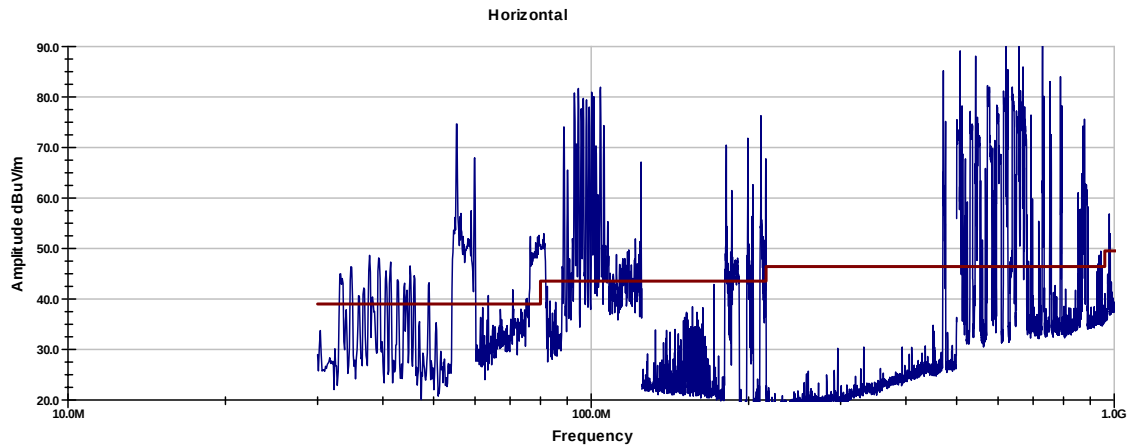

Field Strengths (location 13) 30 MHz– 1,000 MHz									
Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	47.4	33.5	17.1	1.0	0.0	32.0	39	-7.0	QP
31.1	45.8	33.5	17.1	1.0	0.0	30.4	39	-8.6	QP
31.9	47	33.5	17.1	1.0	0.0	31.6	39	-7.4	QP

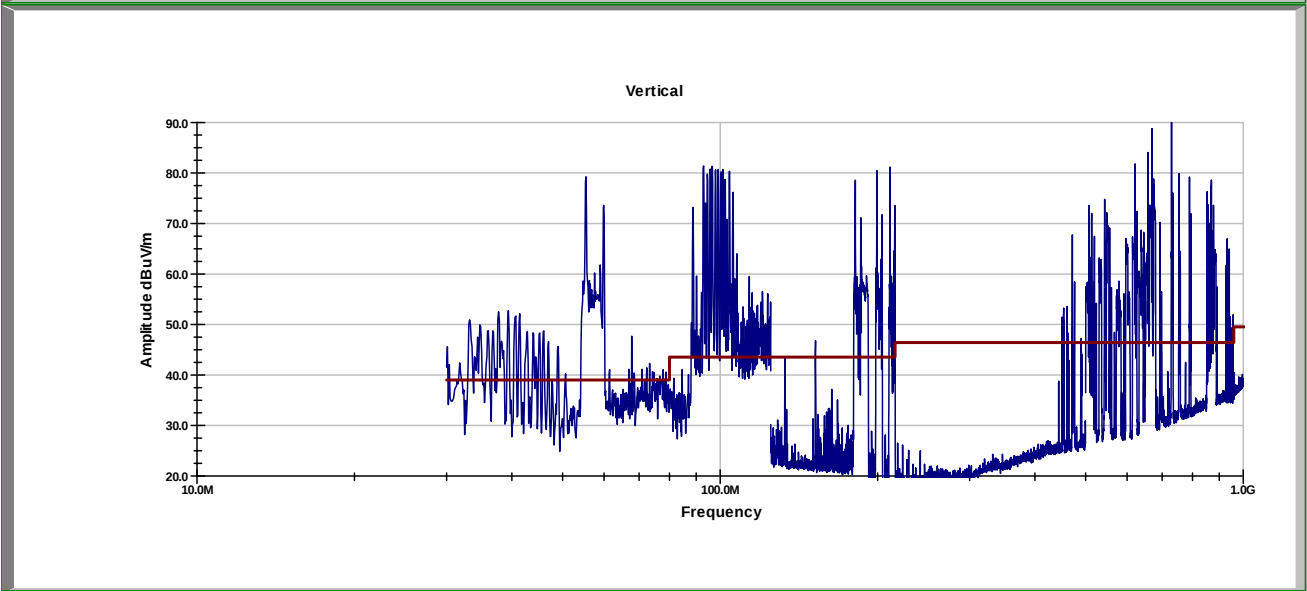
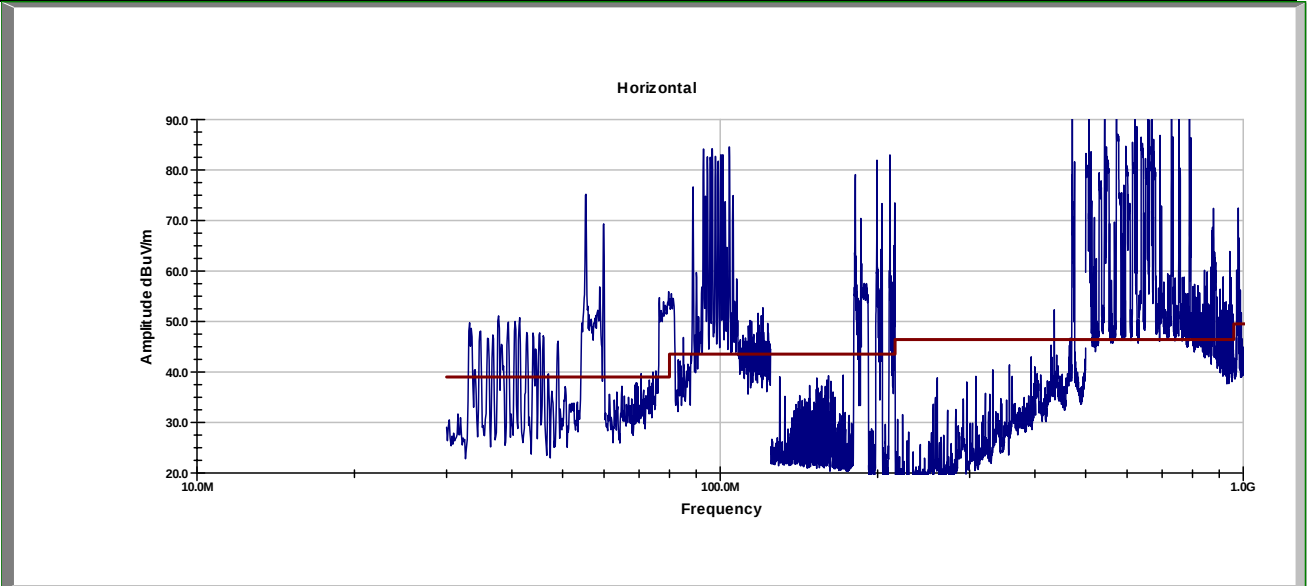


Field Strengths (location 14) 30 MHz– 1,000 MHz									
Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	42.9	33.5	17.1	1.0	0.0	27.5	39	-11.5	QP
31.1	40.7	33.5	17.1	1.0	0.0	25.3	39	-13.7	QP
31.9	44	33.5	17.1	1.0	0.0	28.6	39	-10.4	QP

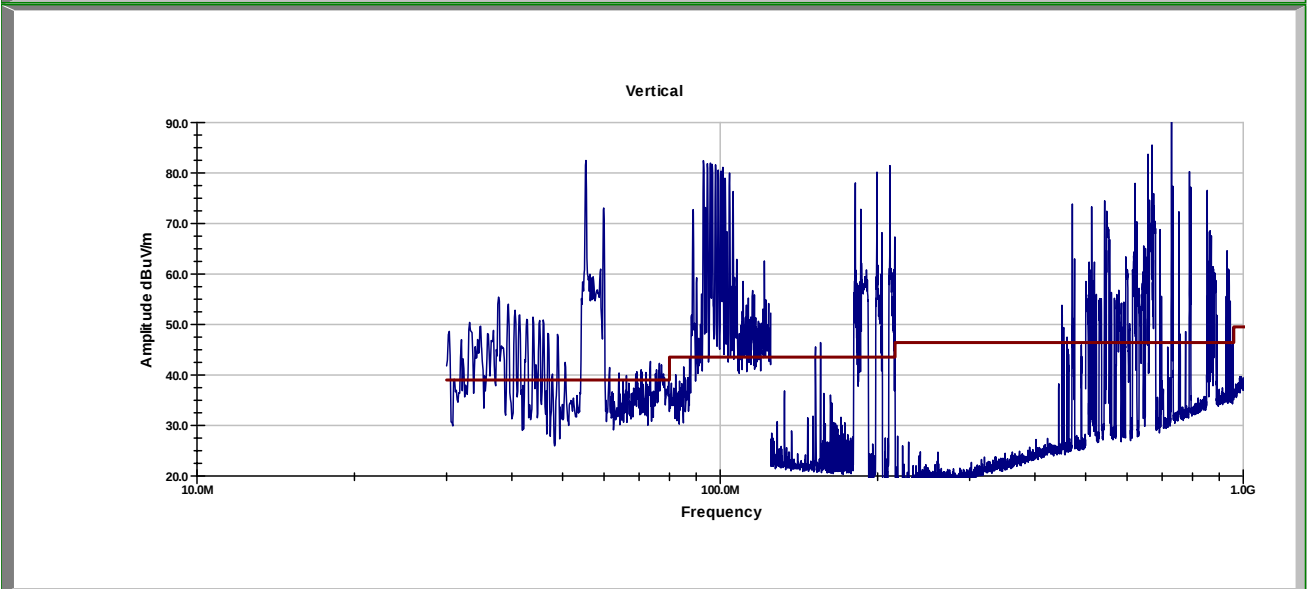
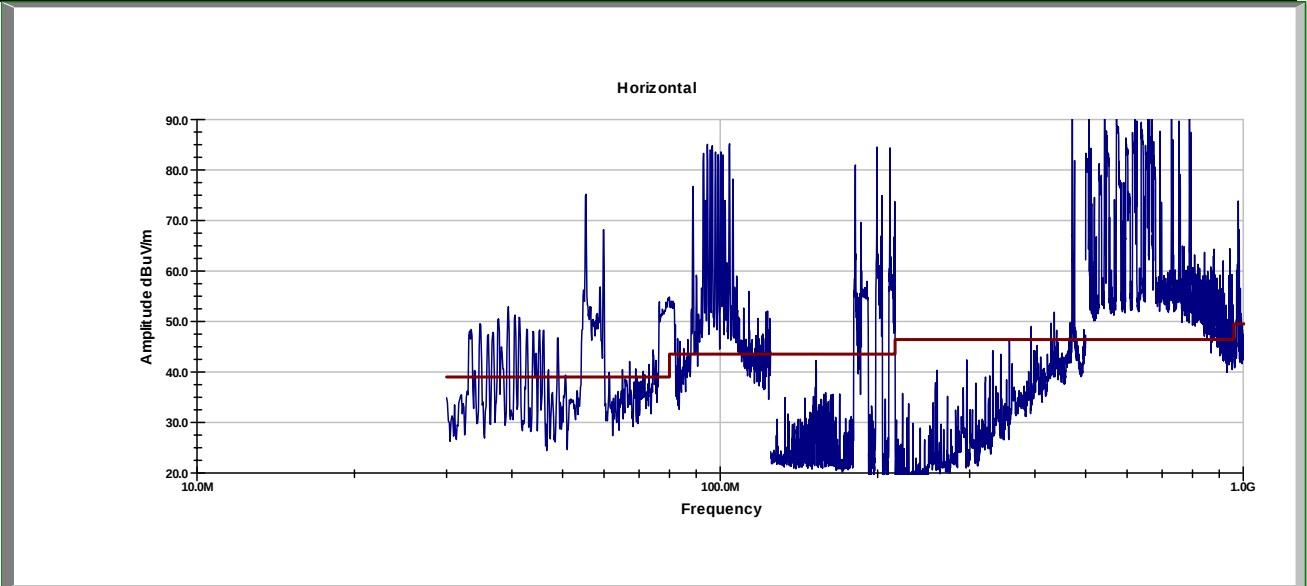


Field Strengths (location 15) 30 MHz– 1,000 MHz

Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	34.4	33.5	17.1	1.0	0.0	19.0	39	-20.0	QP
31.1	37.2	33.5	17.1	1.0	0.0	21.8	39	-17.2	QP
31.9	38.4	33.5	17.1	1.0	0.0	23.0	39	-16.0	QP

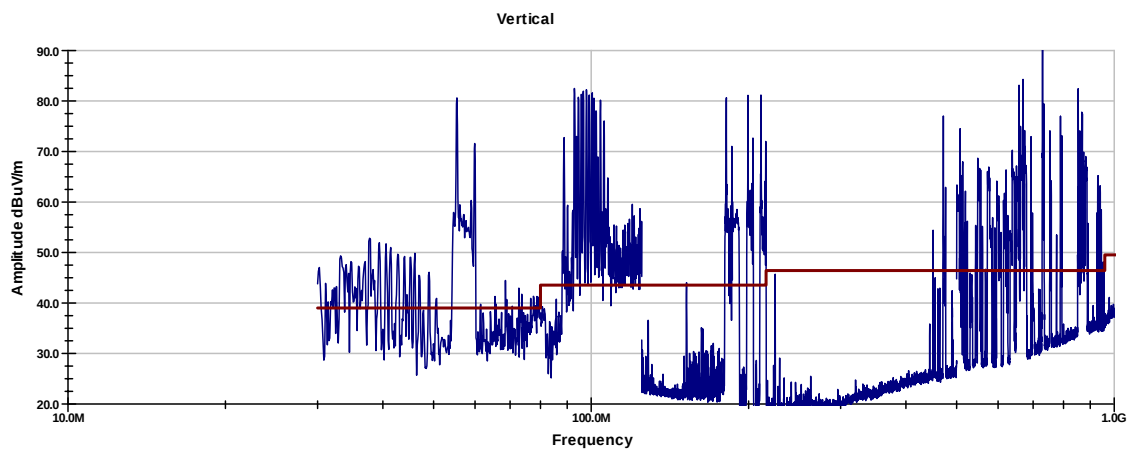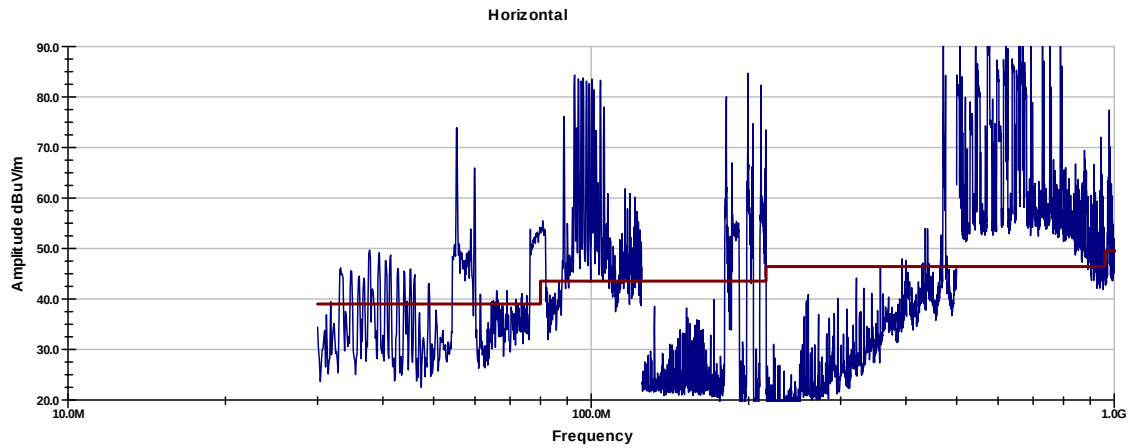


Field Strengths (location 16) 30 MHz– 1,000 MHz									
Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	40.5	33.5	17.1	1.0	0.0	25.1	39	-13.9	QP
31.1	37	33.5	17.1	1.0	0.0	21.6	39	-17.4	QP
31.9	38.6	33.5	17.1	1.0	0.0	23.2	39	-15.8	QP

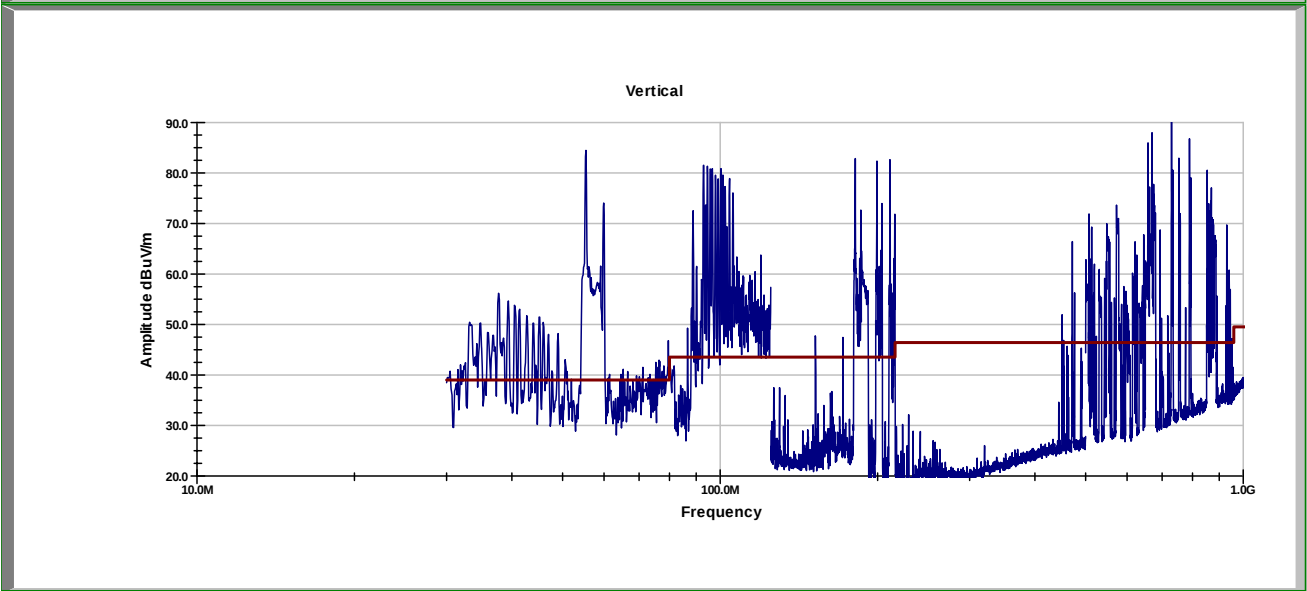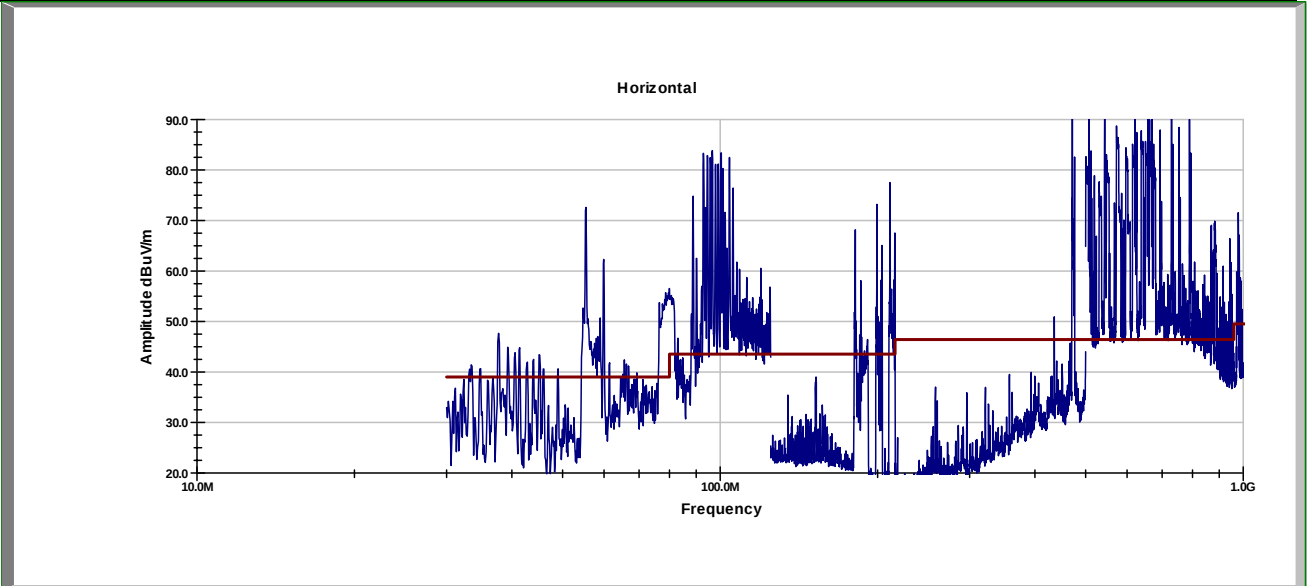

Examine all the data taken in this test sequence and enter the worst case corrected field strengths recorded regardless of location or polarization in the table below for inclusion in the Test Report. (Indicate polarization and whether Peak or Quasi-Peak detection was used on each reading)

Field Strengths (all locations) 30 MHz – 1,000 MHz									
Frequency (MHz)	Recorded Level (dBuV)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Slant Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Function
30.3	47.4	33.5	17.1	1.0	0.0	32.0	39	-7.0	QP
31.1	46.5	33.5	17.1	1.0	0.0	31.1	39	-7.9	QP
31.9	47.7	33.5	17.1	1.0	0.0	32.3	39	-6.7	QP

Ensure that the six **worst case** readings are below the limit line curve for this frequency range as shown below.

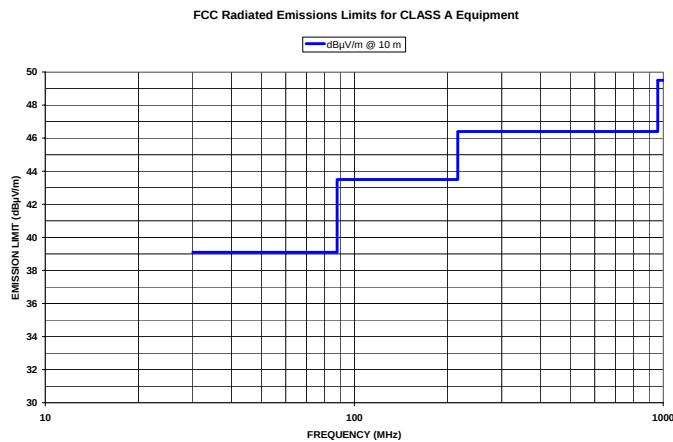

Cumulative Test Results:	PASS
Name & Address of Testing Organization:	Professional Testing 1601 North A.W. Grimes Boulevard Suite B Round Rock, Texas 78665
Test Engineer's Signature:	<i>Michael A. Royce</i>
Date:	
Name & Address of Entity requesting this test:	Corinex Communications

