

FCC TEST REPORT FCC 47 CFR Part 22H Industry Canada RSS-132, Issue 2 Cellular Telephones Operating in the Bands 824-849MHz and 869-894MHz FCC 47 CFR Part 24E Industry Canada RSS-133, Issue 5 2GHz Personal Communication Services	
Report Reference No.	G0M-1607-5772-TFC224GS-V02
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	  A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A
Applicant's name	FALCOM GmbH
Address	Gewerbering 6 98704 Langewiesen GERMANY
Test specification:	
Standard	47 CFR Part 22H, 47 CFR Part 24E RSS-132, Issue 3: 2013-01, RSS-133, Issue 6: 2013-01
Test scope	partial Radio compliance test
Equipment under test (EUT):	
Product description	UMTS/GSM/GPS-Device
Model No.	FOX3-KMD
Additional Model(s)	None
Brand Name(s)	None
Hardware version	O_102_Rev02b
Firmware / Software version	3.0.4
	FCC-ID: QIXFOX3-KMD IC: 5383A-FOX3KMD
Test result	Passed

Possible test case verdicts:

- neither assessed nor tested : N/N
- required by standard but not appl. to test object : N/A
- required by standard but not tested : N/T
- not required by standard for the test object : N/R
- test object does meet the requirement : P (Pass)
- test object does not meet the requirement : F (Fail)

Testing:

Test Lab Temperature : 20 – 23 °C

Test Lab Humidity : 32 – 38 %

Date of receipt of test item : 2016-07-28

Date (s) of performance of tests : 2016-08-23 - 2016-08-24

Compiled by : Burkhard Pudell

Tested by (+ signature) : Burkhard Pudell
(Responsible for Test) 

Approved by (+ signature) : Christian Weber
(Head of Lab) 

Date of issue : 2017-01-19

Total number of pages : 35

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Test case reduction on radiated measurements only is based on the requirements for host integration for full modular approved transmitter modules (KDB 996369 D02) used by the EUT. The EUT uses a module with full modular approval according to FCC and IC rules. For details about the radio module see EUT description in section 1.

Version History

Version	Issue Date	Remarks	Revised by
01	2016-10-27	Initial Release	
02	2017-01-19	Test scope and test remarks corrected	C. Weber

REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment External	7
1.2	Photos – Equipment internal	9
1.3	Photos – Test setup	10
1.4	Supporting Equipment Used During Testing	11
1.5	Test Modes	12
1.6	Test Equipment Used During Testing	13
1.7	Sample emission level calculation	14
2	RESULT SUMMARY	15
3	TEST CONDITIONS AND RESULTS	16
3.1	Test Conditions and Results – Occupied Bandwidth	16
3.2	Test Conditions and Results – Effective radiated power / Equivalent isotropic radiated power	30
3.3	Test Conditions and Results – Transmitter radiated emissions	32
3.4	Test Conditions and Results – Receiver radiated emissions	34

1 Equipment (Test item) Description



Description	UMTS/GSM/GPS-Device		
Model	FOX3-KMD		
Additional Model(s)	None		
Brand Name(s)	None		
Serial number	None		
Hardware version	O_102_Rev02b		
Software / Firmware version	3.0.4		
PMN	Keyless-Mobility Device		
HVIN	FOX3-KMD		
FVIN	none		
HMN	none		
FCC-ID	QIXFOX3-KMD		
IC	5383A-FOX3KMD		
Equipment type	End product		
Equipment classification	Mobile Device (Human Body distance > 20 cm)		
Radio type	Transceiver		
Radio technology	GSM850 / GSM1900		
Operating frequency range	GSM850 : TX = 824 - 849 MHz, RX = 869 - 894 MHz GSM1900 : TX = 1850 - 1910 MHz, RX = 1930 - 1990 MHz		
Assigned frequency band	Cell. Service Block A & B : 824 - 849 MHz & 869 - 894 MHz Broadband PCS : 1850 - 1910 MHz & 1930 - 1990 MHz		
Main test frequencies GSM850	F _{LOW}	CH : 128 UL: 824.2 MHz	CH : 128 DL: 869.2 MHz
	F _{MID}	CH : 188 UL: 836.2 MHz	CH : 188 DL: 881.2 MHz
	F _{HIGH}	CH : 251 UL: 848.8 MHz	CH : 251 DL: 893.8 MHz
Main test frequencies GSM1900	F _{LOW}	CH : 512 UL: 1850.2 MHz	CH : 512 DL: 1930.2 MHz
	F _{MID}	CH : 661 UL: 1880.0 MHz	CH : 661 DL: 1960.0 MHz
	F _{HIGH}	CH : 810 UL: 1909.8 MHz	CH : 810 DL: 1989.8 MHz
Supported transmission modes	GSM, GPRS		
Modulations	GSM, GPRS : GMSK		
Multislot class	10		
Number of antennas	1		
Radio module	Type	GSM/GPRS/UMTS module	
	Model	LISA-U201	
	Manufacturer	uBlox	
	HW Version	214001	
	SW Version	03S(23.41)	
	FCC-ID	YPYLISAU201	
	IC	8595A-LISAU201	


Test Report No.: G0M-1607-5772-TFC224GS-V02

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany



Antenna	Type	external dedicated
	Model	FAL-ANT14 MA220
	Manufacturer	Taoglas
	Gain	2dBi
Manufacturer	FALCOM GmbH Gewerbering 6 98704 Langewiesen GERMANY	
Power supply	V _{NOM}	12 or 24 VDC (Battery only)
	V _{MIN}	N/A
	V _{MIN}	N/A
AC/DC-Adaptor	Model	N/A
	Vendor	N/A
	Input	N/A
	Output	N/A

1.1 Photos – Equipment External

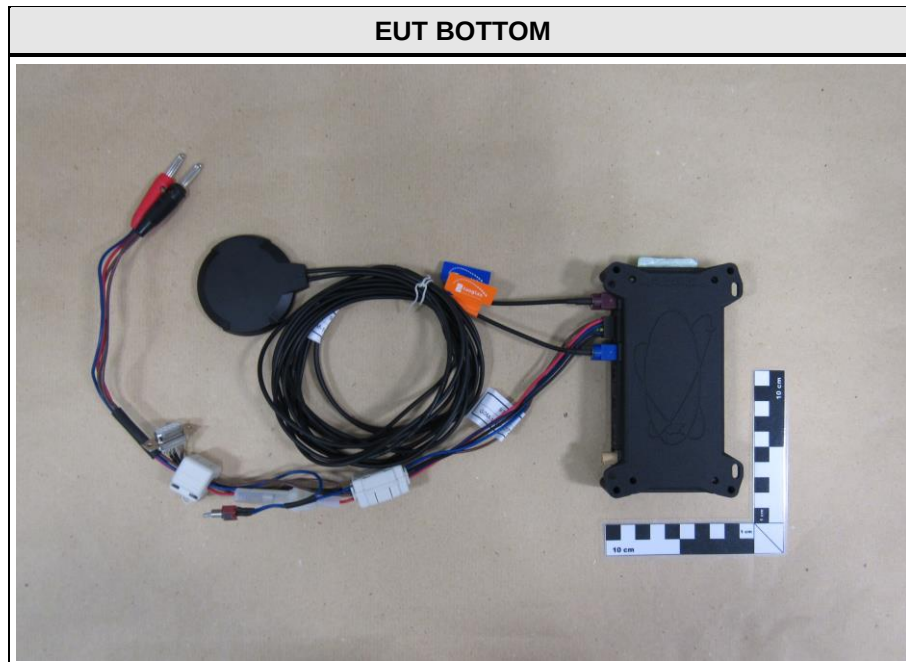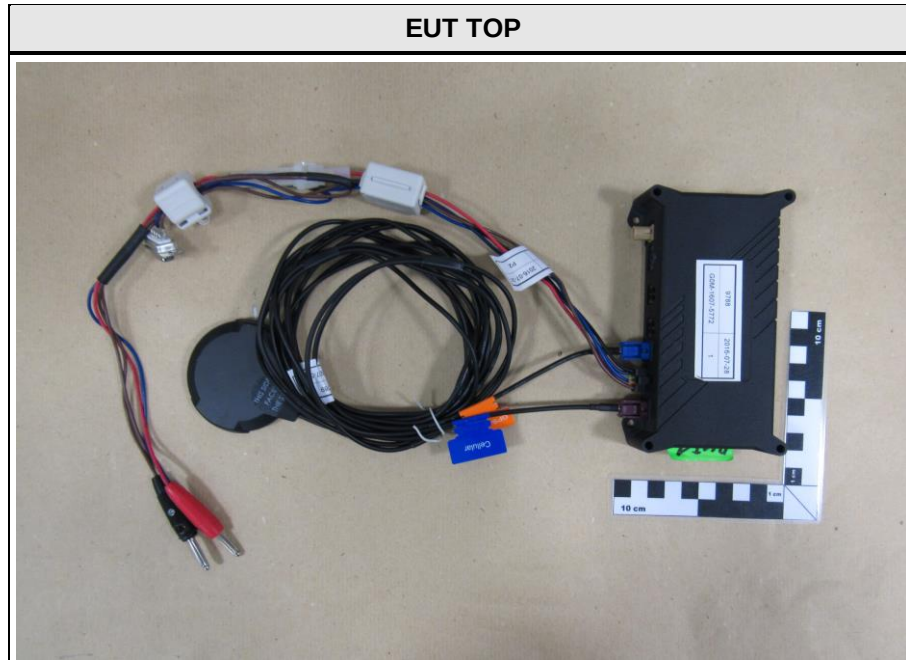


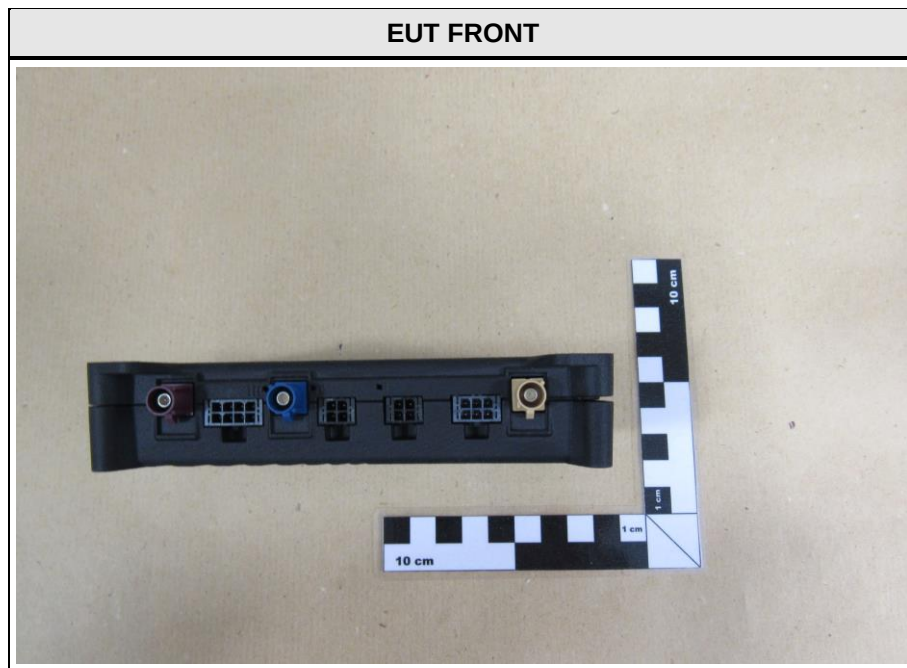

1.2 Photos – Equipment internal

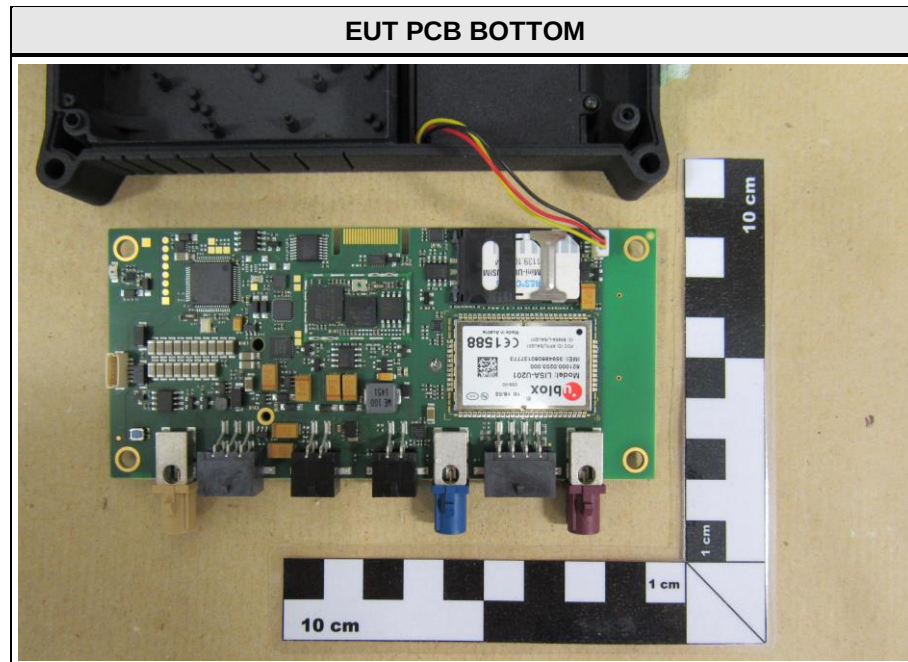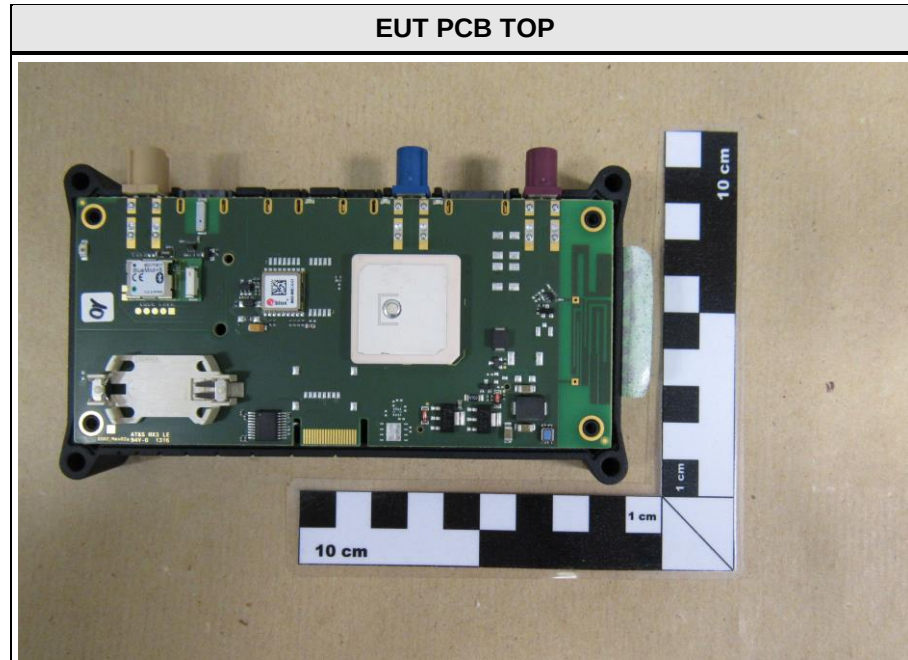

1.3 Photos – Test setup

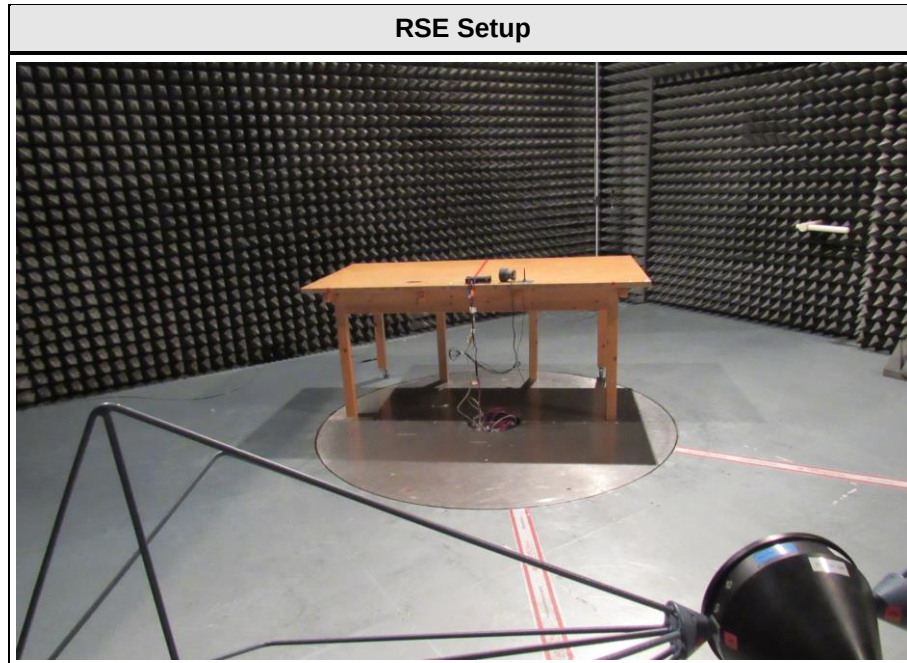

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
SIM	Communication tester	Rohde & Schwarz	CMW500	GSM-tester
*Note: Use the following abbreviations: AE : Auxiliary/Associated Equipment, or SIM : Simulator (Not Subjected to Test) CABL : Connecting cables				

1.5 Test Modes

Mode #	Description	
GSM850-Ext	General conditions:	EUT powered by power supplier. External GSM and GPS antenna connected. Active call to communication tester.
	Radio conditions:	Mode = transmit Connection = packed switched Modulation = GMSK Slot configuration = 1 up / 1 down Power level = Maximum (gamma3)
GSM1900-Ext	General conditions:	EUT powered by power supplier. External GSM and GPS antenna connected. Active call to communication tester.
	Radio conditions:	Mode = transmit Connection = packed switched Modulation = GMSK Slot configuration = 1 up / 1 down Power level = Maximum (gamma3)
Idle-Ext	General conditions:	EUT powered by power supplier. External GSM and GPS antenna connected. Registered to communication tester.
	Radio conditions:	Mode = idle Connection = none Modulation = GMSK

1.6 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2015.2.4

Occupied Bandwidth					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSIQ26	EF00242	2016-04	2017-04

Radiated power					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Fully-anechoic chamber	Frankonia	AC 3	EF00199	--	--
Spectrum Analyzer	R&S	FSIQ 26	EF00242	2016-04	2017-04
LPD Antenna	R&S	HL 223	EF00187	2016-05	2019-05
LPD Antenna	R&S	HL 025	EF00327	2015-10	2018-10

Radiated spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 1	EF00062	2016-01	2019-01
MXE EMI Receiver	Keysight Technologies	N9038A-526/WXP	EF01070	2016-08	2017-08
Biconical Antenna	R&S	HK 116	EF00012	2016-05	2019-05
LPD Antenna	R&S	HL 223	EF00212	2016-04	2019-04
LPD Antenna	R&S	HL 025	EF00327	2015-10	2018-10

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 22H, 24E, IC RSS-132, 133				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
RSS-Gen 6.6	Occupied Bandwidth	RSS-Gen 6.6 KDB 971168		Informational only
FCC § 24.235 FCC § 22.355 IC RSS-132 § 4.3 IC RSS-133 § 6.3	Frequency stability	FCC § 24.235 FCC § 22.355 IC RSS-132 § 4.3 IC RSS-133 § 6.3 KDB 971168	N/T	
FCC § 22.913(a)	Effective radiated power	ANSI/TIA-603-D KDB 971168	PASS	
FCC § 24.232(c) IC RSS-132 § 4.4 IC RSS-133 § 6.4	Equivalent isotropic radiated power	ANSI/TIA-603-D KDB 971168	PASS	
FCC § 24.232(d) IC RSS-133 § 6.4	Peak to average ratio	FCC § 24.232(d) IC RSS-133 § 6.4 KDB 971168	N/T	
FCC § 22.917(b) FCC § 24.238(b) IC RSS-132 § 4.5 IC RSS-133 § 6.5	Band-edge compliance	FCC § 22.917(b) FCC § 24.238(b) IC RSS-132 § 4.5 IC RSS-133 § 6.5 KDB 971168	N/T	
FCC § 22.917(a) FCC § 24.238(a) IC RSS-132 § 4.5 IC RSS-133 § 6.5	Conducted out-of-band emissions	FCC § 22.917(a) FCC § 24.238(a) IC RSS-132 § 4.5 IC RSS-133 § 6.5 KDB 971168	N/T	
FCC § 22.917(a) FCC § 24.238(a) IC RSS-132 § 4.5 IC RSS-133 § 6.5	Radiated out-of-band emissions	ANSI/TIA-603-D KDB 971168	PASS	
IC RSS-132 § 4.6 IC RSS-133 § 6.6 IC RSS-Gen 7.1	Receiver radiated spurious emissions	IC RSS-132 § 4.6 IC RSS-133 § 6.6 IC RSS-Gen 7.1 KDB 971168	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Occupied Bandwidth

Occupied Bandwidth acc. to IC RSS-Gen			
Test according to measurement reference		Reference Method	
		RSS-Gen 6.6	
Test frequency range		Tested frequencies	
		F _{LOW} / F _{MID} / F _{HIGH}	
Limits			
None (Informational only)			
Test setup			
Spectrum Analyzer EUT			
Test procedure			
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to at least twice the emission spectrum 3. Resolution bandwidth set to 1 % of span 4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function			
Test results – GSM850			
Channel	Frequency [MHz]	Mode	Occupied Bandwidth [kHz]
F _{LOW}	824.2	GSM850	252.5
F _{MID}	836.2	GSM850	240.5
F _{HIGH}	848.8	GSM850	242.5
F _{LOW}	824.2	EGPRS850	252.5
F _{MID}	836.2	EGPRS850	250.5
F _{HIGH}	848.8	EGPRS850	250.5


Test results – GSM1900			
Channel	Frequency [MHz]	Mode	Occupied Bandwidth [kHz]
F _{LOW}	1850.2	GSM1900	244.5
F _{MID}	1880	GSM1900	244.5
F _{HIGH}	1909.8	GSM1900	242.5
F _{LOW}	1850.2	EGPRS1900	252.5
F _{MID}	1880	EGPRS1900	254.5
F _{HIGH}	1909.8	EGPRS1900	256.2
Comments:			

Occupied Bandwidth – GSM850 F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5772

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS-Device
Model: FOX3-KMD
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: EDGE 850 / CH: 128 / Gamma:6 (27 dBm) / Main Slot 3
Test Date: 2016-08-24
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 252.5 kHz

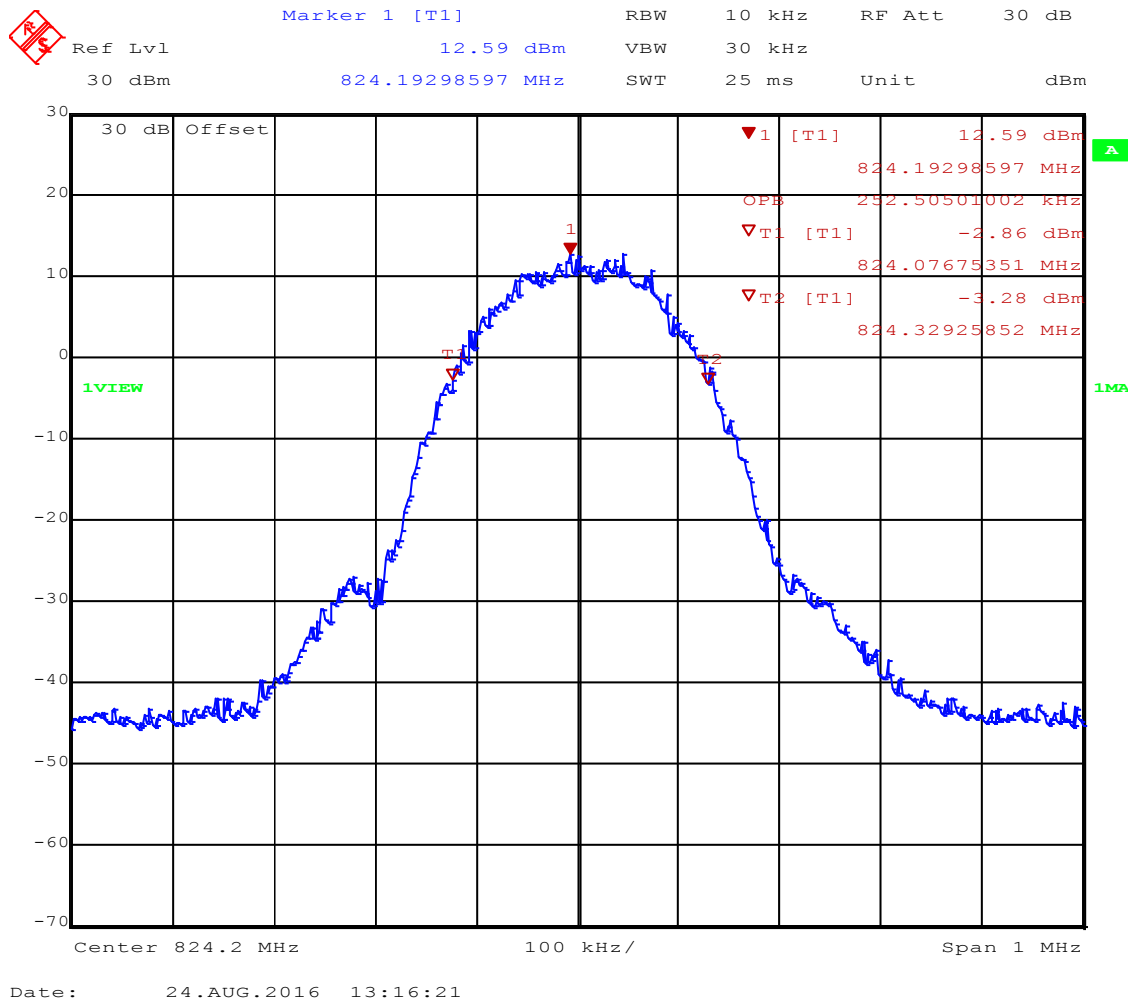

Test Report No.: G0M-1607-5772-TFC224GS-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – GSM850 F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5772

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS-Device
Model: FOX3-KMD
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: GPRS 850 / CH: 188 / Gamma:3 (33 dBm) / Main Slot 3
Test Date: 2016-08-24
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 240.5 kHz

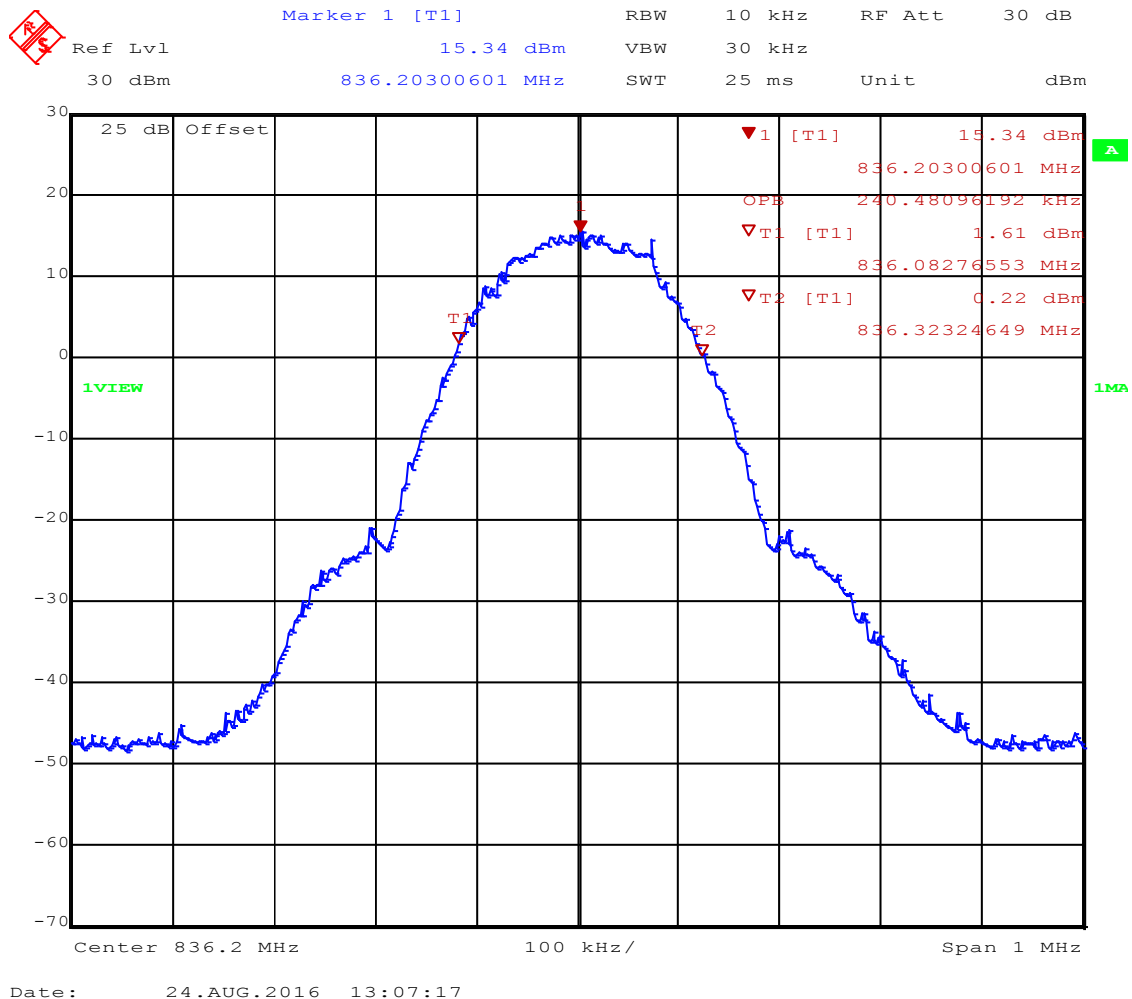


Occupied Bandwidth – GSM850 F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5772

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS-Device
Model: FOX3-KMD
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: GPRS 850 / CH: 251 / Gamma:3 (33 dBm) / Main Slot 3
Test Date: 2016-08-24
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 242.5 kHz

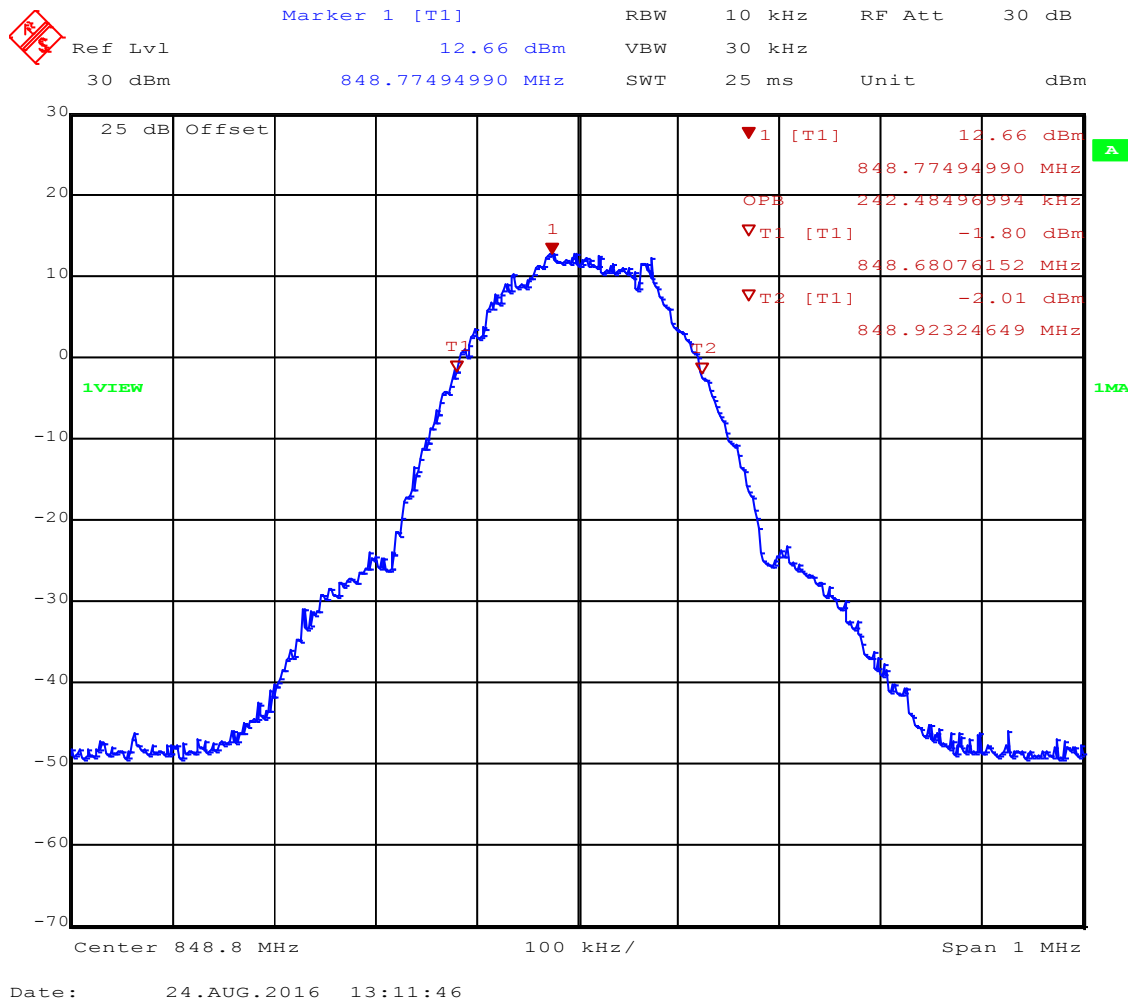


Occupied Bandwidth – EGPRS850 F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5772

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS-Device
Model: FOX3-KMD
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: EDGE 850 / CH: 128 / Gamma:6 (27 dBm) / Main Slot 3
Test Date: 2016-08-24
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 252.5 kHz

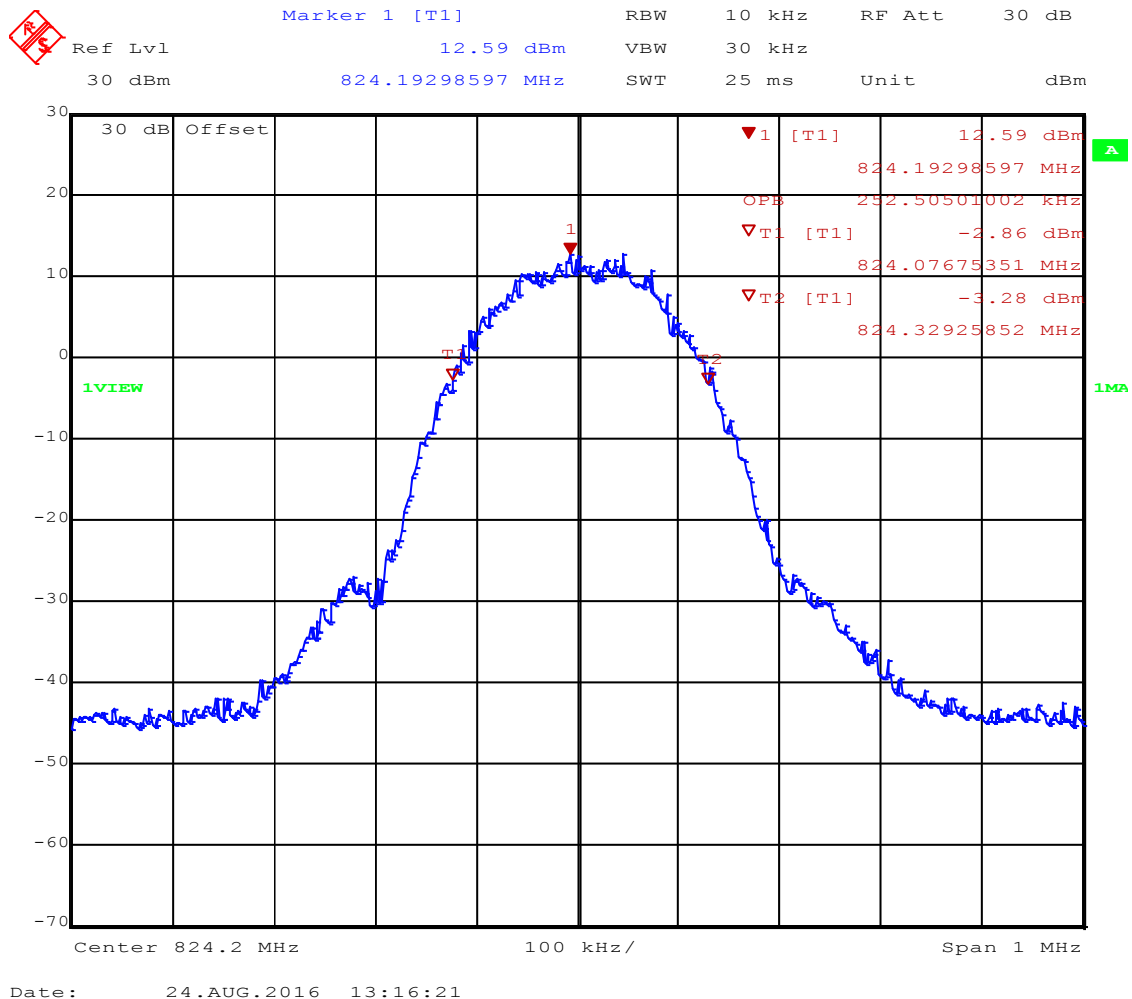

Test Report No.: G0M-1607-5772-TFC224GS-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – EGPRS850 F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5772

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS-Device
Model: FOX3-KMD
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: EDGE 850 / CH: 188 / Gamma:6 (27 dBm) / Main Slot 3
Test Date: 2016-08-24
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 250.5 kHz

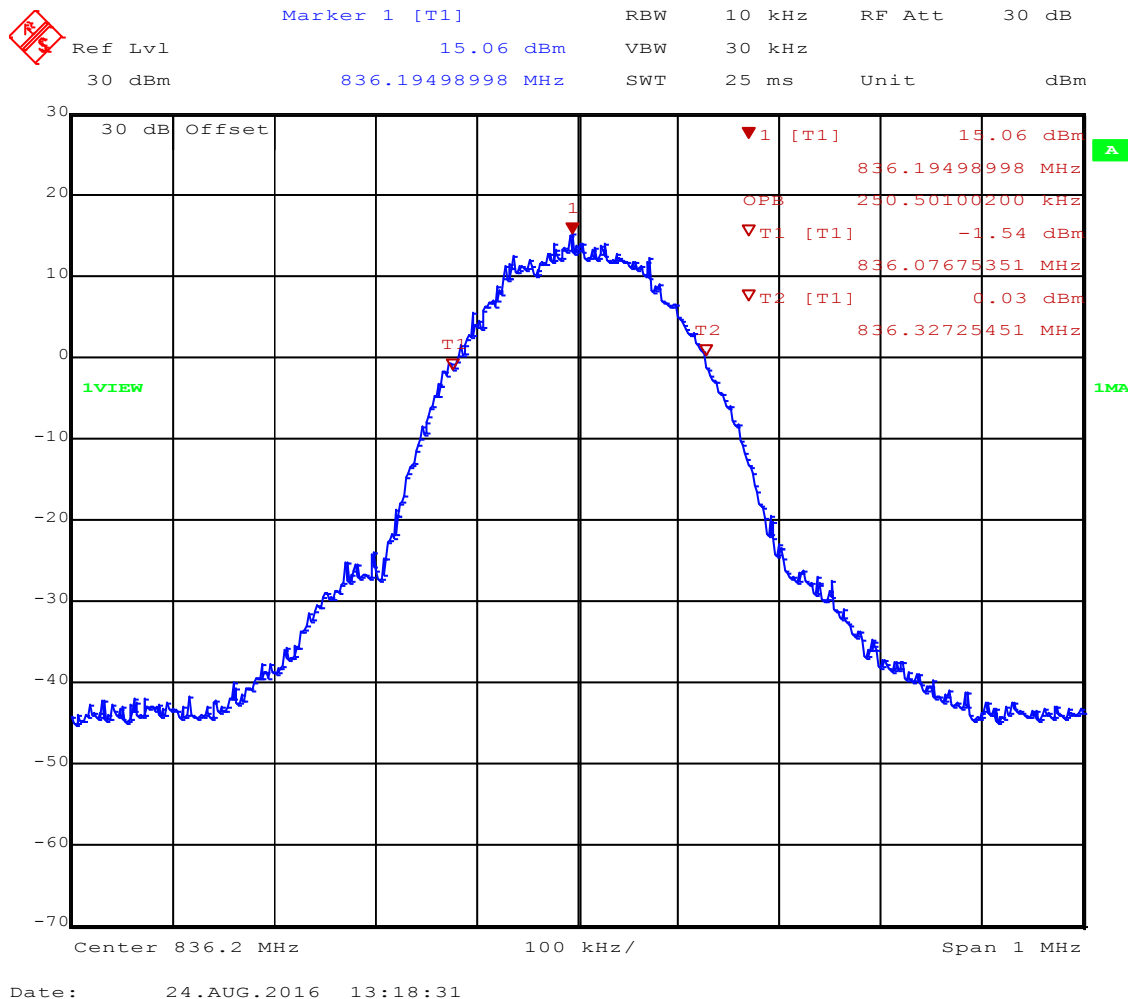


Occupied Bandwidth – EGPRS850 F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5772

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS-Device
Model: FOX3-KMD
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: EDGE 850 / CH: 251 / Gamma:6 (27 dBm) / Main Slot 3
Test Date: 2016-08-24
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 250.5 kHz

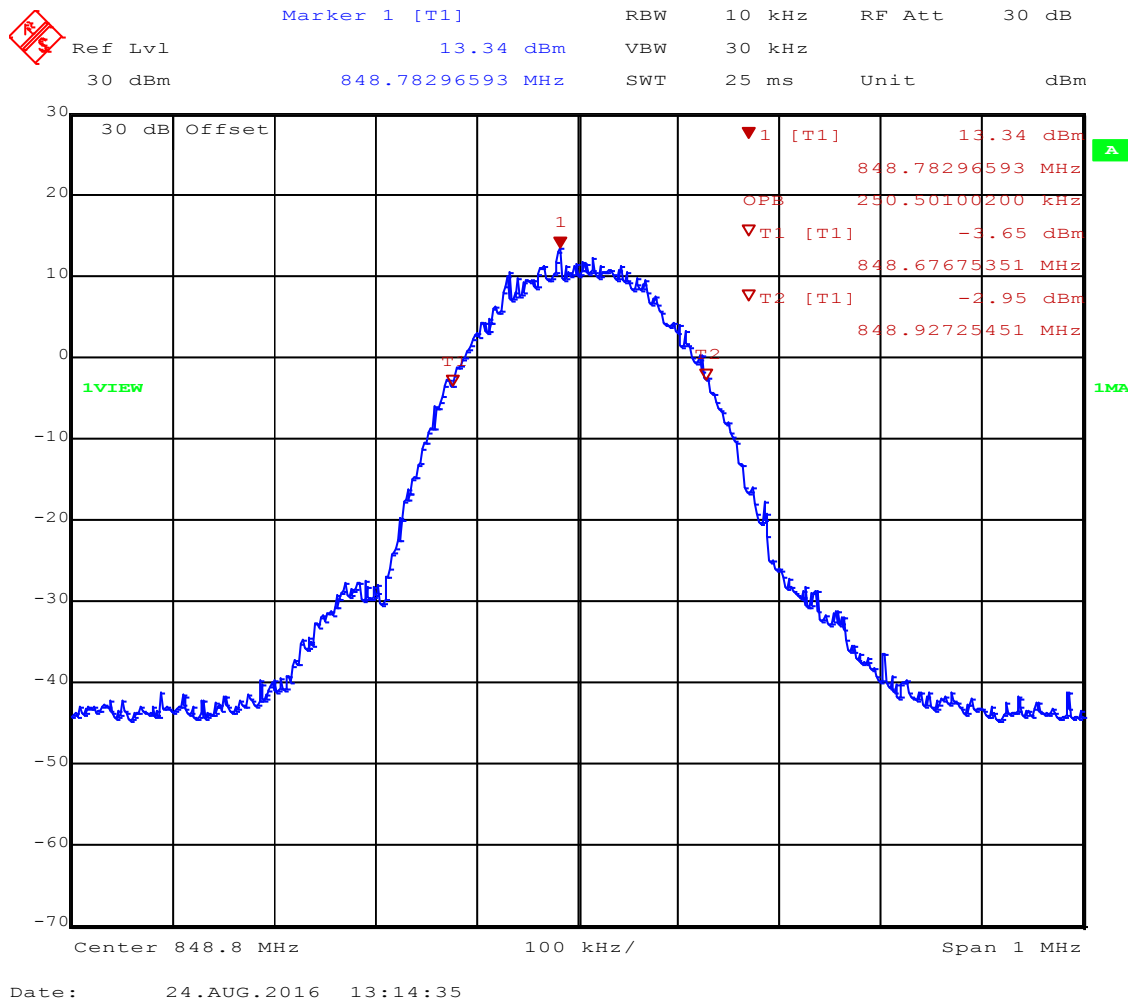

Test Report No.: G0M-1607-5772-TFC224GS-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – GSM1900 F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5772

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS-Device
Model: FOX3-KMD
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: GPRS 1900 / CH: 512 / Gamma:3 (30 dBm) / Main Slot 3
Test Date: 2016-08-24
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 244.5 kHz

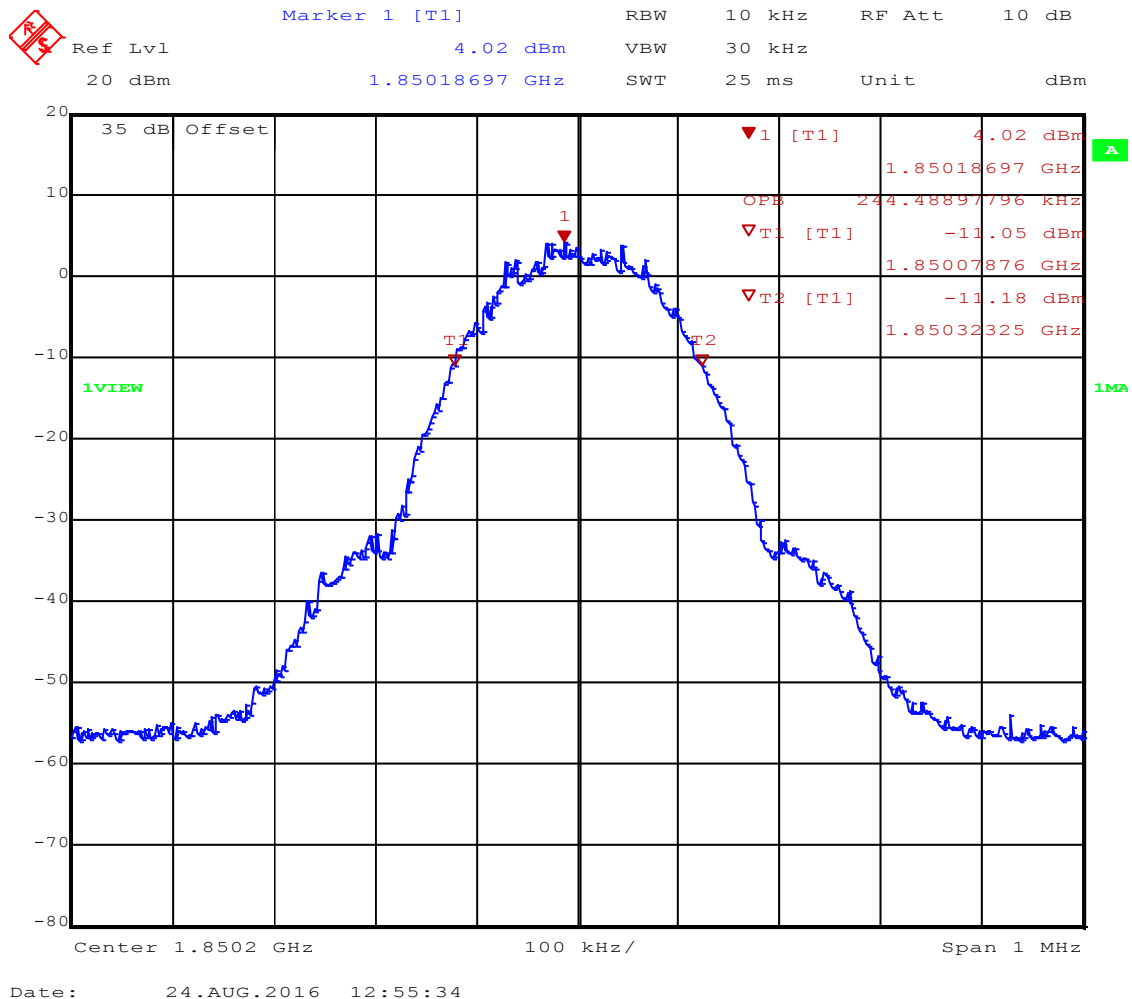

Test Report No.: G0M-1607-5772-TFC224GS-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – GSM1900 F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5772

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS-Device
Model: FOX3-KMD
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: GPRS 1900 / CH: 661 / Gamma:3 (30 dBm) / Main Slot 3
Test Date: 2016-08-24
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 244.5 kHz

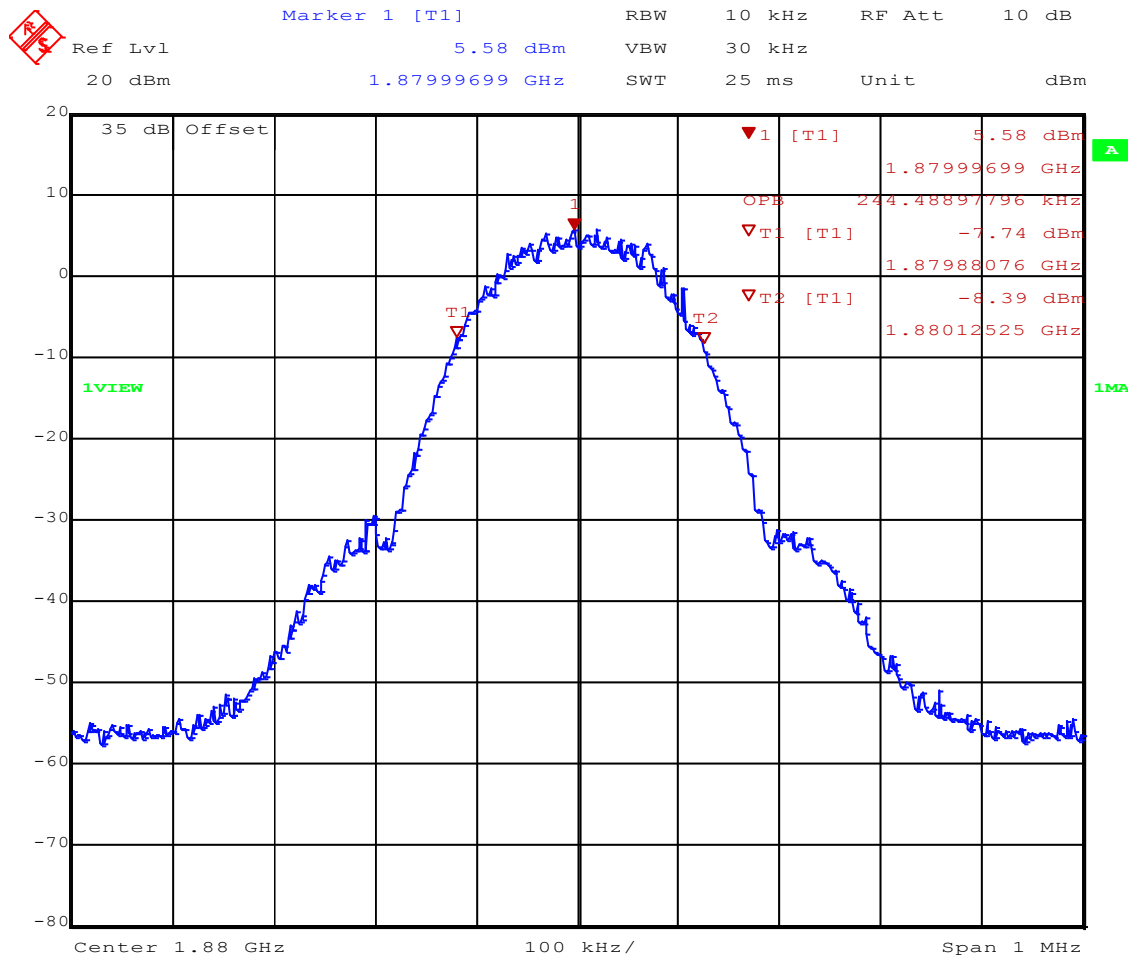

Date: 24.AUG.2016 12:53:08

Test Report No.: G0M-1607-5772-TFC224GS-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – GSM1900 F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5772

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS-Device
Model: FOX3-KMD
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: GPRS 1900 / CH: 810 / Gamma:3 (30 dBm) / Main Slot 3
Test Date: 2016-08-24
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 242.5 kHz

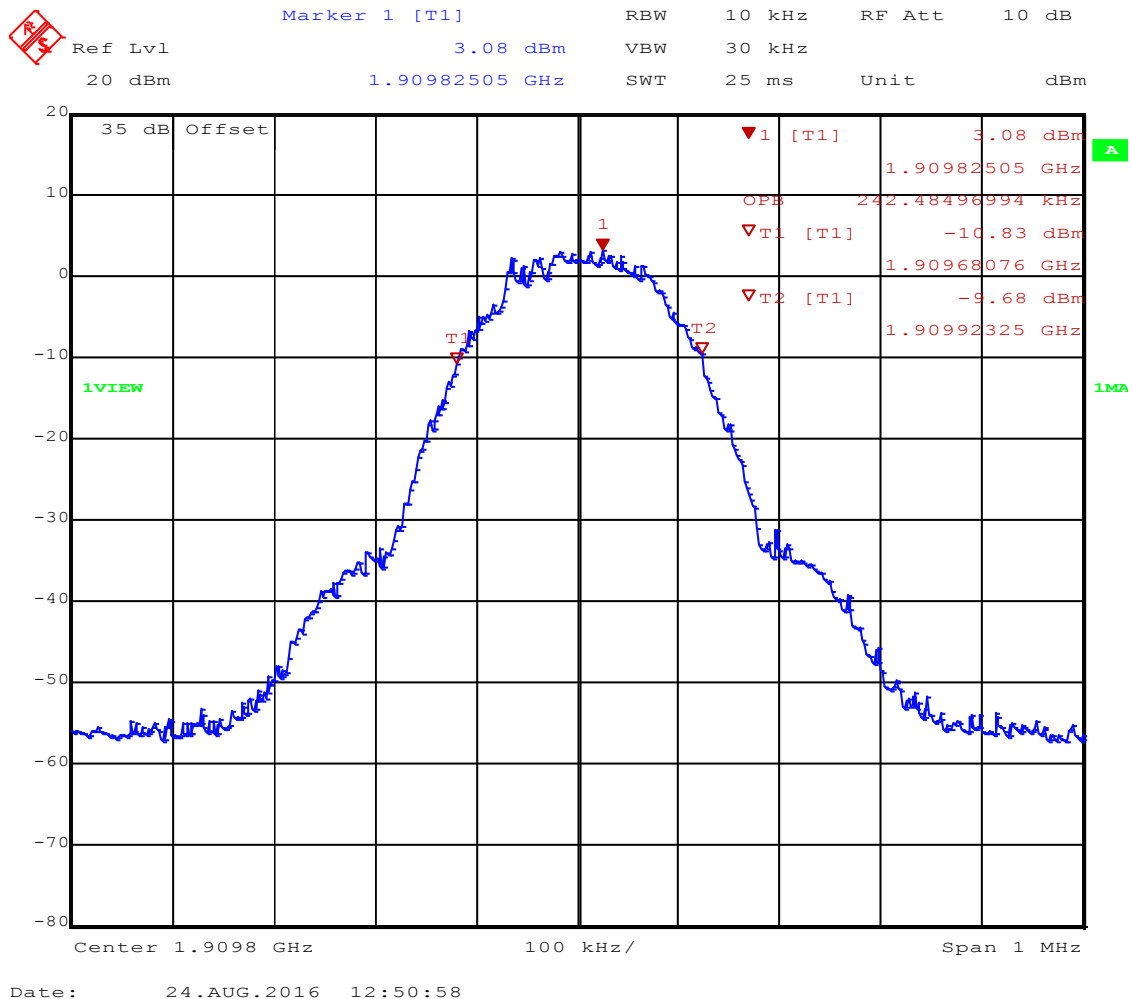

Test Report No.: G0M-1607-5772-TFC224GS-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – EGPRS1900 F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5772

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS-Device
Model: FOX3-KMD
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: EDGE 1900 / CH: 512 / Gamma:5 (26 dBm) / Main Slot 3
Test Date: 2016-08-24
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 252.5 kHz

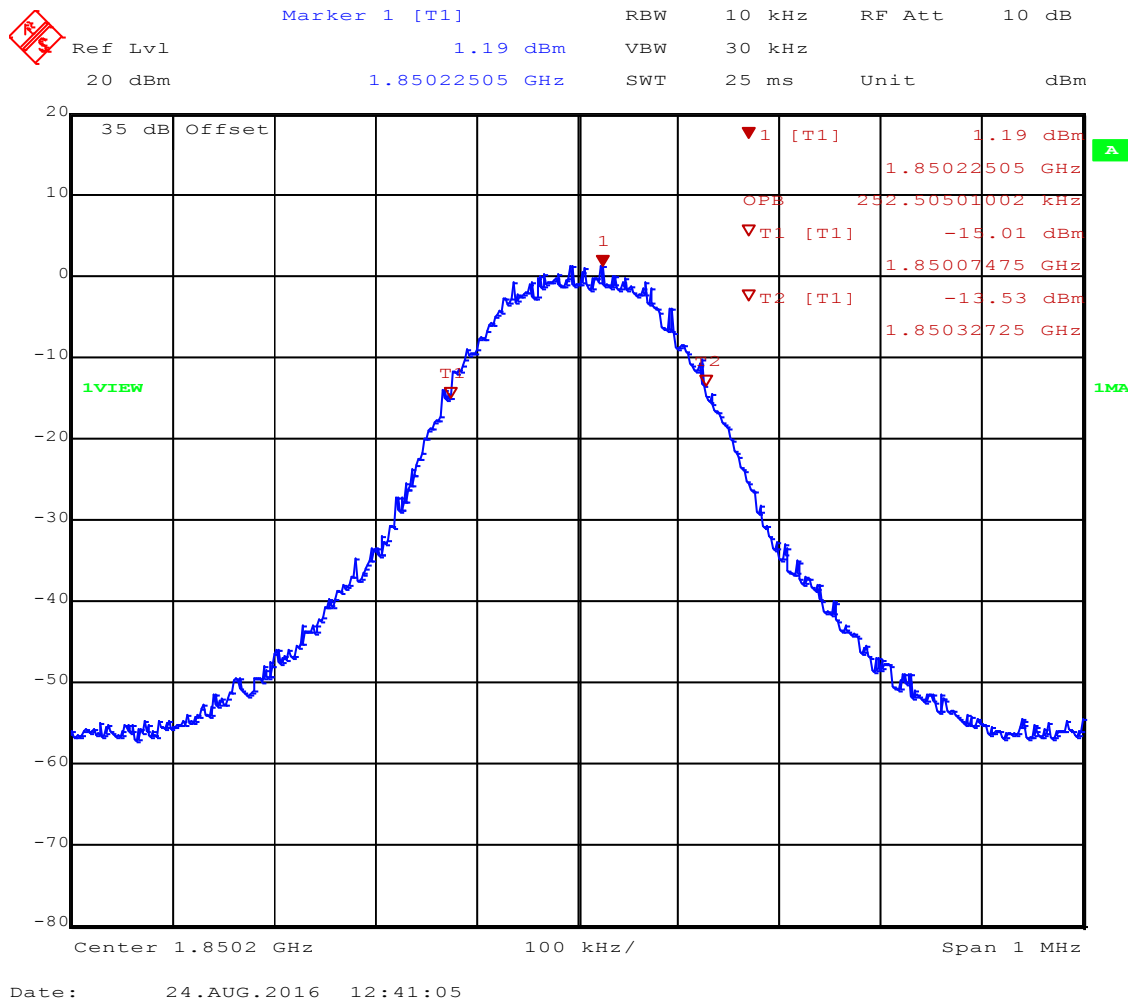

Test Report No.: G0M-1607-5772-TFC224GS-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – EGPRS1900 F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5772

Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS-Device
Model: FOX3-KMD
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: EDGE 1900 / CH: 661 / Gamma:5 (26 dBm) / Main Slot 3
Test Date: 2016-08-24
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 254.5 kHz

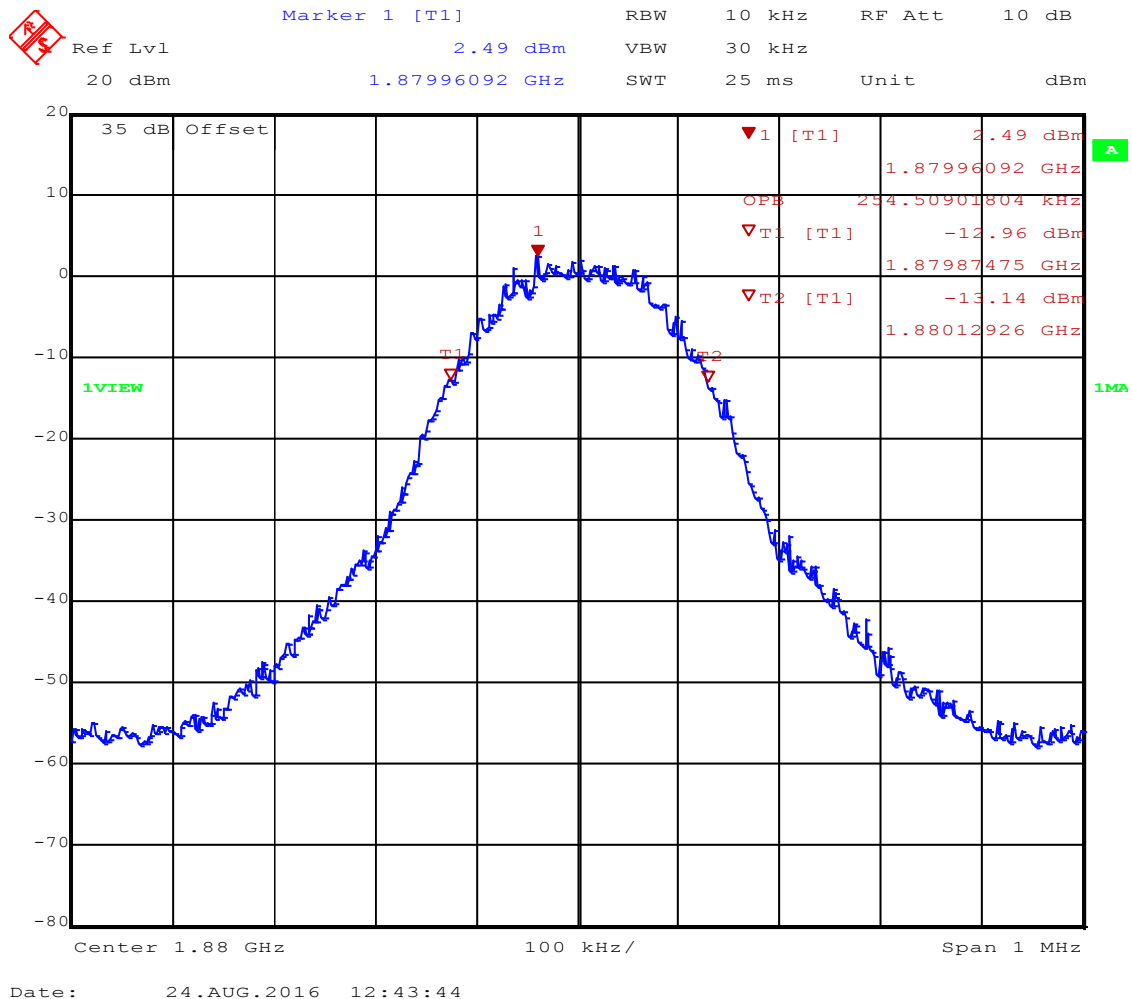

Test Report No.: G0M-1607-5772-TFC224GS-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – EGPRS1900 F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1607-5772


Applicant: FALCOM GmbH
EUT Name: UMTS/GSM/GPS-Device
Model: FOX3-KMD
Test Site: Eurofins Product Service GmbH
Operator: Burkhard Pudell
Test Conditions: Tnom / Vnom
Mode: EDGE 1900 / CH: 810 / Gamma:5 (26 dBm) / Main Slot 3
Test Date: 2016-08-24
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: OBW = 256.5 kHz

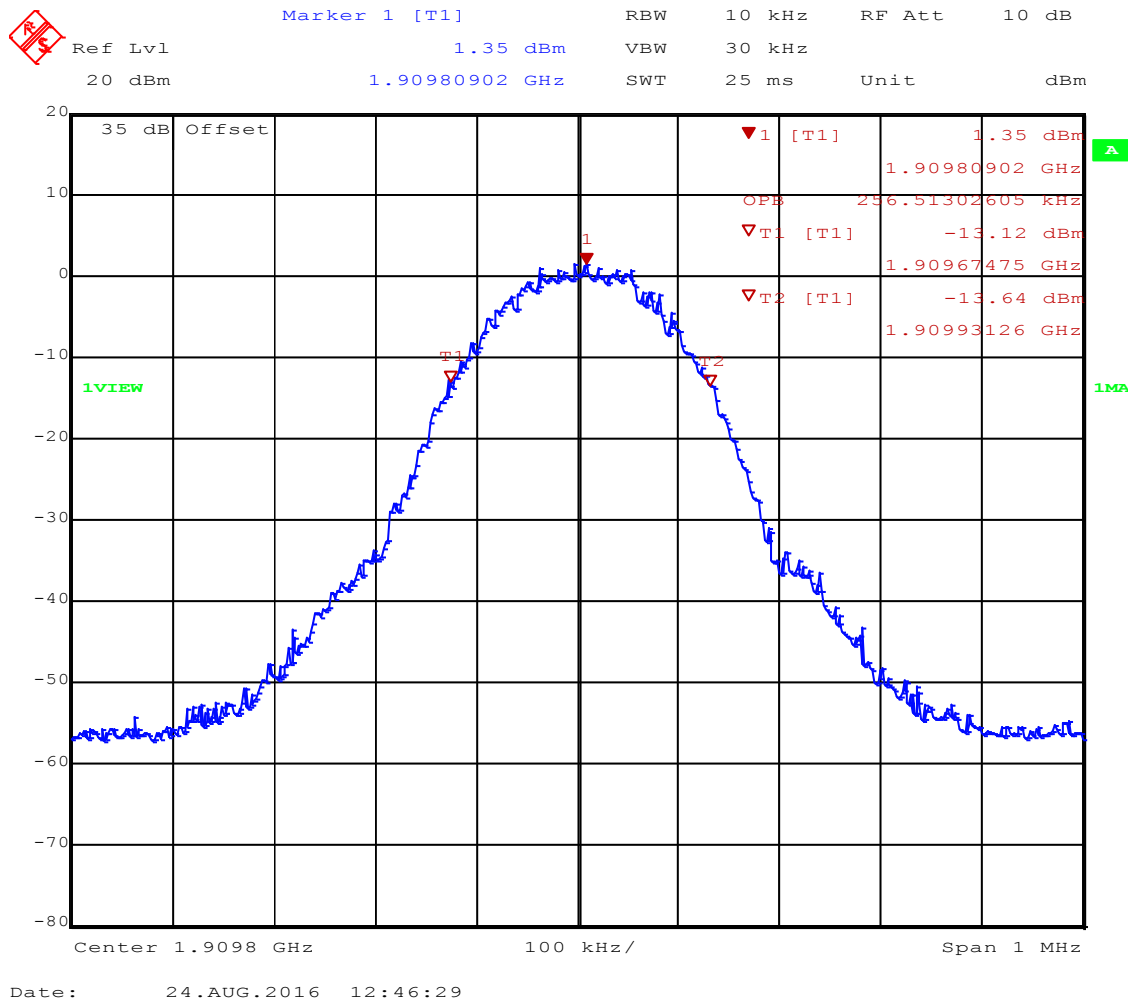

Test Report No.: G0M-1607-5772-TFC224GS-V02


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.2 Test Conditions and Results – Effective radiated power / Equivalent isotropic radiated power

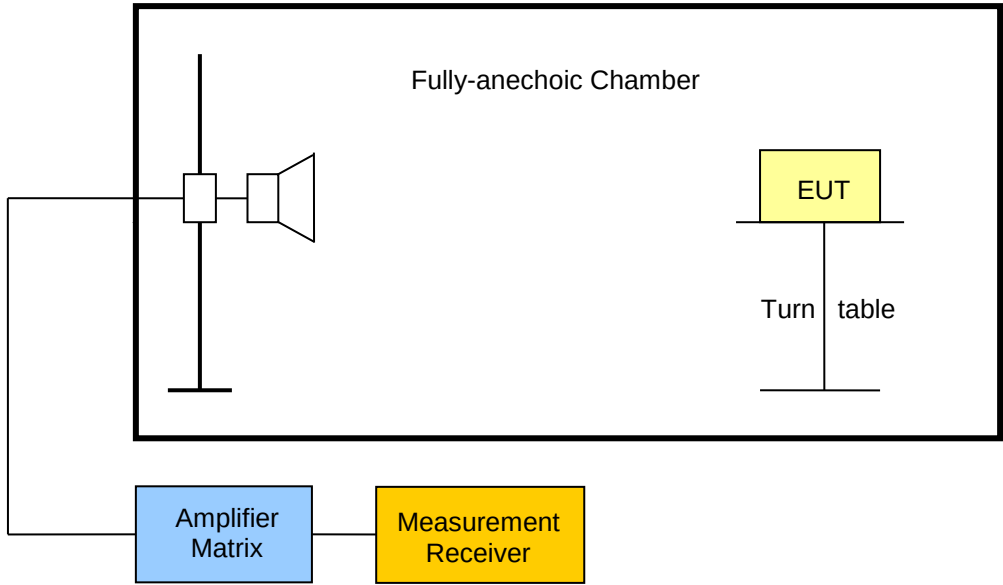Radiated power acc. to FCC 22H / FCC 24E / IC RSS-132 / IC RSS-133			Verdict: PASS
EUT requirement rule parts and clause	Reference		
	FCC § 22.913(a) / FCC § 24.232(c) IC RSS-132 § 4.4 /IC RSS-133 § 6.4		
Test according to measurement reference	Reference Method		
	FCC § 22.913(a) / FCC § 24.232(c) / ANSI/TIA-603-D IC RSS-132 § 4.4 /IC RSS-133 § 6.4		
Test frequency range	Tested frequencies		
	F _{LOW} / F _{MID} / F _{HIGH}		
Limits			
Carrier Frequency range	Equipment type	Power limit	
824-849 MHz	Mobile transmitter	FCC : 7 Watts (38.45 dBm) e.i.r.p. IC : 11.5 Watts (40.60 dBm) e.i.r.p.	
1850-1910 MHz	Mobile transmitter	FCC : 2 Watts (33 dBm) e.i.r.p. IC : 2 Watts (33 dBm) e.i.r.p.	
Test setup			
			
Test procedure			
1. EUT set to test mode 2. The radiated power is measured with a measurement antenna in vertical polarization 3. To obtain maximum level the EUT is rotated 4. The EUT is replaced with a half-wave dipole and the power to the dipole is adjusted to obtain same radiated power measurement value			


Test results – GSM850 E.R.P.							
Channel	Frequency [MHz]	Mode	Pol.	Power [dBm e.r.p]	Limit [dBm e.r.p]	Margin [dB]	Result
F _{LOW}	824.2	GSM850	hor	24.5	38.45	-13.95	PASS
F _{MID}	836.2	GSM850	hor	26.7	38.45	-11.75	PASS
F _{HIGH}	848.8	GSM850	hor	26.9	38.45	-11.55	PASS
F _{LOW}	824.2	EGPRS850	hor	21.5	38.45	-16.95	PASS
F _{MID}	836.2	EGPRS850	hor	23.8	38.45	-14.65	PASS
F _{HIGH}	848.8	EGPRS850	hor	24.0	38.45	-14.45	PASS
Test results – GSM850 E.I.R.P.							
Channel	Frequency [MHz]	Mode	Pol.	Power [dBm e.i.r.p]	Limit [dBm e.i.r.p]	Margin [dB]	Result
F _{LOW}	824.2	GSM850	hor	26.65	40.6	-13.95	PASS
F _{MID}	836.2	GSM850	hor	28.85	40.6	-11.75	PASS
F _{HIGH}	848.8	GSM850	hor	29.05	40.6	-11.55	PASS
F _{LOW}	824.2	EGPRS850	hor	23.65	40.6	-16.95	PASS
F _{MID}	836.2	EGPRS850	hor	25.95	40.6	-14.65	PASS
F _{HIGH}	848.8	EGPRS850	hor	26.15	40.6	-14.45	PASS
Test results – GSM1900 E.I.R.P.							
Channel	Frequency [MHz]	Mode	Pol.	Power [dBm e.i.r.p]	Limit [dBm e.i.r.p]	Margin [dB]	Result
F _{LOW}	1850.2	GSM1900	hor	15.6	33	-17.4	PASS
F _{MID}	1880	GSM1900	hor	17.2	33	-15.8	PASS
F _{HIGH}	1909.8	GSM1900	hor	17.9	33	-15.1	PASS
F _{LOW}	1850.2	EGPRS1900	hor	16.2	33	-16.8	PASS
F _{MID}	1880	EGPRS1900	hor	16.4	33	-16.6	PASS
F _{HIGH}	1909.8	EGPRS1900	hor	14.1	33	-18.9	PASS
Comments:							

3.3 Test Conditions and Results – Transmitter radiated emissions

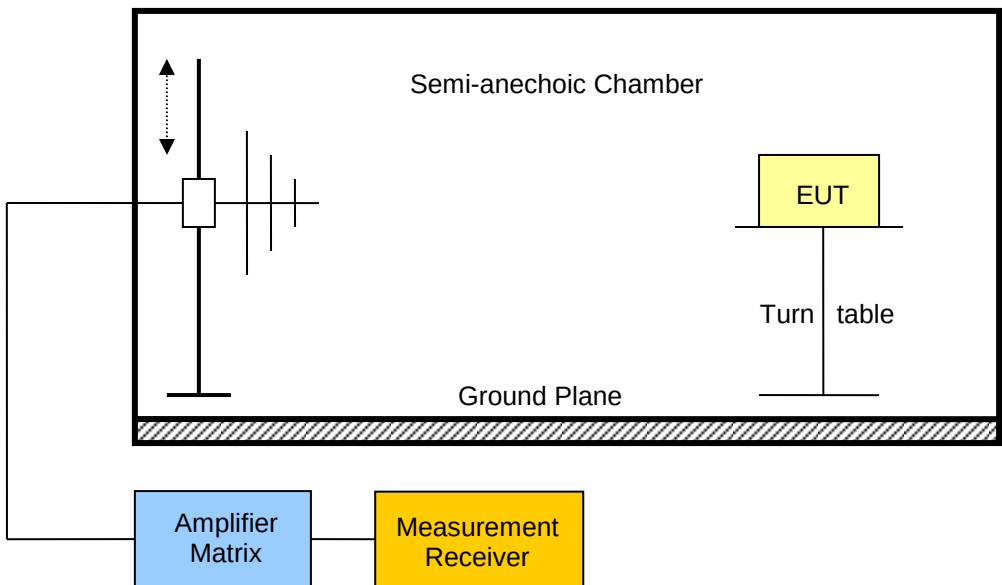Transmitter radiated power acc. to FCC 22H / FCC 24E / IC RSS-132 / IC RSS-133		Verdict: PASS
Test according referenced standards	Reference Method	
	FCC § 22.917(a) / FCC § 24.238(a) IC RSS-132 § 4.5 / IC RSS-133 § 6.5	
Test according to measurement reference	Reference Method	
	ANSI/TIA-603-D	
Test frequency range	Tested frequencies	
	30 MHz – 10 th Harmonic	
Limits		
Carrier Frequency range	Limit	
824-849 MHz	Attenuation below transmitter power ≥ 43 + 10 · log ₁₀ (P) [dB] = -13 dBm	
1850-1910 MHz	Attenuation below transmitter power ≥ 43 + 10 · log ₁₀ (P) [dB] = -13 dBm	
Test setup		
		
Test procedure		
1. EUT set to test mode 2. Maximum emission level is measured by rotating the EUT and adjusting the antenna height for vertical polarization 3. The EUT is replaced by a substitution antenna and generator 4. The power level is set to obtain the same power reading 5. Measurement is repeated for horizontal polarization		

Test results – GSM850							
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dbm]	Pol.	Limit [dBm]	Margin [dB]
F _{LOW}	824.2	GPRS850	1738	-34.4	hor	-13	-21.4
F _{MID}	836.2	GPRS850	1763	-35.0	hor	-13	-22.0
F _{HIGH}	848.8	GPRS850	1788	-36.5	hor	-13	-23.5
Test results – GSM1900							
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dbm]	Pol.	Limit [dBm]	Margin [dB]
F _{LOW}	1850.2	GPRS1900	1850	-21.5	ver	-13	-8.5
F _{LOW}	1850.2	GPRS1900	1850	-16.1	hor	-13	-3.1
F _{HIGH}	1909.8	GPRS1900	1910	-23.6	ver	-13	-10.6
F _{HIGH}	1909.8	GPRS1900	1910	15.3	hor	-13	-2.3
Comments:							

3.4 Test Conditions and Results – Receiver radiated emissions

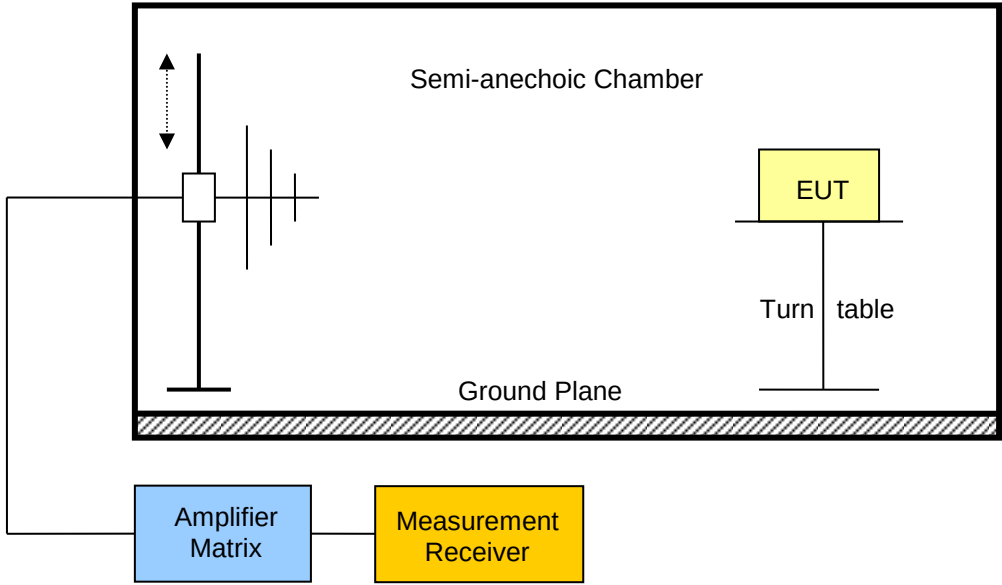Receiver radiated emissions acc. to IC RSS-210				Verdict: PASS
Test according referenced standards	Reference Method			
	IC RSS-132 5.6 / 133 6.6			
Test according to measurement reference	Reference Method			
	ANSI C63.4			
Test frequency range	Tested frequencies			
	30 MHz – 5 th Harmonic			
EUT test mode	Receive			
Limits				
Frequency range [MHz]	Detector	Limit [µV/m]	Limit [dBµV/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Test setup				
				

Test procedure							
1. EUT set to receive mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1MHz with peak/average detector is used above 1GHz 4. Markers are set to peak emission levels							
Test results							
Channel	Frequency [MHz]	Emission [MHz]	Emission Level [dbμV/m]	Emission Level [μV/m]	Det.	Limit [μV/m]	Margin [μV/m]
F _{MID}	836.2	632	33.81	49.03	hor	200	150.97
F _{MID}	1880	7864	51.47	374.5	hor	500	125.50
Comments: * Physical distance between EUT and measurement antenna. ** Emission level corresponds to ambient noise floor							