



SK TECH CO., LTD.

Page 1 of 43

Certificate of Compliance

Test Report No.:	SKTTRT-070426-012		
KOLAS No.:	KT191		
Applicant:	Samsin Innotec Co., Ltd.		
Applicant Address:	252-23, Sarihyun-Dong, Ilsandong-Gu, Goyang-City, Kyonggi-Do, 411-530 Korea		
Manufacturer:	Samsin Innotec Co., Ltd.		
Manufacturer Address:	252-23, Sarihyun-Dong, Ilsandong-Gu, Goyang-City, Kyonggi-Do, 411-530 Korea		
Device Under Test:	Bluetooth stereo speaker		
FCC ID:	QJ8-SBS6600R	Model Name:	SBS-6600R
Serial number:	Prototype		
Receipt No.:	SKTEU07-0041	Date of receipt:	Jan. 9, 2007
Date of Issue:	April. 26, 2007		
Location of Testing:	SK TECH CO., LTD. 820-2, Wolmoon-Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea		
Test Procedure:	ANSI C63.4, FCC Public Notice DA 00-705 (March 2000)		
Test Specification:	47CFR, Part 15 Rules		
FCC Equipment Class:	DSS - Part 15 Spread Spectrum Transmitter		
Test Result:	The above-mentioned device has been tested and passed.		
Tested & Reported by: Chang-Min, Moon	Approved by: Jong-Soo, Yoon		
	2007. 04. 26		2007. 04. 26
<i>Signature</i>	<i>Date</i>	<i>Signature</i>	<i>Date</i>
Other Aspects:	-		
Abbreviations:	· OK, Pass = passed · Fail = failed · N/A = not applicable		

☞ This test report is not permitted to copy partly and entirely without our permission.
 ☞ This test result is dependent on only equipment to be used.
 ☞ This test result is based on a single evaluation of submitted samples of the above mentioned.
 ☞ This test report is the accredited testing items by Korea Laboratory Accreditation Scheme, which signed the ILAC-MRA.



>> CONTENTS <<

1. GENERAL	4
2. TEST SITE	4
2.1 Location	4
2.2 List of Test and Measurement Instruments	5
2.3 Test Date	5
2.4 Test Environment	5
3. DESCRIPTION OF THE EQUIPMENT UNDER TEST	6
3.1 Rating and Physical Characteristics	6
3.2 Equipment Modifications	6
3.3 Submitted Documents	6
4. MEASUREMENT CONDITIONS	7
4.1 Description of test configuration	7
4.2 List of Peripherals	7
4.3 Type of Used Cables	8
4.4 Uncertainty	8
5. TEST AND MEASUREMENTS	9
5.1 ANTENNA REQUIREMENT	9
5.1.1 Regulation	9
5.1.2 Result	9
5.2 MAXIMUM PEAK OUTPUT POWER	10
5.2.1 Regulation	10
5.2.2 Test Procedure	10
5.2.3 Test Results	10
Table 1: Measured values of the Maximum Peak Output Power (Conducted)	10
5.3 CARRIER FREQUENCY SEPARATION	11
5.3.1 Regulation	11
5.3.2 Test Procedure	11
5.3.3 Test Results	11
Table 2: Measured values of the Carrier Frequency Separation (Conducted)	11
5.4 20dB CHANNEL BANDWIDTH	12
5.4.1 Regulation	12
5.4.2 Test Procedure	12
5.4.3 Test Results	12
Table 3: Measured values of the 20dB Channel Bandwidth (Conducted)	12



5.5 NUMBER OF HOPPING CHANNELS	13
5.5.1 Regulation	13
5.5.2 Test Procedure	13
5.5.3 Test Results	13
Table 4: Measured values of the Number of Hopping Channels (Conducted)	13
5.6 TIME OF OCCUPANCY (DWELL TIME)	14
5.6.1 Regulation	14
5.6.2 Test Procedure	14
5.6.3 Test Results	14
Table 5: Measured values of the Time of Occupancy (Conducted)	14
5.7 SPURIOUS EMISSION, BAND EDGE, AND RESTRICTED BANDS	15
5.7.1 Regulation	15
5.7.2 Test Procedure	16
5.7.3 Test Results	18
Table 6: Measured values of the field strength of spurious emission (Radiated); Main-RF	18
Table 7: Measured values of the field strength of spurious emission (Radiated); Sub-RF	19
5.8 PEAK POWER SPECTRAL DENSITY	20
5.8.1 Regulation	20
5.8.2 Test Procedure	20
5.8.3 Test Results	20
Table 8: Measured values of the Peak Power Spectral Density (Conducted)	20
5.9 CONDUCTED EMISSIONS	21
5.9.1 Regulation	21
5.9.2 Test Procedure	21
5.9.3 Test Results	22
Table 9: Measured values of the Conducted Emissions	22
5.10 RF EXPOSURE	23
5.10.1 Regulation	23
5.10.2 RF Exposure Compliance Issue	23
APPENDIX. Plot of the measurement results	24
Figure 1: Maximum Peak Output Power (Conducted)	24
Figure 2: Carrier Frequency Separation (Conducted)	26
Figure 3: 20dB Channel Bandwidth (Conducted)	28
Figure 4: Number of Hopping Channels (Conducted)	30
Figure 5: Time of Occupancy (Conducted)	31
Figure 6: Band Edge compliance (Conducted)	33
Figure 7: Band Edge compliance (Radiated)	36
Figure 8: Spurious RF conducted emissions	39
Figure 9: Plot of the Peak Power Spectral Density (Conducted)	42
Figure 10: AC power line Conducted Emissions	43



1. GENERAL

These tests were performed using the test procedure outlined in ANSI C63.4, 2003 for intentional radiators, and in accordance with the limits set forth in FCC Part 15.247 for Spread Spectrum Transmitter. The EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards.

We attest to the accuracy of data. All measurements reported herein were performed by SK TECH Co., Ltd. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

2. TEST SITE

SK TECH Co., Ltd.



2.1 Location

820-2, Wolmoon-Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea

This test site is in compliance with ISO/IEC 17025 for general requirements for the competence of testing and calibration laboratories.

This laboratory is recognized as a Conformity Assessment Body(CAB) for CAB's Designation Number: **KR0007** by FCC, is accredited by NVLAP for NVLAP Lab. Code: **200220-0**, DATech for DAR-Registration No.: **DAT-P-076/97-01** and KOLAS for Accreditation No. : **KT191**.



2.2 List of Test and Measurement Instruments

Description	Manufacturer	Model #	Serial #	
Spectrum Analyzer	Agilent	E4405B	US40520856	<input checked="" type="checkbox"/>
EMC Spectrum Analyzer	Agilent	E7405A	US40240203	<input checked="" type="checkbox"/>
EMI Test Receiver	Rohde&Schwarz	ESIB40	100277	<input checked="" type="checkbox"/>
EMI Test Receiver	Rohde&Schwarz	ESVS10	825120/008	
EMI Test Receiver	Rohde&Schwarz	ESVS10	834468/013	
EMI Test Receiver	Rohde&Schwarz	ESHS10	835871/002	
EMI Test Receiver	Rohde&Schwarz	ESHS10	862970/019	<input checked="" type="checkbox"/>
Artificial Mains Network	Rohde&Schwarz	ESH2-Z5	834549/011	<input checked="" type="checkbox"/>
Pre-amplifier	HP	8447F	3113A05153	<input checked="" type="checkbox"/>
Pre-amplifier	MITEQ	AFS44	1116321	<input checked="" type="checkbox"/>
Pre-amplifier	MITEQ	AFS44	1116322	
Power Meter	Agilent	E4418B	US39402179	
Power Sensor	HP	8485A	3318A13916	
Oscilloscope	Agilent	54820A	US40240160	<input checked="" type="checkbox"/>
Diode detector	Agilent	8473C	1882A03173	<input checked="" type="checkbox"/>
Power Divider	HP	11636A	08476	<input checked="" type="checkbox"/>
High Pass Filter	Wainwright	WHKX3.0/18G	8	<input checked="" type="checkbox"/>
Attenuator (10dB)	HP	8491B	38067	<input checked="" type="checkbox"/>
VHF Precision Dipole Antenna (TX/RX)	Schwarzbeck	VHAP	1014 / 1015	
UHF Precision Dipole Antenna (TX/RX)	Schwarzbeck	UHAP	989 / 990	
Loop Antenna	Schwarzbeck	HFH2-Z2	863048/019	
TRILOG Broadband Antenna	Schwarzbeck	VULB9160	3141	<input checked="" type="checkbox"/>
Biconical Antenna	Schwarzbeck	VHA9103	2265	
Log-Periodic Antenna	Schwarzbeck	UHALP9107	1819	
Horn Antenna	AH Systems	SAS-200/571	304	
Horn Antenna	EMCO	3115	00040723	
Horn Antenna	EMCO	3115	00056768	<input checked="" type="checkbox"/>
Vector Signal Generator	Agilent	E4438C	MY42080359	
PSG analog signal generator	Agilent	E8257D-520	MY45141255	
DC Power Supply	HP	6634A	2926A-01078	
DC Power Supply	HP	6622A	3448A03950	
Digital Multimeter	HP	HP3458A	2328A14389	
PCS Interface	HP	83236B	3711J00881	
CDMA Mobile Test Set	HP	8924C	US35360253	
Hygro/Thermo Graph	SATO	PC-5000TRH-II	-	<input checked="" type="checkbox"/>
Temperature/Humidity Chamber	All Three	ATH-50M	20030425	

2.3 Test Date

Date of Application Jan. 9, 2007
 Date of Test April. 16, 2007 ~ April. 25, 2007

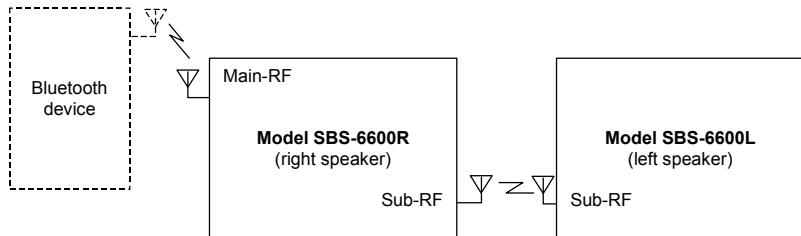
2.4 Test Environment

See each test item's description.



3. DESCRIPTION OF THE EQUIPMENT UNDER TEST

The product specification described herein was obtained from the product data sheet or user's manual.



3.1 Rating and Physical Characteristics

Type designation	Bluetooth stereo speaker	
Model name	SBS-6600R (right speaker)	SBS-6600L (left speaker) **
FCC ID	FCC ID: QJ8-SBS6600R	FCC ID: QJ8-SBS6600L **
Power source	DC 3.7 V Li-polymer battery and/or AC/DC Adaptor	DC 3.7 V Li-polymer battery and/or AC/DC Adaptor
Local Oscillator or X-Tal	X-Tal: 26 MHz, 16MHz	X-Tal: 16MHz
RF chipset	Main-RF: CSR, BC358239A Sub-RF: NORDIC, NRF24Z1	Sub-RF: NORDIC, NRF24Z1
Transmitting frequency	Main-RF: 2402 ~ 2480 MHz (1MHz step, 79 channels) Sub-RF: 2404 ~ 2478 MHz (2MHz step, 38 channels)	Sub-RF: 2404 ~ 2478 MHz (2MHz step, 38 channels)
Antenna type	Main-RF: chip antenna Sub-RF: wire antenna	Sub-RF: wire antenna
Type of modulation	Main-RF: FHSS (GFSK) Sub-RF: FHSS (GFSK)	Sub-RF: FHSS (GFSK)
RF power output	Main-RF: < 4 dBm Sub-RF: < 4 dBm	Sub-RF: < 4 dBm
External ports	DC input for charging the battery One AC/DC Adaptor for charging the batteries simultaneously - Manufacturer: E-TEK Electronics Manufactory Ltd. - Input: AC 100 – 240 V, 0.15 A, 50-60 Hz - Output: DC 5 V, 1.0 A	

**The test report for Model SBS-6600L was separately issued for equipment authorization.

3.2 Equipment Modifications

The ferrite core (Manufacturer: FEELUX, Model No.: BNF-1730) at the connector end of its DC line was necessary for compliance during certification testing.

3.3 Submitted Documents

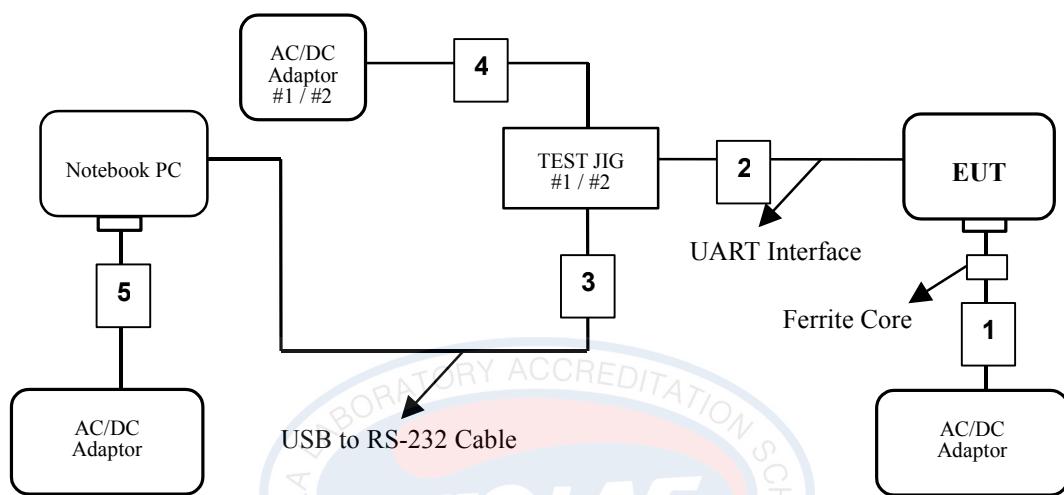
Block diagram / Schematic diagram / Part List / Antenna Specification / User manual



4. MEASUREMENT CONDITIONS

4.1 Description of test configuration

The measurements were taken in continuous transmitting mode using the TEST JIG provided by the applicant for controlling the EUT so that the hop frequencies could be selected.



NOTE: The AC power line conducted emission measurement was performed while charging the battery and simultaneously transmitting the RF signal. If not otherwise stated, a pseudo random bit sequence with DH5 packet type was used for test modulation of the Main-RF transmitter, and the generated RF signal using by test command supplied by the applicant was used for Sub-RF transmitter.

4.2 List of Peripherals

Equipment Type	Manufacturer	Model	S/N
AC/DC Adaptor	E-TEK Electronics Manufactory Ltd.	-	None
Notebook PC **	DELL	PP191	CN-0MG532-70166-6BT-004G
AC/DC Adaptor** (for Notebook PC)	DELL	LA65NS0-00	CN-0DF263-71615-6BT-81A8
TEST JIG #1 **	Supplied by the applicant	None	None
TEST JIG #2 **	Supplied by the applicant	None	None
AC/DC Adaptor #1** (for Test JIG #1)	Supplied by the applicant	None	None
AC/DC Adaptor #2** (for Test JIG #2)	Supplied by the applicant	None	None

** For control of the RF module via UART interface in the EUT.



4.3 Type of Used Cables

#	START		END		CABLE	
	NAME	I/O PORT	NAME	I/O PORT	Length (m)	Shielded
1	EUT	DC power IN	AC/DC Adaptor **	DC Output	1.8	NO
2	EUT	UART Interface (USB Type)	TEST JIG	UART	0.1	NO
3	TEST JIG #1/#2	RS232	Notebook PC	USB	1.5	YES
4	TEST JIG #1/#2	DC power IN	AC/DC Adaptor #1/#2	DC Output	1.5	NO
5	Notebook PC	DC power IN	AC/DC Adaptor	DC Output	1.8	NO

** The ferrite core at the connector end of its DC line was necessary for compliance during certification testing.

4.4 Uncertainty

Measurement Item	Combined Standard Uncertainty U_c	Expanded Uncertainty $U = KU_c$ ($K = 2$)
Conducted RF power	± 1.49 dB	± 2.98 dB
Radiated disturbance	± 2.30 dB	± 4.60 dB
Conducted disturbance	± 1.96 dB	± 3.92 dB

TESTING NO. 191



5. TEST AND MEASUREMENTS

Summary of Test Results

Requirement	CFR 47 Section	Report Section	Test Result
Antenna Requirement	15.203, 15.247(b)(4)	5.1	PASS
Maximum Peak Output Power	15.247(b)(1), (4)	5.2	PASS
Carrier Frequency Separation	15.247(a)(1)	5.3	PASS
20dB Channel Bandwidth	15.247(a)(1)	5.4	PASS
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	5.5	PASS
Time of Occupancy (Dwell Time)	15.247(a)(iii)	5.6	PASS
Spurious Emission, Band Edge, and Restricted bands	15.247(d), 15.205(a), 15.209(a)	5.7	PASS
Peak Power Spectral Density	15.247(e)	5.8	PASS
Conducted Emissions	15.207(a)	5.9	PASS
RF Exposure	15.247(i), 1.1307(b)(1)	5.10	PASS

5.1 ANTENNA REQUIREMENT

5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.1.2 Result:

PASS

The transmitter has an integral/internal antenna. The directional gain of the antenna is -3.03 dBi and -0.22 dBi.



5.2 MAXIMUM PEAK OUTPUT POWER

5.2.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2.2 Test Procedure

1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
3. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via UART interface and make sure the spectrum analyzer is operated in its linear range.
4. Set the spectrum analyzer as follows:
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW > the 20 dB bandwidth of the emission being measured
VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
5. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
6. Repeat above procedures until all frequencies measured were complete.

5.2.3 Test Results:

PASS

Table 1: Measured values of the Maximum Peak Output Power (Conducted)

Operating Frequency	Resolution Bandwidth	Actual	Limit
Main-RF (79 channels)			
2402 MHz	3 MHz	-1.266 dBm (0.75 mW)	30 dBm (1 W)
2441 MHz	3 MHz	-1.656 dBm (0.68 mW)	30 dBm (1 W)
2480 MHz	3 MHz	-2.668 dBm (0.54 mW)	30 dBm (1 W)
Sub- RF (38 channels)			
2404 MHz	3 MHz	0.279 dBm (1.07 mW)	21 dBm (0.125 W)
2440 MHz	3 MHz	-0.608 dBm (0.87 mW)	21 dBm (0.125 W)
2478 MHz	3 MHz	-2.361 dBm (0.58 mW)	21 dBm (0.125 W)

NOTE:

1. Since the directional gain of the antenna declared by the manufacturer ($G_{ANT} = -3.03$ dBi and -0.22 dBi) does not exceed 6.0 dBi, there was no need to reduce the output power.
2. We took the insertion loss of the attenuator and cable loss into consideration within the measuring instrument.



5.3 CARRIER FREQUENCY SEPARATION

5.3.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.3.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
3. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via UART interface.
4. Set the spectrum analyzer as follows:
 - Span = wide enough to capture the peaks of two adjacent channels
 - Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span
 - Video (or Average) Bandwidth (VBW) \geq RBW
 - Sweep = auto, Detector function = peak, Trace = max hold
5. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
6. Repeat above procedures until all frequencies measured were complete.

5.3.3 Test Results:

PASS

Table 2: Measured values of the Carrier Frequency Separation (Conducted)

Operating frequency	Carrier frequency separation	Limit
Main-RF (79 channels)		
2402 MHz	1002 kHz	≥ 25 kHz or 20 dB bandwidth
2441 MHz	1002 kHz	≥ 25 kHz or 20 dB bandwidth
2480 MHz	999 kHz	≥ 25 kHz or 20 dB bandwidth
Sub- RF (38 channels, operated with an output power no greater than 125 mW)		
2404 MHz	1998 kHz	≥ 25 kHz or $2/3 \times 20$ dB bandwidth
2440 MHz	2004 kHz	≥ 25 kHz or $2/3 \times 20$ dB bandwidth
2478 MHz	1998 kHz	≥ 25 kHz or $2/3 \times 20$ dB bandwidth

NOTE: We took the insertion loss of the attenuator and cable loss into consideration within the measuring instrument.



5.4 20dB CHANNEL BANDWIDTH

5.4.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.4.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
3. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via UART interface and make sure the spectrum analyzer is operated in its linear range.
4. Set the spectrum analyzer as follows:
 - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 - RBW \geq 1% of the 20 dB bandwidth
 - VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
5. Set a reference level on it equal to the highest peak value.
6. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
7. Repeat above procedures until all frequencies measured were complete.

5.4.3 Test Results:

PASS

Table 3: Measured values of the 20dB Channel Bandwidth (Conducted)

Operating frequency	20dB channel bandwidth	Carrier frequency separation	Limit
Main-RF (79 channels)			
2402 MHz	875.6 kHz	1002 kHz	< Carrier frequency separation
2441 MHz	873.8 kHz	1002 kHz	< Carrier frequency separation
2480 MHz	871.9 kHz	999 kHz	< Carrier frequency separation
Sub- RF (38 channels, operated with an output power no greater than 125 mW)			
2404 MHz	1328.4 kHz	1998 kHz	< $3/2 \times$ Carrier frequency separation
2440 MHz	1245.9 kHz	2004 kHz	< $3/2 \times$ Carrier frequency separation
2478 MHz	1031.3 kHz	1998 kHz	< $3/2 \times$ Carrier frequency separation

NOTE: We took the insertion loss of the attenuator and cable loss into consideration within the measuring instrument.



5.5 NUMBER OF HOPPING CHANNELS

5.5.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.5.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
3. Turn on the EUT and set the hopping function enabled by controlling it via UART interface.
4. Set the spectrum analyzer as follows:
 - Span = the frequency band of operation
 - RBW $\geq 1\%$ of the span
 - VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
5. Record the number of hopping channels.

5.5.3 Test Results:

PASS

Table 4: Measured values of the Number of Hopping Channels (Conducted)

Operating frequency	Number of hopping channels	Limit
Main-RF (79 channels)		
2402 - 2480 MHz	79	≥ 15
Sub- RF (38 channels, operated with an output power no greater than 125 mW)		
2404 - 2478 MHz	38	≥ 15

NOTE: We took the insertion loss of the attenuator and cable loss into consideration within the measuring instrument.



5.6 TIME OF OCCUPANCY (DWELL TIME)

5.6.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable.
3. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via UART interface.
4. Set the spectrum analyzer as follows:
 - Span = zero span, centered on a hopping channel
 - RBW = 1 MHz, VBW \geq RBW
 - Sweep = as necessary to capture the entire dwell time per hopping channel
 - Detector function = peak, Trace = max hold
5. Measure the dwell time using the marker-delta function.
6. Repeat above procedures until all frequencies measured were complete.
7. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

5.6.3 Test Results:

PASS

Table 5: Measured values of the Time of Occupancy (Conducted); Bluetooth

Operating frequency	Burst ON time	Period	Number of hopping Channels	Actual	Limit
Main-RF (79 channels)					
2402 MHz	2.923 ms	3.751 ms	79	0.312 seconds	0.4 seconds
Sub- RF (38 channels, operated with an output power no greater than 125 mW)					
2404 MHz	92 μ s	594 μ s	38	0.062 seconds	0.4 seconds

NOTE: Each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event. Actual = $(0.4 \times \text{Number of hopping Channels}) \times \text{Burst ON time} / (\text{Period} \times \text{Number of hopping Channels})$



5.7 SPURIOUS EMISSIONS, BAND EDGE, AND RESTRICTED BANDS

5.7.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Field strength (μ V/m @ 3m)	Field strength (dB μ V/m @ 3m)
30–88	100	40.0
88–216	150	43.5
216–960	200	46.0
Above 960	500	54.0

According to §15.109(a), for an unintentional device, except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the above table.

** The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasi-peak detector and above 1000 MHz are based on the average value of measured emissions.



5.7.2 Test Procedure

1) Band-edge Compliance of RF Conducted Emissions

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.
3. Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

2) Spurious RF Conducted Emissions:

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.

3) Spurious Radiated Emissions:

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters.
2. The EUT was placed on the top of the 0.8-meter height, 1 \times 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 30 to 1000 MHz using the TRILOG broadband antenna, and from 1000 MHz to 18000 MHz using the horn antenna.
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4 \times 4 meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.



6. The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT.
7. If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative "marker-delta" method may be employed.

4) Marker-Delta Method at the edge of the authorized band of operation:

1. Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function as the above Spurious Radiated Emissions test procedure.
2. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 1% of the total span (but never less than 30 kHz) with a video bandwidth equal to or greater than the RBW. Record the peak levels of the fundamental emission and the relevant band-edge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band-edge relative to the highest fundamental emission level.
3. Subtract the delta measured in step (2) from the field strengths measured in step (1). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance as required by Section 15.205.
4. The above "delta" measurement technique may be used for measuring emissions that are up to two "standard" bandwidths away from the band-edge, where a "standard" bandwidth is the bandwidth specified by C63.4 for the frequency being measured. For example, for band-edge measurements in the restricted band that begins at 2483.5 MHz, C63.4 specifies a measurement bandwidth of at least 1 MHz. Therefore you may use the "delta" technique for measuring emissions up to 2 MHz removed from the band-edge. Radiated emissions that are removed by more than two "standard" bandwidths must be measured as the above Spurious Radiated Emissions test procedure.



5.7.3 Test Results:

PASS

Spurious RF conducted emissions were shown in the APPENDIX.

Main-RF on page 33&39

Sub-RF on page 34&40

Inter-modulation (simultaneously operating Main-RF and Sub-RF) on page 35

NOTE: We took the insertion loss of the attenuator and cable loss into consideration within the measuring instrument.

Table 6: Measured values of the Field strength of spurious emission (Radiated); Main-RF

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Antenna Height [m]	Reading [dB(μV)]	Amp Gain [dB]	ATT [dB]	AF [dB(1/m)]	CL [dB]	Actual [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Quasi-peak data, emissions below 1000 MHz											
No Spurious Radiated Emissions Found											
AVERAGE data, emissions above 1000 MHz											
2402.00	1000	H	1.64	86.05	43.7	10.1	28.3	4.9	85.7	-	-
4803.69	1000	H	1.46	45.16	44.6	0.8	32.6	7.2	41.2	54.0	12.8
2441.00	1000	H	1.61	87.11	43.7	10.1	28.3	4.9	86.7	-	-
4881.65	1000	H	1.22	44.87	44.6	0.8	32.5	7.3	40.9	54.0	13.1
2480.00	1000	H	1.57	87.93	43.8	10.1	28.6	5.0	87.8	-	-
4959.63	1000	H	1.83	46.32	44.6	0.8	32.5	7.3	42.3	54.0	11.7
PEAK data, emissions above 1000 MHz											
2402.00	1000	H	1.64	88.29	43.7	10.1	28.3	4.9	87.9	-	-
4803.69	1000	H	1.46	52.61	44.6	0.8	32.6	7.2	48.6	74.0	25.4
2441.00	1000	H	1.61	89.34	43.7	10.1	28.3	4.9	88.9	-	-
4881.65	1000	H	1.22	52.33	44.6	0.8	32.5	7.3	48.3	74.0	25.7
2480.00	1000	H	1.57	90.18	43.8	10.1	28.6	5.0	90.1	-	-
4959.63	1000	H	1.83	54.29	44.6	0.8	32.5	7.3	50.3	74.0	23.7

Margin (dB) = Limit – Actual

[Actual = Reading – Amp Gain + Attenuator + AF + CL]

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.



Table 7: Measured values of the Field strength of spurious emission (Radiated); Sub-RF

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Antenna Height [m]	Reading [dB(μV)]	Amp Gain [dB]	ATT [dB]	AF [dB(1/m)]	CL [dB]	Actual [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
--------------------	--------------------------------	---------------	--------------------------	---------------------	---------------------	-------------	-----------------	------------	----------------------	---------------------	----------------

Quasi-peak data, emissions below 1000 MHz

No Spurious Radiated Emissions Found

AVERAGE data, emissions above 1000 MHz

2404.00	1000	H	1.85	67.26	43.7	10.1	28.3	4.9	66.9	-	-
4806.77	1000	H	1.20	45.56	44.6	0.8	32.6	7.2	41.6	54.0	12.4
2440.00	1000	H	1.82	66.74	43.7	10.1	28.3	4.9	66.3	-	-
4878.76	1000	H	1.23	45.55	44.6	0.8	32.5	7.3	41.6	54.0	12.5
2478.00	1000	H	1.81	65.72	43.8	10.1	28.6	5.0	65.6	-	-
4954.81	1000	H	1.24	45.52	44.6	0.8	32.5	7.3	41.5	54.0	12.5

PEAK data, emissions above 1000 MHz

2404.00	1000	H	1.85	88.83	43.7	10.1	28.3	4.9	88.4	-	-
4806.77	1000	H	1.20	67.33	44.6	0.8	32.6	7.2	63.3	74.0	10.7
2440.00	1000	H	1.82	87.64	43.7	10.1	28.3	4.9	87.2	-	-
4878.76	1000	H	1.23	67.41	44.6	0.8	32.5	7.3	63.4	74.0	10.6
2478.00	1000	H	1.81	86.86	43.8	10.1	28.6	5.0	86.8	-	-
4954.81	1000	H	1.24	66.97	44.6	0.8	32.5	7.3	63.0	74.0	11.0

Margin (dB) = Limit – Actual

[Actual = Reading – Amp Gain + Attenuator + AF + CL]

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.



5.8 PEAK POWER SPECTRAL DENSITY

5.8.1 Regulation

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.8.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
3. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via UART interface and make sure the spectrum analyzer is operated in its linear range.
4. Set the spectrum analyzer to MAX HOLD mode with RBW = 3kHz.
5. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
6. Repeat above procedures until all frequencies measured were complete.

5.8.3 Test Results:

PASS

Table 8: Measured values of the Peak Power Spectral Density (Conducted)

Operating frequency	Actual	Limit
Main-RF (79 channels)		
2402 MHz	-10.69 dBm	8.0 dBm
2441 MHz	-11.34 dBm	8.0 dBm
2480 MHz	-12.22 dBm	8.0 dBm
Sub- RF (38 channels, operated with an output power no greater than 125 mW)		
2404 MHz	-15.96 dBm	8.0 dBm
2440 MHz	-16.21 dBm	8.0 dBm
2478 MHz	-14.94 dBm	8.0 dBm

NOTE: We took the insertion loss of the attenuator and cable loss into consideration within the measuring instrument.



5.9 CONDUCTED EMISSIONS

5.9.1 Regulation

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a $50\mu\text{H}/50\Omega$ line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.

5.9.2 Test Procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a $50\Omega/50\mu\text{H}$ LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.



5.9.3 Test Results:

PASS

Table 9: Measured values of the Conducted Emissions

Frequency [MHz]	Reading [dB μ V]	L / N	CF [dB]	CL [dB]	Actual [dB μ V]	Limit [dB μ V]	Margin [dB]
QUASI-PEAK DATA							
0.195	41.11	N	0.12	0.02	41.25	63.82	22.57
0.200	38.91	L	0.13	0.02	39.06	63.61	24.55
0.365	36.27	N	0.12	0.04	36.43	58.61	22.18
0.370	33.99	L	0.13	0.04	34.16	58.50	24.34
0.395	34.26	N	0.12	0.04	34.42	57.96	23.54
0.590	27.95	N	0.12	0.04	28.11	56.00	27.89
0.595	25.61	L	0.14	0.05	25.80	56.00	30.20
0.795	30.28	L	0.14	0.06	30.48	56.00	25.52
27.215	28.61	L	1.18	0.43	30.22	60.00	29.78
27.485	29.11	N	0.86	0.43	30.40	60.00	29.60
AVERAGE DATA							
0.195	32.11	N	0.12	0.02	32.25	53.82	21.57
0.200	29.40	L	0.13	0.02	29.55	53.61	24.06
0.365	27.47	N	0.12	0.04	27.63	48.61	20.98
0.370	28.27	L	0.13	0.04	28.44	48.50	20.06
0.395	27.94	N	0.12	0.04	28.10	47.96	19.86
0.590	22.60	N	0.12	0.04	22.76	46.00	23.24
0.595	20.20	L	0.14	0.05	20.39	46.00	25.61
0.795	21.84	L	0.14	0.06	22.04	46.00	23.96
27.215	14.76	L	1.18	0.43	16.37	50.00	33.63
27.485	14.73	N	0.86	0.43	16.02	50.00	33.98

Margin (dB) = Limit – Actual

[Actual = Reading + CF + CL]

L/N = LINE / NEUTRAL

CF/CL = Correction Factor and Cable Loss

NOTE: The frequency range was scanned from 150 kHz to 30 MHz. All emissions not reported were more than 20 dB below the specified limit.



5.10 RF Exposure

5.10.1 Regulation

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Limits for Maximum Permissive Exposure: RF exposure is calculated.

Frequency Range	Electric Field Strength [V/m]	Magnetic Field Strength [A/m]	Power Density [mW/cm ²]	Averaging Time [minute]
Limits for General Population/Uncontrolled Exposure				
0.3 ~ 1.34	614	1.63	*(100)	30
1.34 ~ 30	824/f	2.19/f	*(180/f ²)	30
30 ~ 300	27.5	0.073	0.2	30
300 ~ 1500	/	/	f/1500	30
1500 ~ 15000	/	/	1.0	30

f = frequency in MHz,

* = Plane-wave equivalent power density

MPE (Maximum Permissive Exposure) Prediction

Predication of MPE limit at a given distance: Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

S = power density [mW/cm²]

P = power input to antenna [mW]

$$(\Rightarrow R = \sqrt{PG/4\pi S})$$

G = power gain of the antenna in the direction of interest

relative to an isotropic radiator

R = distance to the center of radiation of the antenna [cm]

EUT: Maximum peak output power = 0.279 [dBm] (= 1.07 [mW]) & Antenna gain = -0.22 [dBi]	
100 mW, at 20 cm from an antenna 6 [dBi]	$S = PG/4\pi R^2 = 100 \times 3.98 / (4 \times \pi \times 400) = 0.0792 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
1.07 mW, at 20 cm from the antenna -0.22 [dBi]	$S = PG/4\pi R^2 = 0.0002 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
1.07 mW, at 2.5 cm from the antenna -0.22 [dBi]	$S = PG/4\pi R^2 = 0.0129 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
1.07 mW, at 0.5 cm from the antenna -0.22 [dBi]	$S = PG/4\pi R^2 = 0.3235 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$

NOTE: The antennas used for the EUT are an integral Wire ANT & Chip ANT. The calculated values of MPE for the EUT show that MPE is safe beyond 0.5 cm from the antenna.

5.10.2 RF Exposure Compliance Issue

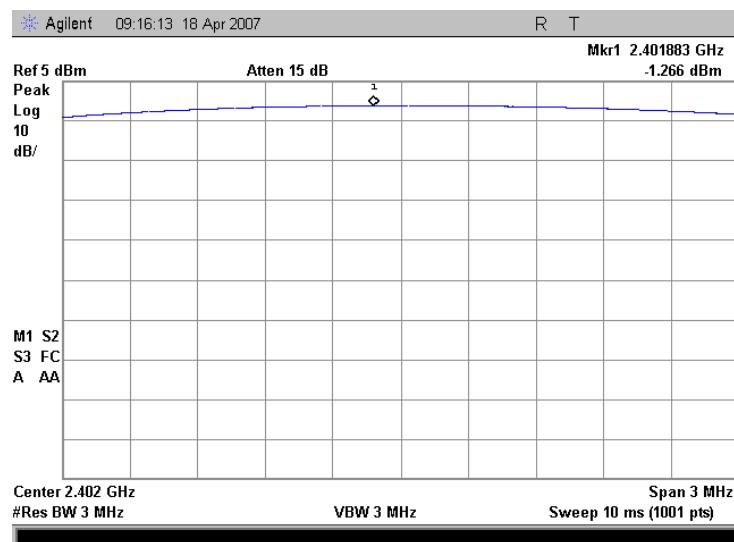
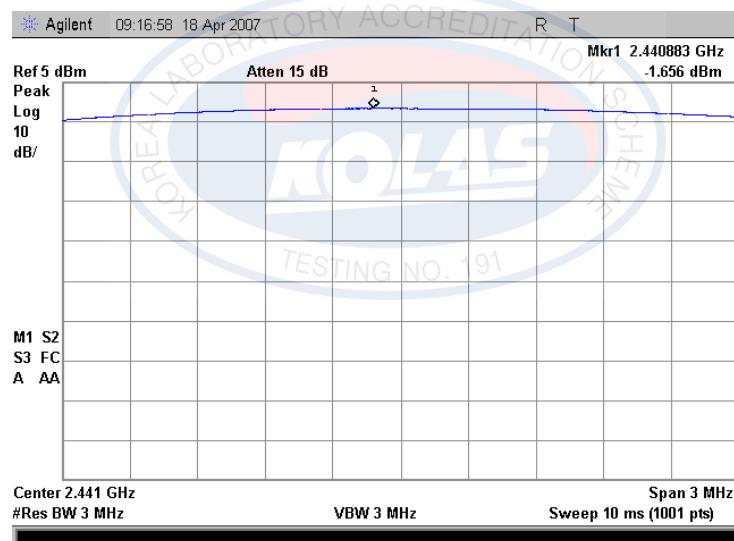
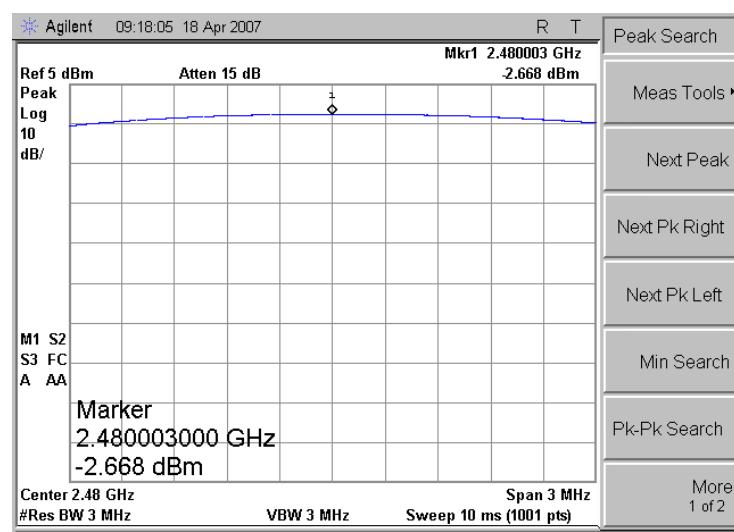
The EUT is categorically excluded from routine environmental because it operates at very low power level. The equipment is deemed to comply with the SAR or MPE limits without testing due to this very low power level. SAR data was not submitted because the output power of the EUT was below the low thresholds in the July02 TCB Exclusion List: for portable transmitters,

Low threshold [(60/f_{GHZ} ≈ 25) mW, d < 2.5 cm, (120/f_{GHZ} ≈ 50) mW, d ≥ 2.5 cm], and

High threshold [(900/f_{GHZ} ≈ 370) mW, d < 20 cm], where f_{GHZ}: 2.44, d: distance to a person's body





SK TECH CO., LTD.

Page 24 of 43

APPENDIX. Plot of the measurement results
Figure 1: Maximum Peak Output Power (Conducted)
Main-RF
**Lowest Channel
(2402 MHz)**

Main-RF
**Middle Channel
(2441 MHz)**

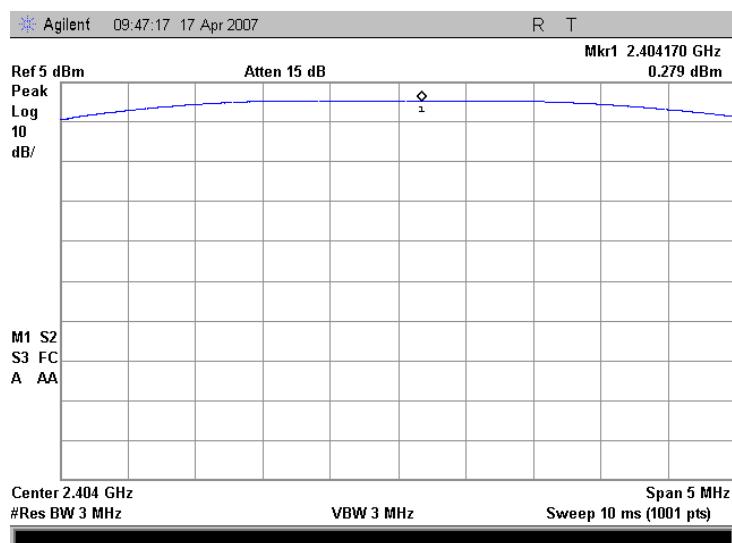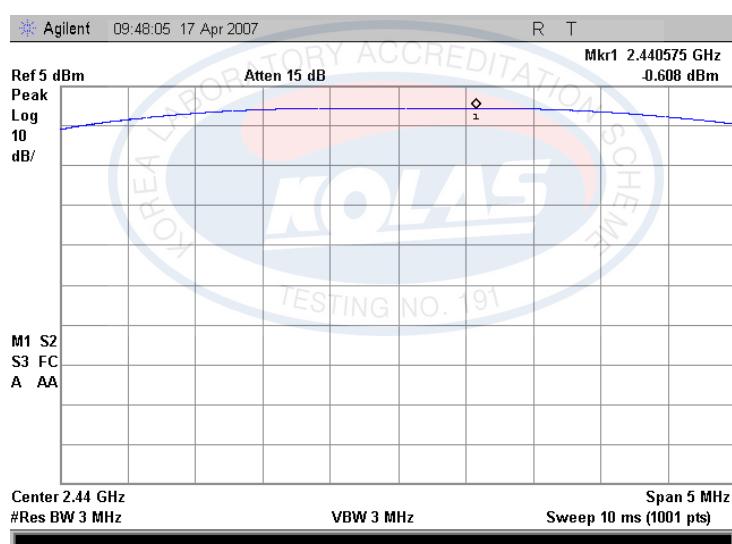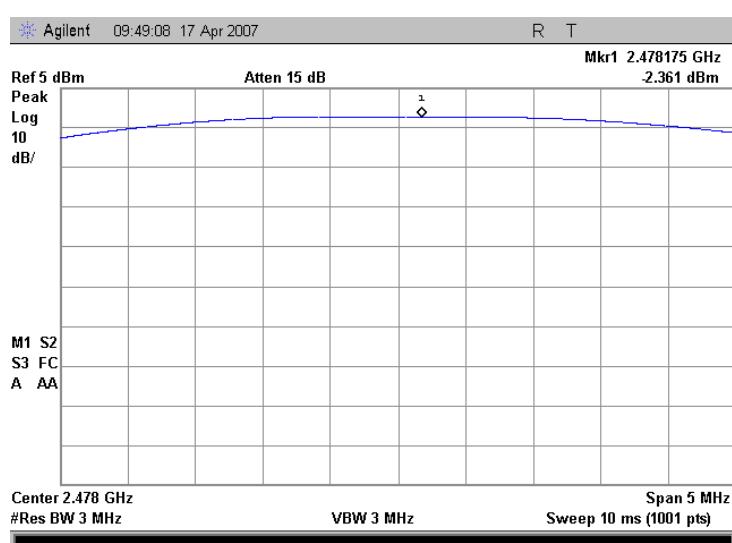Main-RF
**Highest Channel
(2480 MHz)**


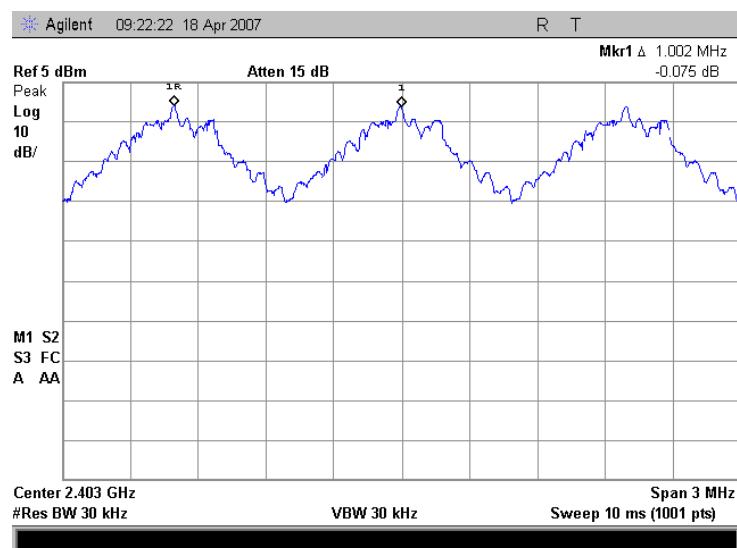
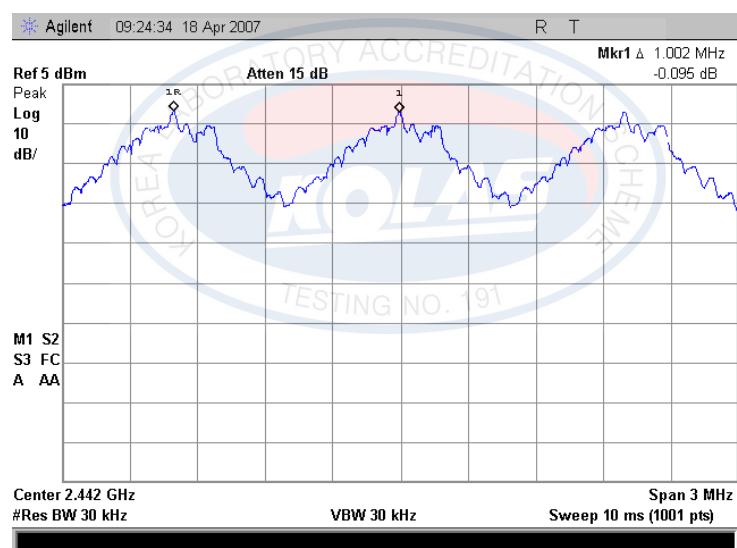
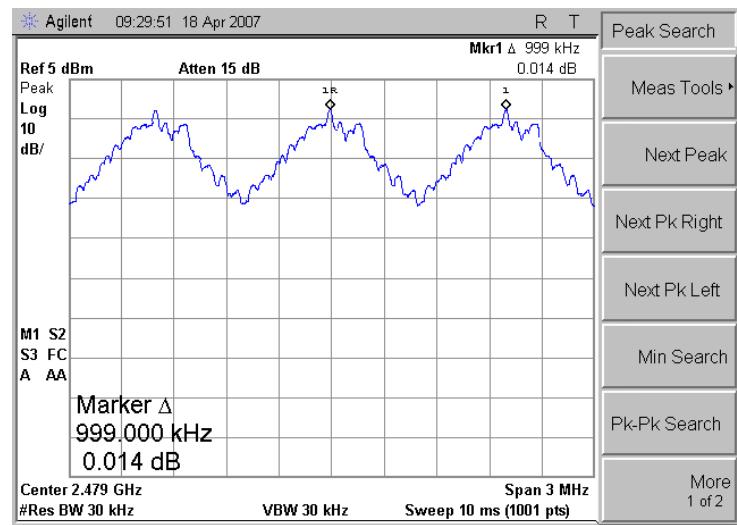

SK TECH CO., LTD.

Page 25 of 43

Maximum Peak Output Power (Conducted)
Sub-RFLowest Channel
(2404 MHz)**Sub-RF**Middle Channel
(2440 MHz)**Sub-RF**Highest Channel
(2478 MHz)




SK TECH CO., LTD.

Page 26 of 43

Figure 2: Carrier Frequency Separation (Conducted)
Main-RFLowest Channel
(2402 MHz)**Main-RF**Middle Channel
(2441 MHz)**Main-RF**Highest Channel
(2480 MHz)





SK TECH CO., LTD.

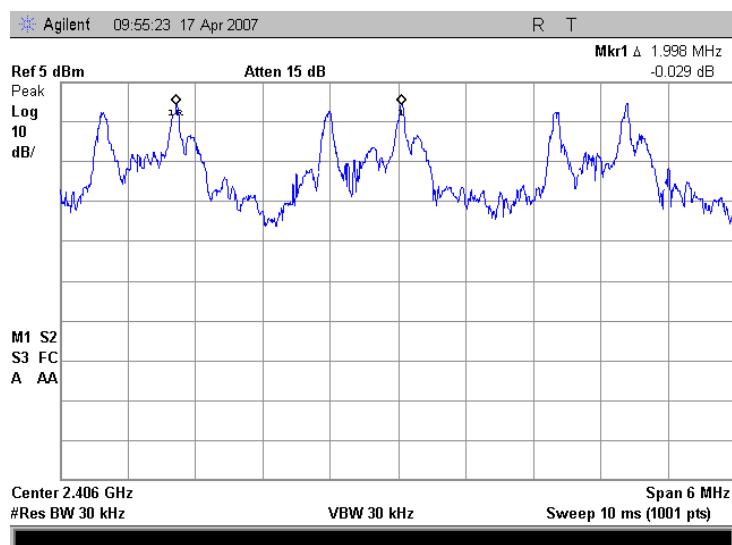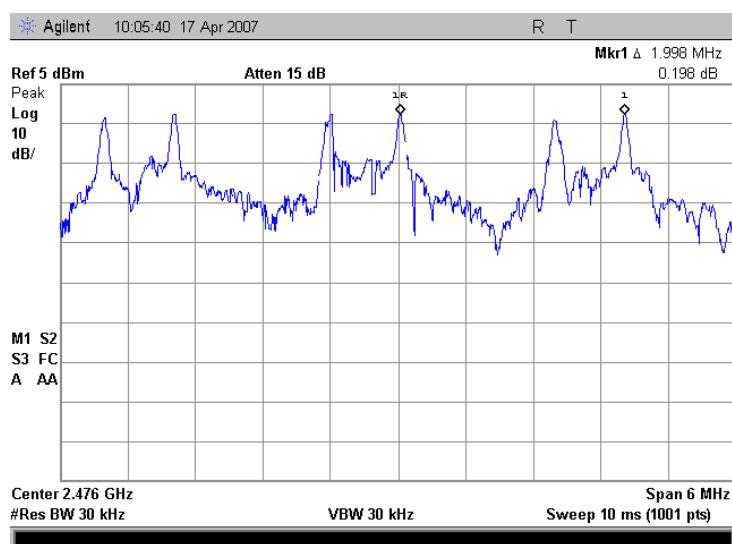Page 27 of 43

Carrier Frequency Separation (Conducted)
Sub-RFLowest Channel
(2404 MHz)**Sub-RF**Middle Channel
(2440 MHz)**Sub-RF**Highest Channel
(2478 MHz)





SK TECH CO., LTD.

Page 28 of 43

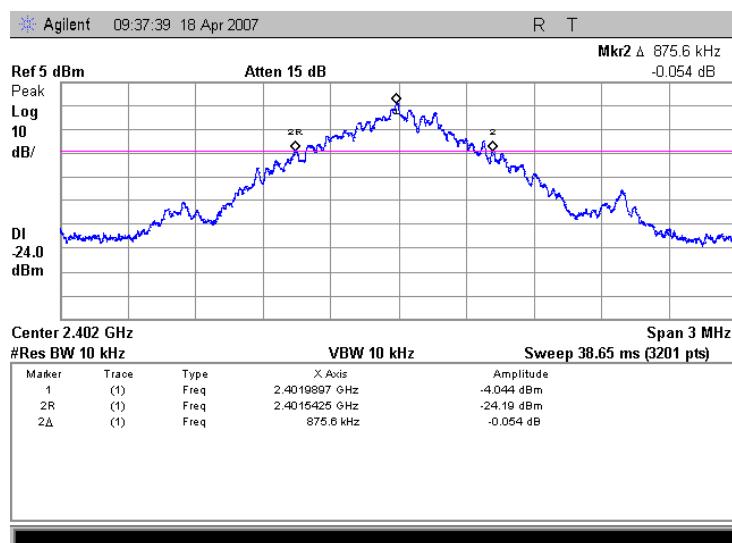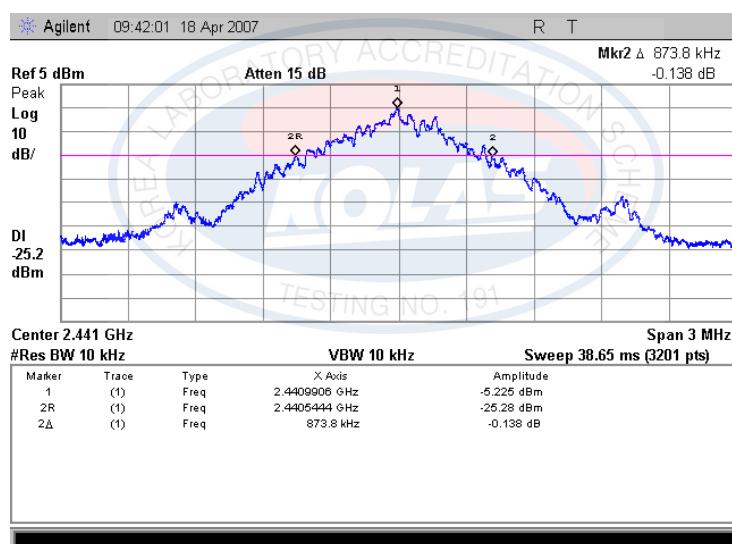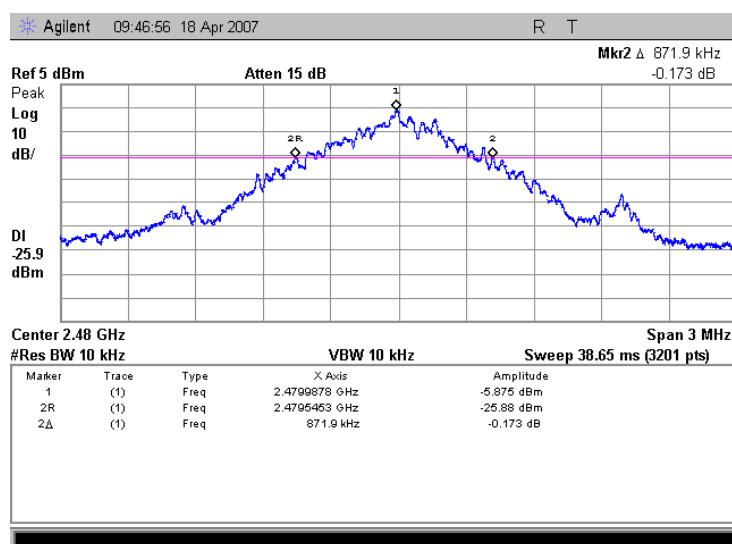Figure 3: 20dB Channel Bandwidth (Conducted)**Main-RF**Lowest Channel
(2402 MHz)**Main-RF**Middle Channel
(2441 MHz)**Main-RF**Highest Channel
(2480 MHz)



SK TECH CO., LTD.

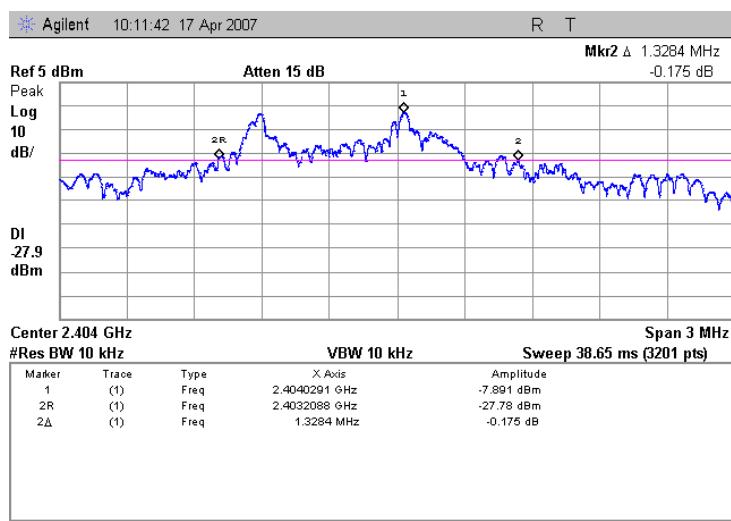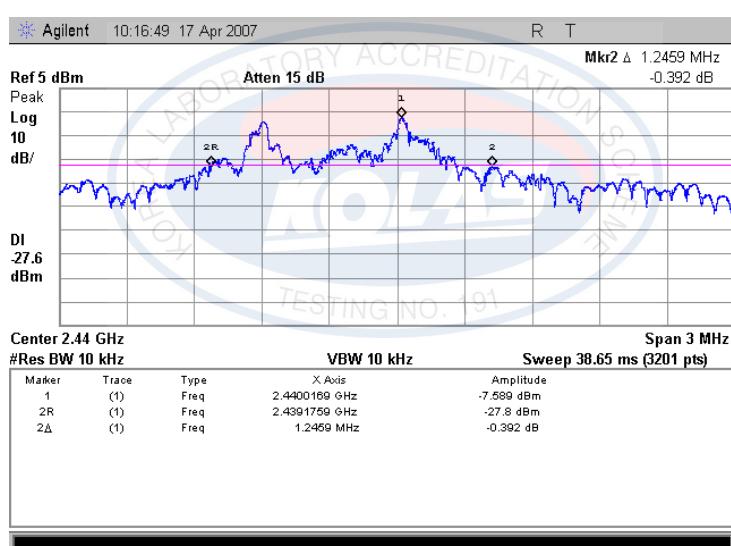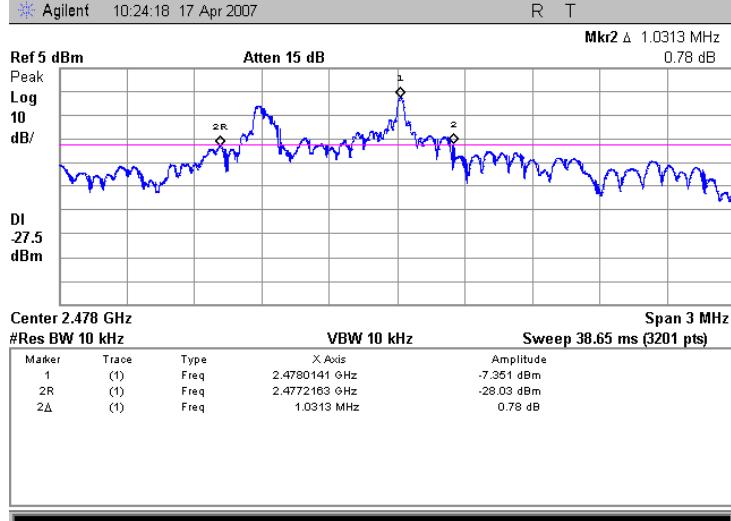Page 29 of 43

20dB Channel Bandwidth (Conducted)
Sub-RF
 Lowest Channel
 (2404 MHz)

Sub-RF
 Middle Channel
 (2440 MHz)

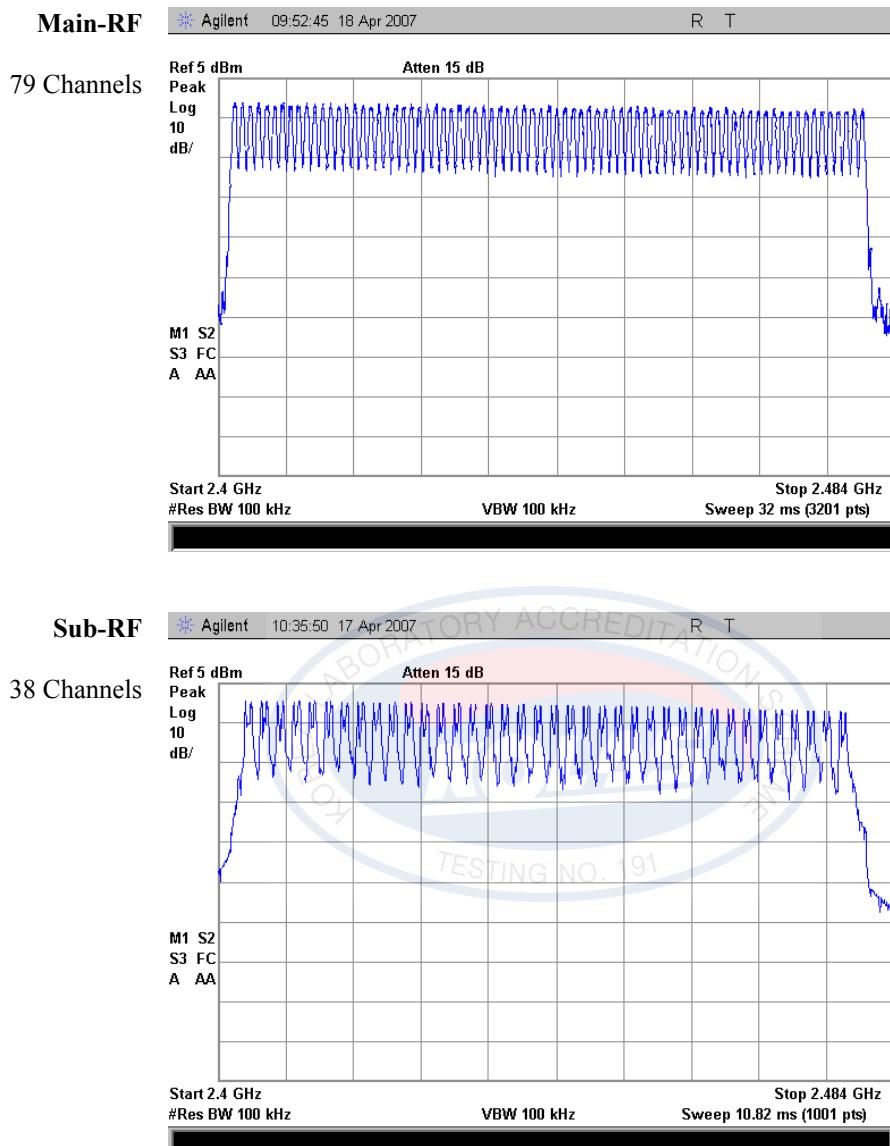Sub-RF
 Highest Channel
 (2478 MHz)


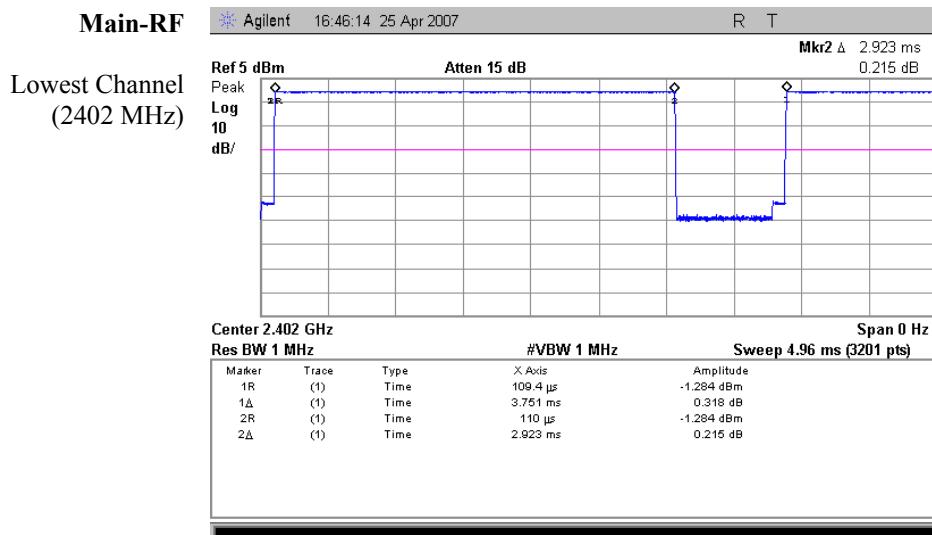
**SK TECH CO., LTD.**

Page 30 of 43

Figure 4: Number of Hopping Channels (Conducted)

**SK TECH CO., LTD.**

Page 31 of 43


Figure 5: Time of Occupancy (Conducted)


SK TECH CO., LTD.

Page 32 of 43

Time of Occupancy (Conducted)

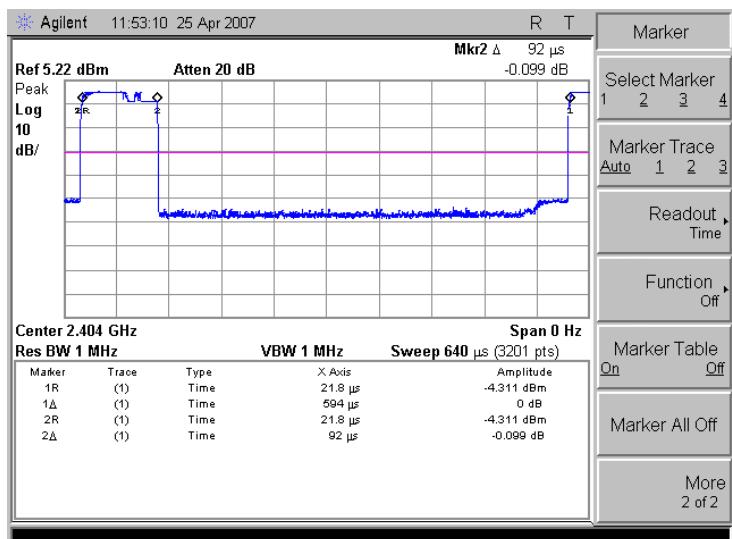Sub-RF
Lowest Channel
(2404 MHz)





Burst ON Time = 92 μs
Period = 594 μs






SK TECH CO., LTD.

Page 33 of 43

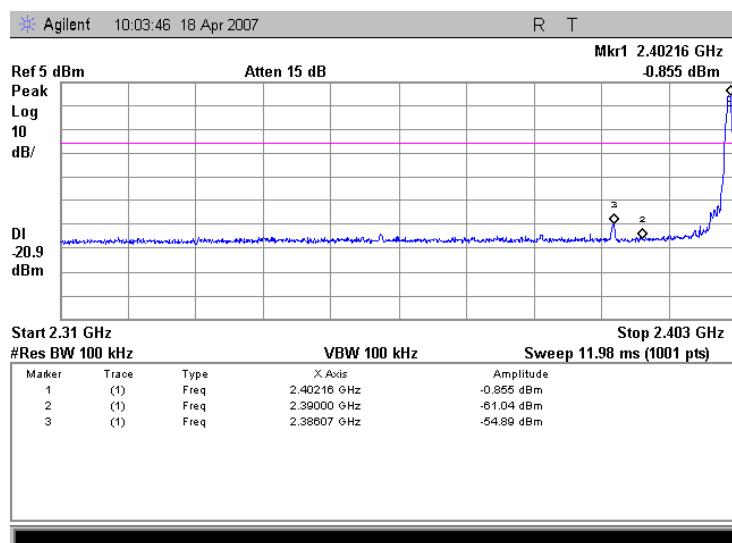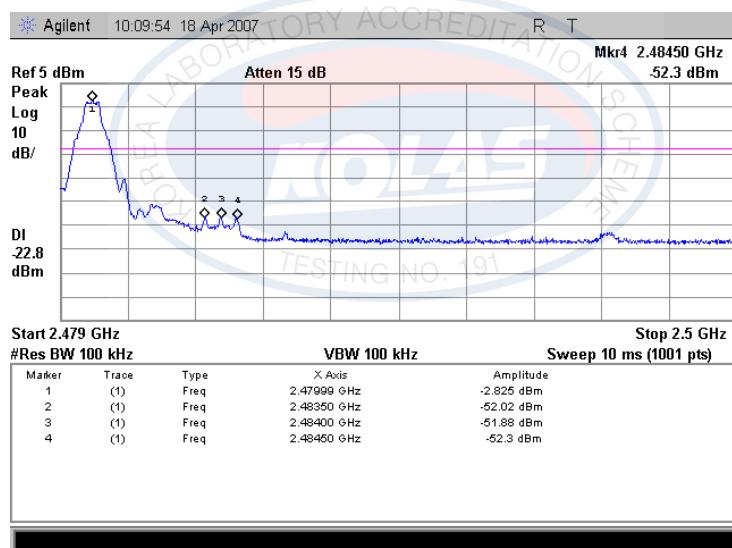Figure 6: Band Edge compliance (Conducted)
Main-RF
 Lower band-edge
Hopping DISENABLED
**Main-RF**
 Upper band-edge
Hopping DISENABLED



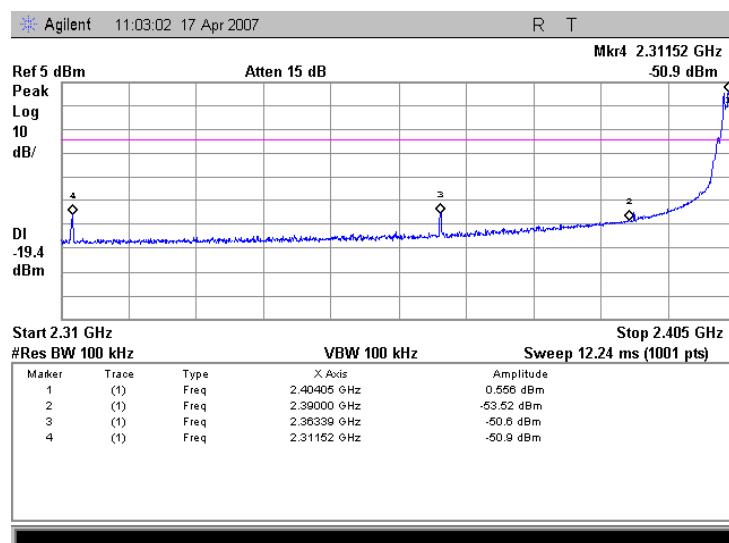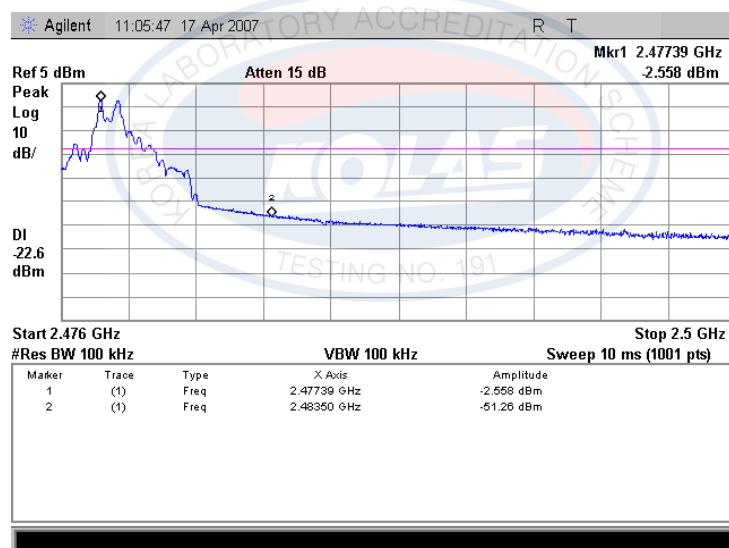SK TECH CO., LTD.

Page 34 of 43

Band Edge compliance (Conducted)
Sub-RF
 Lower band-edge
Hopping DISENABLED
**Sub-RF**
 Upper band-edge
Hopping DISENABLED


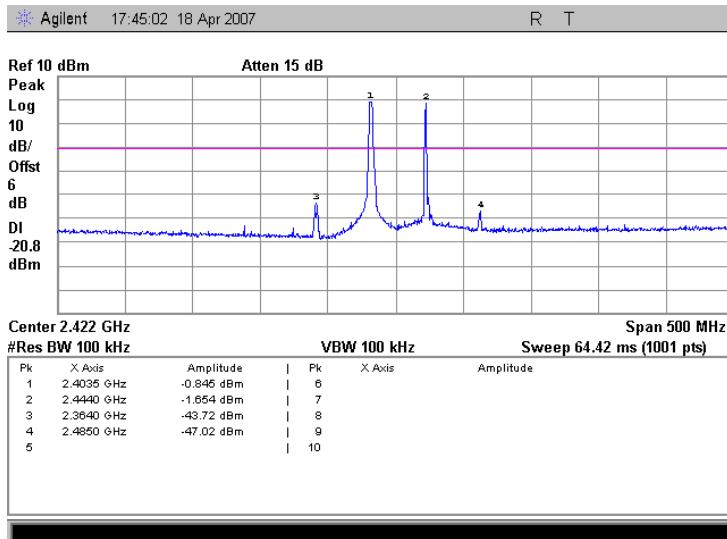


Band Edge compliance (Conducted)

Intermodulation (2172 ~ 2672 MHz)

Main-RF: 2444MHz
Sub-RF: 2404 MHz

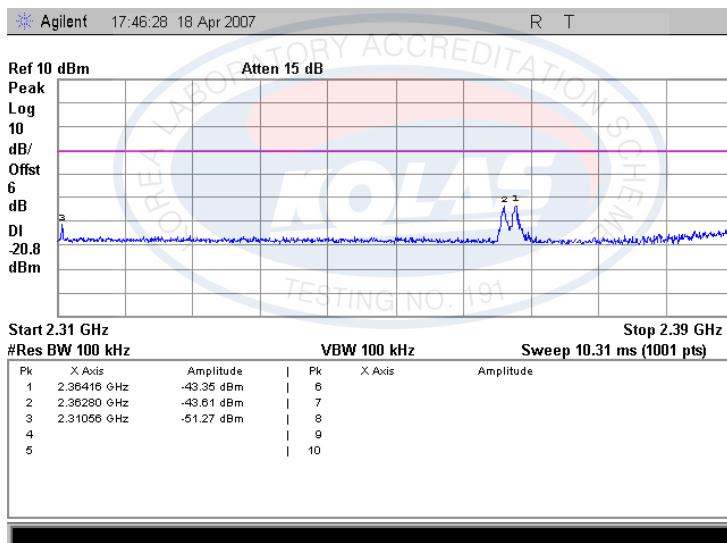
The condition of transmitting at the above frequencies was the worst case, which the spurious emissions generated by intermodulation fall in the restricted band.



Intermodulation

Lower band-edge


Main-RF: 2444MHz
Sub-RF: 2404 MHz



Intermodulation

Upper band-edge

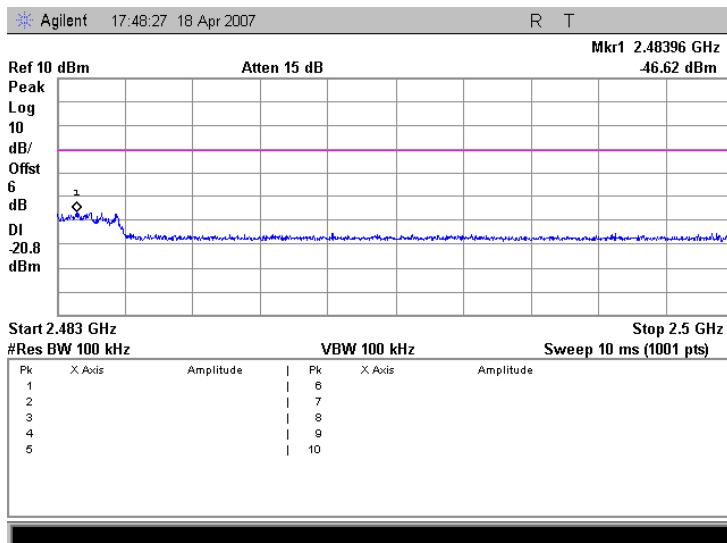Main-RF: 2444MHz
Sub-RF: 2404 MHz






SK TECH CO., LTD.


Page 36 of 43

Figure 7: Band Edge compliance (Radiated)

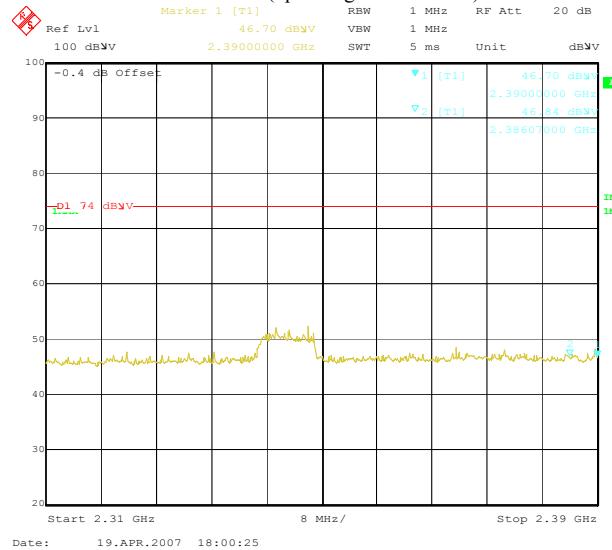
Main-RF Lowest Channel (operating at 2402 MHz): PEAK



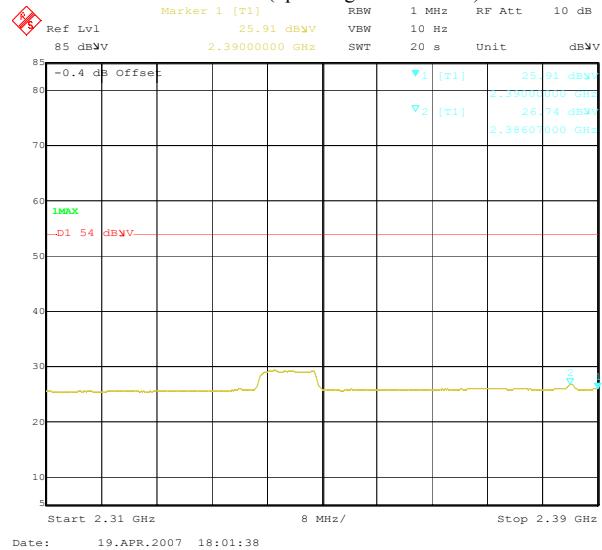
Main-RF Lowest Channel (operating at 2402 MHz): AVERAGE



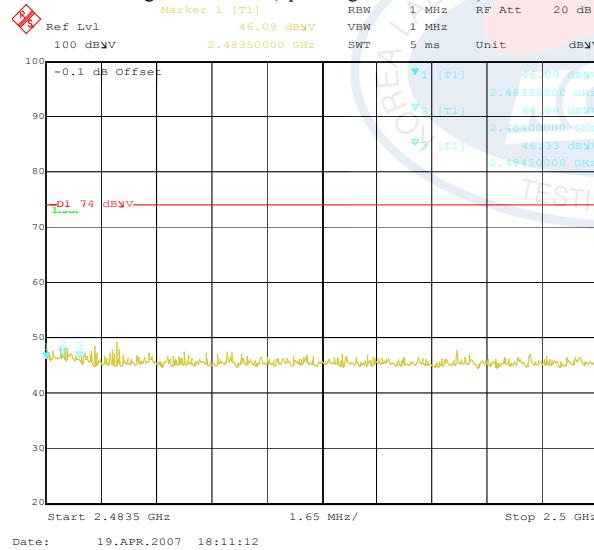Main-RF Highest Channel (operating at 2480 MHz): PEAK



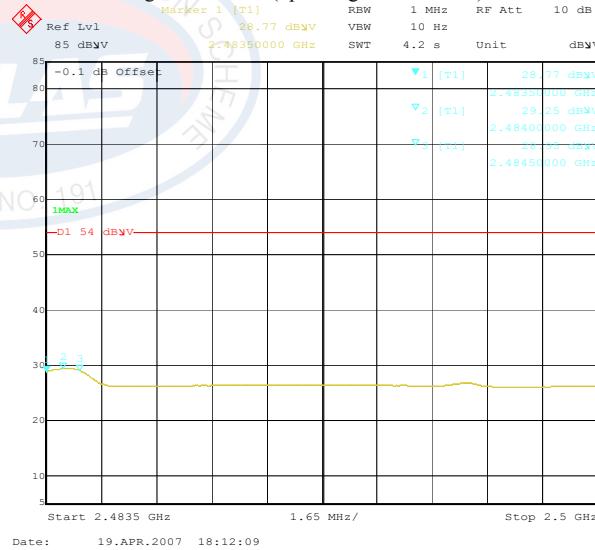Main-RF Highest Channel (operating at 2480 MHz): AVERAGE






SK TECH CO., LTD.

Page 37 of 43


Band Edge compliance (Radiated)

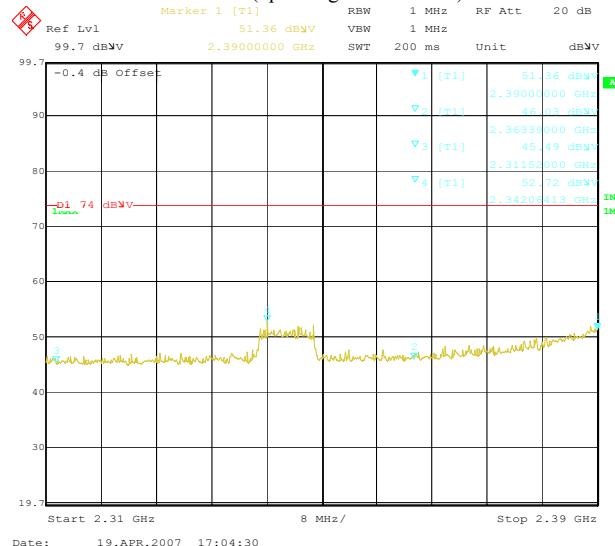Sub-RF Lowest Channel (operating at 2404 MHz): PEAK




Date: 19.APR.2007 17:04:30

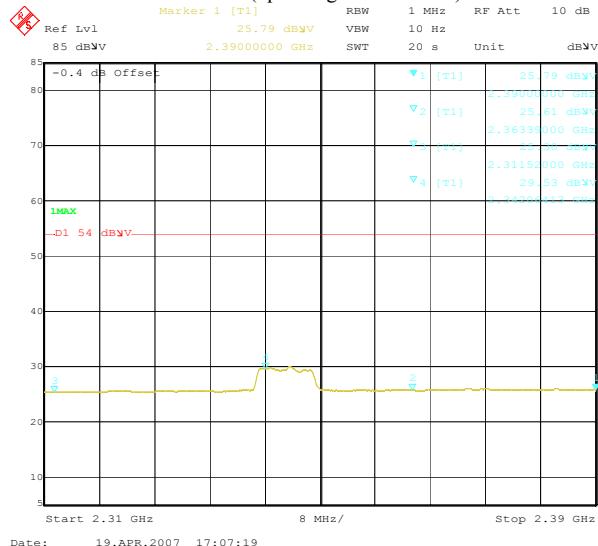Sub-RF Lowest Channel (operating at 2404 MHz): AVERAGE




Date: 19.APR.2007 17:07:19

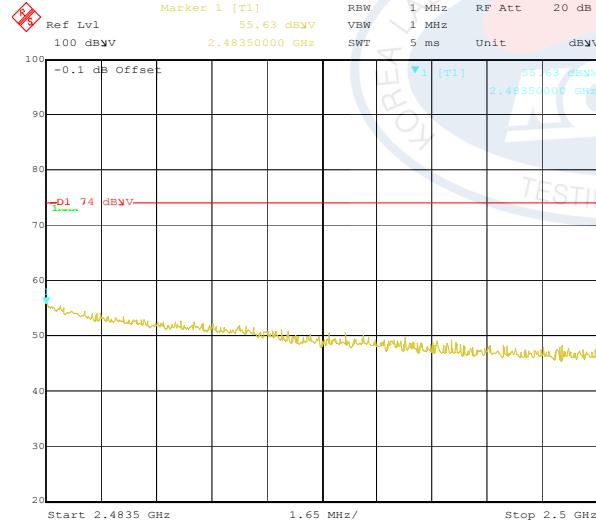Sub-RF Highest Channel (operating at 2478 MHz): PEAK



Date: 19.APR.2007 16:04:10

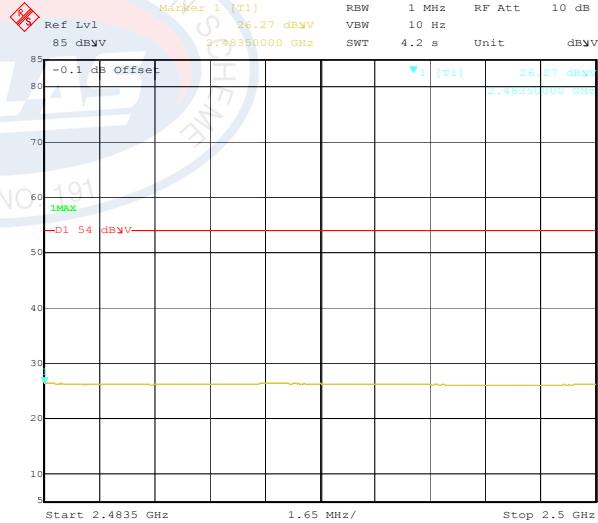Sub-RF Highest Channel (operating at 2478 MHz): AVERAGE



Date: 19.APR.2007 16:05:22



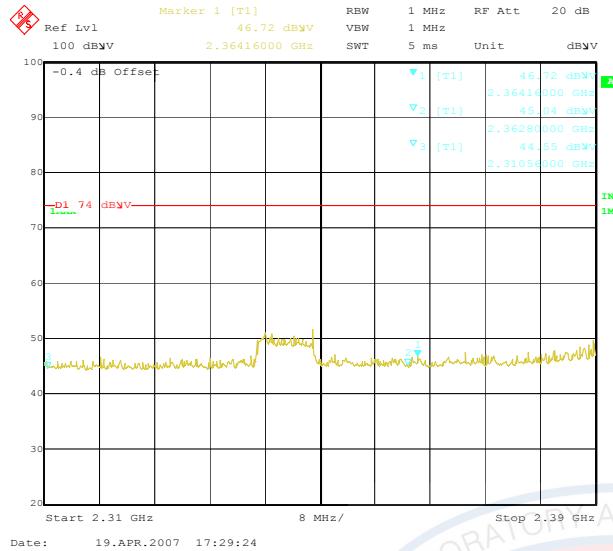
SK TECH CO., LTD.

Page 38 of 43

Band Edge compliance (Radiated)


Intermodulation Lower band-edge: PEAK

Main-RF: 2444MHz and Sub-RF: 2404 MHz




Intermodulation Lower band-edge: AVERAGE

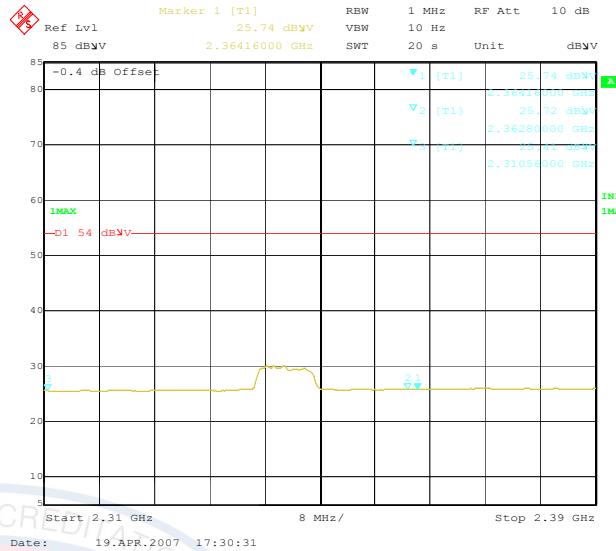Main-RF: 2444MHz and Sub-RF: 2404 MHz




Intermodulation Upper band-edge: PEAK

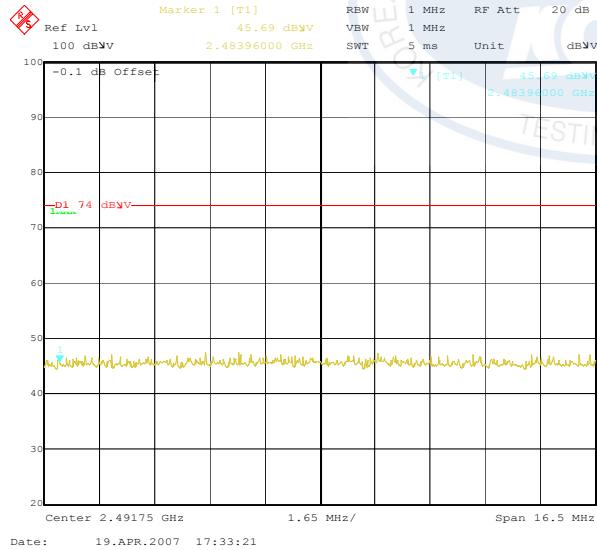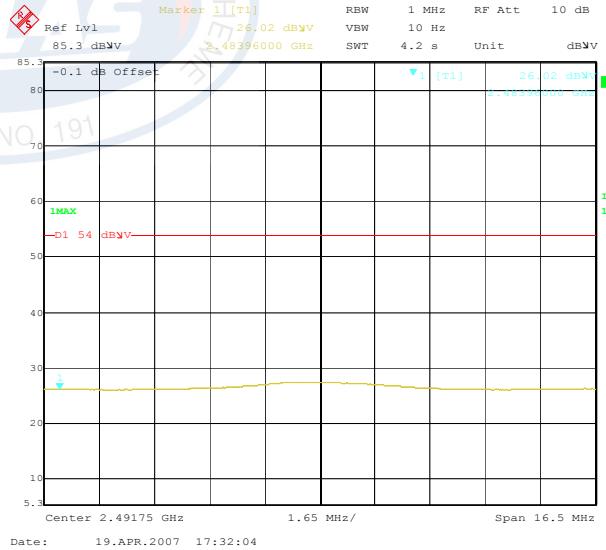Main-RF: 2444MHz and Sub-RF: 2404 MHz



Intermodulation Upper band-edge: AVERAGE

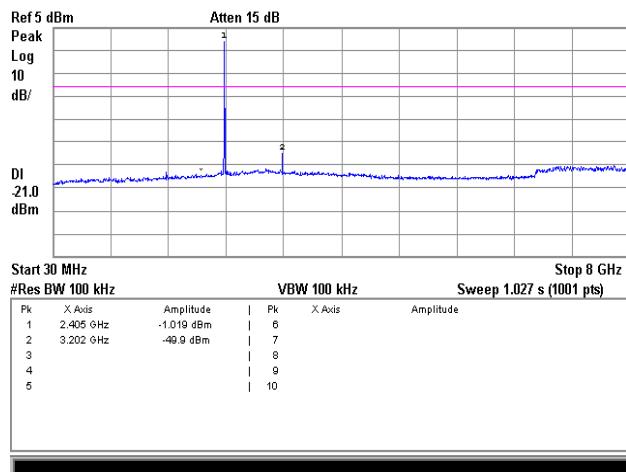
Main-RF: 2444MHz and Sub-RF: 2404 MHz



**Figure 8: Spurious RF conducted emissions****Main-RF Lowest Channel (2402 MHz): 30 MHz ~ 8 GHz**


Agilent 10:22:00 18 Apr 2007

R T

**Main-RF Lowest Channel (2402 MHz): 8 GHz ~ 25 GHz**


Marker 1 (T1) RBW 100 kHz RF Att 30 dB

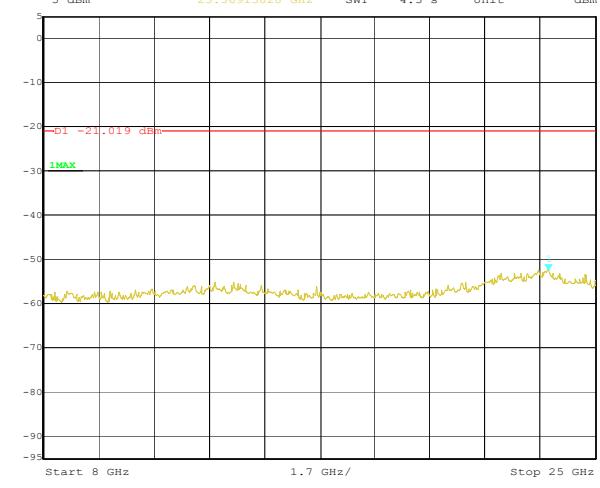Ref Lvl -52.55 dBm VBW 100 kHz SWT 4.3 s Unit dBm

**Main-RF Middle Channel (2441 MHz): 30 MHz ~ 8 GHz**


Agilent 10:33:53 18 Apr 2007

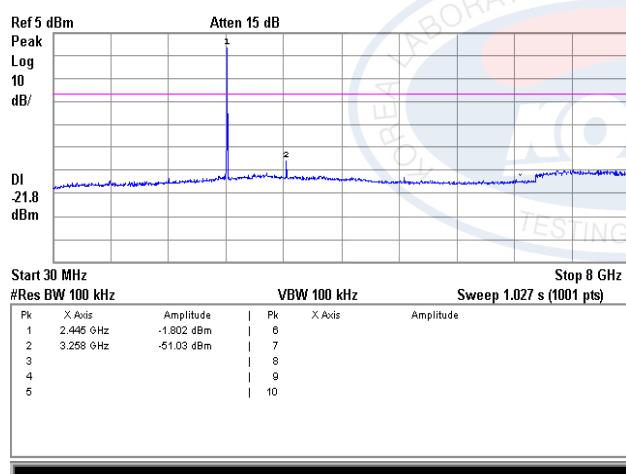R T

**Main-RF Middle Channel (2441 MHz): 8 GHz ~ 25 GHz**


Marker 1 (T1) RBW 100 kHz RF Att 30 dB

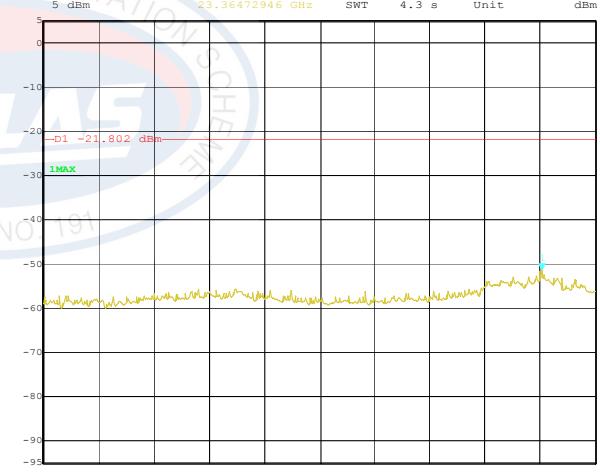Ref Lvl -51.37 dBm VBW 100 kHz SWT 4.3 s Unit dBm

**Main-RF Highest Channel (2480 MHz): 30 MHz ~ 8 GHz**


Agilent 10:18:35 18 Apr 2007

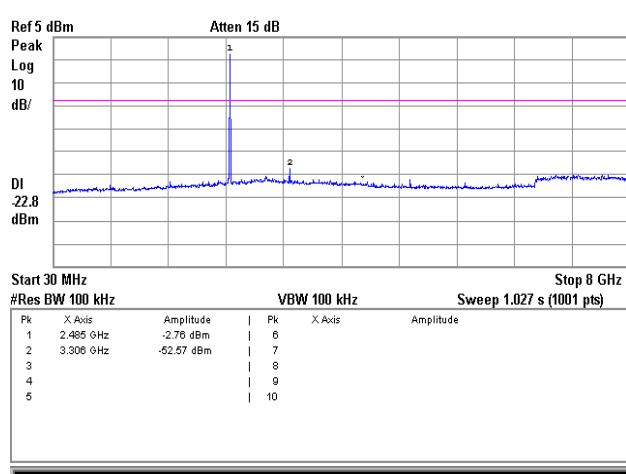R T

**Main-RF Highest Channel (2480 MHz): 8 GHz ~ 25 GHz**

Marker 1 (T1) RBW 100 kHz RF Att 30 dB

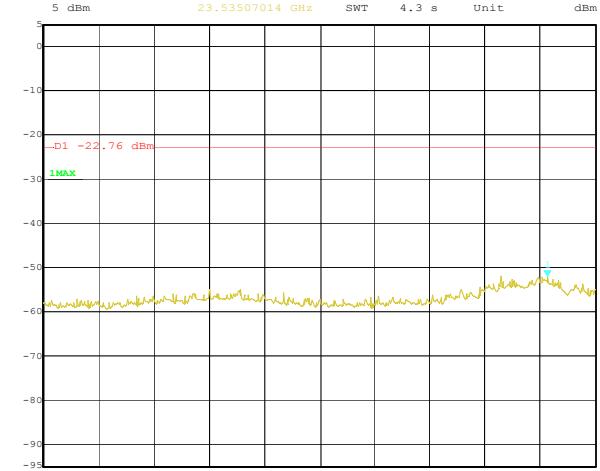
Ref Lvl -52.24 dBm VBW 100 kHz SWT 4.3 s Unit dBm






Spurious RF conducted emissions

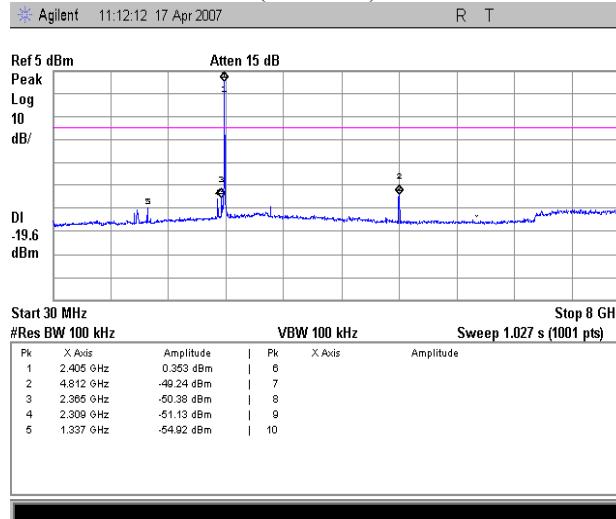
Sub-RF Lowest Channel (2404 MHz): 30 MHz ~ 8 GHz



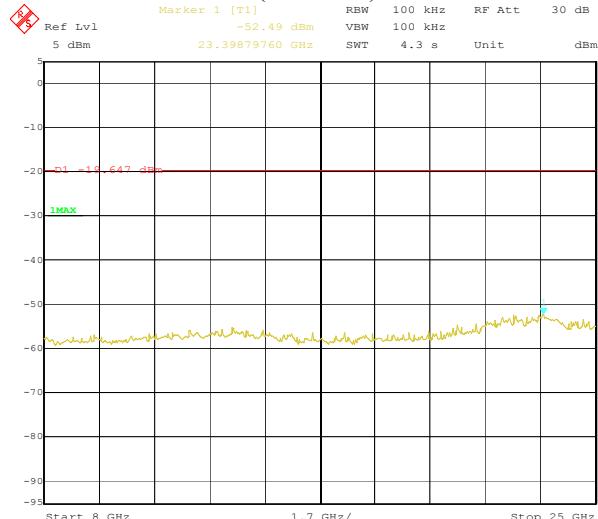
Sub-RF Lowest Channel (2404 MHz): 8 GHz ~ 25 GHz



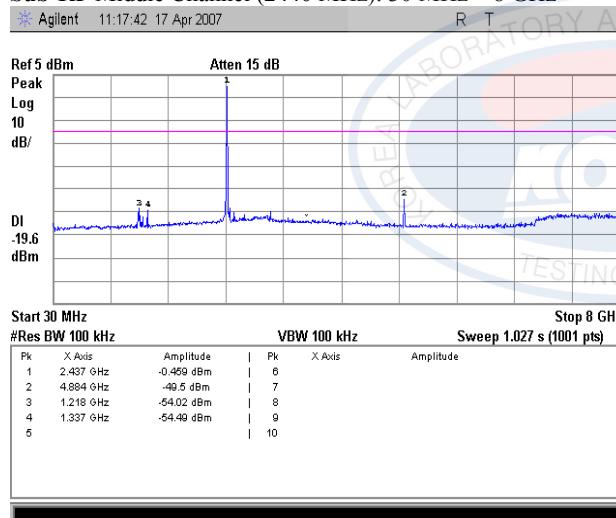
Sub-RF Middle Channel (2440 MHz): 30 MHz ~ 8 GHz



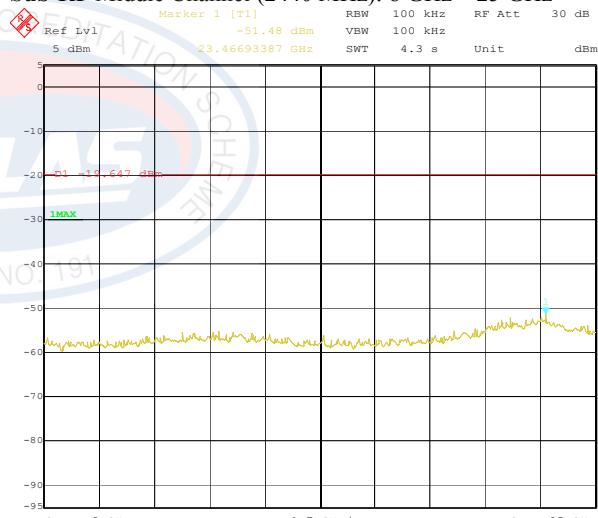
Sub-RF Middle Channel (2440 MHz): 8 GHz ~ 25 GHz



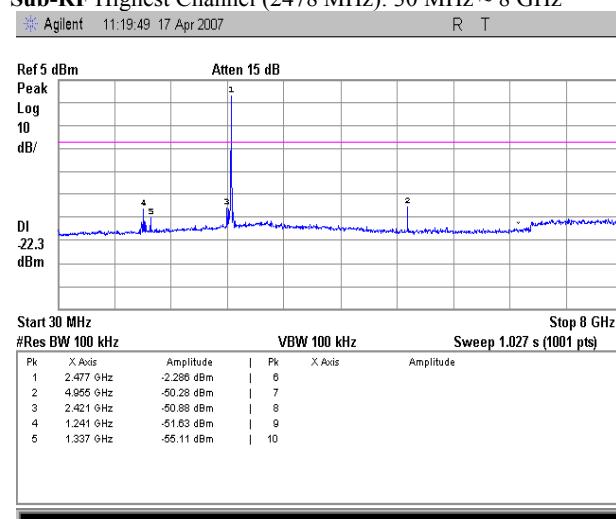Sub-RF Highest Channel (2478 MHz): 30 MHz ~ 8 GHz




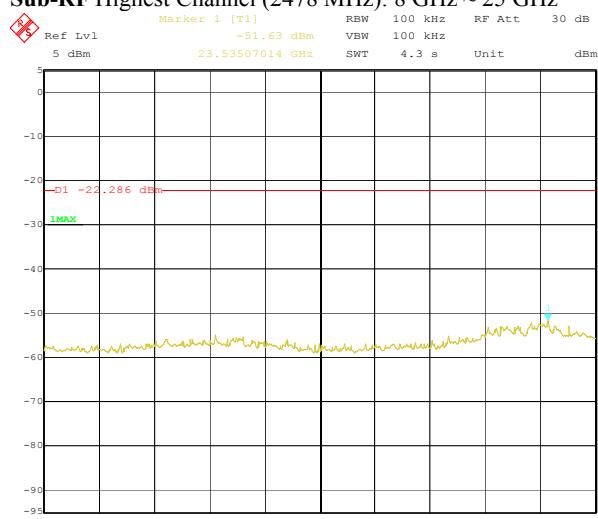Sub-RF Highest Channel (2478 MHz): 8 GHz ~ 25 GHz







SK TECH CO., LTD.

Page 41 of 43

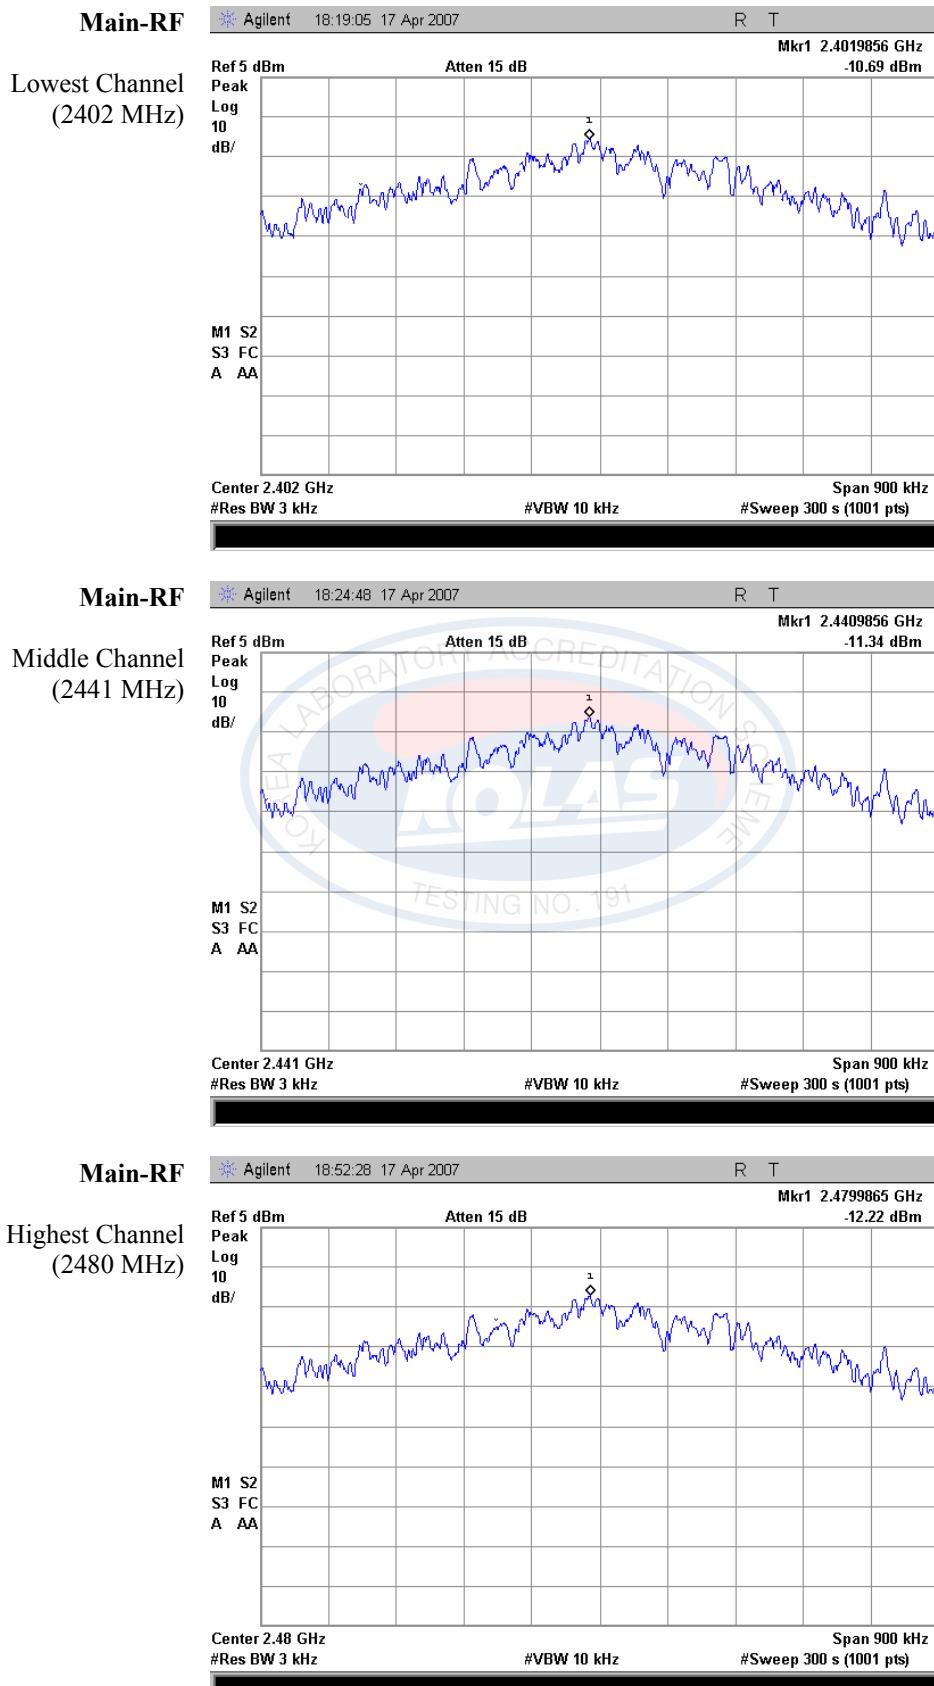Figure 9: Power Spectral Density (Conducted)



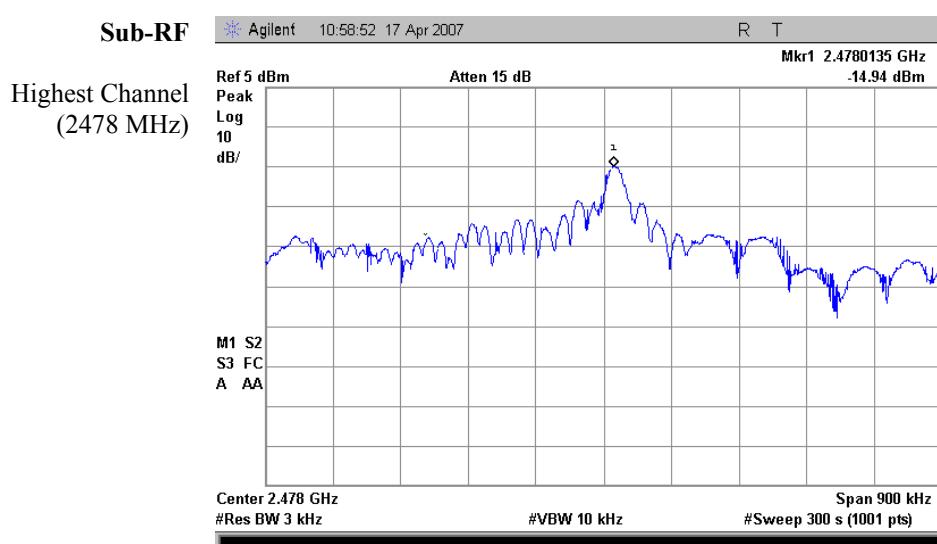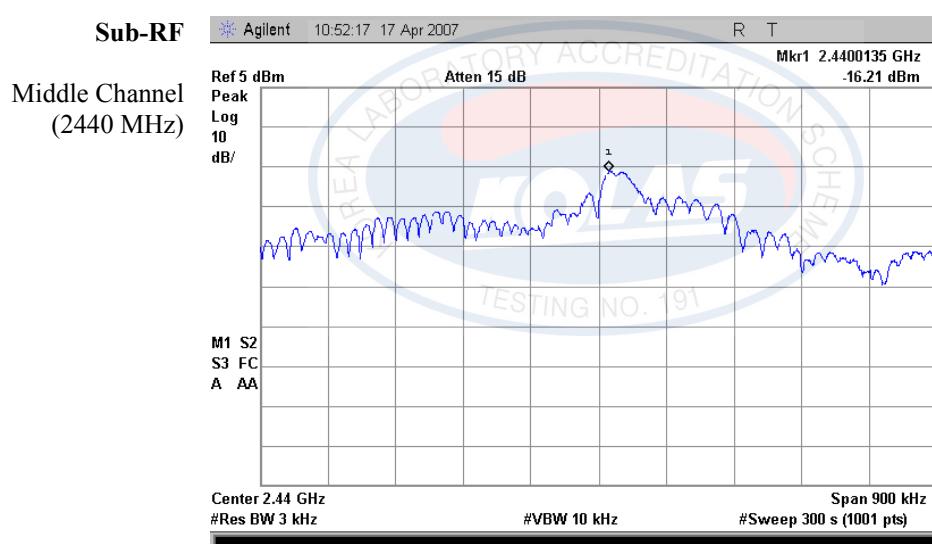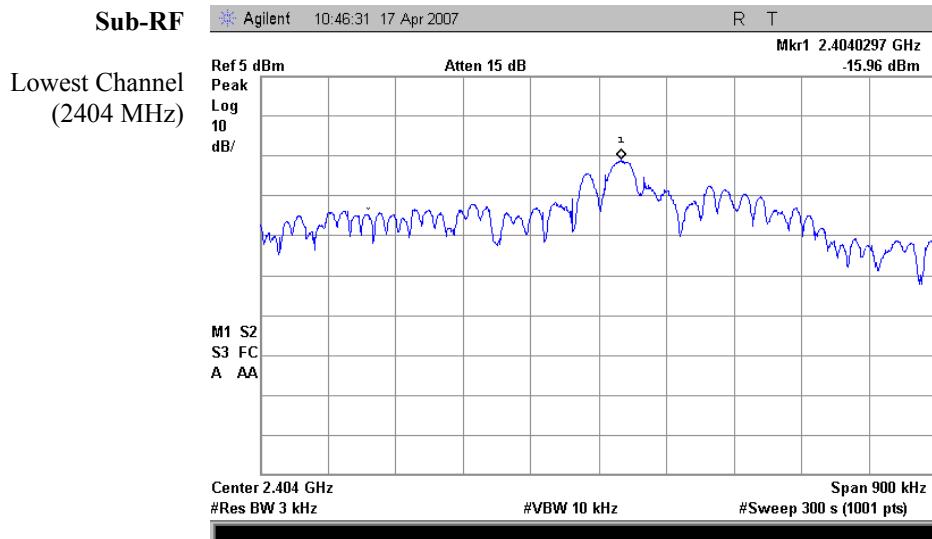SK TECH CO., LTD.

Page 42 of 43

Power Spectral Density (Conducted)


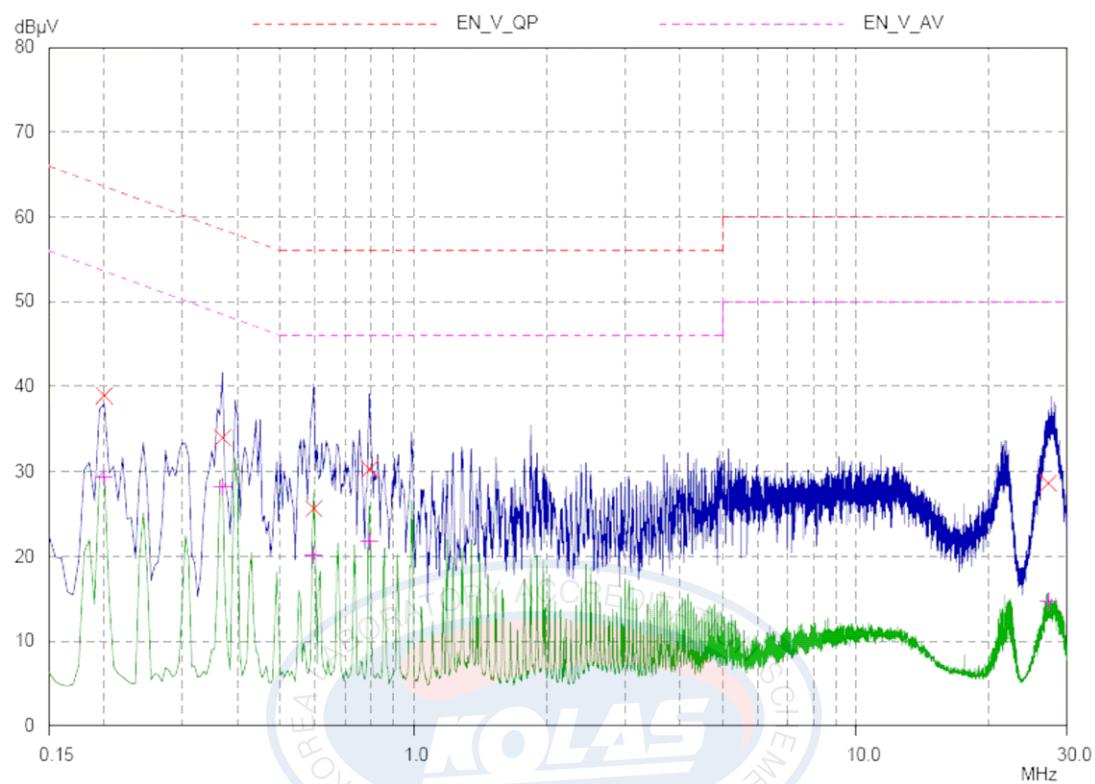


SK TECH CO., LTD.

Page 43 of 43

Figure 10. AC power line Conducted Emissions

Line – PE(Quasi-Peak and Average detector used)



Neutral – PE(Quasi-Peak and Average detector used)

