

TEST REPORT

1. Applicant

Name : Samsin innotec Co., Ltd.
Brand Name : N/A
Address : 252-23, Sarihyun-Dong, Ilsandong-gu, Goyang-City,
Kyonggi-Do, Korea
FCC ID : QJ8CS10

2. Products

Name : Personal Sound Amplifier
Model/Type : CS10 / FHSS(GFSK)
Manufacturer : Samsin innotec Co., Ltd.

3. Test Standard

: FCC CFR 47 Part 15.247 Subpart C
RSS-210 Issue 8

4. Test Method

: ANSI C63.4-2009

5. Test Result

: Positive

6. Dates of Test

: October 02, 2012 to October 05, 2012

7. Date of Issue

: October 08, 2012

8. Test Laboratory

: Korea Standard Quality Laboratories
FCC Designation Number : KR0024

Tested by



SoonHo, Kim

Test Engineer:

Approved by



SangMin, Lee

Compliance Engineer:

This report may not be reproduced without the full written consent of Korea Standard Quality Laboratories.

TABLE OF CONTENTS

1. GENERAL.....	5
2. TEST SITE.....	5
2.1 Location.....	5
2.2 Test Date.....	5
2.3 Test Environment.....	5
3. DESCRIPTION OF THE EQUIPMENT UNDER TEST.....	6
3.1 Rating and Physical Characteristics.....	6
3.2 Equipment Modifications.....	6
3.3 Submitted Documents.....	6
4. MEASUREMENT CONDITIONS.....	7
4.1 Description of test configuration.....	7
4.2 List of Peripherals.....	7
4.3 Type of Used Cables.....	7
5. TEST AND MEASUREMENT.....	8
 5.1 ANTENNA REQUIREMENT.....	8
5.1.1 Regulation.....	8
5.1.2 Result.....	8
 5.2. 20dB BANDWIDTH.....	9
5.2.1 Regulation.....	9
5.2.2 Test Condition.....	9
5.2.3 Test result.....	9
Table 1 : Measured values of the 20dB Bandwidth.....	9
Figure 1 Plot of the 20dB Channel Bandwidth.....	10
 5.3. MAXIMUM PEAK POWER.....	12
5.3.1 Regulation.....	12
5.3.2 Test Condition.....	12
5.3.3 Test result.....	12
Table 2 : Measured values of the Maximum Peak Output Power(Conducted).....	12
Figure 2 : Plot of the Maximum Peak Output Power(Conducted).....	13
 5.4. CARRIER FREQUENCY SEPARATION.....	15
5.4.1 Regulation.....	15
5.4.2 Test Condition.....	15

5.4.3 Test result.....	15
Table 3 : Measured values of the Carrier Frequency Separation.....	15
Figure 3 : Plot of the Carrier Frequency Separation.....	16
5.5. NUMBER OF HOPPING CHANNELS.....	17
5.5.1 Regulation.....	17
5.5.2 Test Condition.....	17
5.5.3 Test result.....	17
Table 4 : Measured values of the Number of Hopping Channels.....	17
Figure 4 : Plot of the Number of Hopping Channels.....	18
5.6. TIME OF OCCUPANCY(DWELL TIME).....	19
5.6.1 Regulation.....	19
5.6.2 Test Condition.....	19
5.6.3 Test result.....	19
Table 5 : Measured values of the Dwell Time.....	19
Figure 5 : Plot of the Carrier Dwell Time.....	20
5.7. SPURIOUS EMISSIONS, BAND EDGE, AND RESTRICTED BANDS.....	22
5.7.1 Regulation.....	22
5.7.2 Test Setup Layout.....	23
5.7.2.1 Radiated Emission Test Set-Up, Frequency Below 1000MHz.....	23
5.7.2.2 Radiated Emission Test Set-UP Frequency Over 1000MHz	23
5.7.3 Test Procedure.....	24
5.7.4 Test Results.....	26
Table 6 : Measured values of the Field strength of spurious emission (Transmit mode).....	26
Figure 6 : Plot of the Band Edge (Conducted).....	27
Figure 7 : Plot of the Band Edge (Radiated).....	28
Figure 8 : Plot of the Spurious RF conducted emissions.....	29
5.8. AC POWER LINE CONDUCTED EMISSIONS.....	30
5.8.1 Regulation.....	30
5.8.2 Test Procedure.....	31
5.8.3 Test Results.....	31
Table 7 : Measured values of the Conducted Emissions.....	31
Figure 9 : Plot of the AC Power Line Conducted Emissions.....	32
5.9. Peak Power Spectral Density.....	33
5.9.1 Regulation.....	33
5.9.2 Test Procedure.....	33
5.9.3 Test Results.....	33
Table 8 : Measured values of the Conducted Emissions.....	33
Figure 10 : Plot of the AC Power Line Conducted Emissions.....	34

6.0. RF EXPOSURE.....	36
5.9.1 Regulation.....	36
5.9.2 RF Exposure Compliance Issue.....	36
7. TEST EQUIPMENTS.....	37
** APPENDIXS	
1. EUT photo	

1. GENERAL

These tests were performed using the test procedure outlined in ANSI C63.4, 2003 for intentional radiators, and in accordance with the limits set forth in FCC Part 15.247 and RSS-210 Issue 8 – Category I Equipment, Annex 8. The EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards.

We attest to the accuracy of data. All measurements reported herein were performed by Korea Standard Quality Laboratories and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

2. TEST SITE

Korea Standard Quality Laboratories

2.1 Location

#102, Jangduk Dong, Hwasung City, Kyunggi Do, South Korea
(FCC Designation Number : KR0024)

This test site is in compliance with ISO/IEC 17025 for general requirements for the competence of testing and calibration laboratories.

2.2 Test Date

Date of Test: October 02, 2012 to October 05, 2012

2.3 Test Environment

See each test item's description.

3. DESCRIPTION OF THE EQUIPMENT UNDER TEST

The product specification described herein was obtained from the product data sheet or user's manual.

3.1 Rating and Physical Characteristics

Model	CS10
Power source	DC 3.7V
Transmit Frequency	2402 ~ 2480 MHz (79 channels)
Antenna Type	Chip Antenna, Gain: 0.8 dBi max.
Channel Separation	1MHz
Type of Modulation	FHSS (GFSK)
Size	Headset 20mm(D) * 30mm(W) * 20mm(H) Battery 50mm(D) * 10mm(W) * 10mm(H)
Weight	25g

3.2 Equipment Modifications

None.


3.3 Submitted Documents

Block diagram
Schematic diagram
Antenna Specification
External photos
Test setup photos
Part List
Tune up Procedure
Label Location
User manual

4. MEASUREMENT CONDITIONS

4.1 Description of test configuration

The measurements were taken in continuous transmitting mode using the TEST MODE. For controlling the EUT as TEST MODE, the test program and the cable assembly were provided by the applicant.

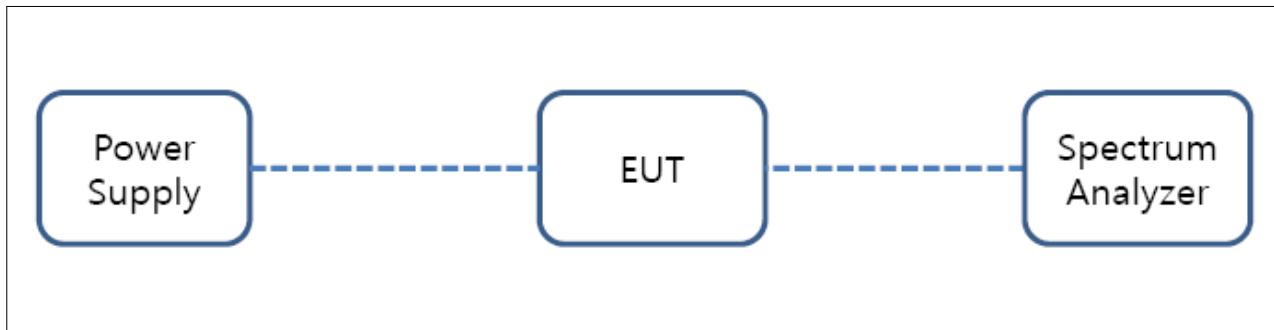

[System Block Diagram of Test Configuration]

4.2 List of Peripherals

Equipment Type	Manufacturer	Model	S/N
PC	Omy pc	JT4102	-
Monitor	3GATE	SYS0625	-
Mouse	M-200	T-SONIC	-
Keyboard	COSY	KB956	-
EUT Jig	-	-	-
Power Supply	ALINCO	DM-340MW	-

** For control of the RF module via SPI interface in the EUT. For radiated spurious emission measurements, setting the EUT to TEST MODE.

4.3 Type of Used Cables

#	START		END		CABLE	
	NAME	I/O PORT	NAME	I/O PORT	LENGTH(m)	SHIELDED
1	PC	D-SUB	Monitor	D-SUB	1.0	Y
2	PC	USB	Mouse	-	1.0	Y
3	PC	USB	Keyboard	-	1.0	Y
4	Power	DC5V	EUT Jig	-	0.5	N
5	PC	USB	EUT Jig	Mini USB	0.5	Y

5. TEST AND MEASUREMENT

Summary of Test Results

Requirement	CFR 47 Section	Report Section	Test Result
Antenna Requirement	15.203, 15.247(b)(4)	5.1	PASS
20dB Bandwidth	15.247(a)(1)	5.2	PASS
Maximum Peak Output Power	15.247(b)(1),(4)	5.3	PASS
Carrier Frequency Separation	15.247(a)(1)	5.4	PASS
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	5.5	PASS
Time of Occupancy (Dwell Time)	15.247(a)(iii)	5.6	PASS
Spurious Emission, Band Edge, and Restricted bands	15.247(d), 15.205(a), 15.209(a)	5.7	PASS
Conducted Emissions	15.207(a)	5.8	PASS
Peak Power Spectral Density	15.247(e)	5.9	PASS
RF Exposure	15.247(i), 1.1307(b)(1)	6.0	PASS

5.1 ANTENNA REQUIREMENT

5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.1.2 Result : PASS

The transmitter has an Chip Antenna. The directional gain of the antenna is 0.8 dBi.

5.2. 20dB BANDWIDTH

5.2.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.2.2. Test Condition

- Set RBW of Spectrum analyzer to 10 kHz, Span=3MHz, Sweep=auto
- The 20dB bandwidth is defined as the frequency range where the power is higher than the peak power minus 20dB . Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater


5.2.3. Test result :

PASS**Table 1 : Measured values of the 20dB Bandwidth**


Modulation	Frequency (MHz)	Result (kHz)	Verdict
GFSK	2402	922	Pass
	2441	922	Pass
	2480	922	Pass

Figure 1. Plot of the 20dB Channel Bandwidth


Low Channel (2402 MHz)

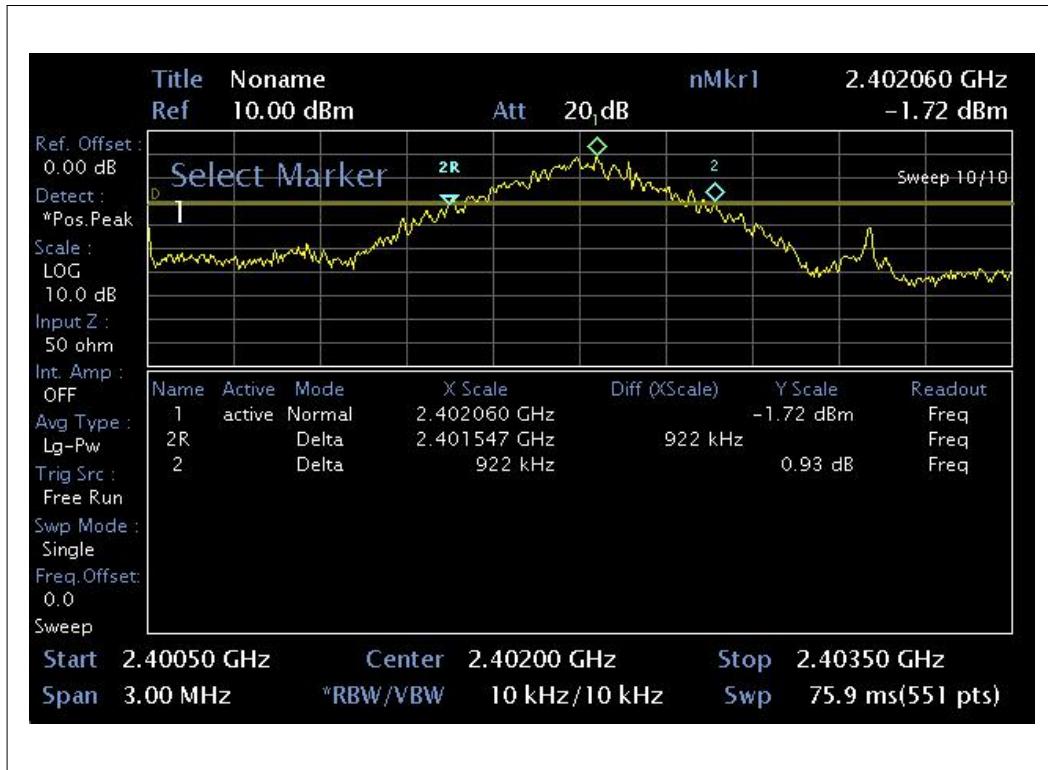

Middle Channel (2441 MHz)

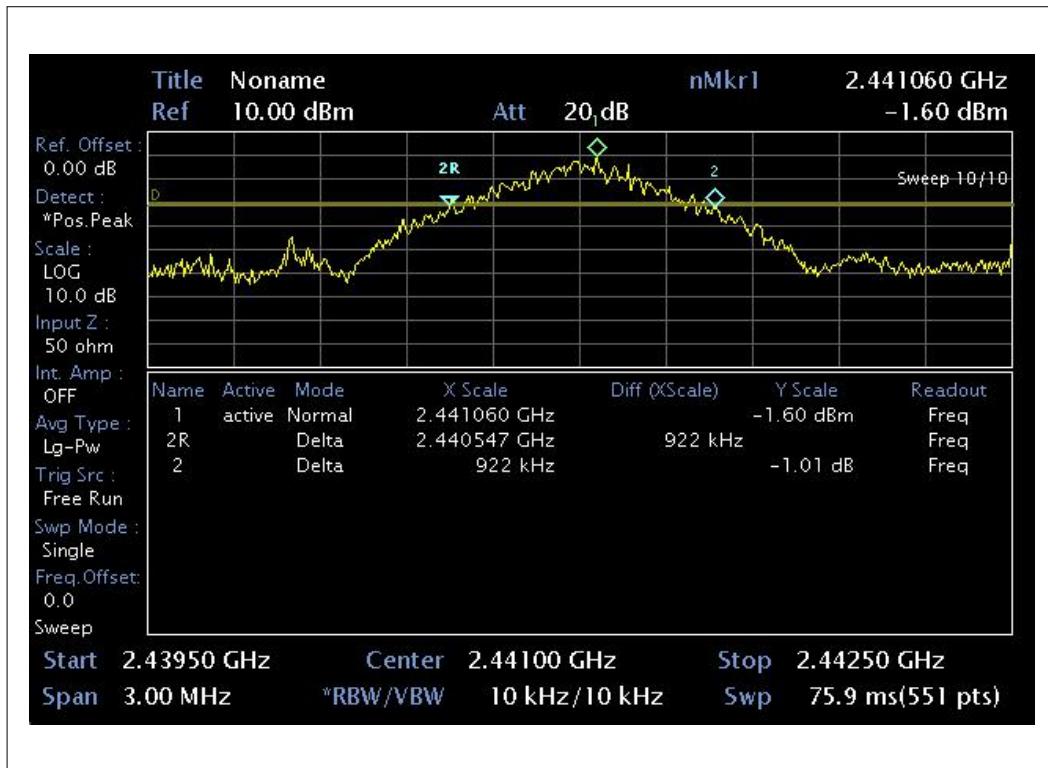

Highest Channel (2480 MHz)

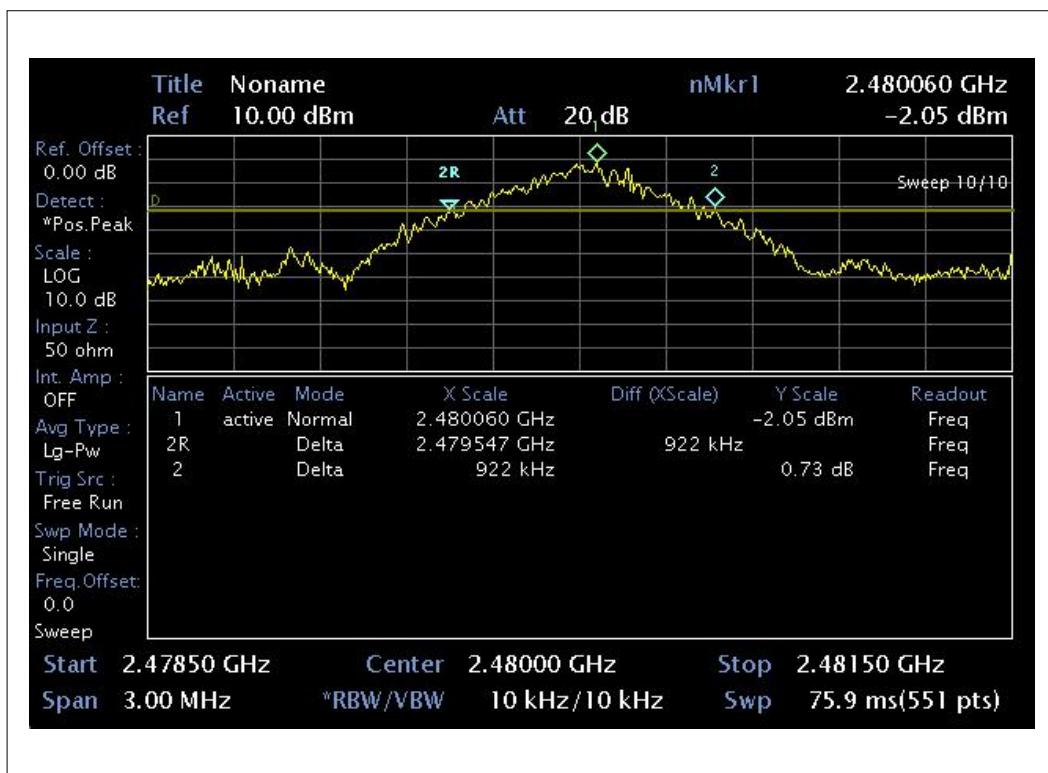

5.3. MAXIMUM PEAK POWER

5.3.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3.2 Test Condition

- Set RBW of Spectrum analyzer to 1 MHz
- The Maximum Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

5.3.3 Test result :


PASS

Table 2 : Measured values of the Maximum Peak Output Power(Conducted)


Modulation	Frequency (MHz)	Reading Power (dBm)	Output Power (W)	Limit (W)	Verdict
GFSK	2402	4.48	0.0028	1	Pass
	2441	4.73	0.0029	1	Pass
	2480	4.07	0.0025	1	Pass

Figure 2. Plot of the Maximum Peak Output Power


Low Channel (2402MHz)

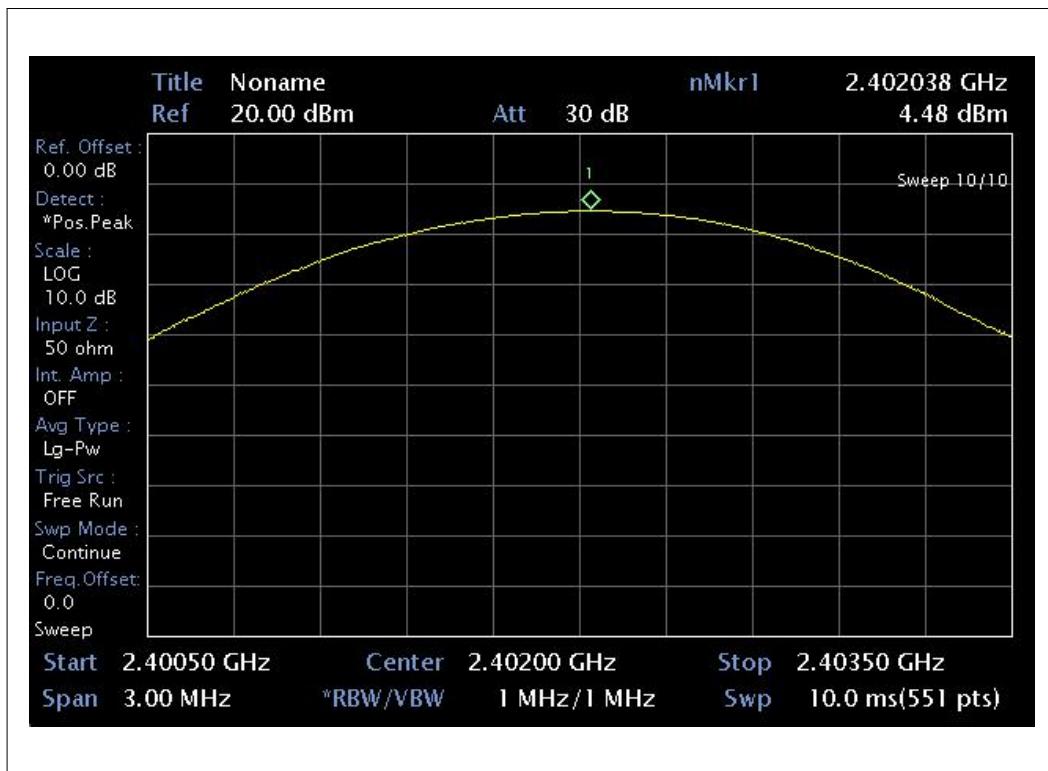

Middle Channel (2441 MHz)

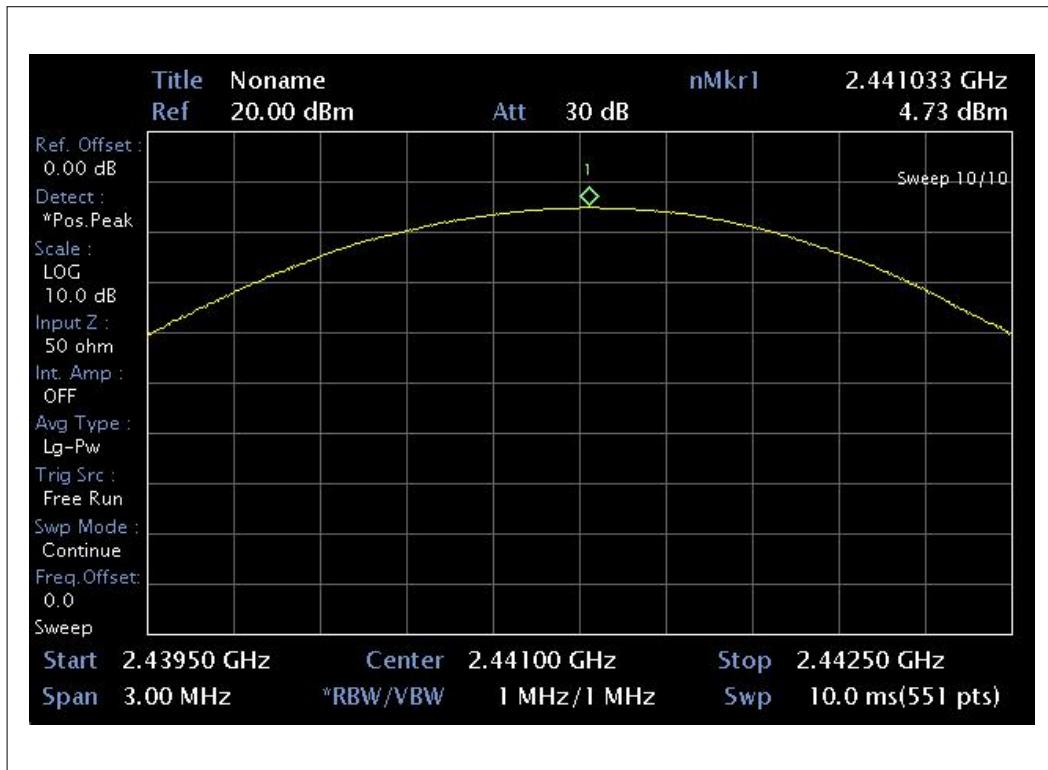

Highest Channel (2480 MHz)

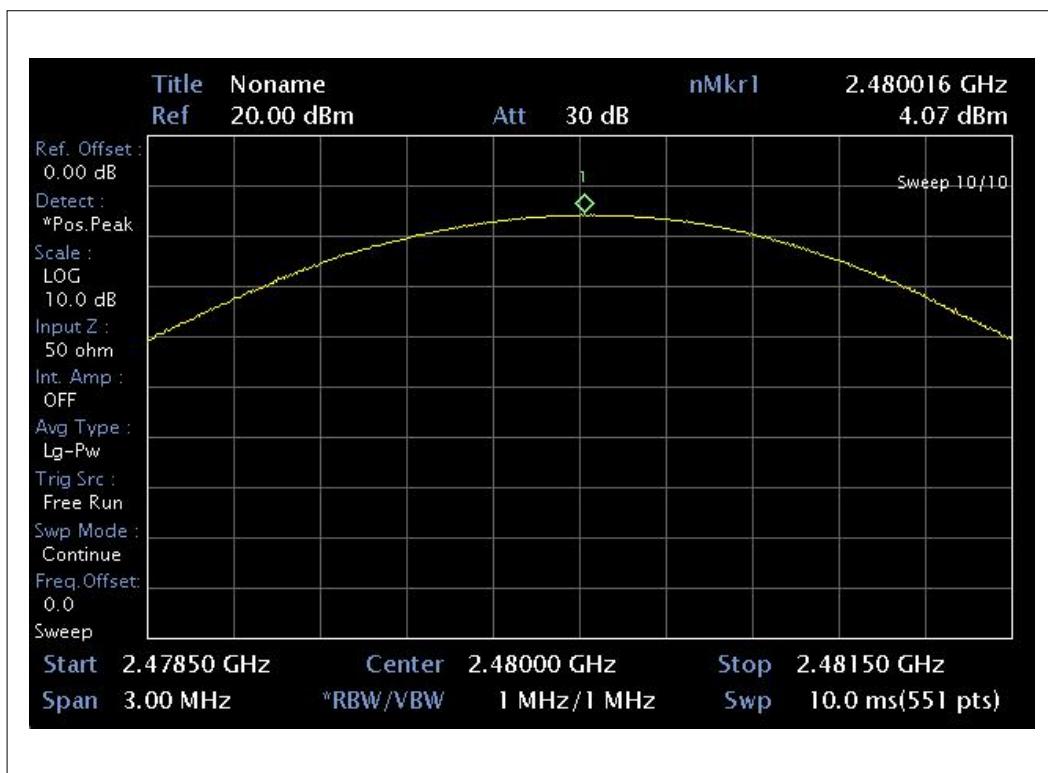

5.4 CARRIER FREQUENCY SEPARATION

5.4.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.4.2 Test Condition

- Set RBW of Spectrum analyzer to 10 kHz, Span=3MHz, Sweep=auto
- Frequency hopping system shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

5.4.3 Test result :


PASS

Table 3 : Measured values of the Carrier Frequency Separation

Modulation	Channel separation (kHz)	20 dB bandwidth (kHz)	Limit (frequency separation)	Verdict
GFSK	991(Worst)	922(Worst)	≥ 25 kHz or 20 dB bandwidth, whichever is greater	Pass

Figure 4. Plot of the Carrier Frequency Separation

Carrier Frequency Separation

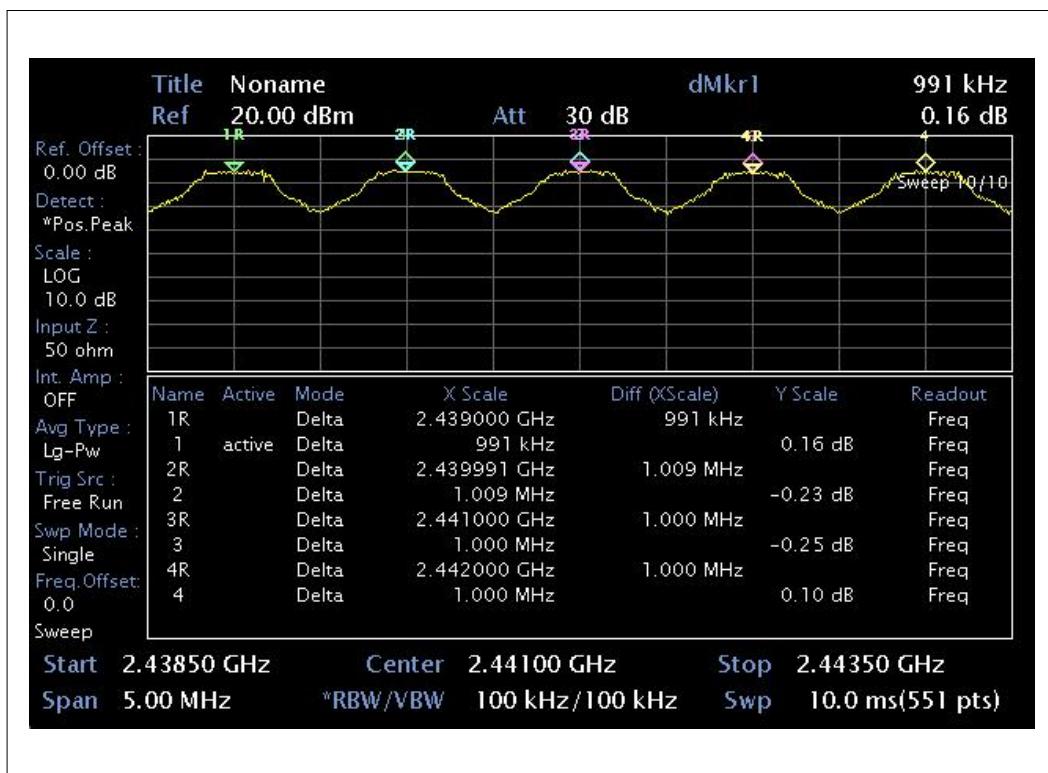

5.5. NUMBER OF HOPPING CHANNELS

5.5.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125watts.

5.5.2 Test Condition

- Set RBW of Spectrum analyzer to 100 kHz
- Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

5.5.3 Test result :


PASS

Table 4 : Measured values of the Number of Hopping Channels


Modulation	Operating frequency (MHz)	Result (channel)	Limit (channel)	Verdict
GFSK	2402 ~ 2480MHz	79	>15	Pass

Figure 4. Plot of the Number of Hopping Channels

2402MHz ~ 2441MHz

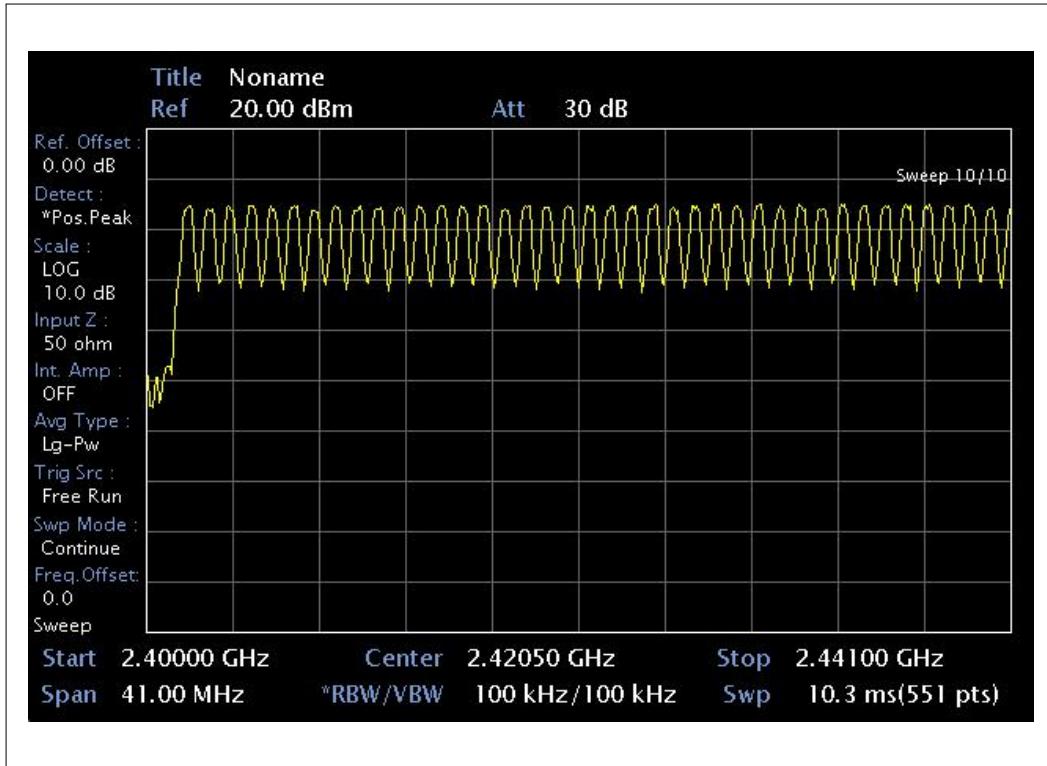

2441MHz ~ 2480MHz

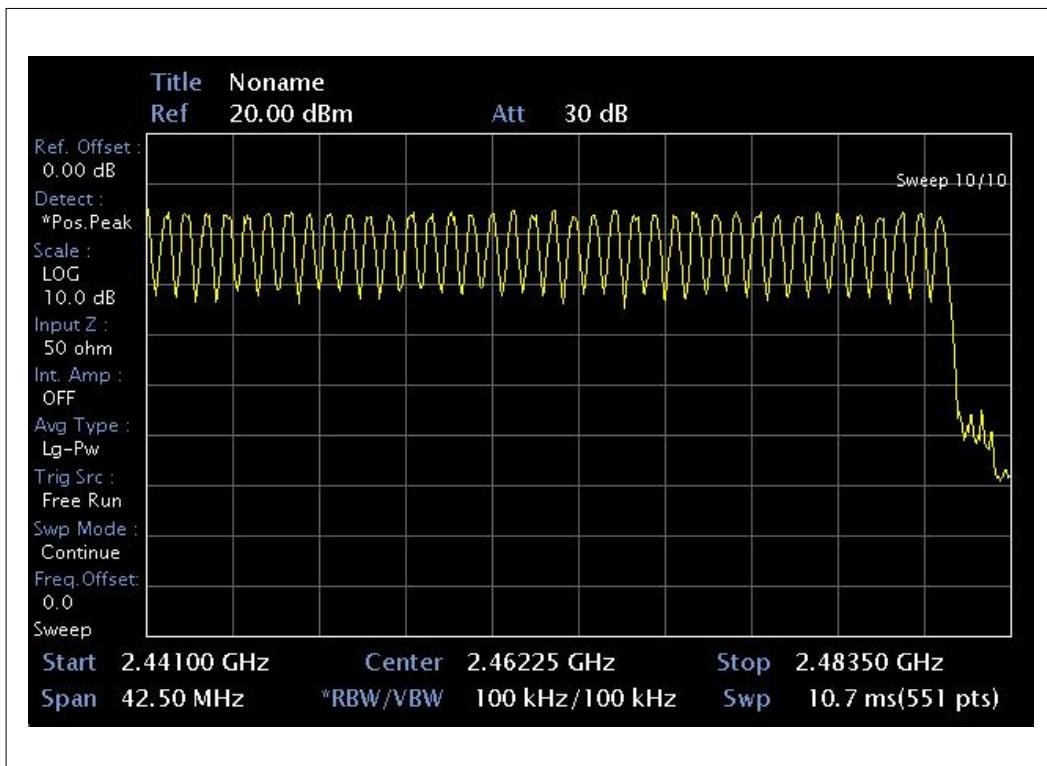

5.6 TIME OF OCCUPANCY (DWELL TIME)

5.6.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Condition

- Set RBW of Spectrum analyzer to 3 MHz, sweep time is 4.0 ms
- Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6 seconds.

5.6.3 Test result :

PASS

Table 5 : Measured values of the Dwell Time

Modulation	Operating frequency (MHz)	Reading (ms)	hop rate (hops/s)	Number of hopping Channels	Period Time	Dwell time (ms)	Limits (ms)	Verdict
GFSK	2402 MHz	2.900	266.667	79	31.6	309.33	≤ 400	Pass
	2441 MHz	2.900	266.667	79	31.6	309.33	≤ 400	Pass
	2480 MHz	2.900	266.667	79	31.6	309.33	≤ 400	Pass

Dwell time = Reading × (Hopping rate / Number of channels) × Period Time


Test Period = 0.4[seconds / channel] × 79[Channel] = 31.6[seconds]

NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels.


The DH5 Packet (GFSK) Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

Figure 5. Plot of the Carrier Dwell Time


Low Channel (2402 MHz)

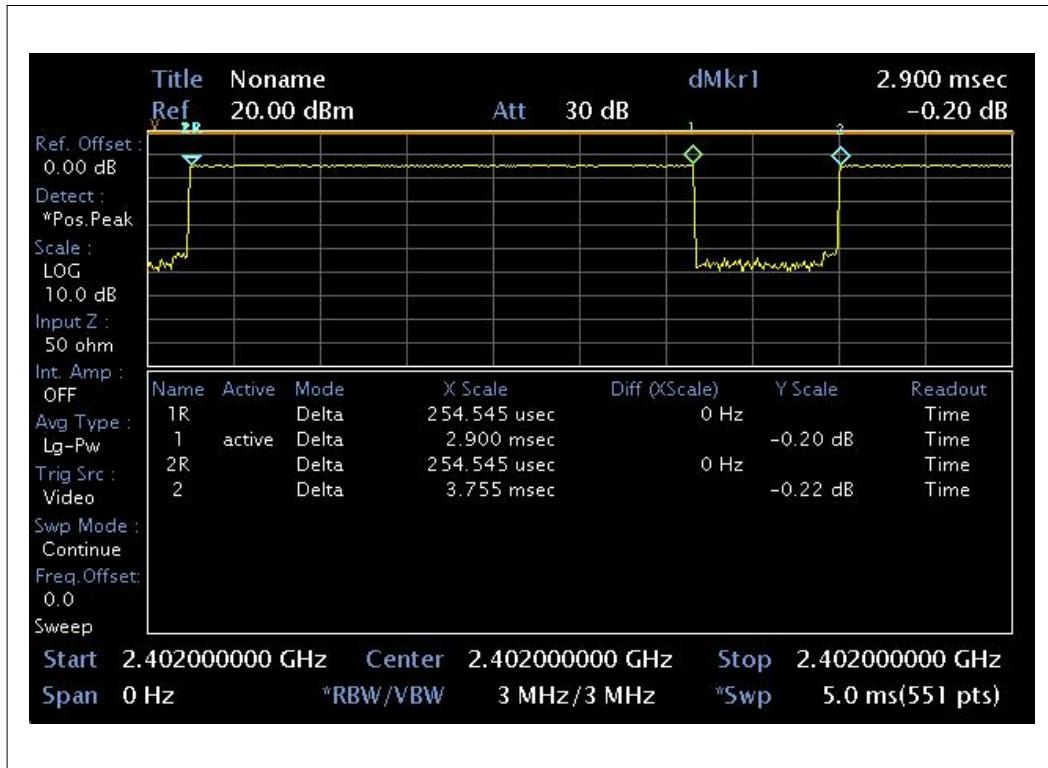

Middle Channel (2441 MHz)

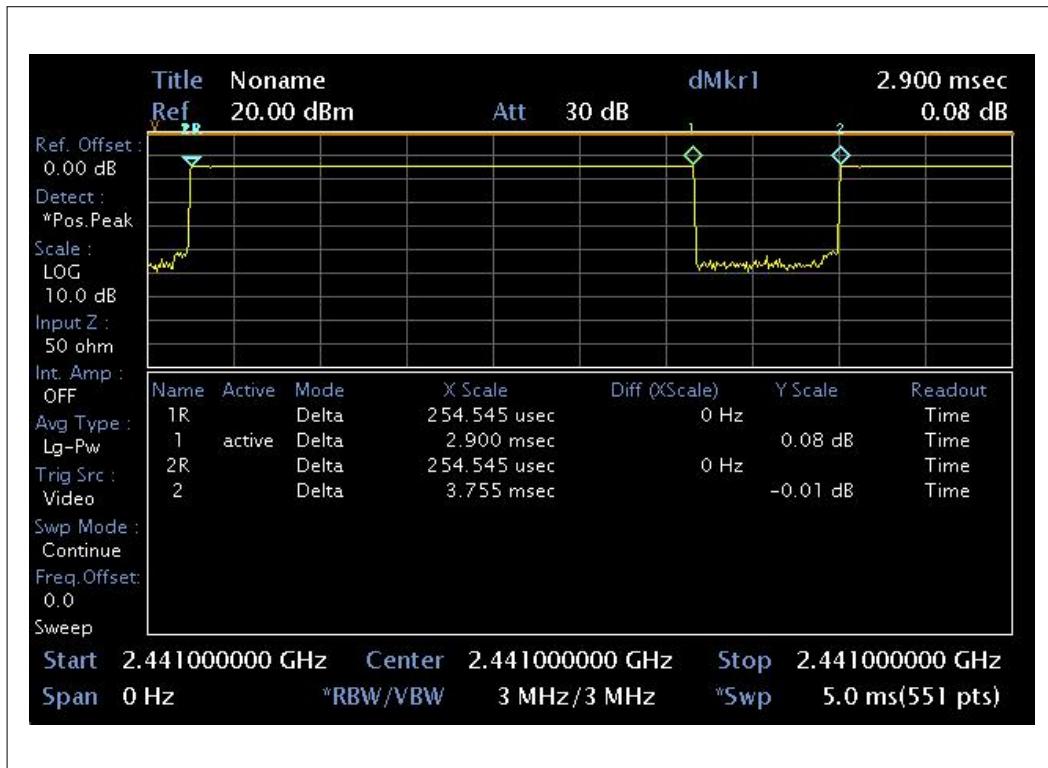

Highest Channel (2480 MHz)

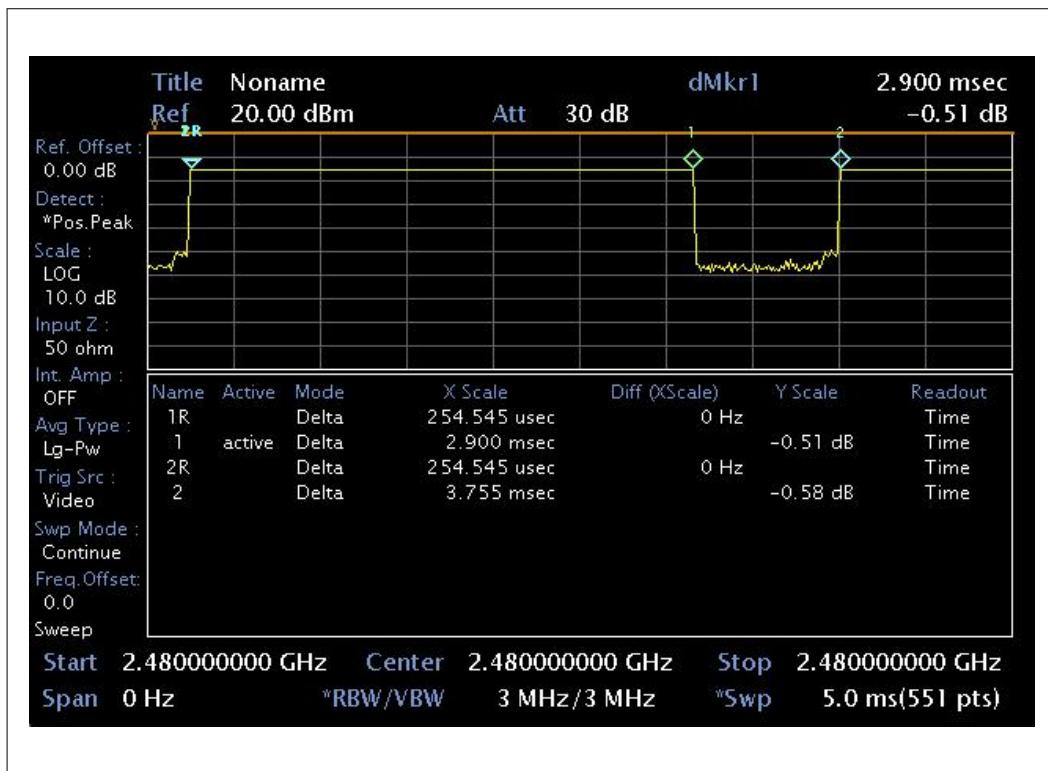

5.7 SPURIOUS EMISSIONS, BAND EDGE, AND RESTRICTED BANDS

5.7.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:


Frequency (MHz)	Field strength (μ V/m @ 3m)	Field strength (dB μ V/m @ 3m)
30–88	100	40.0
88–216	150	43.5
216–960	200	46.0
Above 960	500	54.0

According to §15.109(a), for an unintentional device, except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the above table.


** The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasi-peak detector and above 1000 MHz are based on the average value of measured emissions.

5.7.2 Test Setup Layout

5.7.2.1 Radiated Emission Test Set-Up, Frequency Below 1000MHz

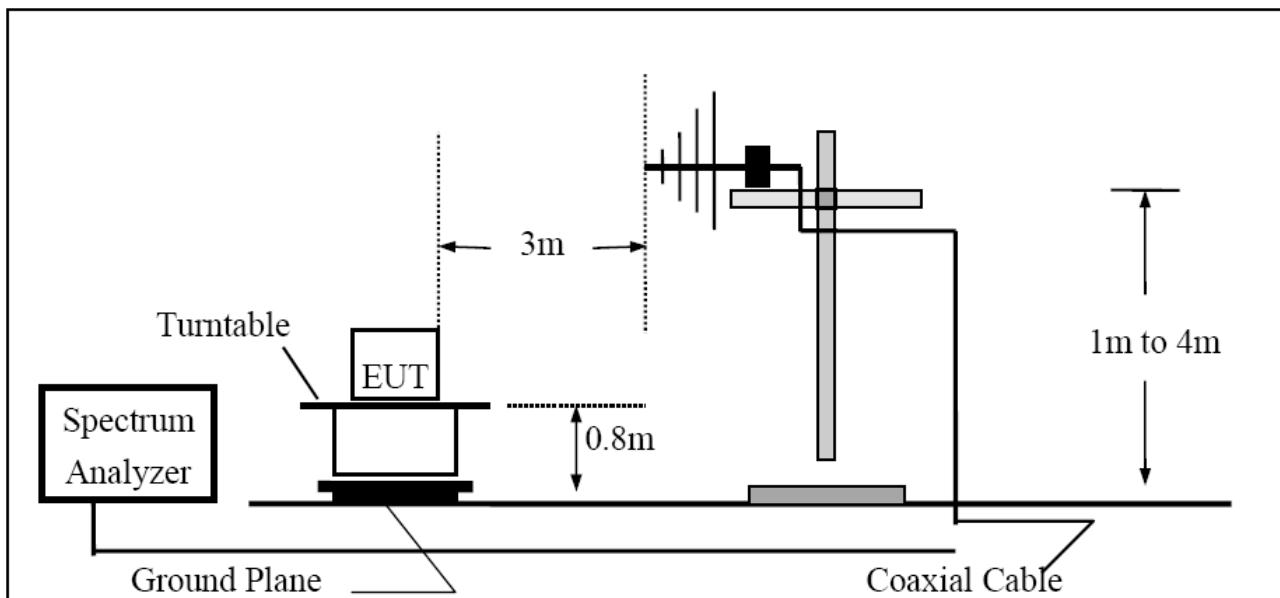

5.7.2.2 Radiated Emission Test Set-UP Frequency Over 1000MHz

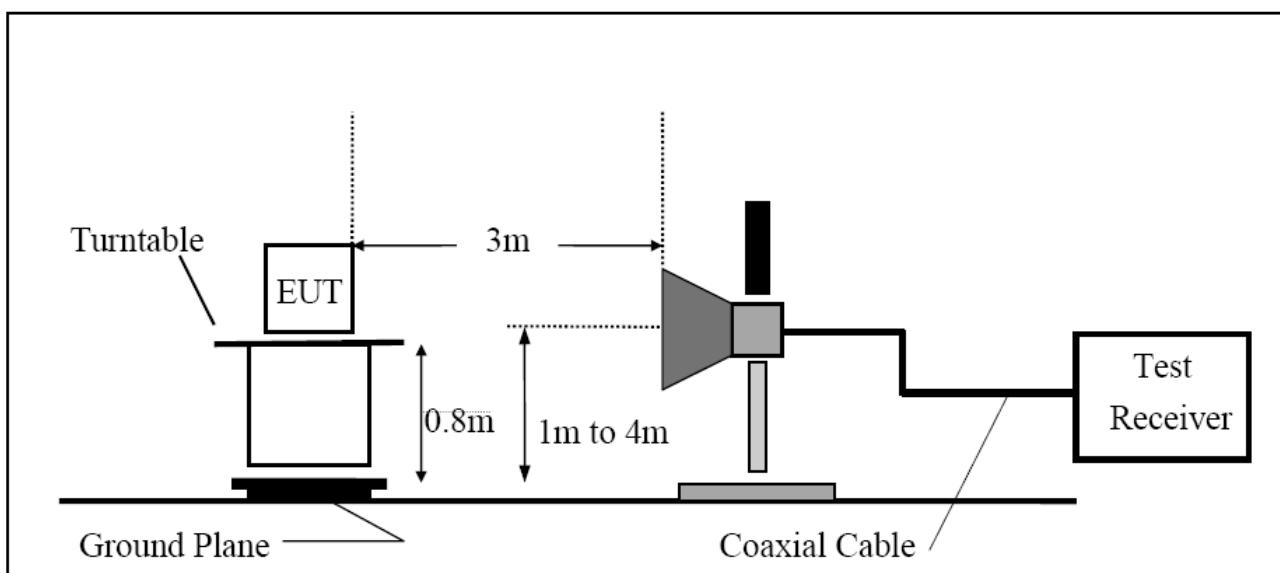

5.7.3 Test Procedure

1) Band-edge Compliance of RF Conducted Emissions

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

3. Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

2) Spurious RF Conducted Emissions:

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.

3) Spurious Radiated Emissions:

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters for above 30 MHz, and at 1 meter distance for below 30 MHz.

2. The EUT was placed on the top of the 0.8-meter height, 1 \times 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.

3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, from 30 to 1000 MHz using the Trilog broadband antenna, and from 1 GHz to tenth harmonic of the highest fundamental frequency using the horn antenna.
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4×4 meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
6. The EUT is situated in three orthogonal planes (if appropriate)
7. The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT.
8. If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative "marker-delta" method may be employed.

4) Marker-Delta Method at the edge of the authorized band of operation:

1. Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function as the above Spurious Radiated Emissions test procedure.
2. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 1% of the total span (but never less than 30 kHz) with a video bandwidth equal to or greater than the RBW. Record the peak levels of the fundamental emission and the relevant band-edge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band-edge relative to the highest fundamental emission level.
3. Subtract the delta measured in step (2) from the field strengths measured in step (1). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance as required by Section 15.205.
4. The above "delta" measurement technique may be used for measuring emissions that are up to two "standard" bandwidths away from the band-edge, where a "standard" bandwidth is the bandwidth specified by C63.4 for the frequency being measured. For example, for band-edge measurements in the restricted band that begins at 2483.5 MHz, C63.4 specifies a measurement bandwidth of at least 1 MHz. Therefore you may use the "delta" technique for measuring emissions up to 2 MHz removed from the band-edge. Radiated emissions that are removed by more than two "standard" bandwidths must be measured as the above Spurious Radiated Emissions test procedure.

5.7.4 Test Results:
PASS
Band-edge compliance of RF conducted/radiated emissions was shown in the Figure 6 and Figure 7

NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.

Spurious RF conducted emissions were shown in the Figure 8

NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.


Table 6 : Measured values of the Field strength of spurious emission (Transmit mode)									
Frequency (MHz)	Detect Mode	Polarization (V/H)	Measured Value (dB μ V)	Antenna Factor + Cable Loss (dB/m)	Amplifier Gain (dB)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	
Average/Peak/Quasi-peak data, emissions below 30 MHz									
No Spurious Radiated Emissions Found									
Quasi-peak data, emissions below 1000 MHz									
No Spurious Radiated Emissions Found									
Peak/Average data, emissions above 1000 MHz									
CH 0 (2402MHz)	1605.8	Peak	J	50.41	29.91	34.46	54.96	74	19.04
	1605.8	Average	V	41.59	29.91	34.46	46.14	54	7.86
	4804.4	Peak	H	57.46	38.58	34.89	5377	74	20.23
	4804.4	Average	H	42.51	38.58	34.89	38.82	54	15.18
CH38 2441MHz	1634.5	Peak	V	55.74	29.91	34.82	60.65	74	13.35
	1634.5	Average	V	40.25	29.91	34.82	45.16	54	8.84
	4876.6	Peak	H	52.49	38.58	34.92	48.83	74	25.17
	4876.6	Average	H	41.85	38.58	34.92	38.19	54	15.81
CH78 2480MHz	1652.3	Peak	V	56.78	29.91	34.81	61.68	74	12.32
	1652.3	Average	V	44.82	29.91	34.81	49.72	54	4.28
	4962.8	Peak	H	52.06	38.75	34.91	48.22	74	25.78
	4962.8	Average	H	41.22	38.75	34.91	37.38	54	16.62

1. Margin (dB) = Limit – Emission Level

2. H = Horizontal, V = Vertical Polarization

Figure 6. Plot of the Band Edge

Low Channel (2402 MHz)

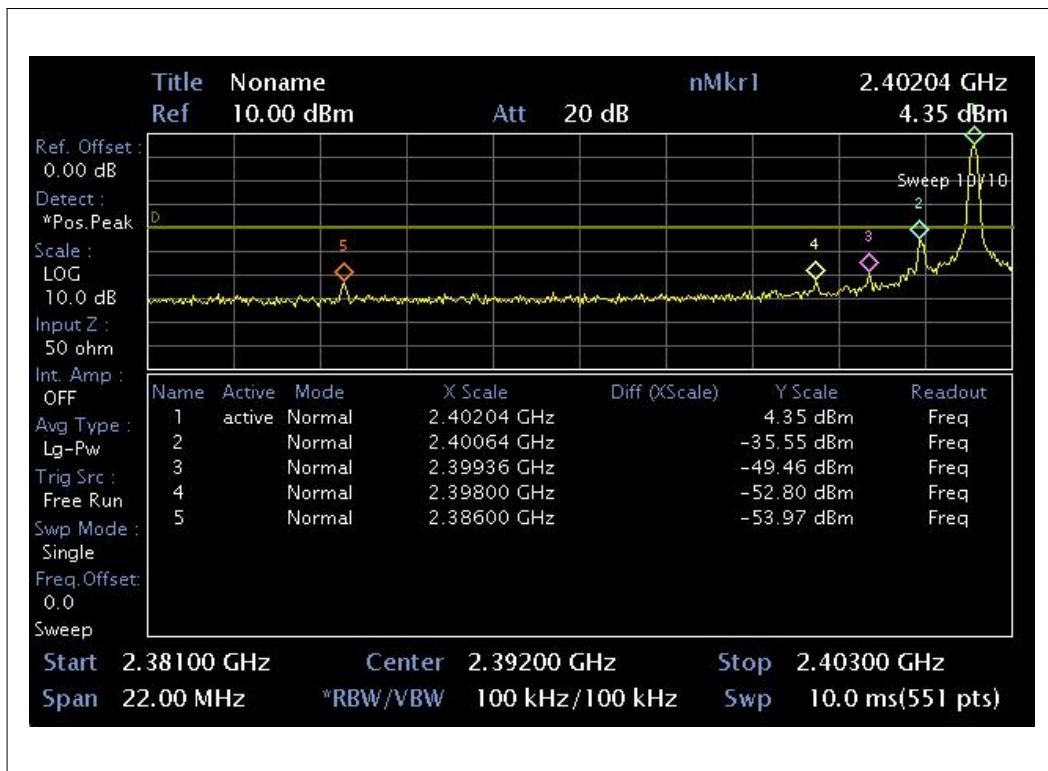

High Channel (2480 MHz)


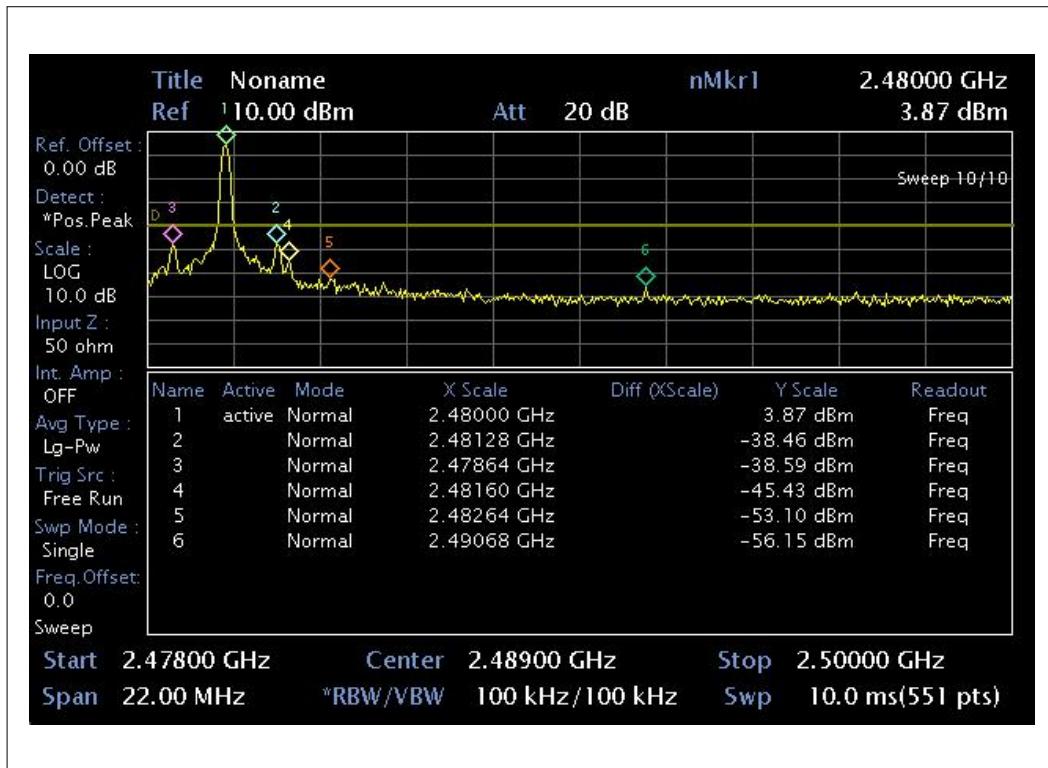


Figure 7. Plot of the Band Edge (Radiated)

Peak
 Average

Low Channel (2402 MHz)

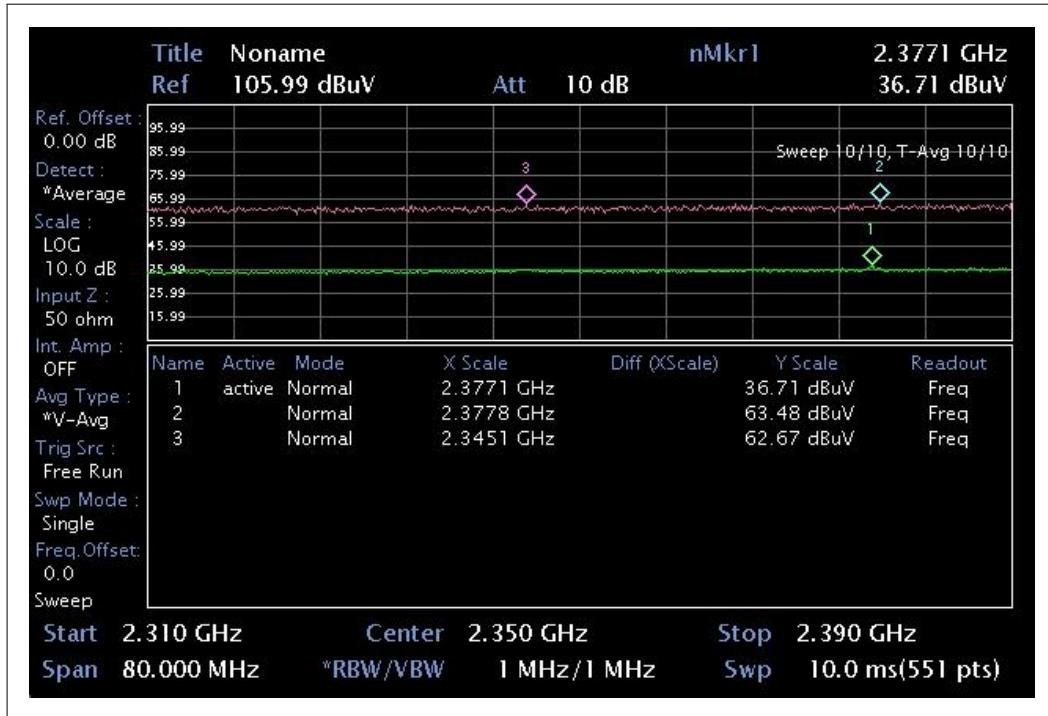

High Channel (2480 MHz)



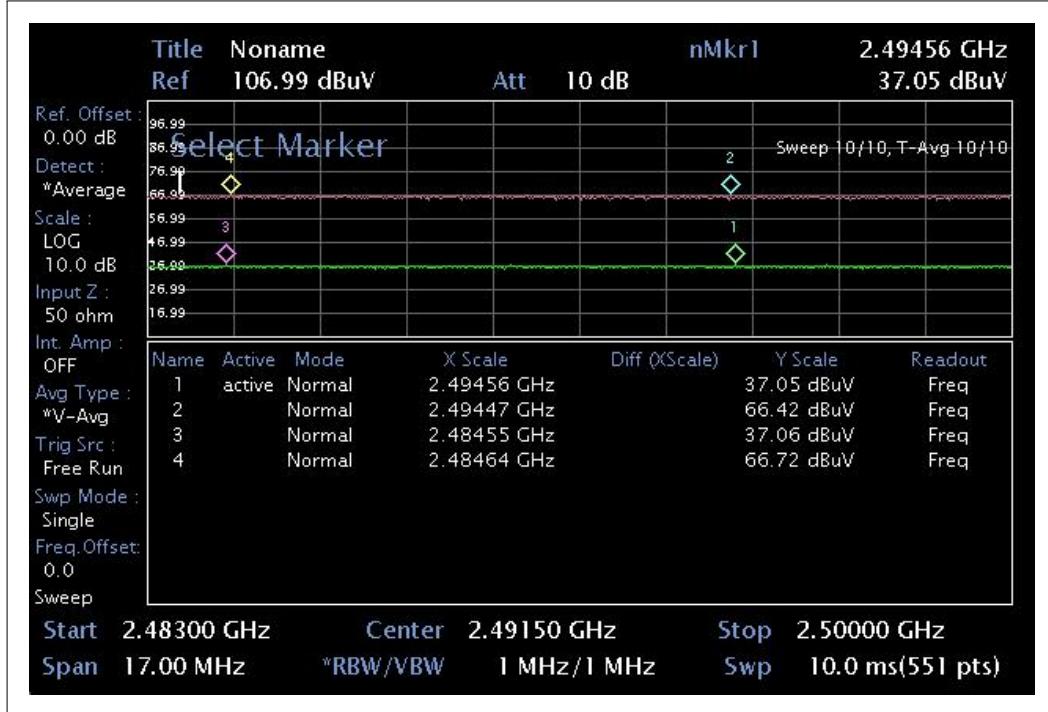


Figure 8. Plot of the Spurious RF conducted emissions


Low Channel (2402 MHz) : 30MHz ~ 3GHz

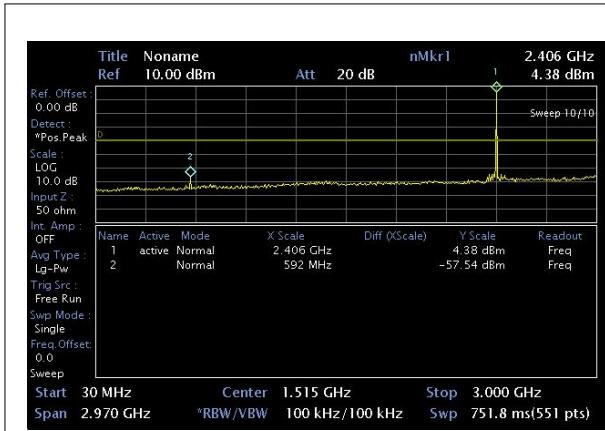


Low Channel (2402 MHz) : 3GHz ~ 26.5GHz

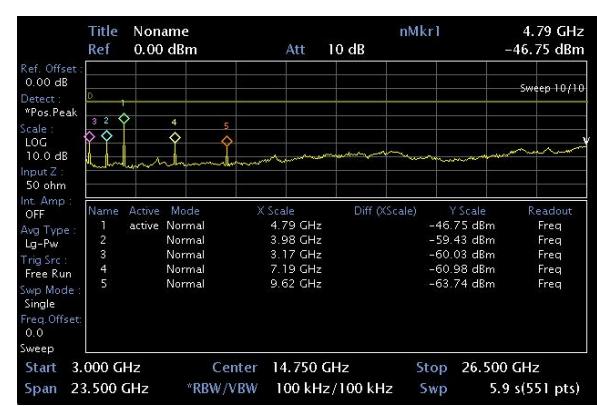


Middle Channel (2441 MHz) : 30MHz ~ 3GHz

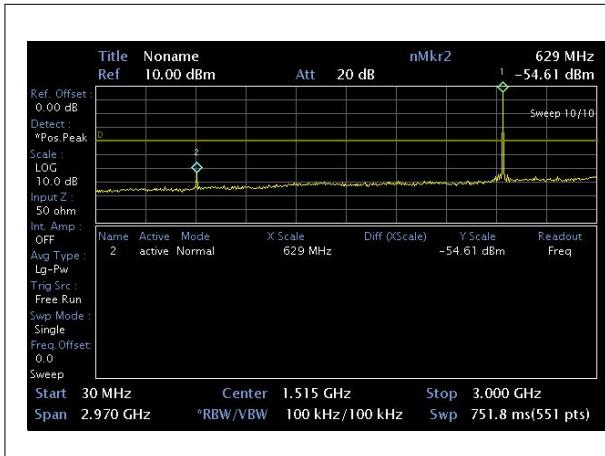


Middle Channel (2441 MHz) : 3GHz ~ 26.5GHz

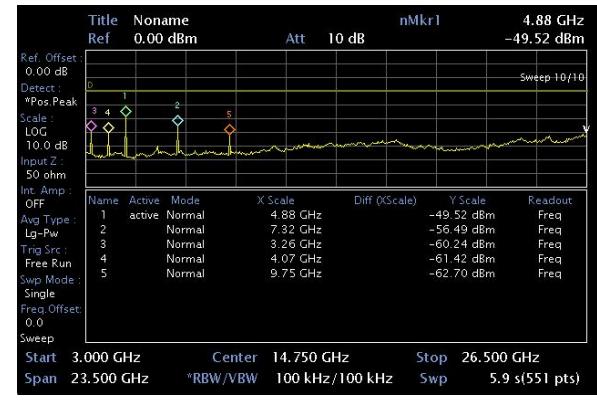

Highest Channel (2480 MHz) : 30MHz ~ 3GHz

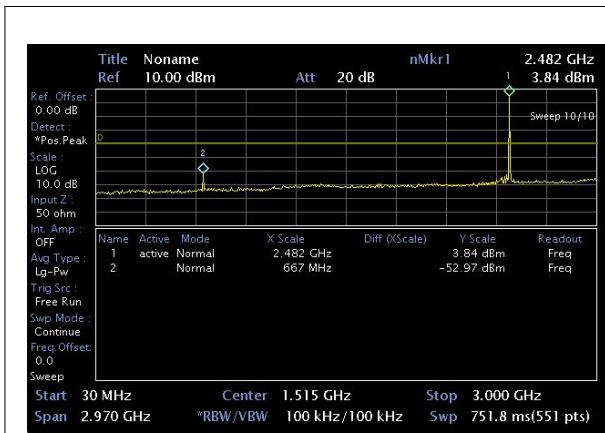

Highest Channel (2480 MHz) : 3GHz ~ 26.5GHz

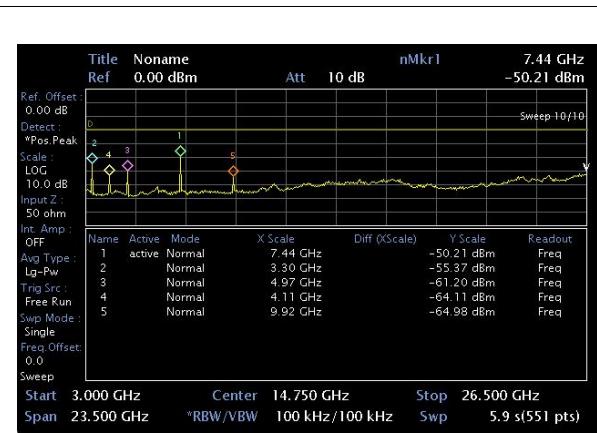

5.8 AC POWER LINE CONDUCTED EMISSIONS

5.8.1 Regulation

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, with in the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a $50\mu\text{H}/50\Omega$ line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.

5.8.2 Test Procedure


1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a $50\Omega/50\mu\text{H}$ LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

5.8.3 Test Results:
PASS
Table 7 : Measured values of the Conducted Emissions


Frequency (MHz)	Correction Factor		Pulse Limiter	Line	Quasi-Peak			Average		
	LISN	Cable			Limit [dBuV]	Reading [dBuV]	Result [dBuV]	Limit [dBuV]	Reading [dBuV]	Result [dBuV]
0.17	0.14	0.10	9.91	N	64.96	32.65	42.80	54.96	18.09	28.24
0.19	0.23	0.10	9.91	H	64.03	28.74	38.98	54.03	19.71	29.95
0.24	0.14	0.10	9.90	N	62.09	24.82	34.96	52.09	14.79	24.93
0.25	0.23	0.10	9.90	H	64.75	32.50	42.73	54.75	26.85	37.08
0.28	0.14	0.10	9.90	N	60.81	21.06	31.20	50.81	13.03	23.17
0.33	0.25	0.08	9.89	H	59.45	27.29	37.51	49.45	24.02	34.24
0.97	0.30	0.09	9.89	H	56.00	21.05	31.33	46.00	17.53	27.81
1.76	0.11	0.09	9.89	N	56.00	21.24	31.33	46.00	18.21	28.30
1.77	0.32	0.09	9.89	H	56.00	20.28	30.58	46.00	18.12	28.42
3.53	0.46	0.14	9.89	H	56.00	14.70	25.19	46.00	6.88	17.37
3.54	0.20	0.14	9.89	N	56.00	15.21	25.44	46.00	10.34	20.57
4.33	0.26	0.15	9.90	N	56.00	4.82	15.13	46.00	-2.27	8.04
5.30	0.64	0.17	9.90	H	60.00	11.06	21.77	50.00	4.42	15.13
5.31	0.34	0.17	9.90	N	60.00	10.49	20.90	50.00	4.53	14.94
10.70	0.86	0.22	9.96	N	60.00	9.85	20.89	50.00	7.51	18.55
10.71	1.26	0.22	9.96	H	60.00	11.40	22.84	50.00	7.70	19.14
20.42	2.19	0.34	10.06	N	60.00	6.33	18.92	50.00	2.79	15.38
24.36	3.12	0.39	10.06	H	60.00	7.40	20.97	50.00	0.65	14.22

Figure 9. Plot of the AC Power Line Conducted Emissions

Hot Line – PE(Peak and Average detector used)

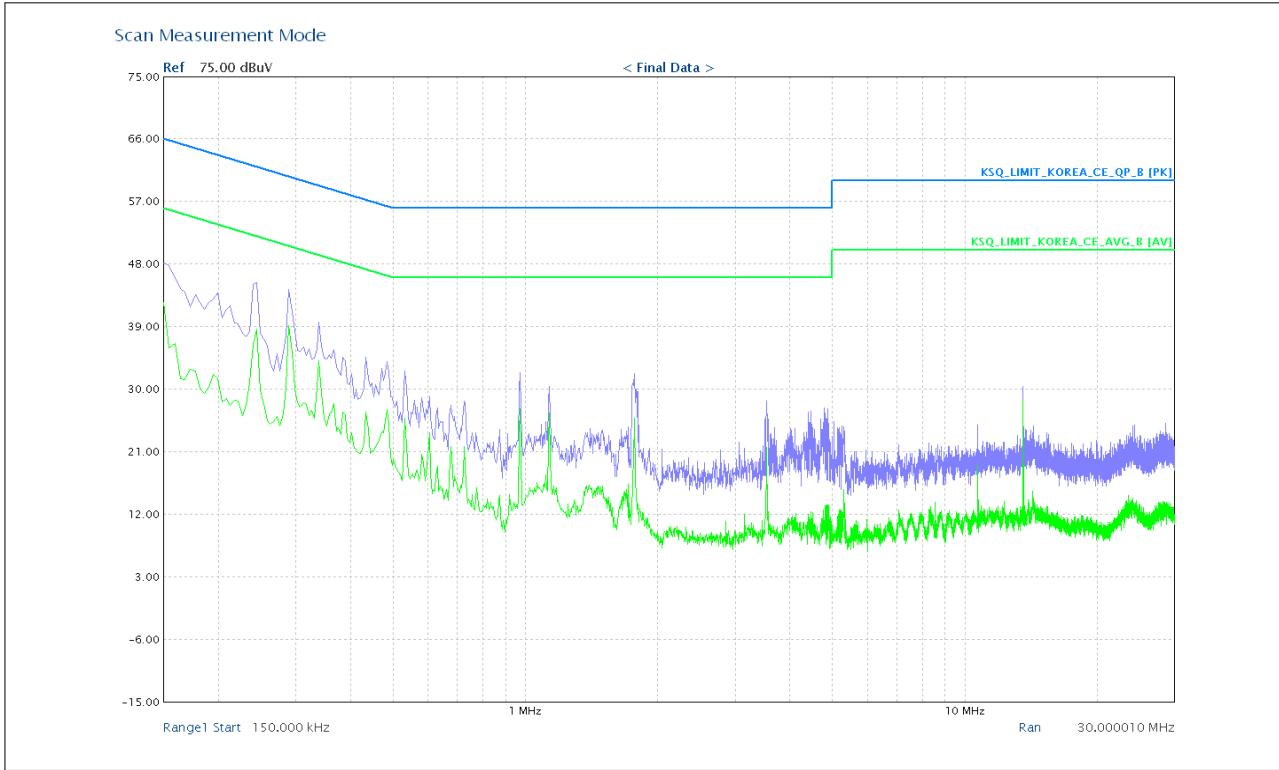

Neutral – PE(Peak and Average detector used)

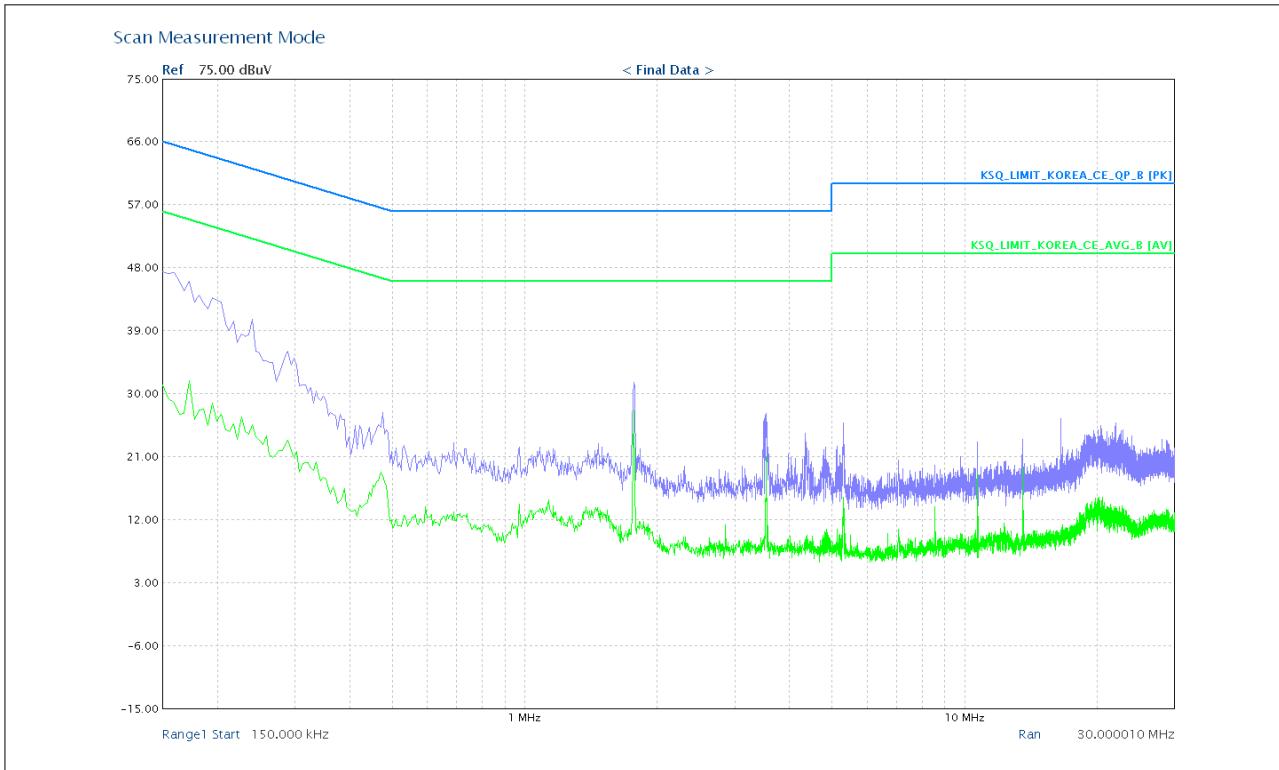

5.9 PEAK POWER SPECTRAL DENSITY

5.9.1 Regulation

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.9.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
3. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via UART interface and make sure the spectrum analyzer is operated in its linear range.
4. Set the spectrum analyzer to MAX HOLD mode with RBW = 3kHz.
5. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
6. Repeat above procedures until all frequencies measured were complete.

5.9.3 Test Results


Table 8 : Measured values of the Peak Power Spectral Density

Frequency (MHz)	Actual (dBm)	Limit (dBm)	Margin (dB)	Verdict
2402	4.06	8.0	3.94	Pass
2441	4.15	8.0	3.85	Pass
2480	3.53	8.0	4.47	Pass


NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.

Figure 10. Plot of the Peak Power Spectral Density


Low Channel (2402MHz)

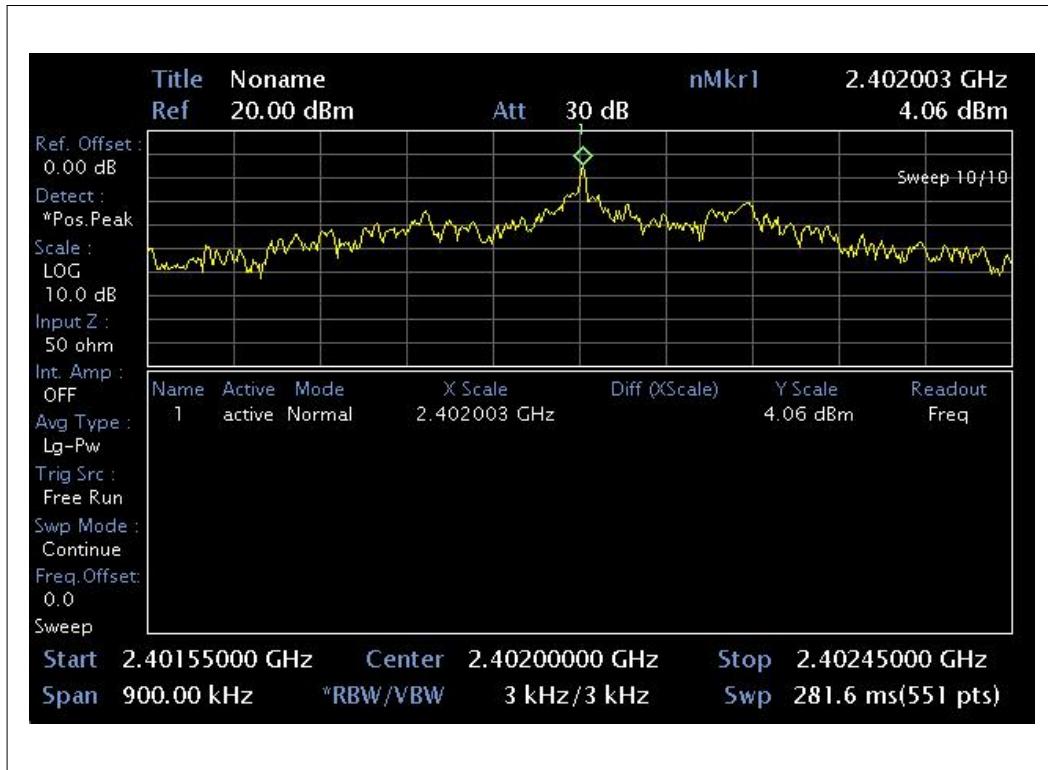

Middle Channel (2441 MHz)

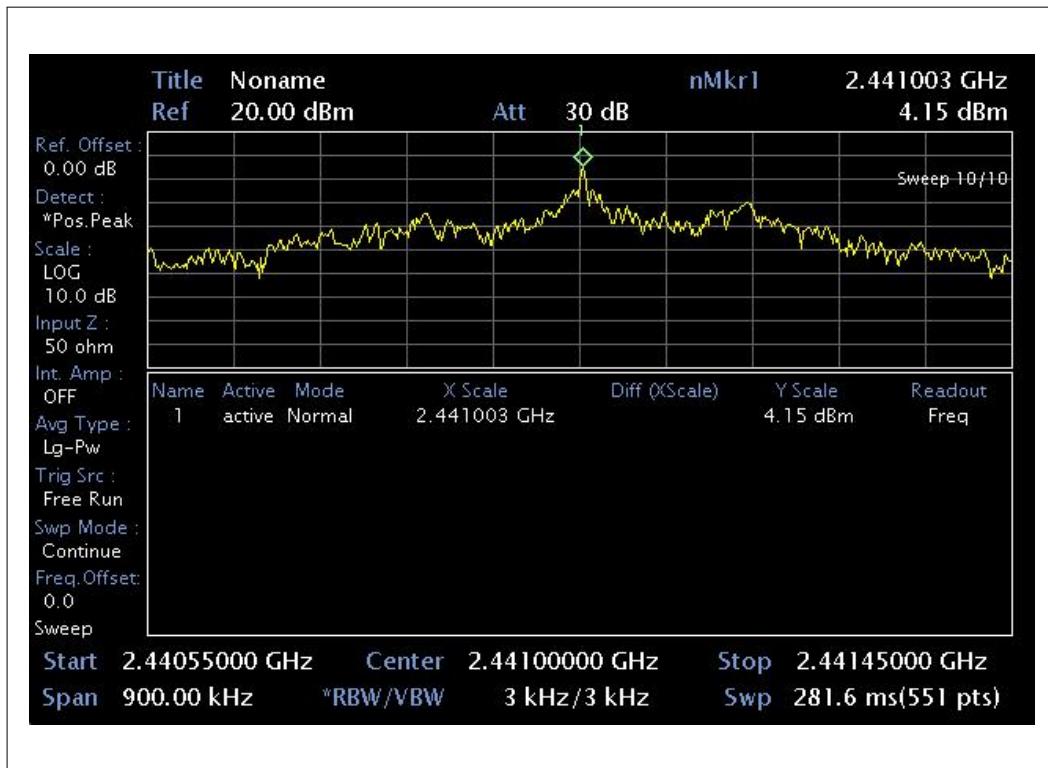

Highest Channel (2480 MHz)

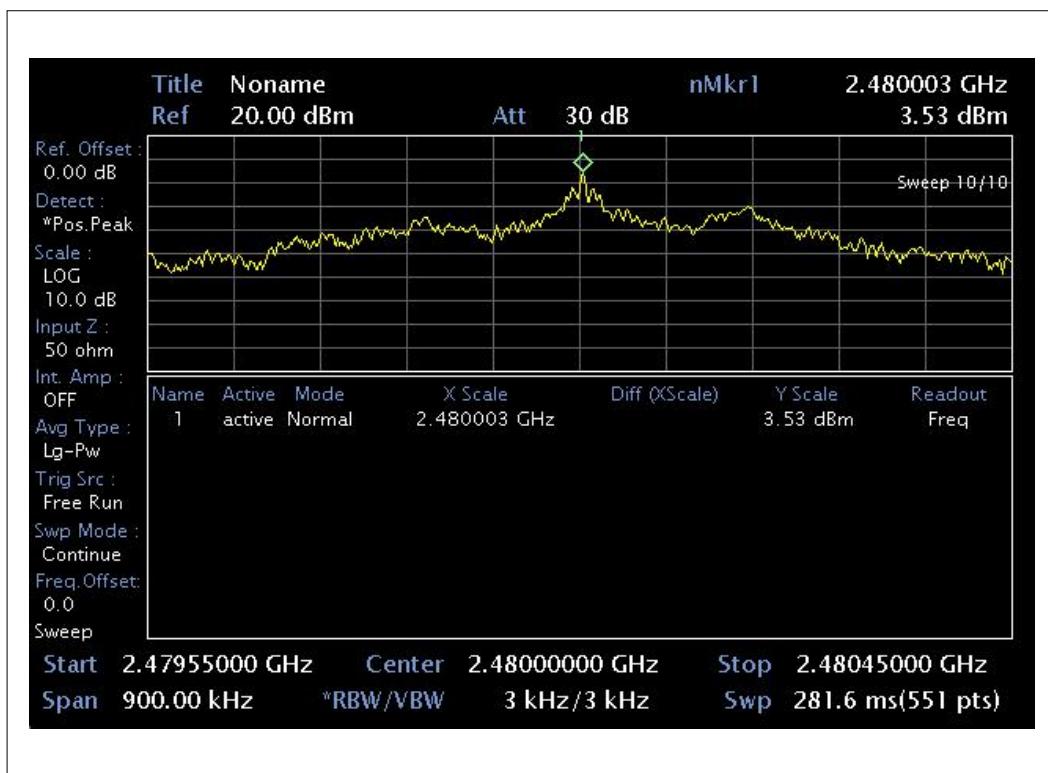

6.0 RF EXPOSURE

6.0.1 Regulation

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Limits for Maximum Permissive Exposure: RF exposure is calculated.

Frequency Range	Electric Field Strength [V/m]	Magnetic Field Strength [A/m]	Power Density [mW/cm ²]	Averaging Time [minute]
Limits for General Population/Uncontrolled Exposure				
0.3 ~ 1.34	614	1.63	*(100)	30
1.34 ~ 30	824/f	2.19/f	*(180/f ²)	30
30 ~ 300	27.5	0.073	0.2	30
300 ~ 1500	/	/	f/1500	30
1500 ~ 15000	/	/	1.0	30

f = frequency in MHz, * = Plane-wave equivalent power density

MPE (Maximum Permissive Exposure) Prediction

Predication of MPE limit at a given distance: Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2 \quad S = \text{power density [mW/cm}^2\text{]}$$

$$P = \text{power input to antenna [mW]}$$

$$(\Rightarrow R = \sqrt{PG/4\pi S}) \quad G = \text{power gain of the antenna in the direction of interest}$$

relative to an isotropic radiator

$$R = \text{distance to the center of radiation of the antenna [cm]}$$

EUT: Maximum peak output power=2.60 [mW](= 4.15 dBm)& Antenna gain=1.2 [mW](= 0.8 [dBi])	
100 mW, at 20 cm from an antenna 6 [dBi]	$S = PG/4\pi R^2 = 100 \times 3.98 / (4 \times \pi \times 400)$ $= 0.0792 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
4.15 mW, at 20 cm from the antenna 0.8 [dBi]	$S = PG/4\pi R^2 = 0.00099 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
4.15 mW, at 2.5 cm from the antenna 0.8 [dBi]	$S = PG/4\pi R^2 = 0.063 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$

6.0.2 RF Exposure Compliance Issue

The information should be included in the user's manual: This appliance and its antenna must not be co-located or operation in conjunction with any other antenna or transmitter. A minimum separation distance of 20 cm must be maintained between the antenna and the person for this appliance to satisfy the RF exposure requirements.

7. TEST EQUIPMENTS

APPENDIX TEST EQUIPMENT USED FOR TESTS

No.	Description	Manufacturer	Model No.	Specifications	Next Cal. Data	Used equipment
1	EMI Test Receiver	LIG Nex1	LSA-265	3Hz~26.5GHz	12.12.27	<input checked="" type="checkbox"/>
3	Bi-log Antenna	Schwarzbeck	VULB9160	30~1GHz	13.11.17	<input checked="" type="checkbox"/>
4	Bi-log Antenna	Schaffner-Chase EMC Ltd.	CBL6140A	50V, 5A	N/A	<input type="checkbox"/>
5	Turn Table	KEI	KEI-TURN	1500×1000×800	N/A	<input type="checkbox"/>
6	Turn Table	KEI	KEI-TURN	1500×1000×800	N/A	<input checked="" type="checkbox"/>
7	Loop ANT.	Com-Power	AL-130	9kHz~30MHz	13.04.21	<input type="checkbox"/>
8	Spectrum Analyzer	LIG Nex1	ISA-265	1kHz~26.5GHz	13.05.24	<input checked="" type="checkbox"/>
9	Function Generator	Agilent	33120A	15MHz sine&square	13.06.08	<input type="checkbox"/>
10	Frequency Counter	HP	5350B	10Hz~20GHz	13.06.08	<input checked="" type="checkbox"/>
11	Modulation Analyzer	Agilent	8901B	10MHz~1.3GHz	13.06.08	<input type="checkbox"/>
12	Audio Analyser	Agilent	8903B	20Hz~100kHz	13.06.08	<input type="checkbox"/>
13	Attenuator	Agilent	8494B	0~11dB, 18GHz	13.06.08	<input checked="" type="checkbox"/>
14	Attenuator	Agilent	8496B	0~110dB, 18GHz	13.06.08	<input checked="" type="checkbox"/>
15	Attenuator	Agilent	8495B	0~70dB, 18GHz	13.06.08	<input checked="" type="checkbox"/>
16	Attenuator	TAE SUNG	SMA-1	6dB	13.06.08	<input type="checkbox"/>
17	Attenuator	TAE SUNG	SMA-2	6dB	13.06.08	<input type="checkbox"/>
18	Power Meter	Agilent	E4418B	100kHz~110GHz, 0.0001uW~25100mW	13.06.08	<input checked="" type="checkbox"/>
19	Power Sensor	HP	8485A	50MHz~26.5GHz	13.06.08	<input checked="" type="checkbox"/>
20	Vibration Tester	Gana	GNV-400	10~60Hz, 0~4mm	13.09.15	<input type="checkbox"/>
21	RF Cable	Gigalane	SMS-LL280-SMS -1.5M	1.5m	N/A	<input checked="" type="checkbox"/>
22	Temp & Humidity Chamber	Seoksan Tech	SE-CT-02	-40~150°C, 30~98%	13.06.08	<input checked="" type="checkbox"/>
23	Signal Generator	Leader Electronics	3220	100kHz~1.3GHz	13.06.08	<input checked="" type="checkbox"/>
24	Oscilloscope	Tektronix	TDS-350	200MHz	13.06.08	<input type="checkbox"/>
25	Drop Tester	Self-made	KSQ-01	150cm	N/A	<input type="checkbox"/>
26	Pre Amplifier	GTC	GA-1825A	0.1~18GHz	N/A	<input checked="" type="checkbox"/>
27	Continuous operation tester	GTC	CT-100	Local Control	13.06.08	<input type="checkbox"/>
28	CW Generator	HP	83711B	1~20GHz	13.06.08	<input checked="" type="checkbox"/>
29	POWER DIVIDER	Agilent	11636B	26.5GHz	13.06.08	<input type="checkbox"/>
30	Power Sensor	Agilent	8482B	100kHz ~ 4.2GHz	13.06.08	<input type="checkbox"/>
31	Attenuator	Winswell	53-30-33	dc~2.5GHz, 500W	13.06.08	<input type="checkbox"/>
32	DC Power Supply	Hanil	HPS-505A	50V, 5A	13.06.08	<input checked="" type="checkbox"/>
33	Slidacs	Hanchang	5KV	5kW, 300V	13.06.08	<input type="checkbox"/>
34	Termination	Kwang Yeok	KYTE-NJ-150W	150W	13.06.08	<input type="checkbox"/>
35	Band-limited filter	MITECH	KSQ-02	600Ω	13.06.08	<input type="checkbox"/>
36	Signal Generator	WILTRON	6759B	10MHz ~ 26.5GHz	13.06.08	<input type="checkbox"/>
37	Digital Multimeter	DONG HWA	DM-300A	AC/DC 500V Max, 320mA Max	13.06.08	<input checked="" type="checkbox"/>
38	Horn ANT.	SCHWARZBECK	BBHA 9120D	700MHz ~ 18GHz	14.07.12	<input checked="" type="checkbox"/>
39	DC Power Supply	ALINCO	DM-340MW	15V, 30A	13.06.08	<input checked="" type="checkbox"/>
40	LISN	Electro Metrics	ANS-25/2	2535	13.06.08	<input checked="" type="checkbox"/>
41	LISN	Kyoritsu	KNW-407	8-1010-14	13.06.08	<input checked="" type="checkbox"/>
42	Pulse Limiter	LIG Nex1	EPL-30	N/A	13.06.08	<input checked="" type="checkbox"/>

APPENDIX**1. EUT photo**

FRONT VIEW



BACK VIEW

