



## **MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13301 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

May 31, 2013

Motorola Solutions, Inc.  
1064 Greenwood Blvd. Suite 400  
Lake Mary, FL 32746

Dear Bob Greenway,

Enclosed is the EMC Wireless test report for compliance testing of the Motorola Solutions, Inc., AP-7161 as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15.407 and RSS-210, Issue 8, Dec. 2010 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Jennifer Warnell  
Documentation Department

Reference: (\Motorola Solutions, Inc.\EMC37797A-FCC407 Rev. 2)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



## **MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13301 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

---

### **Electromagnetic Compatibility Criteria Test Report**

for the

**Motorola Solutions, Inc.  
Model AP-7161**

**Tested under**  
the Certification Rules  
contained in  
Title 47 of the CFR, Part 15.407  
& RSS-210, Issue 8, Dec. 2010  
for Intentional Radiators

**MET Report: EMC37797A-FCC407 Rev. 2**

May 31, 2013

#### **Prepared For:**

**Motorola Solutions, Inc.  
1064 Greenwood Blvd. Suite 400  
Lake Mary, FL 32746**

**Prepared By:**  
**MET Laboratories, Inc.**  
914 W. Patapsco Ave  
Baltimore, MD 21230

## Electromagnetic Compatibility Criteria Test Report

for the

**Motorola Solutions, Inc.**  
**Model AP-7161**

the Certification Rules  
contained in  
Title 47 of the CFR, Part 15.407  
& RSS-210, Issue 8, Dec. 2010  
for Intentional Radiators



Jeff Pratt, Project Engineer  
Electromagnetic Compatibility Lab



Jennifer Warnell  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 15.407, of the FCC Rules and Industry Canada standard RSS-210, Issue 8, Dec. 2010 under normal use and maintenance.



Asad Bajwa,  
Director, Electromagnetic Compatibility Lab

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	May 9, 2013	Initial Issue.
1	May 22, 2013	Revised to reflect customer correction.
2	May 29, 2013	Revised to reflect engineer notes.

## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
	A. Purpose of Test .....	2
	B. Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
	A. Overview.....	4
	B. References.....	5
	C. Test Site .....	5
	D. Description of Test Sample .....	6
	E. Equipment Configuration.....	8
	F. Support Equipment .....	8
	G. Ports and Cabling Information.....	8
	H. Mode of Operation.....	8
	I. Method of Monitoring EUT Operation.....	8
	J. Modifications .....	8
	a) Modifications to EUT .....	8
	b) Modifications to Test Standard.....	8
	K. Disposition of EUT .....	8
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>9</b>
	§ 15.203 Antenna Requirement .....	10
	§ 15.407(a)(2)(3) RF Power Output .....	11
	§ 15.407(b)(2), (3), (6), (7) Undesirable Emissions .....	13
	§ 15.407(f) RF Exposure .....	57
<b>IV.</b>	<b>Test Equipment .....</b>	<b>58</b>
<b>V.</b>	<b>Certification &amp; User's Manual Information.....</b>	<b>60</b>
	A. Certification Information .....	61
	B. Label and User's Manual Information .....	65
<b>VI.</b>	<b>Appendix A .....</b>	<b>67</b>

## List of Tables

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing .....	2
Table 2. EUT Summary.....	4
Table 3. References .....	5
Table 4. Equipment Configuration .....	8
Table 5. Support Equipment.....	8
Table 6. Ports and Cabling Information .....	8
Table 7. RF Power Output, Test Results .....	12
Table 8. Test Equipment List .....	59

## List of Figures

Figure 1. Block Diagram of Test Configuration.....	6
Figure 2. Power Output Test Setup .....	11

## List of Photographs

Photograph 1. Motorola Solutions, Inc., AP-7161 .....	6
Photograph 2. Antenna Front .....	7
Photograph 2. Antenna Back.....	7

## List of Plots

Plot 1. Radiated Spurious Emissions, 5280 MHz, 802.11a, 30 MHz – 1 GHz, Pre-Scan .....	14
Plot 2. Radiated Spurious Emissions, 5280 MHz, 802.11a, 1 GHz – 7 GHz, Average.....	14
Plot 3. Radiated Spurious Emissions, 5280 MHz, 802.11a, 1 GHz – 7 GHz, Peak .....	14
Plot 4. Radiated Spurious Emissions, 5280 MHz, 802.11a, 7 GHz – 18 GHz, Average.....	15
Plot 5. Radiated Spurious Emissions, 5280 MHz, 802.11a, 7 GHz – 18 GHz, Peak .....	15
Plot 6. Radiated Spurious Emissions, 5300 MHz, 802.11a, 30 MHz – 1 GHz.....	15
Plot 7. Radiated Spurious Emissions, 5300 MHz, 802.11a, 1 GHz – 7 GHz .....	16
Plot 8. Radiated Spurious Emissions, 5300 MHz, 802.11a, 7 GHz – 18 GHz .....	16
Plot 9. Radiated Spurious Emissions, 5300 MHz, 802.11a, 18 GHz – 40 GHz .....	16
Plot 10. Radiated Spurious Emissions, 5320 MHz, 802.11a, 30 MHz – 1 GHz.....	17
Plot 11. Radiated Spurious Emissions, 5320 MHz, 802.11a, 1 GHz – 7 GHz .....	17
Plot 12. Radiated Spurious Emissions, 5320 MHz, 802.11a, 7 GHz – 18 GHz .....	17
Plot 13. Radiated Spurious Emissions, 5320 MHz, 802.11a, 18 GHz – 40 GHz .....	18
Plot 14. Radiated Spurious Emissions, 5500 MHz, 802.11a, 30 MHz – 1 GHz.....	18
Plot 15. Radiated Spurious Emissions, 5500 MHz, 802.11a, 1 GHz – 7 GHz.....	18
Plot 16. Radiated Spurious Emissions, 5500 MHz, 802.11a, 7 GHz – 18 GHz .....	19
Plot 17. Radiated Spurious Emissions, 5500 MHz, 802.11a, 18 GHz – 40 GHz .....	19
Plot 18. Radiated Spurious Emissions, 5580 MHz, 802.11a, 30 MHz – 1 GHz.....	19
Plot 19. Radiated Spurious Emissions, 5580 MHz, 802.11a, 1 GHz – 7 GHz .....	20
Plot 20. Radiated Spurious Emissions, 5580 MHz, 802.11a, 7 GHz – 18 GHz .....	20
Plot 21. Radiated Spurious Emissions, 5580 MHz, 802.11a, 18 GHz – 40 GHz .....	20
Plot 22. Radiated Spurious Emissions, 5700 MHz, 802.11a, 30 MHz – 1 GHz.....	21
Plot 23. Radiated Spurious Emissions, 5700 MHz, 802.11a, 1 GHz – 7 GHz .....	21
Plot 24. Radiated Spurious Emissions, 5700 MHz, 802.11a, 7 GHz – 18 GHz .....	21
Plot 25. Radiated Spurious Emissions, 5700 MHz, 802.11a, 18 GHz – 40 GHz .....	22
Plot 26. Radiated Spurious Emissions, 5745 MHz, 802.11a, 30 MHz – 1 GHz.....	22
Plot 27. Radiated Spurious Emissions, 5745 MHz, 802.11a, 1 GHz – 7 GHz, Average.....	22
Plot 28. Radiated Spurious Emissions, 5745 MHz, 802.11a, 1 GHz – 7 GHz, Peak .....	23

Plot 29. Radiated Spurious Emissions, 5745 MHz, 802.11a, 7 GHz – 18 GHz, Peak under Average .....	23
Plot 30. Radiated Spurious Emissions, 5745 MHz, 802.11a, 18 GHz – 40 GHz, Peak under Average .....	23
Plot 31. Radiated Spurious Emissions, 5785 MHz, 802.11a, 30 MHz – 1 GHz.....	24
Plot 32. Radiated Spurious Emissions, 5785 MHz, 802.11a, 1 GHz – 7 GHz, Average.....	24
Plot 33. Radiated Spurious Emissions, 5785 MHz, 802.11a, 1 GHz – 7 GHz, Peak .....	24
Plot 34. Radiated Spurious Emissions, 5785 MHz, 802.11a, 7 GHz – 18 GHz, Peak under Average .....	25
Plot 35. Radiated Spurious Emissions, 5785 MHz, 802.11a, 18 GHz – 40 GHz, Peak under Average .....	25
Plot 36. Radiated Spurious Emissions, 5805 MHz, 802.11a, 30 MHz – 1 GHz.....	25
Plot 37. Radiated Spurious Emissions, 5280 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz .....	26
Plot 38. Radiated Spurious Emissions, 5280 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz, Average .....	26
Plot 39. Radiated Spurious Emissions, 5280 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz, Peak .....	26
Plot 40. Radiated Spurious Emissions, 5280 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz, Average .....	27
Plot 41. Radiated Spurious Emissions, 5280 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz, Peak .....	27
Plot 42. Radiated Spurious Emissions, 5300 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz .....	27
Plot 43. Radiated Spurious Emissions, 5300 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz.....	28
Plot 44. Radiated Spurious Emissions, 5300 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz.....	28
Plot 45. Radiated Spurious Emissions, 5300 MHz, 802.11n 20 MHz, 18 GHz – 40 GHz.....	28
Plot 46. Radiated Spurious Emissions, 5320 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz .....	29
Plot 47. Radiated Spurious Emissions, 5320 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz.....	29
Plot 48. Radiated Spurious Emissions, 5320 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz.....	29
Plot 49. Radiated Spurious Emissions, 5320 MHz, 802.11n 20 MHz, 18 GHz – 40 GHz.....	30
Plot 50. Radiated Spurious Emissions, 5500 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz .....	30
Plot 51. Radiated Spurious Emissions, 5500 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz.....	30
Plot 52. Radiated Spurious Emissions, 5500 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz.....	31
Plot 53. Radiated Spurious Emissions, 5500 MHz, 802.11n 20 MHz, 18 GHz – 40 GHz.....	31
Plot 54. Radiated Spurious Emissions, 5580 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz .....	31
Plot 55. Radiated Spurious Emissions, 5580 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz.....	32
Plot 56. Radiated Spurious Emissions, 5580 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz.....	32
Plot 57. Radiated Spurious Emissions, 5580 MHz, 802.11n 20 MHz, 18 GHz – 40 GHz.....	32
Plot 58. Radiated Spurious Emissions, 5700 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz .....	33
Plot 59. Radiated Spurious Emissions, 5700 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz.....	33
Plot 60. Radiated Spurious Emissions, 5700 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz.....	33
Plot 61. Radiated Spurious Emissions, 5700 MHz, 802.11n 20 MHz, 18 GHz – 40 GHz.....	34
Plot 62. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz .....	34
Plot 63. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz, Average .....	34
Plot 64. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz, Peak .....	35
Plot 65. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz, Peak under Average.....	35
Plot 66. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 18 GHz – 40 GHz, Peak under Average .....	35
Plot 67. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz .....	36
Plot 68. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz, Average .....	36
Plot 69. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz, Peak .....	36
Plot 70. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz, Peak under Average.....	37
Plot 71. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 18 GHz – 40 GHz, Peak under Average .....	37
Plot 72. Radiated Spurious Emissions, 5805 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz .....	37
Plot 73. Radiated Spurious Emissions, 5300 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz .....	38
Plot 74. Radiated Spurious Emissions, 5300 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz.....	38
Plot 75. Radiated Spurious Emissions, 5300 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz.....	38
Plot 76. Radiated Spurious Emissions, 5300 MHz, 802.11n 40 MHz, 18 GHz – 40 GHz.....	39
Plot 77. Radiated Spurious Emissions, 5310 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz .....	39
Plot 78. Radiated Spurious Emissions, 5310 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz.....	39
Plot 79. Radiated Spurious Emissions, 5310 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz.....	40
Plot 80. Radiated Spurious Emissions, 5310 MHz, 802.11n 40 MHz, 18 GHz – 40 GHz.....	40
Plot 81. Radiated Spurious Emissions, 5510 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz .....	40
Plot 82. Radiated Spurious Emissions, 5510 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz.....	41
Plot 83. Radiated Spurious Emissions, 5510 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz.....	41
Plot 84. Radiated Spurious Emissions, 5510 MHz, 802.11n 40 MHz, 18 GHz – 40 GHz.....	41

Plot 85. Radiated Spurious Emissions, 5580 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz .....	.42
Plot 86. Radiated Spurious Emissions, 5580 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz.....	.42
Plot 87. Radiated Spurious Emissions, 5580 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz.....	.42
Plot 88. Radiated Spurious Emissions, 5580 MHz, 802.11n 40 MHz, 18 GHz – 40 GHz.....	.43
Plot 89. Radiated Spurious Emissions, 5690 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz .....	.43
Plot 90. Radiated Spurious Emissions, 5690 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz.....	.43
Plot 91. Radiated Spurious Emissions, 5690 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz.....	.44
Plot 92. Radiated Spurious Emissions, 5690 MHz, 802.11n 40 MHz, 18 GHz – 40 GHz.....	.44
Plot 93. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz .....	.44
Plot 94. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz, Average .....	.45
Plot 95. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz, Peak .....	.45
Plot 96. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz, Peak under Average.....	.45
Plot 97. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 18 GHz – 40 GHz, Peak under Average.....	.46
Plot 98. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz .....	.46
Plot 99. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz, Average .....	.46
Plot 100. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz, Peak .....	.47
Plot 101. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz, Peak under Average.....	.47
Plot 102. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 18 GHz – 40 GHz, Peak under Average .....	.47
Plot 103. EIRP, 5280 MHz, 802.11a, Band Edge.....	.48
Plot 104. EIRP, 5320 MHz, 802.11a, Band Edge.....	.48
Plot 105. EIRP, 5320 MHz, 802.11a, Band Edge.....	.48
Plot 106. EIRP, 5500 MHz, 802.11a, Band Edge.....	.49
Plot 107. EIRP, 5500 MHz, 802.11a, Band Edge.....	.49
Plot 108. EIRP, 5700 MHz, 802.11a, Band Edge.....	.49
Plot 109. EIRP, 5700 MHz, 802.11a, Band Edge.....	.50
Plot 110. EIRP, 5280 MHz, 802.11n 20 MHz, Band Edge .....	.50
Plot 111. EIRP, 5320 MHz, 802.11n 20 MHz, Band Edge .....	.50
Plot 112. EIRP, 5500 MHz, 802.11n 20 MHz, Band Edge .....	.51
Plot 113. EIRP, 5700 MHz, 802.11n 20 MHz, Band Edge .....	.51
Plot 114. EIRP, 5310 MHz, 802.11n 40 MHz, Band Edge .....	.51
Plot 115. EIRP, 5510 MHz, 802.11n 40 MHz, Band Edge .....	.52
Plot 116. EIRP, 5690 MHz, 802.11n 40 MHz, Band Edge .....	.52
Plot 117. Restricted Band, 802.11a, 5320 MHz, Average .....	.53
Plot 118. Restricted Band, 802.11a, 5320 MHz, Peak .....	.53
Plot 119. Restricted Band, 802.11a, 5500 MHz, Average .....	.53
Plot 120. Restricted Band, 802.11a, 5500 MHz, Peak .....	.54
Plot 121. Restricted Band, 802.11n 20 MHz, 5320 MHz, Average .....	.54
Plot 122. Restricted Band, 802.11n 20 MHz, 5320 MHz, Peak .....	.54
Plot 123. Restricted Band, 802.11n 20 MHz, 5500 MHz, Average .....	.55
Plot 124. Restricted Band, 802.11n 20 MHz, 5500 MHz, Peak .....	.55
Plot 125. Restricted Band, 802.11n 40 MHz, 5310 MHz, Average .....	.55
Plot 126. Restricted Band, 802.11n 40 MHz, 5310 MHz, Peak .....	.56
Plot 127. Restricted Band, 802.11n 40 MHz, 5510 MHz, Average .....	.56
Plot 128. Restricted Band, 802.11n 40 MHz, 5510 MHz, Peak .....	.56

## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<i>d</i>	Measurement Distance
<b>dB</b>	Decibels
<b>dB<sub>μ</sub>A</b>	Decibels above one <b>microamp</b>
<b>dB<sub>μ</sub>V</b>	Decibels above one <b>microvolt</b>
<b>dB<sub>μ</sub>A/m</b>	Decibels above one <b>microamp per meter</b>
<b>dB<sub>μ</sub>V/m</b>	Decibels above one <b>microvolt per meter</b>
<b>DC</b>	Direct Current
<b>E</b>	Electric Field
<b>DSL</b>	Digital Subscriber Line
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<i>f</i>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>GRP</b>	Ground Reference Plane
<b>H</b>	Magnetic Field
<b>HCP</b>	Horizontal Coupling Plane
<b>Hz</b>	Hertz
<b>IEC</b>	International Electrotechnical Commission
<b>kHz</b>	kilohertz
<b>kPa</b>	kilopascal
<b>kV</b>	kilovolt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	Megahertz
<b>μH</b>	<b>microhenry</b>
$\mu$	<b>microfarad</b>
$\mu$ s	<b>microseconds</b>
<b>PRF</b>	Pulse Repetition Frequency
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square
<b>TWT</b>	Traveling Wave Tube
<b>V/m</b>	Volts per meter
<b>VCP</b>	Vertical Coupling Plane

## I. Executive Summary

## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Motorola Solutions, Inc. AP-7161, with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the AP-7161. Motorola Solutions, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the AP-7161, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with Motorola Solutions, Inc., quote number 1MOT2002. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference	IC Reference RSS-210 Issue 8: 2010	Description	Results
15.203	RSS-GEN, 7.1.4	Antenna Requirements	Compliant
15.407 (a)(2)(3)	RSS-210, A9.2	Conducted Transmitter Output Power	Compliant
15.407 (b)(2), (3), (4), (5), (6)	RSS-210, A9.2	Undesirable Emissions (15.205/15.209 - General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Compliant
15.407(f)	RSS-102, 4.1	RF Exposure	Compliant

**Table 1. Executive Summary of EMC Part 15.407 Compliance Testing**

## II. Equipment Configuration

## A. Overview

MET Laboratories, Inc. was contracted by Motorola Solutions, Inc. to perform testing on the AP-7161, under Motorola Solutions, Inc.'s quote number 1MOT2002.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing on the Motorola Solutions, Inc. AP-7161, used in outdoor installations with the MTI MT-465019/NVD multi-port panel antenna in the U-NII2, U-NII2e and U-NII3 frequency bands, as part of a Class II Permissive Change to the add the MTI MT-465019/NVD antenna.

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	AP-7161
<b>Model(s) Covered:</b>	AP-7161
<b>EUT Specifications:</b>	Primary Power: 120 VAC, 60 Hz
	FCC ID: QJEAP716101
	IC: 4602A-AP716101
	Emission Designators: D7D
	Equipment Code: NII
	Peak RF Output Power: 9.997 dBm
<b>EUT Frequency Ranges:</b>	5280 – 5320 MHz
	5500 – 5700 MHz
	5745 – 5805 MHz
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C
	Relative Humidity: 30-60%
	Barometric Pressure: 860-1060 mbar
<b>Evaluated by:</b>	Jeffrey Pratt
<b>Report Date(s):</b>	May 31, 2013

**Table 2. EUT Summary**

## B. References

<b>CFR 47, Part 15, Subpart E</b>	Unlicensed National Information Infrastructure Devices (UNII)
<b>ANSI C63.4:2003</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>RSS-210, Issue 8, Dec. 2010</b>	Low-power Licence-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
<b>ISO/IEC 17025:2005</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2009</b>	American National Standard for Testing Unlicensed Wireless Devices

**Table 3. References**

## C. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

## D. Description of Test Sample

The Motorola Solutions, Inc. AP-7161 is an outdoor 802.11a/b/g/n wireless access point, here tested with an MTI MT-465019 outdoor multi-port panel antenna.



Photograph 1. Motorola Solutions, Inc., AP-7161


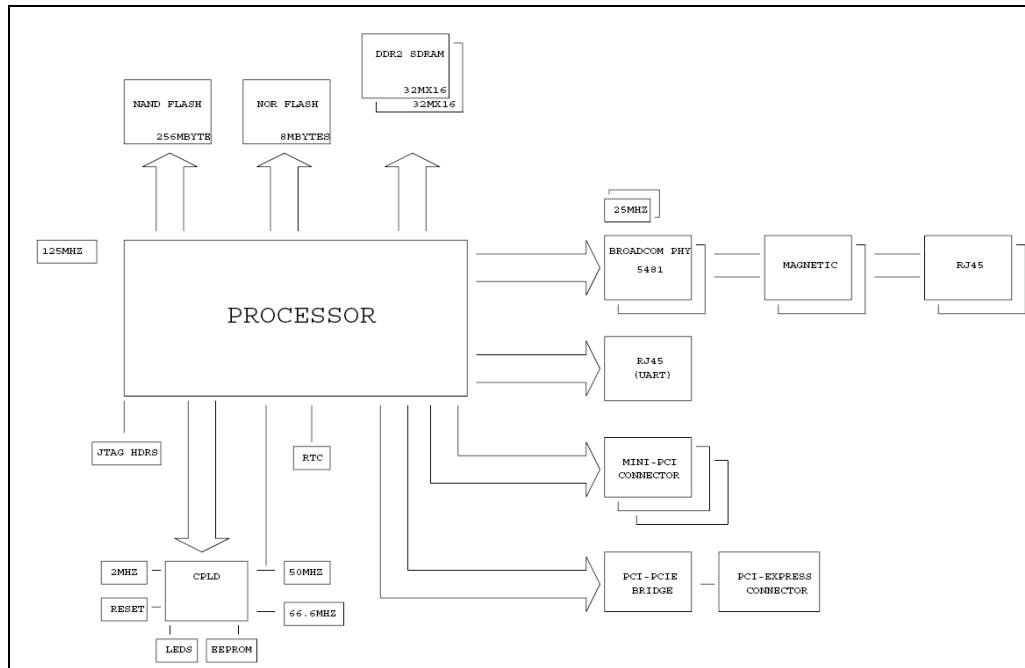


Figure 1. Block Diagram of Test Configuration



**Photograph 2. Antenna Front**

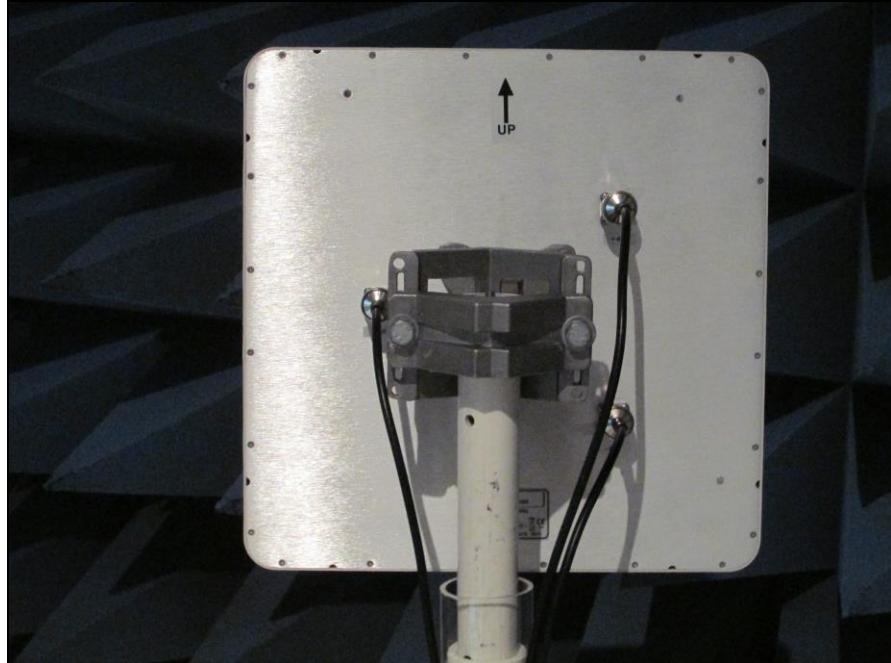

**Photograph 3. Antenna Back**

## E. Equipment Configuration

All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number
1	AP 7161	AP-7161
2	Power Cable	N/A

**Table 4. Equipment Configuration**

## F. Support Equipment

Motorola Solutions, Inc. supplied support equipment necessary for the operation and testing of the AP-7161. All support equipment supplied is listed in the following Support Equipment List.

Ref. ID	Name / Description	Manufacturer	Model Number
1	Laptop with ART software	Dell	D600

**Table 5. Support Equipment**

## G. Ports and Cabling Information

Port Name on EUT	Cable Description	Qty.	Length (m)	Shielded (Y/N)	Termination Point
GE1 (LAN)	Cat5	1	N/A	Y	N/A
GE2 (WAN)	Cat5	1	N/A	Y	N/A
Console (Serial)	RJ-45	1	N/A	N	N/A
Power	16 AWG Power Cable	1	6	N/A	N/A

**Table 6. Ports and Cabling Information**

## H. Mode of Operation

Test software (WinPrius) running on laptop and EUT which communicate over Ethernet.

## I. Method of Monitoring EUT Operation

Wireless radios are monitored in the intended frequency bands.

## J. Modifications

### a) Modifications to EUT

No modifications were made to the EUT.

### b) Modifications to Test Standard

No modifications were made to the test standard.

## K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Motorola Solutions, Inc. upon completion of testing.

### III. Electromagnetic Compatibility Criteria for Intentional Radiators

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:**

**§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:**

The EUT as tested is compliant the criteria of §15.203. The EUT is professionally installed in an outdoor setting. This outdoor antenna is not intended for and will not be used in the 5150 MHz – 5250 MHz band.

**Test Engineer(s):** Jeff Pratt

**Test Date(s):** 02/22/13

Gain	Type	Model	Manufacturer
19.77	Panel	MT-465019/NVD	MTI
<b>Polarization</b>		Vertical	Dual Slant +/- 45°
<b>Gain</b>		21 dBi	19 dBi

Note: See Appendix A

When in 802.11n-mode, array gain can be calculated in one of two ways. Based on KDB 662911, when an antenna with multiple ports of unequal gain is fed with completely uncorrelated signals of equal power (i.e. power across the ports deviates by less than 2dB), the directional gain of the antenna is calculated using the following equation:

$$\text{Directional Gain} = 10 \log \left( \frac{\left( \frac{G_1}{10^{20}} + \frac{G_2}{10^{20}} + \dots + \frac{G_N}{10^{20}} \right)^2}{N_{ANT}} \right)$$

When an antenna with multiple ports of unequal gain is fed with completely uncorrelated signals of unequal power (i.e. power across the ports deviates by more than 2dB), the directional gain of the antenna is calculated using the following equation (see KDB tracking number 704031):

$$\text{Directional Gain} = 10 \log \left( \frac{(p_1 g_1 + p_2 g_2 + \dots + p_N g_N) / (p_1 + p_2 + \dots + p_N)}{N_{ANT}} \right)$$

Where,  $p_N$  = output power of port N in mW

$$g_N = 10^{\frac{GN}{10}} = \text{linear gain of the antenna}$$

Based on the measured output power of the EUT, the equation for directional gain for antennas fed with signals of unequal power resulted in a lower directional gain than the equation for antennas fed with signals of equal power. For this reason, the equal power directional gain equation was used throughout testing, resulting in a gain of 19.77dBi.

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15. 407(a)(2)(3) RF Power Output

**Test Requirements:** **§15.407(a) (2):** For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10\log B$ , where B is the 26 dB emission bandwidth in megahertz.


**§15.407(a) (3):** For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W or  $17 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz.

**Test Procedure:** Each of the radio's three antenna ports were connected individually to a spectrum analyzer via an RF cable and attenuator. The EUT was set to transmit on low, mid, and high channels and the power was measured according to method SA-1 from FCC Publication Number 789033. The power measured on each port for each channel and mode was summed and compared to the power limits of 15.407(a)(3), based on the antenna gain calculation from section 15.203 of this report.

**Test Results:** Equipment was compliant with the Peak Power Output limits of **§ 15.401(a)(2)**.

**Test Engineer(s):** Jeff Pratt

**Test Date(s):** 04/12/13



**Figure 2. Power Output Test Setup**

Frequency (MHz)	Mode	Port A Conducted Power (dBm)	Port B Conducted Power (dBm)	Port C Conducted Power (dBm)	Summed Conducted Power (dBm)	Antenna Gain (dBi)	Power Limit (dBm)	Margin (dB)
5280	802.11a	7.83	--	--	7.83	21	9	-1.17
5300	802.11a	7.78	--	--	7.78	21	9	-1.22
5320	802.11a	7.92	--	--	7.92	21	9	-1.08
5500	802.11a	7.84	--	--	7.84	21	9	-1.16
5580	802.11a	7.83	--	--	7.83	21	9	-1.17
5700	802.11a	7.88	--	--	7.88	21	9	-1.12
5280	802.11n HT20	3.38	4.26	4.82	8.96	19.77	10.23	-1.26
5300	802.11n HT20	2.96	4.51	5.77	9.33	19.77	10.23	-0.89
5320	802.11n HT20	1.94	3.82	6.31	9.16	19.77	10.23	-1.06
5500	802.11n HT20	5.04	4.04	3.85	9.11	19.77	10.23	-1.11
5580	802.11n HT20	4.7	4.44	3.84	9.11	19.77	10.23	-1.11
5700	802.11n HT20	3.05	4.74	5.18	9.19	19.77	10.23	-1.04
5300	802.11n HT40	3.74	3.96	5.19	9.12	19.77	10.23	-1.11
5310	802.11n HT40	3.27	5.74	6.15	9.997	19.77	10.23	-0.23
5510	802.11n HT40	5.19	4.82	5.24	9.86	19.77	10.23	-0.37
5580	802.11n HT40	5.3	5.26	4.83	9.91	19.77	10.23	-0.32
5690	802.11n HT40	4.45	4.99	5.74	9.86	19.77	10.23	-0.36

**Table 7. RF Power Output, Test Results**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(b)(2), (3), (6), (7) Undesirable Emissions

**Test Requirements:** § 15.407(b)(2), (3), (6), (7); §15.205: Emissions outside the frequency band.

**§ 15.407(b)(2):** For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.

**§ 15.407(b)(3):** For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

**§ 15.407(b)(4):** For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz.

**§ 15.407(b)(6):** Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

**§ 15.407(b)(7):** The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

**Test Procedure:** The EUT was placed on a non-conducting 0.8m high stand on a turntable in a semi-anechoic chamber. The EUT was set to transmit on low, mid, and high channels, while the turntable was rotated 360 degrees through three orthogonal axes and the receiving antenna height was varied to maximize emissions.

For frequencies from 30MHz to 1GHz, measurements were first made using a peak detector with a 100 kHz resolution bandwidth. Emissions which exceeded the limits were re-measured using a quasi-peak detector with a 120 kHz resolution bandwidth.

For measurements above 1 GHz, measurements were made with a Peak detector with 1 MHz resolution bandwidth. Where the spurious emissions fell into a restricted band, measurements were also made with an average detector to make sure they complied with 15.209 limits. Emissions were explored up to 40 GHz.

The equation, **EIRP = E + 20 log D - 104.8** was used to convert an EIRP limit to a field strength limit.

E = field strength (dBUV/m)


D = Reference measurement distance

**Test Results:** The EUT was compliant with the Radiated Emission limits for Intentional Radiators. See following pages for detailed test results. Emissions below 1 GHz that appear to be failing were re-measured with a QP detector and passed or did not fall in a restricted band and therefore met the 20 dBc requirement.


**Test Engineer(s):** Jeff Pratt

**Test Date(s):** 04/16/13


## § 15.209 Radiated Emissions Limits

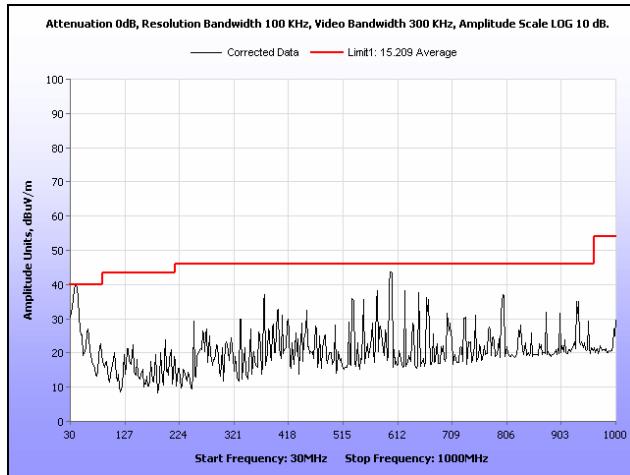


Plot 1. Radiated Spurious Emissions, 5280 MHz, 802.11a, 30 MHz – 1 GHz, Pre-Scan

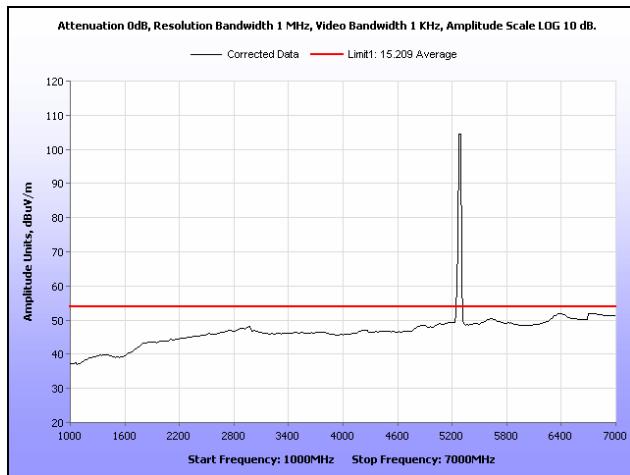


Plot 2. Radiated Spurious Emissions, 5280 MHz, 802.11a, 1 GHz – 7 GHz, Average

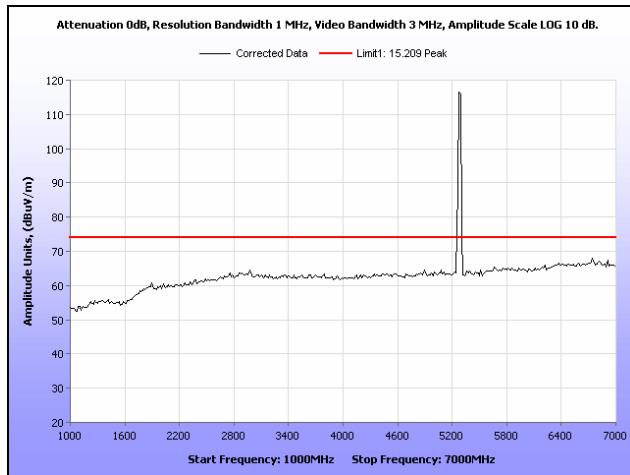


Plot 3. Radiated Spurious Emissions, 5280 MHz, 802.11a, 1 GHz – 7 GHz, Peak

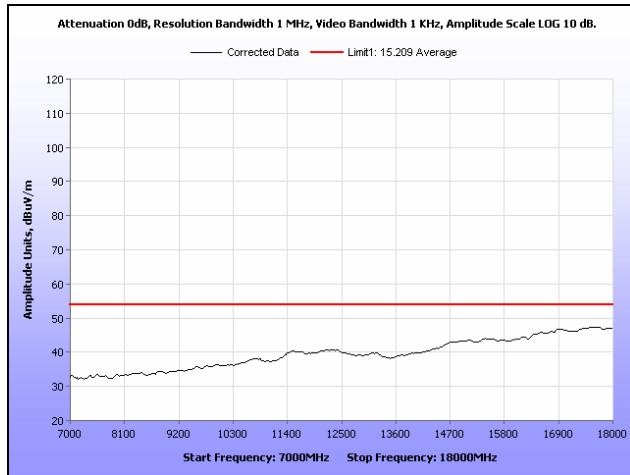


**Plot 4. Radiated Spurious Emissions, 5280 MHz, 802.11a, 7 GHz – 18 GHz, Average**

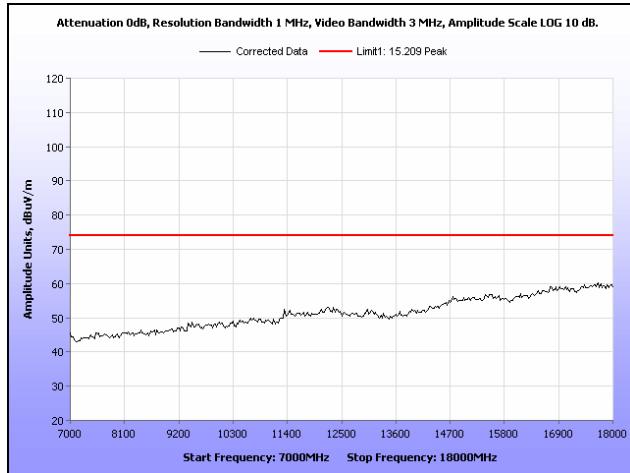


**Plot 5. Radiated Spurious Emissions, 5280 MHz, 802.11a, 7 GHz – 18 GHz, Peak**

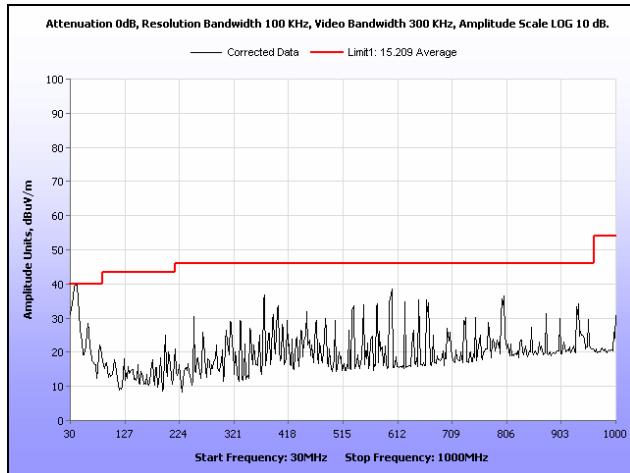


**Plot 6. Radiated Spurious Emissions, 5300 MHz, 802.11a, 30 MHz – 1 GHz**

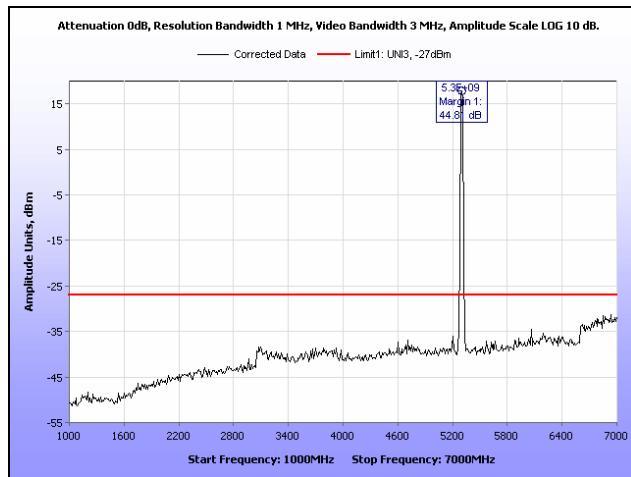


**Plot 7. Radiated Spurious Emissions, 5300 MHz, 802.11a, 1 GHz – 7 GHz**

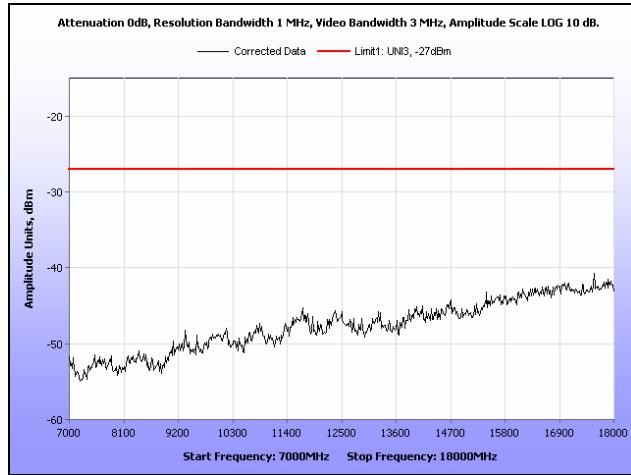


**Plot 8. Radiated Spurious Emissions, 5300 MHz, 802.11a, 7 GHz – 18 GHz**

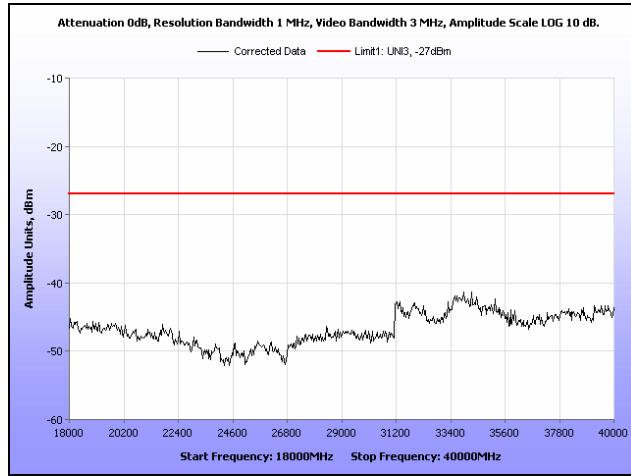


**Plot 9. Radiated Spurious Emissions, 5300 MHz, 802.11a, 18 GHz – 40 GHz**

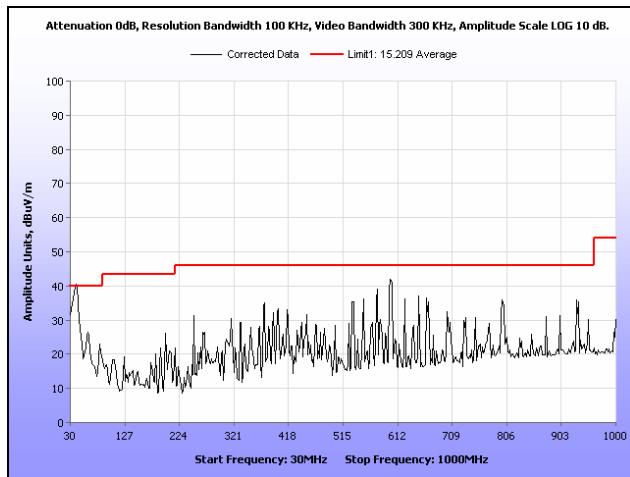


**Plot 10. Radiated Spurious Emissions, 5320 MHz, 802.11a, 30 MHz – 1 GHz**

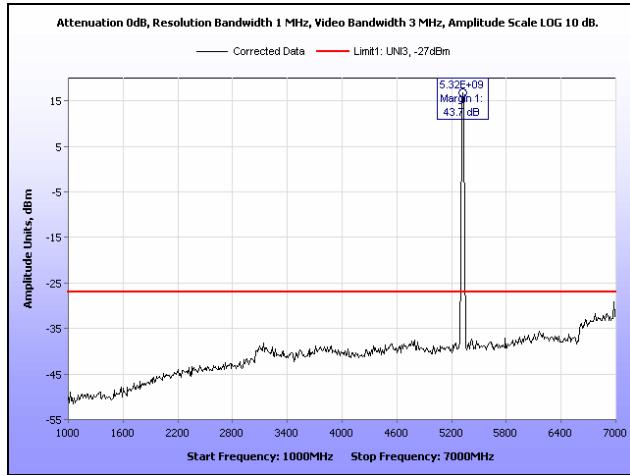


**Plot 11. Radiated Spurious Emissions, 5320 MHz, 802.11a, 1 GHz – 7 GHz**

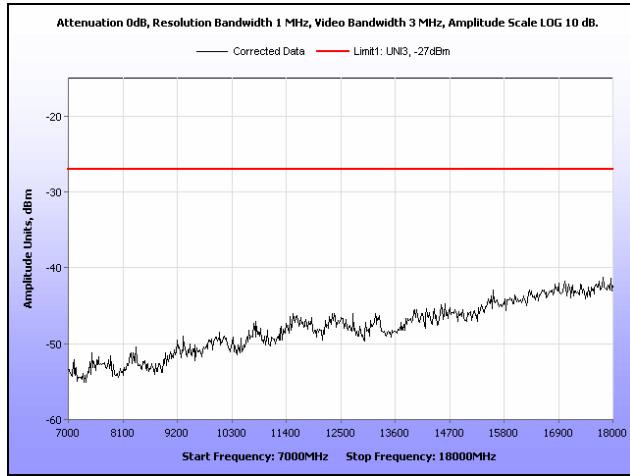


**Plot 12. Radiated Spurious Emissions, 5320 MHz, 802.11a, 7 GHz – 18 GHz**

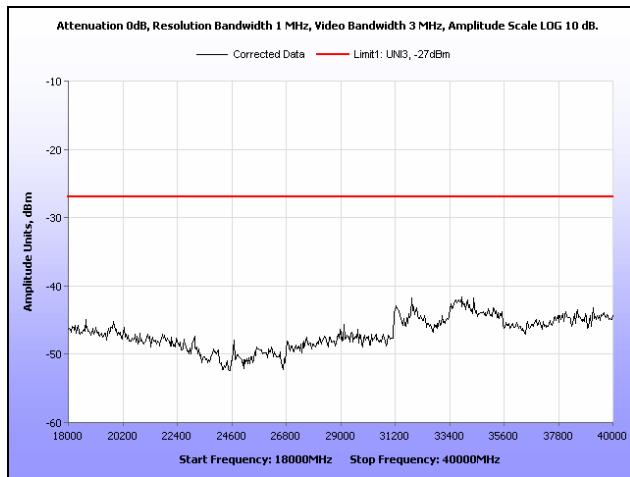


**Plot 13. Radiated Spurious Emissions, 5320 MHz, 802.11a, 18 GHz – 40 GHz**

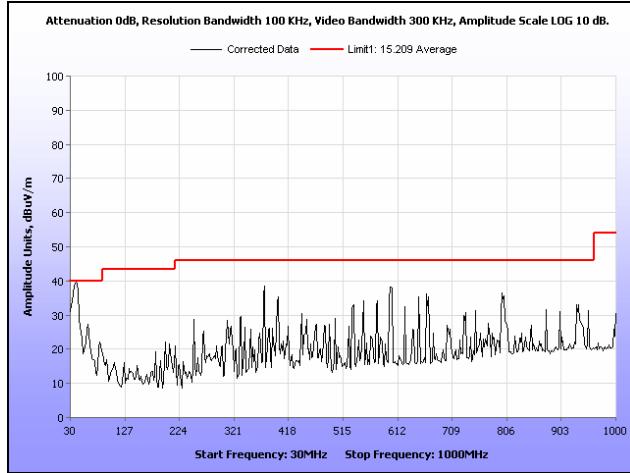


**Plot 14. Radiated Spurious Emissions, 5500 MHz, 802.11a, 30 MHz – 1 GHz**

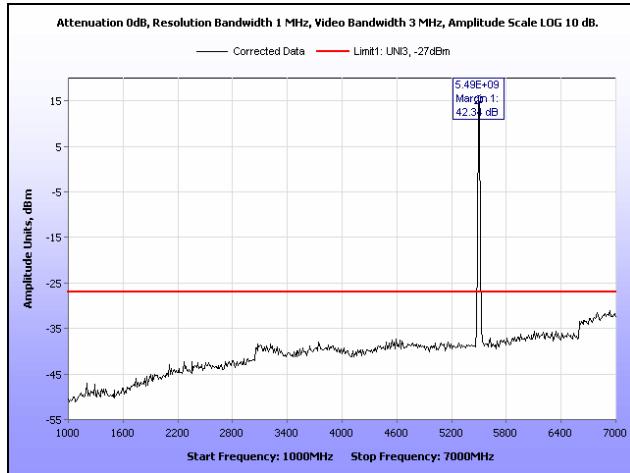


**Plot 15. Radiated Spurious Emissions, 5500 MHz, 802.11a, 1 GHz – 7 GHz**

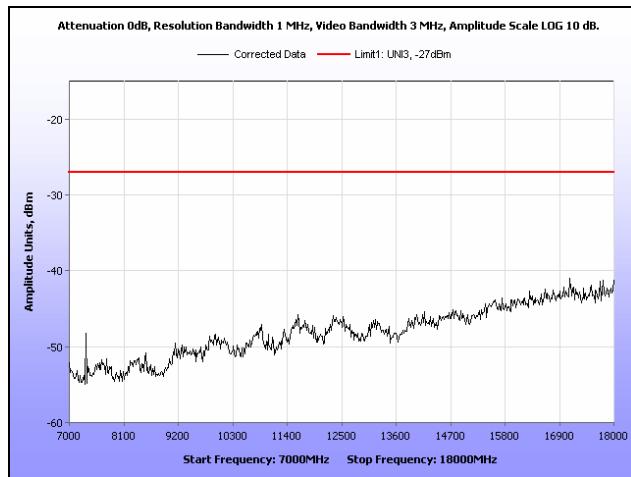


**Plot 16. Radiated Spurious Emissions, 5500 MHz, 802.11a, 7 GHz – 18 GHz**

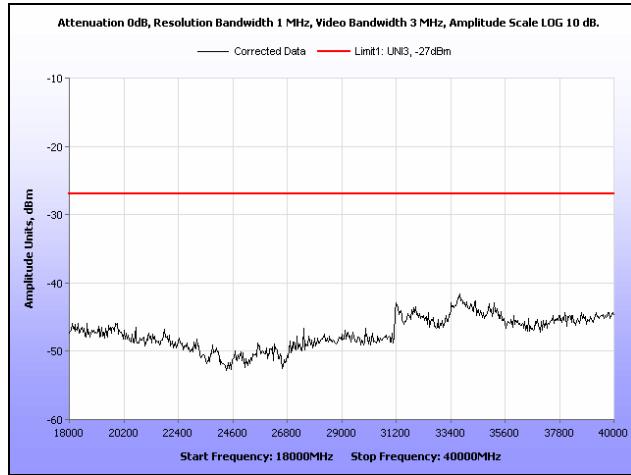


**Plot 17. Radiated Spurious Emissions, 5500 MHz, 802.11a, 18 GHz – 40 GHz**

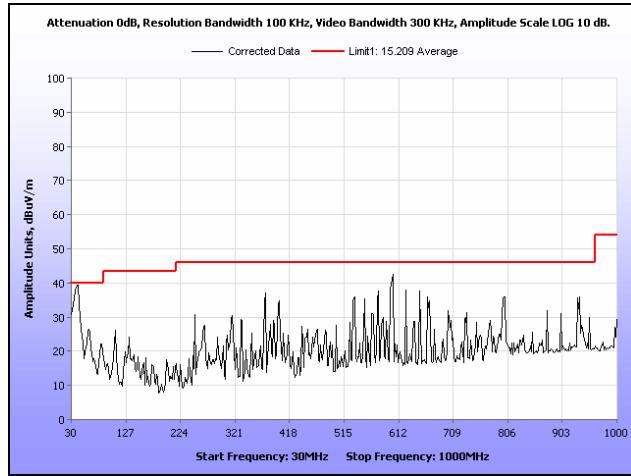


**Plot 18. Radiated Spurious Emissions, 5580 MHz, 802.11a, 30 MHz – 1 GHz**

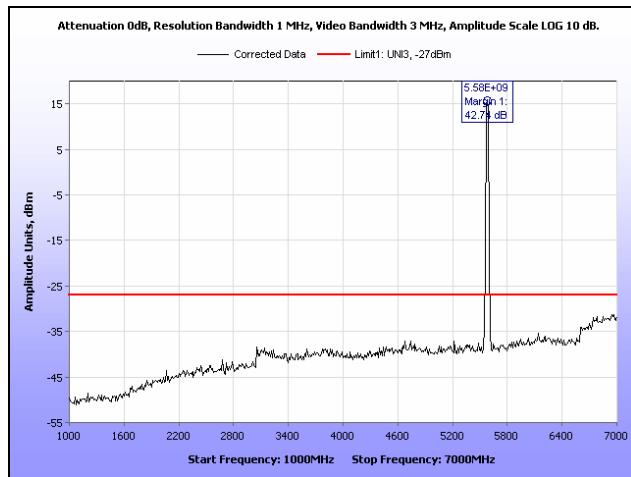


**Plot 19. Radiated Spurious Emissions, 5580 MHz, 802.11a, 1 GHz – 7 GHz**

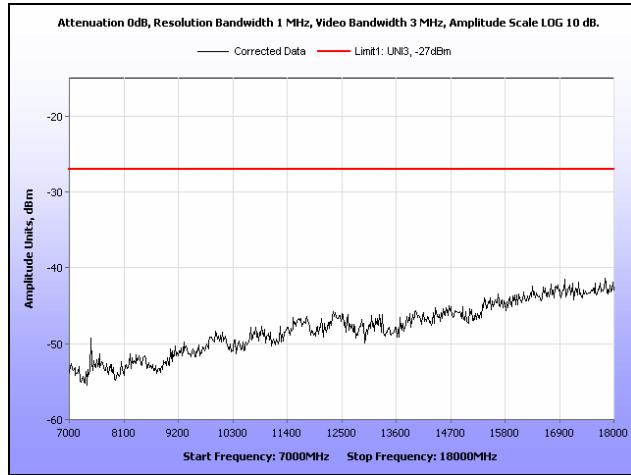


**Plot 20. Radiated Spurious Emissions, 5580 MHz, 802.11a, 7 GHz – 18 GHz**

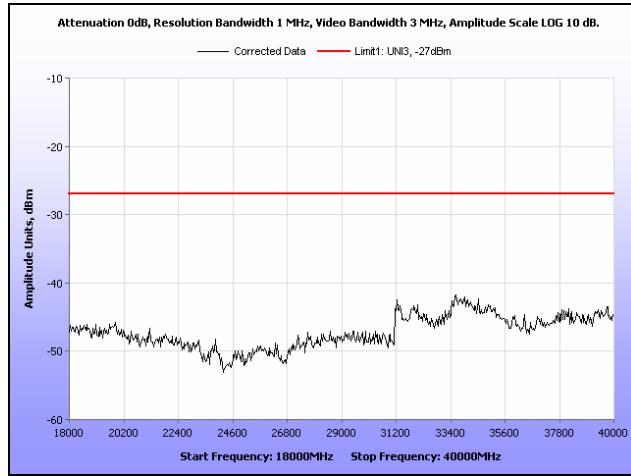


**Plot 21. Radiated Spurious Emissions, 5580 MHz, 802.11a, 18 GHz – 40 GHz**

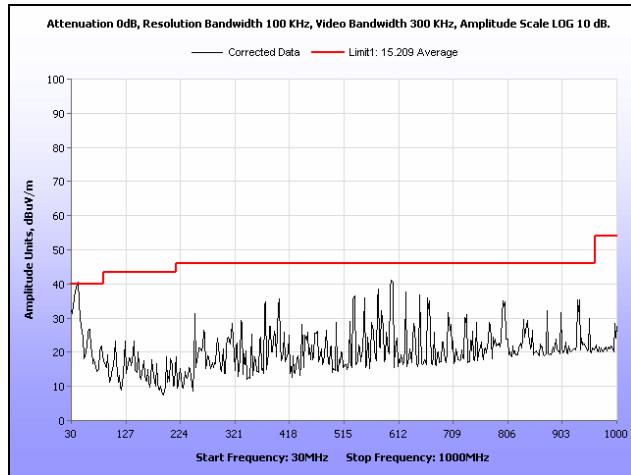


Plot 22. Radiated Spurious Emissions, 5700 MHz, 802.11a, 30 MHz – 1 GHz

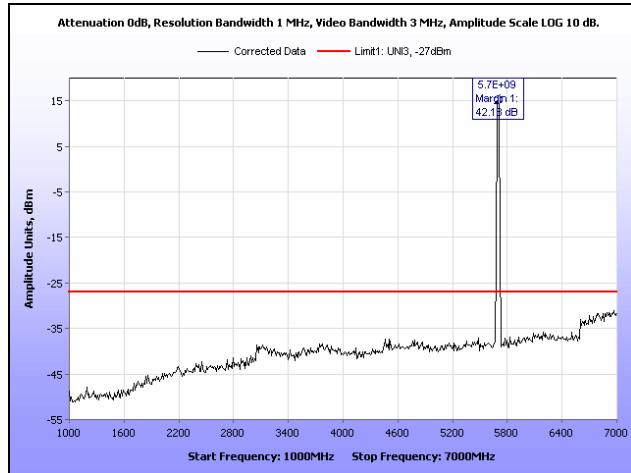


Plot 23. Radiated Spurious Emissions, 5700 MHz, 802.11a, 1 GHz – 7 GHz

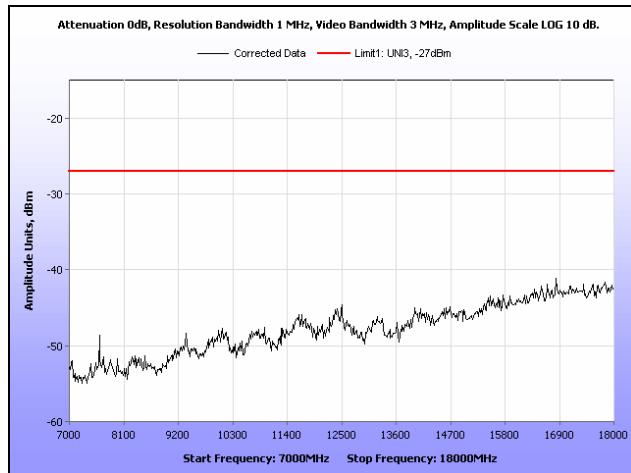


Plot 24. Radiated Spurious Emissions, 5700 MHz, 802.11a, 7 GHz – 18 GHz

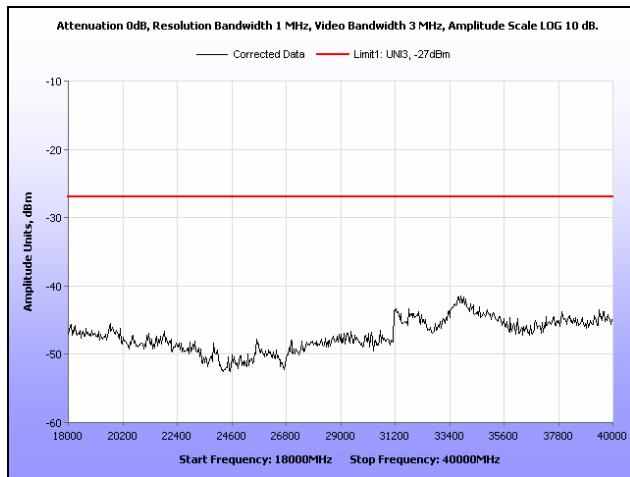


**Plot 25. Radiated Spurious Emissions, 5700 MHz, 802.11a, 18 GHz – 40 GHz**

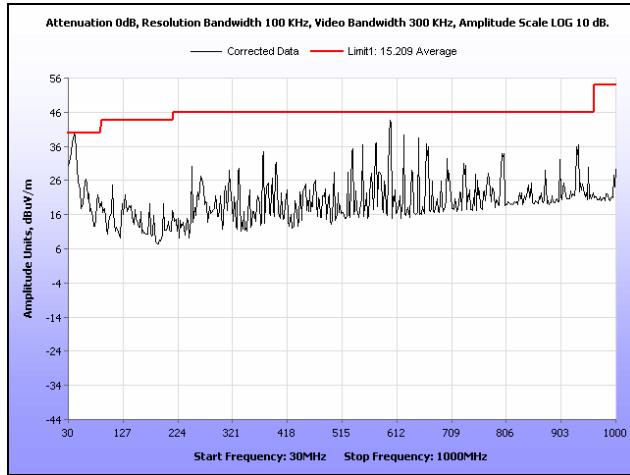


**Plot 26. Radiated Spurious Emissions, 5745 MHz, 802.11a, 30 MHz – 1 GHz**

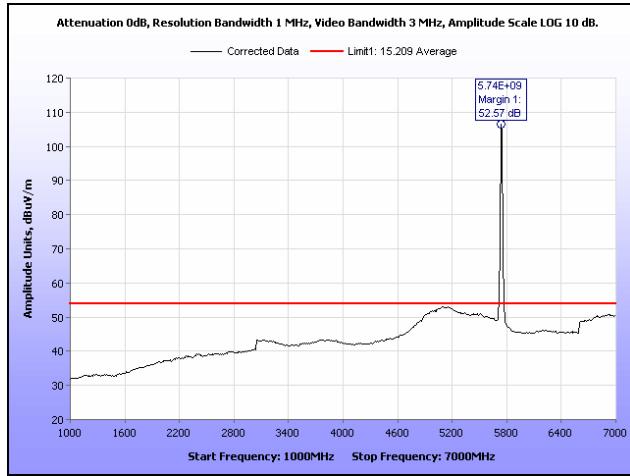


**Plot 27. Radiated Spurious Emissions, 5745 MHz, 802.11a, 1 GHz – 7 GHz, Average**

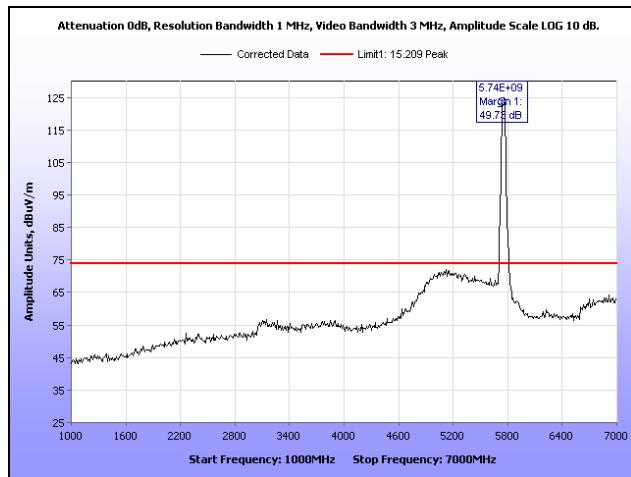


**Plot 28. Radiated Spurious Emissions, 5745 MHz, 802.11a, 1 GHz – 7 GHz, Peak**

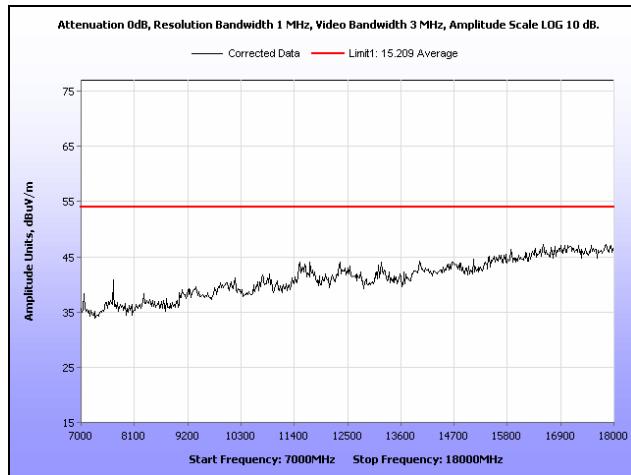


**Plot 29. Radiated Spurious Emissions, 5745 MHz, 802.11a, 7 GHz – 18 GHz, Peak under Average**

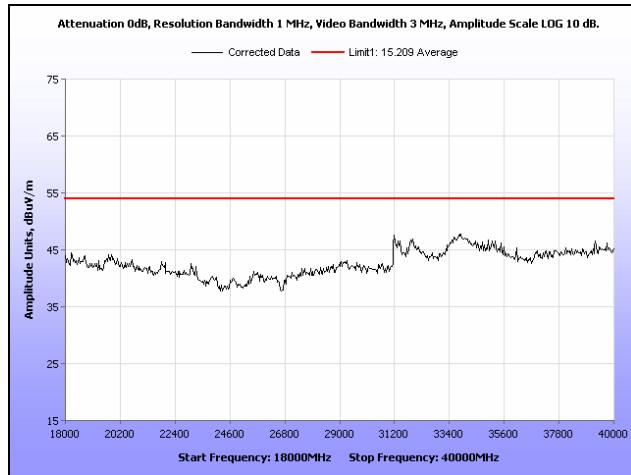


**Plot 30. Radiated Spurious Emissions, 5745 MHz, 802.11a, 18 GHz – 40 GHz, Peak under Average**

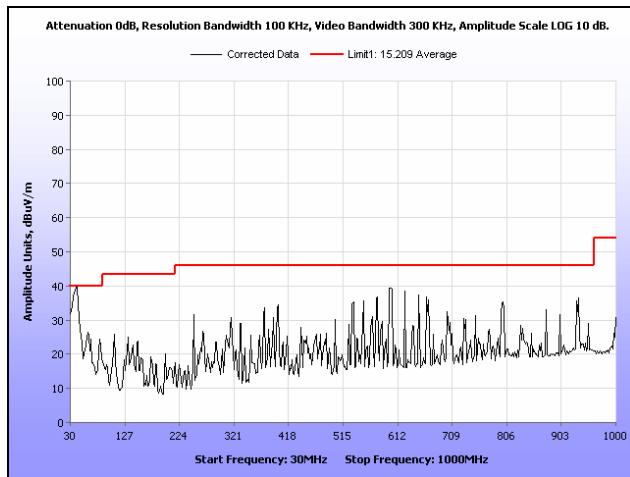


**Plot 31. Radiated Spurious Emissions, 5785 MHz, 802.11a, 30 MHz – 1 GHz**

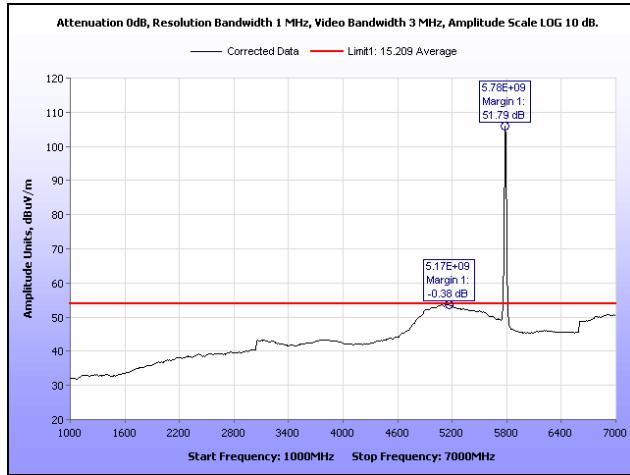


**Plot 32. Radiated Spurious Emissions, 5785 MHz, 802.11a, 1 GHz – 7 GHz, Average**

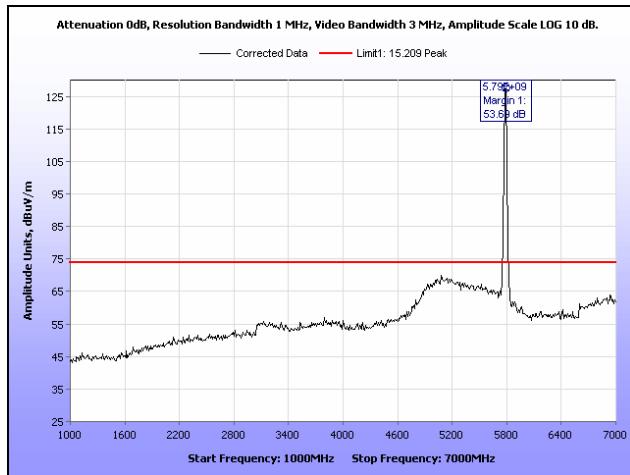


**Plot 33. Radiated Spurious Emissions, 5785 MHz, 802.11a, 1 GHz – 7 GHz, Peak**

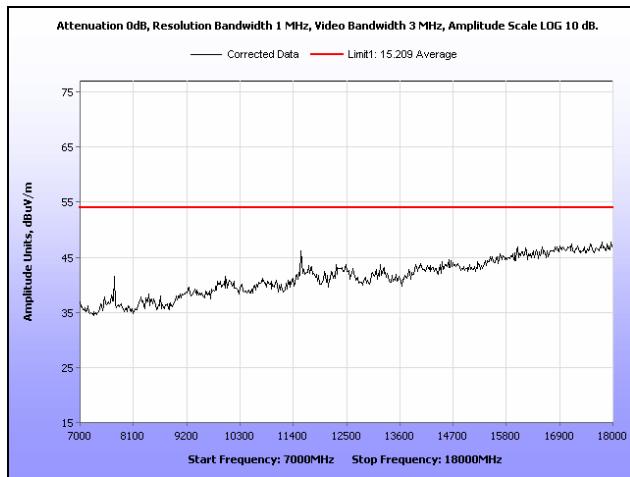


**Plot 34. Radiated Spurious Emissions, 5785 MHz, 802.11a, 7 GHz – 18 GHz, Peak under Average**

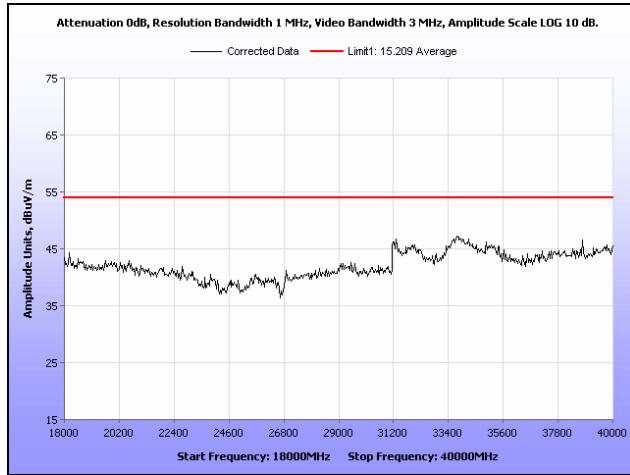


**Plot 35. Radiated Spurious Emissions, 5785 MHz, 802.11a, 18 GHz – 40 GHz, Peak under Average**

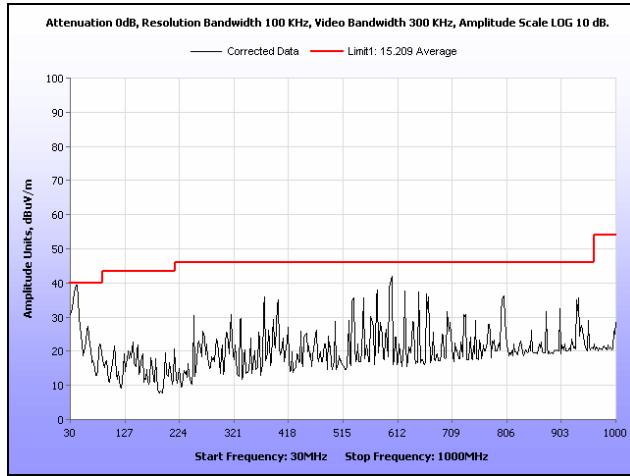


**Plot 36. Radiated Spurious Emissions, 5805 MHz, 802.11a, 30 MHz – 1 GHz**

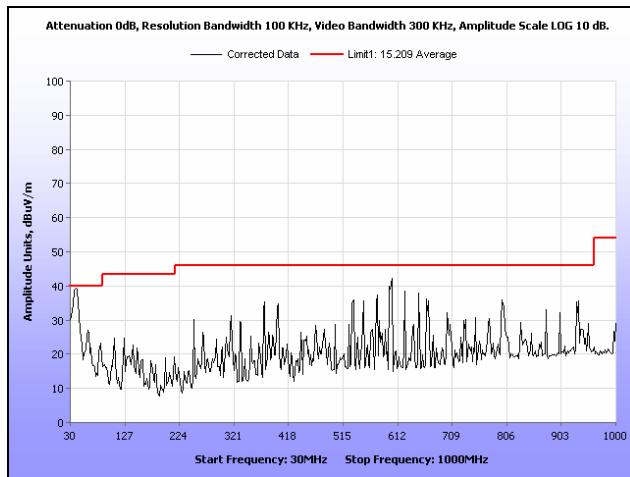


**Plot 37. Radiated Spurious Emissions, 5280 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz**

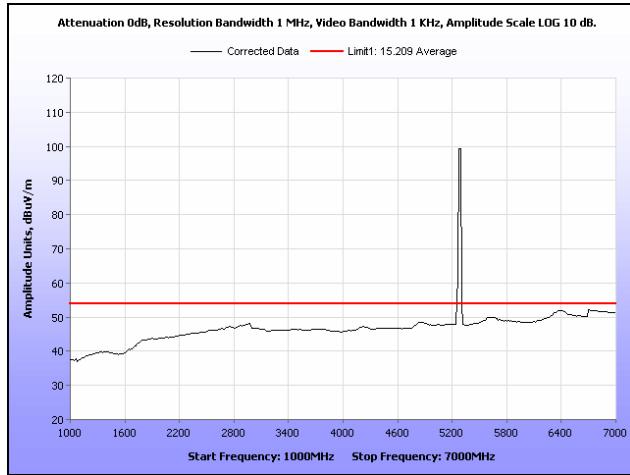


**Plot 38. Radiated Spurious Emissions, 5280 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz, Average**

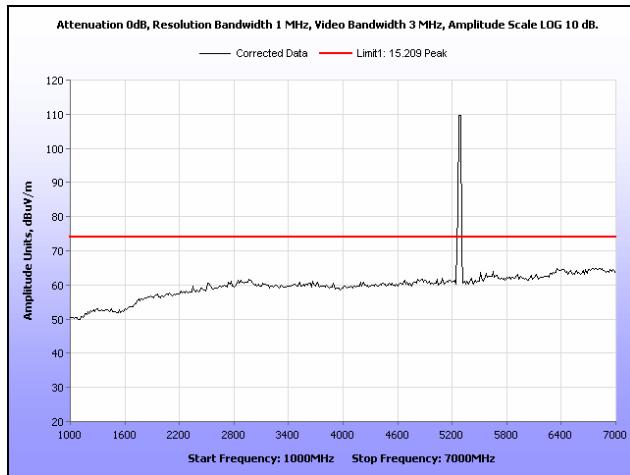


**Plot 39. Radiated Spurious Emissions, 5280 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz, Peak**

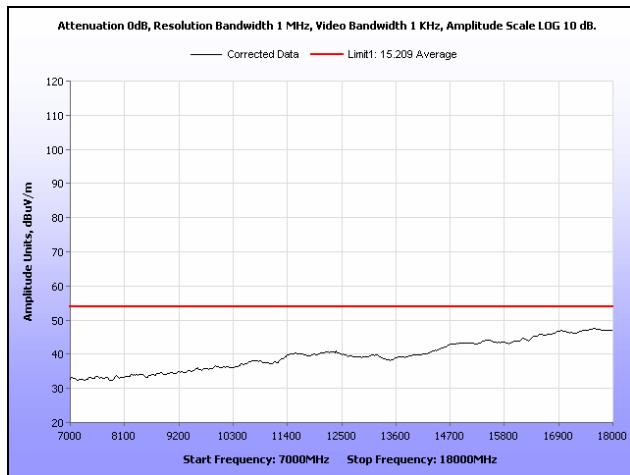


Plot 40. Radiated Spurious Emissions, 5280 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz, Average

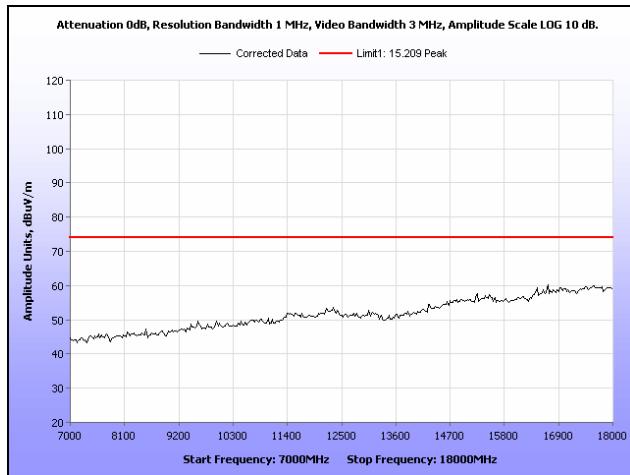


Plot 41. Radiated Spurious Emissions, 5280 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz, Peak

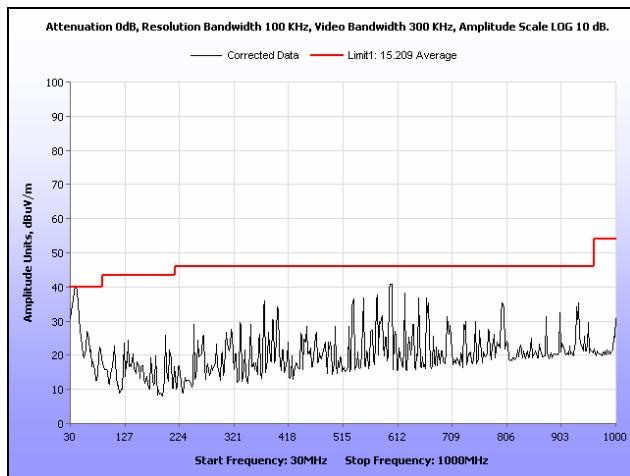


Plot 42. Radiated Spurious Emissions, 5300 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz

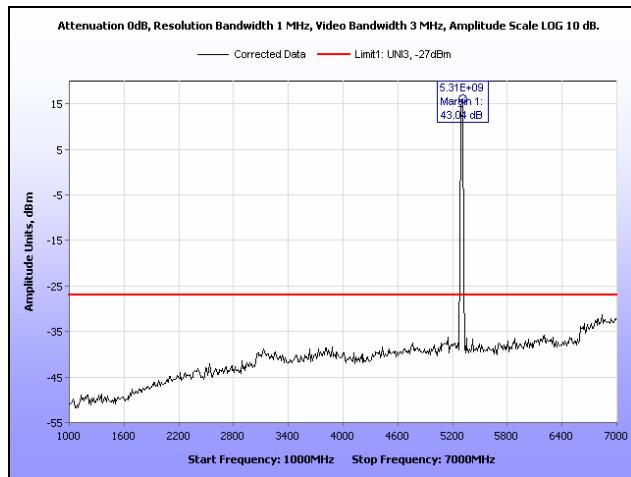


**Plot 43. Radiated Spurious Emissions, 5300 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz**

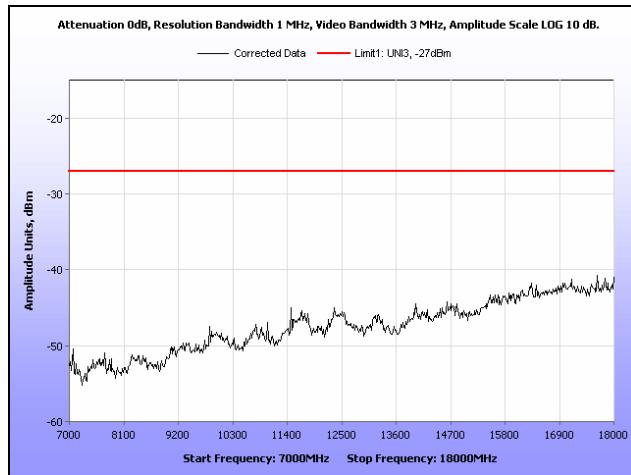


**Plot 44. Radiated Spurious Emissions, 5300 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz**

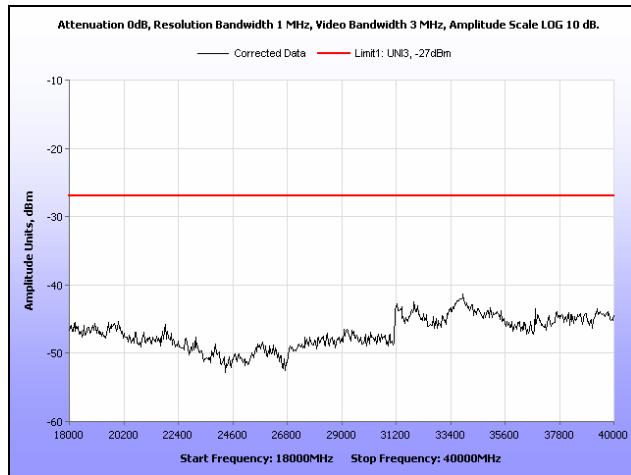


**Plot 45. Radiated Spurious Emissions, 5300 MHz, 802.11n 20 MHz, 18 GHz – 40 GHz**

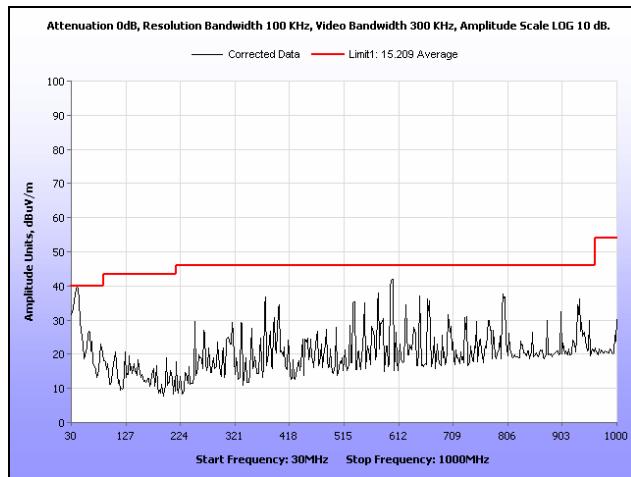


**Plot 46. Radiated Spurious Emissions, 5320 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz**

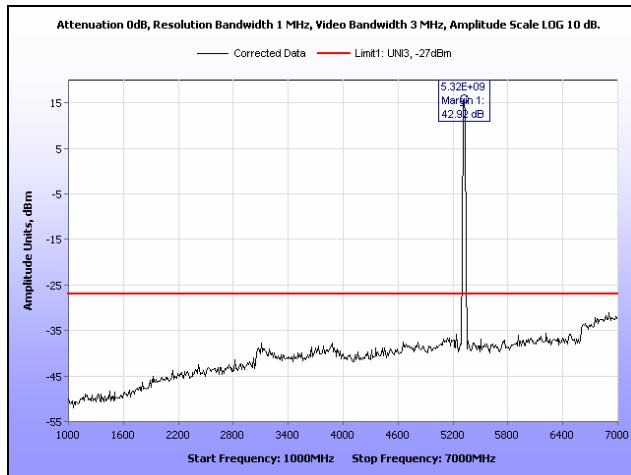


**Plot 47. Radiated Spurious Emissions, 5320 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz**

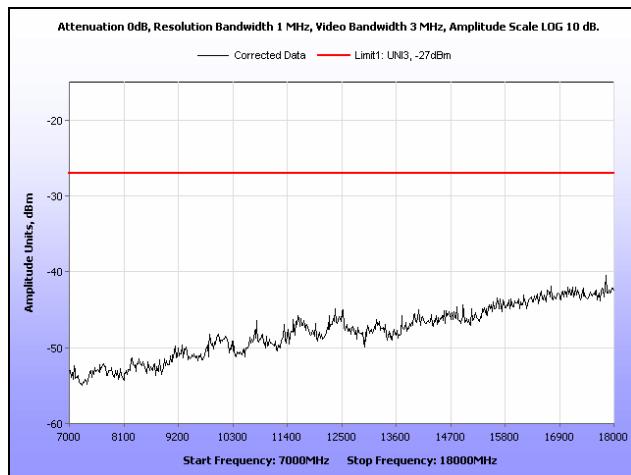


**Plot 48. Radiated Spurious Emissions, 5320 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz**

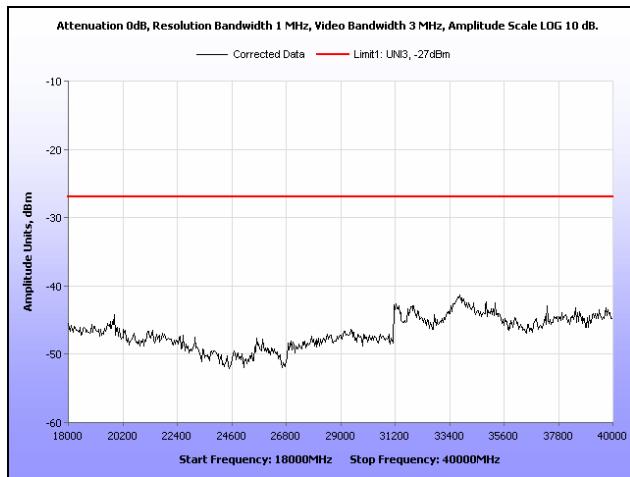


**Plot 49. Radiated Spurious Emissions, 5320 MHz, 802.11n 20 MHz, 18 GHz – 40 GHz**

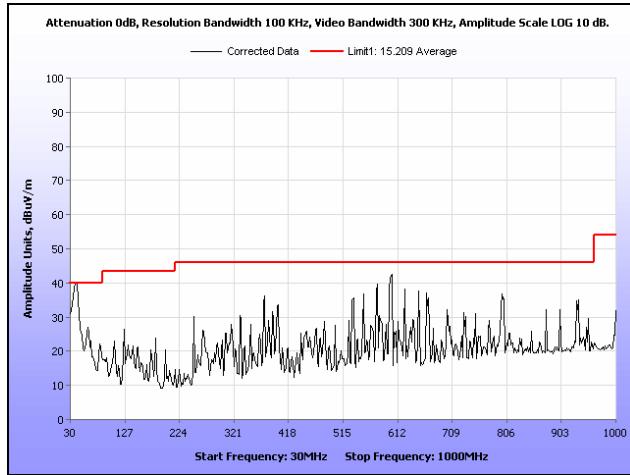


**Plot 50. Radiated Spurious Emissions, 5500 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz**

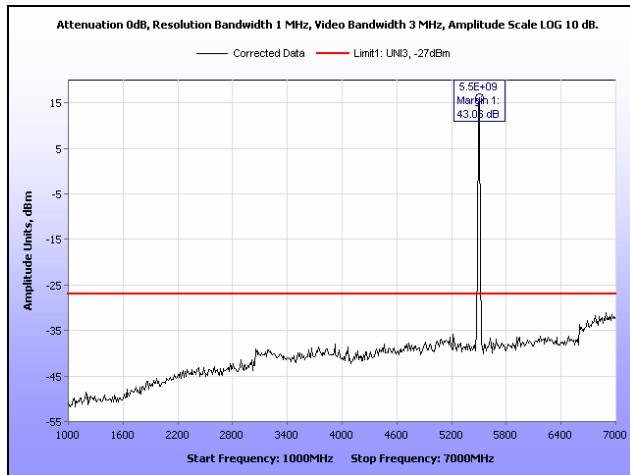


**Plot 51. Radiated Spurious Emissions, 5500 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz**

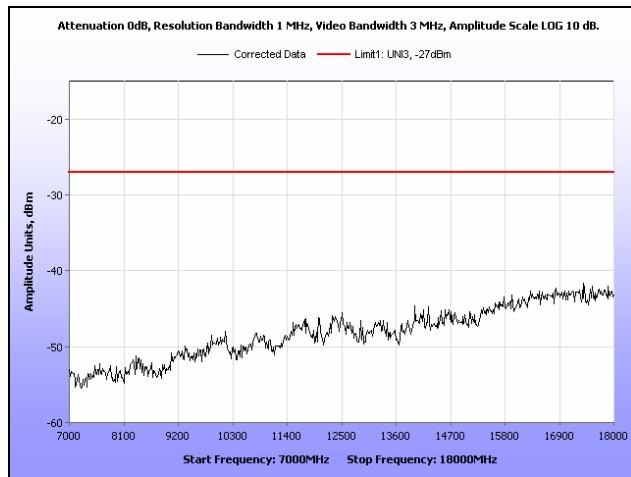


**Plot 52. Radiated Spurious Emissions, 5500 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz**

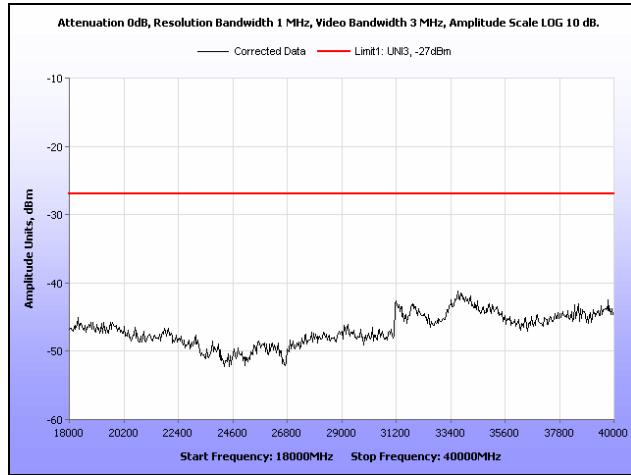


**Plot 53. Radiated Spurious Emissions, 5500 MHz, 802.11n 20 MHz, 18 GHz – 40 GHz**

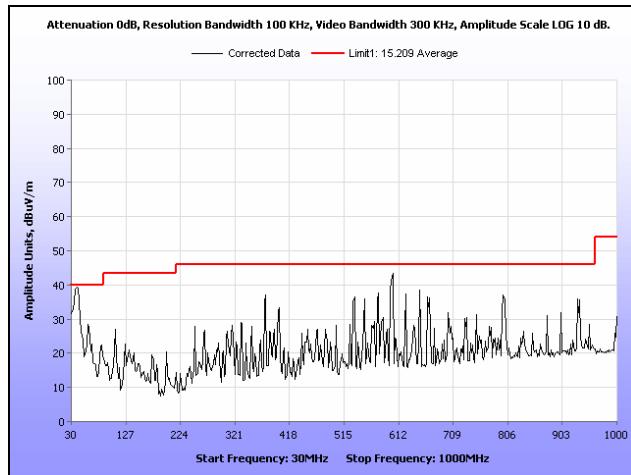


**Plot 54. Radiated Spurious Emissions, 5580 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz**

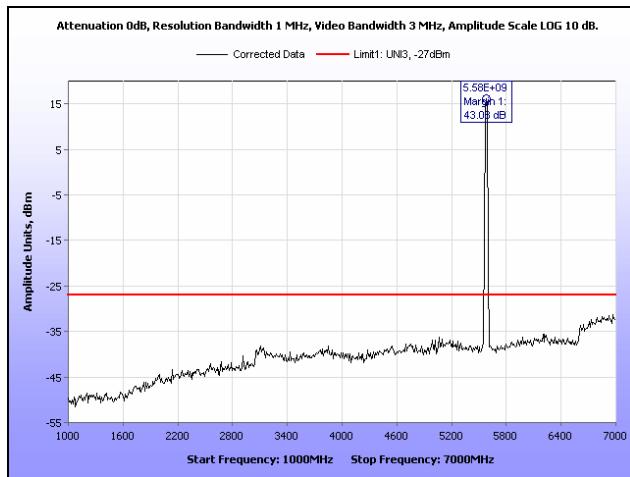


**Plot 55. Radiated Spurious Emissions, 5580 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz**

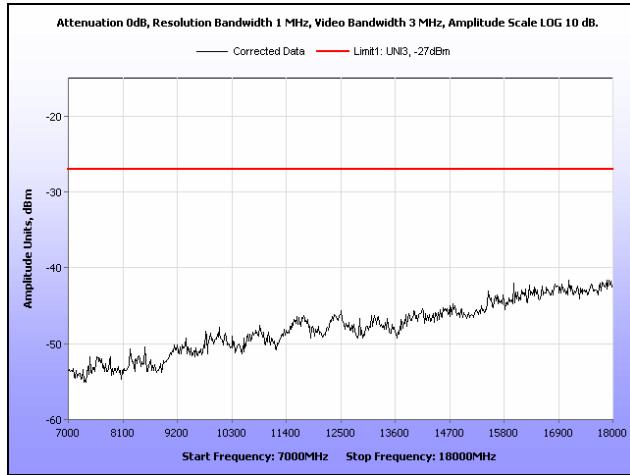


**Plot 56. Radiated Spurious Emissions, 5580 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz**

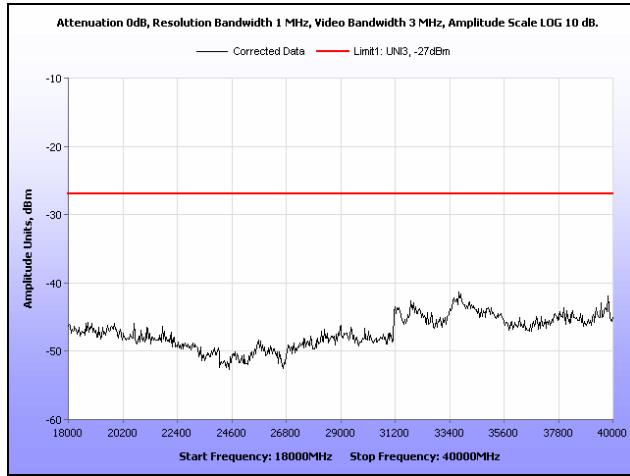


**Plot 57. Radiated Spurious Emissions, 5580 MHz, 802.11n 20 MHz, 18 GHz – 40 GHz**

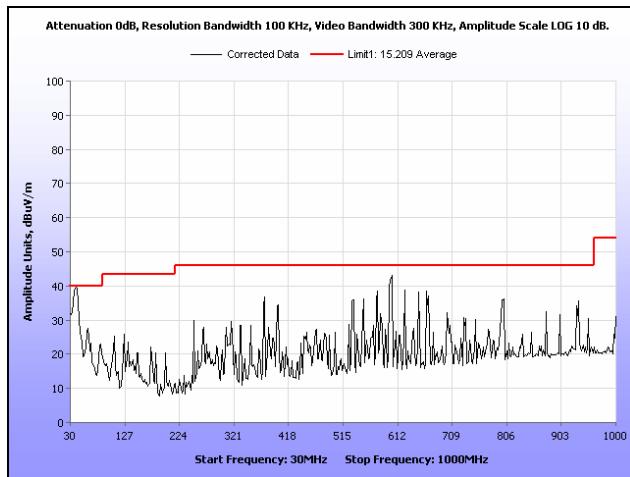


**Plot 58. Radiated Spurious Emissions, 5700 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz**

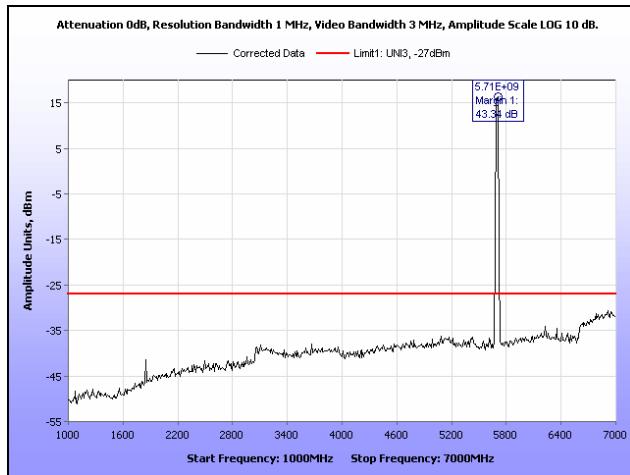


**Plot 59. Radiated Spurious Emissions, 5700 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz**

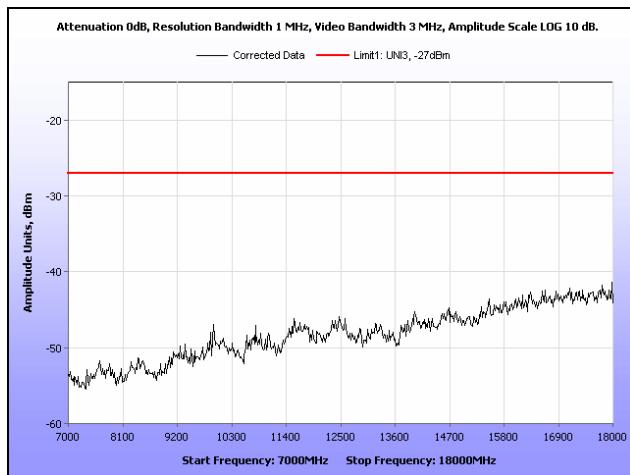


**Plot 60. Radiated Spurious Emissions, 5700 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz**

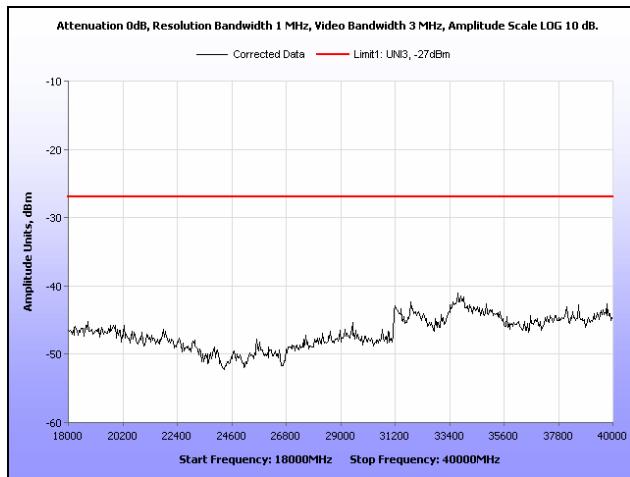


**Plot 61. Radiated Spurious Emissions, 5700 MHz, 802.11n 20 MHz, 18 GHz – 40 GHz**

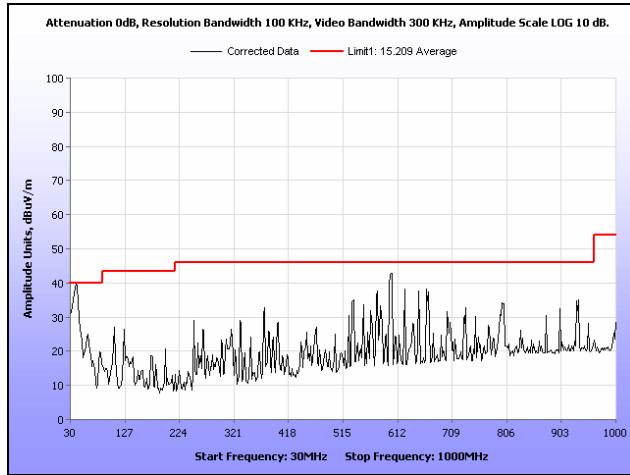


**Plot 62. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz**

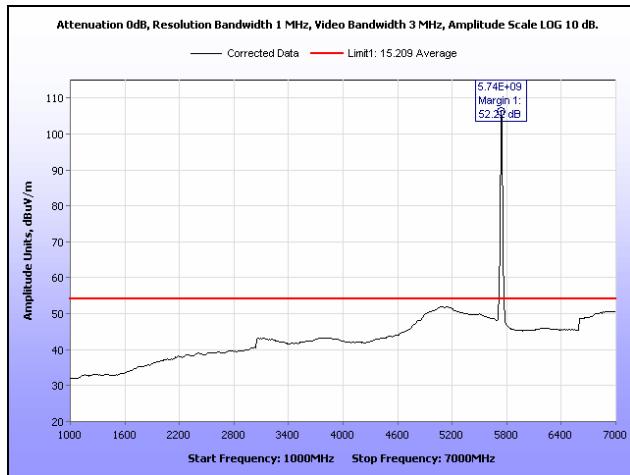


**Plot 63. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz, Average**

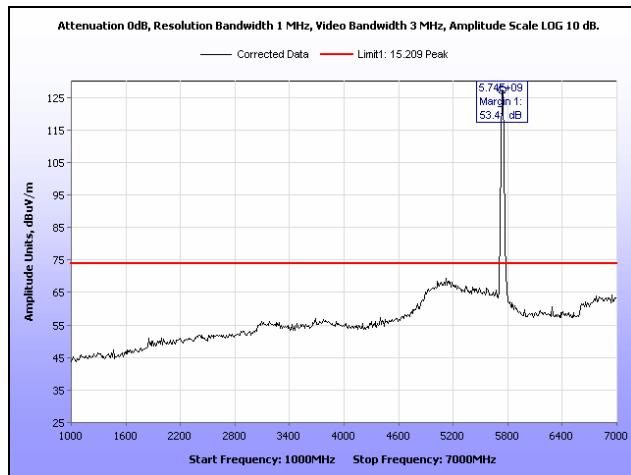


**Plot 64. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz, Peak**

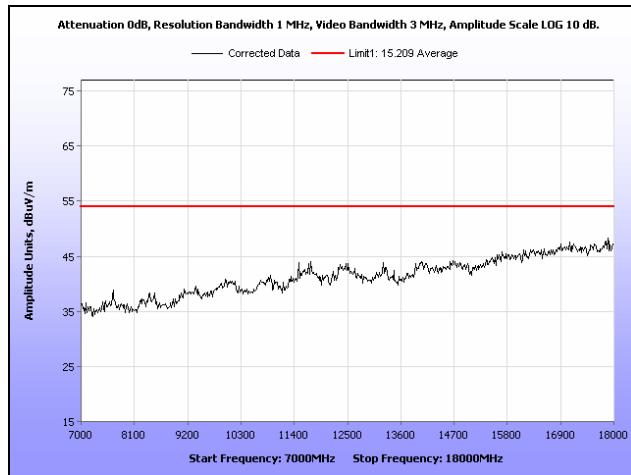


**Plot 65. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz, Peak under Average**

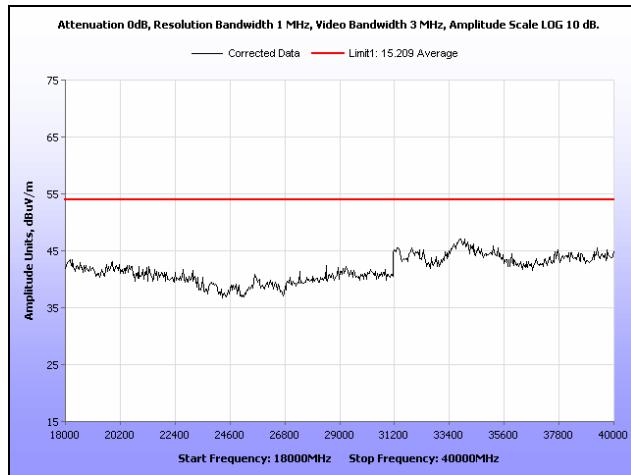


**Plot 66. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 18 GHz – 40 GHz, Peak under Average**

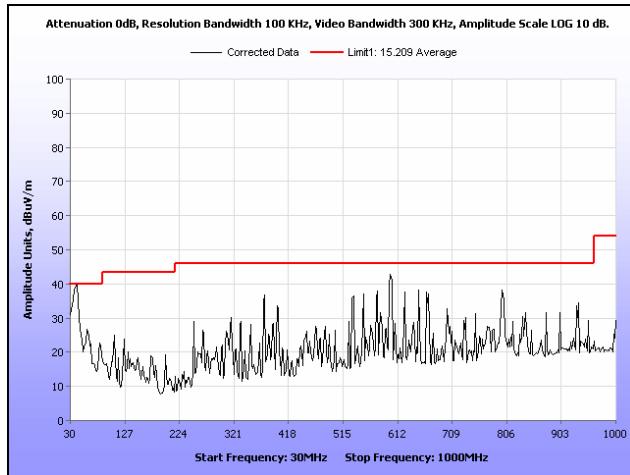


**Plot 67. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz**

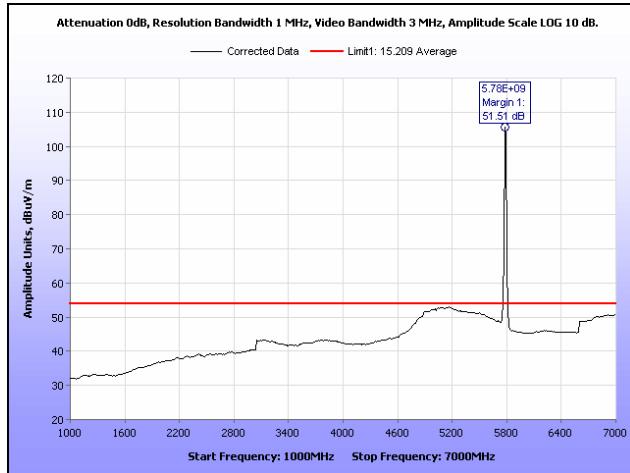


**Plot 68. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz, Average**

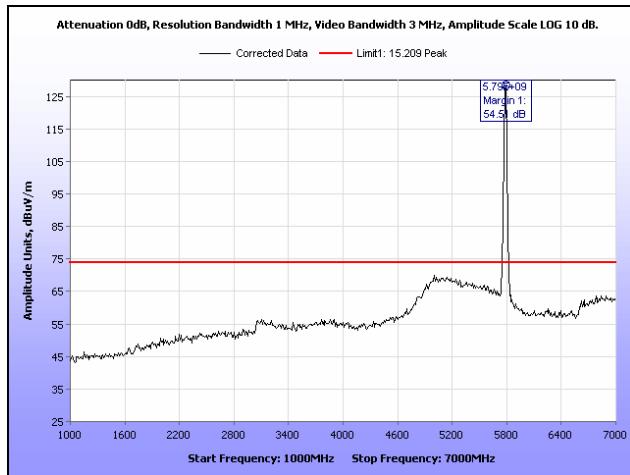


**Plot 69. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz, Peak**

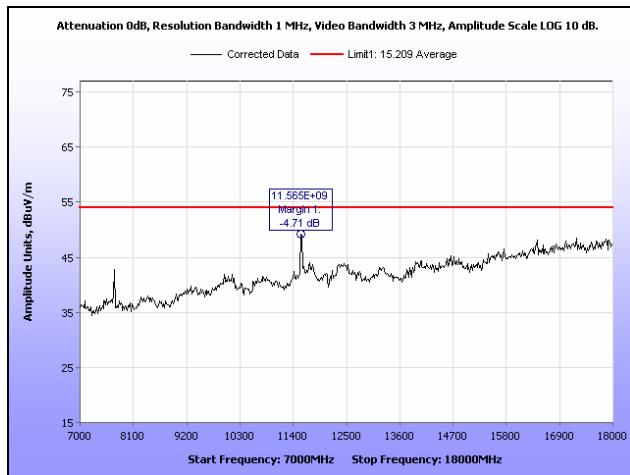


**Plot 70. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz, Peak under Average**

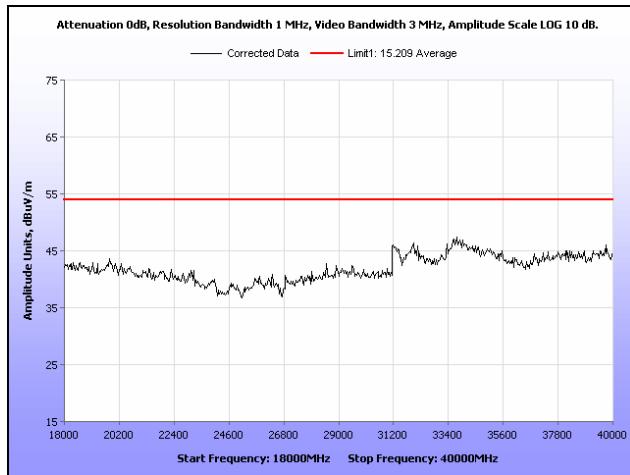


**Plot 71. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 18 GHz – 40 GHz, Peak under Average**

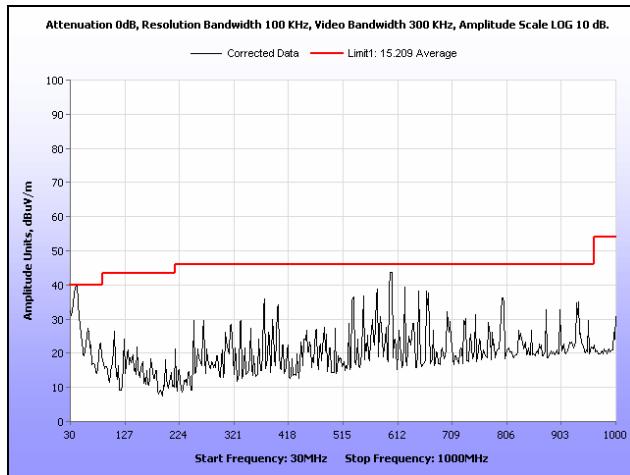


**Plot 72. Radiated Spurious Emissions, 5805 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz**

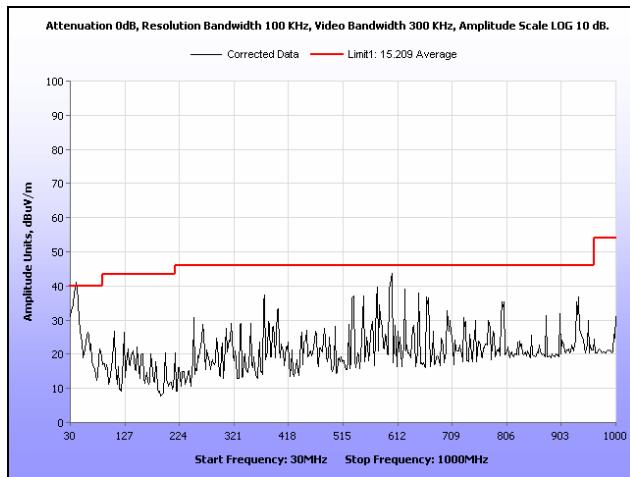


**Plot 73. Radiated Spurious Emissions, 5300 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz**

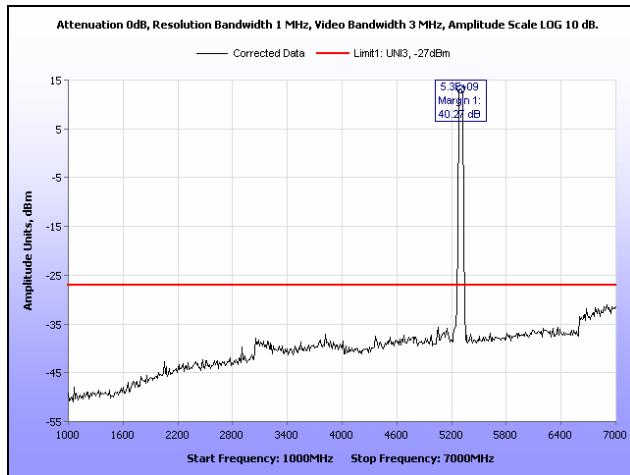


**Plot 74. Radiated Spurious Emissions, 5300 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz**

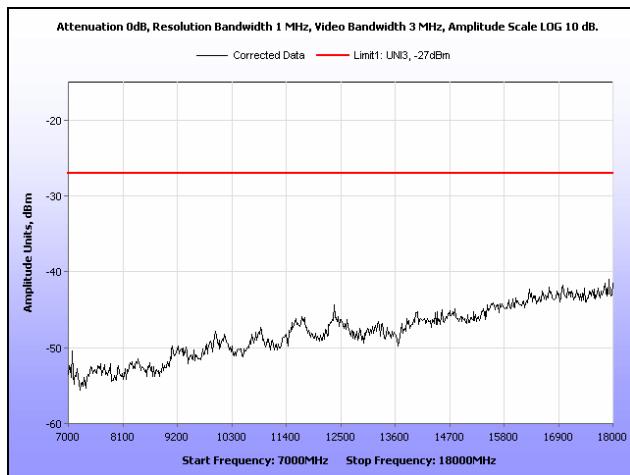


**Plot 75. Radiated Spurious Emissions, 5300 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz**

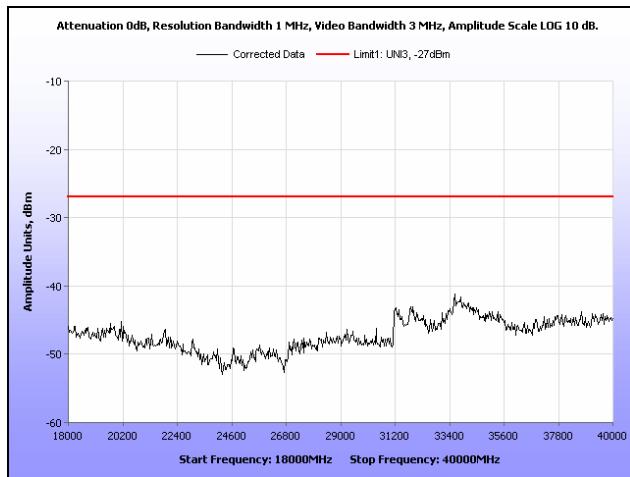


**Plot 76. Radiated Spurious Emissions, 5300 MHz, 802.11n 40 MHz, 18 GHz – 40 GHz**

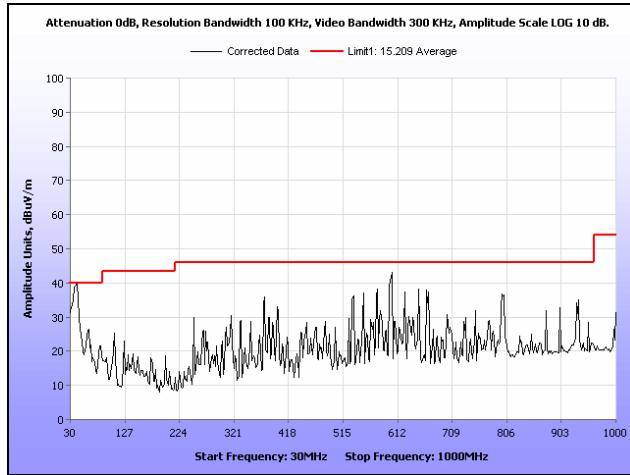


**Plot 77. Radiated Spurious Emissions, 5310 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz**

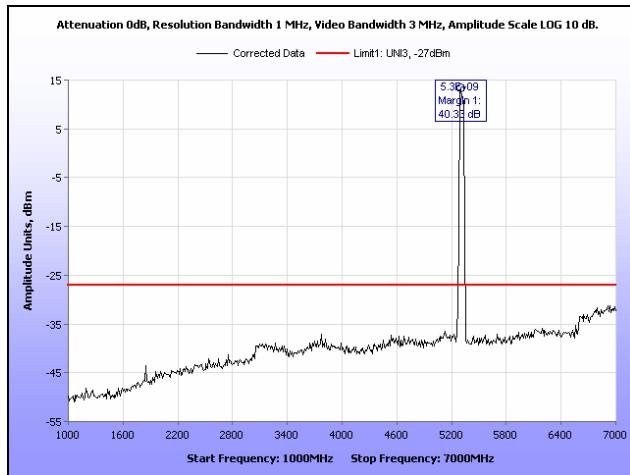


**Plot 78. Radiated Spurious Emissions, 5310 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz**

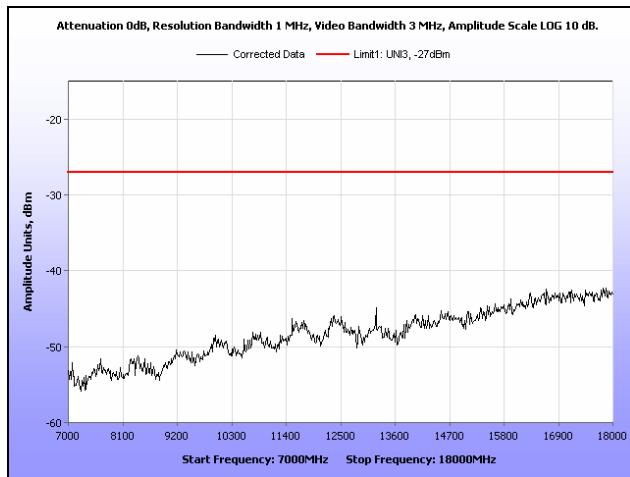


**Plot 79. Radiated Spurious Emissions, 5310 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz**

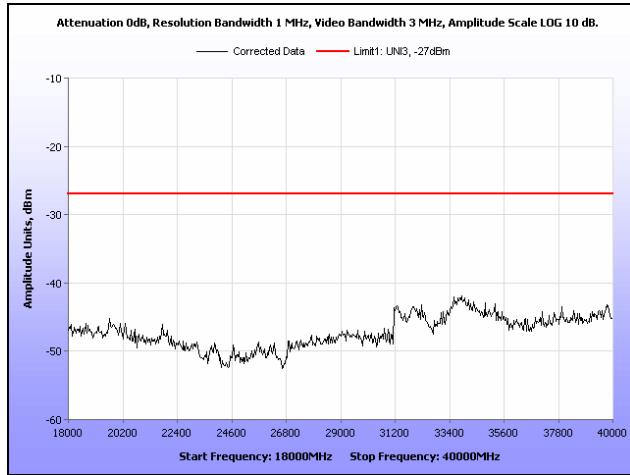


**Plot 80. Radiated Spurious Emissions, 5310 MHz, 802.11n 40 MHz, 18 GHz – 40 GHz**

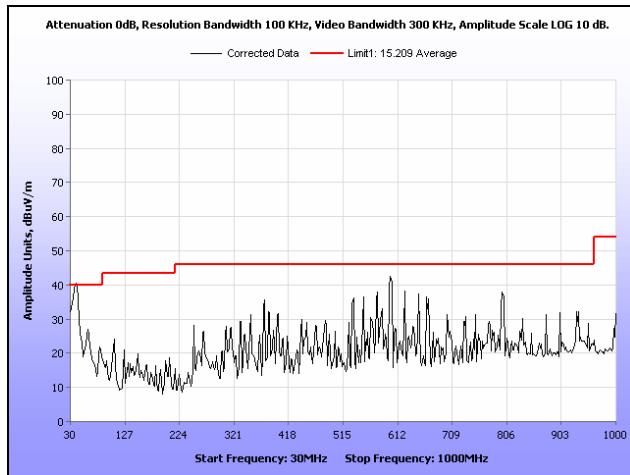


**Plot 81. Radiated Spurious Emissions, 5510 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz**

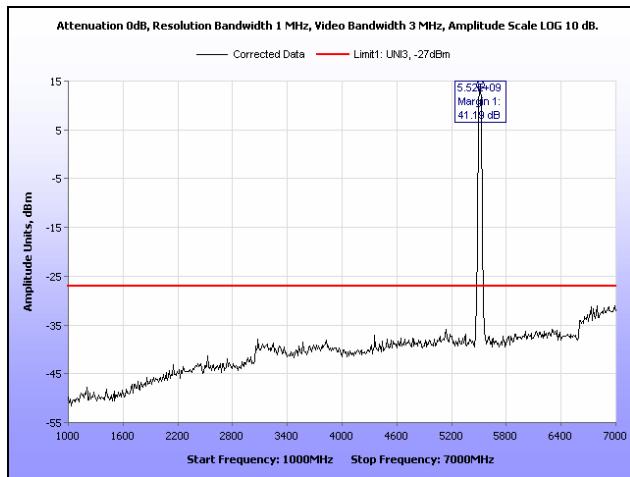


**Plot 82. Radiated Spurious Emissions, 5510 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz**

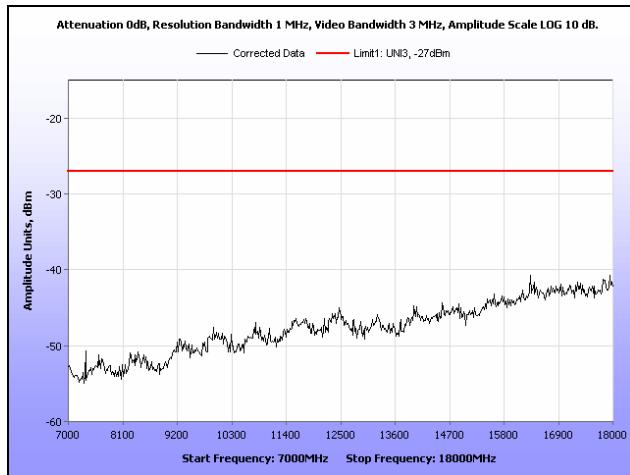


**Plot 83. Radiated Spurious Emissions, 5510 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz**

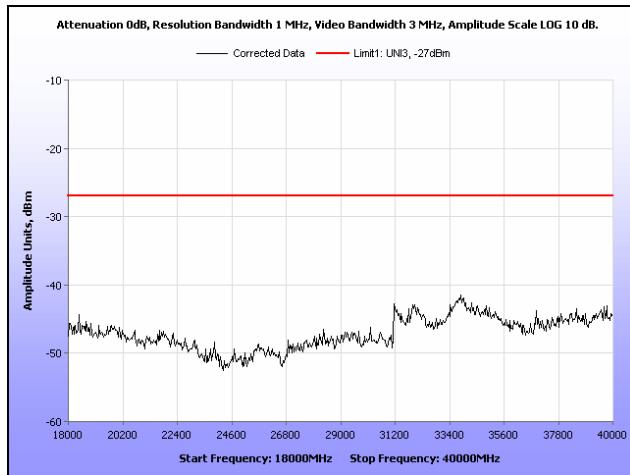


**Plot 84. Radiated Spurious Emissions, 5510 MHz, 802.11n 40 MHz, 18 GHz – 40 GHz**

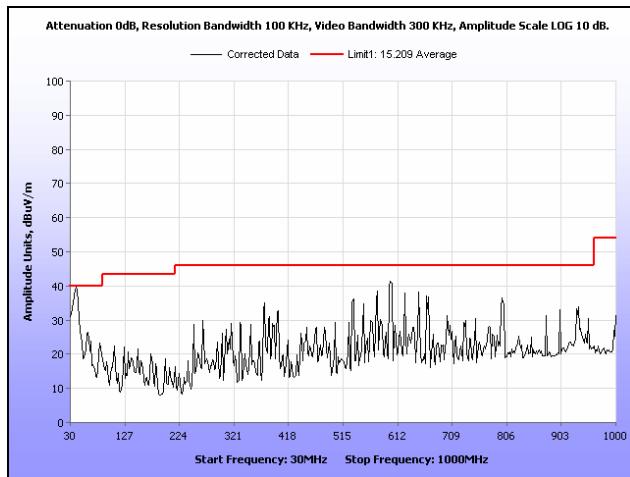


**Plot 85. Radiated Spurious Emissions, 5580 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz**

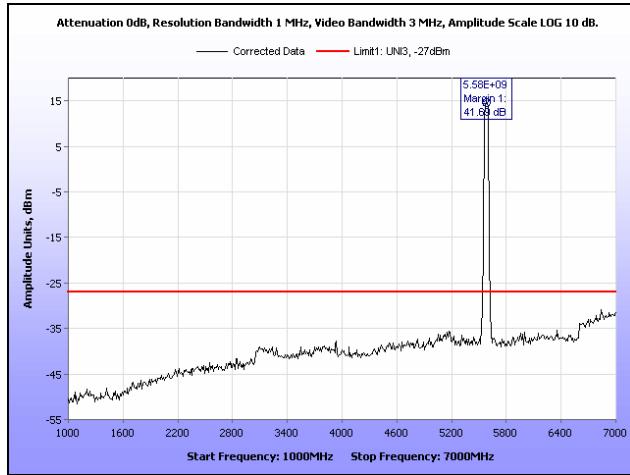


**Plot 86. Radiated Spurious Emissions, 5580 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz**

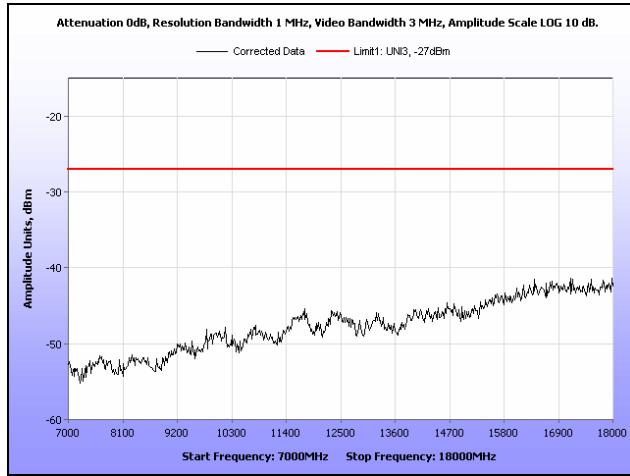


**Plot 87. Radiated Spurious Emissions, 5580 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz**

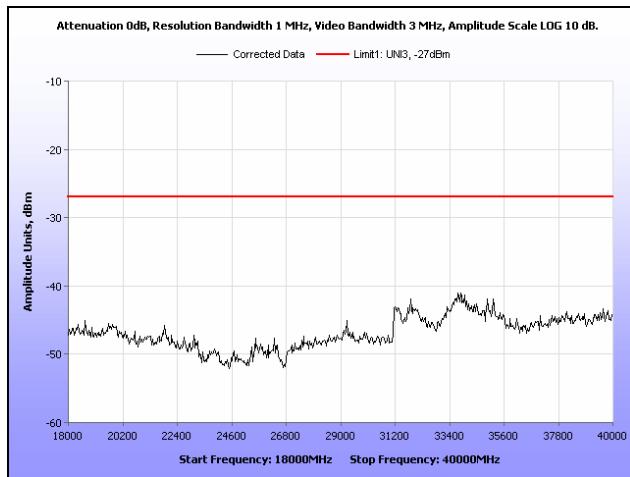


**Plot 88. Radiated Spurious Emissions, 5580 MHz, 802.11n 40 MHz, 18 GHz – 40 GHz**

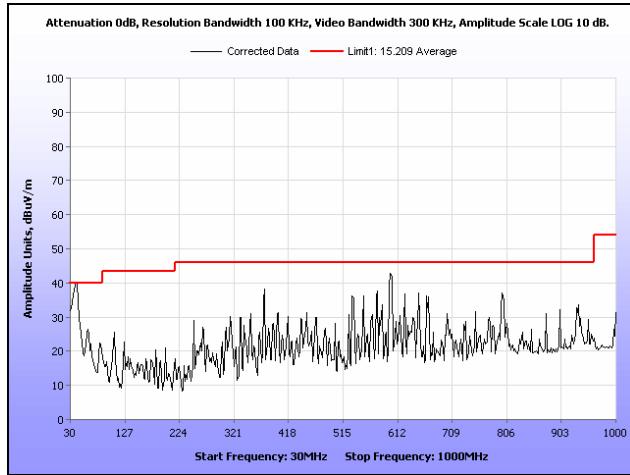


**Plot 89. Radiated Spurious Emissions, 5690 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz**

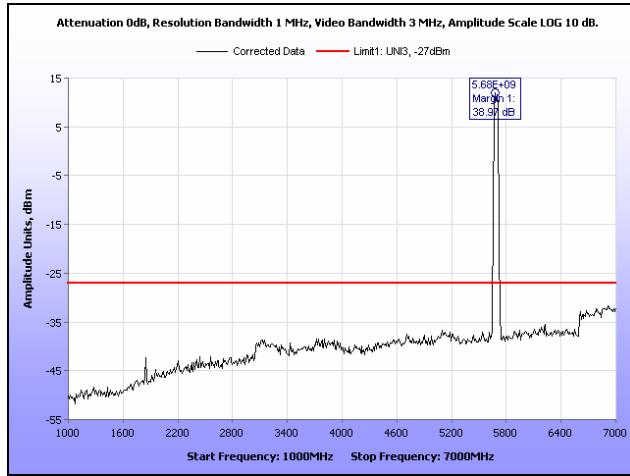


**Plot 90. Radiated Spurious Emissions, 5690 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz**

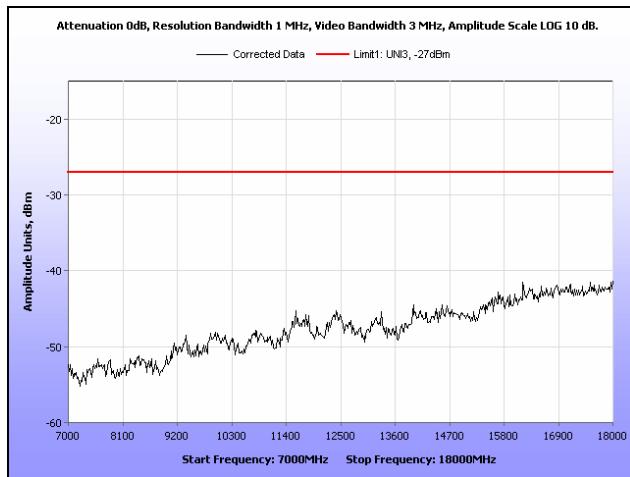


**Plot 91. Radiated Spurious Emissions, 5690 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz**

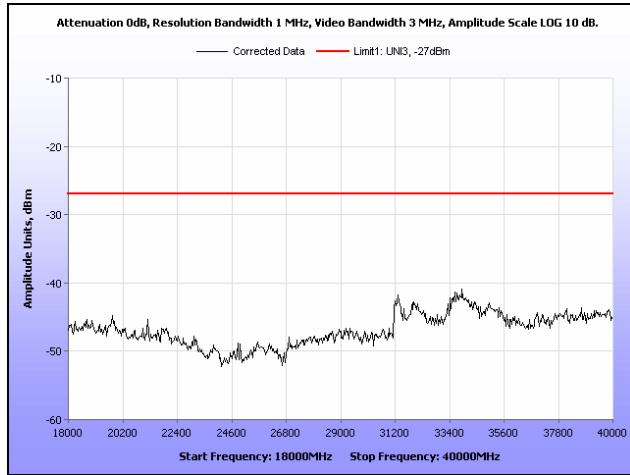


**Plot 92. Radiated Spurious Emissions, 5690 MHz, 802.11n 40 MHz, 18 GHz – 40 GHz**

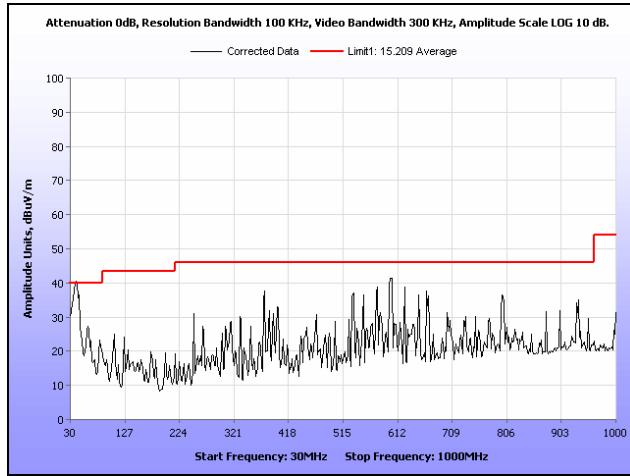


**Plot 93. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz**

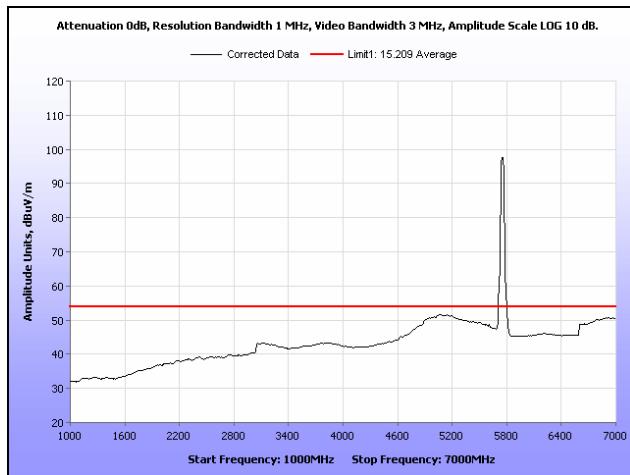

**Plot 94. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz, Average**

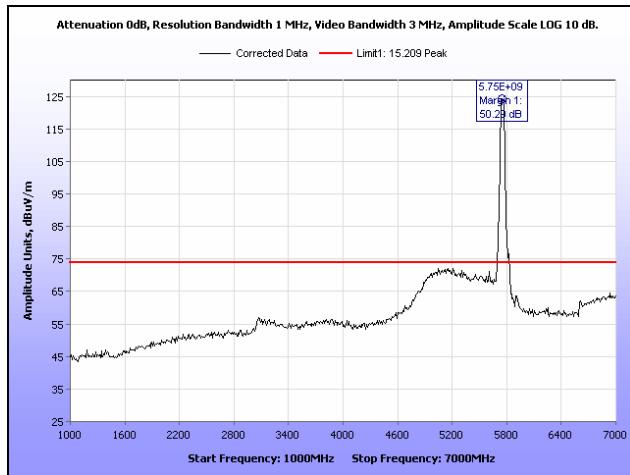


**Plot 95. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz, Peak**

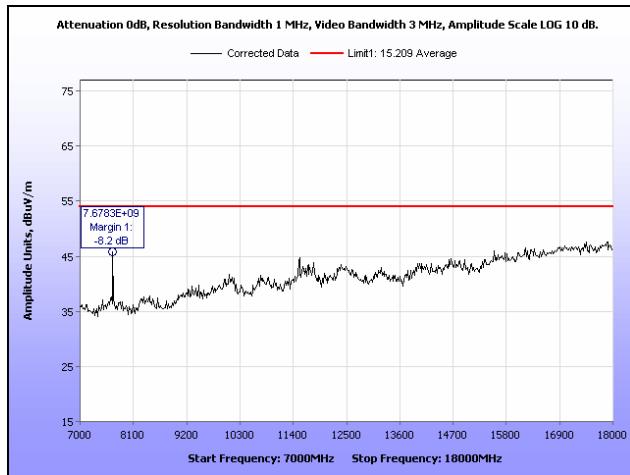


**Plot 96. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz, Peak under Average**




**Plot 97. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 18 GHz – 40 GHz, Peak under Average**

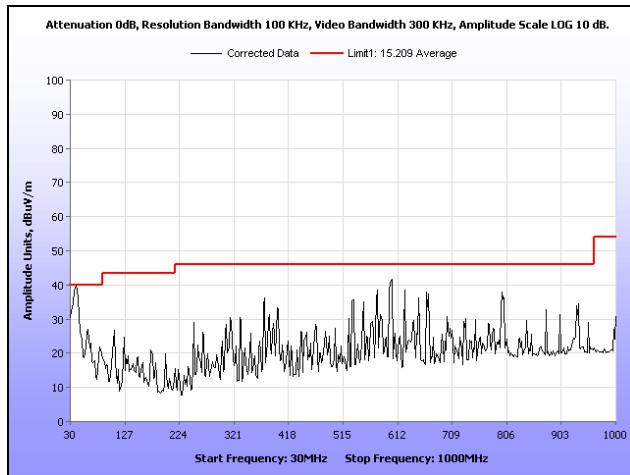


**Plot 98. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz**

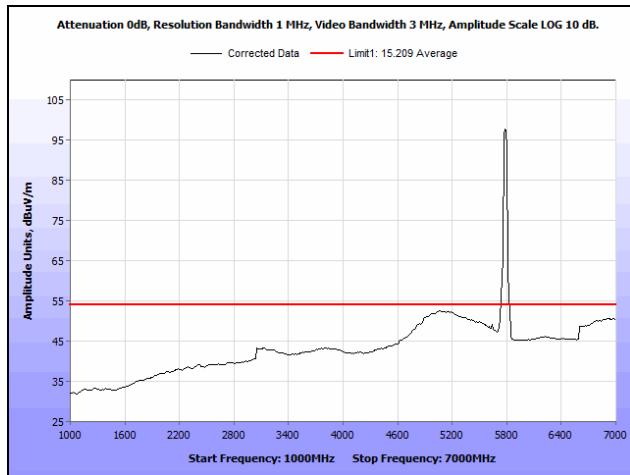


**Plot 99. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz, Average**

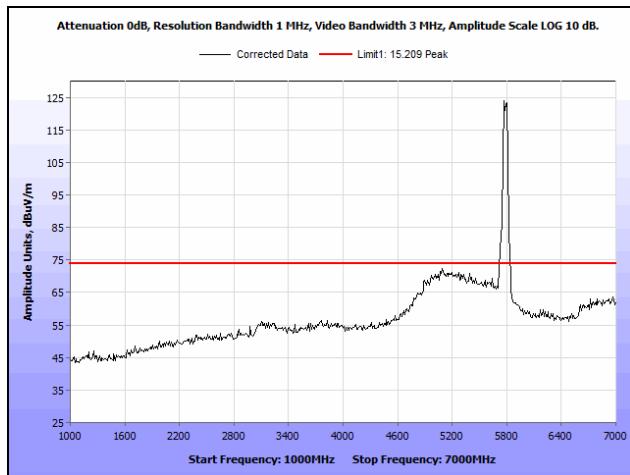

**Plot 100. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz, Peak**

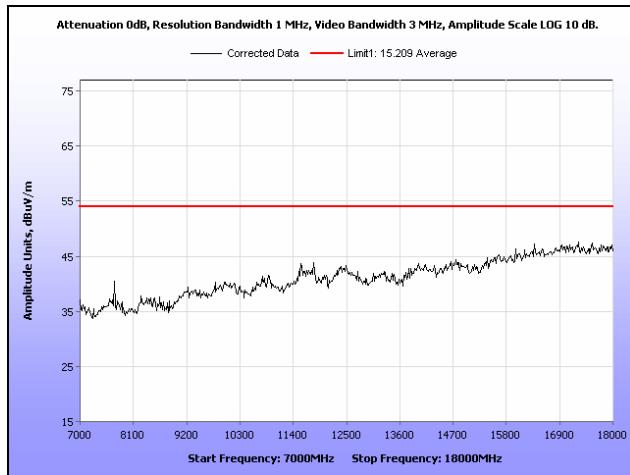


**Plot 101. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz, Peak under Average**

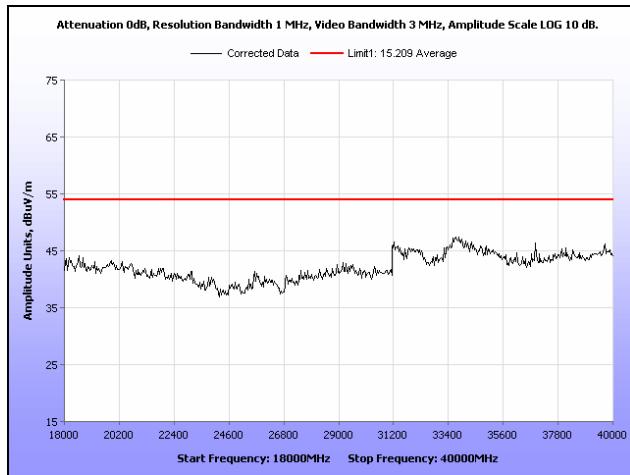


**Plot 102. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 18 GHz – 40 GHz, Peak under Average**


## EIRP

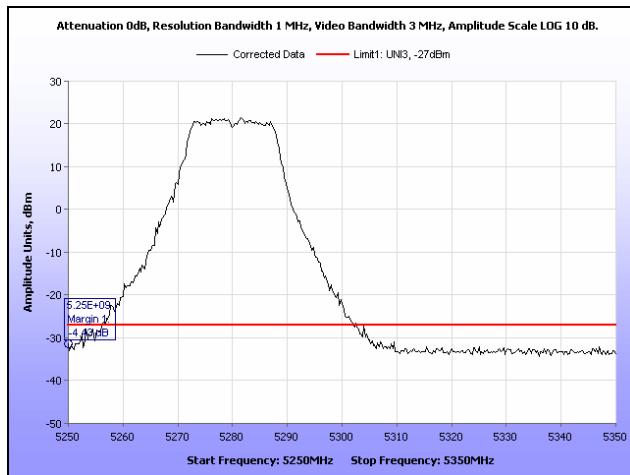


Plot 103. EIRP, 5280 MHz, 802.11a, Band Edge

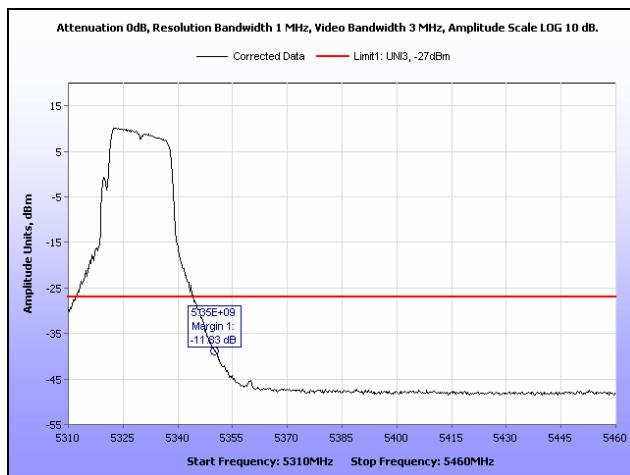


Plot 104. EIRP, 5320 MHz, 802.11a, Band Edge

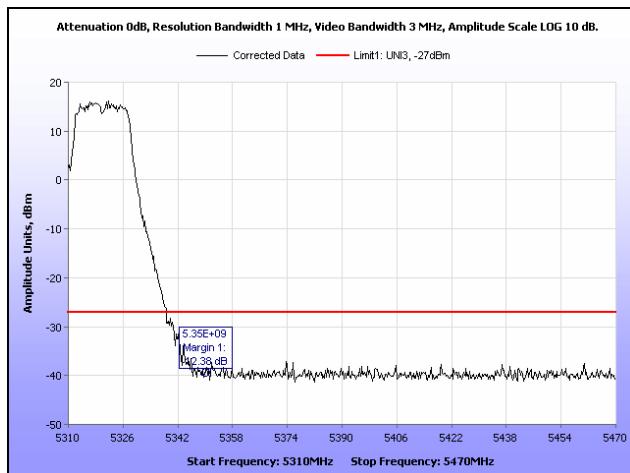


Plot 105. EIRP, 5320 MHz, 802.11a, Band Edge

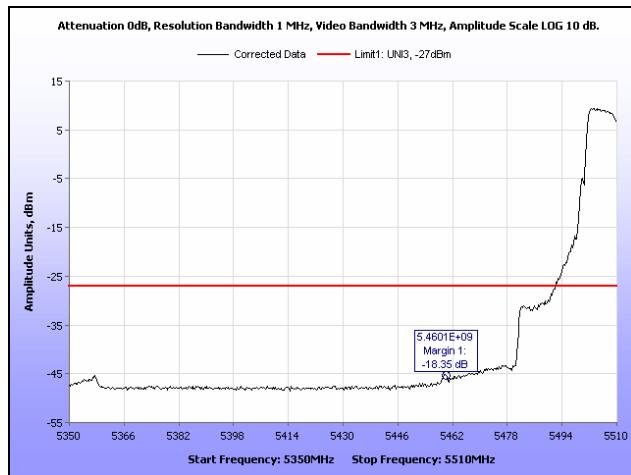


Plot 106. EIRP, 5500 MHz, 802.11a, Band Edge

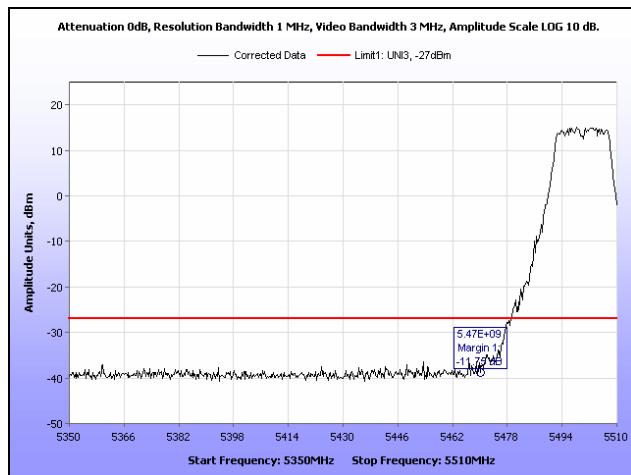


Plot 107. EIRP, 5500 MHz, 802.11a, Band Edge

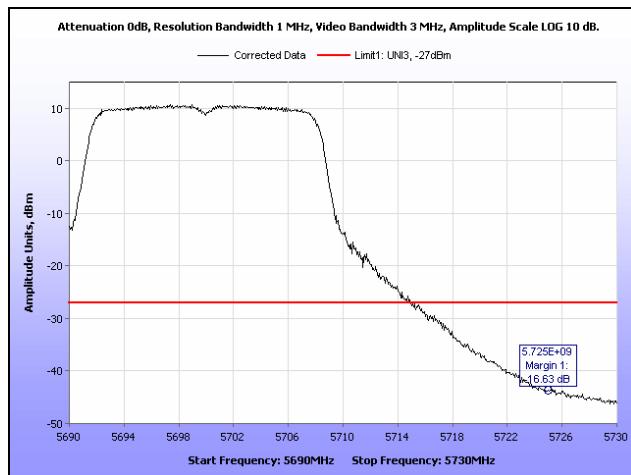


Plot 108. EIRP, 5700 MHz, 802.11a, Band Edge

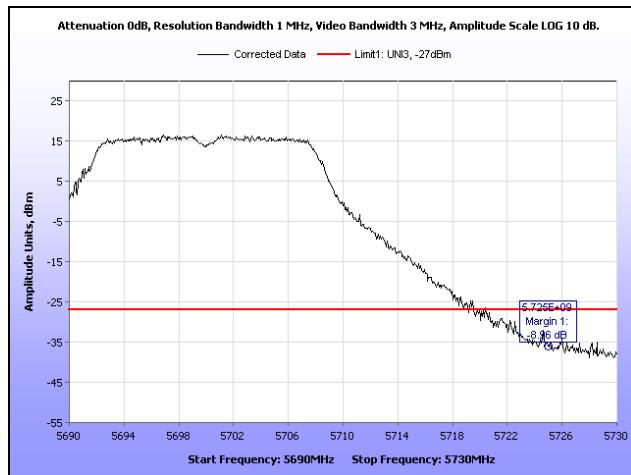


Plot 109. EIRP, 5700 MHz, 802.11a, Band Edge

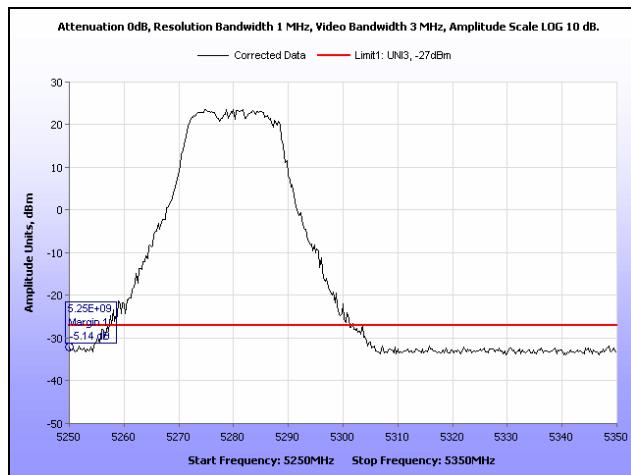


Plot 110. EIRP, 5280 MHz, 802.11n 20 MHz, Band Edge

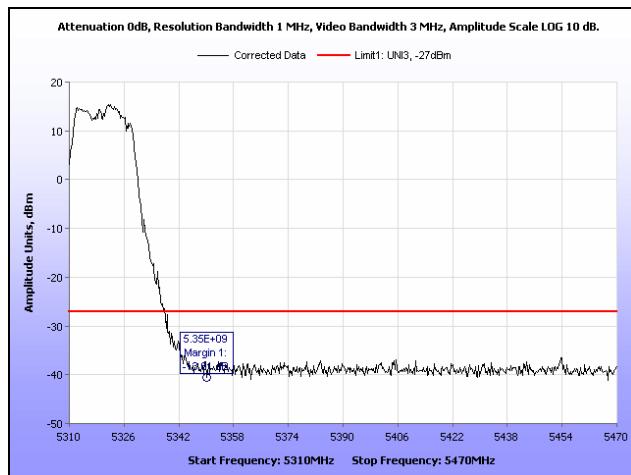


Plot 111. EIRP, 5320 MHz, 802.11n 20 MHz, Band Edge

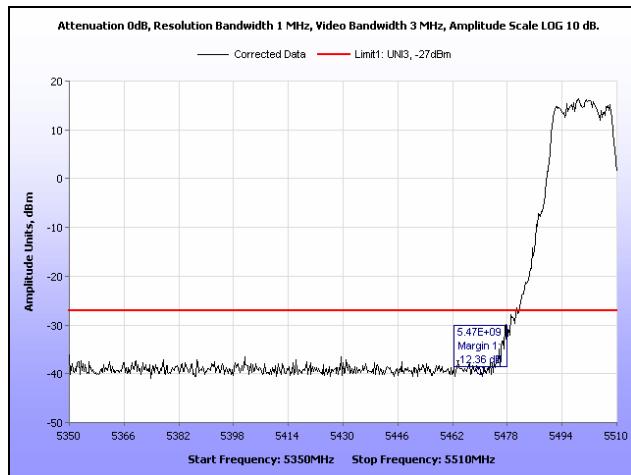


Plot 112. EIRP, 5500 MHz, 802.11n 20 MHz, Band Edge

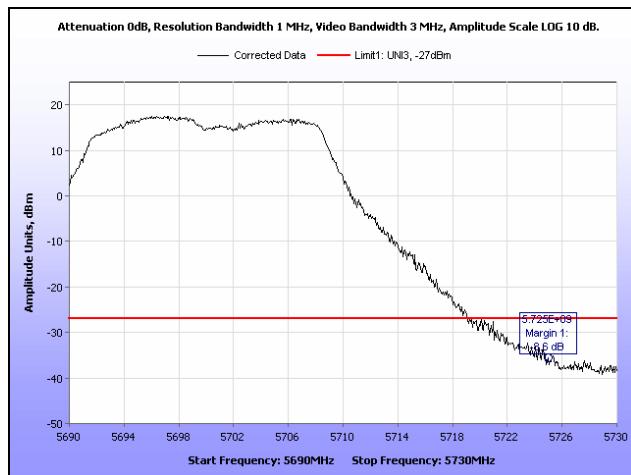


Plot 113. EIRP, 5700 MHz, 802.11n 20 MHz, Band Edge

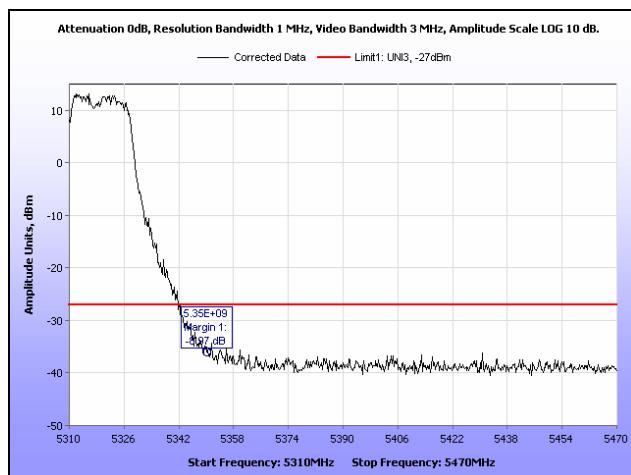

Plot 114. EIRP, 5310 MHz, 802.11n 40 MHz, Band Edge

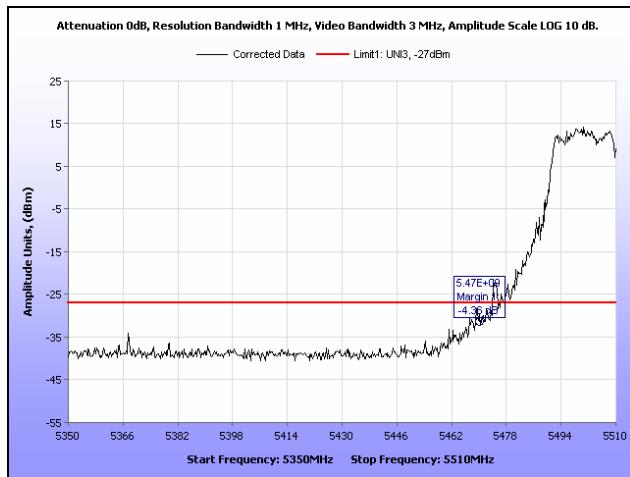


Plot 115. EIRP, 5510 MHz, 802.11n 40 MHz, Band Edge

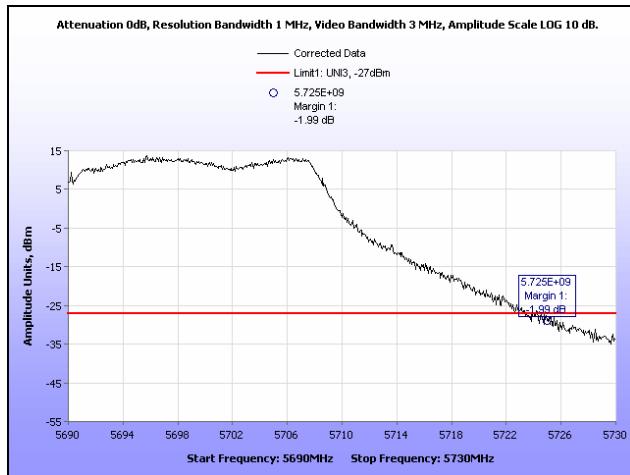


Plot 116. EIRP, 5690 MHz, 802.11n 40 MHz, Band Edge


## Restricted Band

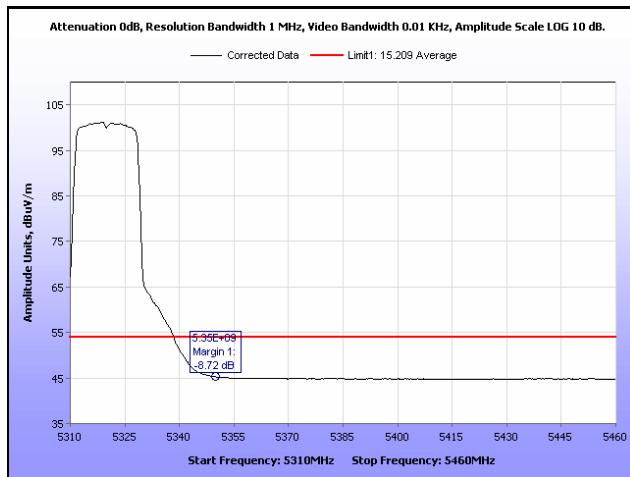


Plot 117. Restricted Band, 802.11a, 5320 MHz, Average

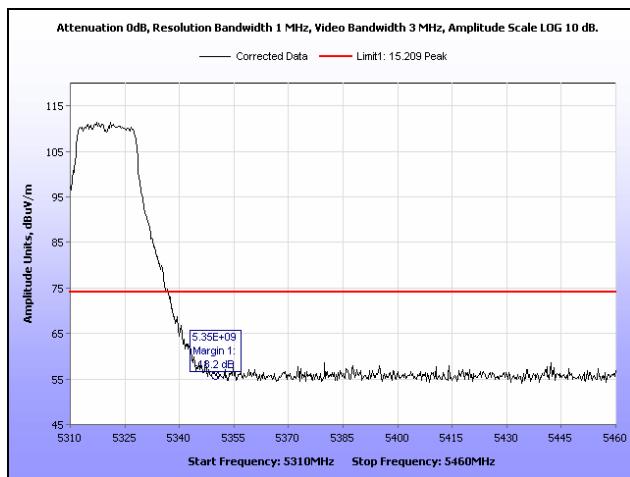


Plot 118. Restricted Band, 802.11a, 5320 MHz, Peak

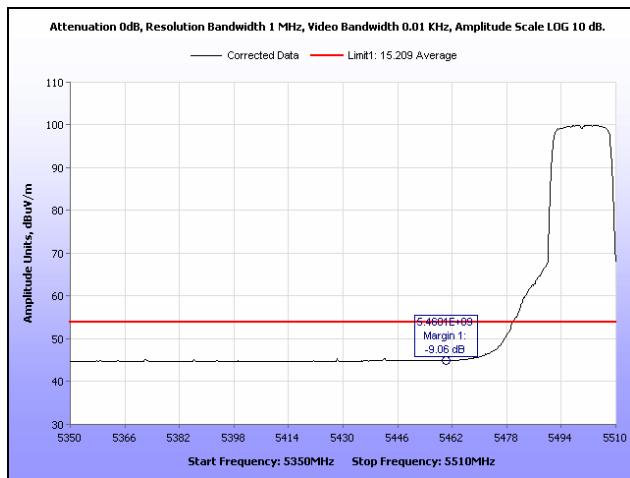


Plot 119. Restricted Band, 802.11a, 5500 MHz, Average

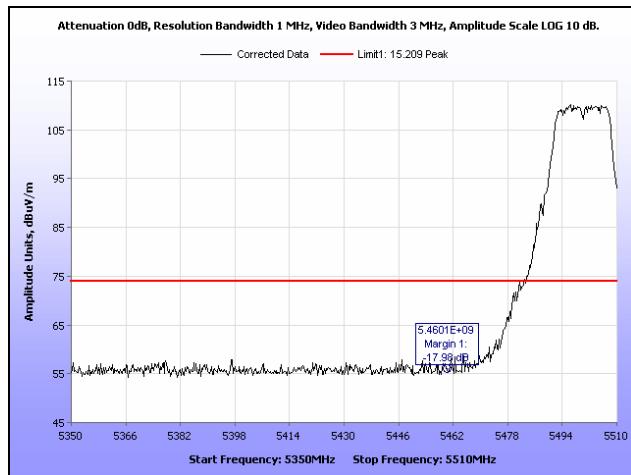


**Plot 120. Restricted Band, 802.11a, 5500 MHz, Peak**

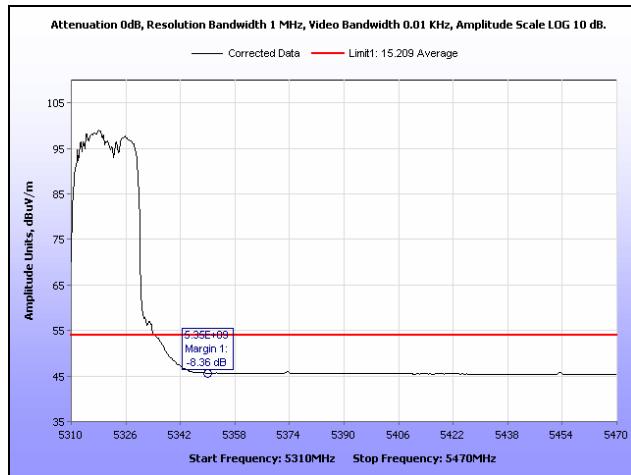


**Plot 121. Restricted Band, 802.11n 20 MHz, 5320 MHz, Average**

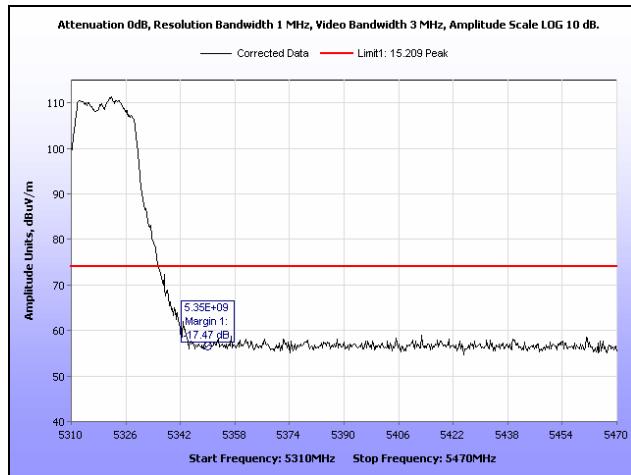


**Plot 122. Restricted Band, 802.11n 20 MHz, 5320 MHz, Peak**

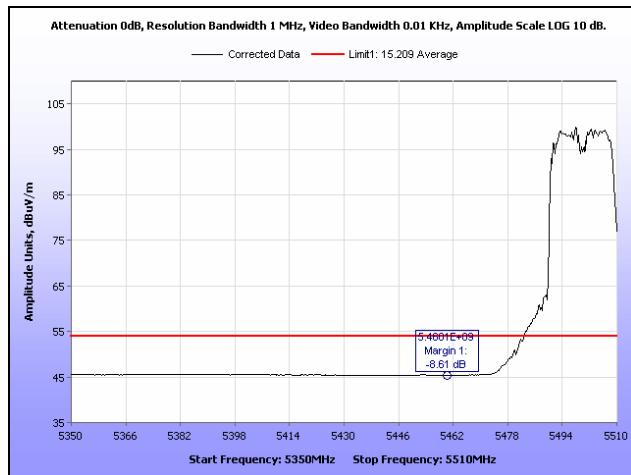


**Plot 123. Restricted Band, 802.11n 20 MHz, 5500 MHz, Average**

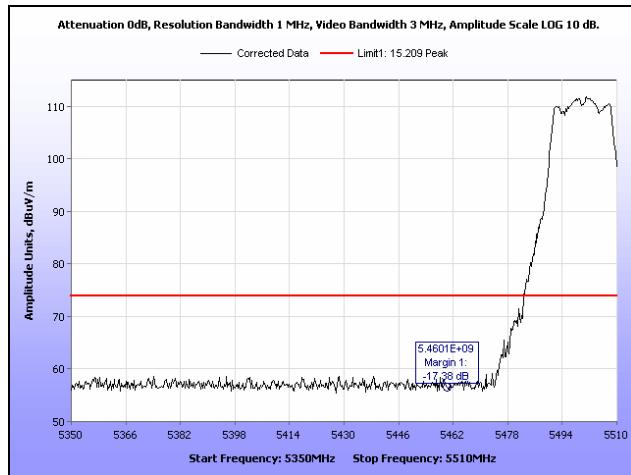


**Plot 124. Restricted Band, 802.11n 20 MHz, 5500 MHz, Peak**

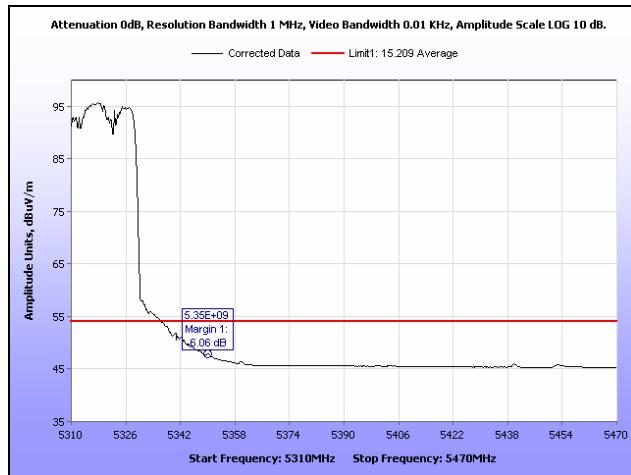


**Plot 125. Restricted Band, 802.11n 40 MHz, 5310 MHz, Average**

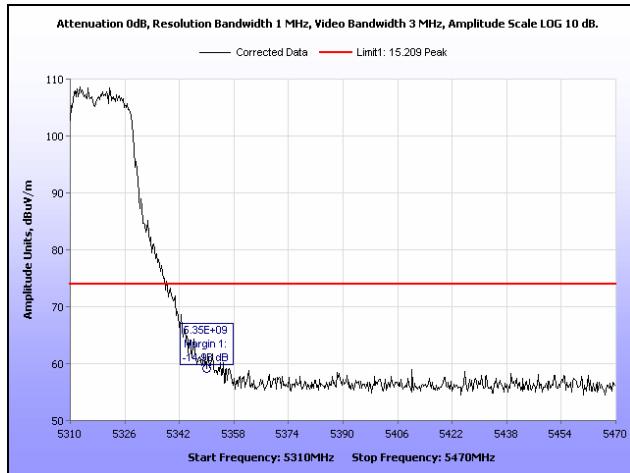

**Plot 126. Restricted Band, 802.11n 40 MHz, 5310 MHz, Peak**

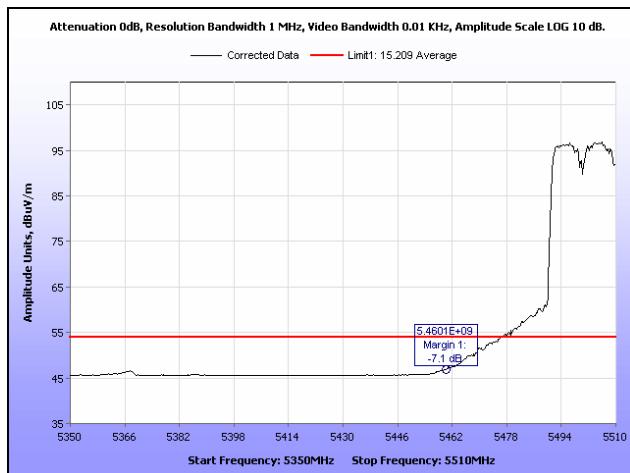

**Plot 127. Restricted Band, 802.11n 40 MHz, 5510 MHz, Average**

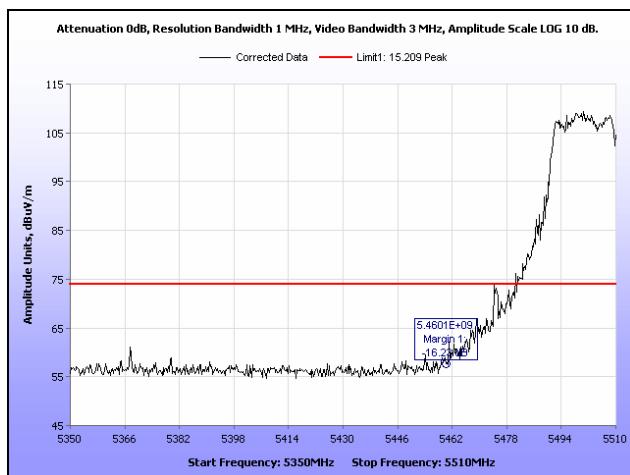

**Plot 128. Restricted Band, 802.11n 40 MHz, 5510 MHz, Peak**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(f) RF Exposure

**RF Exposure Requirements:** **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

**RF Radiation Exposure Limit:** **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 5250-5350MHz and 5470-5725MHz; highest conducted power = 9.997dBm (avg) therefore, **Limit for Uncontrolled exposure: 1 mW/cm<sup>2</sup> or 10 W/m<sup>2</sup>**

Gain of Vertical Antenna Element @ 5.8GHz = 21dBi

Gain of Dual Slant 45° Elements @ 5.8GHz = 19dBi

# of Antenna Elements = 3

Directional Gain =  $10\log[(10^{G1/10}+10^{G2/10}+10^{G3/10})/N_{ANT}] = 19.77 \text{ dBi}$

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (mW/cm<sup>2</sup>)

P = Power Input to antenna (11.06 mW)

G = Antenna Gain (94.92)

R = Separation Distance (20cm)

$$S = (11.06*94.92/ 4*3.14*20^2) = 0.189 \text{ mW/cm}^2$$

Since S<1 mW/cm<sup>2</sup>, the EUT meets the RF exposure limits at a distance of 20cm.

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4612	SPECTRUM ANALYZER	AGILENT	E4407B	5/23/2012	11/23/2013
1T4149	HIGH-FREQUENCY ANECHOIC CHAMBER	RAY-PROOF	81	SEE NOTE	
1T4483	ANTENNA; HORN	ETS-LINDGREN	3117	8/6/2012	2/6/2014
1T4771	PSA SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4446A	2/15/2013	8/15/2014
1T4791	THERMO./CLOCK/HUMIDITY	CONTROL COMPANY	06-662-4	3/8/2012	3/8/2014
1T4442	PRE-AMPLIFIER; MICROWAVE	MITEQ	AFS42-01001800-30-10P	SEE NOTE	
1T4745	ANTENNA; HORN	ETS-LINDGREN	3116	10/19/2012	10/19/2013
1T4752	PRE-AMPLIFIER	MITEQ	JS44-18004000-35-8P	SEE NOTE	
1T4300	SEMI-ANECHOIC CHAMBER #1	EMC TEST SYSTEMS	N/A	7/24/2012	7/24/2015
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	7/16/2012	7/16/2013
1T4568	RADIATING NOISE SOURCE	MET LABORATORIES	N/A	SEE NOTE	
1T4814	COMB GENERATOR	COM-POWER	CGO-5100	SEE NOTE	
1T2278	SWEPT SIGNAL GENERATOR	HEWLETT PACKARD	83650B	10/31/2012	10/31/2013
1T4751	ANTENNA – BILOG	SUNOL SCIENCES	JB6	1/8/2013	7/8/2014

**Table 8. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



Motorola Solutions, Inc.  
AP-7161

Electromagnetic Compatibility  
Certification & User's Manual Information  
CFR Title 47, Part 15, Subpart E; RSS-210, Issue 8, Dec. 2010

## V. Certification & User's Manual Information



## Certification & User's Manual Information

### A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



## Certification & User's Manual Information

**The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:**

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer*, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

(a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.

(1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.

(i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*

(ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

(2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



Motorola Solutions, Inc.  
AP-7161

Electromagnetic Compatibility  
Certification & User's Manual Information  
CFR Title 47, Part 15, Subpart E; RSS-210, Issue 8, Dec. 2010

## Certification & User's Manual Information

### Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Motorola Solutions, Inc.  
AP-7161

Electromagnetic Compatibility  
Appendix A  
CFR Title 47, Part 15, Subpart E; RSS-210, Issue 8, Dec. 2010

## VI. Appendix A