


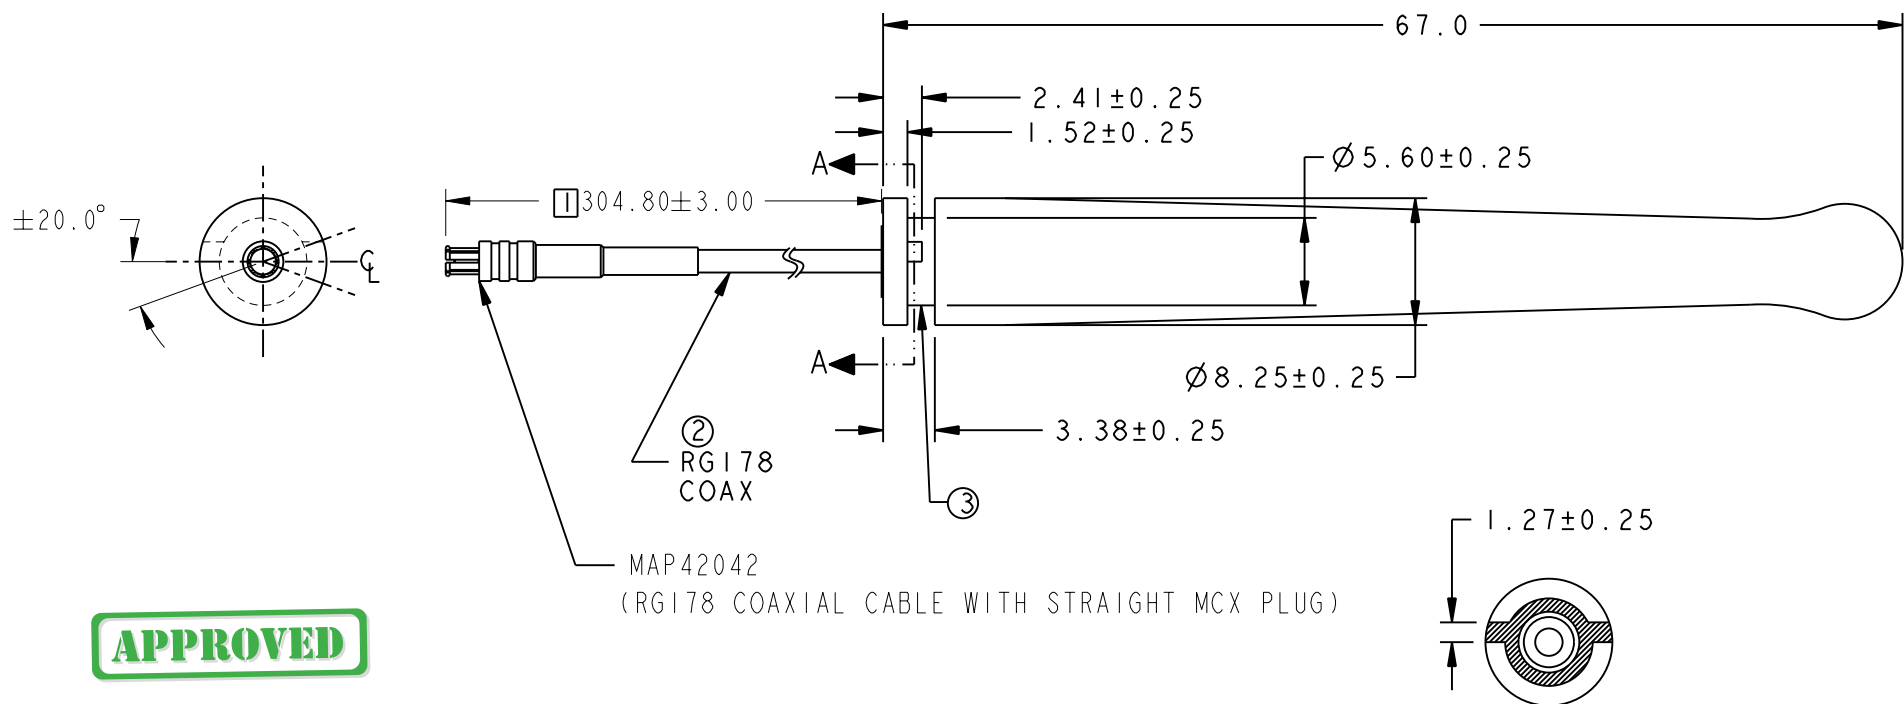

NOTES:

1 SPECIFICATIONS:

FREQUENCY RANGE: 2.4-2.5 GHz

POWER RATING: 10 WATTS

IMPEDANCE: 50 OHMS NOMINAL

OPERATING TEMPERATURE: -40°C - +80°C

② CABLE PULL IN-LINE - 40N MIN

③ STRENGTH OF INTERLOCK FEATURE: 100 N TYP
WITH I.D. OF HOUSING AT Ø5.60

④ FINAL ADJUSTMENT OF CONNECTOR IS
PERMISSIBLE BY ADJUSTING CABLE ORIENTATION

DIMENSIONS ARE IN MILLIMETERS UNLESS STATED OTHERWISE.
THIS DRAWING WAS GENERATED VIA PRO/ENGINEER

ISS	REVISIONS	DATE	CK	APP	SCALE: NTS	TOL. (UNLESS STATED)
					DR: KUA CK:POR	.X = ± 0.3 .XX = ± 0.13 ANGULAR = ± 30'
					PHONE 6-04-3989298 FAX 6-04-3989198 NO.8.(LOT5353) LRG.JELAWAT 4 BANDAR SEBERANG JAYA,13700 PERAI P. PINANG	
					WCP2400 MMCX WITH 12" RG178 COAX CABLE	
					MATERIAL: N/A	
					DATE: 17/5/04	DWG. NO. : MAF94058
					PG. 1/3	REV DI

CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENT IS OF A PROPRIETARY NATURE. IT MAY NOT BE REPRODUCED OR USED WITHOUT EXPRESS WRITTEN PERMISSION OF CENTURION WIRELESS COMPONENTS P.PINANG

COPYRIGHT 2004 CENTURION WIRELESS COMPONENTS P4873