

FCC Part 15 Subpart C

TEST REPORT

of

E.U.T. : Wireless Handsfree (Handset)

FCC ID: QJGAROMA49H

MODEL: AROMA49

Working Frequency: 49.830MHz

Issused Dated: July 16, 2002

for

APPLICANT : YIH TAY TECHNOLOGY CO., LTD.

ADDRESS : 3F., NO. 651-3, CHUNG CHENG RD., SHIN
CHUANG, TAIPEI HSIEN, TAIWAN, R. O. C.

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN

NO. 8 LANE 29, WENMING ROAD,
LOSHAN TSUN, KWEISHAN HSIANG,
TAOYUAN, TAIWAN, R.O.C.

Tel:(03)3276170-3276174

Fax:(03)3276188

Report Number: ET91S-01-155-01

TEST REPORT CERTIFICATION

Applicant : YIH TAY TECHNOLOGY CO., LTD.
3F., NO. 651-3, CHUNG CHENG RD., SHIN CHUANG, TAIPEI HSIEN,
TAIWAN, R. O. C.

Manufacturer : SINOCA ENTERPRISES CO., LTD.
NO. 2, CHUNG HO RD., KEELUNG TAIWAN, R. O. C.

Description of EUT :
a) Type of EUT : Wireless Handsfree (Handset)
b) Trade Name : AROMA
c) Model No. : AROMA49
d) FCC ID : QJGAROMA49H
e) Working Frequency : 49.830MHz
f) Power Supply : DC 3.6V Battery

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C (2001)

I HEREBY CERTIFY THAT; The data shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The results of the testing report relate only to the items tested.
2. The testing report shall not be reproduced except in full, without the written approval of ETC.

Test Date: May 20, 2002

Test Engineer: Rick Hu

Approve & Authorized
Signer: Win-Po Tsai July 16, 2002
Win-Po Tsai, Manager, NVLAP Signatory
EMC Dept. I of ELECTRONICS
TESTING CENTER, TAIWAN

Table of Contents

	<i>Page</i>
1. GENERAL INFORMATION	1
1.1 PRODUCT DESCRIPTION.....	1
1.2 CHARACTERISTICS OF DEVICE:.....	1
1.3 TEST METHODOLOGY	1
1.4 TEST FACILITY	1
2. DEFINITION AND LIMITS.....	2
2.1 DEFINITION	2
2.2 RESTRICTED BANDS OF OPERATION	2
2.3 LIMITATION	2
2.4 LABELING REQUIREMENT	4
2.5 USER INFORMATION	4
3. RADIATED EMISSION MEASUREMENT.....	5
3.1 APPLICABLE STANDARD.....	5
3.2 DEVICES FOR TESTED SYSTEM	5
3.3 MEASUREMENT PROCEDURE	6
3.4 TEST DATA.....	8
3.5 FIELD STRENGTH CALCULATION	10
3.6 RADIATED TEST EQUIPMENT	10
3.7 MEASURING INSTRUMENT SETUP	11
3.8 RADIATED MEASUREMENT PHOTOS.....	12
4. CONDUCTED EMISSION MEASUREMENT.....	13
4.1 APPLICABLE STANDARD.....	13
4.2 MEASUREMENT PROCEDURE	13
4.3 CONDUCTED EMISSION DATA.....	14
4.4 RESULT DATA CALCULATION.....	17
4.5 CONDUCTED MEASUREMENT EQUIPMENT	17
4.6 CONDUCTED MEASUREMENT PHOTOS.....	18

1. GENERAL INFORMATION

1.1 Product Description

- | | |
|----------------------|--------------------------------|
| a) Type of EUT | : Wireless Handsfree (Handset) |
| b) Trade Name | : AROMA |
| c) Model No. | : AROMA49 |
| d) FCC ID | : QJGAROMA49H |
| e) Working Frequency | : 49.830MHz |
| f) Power Supply | : DC 3.6V Battery |

1.2 Characteristics of Device:

Wireless hand free for cell phone, operate frequency 49.830MHz.

1.3 Test Methodology

Radiated testing were performed according to the procedures in chapter 13 of ANSI C63.4. The Wireless Handsfree (Handset) under test was operated continuously in its normal operating mode for the purpose of the measurements. In order to secure the continuous operation of the device under test, rewiring in the circuit was done by the manufacturer so as to affect its intended operation.

The receiving antenna was varied from 1 to 4 meters and the wooden turntable was rotated through 360 degrees to obtain the highest reading on the field strength meter or on the display of the spectrum analyzer. And also, each emission was to be maximized by changing the orientation of the Wireless Handsfree (Handset) under test. The ear phone devices rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relatives to the limit.

1.4 Test Facility

The semi-anechoic chamber and conducted measurement facility used to collect the radiated and conducted data are located inside the Building at No.8, Lane 29, Wen-ming Road, Lo-shan Tsun, Kweishan Hsiang, Taoyuan, Taiwan, R.O.C.

This site has been accreditation as a FCC filing site.

2. DEFINITION AND LIMITS

2.1 Definition

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Remark “**”: Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.3 Limitation

(1) Conducted Emission Limits:

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the conducted limit is the following:

Frequency (MHz)	Emission (μ V)	Emission (dB μ V)
0.45 - 30.0	250	48.0

(2) Radiated Emission Limits:

According to 15.209 the field strength of emissions from intentional radiators operated under these frequency bands 42.5~51.5MHz shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental	
	µV/meter	dBµV/meter
30-88	100	40.0

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209, as following table:

Other Frequencies (MHz)	Field Strength of Fundamental	
	µV/meter	dBµV/meter
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

3. RADIATED EMISSION MEASUREMENT

3.1 Applicable Standard

1. The field strength of 49.830MHz (Handset) shall not exceed 100 microvolts/meter at 3 meters.
2. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.

3.2 Devices for Tested System


Description	Model	Manufacturer	Cable
Wireless Handsfree (Handset) (Handset) *	AROMA49	YIH TAY TECHNOLOGY CO., LTD.	----
Adaptor (Charger)	DVR-6100	DVE	Power cable: 2.0m, Unshielded

“*” -- Equipment Under Test

3.3 Measurement Procedure

1. Setup the configuration per figure 1 for frequencies measured below 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, it is performed in a semi-anechoic chamber to determine the accurate frequencies of higher emissions.
3. For emission frequencies measured below 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Record the result.

Figure 1: Frequencies measured below 1 GHz configuration

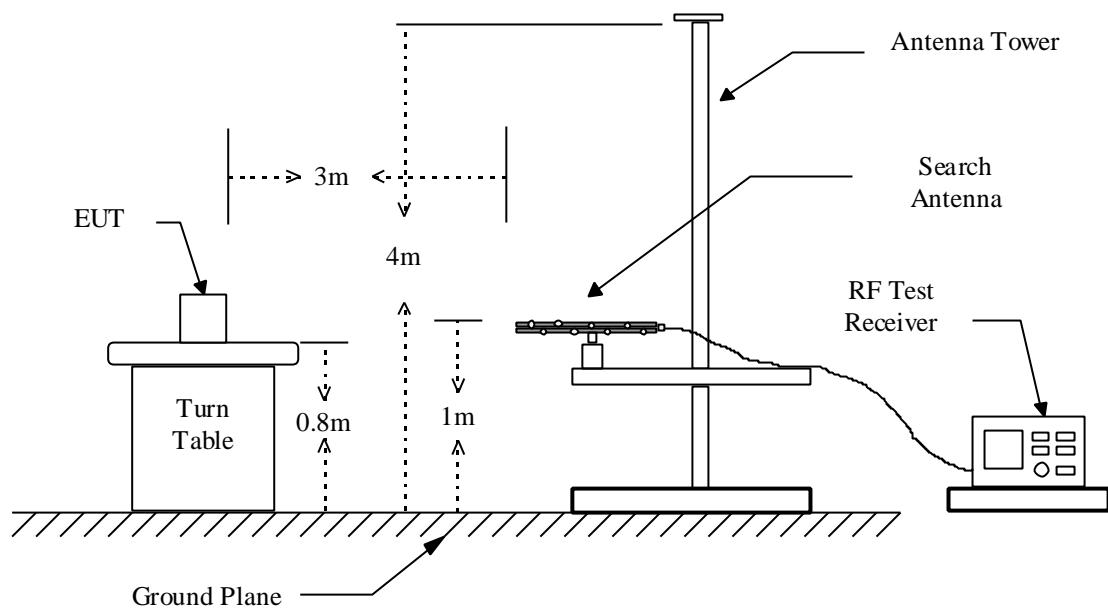

3.4 Test Data

3.4.1 Transmitter (Handset)

Data 1: Fundamental & Harmonics

Temperature : 18
 Humidity : 65%
 Mode : Tx/ Rx
 Transmitting Frequency : 49.830MHz
 Test Date : May 20, 2002

Frequency (MHz)	Ant Pol H/V	Reading (dBuV) Peak	Correct Factor (dB)	Result @3m (dBuV/m) Peak	Limit @3m (dBuV/m) Q.P.	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
49.830	H	20.0	8.0	28.0	40.0	-12.0	210	1.0
49.830	V	23.1	8.0	31.1	40.0	-8.9	210	1.0
99.660	H/V	----	9.4	----	43.5	----	----	----
149.490	H/V	----	12.7	----	43.5	----	----	----
199.320	H/V	----	12.7	----	43.5	----	----	----
249.150	H/V	----	14.5	----	46.0	----	----	----
298.980	H/V	----	17.5	----	43.5	----	----	----
348.810	H/V	----	19.0	----	43.5	----	----	----
398.640	H/V	----	20.6	----	43.5	----	----	----
448.470	H/V	----	21.3	----	43.5	----	----	----
498.300	H/V	----	22.3	----	46.0	----	----	----

Note:

1. The radiation emissions have been measured to beyond the tenth harmonic of the fundamental frequency and show the significant frequencies, other means the value is too low to be detected.
2. If the data table appeared symbol of “----“ means the value is too low to be measured.
3. The EUT is a hand-held product. In order to get the worse data, X, Y, Z directions were adjusted during the test.

Data 2: Other emissions

Temperature : 18
 Humidity : 65%
 Test Date : May 20, 2002

Frequency (MHz)	Ant Pol H/V	Reading (dBuV) Peak	Correct Factor (dB)	Result @3m (dBuV/m) Peak	Limit @3m (dBuV/m) Q.P.	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
31.342	H	12.9	13.9	26.8	40.0	-13.2	65	1.8
31.342	V	13.4	13.9	27.3	40.0	-12.7	90	1.2
33.180	H	13.4	12.4	25.8	40.0	-14.2	320	1.5
33.180	V	13.9	12.4	26.3	40.0	-13.7	120	1.2
42.690	V	15.7	11.1	26.8	40.0	-13.2	20	2.1
42.690	H	10.8	11.1	21.9	40.0	-18.1	20	1.1
44.240	H	14.4	9.5	23.9	40.0	-16.1	40	1.6
44.240	V	19.6	9.5	27.1	40.0	-10.9	60	1.1
46.740	V	15.6	9.5	25.1	40.0	-14.9	290	1.0

Note:

1. The radiation emissions have been measured to beyond the tenth harmonic of the fundamental frequency and show the significant frequencies, other means the value is too low to be detected.
2. If the data table appeared symbol of “---“ means the value is too low to be measured.
3. The EUT is a hand-held product. In order to get the worse data, X, Y, Z directions were adjusted during the test.

3.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{CORR. FACTOR}$$

where CORR. FACTOR = Antenna FACTOR + Cable FACTOR

Assume a receiver reading of 22.5 dB μ V is obtained. The Antenna Factor of 14.5 and a Cable Factor of 1.5 is added. The total of field strength is 38.5 dB μ V/m.

$$\text{RESULT} = 22.5 + 14.5 + 1.5 = 38.5 \text{ dB } \mu \text{ V/m}$$

$$\begin{aligned} \text{Level in } \mu \text{ V/m} &= \text{Common Antilogarithm}[(38.5 \text{ dB } \mu \text{ V/m})/20] \\ &= 84.14 \text{ } \mu \text{ V/m} \end{aligned}$$

3.6 Radiated Test Equipment

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
EMI Test Receiver	Hewlett-Packard	8546A	13054404-001	Nov. 06, 2002
LogBicone Antenna	Schwarzbeck	VULB9160	13057310-001	Oct. 18, 2002

Note: The standards used to perform this calibration are traceable to NML/ROC, NIST/USA and NPL.

Measuring instrument setup in measured frequency band when specified detector function is used:

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	Auto


3.7 Measuring Instrument Setup

Explanation of measuring instrument setup in frequency band measured is as following:

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz

3.8 Radiated Measurement Photos

Handset

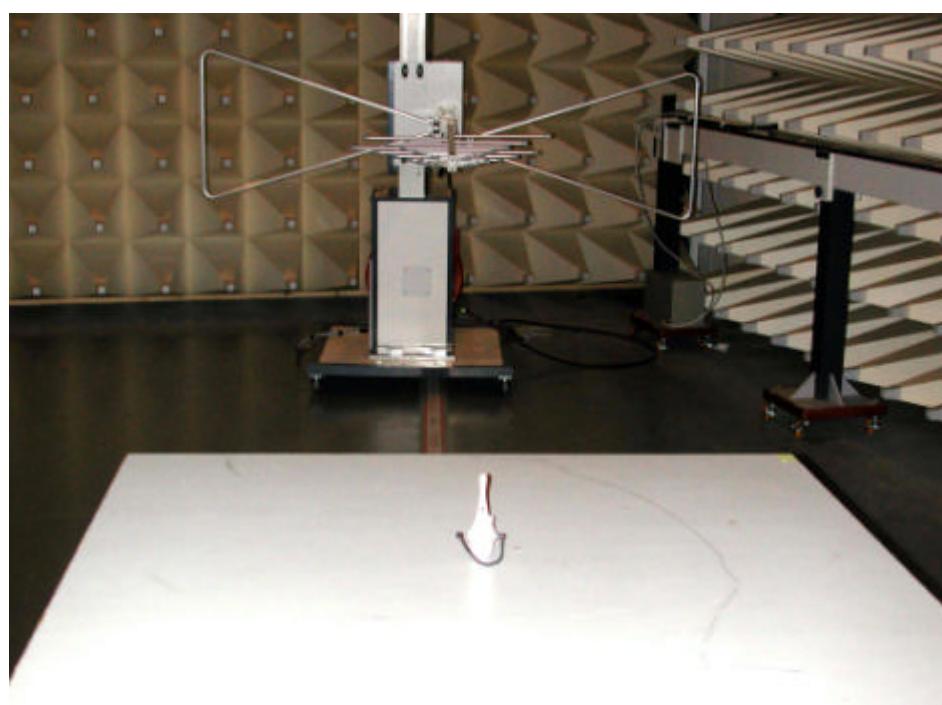

4. CONDUCTED EMISSION MEASUREMENT


4.1 Applicable Standard

For unintentional digital devices, Line Conducted Emission Limits are in accordance to § 15.107(a) . And according to § 5.107(e), an alternative to the conducted limits is CISPR 22.

4.2 Measurement Procedure

1. Setup the configuration per figure 2.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 4 to 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 2 : Conducted emissions measurement configuration

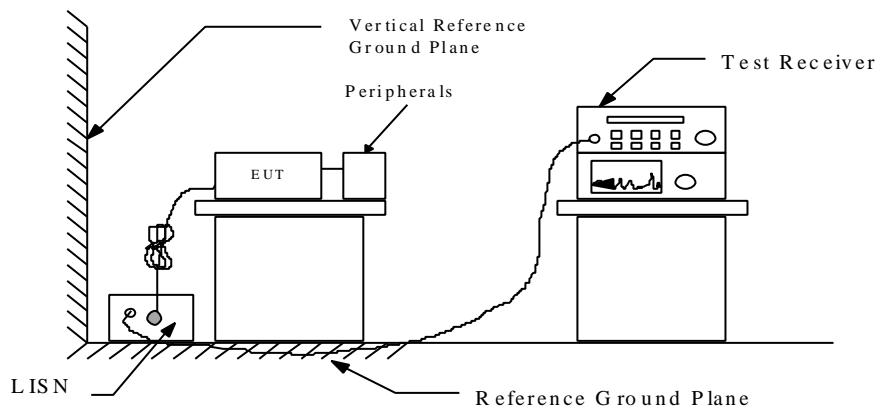

4.3 Conducted Emission Data

Mode : Charge (Handset)
 Temperature : 23
 Humidity : 63%
 Test Date : May 31, 2002

Emission Frequency (MHz)	Meter Reading (dBuV)		CORR'd Factor (dB)	Results (dBuV)		Limit (dBuV)	Margins (dB)
	L1	L2		L1	L2		
0.516	14.3 #	***	0.1	14.4#	***	48.0	-33.6
1.043	***	14.7 #	0.2	***	14.9#	48.0	-33.1
1.477	14.9 #	***	0.2	15.1#	***	48.0	-32.9
1.668	***	15.0 #	0.2	***	15.2#	48.0	-32.8
6.496	16.9 #	***	0.2	17.1#	***	48.0	-30.9
7.449	***	17.5 #	0.3	***	17.8#	48.0	-30.2
7.613	17.8 #	***	0.3	18.1#	***	48.0	-29.9
9.461	17.1 #	***	0.3	17.4#	***	48.0	-30.6
11.734	***	17.8 #	0.3	***	18.1#	48.0	-29.9
18.664	17.5 #	***	0.4	17.9#	***	48.0	-30.1
22.758	***	18.9 #	0.5	***	19.4#	69.5	-50.1

Note :

1. The full frequency range scanning test data is shown in next two pages.
2. If the data table appeared symbol of “***“ means the value is too low to be measured.
3. If the data table appeared symbol of “#“ means the peak value.


Graphic of Conducted Emission 1

Conducted Emission

Peak Value

EUT: Wireless Handfree
Manuf:
Op Cond: Charge (Handset)
Operator: Rick Hu
Test Spec: FCC Part 15 Class B
Comment: L1
Model : AROMA49

Prescan Measurement: Detector: X PK
Meas Time: see scan settings
Peaks: 8
Acc Margin: 10 dB

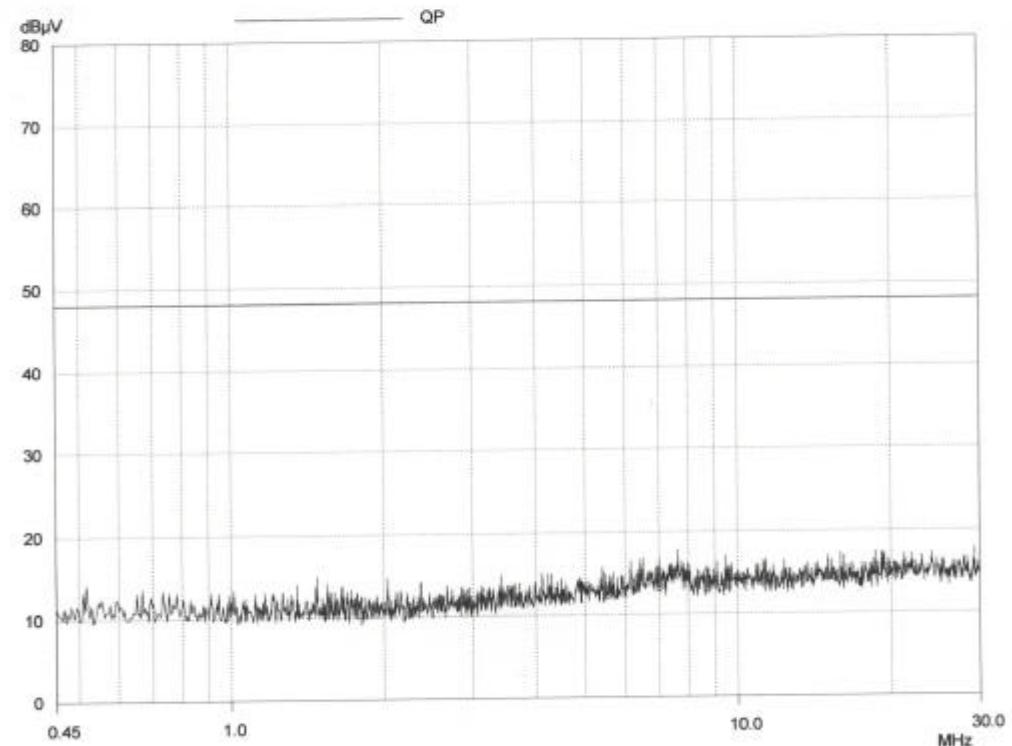


Graphic of Conducted Emission 2

Conducted Emission

Peak Value

EUT: Wireless Handfree
Manuf:
Op Cond: Charge (Handset)
Operator: Rick Hu
Test Spec: FCC Part 15 Class B
Comment: L2
Model : AROMA49

Prescan Measurement: Detector: X PK
Meas Time: see scan settings
Peaks: 8
Acc Margin: 10 dB

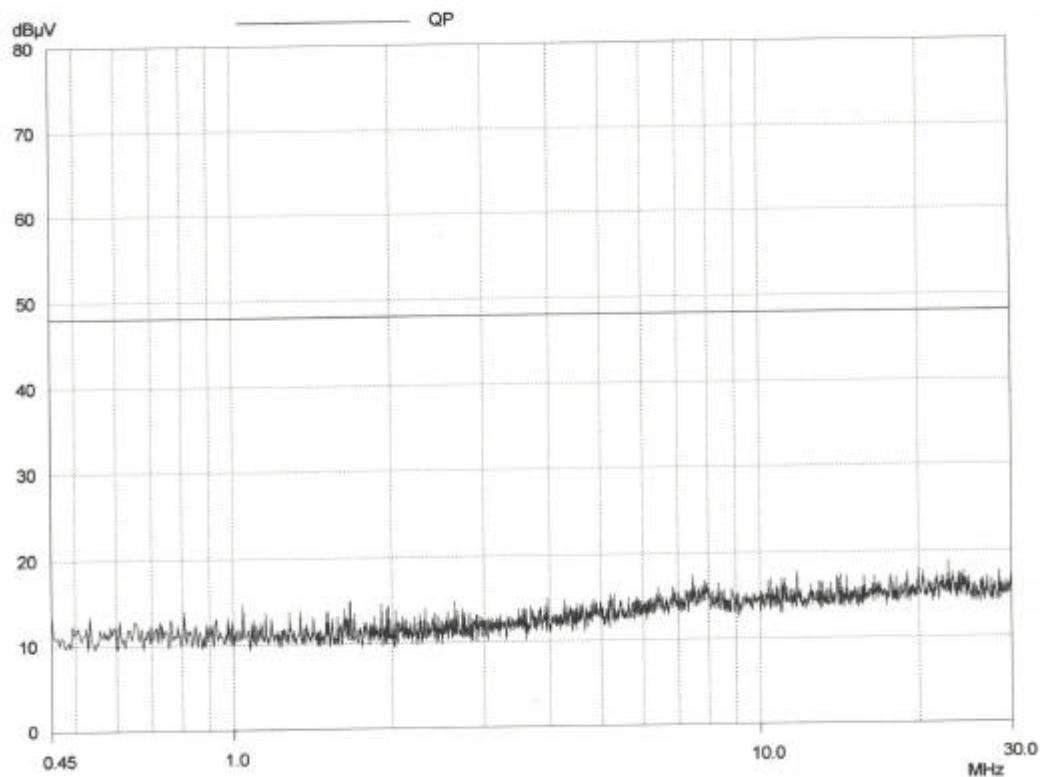

4.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{LISN FACTOR}$$

Assume a receiver reading of 22.5 dB μ V is obtained, and LISN Factor is 0.1 dB, then the total of field strength is 22.6 dB μ V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}$$

$$\begin{aligned} \text{Level in } \mu \text{ V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20] \\ &= 13.48 \text{ } \mu \text{ V} \end{aligned}$$

4.5 Conducted Measurement Equipment


The following test equipment are used during the conducted test .

Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
EMI Test Receiver	Rohde and Schwarz	ESCS30	13054409-001	Sep. 18, 2002
Line Impedance Stabilization network	EMCO	3825/2	13057704-001	Oct. 26, 2002
Plotter	Hewlett-Packard	7470A	----	N/A

Note: The standards used to perform this calibration are traceable to NML/ROC and NIST/USA.

4.6 Conducted Measurement Photos

Handset

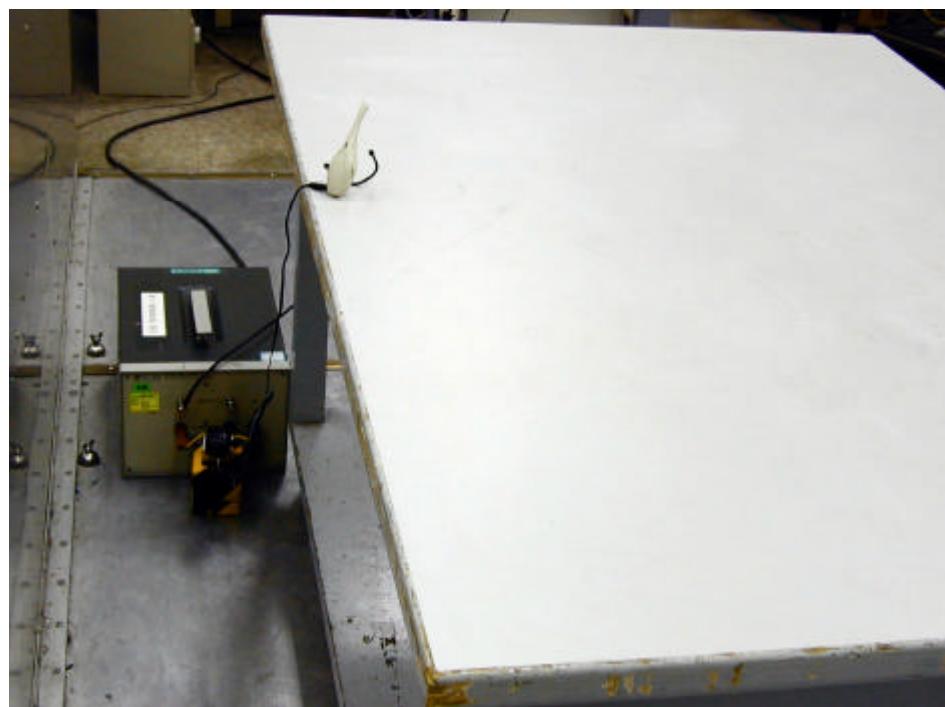

Construction Photos


1. Front View of EUT




2. Rear View of EUT




3. Inside 1 of EUT

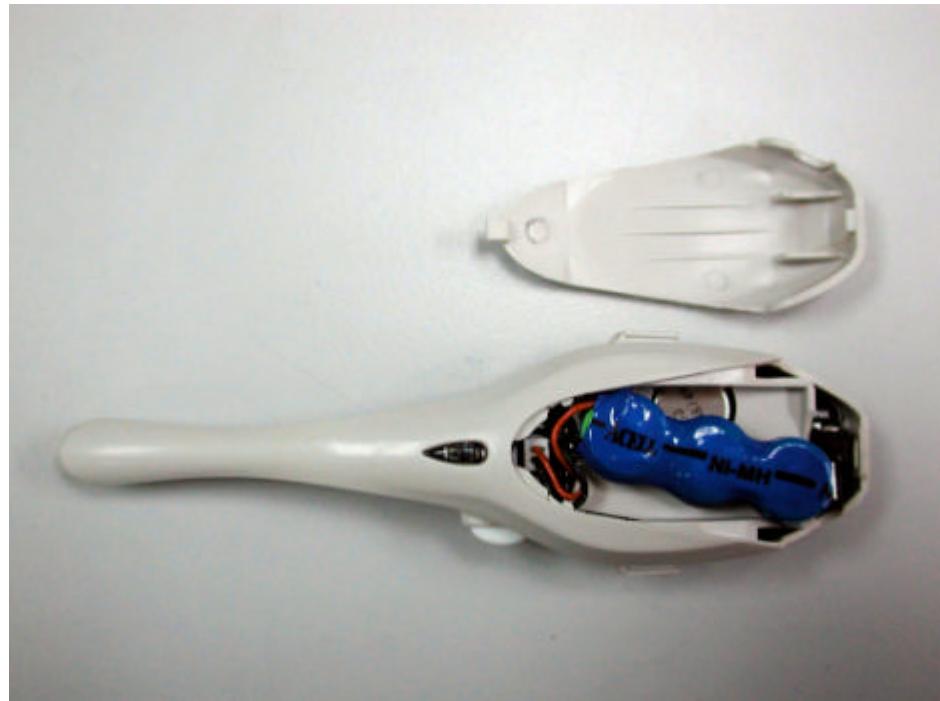


4. Inside 2 of EUT

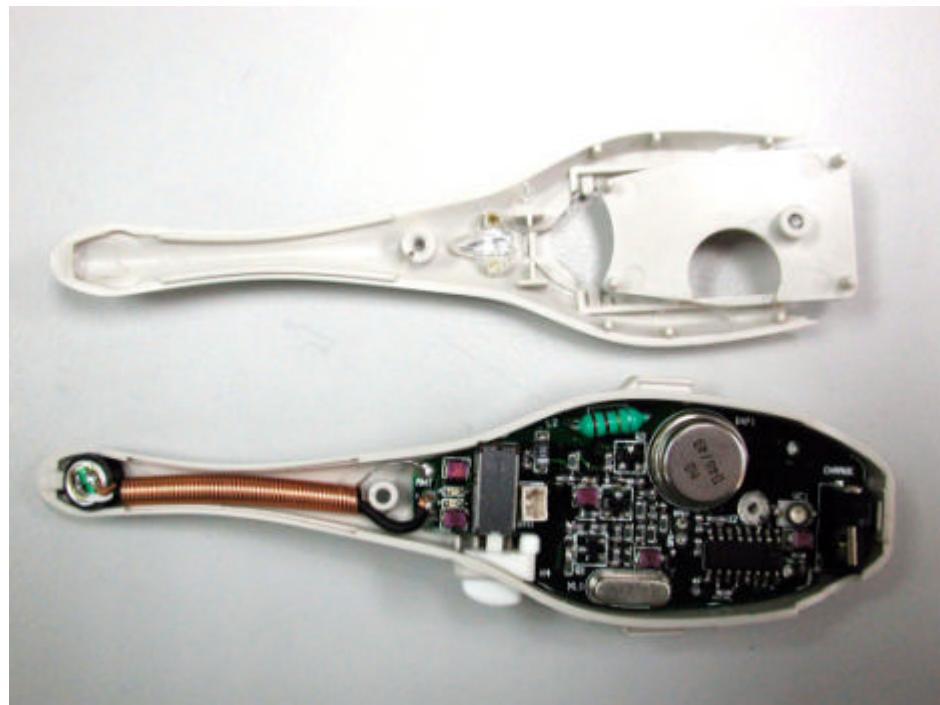


5. Inside 3 of EUT

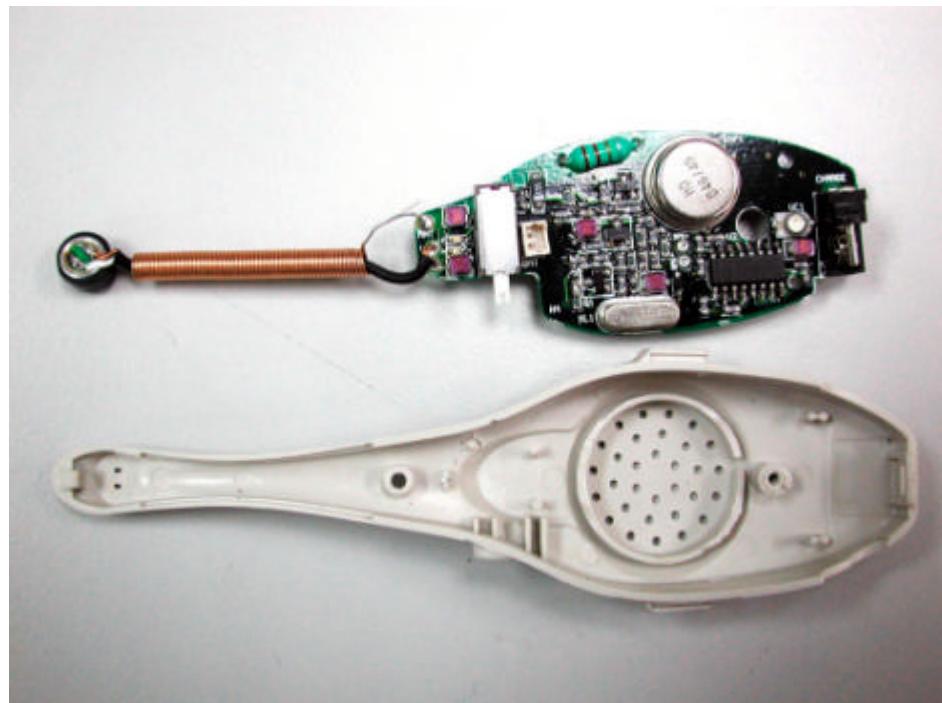


6. Inside 4 of EUT

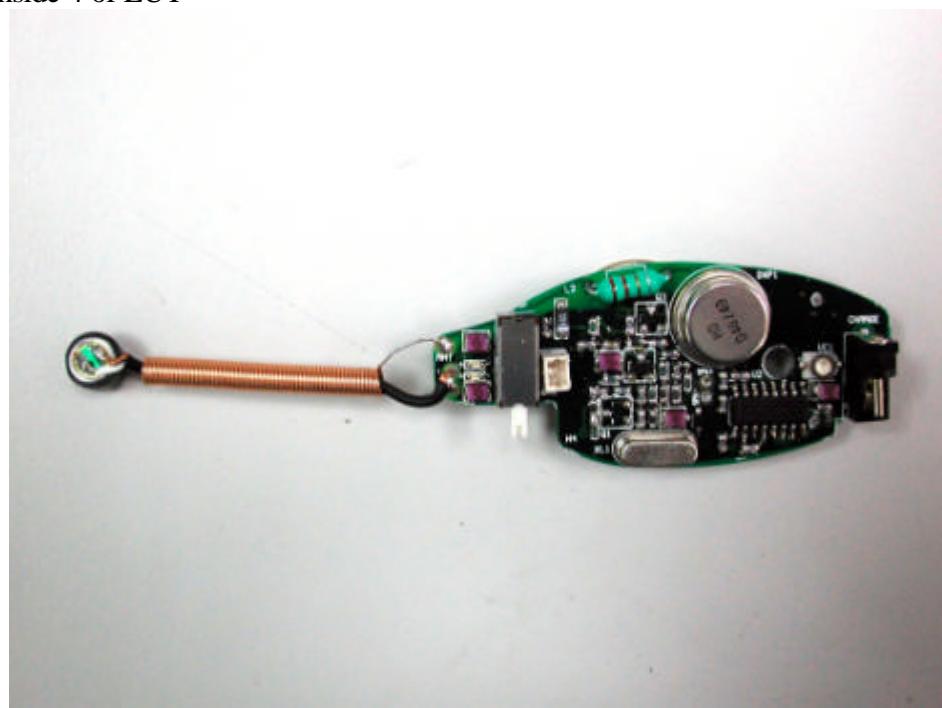

7. Inside 5 of EUT

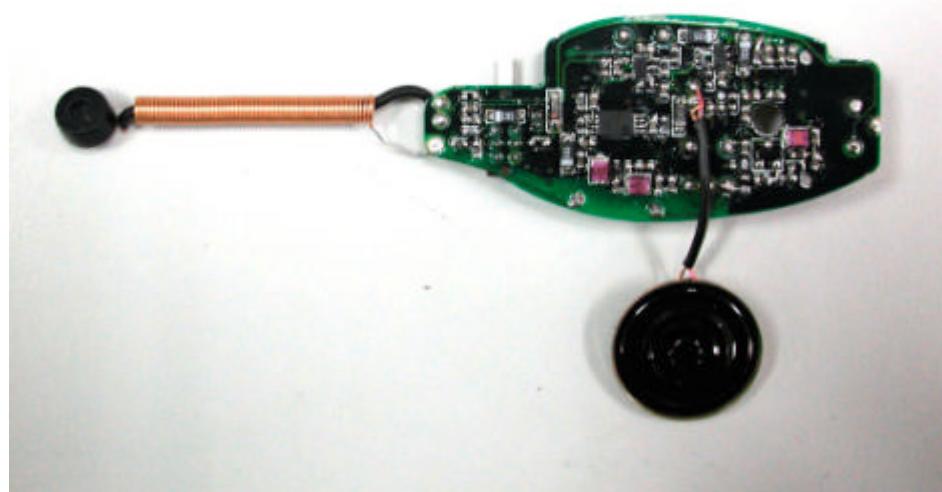

8. Front View of PCB

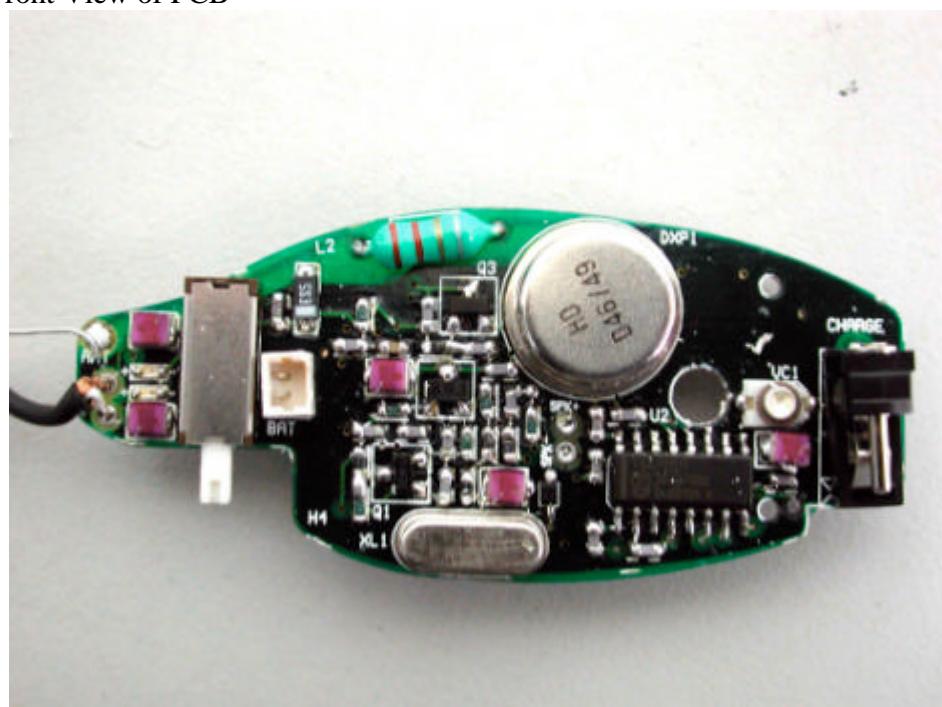

9. Front View of PCB

