



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART CTEST REPORT

FCC PART 15.247

Report Reference No......: **GTS20210111019-1-1**

FCC ID.....: **QKJ92016**

Compiled by
(position+printedname+signature)....: File administrators Jimmy Wang

Jimmy Wang

Supervised by
(position+printedname+signature).....: Test Engineer Aaron Tan



Approved by
(position+printedname+signature).....: Manager Jason Hu

Jason Hu

Date of issue.....: Jan. 11, 2021

Representative Laboratory Name.: **Shenzhen Global Test Service Co.,Ltd.**

Address.....: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

Applicant's name: **Man Shun Uinon Electronic Technology (Shenzhen) Co., Ltd.**

Address: 1-3/F, 23# Shengxin Road, Shengping, Longgang, Shenzhen, Guangdong, China 518172

Test specification

Standard: **FCC Part 15.247**

TRF Originator: Shenzhen Global Test Service Co.,Ltd.

Master TRF.....: Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Wireless Bluetooth Headphones

Trade Mark: N/A

Manufacturer: Man Shun Uinon Electronic Technology (Shenzhen) Co., Ltd.

Model/Type reference.....: BB427

Listed Models: 92016, BBxxx (000~999)

Modulation Type: GFSK,II/4DQPSK,8DPSK

Operation Frequency.....: From 2402MHz to 2480MHz

Rating: DC3.7V from battery

Result.....: **PASS**

TEST REPORT

Test Report No. : GTS20210111019-1-1	Jan. 11, 2021 Date of issue
--	--------------------------------

Equipment under Test : Wireless Bluetooth Headphones

Model /Type : BB427

Listed Models : 92016, BBxxx (000~999)

Applicant : **Man Shun Uinon Electronic Technology (Shenzhen) Co., Ltd.**

Address : 1-3/F, 23# Shengxin Road, Shengping, Longgang, Shenzhen, Guangdong, China 518172

Manufacturer : **Man Shun Uinon Electronic Technology (Shenzhen) Co., Ltd.**

Address : 1-3/F, 23# Shengxin Road, Shengping, Longgang, Shenzhen, Guangdong, China 518172

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2</u>	<u>SUMMARY</u>	<u>5</u>
2.1	General Remarks	5
2.2	Product Description	5
2.3	Test Sample	5
2.4	Equipment Under Test	5
2.5	Short description of the Equipment under Test (EUT)	5
2.6	EUT operation mode	6
2.7	Block Diagram of Test Setup	6
2.8	Special Accessories	6
2.9	Related Submittal(s) / Grant (s)	6
2.10	Modifications	6
<u>3</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1	Address of the test laboratory	7
3.2	Test Facility	7
3.3	Environmental conditions	7
3.4	Summary of measurement results	8
3.5	Statement of the measurement uncertainty	8
3.6	Equipments Used during the Test	9
<u>4</u>	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>10</u>
4.1	AC Power Conducted Emission	10
4.2	Radiated Emission	13
4.3	MaximumPeak Output Power	20
4.4	20dB Bandwidth	21
4.5	Frequency Separation	25
4.6	Number of hopping frequency	27
4.7	Time ofOccupancy (Dwell Time)	29
4.8	Out-of-band Emissions	33
4.9	Pseudorandom Frequency Hopping Sequence	41
4.10	Antenna Requirement	42
<u>5</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>43</u>
<u>6</u>	<u>PHOTOS OF THE EUT</u>	<u>44</u>

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Jan. 06, 2021
Testing commenced on	:	Jan. 07, 2021
Testing concluded on	:	Jan. 11, 2021

2.2 Product Description

Product Name:	Wireless Bluetooth Headphones
Model/Type reference:	BB427
Power supply:	DC 3.7V from battery
Hardware version:	730_MA_PCB_BOARD 20200108
Software version:	V1.0
Sample ID:	GTS20210111019-1-1#/ GTS20210111019-1-2#
Bluetooth :	
Supported Type:	Bluetooth BR/EDR
Modulation:	GFSK, π /4DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB antenna
Antenna gain:	0.0dBi

2.3 Test Sample

The application provides 2 samples to meet requirement.

Sample Number	Description
GTS20210111019-1-1#	Engineer sample – continuous transmit
GTS20210111019-1-2#	Normal sample – Intermittent transmit

2.4 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V/ 50 Hz	☐ 120V/60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 3.7V from battery

2.5 Short description of the Equipment under Test (EUT)

This is a Wireless Bluetooth Headphones.

For more details, refer to the user's manual of the EUT.


2.6 EUT operation mode

The Applicant provides communication tools software (Actions BT FCC Tool V2.24) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing. There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

Operation Frequency:

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
38	2440
39	2441
40	2442
⋮	⋮
77	2479
78	2480

2.7 Block Diagram of Test Setup

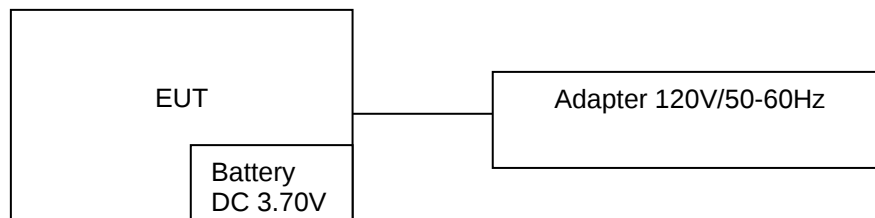

2.8 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

Description	Manufacturer	Model	Technical Parameters	Certificate	Provided by
AC-DC Adapter	MOSO	EP-TA20CBC	Input:AC100-240V-50/60Hz, 0.5A Output:DC 5V,1A	FCC	Laboratory
/	/	/	/	/	/
/	/	/	/	/	/
/	/	/	/	/	/

2.9 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.10 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.:165725

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

A2LA-Lab Cert. No.: 4758.01

Shenzhen Global Test Service Co.,Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

CNAS-Lab Code: L8169

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2024.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4 Summary of measurement results

Test Specification clause	Test case	Test Sample	Test Mode	Test Channel	Recorded In Report		Test result
§15.247(a)(1)	Carrier Frequency separation	GTS20210111 019-1-1#	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Middle	Compliant
§15.247(a)(1)	Number of Hopping channels	GTS20210111 019-1-1#	GFSK Π/4DQPSK 8DPSK	☒ Full	GFSK 8DPSK	☒ Full	Compliant
§15.247(a)(1)	Time of Occupancy (dwell time)	GTS20210111 019-1-1#	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Middle	Compliant
§15.247(a)(1)	Spectrum bandwidth of aFHSS system 20dB bandwidth	GTS20210111 019-1-1#	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.247(b)(1)	Maximum output power	GTS20210111 019-1-1#	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.247(d)	Band edge compliance conducted	GTS20210111 019-1-1#	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Highest	Compliant
§15.205	Band edge compliance radiated	GTS20210111 019-1-1#	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Highest	GFSK	☒ Lowest ☒ Highest	Compliant
§15.247(d)	TX spurious emissions conducted	GTS20210111 019-1-1#	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.247(d)	TX spurious emissions radiated	GTS20210111 019-1-1#	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.209(a)	TX spurious Emissions radiated Below 1GHz	GTS20210111 019-1-2#	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Middle	Compliant
§15.107(a) §15.207	Conducted Emissions 9KHz-30 MHz	GTS20210111 019-1-2#	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Middle	Compliant

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18~40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6 Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2020/09/19	2021/09/18
LISN	R&S	ESH2-Z5	893606/008	2020/09/19	2021/09/18
EMI Test Receiver	R&S	ESPI3	101841-cd	2020/09/19	2021/09/18
EMI Test Receiver	R&S	ESCI7	101102	2020/09/19	2021/09/18
Spectrum Analyzer	Agilent	N9020A	MY48010425	2020/09/19	2021/09/18
Spectrum Analyzer	R&S	FSV40	100019	2020/09/19	2021/09/18
Vector Signal generator	Agilent	N5181A	MY49060502	2020/09/19	2021/09/18
Spectrum Analyzer	Agilent	E4421B	3610AO1069	2020/09/19	2021/09/18
Climate Chamber	ESPEC	EL-10KA	A20120523	2020/09/19	2021/09/18
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2020/09/19	2021/09/18
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2020/10/11	2021/10/10
Bilog Antenna	Schwarzbeck	VULB9163	000976	2020/05/26	2021/05/25
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2020/09/19	2021/09/18
Amplifier	Schwarzbeck	BBV 9743	#202	2020/09/19	2021/09/18
Amplifier	Schwarzbeck	BBV9179	9719-025	2020/09/19	2021/09/18
Amplifier	EMCI	EMC051845B	980355	2020/09/19	2021/09/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2020/09/19	2021/09/18
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2020/09/19	2021/09/18
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2020/09/19	2021/09/18
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2020/09/19	2021/09/18
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2020/09/19	2021/09/18
Data acquisition card	Agilent	U2531A	TW53323507	2020/09/19	2021/09/18
Power Sensor	Agilent	U2021XA	MY5365004	2020/09/19	2021/09/18
Test Control Unit	Tonscend	JS0806-1	178060067	2020/06/19	2021/06/18
Automated filter bank	Tonscend	JS0806-F	19F8060177	2020/06/19	2021/06/18
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

Note: The Cal.Interval was one year.

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

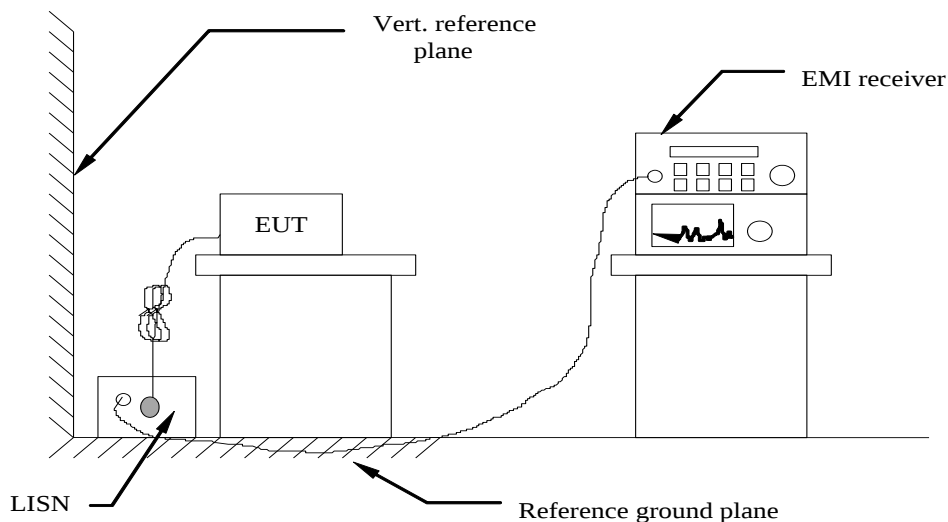

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


TEST RESULTS

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	BT

Remark:

1. All modes of GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and Highchannel; only the worst result of GFSK Middle Channel was reported as below:
2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested,only the worst result of 120 VAC, 60 Hz was reported as below:

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

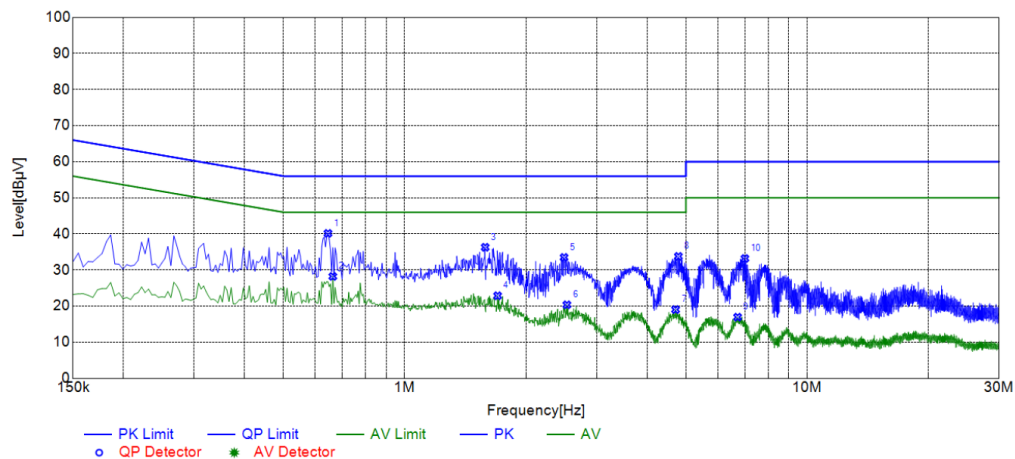Test Graph**Suspected List**

NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	Result [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Line	Remark
1	0.6450	30.09	10.06	40.15	56.00	15.85	PK	L1	PASS
2	0.6630	18.17	10.05	28.22	46.00	17.78	AV	L1	PASS
3	1.5855	26.17	10.12	36.29	56.00	19.71	PK	L1	PASS
4	1.7025	12.74	10.13	22.87	46.00	23.13	AV	L1	PASS
5	2.4900	23.27	10.22	33.49	56.00	22.51	PK	L1	PASS
6	2.5305	10.13	10.23	20.36	46.00	25.64	AV	L1	PASS
7	4.7130	8.58	10.46	19.04	46.00	26.96	AV	L1	PASS
8	4.7895	23.31	10.46	33.77	56.00	22.23	PK	L1	PASS
9	6.7200	6.37	10.58	16.95	50.00	33.05	AV	L1	PASS
10	7.0080	22.60	10.59	33.19	60.00	26.81	PK	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

AC 120V/60Hz

Polarization

N

Test Graph

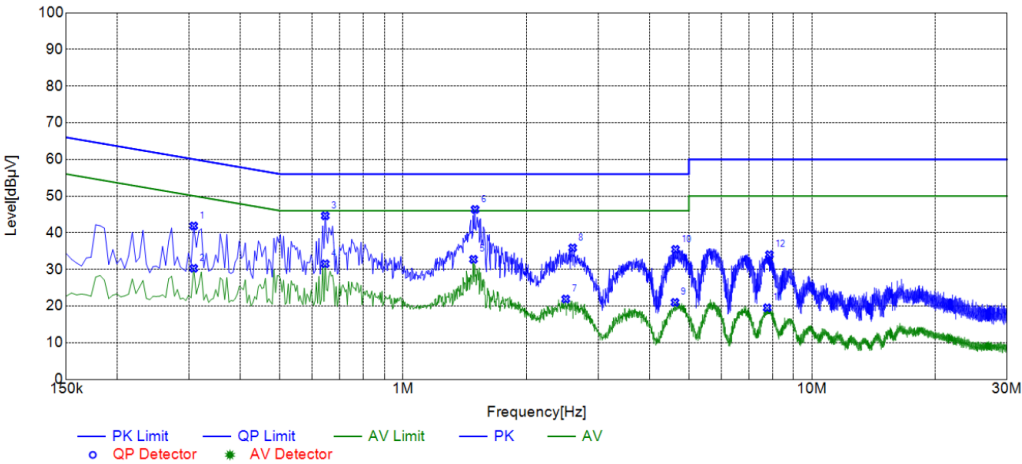

Suspected List

NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	Result [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Line	Remark
1	0.3075	31.87	9.98	41.85	60.04	18.19	PK	N	PASS
2	0.3075	20.33	9.98	30.31	50.04	19.73	AV	N	PASS
3	0.6450	34.55	10.06	44.61	56.00	11.39	PK	N	PASS
4	0.6450	21.47	10.06	31.53	46.00	14.47	AV	N	PASS
5	1.4865	22.63	10.11	32.74	46.00	13.26	AV	N	PASS
6	1.5000	36.24	10.11	46.35	56.00	9.65	PK	N	PASS
7	2.4990	11.70	10.22	21.92	46.00	24.08	AV	N	PASS
8	2.5980	25.63	10.24	35.87	56.00	20.13	PK	N	PASS
9	4.6230	10.55	10.45	21.00	46.00	25.00	AV	N	PASS
10	4.6365	25.00	10.45	35.45	56.00	20.55	PK	N	PASS
11	7.7730	8.90	10.62	19.52	50.00	30.48	AV	N	PASS
12	7.8675	23.39	10.63	34.02	60.00	25.98	PK	N	PASS


Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


4.2 Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz–30MHz

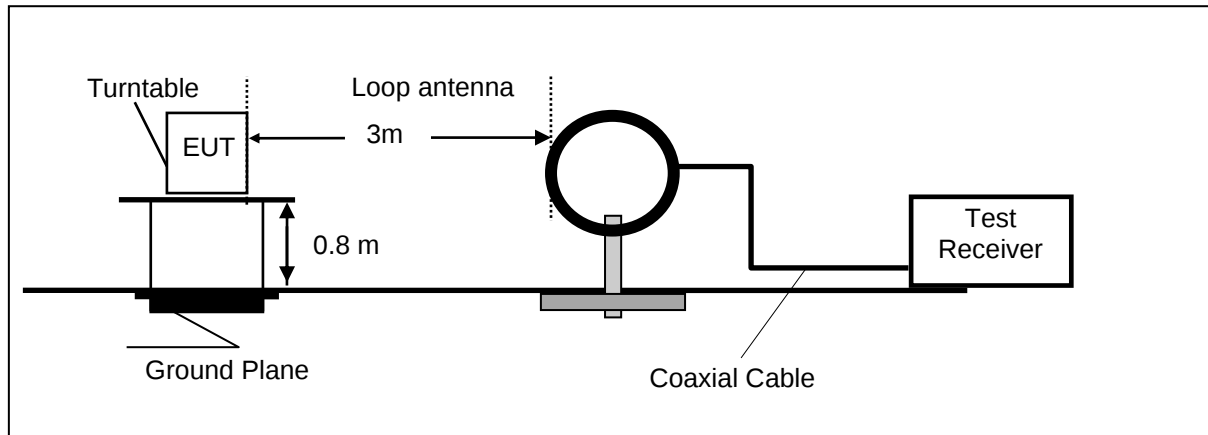

Frequency range 30MHz – 1000MHz

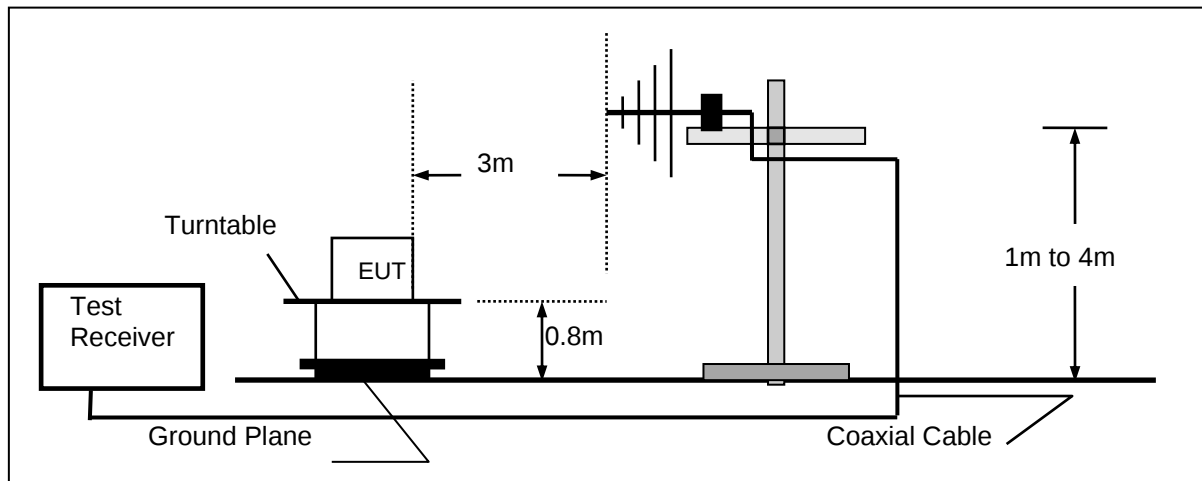

Frequency range above 1GHz-25GHz

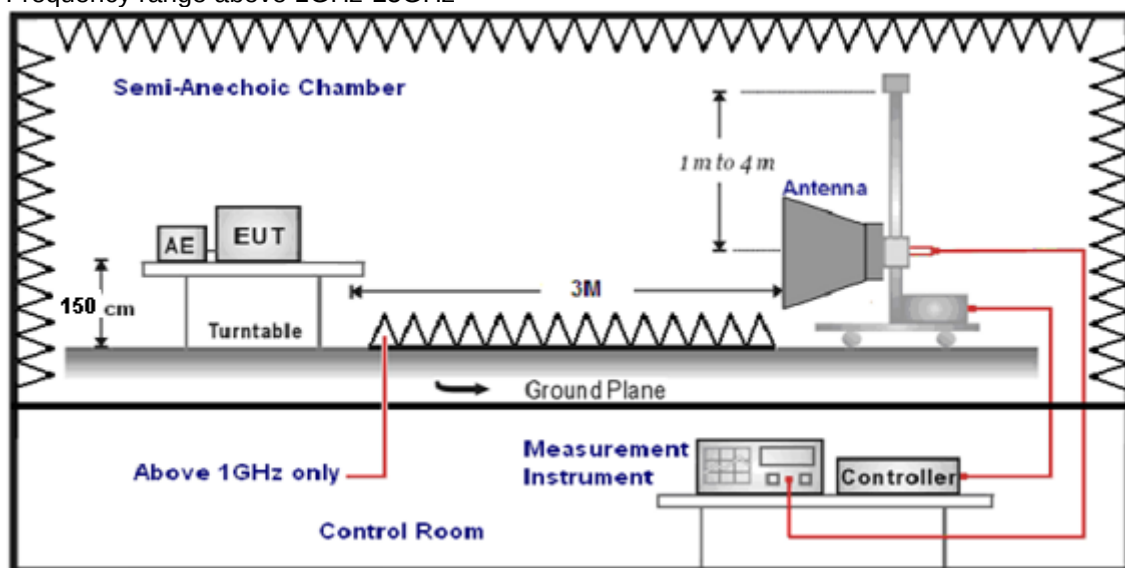

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz–1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz–25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$Transd=AF +CL-AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.


Frequency(MHz)	Distance(Meters)	Radiated(dBμV/m)	Radiated(μV/m)
0.009-0.49	3	$20\log(2400/F(KHz))+40\log(300/3)$	$2400/F(KHz)$
0.49-1.705	3	$20\log(24000/F(KHz))+ 40\log(30/3)$	$24000/F(KHz)$
1.705-30	3	$20\log(30)+ 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	BT

Remark:


1. We measured Radiated Emission at GFSK, $\pi/4$ DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
2. For below 1GHz testing recorded worst at GFSK DH5 middle channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

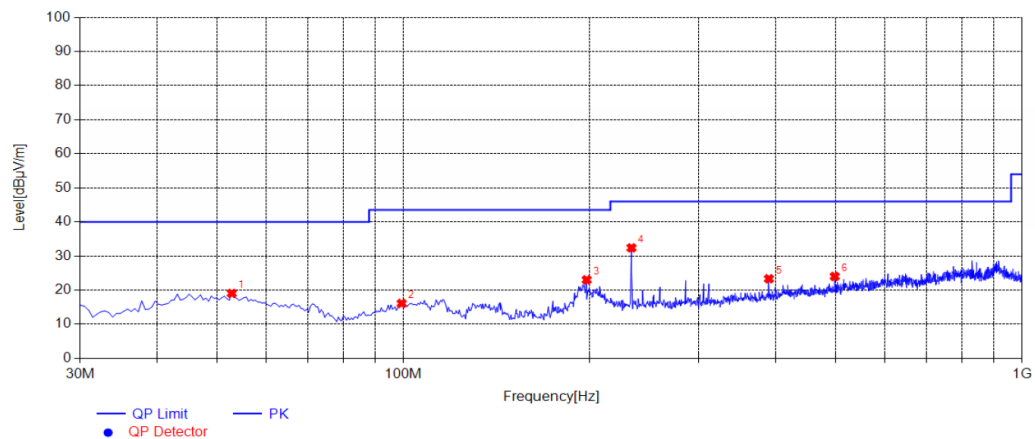For 30MHz-1GHz**Horizontal****Test Graph****Suspected List**

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	52.7950	25.82	-6.77	19.05	40.00	20.95	100	60	PK	Horizontal	PASS
2	99.3550	24.64	-8.55	16.09	43.50	27.41	100	220	PK	Horizontal	PASS
3	197.8100	31.97	-8.95	23.02	43.50	20.48	100	60	PK	Horizontal	PASS
4	233.7000	41.11	-8.71	32.40	46.00	13.60	100	260	PK	Horizontal	PASS
5	389.8700	28.60	-5.27	23.33	46.00	22.67	100	340	PK	Horizontal	PASS
6	498.0250	26.94	-2.92	24.02	46.00	21.98	100	290	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

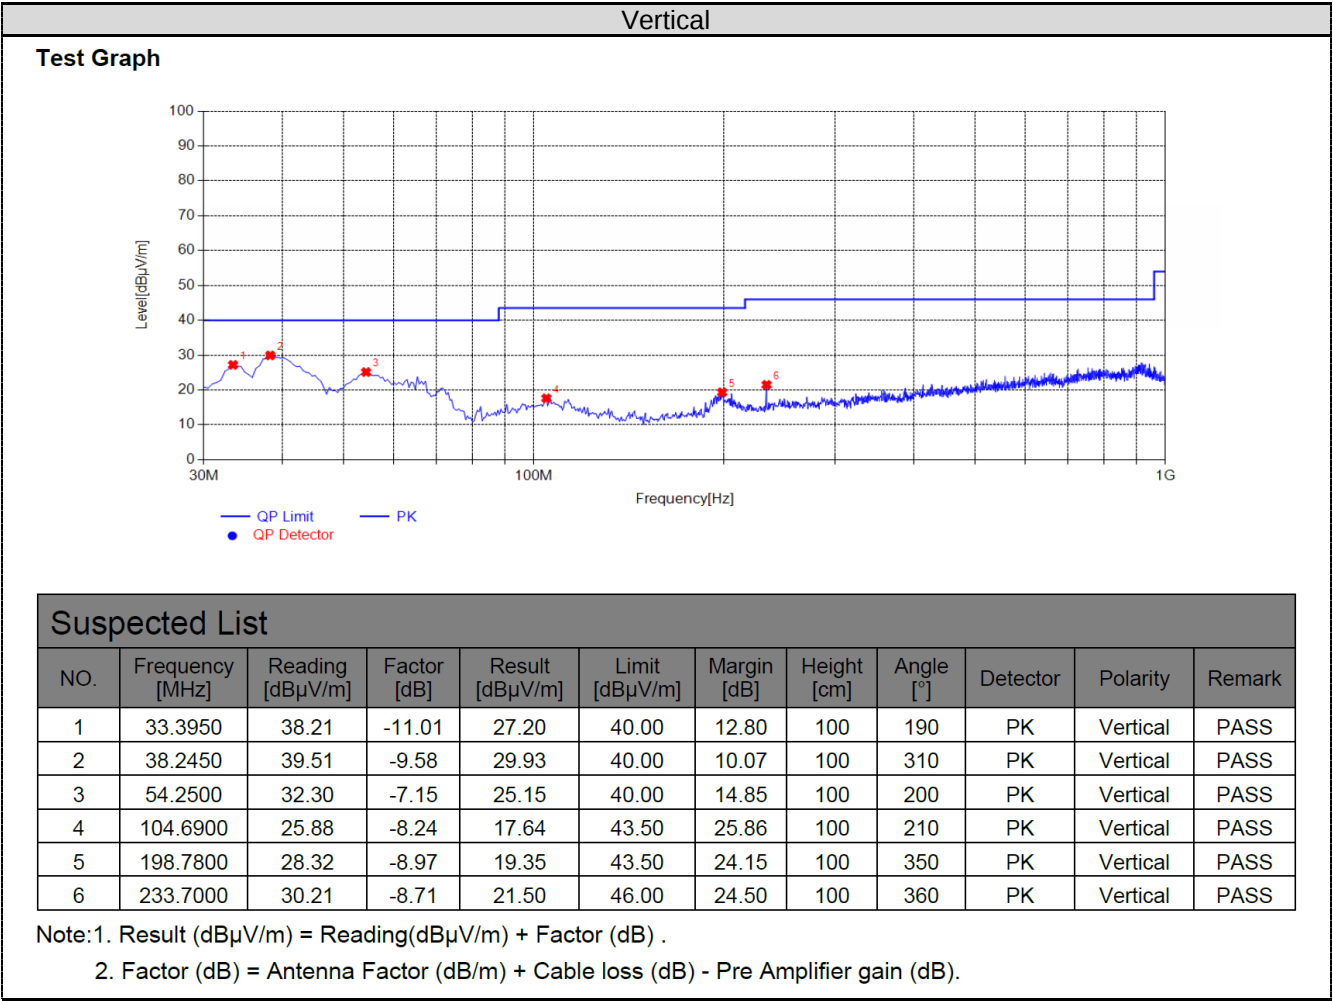

For 1GHz to 25GHz

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

GFSK (above 1GHz)

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	55.74	PK	74	18.26	53.84	31.42	6.98	36.50	1.90
4804.00	47.07	AV	54	6.93	45.17	31.42	6.98	36.50	1.90
7206.00	59.36	PK	74	14.64	48.76	37.03	8.87	35.30	10.60
7206.00	49.93	AV	54	4.07	39.33	37.03	8.87	35.30	10.60
9608.00	59.04	PK	74	14.96	45.52	38.53	10.97	35.99	13.52
9608.00	49.53	AV	54	4.47	36.01	38.53	10.97	35.99	13.52

Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	56.23	PK	74	17.77	54.33	31.42	6.98	36.50	1.90
4804.00	47.61	AV	54	6.39	45.71	31.42	6.98	36.50	1.90
7206.00	60.42	PK	74	13.58	49.82	37.03	8.87	35.30	10.60
7206.00	50.98	AV	54	3.02	40.38	37.03	8.87	35.30	10.60
9608.00	59.55	PK	74	14.45	46.03	38.53	10.97	35.99	13.52
9608.00	50.89	AV	54	3.11	37.37	38.53	10.97	35.99	13.52

Frequency(MHz):			2441		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882.00	55.96	PK	74	18.04	53.90	30.98	7.58	36.50	2.06
4882.00	48.41	AV	54	5.59	46.35	30.98	7.58	36.50	2.06
7323.00	60.56	PK	74	13.44	49.64	37.66	8.56	35.30	10.92
7323.00	50.64	AV	54	3.36	39.72	37.66	8.56	35.30	10.92
9764.00	59.19	PK	74	14.81	45.16	38.67	11.04	35.68	14.03
9764.00	48.28	AV	54	5.72	34.25	38.67	11.04	35.68	14.03

Frequency(MHz):			2441		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882.00	56.98	PK	74	17.02	54.92	30.98	7.58	36.50	2.06
4882.00	46.94	AV	54	7.06	44.88	30.98	7.58	36.50	2.06
7323.00	59.14	PK	74	14.86	48.22	37.66	8.56	35.30	10.92
7323.00	50.53	AV	54	3.47	39.61	37.66	8.56	35.30	10.92
9764.00	59.18	PK	74	14.82	45.15	38.67	11.04	35.68	14.03
9764.00	51.41	AV	54	2.59	37.38	38.67	11.04	35.68	14.03

Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	56.39	PK	74	17.61	53.32	31.47	7.80	36.20	3.07
4960.00	47.98	AV	54	6.02	44.91	31.47	7.80	36.20	3.07
7440.00	58.95	PK	74	15.05	47.21	38.32	8.72	35.30	11.74
7440.00	48.94	AV	54	5.06	37.20	38.32	8.72	35.30	11.74
9920.00	58.80	PK	74	15.20	44.17	38.90	11.11	35.37	14.63
9920.00	49.39	AV	54	4.61	34.76	38.90	11.11	35.37	14.63

Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	56.04	PK	74	17.96	52.97	31.47	7.80	36.20	3.07
4960.00	46.54	AV	54	7.46	43.47	31.47	7.80	36.20	3.07
7440.00	59.97	PK	74	14.03	48.23	38.32	8.72	35.30	11.74
7440.00	49.33	AV	54	4.67	37.59	38.32	8.72	35.30	11.74
9920.00	59.81	PK	74	14.19	45.18	38.90	11.11	35.37	14.63
9920.00	50.12	AV	54	3.88	35.49	38.90	11.11	35.37	14.63

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)- Pre-amplifier
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

Results of Band Edges Test (Radiated)

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

GFSK

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	49.58	PK	74.00	24.42	54.99	27.49	3.32	36.22	-5.41
2390.00	--	AV	54.00	--	--	--	--	--	--
Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	50.68	PK	74.00	23.32	56.09	27.49	3.32	36.22	-5.41
2390.00	--	AV	54.00	--	--	--	--	--	--
Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	47.85	PK	74.00	26.15	53.36	27.45	3.38	36.34	-5.51
2483.50	--	AV	54.00	--	--	--	--	--	--
Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	49.25	PK	74.00	24.75	54.76	27.45	3.38	36.34	-5.51
2483.50	--	AV	54.00	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.

4.3 MaximumPeak Output Power


Limit

The Maximum Peak Output Power Measurement is 125mW (20.97).

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the powersensor.

Test Configuration



Test Results

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	BT

Type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	2.065	20.97	Pass
	39	2.023		
	78	2.239		
π/4DQPSK	00	1.930	20.97	Pass
	39	2.239		
	78	2.104		
8DPSK	00	1.899	20.97	Pass
	39	1.976		
	78	2.384		

Note: 1.The test results including the cable lose.

4.4 20dB Bandwidth

Limit


For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Configuration



Test Results

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	BT

Modulation	Channel	20dB bandwidth (MHz)	99% OBW (MHz)	Result
GFSK	CH00	0.8668	0.953	Pass
	CH39	0.8485	0.943	
	CH78	0.8696	0.934	
$\pi/4$ DQPSK	CH00	1.1826	1.318	
	CH39	1.1675	1.283	
	CH78	1.1581	1.234	
8DPSK	CH00	1.1767	1.259	
	CH39	1.1541	1.211	
	CH78	1.1602	1.247	

Test plot as follows:

GFSK Modulation	
Agilent Ch Freq 2.402 GHz Trig Free Occupied Bandwidth Center 2.40200000 GHz Ref 16 dBm #Atten 25 dB #Peak Log 10 dB/ Offst 1 dB Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 5 ms (401 pts) Occupied Bandwidth 866.7616 kHz Transmit Freq Error -8.901 kHz x dB Bandwidth 952.859 kHz Occ BW % Pwr 99.00 % x dB -20.00 dB Freq/Channel Center Freq 2.40200000 GHz Start Freq 2.40050000 GHz Stop Freq 2.40350000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin	
CH00	
Agilent Ch Freq 2.441 GHz Trig Free Occupied Bandwidth Center 2.441000000 GHz Ref 16 dBm #Atten 25 dB #Peak Log 10 dB/ Offst 1 dB Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 5 ms (401 pts) Occupied Bandwidth 848.5222 kHz Transmit Freq Error -15.757 kHz x dB Bandwidth 942.835 kHz Occ BW % Pwr 99.00 % x dB -20.00 dB Freq/Channel Center Freq 2.44100000 GHz Start Freq 2.43950000 GHz Stop Freq 2.44250000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin	
CH39	
Agilent Ch Freq 2.48 GHz Trig Free Occupied Bandwidth Center 2.480000000 GHz Ref 16 dBm #Atten 25 dB #Peak Log 10 dB/ Offst 1 dB Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 5 ms (401 pts) Occupied Bandwidth 869.5629 kHz Transmit Freq Error -8.094 kHz x dB Bandwidth 934.219 kHz Occ BW % Pwr 99.00 % x dB -20.00 dB Freq/Channel Center Freq 2.48000000 GHz Start Freq 2.47850000 GHz Stop Freq 2.48150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin	
CH78	

$\pi/4$ DQPSK Modulation	
Agilent Ch Freq 2.402 GHz Trig Free Occupied Bandwidth Center 2.40200000 GHz Ref 16 dBm #Atten 25 dB #Peak Log 10 dB/ Offst 1 dB Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts) Occupied Bandwidth 1.1826 MHz Transmit Freq Error -10.302 kHz x dB Bandwidth 1.318 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Freq/Channel Center Freq 2.40200000 GHz Start Freq 2.40050000 GHz Stop Freq 2.40350000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin	
CH00	
Agilent Ch Freq 2.441 GHz Trig Free Occupied Bandwidth Center 2.441000000 GHz Ref 16 dBm #Atten 25 dB #Peak Log 10 dB/ Offst 1 dB Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts) Occupied Bandwidth 1.1675 MHz Transmit Freq Error -14.848 kHz x dB Bandwidth 1.283 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Freq/Channel Center Freq 2.44100000 GHz Start Freq 2.43950000 GHz Stop Freq 2.44250000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin	
CH39	
Agilent Ch Freq 2.48 GHz Trig Free Occupied Bandwidth Center 2.480000000 GHz Ref 16 dBm #Atten 25 dB #Peak Log 10 dB/ Offst 1 dB Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts) Occupied Bandwidth 1.1581 MHz Transmit Freq Error -14.595 kHz x dB Bandwidth 1.234 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Freq/Channel Center Freq 2.48000000 GHz Start Freq 2.47850000 GHz Stop Freq 2.48150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin	
CH78	

8DPSK Modulation

Agilent

L

Ch Freq

2.402 GHz

Trig

Free

Occupied Bandwidth

Center 2.40200000 GHz

Ref 16 dBm

#Atten 25 dB

#Peak

Log

10

dB/

Offst

1

dB

Center 2.402 GHz

#Res BW 30 kHz

#VBW 100 kHz

Sweep 5 ms (401 pts)

Occupied Bandwidth

1.1767 MHz

Transmit Freq Error

-9.821 kHz

x dB Bandwidth

1.259 MHz

Occ BW % Pwr

99.00 %

x dB

-20.00 dB

Freq/Channel

Center Freq

2.40200000 GHz

Start Freq

2.40050000 GHz

Stop Freq

2.40350000 GHz

CF Step

300.000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

CH00

Agilent

L

Ch Freq

2.441 GHz

Trig

Free

Occupied Bandwidth

Center 2.441000000 GHz

Ref 16 dBm

#Atten 25 dB

#Peak

Log

10

dB/

Offst

1

dB

Center 2.441 GHz

#Res BW 30 kHz

#VBW 100 kHz

Sweep 5 ms (401 pts)

Occupied Bandwidth

1.1541 MHz

Transmit Freq Error

-7.988 kHz

x dB Bandwidth

1.211 MHz

Occ BW % Pwr

99.00 %

x dB

-20.00 dB

Freq/Channel

Center Freq

2.44100000 GHz

Start Freq

2.43950000 GHz

Stop Freq

2.44250000 GHz

CF Step

300.000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

CH39

Agilent

L

Ch Freq

2.48 GHz

Trig

Free

Occupied Bandwidth

Center 2.480000000 GHz

Ref 16 dBm

#Atten 25 dB

#Peak

Log

10

dB/

Offst

1

dB

Center 2.48 GHz

#Res BW 30 kHz

#VBW 100 kHz

Sweep 5 ms (401 pts)

Occupied Bandwidth

1.1602 MHz

Transmit Freq Error

-5.942 kHz

x dB Bandwidth

1.247 MHz

Occ BW % Pwr

99.00 %

x dB

-20.00 dB

Freq/Channel

Center Freq

2.48000000 GHz

Start Freq

2.47850000 GHz

Stop Freq

2.48150000 GHz

CF Step

300.000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Scale Type

Log

Lin

CH78

4.5 Frequency Separation


LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $2/3 \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

TEST CONFIGURATION



TEST RESULTS

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	BT


Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH39	0.995	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			
$\pi/4\text{DQPSK}$	CH39	1.005	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			
8DPSK	CH39	1.005	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			

Note:


We have tested all mode at high, middle and low channel, and recorded worst case at middle

Test plot as follows:


GFSK Modulation

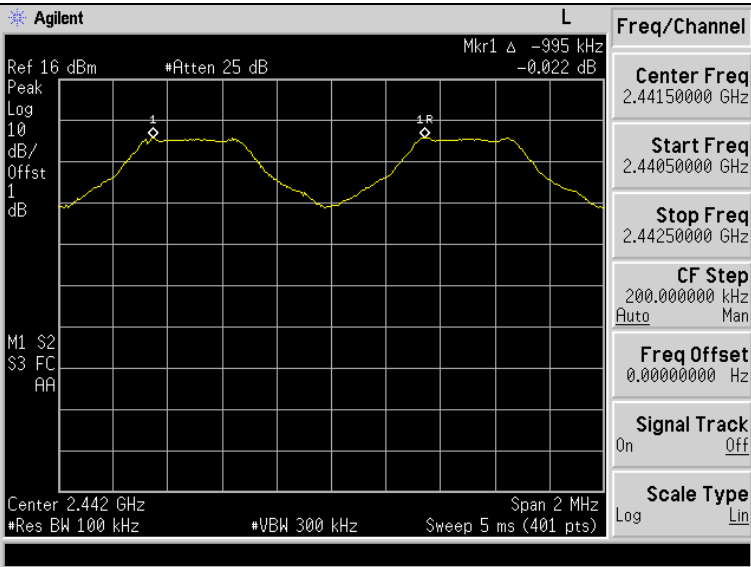

$\pi/4$ DQPSK Modulation

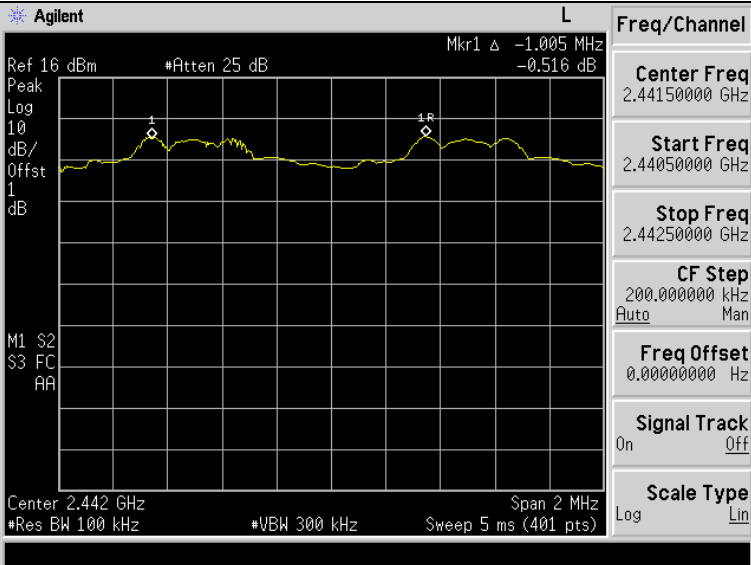

8DPSK Modulation

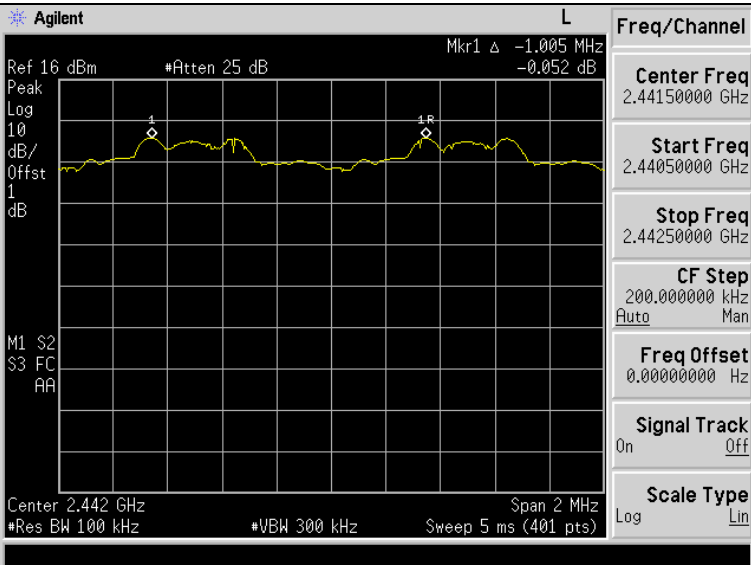

4.6 Number of hopping frequency


Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.

Test Configuration




Test Results

Temperature	22.8℃	Humidity	56%
Test Engineer	Moon Tan	Configurations	BT


Modulation	Number of Hopping Channel	Limit	Result
GFSK	79	≥15	Pass
$\pi/4$ DQPSK	79		
8DPSK	79		

Test plot as follows:


GFSK Modulation

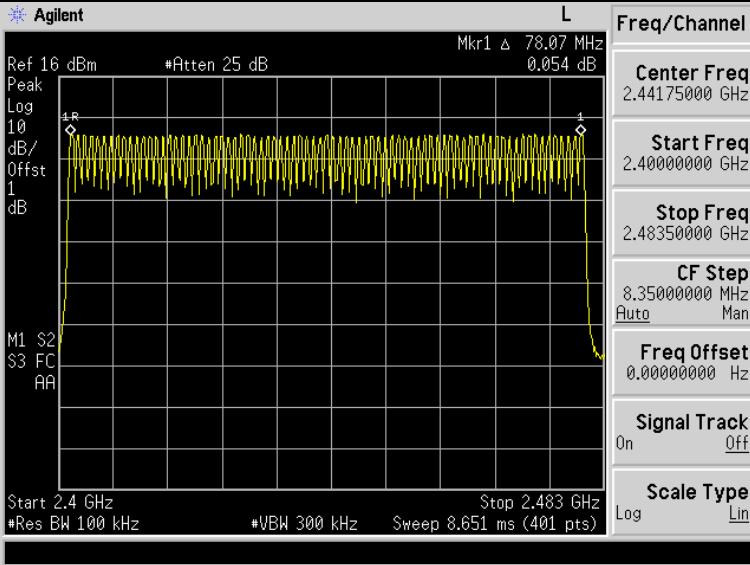

$\pi/4$ DQPSK Modulation

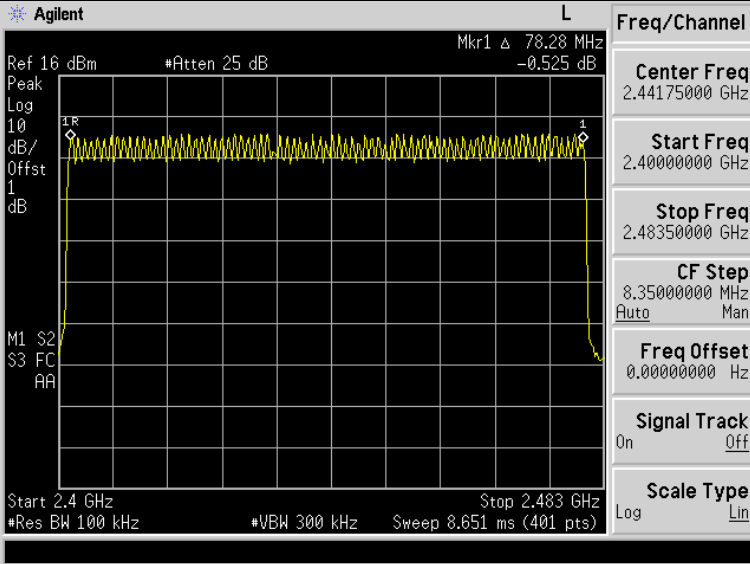

8DPSK Modulation

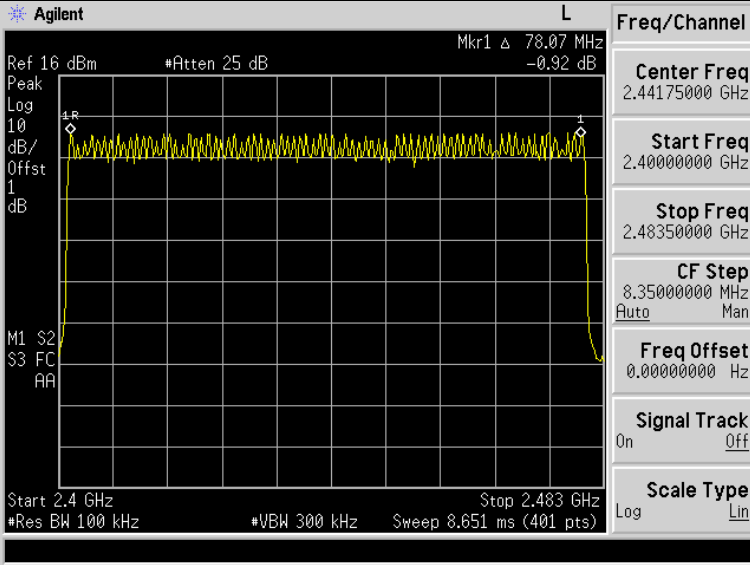

4.7 Time of Occupancy (Dwell Time)


Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

Test Configuration



Test Results

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	BT


Modulation	Packet	Pulse time (ms)	Dwell time (s)	Limit (s)	Result
GFSK	DH1	0.370	0.118	0.40	Pass
	DH3	1.631	0.261		
	DH5	2.875	0.307		
π/4DQPSK	2-DH1	0.380	0.122	0.40	Pass
	2-DH3	1.631	0.261		
	2-DH5	2.900	0.309		
8DPSK	3-DH1	0.370	0.118	0.40	Pass
	3-DH3	1.631	0.261		
	3-DH5	2.875	0.307		

Note:


- We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
- $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 2 \div 79) \times 31.6$ Second for DH1, 2-DH1, 3-DH1
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 4 \div 79) \times 31.6$ Second for DH3, 2-DH3, 3-DH3
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 6 \div 79) \times 31.6$ Second for DH5, 2-DH5, 3-DH5

Test plot as follows:


GFSK Modulation

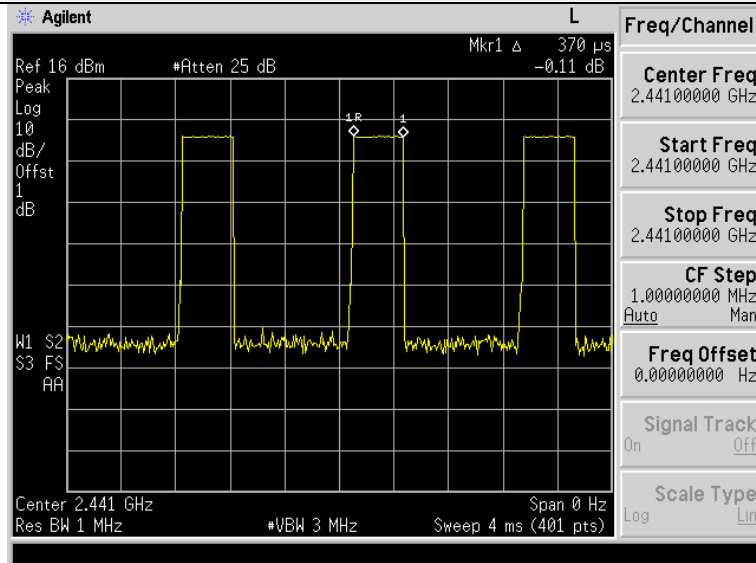

DH1

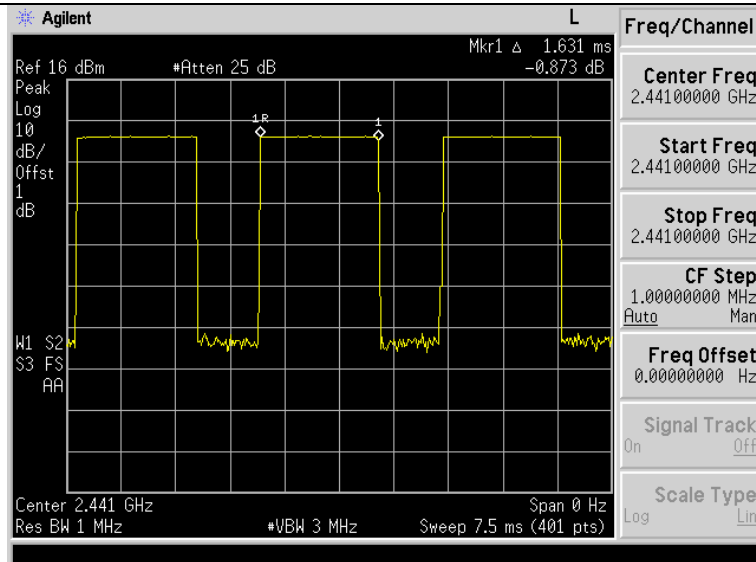


DH3

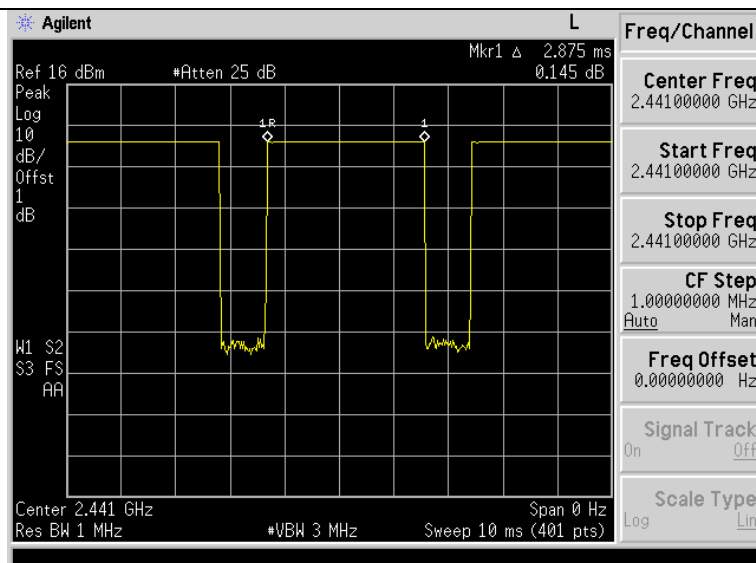


DH5


$\pi/4$ DQPSK Modulation

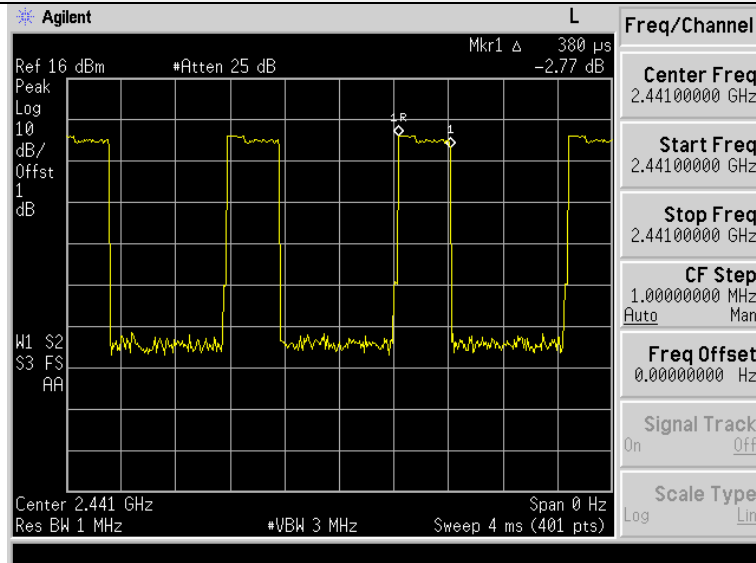


2-DH1

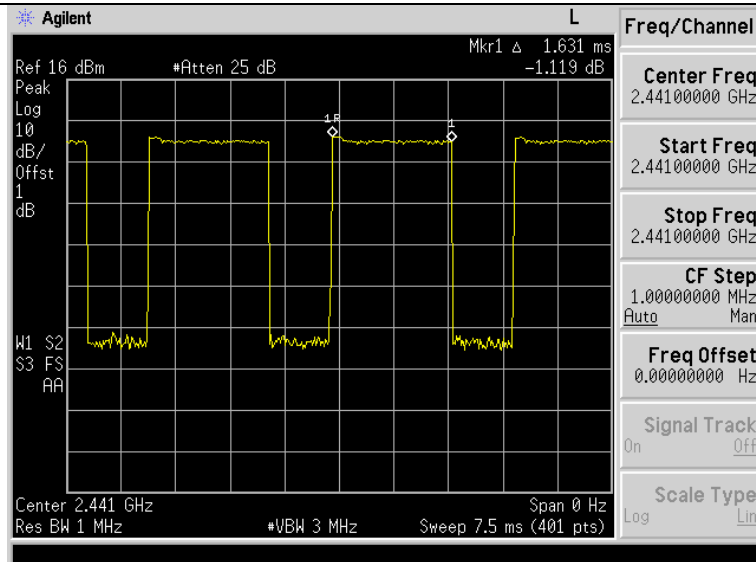

2-DH3

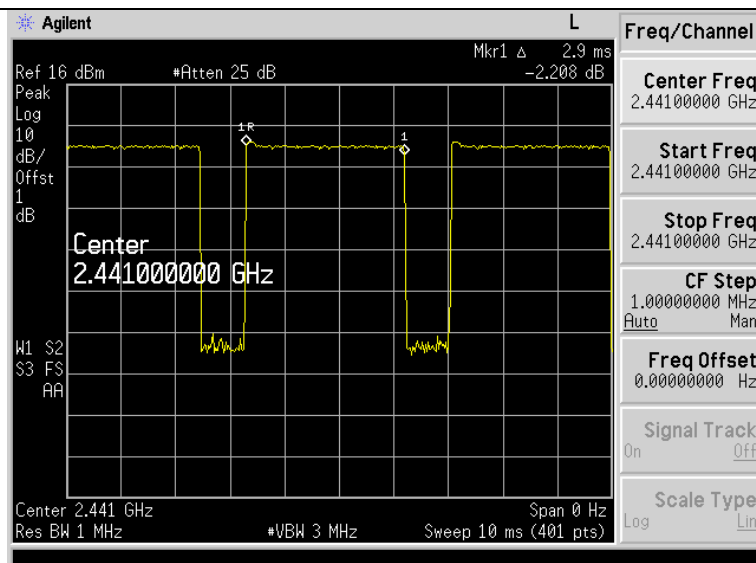

2-DH5

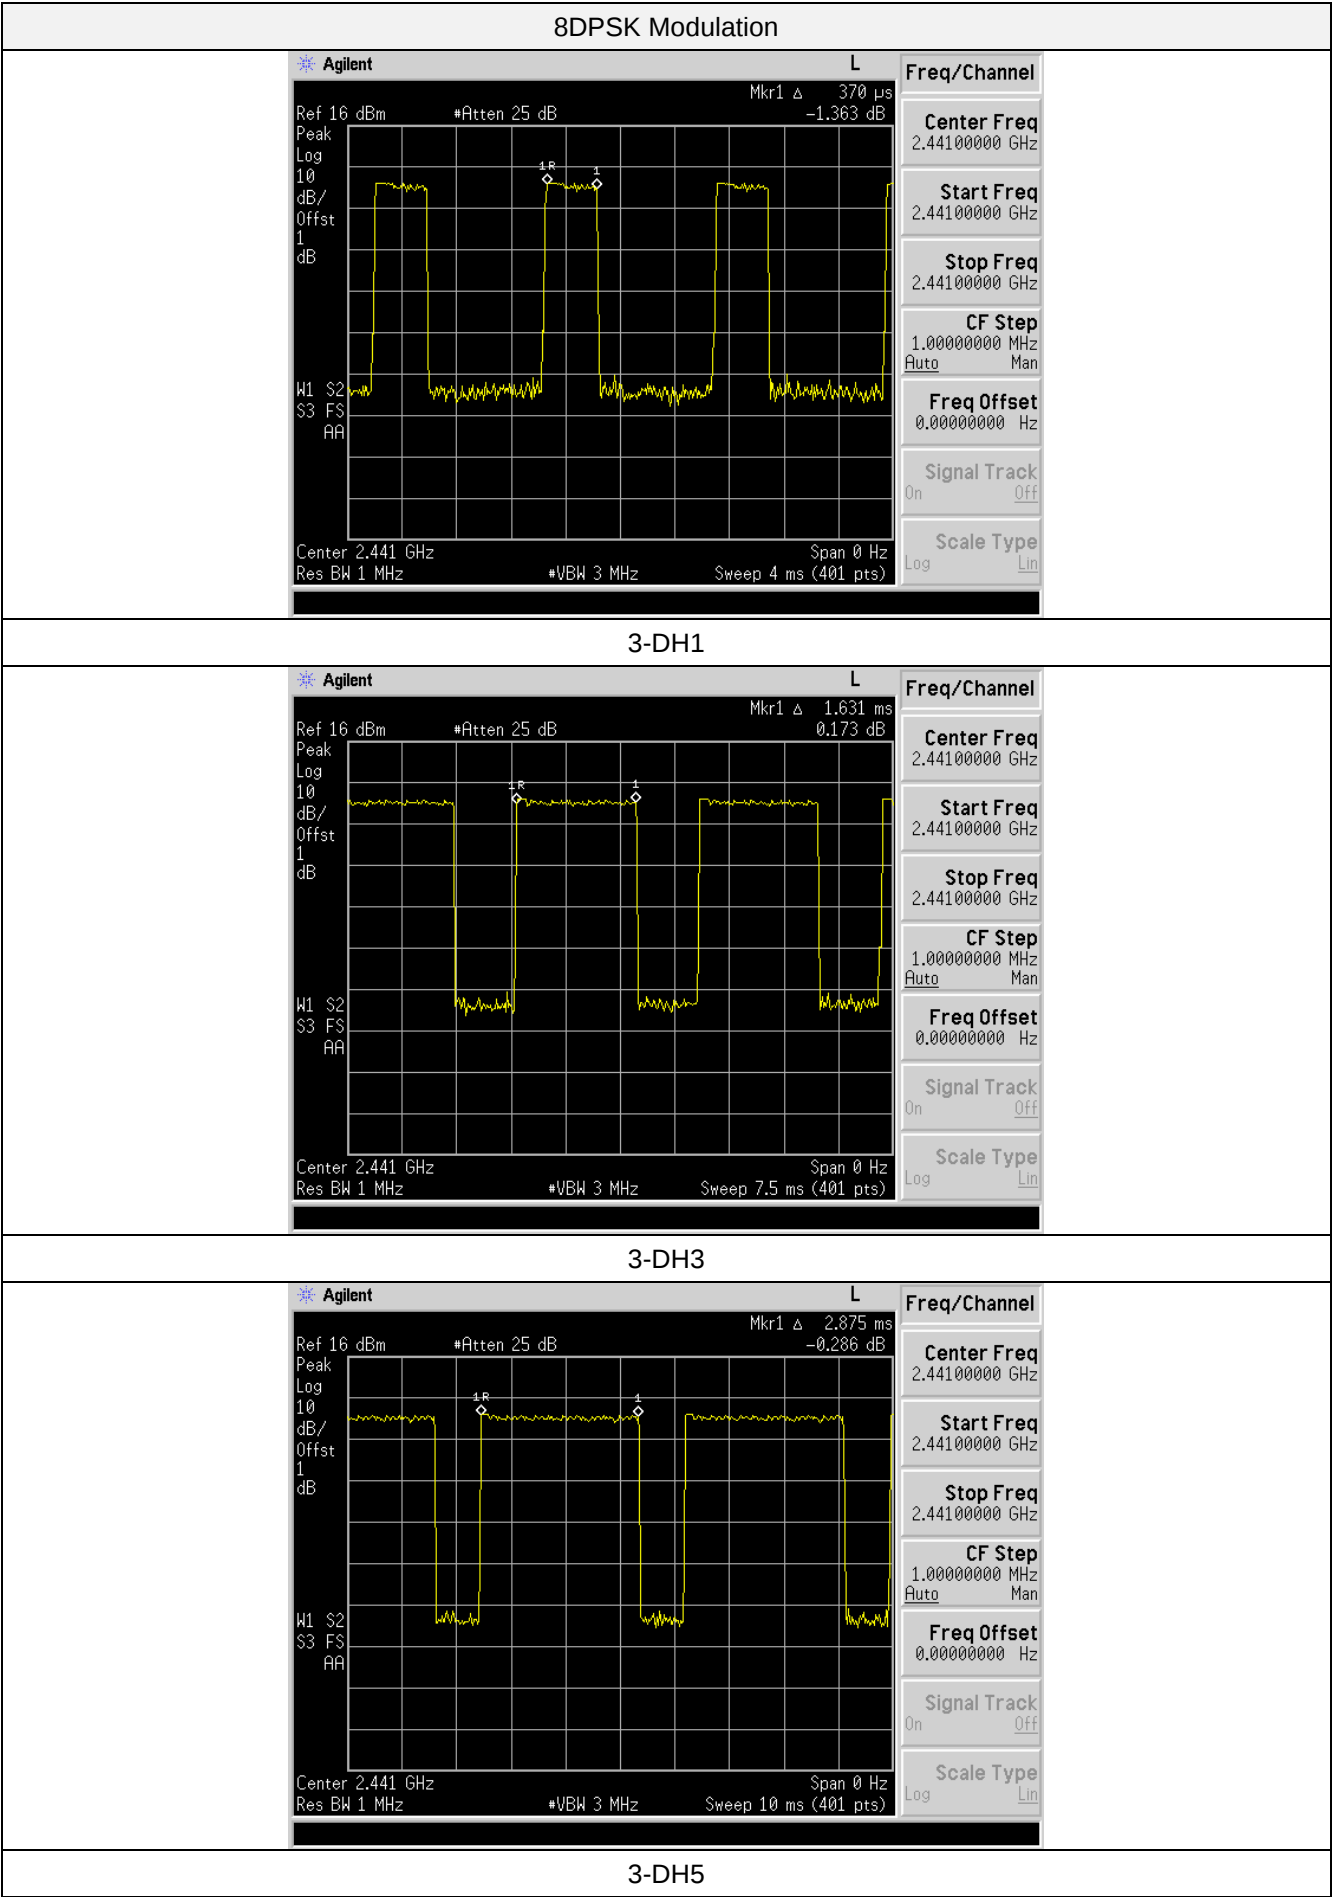

4.8 Out-of-band Emissions


Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration







Test Results





Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	BT


Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

We measured all conditions (DH1, DH3, DH5) and recorded worst case at DH5


Test plot as follows:

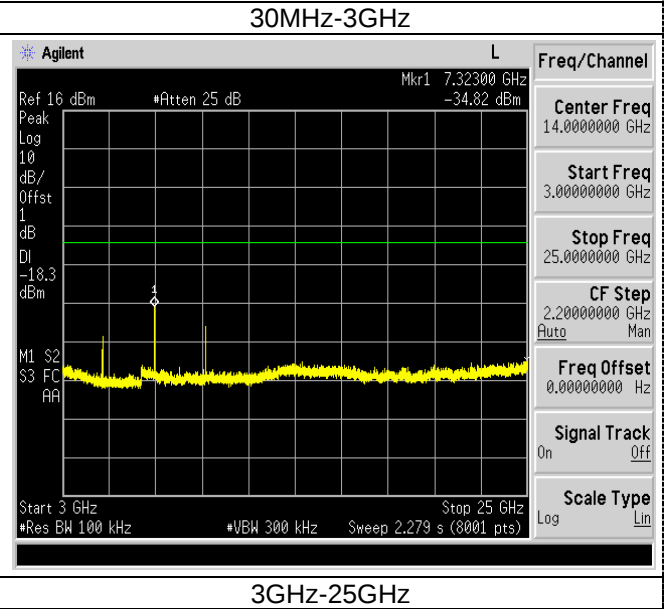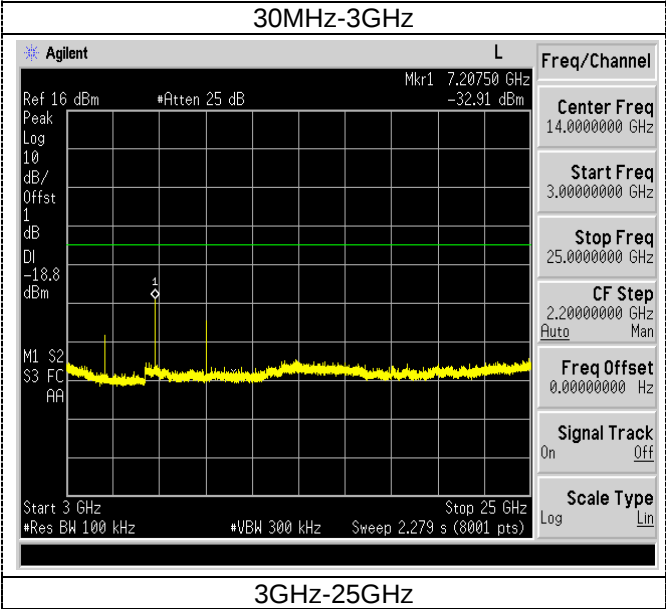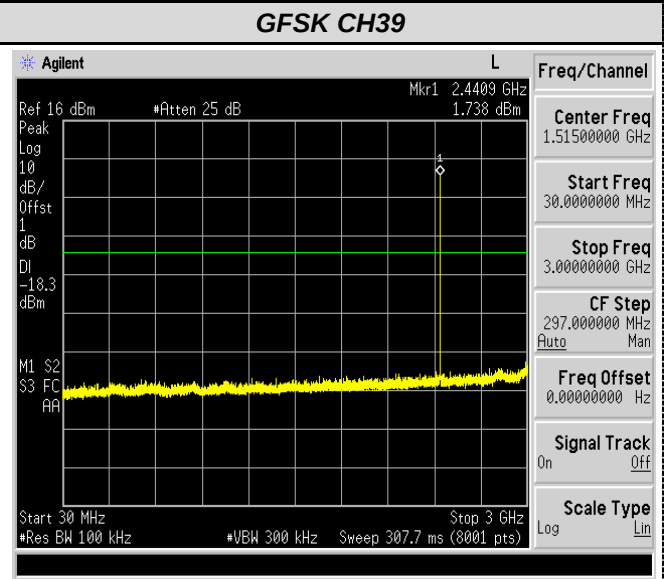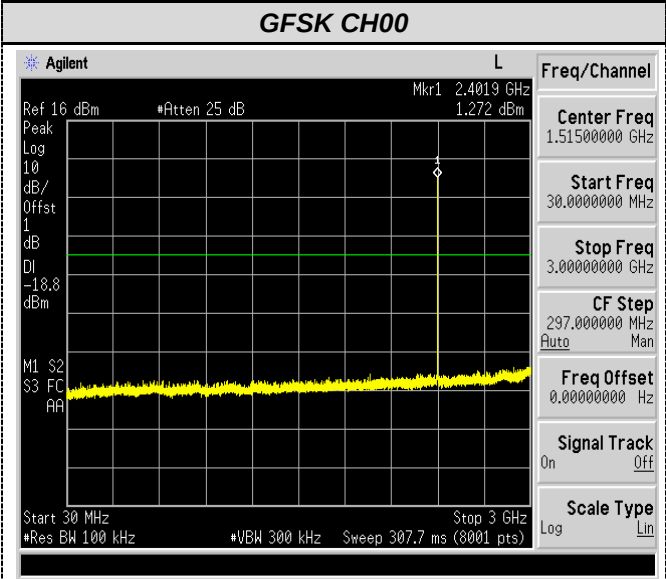

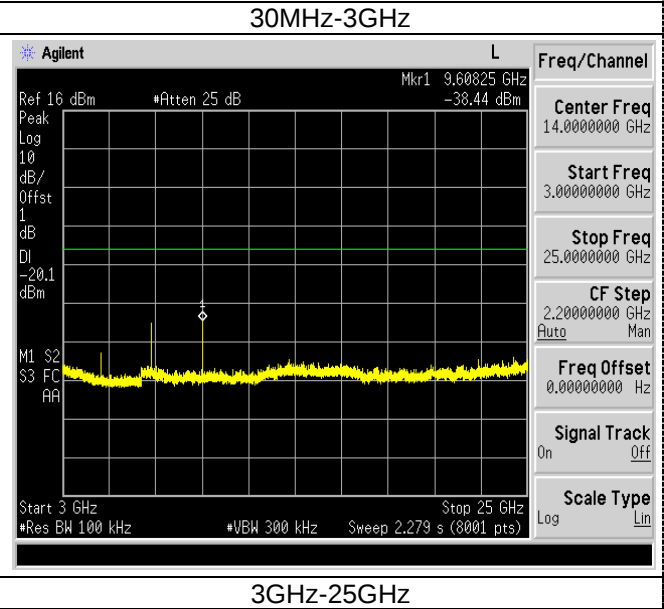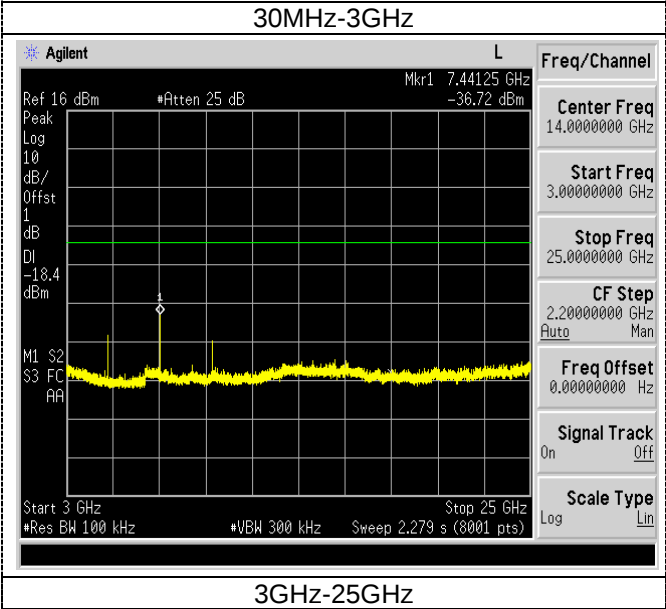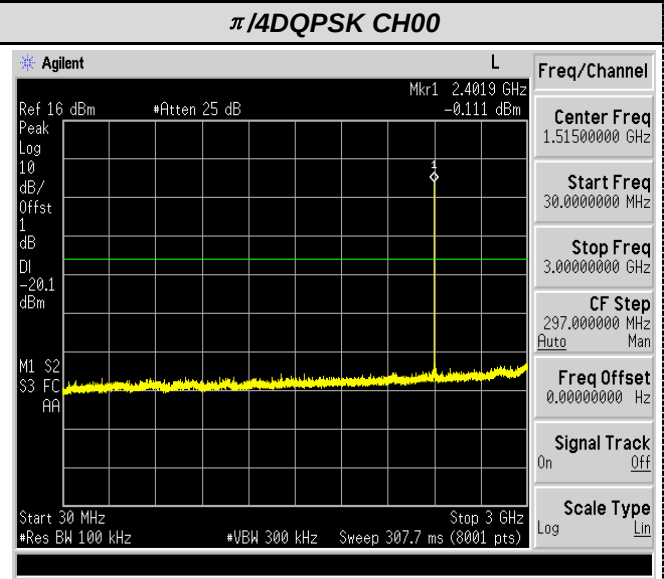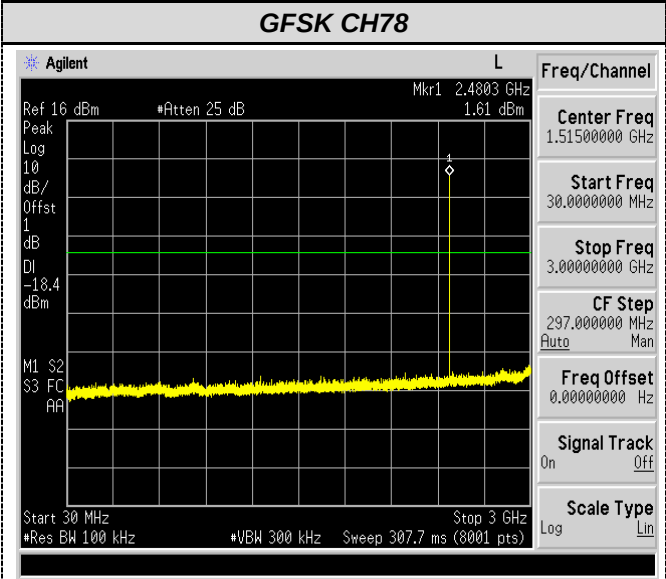


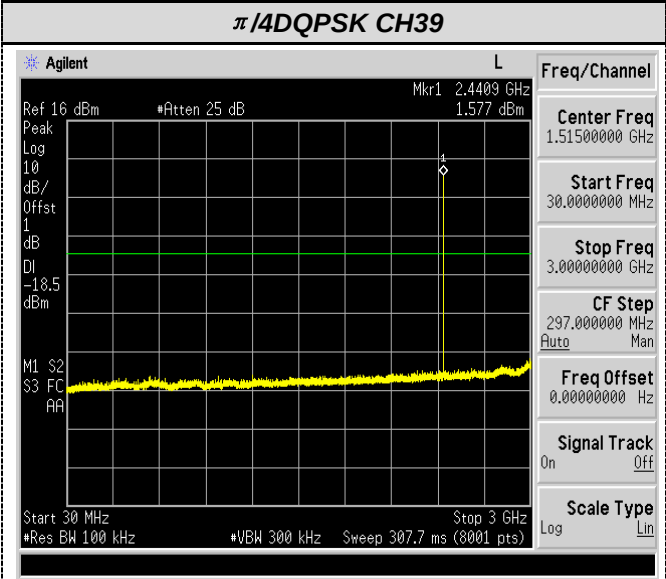


30MHz-3GHz

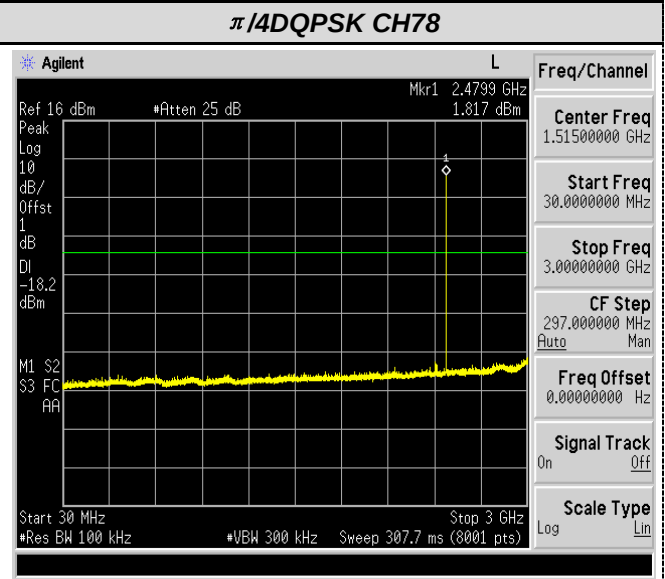





30MHz-3GHz

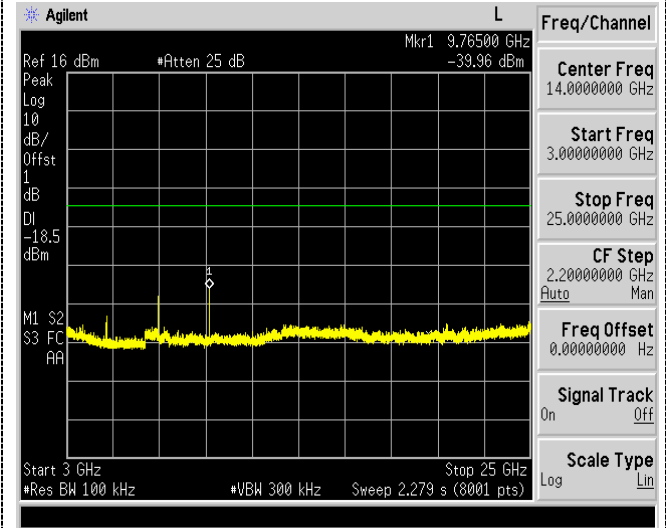




3GHz-25GHz

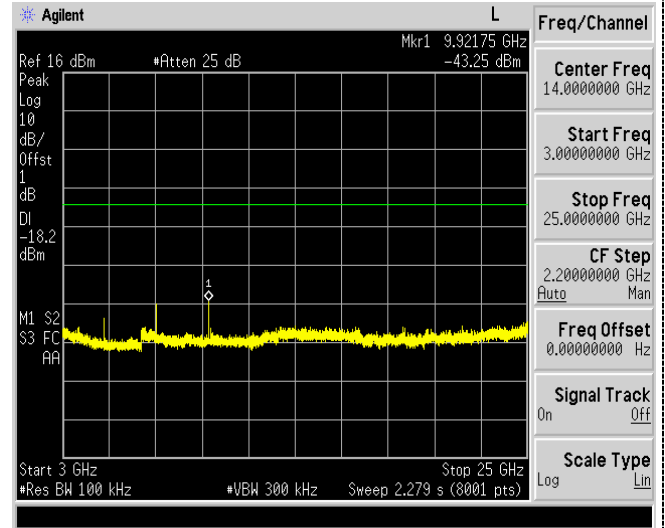

3GHz-25GHz

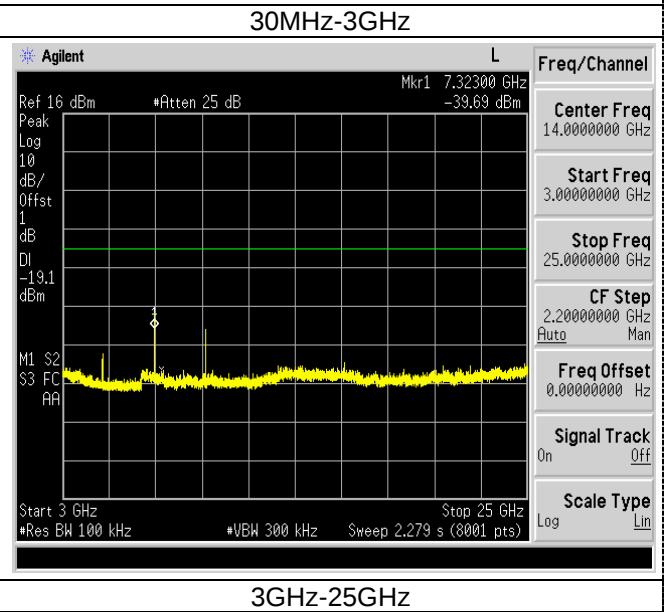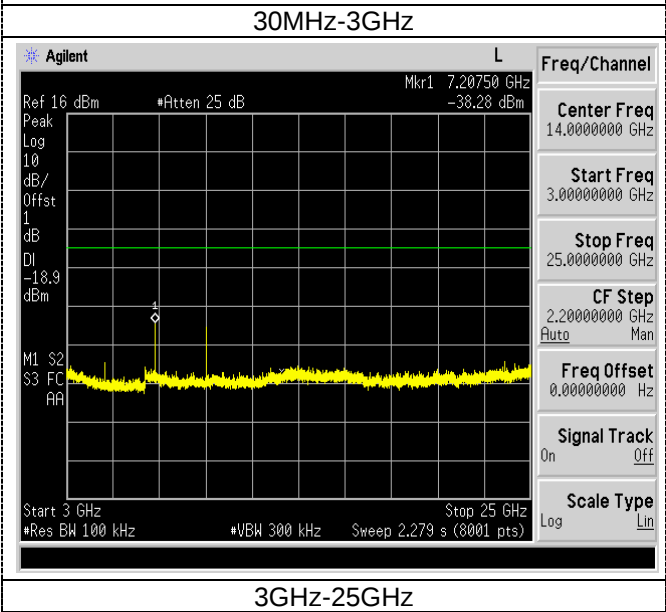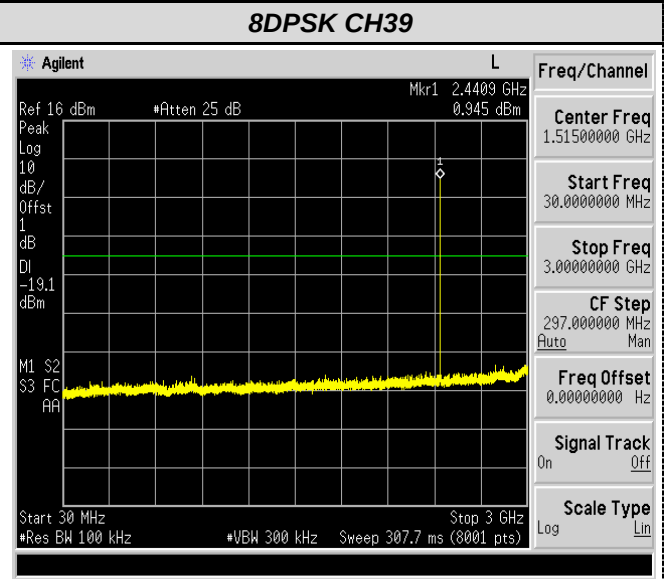
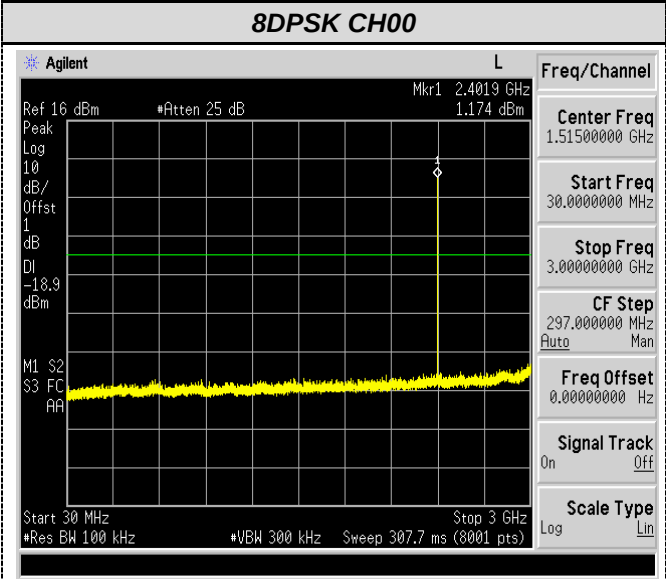


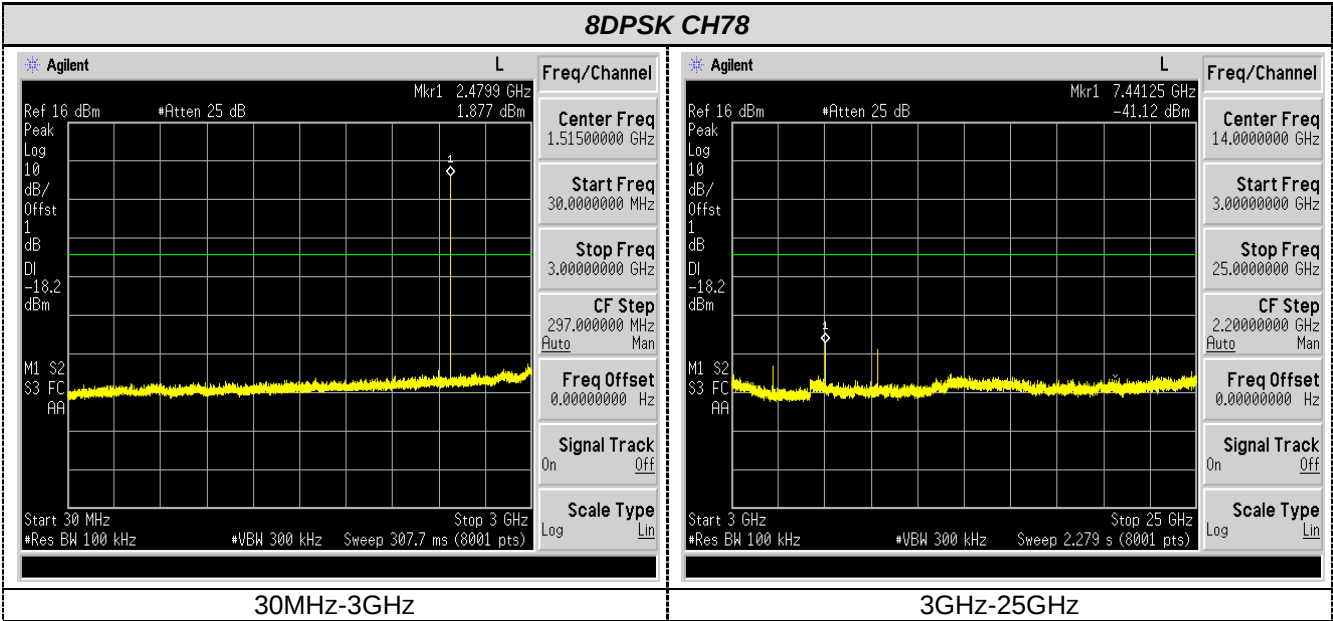

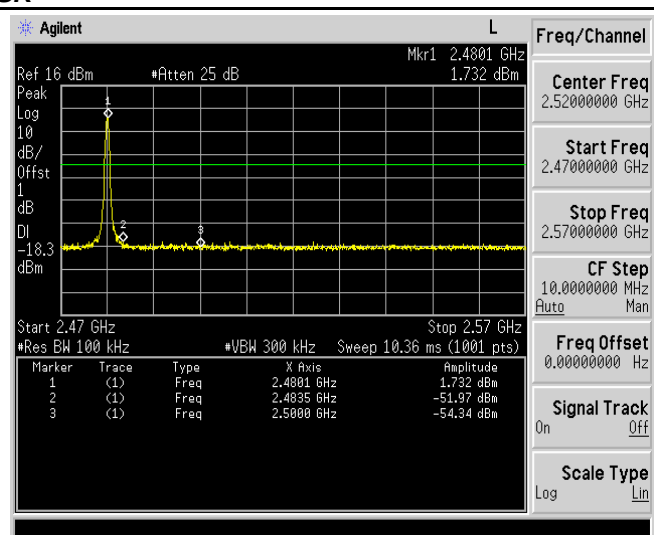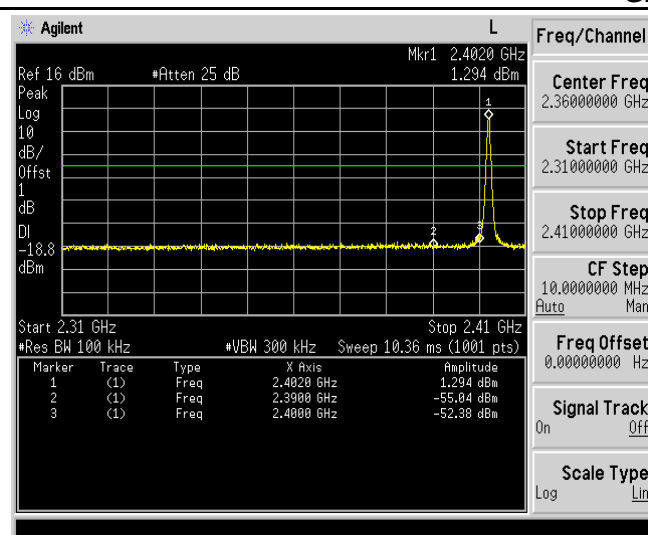Band-edge Measurements for RF Conducted Emissions:**GFSK**



Left Band edge hopping off

RightBand edge hopping off

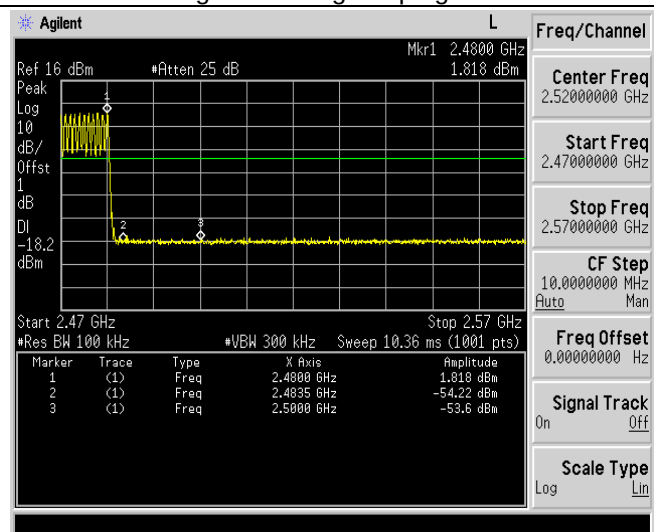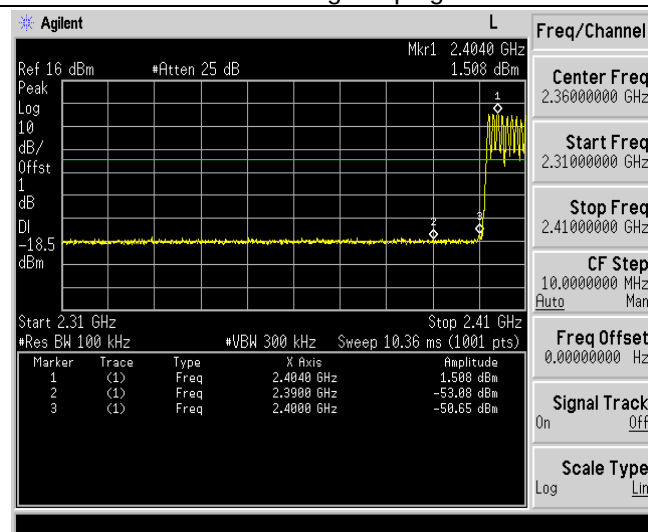


Left Band edge hopping on

RightBand edge hopping on

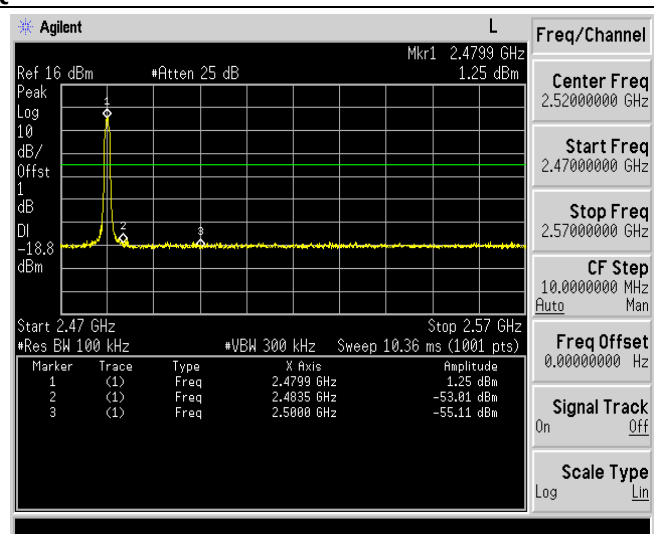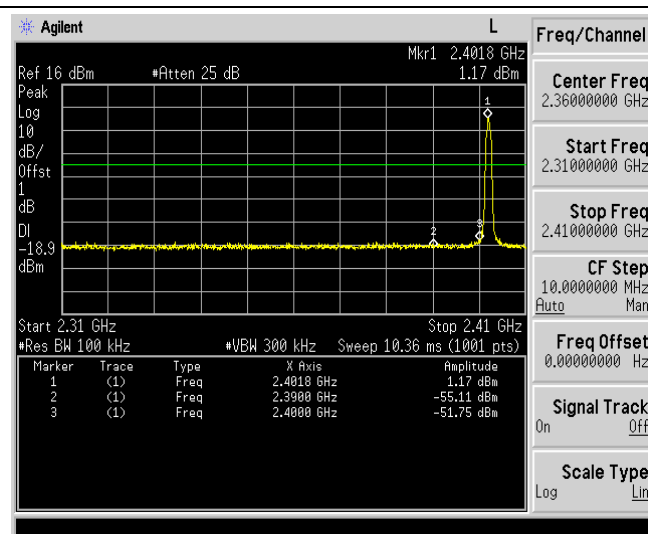
 $\pi/4$ DQPSK

Left Band edge hopping off


RightBand edge hopping off

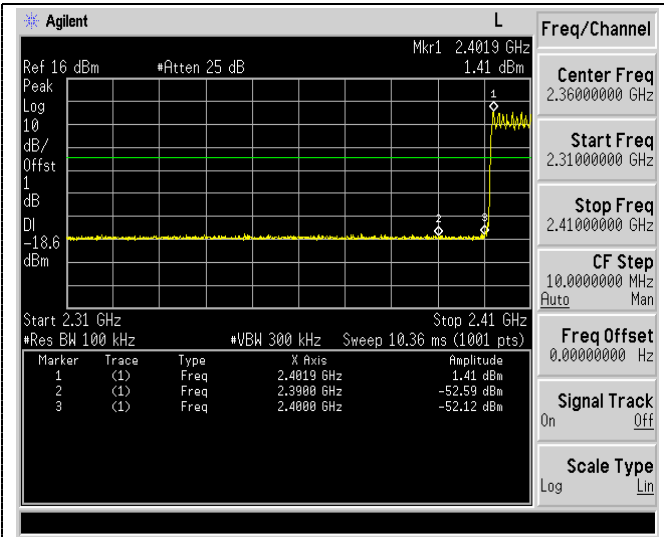


Left Band edge hopping on

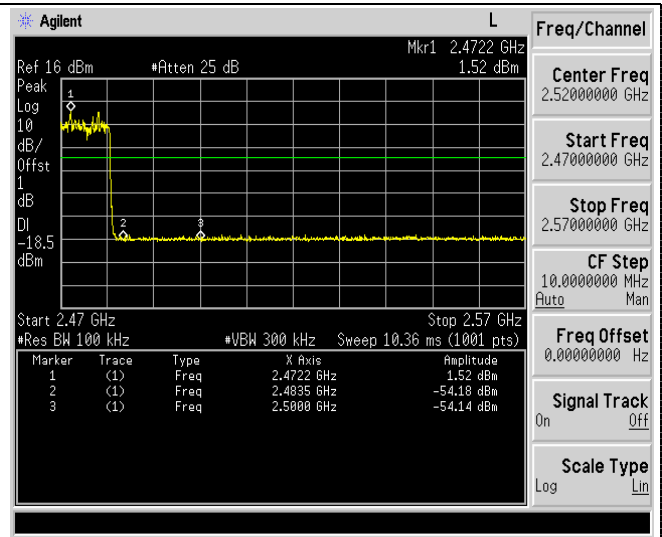


RightBand edge hopping on

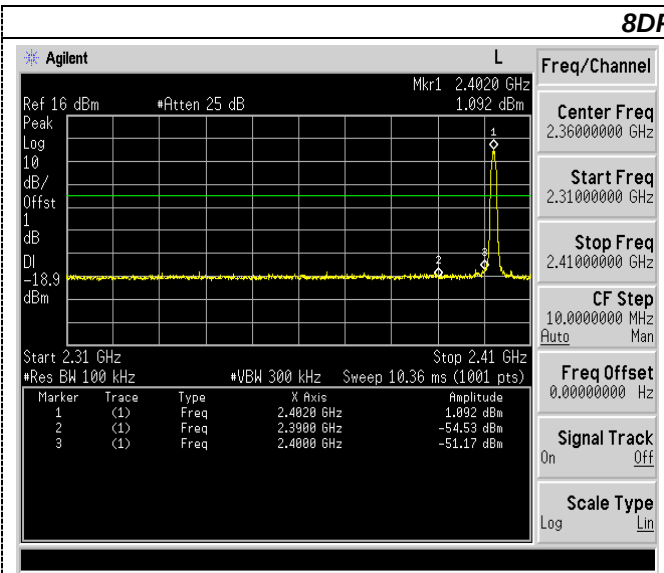


Left Band edge hopping off

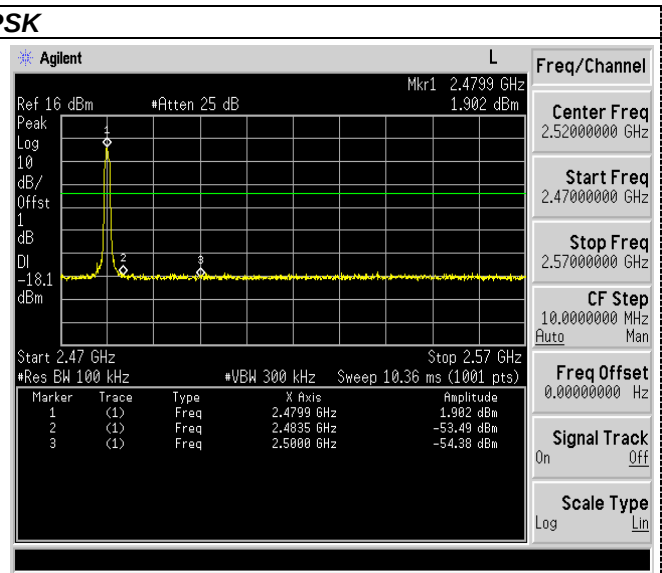

RightBand edge hopping off

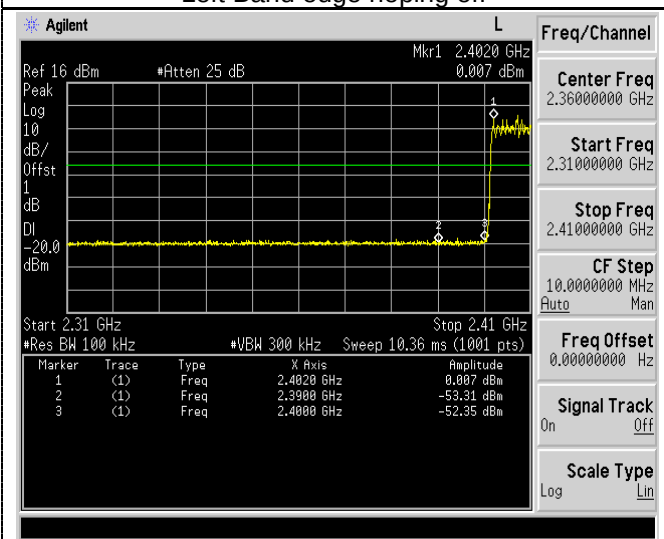

Left Band edge hopping on

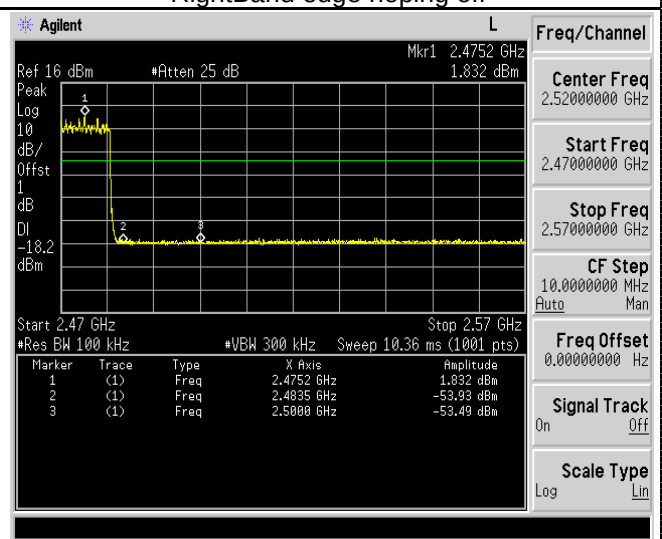

RightBand edge hopping on

4.9 Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a) (1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, foreexample: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros:8(non-inverted signal)

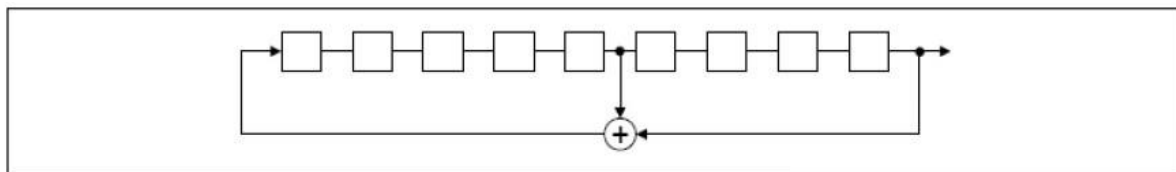

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

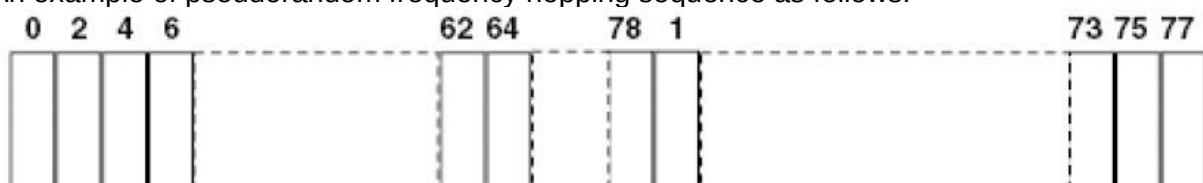

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

4.10 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.



Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The maximum gain of antenna was 0dBi.

5 Test Setup Photos of the EUT

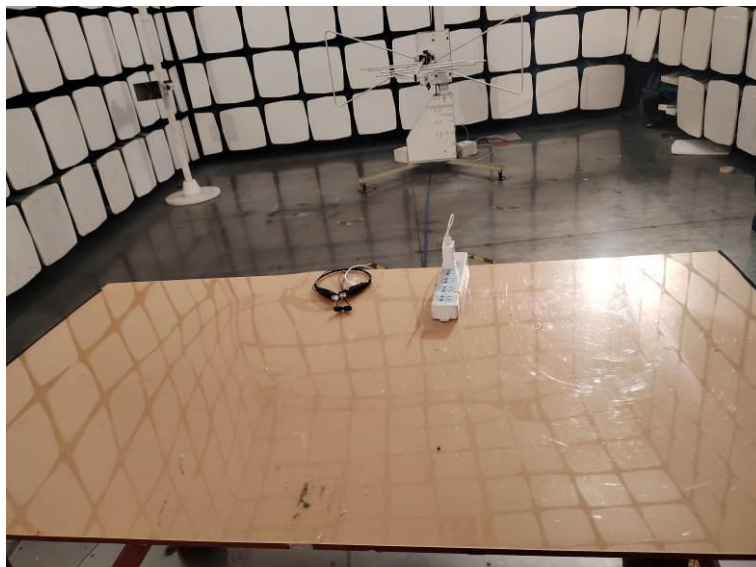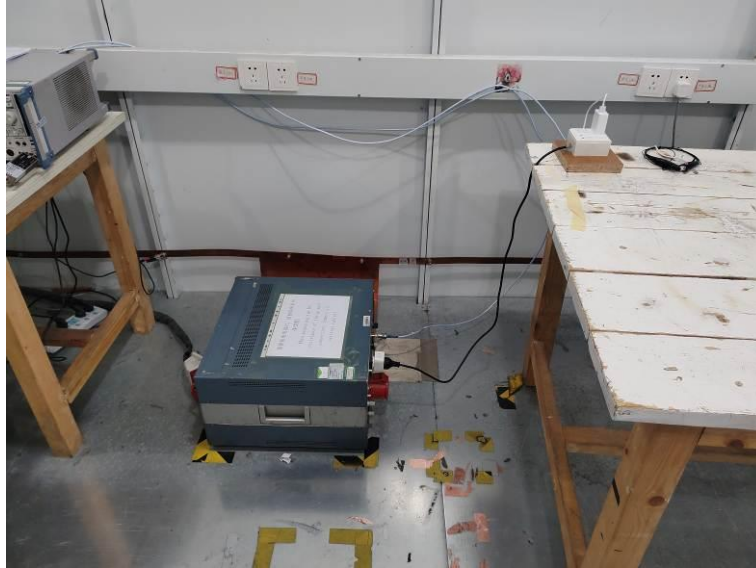




6 Photos of the EUT


External Photos of EUT





Internal Photos

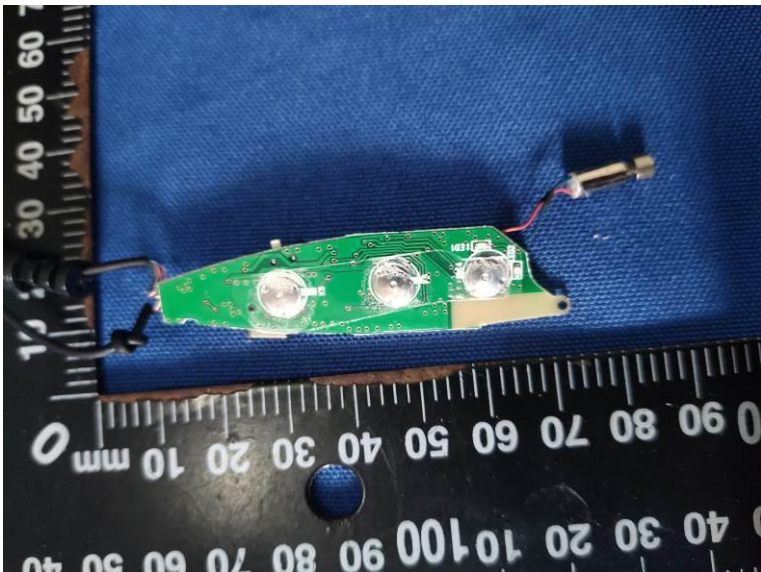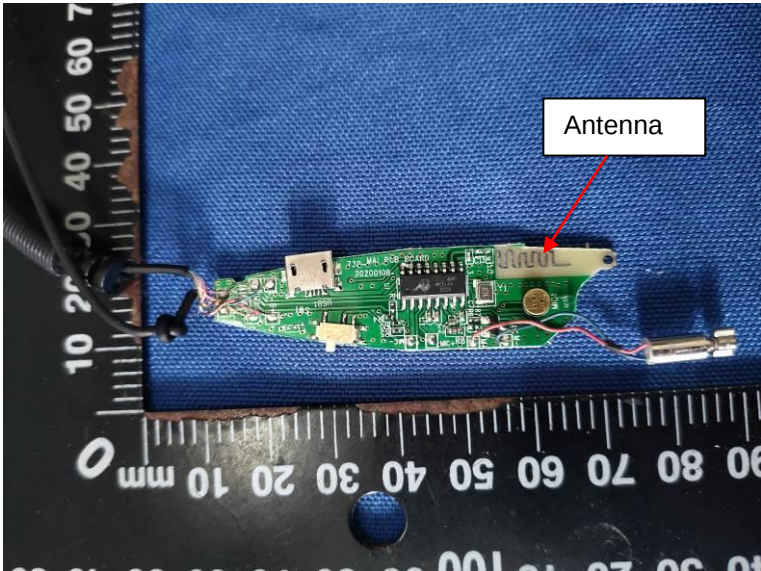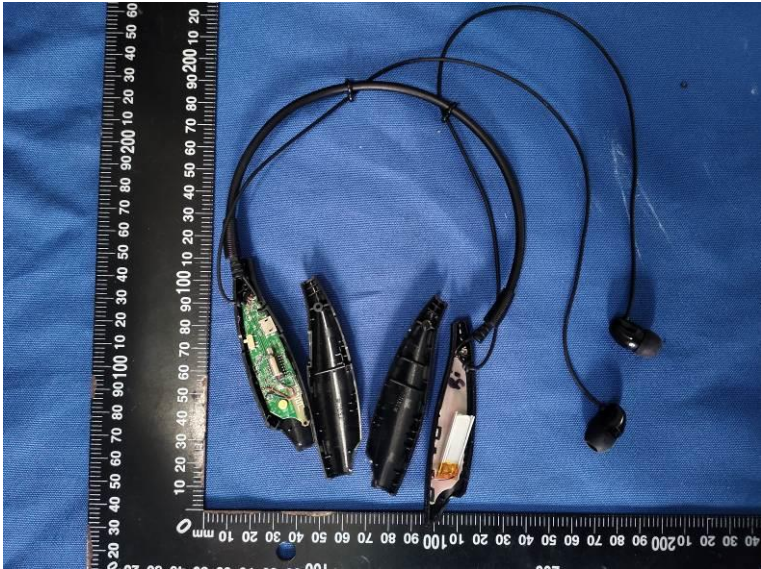

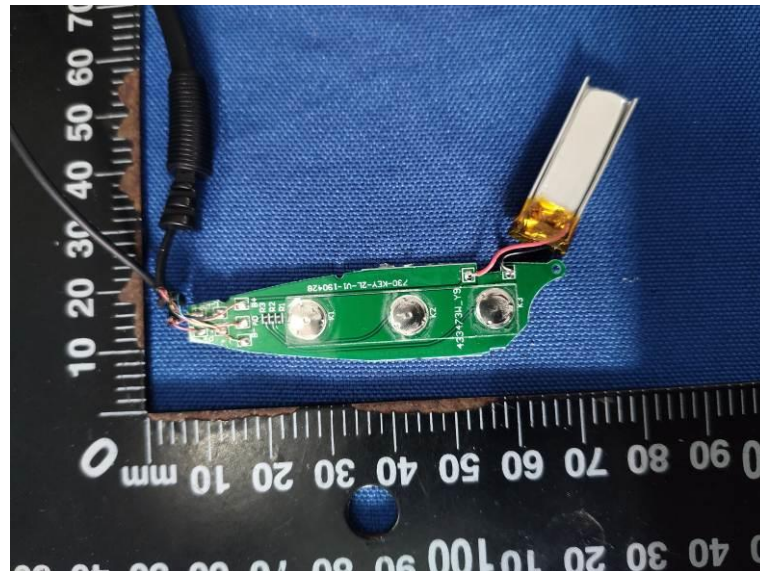

***** End of Report *****