

Connect your detector to your smartphone via Bluetooth®

A Power on the MAX 3.

Make sure the unit is connected to your car's 12V port.


B Install and run the ESCORT Live app on your smartphone.

Note: The first time you run the app, you will be prompted to register a new account.

C In the ESCORT Live app, press the Menu button then select "Devices".



MENU
Button



D Select "MAX 3" from the list.

E In the ESCORT Live app, the MAX 3 entry will display "Connected" when it has paired. Press the "Menu" button then "Home" to return to the Map screen.

F You're all set!



BLANK PAGE?

ESCORT MAX 3

Premium Radar Laser Detector



QUICK START GUIDE

THANK YOU!

For purchasing the new
ESCORT® MAX 3

Full manual available at: www.escortradar.com



FCC ID:QKLMAX3. CONTAINS FCC ID:QKLB72. THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.

FCC NOTE: Modifications not expressly approved by the manufacturer could void the user's FCC granted authority to operate the equipment.

©2020 ESCORT INC. ESCORT®, ESCORT MAX3®, DEFENDER®, TRUELOCK™, SPEEDALERT™, AUTOSENSITIVITY™, SMARTMUTE™, MUTEDISPLAY™, SPECDISPLAY™, IVT Filter™, AutoLearn®, EZ Mag Mount™ AND EXPERTMETER™ ARE TRADEMARKS OF ESCORT INC.


APPLE AND THE APPLE LOGO ARE TRADEMARKS OF APPLE INC., REGISTERED IN THE U.S. AND OTHER COUNTRIES. APP STORE IS A SERVICE MARK OF APPLE INC. ANDROID, GOOGLE PLAY, AND THE GOOGLE PLAY LOGO ARE TRADEMARKS OF GOOGLE INC. THE BLUETOOTH® WORD MARK AND LOGOS ARE REGISTERED TRADEMARKS OWNED BY BLUETOOTH SIG, INC. AND ANY USE OF SUCH MARKS BY ESCORT IS UNDER LICENSE.

Printed in the Philippines

UPDATES KEEP YOUR DETECTOR FUTURE-PROOF

IMPORTANT: Because of emerging radar technologies in newer vehicles, Escort is constantly updating its products' software to keep your product performing at its best, every day.

MAX 3 can be updated using a USB A/Mini B cable and our Detector Tools Pro software available on our web site.

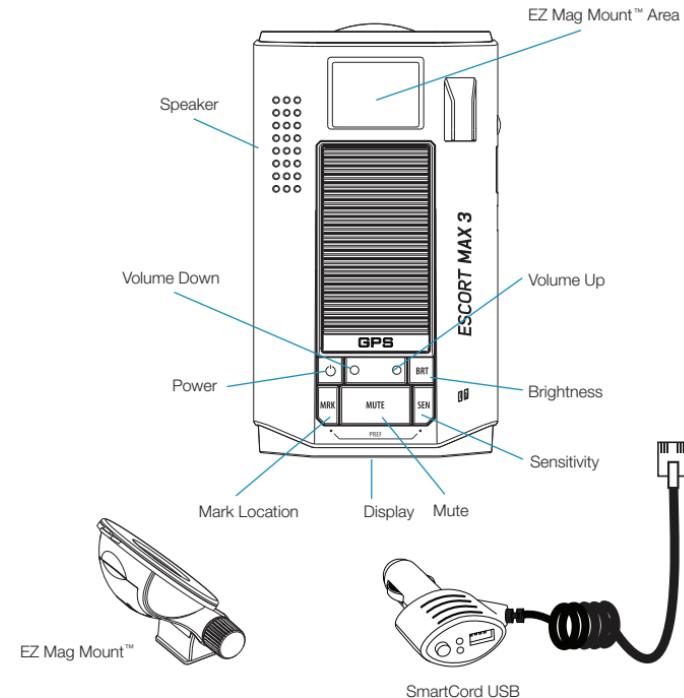

Mounting to the Windshield

