

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No. : DREFCC2105-0077

2. Client / Applicant

- Name : Escort Inc.
- Address : 5440 West Chester Rd., West Chester, OH 45069

3. Use of Report : Grant of Certification

4. Product Name / Model Name : Radar/Laser Detector with Dashcam / MAXcam 360c
(FCC ID : QKLMXCAM)

5. Test Standard : ANSI C63.4 : 2014
FCC Part 15 Subpart B
(Radar detector)


6. Date of Test : Feb. 22. 2020

7. Location of Test : Permanent Testing Lab On Site Testing

8. Testing Environment : Temperature (21) °C , Humidity (38) % R.H.

9. Test Result : Refer to the attached Test Result

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Affirmation	Tested by	Reviewed by
	Name : ChanGeun Lee 	Name : KyoungHwan Bae 

May. 07. 2021

DT&C Co., Ltd.

This test report is a general report that does not use the KOLAS accreditation mark and
is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

CONTENTS

1. General Remarks	3
2. Test Laboratory.....	3
3. General Information of EUT.....	4
4. EUT Operations and Test Configurations	5
4.1 Principle of Configuration Selection	5
4.2 EUT Operation Mode	5
4.3 Test Configuration Mode.....	5
4.4 Supported Equipment	6
4.5 EUT In/Output Port	6
4.6 Test Voltage and Frequency	6
5. Test Summary	7
6. Test Environment.....	7
7. Test Results : Emission.....	8
7.1 Conducted Disturbance	8
7.2 Radiated Disturbance	10
8. Revision History.....	16

1. General Remarks

This report contains the result of tests performed by :

DT&C Co., Ltd.

42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042

<http://www.dtnc.net>

Tel: +82-31-321-2664 Fax: +82-31-321-1664

2. Test Laboratory

DT&C Co., Ltd. has been accredited / filed / authorized by the agencies listed in the following table;

Certificate	Nation	Agency	Code	Remark
Accreditation	Korea	KOLAS	393	ISO/IEC 17025
	South Africa	SABS	0006	ISO/IEC 17025
	Ghana	NCA	NCA agreement 23rd,Oct,2018	-
Site Filing	USA	FCC	KR0034 101842 678747, 596748, 804488, 165783	Accredited 2.948 Listed
	Canada	IC	5740A-3 5740A-4	Registered
	Japan	VCCI	C-1427, R-3385, R-14076, R-14180, R-14496, T-11442, G-10338, G-10754, G-10815, G-20051	Registered
Certification	Korea	KC	KR0034	Designation
	Germany	TUV	CARAT 089112 0008 Rev.00	ISO/IEC 17025
	Russia	RMRS	17.10189.296	ISO/IEC 17025

Quality control in the testing laboratory is implemented as per ISO/IEC 17025
which is the "General requirements for the competent of calibration and testing laboratory".

3. General Information of EUT

Applicant	Escort Inc. 5440 West Chester Rd., West Chester, OH 45069
Manufacturer	Escort Inc. 5440 West Chester Rd., West Chester, OH 45069
Factory	BAEK GEUM Philippines Corporation Unit 1,2 &3 Orient Goldcrest Bldg. 1 Block 4 Lot 1, Calamba Premiere International Park, Calamba City, Laguna, Philippines
Product Name	Radar/Laser Detector with Dashcam
Model Name	MAXcam 360c
Add Model Name	None
Add Model Difference	None
S/W version	None
H/W version	Rev.D
RF Module Name	BW2455-44p
Maximum Internal Frequency	5,825 MHz
Rated Power	DC 12 V
FCC ID	QKLMXCAM
Remarks	- Wireless Frequency X : 10.460 ~ 10.580 GHz K : 23.935 ~ 24.275 GHz Ka : 33.385 ~ 36.030 GHz

Related Submittal(s) / Grant(s)**Original submittal only**

4. EUT Operations and Test Configurations

4.1 Principle of Configuration Selection

Emission :

The equipment under test (EUT) was configured to measure its highest possible radiation level.

The test modes were adapted accordingly in reference to the instructions for use.

For each testing mode different configurations were used,

Refer to the individual tests.

4.2 EUT Operation Mode

No.	Mode	Description
1	Normal Operation	DC 12V voltage is supplied to the EUT. The EUT is a radar device that detects external frequencies in the 10.525 GHz, 24.15 GHz and 33 to 36 GHz bands. The EUT has enabled the Bluetooth and Wi-Fi 2.4GHz functions and has recorded video with an internal camera, checked and tested that video.

* The EUT is a product with the RADAR DETECTOR function, and the RE test in the 11.7-12.2GHz frequency range was conducted.

4.3 Test Configuration Mode

No.	Mode	Description
1	Normal Operation	EUT connected to the DC supply. EUT AUX port connected to Headset EUT mini USB port is terminated. Connect Micro SD Card to Micro SD Card Slot of EUT

4.4 Supported Equipment

Used*	Product Type	Manufacturer	Model	Remarks
AE	Headset	SAMSUNG	SHS-150V/M	N/A
AE	Micro SD Card	N/A	N/A	N/A

*Abbreviations:
AE - Auxiliary/Associated Equipment, or
SIM - Simulator

4.5 EUT In/Output Port

Name	Type*	Cable Max. >3 m	Cable Shielded	Cable Back shell	Remarks
RJ11 (DC IN)	DC	0.5	Non shield	Plastic	None
Micro SD slot	I/O	-	-	-	None
AUX	I/O	2.0	Non shield	-	None
Mini USB	I/O	1.0	Shield	-	None

*Abbreviations:
AC = AC Power Port DC = DC Power Port N/E = Non-Electrical
I/O = Signal Input or Output Port
TP = Telecommunication Ports

4.6 Test Voltage and Frequency

Case	Voltage (V)	Frequency (Hz)	Phases	Remarks
1	DC 12	-	-	None

5. Test Summary

Test Items	Applied Standards	Results
Conducted Disturbance	ANSI C63.4:2014	N/A (Note 1)
Radiated Disturbance	ANSI C63.4:2014	C
C=Comply N/C=Not Comply N/T=Not Tested N/A=Not Applicable		
Note) This test was not required because EUT was used DC power.		

The data in this test report are traceable to the national or international standards.

- Conducted Disturbance

Frequency [MHz]	Pol.	Result [dB μ V/m]	Detector	Limit [dB μ V/m]	Margin [dB]
-	-	-	-	-	-

-Radiated Disturbance

Frequency [MHz]	Pol.	Result [dB μ V/m]	Detector	Limit [dB μ V/m]	Margin [dB]
11787.120	H	31.23	Cispr - Average	54.00	22.77

6. Test Environment

Test Items	Test date (YYYY-MM-DD)	Temp. (°C)	Humidity (% R.H.)	Pressure (kPa)
Radiated Disturbance	2021-02-22	21	38	-

7. Test Results : Emission

7.1 Conducted Disturbance

ANSI C63.4	Mains terminal disturbance voltage		Result		
<u>Method:</u> The AMN placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane. This distance was between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment were at least 0,8 m from the AMN. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on mains lines were made at the output of the AMN. The measuring port of the LISN for EUT was connected to spectrum analyzer. Using conducted emission test software, the emissions were scanned with peak detector mode. After scanning over the frequency range, suspected emissions were selected to perform final measurement. When performing final measurement, the receiver was used which has Quasi-Peak detector and CISPR Average detector. For (0.15 ~ 30) MHz frequency range, Quasi-Peak detector with 10 kHz RBW and 30 kHz VBW was used. By varying the configuration of the test sample and the cable routing it was attempted to maximize the emission.			Not Applicable		
Fully configured sample scanned over the following frequency range		Frequency range on each side of line	Measurement Point		
		150 kHz to 30 MHz	Mains		
EUT mode (Refer to clauses 4)		Test configuration mode	N/A		
		EUT Operation mode	N/A		
Limits – Class A					
Frequency (MHz)	Limit dB μ V				
	Quasi-Peak	Average			
0.15 to 0.50	79	66			
0.50 to 30	73	60			
Limits – Class B					
Frequency (MHz)	Limit dB μ V				
	Quasi-Peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			

Measurement Instrument					
Description	Model	Manufacturer	Identifier	Cal. Date	Cal. Due
-	-	-	-	-	-

Calculation

N : Neutral phase, L1 : Live phase
C.FACTOR(dB) : Pulse Limiter(dB) + Cable loss(dB) + Insertion loss of LISN(dB)
Result(dB μ V) : Reading Value(dB μ V) + C.FACTOR(dB)
Margin(dB) : Limit(dB μ V) - Result(dB μ V)

Mains terminal disturbance voltage _Measurement data			
Test configuration mode	N/A	EUT Operation mode	N/A
Test voltage (V)	N/A	Test Frequency (Hz)	N/A

7.2 Radiated Disturbance

ANSI C63.4	Radiated disturbance 30 MHz –30 GHz**			Result		
<u>Method:</u> Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 10 or 3 meter below 1GHz and 3 meter above 1GHz. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable. For final measurement below 1 GHz frequency range, Quasi-Peak detector with (RBW = 120 kHz Bandwidth) was used. For final measurement above 1 GHz frequency range, Peak detector with (RBW = 1 MHz Bandwidth) and CISPR Average detector with (RBW = 1 MHz Bandwidth) were used.				Comply		
EUT mode (Refer to clauses 4)	Test configuration mode EUT Operation mode			1 1		
Radiated Disturbance below 1 000 MHz						
Frequency range (MHz)	Quasi-peak limit dBμV/m					
	Class A		Class B			
	3 m distance	10 m distance	3 m distance			
30 to 88	49.1	39.1	40			
88 to 216	53.5	43.5	43.5			
216 to 960	56.4	46.4	46			
960 to 1 000	59.5	49.5	54			
According to 15.109(g), as an alternative to the radiated emission limit shown above, digital devices may be shown to comply with the standards contained in Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22 shown.						
Frequency range (MHz)	Quasi-peak limit dBμV/m					
	Class A (10 m distance)		Class B (10 m distance)			
	40		30			
230 to 1 000	47		37			
Radiated Disturbance for above 1 000 MHz at a measurement distance of 3 m						
Frequency range (GHz)	Peak limit dBμV/m		Average limit dBμV/m			
	Class A	Class B	Class A	Class B		
1 to 40	80	74	60	54		
The test frequency range of Radiated Disturbance measurements are listed below.						
Highest frequency generated or used in the device or on which the device operates or tunes (MHz)		Upper frequency of measurement range (MHz)				
Below 108		1 000				
108 – 500		2 000				
500 – 1 000		5 000				
Above 1 000		5 th harmonic of the highest frequency or 40 GHz, whichever is lower				

Measurement Instrument					
Description	Model	Manufacturer	Identifier	Cal. Date	Cal. Due
MEASUREMENT SOFTWARE	EMI-R VER. 2.00.0147	TSJ	N/A	N/A	N/A
EMI TEST RECEIVER	ESU40	ROHDE&SCHWARZ	100525	2020-12-14	2021-12-14
HORN ANTENNA WITH PREAMPLIFIER	EM-6969	ELECTRO-METRICS	156	2020-12-29	2021-12-29
	MLA-0618-B03-34	TSJ	1785642	2020-12-24	2021-12-24

(NOTE : THE MEASUREMENT ANTENNAS WERE CALIBRATED IN ACCORDANCE TO THE REQUIREMENTS OF C63.5-2017.)

Calculation

Result(dBuV/m) : Reading Value(dBuV) + Cable loss(dB) - Pre amplifier gain(dB) + Ant. Factor(dB)
--

Margin : Limit(dBuV/m) - Result(dBuV/m)

Radiated disturbance at (11.7 ~ 12.2) GHz _Peak Measurement data			
Test configuration mode	1	EUT Operation mode	1
Test voltage (V)	DC 12	Test Frequency (Hz)	-

RADIATED EMISSION

Date 2021-02-22



Order No. DTNC2101-00528
 Power Supply 120 V 60 Hz
 Temp/Humi 21 °C 38 % R.H.
 Test Condition Nomal Operation

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
 FCC Part15 Subpart.B Class B (3m) - GHz(Average)

Antenna Factor
 1. EMC-233-A_EM-6969_156_2020.12.29

Cable Loss
 1. #27_C1_Ant to Bottom_3m_창의_1-18G_2020.03.04
 2. #28_C2_Bottom to Amp(Filter,Receiver)_3m_창의_1-18G_2020.03.04
 Pre Amp Gain
 1. EMC-233-M_MLA-0618-B03-34_2020.12.24

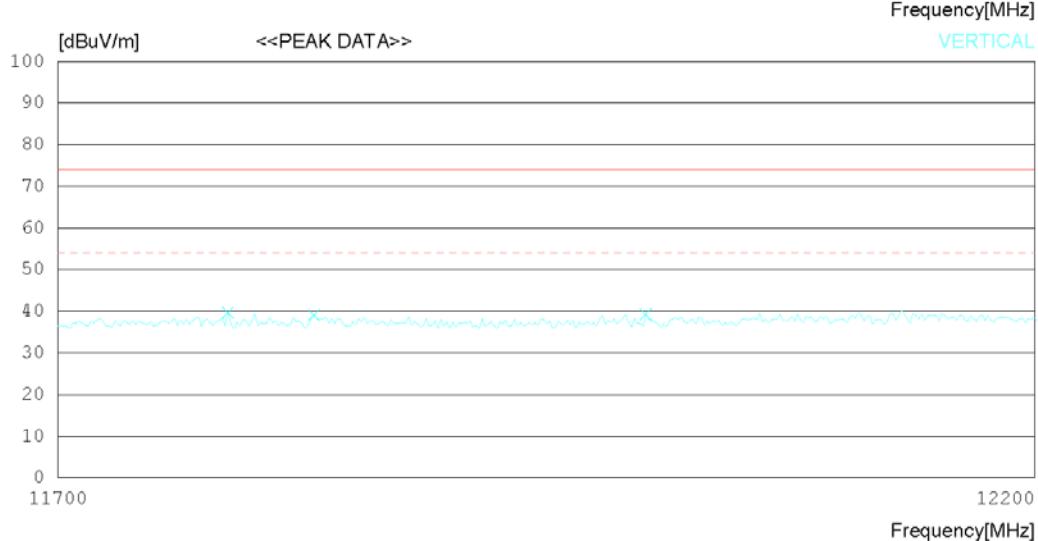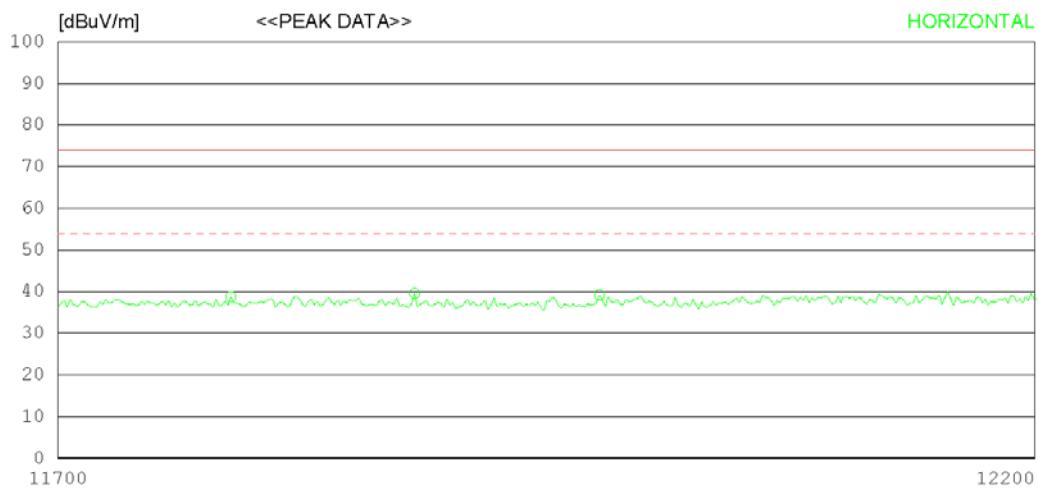

RADIATED EMISSION

Date 2021-02-22

Order No. DTNC2101-00528
Power Supply 120 V 60 Hz
Temp/Humi 21 °C 38 % R.H.
Test Condition Nomal Operation

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

Antenna Factor

1. EMC-233-A_EM-6969_156_2020.12.29

Cable Loss

1. #27_C1_Ant to Bottom_3m_창의_1-18G_2020.03.04

2. #28_C2_Bottom to Amp(Filter,Receiver)_3m_창의_1-18G_2020.03.04

Pre Amp Gain

1. EMC-233-M_MLA-0618-B03-34_2020.12.24

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
<hr/>										
1	11787.000	28.20	32.70	16.28	38.45	38.73	74.0	35.27	300	310
2	11880.000	29.60	32.80	15.70	38.51	39.59	74.0	34.41	200	256
3	11974.500	30.10	32.80	14.88	38.56	39.22	74.0	34.78	100	1
<hr/>										
4	11785.500	29.20	32.70	16.27	38.45	39.72	74.0	34.28	100	358
5	11829.000	28.70	32.76	16.14	38.48	39.12	74.0	34.88	300	358
6	11998.500	30.40	32.80	14.68	38.58	39.30	74.0	34.7	300	34

Radiated disturbance at (11.7 ~ 12.2) GHz _ Average Measurement data			
Test configuration mode	1	EUT Operation mode	1
Test voltage (V)	DC 12	Test Frequency (Hz)	-

RADIATED EMISSION

Date 2021-02-22

Order No. DTNC2101-00528
Power Supply 120 V 60 Hz
Temp/Humi 21 'C 38 % R.H.
Test Condition Nomal Operation

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)



Antenna Factor
1. EMC-233-A_EM-6969_156_2020.12.29

Cable Loss

1. #27_C1_Ant to Bottom_3m_창의_1-18G_2020.03.04
2. #28_C2_Bottom to Amp(Filter,Receiver)_3m_창의_1-18G_2020.03.04

Pre Amp Gain

1. EMC-233-M_MLA-0618-B03-34_2020.12.24

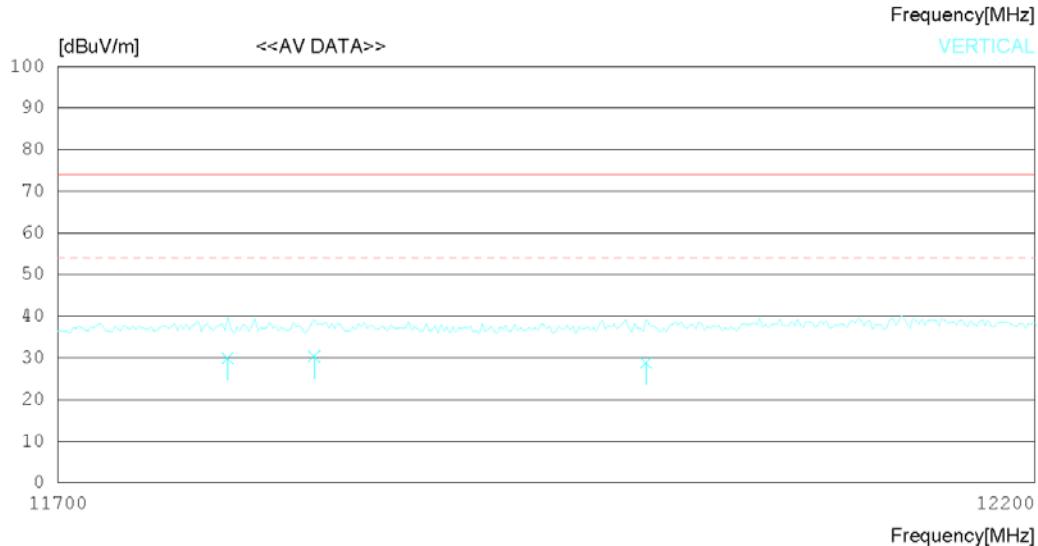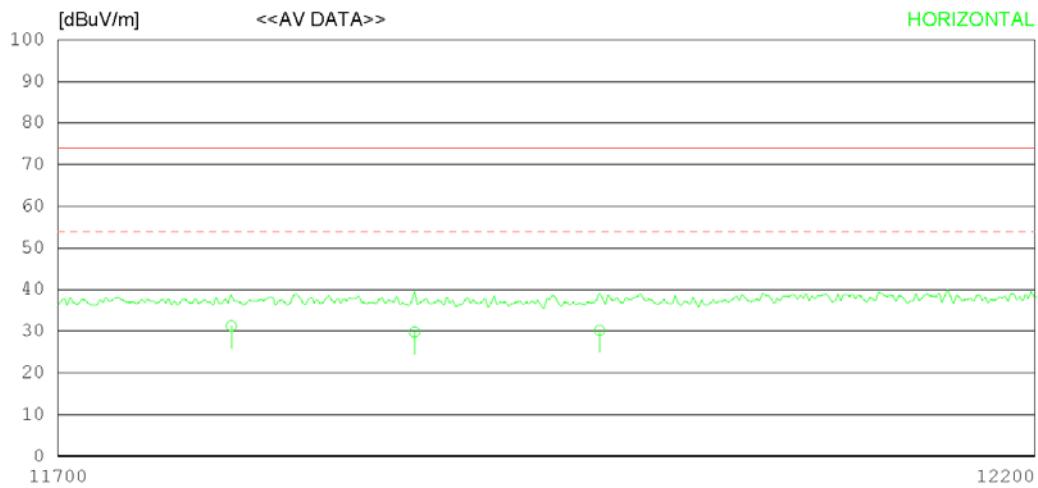

RADIATED EMISSION

Date 2021-02-22

Order No. DTNC2101-00528
Power Supply 120 V 60 Hz
Temp/Humi 21 'C 38 % R.H.
Test Condition Nomal Operation

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

Antenna Factor

1. EMC-233-A_EM-6969_156_2020.12.29

Cable Loss

1. #27_C1_Ant to Bottom_3m_창의_1-18G_2020.03.04

2. #28_C2_Bottom to Amp(Filter,Receiver)_3m_창의_1-18G_2020.03.04

Pre Amp Gain

1. EMC-233-M_MLA-0618-B03-34_2020.12.24

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- HORIZONTAL -----										
1	11787.120	20.70	32.70	16.28	38.45	31.23	54.00	22.77	126	217
2	11880.070	19.80	32.80	15.70	38.51	29.79	54.00	24.21	303	223
3	11974.620	21.10	32.80	14.88	38.56	30.22	54.00	23.78	328	59
----- VERTICAL -----										
4	11785.390	19.40	32.70	16.27	38.45	29.92	54.00	24.08	194	331
5	11829.090	20.00	32.76	16.14	38.48	30.42	54.00	23.58	257	347
6	11998.520	19.90	32.80	14.68	38.58	28.80	54.00	25.20	210	37

8. Revision History

Date	Description	Revised By	Reviewed By
May. 07. 2021	Initial report	ChanGeun Lee	KyoungHwan Bae

-End of test report-