




9.9 TEST RESULTS - 5250-5350 MHZ

E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5260 MHz		

Polarization: Vertical

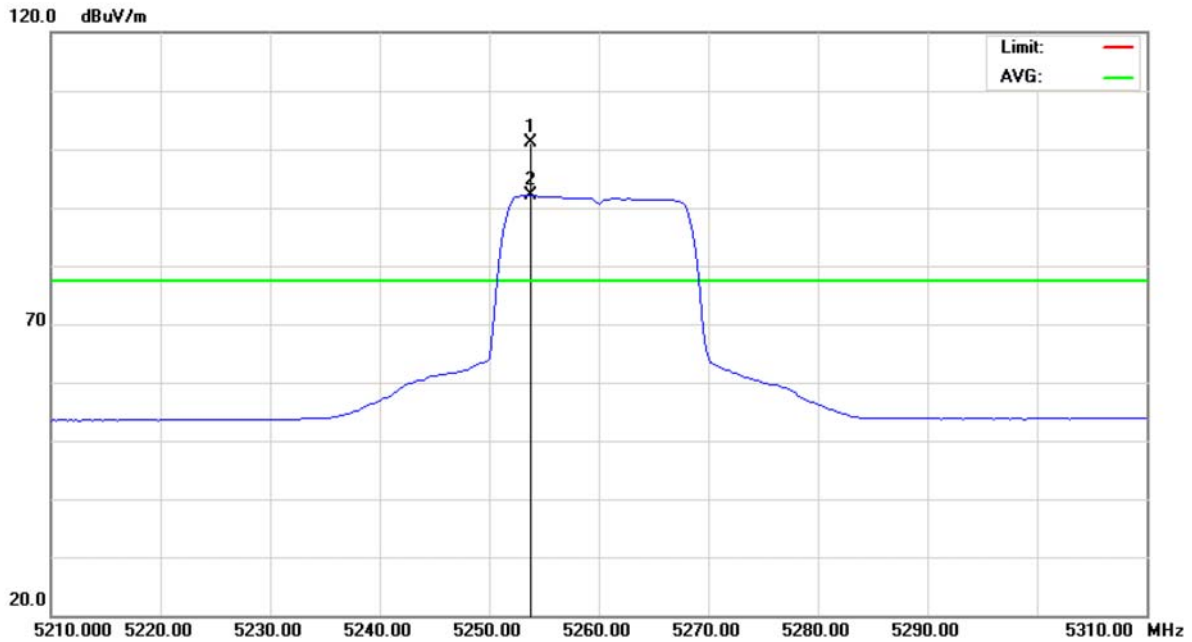


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5253.750	59.98	41.09	101.07	77.30	23.77	peak	
2	X	5253.750	51.06	41.09	92.15	77.30	14.85	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5260 MHz		

Polarization: Vertical

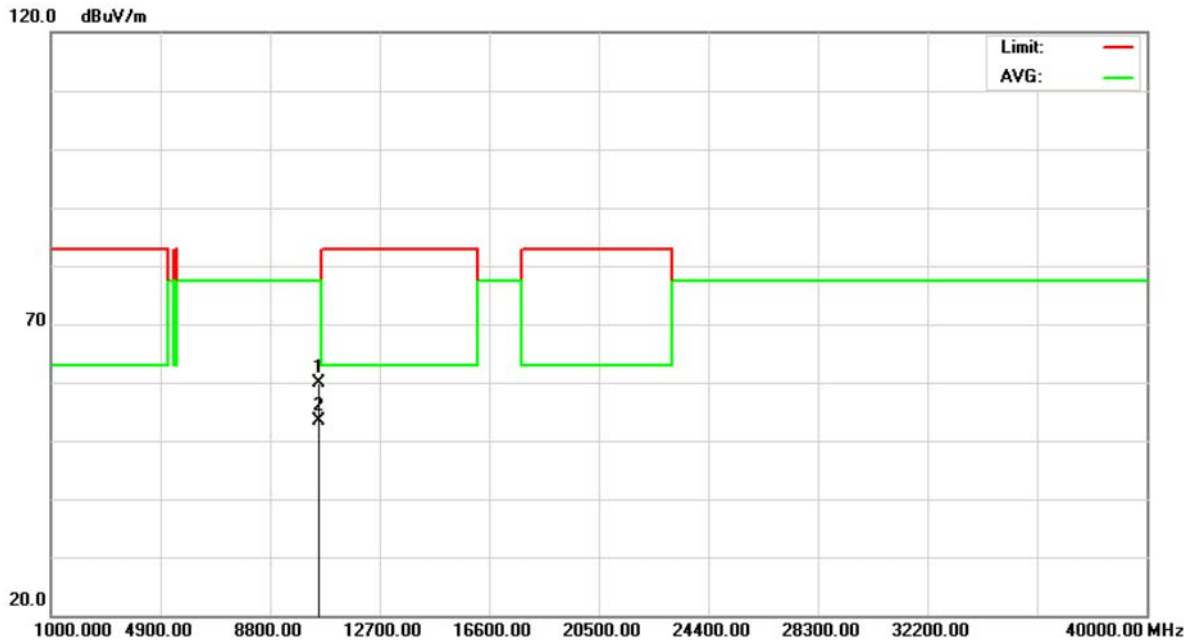


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10518.75	39.68	20.32	60.00	77.30	-17.30	peak	
2		10518.75	33.00	20.32	53.32	77.30	-23.98	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5260 MHz		

Polarization: Horizontal

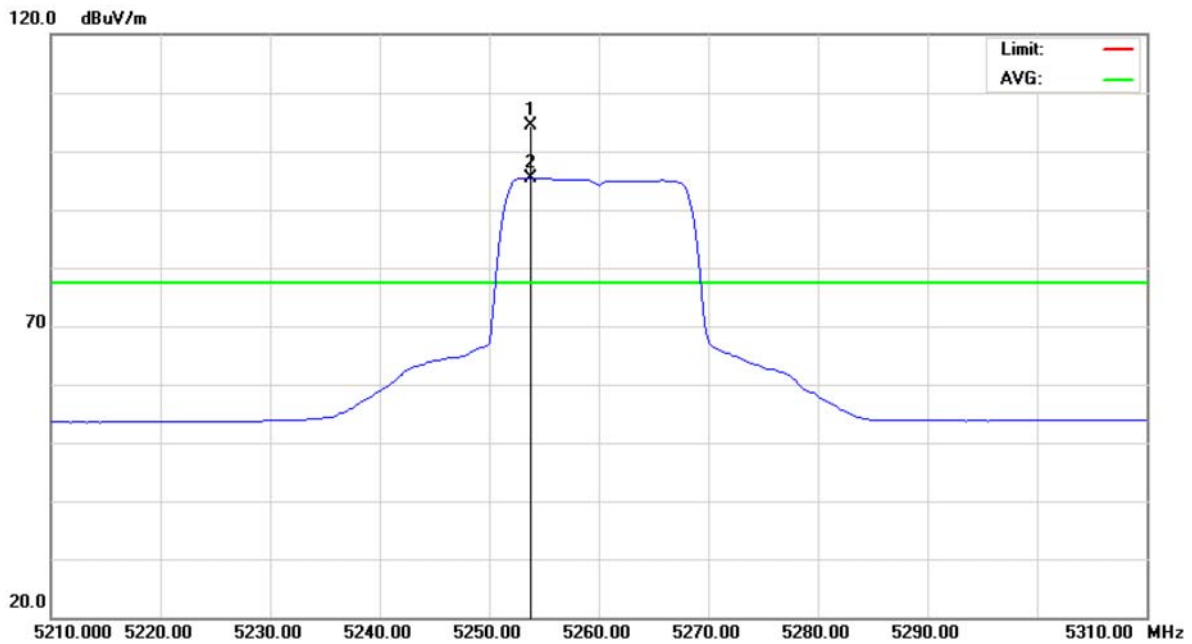


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5253.750	63.31	41.09	104.40	77.30	27.10	peak	
2	X	5253.750	54.41	41.09	95.50	77.30	18.20	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5260 MHz		

Polarization: Horizontal

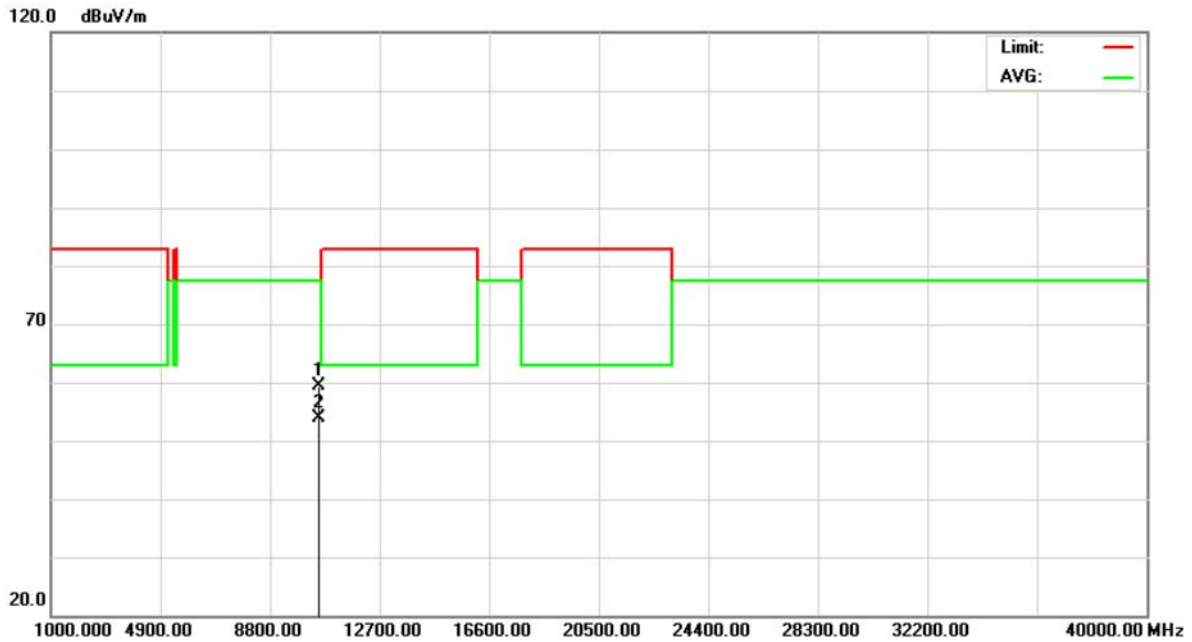


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10522.50	39.04	20.33	59.37	77.30	-17.93	peak	
2		10522.50	33.50	20.33	53.83	77.30	-23.47	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5300 MHz		

Polarization: Vertical

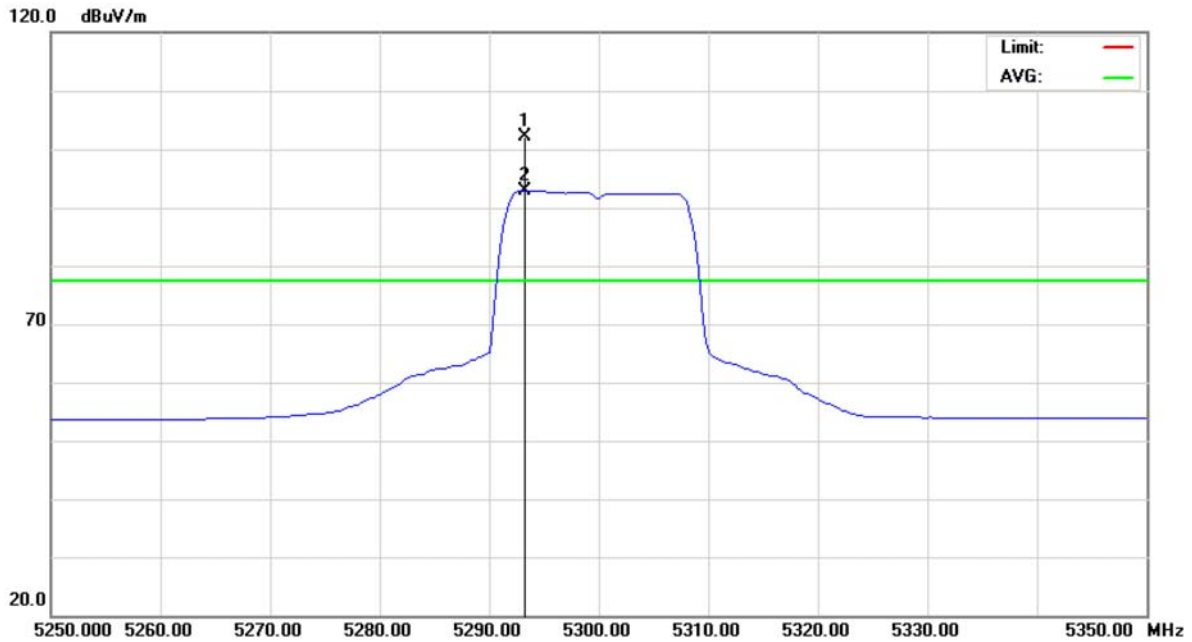


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5293.250	60.90	41.15	102.05	77.30	24.75	peak	
2	X	5293.250	51.76	41.15	92.91	77.30	15.61	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5300 MHz		

Polarization: Vertical

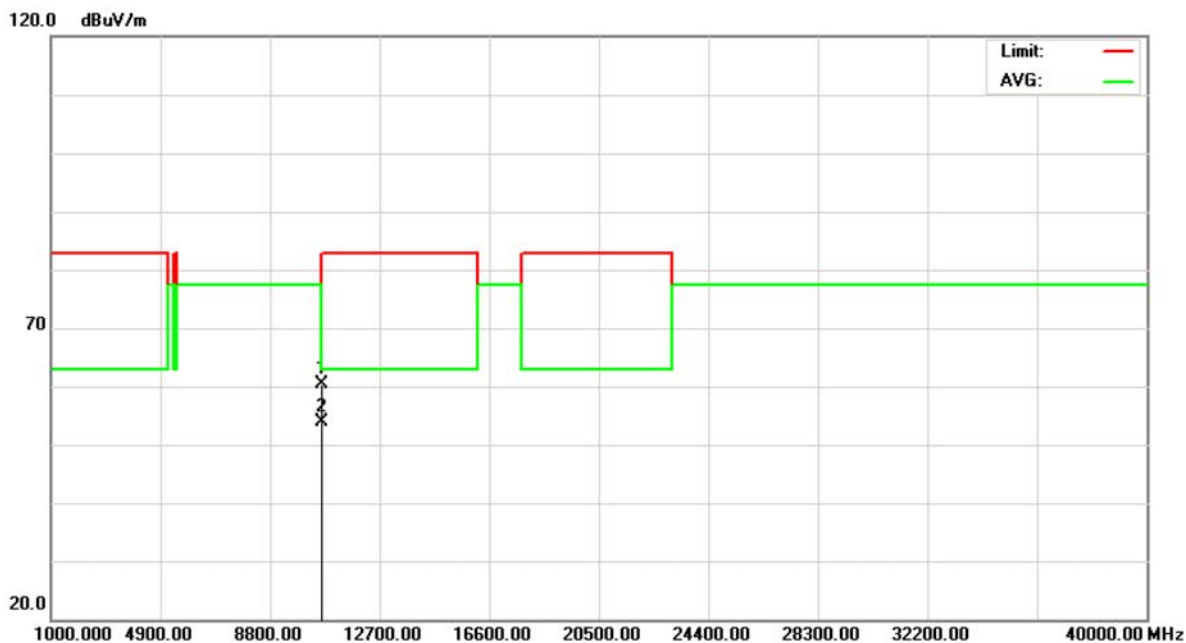


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.25	39.84	20.46	60.30	83.00	-22.70	peak	
2	*	10600.25	33.31	20.46	53.77	63.00	-9.23	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5300 MHz		

Polarization: Horizontal

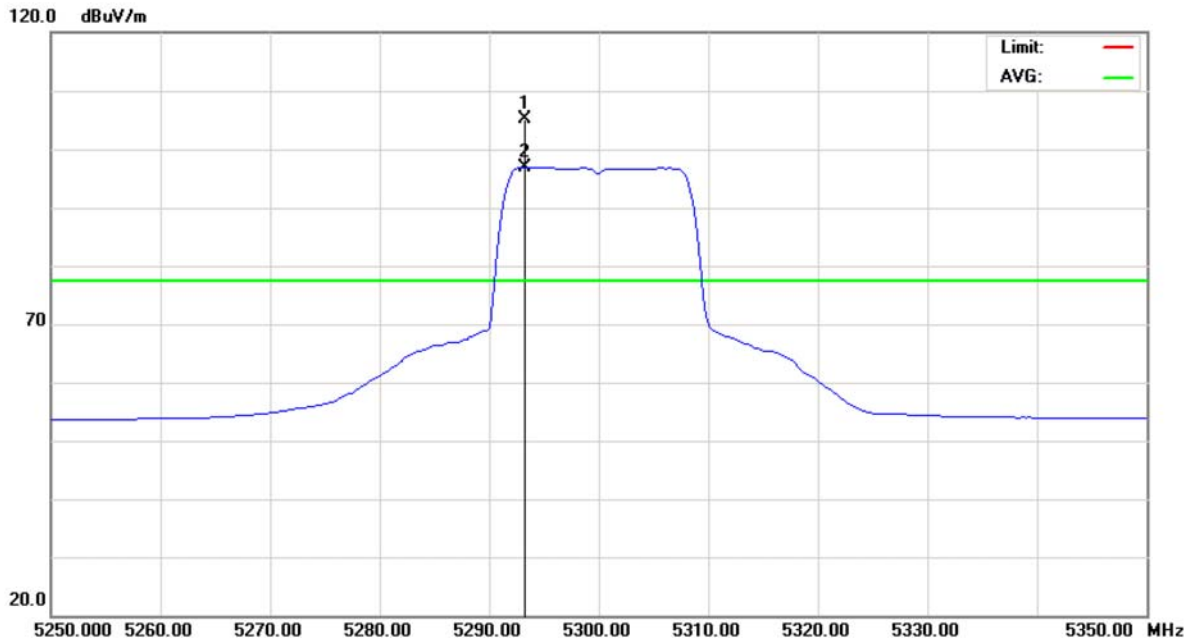


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5293.250	64.08	41.15	105.23	77.30	27.93	peak	
2	X	5293.250	55.84	41.15	96.99	77.30	19.69	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5300 MHz		

Polarization: Horizontal

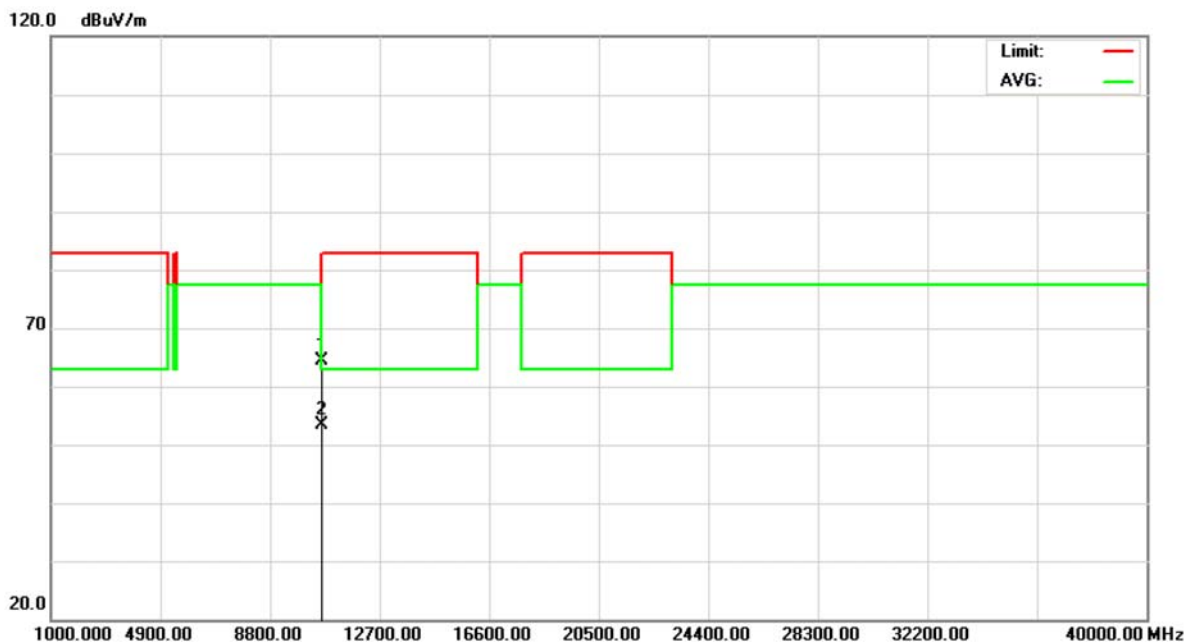


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.25	44.04	20.46	64.50	83.00	-18.50	peak	
2	*	10600.25	32.91	20.46	53.37	63.00	-9.63	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5320 MHz		

Polarization: Vertical

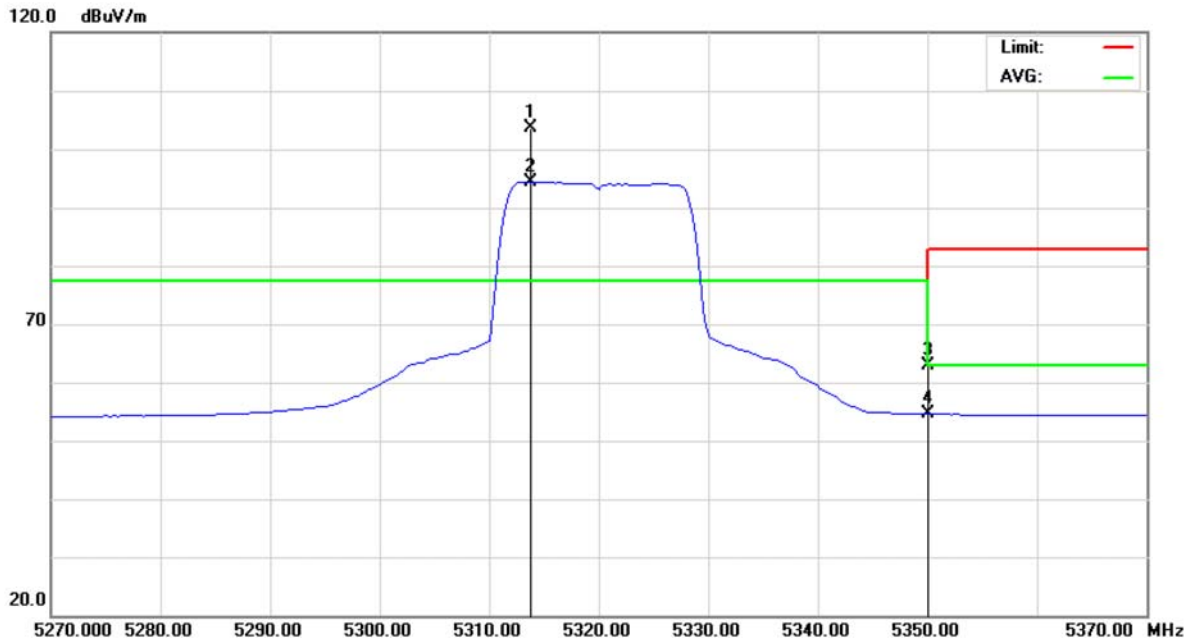


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5313.750	62.45	41.18	103.63	77.30	26.33	peak	
2	X	5313.750	53.29	41.18	94.47	77.30	17.17	AVG	
3		5350.000	21.59	41.24	62.83	77.30	-14.47	peak	
4		5350.000	13.37	41.24	54.61	63.00	-8.39	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5320 MHz		

Polarization: Vertical

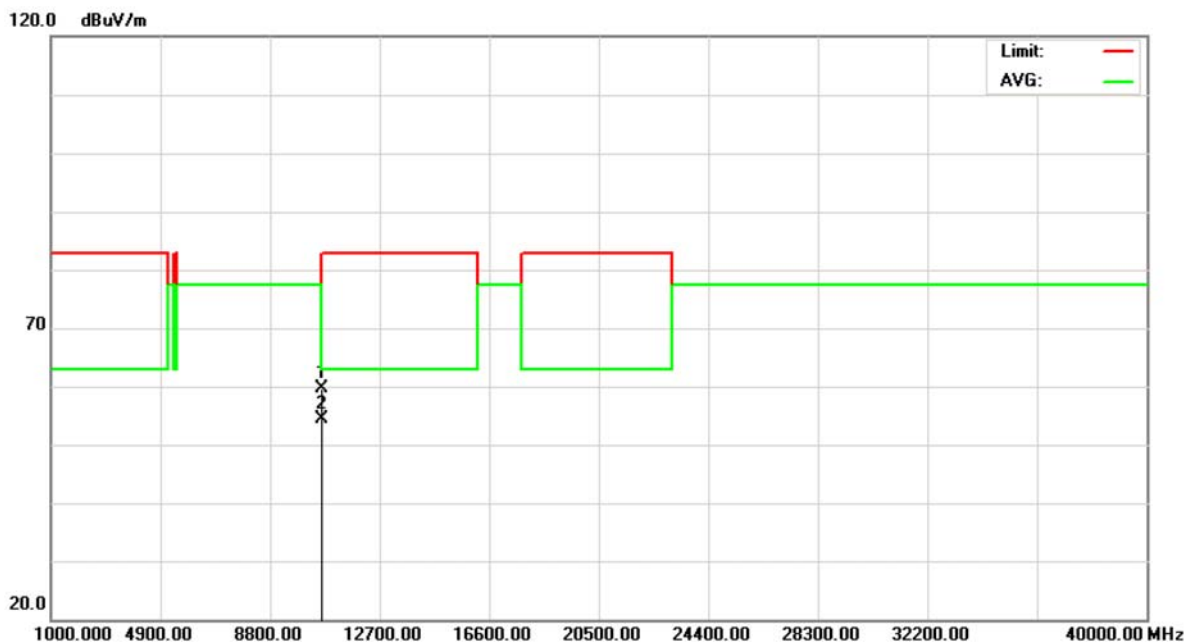


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10641.50	39.23	20.52	59.75	83.00	-23.25	peak	
2	*	10641.50	33.75	20.52	54.27	63.00	-8.73	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5320 MHz		

Polarization: Horizontal

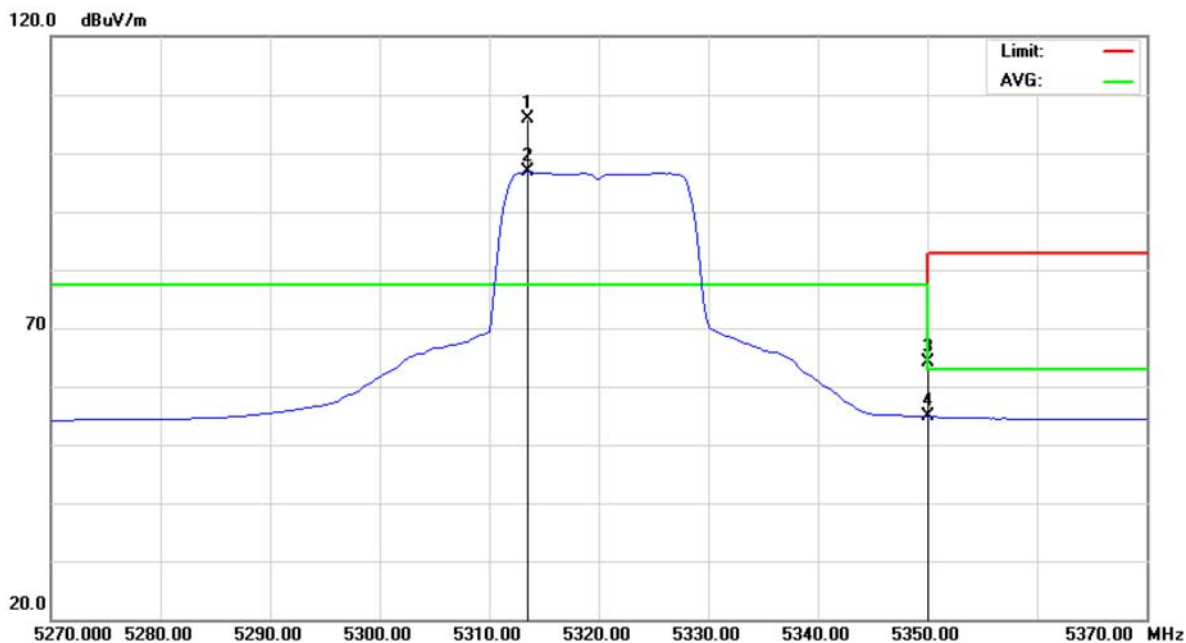


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5313.500	64.60	41.18	105.78	77.30	28.48	peak	
2	X	5313.500	55.60	41.18	96.78	77.30	19.48	AVG	
3		5350.000	22.79	41.24	64.03	77.30	-13.27	peak	
4		5350.000	13.56	41.24	54.80	63.00	-8.20	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5320 MHz		

Polarization: Horizontal

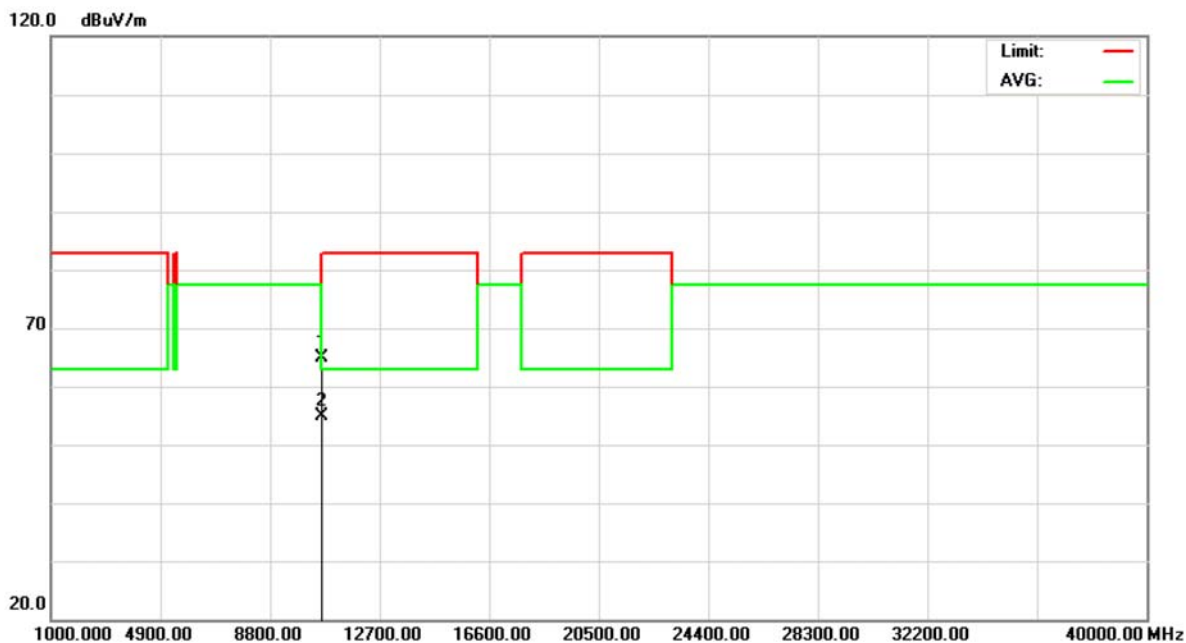


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10639.75	44.47	20.52	64.99	83.00	-18.01	peak	
2	*	10639.75	34.27	20.52	54.79	63.00	-8.21	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5260 MHz		

Polarization: Vertical

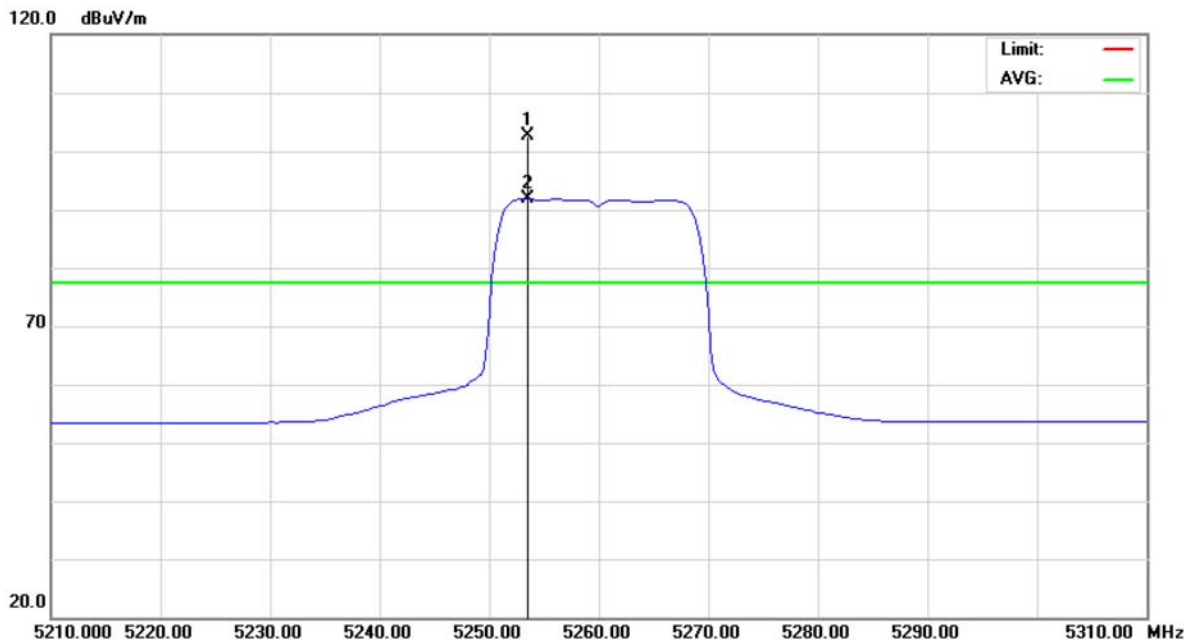


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5253.500	61.58	41.09	102.67	77.30	25.37	peak	
2	X	5253.500	50.81	41.09	91.90	77.30	14.60	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5260 MHz		

Polarization: Vertical

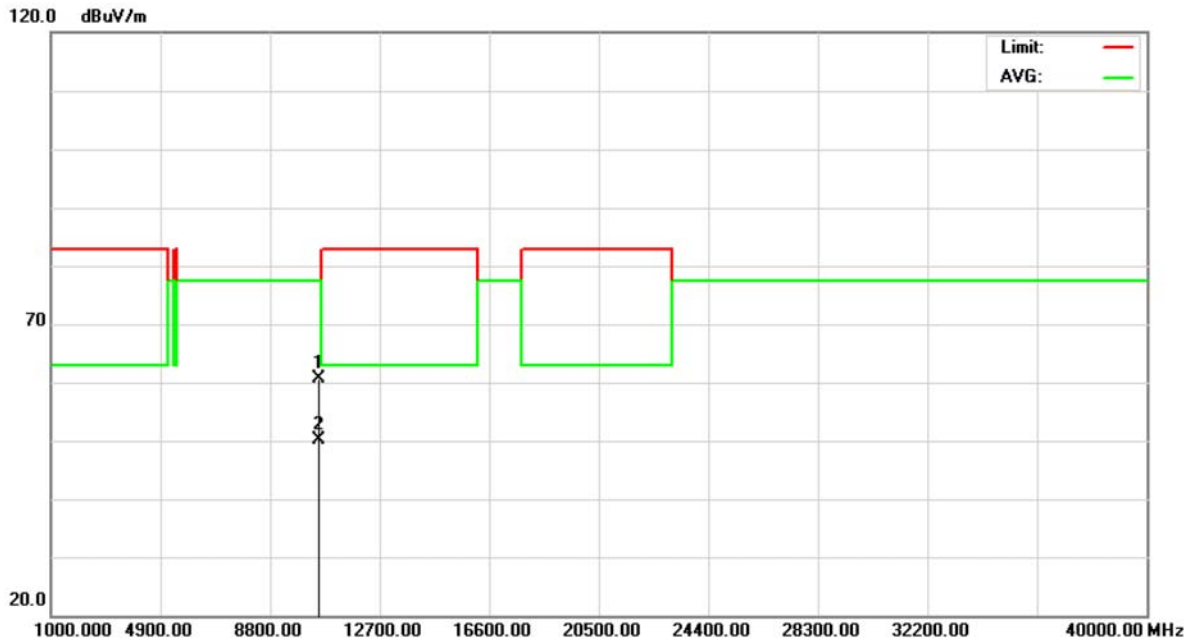


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10521.00	40.32	20.32	60.64	77.30	-16.66	peak	
2		10521.00	29.79	20.32	50.11	77.30	-27.19	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5260 MHz		

Polarization: Horizontal

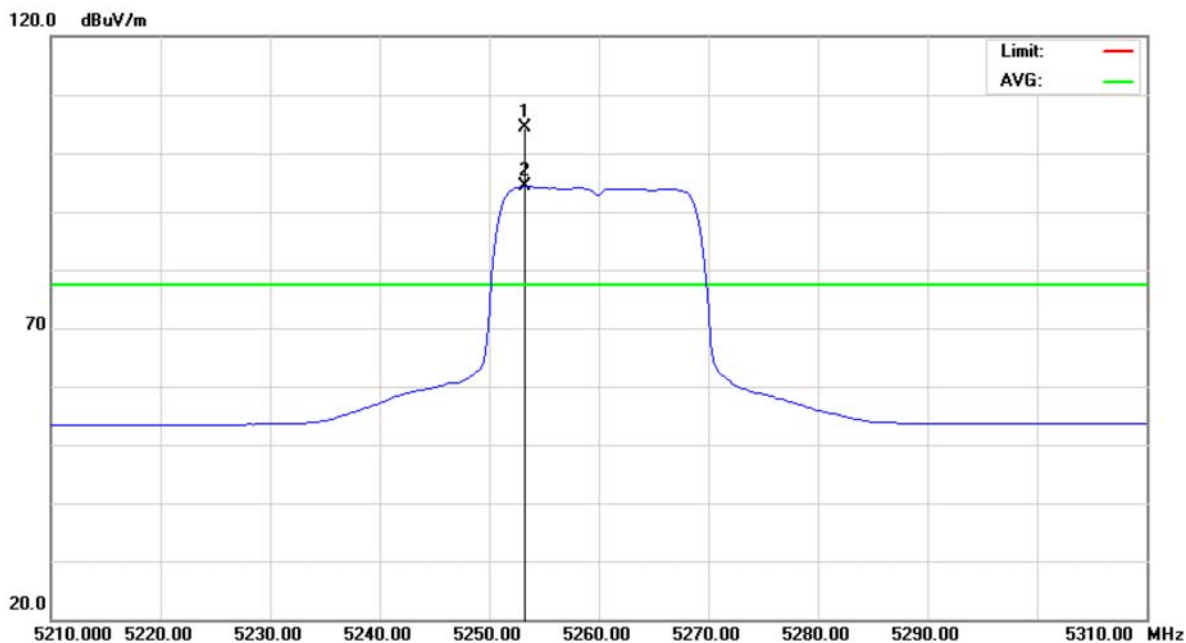


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5253.250	63.20	41.09	104.29	77.30	26.99	peak	
2	X	5253.250	53.19	41.09	94.28	77.30	16.98	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5260 MHz		

Polarization: Horizontal

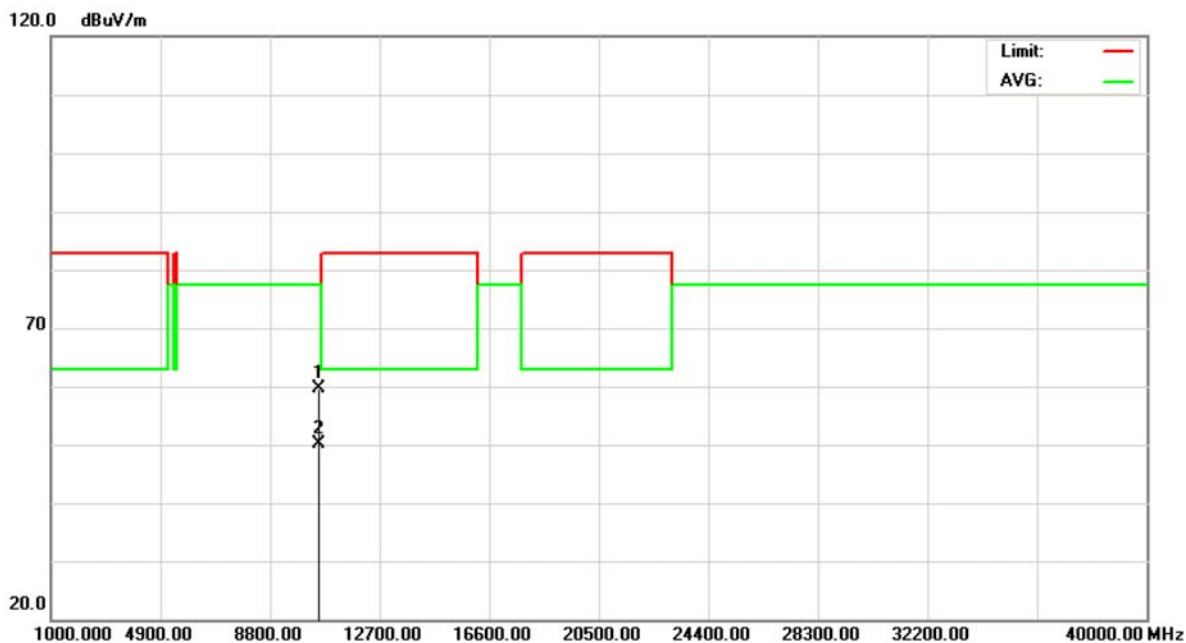


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10524.25	39.38	20.33	59.71	77.30	-17.59	peak	
2		10524.25	29.77	20.33	50.10	77.30	-27.20	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5300 MHz		

Polarization: Vertical

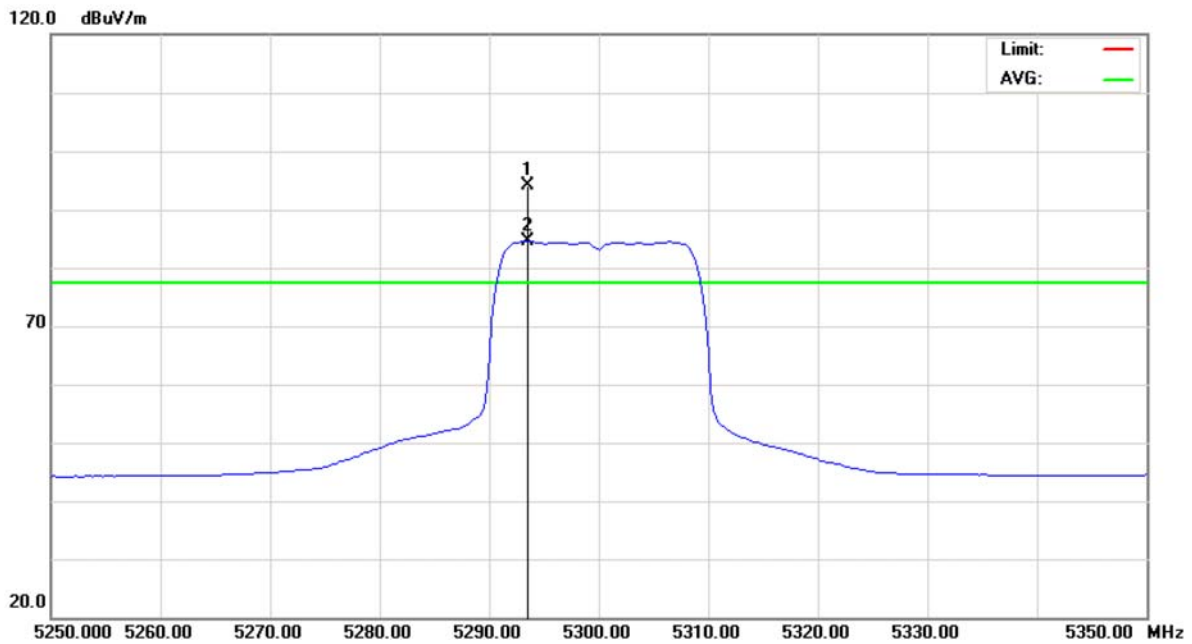


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5293.500	62.30	31.95	94.25	77.30	16.95	peak	
2	X	5293.500	52.68	31.95	84.63	77.30	7.33	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5300 MHz		

Polarization: Vertical

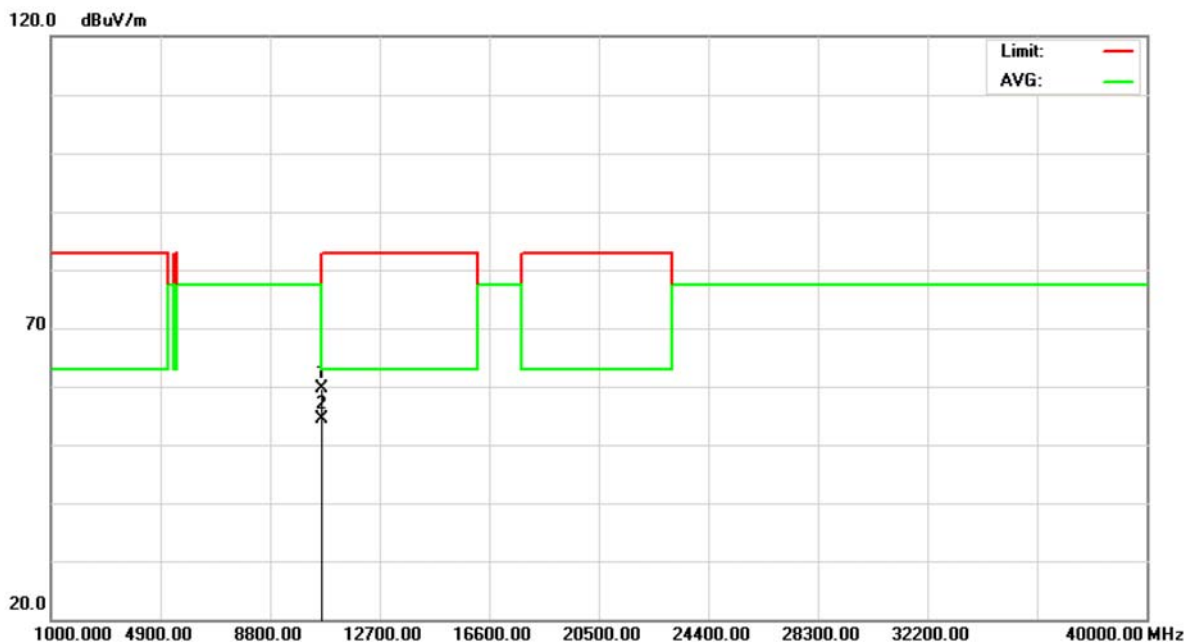


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10594.50	39.12	20.45	59.57	77.30	-17.73	peak	
2		10594.50	34.01	20.45	54.46	77.30	-22.84	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5300 MHz		

Polarization: Horizontal

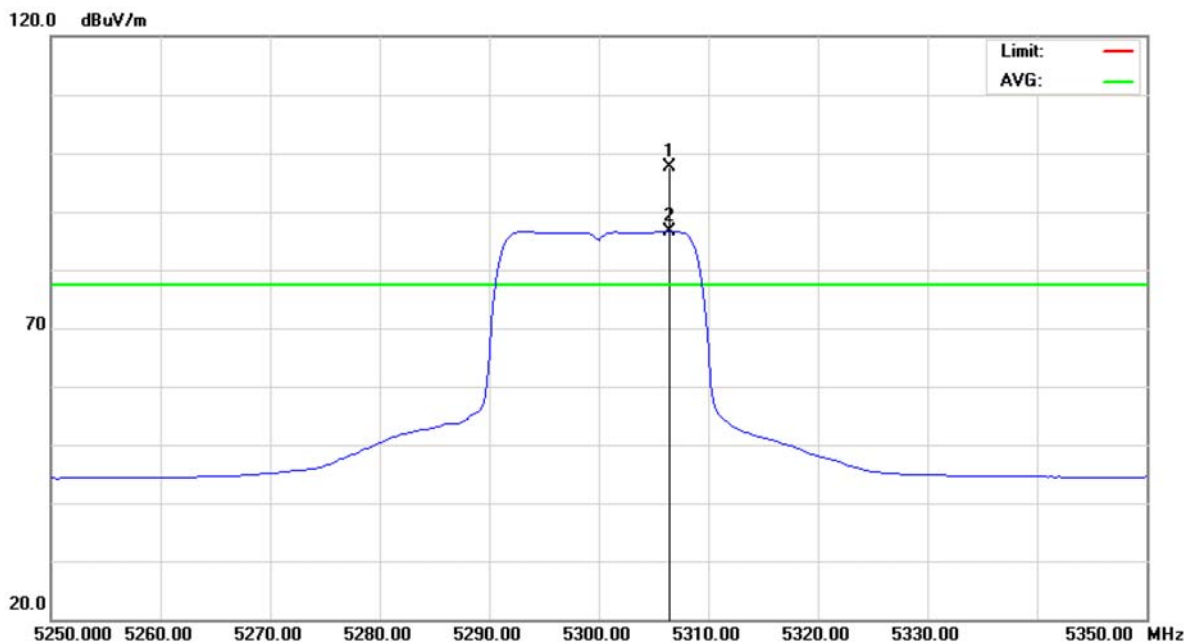


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5306.500	65.59	31.97	97.56	77.30	20.26	peak	
2	X	5306.500	54.78	31.97	86.75	77.30	9.45	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5300 MHz		

Polarization: Horizontal

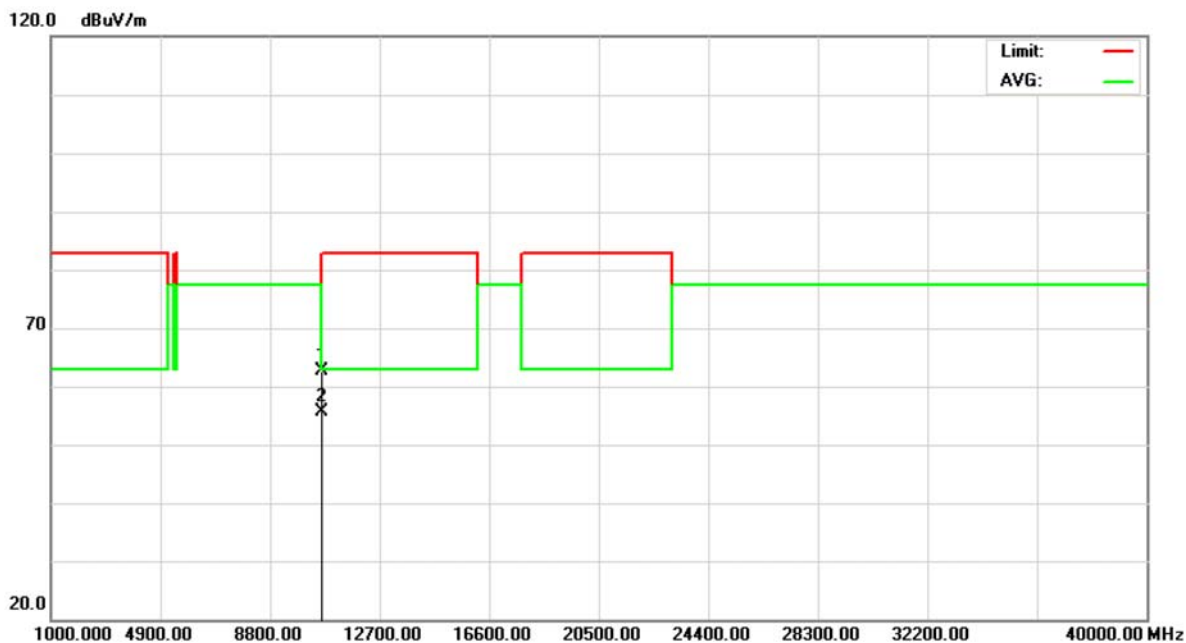


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10599.75	42.22	20.46	62.68	77.30	-14.62	peak	
2		10599.75	35.16	20.46	55.62	77.30	-21.68	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5320 MHz		

Polarization: Vertical

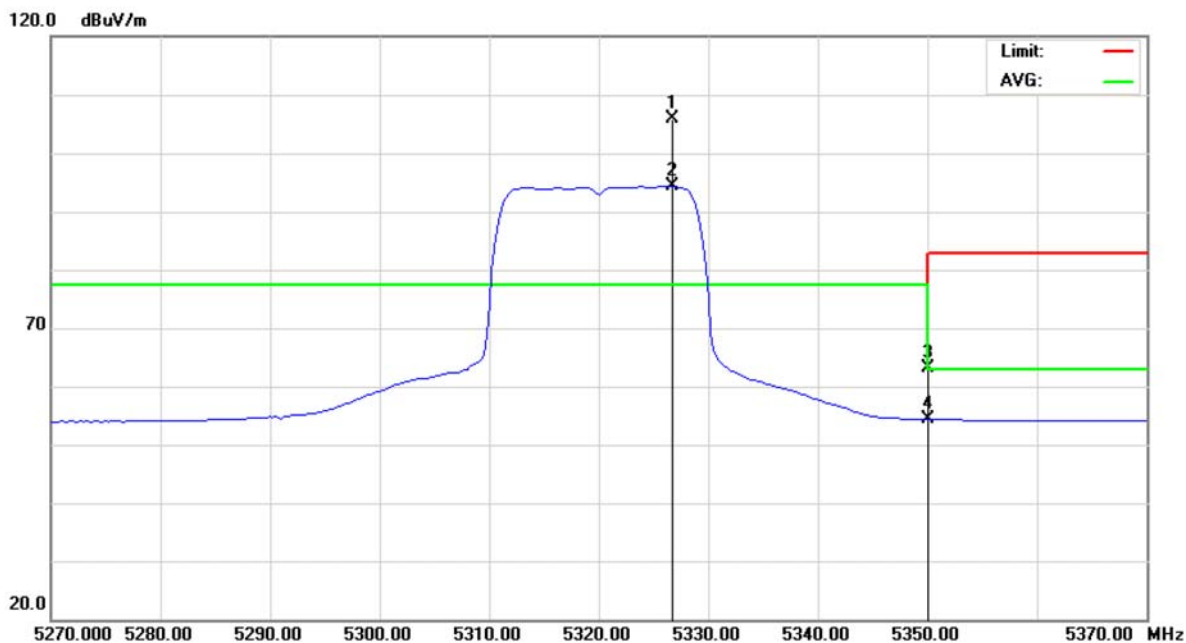


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5326.750	64.70	41.20	105.90	77.30	28.60	peak	
2	X	5326.750	53.22	41.20	94.42	77.30	17.12	AVG	
3		5350.000	21.90	41.24	63.14	77.30	-14.16	peak	
4		5350.000	13.20	41.24	54.44	63.00	-8.56	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5320 MHz		

Polarization: Vertical

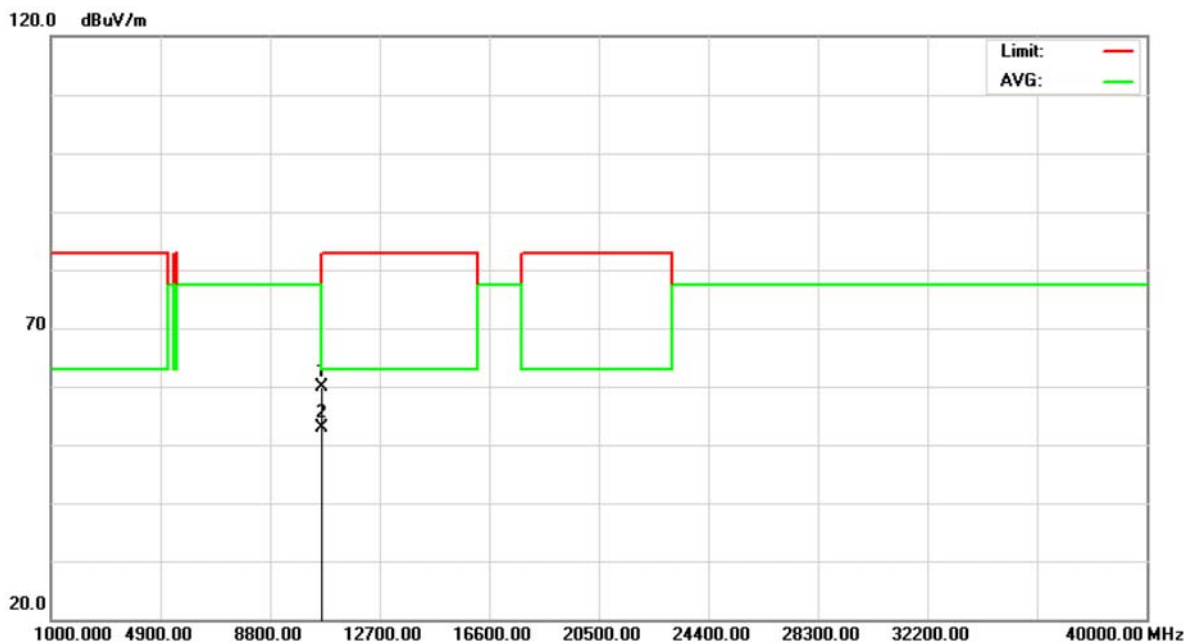


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.75	39.33	20.52	59.85	83.00	-23.15	peak	
2	*	10640.75	32.34	20.52	52.86	63.00	-10.14	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5320 MHz		

Polarization: Horizontal

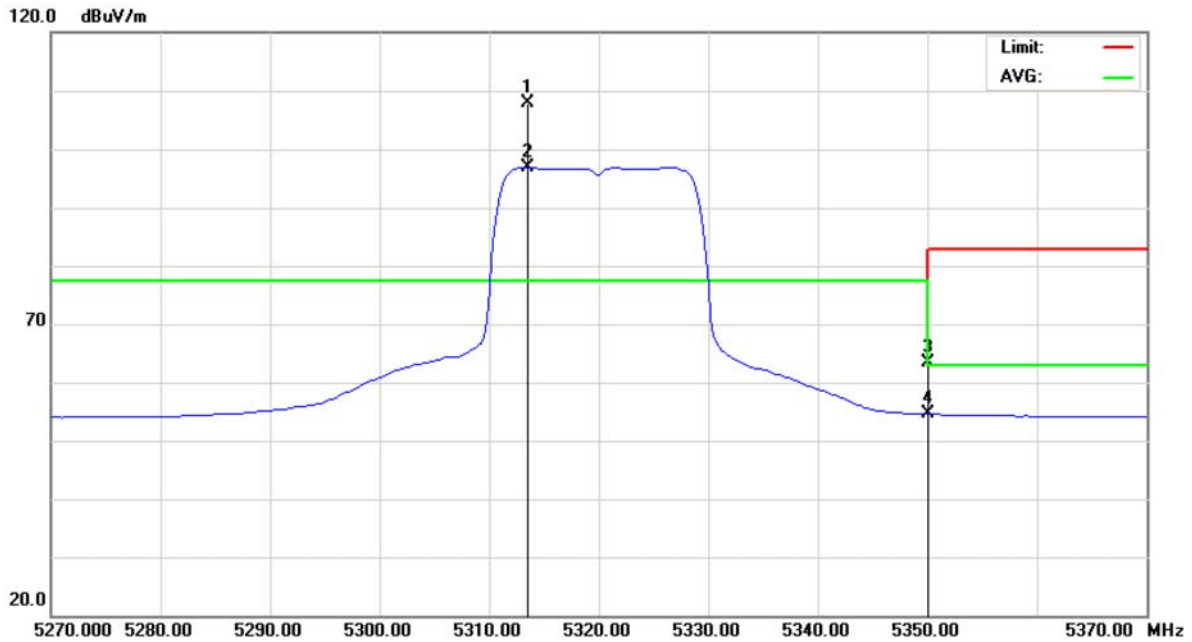


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5313.500	66.60	41.18	107.78	77.30	30.48	peak	
2	X	5313.500	55.78	41.18	96.96	77.30	19.66	AVG	
3		5350.000	22.11	41.24	63.35	77.30	-13.95	peak	
4		5350.000	13.34	41.24	54.58	63.00	-8.42	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5320 MHz		

Polarization: Horizontal

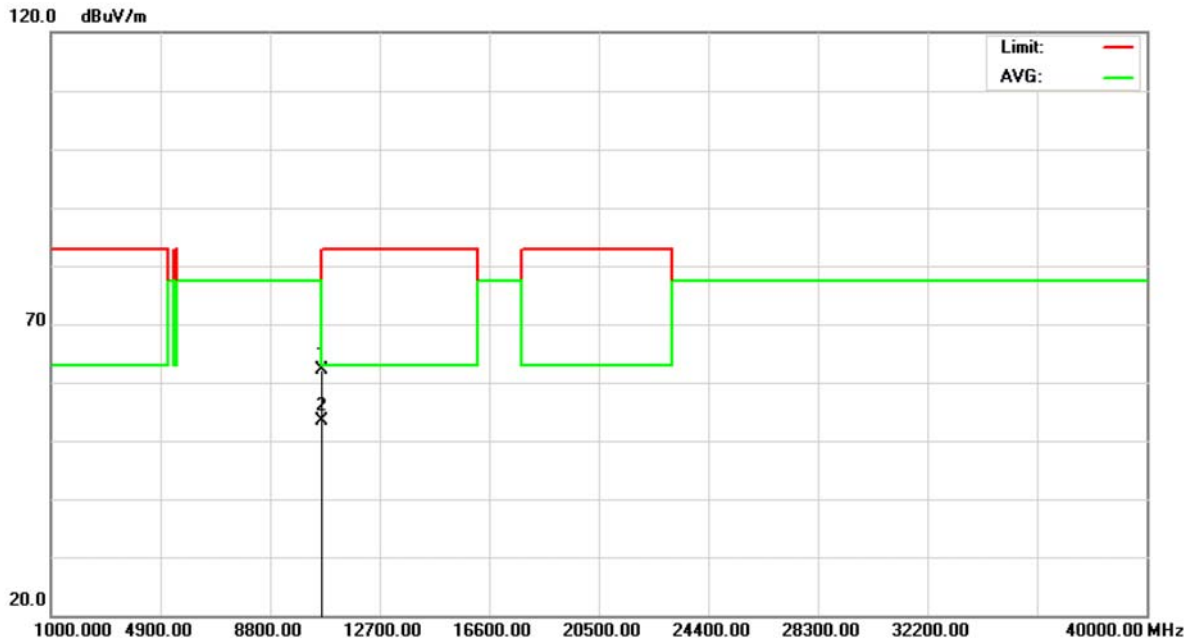


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10639.25	41.69	20.52	62.21	83.00	-20.79	peak	
2	*	10639.25	32.76	20.52	53.28	63.00	-9.72	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5270 MHz		

Polarization: Vertical

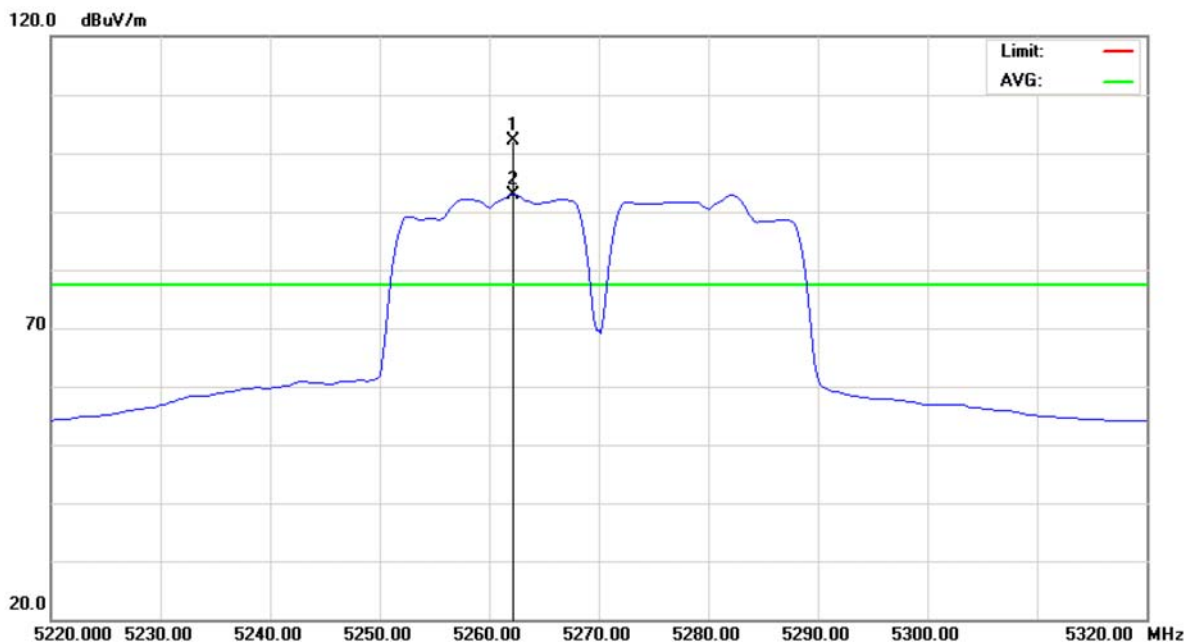


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5262.250	61.00	41.10	102.10	77.30	24.80	peak	
2	X	5262.250	51.89	41.10	92.99	77.30	15.69	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5270 MHz		

Polarization: Vertical

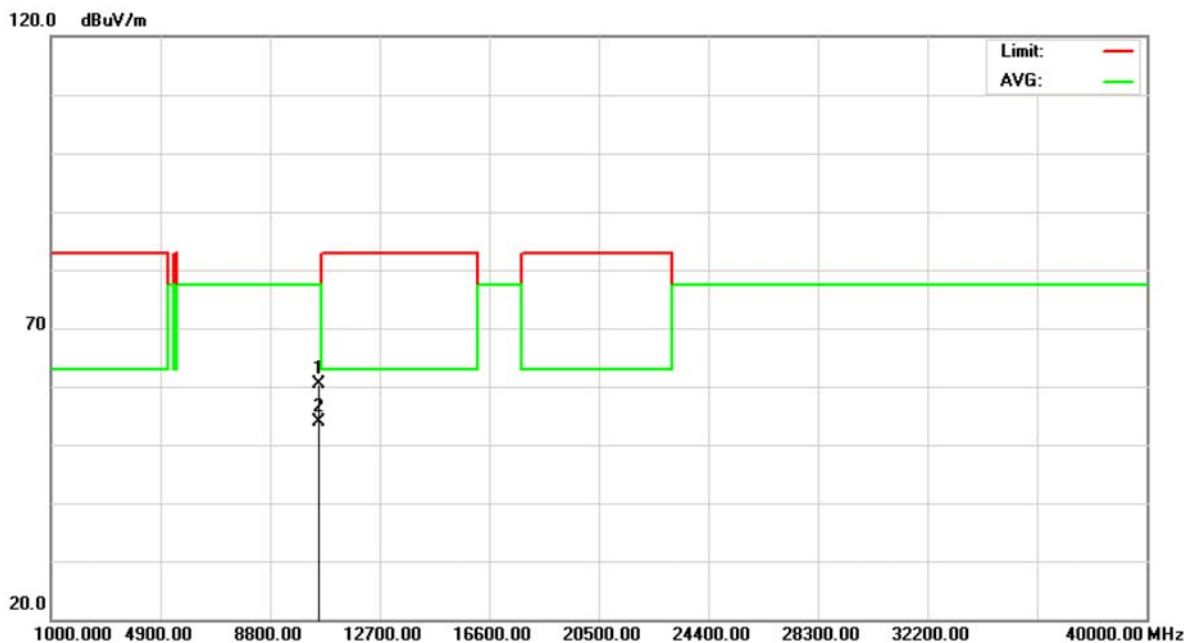


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10542.75	40.11	20.36	60.47	77.30	-16.83	peak	
2		10542.75	33.41	20.36	53.77	77.30	-23.53	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5270 MHz		

Polarization: Horizontal

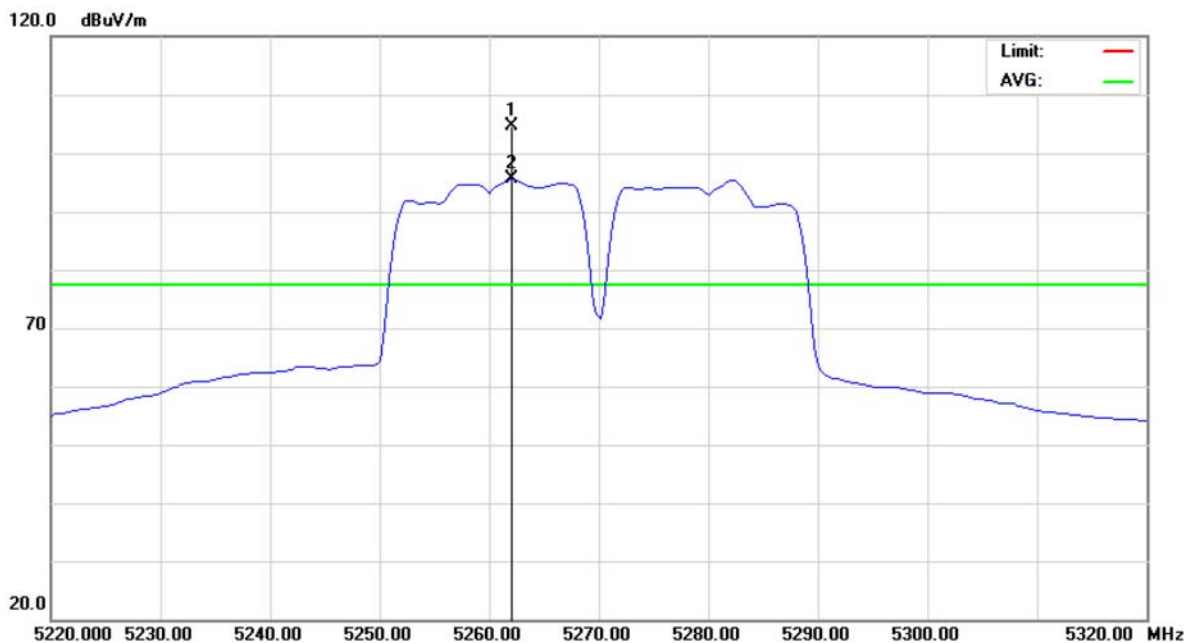


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5262.000	63.53	41.10	104.63	77.30	27.33	peak	
2	X	5262.000	54.51	41.10	95.61	77.30	18.31	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5270 MHz		

Polarization: Horizontal

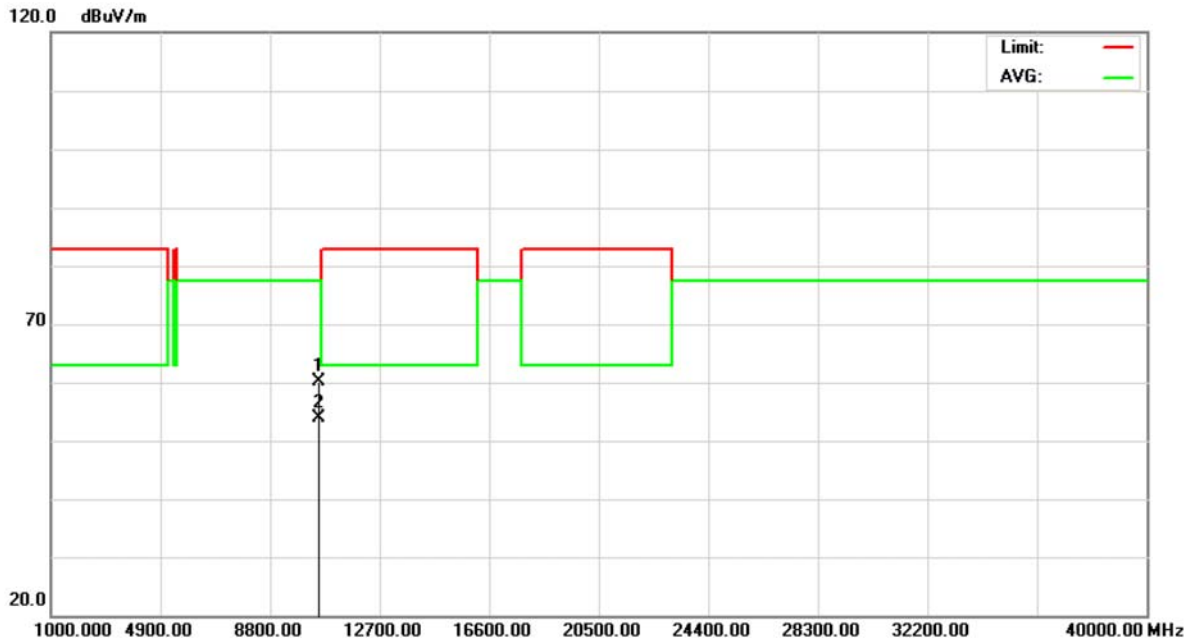


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10538.25	39.79	20.35	60.14	77.30	-17.16	peak	
2		10538.25	33.61	20.35	53.96	77.30	-23.34	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5310 MHz		

Polarization: Vertical

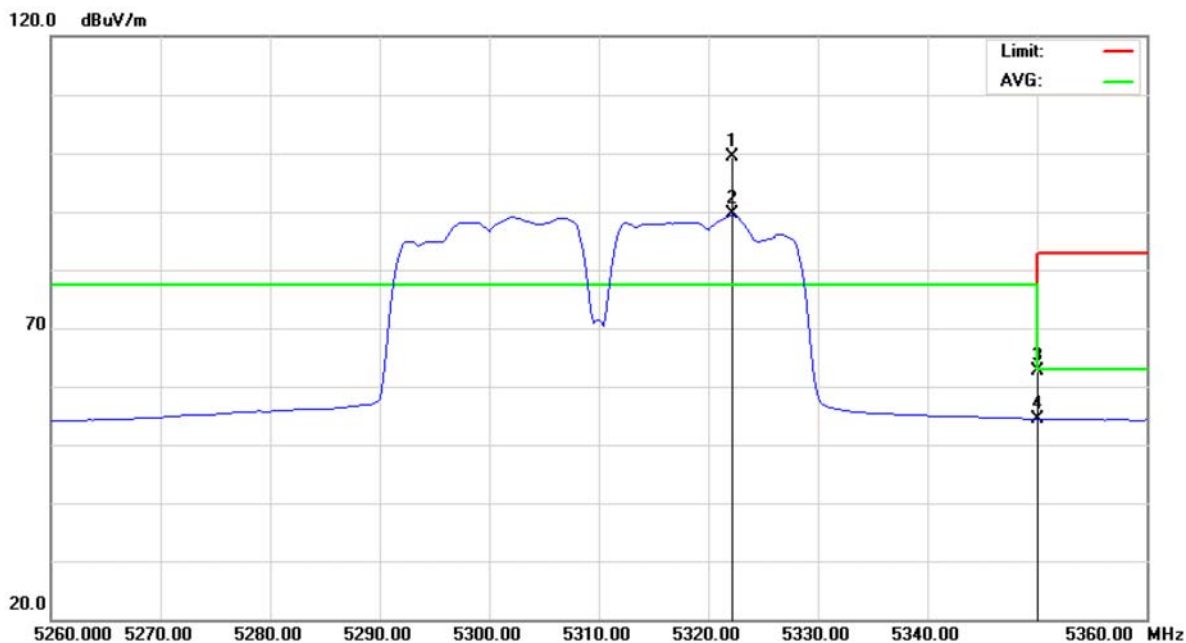


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5322.250	58.30	41.19	99.49	77.30	22.19	peak	
2	X	5322.250	48.33	41.19	89.52	77.30	12.22	AVG	
3		5350.000	21.36	41.24	62.60	77.30	-14.70	peak	
4		5350.000	13.25	41.24	54.49	63.00	-8.51	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5310 MHz		

Polarization: Vertical

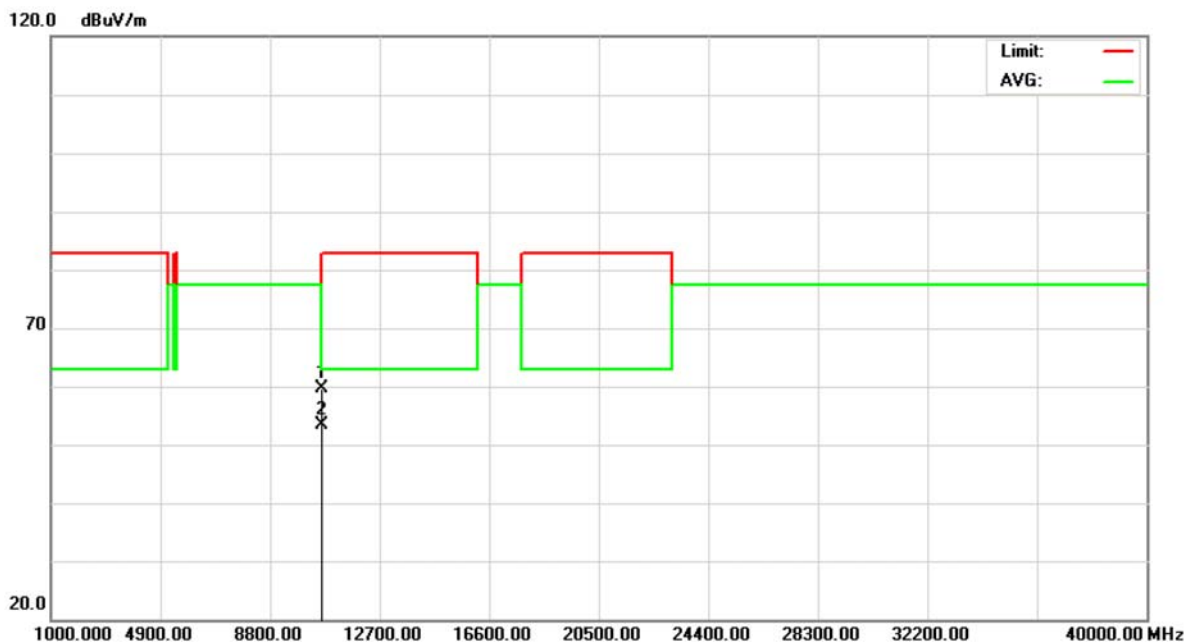


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10611.00	39.19	20.47	59.66	83.00	-23.34	peak	
2	*	10611.00	32.99	20.47	53.46	63.00	-9.54	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5310 MHz		

Polarization: Horizontal

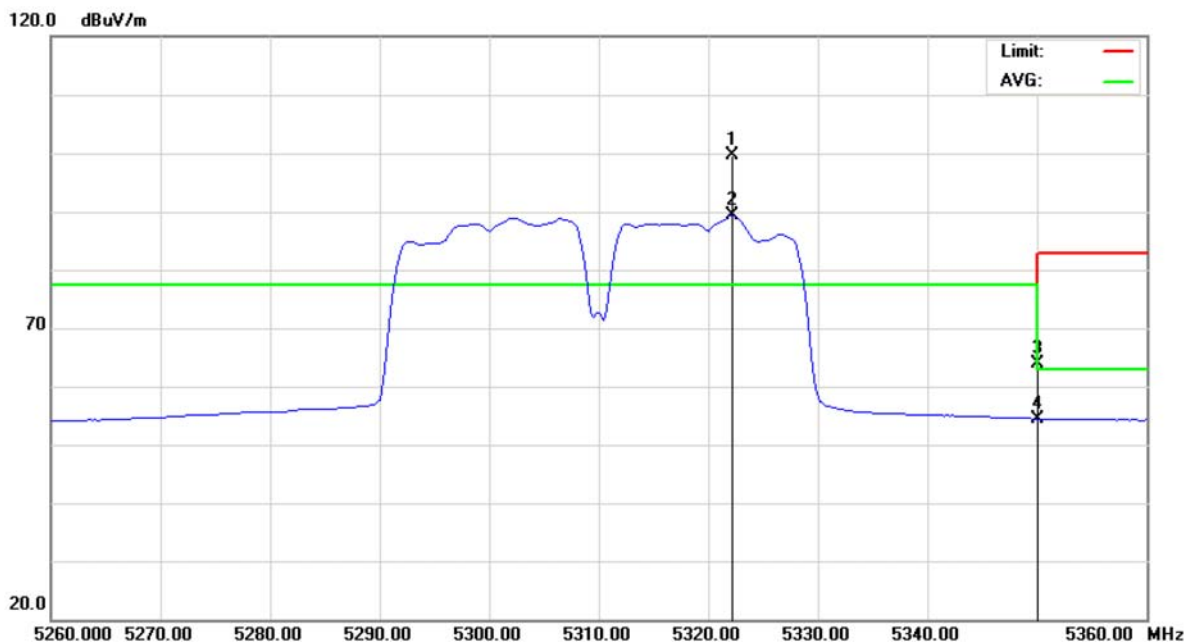


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5322.250	58.35	41.19	99.54	77.30	22.24	peak	
2	X	5322.250	48.11	41.19	89.30	77.30	12.00	AVG	
3		5350.000	22.57	41.24	63.81	77.30	-13.49	peak	
4		5350.000	13.24	41.24	54.48	63.00	-8.52	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5310 MHz		

Polarization: Horizontal

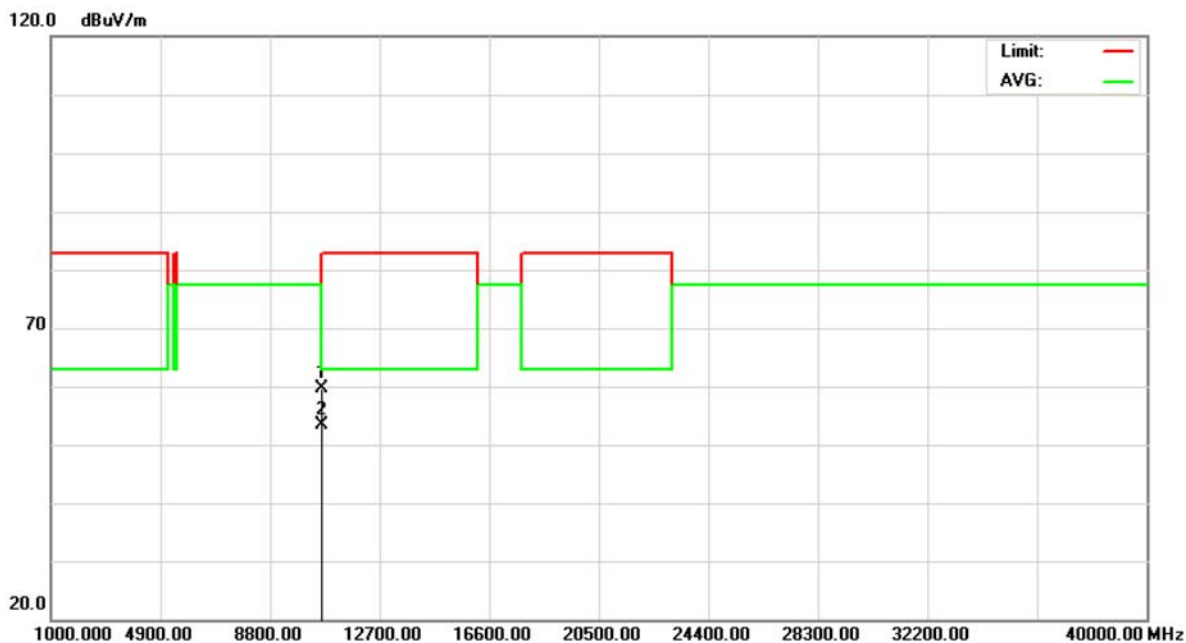


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	39.18	20.49	59.67	83.00	-23.33	peak	
2	*	10620.00	32.91	20.49	53.40	63.00	-9.60	AVG	



9.10 TEST RESULTS - 5470-5725 MHZ

E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz		

Polarization: Vertical

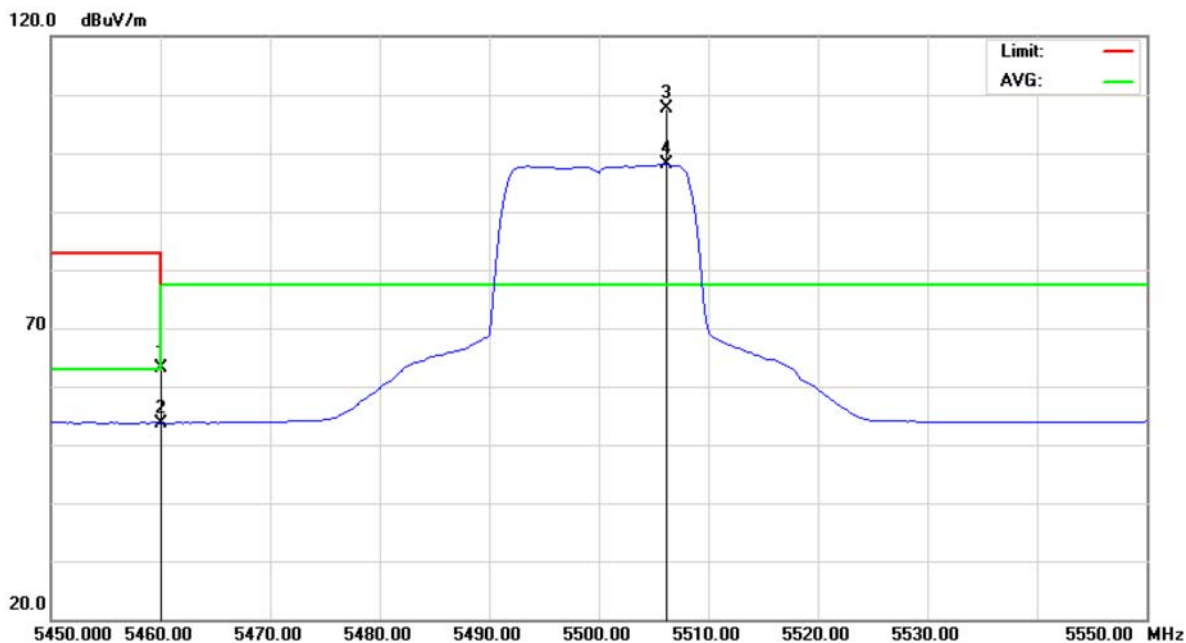


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	21.75	41.41	63.16	77.30	-14.14	peak	
2		5460.000	12.32	41.41	53.73	63.00	-9.27	AVG	
3	*	5506.250	66.11	41.49	107.60	77.30	30.30	peak	
4	X	5506.250	56.59	41.49	98.08	77.30	20.78	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz		

Polarization: Vertical

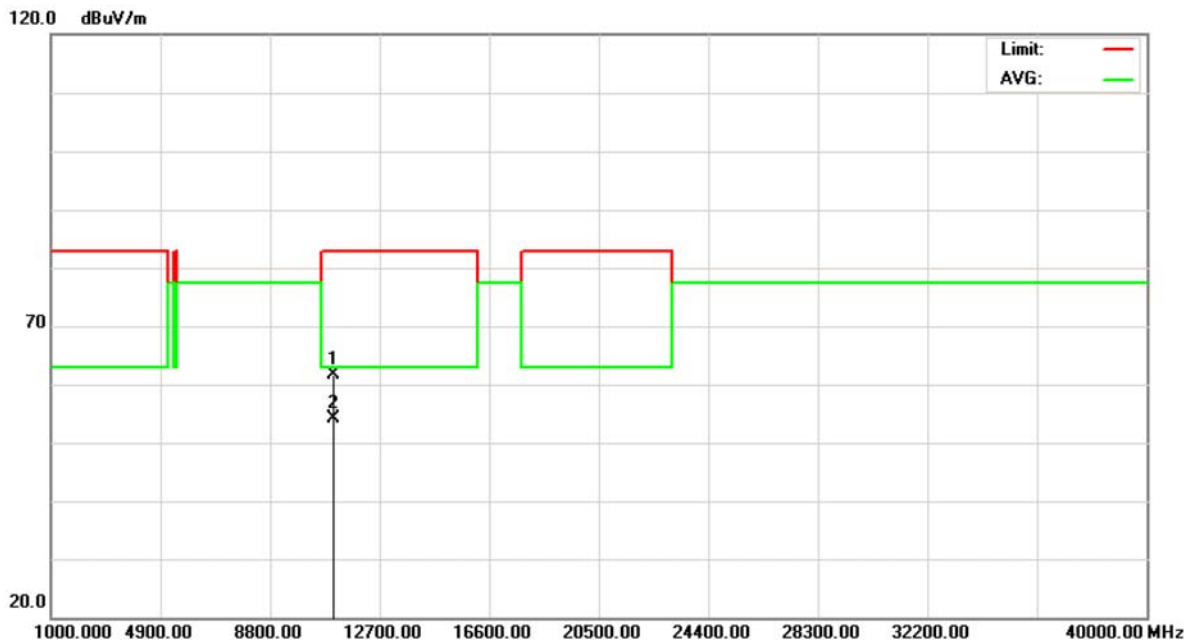


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.75	40.50	21.12	61.62	83.00	-21.38	peak	
2	*	11000.75	32.98	21.12	54.10	63.00	-8.90	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz		

Polarization: Horizontal

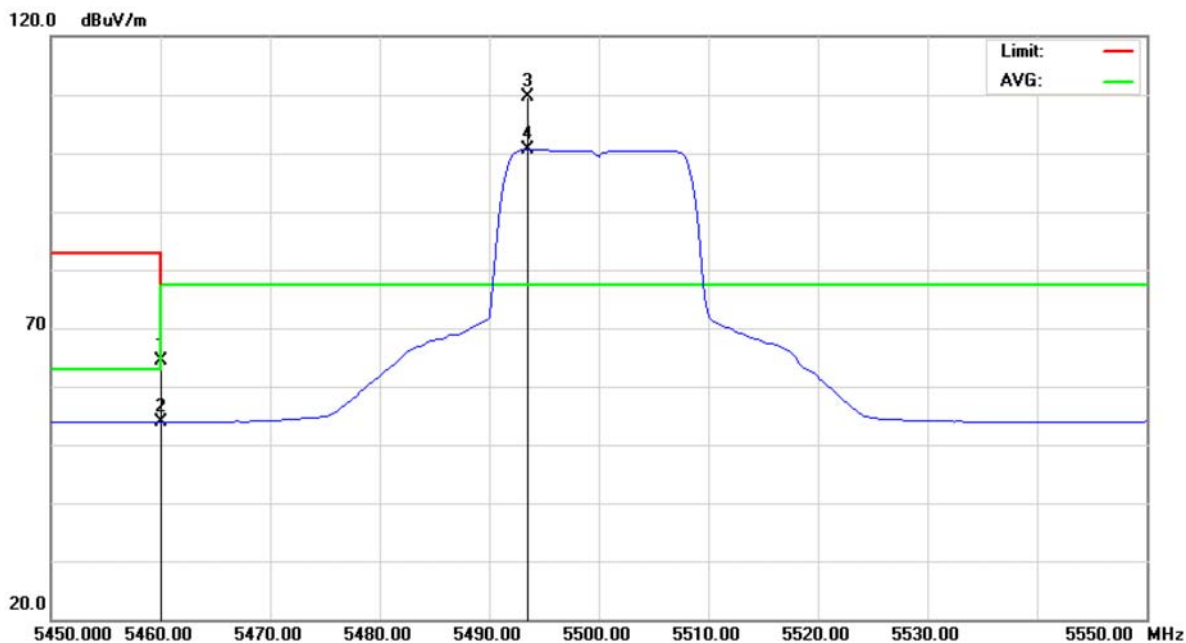


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	23.00	41.41	64.41	77.30	-12.89	peak	
2		5460.000	12.43	41.41	53.84	63.00	-9.16	AVG	
3	*	5493.500	68.22	41.46	109.68	77.30	32.38	peak	
4	X	5493.500	59.12	41.46	100.58	77.30	23.28	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz		

Polarization: Horizontal

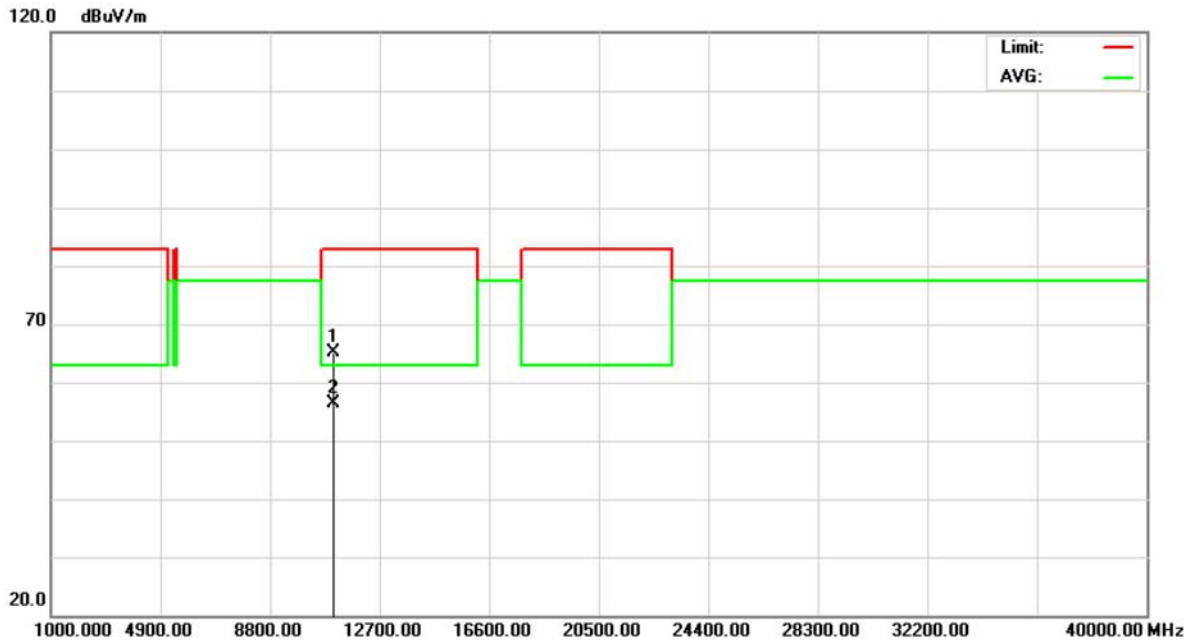


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10999.75	43.92	21.12	65.04	83.00	-17.96	peak	
2	*	10999.75	35.33	21.12	56.45	63.00	-6.55	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5580 MHz		

Polarization: Vertical

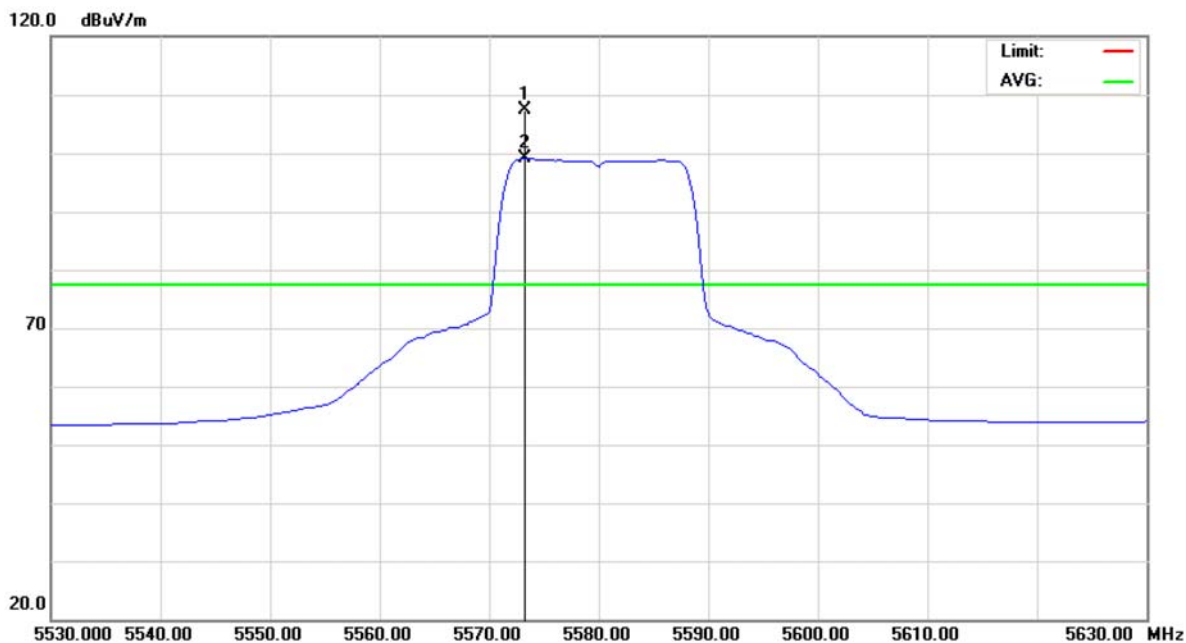


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5573.250	65.78	41.71	107.49	77.30	30.19	peak	
2	X	5573.250	57.47	41.71	99.18	77.30	21.88	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5580 MHz		

Polarization: Vertical

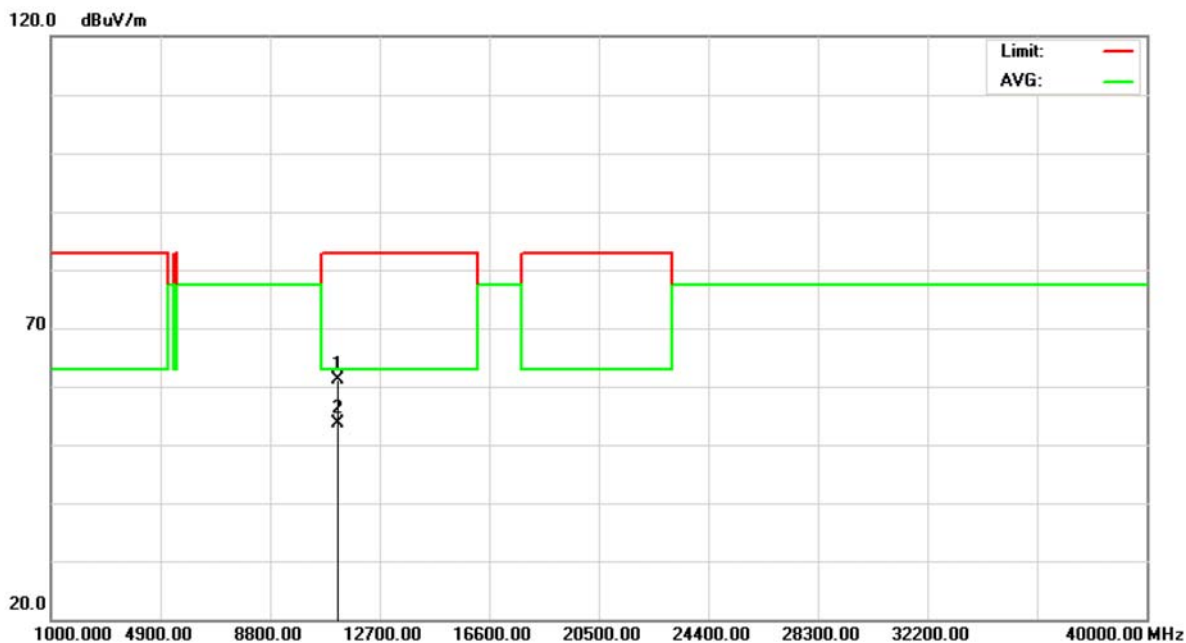


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	40.29	20.75	61.04	83.00	-21.96	peak	
2	*	11160.00	32.80	20.75	53.55	63.00	-9.45	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5580 MHz		

Polarization: Horizontal

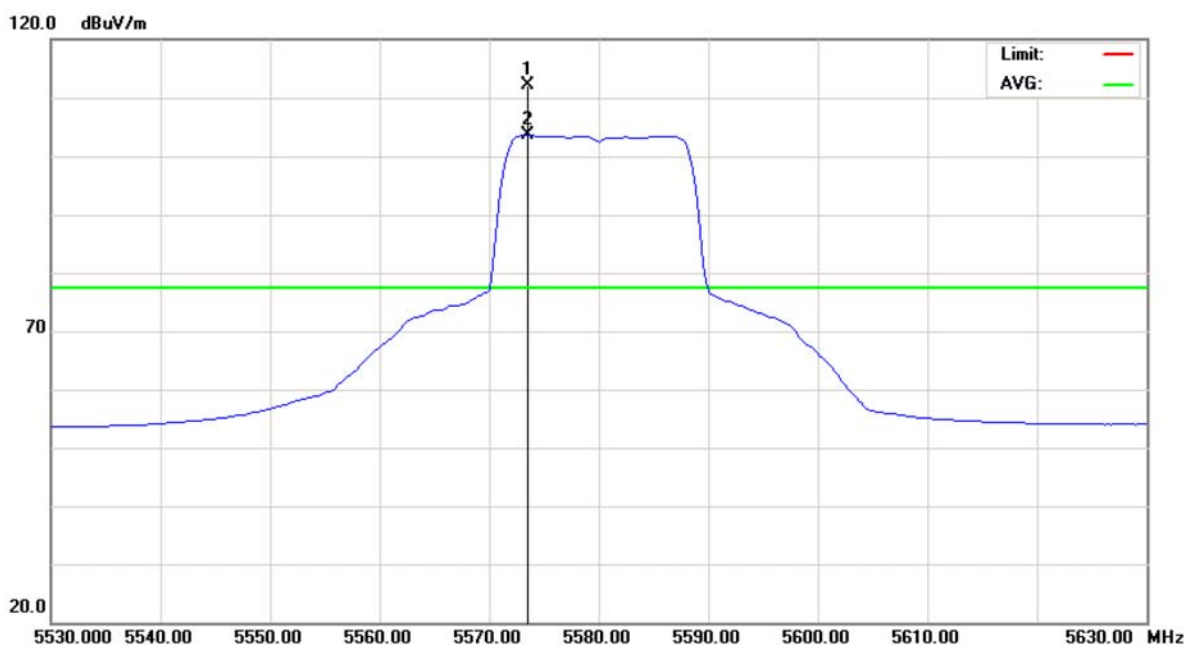


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5573.500	70.52	41.72	112.24	77.30	34.94	peak	
2	X	5573.500	61.88	41.72	103.60	77.30	26.30	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5580 MHz		

Polarization: Horizontal

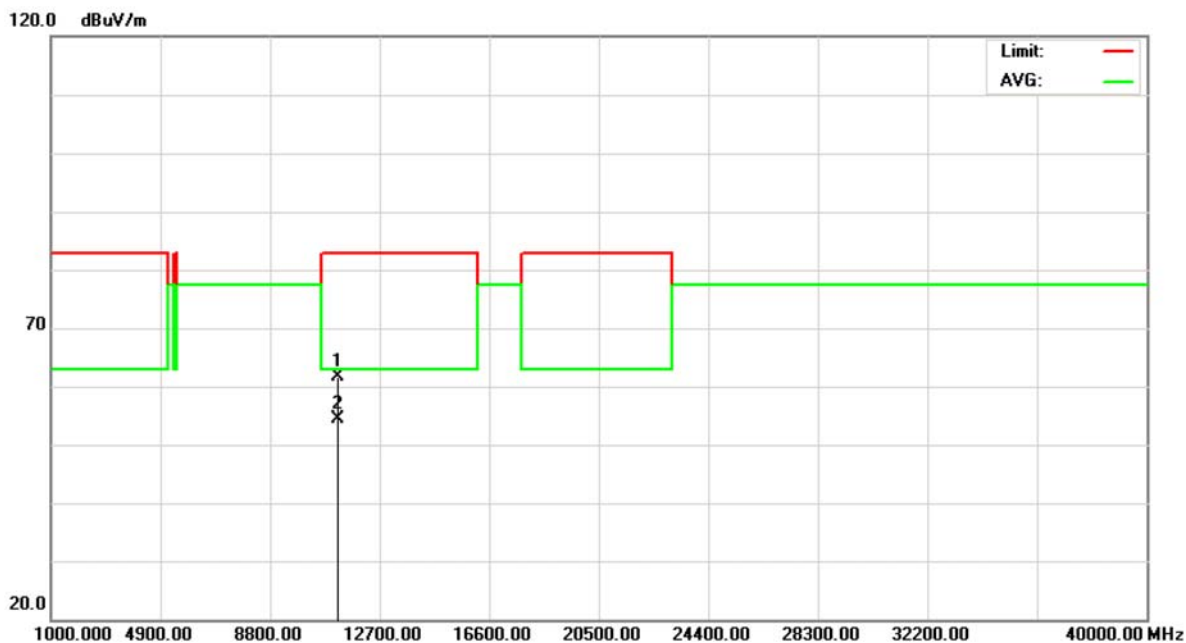


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	40.88	20.75	61.63	83.00	-21.37	peak	
2	*	11160.00	33.69	20.75	54.44	63.00	-8.56	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5700 MHz		

Polarization: Vertical

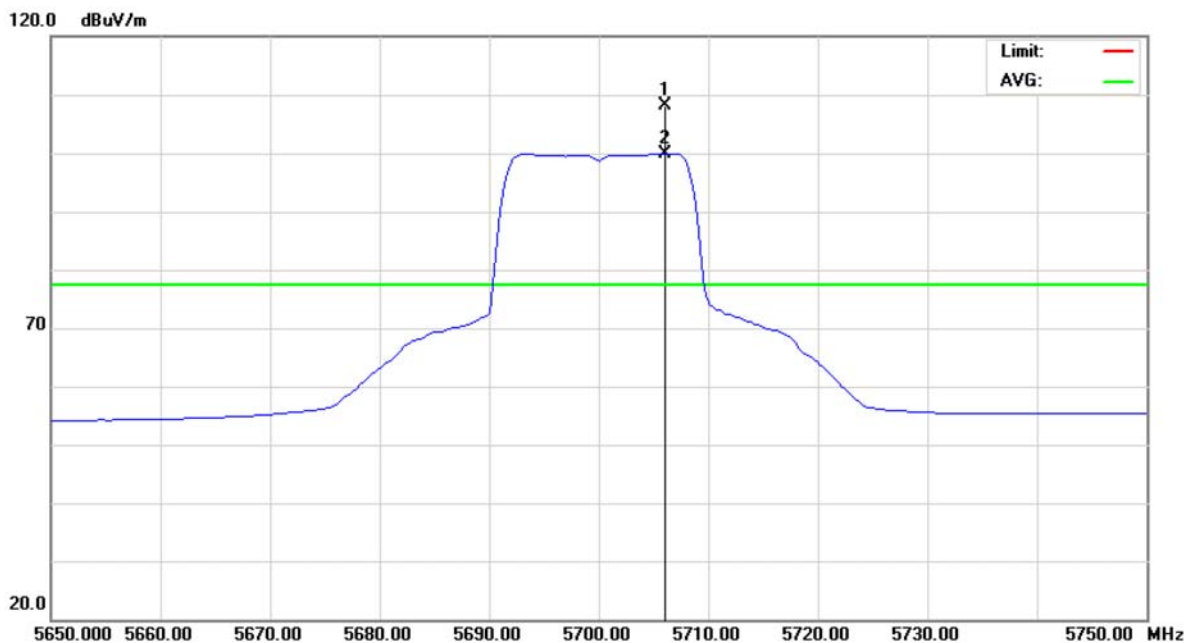


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5706.000	65.86	42.16	108.02	77.30	30.72	peak	
2	X	5706.000	57.81	42.16	99.97	77.30	22.67	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5700 MHz		

Polarization: Vertical

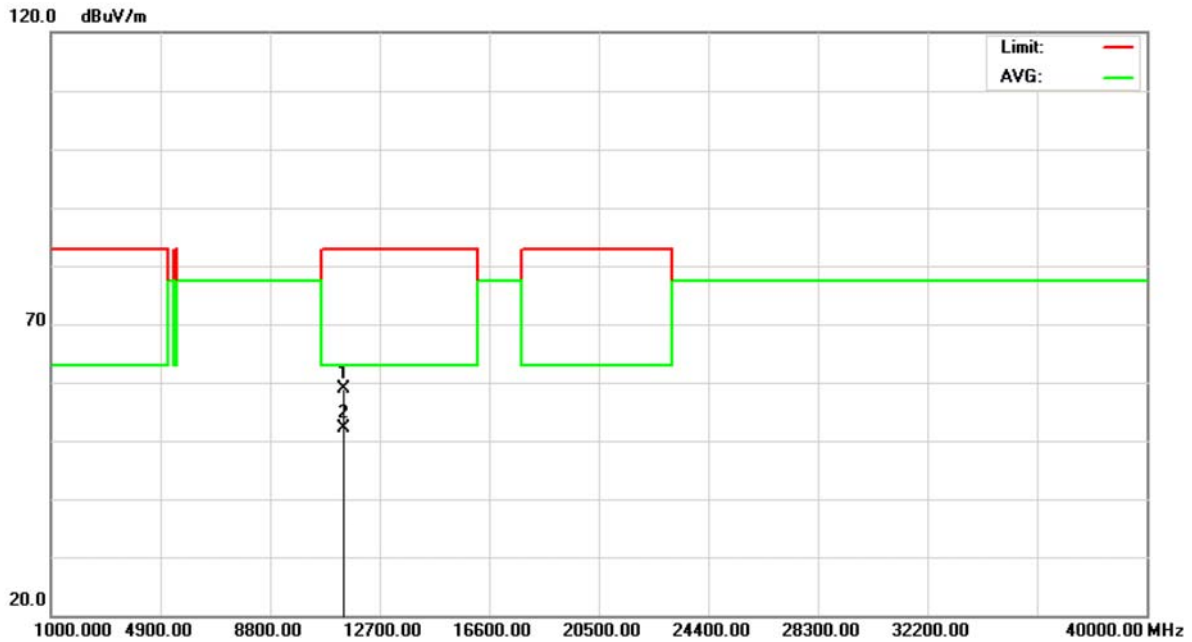


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11396.25	38.64	20.20	58.84	83.00	-24.16	peak	
2	*	11396.25	31.99	20.20	52.19	63.00	-10.81	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5700 MHz		

Polarization: Horizontal

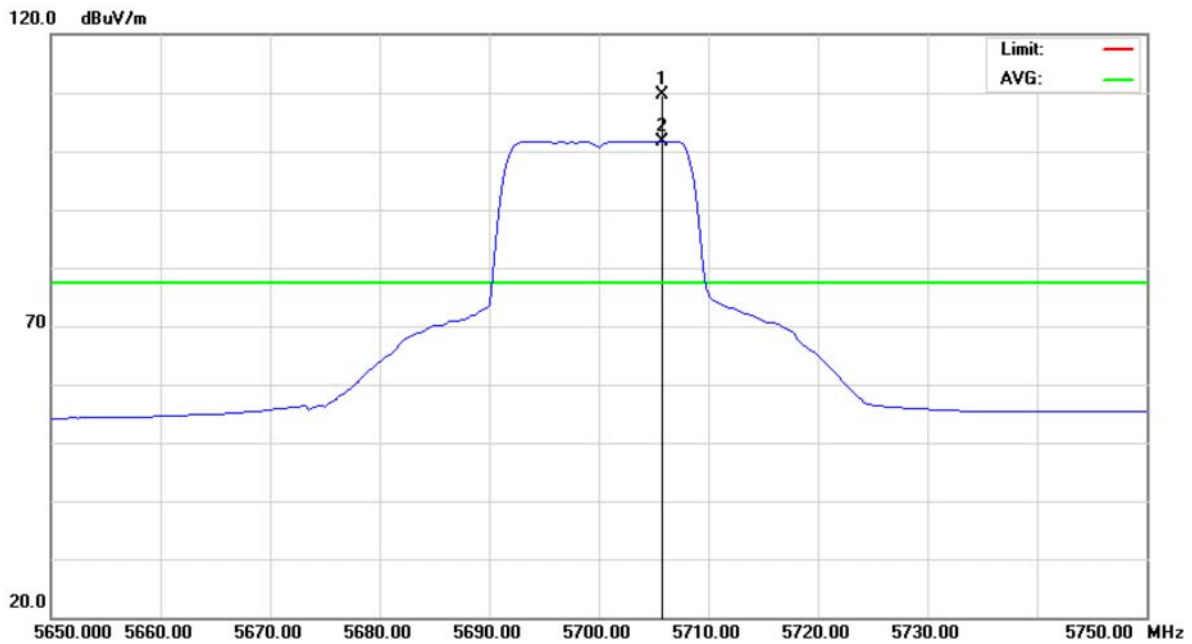


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5705.750	67.57	42.16	109.73	77.30	32.43	peak	
2	X	5705.750	59.58	42.16	101.74	77.30	24.44	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5700 MHz		

Polarization: Horizontal

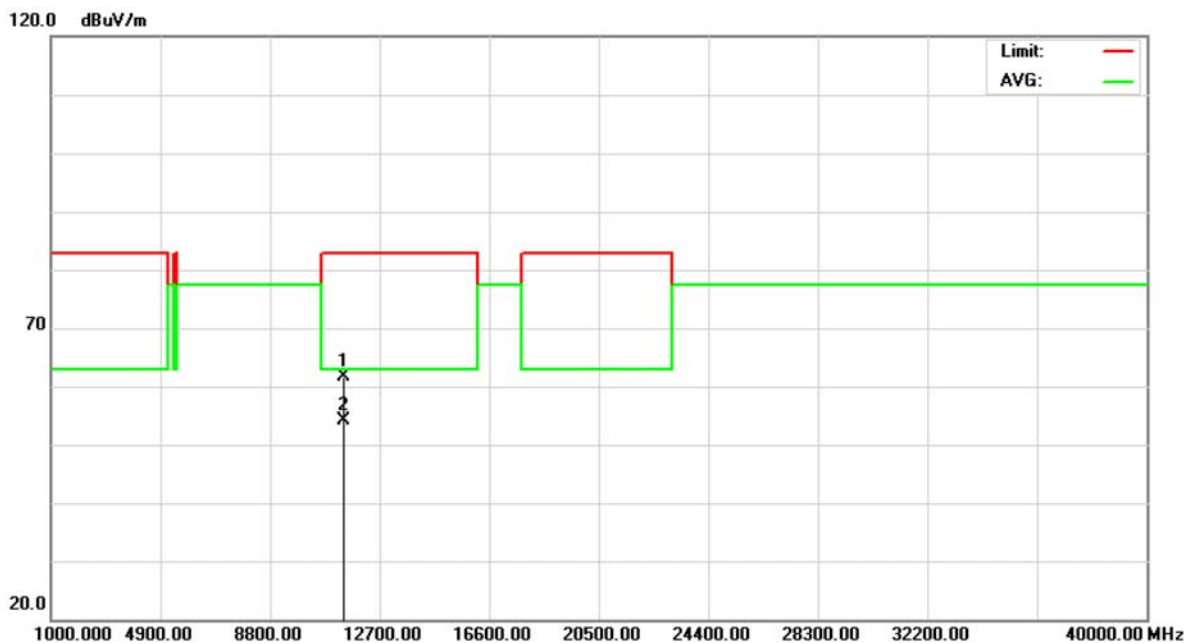


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11401.75	41.53	20.19	61.72	83.00	-21.28	peak	
2	*	11401.75	33.88	20.19	54.07	63.00	-8.93	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5500 MHz		

Polarization: Vertical

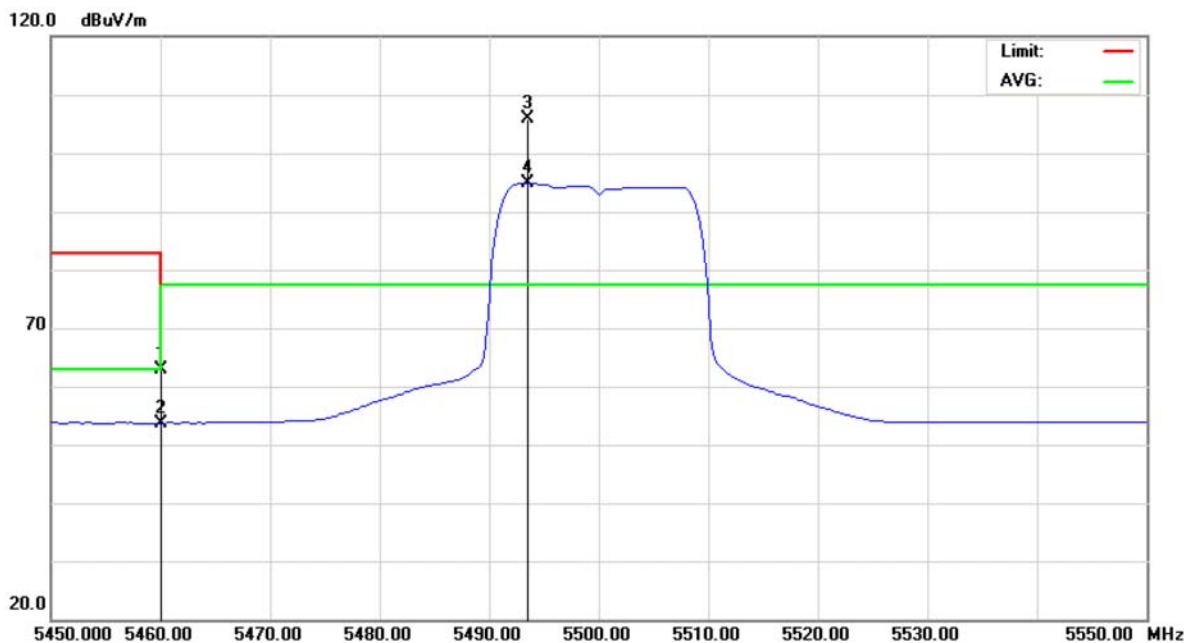


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	21.57	41.41	62.98	77.30	-14.32	peak	
2		5460.000	12.34	41.41	53.75	63.00	-9.25	AVG	
3	*	5493.500	64.45	41.46	105.91	77.30	28.61	peak	
4	X	5493.500	53.50	41.46	94.96	77.30	17.66	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5500 MHz		

Polarization: Vertical

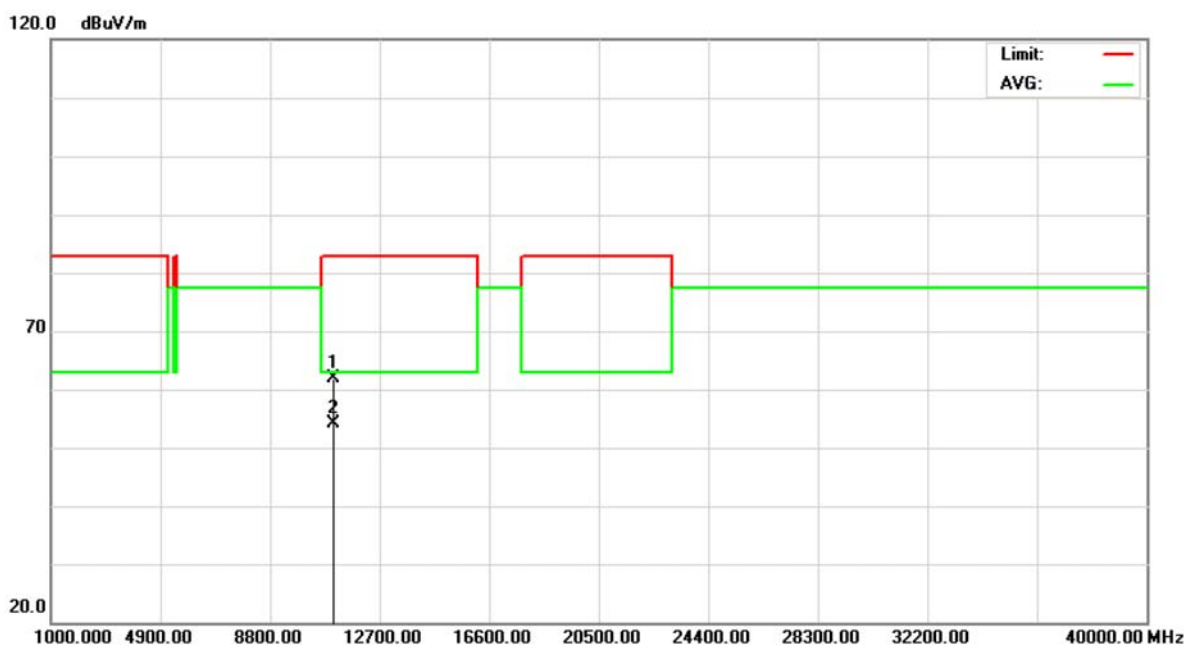


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10996.50	40.73	21.11	61.84	83.00	-21.16	peak	
2	*	10996.50	33.11	21.11	54.22	63.00	-8.78	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5500 MHz		

Polarization: Horizontal

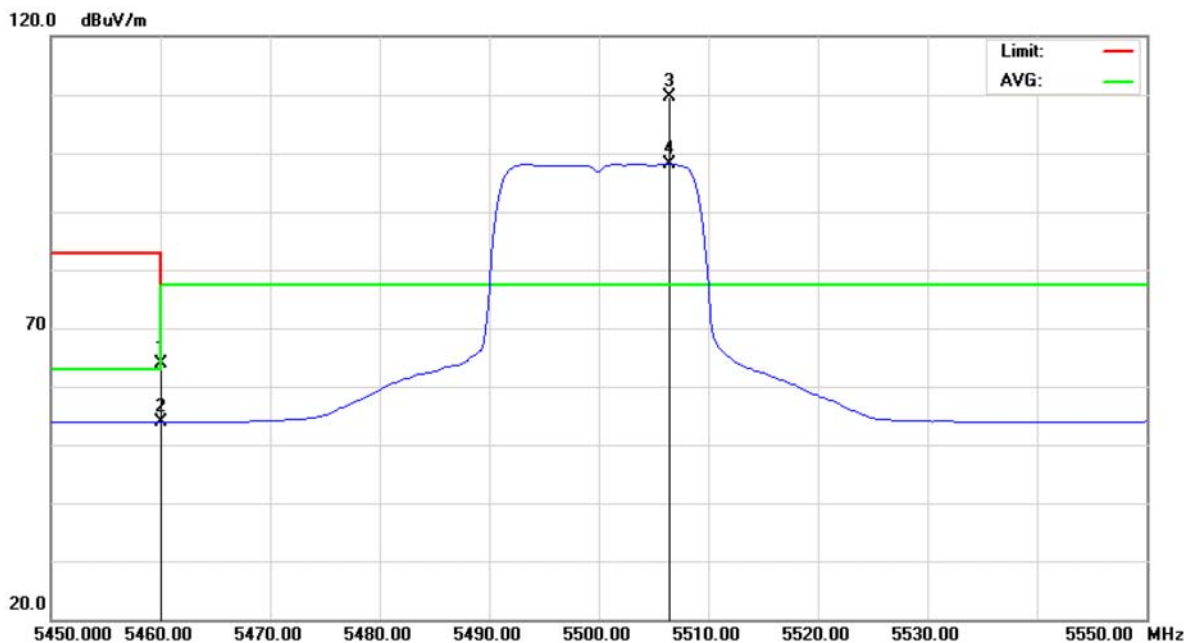


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	22.35	41.41	63.76	77.30	-13.54	peak	
2		5460.000	12.37	41.41	53.78	63.00	-9.22	AVG	
3	*	5506.500	68.04	41.49	109.53	77.30	32.23	peak	
4	X	5506.500	56.68	41.49	98.17	77.30	20.87	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5500 MHz		

Polarization: Horizontal

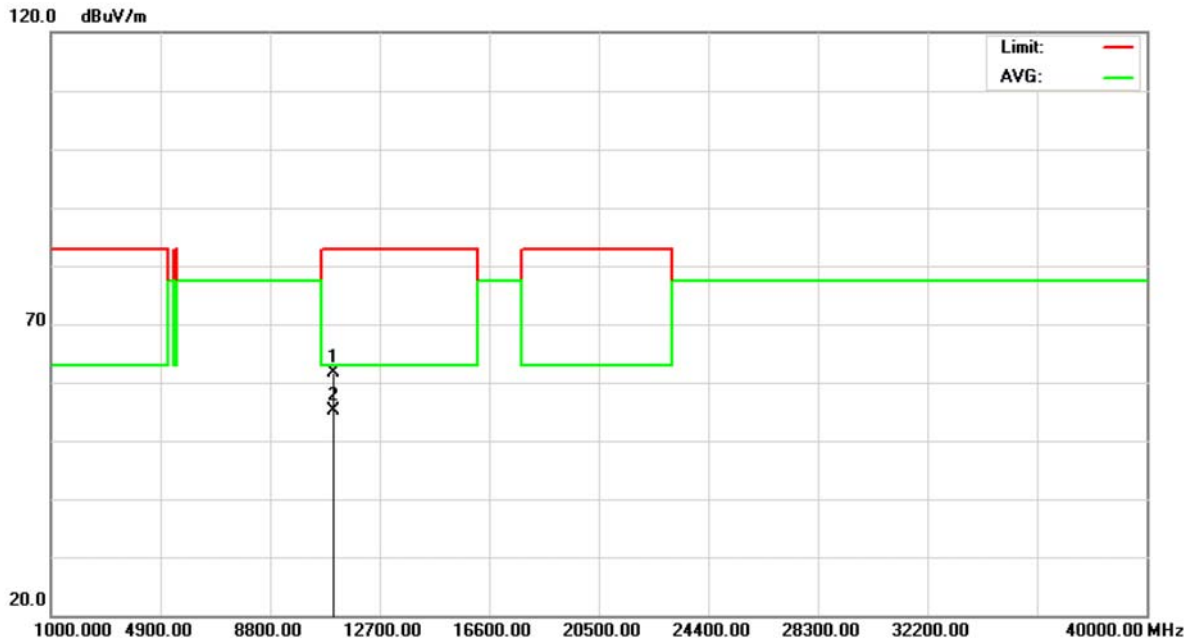


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10999.50	40.42	21.12	61.54	83.00	-21.46	peak	
2	*	10999.50	34.06	21.12	55.18	63.00	-7.82	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5580 MHz		

Polarization: Vertical

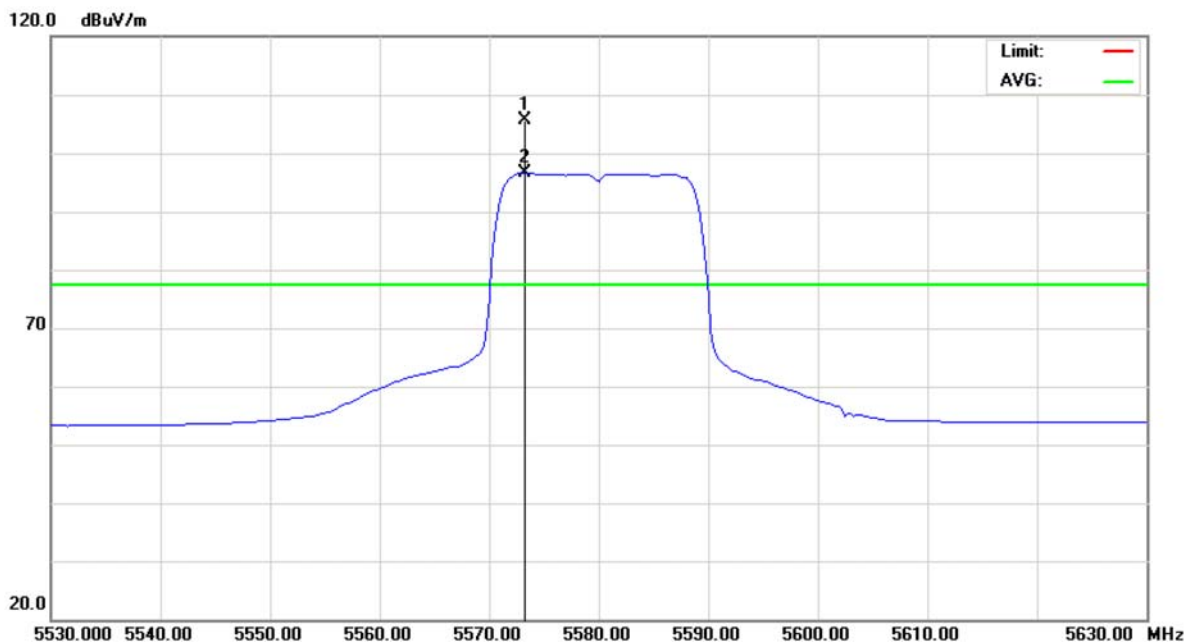


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5573.250	63.96	41.71	105.67	77.30	28.37	peak	
2	X	5573.250	54.95	41.71	96.66	77.30	19.36	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5580 MHz		

Polarization: Vertical

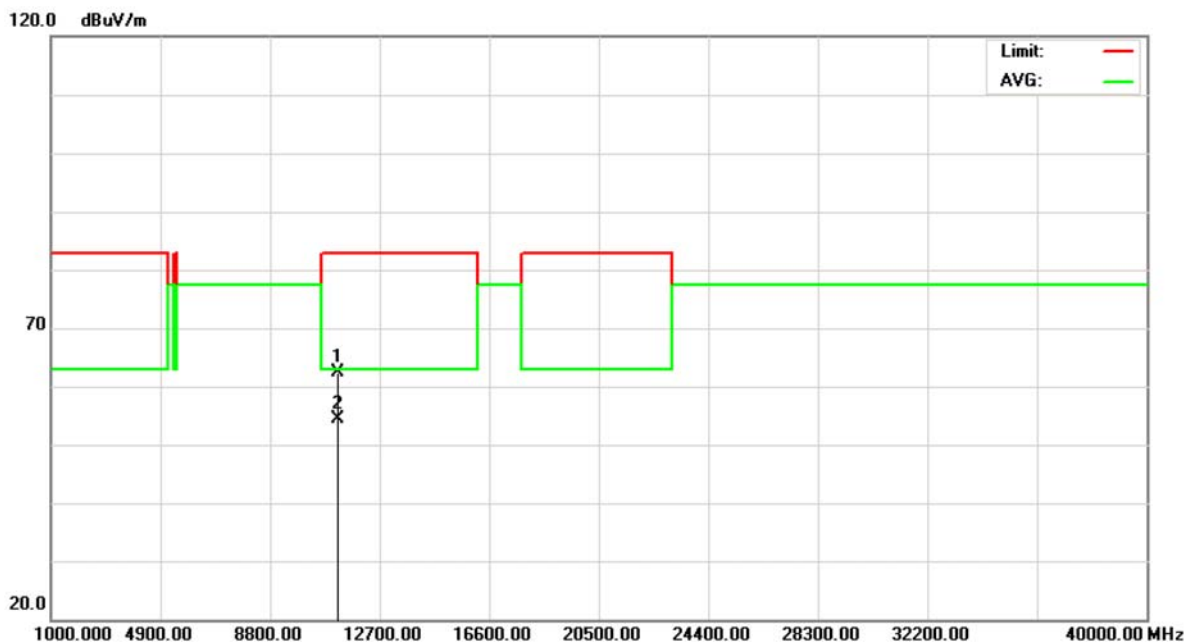


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.25	41.51	20.75	62.26	83.00	-20.74	peak	
2	*	11160.25	33.66	20.75	54.41	63.00	-8.59	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5580 MHz		

Polarization: Horizontal

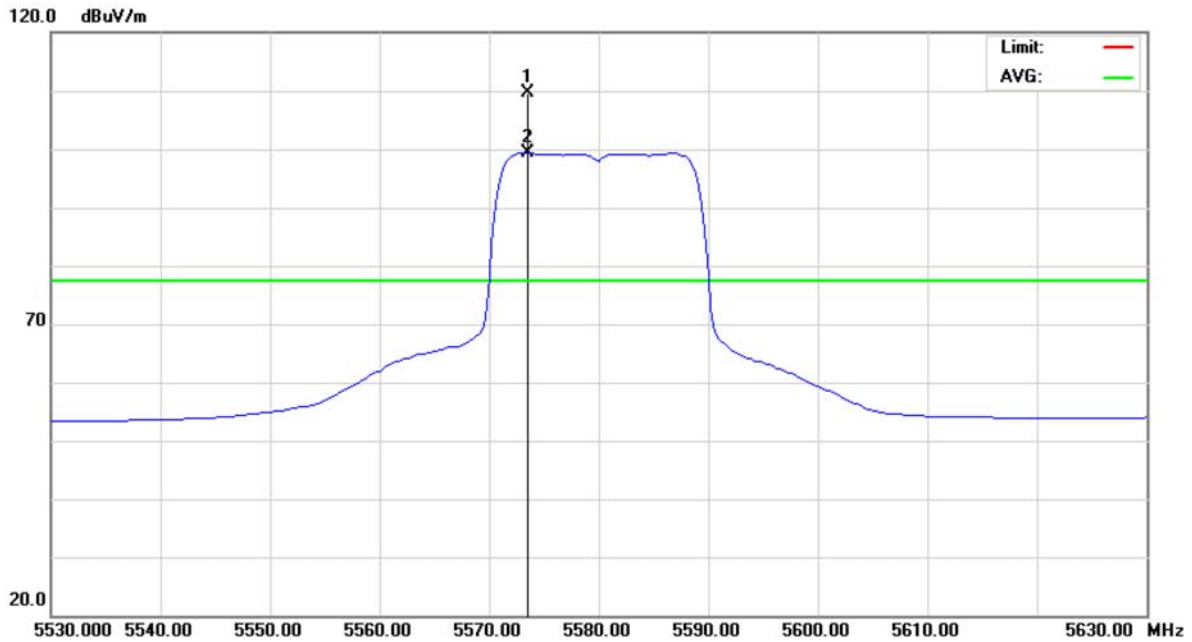


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5573.500	68.03	41.72	109.75	77.30	32.45	peak	
2	X	5573.500	57.66	41.72	99.38	77.30	22.08	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5580 MHz		

Polarization: Horizontal

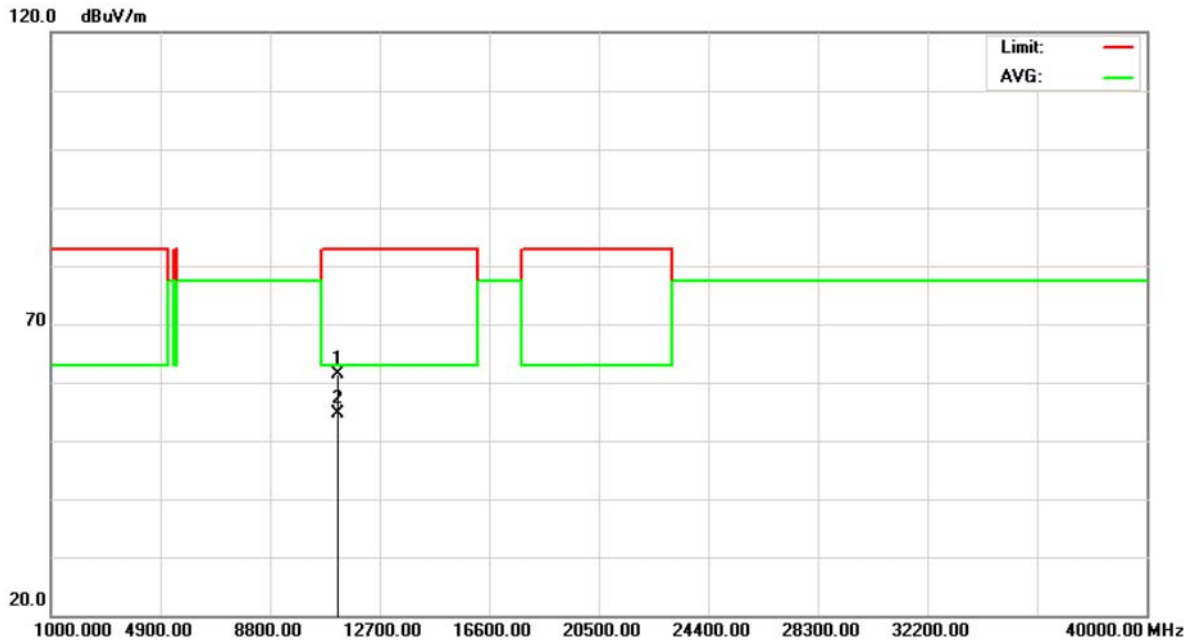


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.25	40.67	20.75	61.42	83.00	-21.58	peak	
2	*	11160.25	33.95	20.75	54.70	63.00	-8.30	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5700 MHz		

Polarization: Vertical

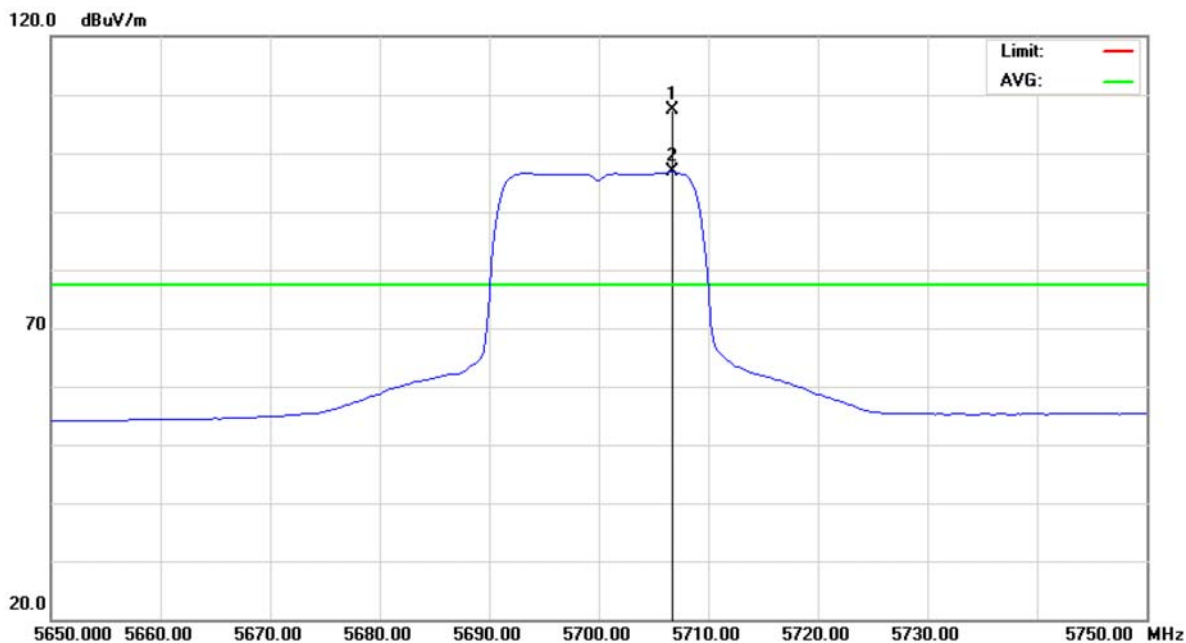


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5706.750	65.17	42.16	107.33	77.30	30.03	peak	
2	X	5706.750	54.63	42.16	96.79	77.30	19.49	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5700 MHz		

Polarization: Vertical

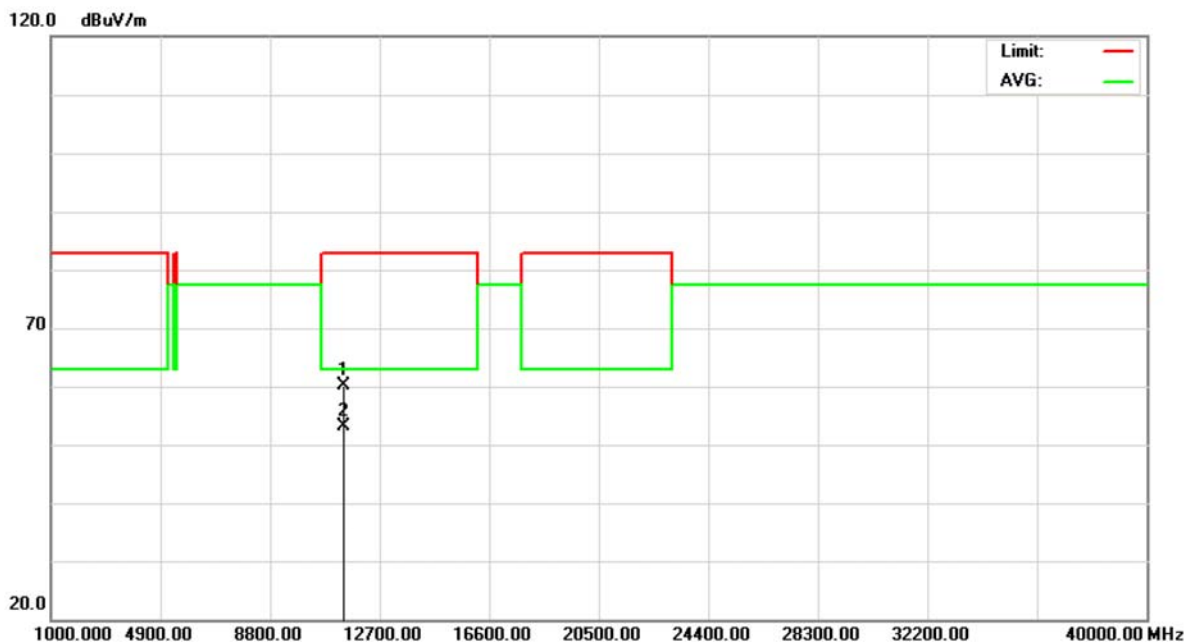


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11404.50	39.87	20.18	60.05	83.00	-22.95	peak	
2	*	11404.50	33.07	20.18	53.25	63.00	-9.75	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5700 MHz		

Polarization: Horizontal

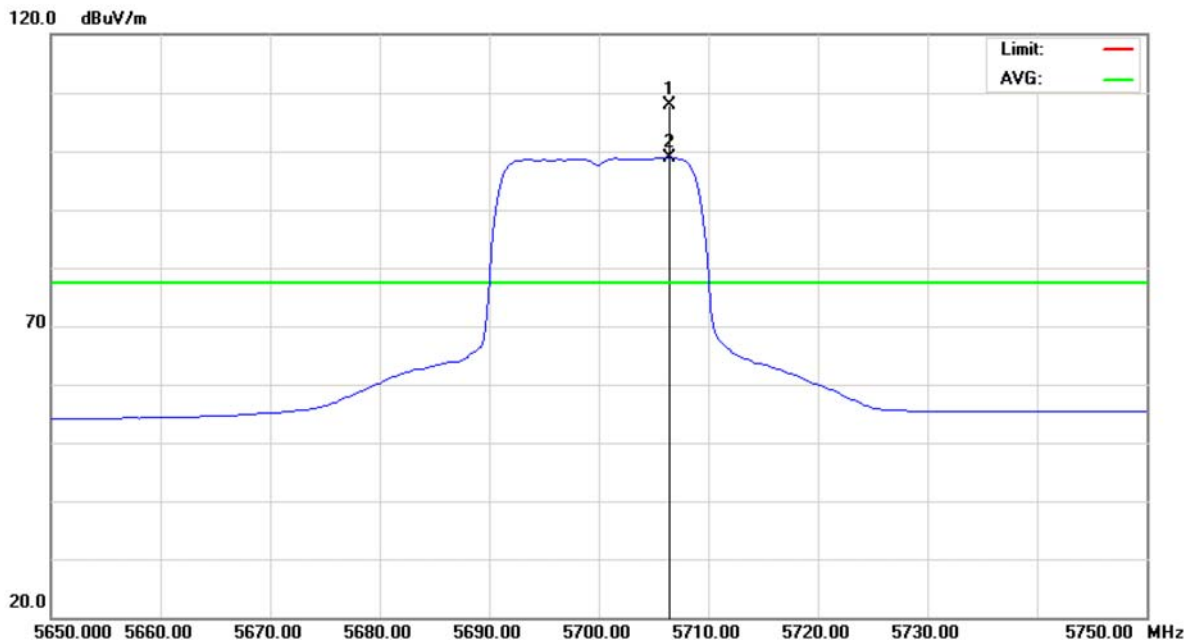


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5706.500	65.60	42.16	107.76	77.30	30.46	peak	
2	X	5706.500	56.72	42.16	98.88	77.30	21.58	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5700 MHz		

Polarization: Horizontal

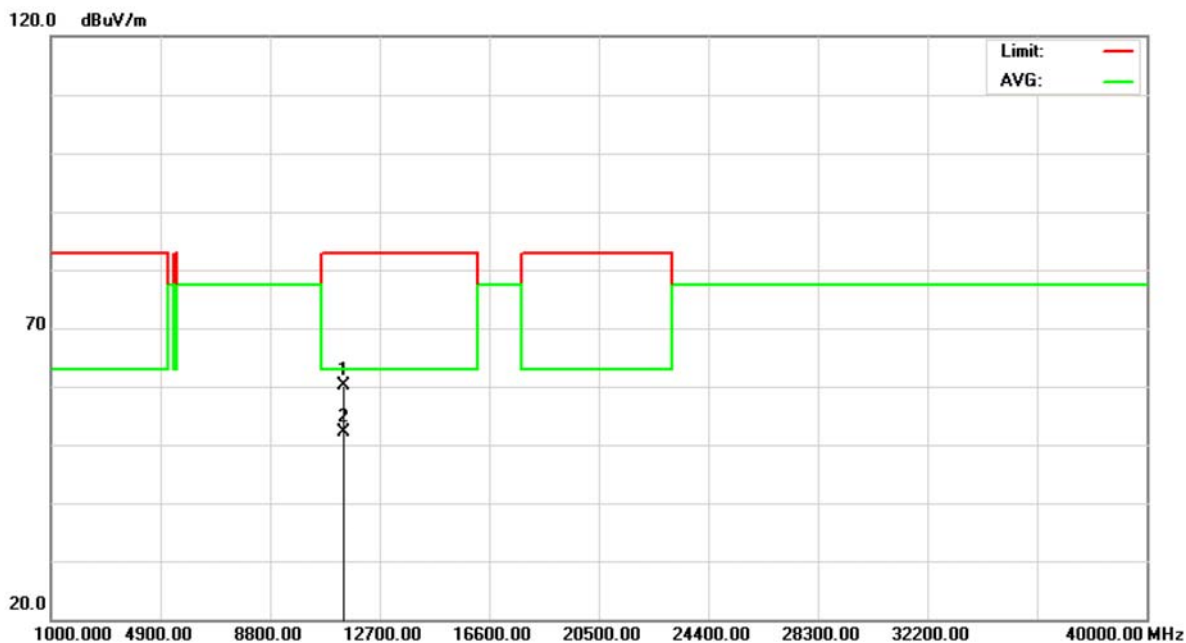


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11402.25	39.92	20.19	60.11	83.00	-22.89	peak	
2	*	11402.25	31.98	20.19	52.17	63.00	-10.83	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5510 MHz		

Polarization: Vertical

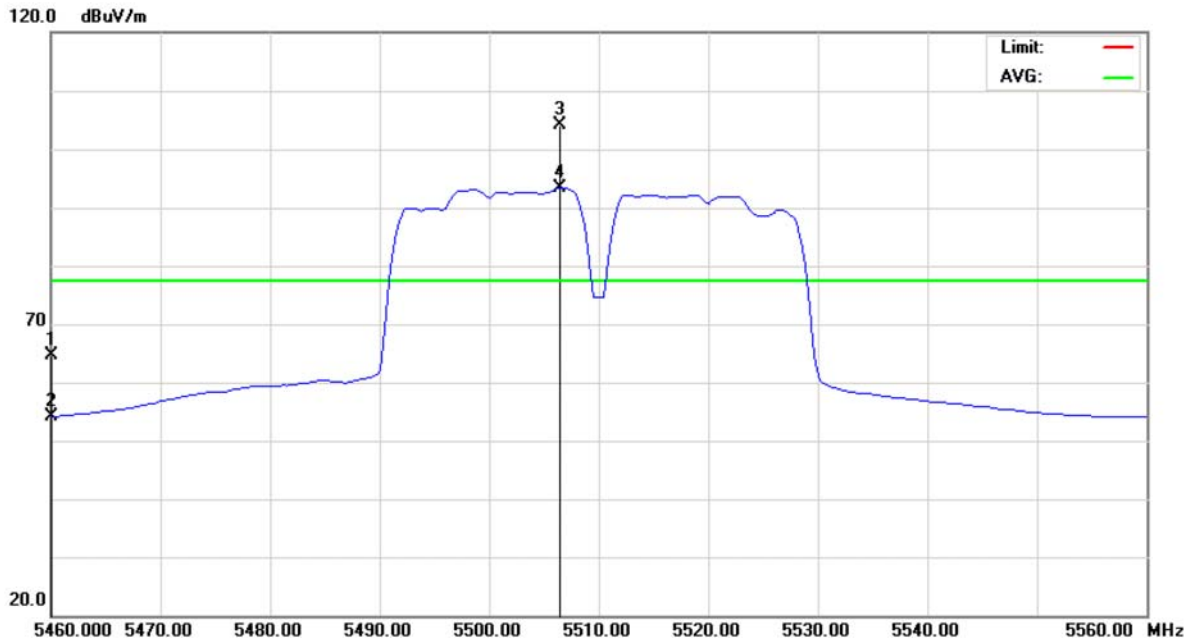


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	23.11	41.41	64.52	77.30	-12.78	peak	
2		5460.000	12.75	41.41	54.16	63.00	-8.84	AVG	
3	*	5506.500	62.58	41.49	104.07	77.30	26.77	peak	
4	X	5506.500	51.99	41.49	93.48	77.30	16.18	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5510 MHz		

Polarization: Vertical

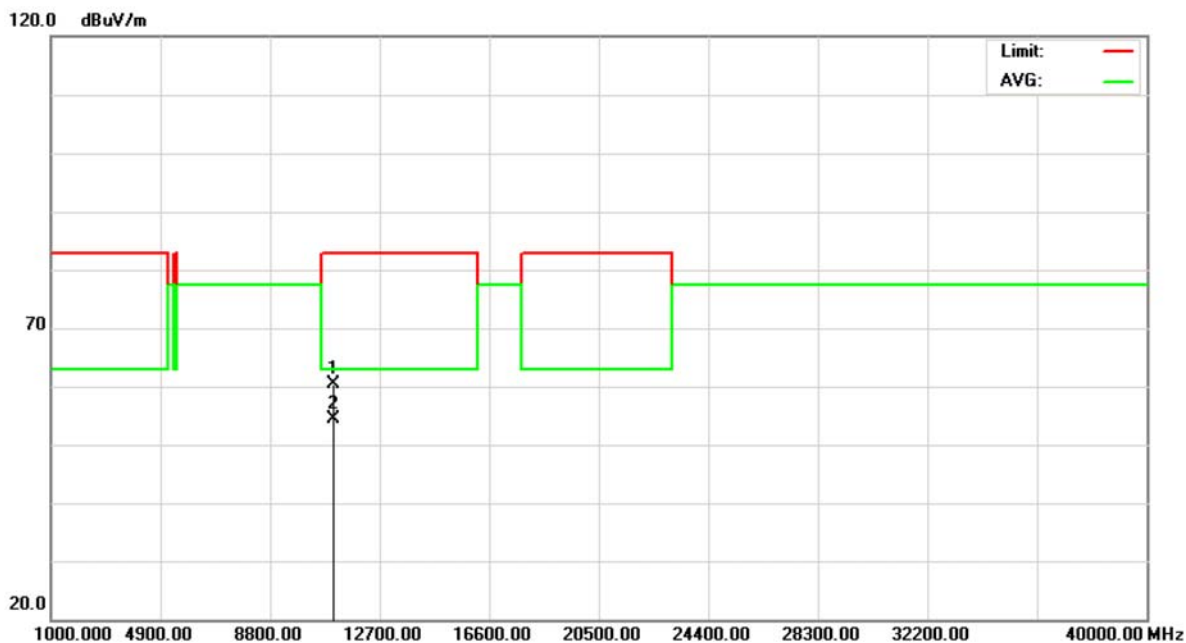


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.50	39.37	21.07	60.44	83.00	-22.56	peak	
2	*	11020.50	33.23	21.07	54.30	63.00	-8.70	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5510 MHz		

Polarization: Horizontal

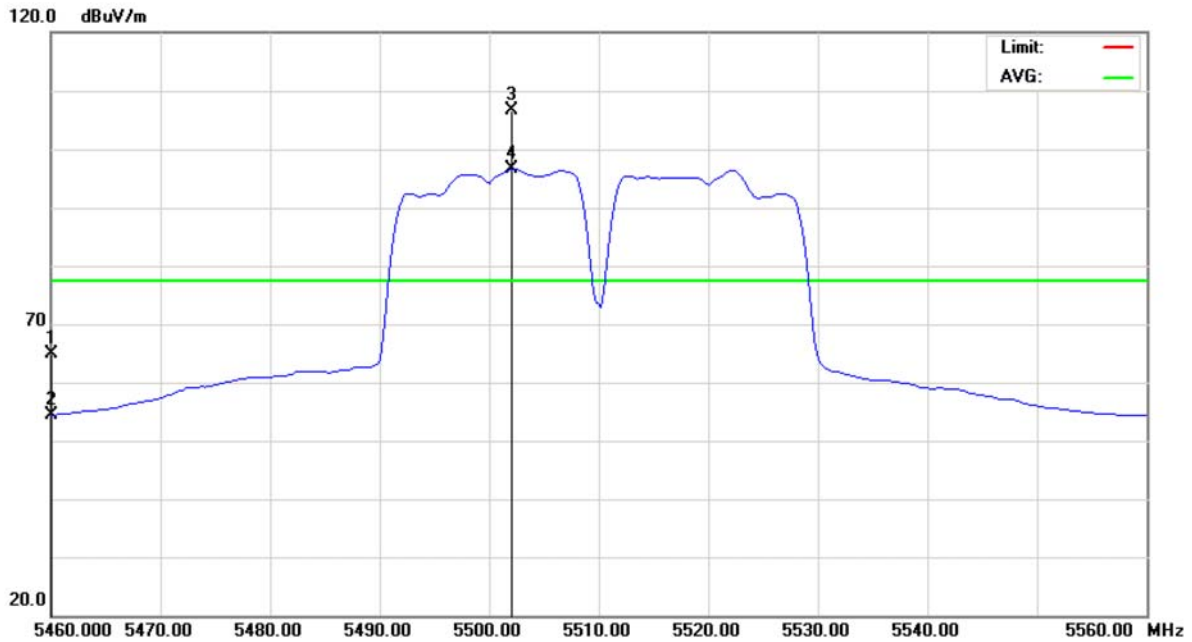


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	23.51	41.41	64.92	77.30	-12.38	peak	
2		5460.000	12.94	41.41	54.35	63.00	-8.65	AVG	
3	*	5502.000	65.15	41.48	106.63	77.30	29.33	peak	
4	X	5502.000	55.19	41.48	96.67	77.30	19.37	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5510 MHz		

Polarization: Horizontal

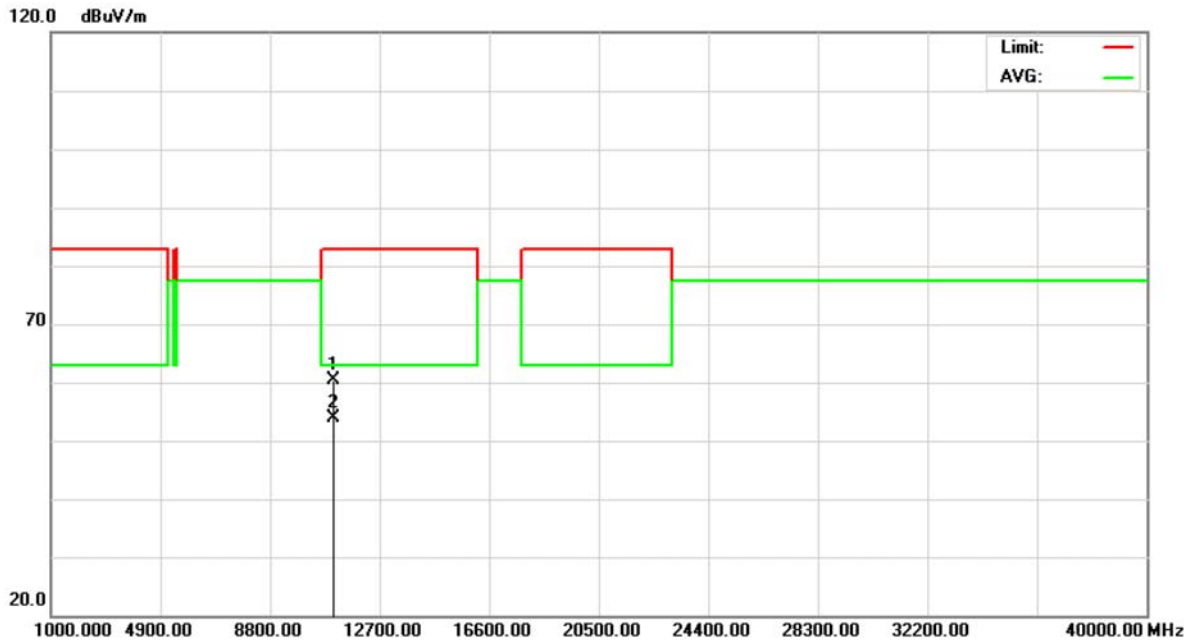


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.50	39.32	21.07	60.39	83.00	-22.61	peak	
2	*	11020.50	32.93	21.07	54.00	63.00	-9.00	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5550 MHz		

Polarization: Vertical

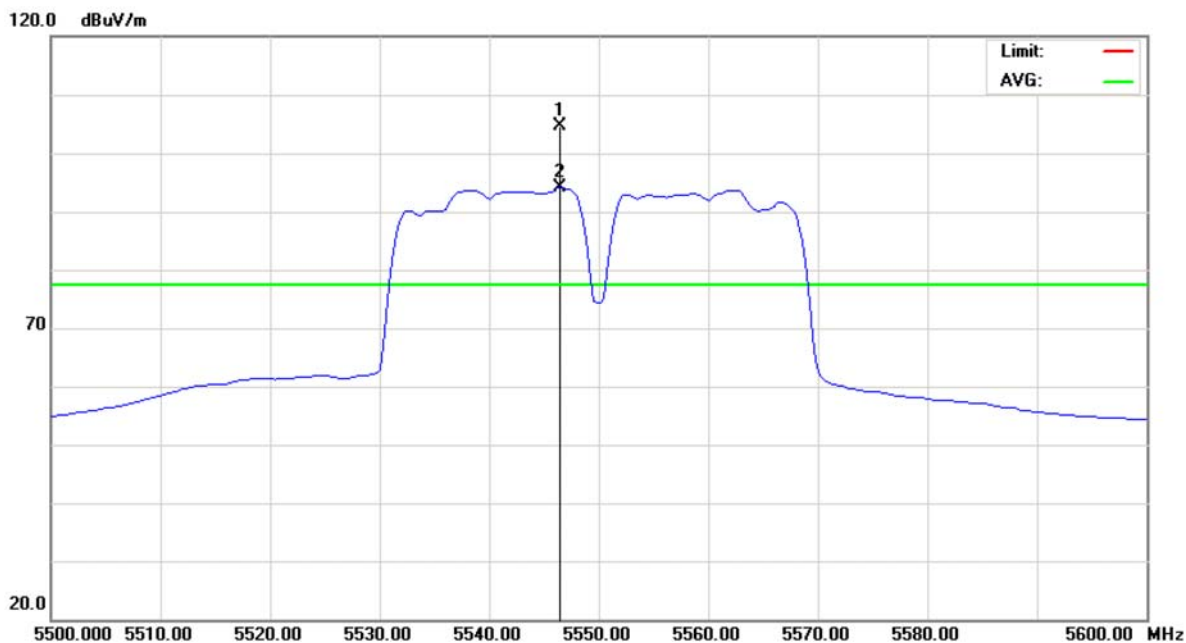


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5546.500	62.99	41.63	104.62	77.30	27.32	peak	
2	X	5546.500	52.61	41.63	94.24	77.30	16.94	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5550 MHz		

Polarization: Vertical

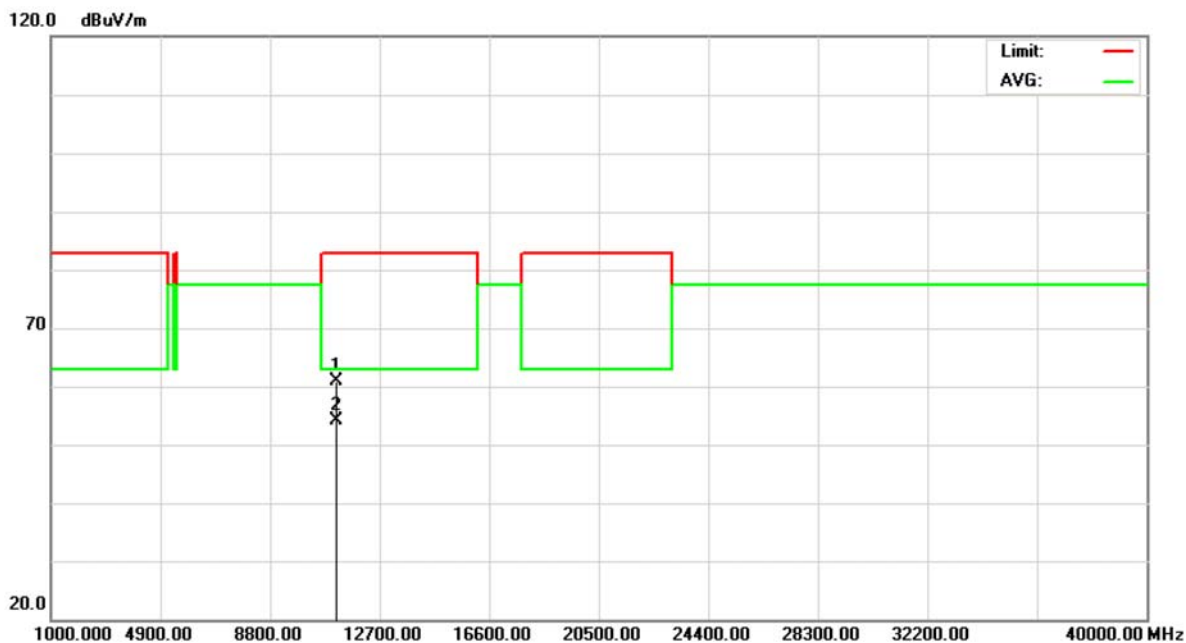


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	40.02	20.89	60.91	83.00	-22.09	peak	
2	*	11100.00	33.28	20.89	54.17	63.00	-8.83	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5550 MHz		

Polarization: Horizontal

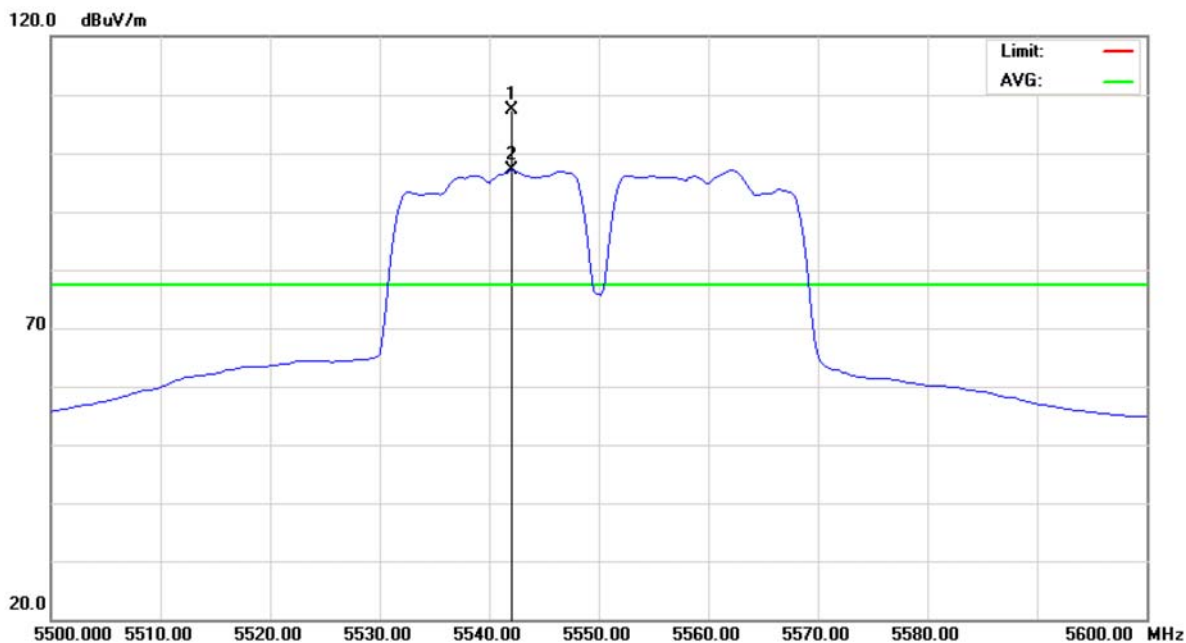


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5542.000	65.71	41.61	107.32	77.30	30.02	peak	
2	X	5542.000	55.42	41.61	97.03	77.30	19.73	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5550 MHz		

Polarization: Horizontal

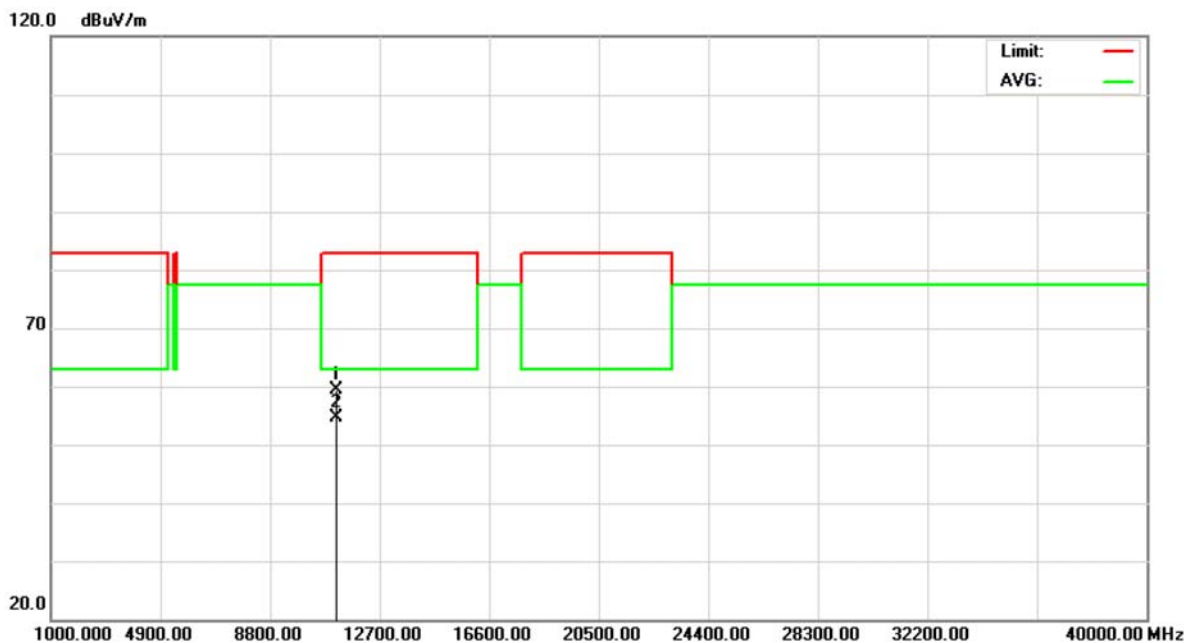


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	38.57	20.89	59.46	83.00	-23.54	peak	
2	*	11100.00	33.80	20.89	54.69	63.00	-8.31	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5670 MHz		

Polarization: Vertical

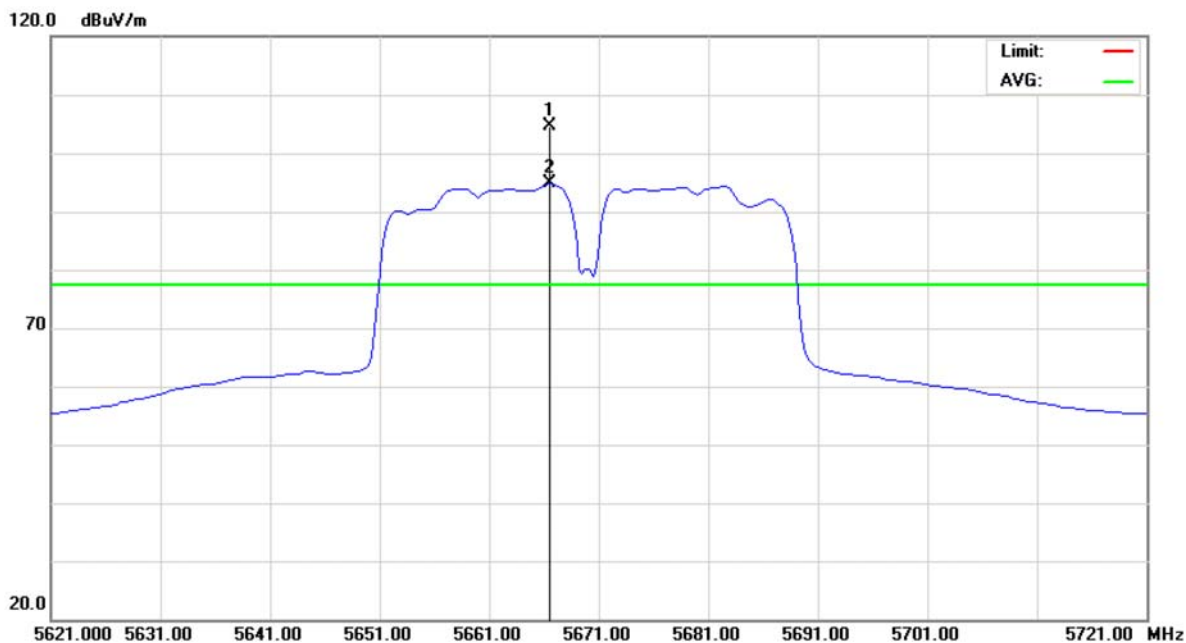


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5666.500	62.69	42.03	104.72	77.30	27.42	peak	
2	X	5666.500	52.73	42.03	94.76	77.30	17.46	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5670 MHz		

Polarization: Vertical

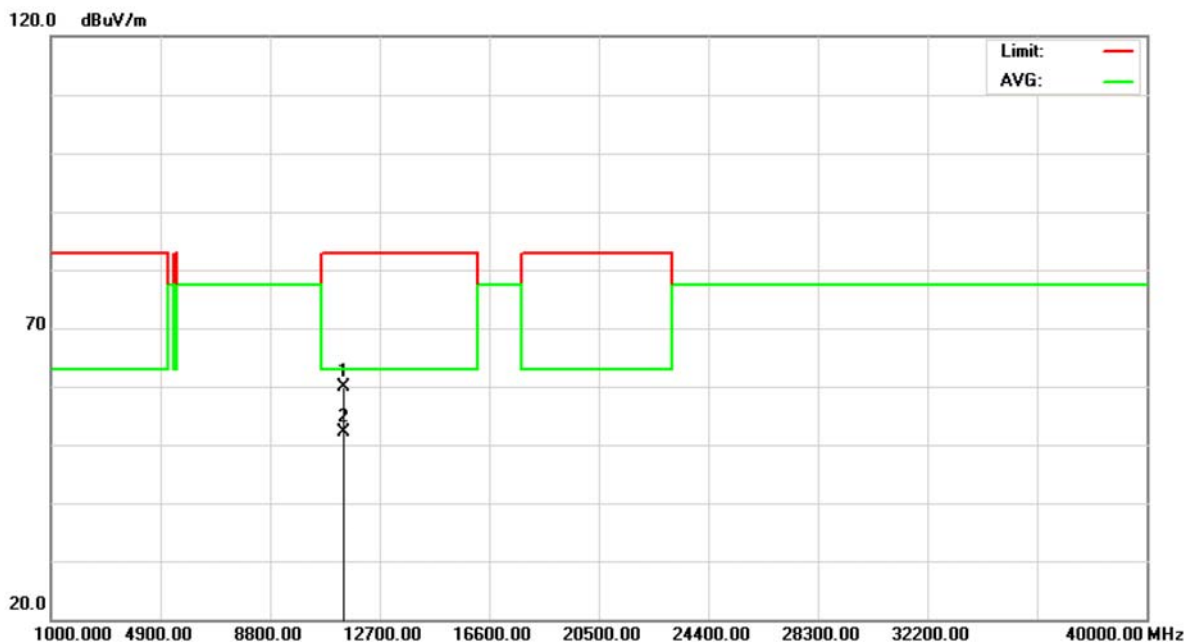


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	39.52	20.33	59.85	83.00	-23.15	peak	
2	*	11340.00	31.79	20.33	52.12	63.00	-10.88	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5670 MHz		

Polarization: Horizontal

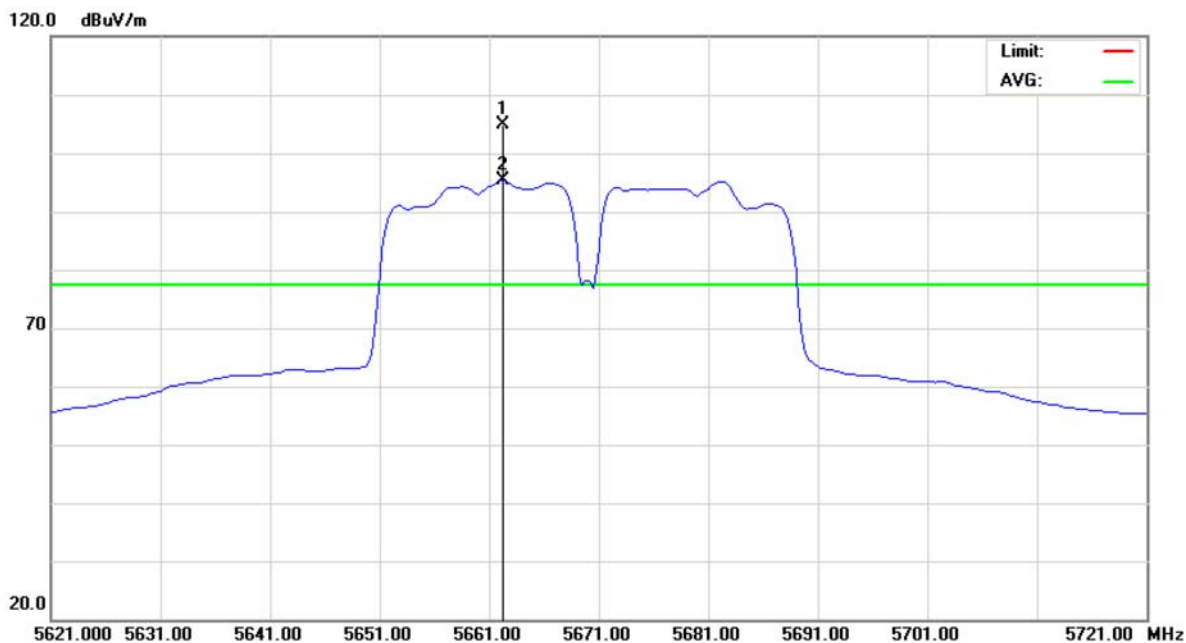


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5662.250	62.94	42.01	104.95	77.30	27.65	peak	
2	X	5662.250	53.28	42.01	95.29	77.30	17.99	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (40 MHz)/5670 MHz		

Polarization: Horizontal

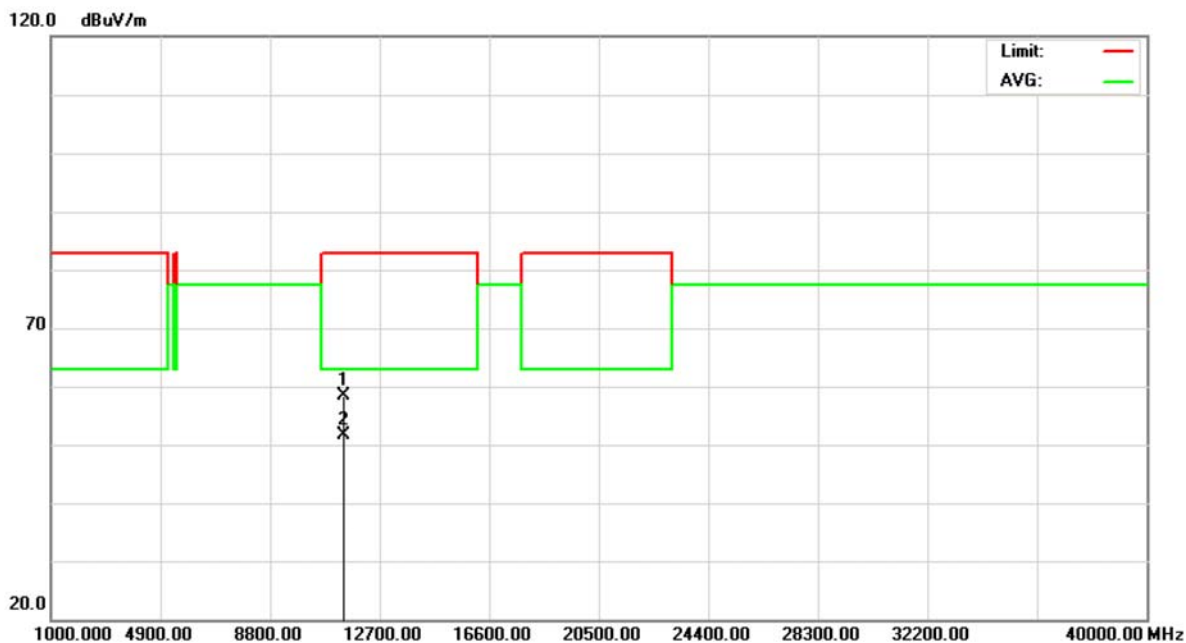


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	37.98	20.33	58.31	83.00	-24.69	peak	
2	*	11340.00	31.42	20.33	51.75	63.00	-11.25	AVG	



9.11 TEST RESULTS (RESTRICTED BANDS)

E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5180 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 4500-5150 MHz.		

Polarization: Vertical

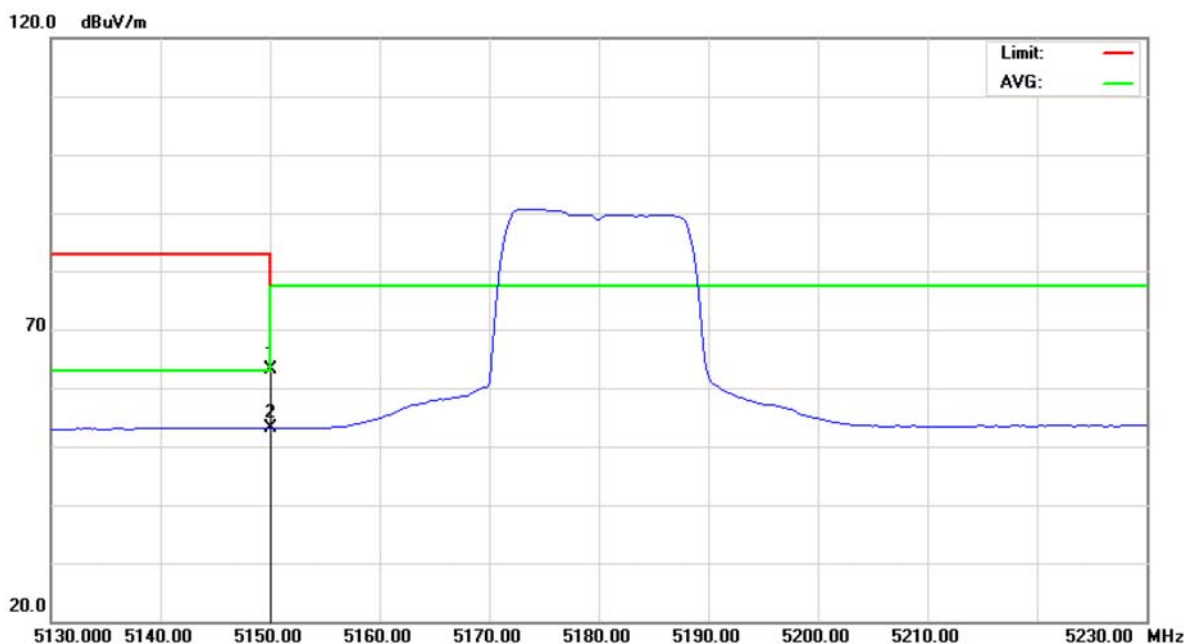


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	22.25	40.92	63.17	77.30	-14.13	peak	
2	*	5150.000	12.19	40.92	53.11	63.00	-9.89	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5180 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 4500-5150 MHz.		

Polarization: Horizontal

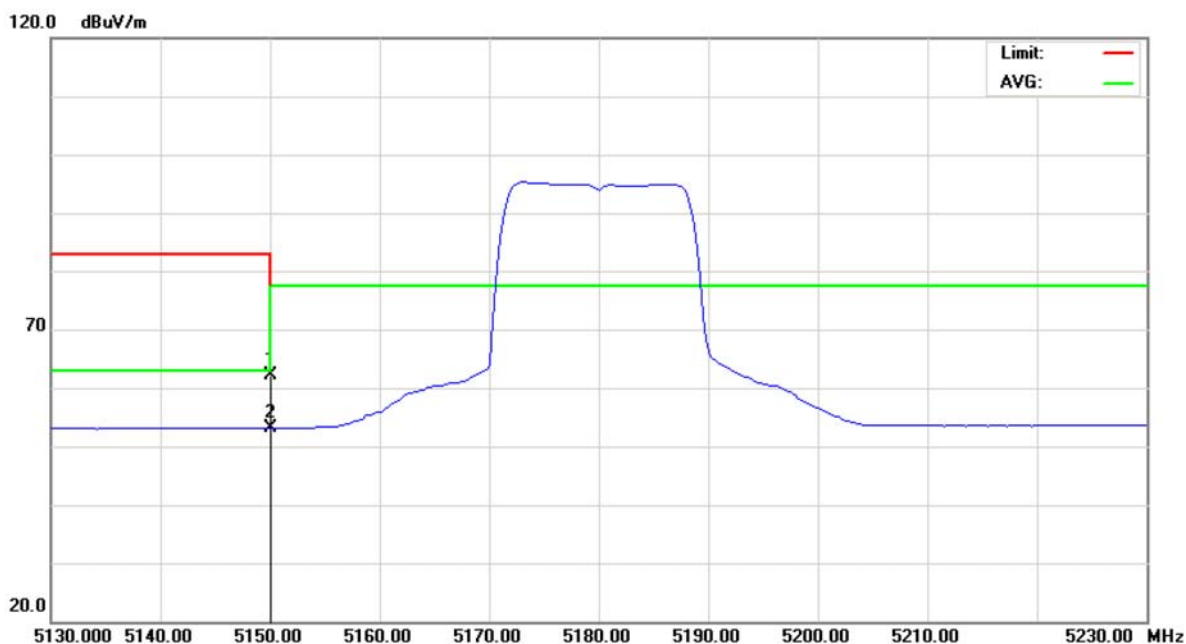


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	21.14	40.92	62.06	77.30	-15.24	peak	
2	*	5150.000	12.27	40.92	53.19	63.00	-9.81	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5320 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

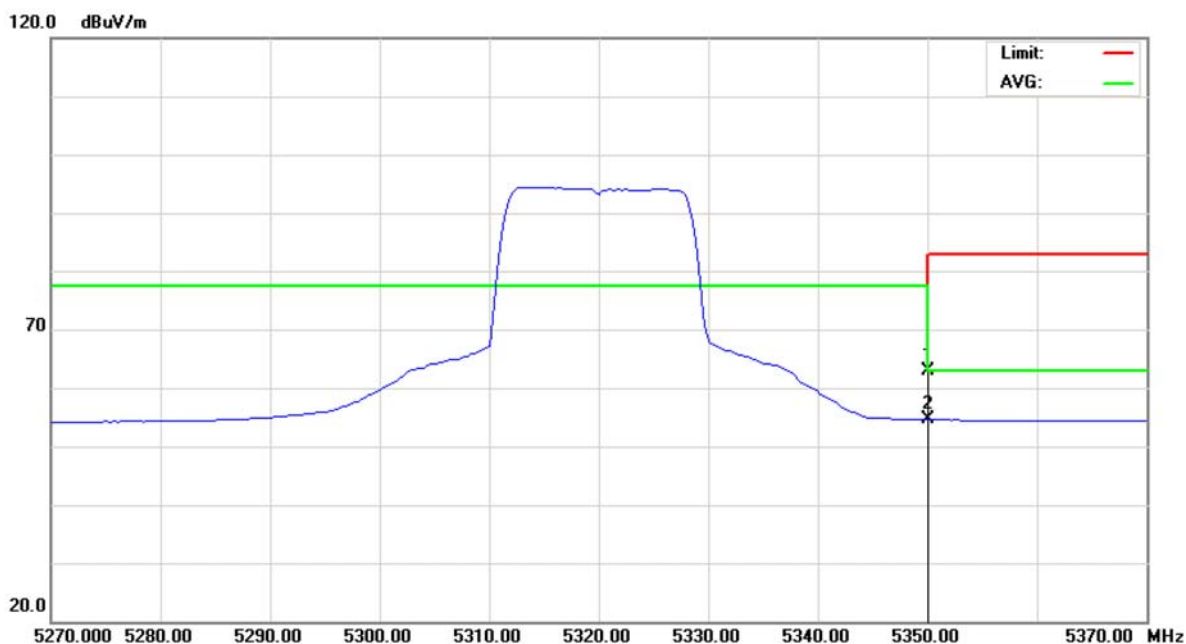


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	21.59	41.24	62.83	77.30	-14.47	peak	
2	*	5350.000	13.37	41.24	54.61	63.00	-8.39	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5320 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

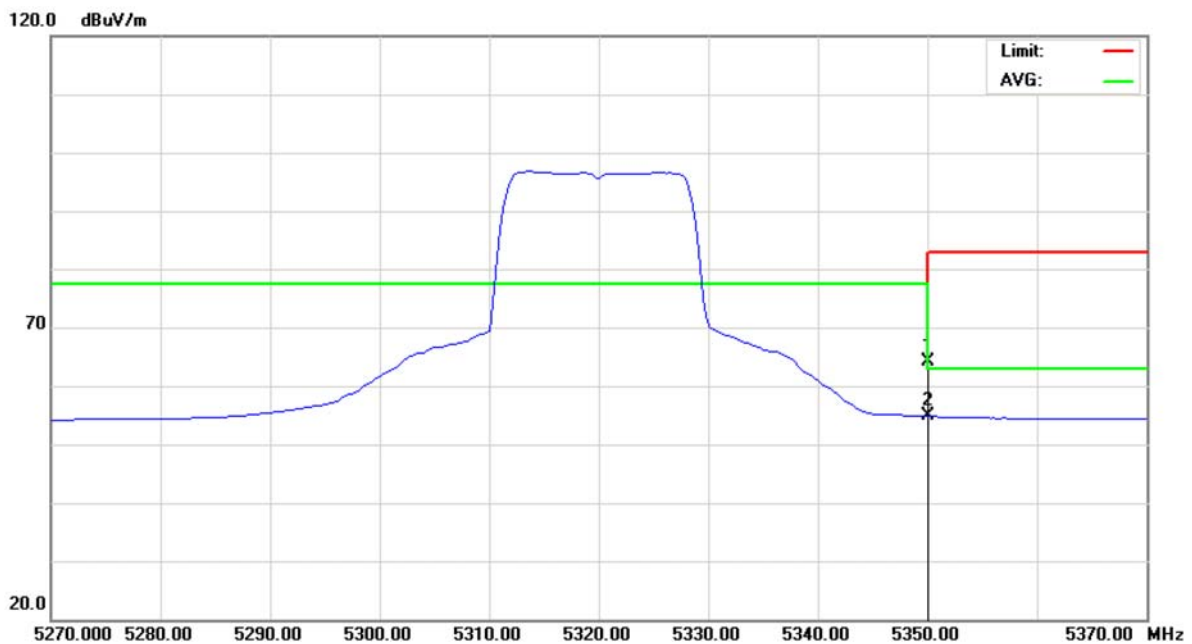


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	22.79	41.24	64.03	77.30	-13.27	peak	
2	*	5350.000	13.56	41.24	54.80	63.00	-8.20	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

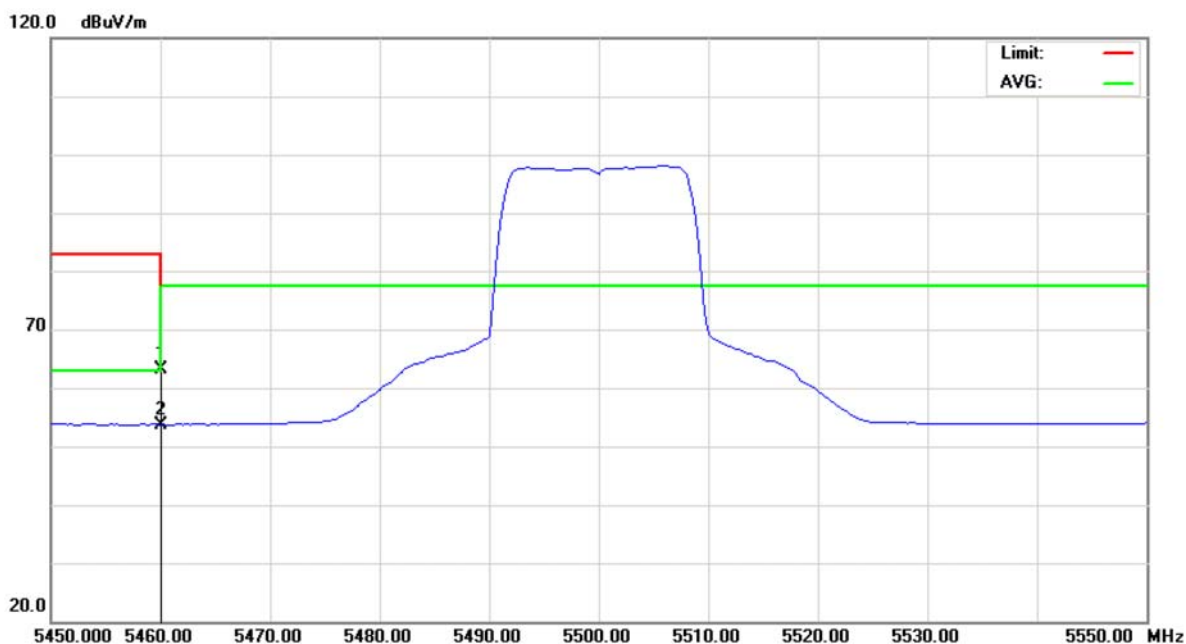


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	21.75	41.41	63.16	77.30	-14.14	peak	
2	*	5460.000	12.32	41.41	53.73	63.00	-9.27	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

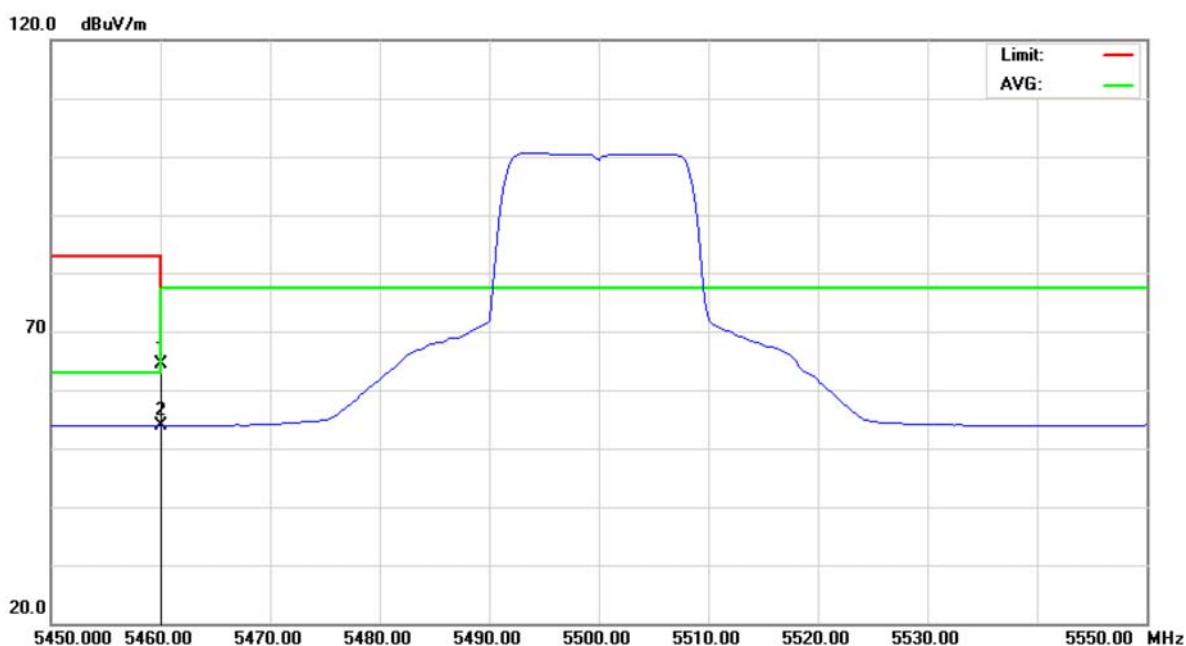


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	23.00	41.41	64.41	77.30	-12.89	peak	
2	*	5460.000	12.43	41.41	53.84	63.00	-9.16	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5180 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 4500-5150 MHz.		

Polarization: Vertical

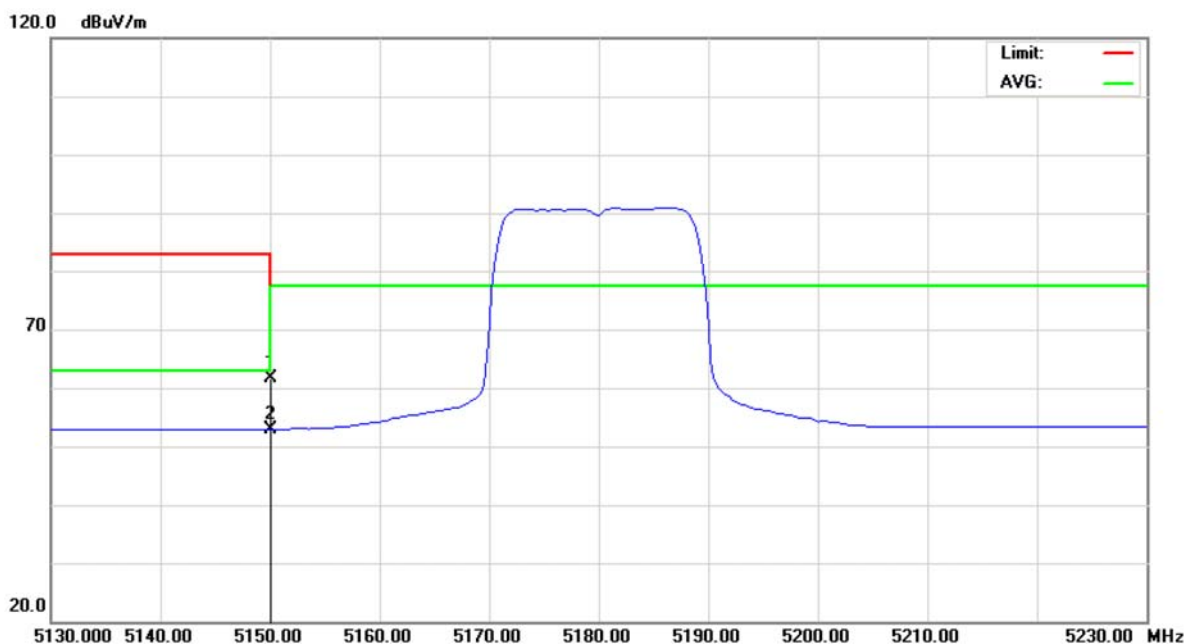


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	20.68	40.92	61.60	77.30	-15.70	peak	
2	*	5150.000	12.04	40.92	52.96	63.00	-10.04	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5180 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 4500-5150 MHz.		

Polarization: Horizontal

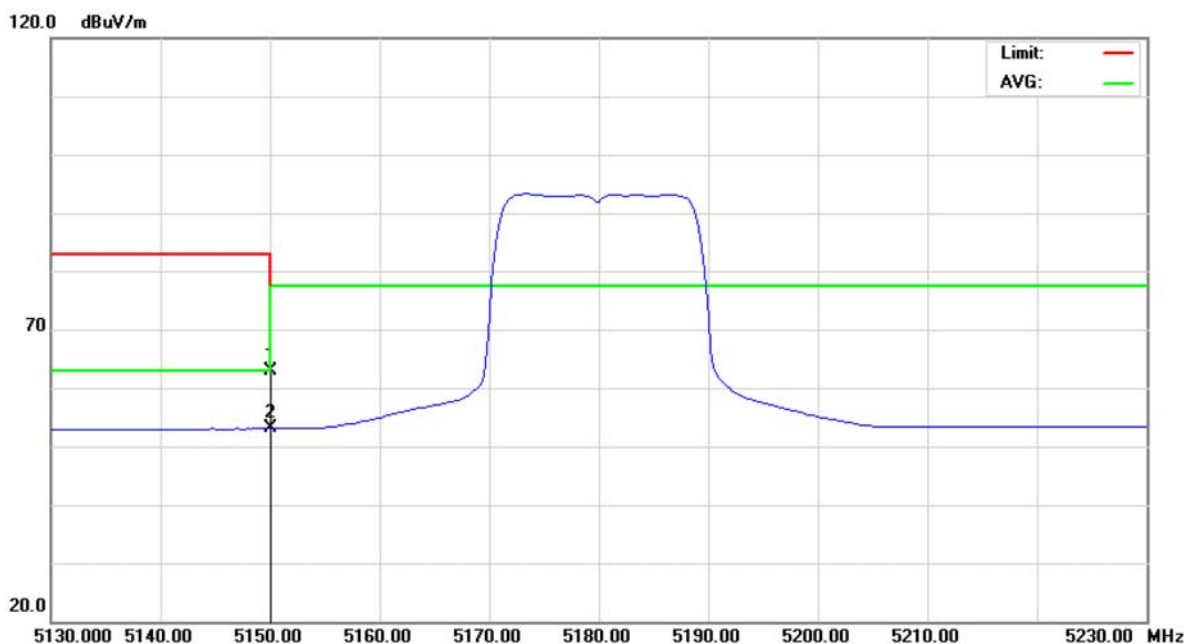


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	21.85	40.92	62.77	77.30	-14.53	peak	
2	*	5150.000	12.13	40.92	53.05	63.00	-9.95	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5320 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

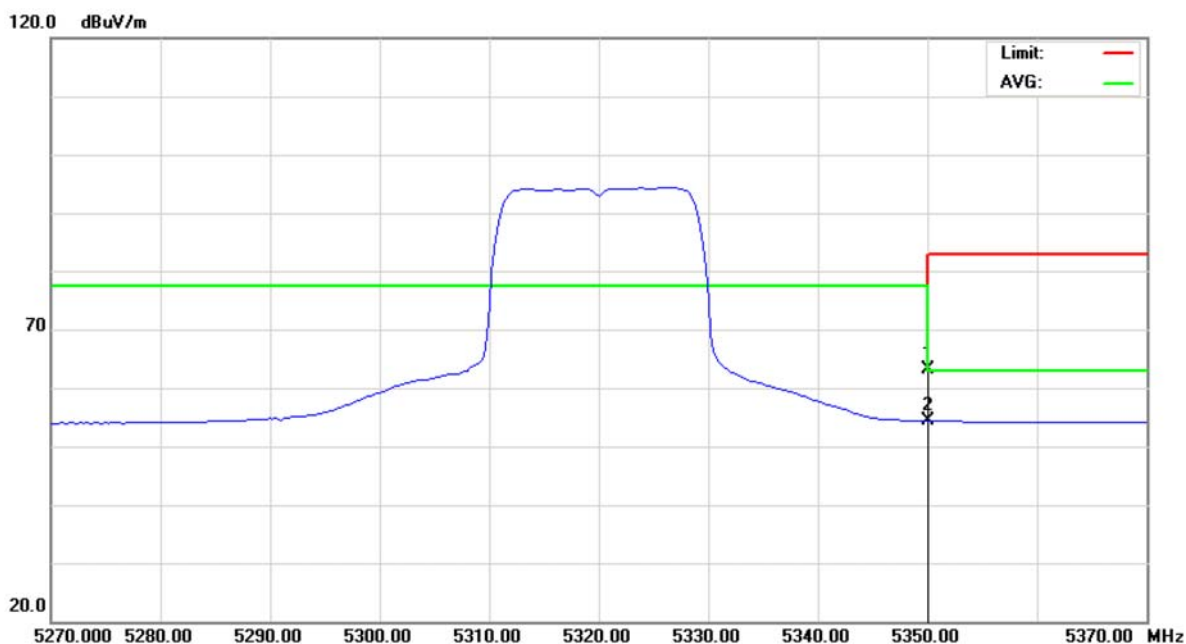


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	21.90	41.24	63.14	77.30	-14.16	peak	
2	*	5350.000	13.20	41.24	54.44	63.00	-8.56	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)5320 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

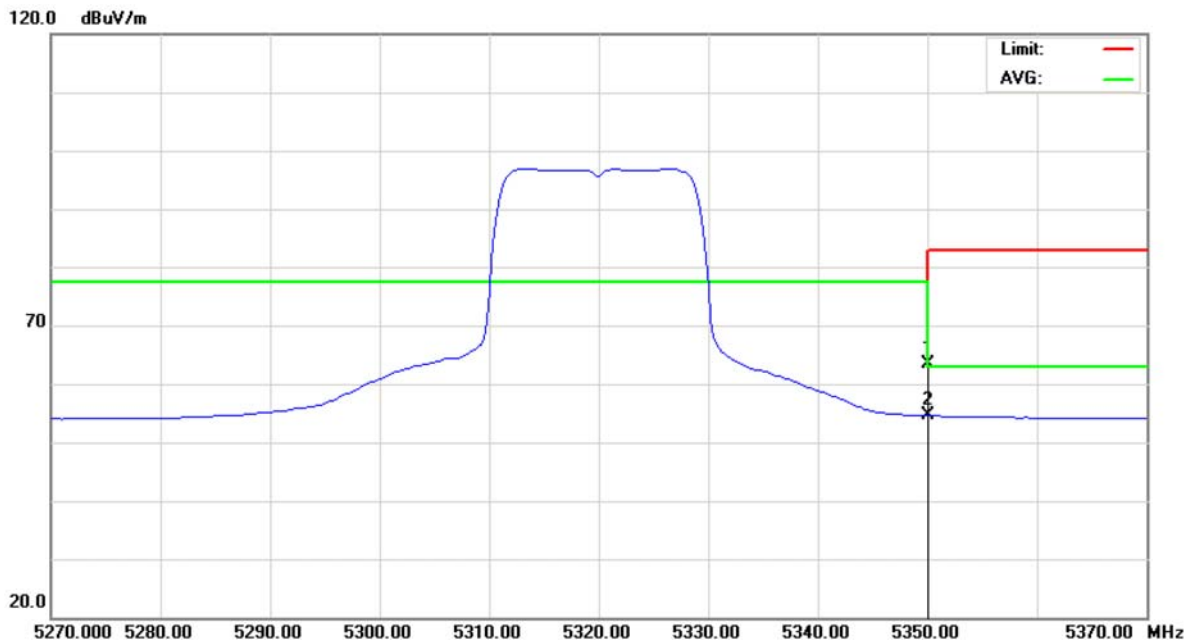


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	22.11	41.24	63.35	77.30	-13.95	peak	
2	*	5350.000	13.34	41.24	54.58	63.00	-8.42	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)5500 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

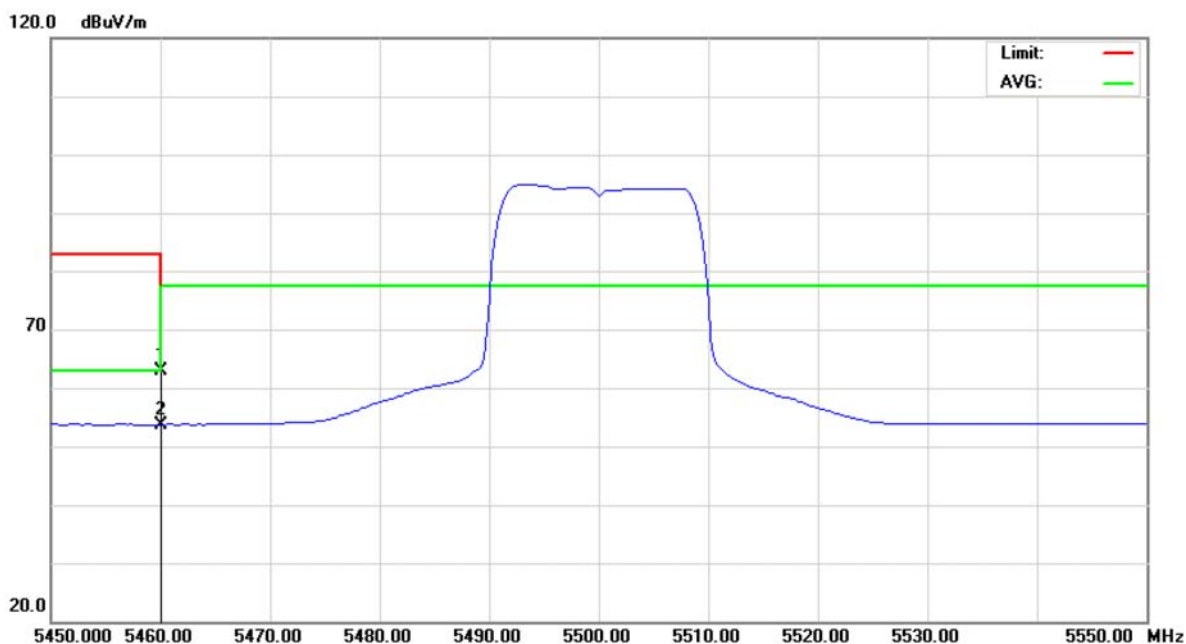


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	21.57	41.41	62.98	77.30	-14.32	peak	
2	*	5460.000	12.34	41.41	53.75	63.00	-9.25	AVG	



E.U.T	MONDOCENTER	Model Name	INF-MCENTER
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5500 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

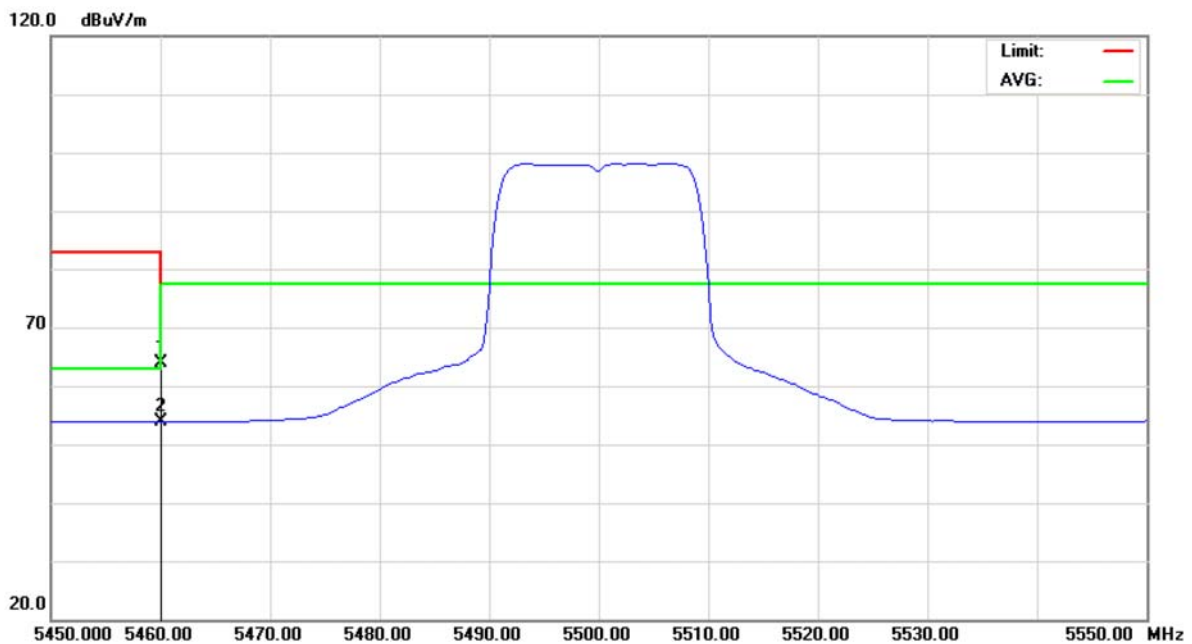

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	22.35	41.41	63.76	77.30	-13.54	peak	
2	*	5460.000	12.37	41.41	53.78	63.00	-9.22	AVG	