



# TEST REPORT

Ref. Report No.

02-341-019

Name and address of the applicant

SM TECH Co., Ltd.

Sangwoo Bldg. , 8, Yuweol-dong, Ojung-gu, Puchun-city,  
Kyungki-do, 421-811, Korea

Standard / Test regulation

FCC Part 15, Subpart B

Test result

Pass

**Incoming date : June 21, 2002**

**Test date : July 20, 2002**

Test item(s) ;

Class B Computing Device Peripheral  
(Portable Storage Disk)

Model/type ref. ;

MMC Drive

Manufacturer ;

SM TECH Co., Ltd.

Additional information ;

-Required Authorization : Certification  
-FCC ID. : QKT-MDV11

**Issue date : July 22, 2002**

*This test report only responds to the tested sample and shall not be reproduced except in full without written approval of the Korea Testing Laboratory.*

**Tested and reported by**

Jeong-Min Kim , Senior Engineer

Manager

**Reviewed by**

Hee-Soo Kim , Telecommunication Team

**KOREA TESTING  
LABORATORY**

**TABLE OF CONTENTS**

|  |    |
|--|----|
| I. GENERAL INFORMATION .....                             | 3  |
| 1. Applicant's Name and Mailing Address                  |    |
| 2. Manufacturer's Name and Mailing Address               |    |
| 3. Equipment Descriptions                                |    |
| 4. Rules and Regulations                                 |    |
| 5. Measuring Procedure                                   |    |
| 6. Date of Measurement                                   |    |
| α. GENERAL REQUIREMENTS OF THE EUT .....                 | 4  |
| 1. Labeling Requirement (Section 15.19)                  |    |
| 2. Information to User (Sections 15.21 and 15.105)       |    |
| 3. Special Accessories (Section 15.27)                   |    |
| β. CONDUCTED EMISSION MEASUREMENT (Section 15.107) ..... | 6  |
| 1. Test Procedure  |    |
| 2. Photograph for the test configuration                 |    |
| 3. Sample Calculation                                    |    |
| 4. Measurement Data                                      |    |
| γ. RADIATED EMISSION MEASUREMENT (Section 15.109) .....  | 10 |
| 1. Test Procedure  |    |
| 2. Photograph for the test configuration                 |    |
| 3. Sample Calculation                                    |    |
| 4. Measurement Data                                      |    |
| δ. TEST EQUIPMENTS USED FOR MEASUREMENT .....            | 13 |

. GENERAL INFORMATION

1. Applicant's Name and : SM TECH Co., Ltd.  
 Mailing Address Sangwoo Bldg., 8, Yuweol-dong, Ojung-gu, Puchun-city,  
 Kyunggi-do, 421-811, Korea

2. Manufacturer's Name and : SM TECH Co., Ltd.  
 Mailing Address Sangwoo Bldg., 8, Yuweol-dong, Ojung-gu, Puchun-city,  
 Kyunggi-do, 421-811, Korea

## 3. Equipment Descriptions

3.1 Crystal used : 8 MHz  
 3.2 I/O port : USB port  
 3.3 Data Transmission rate : 1.6 Mbps(max.)  
 3.4 Power Supply : DC 5 V(USB line power)  
 3.5 Model name : MMC Drive

## 4. Devices of Test System

| Device                | Model name | Serial Number  | Manufacturer    |
|-----------------------|------------|----------------|-----------------|
| Personal Computer     | DPEP P500  | 7951/CJN20009  | Compaq          |
| Monitor               | DP15L/S    | DP15HICN102768 | Compaq          |
| Mouse                 | M-S34      | 166861-001     | Compaq          |
| Keyboard              | PR235BTWKO | B13BBOT39I7045 | Compaq          |
| Printer               | 2225C+     | 3145S02416     | Hewlett Packard |
| Portable Storage Disk | MMC Drive  | -              | SM TECH         |

5. Rules and Regulations : FCC Part 15, Subpart B

6. Measuring Procedure : ANSI C63.4-2001

## 7. Date of Measurement

7.1 Conducted Emission : July 20, 2002  
 7.2 Radiated Emission : July 20, 2002

**. GENERAL REQUIREMENTS OF THE EUT****1. Labeling Requirement (Section 15.19)**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

1.1 Location of Label : User's guide manual

1.2 How Applied : Printed

**2. Information to User (Section 15.21 and 15.105)**

The following or similar statements were provided in the manual for user instruction.

Please refer page 7 of the attached manual for details.

**CAUTION :** Any changes or modifications in construction of this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note :** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

3. Special Accessories (Section 15.27)

3.1 Were the special Accessories provided? [ ] yes, [ x ] no

3.2 If yes, details for the special accessories are as follows :

3.3 If yes, were the appropriate instructions provided on the first page of the text concerned with the device?

[ ] yes, [ ] no

3.4 Are these accessories provided of the type which can be readily obtained from multiple retail outlets ?

[ ] yes, [ ] no

And therefore does the manual specify what additional components or accessories are required to be used in order to comply with the Rules?

[ ] yes, [ ] no

**. CONDUCTED EMISSION MEASUREMENT (Section 15.107)****1. Test Procedure**

Conducted emission measurements on the EUT were performed by "AC Power Line Conducted Emissions Testing" procedure as per ANSI C63.4. The EUT was set up on a wooden table 0.8 meters height, 1.0 by 1.5 meters in size, placed in the shielded enclosed with a side of wall of which constituted a vertical conducting surface of 2.2 m x 3.1 m in size to maintain 40 cm from the rear of EUT

LISN(Line Impedance Stabilization Network, EMCO, 3825/2, 50 ohm / 50  $\omega$ H) was installed and electrically bonded to the conducting ground plane. The EUT was connected to the LISN.

One of two 50 ohm output terminals of the LISN was connected to the Spectrum Analyzer(HP, 8566B, 10 kHz to 22 GHz) with the Quasi-Peak Adapter (HP, 85650A, 10 kHz to 1.0 GHz) and the other was terminated in 50 ohms. Measurements were again performed after interchanging such a connection oppositely.

The frequency range from 450 kHz to 30 MHz was examined and the peak values that are within 6 dB of the limit would be compared to quasi-peak values using the Quasi-Peak instrument (ROHDE & SCHWARZ, ESH3, 9 kHz to 30 MHz : Detector Function CISPR Quasi-Peak) or HP Quasi-Peak adapter(85650A, 10 kHz to 1.0 GHz)

The voltage developed across the 50 ohms port in LISN was measured by the Spectrum Analyzer and graphed by the Plotter(HP, 7470A). The 6 dB bandwidth of the Spectrum Analyzer and Quasi-Peak Adapter was set to 9 kHz with no post detector video filter.

The position of connecting cables of the EUT was changed to find the worst case configuration during measurements. The maximum emission level from the EUT occurred in such configuration as shown in the following photograph.

## 2. Photograph for the test configuration



## 3. Sample Calculation

The emission level measured in decibels above one microvolt ( $\text{dB}\vartheta$ ) was converted into microvolt ( $\vartheta$ ) as shown in following sample calculation.

For example :

$$\begin{array}{rcl} \text{Measured Value at} & 8.86 \text{ MHz} & 42.3 \text{ dB}\vartheta \\ + \text{ Cable Losses *} & & 0.0 \text{ dB} \\ \hline = \text{ Conducted Emission} & & 42.3 \text{ dB}\vartheta \\ & & (= 130.3 \vartheta) \end{array}$$

\* In case of RG214/ RF cable 15 Ft, the loss is about 0.17 dB at the frequency of 30 MHz which is negligible.

#### 4. Measurement Data


- Resolution Bandwidth :  Peak (6dB Bandwidth : 9kHz)  
 CISPR Quasi-Peak (6dB Bandwidth : 9kHz)

| Power Lead Tested | Frequency (MHz) | Measured Value |              | Emission Level |       | Limit (dBr) | (*) Margin (dB) |
|-------------------|-----------------|----------------|--------------|----------------|-------|-------------|-----------------|
|                   |                 | Peak (dBr)     | Q-Peak (dBr) | (dBr)          | (dBr) |             |                 |
| Live to Ground    | 0.52            | 37.9           | 34.6         | 34.6           | 53.7  | 250         | - 13.4          |
|                   | 0.73            | 39.5           | 36.1         | 36.1           | 63.8  | 250         | - 11.9          |
|                   | 0.94            | 37.9           | 34.9         | 34.9           | 55.6  | 250         | - 13.1          |
|                   | 8.67            | 36.6           | 31.3         | 31.3           | 36.7  | 250         | - 16.7          |
|                   | 9.32            | 41.1           | 37.7         | 37.7           | 76.7  | 250         | - 10.3          |
|                   | 16.56           | 39.4           | 35.7         | 35.7           | 60.9  | 250         | - 12.3          |
|                   | -               | -              | -            | -              | -     | -           | -               |
| Neutral to Ground | 0.52            | 37.0           | 34.1         | 34.1           | 50.7  | 250         | - 13.9          |
|                   | 0.63            | 41.1           | 38.2         | 38.2           | 81.3  | 250         | - 9.8           |
|                   | 0.94            | 38.6           | 35.3         | 35.3           | 58.2  | 250         | - 12.7          |
|                   | 8.86            | 44.7           | 42.3         | 42.3           | 130.3 | 250         | - 5.7           |
|                   | 16.56           | 39.3           | 35.8         | 35.8           | 61.7  | 250         | - 12.2          |
|                   | 24.84           | 39.8           | 38.7         | 38.7           | 86.1  | 250         | - 9.3           |
|                   | -               | -              | -            | -              | -     | -           | -               |


Note : The noise floor level of the spectrum analyzer was observed in 22 dB $\delta$ .

Refer to measured graphs on next page.

\* Margin(dB) : Emission Level (dB) - Limit (dB)

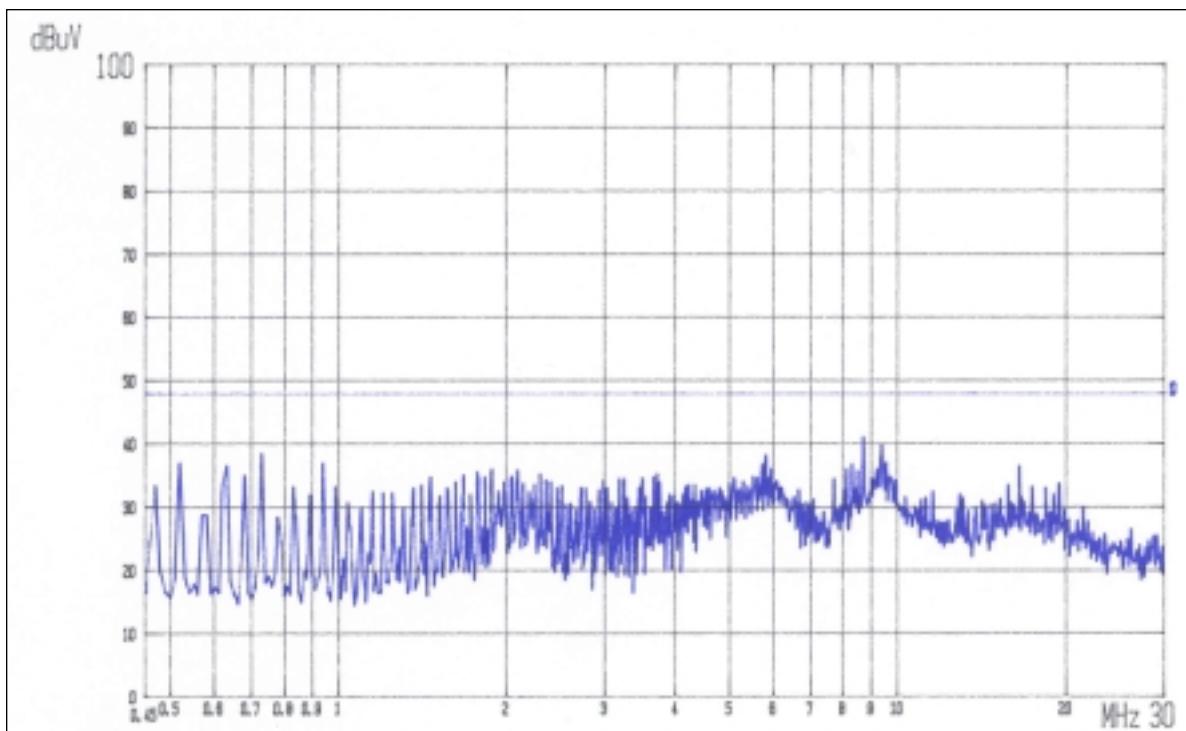

(Test side: Live-Ground side)

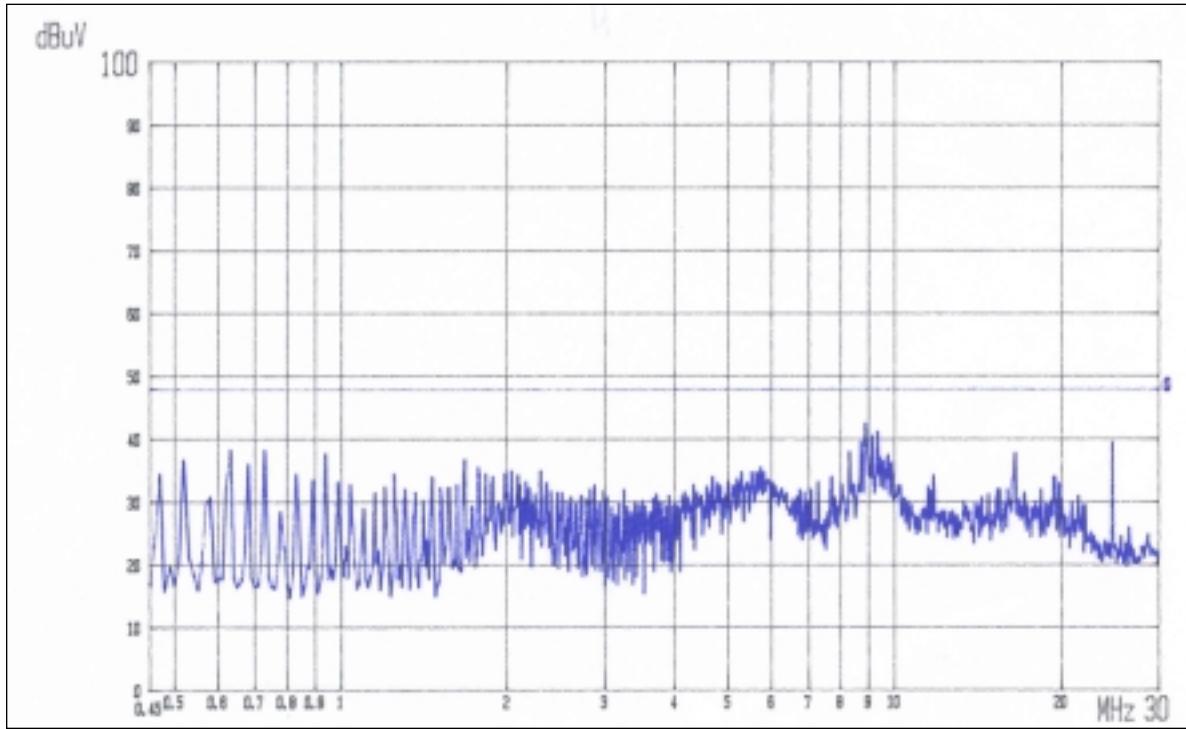

(Test side: Neutral-Ground side)

**. RADIATED EMISSION MEASUREMENT (Section 15.109)****1. Test Procedure****1.1 Preliminary Testing for Reference**

Preliminary testing was performed in a KTL absorber-lined room to determine the emission characteristics of the EUT. The EUT was placed on the wooden table which has dimensions of 0.8 meters in height, 1 meter in length and 1.5 meters in width. Receiving antenna (Biconical antenna : 30 to 300 MHz, Log-periodic antenna : 200 to 1000 MHz or Horn Antenna : 1 to 18 GHz) was placed at the distance of 1 meter from the EUT.

An attempt was made to maximize the emission level with the various configurations of the EUT while rotating the table and varying antenna height.

Emissions level from the EUT with various configurations were examined on a Spectrum Analyzer connected with an RF amplifier and graphed by a plotter.

**1.2 Final Radiated Emission Test at an Absorber-Lined Room**

The final measurement of radiated field strength was carried out in a KTL Absorber-Lined Room that was listed up at FCC according to the "Radiated Emissions Testing" procedure specified by ANSI C63.4.

Based on the test results in preliminary test, measurement was made in same test set up and configuration which produced maximum emission level. Receiving antenna was installed at 3-meter distance from the EUT, and was connected to an EMI receiver.

Turntable was rotated through 360 degrees and receiving antenna height was varied from 1 to 4 meters above the ground plane to read maximum emission level.

If necessary, the radiated emission measurements could be performed at a closer distance than specified distance to ensure higher accuracy and their results were extrapolated to the specified distance using an inverse linear distance extrapolation factor (20 dB/decade) as per Section 15.31(f).

The maximum emission level from the EUT occurred in such configuration as shown in the following photograph.

## 2. Photograph for the test configuration



## 3. Sample Calculation

The emission level measured in decibels above one microvolt ( $\text{dB}\delta$ ) was converted into microvolt per meter ( $\delta/\text{m}$ ) as shown in following sample calculation.

For example :

|                                |                             |      |                                 |
|--------------------------------|-----------------------------|------|---------------------------------|
| Measured Value at              | <u>298.71 MHz</u>           | 18.0 | $\text{dB}\delta$               |
| + Antenna Factor               |                             |      | 19.8 $\text{dB}/\text{m}$       |
| + Cable Loss                   |                             |      | 3.3 dB                          |
| - Preamplifier                 |                             |      | 0.0 dB                          |
| - Distance Correction Factor * |                             |      | 0.0 dB                          |
| <hr/>                          |                             |      |                                 |
| = Radiated Emission            |                             |      | 41.1 $\text{dB}\delta/\text{m}$ |
|                                | $(= 113.5 \delta/\text{m})$ |      |                                 |

\* Extrapolated from the measured distance to the specified distance by an inverse linear distance extrapolation.

## 4. Measurement Data

- Resolution Bandwidth : x CISPR Quasi-Peak (6 dB Bandwidth : 120 kHz)  
\_\_\_\_ Peak (3 dB Bandwidth : 100 kHz)
- Measurement Distance : 3 Meter
- Measurement Frequency : 30 MHz ~ 1000 MHz

| Frequency<br>(MHz) | *<br>D.M. | *<br>A.P. | Measured<br>Value<br>(dB $\delta$ ) | *<br>A.F.<br>+<br>C.L<br>(dB/m) | *<br>A.G.<br>(dB) | *<br>D.C.F.<br>(dB) | Emission<br>Level |                | Limit<br>(dB $\delta$ /m) | **<br>Margin<br>(dB) |
|--------------------|-----------|-----------|-------------------------------------|---------------------------------|-------------------|---------------------|-------------------|----------------|---------------------------|----------------------|
|                    |           |           |                                     |                                 |                   |                     | (dB $\delta$ /m)  | ( $\delta$ /m) |                           |                      |
| 48.00              | Q         | V         | 18.6                                | 13.4                            | -                 | -                   | 32.0              | 39.8           | 40.0                      | - 8.0                |
| 66.26              | Q         | V         | 20.4                                | 8.9                             | -                 | -                   | 29.3              | 29.2           | 40.0                      | - 10.7               |
| 88.52              | Q         | V         | 15.7                                | 10.0                            | -                 | -                   | 25.7              | 19.3           | 43.5                      | - 17.8               |
| 96.02              | Q         | V         | 16.0                                | 11.4                            | -                 | -                   | 27.4              | 23.4           | 43.5                      | - 16.1               |
| 110.62             | Q         | V         | 17.3                                | 13.8                            | -                 | -                   | 31.1              | 35.9           | 43.5                      | - 12.4               |
| 144.03             | Q         | V         | 18.8                                | 16.8                            | -                 | -                   | 35.6              | 60.3           | 43.5                      | - 7.9                |
| 158.50             | Q         | V         | 9.2                                 | 17.6                            | -                 | -                   | 26.8              | 21.9           | 43.5                      | - 16.7               |
| 298.71             | Q         | H         | 18.0                                | 23.1                            | -                 | -                   | 41.1              | 113.5          | 46.0                      | - 4.9                |
| 332.10             | Q         | H         | 21.9                                | 17.7                            | -                 | -                   | 39.6              | 95.5           | 46.0                      | - 6.4                |

## Note

The observed EMI receiver(ESVS30) noise floor level was 2.0 dB $\delta$ . And all other emissions not reported on data were more than 25 dB below the permitted level.

- \* D.M. : Detect Mode (P : Peak, Q : Quasi-Peak, A : Average)
- A.P. : Antenna Polarization (H : Horizontal, V : Vertical)
- A.F. : Antenna Factor
- C.L. : Cable Loss
- A.G. : Amplifier Gain
- D.C.F. : Distance Correction Factor
- < : Less than

\*\* Margin (dB) = Emission Level (dB) - Limit (dB)

. TEST EQUIPMENT USED FOR MEASUREMENTS

| <u>Equipment</u>                           | <u>Model No.</u> | <u>Manufacturer</u> | <u>Serial No.</u> | <u>Effective Cal. Duration</u> |
|--|------------------|---------------------|-------------------|--------------------------------|
| [x] EMI Receiver<br>(20 MHz-1 GHz)         | ESVS30           | R & S               | 830516/002        | 06/13/02-06/13/03              |
| [x] EMI Receiver<br>(20 Hz-7 GHz)          | ESI              | R & S               | 835571/004        | 09/05/01-09/05/02              |
| [x] Spectrum Analyzer<br>(9 kHz-26.5 GHz)  | 8563A            | H. P.               | 3222A02069        | 03/27/02-03/27/03              |
| [x] Spectrum Analyzer<br>(100 Hz-22 GHz)   | 8566B            | H. P.               | 3014A07057        | 05/26/02-05/26/03              |
| [x] Quasi-Peak Adapter<br>(10 kHz-1 GHz)   | 85650A           | H. P.               | 3107A01511        | 05/26/02-05/26/03              |
| [x] RF-Preselector<br>(20 Hz-2 GHz)        | 85685A           | H. P.               | 3010A01181        | 05/26/02-05/26/03              |
| [x] Test Receiver<br>(9 kHz-30 MHz)        | ESH3             | R & S               | 860905/001        | 06/13/02-06/13/03              |
| [x] Pre-Amplifier<br>(0.1-3000 MHz, 30 dB) | 8347A            | H. P.               | 2834A00543        | 05/26/02-05/26/03              |
| [ ] Pre-Amplifier<br>(1-26.5 GHz, 35 dB)   | 8449B            | H. P.               | 3008A00302        | 05/26/02-05/26/03              |
| [x] LISN(50 , 50 H<br>(10 kHz-100 MHz)     | 3825/2           | EMCO                | 9010-1710         | 05/26/02-05/26/03              |
| [x] Plotter                                | 7470A            | H. P.               | 3104A21292        | -                              |
| [ ] Tuned Dipole Ant.<br>(30 MHz-300 MHz)  | VHA 9103         | Schwarzbeck         | -                 | *                              |
| [ ] Tuned Dipole Ant.<br>(300 MHz-1 GHz)   | UHA 9105         | Schwarzbeck         | -                 | *                              |
| [x] Biconical Ant.<br>(30 MHz-300 MHz)     | BBA 9106         | Schwarzbeck         | -                 | *                              |
| [x] Log Periodic Ant.<br>(200 MHz-1 GHz)   | 3146             | EMCO                | -                 | *                              |
| [ ] Horn Ant.<br>(1 GHz-18 GHz)            | 3115             | EMCO                | -                 | *                              |
| [ ] Active Loop Ant.<br>(9 kHz-30 MHz)     | 6502             | EMCO                | 2532              | *                              |
| [ ] DC Power Supply                        | 6260B            | H.P.                | 1145A04822        | -                              |
| [x] Shielded Room<br>(5.0 m x 4.5 m)       | -                | SIN-MYUNG           | -                 | -                              |

\* Each set of antennas has been calibrated to ensure correlation with ANSI C63.5 standard. The calibration of antennas is traceable to Korea Standard Research Institute(KSRI).