

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : Presentation Remote Controller01

Model No. : BT-PM01B

FCC ID. : QLHCAF0303

Filing Type : Certification

Applicant : **EPOX COMPUTER CO., LTD.**
10F, 346, Sec. 2, Chung San Rd., Chung Ho City,
Taipei Hsien, 235 Taiwan, R.O.C.

The test result refers exclusively to the test presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.



Lab Code: 200079-0

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

Table of Contents

History of this test report	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test.....	2
1.1. Applicant.....	2
1.2. Manufacturer	2
1.3. Basic Description of Equipment under Test	2
1.4. Feature of Equipment under Test	2
2. Test Configuration of Equipment under Test.....	4
2.1. Test Manner	4
2.2. Description of Supporting Units.....	4
2.3. Connection Diagram of Test System	6
3. Test Software	7
4. General Information of Test.....	8
4.1. Test Voltage	8
4.2. Standard for Methods of Measurement.....	8
4.3. Test in Compliance with	8
4.4. Frequency Range Investigated	8
4.5. Test Distance	8
5. Report of Measurements and Examinations	9
5.1. List of Measurements and Examinations	9
5.2. Hopping Channel Separation	10
5.3. Number of Hopping Frequency	11
5.4. Hopping Channel Bandwidth.....	12
5.5. Dwell Time of Each Frequency within a 30 Seconds Period.....	13
5.6. Output Power	14
5.7. 100KHz Bandwidth of Frequency Band Edges	15
5.8. Test of Conducted Emission	16
5.9. Test of Radiated Emission	17
6. Antenna Requirements	29
6.1. Standard Applicable	29
6.2. Antenna Connected Construction	29
7. EMI Suppression Component List.....	30
8. Antenna Factor & Cable Loss	31
9. List of Measuring Equipments Used	32
10. Uncertainty of Test Site	33

History of this test report

Original Report Issue Date: May 6th, 2004

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

for

47 CFR, Part 15, Subpart C

Equipment : Presentation Remote Controller01

Model No. : BT-PM01B

FCC ID. : QLHCAF0303

Filing Type : Certification

Applicant : **EPOX COMPUTER CO., LTD.**

10F, 346, Sec. 2, Chung San Rd., Chung Ho City,
Taipei Hsien, 235 Taiwan, R.O.C.

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 2001** and the equipment under test was **passed** all test items required in FCC Part 15 subpart C, relative to the equipment under test. Testing was carried out on Sep. 29, 2003 at **SPORTON International Inc. LAB.**



Alex Chen
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

EPOX COMPUTER CO., LTD.
10F, 346, Sec. 2, Chung San Rd., Chung Ho City,
Taipei Hsien, 235 Taiwan, R.O.C.

1.2. Manufacturer

Same as 1.1

1.3. Basic Description of Equipment under Test

Equipment : Presentation Remote Controller01
Model No. : BT-PM01B
FCC ID : QLHCAF0303
Trade Name : EPOX
Power Supply Type : Battery 3VDC
AC Power Input : N/A

1.4. Feature of Equipment under Test

ITEMS	DESCRIPTION
Host/Radio Interface	FHSS
Type of Modulation	GFSK
Number of Channels	79
Frequency Band	2.4G~2.4835GHz
Bandwidth of each Channel	1MHz
Maximum Output Power to Antenna	-1.58dBm
Antenna Type / Gain	Chip Antenna / 1.5dBi
Function Type	Transceiver
Power Rating (DC/AC, Voltage)	DC: 2.7-3.3V
Application	Bluetooth printer interface

Channel	Frequency	Channel	Frequency
00	2402	40	2442
01	2403	41	2443
02	2404	42	2444
03	2405	43	2445
04	2406	44	2446
05	2407	45	2447
06	2408	46	2448
07	2409	47	2449
08	2410	48	2450
09	2411	49	2451
10	2412	50	2452
11	2413	51	2453
12	2414	52	2454
13	2415	53	2455
14	2416	54	2456
15	2417	55	2457
16	2418	56	2458
17	2419	57	2459
18	2420	58	2460
19	2421	59	2461
20	2422	60	2462
21	2423	61	2463
22	2424	62	2464
23	2425	63	2465
24	2426	64	2466
25	2427	65	2467
26	2428	66	2468
27	2429	67	2469
28	2430	68	2470
29	2431	69	2471
30	2432	70	2472
31	2433	71	2473
32	2434	72	2474
33	2435	73	2475
34	2436	74	2476
35	2437	75	2477
36	2438	76	2478
37	2439	77	2479
38	2440	78	2480
39	2441		

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-2001 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. This device is integrated with an SIG qualified BlueTooth module. The used codes for modulating IF carrier is of course pseudo-random. The hopping sequence is determined by the address of the piconet master. Here is the hopping sequence indicated by channel number:
02, 17, 68, 55, 4, 77, 56, 27, 70, 80, 22, 33, 57, 34, 29, 79, 44, 50, 3, 71, 66, 36, 78, 20, 67, 30, 24, 11, 37, 69, 23, 7, 41 38, 63, 14, 31, 59, 40, 13, 6, 25, 65, 15, 61, 73, 58, 47, 19, 28, 54, 76, 74, 48, 52, 75, 5, 42, 64, 72, 62, 51, 60, 18, 45, 53, 16, 39, 46, 32, 49, 43, 8, 21, 9, 12, 10, 26, 35
- c. For 15.247(g), during data transmission, the carrier frequency is repeatedly switched on 79 hopping frequencies, any 2 hopping frequencies will not be available on the spectrum simultaneously. So, this device can be taken as true frequency hopping device.
- d. For 15.247(h), the hopping sequence is determined by the address of piconet master. Each piconet master will have its unique address at any moment, so re-use of the hopping sequence is completely not possible. Within the piconet, one master can be communicated with many slaves via the same hopping sequence, but at any moment only one (master or slave) can be "talk". It is determined by the master that who should be "listen" or "talk". Any slave who want to "talk" has to sent "inquiry" to master first. So, 2 slaves (or one slave one master) is not possible to be on "talk" mode simultaneously.
- e. The following test modes were performed:
Mode 1: CH00 (2402MHz)
Mode 2: CH39 (2441MHz)
Mode 3: CH78 (2480MHz)
- f. Frequency range investigated: radiation 30 MHz to 25000MHz.

2.2. Description of Supporting Units

Support Unit 1. -- Monitor (VIEWSONIC)

FCC ID	: N/A
Model No.	: VCDTS21553-3P
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0051
Data Cable	: Shielded, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. – PS/2 Keyboard (LOGITECH)

FCC ID : N/A
Model No. : Y-SJ17
Serial No. : SP0054
Data Cable : Shielded, 360 degree via metal backshells, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 3. – PS/2 Mouse (LOGITECH)

FCC ID : DZL211029
Model No. : M-S34
Serial No. : SP0041
Data Cable : Shielded, 1.7m

Support Unit 4. -- Printer (EPSON)

FCC ID : N/A
Model No. : STYLUS COLOR C61
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0048
Data Cable : Shielded, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 5. -- Modem (ACEEX)


FCC ID : IFAXDM1414
Model No. : DM1414
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0015
Data Cable : Shielded, 1.15m

Support Unit 6. – Personal Computer (COMPAQ)

FCC ID : N/A
Model No. : Evo D380MX
Power Supply Type : Switching
Power Cord : Non-Shielded
Serial No. : SP0127
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 7. – Test Fixture (EPOX)

2.3. Connection Diagram of Test System

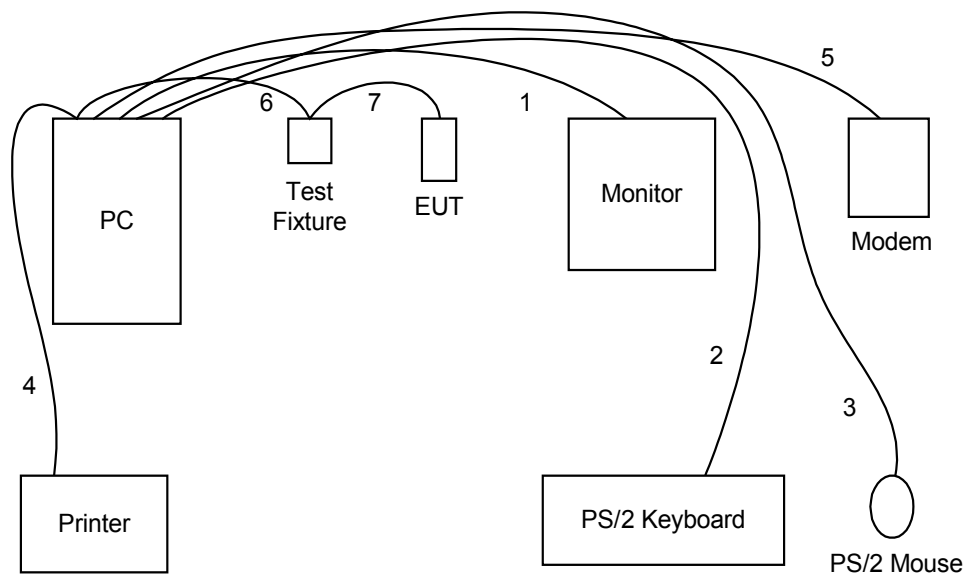

1. The I/O cable is connected from the PC to the support unit 1.
2. The I/O cable is connected from the PC to the support unit 2.
3. The I/O cable is connected from the PC to the support unit 3.
4. The I/O cable is connected from the PC to the support unit 4.
5. The I/O cable is connected from the PC to the support unit 5.
6. The I/O cable is connected from the PC to the support unit 7.
7. The I/O cable is connected from the support unit 7 to the EUT.

3. Test Software

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows:

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the hard disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from c to f.

At the same time, "CSR.EXE" was executed to keep transmitting signals at fixed frequency.

4. General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055

Test Site No : 03CH03-HY

4.1. Test Voltage

DC 3V

4.2. Standard for Methods of Measurement

ANSI C63.4-2001
47CFR Part 15.247

4.3. Test in Compliance with

ANSI C63.4-2001 for conducted power line test and radiated emission test
47CFR Part 15.247

4.4. Frequency Range Investigated

Radiation: from 30 MHz to 25000MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Report of Measurements and Examinations

5.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.247(a)(1)(ii)	Hopping Channel Bandwidth	Pass
15.247(a)(1)	Hopping Channel Separation	Pass
15.247(a)(1)(ii)	Number of Hopping Frequency Used	Pass
15.247(a)(1)(ii)	Dwell Time	Pass
15.247(b)	Output Power	Pass
15.247(c)	100KHz Bandwidth of Frequency Band Edges	Pass
15.107/15.207	Conducted Emission	Pass
15.209	Radiated Emission	Pass
15.203	Antenna Requirement	Pass

5.2. Hopping Channel Separation


5.2.1. Measuring Instruments

As described in chapter 10 of this test report.

5.2.2. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The Hopping Channel Separation is defined as the separation between 2 neighboring channels.

5.2.3. Test Setup Layout

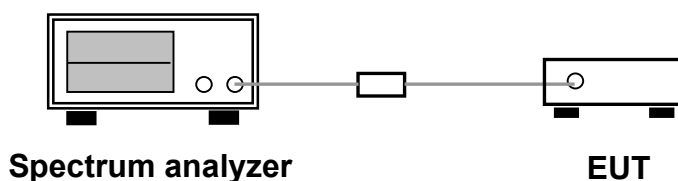

5.2.4. Test Result: The spectrum plots are on the Appendix.

- Temperature: 27°C
- Relative Humidity: 61 %
- Duty Cycle of the Equipment During the Test = 100%

Channel	Frequency (MHz)	Hopping Channel Separation (KHz)	Limits (KHz)
00	2402	1000.0000	25
39	2441	1000.0000	25
78	2480	1000.0000	25

5.3. Number of Hopping Frequency


5.3.1. Measuring Instruments

As described in chapter 10 of this test report.

5.3.2. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The number of hopping frequency used is defined as the total number of the frequencies available.

5.3.3. Test Setup Layout

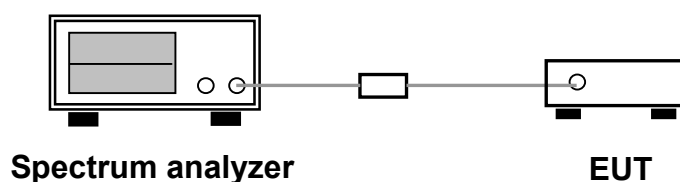

5.3.4. Test Result : The spectrum plots are on the Appendix.

- Temperature: 27°C
- Relative Humidity: 61 %
- Duty Cycle of the Equipment During the Test = 100%

Number of Hopping Frequencies	Limits
79	75

5.4. Hopping Channel Bandwidth


5.4.1. Measuring Instruments

As described in chapter 10 of this test report.

5.4.2. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The Hopping Channel bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

5.4.3. Test Setup Layout

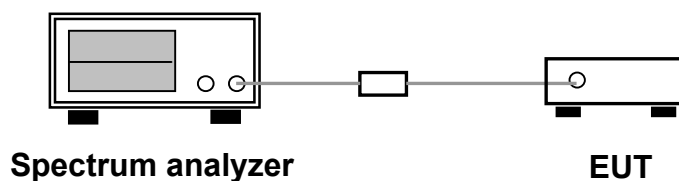

5.4.4. Test Result : The spectrum plots are on the Appendix.

- Temperature: 27°C
- Relative Humidity: 61 %
- Duty Cycle of the Equipment During the Test = 100%

Channel	Frequency (MHz)	Hopping Channel Bandwidth (MHz)	Limits (MHz)
00	2402	0.2720	1.0
39	2441	0.2700	1.0
78	2480	0.2690	1.0

5.5. Dwell Time of Each Frequency within a 30 Seconds Period


5.5.1. Measuring Instruments

As described in chapter 10 of this test report.

5.5.2. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
3. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
4. Dwell time = $30 \times (1600/79) \times t$ (ie: t = the time duration of one single pulse)

5.5.3. Test Setup Layout

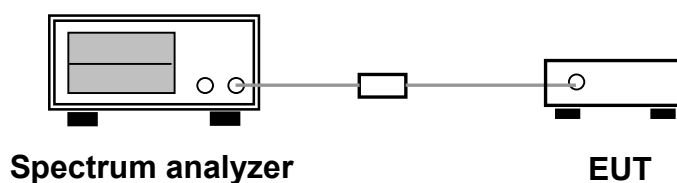

5.5.4. Test Result : The spectrum plots are on the Appendix.

- Temperature: 27°C
- Relative Humidity: 61 %
- Duty Cycle of the Equipment During the Test = 100%

Channel	Frequency (MHz)	Dwell Time (s)	Limits (s)
00	2402	0.337	0.4
39	2441	0.337	0.4
78	2480	0.337	0.4

5.6. Output Power


5.6.1. Measuring Instruments

As described in chapter 10 of this test report.

5.6.2. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The center frequency of the spectrum analyzer was set to the fundamental frequency and set RBW to 1MHz and VBW to 1MHz.

5.6.3. Test Setup Layout

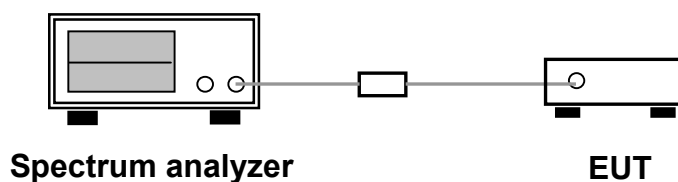

5.6.4. Test Result : The spectrum plots are on the Appendix.

- Temperature: 27°C
- Relative Humidity: 61 %
- Duty Cycle of the Equipment During the Test = 100%

Channel	Frequency (MHz)	Measured Output Power (dBm)	Measured Output Power (mWatt)	Limits (Watt/dBm)
00	2402	-1.67	0.680	1W/30dBm
39	2441	-1.58	0.690	1W/30dBm
78	2480	-2.06	0.622	1W/30dBm

5.7. 100KHz Bandwidth of Frequency Band Edges

5.7.1. Measuring Instruments

As described in chapter 10 of this test report.

5.7.2. Test Procedures

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100 KHz bandwidth from band edge.
3. The band edges was measured and recorded.

5.7.3. Test Result

Test Result in lower band (Channel 00) : PASS

Test Result in higher band(Channel 78) : PASS

5.7.4. Note on Band edge Emission: The spectrum plots are on the Appendix.

The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta of carrier maximum power.

(Right Edge) Delta = 56.89

Polarity	CH78 Power Strength (dB μ V/m)	The maximum field strength in restrict band (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
H	88.53	31.64	54.00	-22.36	Peak

(Left Edge) Delta = 54.6

Polarity	CH00 Power Strength (dB μ V/m)	The maximum field strength in restrict band (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
H	88.92	34.32	54.00	-19.68	Peak

5.8. Test of Conducted Emission

The power is from Battery.

Conduction Powerline test is not applicable for this EUT.

5.9. Test of Radiated Emission


Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2001. The EUT was placed on a nonmetallic stand, 0.8 meter above the ground plane, as shown in section 5.9.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

5.9.1. Major Measuring Instruments

● Amplifier	(MITEQ AFS44)
RF Gain	40 dB
Signal Input	100 MHz to 26.5 GHz
● Amplifier	(HP 8447D)
RF Gain	30 dB
Signal Input	100 KHz to 1.3 GHz
● Spectrum analyzer	(R&S FSP40)
Attenuation	10 dB
Start Frequency	1 GHz
Stop Frequency	25 GHz
Resolution Bandwidth	1 MHz
Video Bandwidth	1 MHz
Signal Input	9 KHz to 40 GHz
● Test Receiver	(SCHAFFNER SCR3501)
Resolution Bandwidth	120 KHz
Frequency Band	9 K – 1 GHz
Quasi-Peak Detector	ON for Quasi-Peak Mode OFF for Peak Mode

5.9.2. Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

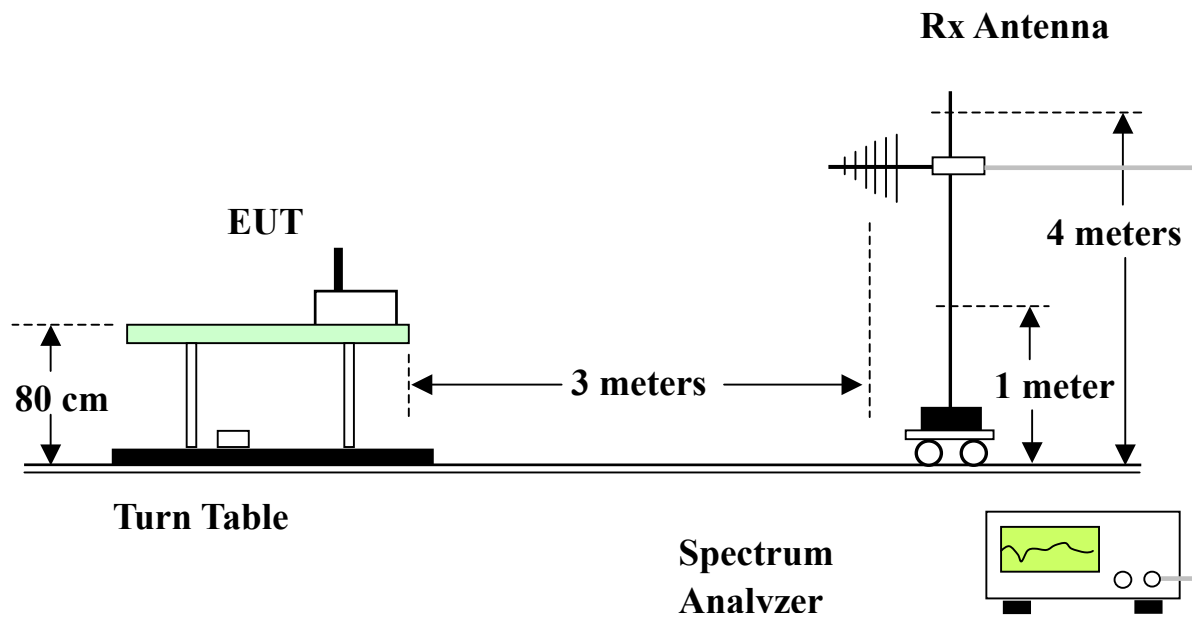5.9.3. Typical Test Setup Layout of Radiated Emission

5.9.4. Test Result of Radiated Emission

- Test Mode: Mode 1
- Test Distance: 3 M
- Temperature: 27 °C
- Relative Humidity: 61 %
- Test Date: Sep. 29, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test was passed at the minimum margin that marked by the frame in the following test record

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : Presentation Remote Controller01
 Power : DC 3V
 MODEL : BT-PM01B
 MEMO : TX CH00 2402MHz
 : X
 : F392401

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.770	36.44	-7.06	43.50	52.88	9.23	1.33	27.00	Peak	---	---
2	147.450	37.67	-5.83	43.50	53.29	9.62	1.57	26.81	Peak	100	102
3	271.380	37.46	-8.54	46.00	50.28	11.63	2.15	26.60	Peak	---	---
1	335.000	32.03	-13.97	46.00	43.87	12.52	2.45	26.81	Peak	---	---
2	383.300	33.41	-12.59	46.00	43.72	14.12	2.67	27.10	Peak	---	---
3	528.200	31.68	-14.32	46.00	39.77	16.33	3.36	27.78	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Presentation Remote Controller01
 Power : DC 3V
 MODEL : BT-PM01B
 MEMO : TX CH00 2402MHz
 : X
 : F392401

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	40.260	33.05	-6.95	40.00	48.40	10.69	1.06	27.10	Peak	---	---
2	55.380	29.71	-10.29	40.00	49.91	5.76	1.13	27.09	Peak	---	---
3	78.060	30.62	-9.38	40.00	50.71	5.71	1.24	27.04	Peak	---	---
1	335.000	27.20	-18.80	46.00	39.04	12.52	2.45	26.81	Peak	---	---
2	383.300	27.13	-18.87	46.00	37.44	14.12	2.67	27.10	Peak	---	---
3	528.200	28.60	-17.40	46.00	36.69	16.33	3.36	27.78	Peak	---	---

FCC TEST REPORT

Report No. : F392401

Site : 03CH03-HY
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : Presentation Remote Controller01
Power : DC 3V
MODEL : BT-PM01B
MEMO : TX CH00 2402MHz
: X
: F392401

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1198.000	42.21	-31.79	74.00	53.68	24.60	4.24	40.31	Peak	---	---
2	1198.000	28.68	-25.32	54.00	40.15	24.60	4.24	40.31	Average	---	---

Site : 03CH03-HY
Condition : 3m HORN-ANT-6741 VERTICAL
EUT : Presentation Remote Controller01
Power : DC 3V
MODEL : BT-PM01B
MEMO : TX CH00 2402MHz
: X
: F392401

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1172.000	37.09	-36.91	74.00	48.63	24.54	4.20	40.28	Peak	---	---
2	1172.000	27.01	-26.99	54.00	38.55	24.54	4.20	40.28	Average	---	---
3	1198.000	37.95	-36.05	74.00	49.42	24.60	4.24	40.31	Peak	---	---
4	1198.000	28.34	-25.66	54.00	39.81	24.60	4.24	40.31	Average	---	---


Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect		
Polarity	Factor	Loss								
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode	
2404.000	H	28.23	6.21	31.49	-	-	65.93	1979.25	A.V.	
2404.000	H	28.23	6.21	54.80	-	-	89.24	28973.44	Peak	
2404.000	V	28.23	6.21	31.24	-	-	65.68	1923.09	A.V.	
2404.000	V	28.23	6.21	54.11	-	-	88.55	26760.86	Peak	
4804.000	V	33.03	9.05	10.36	74.00	5011.87	52.44	418.79	-21.56	Peak
4804.000	V	33.03	9.05	-2.75	54.00	501.19	39.33	92.58	-14.67	A.V.
4804.000	H						-			Peak, A.V.
7206.000	V/H						-			Peak, A.V.
9608.000	V/H						-			Peak, A.V.
12010.000	V/H						-			Peak, A.V.
14412.000	V/H						-			Peak, A.V.
16814.000	V/H						-			Peak, A.V.
19216.000	V/H						-			Peak, A.V.
21618.000	V/H						-			Peak, A.V.
24020.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer:



Steve Chen

- Test Mode: Mode 2
- Test Distance: 3 M
- Temperature: 27 °C
- Relative Humidity: 61 %
- Test Date: Sep. 29, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test was passed at the minimum margin that marked by the frame in the following test record

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : Presentation Remote Controller01
 Power : DC 3V
 MODEL : BT-PM01B
 MEMO : TX CH39 2441MHz
 : X
 : F392401

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	77.250	32.67	-7.33	40.00	52.90	5.58	1.24	27.05	Peak	---	---
2	97.770	35.72	-7.78	43.50	52.16	9.23	1.33	27.00	Peak	---	---
3	143.940	37.32	-6.18	43.50	52.66	9.93	1.55	26.82	Peak	---	---
1	335.000	32.64	-13.36	46.00	44.48	12.52	2.45	26.81	Peak	---	---
2	383.300	33.36	-12.64	46.00	43.67	14.12	2.67	27.10	Peak	---	---
3	528.200	30.40	-15.60	46.00	38.49	16.33	3.36	27.78	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Presentation Remote Controller01
 Power : DC 3V
 MODEL : BT-PM01B
 MEMO : TX CH39 2441MHz
 : X
 : F392401

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 !	39.450	35.60	-4.40	40.00	50.64	11.00	1.06	27.10	Peak	100	110
2	54.300	29.24	-10.76	40.00	49.29	5.91	1.13	27.09	Peak	---	---
3	78.060	30.82	-9.18	40.00	50.91	5.71	1.24	27.04	Peak	---	---
1	335.000	24.90	-21.10	46.00	36.74	12.52	2.45	26.81	Peak	---	---
2	383.300	25.26	-20.74	46.00	35.57	14.12	2.67	27.10	Peak	---	---
3	528.200	25.90	-20.10	46.00	33.99	16.33	3.36	27.78	Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : Presentation Remote Controller01
 Power : DC 3V
 MODEL : BT-PM01B
 MEMO : TX CH39 2441MHz
 : X
 : F392401

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1220.000	41.12	-32.88	74.00	52.53	24.65	4.27	40.33	Peak	---	---
2	1220.000	28.85	-25.15	54.00	40.26	24.65	4.27	40.33	Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : Presentation Remote Controller01
 Power : DC 3V
 MODEL : BT-PM01B
 MEMO : TX CH39 2441MHz
 : X
 : F392401

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1166.000	36.11	-37.89	74.00	47.68	24.52	4.19	40.28	Peak	---	---
2	1166.000	24.00	-30.00	54.00	35.57	24.52	4.19	40.28	Average	---	---
3	1204.000	36.95	-37.05	74.00	48.41	24.61	4.25	40.32	Peak	---	---
4	1204.000	28.29	-25.71	54.00	39.75	24.61	4.25	40.32	Average	---	---
5	1220.000	37.59	-36.41	74.00	49.00	24.65	4.27	40.33	Peak	---	---
6	1220.000	28.48	-25.52	54.00	39.89	24.65	4.27	40.33	Average	---	---

Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

FCC TEST REPORT


Report No. : F392401

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect		
Polarity	Factor	Loss								
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode	
2444.000	H	28.31	6.27	31.64	-	-	66.22	2046.44	A.V.	
2444.000	H	28.31	6.27	54.86	-	-	89.44	29648.31	Peak	
2438.000	V	28.30	6.26	53.67	-	-	88.23	25792.89	Peak	
2438.000	V	28.30	6.26	30.75	-	-	65.31	1842.89	A.V.	
4884.000	V	33.19	9.10	7.66	74.00	5011.87	49.95	314.41	-24.05	Peak
4884.000	V	33.19	9.10	-2.88	54.00	501.19	39.41	93.43	-14.59	A.V.
4882.000	H						-			Peak, A.V.
7323.000	V/H						-			Peak, A.V.
9764.000	V/H						-			Peak, A.V.
12205.000	V/H						-			Peak, A.V.
14646.000	V/H						-			Peak, A.V.
17087.000	V/H						-			Peak, A.V.
19528.000	V/H						-			Peak, A.V.
21969.000	V/H						-			Peak, A.V.
24410.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer:



Steve Chen

- Test Mode: Mode 3
- Test Distance: 3 M
- Temperature: 27 °C
- Relative Humidity: 61 %
- Test Date: Sep. 29, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test was passed at the minimum margin that marked by the frame in the following test record

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : Presentation Remote Controller01
 Power : DC 3V
 MODEL : BT-PM01B
 MEMO : TX CH78 2480MHz
 : X
 : F392401

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	77.250	33.38	-6.62	40.00	53.61	5.58	1.24	27.05	Peak	---	---
2	97.770	36.00	-7.50	43.50	52.44	9.23	1.33	27.00	Peak	---	---
3 !	146.370	37.53	-5.97	43.50	53.06	9.72	1.56	26.81	Peak	---	---
1	335.000	32.82	-13.18	46.00	44.66	12.52	2.45	26.81	Peak	---	---
2	383.300	33.53	-12.47	46.00	43.84	14.12	2.67	27.10	Peak	---	---
3	528.200	30.97	-15.03	46.00	39.06	16.33	3.36	27.78	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Presentation Remote Controller01
 Power : DC 3V
 MODEL : BT-PM01B
 MEMO : TX CH78 2480MHz
 : X
 : F392401

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 !	38.370	35.33	-4.67	40.00	49.85	11.53	1.05	27.10	Peak	100	125
2	54.570	29.64	-10.36	40.00	49.73	5.87	1.13	27.09	Peak	---	---
3	77.250	31.63	-8.37	40.00	51.86	5.58	1.24	27.05	Peak	---	---
1	335.000	27.33	-18.67	46.00	39.17	12.52	2.45	26.81	Peak	---	---
2	528.200	28.13	-17.87	46.00	36.22	16.33	3.36	27.78	Peak	---	---
3	567.400	28.06	-17.94	46.00	35.54	16.88	3.54	27.90	Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : Presentation Remote Controller01
 Power : DC 3V
 MODEL : BT-PM01B
 MEMO : TX CH78 2480MHz
 : X
 : F392401

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1238.000	39.51	-34.49	74.00	50.86	24.70	4.30	40.35	Peak	---	---
2	1238.000	29.67	-24.33	54.00	41.02	24.70	4.30	40.35	Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : Presentation Remote Controller01
 Power : DC 3V
 MODEL : BT-PM01B
 MEMO : TX CH78 2480MHz
 : X
 : F392401

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1206.000	36.36	-37.64	74.00	47.81	24.62	4.25	40.32	Peak	---	---
2	1206.000	27.33	-26.67	54.00	38.78	24.62	4.25	40.32	Average	---	---
3	1238.000	36.35	-37.65	74.00	47.70	24.70	4.30	40.35	Peak	---	---
4	1238.000	28.32	-25.68	54.00	39.67	24.70	4.30	40.35	Average	---	---

Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

FCC TEST REPORT


Report No. : F392401

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin	Detect		
Polarity	Factor	Loss								
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode	
2478.000	H	28.38	6.31	30.54	-	-	65.23	1826.00	A.V.	
2478.000	H	28.38	6.31	53.84	-	-	88.53	26699.31	Peak	
2478.000	V	28.38	6.31	30.28	-	-	64.97	1772.15	A.V.	
2478.000	V	28.38	6.31	52.28	-	-	86.97	22310.02	Peak	
4958.000	V	33.34	9.14	9.88	74.00	5011.87	52.36	414.95	-21.64	Peak
4958.000	V	33.34	9.14	-1.66	54.00	501.19	40.82	109.90	-13.18	A.V.
4960.000	H						-			Peak, A.V.
7440.000	V/H						-			Peak, A.V.
9920.000	V/H						-			Peak, A.V.
12400.000	V/H						-			Peak, A.V.
14880.000	V/H						-			Peak, A.V.
17360.000	V/H						-			Peak, A.V.
19840.000	V/H						-			Peak, A.V.
22320.000	V/H						-			Peak, A.V.
24800.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer:



Steve Chen

6. Antenna Requirements

6.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

6.2. Antenna Connected Construction

The maximum Gain antenna used in this product is a chip antenna. The antenna is soldered on the PCB, No antenna connector is used.

7. EMI Suppression Component List

No EMI suppression components.

8. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.35	1.01	1000	24.10	3.92
35	13.63	1.03	2000	27.40	5.66
40	11.11	1.06	3000	30.00	7.20
45	10.59	1.08	4000	32.60	9.36
50	6.47	1.11	5000	33.40	9.16
55	5.83	1.13	6000	34.20	10.70
60	5.18	1.15	7000	35.30	12.16
65	4.81	1.18	8000	36.90	13.12
70	4.43	1.20	9000	38.10	13.81
75	5.10	1.22	10000	39.00	14.83
80	5.91	1.24	11000	38.60	15.83
85	7.33	1.27	12000	39.50	17.11
90	8.74	1.29	13000	39.30	17.62
95	9.05	1.32	14000	41.60	18.37
100	9.36	1.34	15000	40.60	19.10
110	9.65	1.39	16000	37.20	19.72
120	9.97	1.43	17000	40.20	21.98
130	10.51	1.48	18000	48.90	21.22
140	10.32	1.53	19000	37.60	23.90
150	9.42	1.57	20000	37.30	24.07
160	8.09	1.62	21000	37.00	25.49
170	7.43	1.67	22000	38.00	24.92
180	7.60	1.72	23000	38.70	25.60
190	7.43	1.76	24000	38.60	25.70
200	7.26	1.81	25000	38.90	26.54
220	9.11	1.91			
240	10.88	2.00			
260	11.75	2.09			
280	11.55	2.19			
300	11.36	2.28			
320	12.03	2.38			
340	12.69	2.47			
360	13.33	2.57			
380	14.00	2.66			
400	14.63	2.76			
450	15.33	2.99			
500	16.03	3.22			
550	16.65	3.46			
600	17.29	3.70			
650	17.64	3.93			
700	18.00	4.17			
750	18.39	4.40			
800	18.79	4.64			
850	19.10	4.87			
900	19.42	5.11			
950	19.58	5.35			
1000	19.75	5.58			

9. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz	Jun. 21, 2003	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP40	100004	9KHz~40GHz	Aug. 23, 2003	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Oct. 21, 2002	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2687	30MHz –2GHz	Dec. 21, 2002	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Jan. 02, 2003	Radiation (03CH03-HY)
Amplifier	MITEQ	AFS44	879981	100MHz~26.5GHz	Jul. 23, 2003	Radiation (03CH03-HY)
Horn Antenna	COM-POWER	3115	6741	1GHz – 18GHz	Apr. 08, 2003	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Horn Antenna	Schwarzbeck	BBHA9170	154	15GHz~40GHz	Jun. 02, 2003	Radiation (03CH03-HY)
RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Mar. 14, 2003	Radiation (03CH03-HY)
RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Mar. 14, 2003	Radiation (03CH03-HY)
Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted
Power sensor	R&S	NRV-Z55	100049	DC~40GHz	May 28, 2003	Conducted
Power Sensor	R&S	NRV-Z32	100057	30MHz-6GHz	May 28, 2003	Conducted
AC power source	HPC	HPA-500W	HPA-9100024	AC 0~300V	May 27, 2003	Conducted
Temp. and Humidity	KSON	THS-C3L	612	N/A	Oct. 02, 2002	Conducted
Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted

※ Calibration Interval of instruments listed above is one year.

10. Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m
Antenna factor calibration	normal(k=2)	±1
cable loss calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
Antenna Directivity	rectangular	±3
Antenna Factor V.S. Height	rectangular	±2
Antenna Factor Interpolation for Frequency	rectangular	±0.25
site imperfection	rectangular	±2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1\Gamma_2)$	U-shaped	±0.54
combined standard uncertainty $U_e(y)$	normal	±2.7
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	±5.4

$$U=\sqrt{\{(1/2)^2+(0.3/2)^2+(2^2+0.5^2+2^2+0.25^2+2^2)/3+(0.54)^2/2\}}=2.2 \text{ for 10m test distance}$$

$$U=\sqrt{\{(1/2)^2+(0.3/2)^2+(2^2+3^2+2^2+0.25^2+2^2)/3+(0.54)^2/2\}}=2.7 \text{ for 3m test distance}$$

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz – 30MHz
Cable and I/P attenuator calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
LISN coupling specification	rectangular	±1.5
Transducer factor frequency interpolation	rectangular	±0.2
Mismatch Receiver VSWR $\Gamma_1=0.09$ LISN VSWR $\Gamma_2=0.33$ Uncertainty= $20\log(1-\Gamma_1\Gamma_2)$	U-shaped	0.2
combined standard uncertainty $U_e(y)$	normal	±1.66
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	±3.32

$$U=\sqrt{\{(0.3/2)^2+(2^2+1.5^2+0.2^2)/3+(0.2)^2/2\}}=1.66$$