

**EMC TEST REPORT For FCC**

Test Report No. : CTK03-F081
Date of Issue : October 2, 2003
Model/Type No: P42SX
Kind of Product : PDP TV Monitor
Applicant : KORTEK Corporation
Applicant Address : 1385-15 Juan-5Dong,Nam-Ku,Incheon,Korea
Manufacturer : KORTEK Corporation
Manufacturer Address : 1385-15 Juan-5Dong,Nam-Ku,Incheon,Korea
Contact Person : Kyu-dong, Kim
Telephone : +82-32-860-3151
Received Date : June 25, 2003
Test period : Start: September 22, 2003 End: September 22, 2003
Test Results : **In Compliance** **Not in Compliance**

The test results presented in this report relate only to the object tested.

CERTiTEK Standards Laboratory Co., Ltd. is accredited by Korea Laboratory Accreditation Scheme (KOLAS) which signed the International Laboratory Accreditation Cooperation (ILAC) Mutual Recognition Arrangement (MRA) for the above test item(s) and test method(s).

Tested by

Young-Joon, Park
EMC Test Engineer
Date: October 2, 2003

Reviewed by

James Hong
EMC Technical Manager
Date: October 2, 2003



REPORT REVISION HISTORY

Date	Revision	Page No
Oct., 30, 2003	(CTK03-F081) Issued	All

This report shall not be reproduced except in full, without the written approval of CERTiTEK Standards Laboratory Co., Ltd. This document may be altered or revised by CERTiTEK Standards Laboratory Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CERTiTEK Standards Laboratory Co., Ltd. will constitute fraud and shall nullify the document.



TABLE OF CONTENTS

1.0 General Product Description	4
1.0 General Product Description	4
1.1 Model Differences	4
1.2 Device Modifications.....	5
1.3 EUT Configuration(s)	6
1.4 Test Software	6
1.5 EUT Operating Mode(s).....	6
1.6 Calibration Details of Equipment Used for Measurement	7
1.7 Test Facility.....	7
1.8 Measurement Procedure	7
1.9 Laboratory Accreditations and Listings	8
2.0 Emissions Test Regulations.....	9
2.1 Conducted Voltage Emissions	10
2.2 Radiated Electric Field Emissions.....	11
Configurations	12
APPENDIX A - TEST DATA	13
Conducted Voltage Emissions (Quasi-Peak reading)	13
Radiated Electric Field Emissions (Quasi-Peak reading).....	15



1.0 General Product Description

1.0.1 Tested Equipment

Unless otherwise indicated, all tests were conducted on Model P42SX.

Tests performed on Model _____ were considered to be representative of Model(s) _____.

1.0.2 Equipment Size, Mobility and Identification

Dimensions: 1031(W) by 634(H) by 79(D) mm in
Mobility: Hand-Held Table-top Floor-standing
Serial No.: -

1.0.3 Electrical Ratings

Input: AC 100V-240V, 50/60Hz
Output: Not applicable

1.0.4 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage: 120V
Frequency: 60Hz

1.0.5 Clock & Other Frequencies Utilized

6.0MHz, 14.318MHz, 18.432MHz, 20.0MHz, 20.25MHz




1.1 Model Differences

Not applicable.

1.2 Device Modifications

The following modifications were necessary for compliance:

- 1) Reinforced with 'Gasket'
- 2) Reinforced with 'Ferrite Core'

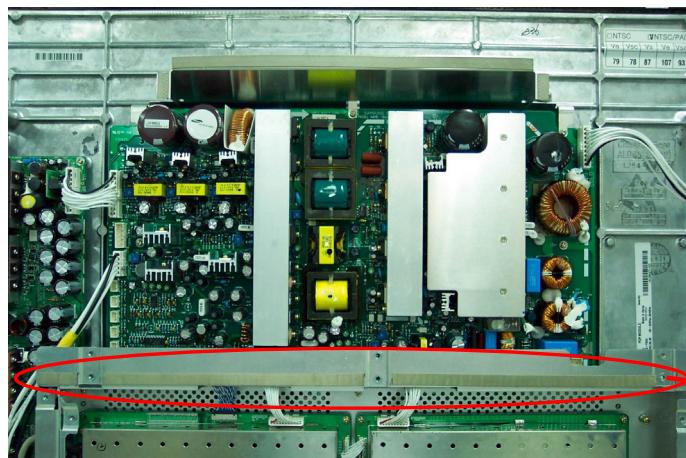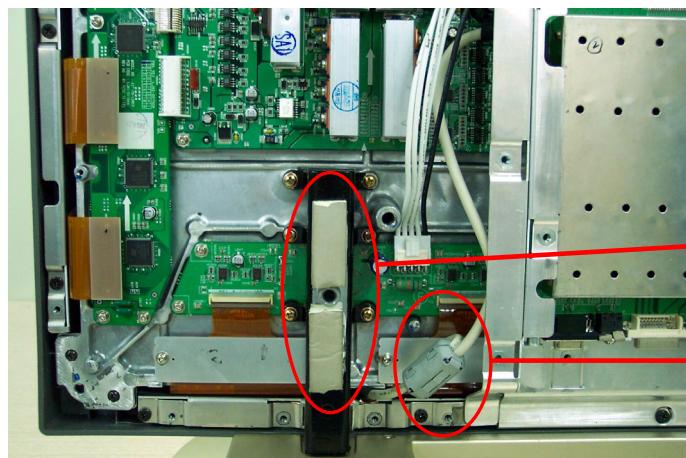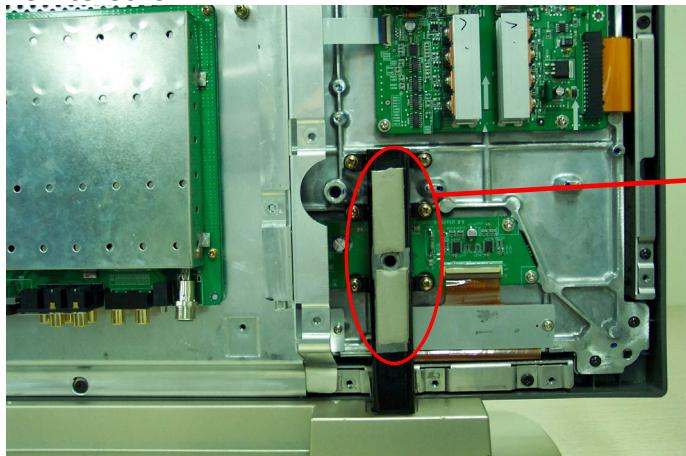



1.3 EUT Configuration(s)

See Appendix A for individual test set-up configuration(s). The following peripheral devices and/or interface cables were connected during the measurement:

Peripheral Devices

Device	Manufacturer	Model No.	Serial No.	FCC ID or DoC
PC	Samsung	M6050	812092ERB00347	DOC
Keyboard	SAMSUNG	SEM-DT35	33008103	DOC
Mouse(PS/2)	SAMSUNG	OMS3CB	0303009872	DOC
Mouse(USB)	SAMSUNG	OMS3CB	0303009877	DOC
Mouse(Serial)	Microsoft	BASM1	4475951-20000	DOC
DVD	Ludens	-	-	-
Earphone	PLANTRONICS	-	-	-

Cable Description

#	Description	Ferrited	Length (m)	Other Details
1	EUT Power Cable, Unshielded	No	1.8	Connect to AC Power
2	ANTENA Cable, Shielded	No	1.5	Connect to EUT
3	Earphone Cable, Unshielded	No	3.0	Between EUT and Earphone
4	PC Power Cable, Unshielded	No	1.8	Connect to AC Power
5	Audio In Cable, Unshielded	No	1.8	Between EUT and PC
6	DVI Cable, Shielded	Yes	1.8	Between EUT and PC
7	PC In Cable, Shielded	Yes	1.8	Between EUT and PC
8	Audio In Cable, Unshielded	No	1.8	Between EUT and DVD
9	S-Video In Cable, Unshielded	No	1.5	Between EUT and DVD
10	Video In Cable, Unshielded	No	1.8	Connect to EUT
11	Scart In Cable, Shielded	No	1.2	Connect to EUT
12	Component In Cable, Unshielded	No	1.5	Connect to EUT
13	Speaker Out Cable, Unshielded	No	1.5	Connect to EUT
14	DVD Power Cable, Unshielded	No	1.5	Connect to DVD
15	Keyboard Cable, Shielded	No	1.5	Between PC and Keyboard
16	Mouse Cable, Shielded	No	1.8	Between PC and Mouse (PS/2)
17	Mouse Cable, Shielded	No	1.8	Between PC and Mouse (USB)
18	Mouse Cable, Shielded	No	2.0	Between PC and Mouse (Serial)

n/a = not available

1.4 Test Software

Pinging
 Name / Manufacturer / Version / Type of pattern
 - EMC Test / Compaq Computer / 1.0 / Scrolling 'H'

1.5 EUT Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:

Test program (H-Pattern) Test program (color bar)
 Standby Test program (customer specific)
 Resolution/ Refresh Rate - 1024 x768 / 85Hz(PC), 1280x1024(DVI)



1.6 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.7 Test Facility

The measurement facility is located at 386-1, Ho-Dong, Yongin-City, Kyungki-Do, Korea 449-100. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.8 Measurement Procedure

Preliminary AC power line conducted emissions tests were performed shielded room. To find worst mode, several typical mode and typical cable position were tested.

Final AC power line conducted emissions test was performed shielded room. (location is same as Preliminary test)

Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

Preliminary radiated emissions test were performed anechoic chamber (Distance of antenna and EUT was 3 m). To find worst mode, several typical mode and typical cable position were tested and peak level and frequency were recorded.

Final radiated emissions test was performed Open Area Test Site. Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

* Measurement procedures was In accordance with ANSI C63.4-1992 7.2.3, 7.2.4, 8.3.1.1, 8.3.1.2



1.9 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 and 10 meter Open Area Test Sites to perform FCC Part 15/18 measurements.	 93250
JAPAN	VCCI	10 meter Open Area Test Site and one conducted site.	 R-948, C-986
KOREA	MIC	10 meter Open Area Test Site and EMS (ESD, RS, EFT/Burst, Surge)	 No. 51, KR0025
International	KOLAS	EMC	
Europe	GLAS	EMC EN 55011, EN 55022, EN 55024, EN 61326, EN 50130-4, EN 50081-1, EN 50081-2, EN 50082-1, EN 50082-2, EN 61000-6-2, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11, EN 61000-3-2, EN 61000-3-3	 No.13000796-02



2.0 Emissions Test Regulations

The emissions tests were performed according to following regulations:

<input type="checkbox"/> EN 50081-1:1992		
<input type="checkbox"/> EN 55011:1998 +A1:1999	<input type="checkbox"/> Group 1 <input type="checkbox"/> Class A	<input type="checkbox"/> Group 2 <input type="checkbox"/> Class B
<input type="checkbox"/> EN 55013:1990 +A12:1994 +A13:1996 +A14:1999		
<input type="checkbox"/> EN 55013:2001		
<input type="checkbox"/> EN 55014-1:1993 +A1:1997 +A2:1999	<input type="checkbox"/> Household appliances and similar <input type="checkbox"/> Portable tools <input type="checkbox"/> Semiconductor devices	
<input type="checkbox"/> EN 55014-1:2000		
<input type="checkbox"/> EN 55014-2:1997		
<input type="checkbox"/> EN 55015:1996 +A1:1997 +A2:1999		
<input type="checkbox"/> EN 55015:2000		
<input type="checkbox"/> EN 55020:1994 +A11:1996 +A13:1999 +A14:1999		
<input type="checkbox"/> EN 55020:1994 +A11:1996 +A12:1999 +A13:1999 +A14:1999		
<input type="checkbox"/> EN 55022:1994 +A1:1995 +A2:1997	<input type="checkbox"/> Class A	<input type="checkbox"/> Class B
<input type="checkbox"/> EN 55022:1998 +A1:2000	<input type="checkbox"/> Class A	<input type="checkbox"/> Class B
<input type="checkbox"/> EN 61000-3-2:1995 +A1:1998 +A2:1998		
<input type="checkbox"/> EN 61000-3-2:1995 +A1:1998 +A2:1998 +A14:2000		
<input type="checkbox"/> EN 61000-3-2:2000		
<input type="checkbox"/> EN 61000-3-3:1995		
<input type="checkbox"/> VCCI V-3/99.05 : 1999	<input type="checkbox"/> Class A	<input type="checkbox"/> Class B
<input checked="" type="checkbox"/> FCC Part 15 SUBPART B	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B
<input type="checkbox"/> AS 3548 (1992)	<input type="checkbox"/> Class A	<input type="checkbox"/> Class B
<input checked="" type="checkbox"/> CISPR 22 (1993)	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B

The unit was tested to CISPR 22 and complied with the alternate methods allowed by FCC under paragraphs 15.107 and 15.109.



2.1 Conducted Voltage Emissions

Test Date

September 22, 2003

Test Location

EMI-CE: Shielded Room

Test Instruments

<input checked="" type="checkbox"/> Field Strength Meter	Rohde & Schwarz	ESHS30	828144/002
--	-----------------	--------	------------

Test Accessories

<input type="checkbox"/> LISN	EMCO	3825/2	9206-1971
<input checked="" type="checkbox"/> LISN	EMCO	3825/2	9409-2246
<input checked="" type="checkbox"/> LISN	EMCO	3825/2	9607-2574
<input checked="" type="checkbox"/> Control PC	HP	Vectra 500	SG72000192

Frequency Range of Measurement

<input checked="" type="checkbox"/> 150 kHz to 30 MHz
<input type="checkbox"/> 450 kHz to 30 MHz
<input type="checkbox"/> _____

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

<input checked="" type="checkbox"/> MET	minimum margin is 3.1 dBuV at 13.27 MHz
<input type="checkbox"/> NOT MET	limit exceeded by maximum of _____ dBuV at _____ MHz
<input type="checkbox"/> NOT APPLICABLE	

RemarksSee Appendix A for test data.



2.2 Radiated Electric Field Emissions

Test Date

September 22, 2003

Test Location

- EMI-OATS: Testing was performed at a test distance of 10 m
- EMI-OATS: Testing was performed at a test distance of 3 m

Test Instruments

- Field Strength Meter Rohde & Schwarz ESVS30 826638/008

Test Accessories

<input checked="" type="checkbox"/> ULTRA Broadband Antenna	Rohde & Schwarz	HL562	361324/014
<input type="checkbox"/> Biconical Antenna	Schwarzbeck	BBA9106	41-00201
<input type="checkbox"/> Biconical Antenna	EMCO	3110B	9607-2564
<input type="checkbox"/> Log-periodic Antenna	EMCO	3146	9607-4567

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz


Test Results

The requirements are:

- MET minimum margin is 3.5 dB (uV/m) at 520.56 MHz
- NOT MET limit exceeded by maximum of _____ dB(uV/m) at _____ MHz
- NOT APPLICABLE

RemarksSee Appendix A for test data

Configuration


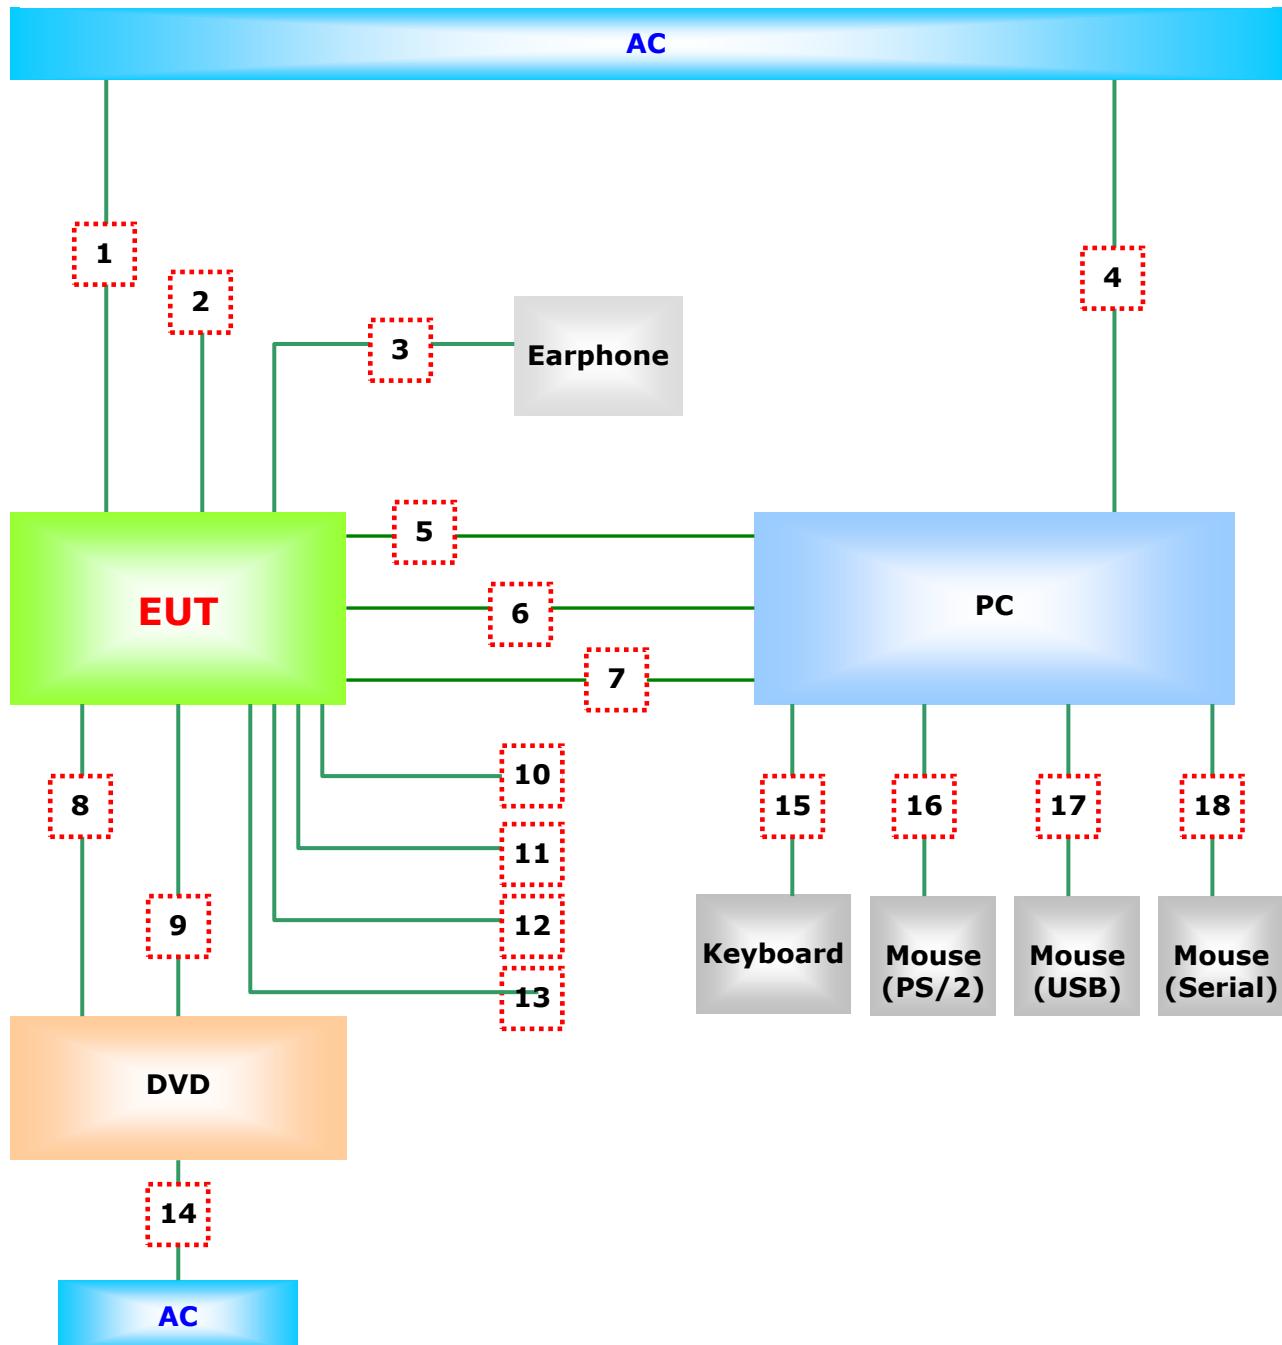




APPENDIX A – TEST DATA

Conducted Voltage Emissions (Quasi-Peak reading)

Frequency [MHz]	Correction Factor		Line	Quasi-peak				Average			
	LISN	Cable		Limit [dBuV]	Reading [dBuV]	Result [dBuV]	Margin [dB]	Limit [dBuV]	Reading [dBuV]	Result [dBuV]	Margin [dB]
0.15	2.2	0.1	L	66.0	51.7	54.0	12.0	56.0	35.1	37.4	18.6
0.19	1.7	0.1	L	64.0	55.9	57.7	6.3	54.0	48.8	50.6	3.4
0.20	1.7	0.1	L	63.6	56.6	58.4	5.2	53.6	40.8	42.6	11.0
12.68	0.4	0.2	L	60.0	54.6	55.2	4.9	50.0	34.4	35.0	15.0
13.07	0.4	0.2	L	60.0	55.5	56.1	3.9	50.0	33.1	33.7	16.3
13.27	0.4	0.2	L	60.0	56.4	57.0	3.1	50.0	36.0	36.6	13.4
13.47	0.4	0.2	L	60.0	54.1	54.7	5.3	50.0	33.3	33.9	16.2
0.15	2.2	0.1	N	66.0	50.1	52.4	13.6	56.0	22.8	25.1	30.9
0.18	1.7	0.1	N	64.5	54.8	56.6	7.9	54.5	49.1	50.9	3.6
0.20	1.7	0.1	N	63.6	54.0	55.8	7.8	53.6	38.6	40.4	13.2
0.23	0.8	0.1	H	62.4	51.4	52.3	10.2	52.4	44.4	45.3	7.2
12.68	0.4	0.2	H	60.0	53.1	53.7	6.3	50.0	32.7	33.3	16.7
12.87	0.4	0.2	N	60.0	52.6	53.2	6.8	50.0	31.2	31.8	18.2
13.07	0.4	0.2	N	60.0	53.5	54.1	5.9	50.0	30.6	31.2	18.8
13.27	0.4	0.2	N	60.0	53.7	54.3	5.7	50.0	33.9	34.5	15.5

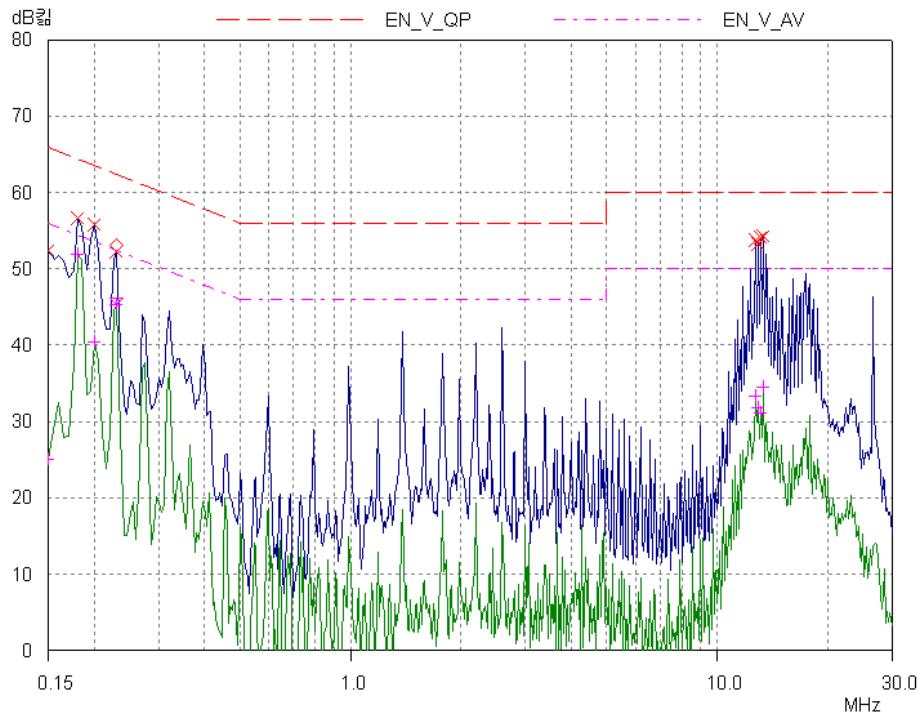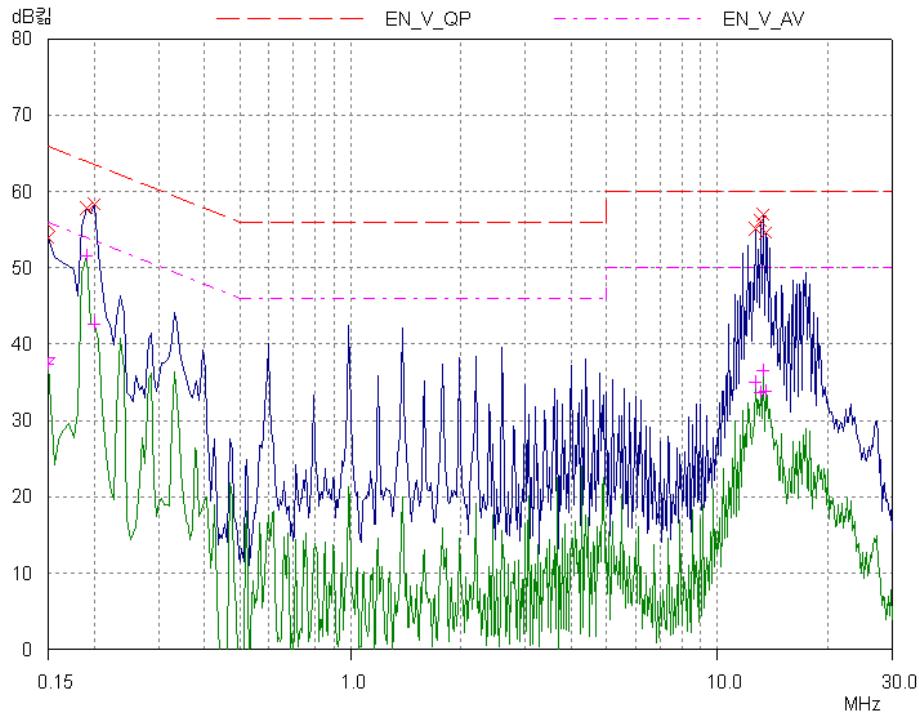



Radiated Electric Field Emissions (Quasi-Peak reading)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Cable			
49.63	17.0	V	1.2	7.9	1.3	30.0	26.2	3.8
72.55	17.5	V	1.5	7.3	1.7	30.0	26.5	3.6
185.96	17.1	H	4.0	6.8	2.6	30.0	26.5	3.6
189.32	15.6	H	3.2	7.0	2.7	30.0	25.3	4.7
196.11	15.3	H	4.0	7.0	2.7	30.0	25.0	5.0
202.85	13.6	H	4.0	7.4	2.8	30.0	23.7	6.3
520.56	12.7	V	1.2	16.0	4.8	37.0	33.5	3.5
660.56	4.0	V	1.5	18.3	5.5	37.0	27.8	9.2
681.53	5.7	V	1.0	18.1	5.5	37.0	29.3	7.7
700.89	4.4	V	1.1	18.4	5.7	37.0	28.5	8.5
709.55	5.4	V	1.0	18.5	5.7	37.0	29.6	7.4
720.01	7.4	V	1.0	18.8	5.9	37.0	32.1	4.9