

Application for FCC Certificate
On Behalf of
SHERRYTECH HK LIMITED TAIWAN BRANCH

SELF-BALLASTED FLUORESCENT LAMP

Model No.:

SHERRYTECH Brand: 2409S, 2411S, 2414S,
2417S, 2507S, 2509S,
2511S, 2513S

ANHUA Brand: DEX/A3-91, DEX/A3-111, DEX/A3-141,
DEX/A3-171, DSG/G0-71, DSG/G0-91,
DSG/G0-111, DSG/G0-131

FCC ID: QM6DEXA0918S06

Prepared For : SHERRYTECH HK LIMITED TAIWAN BRANCH
3/FL NO.94 Chung chen Road. SEC 2
Taipei, Taiwan

Prepared By : Audix Technology (Shanghai) Co., Ltd.
3F 34Bldg 680 Guiping Rd.,
Caohejing Hi-Tech Park,
Shanghai, China 200233

Tel : +86-21-64955500

Fax : +86-21-64955491

Report No. : ACI-F02096
Date of Test : Sep 18-19, 2002
Date of Report : Sep 23, 2002

TABLE OF CONTENTS

	Page
1 GENERAL INFORMATION.....	4
1.1 Description of Equipment Under Test.....	4
1.2 Description of Test Facility	5
1.3 Measurement Uncertainty	5
2 AC POWERLINE CONDUCTED EMISSION TEST	6
2.1 Test Equipment.....	6
2.2 Block Diagram of Test Setup	6
2.3 Conducted Emission Limits	6
2.4 Test Configuration.....	7
2.5 Operating Condition of EUT	7
2.6 Test Procedures	7
2.7 Test Results	8
3 FIELD STRENGTH TEST	16
3.1 Test Equipment.....	16
3.2 Block Diagram of Test Setup	16
3.3 Test Configuration.....	16
3.4 Operating Condition of EUT	16
3.5 Test Procedure	17
3.6 Test Result.....	17

TEST REPORT FOR FCC CERTIFICATE

Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
Manufacturer : SHANGHAI ANHUA ELECTRIC APPLIANCES CO., LTD
EUT Description : SELF-BALLASTED FLUORESCENT LAMP
(A) Model No.:
SHERRYTECH Brand: 2409S, 2411S, 2414S,
2417S, 2507S, 2509S,
2511S, 2513S
ANHUA Brand: DEX/A3-91, DEX/A3-111, DEX/A3-141,
DEX/A3-171, DSG/G0-71, DSG/G0-91,
DSG/G0-111, DSG/G0-131
(B) Power Supply: 120V/60Hz

Test Procedure Used:

FCC RULES AND REGULATIONS PART 18 CONSUMER DEVICES (2000)
AND MP-5/1986

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 18 RF Lighting Device limits both conducted emissions and field strength.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

This report must not be used by the applicant to claim product endorsement by NVLAP or any agency of the U.S. Government.

Date of Test : Sep 18-19, 2002

Prepared by : Jean Liu
JEAN LIU
(Assistant)

2002.9.24
Test Engineer : Lorenzo Chen 2002.9.24
LORENZO CHEN
(Engineer)
For and on behalf of
Audix Technology (Shanghai) Co., Ltd.

Reviewer : Byron Kwo
BYRON KWO
(Supervisor)

Approved Signatory : Jason Chen
Authorized Signatory
(Department Manager)

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test

Description : SELF-BALLASTED FLUORESCENT LAMP

Type of EUT : ☒ Production ☐ Pre-product ☐ Pro-type

Model Number :

SHERRYTECH Brand: 2409S, 2411S, 2414S, 2417S,
2507S, 2509S, 2511S, 2513S

ANHUA Brand: DEX/A3-91, DEX/A3-111, DEX/A3-141, DEX/A3-171,
DSG/G0-71, DSG/G0-91, DSG/G0-111, DSG/G0-131

Note: Except the name, 2409S is the same as DEX/A3-91, 2411S as DEX/A3-111, 2414S as DEX/A3-141, 2417S as DEX/A3-171, 2507S as DSG/G0-71, 2509S as DSG/G0-91, 2511S as DSG/G0-111, 2513S as DSG/G0-131. In this test report, Only ANHUA Brand is noted.

Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
3/FL NO.94 Chung chen Road. SEC 2
Taipei, Taiwan

Manufacturer : SHANGHAI ANHUA ELECTRIC APPLIANCES CO.,
LTD
NO. 6 Siping Road, Pingan, Fengxian,
Shanghai, China

Test Model	Apparent Power (V • A)	Real Power (W)
DEX/A3-91	14.93	8.28
DEX/A3-111	17.04	9.7
DEX/A3-141	23.8	12.52
DEX/A3-171	24.9	13.01
DSG/G0-71	12.46	6.16
DSG/G0-91	15.53	8.86
DSG/G0-111	16.40	9.09
DSG/G0-131	19.31	11.8

1.2 Description of Test Facility

Site Description : Sept. 17, 1998 file on
(Semi-Anechoic Chamber) Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046, USA

Name of Firm : Audix Technology (Shanghai) Co., Ltd.

Site Location : 3F 34Bldg 680 Guiping Rd.,
Caohejing Hi-Tech Park,
Shanghai, China 200233

NVLAP Lab Code : 200371-0

1.3 Measurement Uncertainty

Conducted Emission Uncertainty : $U = \pm 2.66\text{dB}$


2 AC POWERLINE CONDUCTED EMISSION TEST

2.1 Test Equipment

The following test equipment are used during the powerline conducted emission test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	844077/007	Jun 04, 2002	1 Year
2.	Line Impedance Stabilization Network (LISN)	Kyoritsu	KNW-407	8-1280-5	May 09, 2002	1 Year

2.2 Block Diagram of Test Setup

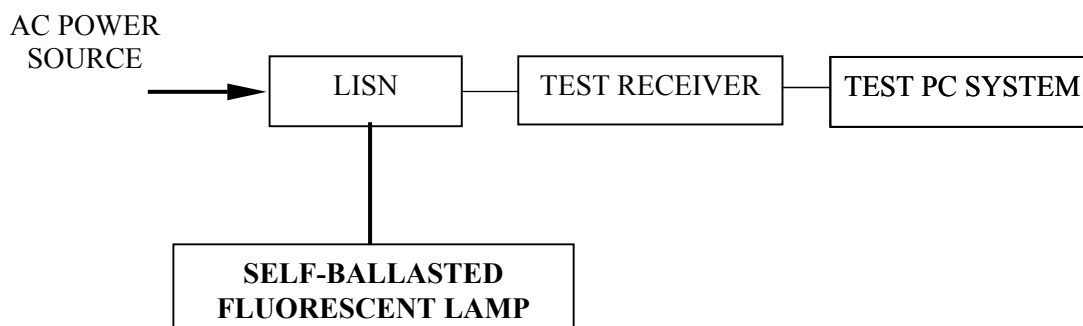

— : SIGNAL LINE
 — : POWER LINE

2.3 Conducted Emission Limits

Frequency (MHz)	Maximum RF Line Voltage	
	(μ V)	dB(μ V)
0.45 ~ 2.51	250	48
2.51 ~ 3	3000	70
3 ~ 30	250	48
NOTE 1 – RF Line Voltage dB (μ V) = 20 log RF Line Voltage (μ V) NOTE 2 – The tighter limits shall apply at the boundary between two frequency ranges.		

2.4 Test Configuration

The EUT (listed in Sec. 1.1) was installed as shown on Sec. 2.2 to meet FCC requirement and operating in a manner which tends to maximize its emission level in a normal application.

2.5 Operating Condition of EUT

2.5.1 Setup the EUT as shown in Sec. 2.2.

2.5.2 Turn on the power of all equipment.

2.5.3 The EUT will be operated normally.

2.6 Test Procedures

The EUT was connected to the power mains through a Line Impedance Stabilization Network (LISN). This provided a 50 ohm coupling impedance for the measuring equipment.

Both sides of AC line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed or manipulated according to MP-5/1986 during conducted emission test.

The IF bandwidth of Test Receiver ESHS10 was set at 10 kHz.

The frequency range from 450 kHz to 30 MHz was checked.

The test mode (ON) was done on conducted test and the test results of the highest emissions are listed in Sec. 2.7.

2.7 Test Results

< PASS >

The frequency and amplitude of the highest AC powerline conducted emissions relative to the limit is reported. All emissions not reported below are too low against the prescribed limits.

EUT	:	<u>SELF-BALLASTED FLUORESCENT LAMP</u>	Temperature :	<u>24.8°C</u>
Model No.	:	<u>DEX/A3-91</u>	Humidity :	<u>53%</u>
Test Mode	:	<u>ON</u>	Date of Test :	<u>Sep 18, 2002</u>

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μV)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.450	0.07	40.33	40.40	48.00	7.6
	0.515	0.06	39.99	40.50	48.00	7.95
	0.714	0.03	40.42	40.45	48.00	7.55
	0.870	0.04	41.79	41.83	48.00	6.17
	0.911	0.04	41.50	41.54	48.00	6.46
	1.129	0.05	42.55	42.60	48.00	5.40
VB	0.487	0.09	37.77	37.86	48.00	10.14
	0.519	0.09	38.85	38.94	48.00	9.06
	0.567	0.09	39.24	39.33	48.00	8.67
	0.870	0.08	41.85	41.93	48.00	6.07
	0.975	0.08	41.36	41.44	48.00	6.56
	1.192	0.09	41.05	41.14	48.00	6.86

NOTE 1 – Emission Level = Meter Reading + Factor

NOTE 2 – Factor = Insertion Loss + Cable Loss

NOTE 3 – All reading are Quasi-Peak Values.

NOTE 4 – The worst emission is detected at 1.129 MHz with corrected signal level of 42.60dB(μV) (limit is 48.00 dB(μV)), when the VA of the EUT is connected to LISN.

TEST ENGINEER: 
(LORENZO CHEN)

EUT : SELF-BALLASTED FLUORESCENT LAMP Temperature : 24.8°C

Model No. : DEX/A3-111 Humidity : 53%

Test Mode : ON Date of Test : Sep 18, 2002

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μV)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.485	0.06	39.76	39.82	48.00	8.18
	0.553	0.05	37.10	37.15	48.00	10.85
	0.594	0.04	36.43	36.47	48.00	11.53
	0.654	0.04	36.19	36.23	48.00	11.77
	0.863	0.04	41.07	41.11	48.00	6.89
	0.919	0.05	40.24	40.29	48.00	7.71
VB	0.489	0.09	39.72	39.81	48.00	8.19
	0.557	0.09	39.69	39.78	48.00	8.22
	0.708	0.08	39.99	40.07	48.00	7.93
	0.870	0.08	41.53	41.61	48.00	6.39
	0.919	0.08	41.02	41.10	48.00	6.90
	1.047	0.08	38.86	38.94	48.00	9.06
NOTE 1 – Emission Level = Meter Reading + Factor NOTE 2 – Factor = Insertion Loss + Cable Loss NOTE 3 – All reading are Quasi-Peak Values. NOTE 4 – The worst emission is detected at 0.870 MHz with corrected signal level of 41.61dB(μV) (limit is 48.00 dB(μV)), when the VB of the EUT is connected to LISN.						

TEST ENGINEER: 
(LORENZO CHEN)

EUT : SELF-BALLASTED FLUORESCENT LAMP Temperature : 24.8°C

Model No. : DEX/A3-141 Humidity : 53%

Test Mode : ON Date of Test : Sep 18, 2002

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μV)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.530	0.05	35.09	35.14	48.00	12.86
	0.723	0.03	32.86	32.89	48.00	15.11
	0.774	0.04	33.39	33.43	48.00	14.57
	0.824	0.04	35.44	35.48	48.00	12.52
	0.870	0.04	36.25	36.29	48.00	11.71
	0.919	0.05	36.43	36.48	48.00	11.52
VB	0.838	0.08	38.84	38.92	48.00	9.08
	0.885	0.08	38.76	38.84	48.00	9.16
	0.950	0.08	38.89	38.97	48.00	9.03
	0.995	0.08	37.20	37.28	48.00	10.72
	1.078	0.08	37.02	37.10	48.00	10.92
	1.143	0.08	36.26	36.34	48.00	11.66
NOTE 1 – Emission Level = Meter Reading + Factor NOTE 2 – Factor = Insertion Loss + Cable Loss NOTE 3 – All reading are Quasi-Peak Values. NOTE 4 – The worst emission is detected at 0.950 MHz with corrected signal level of 38.97dB(μV) (limit is 48.00 dB(μV)), when the VB of the EUT is connected to LISN.						

TEST ENGINEER: 
(LORENZO CHEN)

EUT : SELF-BALLASTED FLUORESCENT LAMP Temperature : 24.8°C

Model No. : DEX/A3-171 Humidity : 53%

Test Mode : ON Date of Test : Sep 18, 2002

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μV)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.452	0.07	40.53	40.60	48.00	7.40
	0.498	0.06	40.08	40.14	48.00	7.86
	0.567	0.05	39.32	39.37	48.00	8.63
	0.632	0.04	35.75	35.79	48.00	12.21
	0.732	0.03	33.31	33.34	48.00	14.66
	0.774	0.04	33.45	33.49	48.00	14.51
VB	0.450	0.10	41.99	42.09	48.00	5.91
	0.483	0.09	40.75	40.84	48.00	7.16
	0.506	0.09	40.94	41.03	48.00	6.97
	0.539	0.09	38.53	38.62	48.00	9.38
	0.567	0.09	37.70	37.79	48.00	10.21
	0.604	0.08	36.21	36.29	48.00	11.71
NOTE 1 – Emission Level = Meter Reading + Factor NOTE 2 – Factor = Insertion Loss + Cable Loss NOTE 3 – All reading are Quasi-Peak Values. NOTE 4 – The worst emission is detected at 0.450 MHz with corrected signal level of 42.09dB(μV) (limit is 48.00 dB(μV)), when the VB of the EUT is connected to LISN.						


 TEST ENGINEER: _____
 (LORENZO CHEN)

EUT : SELF-BALLASTED FLUORESCENT LAMP Temperature : 24.8°C

Model No. : DSG/G0-71 Humidity : 53%

Test Mode : ON Date of Test : Sep 18, 2002

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μV)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.456	0.07	38.32	38.39	48.00	9.61
	0.485	0.06	36.21	36.27	48.00	11.73
	0.624	0.04	32.12	32.16	48.00	15.84
	0.696	0.03	32.51	32.54	48.00	15.46
	0.790	0.04	32.01	32.05	48.00	15.95
	0.824	0.04	31.77	31.81	48.00	16.19
VB	0.463	0.09	37.51	37.60	48.00	10.40
	0.496	0.09	36.40	36.49	48.00	11.51
	0.562	0.09	32.82	32.91	48.00	15.09
	0.622	0.08	31.78	31.86	48.00	16.14
	0.679	0.08	31.17	31.25	48.00	16.75
	0.714	0.08	30.96	31.04	48.00	16.95
NOTE 1 – Emission Level = Meter Reading + Factor NOTE 2 – Factor = Insertion Loss + Cable Loss NOTE 3 – All reading are Quasi-Peak Values. NOTE 4 – The worst emission is detected at 0.456 MHz with corrected signal level of 38.39dB(μV) (limit is 48.00 dB(μV)), when the VA of the EUT is connected to LISN.						

TEST ENGINEER: 
(LORENZO CHEN)

EUT : SELF-BALLASTED FLUORESCENT LAMP Temperature : 24.8°C

Model No. : DSG/G0-91 Humidity : 53%

Test Mode : ON Date of Test : Sep 18, 2002

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μV)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.489	0.06	36.64	36.70	48.00	11.30
	0.579	0.05	36.08	36.13	48.00	11.87
	0.668	0.03	38.30	38.33	48.00	9.67
	0.919	0.05	36.97	37.02	48.00	10.98
	0.983	0.05	37.18	37.23	48.00	10.77
	1.134	0.05	39.42	39.47	48.00	8.53
VB	0.498	0.09	38.62	38.71	48.00	9.29
	0.679	0.08	36.82	36.90	48.00	11.10
	0.863	0.08	38.19	38.27	48.00	9.73
	1.021	0.08	39.11	39.19	48.00	8.81
	1.105	0.08	41.44	41.52	48.00	6.48
	1.158	0.08	42.19	42.27	48.00	5.73
NOTE 1 – Emission Level = Meter Reading + Factor NOTE 2 – Factor = Insertion Loss + Cable Loss NOTE 3 – All reading are Quasi-Peak Values. NOTE 4 – The worst emission is detected at 1.158 MHz with corrected signal level of 42.27dB(μV) (limit is 48.00 dB(μV)), when the VB of the EUT is connected to LISN.						

TEST ENGINEER: 
(LORENZO CHEN)

EUT : SELF-BALLASTED FLUORESCENT LAMP Temperature : 24.8°C

Model No. : DSG/G0-111 Humidity : 53%

Test Mode : ON Date of Test : Sep 18, 2002

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μV)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.546	0.05	40.67	40.72	48.00	7.28
	0.601	0.04	37.62	37.66	48.00	10.34
	0.668	0.03	36.92	36.95	48.00	11.05
	0.774	0.04	38.35	38.39	48.00	9.61
	0.870	0.04	35.93	35.97	48.00	12.03
	1.069	0.05	36.29	36.34	48.00	11.66
VB	0.450	0.10	40.55	40.65	48.00	7.35
	0.494	0.09	39.19	39.28	48.00	8.72
	0.562	0.09	38.85	38.94	48.00	9.06
	0.767	0.08	39.38	39.46	48.00	8.54
	0.870	0.08	40.39	40.47	48.00	7.53
	0.966	0.08	39.63	39.71	48.00	8.29
NOTE 1 – Emission Level = Meter Reading + Factor NOTE 2 – Factor = Insertion Loss + Cable Loss NOTE 3 – All reading are Quasi-Peak Values. NOTE 4 – The worst emission is detected at 0.546 MHz with corrected signal level of 40.72dB(μV) (limit is 48.00 dB(μV)), when the VA of the EUT is connected to LISN.						

TEST ENGINEER: 
(LORENZO CHEN)

EUT : SELF-BALLASTED FLUORESCENT LAMP Temperature : 24.8°C

Model No. : DSG/G0-131 Humidity : 53%

Test Mode : ON Date of Test : Sep 18, 2002

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μV)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.450	0.07	40.85	40.92	48.00	7.08
	0.859	0.04	39.33	39.37	48.00	8.63
	0.958	0.05	40.76	40.81	48.00	7.19
	1.060	0.05	42.77	42.82	48.00	5.18
	1.148	0.05	44.48	44.53	48.00	3.47
	1.212	0.05	41.69	41.74	48.00	6.26
VB	0.452	0.10	39.33	39.43	48.00	8.57
	0.831	0.08	40.27	40.35	48.00	7.65
	0.927	0.08	40.13	40.21	48.00	7.79
	1.029	0.08	40.71	40.79	48.00	7.21
	1.115	0.08	42.82	42.90	48.00	5.10
	1.192	0.09	40.76	40.85	48.00	7.15
NOTE 1 – Emission Level = Meter Reading + Factor NOTE 2 – Factor = Insertion Loss + Cable Loss NOTE 3 – All reading are Quasi-Peak Values. NOTE 4 – The worst emission is detected at 1.148 MHz with corrected signal level of 44.53dB(μV) (limit is 48.00 dB(μV)), when the VA of the EUT is connected to LISN.						

TEST ENGINEER: 
(LORENZO CHEN)


3 FIELD STRENGTH TEST

3.1 Test Equipment

The following test equipment are used during the field strength test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Loop Antenna	Laplace	RF300	5001	Apr 22, 2002	1/2 Year
2.	Test Receiver	Rohde & Schwarz	ESHS10	844077/007	Jun 04, 2002	1 Year

3.2 Block Diagram of Test Setup

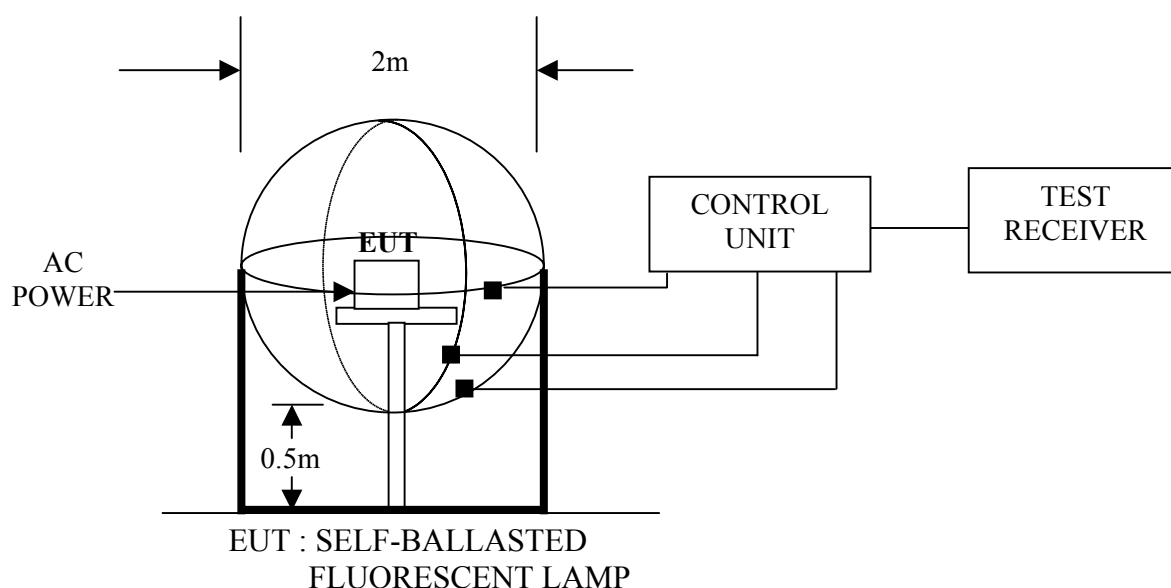

3.3 Test Configuration

The configuration of the EUT is same as those used in conducted emission test. Refer to Sec. 2.4, except the test setup replaced by Sec. 3.2.

3.4 Operating Condition of EUT

Same as conducted emission test which is listed in Sec. 2.5, except the test setup replaced by Sec. 3.2.

3.5 Test Procedure

The EUT was placed on a wooden table, which is in the center of the loop antenna. The loop antenna is 0.5 meters above the ground. Each side had one sensor. The three sensors were through the control unit to connect the Test receiver, which receiving the emission and find out the maximum emission of each side of the loop antenna.

The IF bandwidth of R&S Test Receiver ESHS10 was set at 200 Hz from 9kHz to 150kHz and 10kHz from 150 kHz to 30 MHz.

The IF frequency range from 9 kHz to 30 MHz was checked.

The test mode (ON) was done on field strength test and all the test results are listed in Sec. 3.6.

3.6 Test Result

<PASS>


Refer to the following pages.



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 219 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 11:27:10

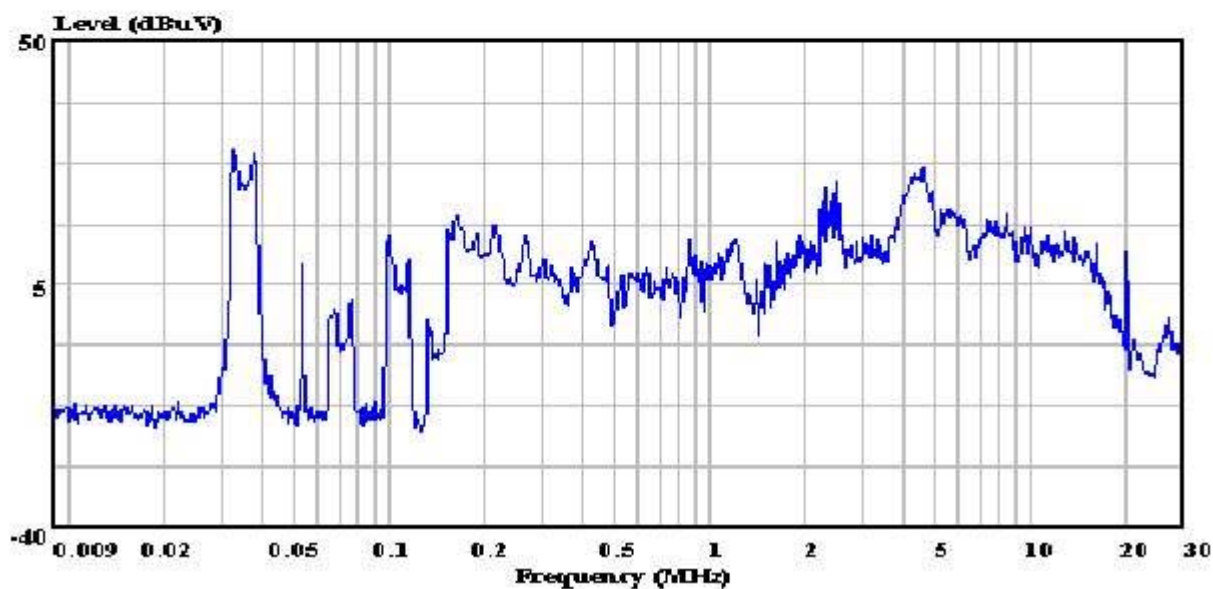


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DEX/A3-91
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : A
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 222 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 11:28:50

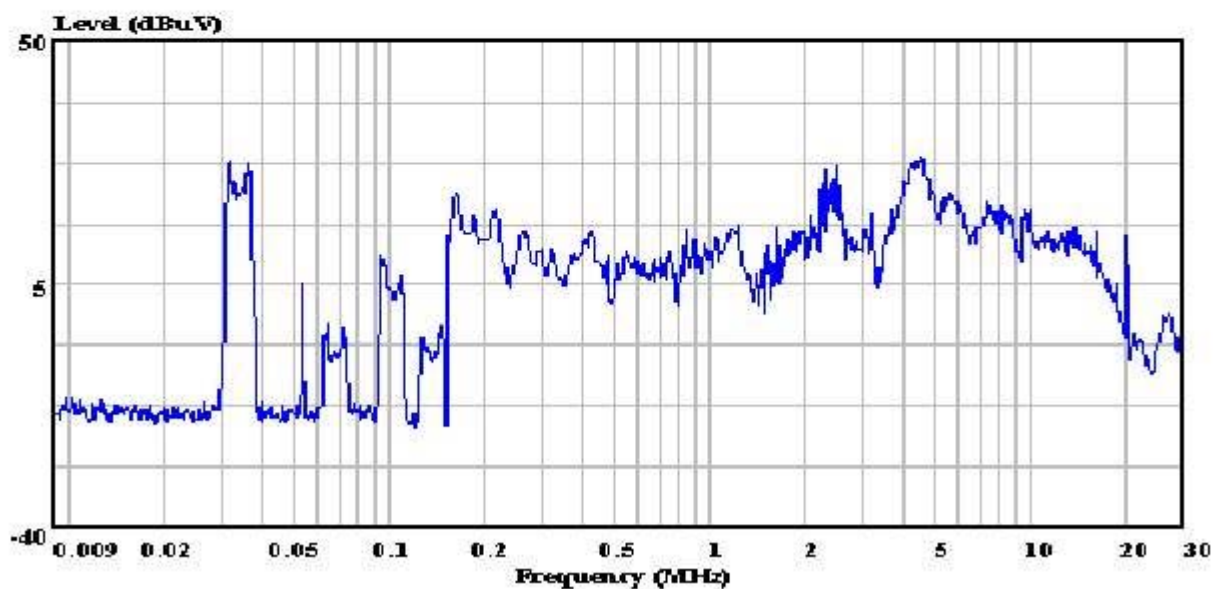


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DEX/A3-91
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : B
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 225 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 11:31:02

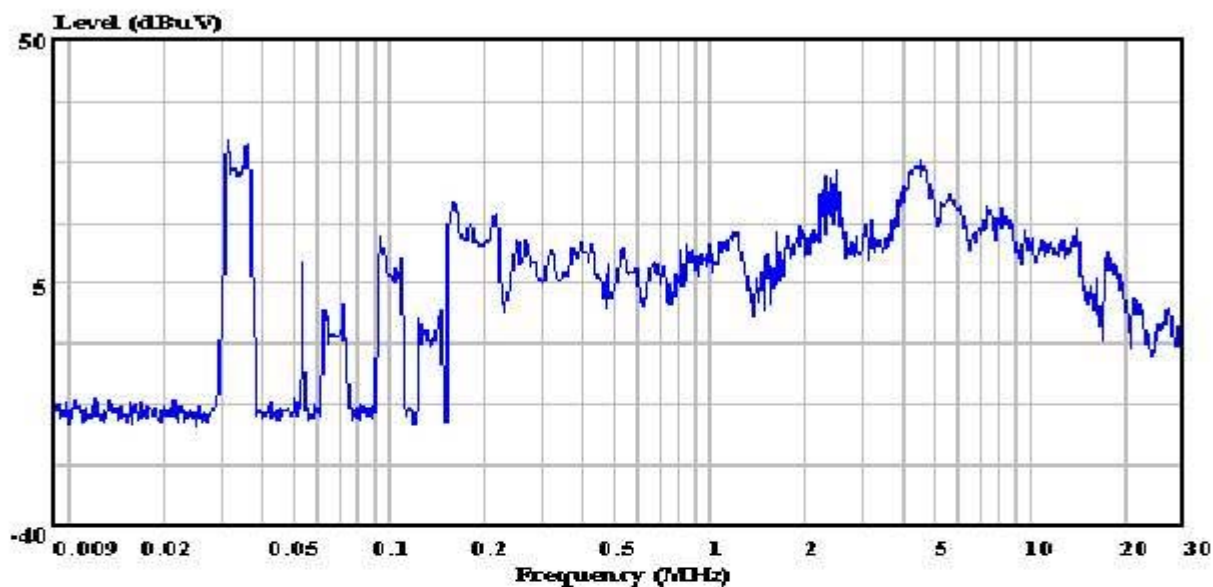


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DEX/A3-91
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : C
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 216 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 11:24:23

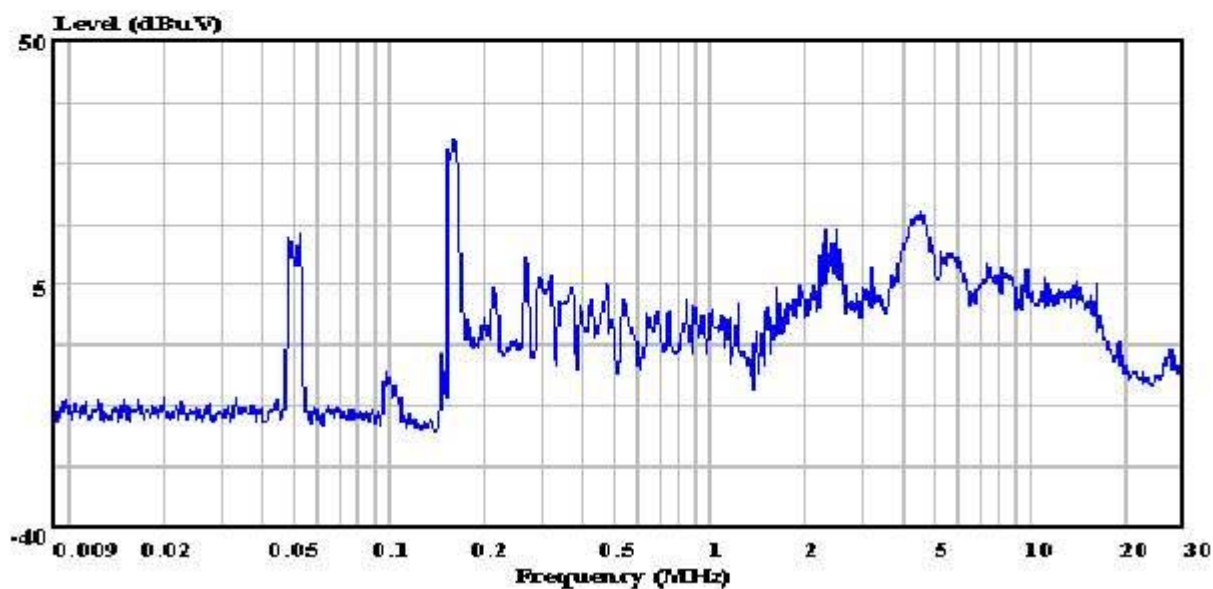


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DEX/A3-111
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : A
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 213 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 11:22:15

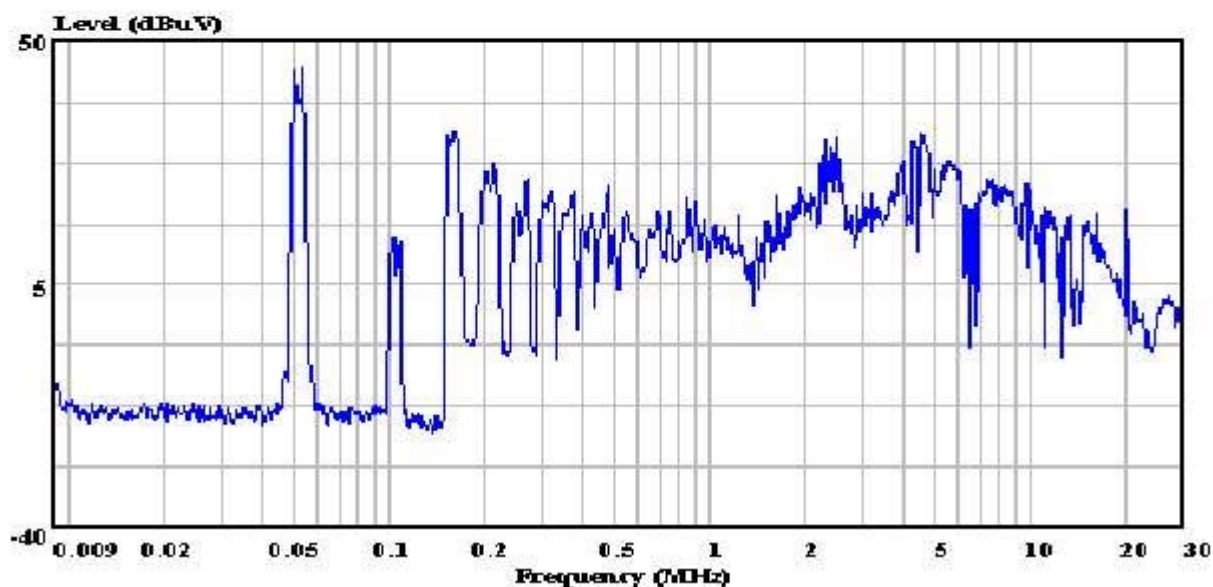


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DEX/A3-111
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : B
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 210 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 11:20:21

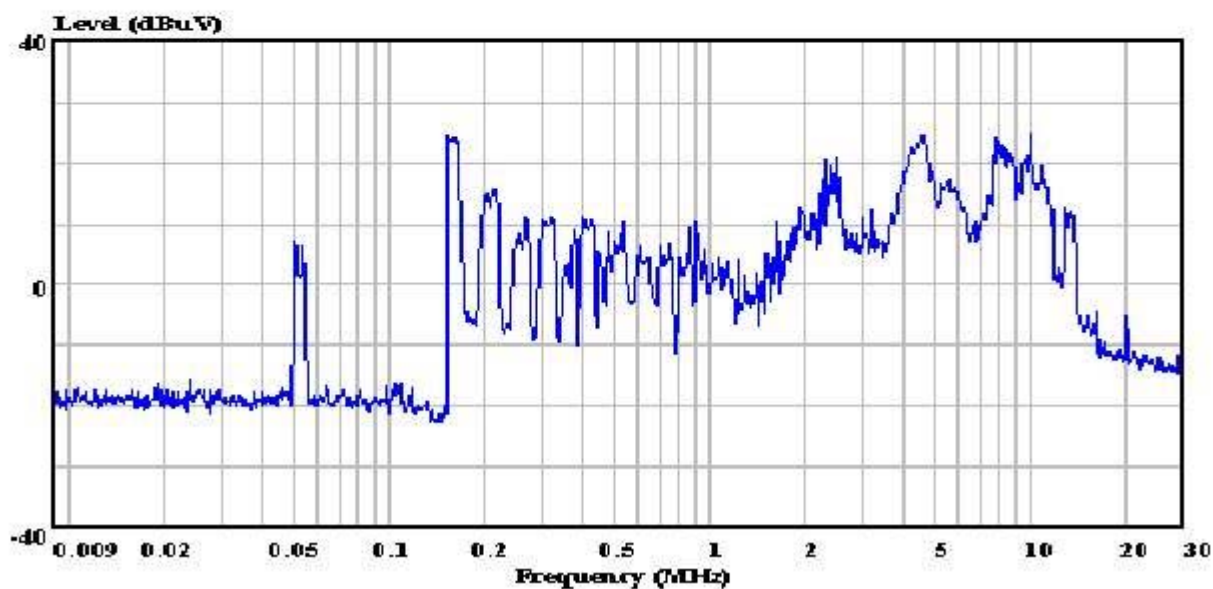


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DEX/A3-111
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : C
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 201 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 11:12:40

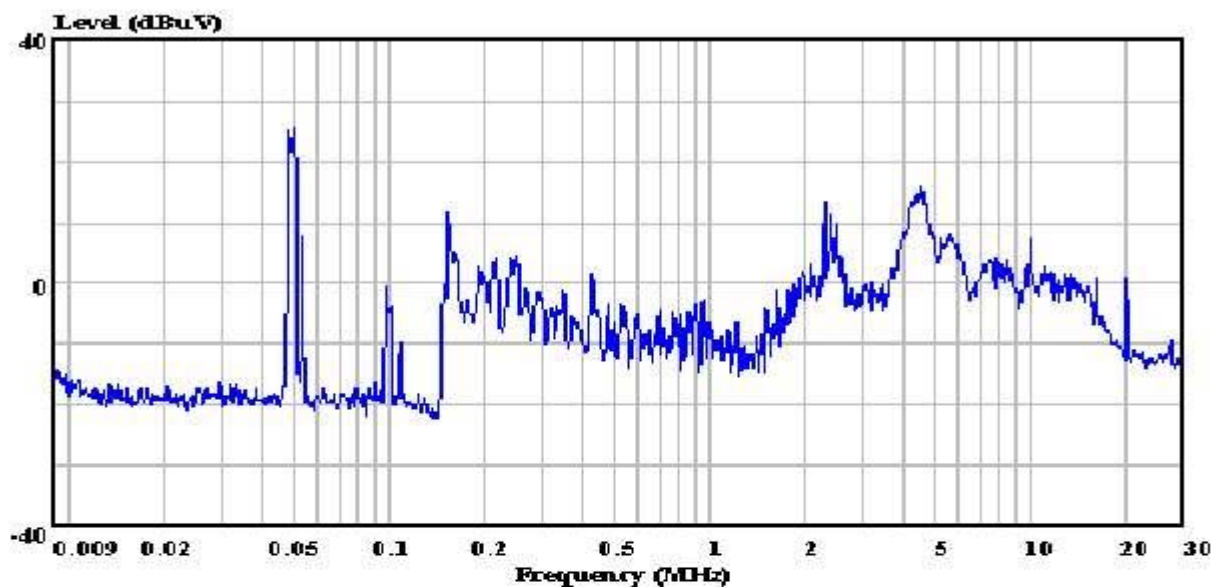


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DEX/A3-141
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : A
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 204 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 11:14:30

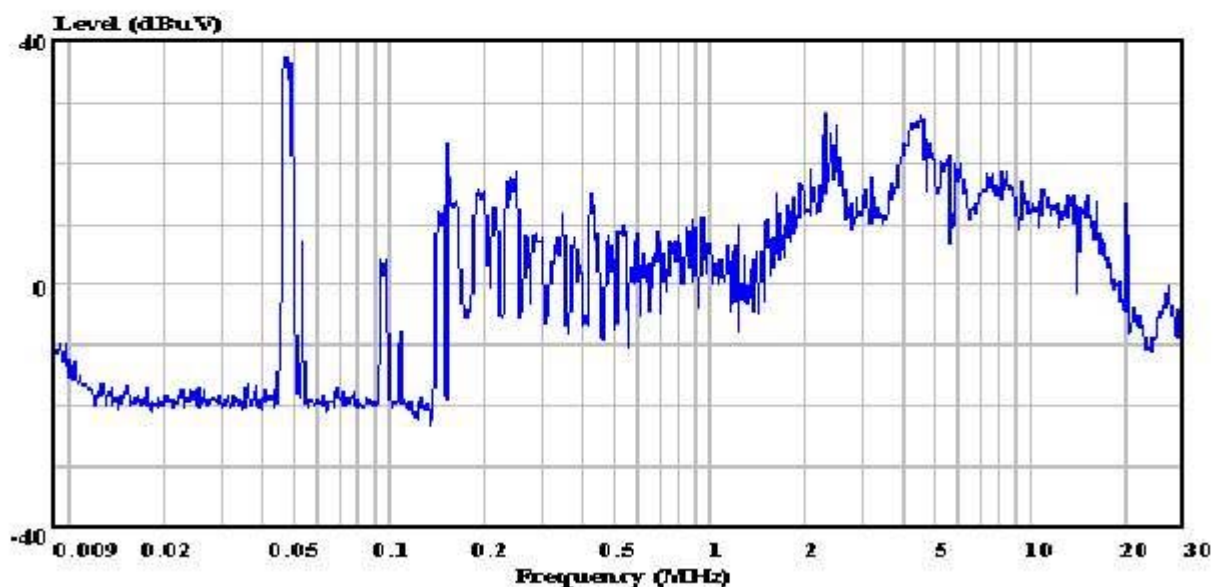


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DEX/A3-141
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : B
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 207 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 11:16:10

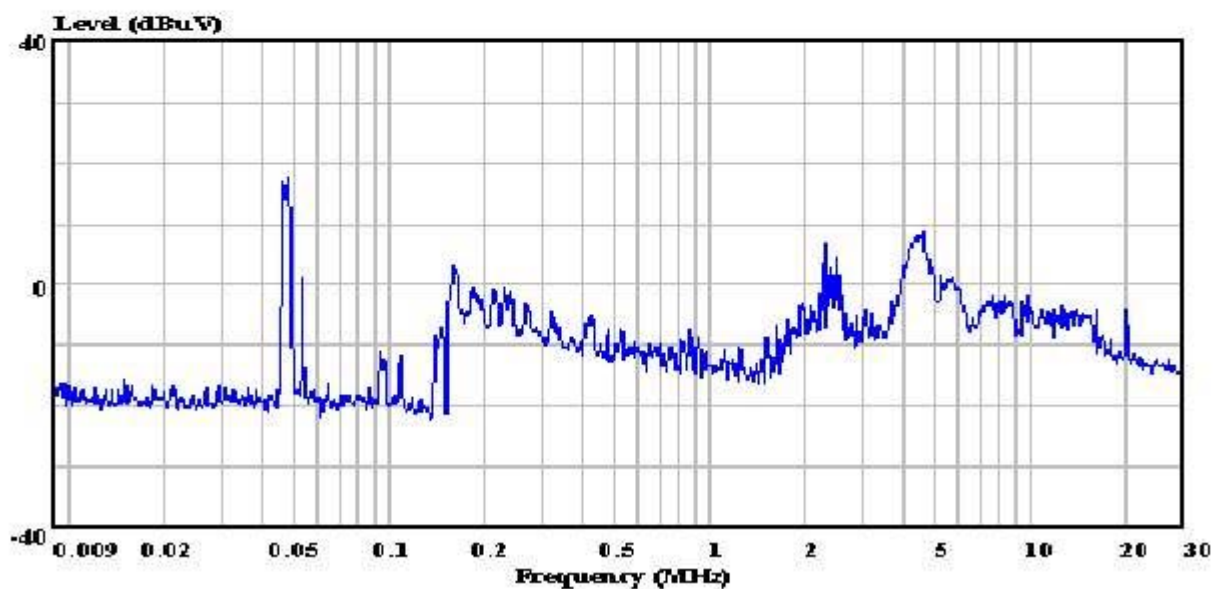


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DEX/A3-141
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : C
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 198 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 11:09:51

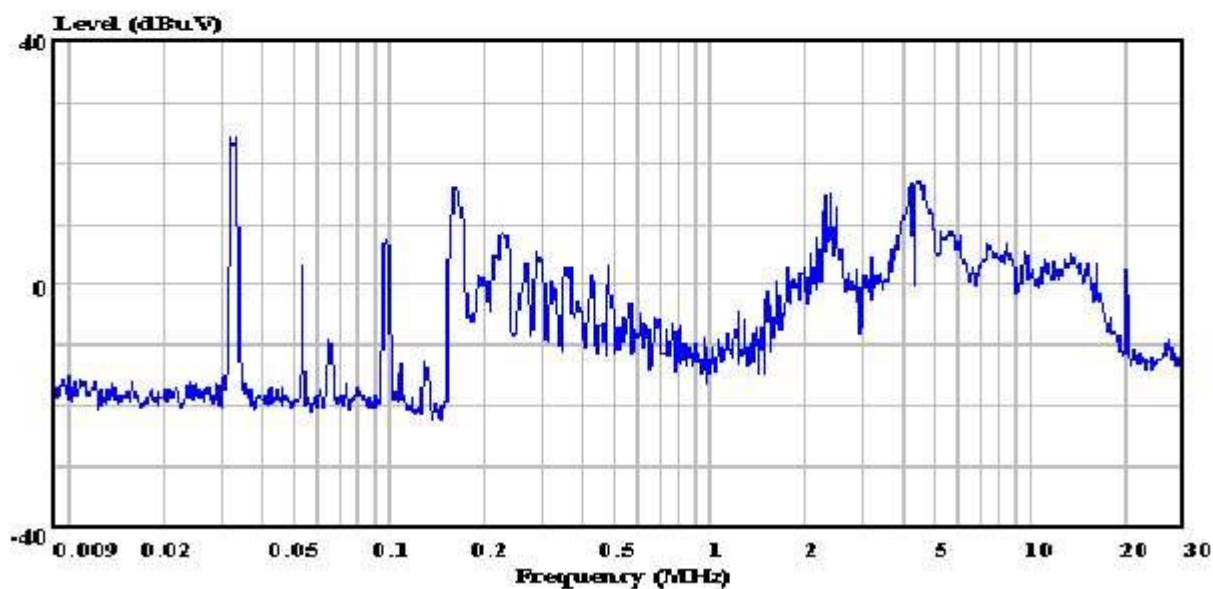


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DEX/A3-171
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : A
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 195 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 11:07:36

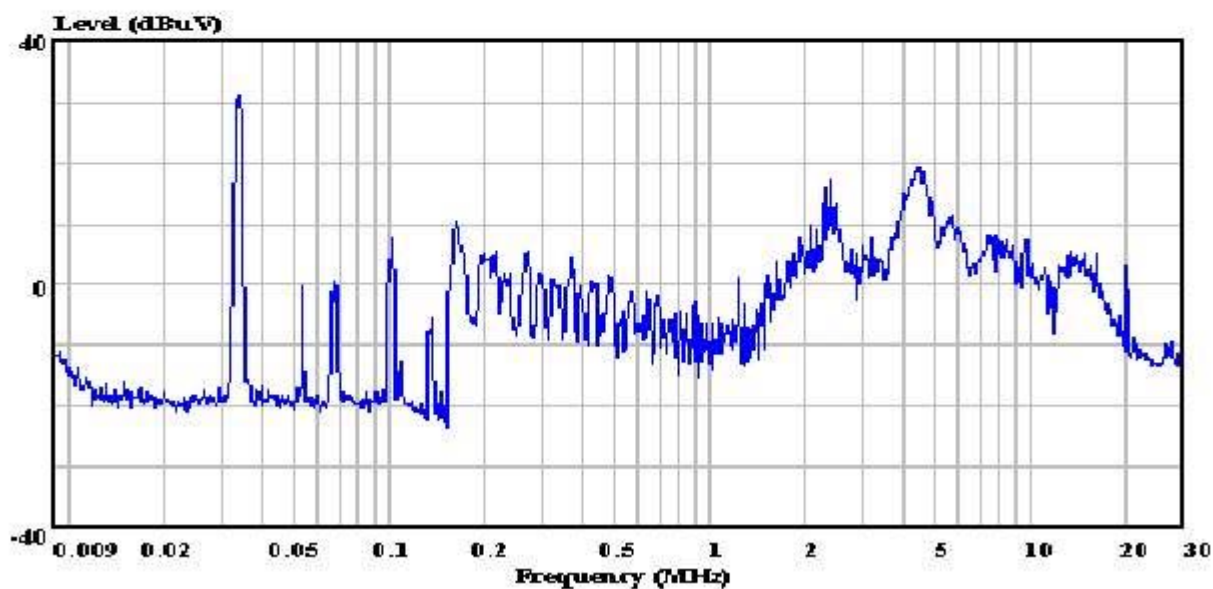


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DEX/A3-171
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : B
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 192 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 11:05:08

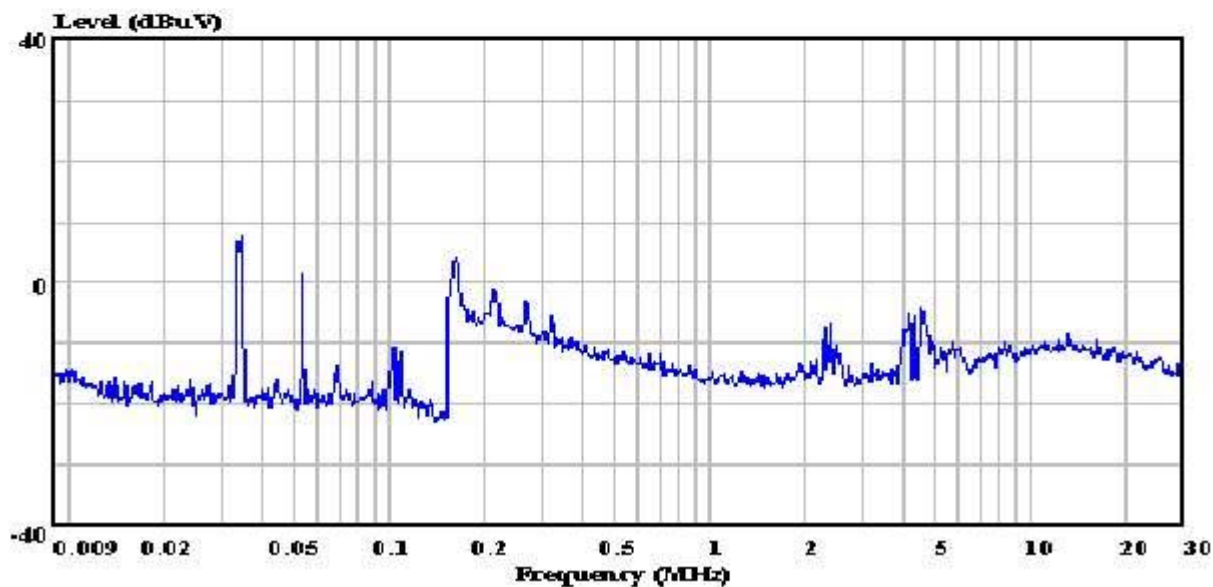


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DEX/A3-171
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : C
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 183 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 10:55:52

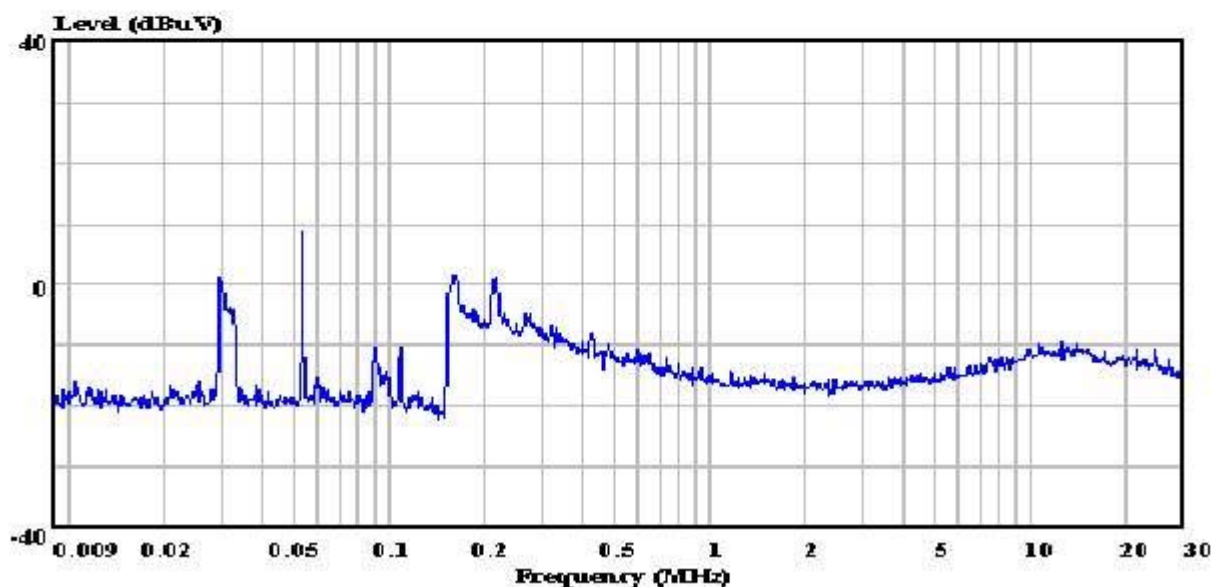


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DSG/G0-71
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : A
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 186 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 10:59:16

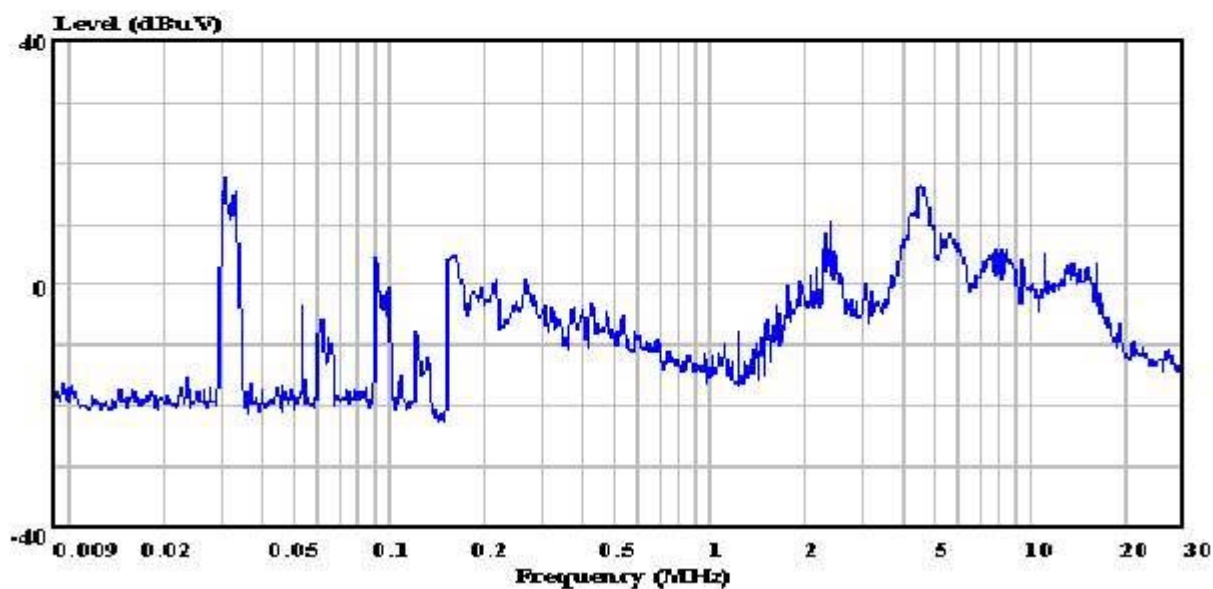


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DSG/G0-71
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : B
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 189 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 11:01:53

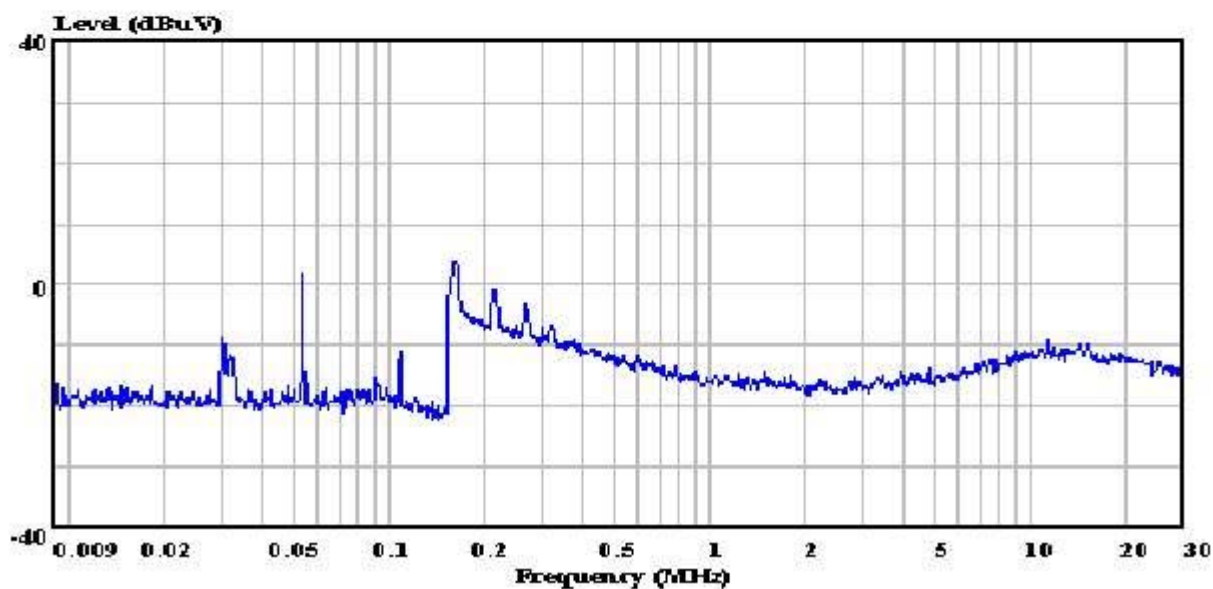


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DSG/G0-71
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : C
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 180 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 10:52:04

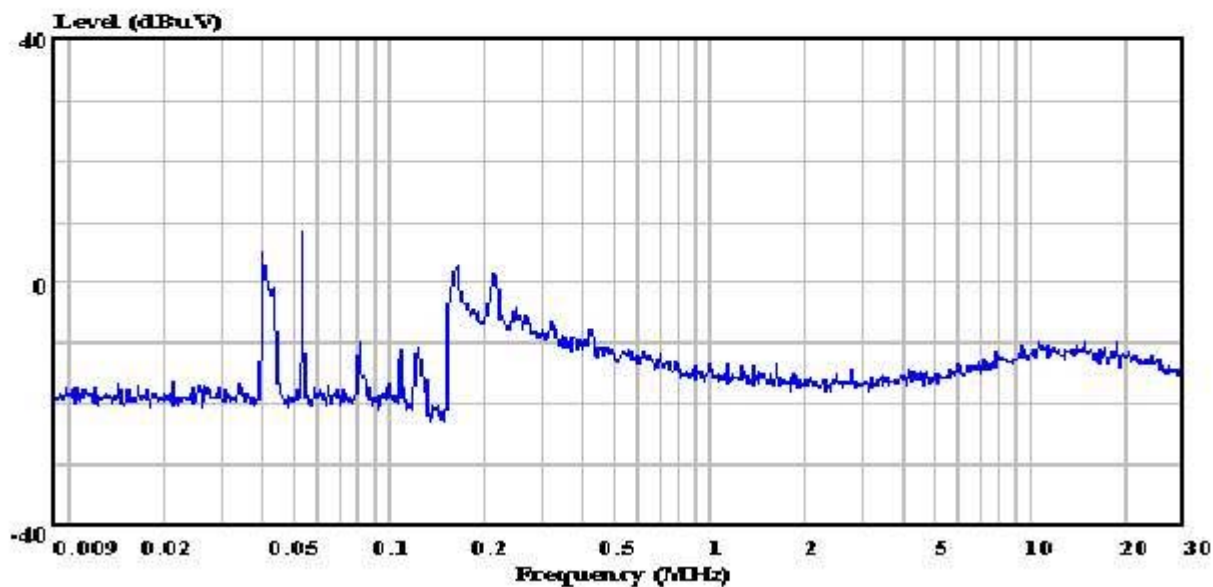


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DSG/G0-91
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : A
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 177 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 10:49:01

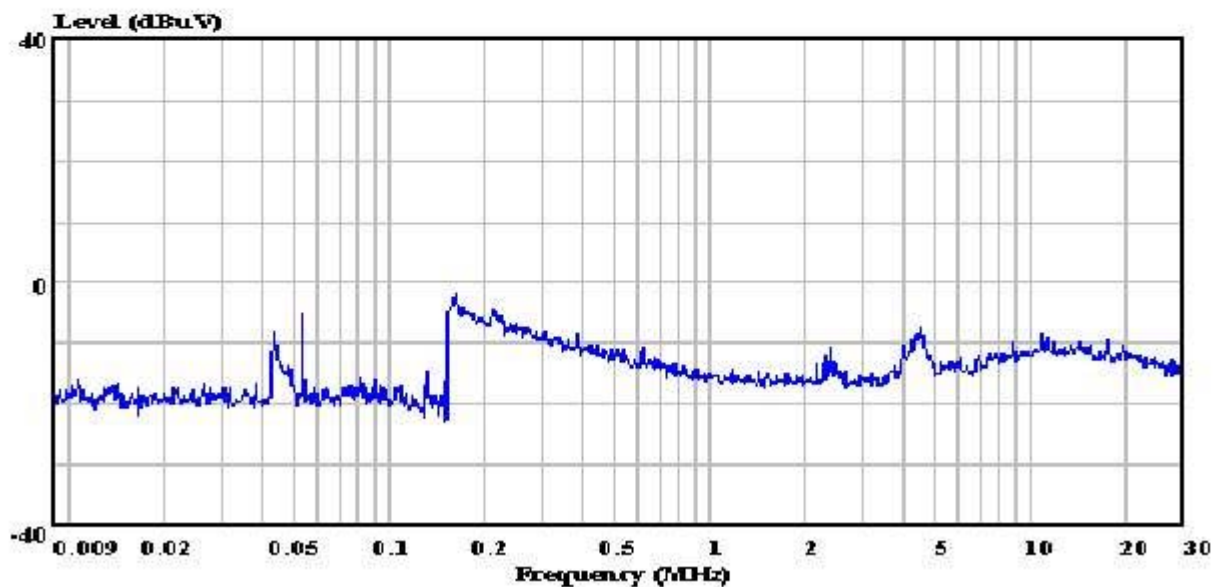


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DSG/G0-91
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : B
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 174 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 10:46:23

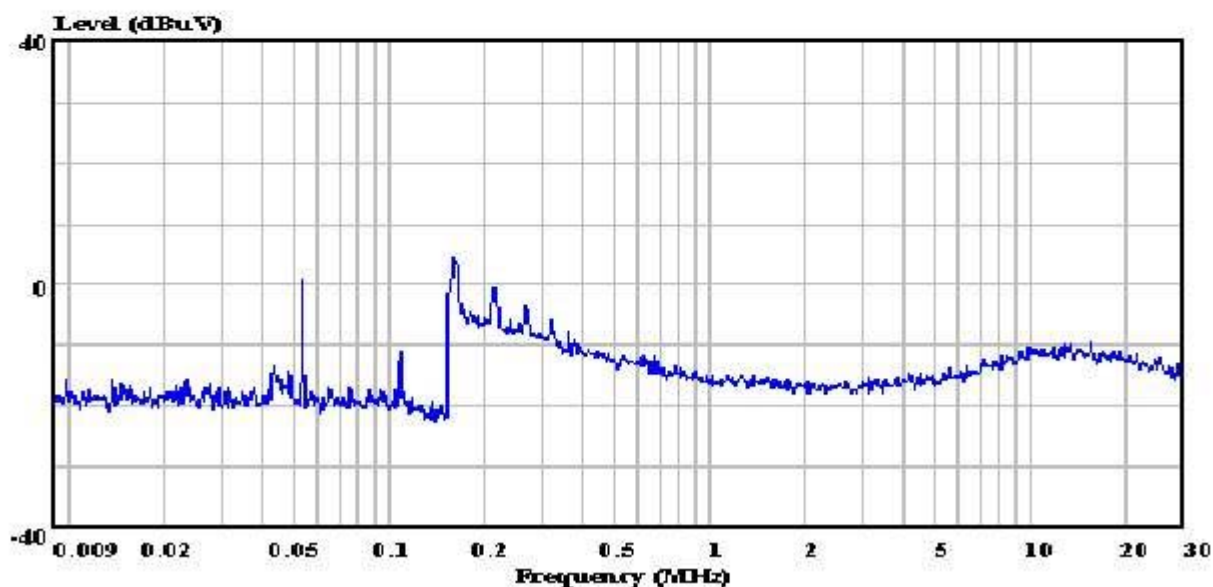


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DSG/GO-91
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : C
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 165 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 10:31:44

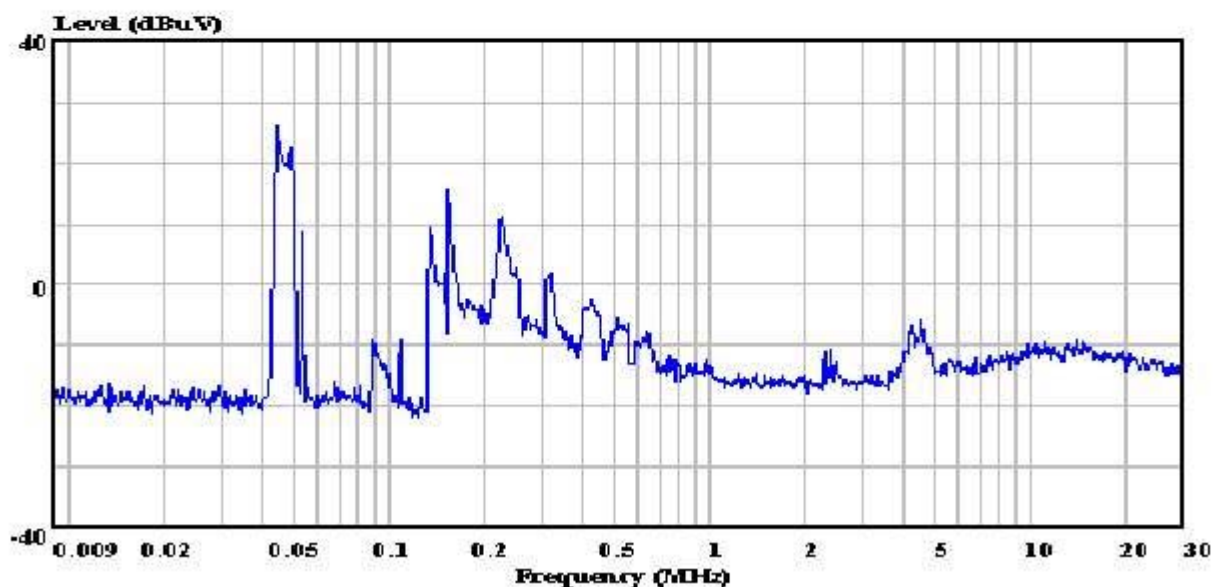


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DSG/G0-111
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : A
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 168 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 10:34:09

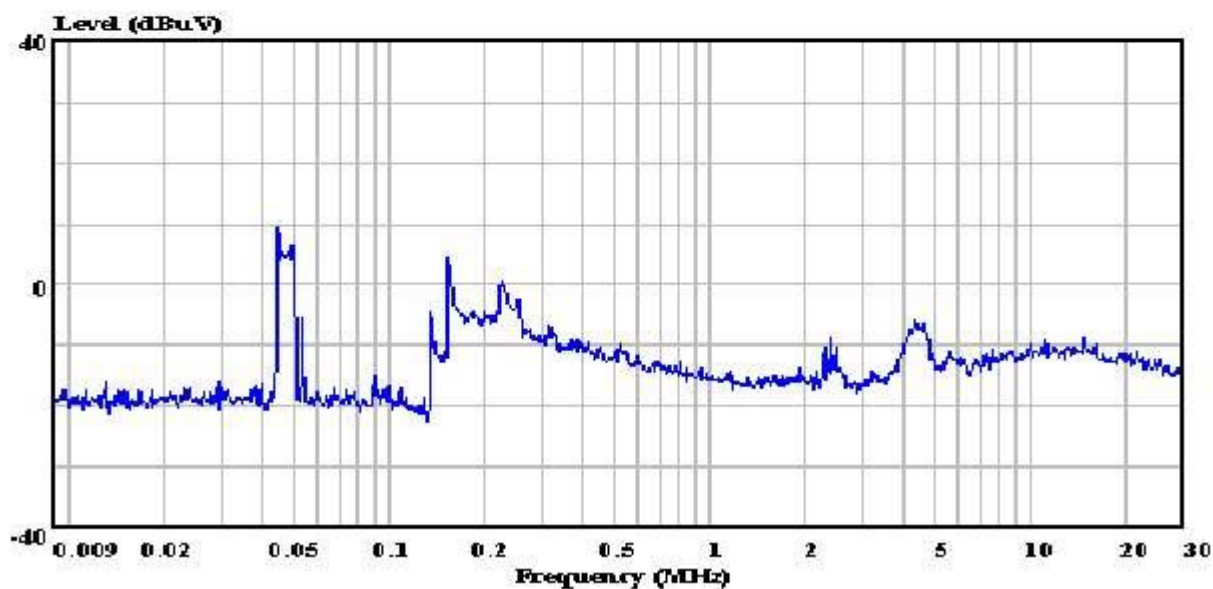


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DSG/G0-111
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : B
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 171 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 10:36:19

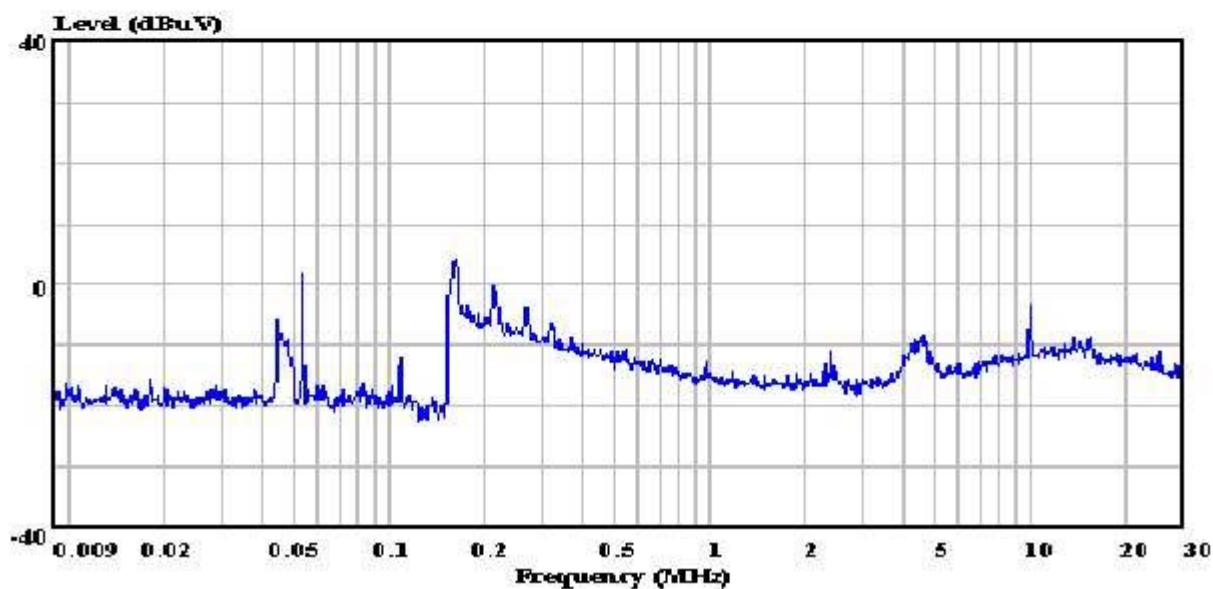


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DSG/G0-111
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : C
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 162 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 10:27:47

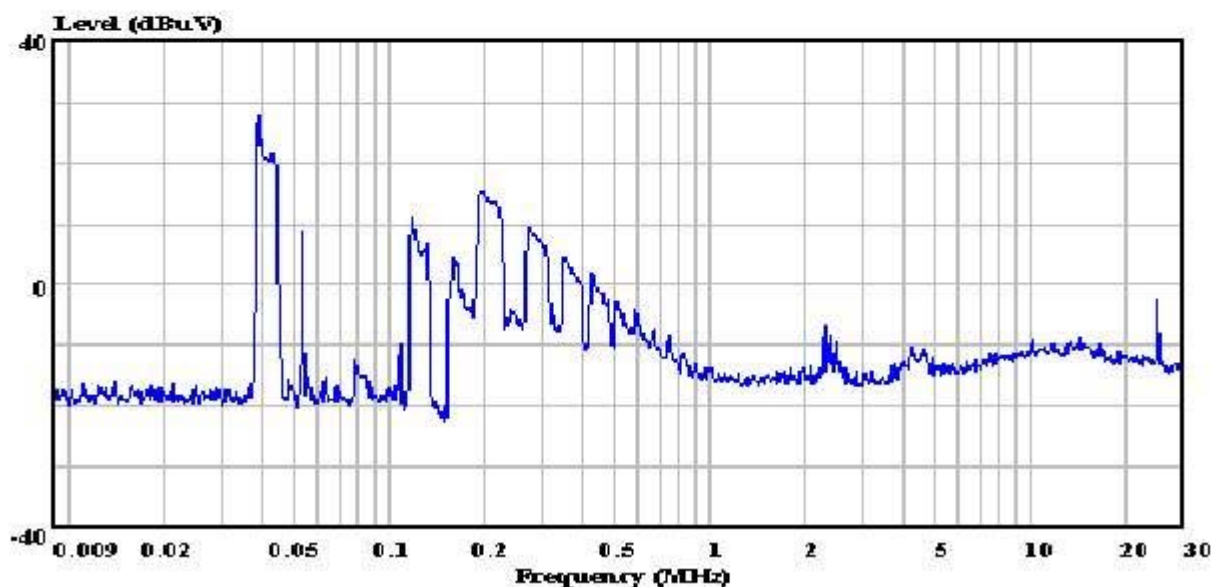


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DSG/GO-131
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : A
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 159 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 10:24:12

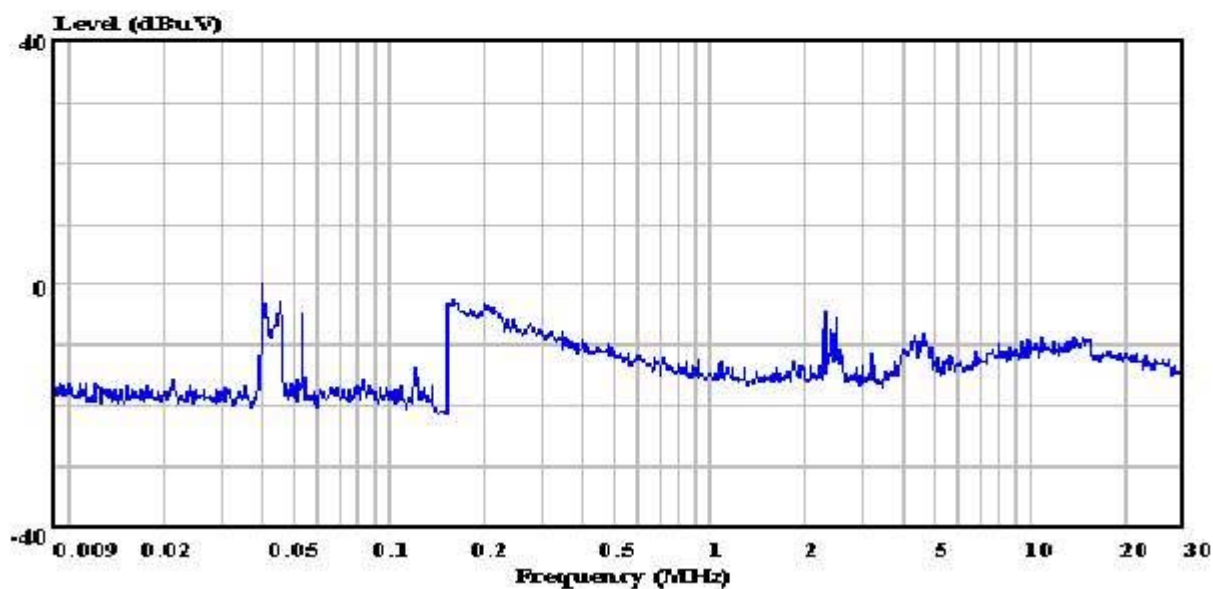


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DSG/GO-131
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : B
S/N :
Test Engineer: *Lorenzo*



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 156 File#: C:\emivm\TEST\A\ANHUA.emi Date: 2002-09-19 Time: 10:20:18

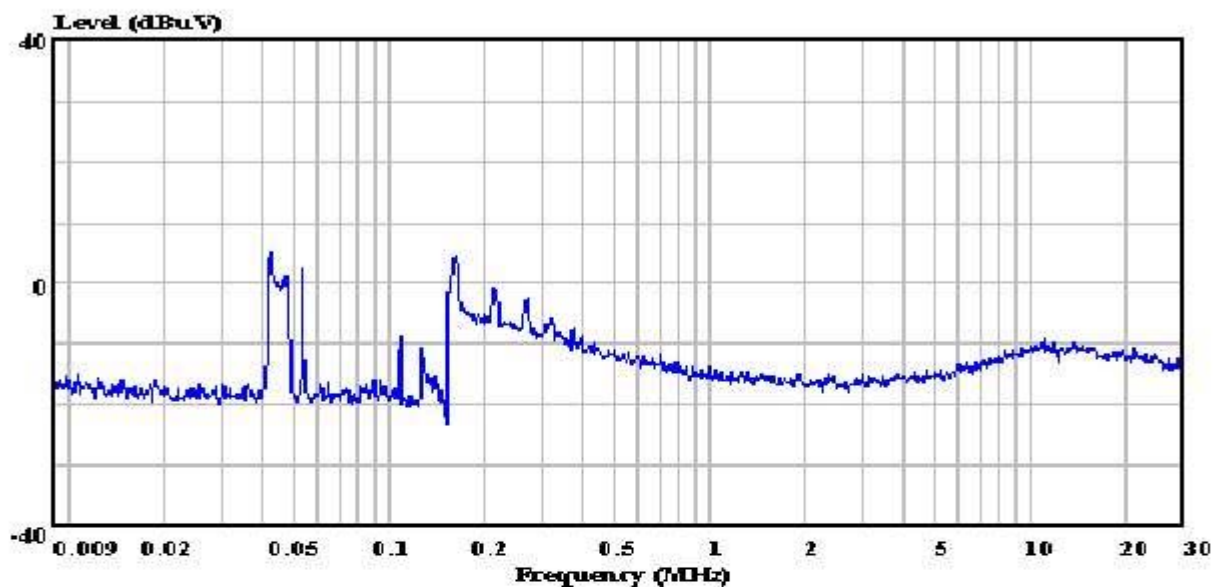

Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000284
Applicant : SHERRYTECH HK LIMITED TAIWAN BRANCH
EUT : Energy Saving Lamp
M/N : DSG/G0-131
Power Supply : 120V/60Hz
Ambient : 24.8'C 53%
Test Mode : ON
Test Line : C
S/N :
Test Engineer: *Lorenzo*