


RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET

Test Method:	Peak Output Power	Thermal Printer with RFID	Job No:	R-4396N
Customer:	Markem Corporation	Test Sample:	Technician:	T. Firkowski
Model No:	CIMJET RFID	Serial No:	Date:	2/23/2005
Test Specification:	FCC Part 15, Subpart C	Paragraph: 15.247(b)		
Operating Mode:	Transmitting a modulated signal			
Notes:	Frequency Tested: 902.41 MHz - no Frequency Hopping			



Ref Lvl 30 dBm
 Marker 1 [T1]
 RBW 500 kHz
 VBW 2 MHz
 SWT 5 ms
 RF Att 30 dB
 Unit dBm

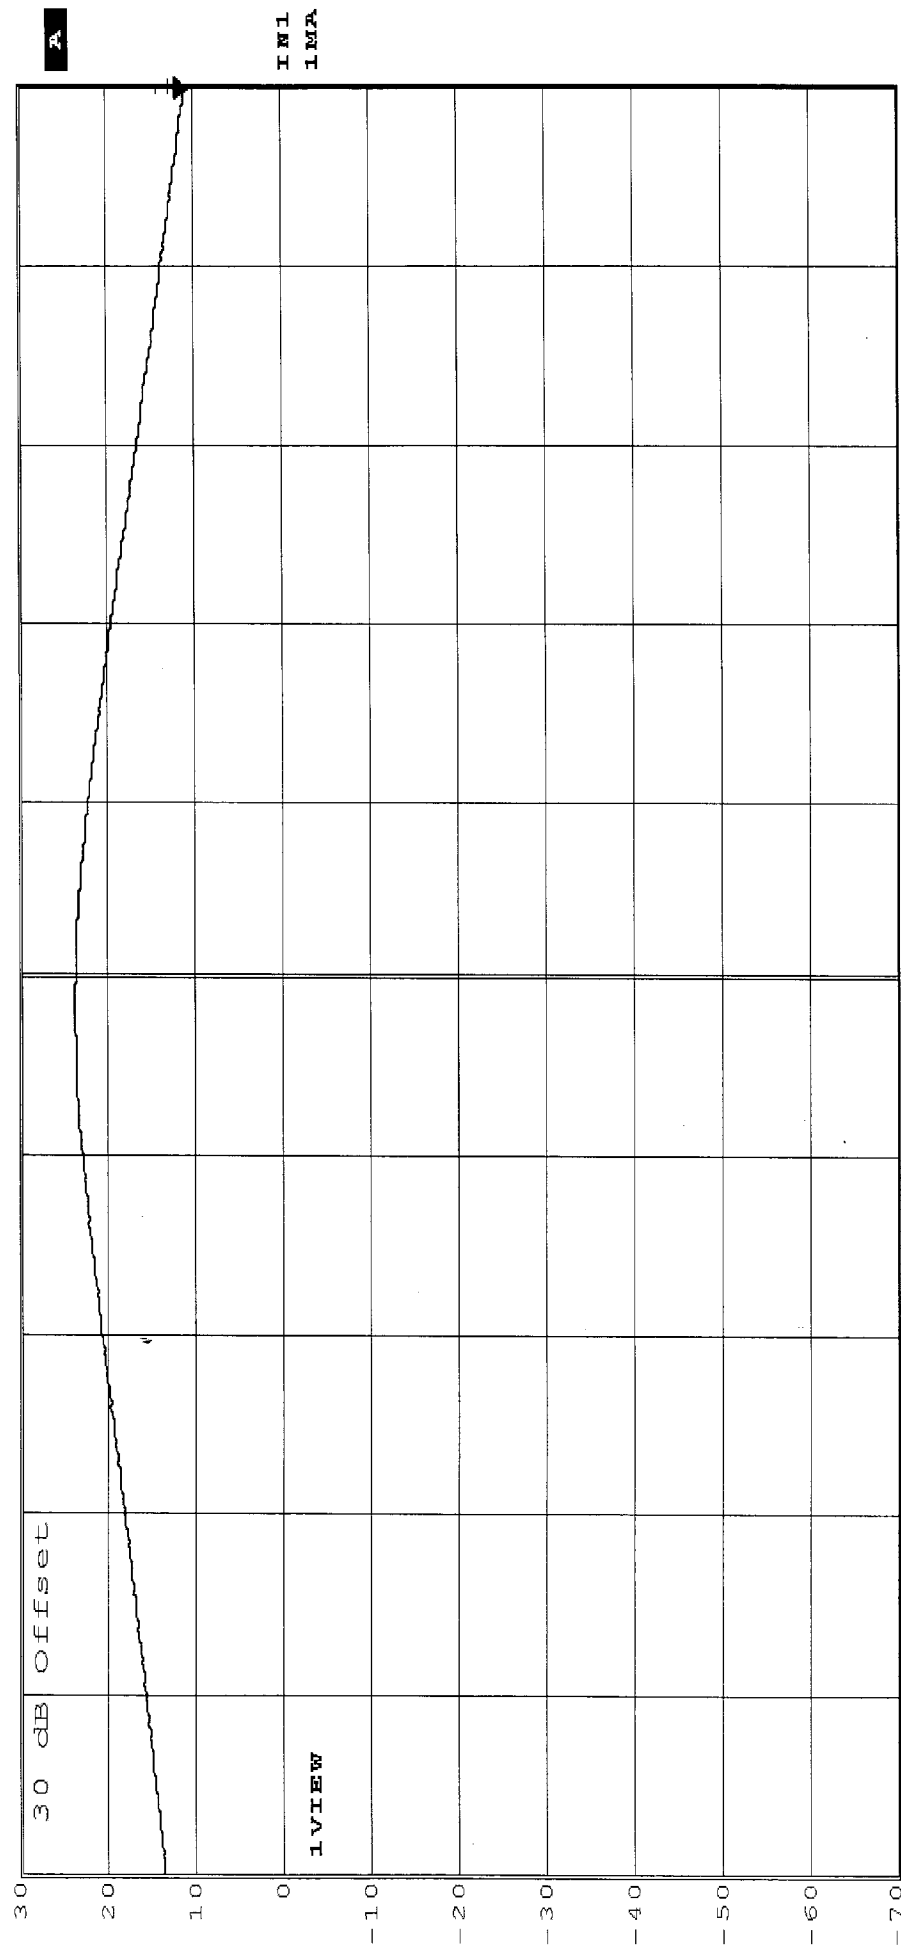

Center 902.41 MHz
 Span 1.5 MHz
 Date: 23.FEB.2005 15:38:30
 Data Sheet 1 of 3 W

R-4396N


RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET

Test Method:	Peak Output Power	Job No:	R-4396N
Customer:	Markem Corporation	Technician:	T. Firkowski
Model No:	CIMJET RFID	Date:	2/23/2005
Test Specification:	FCC Part 15, Subpart C	Paragraph:	15.247(b)
Operating Mode:	Transmitting a modulated signal		
Notes:	Frequency Tested: 914.682 MHz - no Frequency Hopping		



Ref Lvl 30 dBm
 Marker 1 [T1] 23.82 dBm
 RBW 500 kHz
 VBW 2 MHz
 SWT 5 ms
 RF Att 30 dB
 Unit dBm

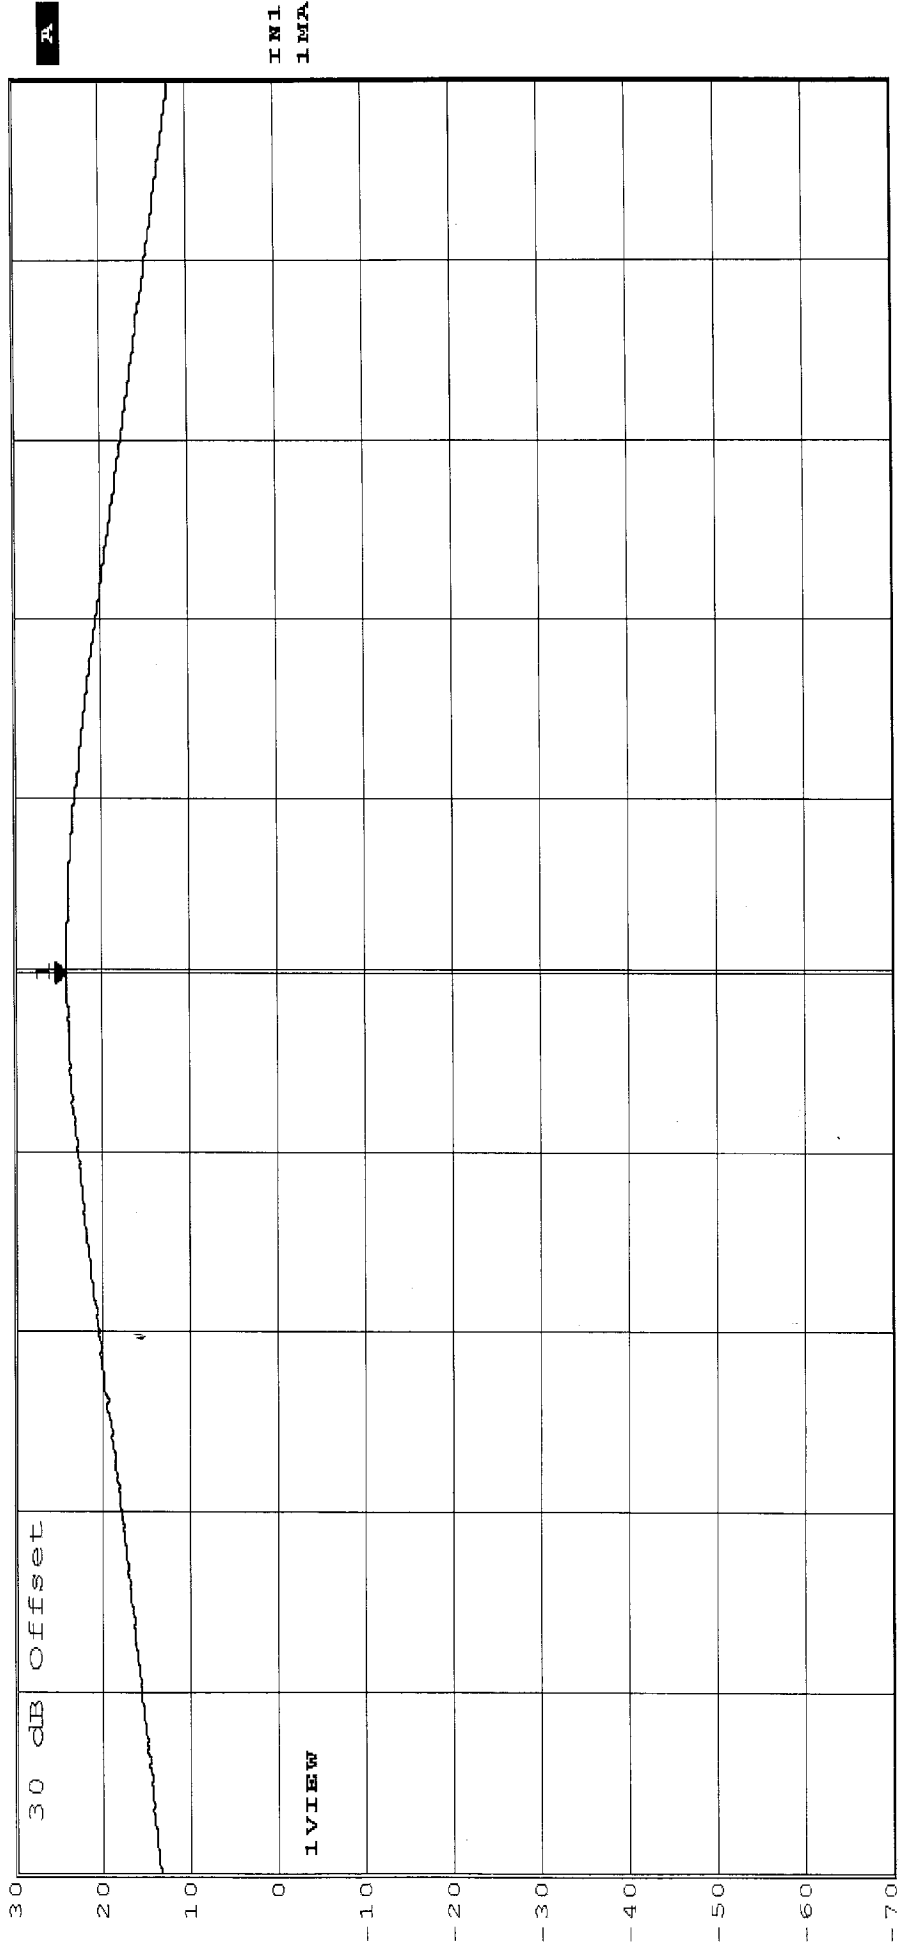

Center 914.6828657 MHz
 Span 1.5 MHz
 Date: 23.FEB.2005 15:41:21
 Data Sheet 2 of 3


RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET

Test Method:	Peak Output Power	Job No:	R-4396N
Customer:	Markem Corporation	Thermal Printer with RFID	
Model No:	CIMJET RFID	Serial No:	04 C3D 3554
Test Specification:	FCC Part 15, Subpart C	Technician:	T. Firkowski
Operating Mode:	Transmitting a modulated signal	Date:	2/23/2005
Notes:	Frequency Tested: 926.53 MHz - no Frequency Hopping		



Ref Lvl 30 dBm
 Marker 1 [T1] 23.81 dBm
 RBW 500 kHz
 VBW 2 MHz
 SWT 5 ms
 RF Att 30 dB
 Unit dBm

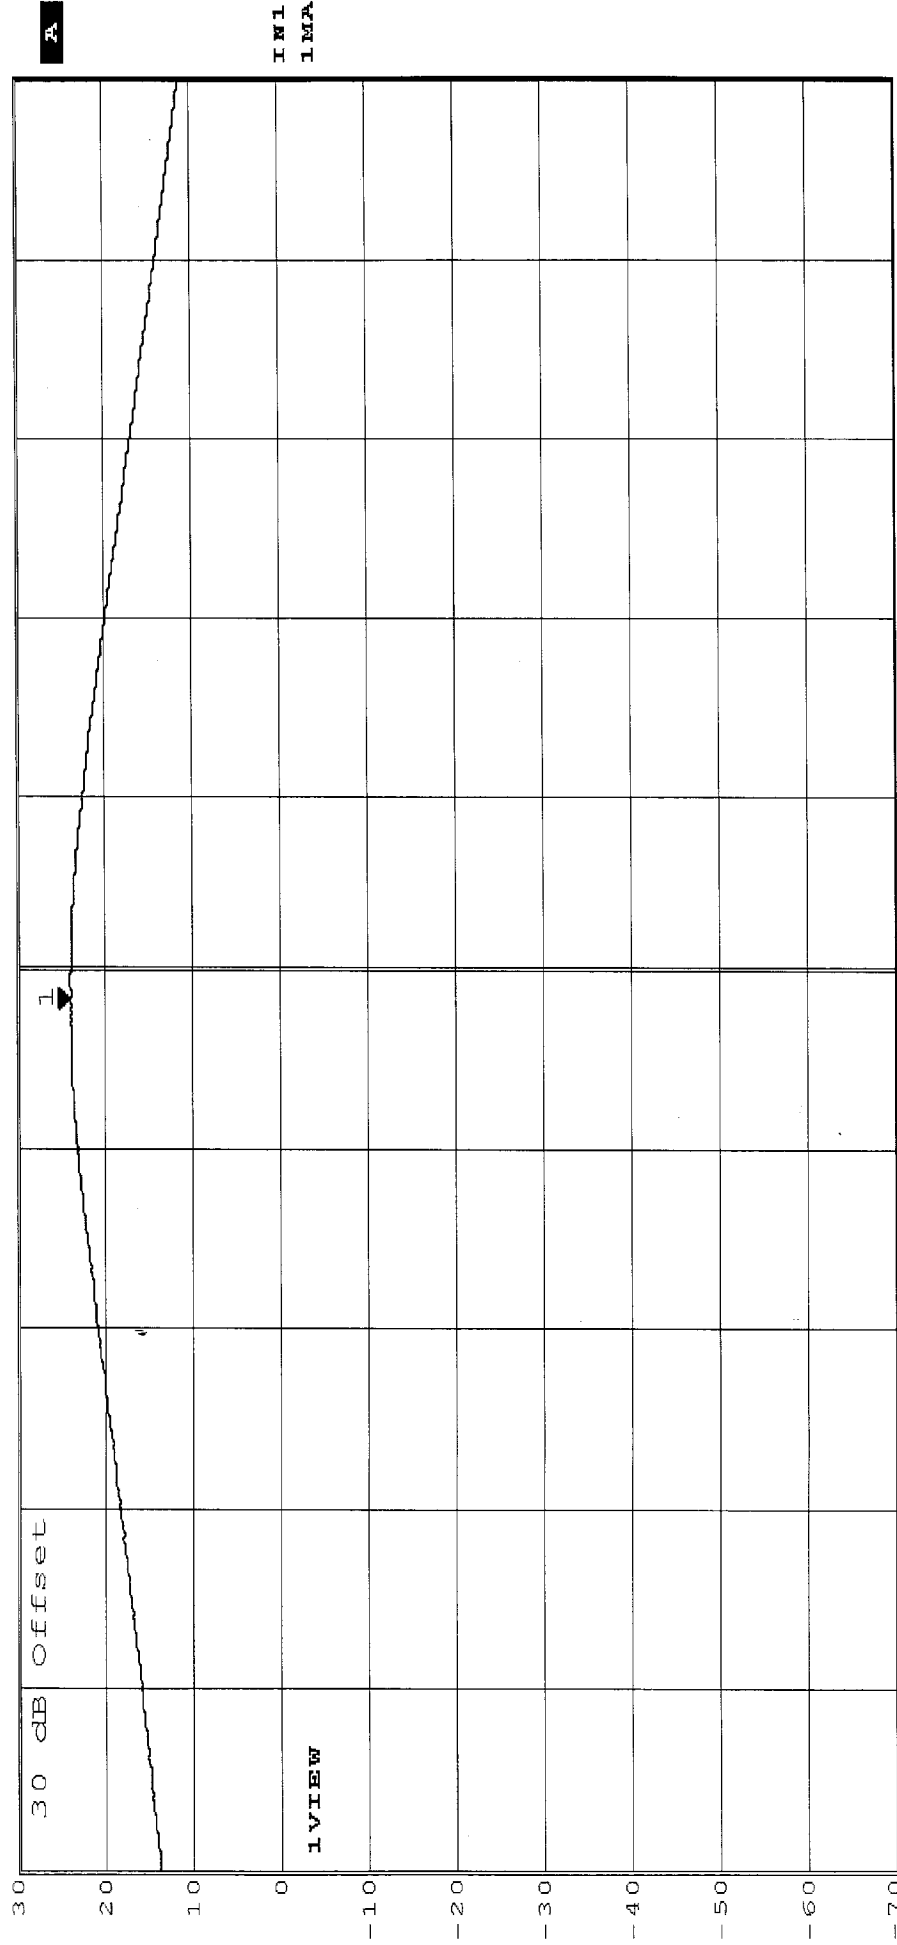

Center 926.53 MHz Span 1.5 MHz

Date: 23.FEB.2005 15:35:18

Data Sheet 3 of 3

R-4396N