


# RETLIF TESTING LABORATORIES

## EMISSIONS DATA SHEET

Test Method:	Peak Output Power		
Customer:	Markem Corporation	Test Sample:	RF ID Tag Reader
Job No:	R-4009N		
Model No:	6100	Serial No:	ENG2
Technician:	T. Firkowski		
Test Specification:	FCC Part 15, Subpart C	Paragraph:	15.247(b)
Date:	9/3/02		
Operating Mode:	Transmitting a modulated signal		
Notes:	Frequency Tested: 902.726 MHz		

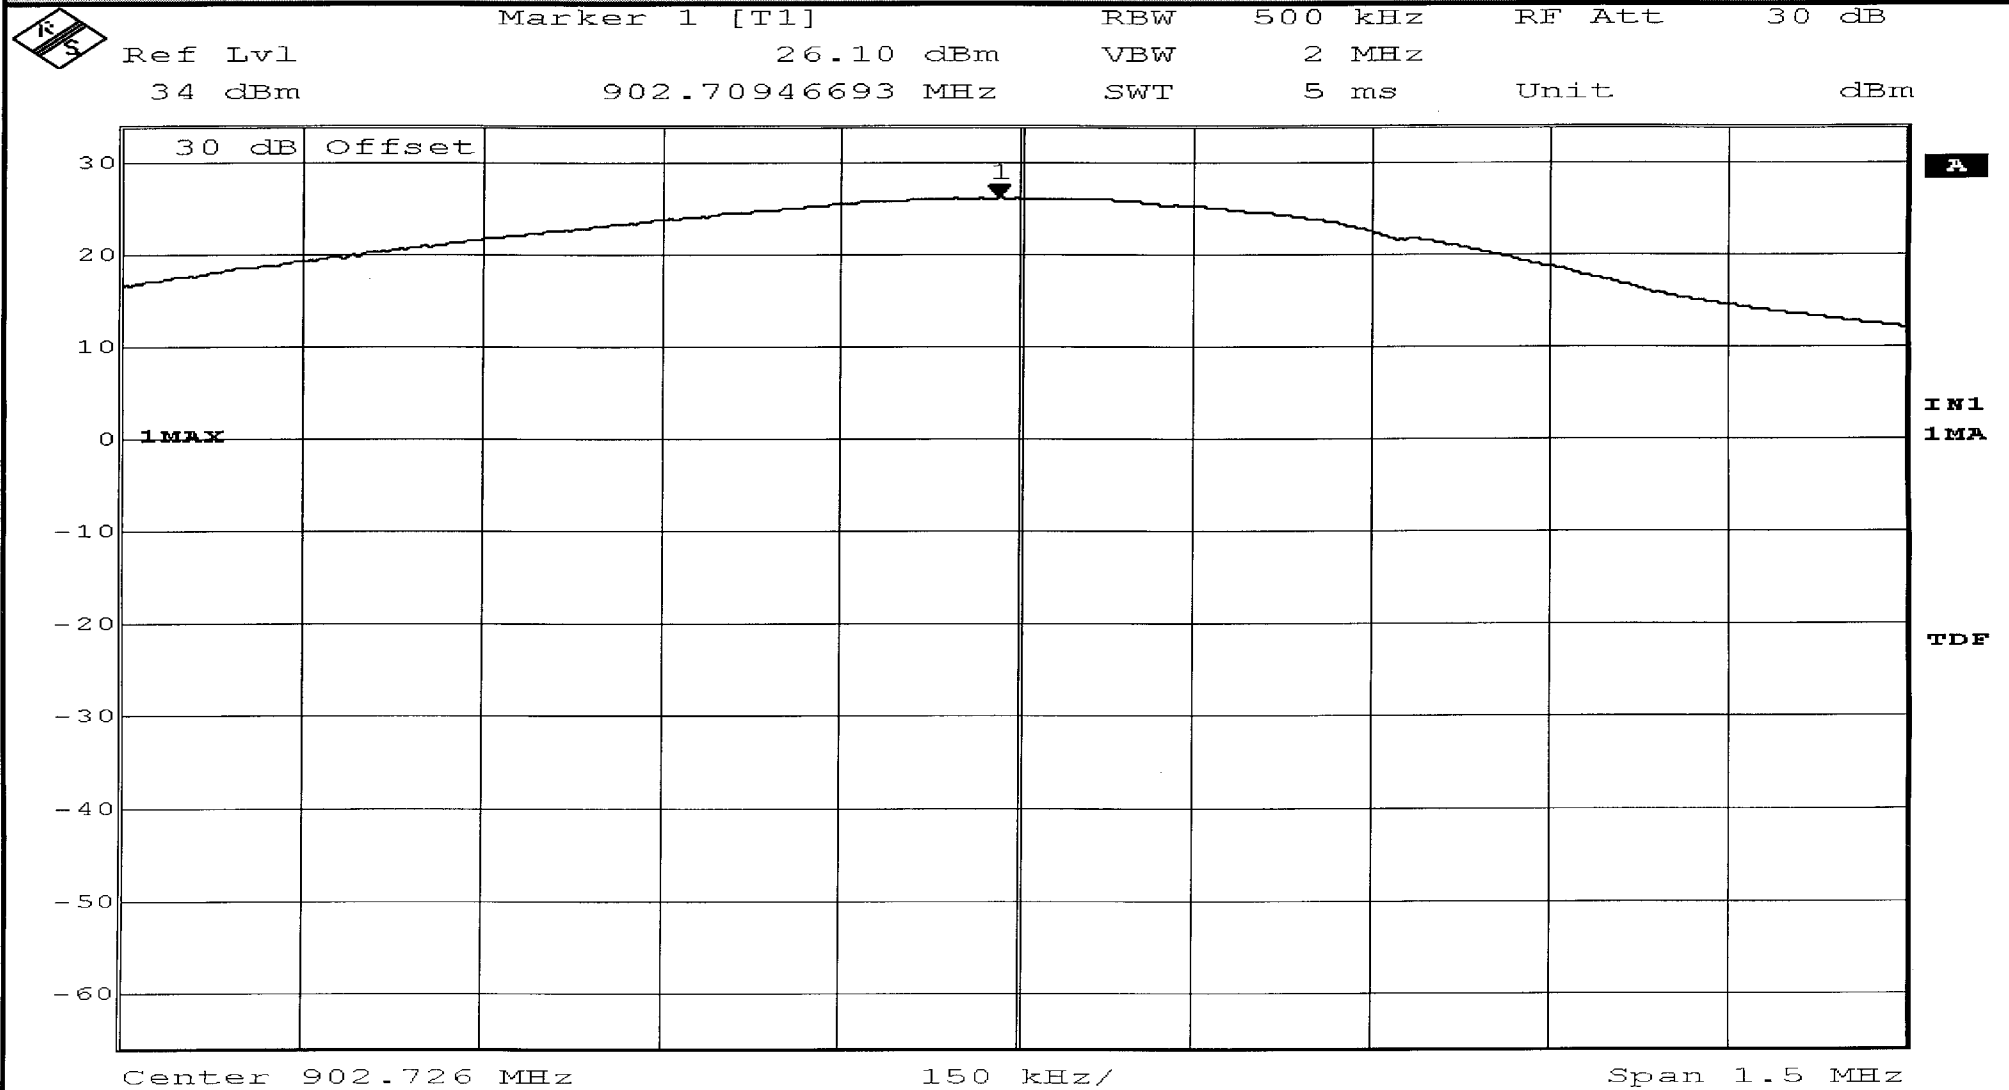


Date: 3.SEP.2002 09:54:03

# RETLIF TESTING LABORATORIES

## EMISSIONS DATA SHEET

Test Method:	Peak Output Power		
Customer:	Markem Corporation	Test Sample:	RF ID Tag Reader
Model No:	6100	Serial No:	ENG2
Test Specification:	FCC Part 15, Subpart C	Paragraph:	15.247(b)
Operating Mode:	Transmitting a modulated signal		Date:
Notes:	Frequency Tested: 914.773 MHz		
Job No:	R-4009N		Technician:
			T. Firkowski

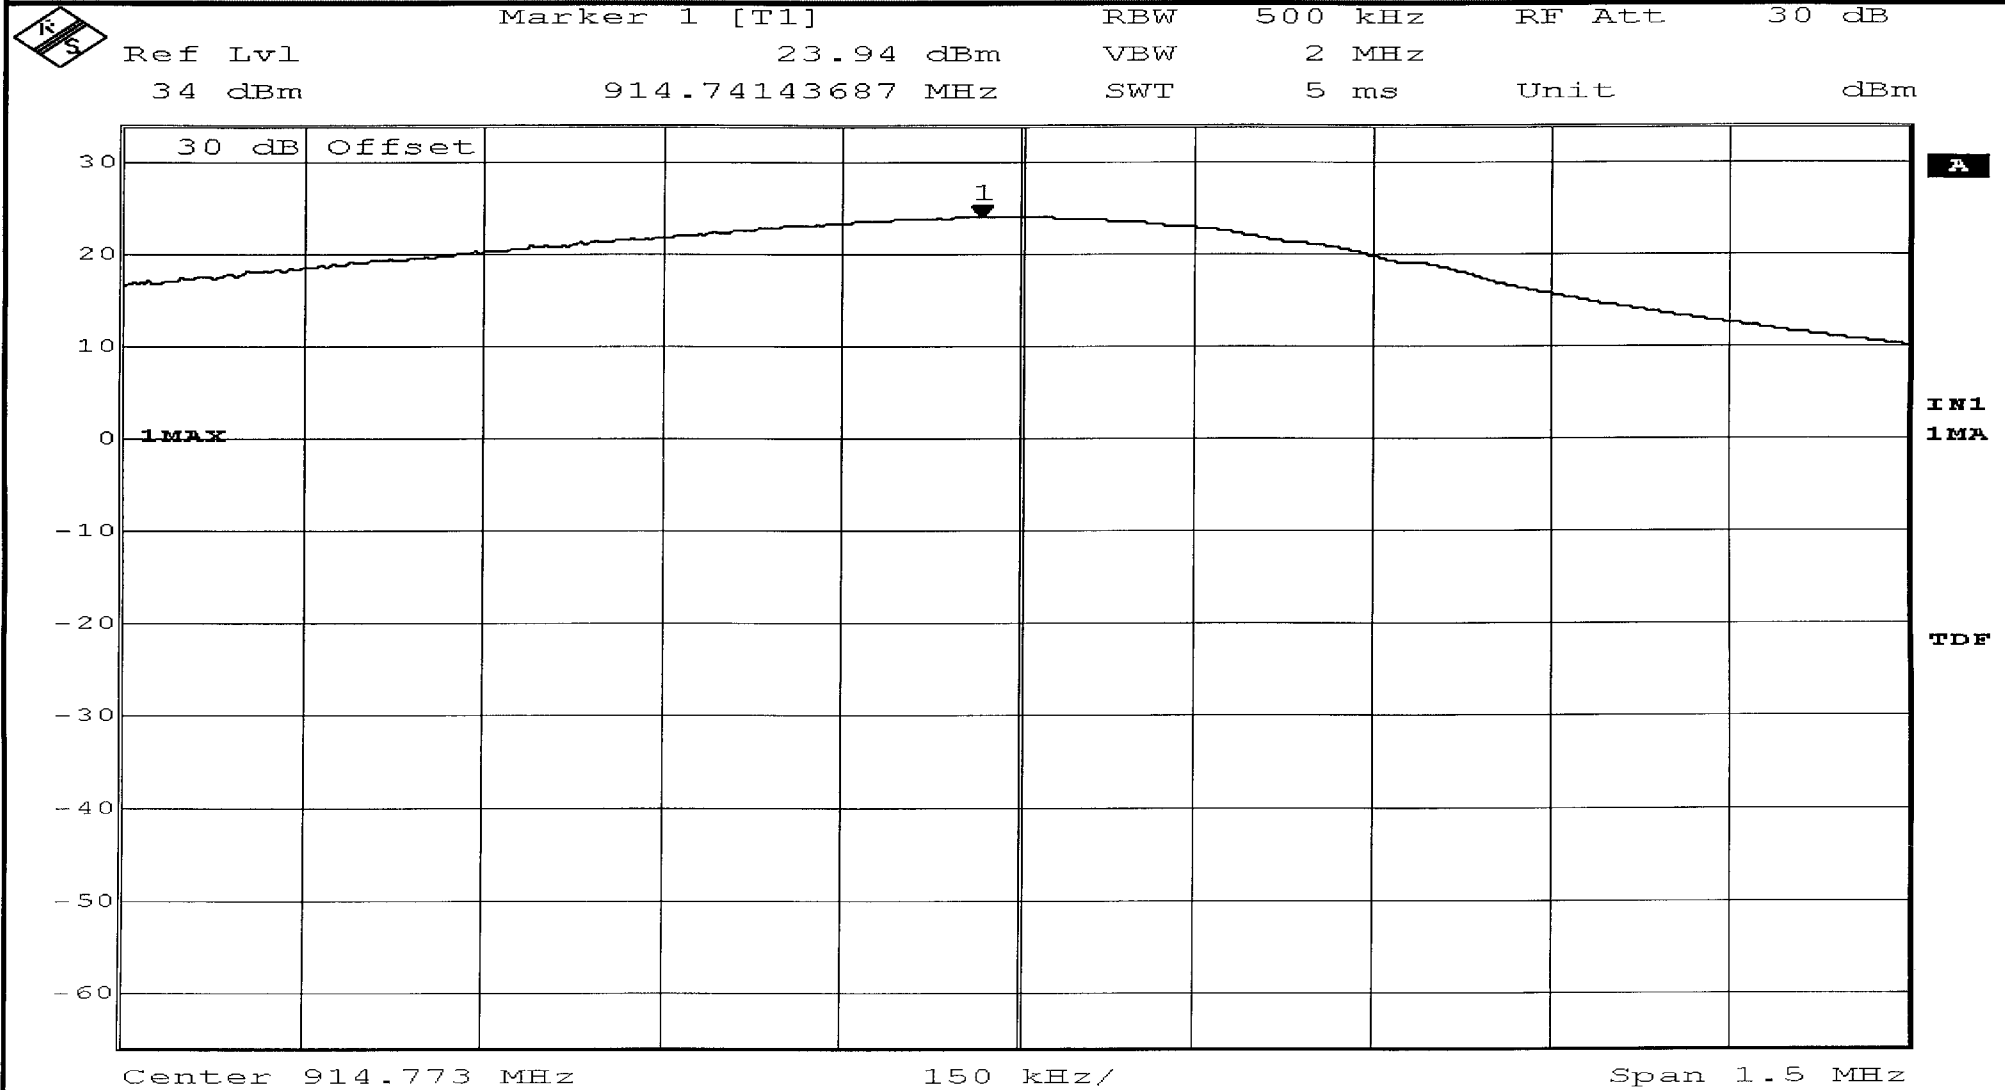


Date: 3.SEP.2002 09:48:37

# RETLIF TESTING LABORATORIES

## EMISSIONS DATA SHEET

Test Method:	Peak Output Power		
Customer:	Markem Corporation	Test Sample:	RF ID Tag Reader
Model No:	6100	Serial No:	ENG2
Test Specification:	FCC Part 15, Subpart C	Paragraph:	15.247(b)
Operating Mode:	Transmitting a modulated signal		Date:
Notes:	Frequency Tested: 927.322 MHz		
Job No:	R-4009N		Technician:
			T. Firkowski

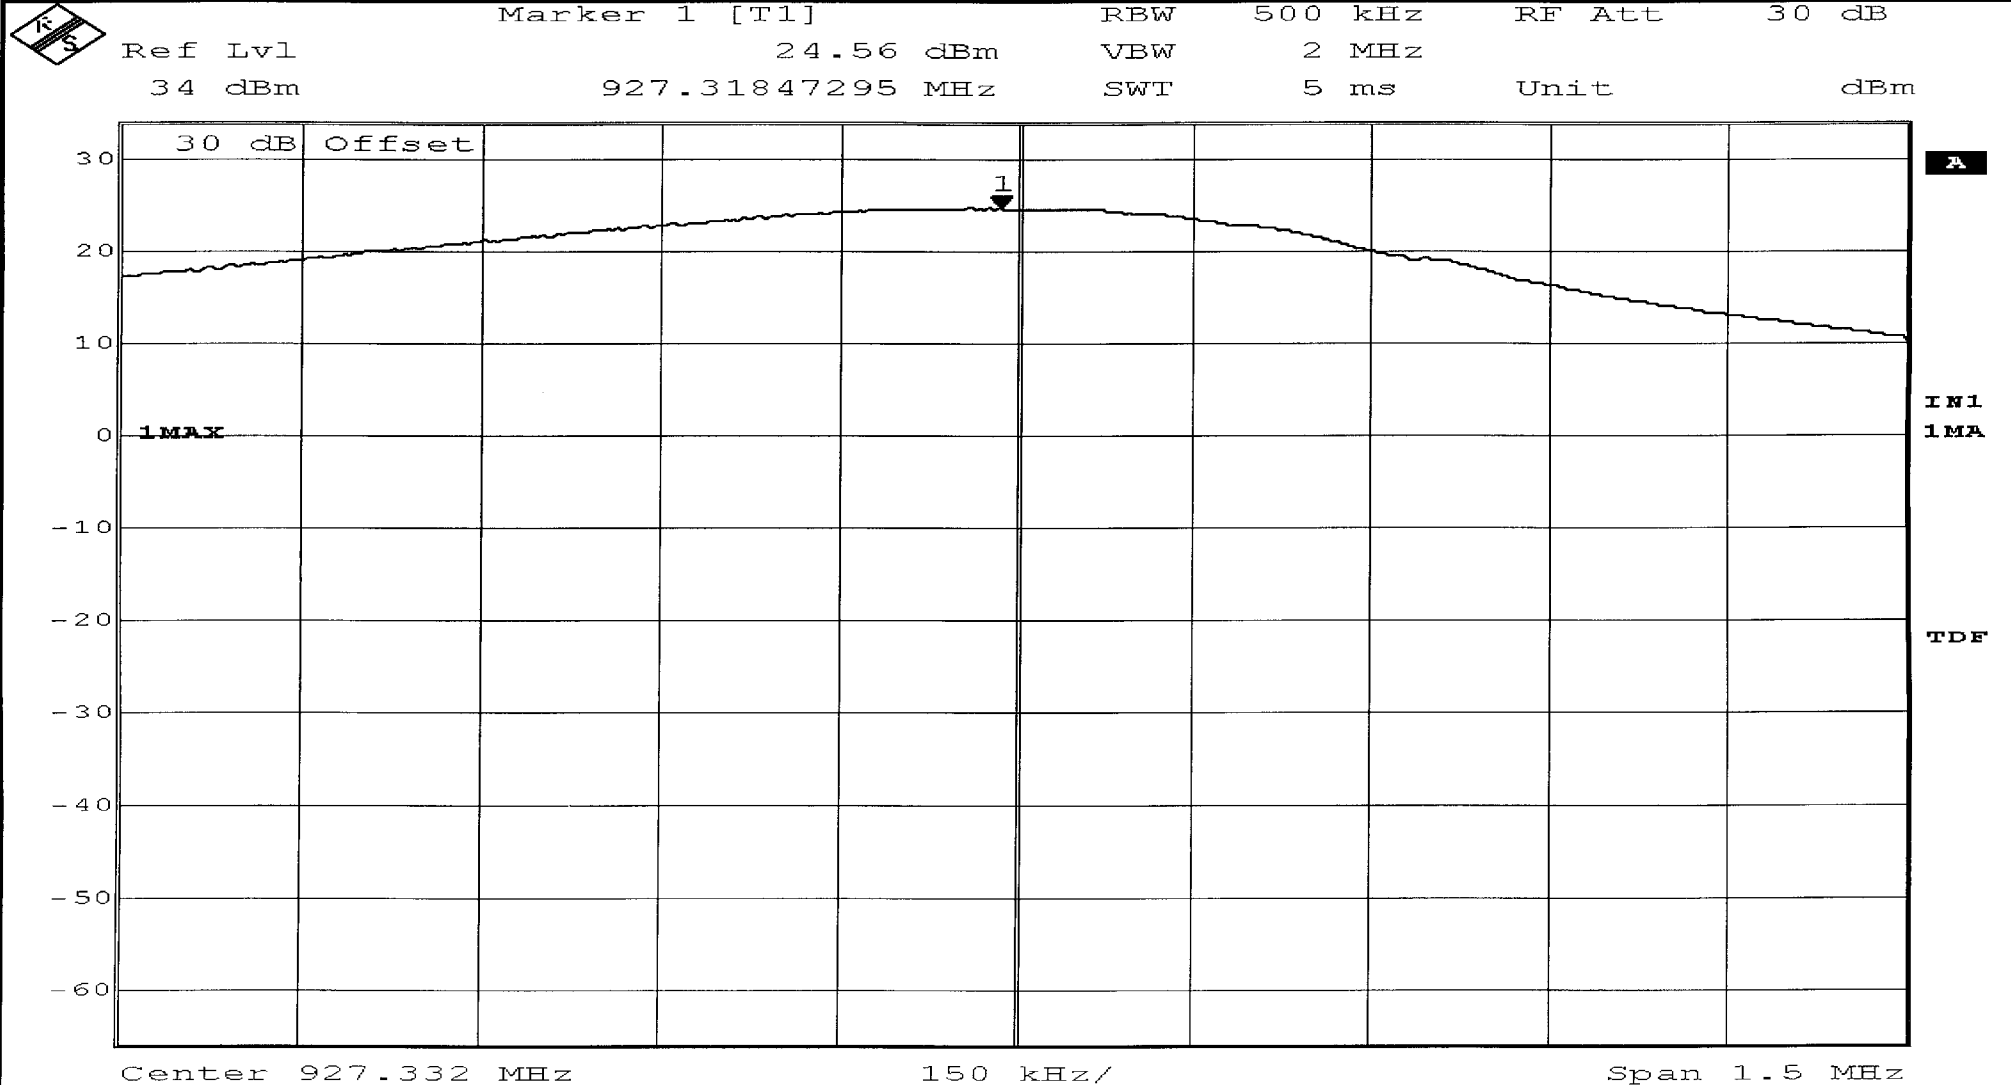


Date: 3.SEP.2002 09:46:35

# RETLIF TESTING LABORATORIES

## EMISSIONS DATA SHEET

Test Method:	Conducted Emissions				
Customer:	Markem Corporation	Test Sample:	RF ID Tag Reader	Job No:	R-4009N
Model No:	6100	Serial No:	ENG1	Technician:	T. Firkowski
Test Specification:	FCC Part 15, Subpart C			Paragraph:	15.207(a)
Operating Mode:	Transmitting a modulated signal		Frequency Tested: Frequency Hopping 902.726-927.322 MHz		
Notes:	Lead Tested: Hot 120 VAC 60 Hz      Peak Readings to Quasi-Peak Limits				

Level [dB $\mu$ V]

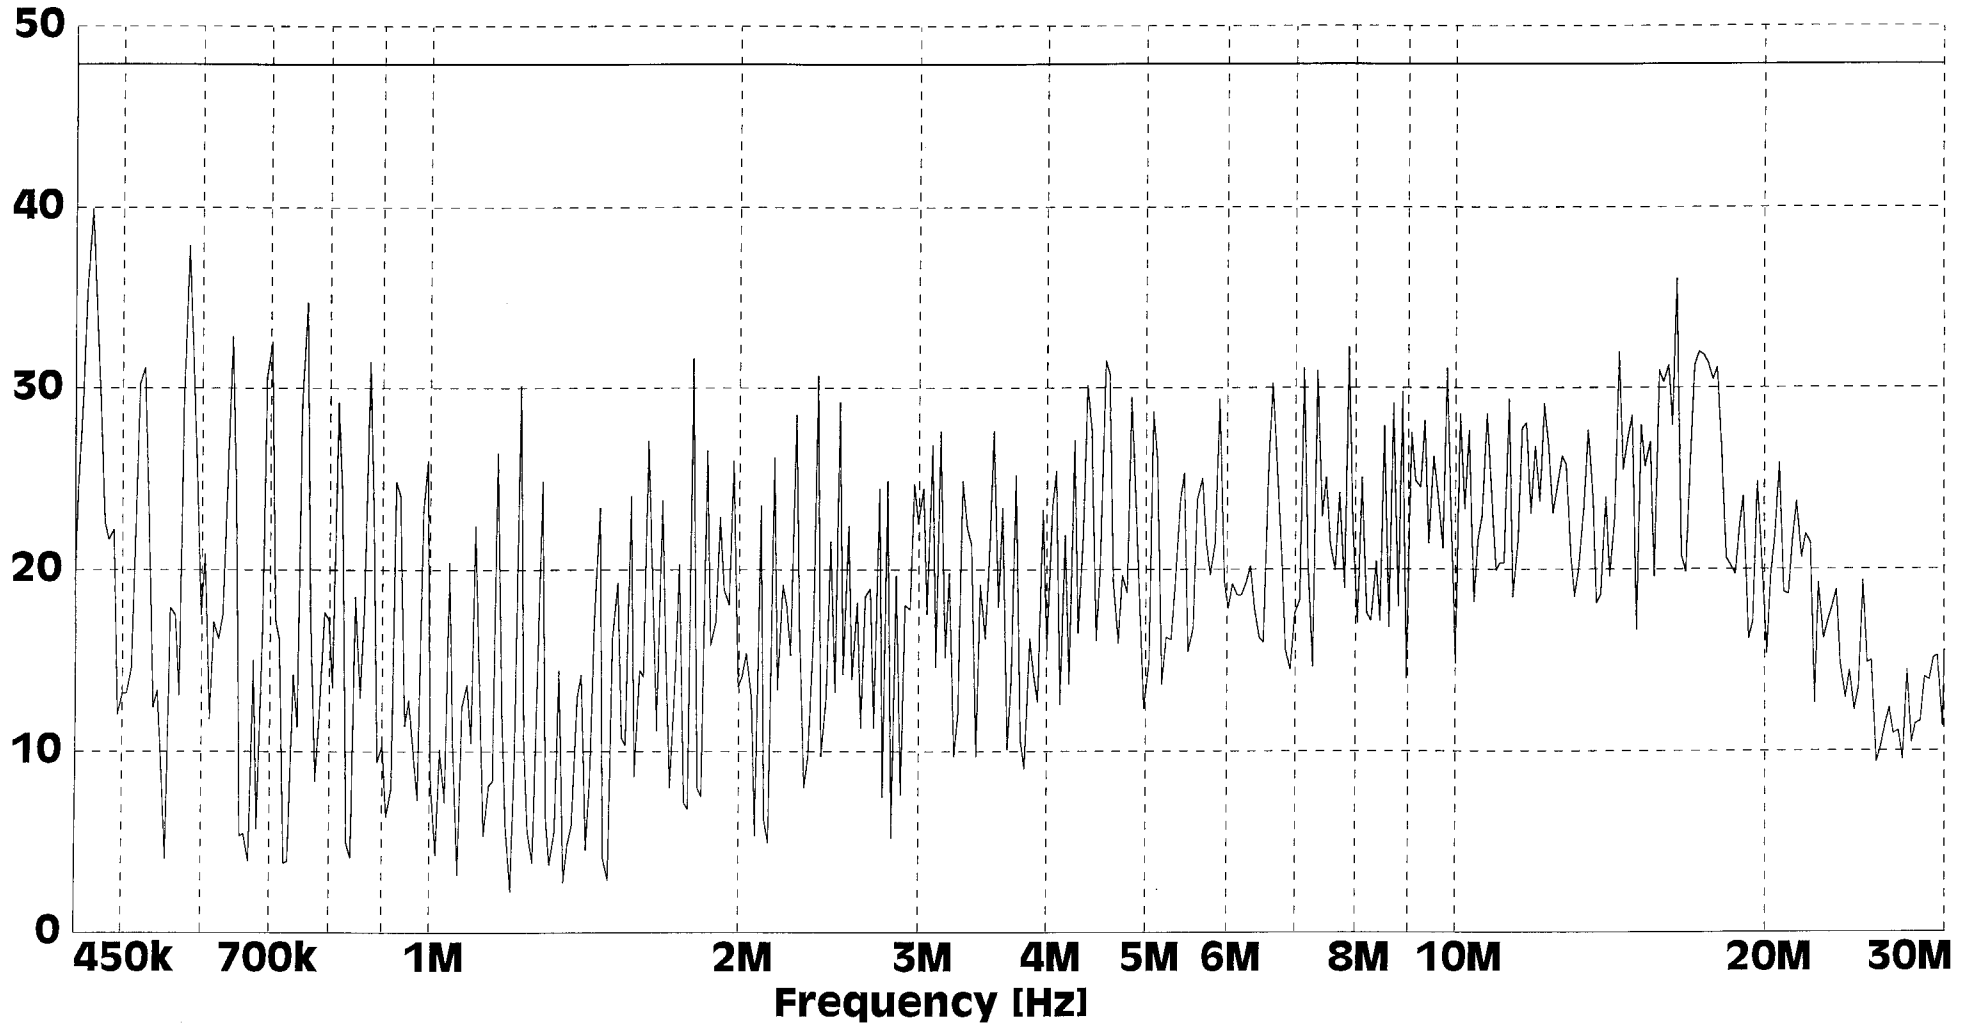


# RETLIF TESTING LABORATORIES

## EMISSIONS DATA SHEET

Test Method:	Conducted Emissions					
Customer:	Markem Corporation	Test Sample:	RF ID Tag Reader	Job No:	R-4009N	
Model No:	6100	Serial No:	ENG1	Technician:	T. Firkowski	
Test Specification:	FCC Part 15, Subpart C		Paragraph: 15.207(a)		Date:	8/21/02
Operating Mode:	Transmitting a modulated signal		Frequency Tested: Frequency Hopping 902.726-927.322 MHz			
Notes:	Lead Tested: Neutral 120 VAC 60 Hz      Peak Readings to Quasi-Peak Limits					

### Level $10\text{dB}\mu\text{V}$

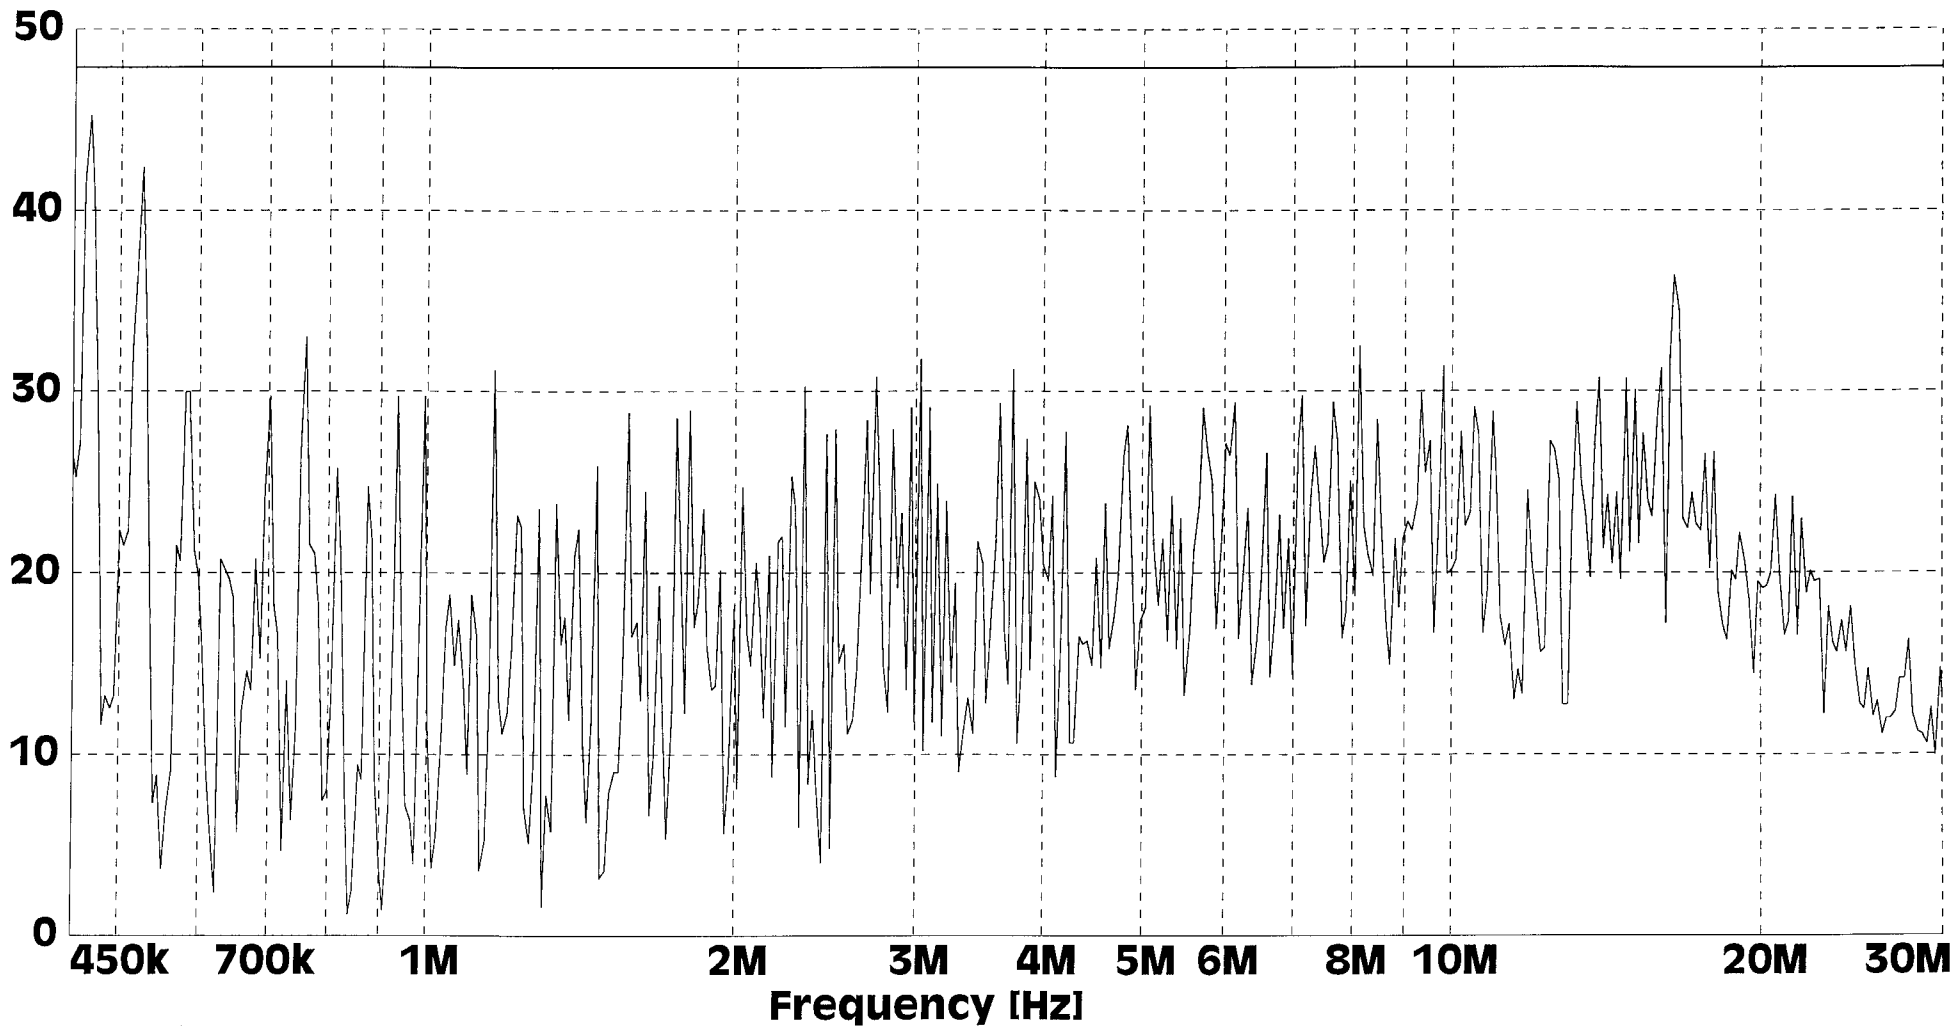

# RETLIF TESTING LABORATORIES

## EMISSIONS DATA SHEET

<b>Test Method:</b>	Spurious Radiated Emissions		
<b>Customer:</b>	Markem Corporation	<b>Job No:</b>	R-4009N
<b>Test Sample:</b>	RF ID Tag Reader		
<b>Model No:</b>	6100	<b>Serial No:</b>	ENG2
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247( c)		
<b>Operating Mode:</b>	Transmitting a CW signal		
<b>Technician:</b>	T. Firkowski	<b>Date:</b>	9/4/02
<b>Notes:</b>	RF ID Tag Reader tested with linear antenna Cushcraft # S9028P Detector: Peak      RBW: 1MHz    VBW 10 Hz		

Transmit Frequency	Test Frequency	Antenna Polarity	Uncorrected Reading	Correction Factor	Corrected Reading	Peak Limit		Duty Cycle Factor	Corrected + Duty Cycle Factor	Average Limit
MHz	GHz	H/V	dBuV	dB	dBuV/m	dBuV/m		dB	dBuV/m	dBuV/m
902.726										
	2.708178	Vertical	34.05	28.75	62.80	74.00		-16.47	46.33	54.0
	3.610904	Horizontal	28.74	31.76	60.50			-16.47	44.03	
	4.513630	-	-	-	-			-	-	
	5.416356	-	-	-	-			-	-	
	8.124543	-	-	-	-			-	-	
	9.027260	-	-	-	-	74.00		-	-	54.0
914.773										
	2.744319	Vertical	28.22	28.88	57.10	74.00		-16.47	40.63	54.0
	3.659092	Horizontal	33.58	31.91	65.48			-16.47	49.01	
	4.573865	-	-	-	-			-	-	
	7.318184	-	-	-	-			-	-	
	8.232957	-	-	-	-			-	-	
	9.147730	-	-	-	-	74.00		-	-	54.0
927.332										
	2.781996	Vertical	33.46	29.02	62.48	74.00		-16.47	46.01	54.0
	3.709328	Horizontal	28.15	32.07	60.22			-16.47	43.75	
	4.636660	-	-	-	-			-	-	
	7.418656	-	-	-	-			-	-	
	8.345988	-	-	-	-	74.00		-	-	54.0

EUT Emissions observed during Spurious RF Conducted Emissions test that fall within restricted band were measured. "-" = Signal levels were lower than the noise floor of the receiver.

