



Lab Code: 200707-0



FCC PART 15D


TEST REPORT

For

Xingtel Xiamen Group Co., Ltd.

Xingtel Building, Chuangxin Road, Torch Hi-Tech Industrial District,
Xiamen, Fujian, China

FCC ID: QMHA1600BT

| | |
|--|--|
| Report Type: Original Report | Product Type: DECT 6.0 Amplified Cordless Freedom Deluxe Phone |
| Test Engineer: <u>Henry Ding</u>  | |
| Report Number: <u>RSZ120726001-00PP</u> | |
| Report Date: <u>2012-08-13</u> | |
| Reviewed By: <u>Alvin Huang</u>  | |
| Test Laboratory: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn | |

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk “★” (Rev.2)

TABLE OF CONTENTS

| | |
|--|-----------|
| GENERAL INFORMATION..... | 4 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | 4 |
| OBJECTIVE | 4 |
| RELATED SUBMITTAL(S)/GRANT(S)..... | 4 |
| TEST METHODOLOGY | 4 |
| TEST FACILITY | 5 |
| SYSTEM TEST CONFIGURATION..... | 6 |
| DESCRIPTION OF TEST CONFIGURATION | 6 |
| EQUIPMENT MODIFICATIONS | 6 |
| LOCAL SUPPORT EQUIPMENT LIST AND DETAILS | 6 |
| BLOCK DIAGRAM OF TEST SETUP | 6 |
| SUMMARY OF TEST RESULTS | 7 |
| FCC §15.319 (I) & §2.1093 - RF EXPOSURE | 8 |
| APPLICABLE STANDARD | 8 |
| FCC §15.317 & §15.203 - ANTENNA REQUIREMENT | 9 |
| APPLICABLE STANDARD | 9 |
| ANTENNA CONNECTOR CONSTRUCTION | 9 |
| FCC §15.315 & §15.207 - CONDUCTED EMISSIONS..... | 10 |
| MEASUREMENT UNCERTAINTY | 10 |
| EUT SETUP | 10 |
| EMI TEST RECEIVER SETUP..... | 11 |
| TEST PROCEDURE | 11 |
| TEST EQUIPMENT LIST AND DETAILS..... | 11 |
| TEST RESULTS SUMMARY..... | 11 |
| TEST DATA | 11 |
| FCC §15.323 (A) - EMISSION BANDWIDTH..... | 14 |
| APPLICABLE STANDARD | 14 |
| TEST EQUIPMENT LIST AND DETAILS..... | 14 |
| TEST PROCEDURE | 14 |
| TEST DATA | 14 |
| FCC §15.319 (C) - PEAK TRANSMIT POWER..... | 17 |
| APPLICABLE STANDARD | 17 |
| TEST PROCEDURE | 17 |
| TEST EQUIPMENT LIST AND DETAILS..... | 17 |
| TEST DATA | 17 |
| FCC §15.319 (D) - POWER SPECTRAL DENSITY..... | 20 |
| APPLICABLE STANDARD | 20 |
| TEST EQUIPMENT LIST AND DETAILS..... | 20 |
| TEST PROCEDURE | 20 |
| TEST DATA | 20 |
| FCC §15.323 (D) - EMISSION INSIDE AND OUTSIDE THE SUB-BAND..... | 25 |
| APPLICABLE STANDARD | 25 |

| | |
|--|-----------|
| TEST EQUIPMENT LIST AND DETAILS..... | 25 |
| TEST DATA | 25 |
| FCC §15.319 (G) - RADIATED SPURIOUS EMISSIONS..... | 34 |
| MEASUREMENT UNCERTAINTY..... | 34 |
| EUT SETUP | 34 |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP | 34 |
| TEST PROCEDURE | 35 |
| CORRECTED AMPLITUDE & MARGIN CALCULATION | 35 |
| TEST EQUIPMENT LIST AND DETAILS..... | 35 |
| TEST RESULTS SUMMARY | 36 |
| TEST DATA | 36 |
| FCC §15.323 (F) - FREQUENCY STABILITY..... | 40 |
| APPLICABLE STANDARD | 40 |
| TEST PROCEDURE | 40 |
| TEST EQUIPMENT LIST AND DETAILS..... | 40 |
| TEST DATA | 41 |
| FCC §15.323 (C) (E) & §15.319(F) – SPECIFIC REQUIREMENTS FOR UPCS DEVICE..... | 42 |
| DECALARATION LETTER | 48 |

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Xingtel Xiamen Group Co., Ltd.*'s product, model: *A1600BT BUN* (FCC ID: *QMHA1600BT*) or the "EUT" in this report was a handset of *DECT 6.0 Amplified Cordless Freedom Deluxe Phone*, Which was measured approximately: 187 mm (L) x 60 mm (W) x 39 mm (H), input voltage: DC 3.6V battery and DC 7.5V adapter for charging

Adapter information:

Model: MN-A075-L054

Input: AC 100-240 V, 50/60 Hz, 0.2A Max

Output: DC 7.5V, 0.3A

Note: The serial products, model A1600BT BUN, A1600BT and A1600E-BT are electrically identical, we select A1600BT BUN to test, the difference among them is only model number due to different combination, and please refers to the attached declaration letter.

**All measurement and test data in this report was gathered from production sample serial number: 1207139 (Assigned by BACL, Shenzhen). The EUT was received on 2012-07-26.*

Objective

This document is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.17 - 2006, and ANSI C64.3 2009.

The tests were performed in order to determine compliance with FCC Part 15, Subpart D, and section 15.203, 15.315, 15.317, 15.319 and 15.323 rules.

Related Submittal(s)/Grant(s)

FCC ID: QMHA1600BT, FCC Part 15D PUB submission of Base portion.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.17 - 2006, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in TBR6 mode which was provided by the manufacturer.


Equipment Modifications

No modification was made to the unit tested.

Local Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number |
|--------------|------------------------------------|-------|---------------|
| R & S | Digital Radio-Communication Tester | CMD60 | 829902/026 |

Block Diagram of Test Setup

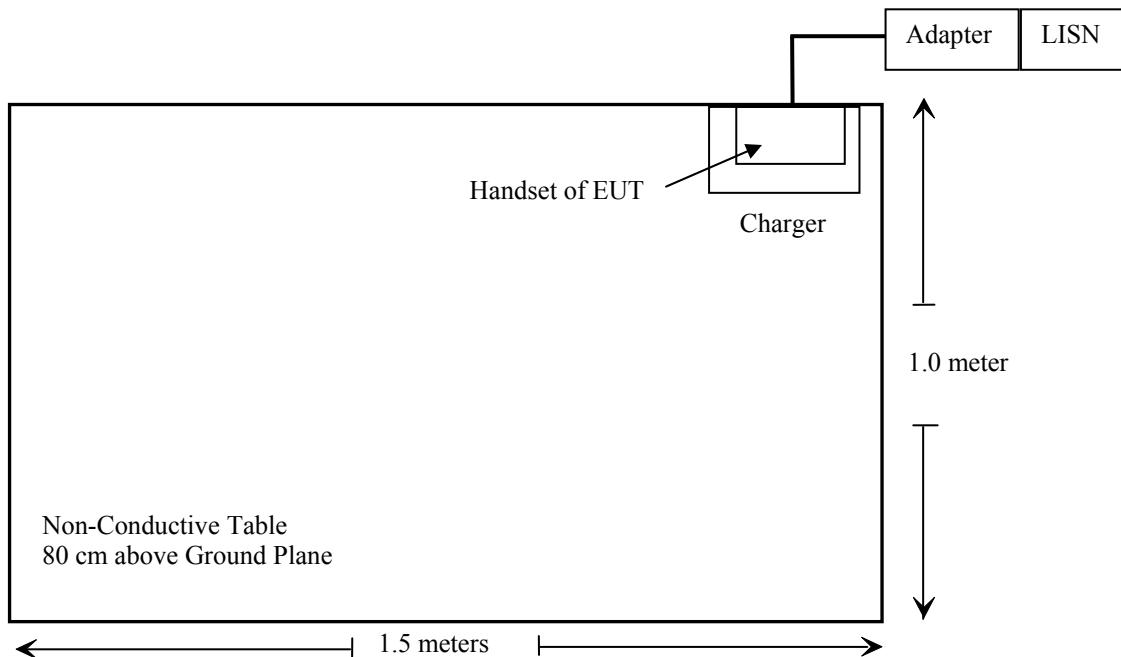

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|---------------------------------|--|------------|
| § 15.319 (i) & §2.1093 | RF Exposure Info | Compliance |
| § 15.317, § 15.203 | Antenna Requirement | Compliance |
| § 15.315, § 15.207 | AC Line Conducted Emission | Compliance |
| § 15.323 (a) | Emission Bandwidth | Compliance |
| § 15.319 (c) | Peak Transmit Power | Compliance |
| § 15.319 (d) | Power Spectral Density | Compliance |
| § 15.323 (d) | Emission Inside and Outside the sub-band | Compliance |
| § 15.319 (g) | Radiated Emission | Compliance |
| § 15.323 (f) | Frequency Stability | Compliance |
| § 15.323 (c)(e) § 15.319 (f) | Specific Requirements for UPCS | Compliance |

FCC §15.319 (i) & §2.1093 - RF EXPOSURE

Applicable Standard

According to §15.319 (i) Unlicensed PCS devices are subject to the radiofrequency radiation exposure requirements specified in § 1.1307(b), 2.1091 and 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

According to KDB 447498 D01 Mobile Portable RF Exposure v041 c): Unless excluded by specific FCC test procedures, portable devices with output power is $\leq 60/f(\text{GHz})$ mW shall include SAR data for equipment approval.

RF Exposure Evaluation

Max peak output power at antenna port:
1928.448 MHz: 16.21 dBm = 41.78 mW

The source-based average power at antenna port:
 $41.78 \text{ mW} * \text{duty cycle} = 41.78 * 0.0414 = 1.73 \text{ mW}$ (2.38 dBm)

The source-based average power:
 $2.38 \text{ dBm} + \text{antenna gain (0.5 dBi)} = 2.88 \text{ dBm} = 1.94 \text{ mW}$

Limit: $60/f(\text{GHz}) = 60/1.928.448 = 31.11 \text{ mW}$
The source-based average power is less than $60/f(\text{GHz})$

So the SAR evaluation can be exempted.

FCC §15.317 & §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

This product has an integrated antenna; please refer to the internal photos. The maximum gain is 0.5 dBi, fulfill the requirement of this section.

Result: Compliance.


FCC §15.315 & §15.207 - CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 2.4 dB (k=2, 95% level of confidence).

EUT Setup

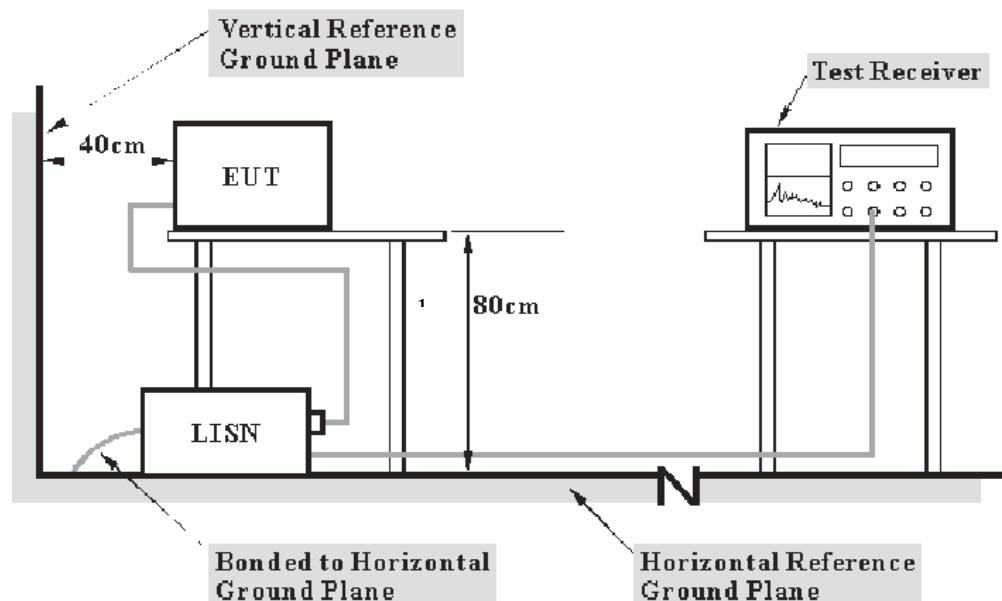

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC 15.315 and FCC 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------------|---------------|
| 150 kHz – 30 MHz | 9 kHz |

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|---------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCS30 | 100176 | 2011-11-24 | 2012-11-23 |
| Rohde & Schwarz | L.I.S.N. | ESH2-Z5 | 892107/021 | 2011-11-17 | 2012-11-16 |
| Rohde & Schwarz | Attenuator | ESH3Z2 | DE25985 | 2012-07-08 | 2013-07-07 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15 .207, with the worst margin reading of:

18.02 dB at 0.325 MHz in the Neutral conducted mode


Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 48 % |
| ATM Pressure: | 100.0 kPa |


The testing was performed by Henry Ding on 2012-08-03.

Test Mode: Charging

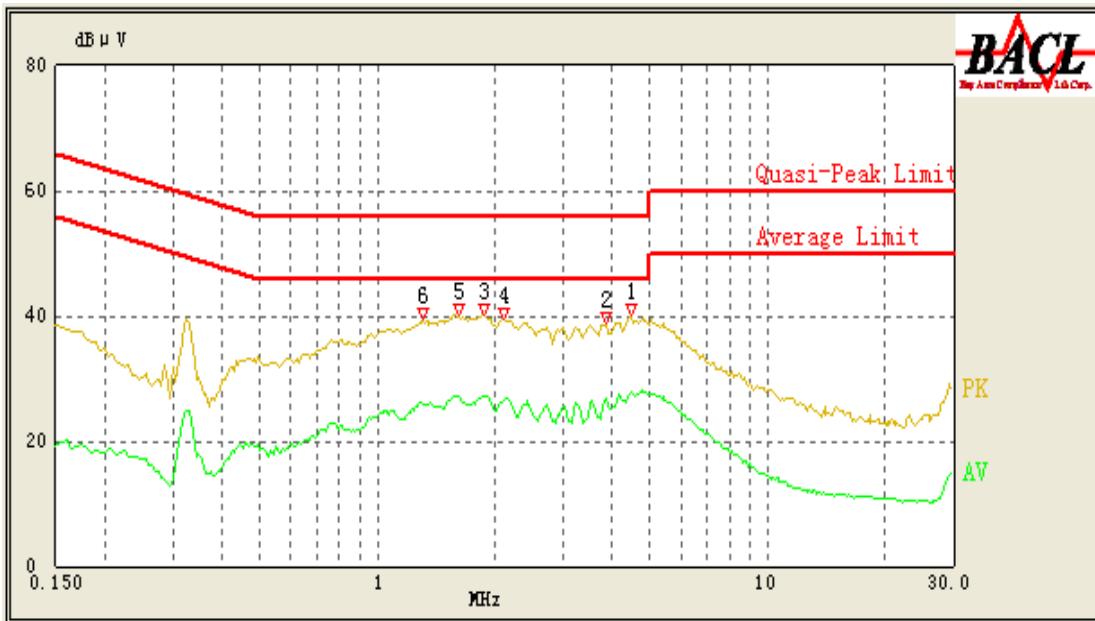120 V, 60 Hz, Line:

| Frequency (MHz) | Corrected Amplitude (dB μ V) | Correction Factor (dB) | Limit (dB μ V) | Margin (dB) | Detector (PK/Ave./QP) |
|-----------------|----------------------------------|------------------------|--------------------|-------------|-----------------------|
| 4.480 | 27.91 | 10.28 | 46.00 | 18.09 | Ave. |
| 1.860 | 27.20 | 10.20 | 46.00 | 18.80 | Ave. |
| 1.610 | 27.09 | 10.19 | 46.00 | 18.91 | Ave. |
| 3.865 | 26.84 | 10.26 | 46.00 | 19.16 | Ave. |
| 2.120 | 26.35 | 10.21 | 46.00 | 19.65 | Ave. |
| 1.875 | 36.26 | 10.20 | 56.00 | 19.74 | QP |
| 1.315 | 25.99 | 10.18 | 46.00 | 20.01 | Ave. |
| 1.615 | 35.92 | 10.19 | 56.00 | 20.08 | QP |
| 2.100 | 35.88 | 10.21 | 56.00 | 20.12 | QP |
| 1.305 | 35.12 | 10.18 | 56.00 | 20.88 | QP |
| 4.485 | 34.93 | 10.28 | 56.00 | 21.07 | QP |
| 3.855 | 34.02 | 10.26 | 56.00 | 21.98 | QP |

120 V, 60 Hz, Neutral:

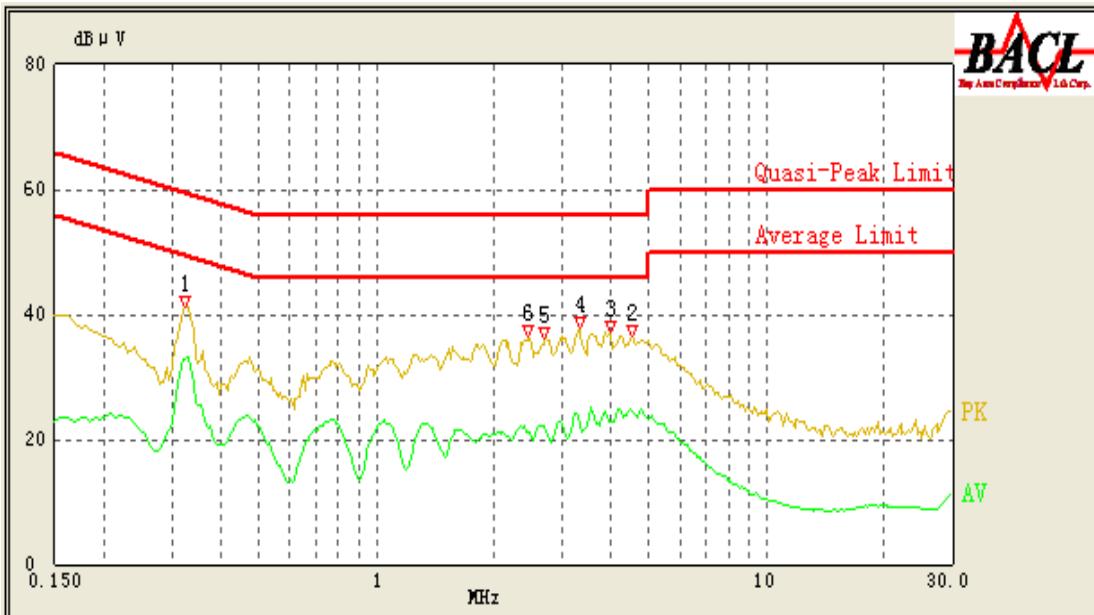


| Frequency (MHz) | Corrected Amplitude (dB μ V) | Correction Factor (dB) | Limit (dB μ V) | Margin (dB) | Detector (PK/Ave./QP) |
|-----------------|----------------------------------|------------------------|--------------------|-------------|-----------------------|
| 0.325 | 32.98 | 10.25 | 51.00 | 18.02 | Ave. |
| 4.485 | 24.90 | 10.27 | 46.00 | 21.10 | Ave. |
| 3.295 | 23.77 | 10.24 | 46.00 | 22.23 | Ave. |
| 0.325 | 38.25 | 10.25 | 61.00 | 22.75 | QP |
| 3.960 | 23.00 | 10.26 | 46.00 | 23.00 | Ave. |
| 2.695 | 22.15 | 10.22 | 46.00 | 23.85 | Ave. |
| 2.470 | 21.09 | 10.21 | 46.00 | 24.91 | Ave. |
| 4.505 | 30.33 | 10.28 | 56.00 | 25.67 | QP |
| 3.325 | 30.03 | 10.24 | 56.00 | 25.97 | QP |
| 3.970 | 29.80 | 10.26 | 56.00 | 26.20 | QP |
| 2.695 | 28.80 | 10.22 | 56.00 | 27.20 | QP |
| 2.455 | 28.54 | 10.21 | 56.00 | 27.46 | QP |

FCC §15.323 (a) - EMISSION BANDWIDTH

Applicable Standard

The emission bandwidth is measured in accordance with ANSI C63.17 sub-clause 6.1.3 using the setup below

Test Setup:

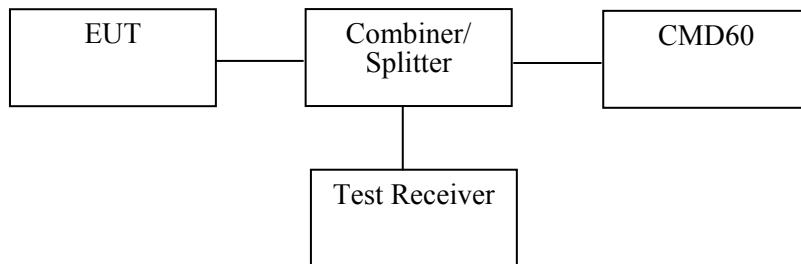

The width, in Hz, of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that is 26 dB down relative to the maximum level of the modulated carrier. It is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1% of the emission band-width of the device under measurement. [Extraction from 47 CFR 15, subpart D, 15.303 (C)].

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101122 | 2011-11-17 | 2012-11-16 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

| | |
|----------------------|---|
| Resolution bandwidth | 1.0% of the emission bandwidth (as close as possible) |
| Video bandwidth | >3 times the resolution bandwidth |
| Number of sweeps | sufficient to stabilize the trace |
| Detection mode | peak detection with maximum hold |

Test Data

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 20 °C |
| Relative Humidity: | 50 % |
| ATM Pressure: | 100.0 kPa |

The testing was performed by Henry Ding on 2012-07-29.


Test Mode: Transmitting

| Channel | Center Frequency (MHz) | 26 dB Bandwidth (MHz) | Limit |
|---------|------------------------|-----------------------|------------------------|
| Low | 1921.536 | 1.480 | 50 kHz < OBW < 2.5 MHz |
| Middle | 1924.992 | 1.480 | 50 kHz < OBW < 2.5 MHz |
| High | 1928.448 | 1.480 | 50 kHz < OBW < 2.5 MHz |


Test Result: Pass

Refer to the attached plots.


Low Channel

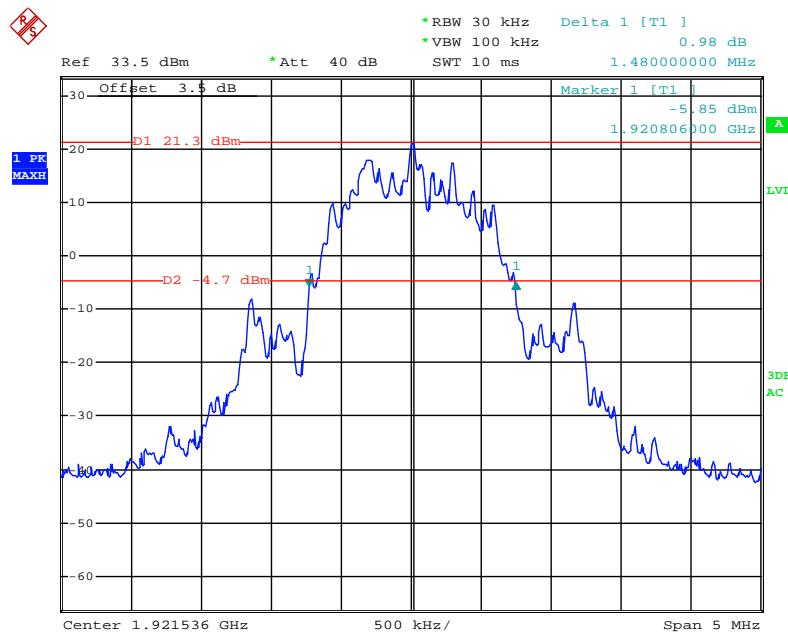

Date: 29.JUL.2012 13:21:58

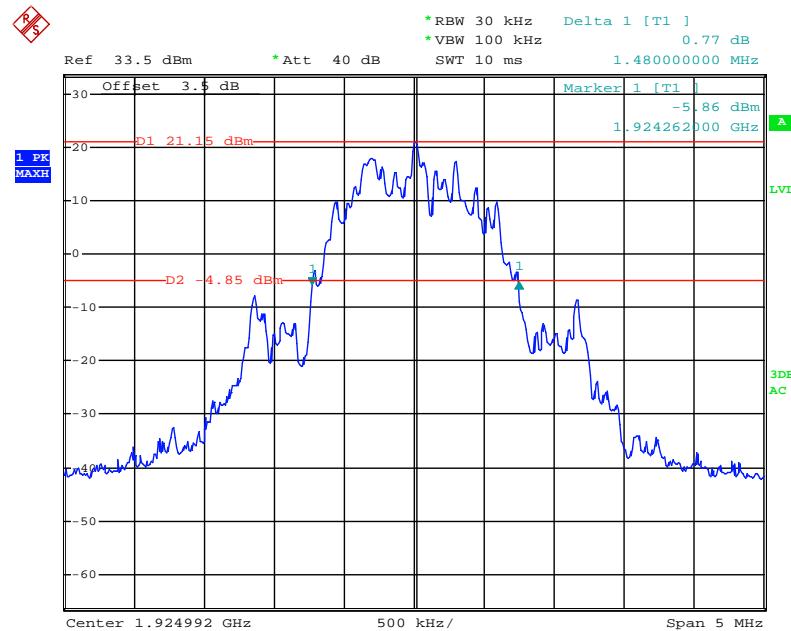Middle Channel

Date: 29.JUL.2012 13:17:43

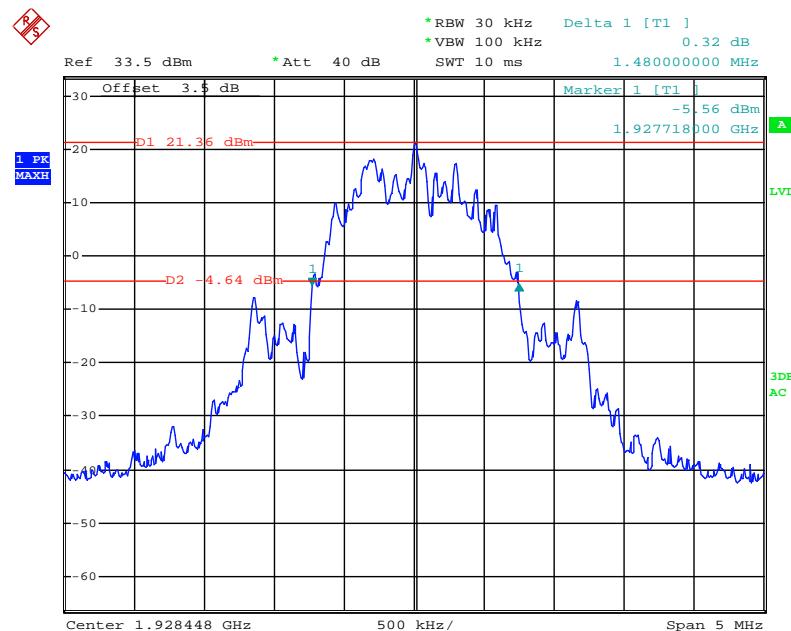High Channel

Date: 29.JUL.2012 13:10:35

FCC §15.319 (c) - PEAK TRANSMIT POWER

Applicable Standard

The peak power output as measured over an interval of time equal to the transmission-burst duration of the device under all conditions of modulation. [47 CFR 15, subpart D, 15.303 (f)].

Part 15.323(a) & Part 15.319(c) Peak Transmit Power:

The limit for Peak Transmit Power (PTP) is calculated using the following formula:

$$PTP = 100 \mu W \times (EBW)^{1/2}$$

EBW is the transmit emission bandwidth in Hz determined in the other test item:

The peak transmitter power is measured in accordance with ANSI C63.17-2006 Clause 6.1.2.

Test Procedure

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

| | |
|------------------|---|
| RBW | \geq Emission bandwidth |
| Video bandwidth | \geq RBW |
| Span | Zero |
| Center frequency | Nominal center frequency of channels |
| Amplitude scale | Log (linear may be used if analyzer has sufficient linear dynamic range and accuracy) |
| Detection | Peak detection |
| Trigger | Video |
| Sweep rate | Sufficiently rapid to permit the transmit pulse to be resolved accurately |

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028 | 2011-11-24 | 2012-11-23 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Data

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 20 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.0 kPa |

The testing was performed by Henry Ding on 2012-08-06.


Test Result: Pass.



Refer to the table and plots.

| Frequency (MHz) | Peak Transmit Power (dBm) | Limit (dBm) |
|-----------------|---------------------------|-------------|
| 1921.536 | 16.13 | 20.85 |
| 1924.992 | 16.15 | 20.85 |
| 1928.448 | 16.21 | 20.85 |

Note: EBW = 1480000 Hz
 $P_{\text{max}} = 100 \mu \text{W} \times (1480000)^{1/2} = 20.85 \text{ dBm}$

Low Channel

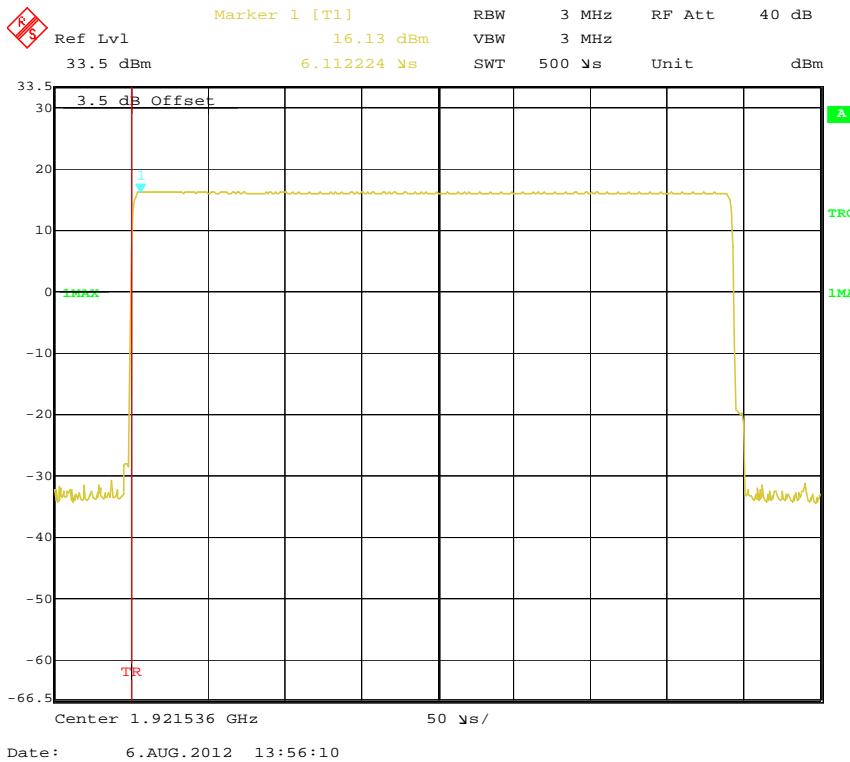

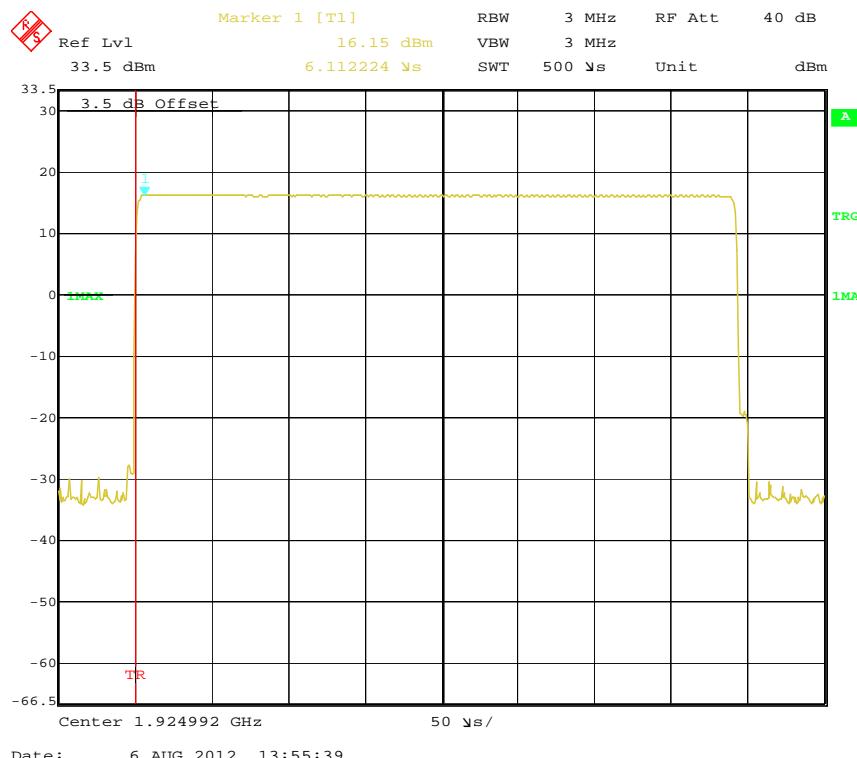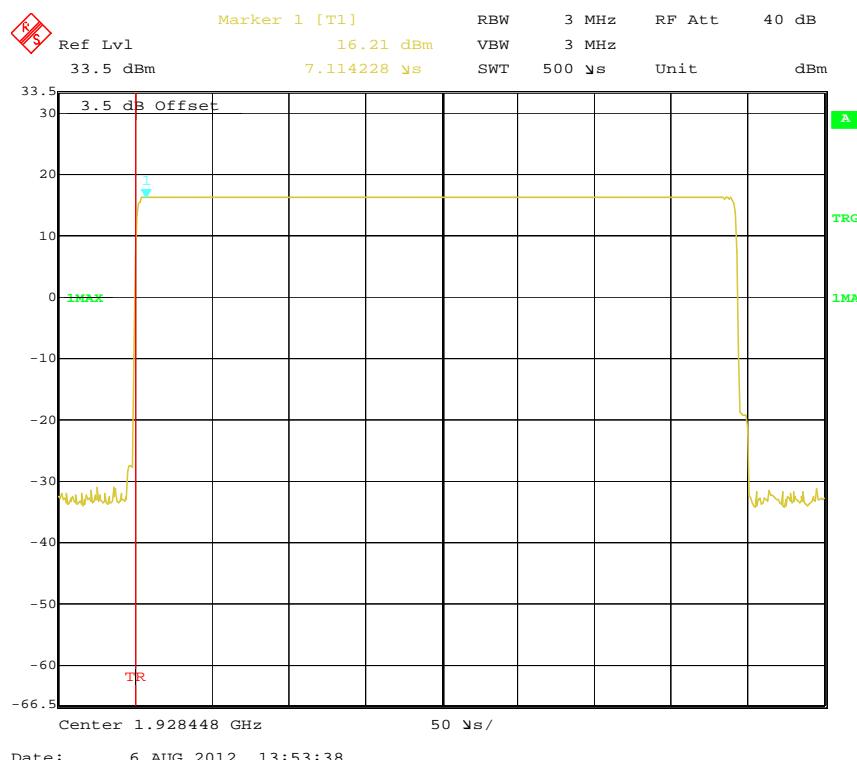Middle Channel**High Channel**

FCC §15.319 (d) - POWER SPECTRAL DENSITY

Applicable Standard

The average pulse energy in a 3 kHz bandwidth is divided by the pulse duration.

The power spectral density shall not exceed 3 mW in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

The power spectral density is measured in accordance with ANSI C63.17.2006 Clause 6.1.5.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101122 | 2011-11-17 | 2012-11-16 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

| | |
|------------------|--|
| RBW | 3kHz |
| Video bandwidth | $\geq 3 \times$ RBW |
| Span | Zero span at frequency with the maximum level (frequency determined in 6.1.3 if the same type of signal (continuous versus burst) was used in 6.1.3) |
| Center frequency | Spectral peak as determined in 6.1.3 |
| Sweep time | For burst signals, sufficient to include essentially all of the maximum length burst at the output of a 3 kHz filter (e.g., maximum input burst duration plus 600 μ s). For continuous signals, 20 ms. |
| Amplitude scale | Log power |
| Detection | Sample detection and averaged for a minimum of 100 sweeps |
| Trigger | External or internal |

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 20 °C |
| Relative Humidity: | 50 % |
| ATM Pressure: | 100.0 kPa |

The testing was performed by Henry Ding on 2012-08-07.


Test Mode: Transmitting

Test Result: Compliance.


Please refer to following tables and plots

| Frequency (MHz) | Power Spectral Density | | Limit (mW/3 kHz) | Result |
|--------------------|------------------------|------------|---------------------|--------|
| | (dBm/3 kHz) | (mW/3 kHz) | | |
| 1921.536 | -3.03 | 0.498 | 3 | Pass |
| 1924.992 | -3.31 | 0.467 | 3 | Pass |
| 1928.448 | -3.13 | 0.486 | 3 | Pass |

Low Channel

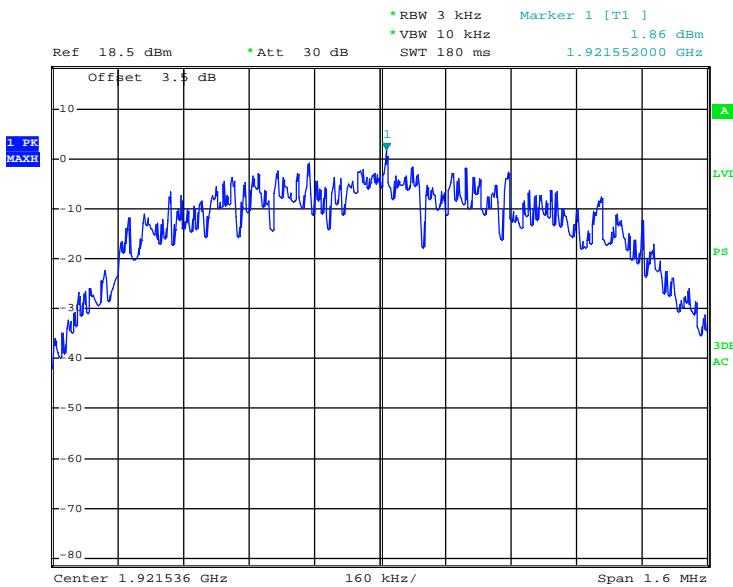


EUT
 Date: 7.AUG.2012 02:02:21

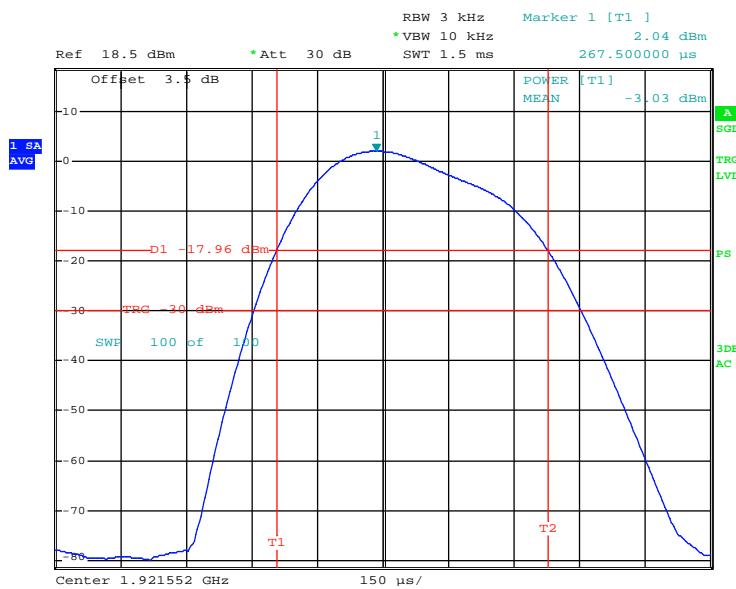

EUT


Date: 7.AUG.2012 02:04:03

Middle Channel

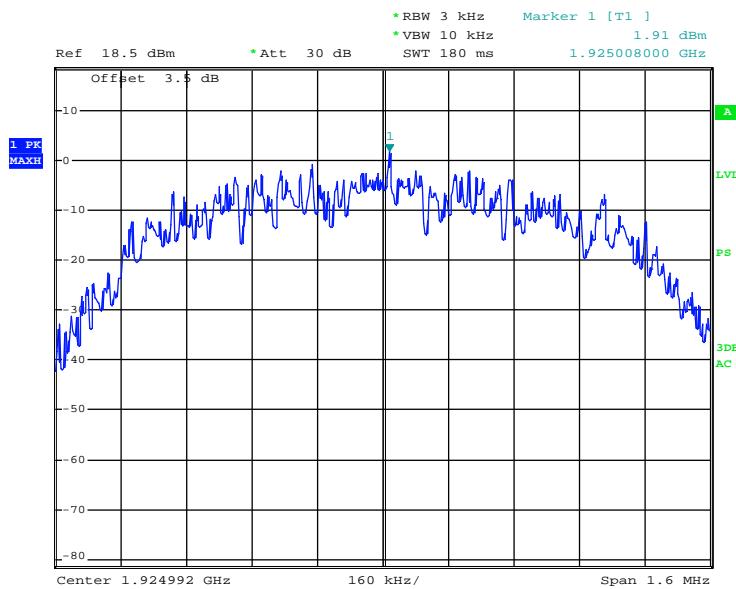

EUT


Date: 7.AUG.2012 01:58:24

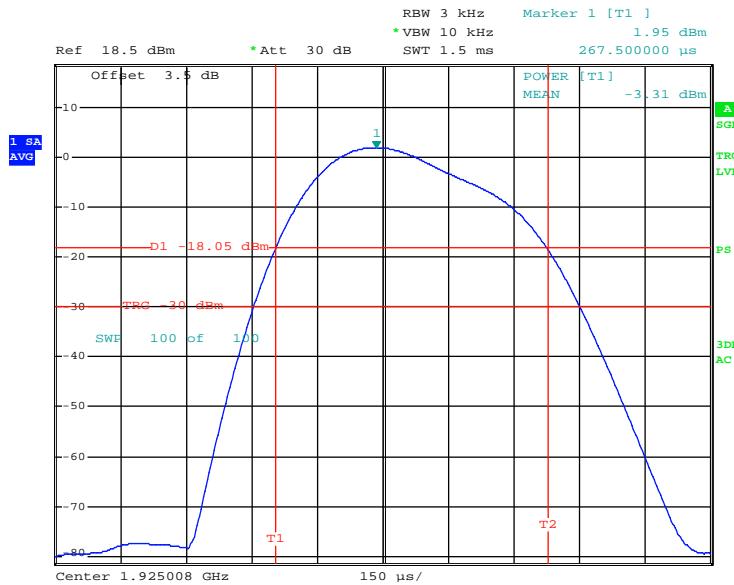

EUT


Date: 7.AUG.2012 02:00:23

High Channel

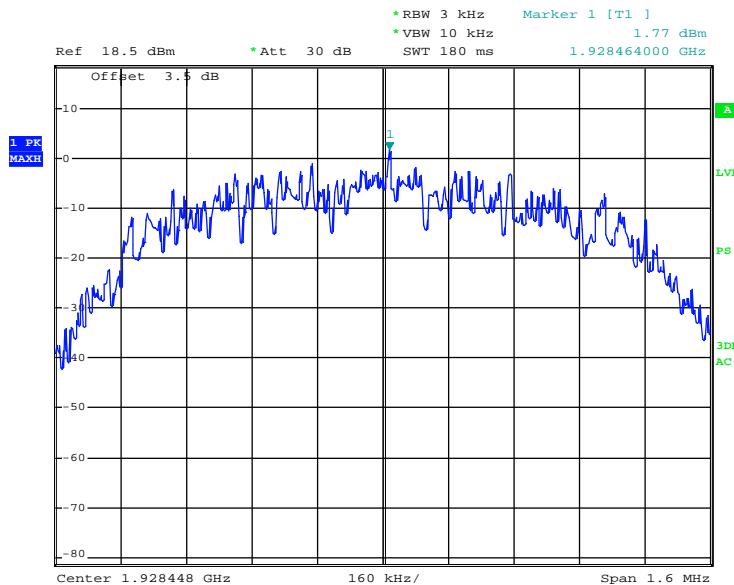

EUT

Date: 7.AUG.2012 02:05:41

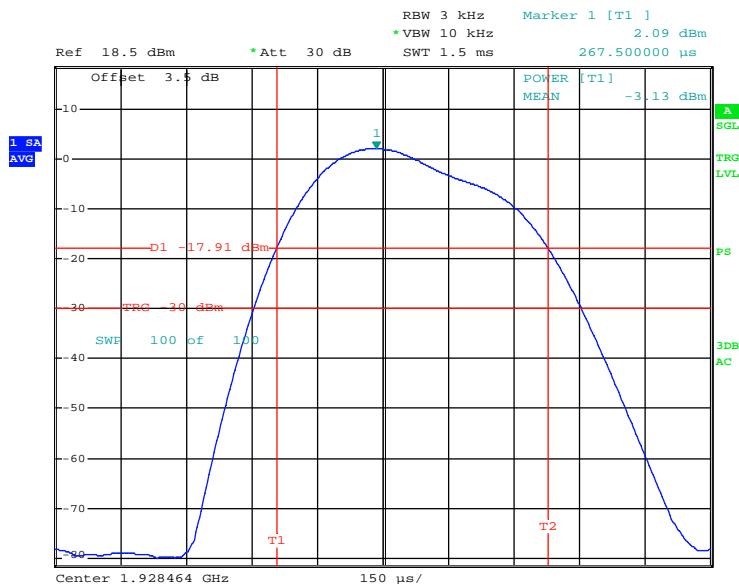

EUT

Date: 7.AUG.2012 02:06:51

FCC §15.323 (d) - EMISSION INSIDE AND OUTSIDE THE SUB-BAND**Applicable Standard**

Emissions inside the sub-band must comply with the following emission mask:

1. In the bands between 1B and 2B measured from the center of the emission bandwidth the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device;
2. in the bands between 2B and 3B measured from the center of the emission bandwidth the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator;
3. in the bands between 3B and the sub-band edge the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator.

Where B = emission bandwidth

Emission Outside the sub-band shall be attenuated below a reference power of 112 mw (20.5 dBm) as follows:

1. 30 dB between the sub-band and 1.25 MHz above or below the sub-band;
2. 50 dB between 1.25 and 2.5 MHz above or below the sub-band;
3. 60 dB at 2.5 MHz or greater above or below the sub-band.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028 | 2011-11-24 | 2012-11-23 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Data**Environmental Conditions**



| | |
|---------------------------|-----------|
| Temperature: | 20 °C |
| Relative Humidity: | 50 % |
| ATM Pressure: | 100.0 kPa |

The testing was performed by Henry Ding on 2012-08-06.


Test Mode: Transmitting

Test Result: Compliant.


Please refer to following tables and plots

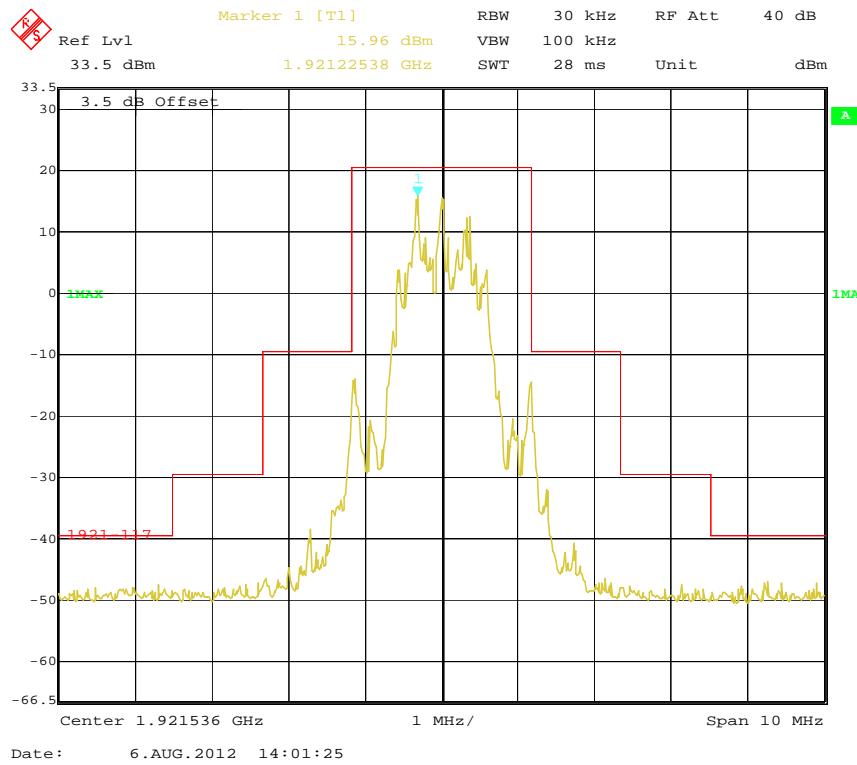
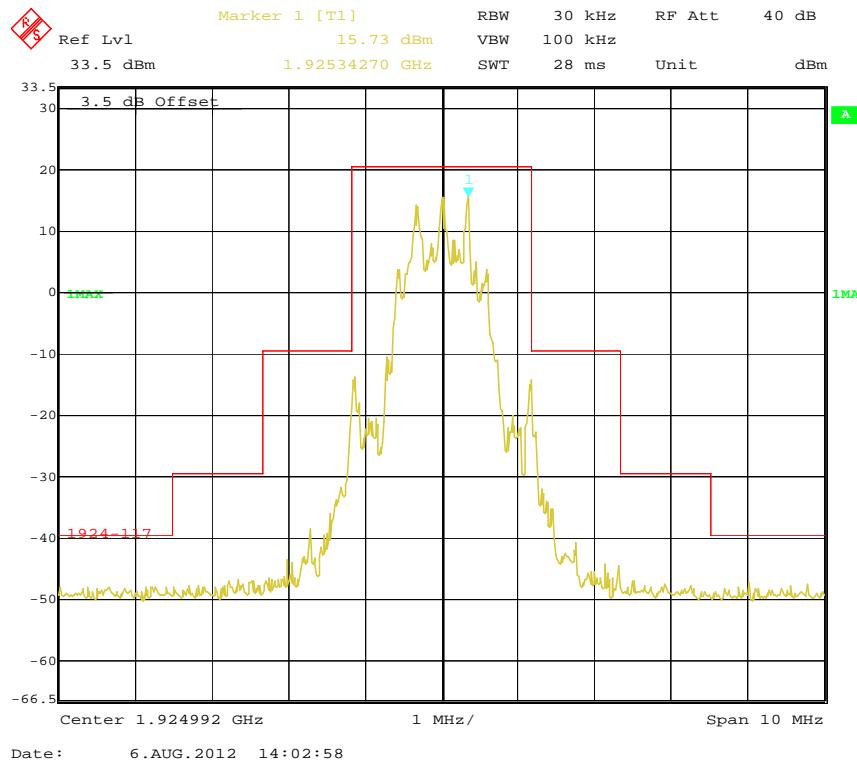
Low Channel (Unwanted Emission inside the Sub-band)**Middle Channel (Unwanted Emission inside the Sub-band)**


High Channel (Unwanted Emission inside the Sub-band)

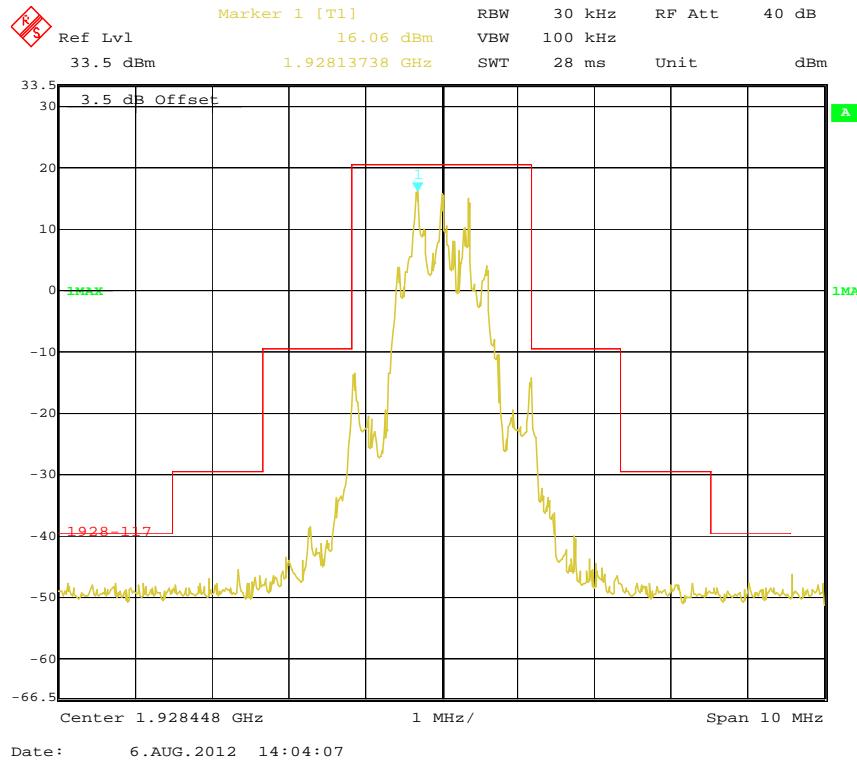


Low Channels (Unwanted Emission outside the Sub-band)


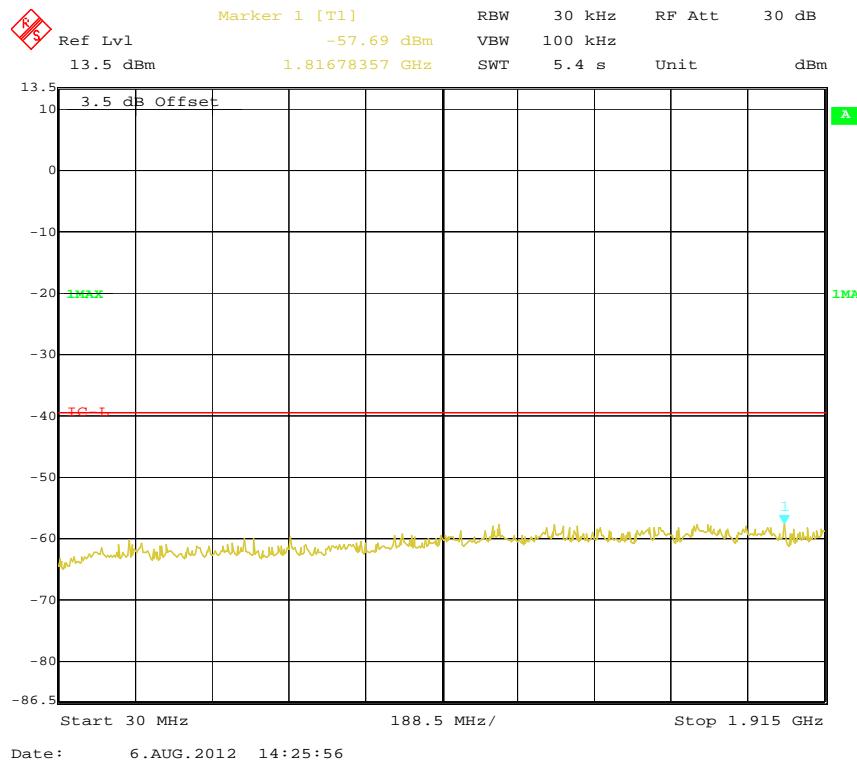


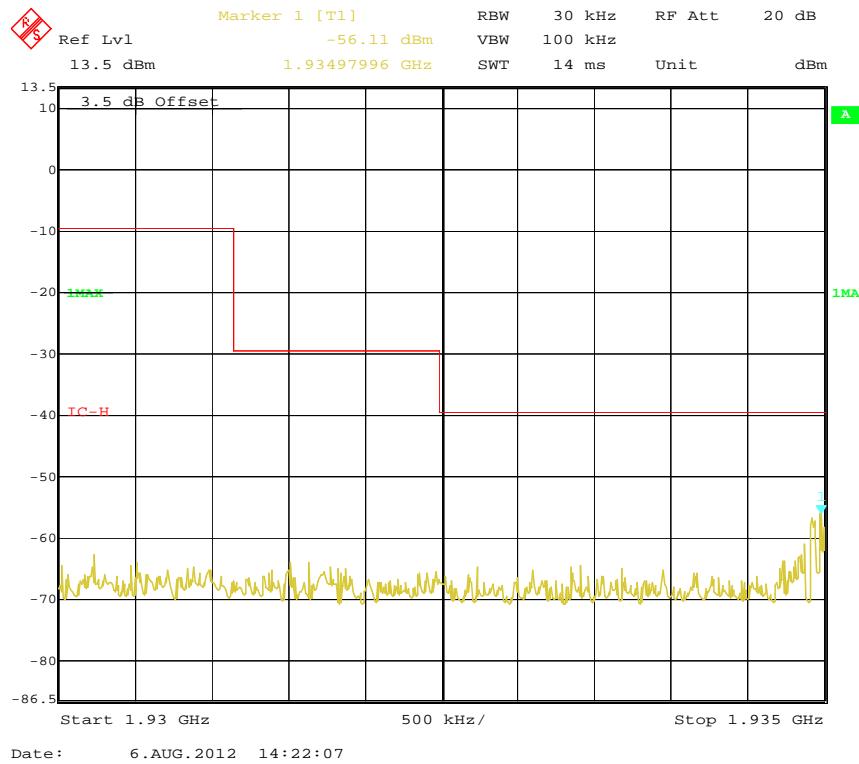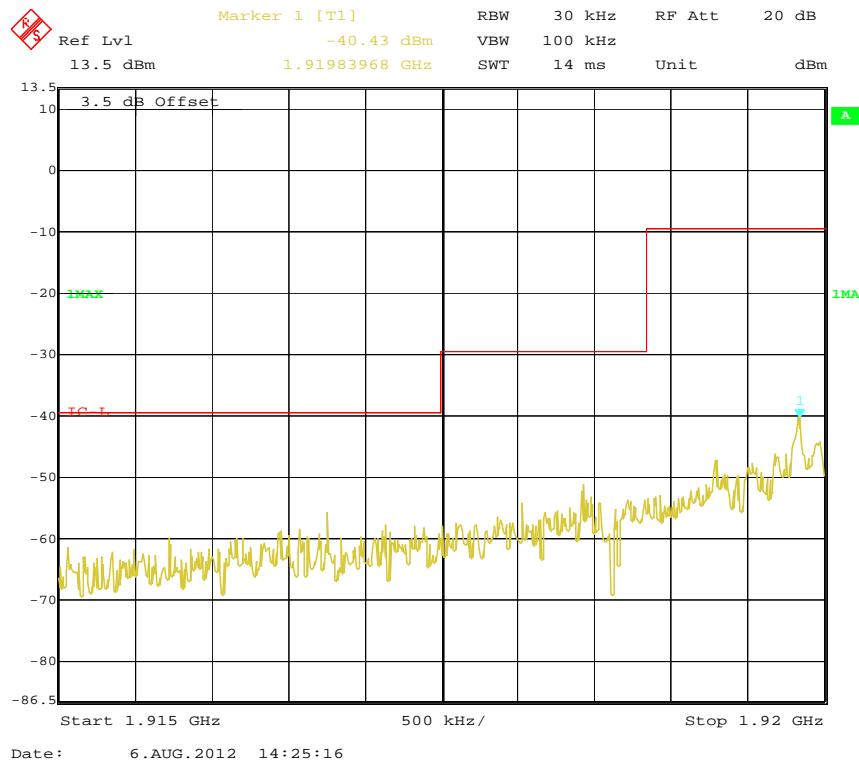


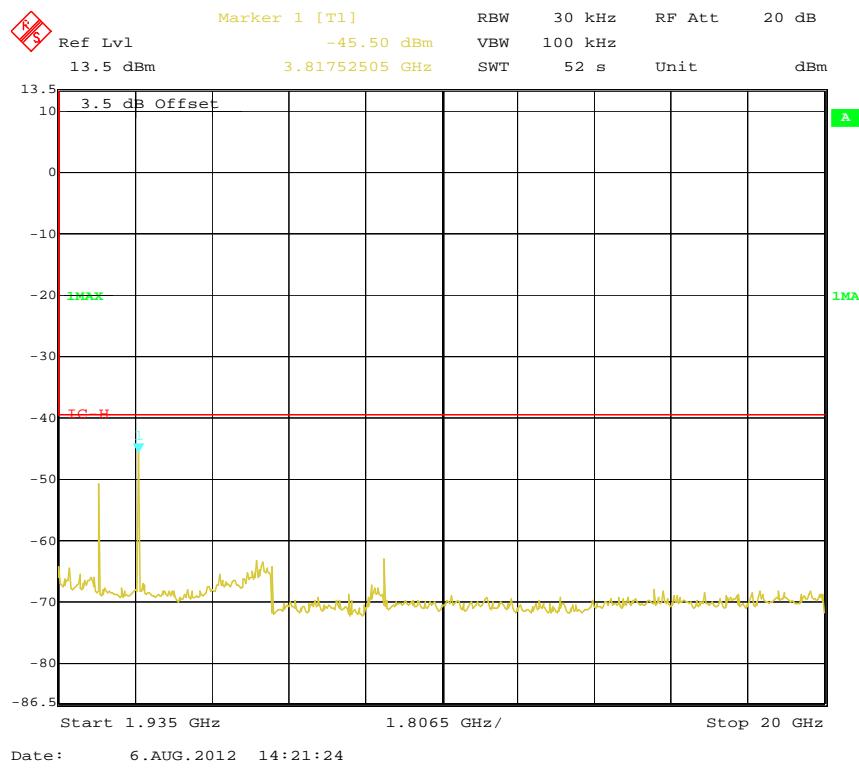


Middle Channels (Unwanted Emission outside the Sub-band)


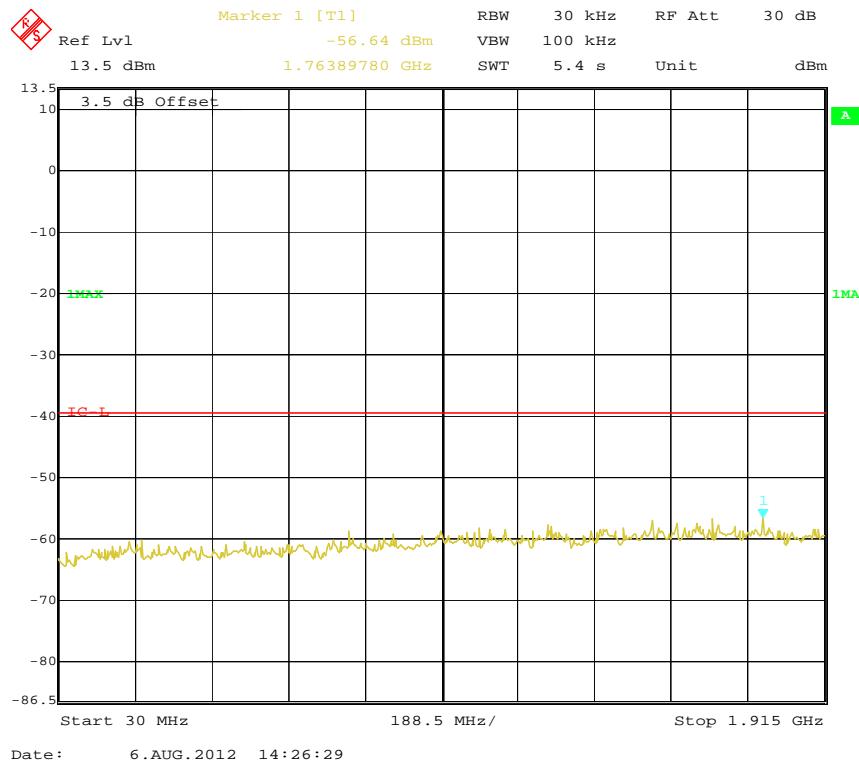


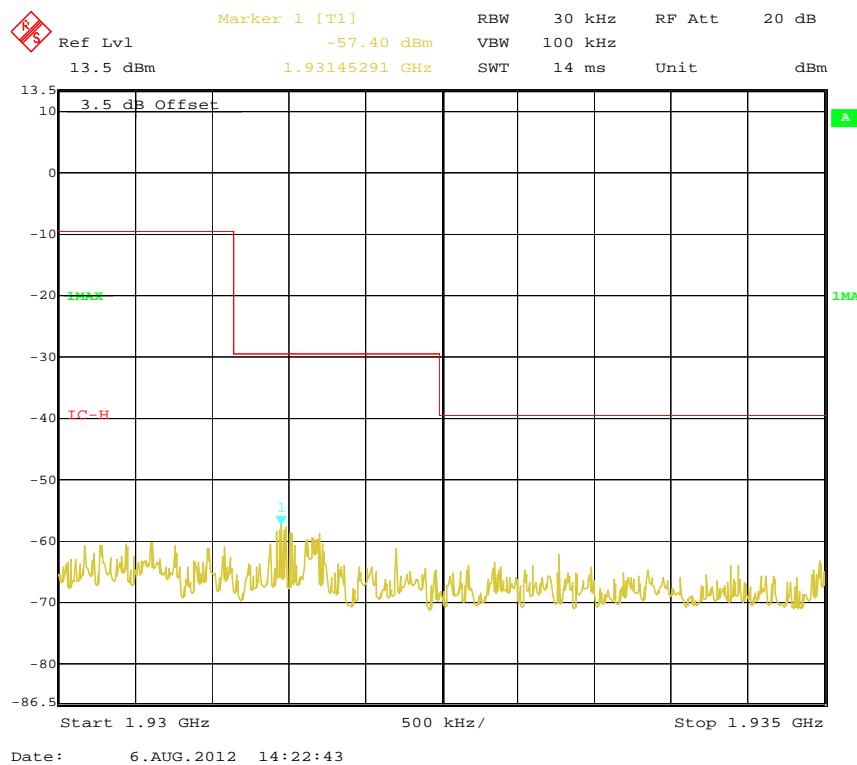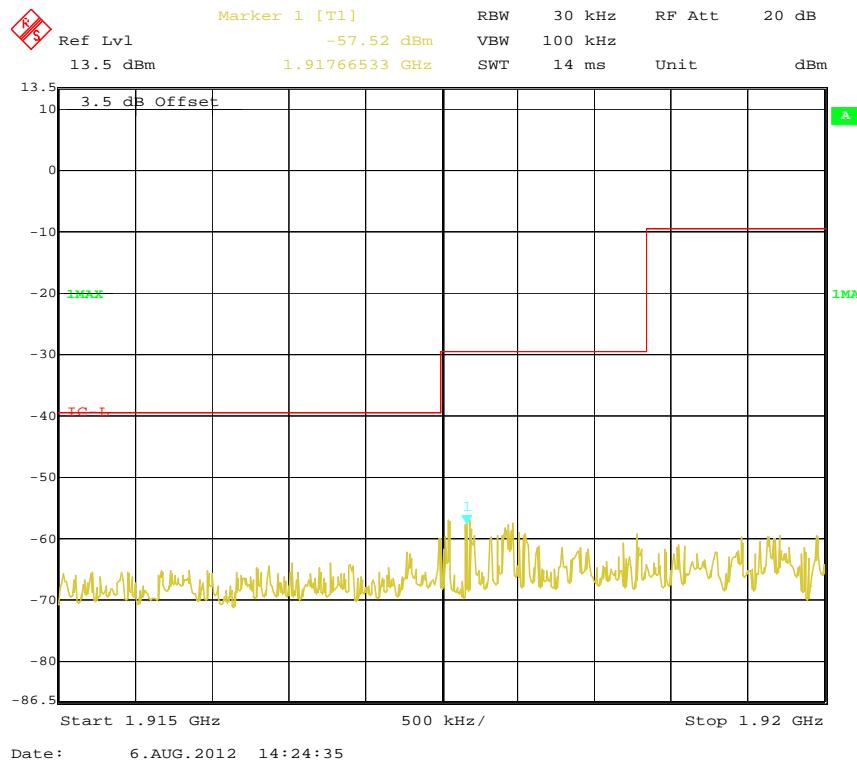


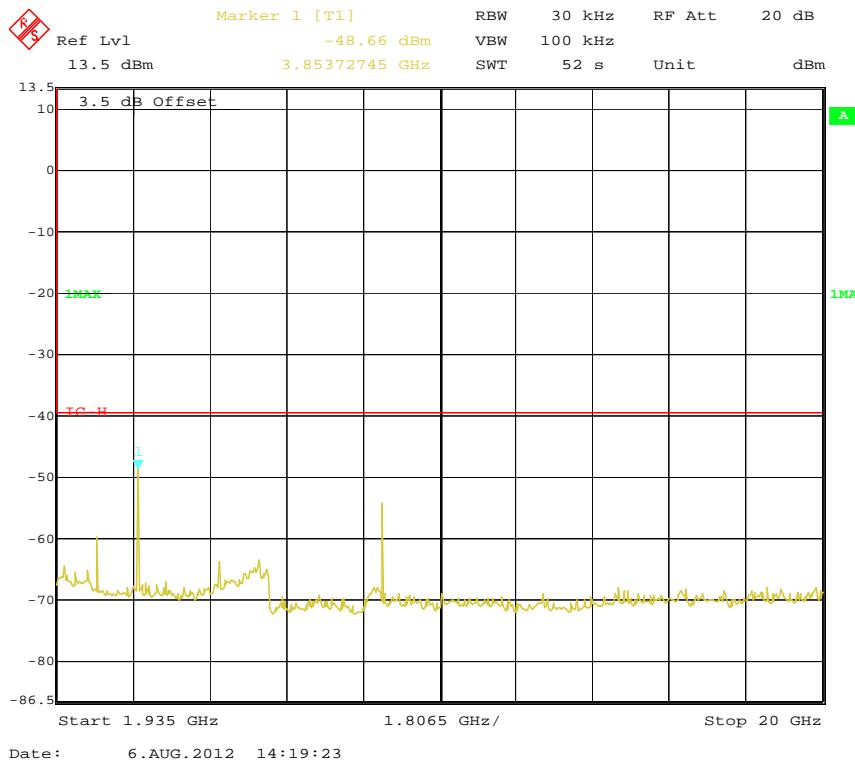

High Channels (Unwanted Emission outside the Sub-band)

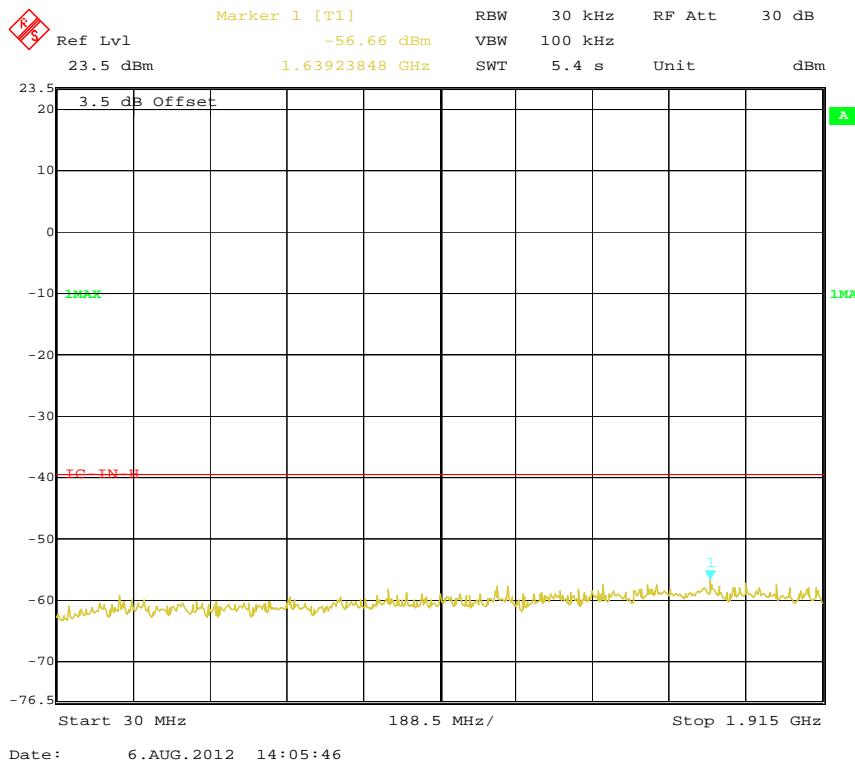

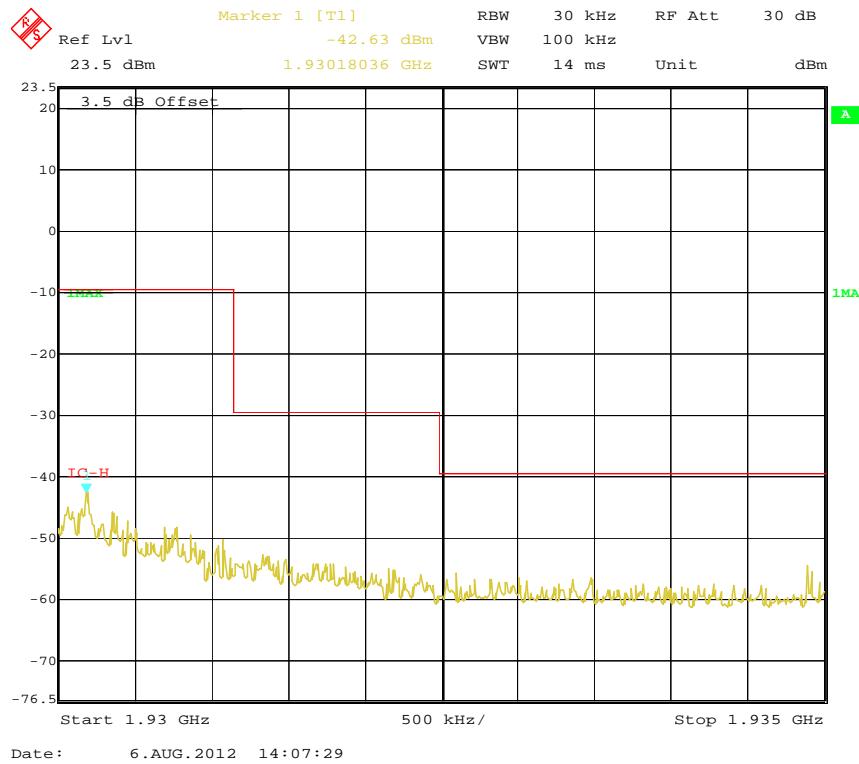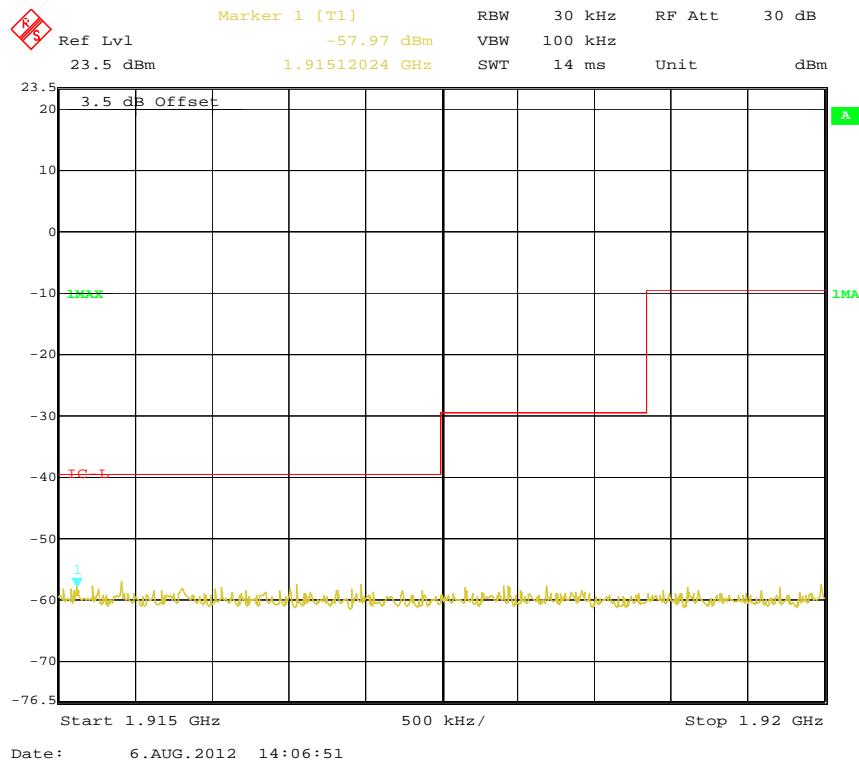

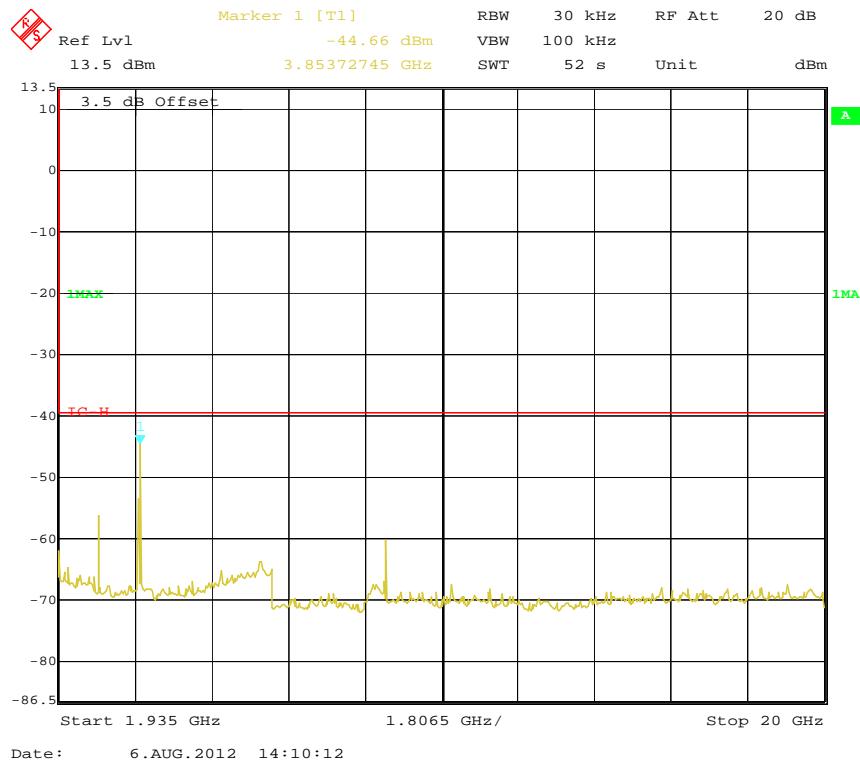


FCC §15.319 (g) - RADIATED SPURIOUS EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB (k=2, 95% level of confidence).

EUT Setup

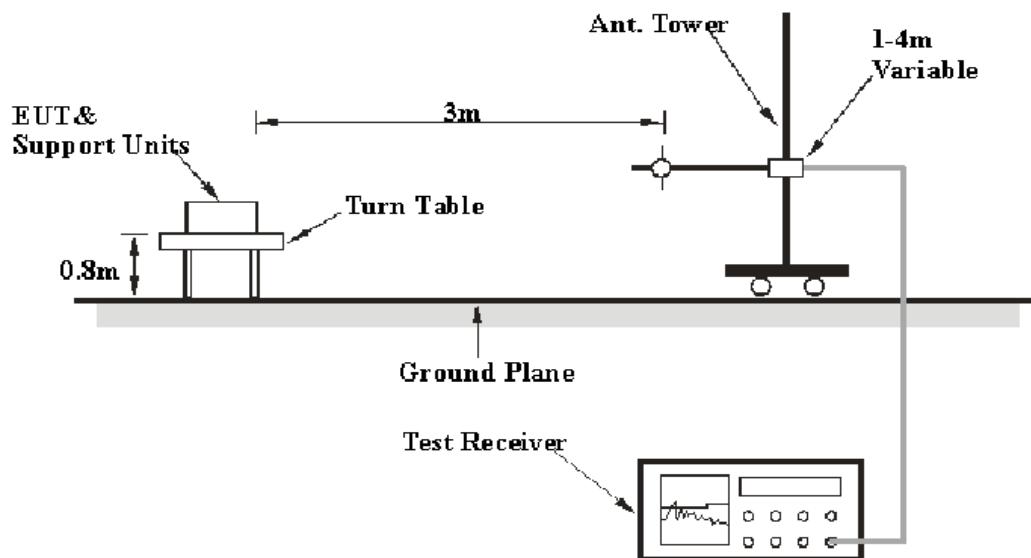

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.17 - 2006. The specification used was the FCC 15.209 and FCC 15.319(g) limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 20 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| <u>Frequency Range</u> | <u>RBW</u> | <u>Video B/W</u> |
|------------------------|------------|------------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz |
| Above 1 GHz | 1 MHz | 3 MHz |

Test Procedure

For the radiated emissions test, the EUT was powered by battery.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all Installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|-------------------|----------|---------------|------------------|----------------------|
| HP | Amplifier | 8447E | 1937A01046 | 2011-11-24 | 2012-11-23 |
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101122 | 2011-11-17 | 2012-11-16 |
| Sunol Sciences | Broadband Antenna | JB1 | A040904-2 | 2011-11-28 | 2012-11-27 |
| Mini-Circuits | Amplifier | ZVA-213+ | N/A | 2011-11-24 | 2012-11-23 |
| Sunol Sciences | Horn Antenna | DRH-118 | A052304 | 2011-12-01 | 2012-11-30 |
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028 | 2011-11-24 | 2012-11-23 |
| Agilent | Spectrum Analyzer | 8564E | 3943A01781 | 2012-05-17 | 2013-05-16 |
| Electro-Mechanics | Horn antenna | 3116 | 9510-2270 | 2011-10-14 | 2012-11-13 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC 15.209 and 15.319 (g), with the worst margin reading of:

14.14 dB at 3856.8 MHz in the **Vertical** polarization

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 20 °C |
| Relative Humidity: | 50 % |
| ATM Pressure: | 100.0 kPa |

The testing was performed by Henry Ding on 2012-08-13.

Test Mode: Transmitting

30MHz~20GHz:

| Frequency (MHz) | Receiver | | Turn table Degree | Rx Antenna | | | Cable Loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBuV/m) | FCC Part 15D | |
|-------------------------------|----------------------|-----------------------|-------------------|------------|-------------|-------------|-----------------|---------------------|------------------------------|----------------|-------------|
| | Reading (dB μ V) | Detector (PK/QP/Ave.) | | Height (m) | Polar (H/V) | Factor (dB) | | | | Limit (dBuV/m) | Margin (dB) |
| Low Channel (1921.536 MHz) | | | | | | | | | | | |
| 1921.5 | 97.84 | PK | 45 | 1.3 | H | 26.60 | 2.97 | 26.50 | 100.91 | / | / |
| 1921.5 | 103.95 | PK | 66 | 1.5 | V | 26.60 | 2.97 | 26.50 | 107.02 | / | / |
| 3843.0 | 48.67 | PK | 92 | 1.2 | V | 33.00 | 3.73 | 26.50 | 58.90 | 74.00 | 15.10 |
| 7686.0 | 36.95 | PK | 146 | 1.3 | H | 37.70 | 5.27 | 26.50 | 53.42 | 74.00 | 20.58 |
| 5764.5 | 35.93 | PK | 137 | 1.2 | H | 35.80 | 4.57 | 26.50 | 49.80 | 74.00 | 24.20 |
| 2231.5 | 35.63 | PK | 152 | 1.3 | H | 28.00 | 2.90 | 26.50 | 40.03 | 74.00 | 33.97 |
| 2269.5 | 34.86 | PK | 55 | 1.2 | V | 28.50 | 2.99 | 26.50 | 39.85 | 74.00 | 34.15 |
| 2293.1 | 33.96 | PK | 93 | 1.2 | V | 28.50 | 2.99 | 26.50 | 38.95 | 74.00 | 35.05 |
| Middle Channel (1924.992 MHz) | | | | | | | | | | | |
| 1924.9 | 97.37 | PK | 54 | 1.2 | H | 26.60 | 2.97 | 26.50 | 100.44 | / | / |
| 1924.9 | 102.98 | PK | 61 | 1.2 | V | 26.60 | 2.97 | 26.50 | 106.05 | / | / |
| 3849.8 | 47.33 | PK | 117 | 1.3 | H | 33.00 | 3.73 | 26.50 | 57.56 | 74.00 | 16.44 |
| 7699.6 | 35.68 | PK | 34 | 1.2 | H | 37.70 | 5.27 | 26.50 | 52.15 | 74.00 | 21.85 |
| 5774.7 | 35.21 | PK | 85 | 1.3 | V | 35.80 | 4.57 | 26.50 | 49.08 | 74.00 | 24.92 |
| 2232.7 | 35.66 | PK | 94 | 1.2 | H | 28.00 | 2.90 | 26.50 | 40.06 | 74.00 | 33.94 |
| 2268.2 | 34.98 | PK | 37 | 1.4 | V | 28.50 | 2.99 | 26.50 | 39.97 | 74.00 | 34.03 |
| 2293.4 | 34.51 | PK | 68 | 1.3 | V | 28.50 | 2.99 | 26.50 | 39.50 | 74.00 | 34.50 |
| High Channel (1928.448 MHz) | | | | | | | | | | | |
| 1928.4 | 98.87 | PK | 85 | 1.3 | H | 26.60 | 2.97 | 26.50 | 101.94 | / | / |
| 1928.4 | 103.39 | PK | 67 | 1.2 | V | 26.60 | 2.97 | 26.50 | 106.46 | / | / |
| 3856.8 | 49.63 | PK | 158 | 1.2 | V | 33.00 | 3.73 | 26.50 | 59.86 | 74.00 | 14.14 |
| 7713.6 | 35.83 | PK | 22 | 1.2 | H | 37.70 | 5.27 | 26.50 | 52.30 | 74.00 | 21.70 |
| 5785.2 | 36.67 | PK | 205 | 1.3 | H | 35.80 | 4.57 | 26.50 | 50.54 | 74.00 | 23.46 |
| 2296.7 | 35.33 | PK | 69 | 1.3 | V | 28.50 | 2.99 | 26.50 | 40.32 | 74.00 | 33.68 |
| 2235.4 | 35.87 | PK | 5 | 1.3 | H | 28.00 | 2.90 | 26.50 | 40.27 | 74.00 | 33.73 |
| 2262.1 | 34.61 | PK | 47 | 1.2 | V | 28.50 | 2.99 | 26.50 | 39.60 | 74.00 | 34.40 |

Note: the data which below 20 dB to the limit was not recorded from 30 MHz to 1 GHz.

| Freq. (MHz) | Peak Corrected Amplitude @ 3m (dB μ V/m) | Ant. Polar (H/V) | Duty Cycle Factor (dB) | Corrected Amplitude (dB μ V/m) | FCC §15.319(g)/§15.209 | | Comment |
|----------------|---|------------------------|------------------------------|--|---------------------------|----------------|----------|
| | | | | | Limit (dB μ V/m) | Margin (dB) | |
| Low Channel | | | | | | | |
| 1921.5 | 100.91 | H | -27.66 | 73.25 | / | / | Fund |
| 1921.5 | 107.02 | V | -27.66 | 79.36 | / | / | Fund |
| 3843.0 | 58.90 | V | -27.66 | 31.24 | 54 | 22.76 | Harmonic |
| 7686.0 | 53.42 | H | -27.66 | 25.76 | 54 | 28.24 | Harmonic |
| 5764.5 | 49.80 | H | -27.66 | 22.14 | 54 | 31.86 | Harmonic |
| 2239.3 | 40.03 | H | -27.66 | 12.37 | 54 | 41.63 | Spurious |
| 2266.7 | 39.85 | V | -27.66 | 12.19 | 54 | 41.81 | Spurious |
| 2295.6 | 38.95 | V | -27.66 | 11.29 | 54 | 42.71 | Spurious |
| Middle Channel | | | | | | | |
| 1924.9 | 100.44 | H | -27.66 | 72.78 | / | / | Fund |
| 1924.9 | 106.05 | V | -27.66 | 78.39 | / | / | Fund |
| 3849.8 | 57.56 | H | -27.66 | 29.90 | 54 | 24.10 | Harmonic |
| 7699.6 | 52.15 | H | -27.66 | 24.49 | 54 | 29.51 | Harmonic |
| 5774.7 | 49.08 | V | -27.66 | 21.42 | 54 | 32.58 | Harmonic |
| 2238.3 | 40.06 | V | -27.66 | 12.40 | 54 | 41.60 | Spurious |
| 2265.9 | 39.97 | H | -27.66 | 12.31 | 54 | 41.69 | Spurious |
| 2294.3 | 39.50 | V | -27.66 | 11.84 | 54 | 42.16 | Spurious |
| High Channel | | | | | | | |
| 1928.4 | 101.94 | H | -27.66 | 74.28 | / | / | Fund |
| 1928.4 | 106.46 | V | -27.66 | 78.80 | / | / | Fund |
| 3856.8 | 59.86 | H | -27.66 | 32.20 | 54 | 21.80 | Harmonic |
| 7713.6 | 52.30 | H | -27.66 | 24.64 | 54 | 29.36 | Harmonic |
| 5785.2 | 50.54 | V | -27.66 | 22.88 | 54 | 31.12 | Harmonic |
| 2298.1 | 40.32 | V | -27.66 | 12.66 | 54 | 41.34 | Spurious |
| 2236.6 | 40.27 | V | -27.66 | 12.61 | 54 | 41.39 | Spurious |
| 2262.9 | 39.60 | H | -27.66 | 11.94 | 54 | 42.06 | Spurious |

Note: Duty Cycle=Ton/Tp*100%

Ton=0.414 ms


Tp=10.00 ms

Duty Cycle=4.14%


Duty cycle factor = $20\lg(\text{Duty Cycle}) = -27.66 \text{ dB}$

Ave.=PK+20* lg(Duty Cycle)

Sweep time at 100ms & T_p:

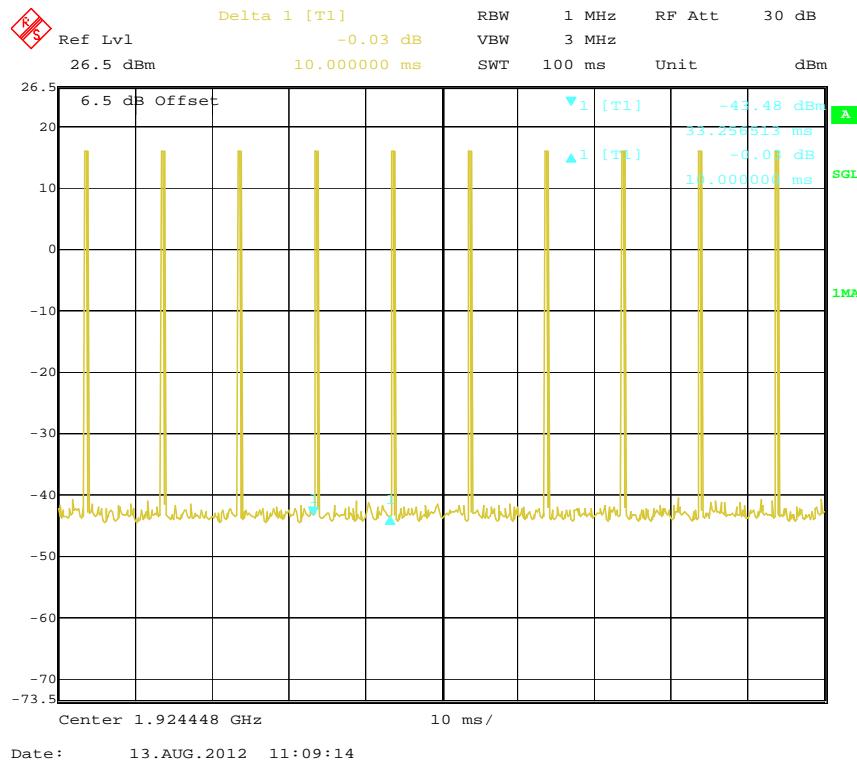

T_{on}:

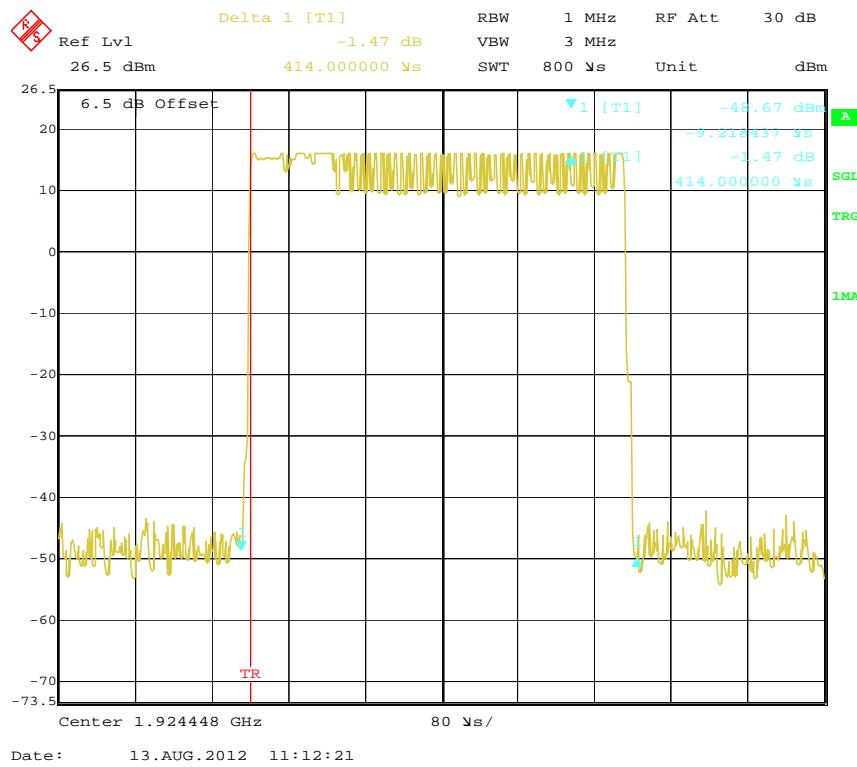

FCC §15.323 (f) - FREQUENCY STABILITY

Applicable Standard

Per §15.323(f), the frequency stability of the carrier frequency of the intentional radiator shall be maintained within ± 10 ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of -20° to $+50^{\circ}$ C at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20° C. For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage

Test Procedure

This procedure should be carried out for each of the following test cases:

| Temperature | Supply Voltage |
|-----------------|--------------------------|
| 20° C | 85-115% or new batteries |
| -20° C | Normal |
| $+50^{\circ}$ C | Normal |

^a Use the lowest temperature at which the EUT is specified to operate if it is above -20° C.

Using the mean carrier frequency at 20° C and at nominal supply voltage as the reference, the mean carrier frequency shall be maintained within ± 10 ppm at the two extreme temperatures (or as declared by the manufacturer) and at normal temperature (typically 20° C) at the two extreme supply voltages. This test does not apply to a EUT that is capable only of operating from a battery.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|------------------------------------|---------|---------------|------------------|----------------------|
| ESPEC | Temperature & Humidity Chamber | EL-10KA | 09107726 | 2011-11-24 | 2012-11-23 |
| R & S | Digital Radio-Communication Tester | CMD60 | 829902/026 | 2012-03-16 | 2013-03-15 |

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Data**Environmental Conditions**

| | |
|---------------------------|-----------|
| Temperature: | 20 °C |
| Relative Humidity: | 50 % |
| ATM Pressure: | 100.0 kPa |

The testing was performed by Henry Ding on 2012-08-06.

Test Mode: Transmitting

Test Result: Compliance.

| Temperature (°C) | Voltage (V _{dc}) | Channel Frequency (MHz) | Measured Frequency Offset (kHz) | Measured Frequency Offset (ppm) | Limit (ppm) |
|------------------|----------------------------|-------------------------|---------------------------------|---------------------------------|-------------|
| 20 | 3.6 | 1924.992 | 10 | 5.19 | ±10 |
| -20 | 3.6 | 1924.992 | 12 | 6.23 | ±10 |
| 50 | 3.6 | 1924.992 | 15 | 6.75 | ±10 |

FCC §15.323 (c) (e) & §15.319(f) – SPECIFIC REQUIREMENTS FOR UPCS DEVICE

Automatic Discontinuation of Transmission, FCC Part 15.319(f)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. The provisions in this section are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Test Procedure:

Please according to the declaration provided by manufacturer.

Test result:

Meet the requirement

Monitoring Time FCC Part 15.323 (c)(1)

Immediately prior to initiating transmission, devices must monitor the combined time and spectrum window in which they intend to transmit. For a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period

Test procedure:

Measurement method according to ANSI C63.17 2006 clause 7.3.4

Test result:

EUT monitors the combined time and spectrum window prior to initiation of transmission. Test result please according to FCC15.323(c)(1).

Lower Monitoring Threshold Part 15.323 (c)(2)

The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth used by the device.

Test procedure:

Measurement method according to ANSI C63.17 2006 clause 7.3.1

Test result: Not Apply

Maximum Transmit Period FCC Part 15.323 (c)(3)

If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

Test procedure:

Measurement method according to ANSI C63.17 2006 clause 8.2.2

Test result:

| Repetition of Access Criteria | Measured Maximum Transmission Time (Second) | Limit (Second) | Results |
|-------------------------------|---|----------------|---------|
| First | 21600 | 28,800 | Pass |
| Second | 21600 | 28,800 | Pass |

System Acknowledgement, FCC Part 15.323 (c) (4)

Once access to specific combined time and spectrum windows is obtained an acknowledgment from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgment, at which time the access criteria must be repeated.

Test procedure:

Measurement method according to ANSI C63.17-2006 clause 8.1.1, 8.2.1

Test result:

| Test | Time taken (second) | Limit (second) | Result |
|---|---------------------|----------------|--------|
| Connection acknowledgement | 0.08 | 1 | Pass |
| Change of access criteria for control information | N/A | 30 | Pass |
| Transmission cease time | 2.2 | 30 | Pass |
| Pulse length | 0.000414 | 0.01 | Pass |

Note: N/A=Not Applicable

Least Interfered Channel (LIC) Selection, FCC Part 15.323 (c) (5)

If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level below a monitoring threshold of 50 dB above the thermal noise power determined for the emission bandwidth may be accessed.

Calculation of monitoring threshold limits for isochroous devices:

Lower threshold: $T_L = -174 + 10\log_{10}B + M_u + P_{MAX} - P_{EUT}$ (dBm)

Upper threshold: $T_U = -174 + 10\log_{10}B + M_u + P_{MAX} - P_{EUT}$ (dBm)

Where: B=Emission bandwidth (Hz)

M_u =dB the threshold may exceed thermal noise (30 for T_L & 50 for T_U)

$P_{MAX} = 5\log_{10}B - 10$ (dBm)

P_{EUT} =Transmitted power (dBm)

Limit:

| Monitor Threshold | B (MHz) | M _u (dB) | P _{MAX} (dBm) | P _{EUT} (dBm) | Threshold (dBm) |
|-------------------|---------|---------------------|------------------------|------------------------|-----------------|
| T _L | 1.480 | 30 | 20.85 | 16.13 | -77.58 |
| T _U | 1.480 | 50 | 20.85 | 16.21 | -57.66 |

The EUT must not transmit until the interference level is less than or equal to:

Measured Threshold Level $\leq T_U$

Where: T_U =Upper threshold level

Test procedure:

Measurement method according to ANSI C63.17-2006 clause 7.3.2, 7.3.3, 7.3.4

Test result:

| Monitor threshold | Measured Threshold Level | Limit (dBm) |
|----------------------|--------------------------|-------------|
| Lower Threshold(dBm) | N/A | -77.58 |
| Upper Threshold(dBm) | N/A | -57.66 |

Note: The upper threshold is applicable as the EUT utilizes more than 40 duplex system channels

Random waiting FCC 15.323(c) (6)

If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same window after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.

Test procedure:

Measurement method according to ANSI C63.17-2006 clause 8.1.3

Test result:

The manufacturer declares that this provision is not utilized by the EUT.

Monitoring Bandwidth, FCC Part 15.323 (c) (7)

The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission and have a maximum reaction time less than $50 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds

Test procedure:

Measurement method according to ANSI C63.17-2006 clause 7.5

Test result:

| Test Equation (μs) | B(bandwidth) (MHz) | Pulse width (μs) | Limit (μs) | Result |
|------------------------------------|-----------------------|----------------------------------|----------------------------|--------|
| $50 (1.25/B)^{1/2}$ | 1.480 | 45.95 | 50 | Pass |
| $35 (1.25/B)^{1/2}$ | 1.480 | 32.17 | 35 | Pass |

Monitoring Antenna, FCC Part 15.323 (c) (8)

The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

Test procedure:

Measurement method according to ANSI C63.17-2006 paragraph 4

Test result:

The antenna of the EUT used for transmission is the same interior antenna that used for monitoring.

Monitoring threshold relation FCC Part 15.323(c) (9)

Devices that have a power output lower than the maximum permitted under the rules can increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

Test procedure:

Measurement method according to ANSI C63.17-2006 paragraph 4

Test result:

Not apply based on 15.323 (c)(5)

Duplex Connections, FCC Part 15.323 (c) (10)

An initiating device may attempt to establish a duplex connection by monitors both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

Test procedure:

Measurement method according to ANSI C63.17-2006 clause 8.3

Test result:

The manufacturer declares that this provision is not utilized by the EUT.

Alternative monitoring interval for co-located devices, FCC Part 15.323 (c) (11)

An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within 1.25 MHz of the center frequency of channel(s) already occupied by that device or co-located co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.

Test procedure:

Measurement method according to ANSI C63.17-2006 clause 8.4

Test result:

The manufacturer declares that this provision is not utilized by the EUT.

Fair Access, FCC Part 15.323 (c) (12)

The provisions of FCC Part15.323(c)(10) or (c)(11) shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

Test result:

The manufacturer declares that this device does not use any mechanisms as provided by Part15.323 (c) (10) or (c) (11) to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other device.

Frame Repetition Stability, Part 15 .323 (e)

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in these sub-bands shall be 20 milliseconds or 10 milliseconds/X where X is a positive whole number.

Test procedure:

Measurement method according to ANSI C63.17-2006 clause 6.2.2, 6.2.3

Test result:

Frame Repetition Stability:

| Frame Repetition Stability (ppm) | Limit (ppm) | Result (Pass/Fail) |
|----------------------------------|-------------|--------------------|
| 0.79 | 10 | Pass |

Frame Period and Jitter:

| Max. pos. Jitter (us) | Max. neg. Jitter (us) | Frame period (ms) | Limit | |
|-----------------------|-----------------------|-------------------|-------------------|-------------|
| | | | Frame Period (ms) | Jitter (us) |
| 0.15 | -0.07 | 10.00000 | 20 or 10/X | 25us |

Note: X is a positive whole number.

DECLARATION LETTER



XINGTEL XIAMEN GROUP CO., LTD.

Xingtel Building, Chuangxin Road, Torch Hi-Tech Industrial
District, Xiamen 361006, P R China
E-mail:info@xingtel.com Website://www.xingtel.com

Tel: +86-592-562-5929
+86-592-603-6442(6 lines)
Fax: +86-592-603-7860

To: Bay Area Compliance Laboratories Corp

Declaration of Similarity

To whom it may concern,

We, Xingtel Xiamen Group Co., Ltd.

Address: Xingtel Building, Chuangxin Road, Torch Hi-tech Industrial District, Xiamen, 361006, China

Hereby declare that

Product Name: DECT 6.0 Amplified Cordless Freedom Deluxe Phone

Trade Name: ClearSounds

| Model number | Combination |
|--------------|--------------------------|
| A1600BT | 1base+1handset |
| A1600BT BUN | 1base+2handsets+1charger |
| A1600E-BT | 1handset+1charger |

All models are electrically and mechanically identical, the only difference between them are the model number and combination for the marketing purpose! **A1600BT BUN** was tested by **BACL**.

Regards,
Xingtel Xiamen Group Co., Ltd.

Simon Liu
Director
July 25, 2012

***** END OF REPORT *****