

**FCC PART 15.247
TEST REPORT**

For

Xingtel Xiamen Group Co., Ltd.

Xingtel Building, Chuangxin Road, Torch Hi-Tech Industrial District,
Xiamen 361006, PR China

FCC ID: QMHI700

Report Type: Original Report	Product Type: DECT & Bluetooth Device
Test Engineer: Felix Li	<i>Felix Li</i>
Report Number: RSZ111214008-00BT	
Report Date: 2012-03-19	
Reviewed By: Alvin Huang EMC Engineer	<i>Alvin Huang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EXTERNAL I/O CABLE.....	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD	9
FCC §15.203 – ANTENNA REQUIREMENT	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA	20
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING	23
APPLICABLE STANDARD	23

TEST PROCEDURE	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST DATA	23
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST DATA	26
FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA	28
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	35
FCC §15.247(d) - BAND EDGES TESTING	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	39
DECLARATION LETTER.....	41

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Xingtel Xiamen Group Co., Ltd.*'s product, model number: *i-700 Twin (FCC ID: QMHI700)* (the "EUT") in this report is a base of *DECT & Bluetooth Device*, named *iPhone Complimate* by applicant, which was measured approximately: 17.9 cm (L) x 10.6cm (W) x 4.3cm (H), input voltage: DC 6 V from adapter.

Adapter information:

Model: MN-A006-L130;

Input: AC 100-240V 50/60Hz 0.3A MAX;

Output: (1-2) 6.0VDC, 700mA

(5-6) 6.0VDC, 300mA

Note: The serial products, model i-700, i-650, i-650 Twin, i-650HS, i-650 Bundle, i-700 Twin and i-700 HS are electrically identical, we select i-700 Twin to test, the difference among them is only model number due to different combination, and please refers to the attached declaration letter.

** All measurement and test data in this report was gathered from production sample serial number: 1112037 (Assigned by BACL, Shenzhen). The EUT was received on 2011-12-14.*

Objective

This report is prepared on behalf of *Xingtel Xiamen Group Co., Ltd.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15D PUE submissions and FCC Part 15D PUB submission of portable part portion with FCC ID: QMHI700

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Test mode.


Equipment Modifications

No modification was made to the unit tested.


External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded Detectable DC Power Cable	1.5	EUT	Adapter

Configuration of Test Setup

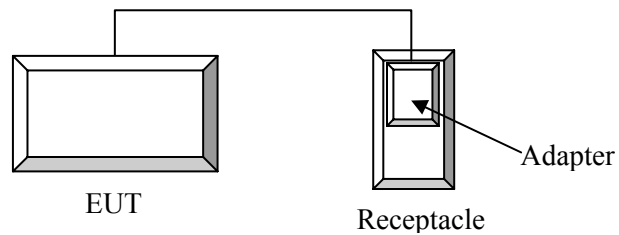

Block Diagram of Test Setup

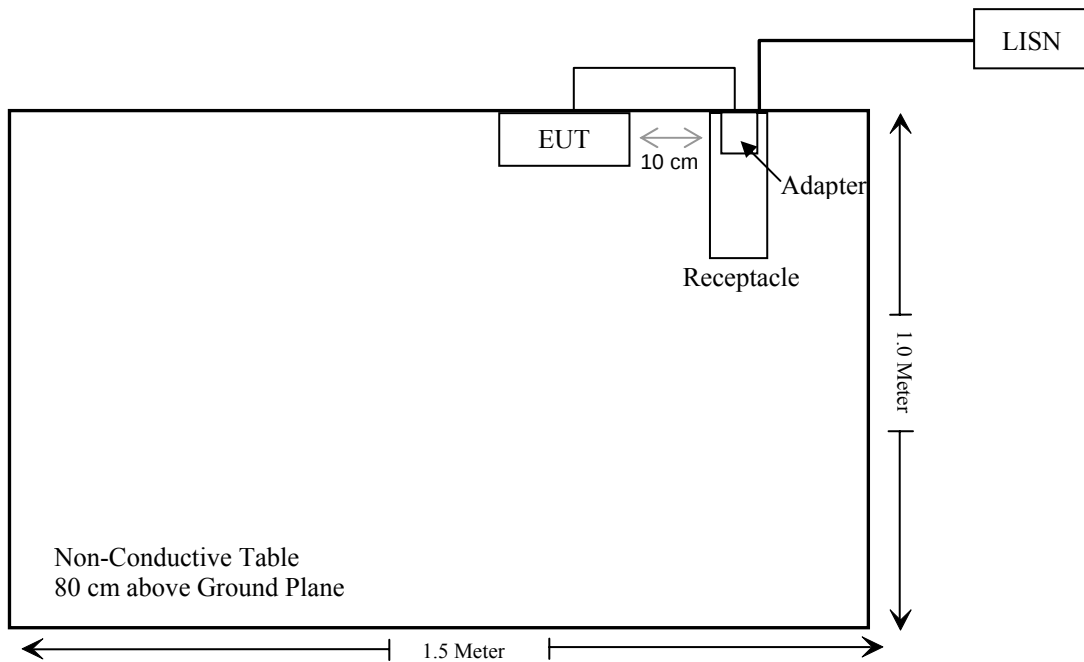

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§ 15.319 (i)&2.1091	Maximum Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to FCC 15.247(i) and subpart §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz;

* = Plane-wave equivalent power density;

MPE Calculation

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where: S = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2402	3	2.0	1.12	1.29	20	0.0005	1.0

Result: Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a PCB antenna, which in accordance to section 15.203. Please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is 2.4 dB (k=2, 95% level of confidence).

EUT Setup

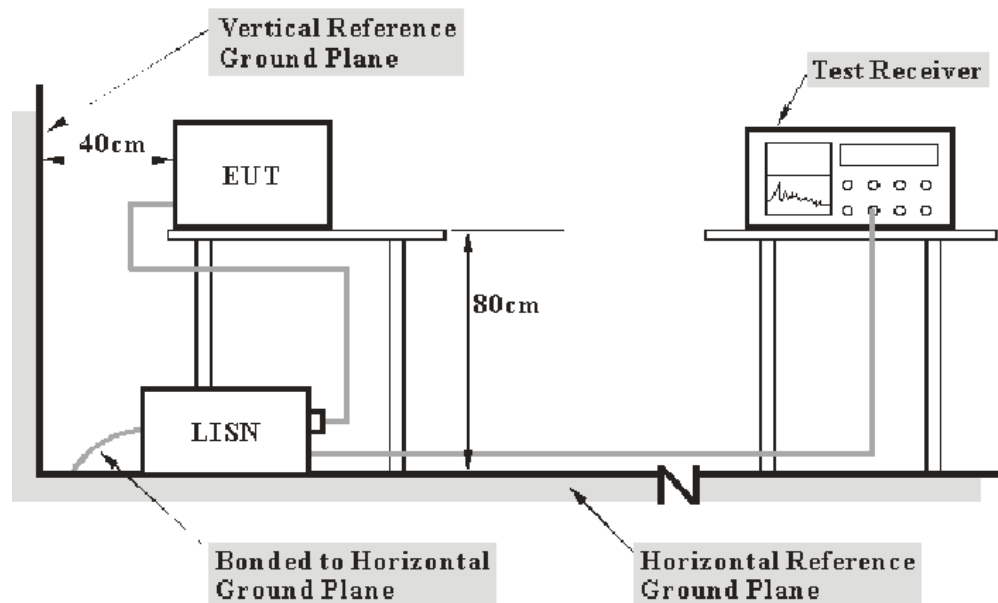

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IF B/W</u>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08

*** Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

3.84 dB at 0.400 MHz in the **Neutral** conducted mode

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa


The testing was performed by Felix Li on 2011-12-16.

Test Mode: Transmitting

AC 120 V, 60 Hz, Line:

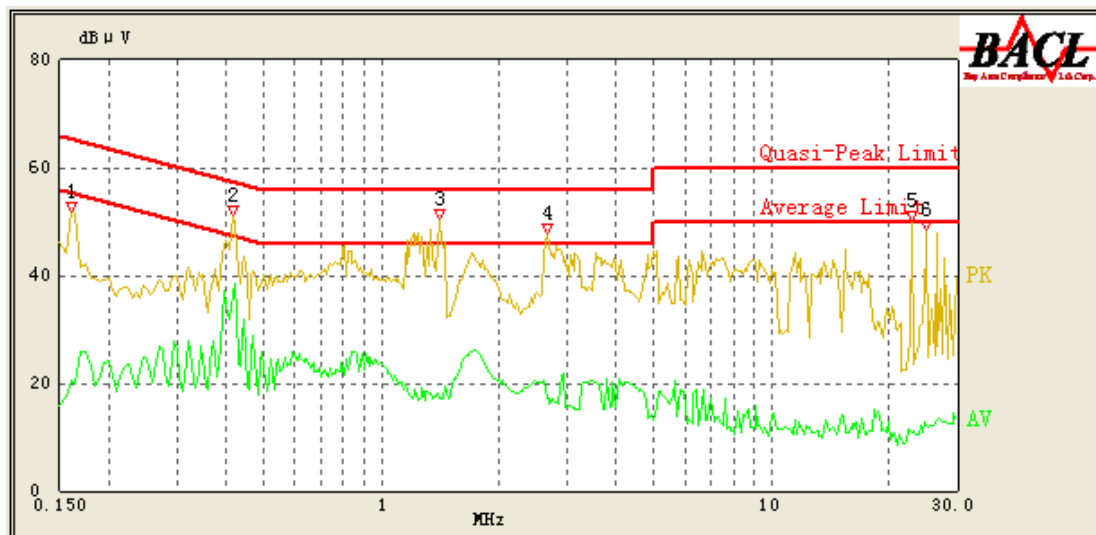

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.415	36.66	10.23	48.43	11.77	Ave.
0.415	43.61	10.23	58.43	14.82	QP
2.655	28.41	10.39	56.00	27.59	QP
1.400	18.18	10.28	46.00	27.82	Ave.
2.655	17.10	10.39	46.00	28.90	Ave.
1.405	26.86	10.28	56.00	29.14	QP
0.160	35.21	10.23	65.71	30.50	QP
0.160	20.37	10.23	55.71	35.34	Ave.
24.970	12.04	12.24	50.00	37.96	Ave.
23.010	10.85	11.96	50.00	39.15	Ave.
24.970	17.42	12.24	60.00	42.58	QP
22.820	16.22	11.93	60.00	43.78	QP

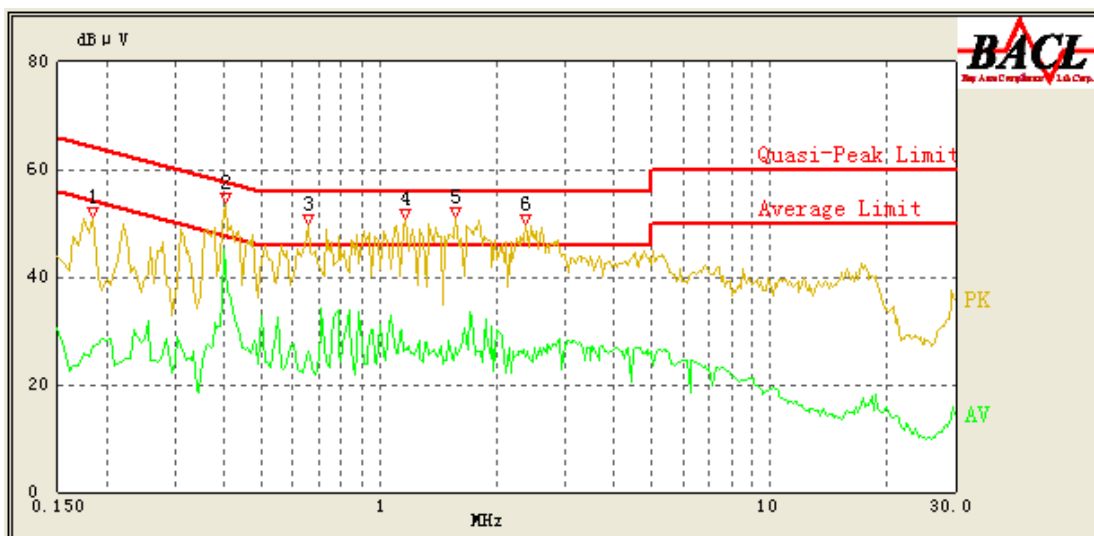AC 120V, 60 Hz, Neutral:

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.400	45.02	10.23	48.86	3.84	Ave.
0.405	54.29	10.23	58.71	4.42	QP
1.160	42.71	10.25	56.00	13.29	QP
1.575	42.55	10.29	56.00	13.45	QP
2.380	40.64	10.36	56.00	15.36	QP
0.660	37.61	10.24	56.00	18.39	QP
1.575	26.69	10.29	46.00	19.31	Ave.
1.155	26.28	10.25	46.00	19.72	Ave.
0.655	26.01	10.24	46.00	19.99	Ave.
2.365	25.09	10.36	46.00	20.91	Ave.
0.185	37.39	10.23	65.00	27.61	QP
0.185	27.06	10.23	55.00	27.94	Ave.

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard

FCC §15.205; §15.209; §15.247(d)


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB. ($k=2$, 95% level of confidence).

EUT Setup

Below 1 GHz:

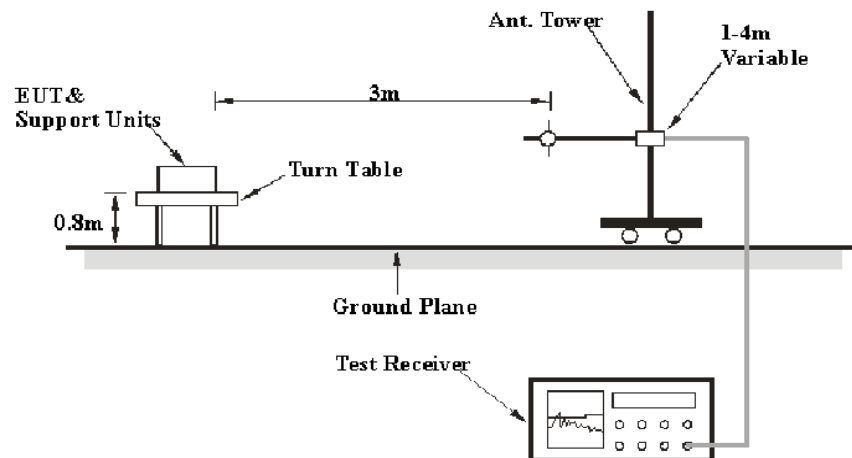

Above 1 GHz:

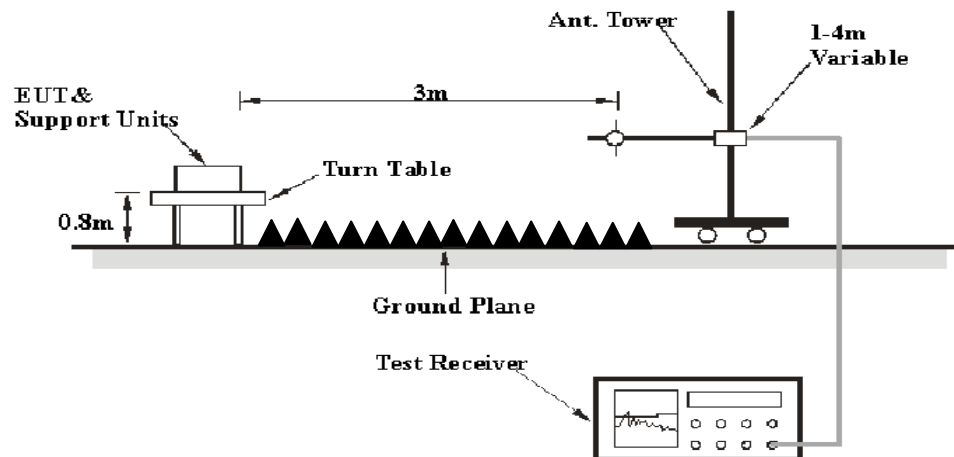

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	PK

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2011-08-02	2012-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2011-07-05	2012-07-04
Mini-Circuits	Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-08
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-05-05	2012-05-04
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07
Agilent	Spectrum Analyzer	8564E	3943A01781	2011-04-12	2012-04-11
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2011-05-05	2012-05-04

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

5.9 dB at 84.5600 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

** The testing was performed by Felix Lin on 2011-12-16.*

30MHz ~ 25 GHz

Test mode: Transmitting

Frequency (MHz)	Receiver Reading (dBμV)	Detector (PK/QP/Ave)	Direction (Degree)	Test Antenna			Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	FCC Part 15.247/205/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	Comment
Low Channel (2402 MHz)												
2402	86.46	PK	125	1.2	H	27.4	3.0	26.65	90.21	/	/	Fund.
2402	85.56	PK	360	1.3	V	27.4	3.0	26.65	89.31	/	/	Fund.
2402	71.6	Ave.	125	1.2	H	27.4	3.0	26.65	75.35	/	/	Fund.
2402	69.59	Ave.	360	1.3	V	27.4	3.0	26.65	73.34	/	/	Fund.
84.56	53.25	QP	100	1.5	V	5.5	0.45	25.90	33.30	40.0	6.7	Spurious
128.12	40.38	QP	49	1.2	H	12.2	0.60	25.48	27.70	43.5	15.8	Spurious
4804	28.16	Ave.	270	1.2	H	36.3	4.30	26.75	42.01	54	11.99	harmonic
4804	47.29	PK	220	1.2	H	36.3	4.30	26.75	61.14	74	12.86	harmonic
4804	46.95	PK	300	1.3	V	35.0	4.30	26.75	59.50	74	14.5	harmonic
4804	27.28	Ave.	95	1.2	V	32.8	4.30	26.75	37.63	54	16.37	harmonic
2365	27.02	Ave.	250	1.3	H	30.1	3.01	27.54	32.59	54	21.41	spurious
2365	26.05	Ave.	250	1.1	V	30.1	3.01	27.54	31.62	54	22.38	spurious
2365	39.75	PK	170	1.4	H	30.1	3.01	27.54	45.32	74	28.68	spurious
2365	33.76	PK	270	1.1	V	30.1	3.01	27.54	39.33	74	34.67	spurious
Middle Channel (2441 MHz)												
2441	86.68	PK	125	1.2	H	27.4	3.0	26.65	90.43	/	/	Fund.
2441	85.01	PK	360	1.3	V	27.4	3.0	26.65	88.76	/	/	Fund.
2441	71.86	Ave.	125	1.2	H	27.4	3.0	26.65	75.61	/	/	Fund.
2441	68.70	Ave.	360	1.3	V	27.4	3.0	26.65	72.45	/	/	Fund.
84.56	53.75	QP	100	1.5	V	5.5	0.45	25.90	33.80	40.0	6.2	Spurious
128.12	40.18	QP	49	1.2	H	12.2	0.60	25.48	27.50	43.5	16.0	Spurious
4882	27.21	Ave.	100	1.3	H	36.6	4.37	26.75	41.43	54	12.57	harmonic
4882	46.54	PK	150	1.2	H	36.6	4.37	26.75	60.76	74	13.24	harmonic
4882	27.04	Ave.	21	1.2	V	35.4	4.37	26.75	40.06	54	13.94	harmonic
4882	46.86	PK	70	1.3	V	35.4	4.37	26.75	59.88	74	14.12	harmonic

Frequency (MHz)	Receiver Reading (dBμV)	Detector (PK/QP/Ave)	Direction (Degree)	Test Antenna			Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	FCC Part 15.247/205/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	Comment
High Channel (2480 MHz)												
2480	85.60	PK	320	1.2	H	27.4	3.0	26.65	89.35	/	/	Fund.
2480	83.45	PK	165	1.2	V	27.4	3.0	26.65	87.20	/	/	Fund.
2480	69.69	Ave.	246	1.3	H	27.4	3.0	26.65	73.44	/	/	Fund.
2480	67.79	Ave.	10	1.2	V	27.4	3.0	26.65	71.54	/	/	Fund.
84.56	54.05	QP	100	1.5	V	5.5	0.45	25.90	34.10	40.0	5.9	Spurious
128.12	39.88	QP	49	1.2	H	12.2	0.60	25.48	27.20	43.5	16.3	Spurious
4960	49.35	PK	260	1.2	H	36.6	4.37	26.75	63.57	74	10.43	harmonic
4960	29.58	Ave.	220	1.2	V	35.4	4.37	26.75	42.60	54	11.40	harmonic
4960	28.08	Ave.	110	1.1	H	36.6	4.37	26.75	42.30	54	11.70	harmonic
4960	49.23	PK	163	1.4	V	35.4	4.37	26.75	62.25	74	11.75	harmonic
2496	25.92	Ave.	80	1.2	V	31.5	3.13	27.54	33.01	54	20.99	spurious
2496	25.13	Ave.	110	1.2	H	31.5	3.13	27.54	32.22	54	21.78	spurious
2496	35.28	PK	215	1.5	H	31.5	3.13	27.54	42.37	74	31.63	spurious
2496	33.25	PK	30	1.2	V	31.5	3.13	27.54	40.34	74	33.66	spurious

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

* The testing was performed by Felix Li on 2011-12-20.


Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	2402	1.004	0.565	Pass
Adjacent	2403			
Middle	2441	1.000	0.579	Pass
Adjacent	2442			
High	2480	1.004	0.570	Pass
Adjacent	2479			


Low Channel

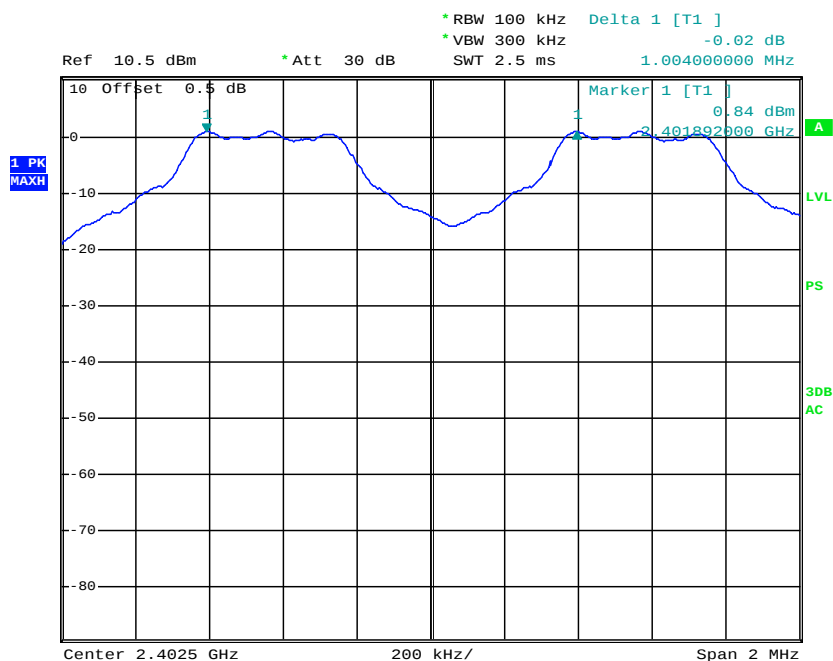

Middle Channel

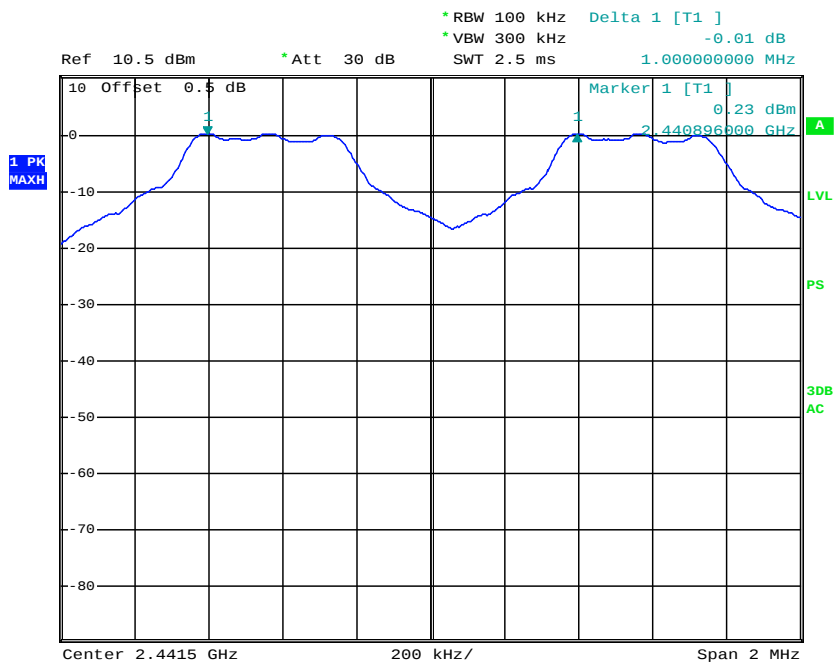

High Channel

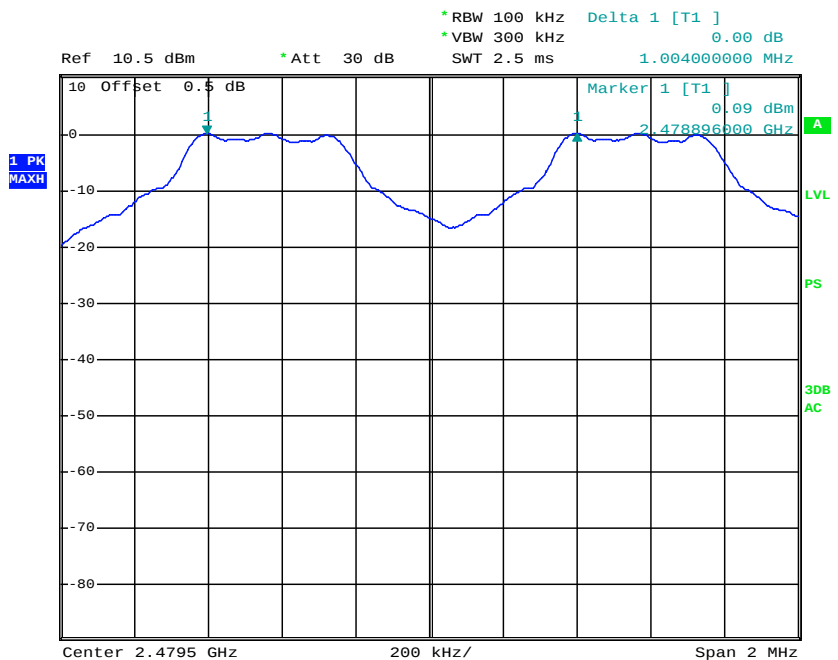

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

* The testing was performed by Felix Li on 2011-12-20.


Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	0.848
Middle	2441	0.868
High	2480	0.856


Low Channel

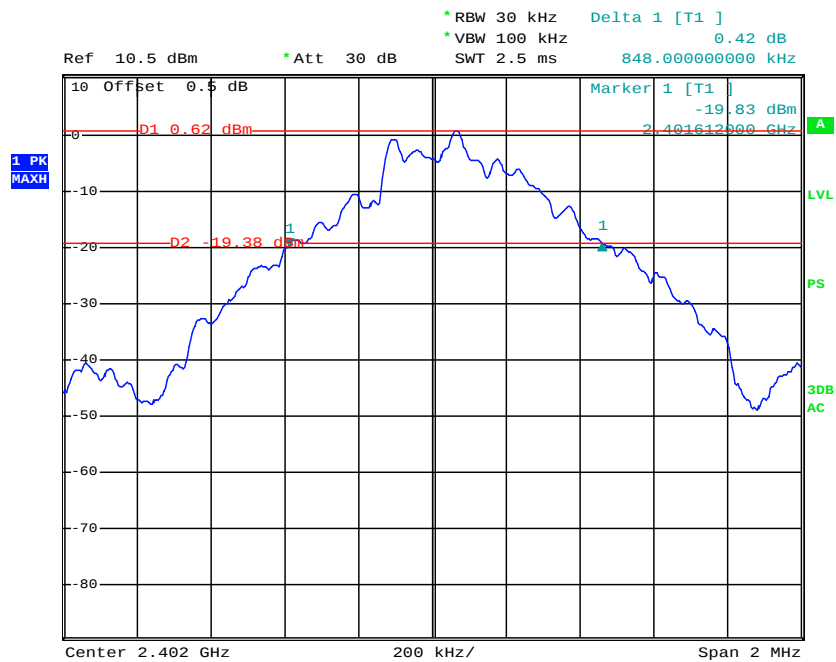

Middle Channel

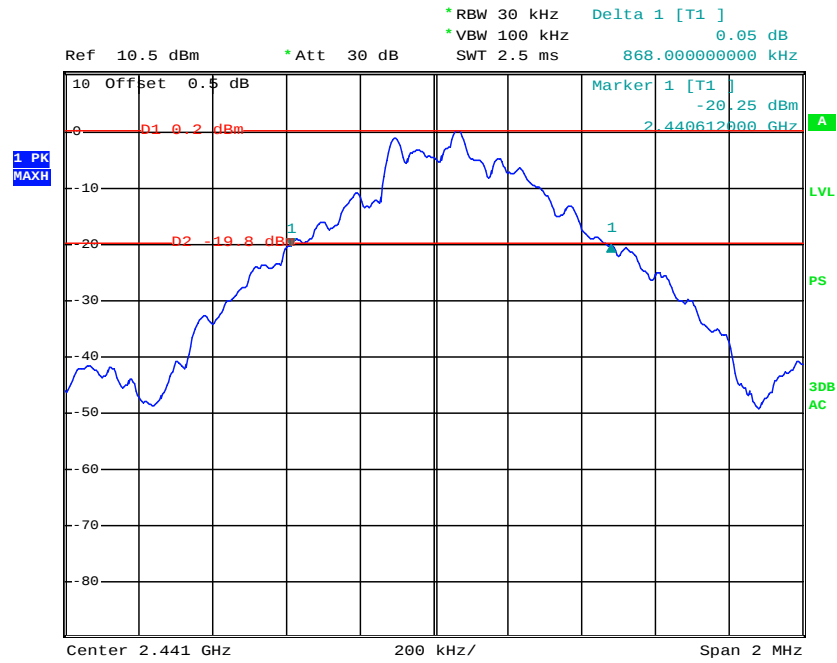

High Channel

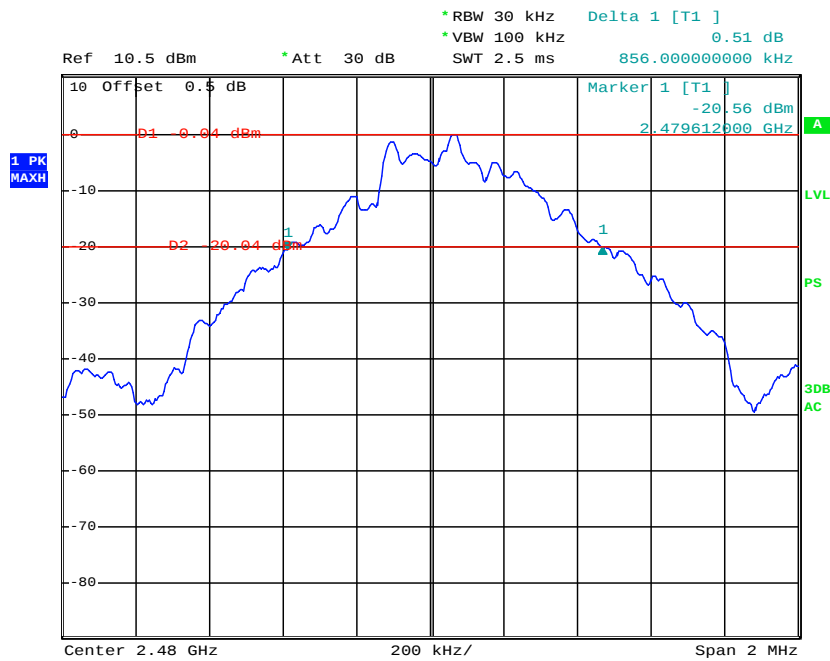

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Felix Li on 2011-12-20.


Test Result: Compliance.

Please refer to following table and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
2402-2480	79	≥15

Number of Hopping Channels

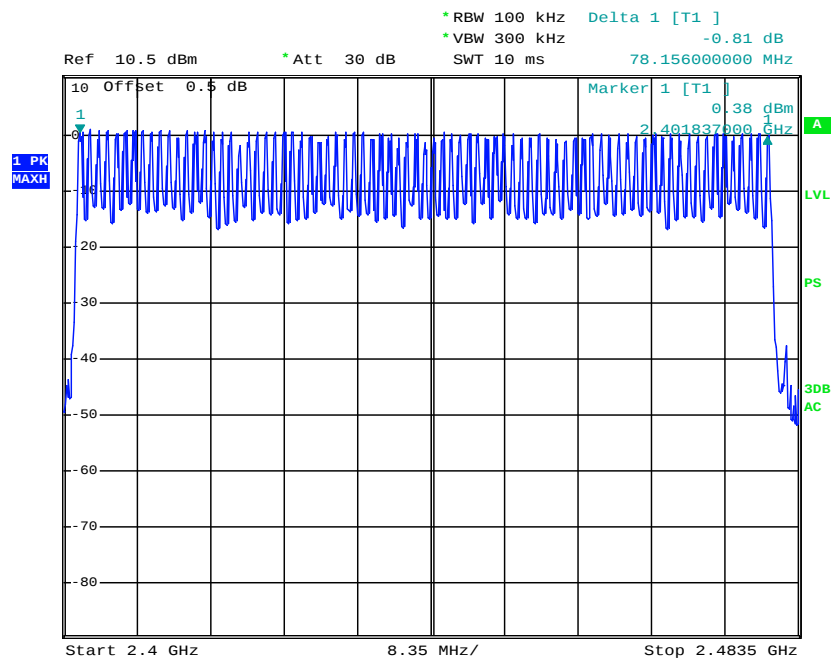

DATE: 1 DEC 2014 09:50:15

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time*hop rate/number of hopping channels*31.6S
Hop rate=1600/S

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

* The testing was performed by Felix Li on 2011-12-20


Test Result: Compliance.

Please refer to following table and plots

Test Mode: Transmitting


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH 1	Low	0.550	0.176	0.4	Pass
	Middle	0.535	0.171	0.4	Pass
	High	0.545	0.174	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600 $\div$ 2 $\div$ 79) $\times$ 31.6 s				
DH 3	Low	1.80	0.288	0.4	Pass
	Middle	1.79	0.286	0.4	Pass
	High	1.81	0.290	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600 $\div$ 4 $\div$ 79) $\times$ 31.6 s				
DH 5	Low	3.10	0.331	0.4	Pass
	Middle	3.14	0.335	0.4	Pass
	High	3.14	0.335	0.4	Pass
	Note: Dwell time=Pulse Time (ms) $\times$ (1600 $\div$ 6 $\div$ 79) $\times$ 31.6 s				

Low Channel for DH 1

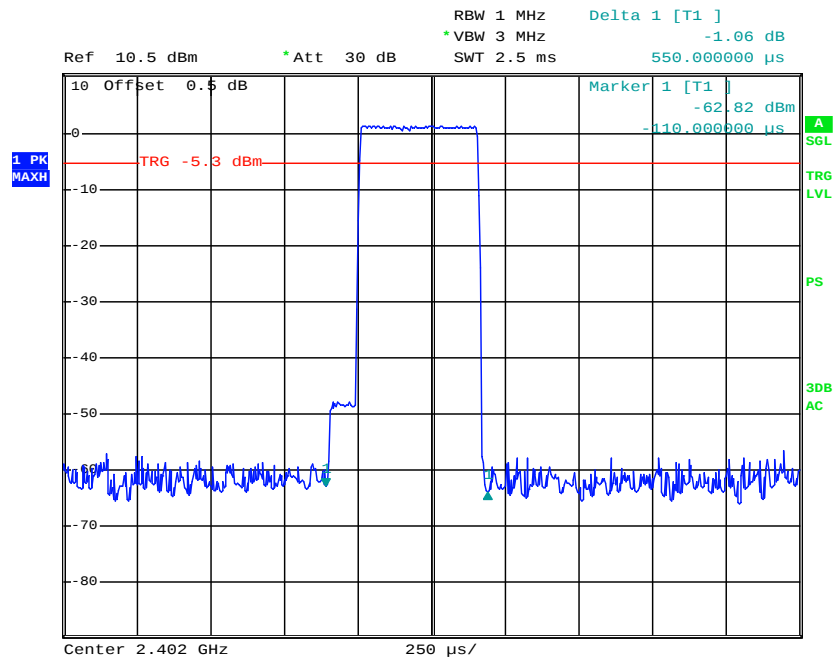


0.000000 0.000000 0.000000 0.000000

Middle Channel for DH 1

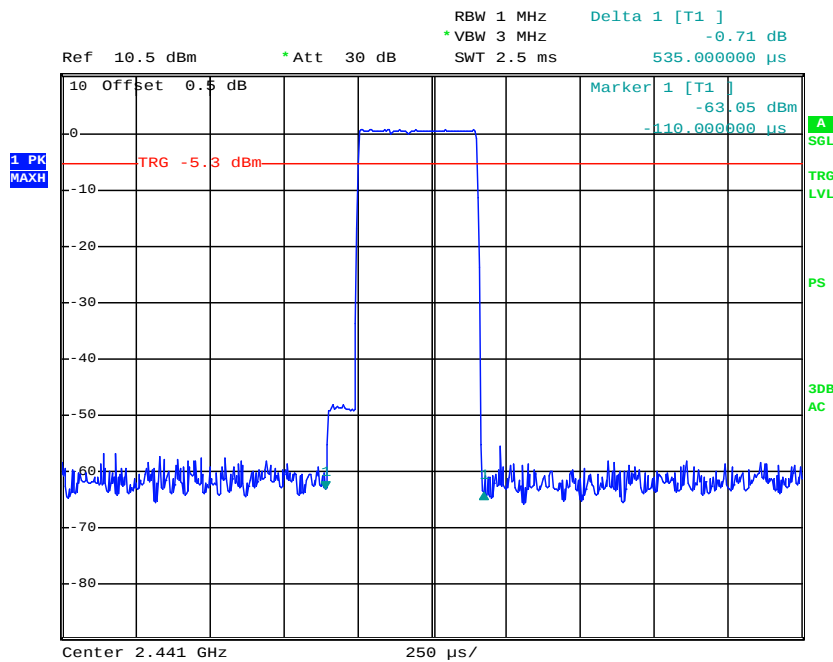


0.000000 0.000000 0.000000 0.000000


High Channel for DH 1

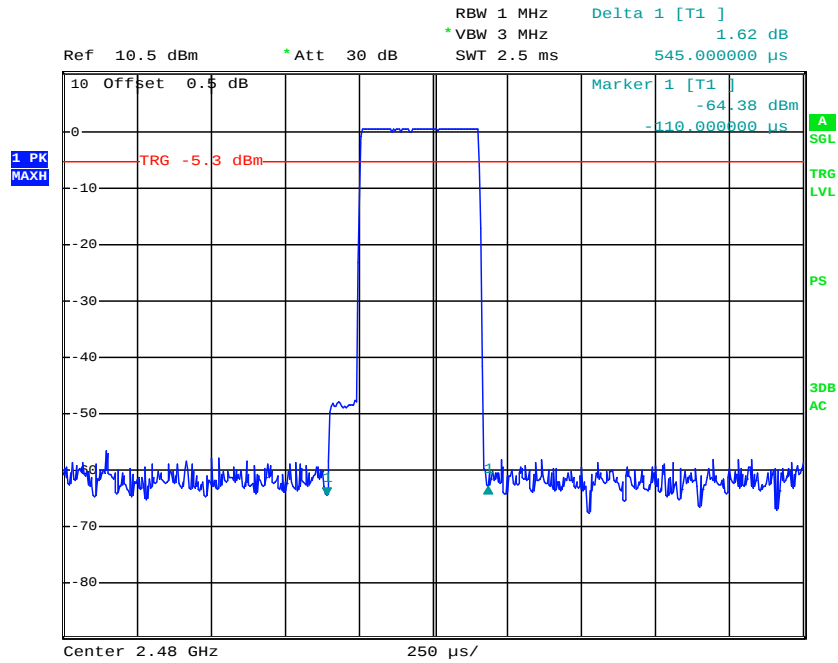


Low Channel for DH 3

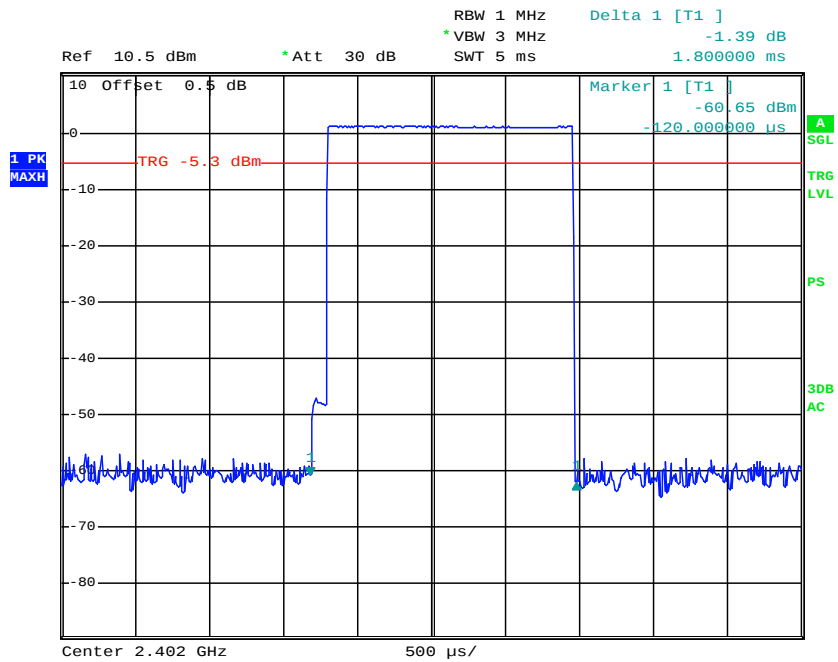


Middle Channel for DH 3

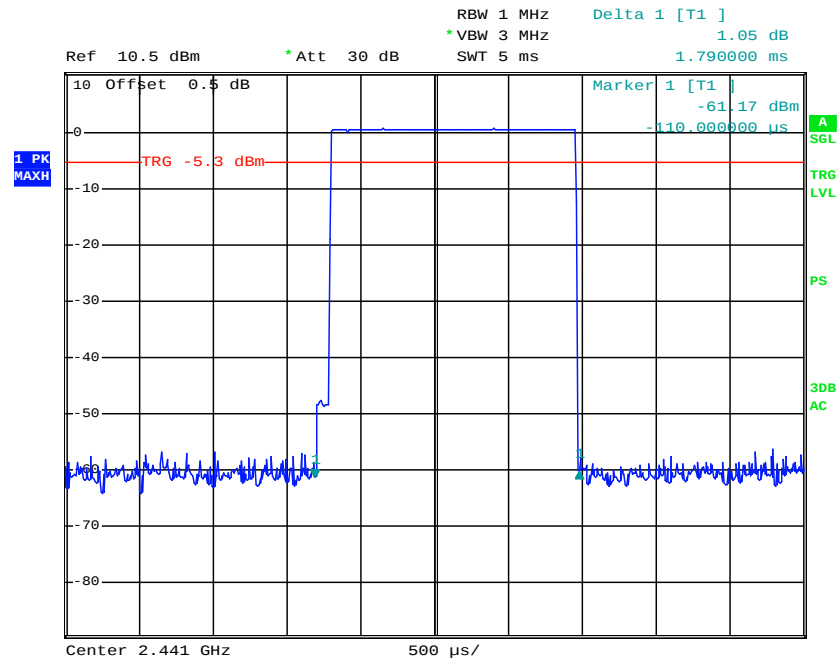


High Channel for DH 3

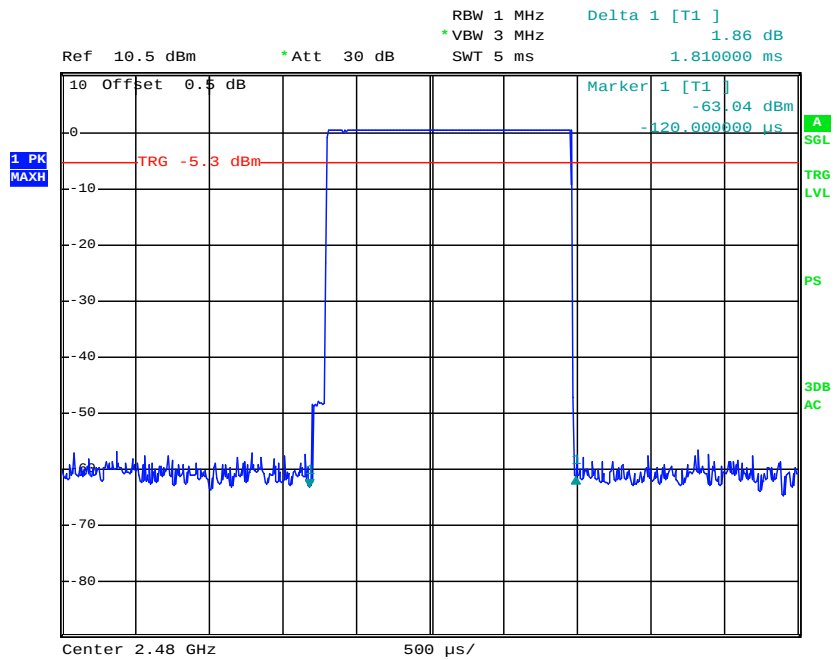

Low Channel for DH 5

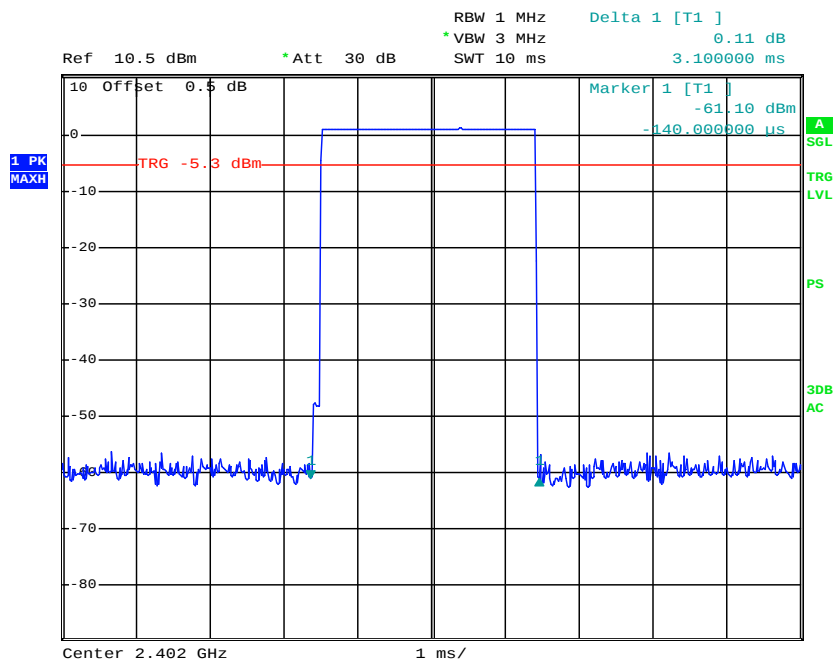


Middle Channel for DH 5

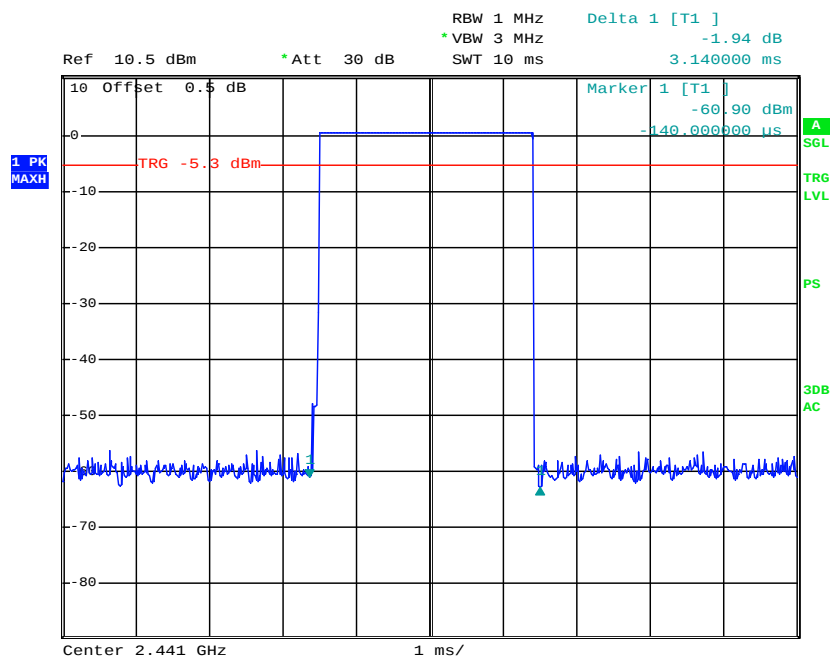

D 5 1 350 2041 20 10 55

High Channel for DH 5

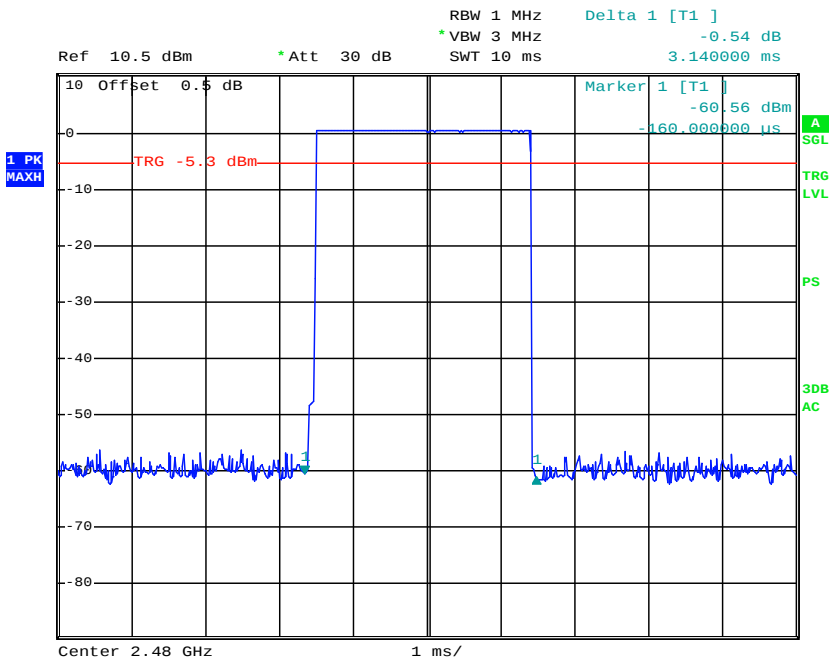


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

* The testing was performed by Felix Li on 2011-12-21.


Test Result: Compliance.

Please refer to following table and plots

Test Mode: Transmitting


Channel	Frequency (MHz)	Conducted Output Power		Limit (mW)
		(dBm)	(mW)	
Low	2402	1.12	1.29	1000
Middle	2441	0.59	1.15	1000
High	2480	0.07	1.02	1000

Low Channel

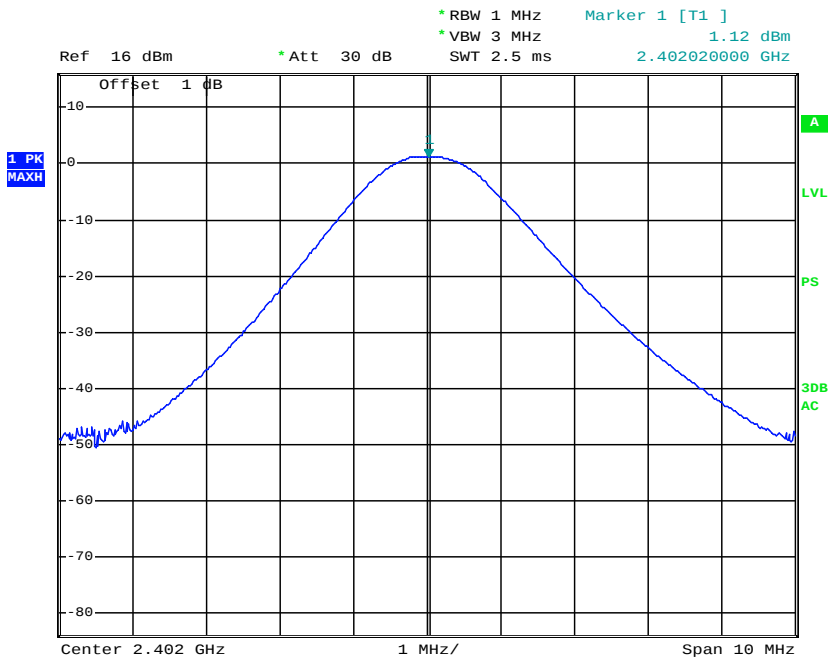


2.402020000 GHz

Middle Channel

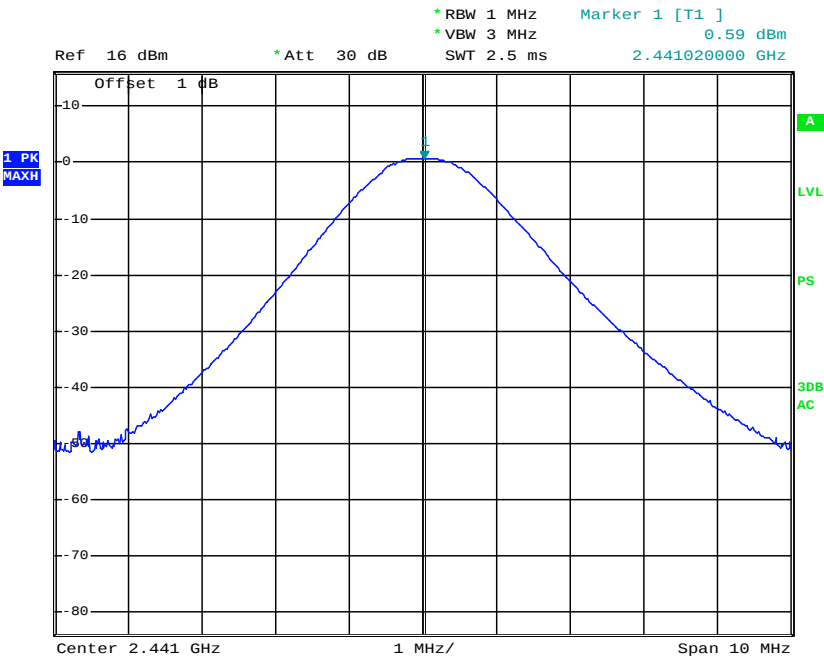

2.441020000 GHz

High Chanel

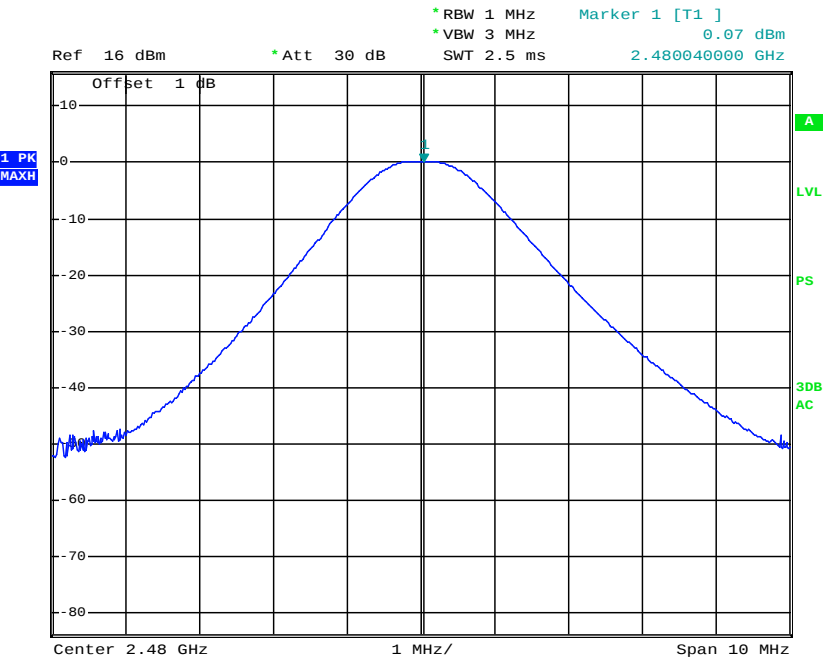

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1 MHz, VBW=3 MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101 kPa


*The testing was performed by Felix Li on 2011-12-21.

Test Result: Compliance


Please refer to the following table and plots.

Test Mode: Transmitting

Frequency (MHz)	Delta Peak to Band Emission (dBc)	≥Limit (dBc)
2396.96	51.20	20
2485.36	49.91	20

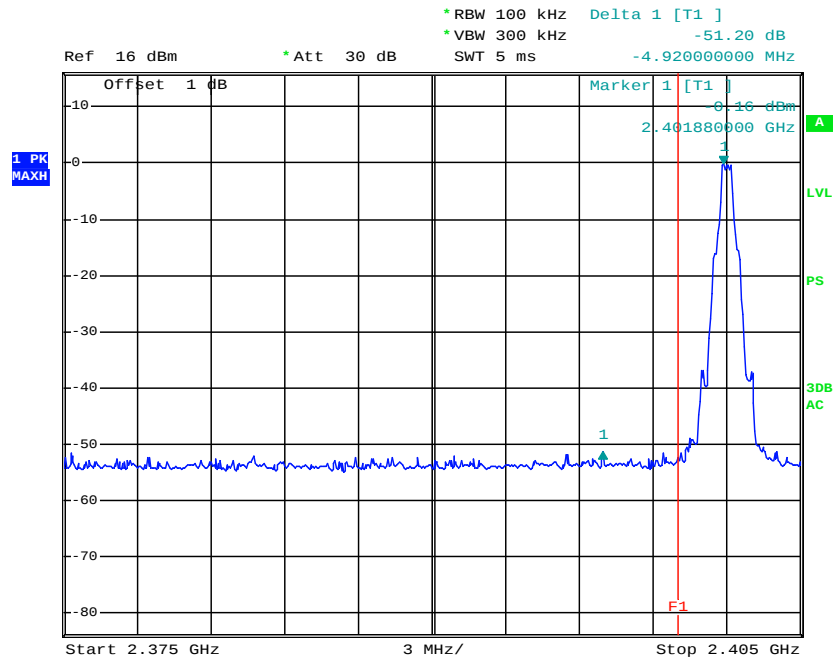Band Edge: Left Side

Band Edge: Right Side

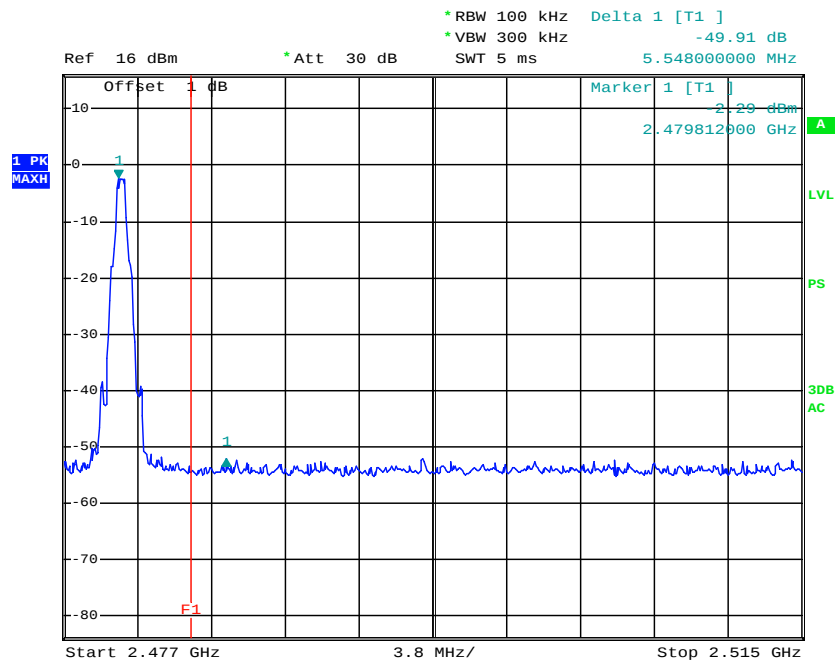

DECLARATION LETTER

**XINGTEL XIAMEN GROUP CO., LTD.**

Xingtel Building, Chuangxin Road, Torch Hi-Tech Industrial
District, Xiamen 361006, P R China
E-mail: info@xingtel.com Website: //www.xingtel.com

Tel: +86-592-562-5929
+86-592-603-6442(6 lines)
Fax: +86-592-603-7860

To: Bay Area Compliance Laboratories Corp

Declaration of Similarity

To whom it may concern,

We, Xingtel Xiamen Group Co., Ltd., hereby declare that our **iPhone Complimate**, Trade Name: **iCreation**, model number: **i-700 Twin** was tested by BACL, and for our marketing purpose we would like to list a series of models on reports and certifications. All these models are named differently due to different combination only, for details as below:

Model number	Combination
i-700	1base+1handset
i-700 Twin	1base+2handsets+1charger
i-700 HS	1handset+1charger
i-650	1base+1handset
i-650 Twin	1base+2handsets+1charger
i-650 Bundle	1base+2handsets+1charger
i-650 HS	1handset+1charger

If you have any other questions, please contact me as soon as possible.

Simon Liu

Director

February 28, 2012

***** END OF REPORT *****