

SAR Compliance Test Report

Test report no.:	FCC_RX-113_01	Date of report:	2013-11-25
Template version:	19.4	Number of pages:	88
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220 TCC Nokia San Diego Laboratory	Client:	Nokia Corporation 16620 West Bernardo Drive SAN DIEGO CA. 92127 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500
Responsible test engineer:	Virpi Tuominen	Product contact person:	Jamie Lee
Measurements made by:	N. Koskinen, T. Miettinen, O. Moisio, J. Moussa, M. Laaksonen, A. Viitanen, J. Gomez, A. Belden, R. Ventura, G. Abadilla, J. Tuomela		
Tested device:	RX-113		
FCC ID:	QMNB	IC:	-
Supplement reports:	SAR_Photo_RX-113_02		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique FCC PUBLISHED RF EXPOSURE KDB PROCEDURES		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		
Date and signatures:			
For the contents:			

CONTENTS

1. SUMMARY OF SAR TEST REPORT	4
1.1 TEST DETAILS.....	4
1.2 MAXIMUM RESULTS.....	4
1.2.1 <i>Body Configuration</i>	4
1.2.2 <i>Summary SAR data</i>	6
1.2.3 <i>Maximum Drift</i>	6
1.2.4 <i>Measurement Uncertainty</i>	6
2. DESCRIPTION OF THE DEVICE UNDER TEST.....	7
2.1 TUNING TARGET WHEN PROXIMITY SENSOR TRIGGERS POWER REDUCTION ON FOR CELLULAR BANDS	11
2.2 DESCRIPTION OF THE ANTENNA.....	12
3. TEST CONDITIONS	12
3.1 TEMPERATURE AND HUMIDITY	12
3.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER.....	12
4. DESCRIPTION OF THE TEST EQUIPMENT.....	14
4.1 MEASUREMENT SYSTEM AND COMPONENTS	14
4.1.1 <i>Isotropic E-field Probe Type ES3DV3</i>	16
4.1.2 <i>Isotropic E-field Probe Type EX3DV4</i>	16
4.2 PHANTOMS	17
4.3 TISSUE SIMULANTS	17
4.3.1 <i>Tissue Simulant Recipes</i>	17
4.4 SYSTEM VALIDATION AND SYSTEM CHECKING.....	18
4.4.1 <i>System validation status</i>	18
4.4.2 <i>System checking</i>	19
4.5 TISSUE SIMULANTS USED IN THE MEASUREMENTS	22
5. DESCRIPTION OF THE TEST PROCEDURE.....	23
5.1 DEVICE HOLDER.....	23
5.2 TEST POSITIONS.....	23
5.2.1 <i>Body Configuration</i>	23
5.2.2 <i>Proximity Sensor Considerations</i>	24
5.3 SCAN PROCEDURES.....	26
5.4 SAR AVERAGING METHODS.....	26
6. MEASUREMENT UNCERTAINTY	27
7. RESULTS	29
7.1 THE MEASURED BODY SAR VALUES FOR THE TEST DEVICE ARE TABULATED BELOW:	29

APPENDIX A: SYSTEM CHECK SCANS

APPENDIX B: MEASUREMENT SCANS

APPENDIX C: DIELECTRIC PARAMETERS OF THE TISSUE SIMULANTS

APPENDIX D: CONDUCTED AVERAGE POWER MEASUREMENTS FOR WCDMA AND HSUPA

APPENDIX E: RELEVANT PAGES FROM PROBE CALIBRATION REPORTS

APPENDIX F: RELEVANT PAGES FROM DIPOLE VALIDATION REPORTS

APPENDIX G: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED GPRS/EGPRS TRANSMISSION MODES

APPENDIX H: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED WCDMA TRANSMISSION MODES

APPENDIX I: CONDUCTED POWER RESULTS FOR WLAN2450 AND WLAN5000

APPENDIX J: SAR EXCLUSION THRESHOLD CALCULATIONS

APPENDIX K: PROXIMITY SENSOR TEST RESULTS

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2013-09-03 to 2013-09-26
SN, HW and SW numbers of tested device	SN:004402/47/357512/8, HW:0107, SW:ROW_9447_1030_1329_v0.1.12a, DUT: 17640 SN:004402/47/357591/2, HW:0107, SW:ROW_9447_1030_1329_v0.1.12a, DUT: 17637 SN:004402/47/357507/8, HW:0107, SW:ROW_9447_1030_1329_v0.1.12a, DUT: 17638 SN:004402/47/357511/0, HW:0107, SW:ROW_9447_1030_1329_v0.1.12a, DUT: 17639 SN:004402/47/357461/8, HW:0107, SW:ROW_9447_1030_1329_v0.1.12a, DUT: 31339
Batteries used in testing	-
Headsets used in testing	-
Other accessories used in testing	-
State of sample	Prototype unit
Notes	-

1.2 Maximum Results

The maximum measured SAR values for Body configuration are given in section 1.2.1. The device conforms to the requirements of the standards when the maximum measured SAR value is less than or equal to the limit.

1.2.1 Body Configuration

Mode	Ch / f(MHz)	Conducted power	Separation distance	Measured SAR value (1g avg)	Reported* SAR value (1g avg)	SAR limit (1g avg)	Result	Plot #
2-slot GPRS850	190 / 836.6	27.30 dBm	0 mm	1.15 W/kg	1.31 W/kg	1.6 W/kg	PASSED	1
WCDMA850	4132 / 826.4	21.24 dBm	0 mm	1.15 W/kg	1.18 W/kg	1.6 W/kg	PASSED	2
4-slot GPRS1900	512 / 1850.2	20.30 dBm	0 mm	1.04 W/kg	1.18 W/kg	1.6 W/kg	PASSED	5
WCDMA1900	9262 / 1852.4	17.57 dBm	0 mm	1.26 W/kg	1.34 W/kg	1.6 W/kg	PASSED	6
WLAN2450	1 / 2412.0	12.82 dBm	0 mm	0.753 W/kg	1.11 W/kg	1.6 W/kg	PASSED	10
WLAN5000	44 / 5220.0	9.82 dBm	0 mm	1.06 W/kg	1.39 W/kg	1.6 W/kg	PASSED	16
2-slot GPRS850 +WLAN2450 Main +WLAN2450 AUX	-	-	0 mm	1.15 W/kg	1.31 W/kg	1.6 W/kg	PASSED	1**
WCDMA850 +WLAN2450 Main +WLAN2450 AUX	-	-	0 mm	1.15 W/kg	1.18 W/kg	1.6 W/kg	PASSED	2**
4-slot GPRS1900 +WLAN2450 Main +WLAN2450 AUX	-	-	0 mm	1.04 W/kg	1.18 W/kg	1.6 W/kg	PASSED	5**

(Table continues)

(Table continues)

WCDMA1900 +WLAN2450 Main +WLAN2450 AUX	-	-	0 mm	1.26 W/kg	1.34 W/kg	1.6 W/kg	PASSED	6**
2-slot GPRS850 +WLAN5000 Main +WLAN5000 AUX	-	-	0 mm	1.20 W/kg	1.53 W/kg	1.6 W/kg	PASSED	18
WCDMA850 +WLAN5000 Main +WLAN5000 AUX	-	-	0 mm	1.16 W/kg	1.47 W/kg	1.6 W/kg	PASSED	19
4-slot GPRS1900 +WLAN5000 Main +WLAN5000 AUX	-	-	0 mm	1.06 W/kg	1.39 W/kg	1.6 W/kg	PASSED	16**
WCDMA1900 +WLAN5000 Main +WLAN5000 AUX	-	-	0 mm	1.09 W/kg	1.42 W/kg	1.6 W/kg	PASSED	20

* Reported SAR values are scaled to, or measured at, upper limit of power tuning tolerance.

** This is due to fact that individual transmitter and antenna SAR hotspots are not overlapping with each other. Hence the combined plot numbers above table are those of the individual cellular, WLAN2450 or WLAN5000 results, whichever is giving highest individual SAR result.

1.2.2 Summary SAR data

	FCC-defined SAR values for the Grants of Equipment Authorization		
	PCE	DTS	NII
Maximum Body SAR values	1.34 W/kg	1.11 W/kg	1.39 W/Kg
{Max + Max} Simultaneous Body SAR value	1.57 W/kg †		
Maximum Simultaneous SAR value Body SAR: 2-slot GPRS850 + WLAN5000 AUX Antenna	1.57 W/kg		

Note:

PCE contains the highest results between all cellular modes (cellular, AWS and PCS bands)

DTS contains the highest results between WLAN 2.4GHz + RLAN 5725-5850MHz

NII contains the highest results between RLAN 5150-5250, 5250-5350 and 5470-5725

† From Section 7.1

{Max + Max} Simultaneous Body SAR quoted here is 1.57W/kg for 2-slot GPRS850 Full power + WLAN5000 AUX Antenna Body Bottom Edge Facing Phantom. This value is highest max+max or max+max+max value not exceeding 1.6W/kg in max+max or max+max+max table.

1.2.3 Maximum Drift

Maximum drift covered by 5% scaling up of the SAR values	Maximum drift during measurements
0.2dB	0.2dB

1.2.4 Measurement Uncertainty

Expanded Uncertainty (k=2) 95%	± 27.8%
--------------------------------	---------

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	Portable
Exposure environment	General population / uncontrolled

Modes of Operation	Bands	Modulation Mode	Duty Cycle	Transmitter Frequency Range (MHz)	Power Tuning Target (dBm)				Upper Limit of Power Tuning Tolerance (dBm)			
					1-slot	2-slot	3-slot	4-slot	1-slot	2-slot	3-slot	4-slot
GPRS	850	GMSK	1/8 to 4/8	824 – 849	32.50	30.00	28.20	27.00	32.85	30.35	28.55	27.35
	1850 – 1910			30.00	27.00	25.20	24.00	30.35	27.35	25.55	24.35	
EGPRS	850	8PSK	1/8 to 4/8	824 – 849	27.00	27.00	27.00	26.50	27.35	27.35	27.35	26.85
	1850 – 1910			25.50	24.50	24.50	23.20	25.85	24.85	24.85	23.55	
WCDMA	850 (Band V)		1	826 – 847	23.50				23.85			
WCDMA	1900 (Band II)		1	1852 – 1908	23.50				23.85			
HSUPA	850 (Band V)		1	826 – 847	See Appendix D for details							
HSUPA	1900 (Band II)		1	1852 – 1908	See Appendix D for details							
BT	2450	GFSK	1	2402 – 2480	8.00				9.50			
					Ch 1 - 11				Ch 1 - 11			
WLAN b-mode** 20MHz – Main Ant	2450	BPSK QPSK	1	2412 – 2472	13.50				15.00			
WLAN b-mode** 20MHz – AUX Ant	2450	BPSK QPSK	1	2412 – 2472	13.00				14.50			
					Ch 1 - 2	Ch 6	Ch 10 - 11	Ch 1 - 2	Ch 6	Ch 10 - 11		
WLAN g-mode** 20MHz – Main Ant	2450	UP to 64QAM	1	2412 – 2472	10.00	11.50	10.00	11.50	13.00	11.50		
WLAN g-mode** 20MHz – AUX Ant	2450	UP to 64QAM	1	2412 – 2472	10.00	11.50	10.00	11.50	13.00	11.50		
WLAN n-mode** 20MHz – Main Ant	2450	UP to 64QAM	1	2412 – 2462 2412 – 2472	8.50	10.00	8.50	10.00	11.50	10.00		
WLAN n-mode** 20MHz – AUX Ant	2450	UP to 64QAM	1	2412 – 2462 2412 – 2472	9.00	10.00	8.50	10.50	11.50	10.00		

(Table continues)

(Table continues)

					Ch 3 - 9					Ch 3 - 9				
WLAN n-mode** 40MHz – Main Ant	2450	UP to 64QAM	1	2412 – 2472	9.00					10.50				
WLAN n-mode** 40MHz – AUX Ant	2450	UP to 64QAM	1	2412 – 2472	9.00					10.50				
					Ch 36 - 48	Ch 52 - 116	Ch 120 - 140	Ch 149 - 165		Ch 36 - 48	Ch 52 - 116	Ch 120 - 140	Ch 149 - 165	
WLAN a-mode** 20MHz – Main Ant	5000	UP to 64QAM	1	5150 – 5825	7.50	7.50	6.50	7.50		9.00	9.00	8.00	9.00	
WLAN a-mode** 20MHz – AUX Ant	5000	UP to 64QAM	1	5150 – 5825	9.50	8.50	9.50	8.50		11.00	10.00	11.00	10.00	
WLAN n-mode** 20MHz – Main Ant	5000	UP to 64QAM	1	5150 – 5825	7.50	7.50	6.50	7.50		9.00	9.00	8.00	9.00	
WLAN n-mode** 20MHz – AUX Ant	5000	UP to 64QAM	1	5150 – 5825	9.50	8.50	9.50	8.50		11.00	10.00	11.00	10.00	
					Ch 38 - 62	Ch 102 – 118	Ch 122 - 130	Ch 134 - 138	Ch 151 – 163	Ch 38 - 62	Ch 102 – 118	Ch 122 - 130	Ch 134 - 138	Ch 151 – 163
WLAN n-mode** 40MHz Main Ant	5000	UP to 64QAM	1	5180 – 5825	8.00	7.00	6.50	7.00	8.00	9.50	8.50	8.00	8.50	9.50
					Ch 38 – 46	Ch 50 – 118	Ch 122 - 130	Ch 134 - 138	Ch 151 – 163	Ch 38 - 62	Ch 102 – 118	Ch 122 - 130	Ch 134 - 138	Ch 151 – 163
WLAN n-mode** 40MHz AUX Ant	5000	UP to 64QAM	1	5180 – 5825	8.50	8.00	9.00	8.50	8.00	10.00	9.50	10.50	10.00	9.50

**Maximum tuning targets are presented above. See full details in Appendix I.

Outside of USA, the transmitter of the device is capable of operating also in GPRS/EGPRS900, GPRS/EGPRS1800, WCDMA900, WCDMA1800, WCDMA2100, LTE845 (band 20), LTE1800 (band 3) and LTE2500 (band 7) bands which are not part of this filing.

This is a WCDMA HSUPA device, but SAR tests for HSUPA mode have not been performed as no HSUPA Sub-test mode has an average power > 0.25dB above the basic WCDMA 12.2kbps RMC mode. Appendix D of this report gives a summary of the measured WCDMA and HSUPA average powers; a detailed report of these WCDMA and HSUPA conducted power tests is submitted separately.

This is a BT Class 1 device; as its upper limit of power tuning tolerance is 9.5dBm (8.91mW), SAR testing was deemed unnecessary since $(8.91\text{mW}/5\text{mm}) \cdot \sqrt{2.48\text{GHz}} < 3.0$ (KDB447498 D01 General RF Exposure Guidelines v05 Section 4.3.1 Standalone SAR test exclusion considerations). Since WLAN2450 and BT use same frequency and antenna, WLAN2450 power is 4.5dB higher in minimum, and they cannot transmit simultaneously, the WLAN2450+cellular bands combined SAR results can be regarded as conservative estimation of BT+cellular combined SARs. As WLAN2450+cellular combined SAR result are below limit, also BT+cellular combined SAR can be deemed to comply without further analysis and estimations required in KDB 447498 for simultaneous transmission exclusion.

This device uses a single antenna for transmission of all the cellular, AWS and PCS bands; two antennas are used for transmission of WLAN, a main antenna and an auxiliary one; these antennas can be used in MIMO mode. Auxiliary one is also used for transmission of BT. Simultaneous transmission of any singular cellular, AWS and PCS band is possible with either WLAN or BT in Body use.

Simultaneous transmission capabilities in Body use		
	WLAN2450	WLAN5000
GPRS/EGPRS850	✓	✓
WCDMA850	✓	✓
GPRS/EGPRS1900	✓	✓
WCDMA1900	✓	✓

This device has Wireless Router "Hotspot" mode capability.

Simultaneous transmission capabilities in Wireless Router use		
	WLAN2450	WLAN5000
GPRS/EGPRS850	✓	–
WCDMA850	✓	–
GPRS/EGPRS1900	✓	–
WCDMA1900	✓	–

Wireless Router SAR is not required to be tested for a tablet since tablet test procedures are more conservative (616217 D04 SAR for laptop and tablets v01r01).

2.1 Tuning target when proximity sensor triggers power reduction on for cellular bands

The following table details the tuning target when proximity sensor triggers power reduction on for cellular bands. Both WLANs were tested at full power.

Band	Power reduction	Target tuning power	Upper Limit of Power Tuning Tolerance
GPRS/EGPRS850	3.0 dB	1-slot GPRS: 29.5 dBm	1-slot GPRS: 29.85 dBm
	2.5 dB	2-slot GPRS: 27.5 dBm	2-slot GPRS: 27.85 dBm
	3.0 dB	3-slot GPRS: 25.2 dBm	3-slot GPRS: 25.55 dBm
	4.0 dB	4-slot GPRS: 23.0 dBm	4-slot GPRS: 23.35 dBm
	0.0 dB	1-slot EGPRS: 27.0 dBm	1-slot EGPRS: 27.35 dBm
	0.0 dB	2-slot EGPRS: 27.0 dBm	2-slot EGPRS: 27.35 dBm
	2.0 dB	3-slot EGPRS: 25.0 dBm	3-slot EGPRS: 25.35 dBm
	3.5 dB	4-slot EGPRS: 23.0 dBm	4-slot EGPRS: 23.35 dBm
WCDMA850	2.5 dB	21.0 dBm	21.35 dBm
GPRS/EGPRS1900	4.0 dB	1-slot GPRS: 26.0 dBm	1-slot GPRS: 26.35 dBm
	5.0 dB	2-slot GPRS: 22.0 dBm	2-slot GPRS: 22.85 dBm
	4.0 dB	3-slot GPRS: 21.2 dBm	3-slot GPRS: 21.55 dBm
	3.5 dB	4-slot GPRS: 20.5 dBm	4-slot GPRS: 20.85 dBm
	0.0 dB	1-slot EGPRS: 25.5 dBm	1-slot EGPRS: 25.85 dBm
	2.5 dB	2-slot EGPRS: 22.0 dBm	2-slot EGPRS: 22.35 dBm
	3.5 dB	3-slot EGPRS: 21.0 dBm	3-slot EGPRS: 21.35 dBm
	3.0 dB	4-slot EGPRS: 20.2 dBm	4-slot EGPRS: 20.55 dBm
WCDMA1900	6.0 dB	17.5 dBm	17.85 dBm

2.2 Description of the Antenna

The device has an internal antenna for cellular, AWS, PCS use and 2 separate internal antennas for WLAN use. The cellular antenna is located near the left edge of the device (when looking from the screen side); the main and AUX WLAN antennas are located near the bottom edge.

Picture of antenna dimensions and antenna interdistances can be found from RX-113_Antenna_Description document.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Ambient temperature (°C):	20.5 – 22.5
Ambient humidity (RH %):	35 - 55

3.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester except for testing WLAN2450/WLAN5000 where control software was used. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

This device was tested in all the available multi-slot GMSK GPRS modes (this is a multi-slot class 33 device).

The transmission mode of the device in all WCDMA tests was configured to 12.2kbps RMC with all TPC bits set as “1”. All WCDMA testing has been carried out in accordance with FCC KDB 941225: SAR Measurement Procedures for 3G Devices.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The conducted output power of the device was measured by a separate test laboratory on the same units as used for SAR testing. The results are given in Appendices G-I of this report.

The standard transmission mode of the device in all WLAN b-mode tests was BPSK QPSK 1Mbps. The standard transmission mode of the device in all WLAN a-mode tests was BPSK 6 Mbps. The standard transmission modes used have maximum time-averaged output powers within 0.25dB of the highest time-averaged output power of all the WLAN a, b, g and n modulation modes in this device as illustrated by the tables in Appendix I. All WLAN testing has been carried out in accordance with FCC KDB 248227: SAR Measurement Procedures for 802.11 a/b/g Transmitters. WLAN MIMO Tx exposure was tested using highest available output powers among SISO and MIMO modes to minimize testing. This gives conservative estimate of the WLAN MIMO Tx mode exposure since SISO Tx mode output powers are always equal to or higher than in MIMO mode. Please see Appendix I for details of the WLAN SISO and MIMO mode output powers.

Here is a summary list of the KDB documents used in the reported testing:

KDB 941225 D01 SAR Measurement Procedures for 3G Devices
KDB 248227: SAR Measurement Procedures for 802.11 a/b/g Transmitters
KDB 648474 D04 Handset SAR v01r01
KDB 447498 D01 General RF Exposure Guidance v05r01
KDB 690783 D01 SAR Listings on Grants
KDB 865664 D01 SAR Measurement 100MHz to 6GHz v01r01
616217 D04 SAR for laptop and tablets v01r01
865664 D02 SAR reporting v01r01

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated DASY near-field scanning system manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration date	Calibration expiry
DAE4	793	2013-06	2014-06
DAE4	1355	2013-01	2014-01
DAE4	1301	2013-02	2014-02
E-field Probe ES3DV3	3131	2013-06	2014-06
E-field Probe ES3DV3	3165	2013-01	2014-01
E-field Probe EX3DV4	3817	2013-01	2014-01
Dipole Validation Kit, D835V2	480	2012-12	2014-12
Dipole Validation Kit, D1900V2	5d013	2012-12	2014-12
Dipole Validation Kit, D2450V2	800	2012-09	2014-09
Dipole Validation Kit, D5GHzV2	1042	2012-11	2014-11
Dipole Validation Kit, D5GHzV2	1123	2012-05	2014-05
DASY5 software	Version 52.8	-	-

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration date	Calibration expiry
Signal Generator	E4438C	MY42080610	2013-08	2014-08
Signal Generator	SML03	101264	2013-08	2014-08
Signal Generator	N5181B	MY51350034	2013-06	2016-06
Amplifier	5S1G4M3	302338	-	-
Amplifier	ZHL-42-SMA	N072095-5	-	-
Amplifier	ZYE-8G+	N811401219	-	-
Power Meter	NRVS	838624/032	2013-08	2014-08
Power Meter	NRVD	840023/028	2013-08	2014-08
Power Meter	E4419B	GB40202156	2013-07	2015-07
Power Sensor	NRV-Z32	100067	2013-08	2014-08
Power Sensor	NRV-Z32	849745/018	2013-08	2014-08
Power Sensor	E9301A	US39211864	2013-07	2014-07
Call Tester	CMU 200	103293	-	-
Call Tester	CMU 200	104983	-	-
Call Tester	MT8820C	6200883095	-	-
Network Analyzer	ENA E5071C	MY46213166	2013-08	2014-08
Network Analyzer	ENA E5071C	MY46315958	2013-07	2014-07
Dielectric Probe Kit	DAK-3.5	1042	-	-
Dielectric Probe Kit	DAK-3.5	1064	-	-

4.1.1 Isotropic E-field Probe Type ES3DV3

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix E
Frequency	10 MHz to 4 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 20 mm Body diameter: 12 mm Tip diameter: 3.9 mm Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 4 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.1.2 Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix E
Frequency	10 MHz to >6 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g, Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 10 mm Body diameter: 12 mm Tip diameter: 2.5 mm Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 6 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

The phantom used for all Body SAR tests i.e. for both system checks and device testing, was a “Triple Flat phantom” and “ELI phantom” manufactured by SPEAG; this phantom conform to the requirements of FCC published RF Exposure KDB Procedures.

System checking and Body SAR testing was performed using the Triple Flat phantom and ELI Phantom.

The device holder made of low loss expanded polystyrene (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2003 and FCC published RF Exposure KDB Procedures. All tests were carried out using simulants whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was at least 15.0 cm for all system check and device tests, measured from the flat reference point of the Triple Flat Phantom and ELI Phantom.

4.3.1 Tissue Simulant Recipes

The following recipes were used for Body tissue simulants:

800MHz band

Ingredient	Body (% by weight)
Deionised Water	69.25
Tween 20	30.00
Salt	0.75

1900MHz band

Ingredient	Body (% by weight)
Deionised Water	70.25
Tween 20	29.41
Salt	0.34

2450MHz band

Ingredient	Body (% by weight)
Deionised Water	70.20
Tween 20	29.62
Salt	0.18

5000MHz band †

Ingredient	Body (% by weight)
Water	60-80
Oil	-
Emulsifiers, Esters, Inhibitors	20-40
Sodium salt	0-1.5

† Recipe is proprietary to SPEAG. The proportions of the constituents have not been disclosed.

4.4 System validation and System checking

4.4.1 System validation status

Probe Calibration Point f / MHz	Test System	DASY SW	Dipole Type / SN	Probe Type / SN	Calibrated signal type(s)	DAE unit Type / SN	Validation done
							Body tissue simulant
835	TCC Salo / SAR-3	V52.8	D835V2 / 480	ES3DV4 / 3165	CW	DAE4 / 1355	2013-05
1900	TCC Salo / SAR-1	V52.8	D1900V2 / 5d013	ES3DV3 / 3131	CW	DAE4 / 793	2013-07
2450	TCC San Diego / SAR-3	V52.8	D2450MHzV2/ 800	EX3DV4 / 3817	CW	DAE4 / 1301	2013-04
5200	TCC San Diego / SAR-3	V52.8	D5GHzV2 / 1042	EX3DV4 / 3817	CW/OFDM	DAE4 / 1301	2013-04
5300	TCC San Diego / SAR-3	V52.8	D5GHzV2 / 1042	EX3DV4 / 3817	CW/OFDM	DAE4 / 1301	2013-04
5500	TCC San Diego / SAR-3	V52.8	D5GHzV2 / 1042	EX3DV4 / 3817	CW/OFDM	DAE4 / 1301	2013-04
5600	TCC San Diego / SAR-3	V52.8	D5GHzV2 / 1042	EX3DV4 / 3817	CW/OFDM	DAE4 / 1301	2013-04
5800	TCC San Diego / SAR-3	V52.8	D5GHzV2 / 1042	EX3DV4 / 3817	CW/OFDM	DAE4 / 1301	2013-04

4.4.2 System checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna (except in the case of the 5000MHz dipole for which 100 mW was supplied), which was placed under the flat section of the Triple Flat Phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

System checking, body tissue simulant

f [MHz]	Description	SAR 1g [W/kg]	Estimated SAR 1g [W/kg]	Estimated SAR 1g Deviation	Dielectric Parameters		SAR 1g Deviation from target	Dielectric Parameters Deviation from target		Temp [°C]	Plot #
				dSAR [%]	ε _r	σ [S/m]	dSAR [%]	dε _r [%]	dσ [%]		
	Tolerances			±3%			±10 %	±5 %	±5 %		
835	IEEE1528 / IEC62209				55.2	0.97					
	Reference result SN:480	2.42	-		54.5	0.99	TCC Salo/SAR-3 ES3DV3 SN:3165 Body 835MHz				
	2013-09-12	2.27	2.28	0.44	53.6	0.98	-6.20	-1.65	-1.01	21.2	-
	2013-09-13	2.24	2.24	0.00	53.5	0.98	-7.44	-1.83	-1.01	21.5	1
	2013-09-25	2.26	2.26	0.00	53.7	0.96	-6.61	-1.47	-3.03	20.9	-
	2013-09-26	2.24	2.26	0.89	53.5	0.97	-7.44	-1.83	-2.02	20.8	-
1900	IEEE1528 / IEC62209				53.3	1.52					
	Reference result SN:5d013	10.3	-		52.2	1.52	TCC Salo/SAR-1 ES3DV3 SN:3131 Body 1900MHz				
	2013-09-11	9.51	9.53	0.21	51.6	1.53	-7.67	-1.15	0.66	20.3	2
	2013-09-12	9.86	9.93	0.71	51.4	1.53	-4.27	-1.53	0.66	20.4	-
	2013-09-26	9.68	9.76	0.83	51.0	1.48	-6.02	-2.30	-2.63	21.9	-
	2450	IEEE1528 / IEC62209				52.7	1.95				
Reference result SN:800		13.0	-		51.0	2.01	TCC San Diego /SAR-3 EX3DV4 SN:3817 Body 2450MHz				
2013-09-09		13.00	13.30	2.31	50.7	1.91	0.00	-0.59	-4.98	21.5	-
2013-09-24		13.00	13.20	1.54	51.0	1.92	0.00	0.00	-4.48	21.5	-
2013-09-25		12.90	13.10	1.55	50.9	1.92	-0.77	-0.20	-4.48	21.5	3
5200		FCC Published RF Exposure KDB Procedures				49.0	5.30				
	Reference result SN:1042	7.36	-		46.8	5.35	TCC San Diego/SAR-3 EX3DV4 SN:3817 Body 5200MHz				
	2013-09-03	7.53	6.83	-9.30	47.9	5.46	2.31	2.35	2.06	21.5	-

(Table continues)

(Table continues)

f [MHz]	Description	SAR 1g [W/kg]	Estimated SAR 1g [W/kg]	Estimated SAR 1g Deviation	Dielectric Parameters		SAR 1g Deviation from target	Dielectric Parameters Deviation from target		Temp [°C]	Plot #
				dSAR [%]	ϵ_r	σ [S/m]	dSAR [%]	d ϵ_r [%]	d σ [%]		
5200	FCC Published RF Exposure KDB Procedures				48.9	5.42					
	Reference result SN:1123	7.32	-		48.7	5.44	TCC San Diego/SAR-3 EX3DV4 SN:3817 Body 5300MHz				
	2013-09-25	6.92	6.39	-7.66	48.3	5.46	-5.98	3.21	2.06	21.5	4
5300	FCC Published RF Exposure KDB Procedures				48.9	5.42					
	Reference result SN:1042	7.54	-		46.7	5.47	TCC San Diego/SAR-3 EX3DV4 SN:3817 Body 5300MHz				
	2013-09-04	7.80	7.17	-8.08	47.5	5.57	3.45	1.71	1.83	21.5	5
5500	FCC Published RF Exposure KDB Procedures				48.6	5.65					
	Reference result SN:1042	7.94	-		46.3	5.73	TCC San Diego/SAR-3 EX3DV4 SN:3817 Body 5500MHz				
	2013-09-04	8.04	7.25	-9.83	47.2	5.82	1.26	1.94	1.57	21.5	-
5500	FCC Published RF Exposure KDB Procedures				48.6	5.65					
	Reference result SN:1123	7.93	-		48.1	5.83	TCC San Diego/SAR-3 EX3DV4 SN:3817 Body 5500MHz				
	2013-09-25	7.35	6.70	-8.84	47.8	5.86	-7.43	3.24	2.27	21.5	6
5600	FCC Published RF Exposure KDB Procedures				48.5	5.77					
	Reference result SN:1042	8.04	-		46.2	5.86	TCC San Diego/SAR-3 EX3DV4 SN:3817 Body 5600MHz				
	2013-09-04	8.15	6.90	-15.34	47.0	5.96	1.37	1.73	1.71	21.5	7
5800	FCC Published RF Exposure KDB Procedures				48.2	6.00					
	Reference result SN:1042	7.46	-		45.9	6.13	TCC San Diego/SAR-3 EX3DV4 SN:3817 Body 5800MHz				
	2013-09-05	7.17	6.53	-8.93	46.7	6.23	-3.89	1.74	1.63	21.5	8

Plots of the system checking scans are given in Appendix A.

4.5 Tissue Simulants used in the Measurements

Body tissue simulant measurements


f [MHz]	Description	Dielectric Parameters		Dielectric Parameters Deviation from Standard target		Temp [°C]
		ϵ_r	σ [S/m]	$d\epsilon_r$ [%]	$d\sigma$ [%]	
	Tolerances			±5 %	±5 %	
835	Recommended value	55.2	0.97			
	2013-09-12	53.6	0.98	-2.90	1.03	21.2
	2013-09-13	53.5	0.98	-3.08	1.03	21.5
	2013-09-25	53.7	0.96	-2.72	-1.03	20.9
	2013-09-26	53.5	0.97	-3.08	0.00	20.8
836	Recommended value	55.2	0.97			
	2013-09-12	53.6	0.98	-2.90	1.03	21.2
	2013-09-13	53.5	0.98	-3.08	1.03	21.5
	2013-09-25	53.7	0.96	-2.72	-1.03	20.9
	2013-09-26	53.5	0.97	-3.08	0.00	20.8
1880	Recommended value	53.3	1.52			
	2013-09-11	51.6	1.51	-3.19	-0.66	20.3
	2013-09-12	51.4	1.51	-3.56	-0.66	20.4
	2013-09-26	51.0	1.47	-4.32	-3.29	21.9
2437	Recommended value	52.7	1.94			
	2013-09-09	50.8	1.90	-3.61	-2.06	21.5
	2013-09-24	51.0	1.90	-3.23	-2.06	21.5
	2013-09-25	51.0	1.90	-3.23	-2.06	21.5
5210	Recommended value	49.0	5.31			
	2013-09-03	47.9	5.48	-2.24	3.20	21.5
	2013-09-25	48.3	5.47	-1.43	3.01	21.5
5290	Recommended value	48.9	5.40			
	2013-09-04	47.5	5.55	-2.86	2.78	21.5
5520	Recommended value	48.6	5.67			
	2013-09-04	47.2	5.85	-2.88	3.17	21.5
	2013-09-25	47.8	5.89	-1.65	3.88	21.5
5620	Recommended value	48.4	5.79			
	2013-09-04	47.0	5.99	-2.89	3.45	21.5
5760	Recommended value	48.3	5.95			
	2013-09-05	46.8	6.18	-3.11	3.87	21.5

Dielectric parameter data for the band edges is given in Appendix C.

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Device Holder

The device was placed in a device holder (illustrated below) supplied by Nokia.

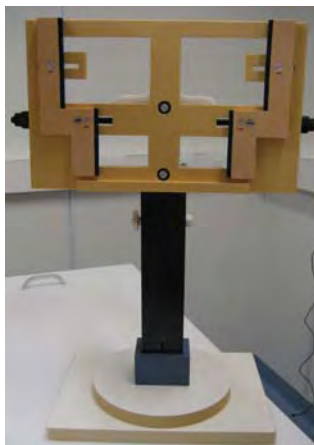

Device holder supplied by Nokia

5.2 Test Positions

5.2.1 Body Configuration

This tablet device was tested in all bands with its back facing the flat phantom; it was also tested with its edges facing the flat phantom as indicated in table below. Exclusion from testing of edges was based on SAR Exclusion Threshold formula (KDB447498 DR01), please find calculations in Appendix J.

The following table details the edge/antenna combinations tested:



	Left edge	Top edge	Right edge	Bottom edge
Cellular antenna	✓	✓	×	✓
WLAN Main	×	×	×	✓
WLAN AUX	×	×	×	✓

For GPRS1900 bottom edge was excluded from tests according to formula.

The tablet device was tested at full power with a separation distance of 22mm from the back surface and a separation distance of 21mm from the Left edge. The separation distance used in all reduced power testing was 0mm. All cellular bands were tested at full power against the top and bottom edge.

5.2.2 Proximity Sensor Considerations


Full power separation distances are based on proximity sensor triggering distances, on back side and left edge, respectively. Following graph depicts the proximity sensor triggering distances for tissue simulating liquids at different frequencies, and when approaching (inbound) and drawn away (outbound) from the phantom:

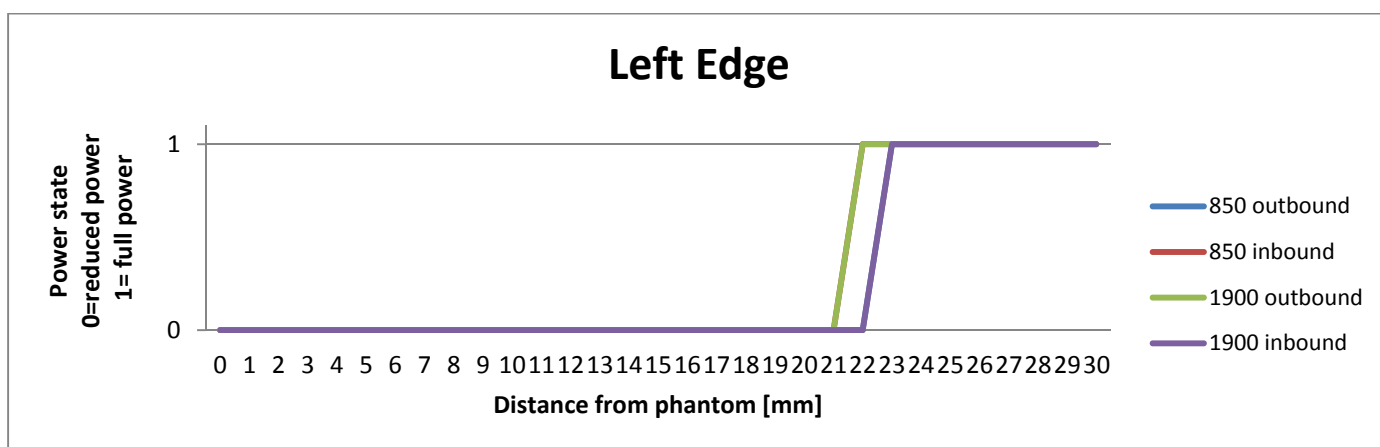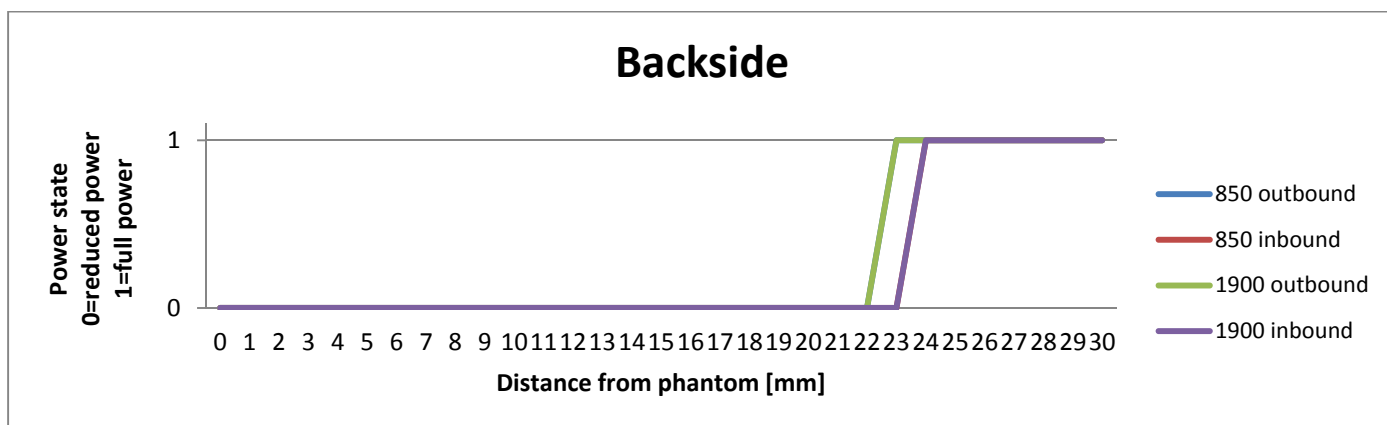

Only 1900 liquid graphs are visible, since triggering distance is exactly the same at both 850 and 1900 liquid. The test distance was chosen as closest distance among these tests, i.e. 22mm from the back surface and 21mm from the left edge.

Following drawings depict proximity sensor coverage area overlaid on top of SAR distribution in 835MHz. 835Mhz has widest spread of all cellular SAR distributions, giving conservative estimate of the needed proximity sensor coverage area.

As Seen From Tablet Back Side

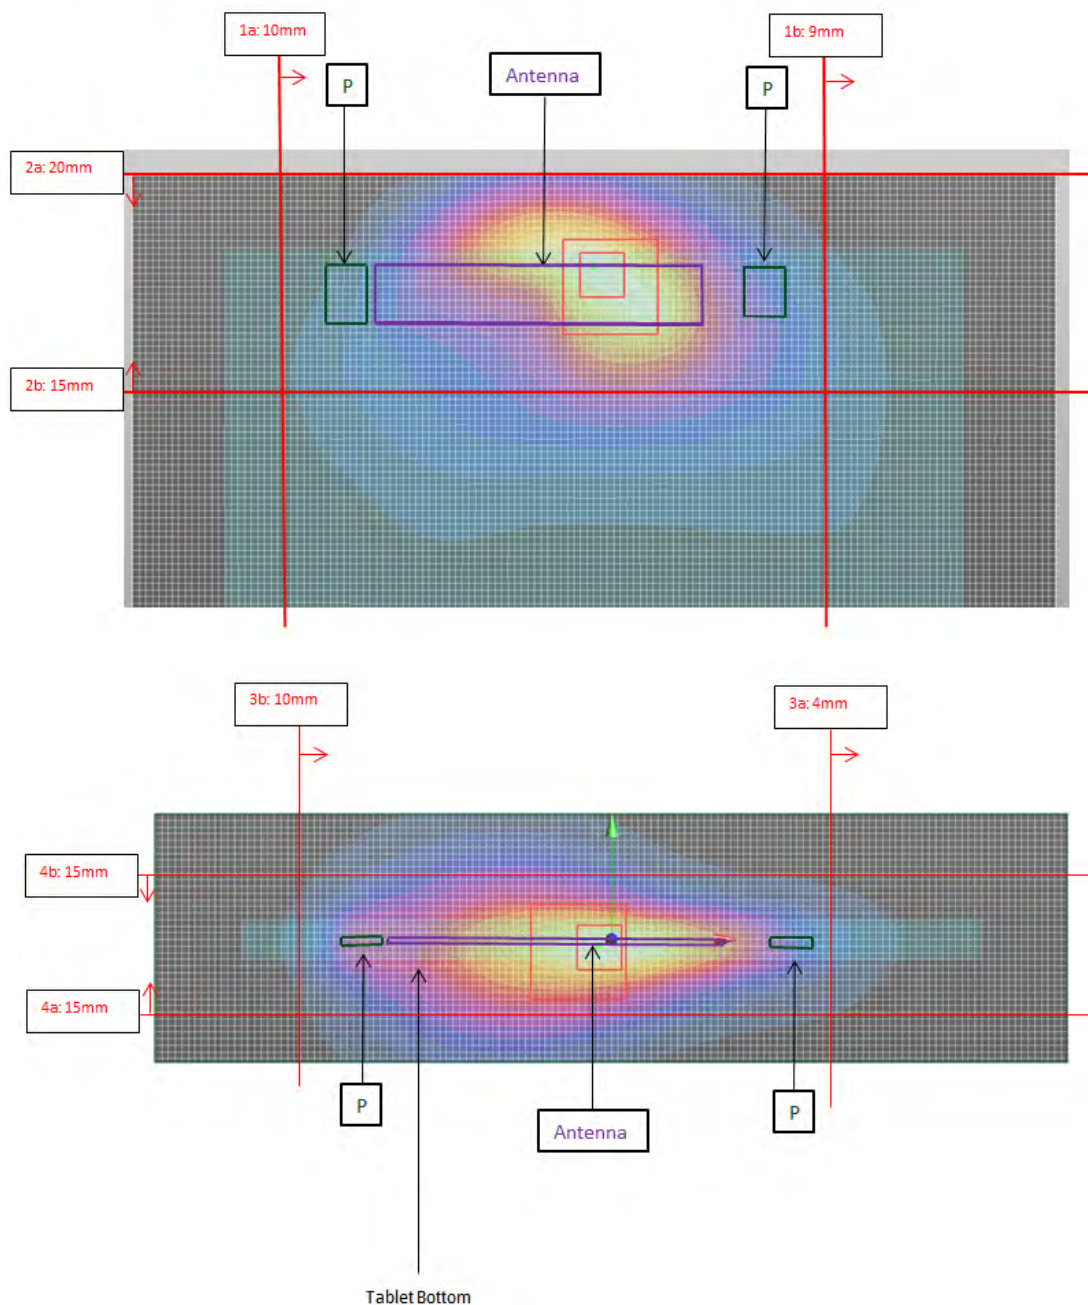

In addition, proximity sensor passes the $\pm 45^\circ$ tilt test for left edge at this distance. Full proximity sensor test results are tabulated in Appendix K.

Both WLANs were tested at full power with device touching the phantom. Combining these WLAN results with cellular band results at above mentioned separation distances gives conservative estimate of the combined SAR value.

5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan, a minimum of $5 \times 5 \times 7$ points covering a volume of at least $30 \times 30 \times 30 \text{ mm}$, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan. Fast SAR is measured according to the KDB 447498 D01 Exposure Guidance v05r01.

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	C_i	$C_i \cdot U_i$ (%)	V_i
Measurement System							
Probe Calibration	E2.1	±6.55	N	1	1	±6.55	∞
Axial Isotropy	E2.2	±4.7	R	$\sqrt{3}$	$(1-c_p)^{1/2}$	±1.9	∞
Hemispherical Isotropy	E2.2	±9.6	R	$\sqrt{3}$	$(c_p)^{1/2}$	±3.9	∞
Boundary Effect	E2.3	±1.0	R	$\sqrt{3}$	1	±0.6	∞
Linearity	E2.4	±4.7	R	$\sqrt{3}$	1	±2.7	∞
System Detection Limits	E2.5	±1.0	R	$\sqrt{3}$	1	±0.6	∞
Readout Electronics	E2.6	±1.0	N	1	1	±1.0	∞
Response Time	E2.7	±0.8	R	$\sqrt{3}$	1	±0.5	∞
Integration Time	E2.8	±2.6	R	$\sqrt{3}$	1	±1.5	∞
RF Ambient Conditions - Noise	E6.1	±3.0	R	$\sqrt{3}$	1	±1.7	∞
RF Ambient Conditions - Reflections	E6.1	±3.0	R	$\sqrt{3}$	1	±1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	±0.4	R	$\sqrt{3}$	1	±0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	±2.9	R	$\sqrt{3}$	1	±1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5	±3.9	R	$\sqrt{3}$	1	±2.3	∞
Test sample Related							
Test Sample Positioning	E4.2	±6.0	N	1	1	±6.0	11
Device Holder Uncertainty	E4.1	±5.0	N	1	1	±5.0	7
Output Power Variation - SAR drift measurement	6.6.3	±5.0	R	$\sqrt{3}$	1	±2.9	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	±4.0	R	$\sqrt{3}$	1	±2.3	∞
Conductivity Target - tolerance	E3.2	±5.0	R	$\sqrt{3}$	0.64	±1.8	∞
Conductivity - measurement uncertainty	E3.3	±5.5	N	1	0.64	±3.5	5
Permittivity Target - tolerance	E3.2	±5.0	R	$\sqrt{3}$	0.6	±1.7	∞
Permittivity - measurement uncertainty	E3.3	±2.9	N	1	0.6	±1.7	5
Combined Standard Uncertainty			RSS			±13.5	116
Coverage Factor for 95%			k=2				
Expanded Uncertainty						±27.1	

Table 6.2 – Measurement uncertainty evaluation for Fast SAR

Relative DASY5 Uncertainty Budget for Fast SAR Tests According to IEEE 1528/2011 and IEC 62209-1/2011 (0.3-6 GHz range)						
Uncertainty Component	Tol. (%)	Prob Dist.	Div.	C_i	$C_i \cdot U_i$ (%)	V_i
Measurement System						
Probe Calibration	±6.55	N	1	0		
Axial Isotropy	±4.7	R	√3	0.7	±1.9	∞
Hemispherical Isotropy	±9.6	R	√3	0.7	±3.9	∞
Boundary Effect	±2.0	R	√3	1	±1.2	∞
Linearity	±4.7	R	√3	1	±2.7	∞
System Detection Limits	±1.0	R	√3	1	±0.6	∞
Modulation Response	±2.4	R	√3	1	±1.4	∞
Readout Electronics	±0.3	N	1	0		
Response Time	±0.8	R	√3	0		
Integration Time	±2.6	R	√3	1	±1.5	∞
RF Ambient Conditions - Noise	±3.0	R	√3	1	±1.7	∞
RF Ambient Conditions - Reflections	±3.0	R	√3	0		
Probe Positioner Mechanical Tolerance	±0.8	R	√3	1	±0.5	∞
Probe Positioning with respect to Phantom Shell	±6.7	R	√3	1	±3.9	∞
Spatial x-y Resolution	±10.0	R	√3	1	±5.8	∞
Fast SAR z Approximation	±14.0	R	√3	1	±8.1	∞
Test sample Related						
Test Sample Positioning	±2.9	N	1	1	±2.9	145
Device Holder Uncertainty	±3.6	N	1	1	±3.6	5
Output Power Variation - SAR drift measurement	±5.0	R	√3	1	±2.9	∞
Power Scaling	±0	R	√3	0		
Phantom and Setup						
Phantom Uncertainty (shape and thickness tolerances)	±6.6	R	√3	1	±3.8	∞
SAR correction	±1.9	R	√3	0		
Conductivity - measurement uncertainty	±2.5	R	√3	0		
Permittivity - measurement uncertainty	±2.5	R	√3	0		
Temperature - Conductivity	±3.4	R	√3	0		
Temperature - Permittivity	±0.4	R	√3	0		
Combined Standard Uncertainty		RSS			±13.9	748
Coverage Factor for 95%		k=2				
Expanded Uncertainty					±27.8	

7. RESULTS

7.1 The measured Body SAR values for the test device are tabulated below:

850MHz Band Body SAR results – Reduced Power

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 128	Ch 190	Ch 251	Ch 128	Ch 190	Ch 251		
			824.2 MHz	836.6 MHz	848.8 MHz	824.2 MHz	836.6 MHz	848.8 MHz		
1-slot GPRS	Tuning Target + Tolerance [dBm]		29.85			Scaling factor*				
	Conducted Slot Average Power [dBm]		29.00	29.00	29.00	0.85	0.85	0.85	dB	
	Time-averaged power [dBm]		19.97	19.97	19.97	1.22	1.22	1.22	Lin	
	Back facing phantom 0mm	Estimated SAR	0.807	0.817	0.781	0.981	0.994	0.950	0.02	-
		Full SAR	-	0.839	-	-	1.02	-		
2-slot GPRS	Tuning Target + Tolerance [dBm]		27.85			Scaling factor*				
	Conducted Slot Average Power [dBm]		27.40	27.30	27.60	0.45	0.55	0.25	dB	
	Time-averaged power [dBm]		21.38	21.28	21.58	1.11	1.14	1.06	Lin	
	Back facing phantom 0mm	Estimated SAR	1.14	1.13	1.12	1.26	1.28	1.19	0.03	1
		Full SAR	1.17	1.15	-	1.30	1.31	-		
	Left edge facing phantom 0mm	Estimated SAR	-	0.342	-	-	0.388	-	0.00	-
		Full SAR	-	0.344	-	-	0.390	-		

(Table continues)

(Table continues)

3-slot GPRS	Tuning Target + Tolerance [dBm]		25.55			Scaling factor*				
	Conducted Slot Average Power [dBm]		25.20	25.50	25.40	0.35	0.05	0.15	dB	
	Time-averaged power [dBm]		20.94	21.24	21.14	1.08	1.01	1.04	Lin	
	Back facing phantom 0mm	Estimated SAR	1.20	1.29	1.12	1.30	1.31	1.16	0.03	-
		Full SAR	1.17	1.28	-	1.27	1.30	-		
	Repeated SAR: Back facing phantom 0mm	Estimated SAR	-	1.23	-	-	1.24	-	0.02	-
		Full SAR	-	1.25	-	-	1.26	-		
4-slot GPRS	Tuning Target + Tolerance [dBm]		23.35			Scaling factor*				
	Conducted Slot Average Power [dBm]		23.10	23.10	23.00	0.25	0.25	0.35	dB	
	Time-averaged power [dBm]		20.09	20.09	19.99	1.06	1.06	1.08	Lin	
	Back facing phantom 0mm	Estimated SAR	0.978	1.03	0.929	1.04	1.09	1.01	0.01	-
		Full SAR	-	1.02	-	-	1.08	-		

(Table continues)

(Table continues)

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 4132	Ch 4175	Ch 4233	Ch 4132	Ch 4175	Ch 4233		
			826.4 MHz	835.0 MHz	846.6 MHz	826.4 MHz	835.0 MHz	846.6 MHz		
WCDMA	Tuning Target + Tolerance [dBm]		21.35			Scaling factor*				
	Conducted Power [dBm]		21.24	21.21	21.28	0.11	0.14	0.07	dB	
	Time-averaged power [dBm]		21.24	21.21	21.28	1.03	1.03	1.02	Lin	
	Back facing phantom 0mm	Estimated SAR	1.13	1.09	1.07	1.16	1.13	1.09	0.02	2
		Full SAR	1.15	-	-	1.18	-	-		
	Left edge facing phantom 0mm	Estimated SAR	-	0.304	-	-	0.314	-	0.01	-
		Full SAR	-	0.312	-	-	0.322	-		
	Repeated SAR: Back facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-
		Full SAR	1.15	-	-	1.18	-	-		

850MHz Band Body SAR results – Full Power

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 128	Ch 190	Ch 251	Ch 128	Ch 190	Ch 251		
			824.2 MHz	836.6 MHz	848.8 MHz	824.2 MHz	836.6 MHz	848.8 MHz		
1-slot GPRS	Tuning Target + Tolerance [dBm]		32.85			Scaling factor*				
	Conducted Slot Average Power [dBm]		32.84	32.52	32.77	0.01	0.33	0.08	dB	
	Time-averaged power [dBm]		23.81	23.49	23.74	1.00	1.08	1.02	Lin	
	Back facing phantom 22mm	Estimated SAR	-	0.302	-	-	0.326	-	-	-
		Full SAR	-	-	-	-	-	-		
2-slot GPRS	Tuning Target + Tolerance [dBm]		30.35			Scaling factor*				
	Conducted Slot Average Power [dBm]		30.28	30.14	30.10	0.07	0.21	0.25	dB	
	Time-averaged power [dBm]		24.26	24.12	24.08	1.02	1.05	1.06	Lin	
	Back facing phantom 22mm	Estimated SAR	0.275	0.326	0.342	0.279	0.342	0.362	0.00	3
		Full SAR	-	-	0.344	-	-	0.364		
	Top edge facing phantom 0mm	Estimated SAR	-	0.303	-	-	0.318	-	-	-
		Full SAR	-	-	-	-	-	-		
	Bottom facing phantom 0mm	Estimated SAR	-	0.209	-	-	0.219	-	-	-
		Full SAR	-	-	-	-	-	-		
	Left edge facing phantom 21mm	Estimated SAR	-	0.150	-	-	0.157	-	-	-
		Full SAR	-	-	-	-	-	-		

(Table continues)

(Table continues)

3-slot GPRS	Tuning Target + Tolerance [dBm]		28.55			Scaling factor*				
	Conducted Slot Average Power [dBm]		28.42	28.31	28.54	0.13	0.24	0.01	dB	
	Time-averaged power [dBm]		24.16	24.05	24.28	1.03	1.06	1.00	Lin	
	Back facing phantom 22mm	Estimated SAR	-	0.313	-	-	0.331	-	-	-
		Full SAR	-	-	-	-	-	-		
4-slot GPRS	Tuning Target + Tolerance [dBm]		27.35			Scaling factor*				
	Conducted Slot Average Power [dBm]		27.10	27.28	27.17	0.25	0.07	0.18	dB	
	Time-averaged power [dBm]		24.09	24.27	24.16	1.06	1.02	1.04	Lin	
	Back facing phantom 22mm	Estimated SAR	-	0.324	-	-	0.329	-	-	-
		Full SAR	-	-	-	-	-	-		

(Table continues)

(Table continues)

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 4132	Ch 4175	Ch 4233	Ch 4132	Ch 4175	Ch 4233		
			826.4 MHz	835.0 MHz	846.6 MHz	826.4 MHz	835.0 MHz	846.6 MHz		
WCDMA	Tuning Target + Tolerance [dBm]		23.85			Scaling factor*				
	Conducted Power [dBm]		23.76	23.66	23.60	0.09	0.19	0.25	dB	
	Time-averaged power [dBm]		23.76	23.66	23.60	1.02	1.04	1.06	Lin	
	Back facing phantom 22mm	Estimated SAR	0.326	0.308	0.281	0.333	0.322	0.298	0.00	4
		Full SAR	0.324	-	-	0.331	-	-		
	Top edge facing phantom 0mm	Estimated SAR	-	0.152	-	-	0.159	-	-	-
		Full SAR	-	-	-	-	-	-		
	Bottom facing phantom 0mm	Estimated SAR	-	0.166	-	-	0.173	-	-	-
		Full SAR	-	-	-	-	-	-		
	Left edge facing phantom 21mm	Estimated SAR	-	0.115	-	-	0.120	-	-	-
		Full SAR	-	-	-	-	-	-		

1900MHz Band Body SAR results – Reduced Power

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 512	Ch 661	Ch 810	Ch 512	Ch 661	Ch 810		
			1850.2 MHz	1880.0 MHz	1909.8 MHz	1850.2 MHz	1880.0 MHz	1909.8 MHz		
1-slot GPRS	Tuning Target + Tolerance [dBm]		26.35			Scaling factor*				
	Conducted Slot Average Power [dBm]		26.00	26.20	26.10	0.35	0.15	0.25	dB	
	Time-averaged power [dBm]		16.97	17.17	17.07	1.08	1.04	1.06	Lin	
	Back facing phantom 0mm	Estimated SAR	0.950	0.946	0.881	1.03	0.979	0.933	0.04	-
		Full SAR	0.989	-	-	1.07	-	-		
2-slot GPRS	Tuning Target + Tolerance [dBm]		22.35			Scaling factor*				
	Conducted Slot Average Power [dBm]		22.30	22.30	22.20	0.05	0.05	0.15	dB	
	Time-averaged power [dBm]		16.28	16.28	16.18	1.01	1.01	1.04	Lin	
	Back facing phantom 0mm	Estimated SAR	-	0.724	-	-	0.732	-	-	-
		Full SAR	-	-	-	-	-	-		
3-slot GPRS	Tuning Target + Tolerance [dBm]		21.55			Scaling factor*				
	Conducted Slot Average Power [dBm]		21.20	21.20	21.20	0.35	0.35	0.35	dB	
	Time-averaged power [dBm]		16.94	16.94	16.94	1.08	1.08	1.08	Lin	
	Back facing phantom 0mm	Estimated SAR	0.998	0.960	0.894	1.08	1.04	0.969	0.05	-
		Full SAR	1.05	-	-	1.14	-	-		

(Table continues)

(Table continues)

4-slot GPRS	Tuning Target + Tolerance [dBm]		20.85			Scaling factor*				
	Conducted Slot Average Power [dBm]		20.30	20.30	20.20	0.55	0.55	0.65	dB	
	Time-averaged power [dBm]		17.29	17.29	17.19	1.14	1.14	1.16	Lin	
	Back facing phantom 0mm	Estimated SAR	0.989	0.950	0.891	1.12	1.08	1.04	0.05	5
		Full SAR	1.04	-	-	1.18	-	-		
	Left edge facing phantom 0mm	Estimated SAR	-	0.476	-	-	0.540	-	0.01	-
Full SAR		-	0.487	-	-	0.553	-			
	Repeated SAR: Back facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-
		Full SAR	1.04	-	-	1.18	-	-		
Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 9262	Ch 9400	Ch 9538	Ch 9262	Ch 9400	Ch 9538		
			1852.4 MHz	1880.0 MHz	1907.6 MHz	1852.4 MHz	1880.0 MHz	1907.6 MHz		
WCDMA	Tuning Target + Tolerance [dBm]		17.85			Scaling factor*				
	Conducted Power [dBm]		17.57	17.61	17.83	0.28	0.24	0.02	dB	
	Time-averaged power [dBm]		17.57	17.61	17.83	1.07	1.06	1.00	Lin	
	Back facing phantom 0mm	Estimated SAR	1.14	1.07	1.10	1.22	1.13	1.11	0.10	-
		Full SAR	1.24	-	-	1.32	-	-		
	Left edge facing phantom 0mm	Estimated SAR	-	0.599	-	-	0.633	-	0.01	-
		Full SAR	-	0.609	-	-	0.644	-		
	Repeated SAR: Back facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	6
		Full SAR	1.26	-	-	1.34	-	-		

1900MHz Band Body SAR results – Full Power

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 512	Ch 661	Ch 810	Ch 512	Ch 661	Ch 810		
			1850.2 MHz	1880.0 MHz	1909.8 MHz	1850.2 MHz	1880.0 MHz	1909.8 MHz		
1-slot GPRS	Tuning Target + Tolerance [dBm]		30.35			Scaling factor*				
	Conducted Slot Average Power [dBm]		30.22	30.32	30.24	0.13	0.03	0.11	dB	
	Time-averaged power [dBm]		21.19	21.29	21.21	1.03	1.01	1.03	Lin	
	Back facing phantom 22mm	Estimated SAR	-	0.078	-	-	0.079	-	-	-
		Full SAR	-	-	-	-	-	-		
2-slot GPRS	Tuning Target + Tolerance [dBm]		27.35			Scaling factor*				
	Conducted Slot Average Power [dBm]		27.32	27.29	27.26	0.03	0.06	0.09	dB	
	Time-averaged power [dBm]		21.30	21.27	21.24	1.01	1.01	1.02	Lin	
	Back facing phantom 22mm	Estimated SAR	-	0.094	-	-	0.096	-	-	-
		Full SAR	-	-	-	-	-	-		
3-slot GPRS	Tuning Target + Tolerance [dBm]		25.55			Scaling factor*				
	Conducted Slot Average Power [dBm]		25.43	25.42	25.50	0.12	0.13	0.05	dB	
	Time-averaged power [dBm]		21.17	21.16	21.24	1.03	1.03	1.01	Lin	
	Back facing phantom 22mm	Estimated SAR	-	0.099	-	-	0.102	-	-	-
		Full SAR	-	-	-	-	-	-		

(Table continues)

(Table continues)

4-slot GPRS	Tuning Target + Tolerance [dBm]		24.35			Scaling factor*				
	Conducted Slot Average Power [dBm]		24.18	24.22	24.28	0.17	0.13	0.07	dB	
	Time-averaged power [dBm]		21.17	21.21	21.27	1.04	1.03	1.02	Lin	
	Back facing phantom 22mm	Estimated SAR	-	0.101	-	-	0.104	-	-	-
		Full SAR	-	-	-	-	-	-		
	Top edge facing phantom 0mm	Estimated SAR	0.350	0.310	0.362	0.364	0.319	0.368	0.00	7
		Full SAR	-	-	0.363	-	-	0.369		
	Left edge facing phantom 21mm	Estimated SAR	-	0.143	-	-	0.147	-	-	-
Full SAR		-	-	-	-	-	-			
Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 9262 1852.4 MHz	Ch 9400 1880.0 MHz	Ch 9538 1907.6 MHz	Ch 9262 1852.4 MHz	Ch 9400 1880.0 MHz	Ch 9538 1907.6 MHz		
WCDMA	Tuning Target + Tolerance [dBm]		23.85			Scaling factor*				
	Conducted Power [dBm]		23.57	23.57	23.62	0.28	0.28	0.23	dB	
	Time-averaged power [dBm]		23.57	23.57	23.62	1.07	1.07	1.05	Lin	
	Back facing phantom 22mm	Estimated SAR	-	0.280	-	-	0.299	-	-	-
		Full SAR	-	-	-	-	-	-		
	Top edge facing phantom 0mm	Estimated SAR	0.695	0.735	0.807	0.741	0.784	0.851	0.07	-
		Full SAR	-	-	0.741	-	-	0.781		
	Bottom edge facing phantom 0mm	Estimated SAR	-	0.063	-	-	0.068	-	-	-
		Full SAR	-	-	-	-	-	-		
	Left edge facing phantom 21mm	Estimated SAR	-	0.313	-	-	0.334	-	0.03	-
		Full SAR	-	0.284	-	-	0.303	-		

(Table continues)

(Table continues)

	Repeated SAR: Top edge facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	8
		Full SAR	-	-	0.761	-	-	0.802		

2450MHz Body SAR results – Main Antenna

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 1	Ch 6	Ch 11	Ch 1	Ch 6	Ch 11		
			2412 MHz	2437.0 MHz	2462.0 MHz	2412 MHz	2437.0 MHz	2462.0 MHz		
WLAN b-mode BPSK 1Mbps	Tuning Target + Tolerance [dBm]		15.00			Scaling factor*				
	Conducted Slot Average Power [dBm]		12.53	14.61	13.44	2.47	0.39	1.56	dB	
	Time-averaged power [dBm]		12.53	14.61	13.44	1.77	1.09	1.43	Lin	
	Back facing phantom 0mm	Estimated SAR	0.565	0.973	0.644	0.998	1.06	0.922	0.08	-
		Full SAR	-	0.889	-	-	0.973	-		
	Bottom edge facing phantom 0mm	Estimated SAR	-	0.375	-	-	0.410	-	0.01	-
		Full SAR	-	0.381	-	-	0.417	-		
		Repeated SAR, Back facing phantom	Estimated SAR	-	-	-	-	-	-	-
Full SAR			-	0.899	-	-	0.983	-		

2450MHz Body SAR results – AUX Antenna

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 1	Ch 6	Ch 11	Ch 1	Ch 6	Ch 11		
			2412.0 MHz	2437.0 MHz	2462.0 MHz	2412.0 MHz	2437.0 MHz	2462.0 MHz		
WLAN b-mode BPSK 1Mbps	Tuning Target + Tolerance [dBm]		14.50			Scaling factor*				
	Conducted Slot Average Power [dBm]		12.82	14.25	12.11	1.68	0.25	2.39	dB	
	Time-averaged power [dBm]		12.82	14.25	12.11	1.47	1.06	1.73	Lin	
	Back facing phantom 0mm	Estimated SAR	0.715	0.914	0.567	1.05	0.968	0.983	0.06	10
		Full SAR	0.753	-	-	1.11	-	-		
	Bottom edge facing phantom 0mm	Estimated SAR	-	0.263	-	-	0.279	-	0.01	-
		Full SAR	-	0.275	-	-	0.291	-		
		Repeated SAR: Back facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-
Full SAR			-	0.935	-	-	0.990	-		

5000MHz Body SAR results
5150–5250 MHz and 5250–5350 MHz – Main Antenna

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]				Reported* 1g SAR [W/kg]				Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 40 5200.0 MHz	Ch 44 5220.0 MHz	Ch 56 5280.0 MHz	Ch 60 5300.0 MHz	Ch 40 5200.0 MHz	Ch 44 5220.0 MHz	Ch 56 5280.0 MHz	Ch 60 5300.0 MHz		
WLAN a-mode BPSK 6 Mbps	Tuning Target + Tolerance [dBm]		9.00		9.00		Scaling factor*					
	Conducted Power [dBm]		8.36	8.51	8.23	8.44	0.64	0.49	0.77	0.56	dB	
	Time-averaged power [dBm]		8.36	8.51	8.23	8.44	1.16	1.12	1.19	1.14	Lin	
	Back facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-	-	-
		Full SAR	0.240	0.270	0.372	0.355	0.278	0.302	0.444	0.404		
	Bottom edge facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-	-	-
		Full SAR	-	0.396	0.389	-	-	0.443	0.464	-		

5000MHz Body SAR results
5150–5250 MHz and 5250–5350 MHz – AUX Antenna

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]				Reported* 1g SAR [W/kg]				Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 36 5180.0 MHz	Ch 44 5220.0 MHz	Ch 52 5260.0 MHz	Ch 60 5300.0 MHz	Ch 36 5180.0 MHz	Ch 44 5220.0 MHz	Ch 52 5260.0 MHz	Ch 60 5300.0 MHz		
WLAN a-mode BPSK 6 Mbps	Tuning Target + Tolerance [dBm]		11.00		10.00		Scaling factor*					
	Conducted Power [dBm]		10.14	9.82	8.48	7.77	0.86	1.18	1.52	2.23	dB	
	Time-averaged power [dBm]		10.14	9.82	8.48	7.77	1.22	1.31	1.42	1.67	Lin	
	Back facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-	-	-
		Full SAR	0.416	0.420	0.415	0.319	0.507	0.551	0.589	0.533		
	Bottom edge facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-	-	11
		Full SAR	-	1.03	0.836	-	-	1.35	1.19	-		
	Repeated SAR: Bottom edge facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-	-	-
		Full SAR	-	1.02	0.835	-	-	1.34	1.19	-		

5000MHz Body SAR results
5470–5725 MHz - Main Antenna

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]				Reported* 1g SAR [W/kg]				Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 104 5520.0 MHz	Ch 112 5560.0 MHz	Ch 128 5640.0 MHz	Ch 136 5680.0 MHz	Ch 104 5520.0 MHz	Ch 112 5560.0 MHz	Ch 128 5640.0 MHz	Ch 136 5680.0 MHz		
WLAN a-mode BPSK 6 Mbps	Tuning Target + Tolerance [dBm]		9.00		8.00		Scaling factor*					
	Conducted Power [dBm]		7.95	7.51	7.08	7.41	1.05	1.49	0.92	0.59	dB	
	Time-averaged power [dBm]		7.95	7.51	7.08	7.41	1.27	1.41	1.24	1.15	Lin	
	Back facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-	-	-
		Full SAR	0.353	0.250	0.154	0.208	0.450	0.352	0.190	0.238		
	Bottom edge facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-	-	12
		Full SAR	0.595	-	-	-	0.758	-	-	-		

5000MHz Body SAR results
5470–5725 MHz - AUX Antenna

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]				Reported* 1g SAR [W/kg]				Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 108	Ch 120	Ch 124	Ch 136	Ch 108	Ch 120	Ch 124	Ch 136		
			5540.0 MHz	5600.0 MHz	5620.0 MHz	5680.0 MHz	5540.0 MHz	5600.0 MHz	5620.0 MHz	5680.0 MHz		
WLAN a-mode BPSK 6 Mbps	Tuning Target + Tolerance [dBm]		10.00	11.00			Scaling factor*					
	Conducted Power [dBm]		9.09	9.82	10.00	9.63	0.91	1.18	1.00	1.37	dB	
	Time-averaged power [dBm]		9.09	9.82	10.00	9.63	1.23	1.31	1.26	1.37	Lin	
	Back facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-	-	-
		Full SAR	0.466	0.507	0.489	0.448	0.575	0.665	0.616	0.614		
	Bottom edge facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-	-	-
		Full SAR	-	0.931	-	-	-	1.22	-	-		
	Repeated SAR: Bottom edge facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-	-	-
		Full SAR	-	0.922	-	-	-	1.21	-	-		

5000MHz Body SAR results
5725–5850 MHz – Main Antenna

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 153	Ch 161	Ch 165	Ch 153	Ch 161	Ch 165		
			5765.0 MHz	5805.0 MHz	5825.0 MHz	5765.0 MHz	5805.0 MHz	5825.0 MHz		
WLAN a-mode BPSK 6 Mbps	Tuning Target + Tolerance [dBm]		9.00			Scaling factor*				
	Conducted Power [dBm]		7.49	8.52	8.46	1.51	0.48	0.54	dB	
	Time-averaged power [dBm]		7.49	8.52	8.46	1.42	1.12	1.13	Lin	
	Back facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-
		Full SAR	0.168	0.245	0.291	0.238	0.274	0.330		
	Bottom edge facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-
		Full SAR	-	-	0.424	-	-	0.480		

5000MHz Body SAR results
5725–5850 MHz – AUX Antenna

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 149	Ch 157	Ch 161	Ch 149	Ch 157	Ch 161		
			5745.0 MHz	5785.0 MHz	5805.0 MHz	5745.0 MHz	5785.0 MHz	5805.0 MHz		
WLAN a-mode BPSK 6 Mbps	Tuning Target + Tolerance [dBm]		10.00			Scaling factor*				
	Conducted Power [dBm]		9.13	9.31	9.29	0.87	0.69	0.71	dB	
	Time-averaged power [dBm]		9.13	9.31	9.29	1.22	1.17	1.18	Lin	
	Back facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-
		Full SAR	0.429	0.451	0.430	0.524	0.529	0.506		
	Bottom edge facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-
		Full SAR	-	0.620	-	-	0.727	-		

**Simultaneous transmissions: Combined Body SAR results –
Individual band Max results – Reduced power**

Test configuration	*Reported Max. 1g SAR results							
	WLAN 2450 - Main	WLAN 2450 - AUX	WLAN 5000 - Main	WLAN 5000 - AUX	2-slot GPRS 850	WCDMA 850	4-slot GPRS 1900	WCDMA 1900
Back facing phantom	0.983	1.11	0.450	0.665	1.31	1.18	1.18	1.34
Bottom edge facing phantom	0.417	0.291	0.758	1.35	-	-	-	-
Left edge facing phantom	-	-	-	-	0.390	0.322	0.553	0.644

**Simultaneous transmissions: Combined Body SAR results –
Individual band Max results – Full power**

Test configuration	*Reported Max. 1g SAR results							
	WLAN 2450 - Main	WLAN 2450 - AUX	WLAN 5000 - Main	WLAN 5000 - AUX	2-slot GPRS 850	WCDMA 850	4-slot GPRS 1900	WCDMA 1900
Back facing phantom	0.983	1.11	0.450	0.665	0.364	0.331	0.104	0.299
Top facing phantom	-	-	-	-	0.318	0.159	0.369	0.802
Bottom edge facing phantom	0.417	0.291	0.758	1.35	0.219	0.173	-	0.068
Left edge facing phantom	-	-	-	-	0.157	0.120	0.147	0.303

**Simultaneous transmissions: Combined body SAR results –
Max + Max combined results - Reduced power**

Test configuration	*Reported Max. 1g SAR results								
	WLAN 2450 Main + WLAN 2450 Aux	2-slot GPRS 850 + WLAN 2450 - Main	WCDMA 850 + WLAN 2450 - Main	4-slot GPRS 1900 + WLAN 2450 - Main	WCDMA 1900 + WLAN 2450 - Main	2-slot GPRS 850 + WLAN 2450 - AUX	WCDMA 850 + WLAN 2450 - AUX	4-slot GPRS 1900 + WLAN 2450 - AUX	WCDMA 1900 + WLAN 2450 - AUX
Back facing phantom	2.09	2.29	2.16	2.16	2.32	2.42	2.29	2.29	2.45
Bottom edge facing phantom	0.708	-	-	-	-	-	-	-	-
Left edge facing phantom	-	-	-	-	-	-	-	-	-
Test configuration	*Reported Max. 1g SAR results								
	WLAN 5000 Main + WLAN 5000 Aux	2-slot GPRS 850 + WLAN 5000 - Main	WCDMA 850 + WLAN 5000 - Main	4-slot GPRS 1900 + WLAN 5000 - Main	WCDMA 1900 + WLAN 5000 - Main	2-slot GPRS 850 + WLAN 5000 - AUX	WCDMA 850 + WLAN 5000 - AUX	4-slot GPRS 1900 + WLAN 5000 - AUX	WCDMA 1900 + WLAN 5000 - AUX
Back facing phantom	1.12	1.76	1.63	1.63	1.79	1.98	1.85	1.85	2.01
Bottom edge facing phantom	2.11	-	-	-	-	-	-	-	-
Left edge facing phantom	-	-	-	-	-	-	-	-	-

**Simultaneous transmissions: Combined body SAR results –
Max + Max combined results - Full power**

Test configuration	*Reported Max. 1g SAR results								
	WLAN 2450 Main + WLAN 2450 Aux	2-slot GPRS 850 + WLAN 2450 - Main	WCDMA 850 + WLAN 2450 - Main	4-slot GPRS 1900 + WLAN 2450 - Main	WCDMA 1900 + WLAN 2450 - Main	2-slot GPRS 850 + WLAN 2450 - AUX	WCDMA 850 + WLAN 2450 - AUX	4-slot GPRS 1900 + WLAN 2450 - AUX	WCDMA 1900 + WLAN 2450 - AUX
Back facing phantom	2.09	1.35	1.31	1.09	1.28	1.47	1.44	1.21	1.41
Top edge facing phantom	-	-	-	-	-	-	-	-	-
Bottom edge facing phantom	0.708	0.636	0.590	-	0.485	0.510	0.464	-	0.359
Left edge facing phantom	-	-	-	-	-	-	-	-	-
Test configuration	*Reported Max. 1g SAR results								
	WLAN 5000 Main + WLAN 5000 Aux	2-slot GPRS 850 + WLAN 5000 - Main	WCDMA 850 + WLAN 5000 - Main	4-slot GPRS 1900 + WLAN 5000 - Main	WCDMA 1900 + WLAN 5000 - Main	2-slot GPRS 850 + WLAN 5000 - AUX	WCDMA 850 + WLAN 5000 - AUX	4-slot GPRS 1900 + WLAN 5000 - AUX	WCDMA 1900 + WLAN 5000 - AUX
Back facing phantom	1.12	0.814	0.781	0.554	0.749	1.03	1.00	0.769	0.964
Top edge facing phantom	-	-	-	-	-	-	-	-	-
Bottom edge facing phantom	2.11	0.977	0.931	-	0.826	1.57	1.52	-	1.42
Left edge facing phantom	-	-	-	-	-	-	-	-	-

**Simultaneous transmissions: Combined body SAR results –
Max + Max + Max combined results - Reduced power**

Test configuration	*Reported Max. 1g SAR results							
	2-slot GPRS 850 + WLAN 2450 – Main + WLAN 2450 - AUX	WCDMA 850 + WLAN 2450 – Main + WLAN 2450 - AUX	4-slot GPRS 1900 + WLAN 2450 – Main + WLAN 2450 - AUX	WCDMA 1900 + WLAN 2450 – Main + WLAN 2450 - AUX	2-slot GPRS 850 + WLAN 5000 – Main + WLAN 5000 - AUX	WCDMA 850 + WLAN 5000 – Main + WLAN 5000 - AUX	4-slot GPRS 1900 + WLAN 5000 – Main + WLAN 5000 - AUX	WCDMA 1900 + WLAN 5000 – Main + WLAN 5000 - AUX
Back facing phantom	3.40	3.27	3.27	3.43	2.43	2.30	2.30	2.46
Bottom edge facing phantom	-	-	-	-	-	-	-	-
Left edge facing phantom	-	-	-	-	-	-	-	-

**Simultaneous transmissions: Combined body SAR results –
Max + Max + Max combined results – Full power**

Test configuration	*Reported Max. 1g SAR results							
	2-slot GPRS 850 + WLAN 2450 – Main + WLAN 2450 - AUX	WCDMA 850 + WLAN 2450 – Main + WLAN 2450 - AUX	4-slot GPRS 1900 + WLAN 2450 – Main + WLAN 2450 - AUX	WCDMA 1900 + WLAN 2450 – Main + WLAN 2450 - AUX	2-slot GPRS 850 + WLAN 5000 – Main + WLAN 5000 - AUX	WCDMA 850 + WLAN 5000 – Main + WLAN 5000 - AUX	4-slot GPRS 1900 + WLAN 5000 – Main + WLAN 5000 - AUX	WCDMA 1900 + WLAN 5000 – Main + WLAN 5000 - AUX
Back facing phantom	2.46	2.42	2.20	2.39	1.48	1.45	1.22	1.41
Top facing phantom	-	-	-	-	-	-	-	-
Bottom edge facing phantom	0.927	0.881	-	0.776	2.33	2.28	-	2.18
Left edge facing phantom	-	-	-	-	-	-	-	-

Simultaneous Transmission SAR Test Exclusion Procedures for Body Measurements

Simultaneous transmissions SAR test exclusion procedures as described in KDB 447498 D01 v05.

Following table gives antenna pair SAR to peak location separation ratios for the transmitter combinations for which the sum of simultaneously transmitting 1g SAR was above limit (See “Max+Max Combined results” table in previous section).

Antenna Pair SAR to Peak Location Separation Ratio

Back facing phantom	WLAN 2450 Main, reduced power	WLAN 2450 Aux, reduced power	WLAN 2450 Main, reduced power	2-slot GPRS 850, reduced power	WLAN 2450 Main, reduced power	WCDMA 850, reduced power
X [mm]	74.0	73.0	74.0	-3.0	74.0	-3.0
Y [mm]	-53.0	53.1	-53.0	117.0	-53.0	117.0
Z [mm]	-179.5	-179.6	-179.5	-181.4	-179.5	-181.4
DISTANCE [mm]	106.1		186.6		186.6	
MAX + MAX (Reported SAR)	2.09		2.29		2.16	
SAR to peak location separation ratio	0.03		0.02		0.02	
Back facing phantom	WLAN 2450 Main, reduced power	4-slot GPRS 1900 , reduced power	WLAN 2450 Main, reduced power	WCDMA 1900, reduced power	WLAN 2450 Aux, reduced power	2-slot GPRS 850, reduced power
X [mm]	74.0	-3.0	74.0	-3.0	73.0	-3.0
Y [mm]	-53.0	120.0	-53.0	120.0	53.1	117.0
Z [mm]	-179.5	-181.7	-179.5	-181.7	-179.6	-181.4
DISTANCE [mm]	189.4		189.4		99.3	
MAX + MAX (Reported SAR)	2.16		2.32		2.42	
SAR to peak location separation ratio	0.02		0.02		0.04	

(Table continues)

(Table continues)

Back facing phantom	WLAN 2450 Aux, reduced power	WCDMA 850, reduced power	WLAN 2450 Aux, reduced power	4-slot GPRS 1900 , reduced power	WLAN 2450 Aux, reduced power	WCDMA 1900, reduced power
X [mm]	73.0	-3.0	73.0	-3.0	73.0	-3.0
Y [mm]	53.1	117.0	53.1	120.0	53.1	120.0
Z [mm]	-179.6	-181.4	-179.6	-181.7	-179.6	-181.7
DISTANCE [mm]	99.3		101.3		101.3	
MAX + MAX (Reported SAR)	2.29		2.29		2.45	
SAR to peak location separation ratio	0.03		0.03		0.04	
Back facing phantom	WLAN 5000 Main, reduced power	2-slot GPRS 850, reduced power	WLAN 5000 Main, reduced power	WCDMA 850 , reduced power	WLAN 5000 Main, reduced power	4-slot GPRS 1900 , reduced power
X [mm]	80.0	-3.0	80	-3	80	-3
Y [mm]	-51.0	117.0	-51	117	-51	120
Z [mm]	-181.0	-181.4	-181	-181	-181	-182
DISTANCE [mm]	187.4		187.38		190.07	
MAX + MAX (Reported SAR)	1.76		1.63		1.63	
SAR to peak location separation ratio	0.01		0.01		0.01	
Back facing phantom	WLAN 5000 Main, reduced power	WCDMA 1900, reduced power	WLAN 5000 Aux, reduced power	2-slot GPRS 850, reduced power	WLAN 5000 Aux, reduced power	WCDMA 850, reduced power
X [mm]	80.0	-3.0	79.0	-3.0	79.0	-3.0
Y [mm]	-51.0	120.0	52.0	117.0	52.0	117.0
Z [mm]	-181.0	-181.7	-181.0	-181.4	-181.0	-181.4
DISTANCE [mm]	190.1		104.6		104.6	
MAX + MAX (Reported SAR)	1.79		1.98		1.85	
SAR to peak location separation ratio	0.01		0.03		0.02	

(Table continues)

(Table continues)

Back facing phantom	WLAN 5000 Aux, reduced power	4-slot GPRS 1900 , reduced power	WLAN 5000 Aux, reduced power	WCDMA 1900, reduced power		
X [mm]	79.0	-3.0	79.0	-3.0		
Y [mm]	52.0	120.0	52.0	120.0		
Z [mm]	-181.0	-181.7	-181.0	-181.7		
DISTANCE [mm]	106.5		106.5			
MAX + MAX (Reported SAR)	1.85		2.01			
SAR to peak location separation ratio	0.02		0.03			
Bottom Edge facing phantom	WLAN 5000 Main, reduced power	WLAN 5000 Aux, reduced power				
X [mm]	0.0	0.0				
Y [mm]	-49.0	53.0				
Z [mm]	-182.2	-182.1				
DISTANCE [mm]	102.0					
MAX + MAX (Reported SAR)	2.11					
SAR to peak location separation ratio	0.03					
2-slot GPRS850 + WLAN 2450 – Main + WLAN 2450 - AUX Back facing phantom	2-slot GPRS 850, reduced power	WLAN 2450 Main, reduced power	2-slot GPRS 850, reduced power	WLAN 2450 Aux, reduced power	WLAN 2450 Main, reduced power	WLAN 2450 Aux, reduced power
X [mm]	-3.0	74.0	-3.0	73.0	74.0	73.0
Y [mm]	117.0	-53.0	117.0	53.1	-53.0	53.1
Z [mm]	-181.4	-179.5	-181.4	-179.6	-179.5	-179.6
DISTANCE [mm]	186.6		99.3		106.1	
MAX + MAX (Reported SAR)	2.29		2.420		2.09	
SAR to peak location separation ratio	0.02		0.04		0.03	

(Table continues)

(Table continues)

WCDMA850 + WLAN 2450 – Main + WLAN 2450 - AUX Back facing phantom	WCDMA 850 , reduced power	WLAN 2450 Main, reduced power	WCDMA 850 , reduced power	WLAN 2450 Aux, reduced power	WLAN 2450 Main, reduced power	WLAN 2450 Aux, reduced power
X [mm]	-3.0	74.0	-3.0	73.0	74.0	73.0
Y [mm]	117.0	-53.0	117.0	53.1	-53.0	53.1
Z [mm]	-181.4	-179.5	-181.4	-179.6	-179.5	-179.6
DISTANCE [mm]	186.6		99.3		106.1	
MAX + MAX (Reported SAR)	2.16		2.29		2.09	
SAR to peak location separation ratio	0.02		0.03		0.03	
4-slot GPRS1900 + WLAN 2450 – Main + WLAN 2450 - AUX Back facing phantom	4-slot GPRS 1900 , reduced power	WLAN 2450 Main, reduced power	4-slot GPRS 1900 , reduced power	WLAN 2450 Aux, reduced power	WLAN 2450 Main, reduced power	WLAN 2450 Aux, reduced power
X [mm]	-3.0	74.0	-3.0	73.0	74.0	73.0
Y [mm]	120.0	-53.0	120.0	53.1	-53.0	53.1
Z [mm]	-181.7	-179.5	-181.7	-179.6	-179.5	-179.6
DISTANCE [mm]	189.4		101.3		106.1	
MAX + MAX (Reported SAR)	2.16		2.29		2.09	
SAR to peak location separation ratio	0.02		0.03		0.03	
WCDMA1900 + WLAN 2450 – Main + WLAN 2450 - AUX Back facing phantom	WCDMA 1900, reduced power	WLAN 2450 Main, reduced power	WCDMA 1900, reduced power	WLAN 2450 Aux, reduced power	WLAN 2450 Main, reduced power	WLAN 2450 Aux, reduced power
X [mm]	-3.0	74.0	-3.0	73.0	74.0	73.0
Y [mm]	120.0	-53.0	120.0	53.1	-53.0	53.1
Z [mm]	-181.7	-179.5	-181.7	-179.6	-179.5	-179.6
DISTANCE [mm]	189.4		101.3		106.1	
MAX + MAX (Reported SAR)	2.32		2.45		2.09	
SAR to peak location separation ratio	0.02		0.04		0.03	

(Table continues)

(Table continues)

2-slot GPRS850 + WLAN 5000 – Main + WLAN 5000 - AUX Back facing phantom	2-slot GPRS 850, reduced power	WLAN 5000 Main, reduced power	2-slot GPRS 850, reduced power	WLAN 5000 Aux, reduced power	WLAN 5000 Main, reduced power	WLAN 5000 Aux, reduced power
X [mm]	-3.0	80.0	-3.0	79.0	80.0	79.0
Y [mm]	117.0	-51.0	117.0	52.0	-51.0	52.0
Z [mm]	-181.4	-181.0	-181.4	-181.0	-181.0	-181.0
DISTANCE [mm]	187.4		104.6		103.0	
MAX + MAX (Reported SAR)	1.76		1.98		1.12	
SAR to peak location separation ratio	0.01		0.03		0.01	
WCDMA850 + WLAN 5000 – Main + WLAN 5000 - AUX Back facing phantom	WCDMA 850, reduced power	WLAN 5000 Main, reduced power	WCDMA 850, reduced power	WLAN 5000 Aux, reduced power	WLAN 5000 Main, reduced power	WLAN 5000 Aux, reduced power
X [mm]	-3.0	80.0	-3.0	79.0	80.0	79.0
Y [mm]	117.0	-51.0	117.0	52.0	-51.0	52.0
Z [mm]	-181.4	-181.0	-181.4	-181.0	-181.0	-181.0
DISTANCE [mm]	187.4		104.6		103.0	
MAX + MAX (Reported SAR)	1.63		1.85		1.12	
SAR to peak location separation ratio	0.01		0.02		0.01	
4-slot GPRS1900 + WLAN 5000 – Main + WLAN 5000 - AUX Back facing phantom	4-slot GPRS 1900 , reduced power	WLAN 5000 Main, reduced power	4-slot GPRS 1900 , reduced power	WLAN 5000 Aux, reduced power	WLAN 5000 Main, reduced power	WLAN 5000 Aux, reduced power
X [mm]	-3.0	80.0	-3.0	79.0	80.0	79.0
Y [mm]	120.0	-51.0	120.0	52.0	-51.0	52.0
Z [mm]	-181.7	-181.0	-181.7	-181.0	-181.0	-181.0
DISTANCE [mm]	190.1		106.5		103.0	
MAX + MAX (Reported SAR)	1.63		1.85		1.12	
SAR to peak location separation ratio	0.01		0.02		0.01	

(Table continues)

(Table continues)

WCDMA1900 + WLAN 5000 – Main + WLAN 5000 - AUX Back facing phantom	WCDMA 1900, reduced power	WLAN 5000 Main, reduced power	WCDMA 1900, reduced power	WLAN 5000 Aux, reduced power	WLAN 5000 Main, reduced power	WLAN 5000 Aux, reduced power
X [mm]	-3.0	80.0	-3.0	79.0	80.0	79.0
Y [mm]	120.0	-51.0	120.0	52.0	-51.0	52.0
Z [mm]	-181.7	-181.0	-181.7	-181.0	-181.0	-181.0
DISTANCE [mm]	190.1		106.5		103.0	
MAX + MAX (Reported SAR)	1.79		2.01		1.12	
SAR to peak location separation ratio	0.01		0.03		0.01	
2-slot GPRS850 + WLAN 2450 – Main + WLAN 2450 - AUX Back facing phantom	2-slot GPRS 850, full power	WLAN 2450 Main, full power	2-slot GPRS 850, full power	WLAN 2450 Aux, full power	WLAN 2450 Main, full power	WLAN 2450 Aux, full power
X [mm]	-3.0	74.0	-3.0	73.0	74.0	73.0
Y [mm]	117.0	-53.0	117.0	53.1	-53.0	53.1
Z [mm]	-181.4	-179.5	-181.4	-179.6	-179.5	-179.6
DISTANCE [mm]	186.6		99.3		106.1	
MAX + MAX (Reported SAR)	1.35		1.47		2.09	
SAR to peak location separation ratio	0.01		0.02		0.03	
WCDMA850 + WLAN 2450 – Main + WLAN 2450 - AUX Back facing phantom	WCDMA 850, full power	WLAN 2450 Main, full power	WCDMA 850, full power	WLAN 2450 Aux, full power	WLAN 2450 Main, full power	WLAN 2450 Aux, full power
X [mm]	-3.0	74.0	-3.0	73.0	74.0	73.0
Y [mm]	117.0	-53.0	117.0	53.1	-53.0	53.1
Z [mm]	-181.4	-179.5	-181.4	-179.6	-179.5	-179.6
DISTANCE [mm]	186.6		99.3		106.1	
MAX + MAX (Reported SAR)	1.31		1.44		2.09	
SAR to peak location separation ratio	0.01		0.02		0.03	

(Table continues)

(Table continues)

4-slot GPRS1900 + WLAN 2450 – Main + WLAN 2450 - AUX Back facing phantom	4-slot GPRS 1900 , full power	WLAN 2450 Main, full power	4-slot GPRS 1900 , full power	WLAN 2450 Aux, full power	WLAN 2450 Main, full power	WLAN 2450 Aux, full power
X [mm]	-3.0	74.0	-3.0	73.0	74.0	73.0
Y [mm]	120.0	-53.0	120.0	53.1	-53.0	53.1
Z [mm]	-181.7	-179.5	-181.7	-179.6	-179.5	-179.6
DISTANCE [mm]	189.4		101.3		106.1	
MAX + MAX (Reported SAR)	1.09		1.21		2.09	
SAR to peak location separation ratio	0.01		0.01		0.03	
WCDMA1900 + WLAN 2450 – Main + WLAN 2450 - AUX Back facing phantom	WCDMA 1900, full power	WLAN 2450 Main, full power	WCDMA 1900, full power	WLAN 2450 Aux, full power	WLAN 2450 Main, full power	WLAN 2450 Aux, full power
X [mm]	-3.0	74.0	-3.0	73.0	74.0	73.0
Y [mm]	120.0	-53.0	120.0	53.1	-53.0	53.1
Z [mm]	-181.7	-179.5	-181.7	-179.6	-179.5	-179.6
DISTANCE [mm]	189.4		101.3		106.1	
MAX + MAX (Reported SAR)	1.28		1.41		2.09	
SAR to peak location separation ratio	0.01		0.02		0.03	
2-slot GPRS850 + WLAN 5000 – Main + WLAN 5000 - AUX Bottom Edge facing phantom	2-slot GPRS850 , full power	WLAN 5000 Main, full power	2-slot GPRS850, full power	WLAN 5000 Aux, full power	WLAN 5000 Main, full power	WLAN 5000 Aux, full power
X [mm]	-1.0	0.0	-1.0	0.0	0.0	0.0
Y [mm]	54.0	-49.0	54.0	53.0	-49.0	53.0
Z [mm]	-181.1	-182.2	-181.1	-182.1	-182.2	-182.1
DISTANCE [mm]	103.0		1.7		102.0	
MAX + MAX (Reported SAR)	0.98		1.57		2.11	
SAR to peak location separation ratio	0.01		1.13		0.03	

(Table continues)

(Table continues)

WCDMA850 + WLAN 5000 – Main + WLAN 5000 - AUX Bottom Edge facing phantom	WCDMA 850, full power	WLAN 5000 Main, full power	WCDMA 850, full power	WLAN 5000 Aux, full power	WLAN 5000 Main, full power	WLAN 5000 Aux, full power
X [mm]	-1.0	0.0	-1.0	0.0	0.0	0.0
Y [mm]	54.0	-49.0	54.0	53.0	-49.0	53.0
Z [mm]	-181.1	-182.2	-181.1	-182.1	-182.2	-182.1
DISTANCE [mm]	103.0		1.7		102.0	
MAX + MAX (Reported SAR)	0.93		1.52		2.11	
SAR to peak location separation ratio	0.01		1.07		0.03	
WCDMA1900 + WLAN 5000 – Main + WLAN 5000 - AUX Bottom Edge facing phantom	WCDMA 1900, full power	WLAN 5000 Main, full power	WCDMA 1900, full power	WLAN 5000 Aux, full power	WLAN 5000 Main, full power	WLAN 5000 Aux, full power
X [mm]	0.0	0.0	0.0	0.0	0.0	0.0
Y [mm]	59.0	-49.0	59.0	53.0	-49.0	53.0
Z [mm]	-180.8	-182.2	-180.8	-182.1	-182.2	-182.1
DISTANCE [mm]	108.0		6.1		102.0	
MAX + MAX (Reported SAR)	0.83		1.42		2.11	
SAR to peak location separation ratio	0.01		0.28		0.03	

All simultaneous transmitter configurations where all antenna pairs' SPLSR is equal to or below 0.04 are excluded from expanded zoom scan testing.

For all transmitters where SPLSR is >0.04, the following tables give individual and combined expanded zoom scan results.

850MHz Band Body SAR Expanded Volume Scan results – Full Power

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 128	Ch 190	Ch 251	Ch 128	Ch 190	Ch 251		
			824.2 MHz	836.6 MHz	848.8 MHz	824.2 MHz	836.6 MHz	848.8 MHz		
2-slot GPRS	Tuning Target + Tolerance [dBm]		30.25			Scaling factor*				
	Conducted Slot Average Power [dBm]		30.28	30.14	30.10	0.07	0.21	0.25	dB	
	Time-averaged power [dBm]		24.26	24.12	24.08	1.02	1.05	1.06	Lin	
	Bottom edge facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	13
		Full SAR	-	0.229	-	-	0.240	-		
Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 4132	Ch 4175	Ch 4233	Ch 4132	Ch 4175	Ch 4233		
			826.4 MHz	835.0 MHz	846.6 MHz	826.4 MHz	835.0 MHz	846.6 MHz		
WCDMA	Tuning Target + Tolerance [dBm]		23.85			Scaling factor*				
	Conducted Power [dBm]		23.76	23.66	23.60	0.09	0.19	0.25	dB	
	Time-averaged power [dBm]		23.76	23.66	23.60	1.02	1.04	1.06	Lin	
	Bottom edge facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	14
		Full SAR	-	0.200	-	-	0.209	-		

WCDMA1900 (Band 2) Body SAR Expanded Volume Scan results – Full Power

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 9262	Ch 9400	Ch 9538	Ch 9262	Ch 9400	Ch 9538		
			1852.4 MHz	1880.0 MHz	1907.6 MHz	1852.4 MHz	1880.0 MHz	1907.6 MHz		
WCDMA	Tuning Target + Tolerance [dBm]		23.85			Scaling factor*				
	Conducted Power [dBm]		23.57	23.57	23.62	0.28	0.28	0.23	dB	
	Time-averaged power [dBm]		23.57	23.57	23.62	1.07	1.07	1.05	Lin	
	Bottom edge facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	15
		Full SAR	-	0.062	-	-	0.066	-		

**5000MHz Body SAR Expanded Volume Scan results
5150–5250 MHz and 5250–5350 MHz – AUX Antenna**

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]				Reported* 1g SAR [W/kg]				Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 36 5180.0 MHz	Ch 44 5220.0 MHz	Ch 52 5260.0 MHz	Ch 60 5300.0 MHz	Ch 36 5180.0 MHz	Ch 44 5220.0 MHz	Ch 52 5260.0 MHz	Ch 60 5300.0 MHz		
WLAN a-mode BPSK 6 Mbps	Tuning Target + Tolerance [dBm]		11.00		10.00		Scaling factor*					
	Conducted Power [dBm]		10.14	9.82	8.48	7.77	0.86	1.18	1.52	2.23	dB	
	Time-averaged power [dBm]		10.14	9.82	8.48	7.77	1.22	1.31	1.42	1.67	Lin	
	Bottom edge facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-	-	16
		Full SAR	-	1.06	-	-	-	1.39	-	-		

**5000MHz Body SAR Expanded Volume Scan results
5470–5725 MHz - Main Antenna**

Mode	Device orientation	SAR measurement	Measured 1g SAR [W/kg]				Reported* 1g SAR [W/kg]				Max Deviation (Estimated SAR - Full SAR) [W/kg]	Plot #
			Ch 104 5520.0 MHz	Ch 112 5560.0 MHz	Ch 128 5640.0 MHz	Ch 136 5680.0 MHz	Ch 104 5520.0 MHz	Ch 112 5560.0 MHz	Ch 128 5640.0 MHz	Ch 136 5680.0 MHz		
WLAN a-mode BPSK 6 Mbps	Tuning Target + Tolerance [dBm]		9.00		8.00		Scaling factor*					
	Conducted Power [dBm]		7.95	7.51	7.08	7.41	1.05	1.49	0.92	0.59	dB	
	Time-averaged power [dBm]		7.95	7.51	7.08	7.41	1.27	1.41	1.24	1.15	Lin	
	Bottom edge facing phantom 0mm	Estimated SAR	-	-	-	-	-	-	-	-	-	17
		Full SAR	0.766	-	-	-	0.976	-	-	-		

**Simultaneous transmissions: Combined Body SAR results –
SPEAG Combined Expanded Zoom scans results**

Test configuration	Max. Reported* 1g SAR results			
	2-slot GPRS850 + WLAN 5000 – Main + WLAN 5000 - AUX	WCDMA850 + WLAN 5000 – Main + WLAN 5000 - AUX	WCDMA1900 + WLAN 5000 – Main + WLAN 5000 - AUX	
Bottom edge facing phantom	1.53	1.47	1.42	

Plots # 18- 20


Highest result within individual zoom scan or individual expanded zoom scan results is given in Section 1.2 for each transmitter. Highest result within contributing individual zoom scan, individual expanded zoom scan, Speag combined algorithm or combined expanded zoom scan results are given in Section for each simultaneous transmitter combination.

Note:


* Reported SAR values are scaled to, or measured at, upper limit of power tuning tolerance.

The following graphics show enlarged Area Scans and hotspots for the individual cellular, WLAN Main and AUX transmitters.


Enlarged Individual band Area scan: 850 – Back Facing Phantom

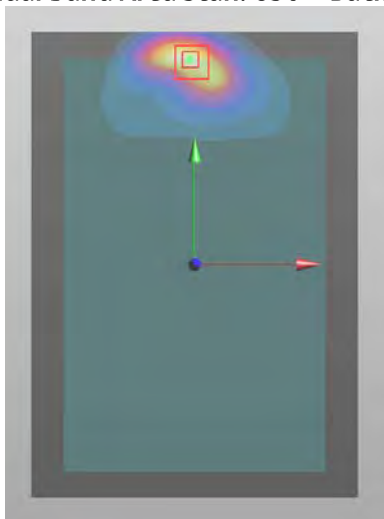


Enlarged Individual band Area scan: 1900 – Back Facing Phantom

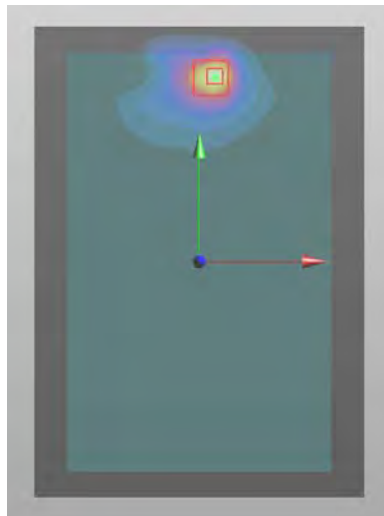

Enlarged Individual band Area scans: WLAN 2450 Main, WLAN 5000 Main – Back Facing Phantom

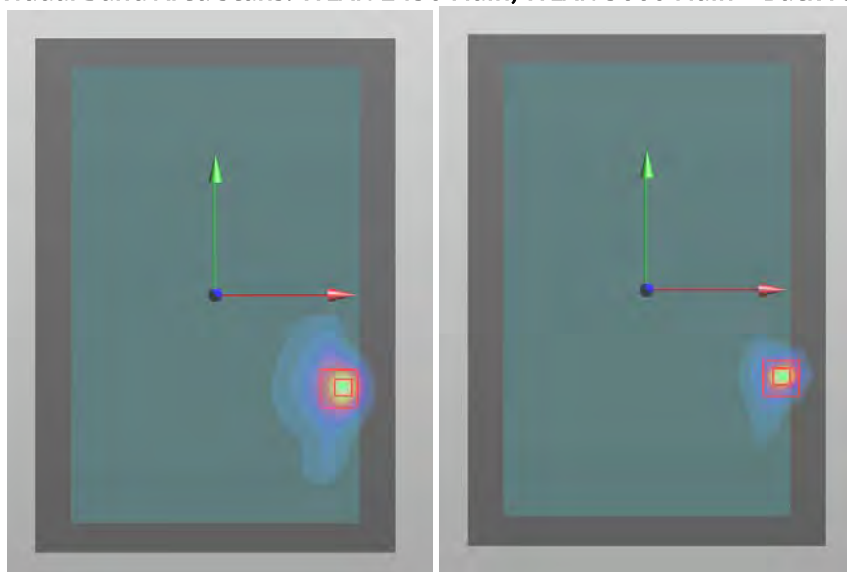


Enlarged Individual band Area scans: WLAN 2450 AUX, WLAN 5000 AUX – Back Facing Phantom

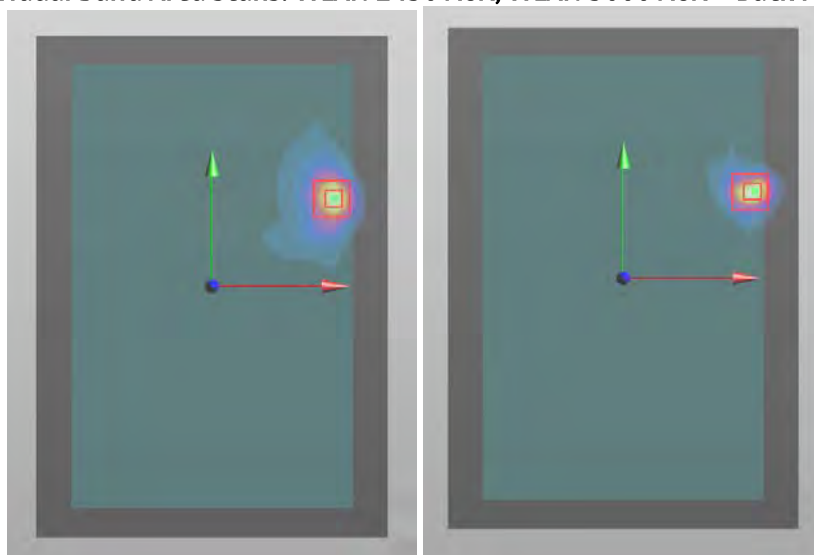


850MHz transmitter combined with all WLAN antennas and frequencies. 850MHz has widest spread of all cellular SAR hotspots, giving conservative estimate of the overlapping of the SAR distributions. The graphics show that individual transmitter and antenna SAR hotspots are not overlapping with each other. Hence the combined SAR results presented in Section 1.2.1 are those of the individual cellular, WLAN2450 or WLAN5000 results, whichever is giving highest individual SAR result.


Enlarged Area Scans: Cellular Mode 850 and WLAN2450 Main antenna – Back Facing Phantom

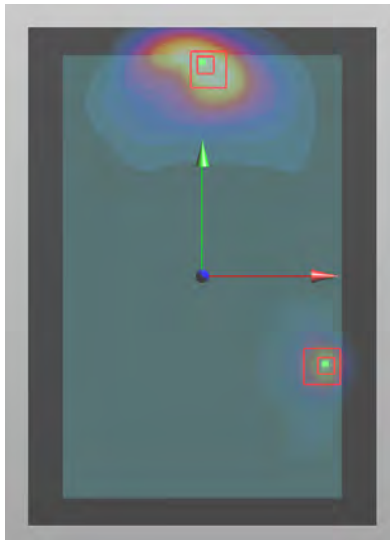


Enlarged Area Scans: Cellular Mode 850 and WLAN2450 Aux antenna – Back Facing Phantom

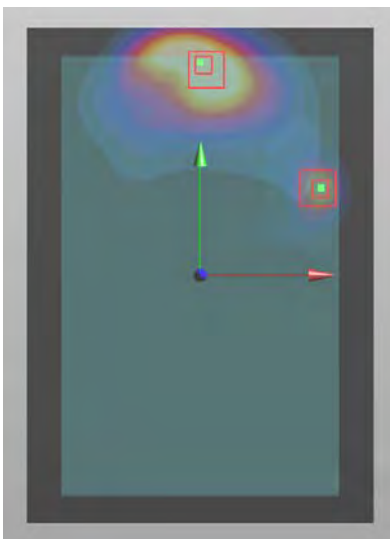

Enlarged Area Scans: Cellular Mode 850 and WLAN5000 Main antenna– Back Facing Phantom

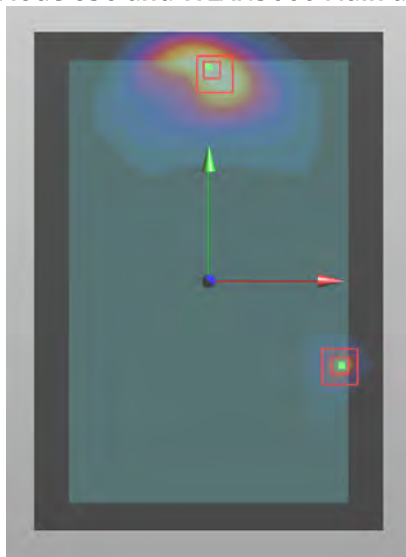

Enlarged Area Scans: Cellular Mode 850 and WLAN5000 Aux antenna– Back Facing Phantom

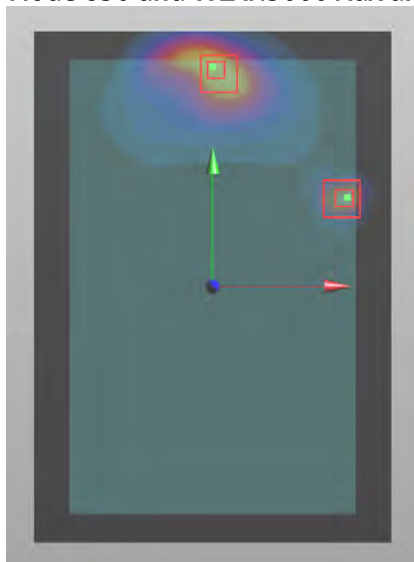

APPENDIX A: SYSTEM CHECKING SCANS

Plot #1

Date/Time: 2013-09-13 07:43:54

Test Laboratory: TCC Nokia

Type: D835V2; Serial: D835V2 - SN:480

Communication System: CW835

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: BSL835; Medium Notes: $t = 21.5$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 0.981$ S/m; $\epsilon_r = 53.458$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(6.04, 6.04, 6.04); Calibrated: 2013-01-21;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1355; Calibrated: 2013-01-08
- Phantom: 1. Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

d=10mm, Pin=250mW/Area Scan (81x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 49.743 V/m

Fast SAR: SAR(1 g) = 2.24 W/kg

Fast SAR(10 g) = 1.51 W/kg

Maximum value of SAR (interpolated) = 2.41 W/kg

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 49.743 V/m


Peak SAR (extrapolated) = 3.26 W/kg

SAR(1 g) = 2.24 W/kg

SAR(10 g) = 1.48 W/kg

Power Drift = -0.01 dB

Maximum value of SAR (measured) = 2.42 W/kg

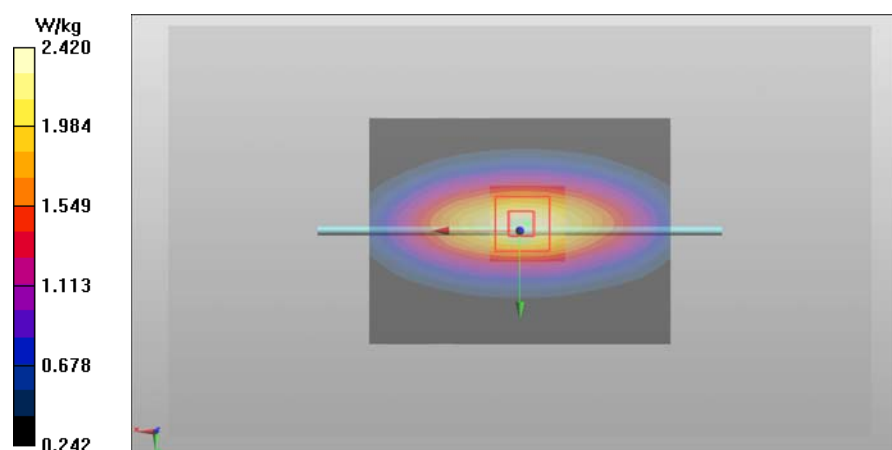

Plot #2

Date/Time: 2013-09-11 16:55:14

Test Laboratory: TCC Nokia

Type: D1900V2; Serial: D1900V2 - SN:5d013

Communication System: CW1900

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: BSL1900; Medium Notes: t= 20.3 C

Medium parameters used: f = 1900 MHz; σ = 1.536 S/m; ϵ_r = 51.566; ρ = 1000 kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(4.62, 4.62, 4.62); Calibrated: 2013-06-18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2013-06-10
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: -
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

d=10mm, Pin=250mW/Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 86.480 V/m

Fast SAR: SAR(1 g) = 9.53 W/kg

Fast SAR(10 g) = 4.96 W/kg

Maximum value of SAR (interpolated) = 10.9 W/kg

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.480 V/m


Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 9.51 W/kg

SAR(10 g) = 5.05 W/kg

Power Drift = -0.12 dB

Maximum value of SAR (measured) = 10.8 W/kg

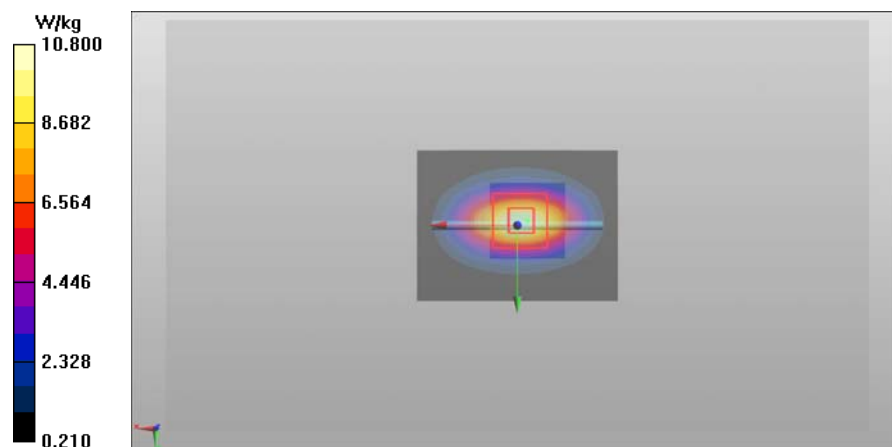

Plot #3

Date/Time: 2013-09-25 08:18:54

Test Laboratory: TCC Nokia

Type: D2450V2; Serial: D2450V2 - SN:800

Communication System: CW2450

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL2450; Medium Notes: T=21.5

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 50.943$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3817
- ConvF(7.13, 7.13, 7.13); Calibrated: 2013-01-23;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 2013/06/28
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.9 (7117)

d=10mm, Pin=250mW/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 100.9 V/m

Fast SAR: SAR(1 g) = 13.1 W/kg

Fast SAR(10 g) = 6.05 W/kg

Maximum value of SAR (interpolated) = 15.3 W/kg

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.9 V/m


Peak SAR (extrapolated) = 24.5 W/kg

SAR(1 g) = 12.9 W/kg

SAR(10 g) = 6.3 W/kg

Power Drift = -0.01 dB

Maximum value of SAR (measured) = 14.8 W/kg

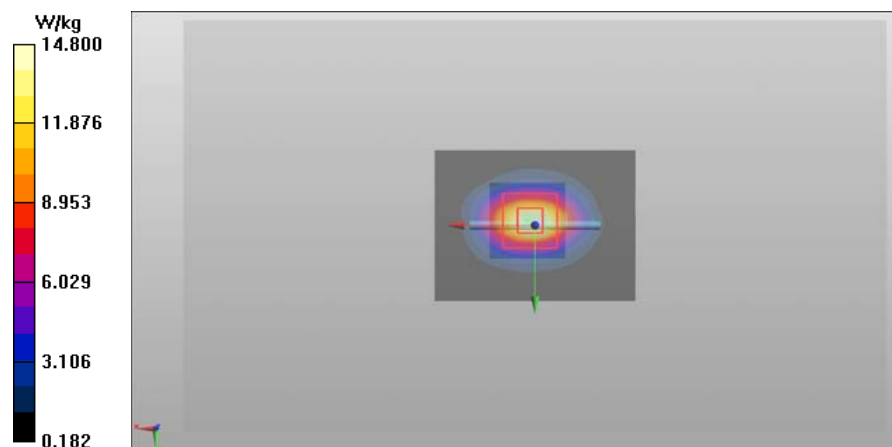

Plot #4

Date/Time: 2013-09-25 15:30:51

Test Laboratory: TCC Nokia

Type: D5GHzV2; Serial: D5GHzV2 - SN: 1123

Communication System: CW5000-6000

Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: MSL5000; Medium Notes: T=21.5

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.468$ S/m; $\epsilon_r = 48.333$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3817
- ConvF(4.54, 4.54, 4.54); Calibrated: 2013-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
- Phantom: SAM 2 ELI5; Type: QDOVA002AA; Serial: TP-1160
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.9 (7117)

WLAN a-mode/d=10mm, Pin=100mW 2/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 55.464 V/m

Fast SAR: SAR(1 g) = 6.39 W/kg

Fast SAR(10 g) = 1.76 W/kg

Maximum value of SAR (interpolated) = 14.2 W/kg

WLAN a-mode/d=10mm, Pin=100mW 2/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.464 V/m


Peak SAR (extrapolated) = 27.1 W/kg

SAR(1 g) = 6.92 W/kg

SAR(10 g) = 1.95 W/kg

Power Drift = -0.11 dB

Maximum value of SAR (measured) = 13.5 W/kg

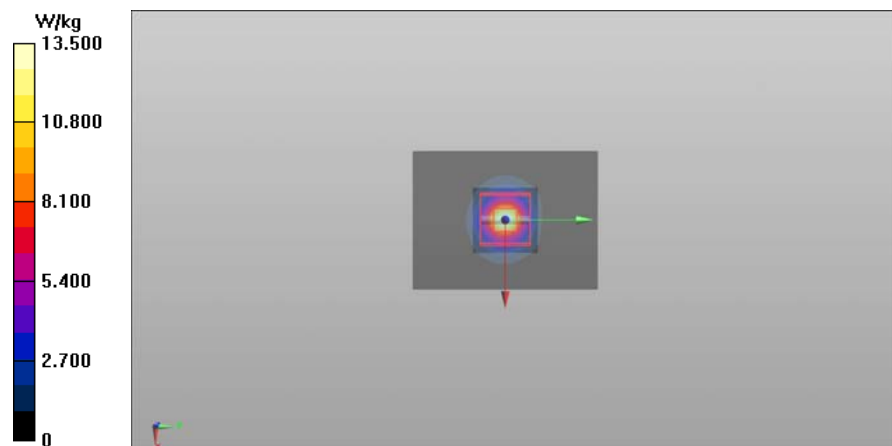

Plot #5

Date/Time: 2013-09-04 09:11:18

Test Laboratory: TCC Nokia

Type: D5GHzV2; Serial: D5GHzV2 - SN: 1042

Communication System: CW5000-6000

Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: MSL5000; Medium Notes: T=21.5

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.574$ S/m; $\epsilon_r = 47.534$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3817
- ConvF(4.34, 4.34, 4.34); Calibrated: 2013-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 2013/06/28
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.9 (7117)

d=10mm, Pin=100mW/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 58.989 V/m

Fast SAR: SAR(1 g) = 7.17 W/kg

Fast SAR(10 g) = 1.96 W/kg

Maximum value of SAR (interpolated) = 16.0 W/kg

d=10mm, Pin=100mW/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 58.989 V/m


Peak SAR (extrapolated) = 26.9 W/kg

SAR(1 g) = 7.8 W/kg

SAR(10 g) = 2.31 W/kg

Power Drift = 0.08 dB

Maximum value of SAR (measured) = 14.4 W/kg

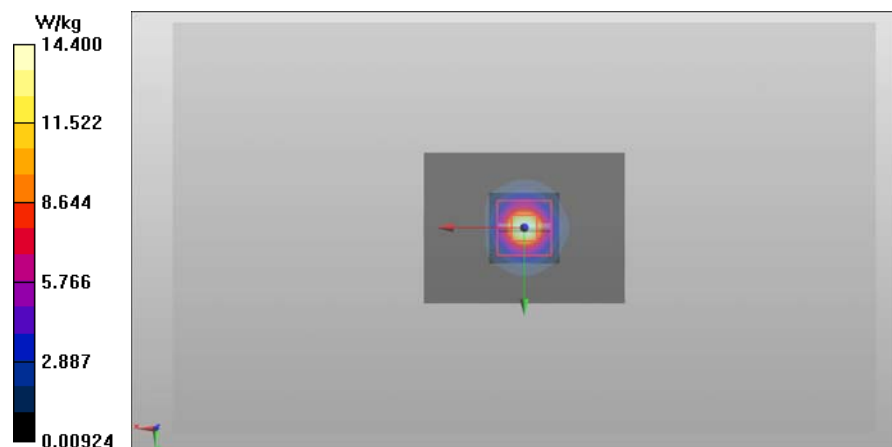

Plot #6

Date/Time: 2013-09-25 14:54:41

Test Laboratory: TCC Nokia

Type: D5GHzV2; Serial: D5GHzV2 - SN: 1123

Communication System: CW5000-6000

Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: MSL5000; Medium Notes: T=21.5

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.863$ S/m; $\epsilon_r = 47.818$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3817
- ConvF(4.07, 4.07, 4.07); Calibrated: 2013-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
- Phantom: SAM 2 ELI5; Type: QDOVA002AA; Serial: TP-1160
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.9 (7117)

WLAN a-mode/d=10mm, Pin=100mW/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 55.329 V/m

Fast SAR: SAR(1 g) = 6.7 W/kg

Fast SAR(10 g) = 1.86 W/kg

Maximum value of SAR (interpolated) = 14.8 W/kg

WLAN a-mode/d=10mm, Pin=100mW/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.329 V/m


Peak SAR (extrapolated) = 30.2 W/kg

SAR(1 g) = 7.35 W/kg

SAR(10 g) = 2.08 W/kg

Power Drift = -0.10 dB

Maximum value of SAR (measured) = 14.7 W/kg

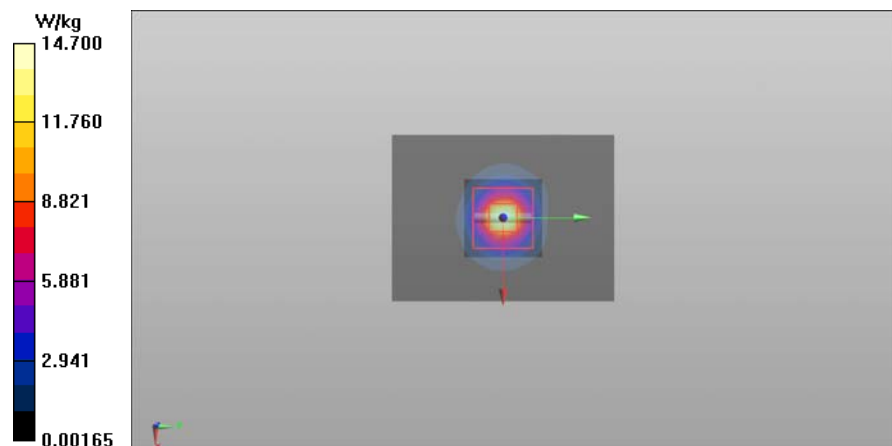

SAR Report

Appendix A for FCC_RX-113_01

Applicant: Nokia Corporation

Type: RX-113

Copyright © 2013 TCC Nokia

Plot #7

Date/Time: 2013-09-04 16:58:19

Test Laboratory: TCC Nokia

Type: D5GHzV2; Serial: D5GHzV2 - SN: 1042

Communication System: CW5000-6000

Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: MSL5000; Medium Notes: T=21.5

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.967$ S/m; $\epsilon_r = 47.041$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3817
- ConvF(3.79, 3.79, 3.79); Calibrated: 2013-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 2013/06/28
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.9 (7117)

d=10mm, Pin=100mW 2/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 57.917 V/m

Fast SAR: SAR(1 g) = 6.9 W/kg

Fast SAR(10 g) = 1.9 W/kg

Maximum value of SAR (interpolated) = 15.7 W/kg

d=10mm, Pin=100mW 2/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 57.917 V/m


Peak SAR (extrapolated) = 29.0 W/kg

SAR(1 g) = 8.15 W/kg

SAR(10 g) = 2.39 W/kg

Power Drift = -0.07 dB

Maximum value of SAR (measured) = 15.8 W/kg

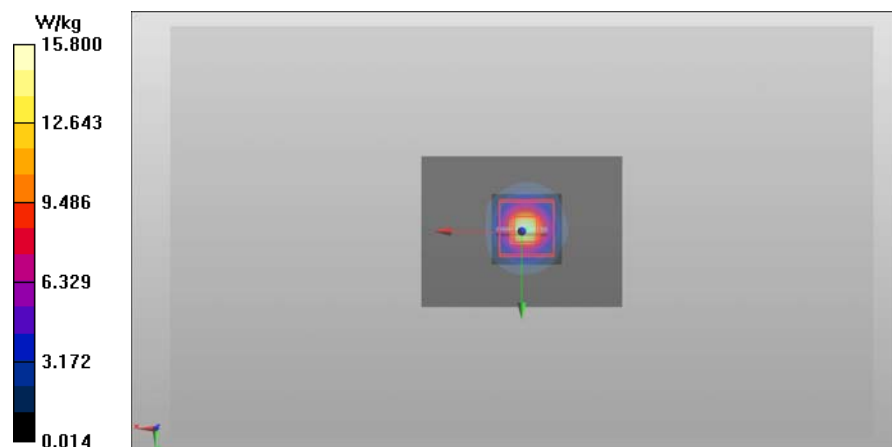

Plot #8

Date/Time: 2013-09-05 10:13:09

Test Laboratory: TCC Nokia

Type: D5GHzV2; Serial: D5GHzV2 - SN: 1042

Communication System: CW5000-6000

Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: MSL5000; Medium Notes: T=21.5

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.237$ S/m; $\epsilon_r = 46.687$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3817
- ConvF(4.25, 4.25, 4.25); Calibrated: 2013-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 2013/06/28
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.9 (7117)

d=10mm, Pin=100mW/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 54.613 V/m

Fast SAR: SAR(1 g) = 6.53 W/kg

Fast SAR(10 g) = 1.79 W/kg

Maximum value of SAR (interpolated) = 14.8 W/kg

d=10mm, Pin=100mW/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 54.613 V/m


Peak SAR (extrapolated) = 26.7 W/kg

SAR(1 g) = 7.17 W/kg

SAR(10 g) = 2.1 W/kg

Power Drift = -0.14 dB

Maximum value of SAR (measured) = 13.9 W/kg

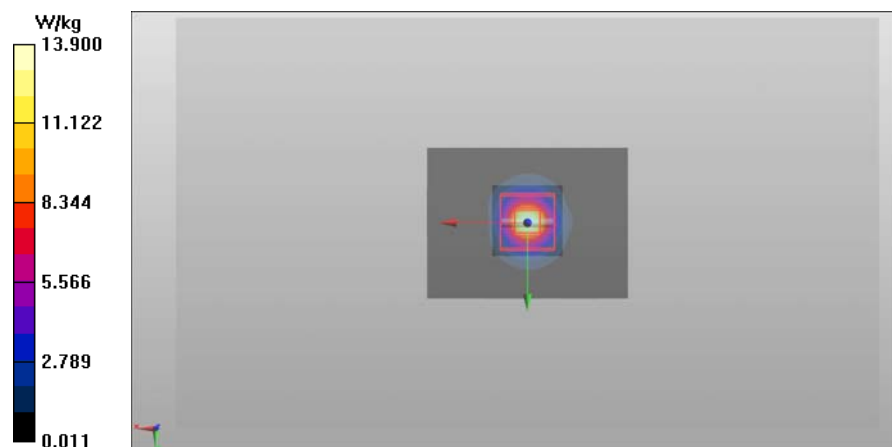

APPENDIX B: MEASUREMENT SCANS

Plot #1

Date/Time: 2013-09-12 15:58:55

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357511/0

Communication System: 2-slot GPRS850

Frequency: 836.6 MHz; Duty Cycle: 1:4.19952

Medium: BSL835; Medium Notes: t= 21.2 C

Medium parameters used: f = 837 MHz; σ = 0.982 S/m; ϵ_r = 53.571; ρ = 1000 kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(6.04, 6.04, 6.04); Calibrated: 2013-01-21;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1355; Calibrated: 2013-01-08
- Phantom: 1. Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

2-slot GPRS850/Body - Middle - Spacer 0mm - No Accessory - Back Facing Phantom - Reduced Power/Area Scan (141x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 29.790 V/m

Fast SAR: SAR(1 g) = 1.13 W/kg

Fast SAR(10 g) = 0.725 W/kg

Maximum value of SAR (interpolated) = 1.26 W/kg

2-slot GPRS850/Body - Middle - Spacer 0mm - No Accessory - Back Facing Phantom - Reduced Power/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 29.790 V/m


Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 1.15 W/kg

SAR(10 g) = 0.663 W/kg

Power Drift = 0.01 dB

Maximum value of SAR (measured) = 1.28 W/kg

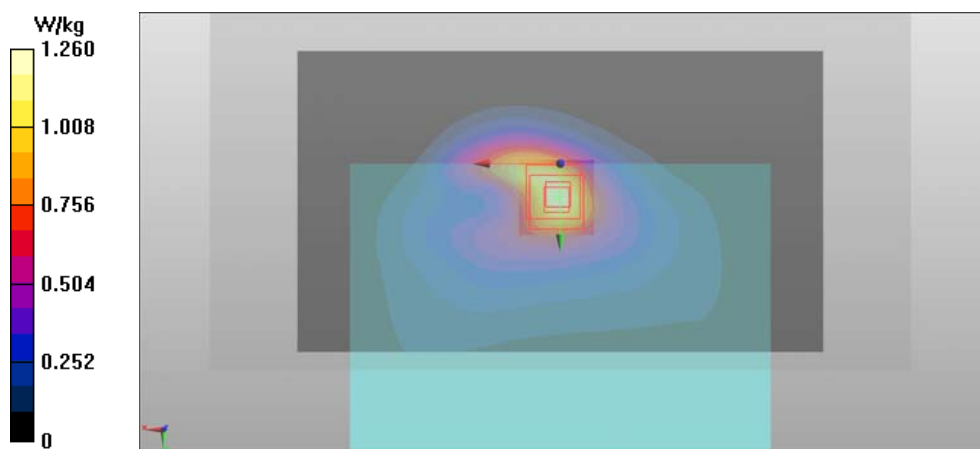

SAR Report

Type: RX-113

Appendix B for FCC_RX-113_01

Applicant: Nokia Corporation

Copyright © 2013 TCC Nokia

Plot #2

Date/Time: 2013-09-12 05:02:11

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357511/0

Communication System: WCDMA850 (Band 5)

Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: BSL835; Medium Notes: t= 21.2 C

Medium parameters used (interpolated): f = 826.4 MHz; $\sigma = 0.976$ S/m; $\epsilon_r = 53.611$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(6.04, 6.04, 6.04); Calibrated: 2013-01-21;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1355; Calibrated: 2013-01-08
- Phantom: 1. Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

WCDMA850 (Band 5)/Body - Low - Spacer 0mm - No Accessory - Back Facing Phantom - Reduced Power - Repeated/Area Scan (141x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 30.709 V/m

Fast SAR: SAR(1 g) = 1.13 W/kg

Fast SAR(10 g) = 0.722 W/kg

Maximum value of SAR (interpolated) = 1.26 W/kg

WCDMA850 (Band 5)/Body - Low - Spacer 0mm - No Accessory - Back Facing Phantom - Reduced Power - Repeated/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 30.709 V/m


Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 1.15 W/kg

SAR(10 g) = 0.665 W/kg

Power Drift = 0.00 dB

Maximum value of SAR (measured) = 1.27 W/kg

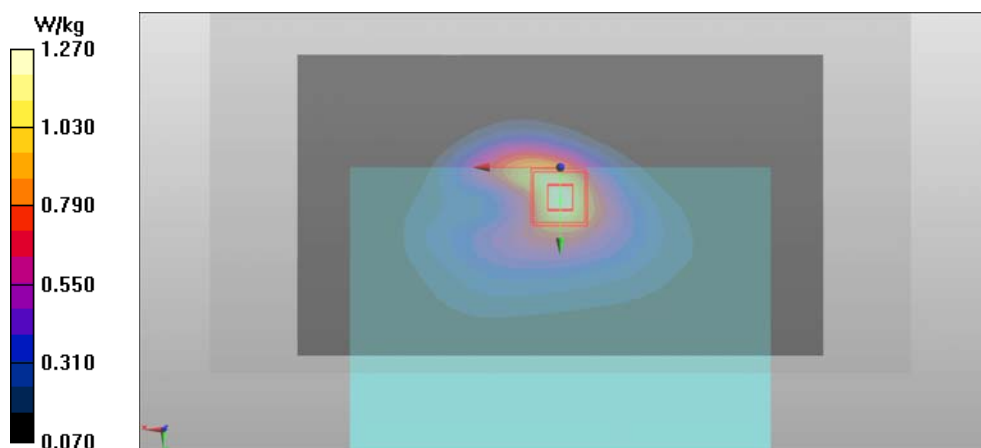

Plot #3

Date/Time: 2013-09-13 13:42:09

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357507/8

Communication System: 2-slot GPRS850

Frequency: 848.8 MHz; Duty Cycle: 1:4.19952

Medium: BSL835; Medium Notes: t= 21.5 C

Medium parameters used: f = 849 MHz; σ = 0.99 S/m; ϵ_r = 53.421; ρ = 1000 kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(6.04, 6.04, 6.04); Calibrated: 2013-01-21;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1355; Calibrated: 2013-01-08
- Phantom: 1. Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

2-slot GPRS850/Body - High - Spacer 22mm - No Accessory - Back Facing Phantom - Full Power/Area Scan (141x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 17.946 V/m

Fast SAR: SAR(1 g) = 0.342 W/kg

Fast SAR(10 g) = 0.240 W/kg

Maximum value of SAR (interpolated) = 0.363 W/kg

2-slot GPRS850/Body - High - Spacer 22mm - No Accessory - Back Facing Phantom - Full Power/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.154 V/m


Peak SAR (extrapolated) = 0.476 W/kg

SAR(1 g) = 0.344 W/kg

SAR(10 g) = 0.241 W/kg

Power Drift = 0.05 dB

Maximum value of SAR (measured) = 0.362 W/kg

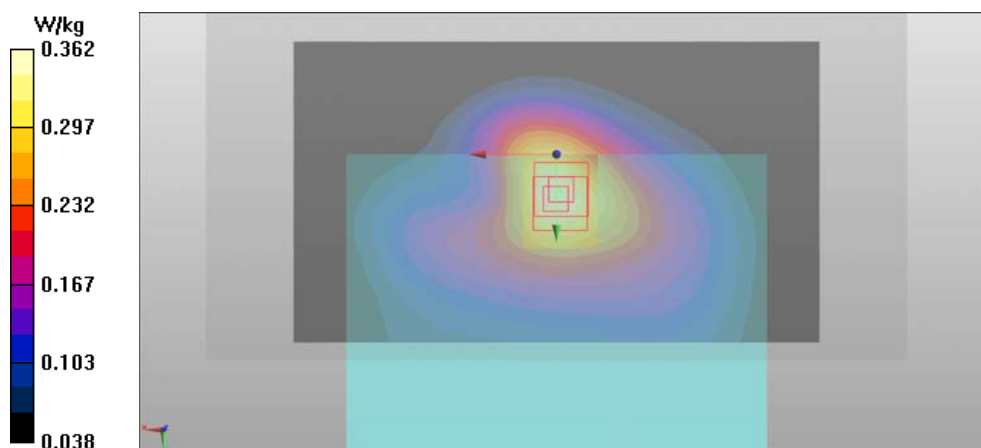

SAR Report

Appendix B for FCC_RX-113_01

Applicant: Nokia Corporation

Type: RX-113

Copyright © 2013 TCC Nokia

Plot #4

Date/Time: 2013-09-13 14:41:48

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357507/8

Communication System: WCDMA850 (Band 5)

Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: BSL835; Medium Notes: t= 21.5 C

Medium parameters used (interpolated): f = 826.4 MHz; $\sigma = 0.976$ S/m; $\epsilon_r = 53.477$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(6.04, 6.04, 6.04); Calibrated: 2013-01-21;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1355; Calibrated: 2013-01-08
- Phantom: 1. Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

WCDMA850 (Band 5)/Body - Low - Spacer 22mm - No Accessory - Back Facing Phantom - Full Power/Area Scan (141x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 17.963 V/m

Fast SAR: SAR(1 g) = 0.326 W/kg

Fast SAR(10 g) = 0.229 W/kg

Maximum value of SAR (interpolated) = 0.347 W/kg

WCDMA850 (Band 5)/Body - Low - Spacer 22mm - No Accessory - Back Facing Phantom - Full Power/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.960 V/m


Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.324 W/kg

SAR(10 g) = 0.229 W/kg

Power Drift = -0.04 dB

Maximum value of SAR (measured) = 0.341 W/kg

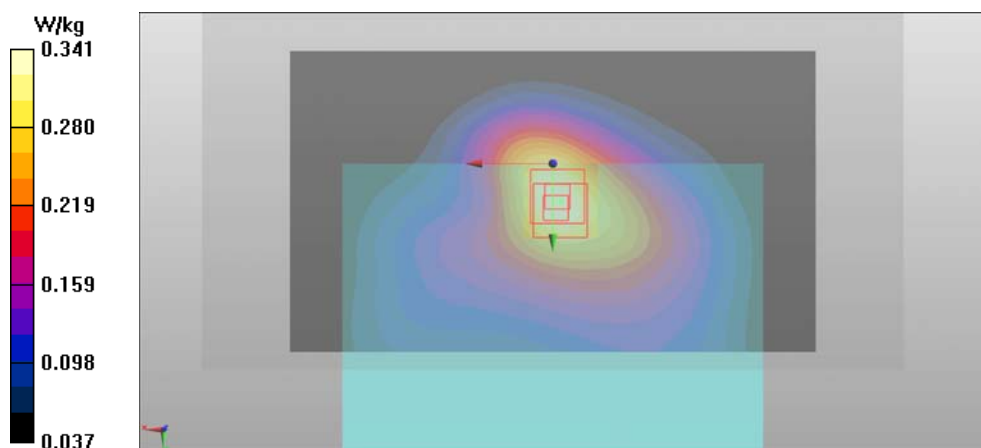

SAR Report

Appendix B for FCC_RX-113_01

Applicant: Nokia Corporation

Type: RX-113

Copyright © 2013 TCC Nokia

Plot #5

Date/Time: 2013-09-11 19:32:59

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357591/2

Communication System: 4-slot GPRS1900

Frequency: 1850.2 MHz; Duty Cycle: 1:2.09991

Medium: BSL1900; Medium Notes: t= 20.3 C

Medium parameters used (interpolated): f = 1850.2 MHz; $\sigma = 1.483$ S/m; $\epsilon_r = 51.65$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(4.62, 4.62, 4.62); Calibrated: 2013-06-18;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2013-06-10
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: -
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

4-slot GPRS1900/Body - Low - Spacer 0mm - No Accessory - Back Facing Phantom - Reduced Power/Area Scan (141x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 23.157 V/m

Fast SAR: SAR(1 g) = 0.989 W/kg

Fast SAR(10 g) = 0.525 W/kg

Maximum value of SAR (interpolated) = 1.16 W/kg

4-slot GPRS1900/Body - Low - Spacer 0mm - No Accessory - Back Facing Phantom - Reduced Power/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 23.181 V/m


Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.04 W/kg

SAR(10 g) = 0.520 W/kg

Power Drift = 0.09 dB

Maximum value of SAR (measured) = 1.12 W/kg

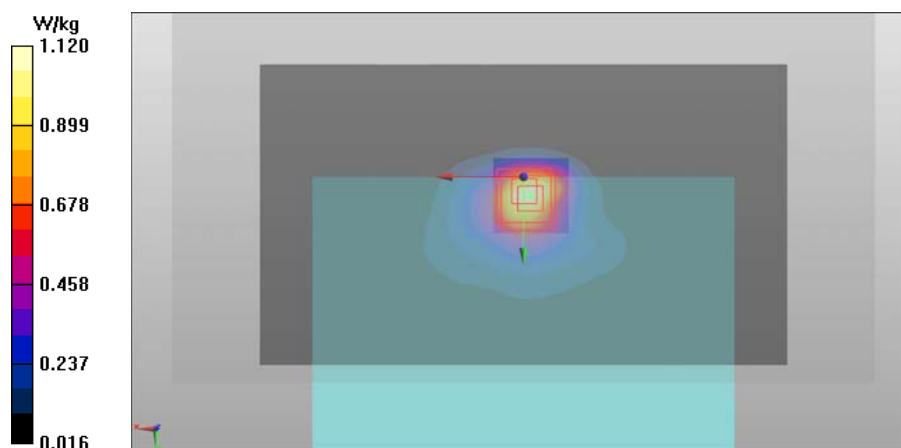

Plot #6

Date/Time: 2013-09-11 23:34:48

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357591/2

Communication System: WCDMA1900 (Band 2)

Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: BSL1900; Medium Notes: t= 20.3 C

Medium parameters used (interpolated): f = 1852.4 MHz; $\sigma = 1.485$ S/m; $\epsilon_r = 51.649$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(4.62, 4.62, 4.62); Calibrated: 2013-06-18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2013-06-10
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: -
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

WCDMA1900 (Band 2)/Body - Low - Spacer 0mm - No Accessory - Back Facing Phantom - Reduced Power - Repeated/Area Scan (141x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 25.747 V/m

Fast SAR: SAR(1 g) = 1.16 W/kg

Fast SAR(10 g) = 0.613 W/kg

Maximum value of SAR (interpolated) = 1.36 W/kg

WCDMA1900 (Band 2)/Body - Low - Spacer 0mm - No Accessory - Back Facing Phantom - Reduced Power - Repeated/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 25.747 V/m


Peak SAR (extrapolated) = 2.44 W/kg

SAR(1 g) = 1.26 W/kg

SAR(10 g) = 0.626 W/kg

Power Drift = 0.03 dB

Maximum value of SAR (measured) = 1.44 W/kg

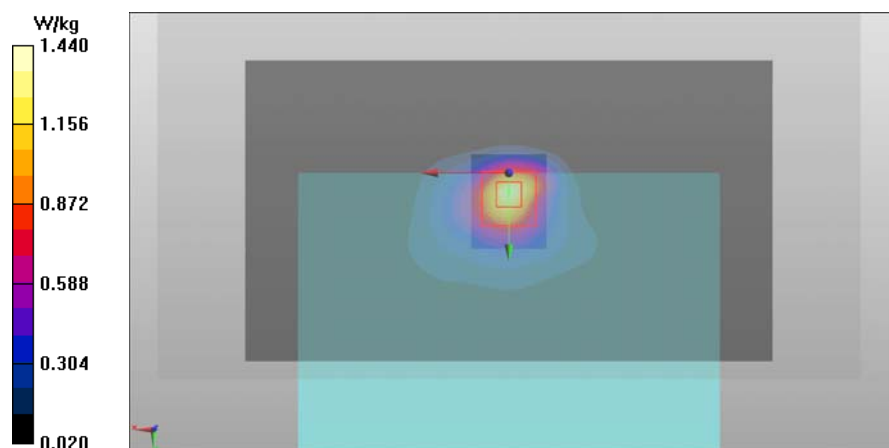

Plot #7

Date/Time: 2013-09-12 04:55:18

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357512/8

Communication System: 4-slot GPRS1900

Frequency: 1909.8 MHz; Duty Cycle: 1:2.09991

Medium: BSL1900; Medium Notes: t= 20.3 C

Medium parameters used: f = 1910 MHz; σ = 1.546 S/m; ϵ_r = 51.538; ρ = 1000 kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(4.62, 4.62, 4.62); Calibrated: 2013-06-18;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2013-06-10
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: -
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

4-slot GPRS1900/Body - High - Spacer 0mm - No Accessory - Top edge Facing Phantom - Full Power/Area Scan (181x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 15.949 V/m

Fast SAR: SAR(1 g) = 0.362 W/kg

Fast SAR(10 g) = 0.179 W/kg

Maximum value of SAR (interpolated) = 0.427 W/kg

4-slot GPRS1900/Body - High - Spacer 0mm - No Accessory - Top edge Facing Phantom - Full Power/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.953 V/m


Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = 0.363 W/kg

SAR(10 g) = 0.194 W/kg

Power Drift = 0.09 dB

Maximum value of SAR (measured) = 0.406 W/kg

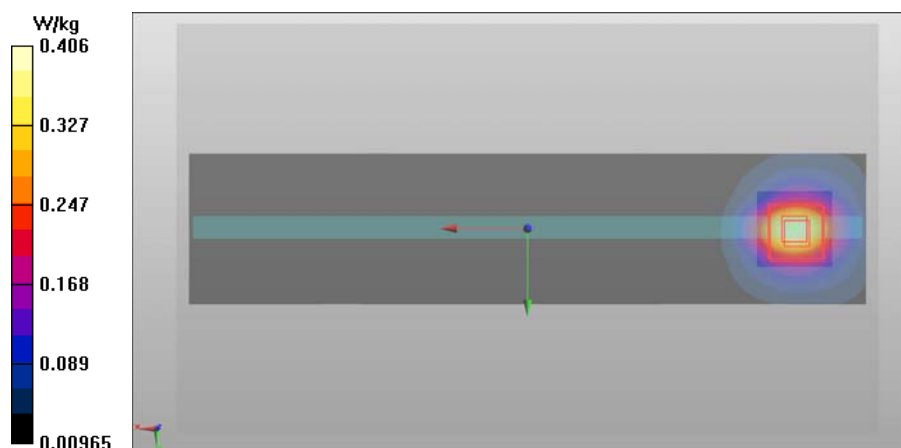

SAR Report

Appendix B for FCC_RX-113_01

Applicant: Nokia Corporation

Type: RX-113

Copyright © 2013 TCC Nokia

Plot #8

Date/Time: 2013-09-12 02:23:19

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357512/8

Communication System: WCDMA1900 (Band 2)

Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: BSL1900; Medium Notes: t= 20.3 C

Medium parameters used: f = 1908 MHz; $\sigma = 1.544$ S/m; $\epsilon_r = 51.546$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(4.62, 4.62, 4.62); Calibrated: 2013-06-18;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2013-06-10
- Phantom: SAM 3 Triple Phantom 5.1C; Type: QD 000 P51 CA; Serial: -
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

WCDMA1900 (Band 2)/Body - High - Spacer 0mm - No Accessory - Top edge Facing Phantom - Full Power - Repeated/Area Scan (181x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 24.355 V/m

Fast SAR: SAR(1 g) = 0.745 W/kg

Fast SAR(10 g) = 0.373 W/kg

Maximum value of SAR (interpolated) = 0.871 W/kg

WCDMA1900 (Band 2)/Body - High - Spacer 0mm - No Accessory - Top edge Facing Phantom - Full Power - Repeated/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 24.355 V/m


Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.761 W/kg

SAR(10 g) = 0.407 W/kg

Power Drift = -0.00 dB

Maximum value of SAR (measured) = 0.866 W/kg

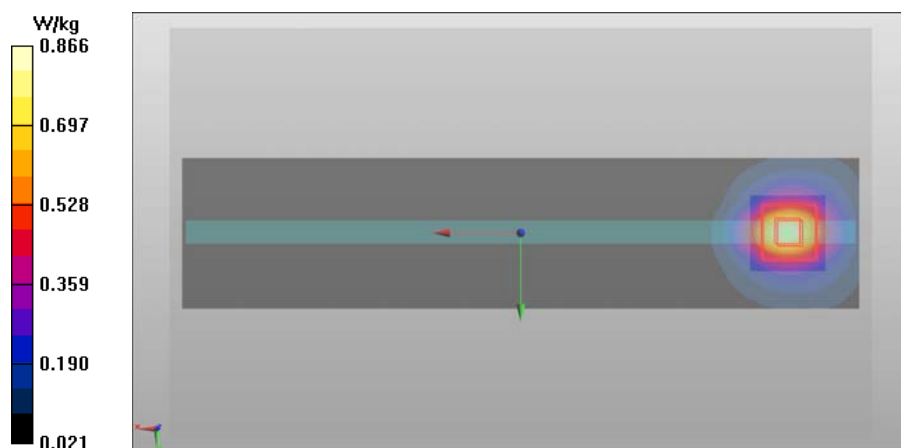

SAR Report

Appendix B for FCC_RX-113_01

Applicant: Nokia Corporation

Type: RX-113

Copyright © 2013 TCC Nokia

Plot #9

Date/Time: 2013-09-09 13:10:28

Test Laboratory: TCC Nokia

Type: RX-114; Serial: 004402/47/357461/8

Communication System: WLAN2450 b-mode

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL2450; Medium Notes: T=21.5

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 50.759$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3817
- ConvF(7.13, 7.13, 7.13); Calibrated: 2013-01-23;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 2013/06/28
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.9 (7117)

WLAN2450 b-mode/Body - Channel 6 - BPSK 1 Mbps - Spacer 0mm - No Accessory - Back Facing Phantom - Main Antenna - Repeated/Area Scan (211x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = not measured

Fast SAR: SAR(1 g) = 0.866 W/kg

Fast SAR(10 g) = 0.383 W/kg

Maximum value of SAR (interpolated) = 1.06 W/kg

WLAN2450 b-mode/Body - Channel 6 - BPSK 1 Mbps - Spacer 0mm - No Accessory - Back Facing Phantom - Main Antenna - Repeated/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.751 V/m


Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.899 W/kg

SAR(10 g) = 0.417 W/kg

Power Drift = -0.18 dB

Maximum value of SAR (measured) = 1.02 W/kg

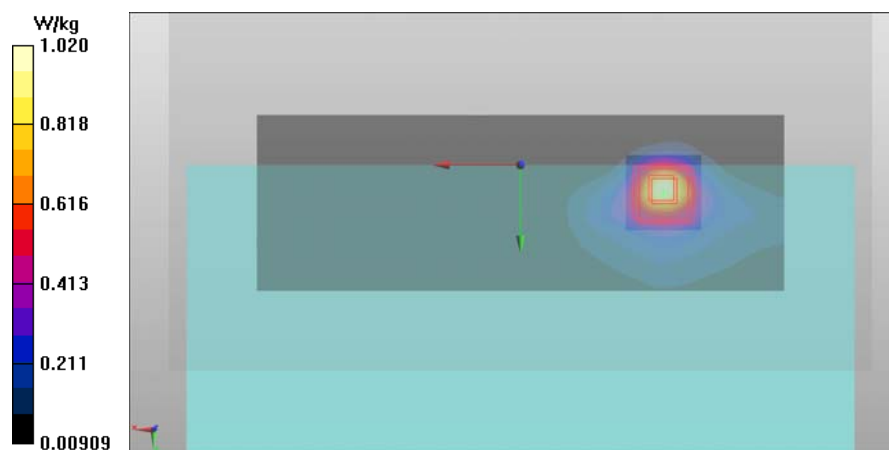

SAR Report

Appendix B for FCC_RX-113_01

Applicant: Nokia Corporation

Type: RX-113

Copyright © 2013 TCC Nokia

Plot #10

Date/Time: 2013-09-25 10:51:18

Test Laboratory: TCC Nokia

Type: RX-114; Serial: 004402/47/357461/8

Communication System: WLAN2450 b-mode

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL2450; Medium Notes: T=21.5

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.869$ S/m; $\epsilon_r = 51.03$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3817
- ConvF(7.13, 7.13, 7.13); Calibrated: 2013-01-23;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 2013/06/28
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.9 (7117)

WLAN2450 b-mode/Body - Channel 1 - BPSK 1 Mbps - Spacer 0mm - No Accessory - Back Facing Phantom - Aux Antenna/Area Scan (211x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = not measured

Fast SAR: SAR(1 g) = 0.715 W/kg

Fast SAR(10 g) = 0.313 W/kg

Maximum value of SAR (interpolated) = 0.855 W/kg

WLAN2450 b-mode/Body - Channel 1 - BPSK 1 Mbps - Spacer 0mm - No Accessory - Back Facing Phantom - Aux Antenna/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.762 V/m


Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.753 W/kg

SAR(10 g) = 0.335 W/kg

Power Drift = -0.19 dB

Maximum value of SAR (measured) = 0.871 W/kg

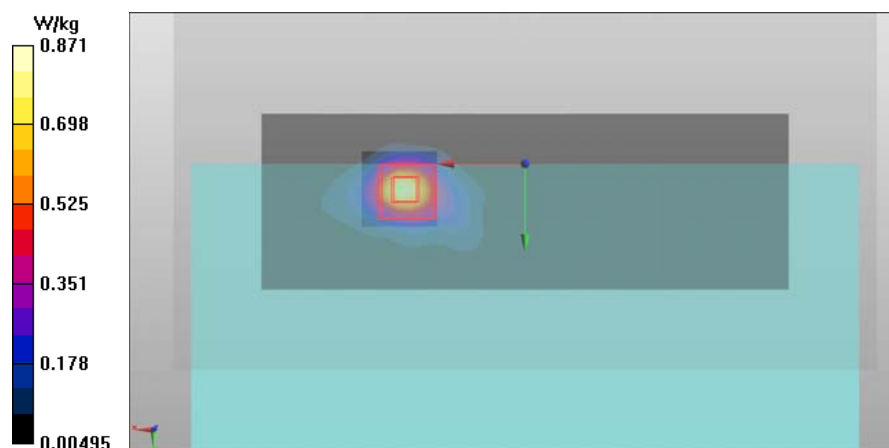

SAR Report

Appendix B for FCC_RX-113_01

Applicant: Nokia Corporation

Type: RX-113

Copyright © 2013 TCC Nokia

Plot #11

Date/Time: 2013-09-04 07:56:04

Test Laboratory: Nokia

Type: RX-114; Serial: 004402/47/357461/8

Communication System: WLAN5000 a-mode

Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: MSL5000; Medium Notes: T=21.5

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.494$ S/m; $\epsilon_r = 47.91$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3817
- ConvF(4.54, 4.54, 4.54); Calibrated: 2013-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 2013/06/28
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.9 (7117)

WLAN5000 a-mode/Body - Channel 44 - BPSK 6 Mbps - Spacer 0mm - No Accessory - Bottom Edge Facing Phantom - Aux Antenna/Area Scan (211x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = not measured

Fast SAR: SAR(1 g) = 0.790 W/kg

Fast SAR(10 g) = 0.193 W/kg

Maximum value of SAR (interpolated) = 2.24 W/kg

WLAN5000 a-mode/Body - Channel 44 - BPSK 6 Mbps - Spacer 0mm - No Accessory - Bottom Edge Facing Phantom - Aux Antenna/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 23.222 V/m


Peak SAR (extrapolated) = 4.63 W/kg

SAR(1 g) = 1.03 W/kg

SAR(10 g) = 0.237 W/kg

Power Drift = -0.07 dB

Maximum value of SAR (measured) = 2.30 W/kg

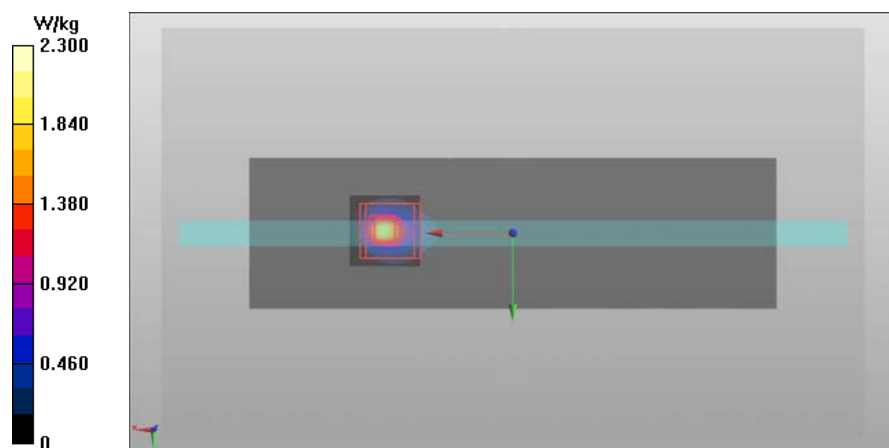

Plot #12

Date/Time: 2013-09-04 20:02:06

Test Laboratory: Nokia

Type: RX-113; Serial: 004402/47/357461/8

Communication System: WLAN5000 a-mode

Frequency: 5520 MHz; Duty Cycle: 1:1

Medium: MSL5000; Medium Notes: T=21.5

Medium parameters used: $f = 5520$ MHz; $\sigma = 5.858$ S/m; $\epsilon_r = 47.18$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3817
- ConvF(4.07, 4.07, 4.07); Calibrated: 2013-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 2013/06/28
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.9 (7117)

WLAN5000 a-mode 2/Body - Channel 104 - BPSK 6 Mbps - Spacer 0mm - No Accessory - Bottom Edge Facing Phantom - Main Antenna/Area Scan (211x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = not measured

Fast SAR: SAR(1 g) = 0.474 W/kg

Fast SAR(10 g) = 0.111 W/kg

Maximum value of SAR (interpolated) = 1.37 W/kg

WLAN5000 a-mode 2/Body - Channel 104 - BPSK 6 Mbps - Spacer 0mm - No Accessory - Bottom Edge Facing Phantom - Main Antenna/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 17.487 V/m


Peak SAR (extrapolated) = 3.31 W/kg

SAR(1 g) = 0.595 W/kg

SAR(10 g) = 0.132 W/kg

Power Drift = -0.09 dB

Maximum value of SAR (measured) = 1.35 W/kg

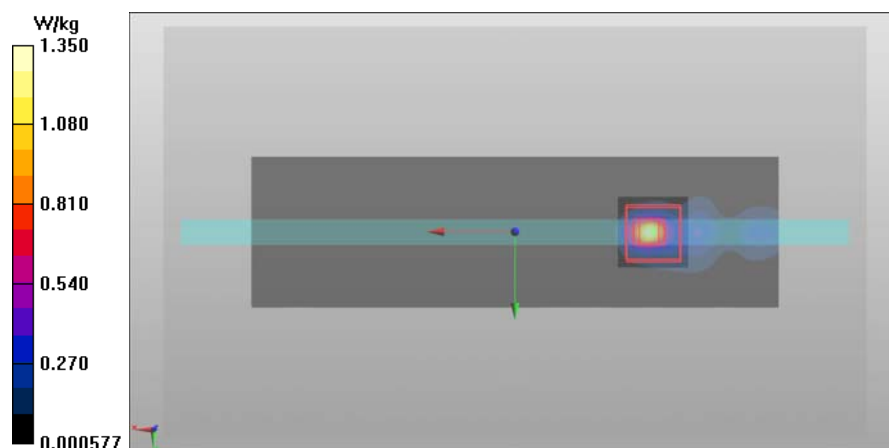

SAR Report

Appendix B for FCC_RX-113_01

Applicant: Nokia Corporation

Type: RX-113

Copyright © 2013 TCC Nokia

Plot #13

Date/Time: 2013-09-26 07:05:02

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357507/8

Communication System: 2-slot GPRS850

Frequency: 836.6 MHz; Duty Cycle: 1:4.19952

Medium: BSL850; Medium Notes: t= 20,8 C

Medium parameters used: f = 837 MHz; σ = 0.968 S/m; ϵ_r = 53.509; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(6.04, 6.04, 6.04); Calibrated: 2013-01-21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1355; Calibrated: 2013-01-08
- Phantom: #2 ELI Phantom; Type: QDOVA002AA; Serial: -
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

2-slot GPRS850/Body - Middle - Spacer 0mm - No Headset - Bottom Edge Facing Phantom - Full Power/Volume Scan (13x64x12): Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.648 V/m

Peak SAR (extrapolated) = 1.44 W/kg


SAR(1 g) = 0.229 W/kg

SAR(10 g) = 0.123 W/kg

Power Drift = 0.05 dB

Total Absorbed Power = 0.0133 W

Maximum value of SAR (measured) = 0.524 W/kg

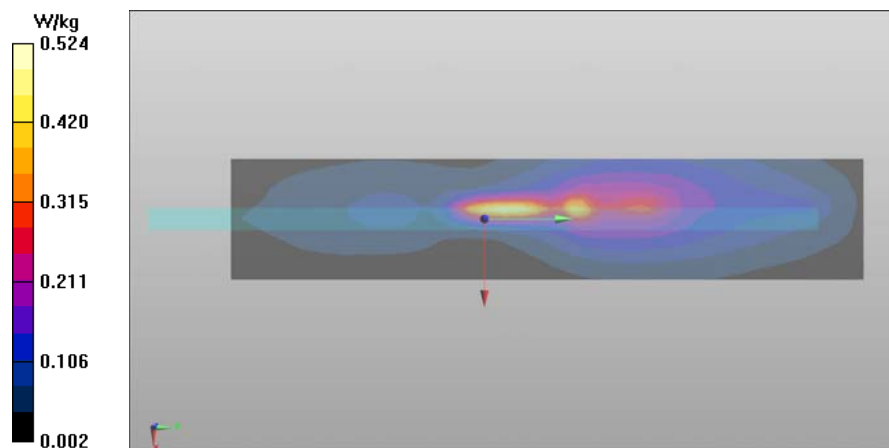

Plot #14

Date/Time: 2013-09-26 13:22:30

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357507/8

Communication System: WCDMA850 (Band 5)

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: BSL850; Medium Notes: t= 20,8 C

Medium parameters used: f = 835 MHz; $\sigma = 0.967$ S/m; $\epsilon_r = 53.523$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(6.04, 6.04, 6.04); Calibrated: 2013-01-21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1355; Calibrated: 2013-01-08
- Phantom: #2 ELI Phantom; Type: QDOVA002AA; Serial: -
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

WCDMA850 (Band 5)/Body - Middle - Spacer 0mm - No Headset - Bottom Edge Facing Phantom - Full

Power/Volume Scan (13x64x12): Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.173 V/m

Peak SAR (extrapolated) = 0.990 W/kg


SAR(1 g) = 0.200 W/kg

SAR(10 g) = 0.108 W/kg

Power Drift = 0.03 dB

Total Absorbed Power = 0.0110 W

Maximum value of SAR (measured) = 0.430 W/kg

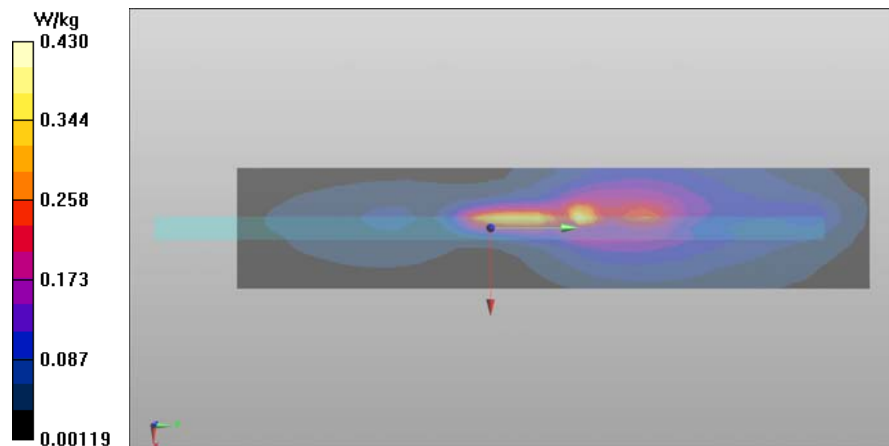

Plot #15

Date/Time: 2013-09-26 06:53:00

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357512/8

Communication System: WCDMA1900 (Band 2)

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: BSL1900; Medium Notes: t= 21.9 C

Medium parameters used: f = 1880 MHz; $\sigma = 1.471$ S/m; $\epsilon_r = 51.024$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(4.62, 4.62, 4.62); Calibrated: 2013-06-18;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2013-06-10
- Phantom: SAM 2 ELI5; Type: QDOVA002AA; Serial: TP-1160
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

WCDMA1900 (Band 2)/Body - Middle - Spacer 0mm - No Headset - Bottom Edge Facing Phantom - Full

Power/Volume Scan (13x64x12): Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.075 V/m

Peak SAR (extrapolated) = 0.250 W/kg


SAR(1 g) = 0.062 W/kg

SAR(10 g) = 0.038 W/kg

Power Drift = 0.05 dB

Total Absorbed Power = 0.00353 W

Maximum value of SAR (measured) = 0.112 W/kg

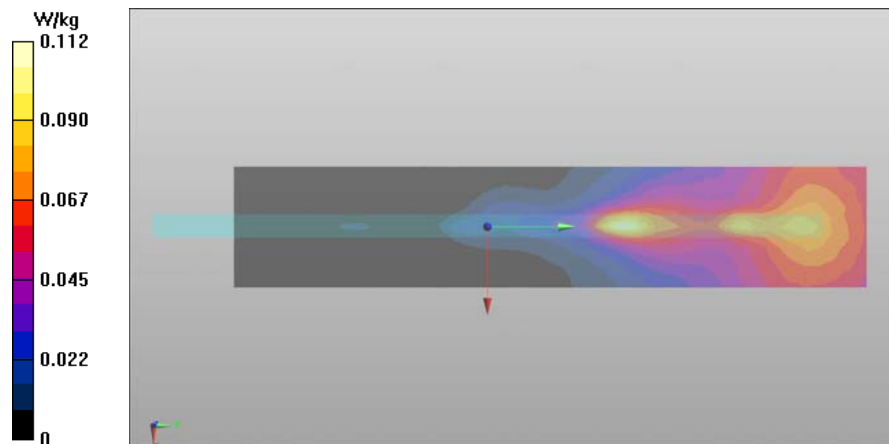

Plot #16

Date/Time: 2013-09-26 11:04:30

Test Laboratory: TCC Nokia

Type: RX-114; Serial: 004402/47/357461/8

Communication System: WLAN5000 a-mode

Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: MSL5000; Medium Notes: T=21.5

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.498$ S/m; $\epsilon_r = 48.284$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3817
- ConvF(4.54, 4.54, 4.54); Calibrated: 2013-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
- Phantom: SAM 2 ELI5; Type: QDOVA002AA; Serial: TP-1160
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.9 (7117)

WLAN5000 a-mode/Body - Channel 44 - BPSK 6Mbps - Spacer 0mm - No Headset - Bottom Edge Facing

Phantom - Aux Antenna/Volume Scan (13x64x12): Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.264 V/m

Peak SAR (extrapolated) = 4.11 W/kg


SAR(1 g) = 1.06 W/kg

SAR(10 g) = 0.254 W/kg

Power Drift = 0.13 dB

Total Absorbed Power = 0.00397 W

Maximum value of SAR (measured) = 2.37 W/kg

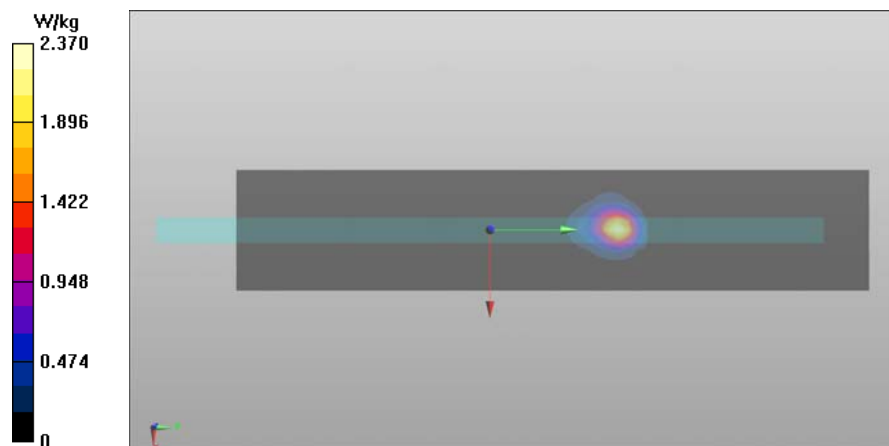

Plot #17

Date/Time: 2013-09-25 16:43:12

Test Laboratory: TCC Nokia

Type: RX-114; Serial: 004402/47/357461/8

Communication System: WLAN5000 a-mode

Frequency: 5520 MHz; Duty Cycle: 1:1

Medium: MSL5000; Medium Notes: T=21.5

Medium parameters used: $f = 5520$ MHz; $\sigma = 5.898$ S/m; $\epsilon_r = 47.771$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3817
- ConvF(4.07, 4.07, 4.07); Calibrated: 2013-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
- Phantom: SAM 2 ELI5; Type: QDOVA002AA; Serial: TP-1160
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.9 (7117)

WLAN a-mode/Body - Channel 104 - BPSK 6 Mbps - Spacer 0mm - No Headset - Bottom Edge Facing Phantom - Main Antenna/Volume Scan (13x64x12): Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.338 V/m

Peak SAR (extrapolated) = 3.00 W/kg


SAR(1 g) = 0.766 W/kg

SAR(10 g) = 0.174 W/kg

Power Drift = -0.03 dB

Total Absorbed Power = 0.00363 W

Maximum value of SAR (measured) = 1.86 W/kg

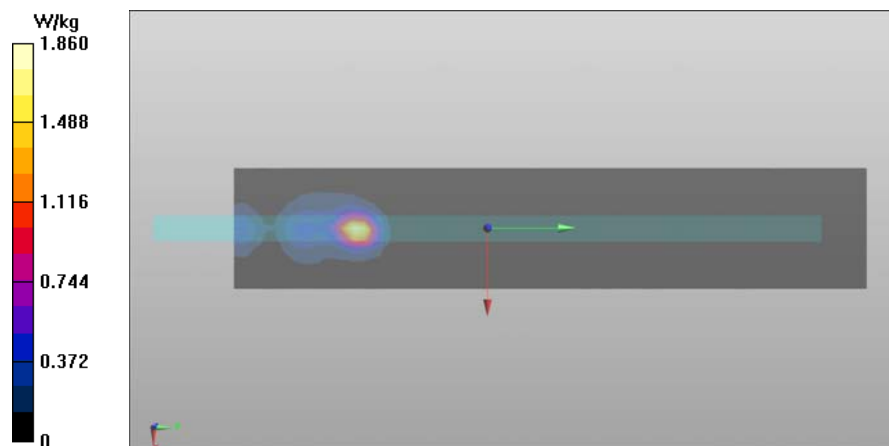

Plot #18

Date/Time: 2013-09-26 07:05:02

DASY Configuration for 2-slot GPRS850/Body - Middle - Spacer 0mm - No Headset - Bottom Edge Facing Phantom - Full Power/Volume Scan:

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357507/8

Communication System: 2-slot GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:4.19952; PMF: 2.04927

Medium: BSL850 Medium parameters used: $f = 837$ MHz; $\sigma = 0.968$ S/m; $\epsilon_r = 53.509$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Probe: ES3DV3 - SN3165; ConvF(6.04, 6.04, 6.04); Calibrated: 2013-01-21;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1355; Calibrated: 2013-01-08

Phantom: #2 ELI Phantom; Type: QDOVA002AA; Serial:

Measurement SW: DASY52, Version 52.8 (6)

Date/Time: 2013-09-25 16:43:12

DASY Configuration for WLAN a-mode/Body - Channel 104 - BPSK 6 Mbps - Spacer 0mm - No Headset - Bottom Edge Facing Phantom - Main Antenna/Volume Scan:

Test Laboratory: TCC Nokia

Type: RX-114; Serial: 004402/47/357461/8

Communication System: WLAN5000 a-mode; Frequency: 5520 MHz; Duty Cycle: 1:1; PMF: 1

Medium: MSL5000 Medium parameters used: $f = 5520$ MHz; $\sigma = 5.898$ S/m; $\epsilon_r = 47.771$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Probe: EX3DV4 - SN3817; ConvF(4.07, 4.07, 4.07); Calibrated: 2013-01-23;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1301; Calibrated: 2013-02-06

Phantom: SAM 2 ELI5; Type: QDOVA002AA; Serial: TP-1160

Measurement SW: DASY52, Version 52.8 (1)

Date/Time: 2013-09-26 11:04:30

DASY Configuration for WLAN5000 a-mode/Body - Channel 44 - BPSK 6Mbps - Spacer 0mm - No Headset - Bottom Edge Facing Phantom - Aux Antenna/Volume Scan:

Test Laboratory: TCC Nokia

Type: RX-114; Serial: 004402/47/357461/8

Communication System: WLAN5000 a-mode; Frequency: 5220 MHz; Duty Cycle: 1:1; PMF: 1

Medium: MSL5000 Medium parameters used: $f = 5220$ MHz; $\sigma = 5.498$ S/m; $\epsilon_r = 48.284$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Probe: EX3DV4 - SN3817; ConvF(4.54, 4.54, 4.54); Calibrated: 2013-01-23;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1301; Calibrated: 2013-02-06

Phantom: SAM 2 ELI5; Type: QDOVA002AA; Serial: TP-1160


Measurement SW: DASY52, Version 52.8 (1)

Multi Band Result:

SAR(1 g) = 1.53 W/kg; SAR(10 g) = 0.451 W/kg

Maximum value of SAR (interpolated) = 5.03 W/kg

2-slot GPRS850 was scaled with factor 1.05, WLAN5000 a-mode Main Antenna with factor 1.27, WLAN5000 a-mode AUX Antenna with factor 1.31, before combining in SEMCAD SW.

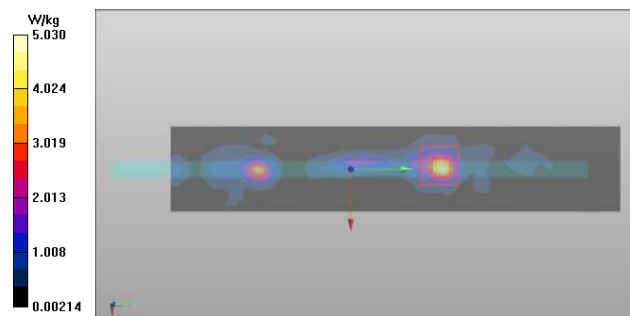

SAR Report

Appendix B for FCC_RX-113_01

Applicant: Nokia Corporation

Type: RX-113

Copyright © 2013 TCC Nokia

Plot #19

Date/Time: 2013-09-26 13:22:30

DASY Configuration for WCDMA850 (Band 5)/Body - Middle - Spacer 0mm - No Headset - Bottom Edge Facing Phantom - Full Power/Volume Scan:

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357507/8

Communication System: WCDMA850 (Band 5); Frequency: 835 MHz; Duty Cycle: 1:1; PMF: 1

Medium: BSL850 Medium parameters used: $f = 835$ MHz; $\sigma = 0.967$ S/m; $\epsilon_r = 53.523$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Probe: ES3DV3 - SN3165; ConvF(6.04, 6.04, 6.04); Calibrated: 2013-01-21;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1355; Calibrated: 2013-01-08
Phantom: #2 ELI Phantom; Type: QDOVA002AA; Serial: -
Measurement SW: DASY52, Version 52.8 (6)

Date/Time: 2013-09-25 16:43:12

DASY Configuration for WLAN a-mode/Body - Channel 104 - BPSK 6 Mbps - Spacer 0mm - No Headset - Bottom Edge Facing Phantom - Main Antenna/Volume Scan:

Test Laboratory: TCC Nokia

Type: RX-114; Serial: 004402/47/357461/8

Communication System: WLAN5000 a-mode; Frequency: 5520 MHz; Duty Cycle: 1:1; PMF: 1

Medium: MSL5000 Medium parameters used: $f = 5520$ MHz; $\sigma = 5.898$ S/m; $\epsilon_r = 47.771$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Probe: EX3DV4 - SN3817; ConvF(4.07, 4.07, 4.07); Calibrated: 2013-01-23;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
Phantom: SAM 2 ELI5; Type: QDOVA002AA; Serial: TP-1160
Measurement SW: DASY52, Version 52.8 (1)

Date/Time: 2013-09-26 11:04:30

DASY Configuration for WLAN5000 a-mode/Body - Channel 44 - BPSK 6Mbps - Spacer 0mm - No Headset - Bottom Edge Facing Phantom - Aux Antenna/Volume Scan:

Test Laboratory: TCC Nokia

Type: RX-114; Serial: 004402/47/357461/8

Communication System: WLAN5000 a-mode; Frequency: 5220 MHz; Duty Cycle: 1:1; PMF: 1

Medium: MSL5000 Medium parameters used: $f = 5220$ MHz; $\sigma = 5.498$ S/m; $\epsilon_r = 48.284$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Probe: EX3DV4 - SN3817; ConvF(4.54, 4.54, 4.54); Calibrated: 2013-01-23;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
Phantom: SAM 2 ELI5; Type: QDOVA002AA; Serial: TP-1160
Measurement SW: DASY52, Version 52.8 (1)

Multi Band Result:

SAR(1 g) = 1.47 W/kg; SAR(10 g) = 0.430 W/kg

Maximum value of SAR (interpolated) = 4.83 W/kg

WCDMA850 was scaled with factor 1.04, WLAN5000 a-mode Main Antenna with factor 1.27, WLAN5000 a-mode AUX Antenna with factor 1.31, before combining in SEMCAD SW.

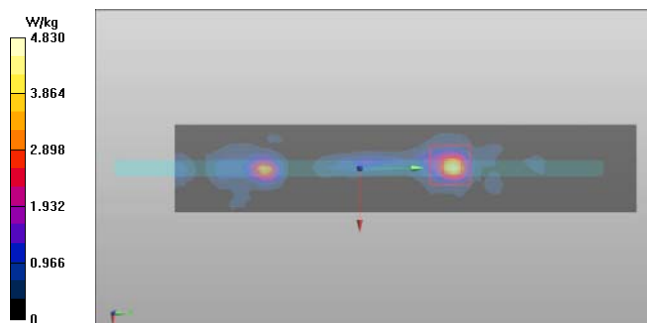

SAR Report

Appendix B for FCC_RX-113_01

Applicant: Nokia Corporation

Type: RX-113

Copyright © 2013 TCC Nokia

Plot #20

Date/Time: 2013-09-26 06:53:00

DASY Configuration for WCDMA1900 (Band 2)/Body - Middle - Spacer 0mm - No Headset - Bottom Edge Facing Phantom - Full

Power/Volume Scan:

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357512/8

Communication System: WCDMA1900 (Band 2); Frequency: 1880 MHz; Duty Cycle: 1:1; PMF: 1

Medium: BSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.471$ S/m; $\epsilon_r = 51.024$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Probe: ES3DV3 - SN3131; ConvF(4.62, 4.62, 4.62); Calibrated: 2013-06-18;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn793; Calibrated: 2013-06-10
Phantom: SAM 2 ELI5; Type: QDOVA002AA; Serial: TP-1160
Measurement SW: DASY52, Version 52.8 (6)

Date/Time: 2013-09-25 16:43:12

DASY Configuration for WLAN a-mode/Body - Channel 104 - BPSK 6 Mbps - Spacer 0mm - No Headset - Bottom Edge Facing Phantom - Main

Antenna/Volume Scan:

Test Laboratory: TCC Nokia

Type: RX-114; Serial: 004402/47/357461/8

Communication System: WLAN5000 a-mode; Frequency: 5520 MHz; Duty Cycle: 1:1; PMF: 1

Medium: MSL5000 Medium parameters used: $f = 5520$ MHz; $\sigma = 5.898$ S/m; $\epsilon_r = 47.771$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Probe: EX3DV4 - SN3817; ConvF(4.07, 4.07, 4.07); Calibrated: 2013-01-23;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
Phantom: SAM 2 ELI5; Type: QDOVA002AA; Serial: TP-1160
Measurement SW: DASY52, Version 52.8 (1)

Date/Time: 2013-09-26 11:04:30

DASY Configuration for WLAN5000 a-mode/Body - Channel 44 - BPSK 6Mbps - Spacer 0mm - No Headset - Bottom Edge Facing Phantom -

Aux Antenna/Volume Scan:

Test Laboratory: TCC Nokia

Type: RX-114; Serial: 004402/47/357461/8

Communication System: WLAN5000 a-mode; Frequency: 5220 MHz; Duty Cycle: 1:1; PMF: 1

Medium: MSL5000 Medium parameters used: $f = 5220$ MHz; $\sigma = 5.498$ S/m; $\epsilon_r = 48.284$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Probe: EX3DV4 - SN3817; ConvF(4.54, 4.54, 4.54); Calibrated: 2013-01-23;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1301; Calibrated: 2013-02-06
Phantom: SAM 2 ELI5; Type: QDOVA002AA; Serial: TP-1160
Measurement SW: DASY52, Version 52.8 (1)

Multi Band Result:

SAR(1 g) = 1.42 W/kg; SAR(10 g) = 0.355 W/kg

Maximum value of SAR (interpolated) = 5.01 W/kg

WCDMA1900 was scaled with factor 1.07, WLAN5000 a-mode Main Antenna with factor 1.27, WLAN5000 a-mode AUX Antenna with factor 1.31, before combining in SEMCAD SW.

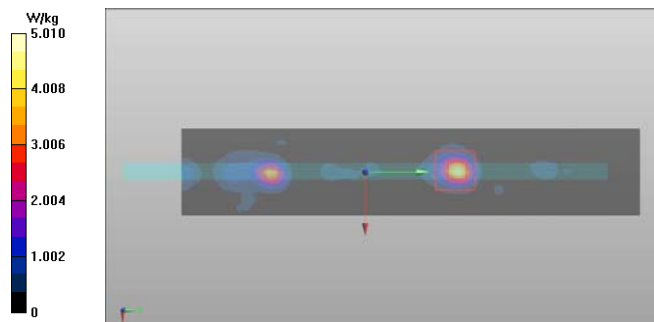

APPENDIX C: DIELECTRIC PARAMETERS OF THE TISSUE SIMULANTS

Body tissue simulant dielectric parameters used in the measurements:

F (MHz)	Date	Dielectric Parameters					
		Ch 4132 826.4 MHz		Ch 4175 835.0 MHz		Ch 4233 846.6 MHz	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
835	2013-09-12	53.6	0.97	53.6	0.98	53.5	0.99
	2013-09-13	53.5	0.97	53.5	0.98	53.4	0.99
	2013-09-25	53.8	0.95	53.7	0.96	53.6	0.97
	2013-09-26	53.6	0.96	53.5	0.97	53.4	0.97
f (MHz)	Date	Dielectric Parameters					
		Ch 128 824.2 MHz		Ch 190 836.6 MHz		Ch 251 848.8 MHz	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
836	2013-09-12	53.6	0.97	53.6	0.98	53.5	0.99
	2013-09-13	53.5	0.97	53.5	0.98	53.4	0.99
	2013-09-25	53.8	0.95	53.7	0.96	53.6	0.97
	2013-09-26	53.6	0.96	53.5	0.97	53.4	0.97
f (MHz)	Date	Dielectric Parameters					
		Ch 512 1850.2 MHz		Ch 661 1880.0 MHz		Ch 810 1909.8 MHz	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
1880	2013-09-11	51.7	1.48	51.6	1.51	51.5	1.54
	2013-09-12	51.4	1.48	51.4	1.51	51.3	1.54
f (MHz)	Date	Dielectric Parameters					
		Ch 9262 1852.4 MHz		Ch 9400 1880.0 MHz		Ch 9538 1907.6 MHz	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
1880	2013-09-11	51.6	1.48	51.6	1.51	51.5	1.54
	2013-09-12	51.4	1.48	51.4	1.51	51.3	1.54
	2013-09-26	51.1	1.45	51.0	1.47	51.0	1.49
f (MHz)	Date	Dielectric Parameters					
		Ch 1 2412.0 MHz		Ch 6 2437.0 MHz		Ch 11 2462.0 MHz	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
2437	2013-09-09	50.8	1.87	50.8	1.90	50.7	1.93
	2013-09-24	51.1	1.87	51.0	1.90	51.0	1.94
	2013-09-25	51.0	1.87	51.0	1.90	50.9	1.94

**Body tissue simulant dielectric parameters used in the measurements 5180 – 5825 MHz:
Main Antenna**

f (MHz)	Date	Dielectric Parameters									
		Ch 40 5200.0 MHz		5210.0 MHz		Ch 44 5220.0 MHz		-		-	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
5210	2013-09-03	47.9	5.47	47.9	5.48	47.9	5.49	-	-	-	-
	2013-09-25	48.3	5.47	48.3	5.48	48.3	5.50				
f (MHz)	Date	Dielectric Parameters									
		Ch 56 5280.0 MHz		5290.0 MHz		Ch 60 5300.0 MHz		-		-	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
5290	2013-09-04	47.6	5.54	47.5	5.56	47.5	5.57	-	-	-	-
f (MHz)	Date	Dielectric Parameters									
		Ch 104 5520.0 MHz		Ch 112 5560.0 MHz		Ch 128 5640.0 MHz		Ch 136 5680.0 MHz		-	
		ϵ_r	ϵ_r	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
5520	2013-09-04	47.2	47.1	47.1	5.91	47.0	6.02	46.9	6.08	-	-
	2013-09-25	47.8	47.8	47.8	5.95	47.6	6.07	47.5	6.12	-	-
f (MHz)	Date	Dielectric Parameters									
		5760.0 MHz		Ch 153 5765.0 MHz		Ch 161 5805.0 MHz		Ch 165 5825.0 MHz		-	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
5760	2013-09-05	46.8	6.18	46.8	6.19	46.7	6.23	46.6	6.28	-	-

**Body tissue simulant dielectric parameters used in the measurements 5180 – 5825 MHz:
AUX Antenna**

f (MHz)	Date	Dielectric Parameters									
		Ch 36 5180.0 MHz		5210.0 MHz		Ch 44 5220.0 MHz		-		-	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
5210	2013-09-03	48.0	5.44	47.9	5.48	47.9	5.49	-	-	-	-
	2013-09-25	48.4	5.44	48.3	5.48	48.3	5.50				
f (MHz)	Date	Dielectric Parameters									
		Ch 52 5260.0 MHz		5290.0 MHz		Ch 60 5300.0 MHz		-		-	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
5290	2013-09-04	47.6	5.51	47.5	5.56	47.5	5.57	-	-	-	-
f (MHz)	Date	Dielectric Parameters									
		5520.0 MHz		Ch 108 5540.0 MHz		Ch 120 5600.0 MHz		Ch 124 5620.0 MHz		Ch 136 5680.0 MHz	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
5520	2013-09-04	47.2	5.86	47.1	5.89	47.0	5.97	47.0	6.00	46.9	6.08
	2013-09-25	47.8	5.90	47.8	5.93	47.6	6.00	47.6	6.04	47.5	6.12
f (MHz)	Date	Dielectric Parameters									
		Ch 149 5745.0 MHz		5760.0 MHz		Ch 157 5785.0 MHz		Ch 161 5805.0 MHz		-	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
5760	2013-09-05	46.8	6.17	46.8	6.18	46.7	6.22	46.7	6.23	-	-

APPENDIX D: CONDUCTED AVERAGE POWER MEASUREMENTS FOR WCDMA AND HSUPA

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357507/8, HW: 0107, SW: ROW_9447_1030_1329_v0.1.12a

D.1. WCDMA850 (Band 5), FULL POWER Test results

Average power

Ch / f(MHz)	P [dBm]
4132	23.76
4175	23.66
4233	23.60

D.2. HSUPA850, FULL POWER Test results

Average power

Ch / f (MHz)	P [dBm]				
	Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
4132	22.59	21.75	21.54	22.21	22.72
4175	22.63	21.51	21.41	22.13	22.67
4233	22.60	21.32	21.48	22.10	22.65

Note: In HSUPA operation, the output power is reduced relative to the tuning target power for WCDMA. This device runs a single HSUPA power control routine: MPR, and additional 0.5dB reduction to ensure PA linearity. As a result, the MPR for each of the Subtest modes is as follows:

Maximum Power Reduction (MPR)				
Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
0.0dB	2.0dB	1.0dB	2.0dB	0.0dB

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357511/0, HW: 0107, SW: ROW_9447_1030_1329_v0.1.12a

D.3. WCDMA850 (Band 5), REDUCED POWER Test results

Average power

Ch / f(MHz)	P [dBm]
4132	21.24
4175	21.21
4233	21.28

D.4. HSUPA850, REDUCED POWER Test results

Average power

Ch / f (MHz)	P [dBm]				
	Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
4132	20.10	19.40	19.00	20.30	20.70
4175	20.70	19.70	19.10	20.30	20.80
4233	20.70	19.70	19.70	20.30	20.90

Note: In HSUPA operation, the output power is reduced relative to the tuning target power for WCDMA. This device runs a single HSUPA power control routine: MPR, and additional 0.5dB reduction to ensure PA linearity. As a result, the MPR for each of the Subtest modes is as follows:

Maximum Power Reduction (MPR)				
Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
0.5dB	1.5dB	1.5dB	0.5dB	0.0dB

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357512/8, HW: 0107, SW: ROW_9447_1030_1329_v0.1.12a

D.5. WCDMA1900 (Band 2), FULL POWER Test results

Average power

Ch / f(MHz)	P [dBm]
9262	23.57
9400	23.57
9538	23.62

D.6. HSUPA1900, FULL POWER Test results

Average power

Ch / f (MHz)	P [dBm]				
	Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
9262	22.22	21.29	21.40	22.00	22.51
9400	21.96	21.24	20.94	22.20	22.55
9538	22.63	21.30	21.57	21.83	22.60

Note: In HSUPA operation, the output power is reduced relative to the tuning target power for WCDMA. This device runs a single HSUPA power control routine: MPR, and additional 0.5dB reduction to ensure PA linearity. As a result, the MPR for each of the Subtest modes is as follows:

Maximum Power Reduction (MPR)				
Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
0.0dB	2.0dB	1.0dB	2.0dB	0.0dB

Test Laboratory: TCC Nokia

Type: RX-113; Serial: 004402/47/357591/2, HW: 0107, SW: ROW_9447_1030_1329_v0.1.12a

D.7. WCDMA1900 (Band 2), REDUCED POWER Test results

Average power

Ch / f(MHz)	P [dBm]
9262	17.57
9400	17.61
9538	17.83

D.8. HSUPA1900, REDUCED POWER Test results

Average power

Ch / f (MHz)	P [dBm]				
	Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
9262	16.70	15.60	15.40	16.20	16.80
9400	17.20	15.90	15.40	16.70	17.30
9538	17.20	15.90	15.50	16.80	17.30

Note: In HSUPA operation, the output power is reduced relative to the tuning target power for WCDMA. This device runs a single HSUPA power control routine: MPR, and additional 0.5dB reduction to ensure PA linearity. As a result, the MPR for each of the Subtest modes is as follows:

Maximum Power Reduction (MPR)				
Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
0.5dB	1.5dB	2.0dB	1.0dB	0.5dB

APPENDIX E: RELEVANT PAGES FROM PROBE CALIBRATION REPORTS



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **ES3-3131_Jun13**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3131**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4**
Calibration procedure for dosimetric E-field probes

Calibration date: **June 18, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	04-Apr-13 (No. 217-01733)	Apr-14
Power sensor E4412A	MY41498087	04-Apr-13 (No. 217-01733)	Apr-14
Reference 3 dB Attenuator	SN: S5054 (3c)	04-Apr-13 (No. 217-01737)	Apr-14
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-13 (No. 217-01735)	Apr-14
Reference 30 dB Attenuator	SN: S5129 (30b)	04-Apr-13 (No. 217-01738)	Apr-14
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	31-Jan-13 (No. DAE4-660_Jan13)	Jan-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-15
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:	Name Israe El-Naouq	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: June 18, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3131

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.23	6.23	6.23	0.31	1.83	± 12.0 %
835	41.5	0.90	5.96	5.96	5.96	0.26	1.99	± 12.0 %
1750	40.1	1.37	5.17	5.17	5.17	0.49	1.47	± 12.0 %
1900	40.0	1.40	4.98	4.98	4.98	0.67	1.27	± 12.0 %
2450	39.2	1.80	4.33	4.33	4.33	0.80	1.14	± 12.0 %
2600	39.0	1.96	4.21	4.21	4.21	0.80	1.09	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3131

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	6.10	6.10	6.10	0.30	1.90	± 12.0 %
835	55.2	0.97	6.03	6.03	6.03	0.39	1.68	± 12.0 %
1750	53.4	1.49	4.87	4.87	4.87	0.31	2.53	± 12.0 %
1900	53.3	1.52	4.62	4.62	4.62	0.28	2.70	± 12.0 %
2450	52.7	1.95	4.27	4.27	4.27	0.68	1.20	± 12.0 %
2600	52.5	2.16	4.17	4.17	4.17	0.50	1.10	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **ES3-3165_Jan13**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3165**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4**
Calibration procedure for dosimetric E-field probes


Calibration date: **January 21, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	20-Jun-12 (No. DAE4-660_Jun12)	Jun-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 

Issued: January 21, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3165

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.46	6.46	6.46	0.23	2.34	± 12.0 %
835	41.5	0.90	6.20	6.20	6.20	0.33	1.65	± 12.0 %
1750	40.1	1.37	5.19	5.19	5.19	0.67	1.25	± 12.0 %
1900	40.0	1.40	5.02	5.02	5.02	0.43	1.47	± 12.0 %
2450	39.2	1.80	4.45	4.45	4.45	0.60	1.41	± 12.0 %
2600	39.0	1.96	4.28	4.28	4.28	0.70	1.34	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3165

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	6.10	6.10	6.10	0.31	1.92	± 12.0 %
835	55.2	0.97	6.04	6.04	6.04	0.71	1.22	± 12.0 %
1750	53.4	1.49	4.86	4.86	4.86	0.54	1.49	± 12.0 %
1900	53.3	1.52	4.60	4.60	4.60	0.46	1.72	± 12.0 %
2450	52.7	1.95	4.18	4.18	4.18	0.64	1.17	± 12.0 %
2600	52.5	2.16	3.98	3.98	3.98	0.80	1.00	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia SD**

Certificate No: **EX3-3817_Jan13**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3817**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v4
Calibration procedure for dosimetric E-field probes**

Calibration date: **January 23, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	20-Jun-12 (No. DAE4-660_Jun12)	Jun-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 26, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3817

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	9.47	9.47	9.47	0.32	0.90	± 12.0 %
835	41.5	0.90	9.07	9.07	9.07	0.20	1.29	± 12.0 %
1750	40.1	1.37	8.03	8.03	8.03	0.65	0.66	± 12.0 %
1900	40.0	1.40	7.77	7.77	7.77	0.80	0.59	± 12.0 %
2450	39.2	1.80	7.09	7.09	7.09	0.75	0.63	± 12.0 %
5200	36.0	4.66	5.14	5.14	5.14	0.40	1.80	± 13.1 %
5300	35.9	4.76	4.94	4.94	4.94	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.84	4.84	4.84	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.45	4.45	4.45	0.45	1.80	± 13.1 %
5800	35.3	5.27	4.53	4.53	4.53	0.45	1.80	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3817

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	9.42	9.42	9.42	0.44	0.83	± 12.0 %
835	55.2	0.97	9.25	9.25	9.25	0.27	1.15	± 12.0 %
1750	53.4	1.49	7.80	7.80	7.80	0.48	0.80	± 12.0 %
1900	53.3	1.52	7.46	7.46	7.46	0.31	0.98	± 12.0 %
2450	52.7	1.95	7.13	7.13	7.13	0.80	0.50	± 12.0 %
5200	49.0	5.30	4.54	4.54	4.54	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.34	4.34	4.34	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.07	4.07	4.07	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.79	3.79	3.79	0.55	1.90	± 13.1 %
5800	48.2	6.00	4.25	4.25	4.25	0.50	1.90	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

APPENDIX F: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORTS



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **D835V2-480_Dec12**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 480**

Calibration procedure(s) **QA CAL-05.v8**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **December 03, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.


All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	30-Dec-11 (No. ES3-3205_Dec11)	Dec-12
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Israe El-Naouq** Name: **Israe El-Naouq** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Signature



Issued: December 3, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.3
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.4 $\pm$ 6 %	0.92 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.39 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.40 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.56 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.16 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.5 $\pm$ 6 %	0.99 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.42 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.51 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.59 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.27 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.8 Ω - 3.3 j Ω
Return Loss	- 29.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.7 Ω - 4.9 j Ω
Return Loss	- 24.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.391 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 28, 2003

DASY5 Validation Report for Head TSL

Date: 03.12.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 480

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.07, 6.07, 6.07); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.814 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

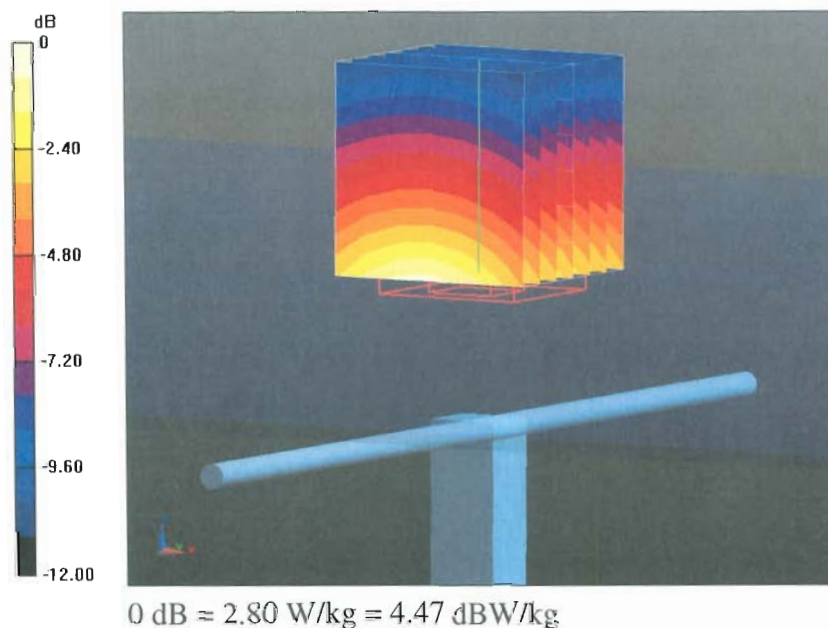

Impedance Measurement Plot for Head TSL

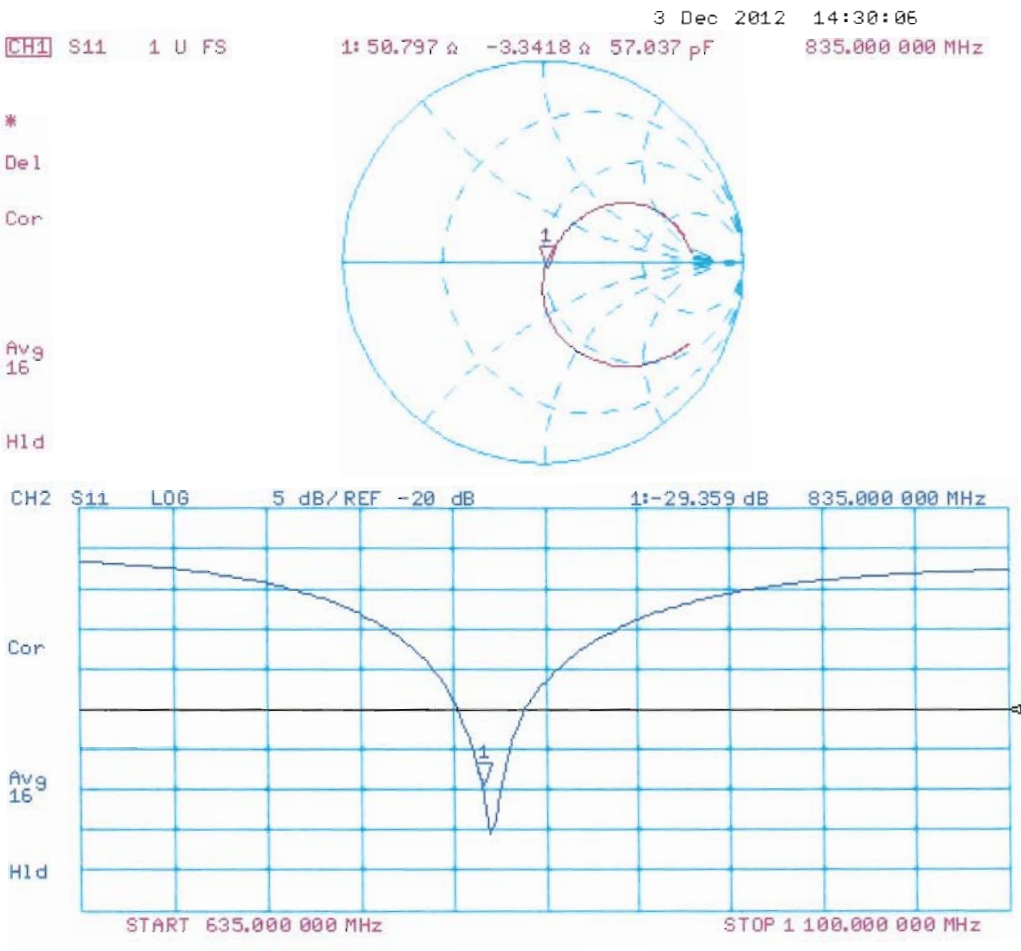

DASY5 Validation Report for Body TSL

Date: 03.12.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 480

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.02, 6.02, 6.02); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.301 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.53 W/kg

SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

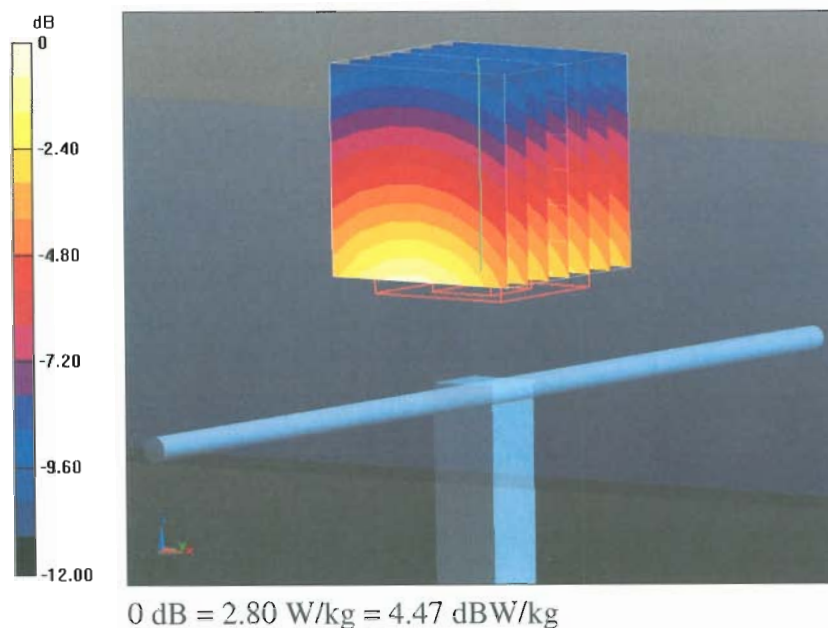

Impedance Measurement Plot for Body TSL

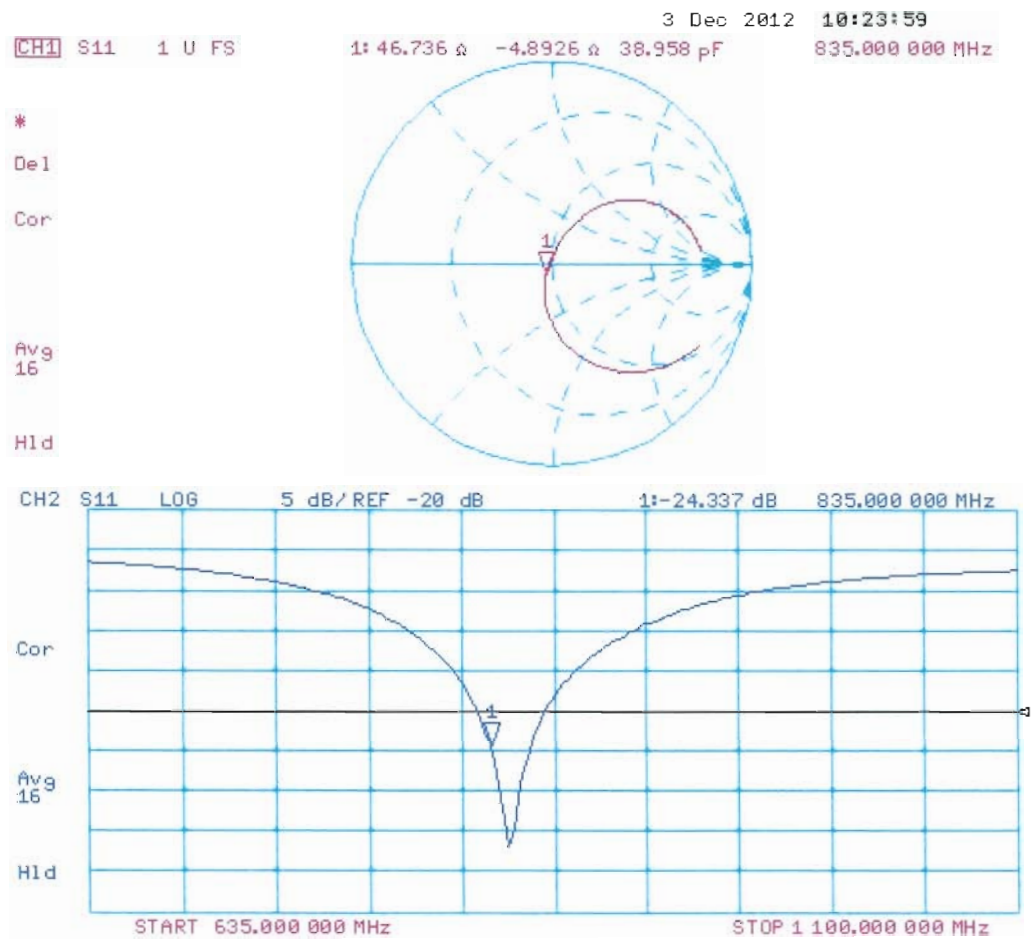



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **D1900V2-5d013_Dec12**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d013**

Calibration procedure(s) **QA CAL-05.v8**
 Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **December 06, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	30-Dec-11 (No. ES3-3205_Dec11)	Dec-12
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

	Name	Function	Signature
Calibrated by:	Israe El-Naouq	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: December 6, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.3
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.5 $\pm$ 6 %	1.38 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.1 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.6 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.2 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.2 $\pm$ 6 %	1.52 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.3 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	41.0 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.41 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.6 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$52.3 \Omega + 6.2 j\Omega$
Return Loss	- 23.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$48.4 \Omega + 5.9 j\Omega$
Return Loss	- 24.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.194 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	April 30, 2002

DASY5 Validation Report for Head TSL

Date: 06.12.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d013

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.01, 5.01, 5.01); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.748 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 18.0 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.28 W/kg

Maximum value of SAR (measured) = 12.4 W/kg

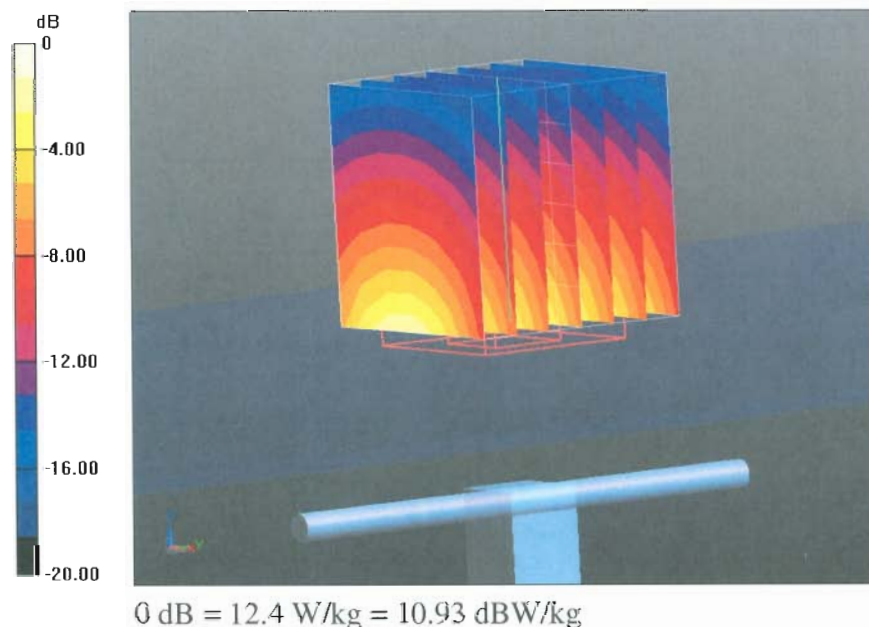

Impedance Measurement Plot for Head TSL

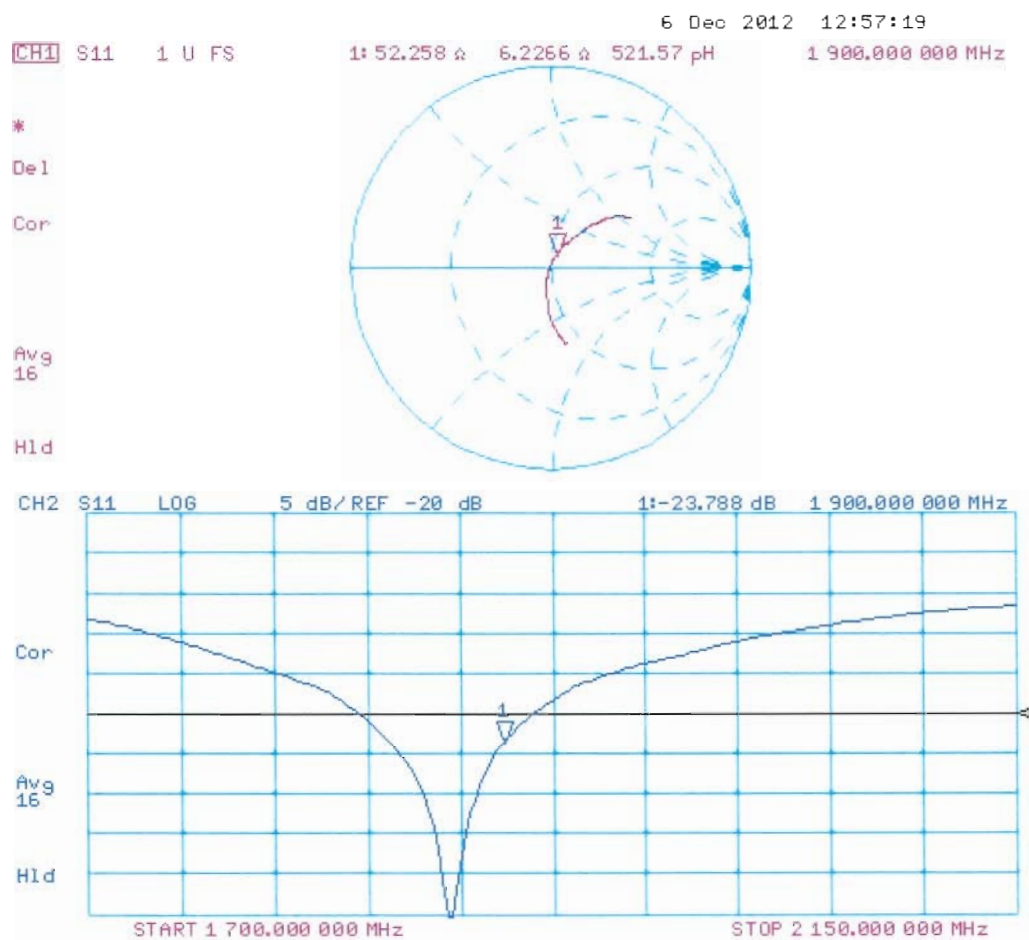

DASY5 Validation Report for Body TSL

Date: 06.12.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d013

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.62, 4.62, 4.62); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.039 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 18.0 W/kg

SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.41 W/kg

Maximum value of SAR (measured) = 12.9 W/kg

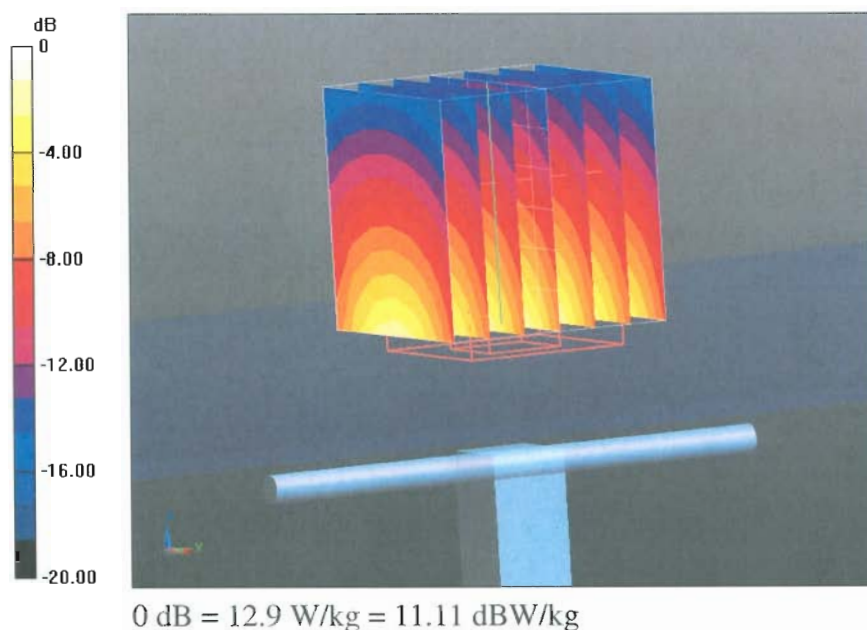

Impedance Measurement Plot for Body TSL

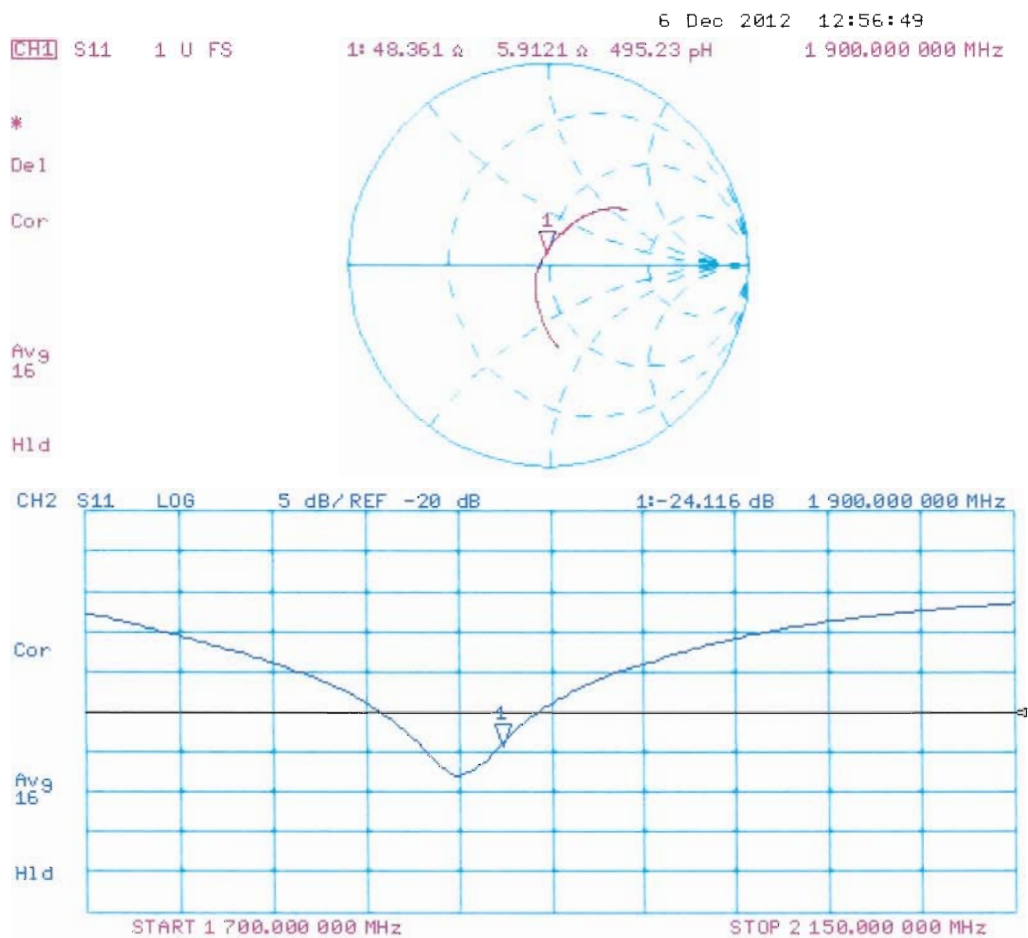



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia SD**

Certificate No: **D2450V2-800_Sep12**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 800**

Calibration procedure(s) **QA CAL-05.v8**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **September 13, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)


Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.2 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	30-Dec-11 (No. ES3-3205_Dec11)	Dec-12
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by: **Jeton Kastrati**  **Laboratory Technician**

Approved by: **Katja Pokovic**  **Technical Manager**

Signature




Issued: September 13, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.9 $\pm$ 6 %	1.84 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.4 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	53.2 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.24 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	24.9 mW / g $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.0 $\pm$ 6 %	2.01 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.0 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	50.9 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.05 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	23.9 mW / g $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$54.9 \Omega + 2.2 j\Omega$
Return Loss	- 25.7 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$51.4 \Omega + 3.7 j\Omega$
Return Loss	- 28.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.159 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 02, 2006

DASY5 Validation Report for Head TSL

Date: 13.09.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 800

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.45, 4.45, 4.45); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.1 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 27.710 mW/g

SAR(1 g) = 13.4 mW/g; SAR(10 g) = 6.24 mW/g

Maximum value of SAR (measured) = 17.2 W/kg

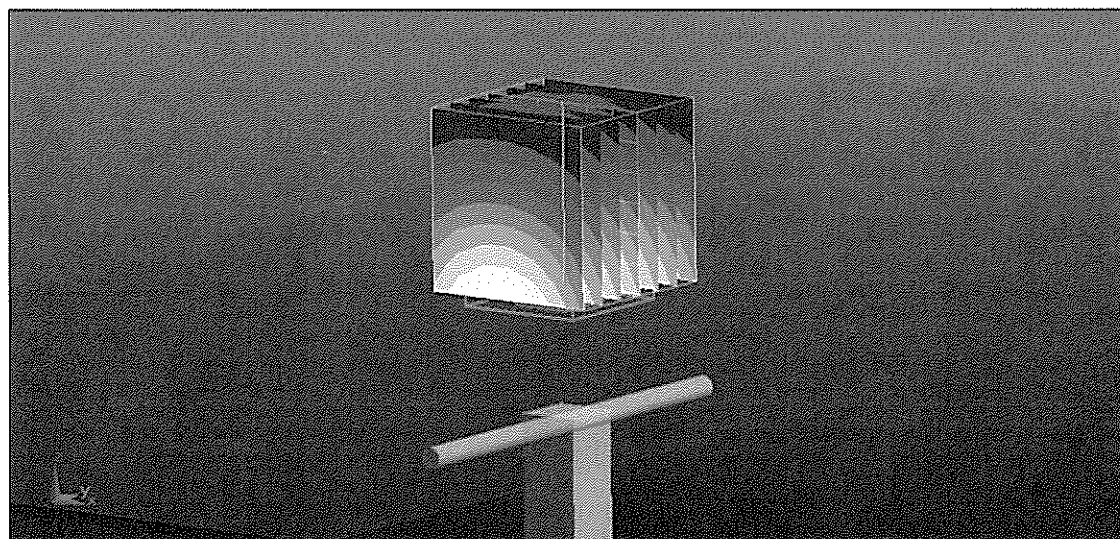


0 dB = 17.2 W/kg = 24.71 dB W/kg

Impedance Measurement Plot for Head TSL

13 Sep 2012 10:29:35
CH1 S11 1 U FS 2: 54.936 Ω 2.2227 Ω 144.39 μH 2 450.000 000 MHz

*
De1
Ca

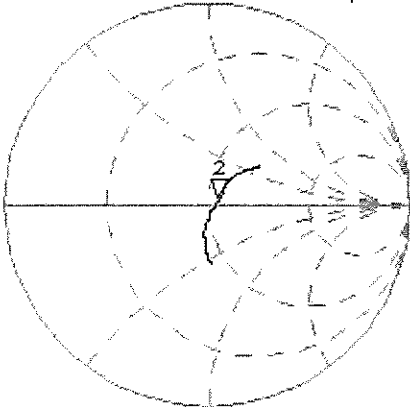

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 2:-25.749 dB 2 450.000 000 MHz

Ca

Avg
16

H1d

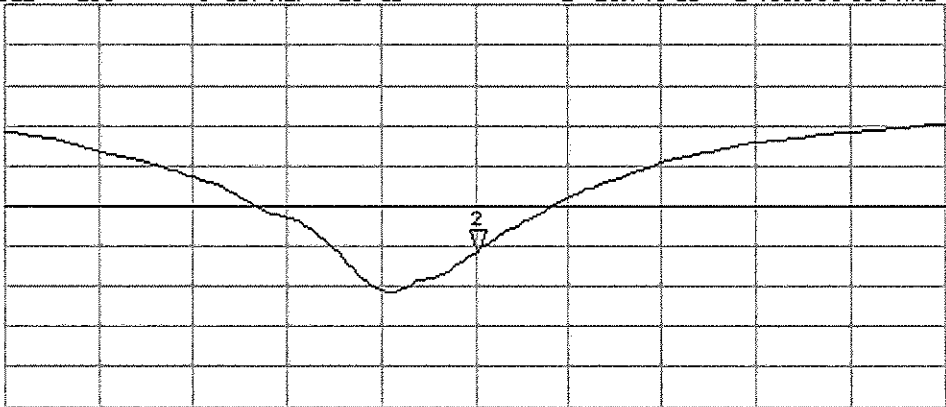

START 2 250.000 000 MHz STOP 2 650.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 13.09.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 800

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.26, 4.26, 4.26); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.223 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.601 mW/g


SAR(1 g) = 13 mW/g; SAR(10 g) = 6.05 mW/g

Maximum value of SAR (measured) = 16.9 W/kg

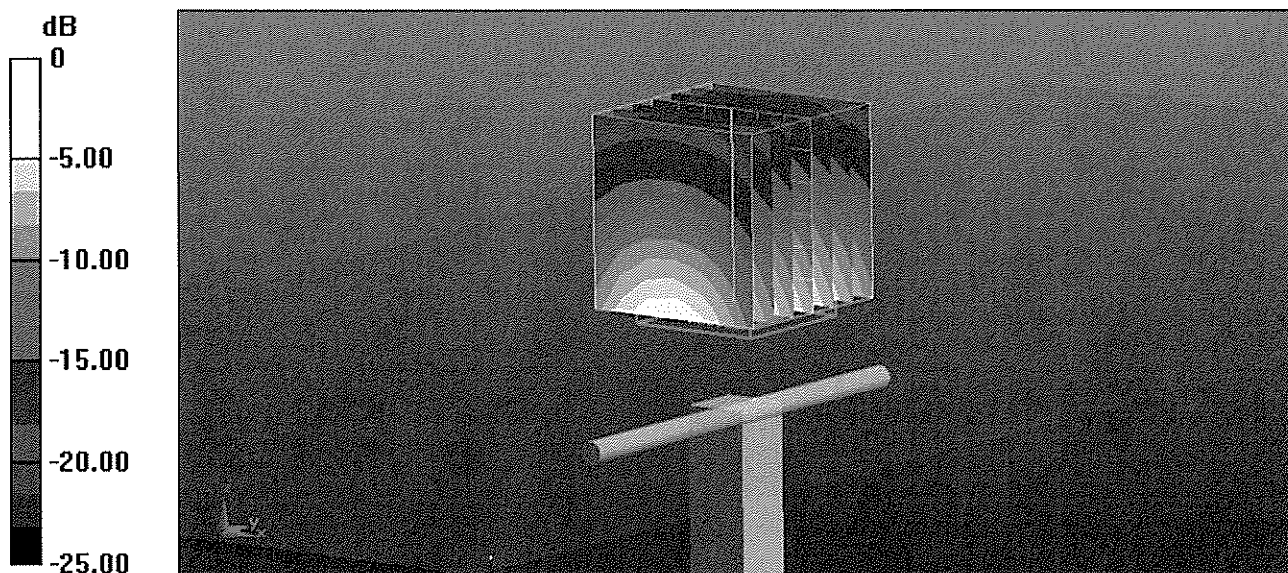

0 dB = 16.9 W/kg = 24.56 dB W/kg

Impedance Measurement Plot for Body TSL

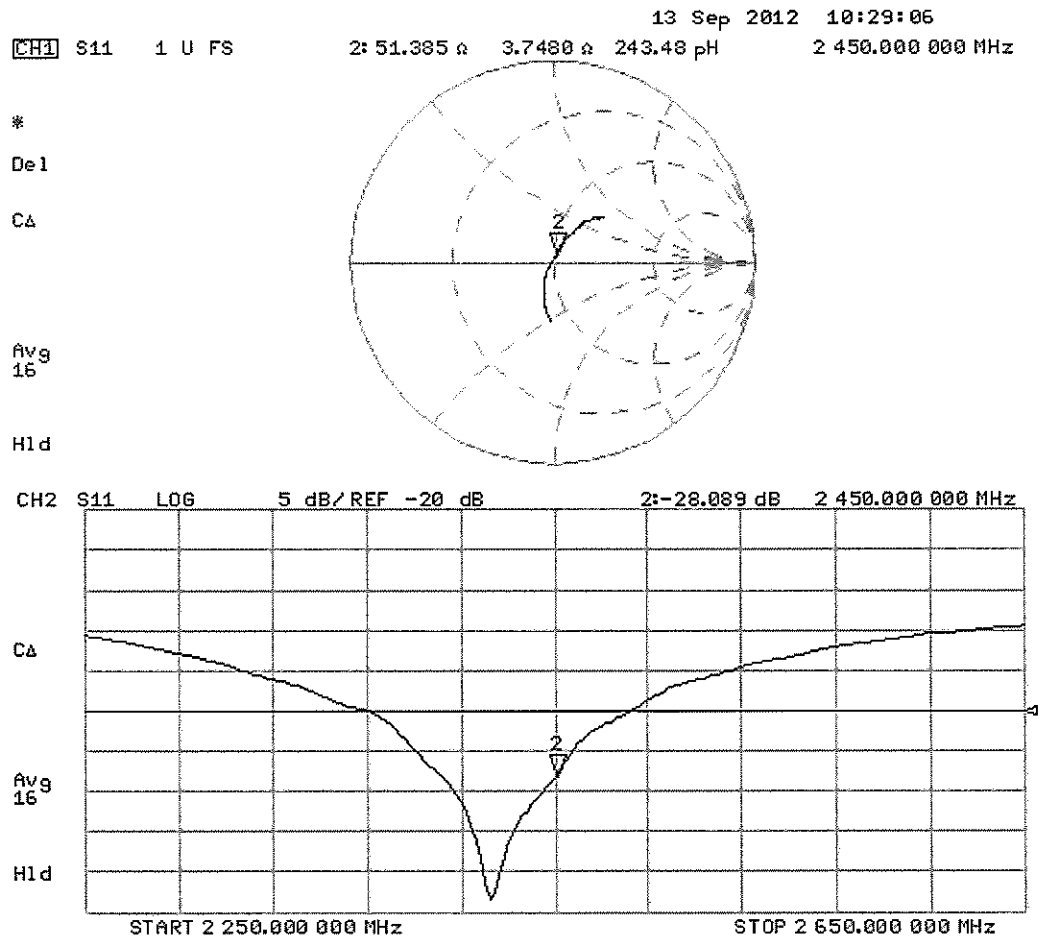



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia SD**

Certificate No: **D5GHzV2-1042_Nov12**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1042**

Calibration procedure(s) **QA CAL-22.v1**
Calibration procedure for dipole validation kits between 3-6 GHz

Calibration date: **November 13, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.2 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe EX3DV4	SN: 3503	30-Dec-11 (No. EX3-3503_Dec11)	Dec-12
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Leif Klysner** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Issued: November 13, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- b) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.3
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz $\pm$ 1 MHz 5300 MHz $\pm$ 1 MHz 5500 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	34.8 $\pm$ 6 %	4.53 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.85 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.9 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.25 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.3 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.7 ± 6 %	4.63 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.15 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.9 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.34 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.2 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 6 %	4.83 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	83.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.5 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.2 ± 6 %	4.93 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.32 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	82.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.4 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.0 ± 6 %	5.15 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.82 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.8 ± 6 %	5.35 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.36 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	72.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.06 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.4 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.7 ± 6 %	5.47 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.54 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	74.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.12 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.0 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.3 ± 6 %	5.73 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.94 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	78.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.20 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.7 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.2 ± 6 %	5.86 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.04 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	79.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.0 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	45.9 ± 6 %	6.13 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.46 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	73.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.07 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.4 W/kg ± 19.5 % (k=2)

Appendix

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	47.7 Ω - 10.7 j Ω
Return Loss	- 19.1 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	50.7 Ω - 7.3 j Ω
Return Loss	- 22.7 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	47.0 Ω - 5.5 j Ω
Return Loss	- 23.9 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	52.5 Ω - 8.1 j Ω
Return Loss	- 21.7 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	54.6 Ω - 2.0 j Ω
Return Loss	- 26.4 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	48.8 Ω - 9.6 j Ω
Return Loss	- 20.2 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	51.0 Ω - 5.9 j Ω
Return Loss	- 24.5 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	47.6 Ω - 4.4 j Ω
Return Loss	- 25.7 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	53.7 Ω - 7.1 $j\Omega$
Return Loss	- 22.3 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	56.7 Ω - 1.0 $j\Omega$
Return Loss	- 24.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.196 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 30, 2005

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1042

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.53$ mho/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 4.63$ mho/m; $\epsilon_r = 34.7$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 4.83$ mho/m; $\epsilon_r = 34.4$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 4.93$ mho/m; $\epsilon_r = 34.2$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.15$ mho/m; $\epsilon_r = 34$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41); Calibrated: 30.12.2011, ConvF(5.1, 5.1, 5.1); Calibrated: 30.12.2011, ConvF(4.91, 4.91, 4.91); Calibrated: 30.12.2011, ConvF(4.76, 4.76, 4.76); Calibrated: 30.12.2011, ConvF(4.81, 4.81, 4.81); Calibrated: 30.12.2011;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.770 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 28.5 W/kg

SAR(1 g) = 7.85 W/kg; SAR(10 g) = 2.25 W/kg

Maximum value of SAR (measured) = 18.0 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.429 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 8.15 W/kg; SAR(10 g) = 2.34 W/kg

Maximum value of SAR (measured) = 18.9 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.178 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 32.8 W/kg

SAR(1 g) = 8.4 W/kg; SAR(10 g) = 2.38 W/kg

Maximum value of SAR (measured) = 19.8 W/kg


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 62.410 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 32.6 W/kg
SAR(1 g) = 8.32 W/kg; SAR(10 g) = 2.37 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 59.880 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 32.0 W/kg
SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.23 W/kg
Maximum value of SAR (measured) = 19.0 W/kg

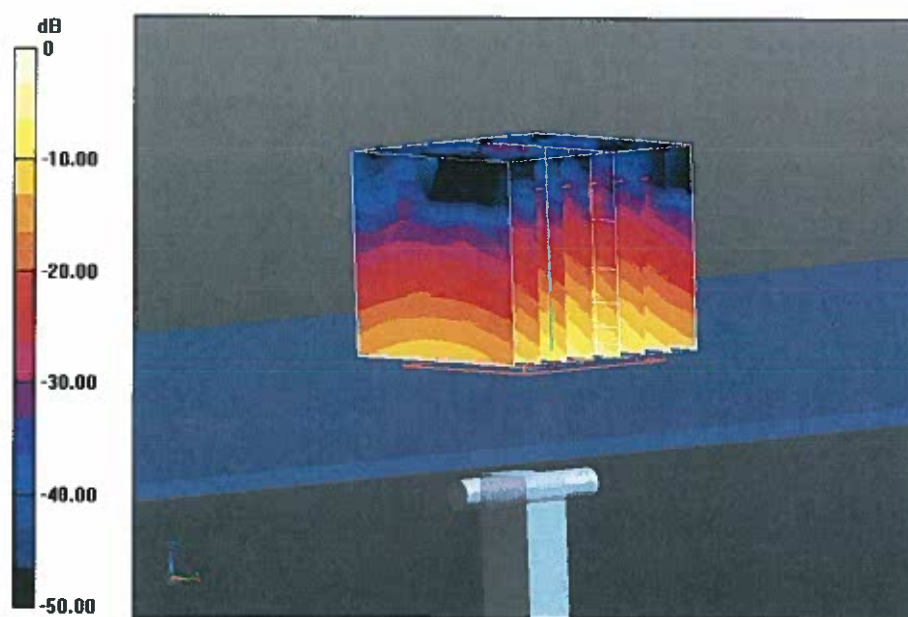

0 dB = 19.0 W/kg = 12.79 dBW/kg

Impedance Measurement Plot for Head TSL

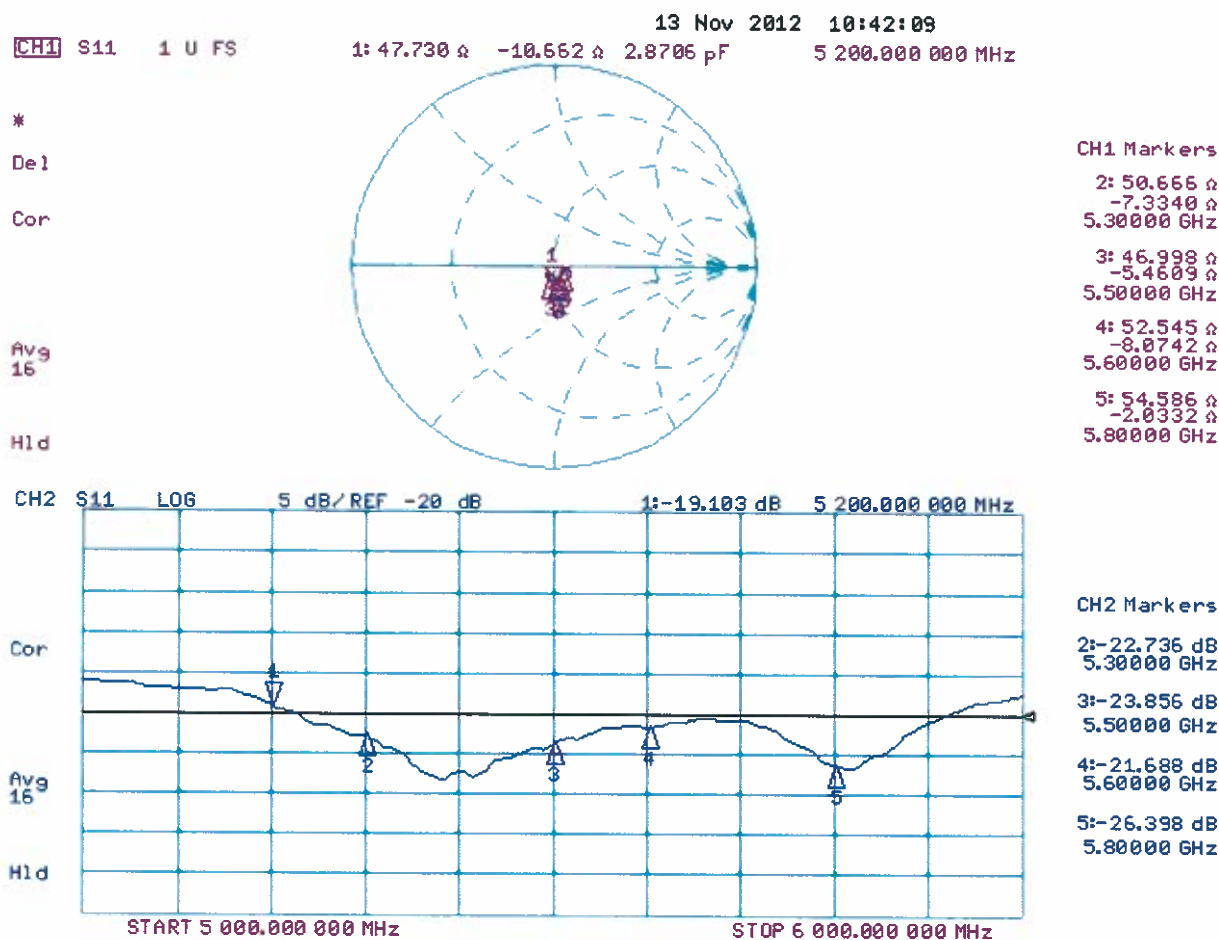

DASY5 Validation Report for Body TSL

Date: 12.11.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1042

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.35$ mho/m; $\epsilon_r = 46.8$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 5.47$ mho/m; $\epsilon_r = 46.7$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 5.73$ mho/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 5.86$ mho/m; $\epsilon_r = 46.2$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 6.13$ mho/m; $\epsilon_r = 45.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91); Calibrated: 30.12.2011, ConvF(4.67, 4.67, 4.67); Calibrated: 30.12.2011, ConvF(4.43, 4.43, 4.43); Calibrated: 30.12.2011, ConvF(4.22, 4.22, 4.22); Calibrated: 30.12.2011, ConvF(4.38, 4.38, 4.38); Calibrated: 30.12.2011;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.598 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 29.3 W/kg

SAR(1 g) = 7.36 W/kg; SAR(10 g) = 2.06 W/kg

Maximum value of SAR (measured) = 17.7 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.989 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 30.7 W/kg

SAR(1 g) = 7.54 W/kg; SAR(10 g) = 2.12 W/kg

Maximum value of SAR (measured) = 18.2 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.380 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 34.4 W/kg

SAR(1 g) = 7.94 W/kg; SAR(10 g) = 2.2 W/kg


Maximum value of SAR (measured) = 19.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 58.795 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 35.9 W/kg
SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.23 W/kg
Maximum value of SAR (measured) = 20.1 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 55.526 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 35.1 W/kg
SAR(1 g) = 7.46 W/kg; SAR(10 g) = 2.07 W/kg
Maximum value of SAR (measured) = 18.9 W/kg

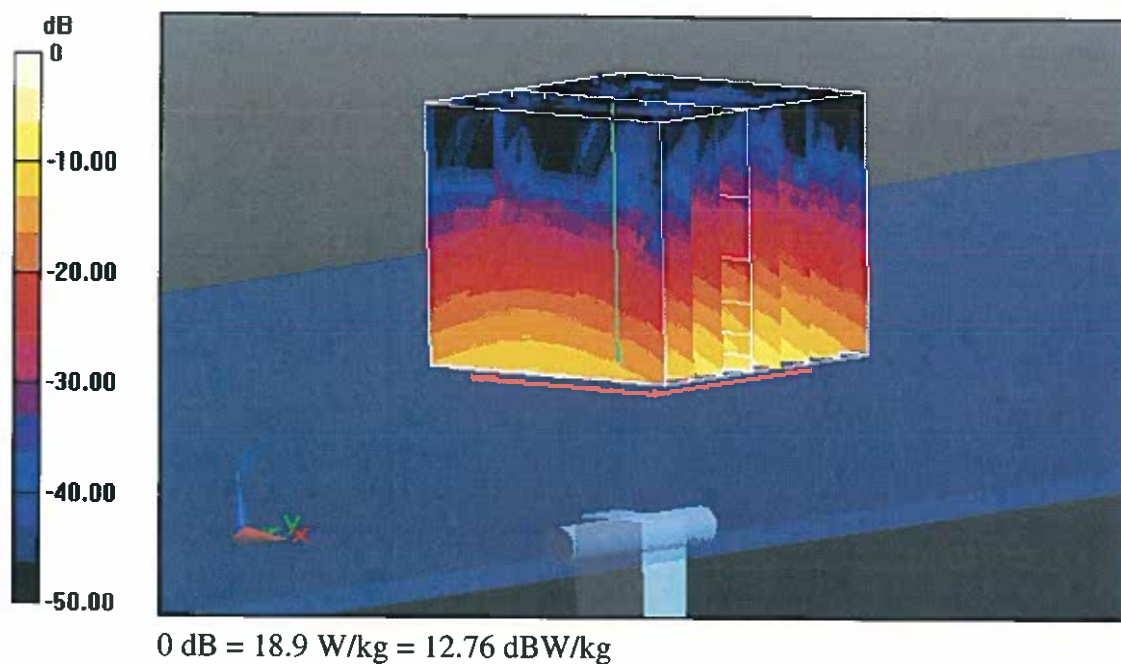

Impedance Measurement Plot for Body TSL

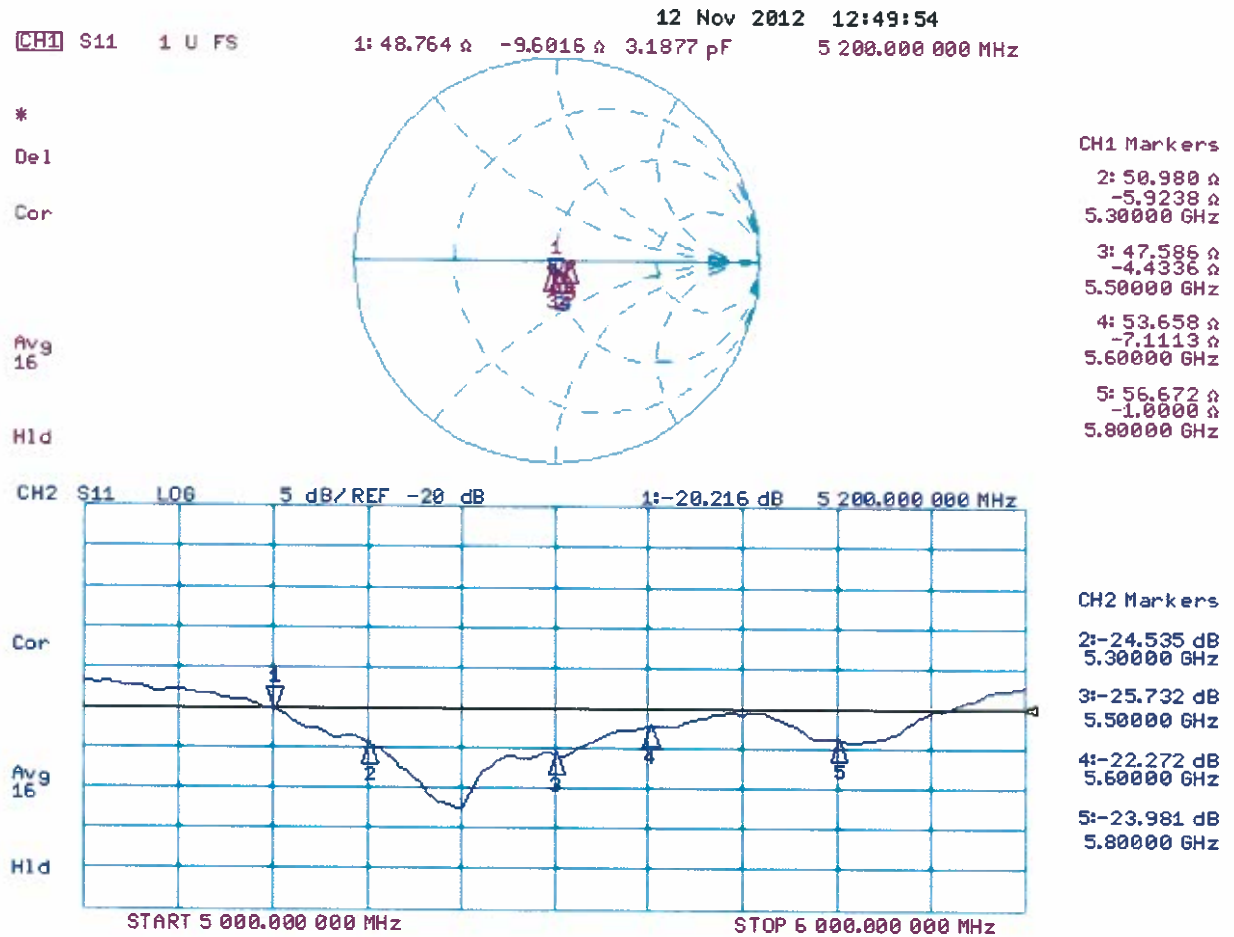



**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **Nokia SD**

Certificate No: **D5GHzV2-1123_May12**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1123**

Calibration procedure(s) **QA CAL-22.v1
Calibration procedure for dipole validation kits between 3-6 GHz**

Calibration date: **May 04, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.2 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe EX3DV4	SN: 3503	30-Dec-11 (No. EX3-3503_Dec11)	Dec-12
DAE4	SN: 601	04-Jul-11 (No. DAE4-601_Jul11)	Jul-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by:	Name Israe El-Naouq	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: May 7, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- b) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz $\pm$ 1 MHz 5500 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	35.7 $\pm$ 6 %	4.59 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.07 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	80.5 mW / g $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.31 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	23.0 mW / g $\pm$ 19.5 % (k=2)

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	35.2 $\pm$ 6 %	4.89 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.59 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	85.6 mW / g $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.45 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	24.4 mW / g $\pm$ 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.8 ± 6 %	5.19 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.04 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	80.1 mW / g ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.29 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	22.8 mW / g ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.7 ± 6 %	5.44 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.32 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	73.2 mW / g ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.05 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	20.5 mW / g ± 19.5 % (k=2)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.1 ± 6 %	5.83 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.93 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	79.2 mW / g ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.20 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	22.0 mW / g ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.6 ± 6 %	6.25 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.25 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	72.4 mW / g ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.01 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	20.1 mW / g ± 19.5 % (k=2)

Appendix

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	51.5 Ω - 7.5 j Ω
Return Loss	- 22.5 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	52.9 Ω - 1.6 j Ω
Return Loss	- 29.8 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	57.0 Ω - 1.4 j Ω
Return Loss	- 23.6 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	51.9 Ω - 6.2 j Ω
Return Loss	- 24.0 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	54.8 Ω - 0.3 j Ω
Return Loss	- 26.7 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	57.7 Ω + 1.0 j Ω
Return Loss	- 22.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 08, 2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1123

Communication System: CW; Frequency: 5200 MHz, Frequency: 5500 MHz, Frequency: 5800 MHz
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.59$ mho/m; $\epsilon_r = 35.7$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 4.89$ mho/m; $\epsilon_r = 35.2$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.19$ mho/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41), ConvF(4.91, 4.91, 4.91), ConvF(4.81, 4.81, 4.81); Calibrated: 30.12.2011
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.566 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 30.0150 mW/g

SAR(1 g) = 8.07 mW/g; SAR(10 g) = 2.31 mW/g

Maximum value of SAR (measured) = 18.509 mW/g

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.375 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 33.9990 mW/g

SAR(1 g) = 8.59 mW/g; SAR(10 g) = 2.45 mW/g

Maximum value of SAR (measured) = 20.086 mW/g


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 61.857 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 33.4580 mW/g


SAR(1 g) = 8.04 mW/g; SAR(10 g) = 2.29 mW/g

Maximum value of SAR (measured) = 19.185 mW/g

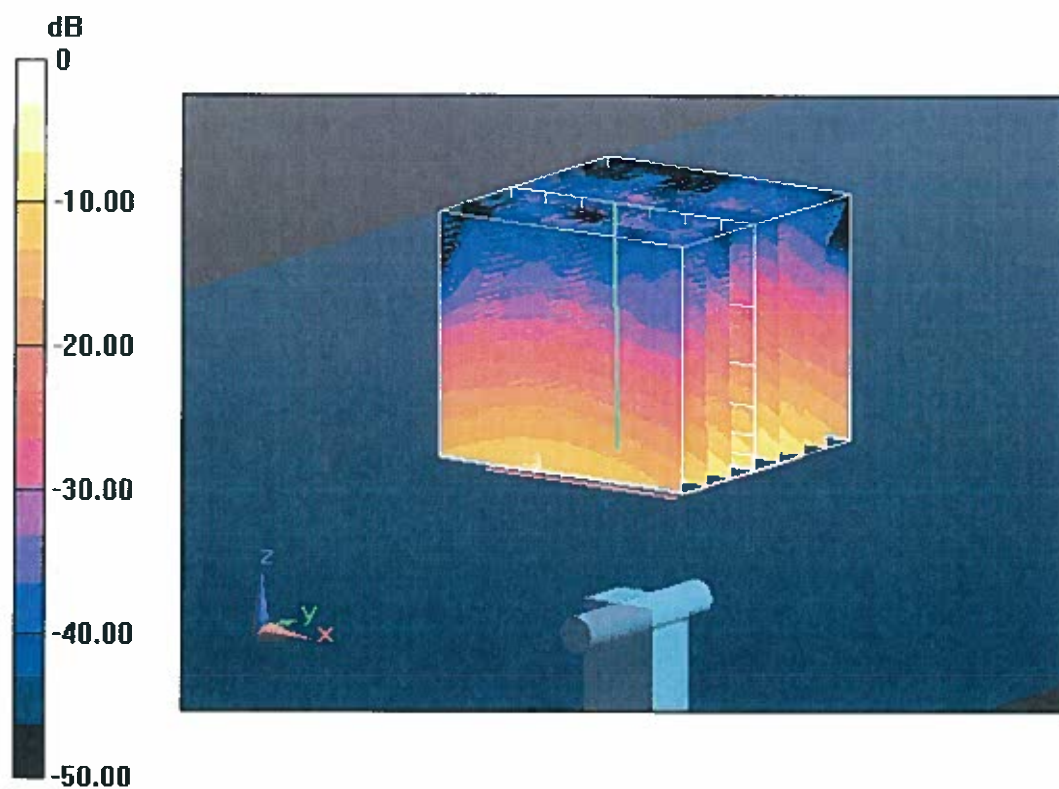

0 dB = 19.180mW/g = 25.66 dB mW/g

Impedance Measurement Plot for Head TSL

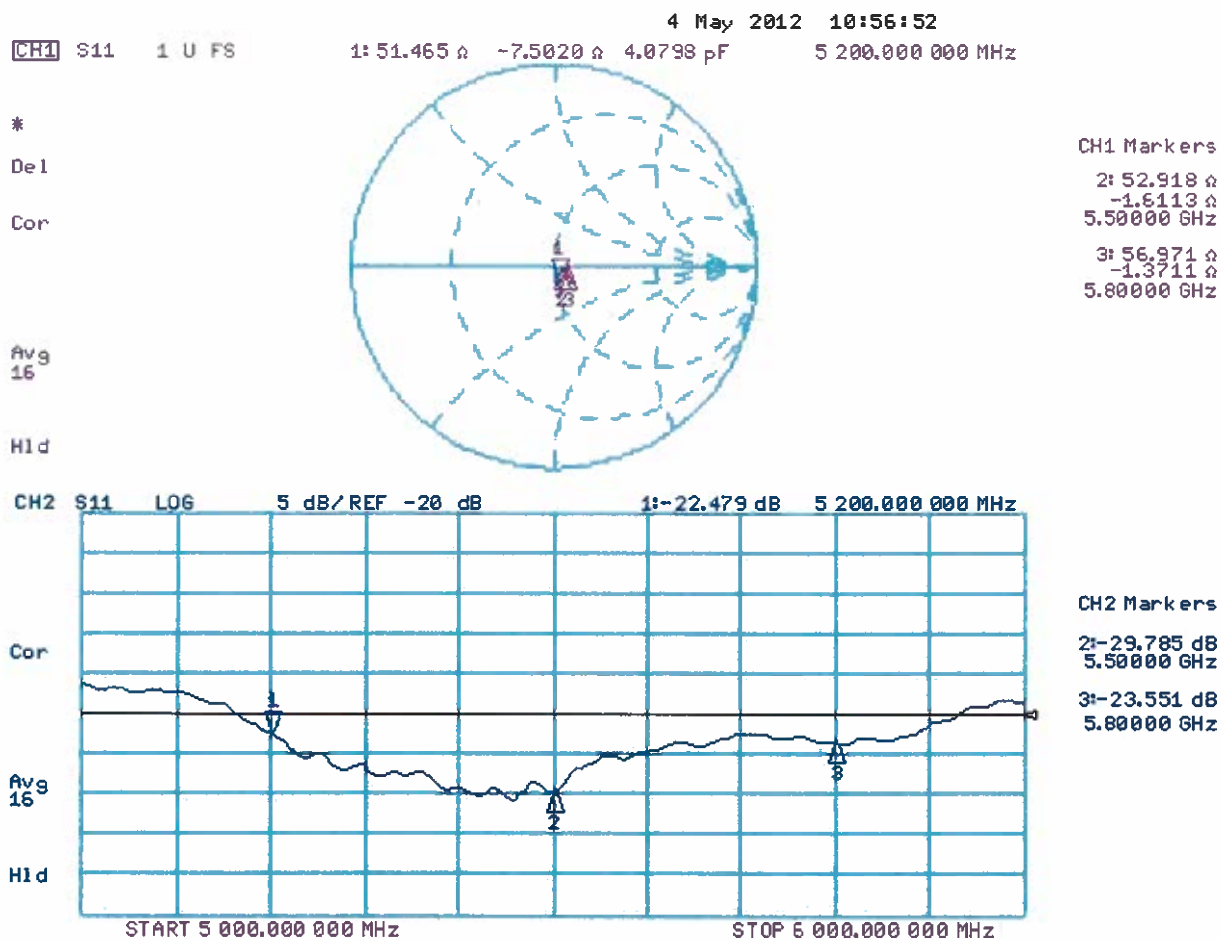

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1123

Communication System: CW; Frequency: 5200 MHz, Frequency: 5500 MHz, Frequency: 5800 MHz
Medium parameters used: $f = 5200$ MHz; $\sigma = 5.44$ mho/m; $\epsilon_r = 48.7$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 5.83$ mho/m; $\epsilon_r = 48.1$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 6.25$ mho/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91); Calibrated: 30.12.2011, ConvF(4.43, 4.43, 4.43); Calibrated: 30.12.2011, ConvF(4.38, 4.38, 4.38); Calibrated: 30.12.2011;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 57.889 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 28.896 mW/g

SAR(1 g) = 7.32 mW/g; SAR(10 g) = 2.05 mW/g

Maximum value of SAR (measured) = 17.2 mW/g

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.366 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 34.150 mW/g

SAR(1 g) = 7.93 mW/g; SAR(10 g) = 2.2 mW/g

Maximum value of SAR (measured) = 19.2 mW/g


Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 54.272 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 33.782 mW/g


SAR(1 g) = 7.25 mW/g; SAR(10 g) = 2.01 mW/g

Maximum value of SAR (measured) = 18.0 mW/g

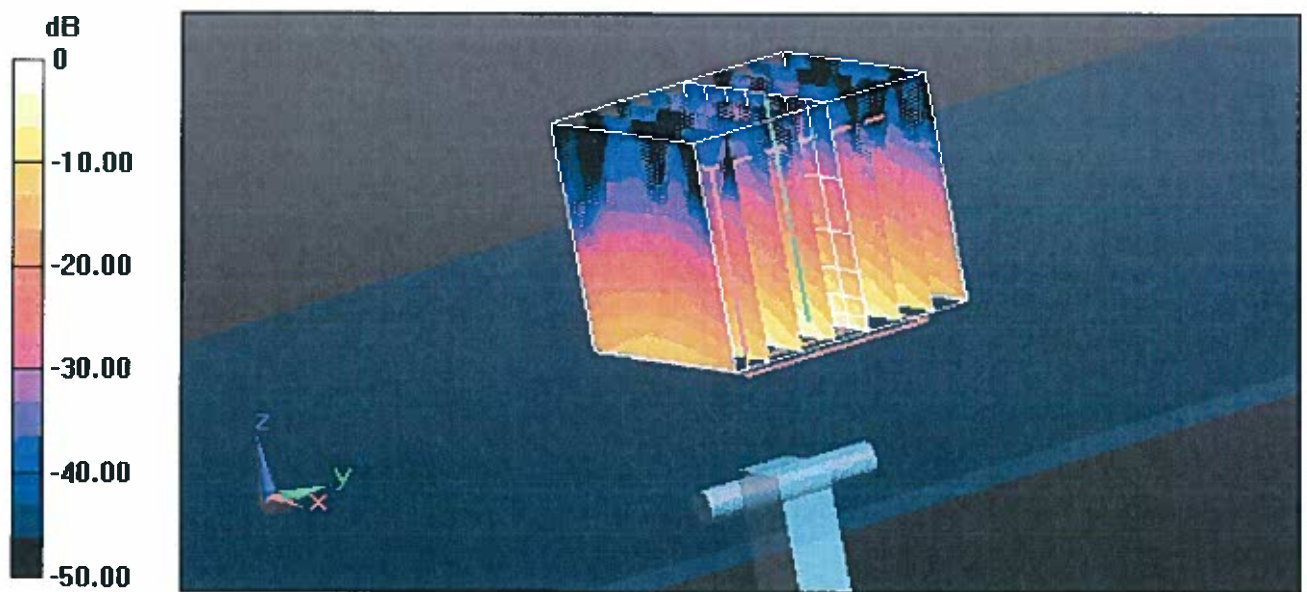

0 dB = 18.410mW/g = 25.30 dB mW/g

Impedance Measurement Plot for Body TSL

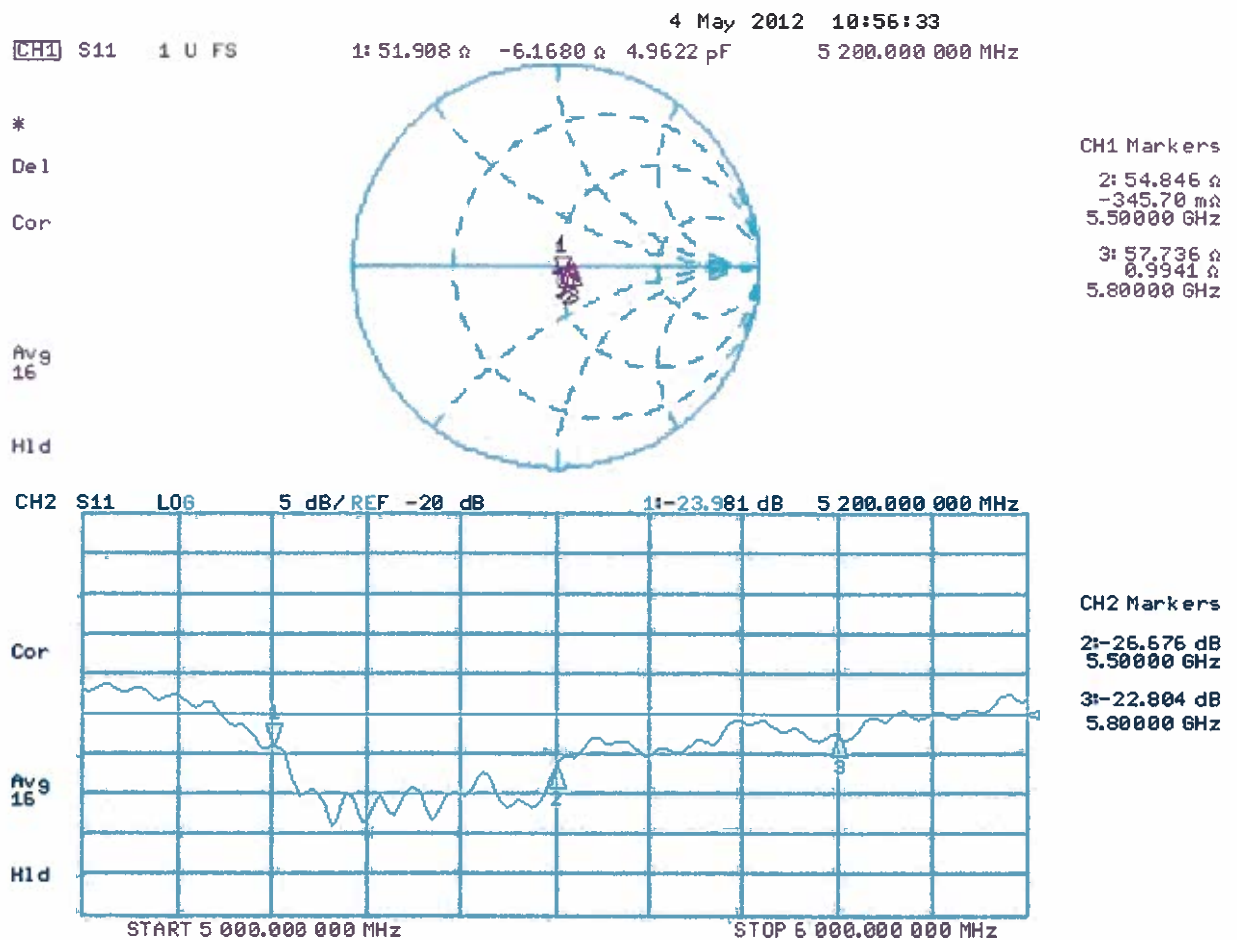

Dipole D5GHzV2 – SN: 1123 Antenna Parameters measured: 2013-10-04.

Antenna Parameters with Body TSL at 5200 MHz

	Calibration certificate	1-year measurement
Impedance, transformed to feed point	51.9 Ω - 6.2 j Ω	49.5 Ω - 5.8 j Ω
Return loss	-24.0 dB	-24.7 dB


Antenna Parameters with Body TSL at 5500 MHz

	Calibration certificate	1-year measurement
Impedance, transformed to feed point	54.8 Ω - 0.3 j Ω	53.3 Ω - 4.3 j Ω
Return loss	-26.7 dB	-25.7 dB

Antenna Parameters with Body TSL at 5800 MHz

	Calibration certificate	1-year measurement
Impedance, transformed to feed point	57.7 Ω + 1.0 j Ω	56.2 Ω - 4.1 j Ω
Return loss	-22.8 dB	-23.2 dB

Body TSL

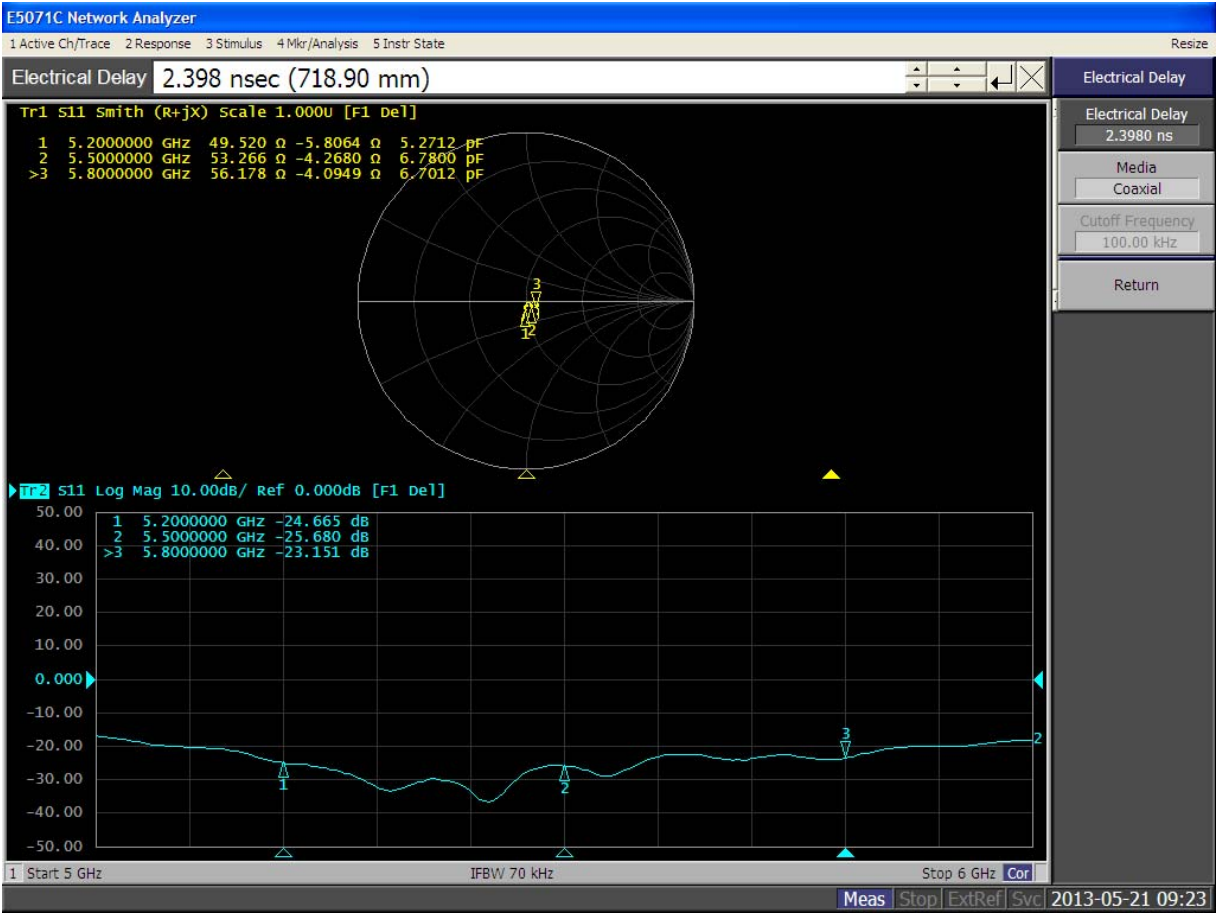

APPENDIX G: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED GSM/GPRS/EGPRS TRANSMISSION MODES

G.1 Power Tuning Targets

FULL POWER

GSM/GPRS/EGPRS 850 Body			
Slot configuration	CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz
GPRS 1-slot	32.5	32.5	32.5
GPRS 2-slot	30.0	30.0	30.0
GPRS 3-slot	28.2	28.2	28.2
GPRS 4-slot	27.0	27.0	27.0
EGRPS 1-slot	27.0	27.0	27.0
EGPRS 2-slot	27.0	27.0	27.0
EGPRS 3-slot	27.0	27.0	27.0
EGPRS 4-slot	26.5	26.5	26.5

GSM/GPRS/EGPRS 1900 Body			
Slot configuration	CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz
GPRS 1-slot	30.0	30.0	30.0
GPRS 2-slot	27.0	27.0	27.0
GPRS 3-slot	25.2	25.2	25.2
GPRS 4-slot	24.0	24.0	24.0
EGRPS 1-slot	25.5	25.5	25.5
EGPRS 2-slot	24.5	24.5	24.5
EGPRS 3-slot	24.5	24.5	24.5
EGPRS 4-slot	23.2	23.2	23.2

REDUCED POWER

GSM/GPRS/EGPRS 850 Body			
Slot configuration	CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz
GPRS 1-slot	29.5	29.5	29.5
GPRS 2-slot	27.5	27.5	27.5
GPRS 3-slot	25.2	25.2	25.2
GPRS 4-slot	23.0	23.0	23.0
EGRPS 1-slot	27.0	27.0	27.0
EGPRS 2-slot	27.0	27.0	27.0
EGPRS 3-slot	25.0	25.0	25.0
EGPRS 4-slot	23.0	23.0	23.0

GSM/GPRS/EGPRS 1900 Body			
Slot configuration	CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz
GPRS 1-slot	26.0	26.0	26.0
GPRS 2-slot	22.0	22.0	22.0
GPRS 3-slot	21.2	21.2	21.2
GPRS 4-slot	20.5	20.5	20.5
EGRPS 1-slot	25.5	25.5	25.5
EGPRS 2-slot	22.0	22.0	22.0
EGPRS 3-slot	21.0	21.0	21.0
EGPRS 4-slot	20.2	20.2	20.2

G.2 Conducted Power from the Samples used in the Testing

Type: RX-113; Serial number: 004402/47/357507/8 used for

- GSM/GPRS/EGPRS850 FULL POWER Body SAR measurements

GSM/GPRS/EGPRS 850 Body			
Slot configuration	CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz
GPRS 1-slot	32.84	32.52	32.77
GPRS 2-slot	30.28	30.14	30.10
GPRS 3-slot	28.42	28.31	28.54
GPRS 4-slot	27.10	27.28	27.17
EGPRS 1-slot	27.01	27.00	27.05
EGPRS 2-slot	27.22	27.19	27.14
EGPRS 3-slot	27.15	27.08	27.00
EGPRS 4-slot	26.77	26.67	26.61

Type: RX-113; Serial number: 004402/47/357511/0 used for

- GSM/GPRS/EGPRS850 REDUCED POWER Body SAR measurements

GSM/GPRS/EGPRS 850 Body			
Slot configuration	CH 128 824.2 MHz	CH 190 836.6 MHz	CH 251 848.8 MHz
GPRS 1-slot	29.00	29.00	29.00
GPRS 2-slot	27.40	27.30	27.60
GPRS 3-slot	25.20	25.50	25.40
GPRS 4-slot	23.10	23.10	23.00
EGPRS 1-slot	27.30	27.30	27.30
EGPRS 2-slot	27.20	27.22	27.20
EGPRS 3-slot	24.80	25.00	24.90
EGPRS 4-slot	22.70	22.80	23.00

Type: RX-113; Serial number: 004402/47/357512/8 used for

- GSM/GPRS/EGPRS1900 FULL POWER Body SAR measurements

GSM/GPRS/EGPRS 1900 Body			
Slot configuration	CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz
GPRS 1-slot	30.22	30.32	30.24
GPRS 2-slot	27.32	27.29	27.26
GPRS 3-slot	25.43	25.42	25.50
GPRS 4-slot	24.18	24.22	24.28
EGPRS 1-slot	25.81	25.75	25.75
EGPRS 2-slot	24.73	24.68	24.65
EGPRS 3-slot	24.85	24.82	24.78
EGPRS 4-slot	23.55	23.47	23.45

Type: RX-113; Serial number: 004402/47/357591/2 used for

- GSM/GPRS/EGPRS1900 REDUCED POWER Body SAR measurements

GSM/GPRS/EGPRS 1900 Body			
Slot configuration	CH 512 1850.2 MHz	CH 661 1880.0 MHz	CH 810 1909.8 MHz
GPRS 1-slot	26.00	26.20	26.10
GPRS 2-slot	22.30	22.30	22.20
GPRS 3-slot	21.20	21.20	21.20
GPRS 4-slot	20.30	20.30	20.20
EGPRS 1-slot	25.70	25.70	25.60
EGPRS 2-slot	22.10	22.10	22.10
EGPRS 3-slot	21.10	21.10	21.00
EGPRS 4-slot	20.10	20.10	20.10

APPENDIX H: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED WCDMA TRANSMISSION MODES

H.1 Power Tuning Targets

FULL POWER

WCDMA 850 (Band 5) Body			
Mode	CH 4132 826.4 MHz	CH 4175 835.0 MHz	CH 4233 846.6 MHz
WCDMA	23.5	23.5	23.5

WCDMA1900 (Band 2) Body			
Mode	CH 9262 1852.4 MHz	CH 9400 1880.0 MHz	CH 9538 1907.6 MHz
WCDMA	23.5	23.5	23.5

REDUCED POWER

WCDMA 850 (Band 5) Body			
Mode	CH 4132 826.4 MHz	CH 4175 835.0 MHz	CH 4233 846.6 MHz
WCDMA	21.0	21.0	21.0

WCDMA1900 (Band 2) Body			
Mode	CH 9262 1852.4 MHz	CH 9400 1880.0 MHz	CH 9538 1907.6 MHz
WCDMA	17.5	17.5	17.5

H.2 Conducted Power from the Samples used in the Testing

Type: RX-113; Serial number: 004402/47/357507/8

- Used for WCDMA850 (Band 5) FULL POWER Body SAR measurements.

WCDMA 850 (Band 5) Body			
Mode	CH 4132 826.4 MHz	CH 4175 835.0 MHz	CH 4233 846.6 MHz
WCDMA	23.76	23.66	23.60

Type: RX-113; Serial number: 004402/47/357511/0

- Used for WCDMA850 (Band 5) REDUCED POWER Body SAR measurements.

WCDMA 850 (Band 5) Body			
Mode	CH 4132 826.4 MHz	CH 4175 835.0 MHz	CH 4233 846.6 MHz
WCDMA	21.24	21.21	21.28

Type: RX-113; Serial number: 004402/47/357512/8

- Used for WCDMA1900 (Band 2) FULL POWER Body SAR measurements.

WCDMA1900 (Band 2) Body			
Mode	CH 9262 1852.4 MHz	CH 9400 1880.0 MHz	CH 9538 1907.6 MHz
WCDMA	23.57	23.57	23.62

Type: RX-113; Serial number: 004402/47/357591/2

- Used for WCDMA1900 (Band 2) REDUCED POWER Body SAR measurements.

WCDMA1900 (Band 2) Body			
Mode	CH 9262 1852.4 MHz	CH 9400 1880.0 MHz	CH 9538 1907.6 MHz
WCDMA	17.57	17.61	17.83

WCDMA and HSUPA Subtest mode conducted powers, measured from a separate, fully representative sample are presented in Appendix D.

APPENDIX I: CONDUCTED POWER RESULTS FOR WLAN2450 AND WLAN5000

I.1 Power Tuning Targets Body Measurements - WLAN2450 – Main Antenna

WLAN 2.4 GHz Tuning Targets – 20 MHz channel bandwidth					
Mode	CH 1	-	CH 6	-	CH 11
b-mode WLAN DSSS 1 Mbps	13.5	-	13.5	-	13.5
b-mode WLAN DSSS 2 Mbps	13.5	-	13.5	-	13.5
b-mode WLAN DSSS 5.5 Mbps	13.5	-	13.5	-	13.5
b-mode WLAN DSSS 11 Mbps	13.5	-	13.5	-	13.5
g-mode WLAN OFDM 6 Mbps	10.0	-	11.5	-	10.0
g-mode WLAN OFDM 9 Mbps	10.0	-	11.5	-	10.0
g-mode WLAN OFDM 12 Mbps	10.0	-	11.5	-	10.0
g-mode WLAN OFDM 18 Mbps	10.0	-	11.5	-	10.0
g-mode WLAN OFDM 24 Mbps	10.0	-	11.5	-	10.0
g-mode WLAN OFDM 36 Mbps	10.0	-	11.5	-	10.0
g-mode WLAN OFDM 48 Mbps	10.0	-	11.5	-	10.0
g-mode WLAN OFDM 54 Mbps	10.0	-	11.5	-	10.0
n-mode MCS 0: OFDM 6.5 / 7.25 Mbps	8.5	-	10.0	-	8.5
n-mode MCS 1: OFDM 13.0 / 14.4 Mbps	6.5	-	8.0	-	6.5
n-mode MCS 2: OFDM 19.5 / 21.7 Mbps	6.5	-	8.0	-	6.5
n-mode MCS 3: OFDM 26.0 / 28.9 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 4: OFDM 39.0 / 43.3 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 5: OFDM 52.0 / 57.8 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 6: OFDM 58.5 / 65.0 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 7: OFDM 65.0 / 72.2 Mbps	5.5	-	7.0	-	5.5
n-mode MCS 8: OFDM 13.0 / 14.5 Mbps	8.5	-	10.0	-	8.5
n-mode MCS 9: OFDM 26.0 / 28.8 Mbps	6.5	-	8.0	-	6.5
n-mode MCS 10: OFDM 39.0 / 43.3 Mbps	6.5	-	8.0	-	6.5
n-mode MCS 11: OFDM 52.0 / 57.7 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 12: OFDM 78.0 / 86.6 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 13: OFDM 104.0 / 115.5 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 14: OFDM 117.0 / 130.0 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 15: OFDM 130.0 / 144.4 Mbps	5.5	-	7.0	-	5.5

(Tables continues)

(Tables continues)

WLAN 2.4 GHz Tuning Targets – 40 MHz channel bandwidth					
Mode	CH 3 (1...5)	CH 4 (2...6)	CH 6 (4...8)	CH 8 (6...10)	CH 9 (7...11)
n-mode MCS 0: OFDM 13.5 / 15.0 Mbps	9.0	-	9.0	-	9.0
n-mode MCS 1: OFDM 27.0 / 30.0 Mbps	7.0	-	7.0	-	7.0
n-mode MCS 2: OFDM 40.5 / 45.0 Mbps	7.0	-	7.0	-	7.0
n-mode MCS 3: OFDM 54.0 / 60.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 4: OFDM 81.0 / 90.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 5: OFDM 108.0 / 120.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 6: OFDM 121.5 / 135.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 7: OFDM 135.0 / 150.0 Mbps	4.0	-	4.0	-	4.0
n-mode MCS 8: OFDM 27.0 / 30.0 Mbps	9.0	-	9.0	-	9.0
n-mode MCS 9: OFDM 54.0 / 60.0 Mbps	7.0	-	7.0	-	7.0
n-mode MCS 10: OFDM 81.0 / 90.0 Mbps	7.0	-	7.0	-	7.0
n-mode MCS 11: OFDM 108.0 / 120.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 12: OFDM 162.0 / 180.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 13: OFDM 216.0 / 240.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 14: OFDM 243.0 / 270.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 15: OFDM 270.0 / 300.0 Mbps	4.0	-	4.0	-	4.0

I.2 Power Tuning Targets Body Measurements - WLAN2450 - AUX Antenna

WLAN 2.4 GHz Tuning Targets – 20 MHz channel bandwidth					
Mode	CH 1	CH 2	CH 6	CH 10	CH 11
b-mode WLAN DSSS 1 Mbps	13.0	-	13.0	-	13.0
b-mode WLAN DSSS 2 Mbps	13.0	-	13.0	-	13.0
b-mode WLAN DSSS 5.5 Mbps	13.0	-	13.0	-	13.0
b-mode WLAN DSSS 11 Mbps	13.0	-	13.0	-	13.0
g-mode WLAN OFDM 6 Mbps	10.0	-	11.5	-	10.0
g-mode WLAN OFDM 9 Mbps	10.0	-	11.5	-	10.0
g-mode WLAN OFDM 12 Mbps	10.0	-	11.5	-	10.0
g-mode WLAN OFDM 18 Mbps	10.0	-	11.5	-	10.0
g-mode WLAN OFDM 24 Mbps	10.0	-	11.5	-	10.0
g-mode WLAN OFDM 36 Mbps	10.0	-	11.5	-	10.0
g-mode WLAN OFDM 48 Mbps	10.0	-	11.5	-	10.0
g-mode WLAN OFDM 54 Mbps	10.0	-	11.5	-	10.0
n-mode MCS 0: OFDM 6.5 / 7.25 Mbps	9.0	-	10.0	-	8.5
n-mode MCS 1: OFDM 13.0 / 14.4 Mbps	7.5	-	8.0	-	6.5
n-mode MCS 2: OFDM 19.5 / 21.7 Mbps	7.5	-	8.0	-	6.5
n-mode MCS 3: OFDM 26.0 / 28.9 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 4: OFDM 39.0 / 43.3 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 5: OFDM 52.0 / 57.8 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 6: OFDM 58.5 / 65.0 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 7: OFDM 65.0 / 72.2 Mbps	6.0	-	7.0	-	5.5
n-mode MCS 8: OFDM 13.0 / 14.5 Mbps	9.0	-	10.0	-	8.5
n-mode MCS 9: OFDM 26.0 / 28.8 Mbps	7.5	-	8.0	-	6.5
n-mode MCS 10: OFDM 39.0 / 43.3 Mbps	7.5	-	8.0	-	6.5
n-mode MCS 11: OFDM 52.0 / 57.7 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 12: OFDM 78.0 / 86.6 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 13: OFDM 104.0 / 115.5 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 14: OFDM 117.0 / 130.0 Mbps	8.0	-	9.5	-	8.0
n-mode MCS 15: OFDM 130.0 / 144.4 Mbps	6.0	-	7.0	-	5.5

(Tables continues)

(Tables continues)

WLAN 2.4 GHz Tuning Targets – 40 MHz channel bandwidth					
Mode	CH 3 (1...5)	CH 4 (2...6)	CH 6 (4...8)	CH 8 (6...10)	CH 9 (7...11)
n-mode MCS 0: OFDM 13.5 / 15.0 Mbps	9.0	-	9.0	-	9.0
n-mode MCS 1: OFDM 27.0 / 30.0 Mbps	7.0	-	7.0	-	7.0
n-mode MCS 2: OFDM 40.5 / 45.0 Mbps	7.0	-	7.0	-	7.0
n-mode MCS 3: OFDM 54.0 / 60.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 4: OFDM 81.0 / 90.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 5: OFDM 108.0 / 120.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 6: OFDM 121.5 / 135.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 7: OFDM 135.0 / 150.0 Mbps	4.0	-	4.0	-	4.0
n-mode MCS 8: OFDM 27.0 / 30.0 Mbps	9.0	-	9.0	-	9.0
n-mode MCS 9: OFDM 54.0 / 60.0 Mbps	7.0	-	7.0	-	7.0
n-mode MCS 10: OFDM 81.0 / 90.0 Mbps	7.0	-	7.0	-	7.0
n-mode MCS 11: OFDM 108.0 / 120.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 12: OFDM 162.0 / 180.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 13: OFDM 216.0 / 240.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 14: OFDM 243.0 / 270.0 Mbps	6.5	-	6.5	-	6.5
n-mode MCS 15: OFDM 270.0 / 300.0 Mbps	4.0	-	4.0	-	4.0

I.3 Power Tuning Targets Body Measurements - WLAN5000 - Main Antenna

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 20 MHz Tuning Targets					
			36	40	44	48	52	56
802.11a	BPSK	6	7.5	7.5	7.5	7.5	7.5	7.5
802.11a	BPSK	9	6.5	6.5	6.5	6.5	7.0	7.0
802.11a	QPSK	12	6.5	6.5	6.5	6.5	7.0	7.0
802.11a	QPSK	18	6.5	6.5	6.5	6.5	7.0	7.0
802.11a	16QAM	24	6.5	6.5	6.5	6.5	7.0	7.0
802.11a	16QAM	36	6.5	6.5	6.5	6.5	7.0	7.0
802.11a	64QAM	48	6.0	6.0	6.0	6.0	6.5	6.5
802.11a	64QAM	54	6.0	6.0	6.0	6.0	6.5	6.5
802.11n	BPSK	6.5 / 7.25	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	QPSK	13.0 / 14.4	6.5	6.5	6.5	6.5	7.0	7.0
802.11n	QPSK	19.5 / 21.7	6.5	6.5	6.5	6.5	7.0	7.0
802.11n	16QAM	26.0 / 28.9	6.5	6.5	6.5	6.5	7.0	7.0
802.11n	16QAM	39.0 / 43.3	6.5	6.5	6.5	6.5	7.0	7.0
802.11n	64QAM	52.0 / 57.8	6.5	6.5	6.5	6.5	7.0	7.0
802.11n	64QAM	58.5 / 65.0	6.0	6.0	6.0	6.0	6.5	6.5
802.11n	64QAM	65.0 / 72.2	6.0	6.0	6.0	6.0	6.5	6.5
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	QPSK	26.0 / 28.9	6.5	6.5	6.5	6.5	7.0	7.0
802.11n	QPSK	39.0 / 43.3	6.5	6.5	6.5	6.5	7.0	7.0
802.11n	16QAM	52.0 / 57.8	6.5	6.5	6.5	6.5	7.0	7.0
802.11n	16QAM	78.0 / 86.7	6.5	6.5	6.5	6.5	7.0	7.0
802.11n	64QAM	104.0 / 115.6	6.5	6.5	6.5	6.5	7.0	7.0
802.11n	64QAM	117.0 / 130.0	6.0	6.0	6.0	6.0	6.5	6.5
802.11n	64QAM	130.0 / 144.4	6.0	6.0	6.0	6.0	6.5	6.5

Standard	Modulation	Data speed [MBPS]	RLAN 5 GHz / 40 MHz Tuning Targets						
			38 (36+40)	42 (40+44)	46 (44+48)	50 (48+52)	54 (52+56)	58 (56+60)	62 (60+64)
802.11n	BPSK	13.5 / 15.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0
802.11n	QPSK	27.0 / 30.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
802.11n	QPSK	40.5 / 45.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
802.11n	16QAM	54.0 / 60.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
802.11n	16QAM	81.0 / 90.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
802.11n	64QAM	108.0 / 120.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
802.11n	64QAM	121.5 / 135.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
802.11n	64QAM	135.0 / 150.0	2.5	2.5	2.5	2.5	2.5	2.5	2.5
802.11ac	256QAM	162.0 / 180.0	-	-	-	-	-	-	-
802.11ac	256QAM	180.0 / 200.0	-	-	-	-	-	-	-
802.11n	BPSK	27.0 / 30.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0
802.11n	QPSK	54.0 / 60.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
802.11n	QPSK	81.0 / 90.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
802.11n	16QAM	108.0 / 120.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
802.11n	16QAM	162.0 / 180.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
802.11n	64QAM	216.0 / 240.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
802.11n	64QAM	243.0 / 270.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
802.11n	64QAM	270.0 / 300.0	2.5	2.5	2.5	2.5	2.5	2.5	2.5

(Tables continues)

(Tables continues)

Standard	Modulation	Data speed [MBPS]	RLAN 5 GHz / 20 MHz Tuning Targets					
			60	64	100	104	108	112
802.11a	BPSK	6	7.5	7.5	7.5	7.5	7.5	7.5
802.11a	BPSK	9	7.0	7.0	6.5	6.5	6.5	6.5
802.11a	QPSK	12	7.0	7.0	6.5	6.5	6.5	6.5
802.11a	QPSK	18	7.0	7.0	6.5	6.5	6.5	6.5
802.11a	16QAM	24	7.0	7.0	6.5	6.5	6.5	6.5
802.11a	16QAM	36	7.0	7.0	6.5	6.5	6.5	6.5
802.11a	64QAM	48	6.5	6.5	6.0	6.0	6.0	6.0
802.11a	64QAM	54	6.5	6.5	6.0	6.0	6.0	6.0
802.11n	BPSK	6.5 / 7.25	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	QPSK	13.0 / 14.4	7.0	7.0	6.5	6.5	6.5	6.5
802.11n	QPSK	19.5 / 21.7	7.0	7.0	6.5	6.5	6.5	6.5
802.11n	16QAM	26.0 / 28.9	7.0	7.0	6.5	6.5	6.5	6.5
802.11n	16QAM	39.0 / 43.3	7.0	7.0	6.5	6.5	6.5	6.5
802.11n	64QAM	52.0 / 57.8	7.0	7.0	6.5	6.5	6.5	6.5
802.11n	64QAM	58.5 / 65.0	6.5	6.5	6.0	6.0	6.0	6.0
802.11n	64QAM	65.0 / 72.2	6.5	6.5	6.0	6.0	6.0	6.0
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	QPSK	26.0 / 28.9	7.0	7.0	6.5	6.5	6.5	6.5
802.11n	QPSK	39.0 / 43.3	7.0	7.0	6.5	6.5	6.5	6.5
802.11n	16QAM	52.0 / 57.8	7.0	7.0	6.5	6.5	6.5	6.5
802.11n	16QAM	78.0 / 86.7	7.0	7.0	6.5	6.5	6.5	6.5
802.11n	64QAM	104.0 / 115.6	7.0	7.0	6.5	6.5	6.5	6.5
802.11n	64QAM	117.0 / 130.0	6.5	6.5	6.0	6.0	6.0	6.0
802.11n	64QAM	130.0 / 144.4	6.5	6.5	6.0	6.0	6.0	6.0

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 40 MHz Tuning Targets					
			102 (100+104)	106 (104+108)	110 (108+112)	114 (112+116)	118 (116+120)	122 (120+124)
802.11n	BPSK	13.5 / 15.0	7.0	7.0	7.0	7.0	7.0	6.5
802.11n	QPSK	27.0 / 30.0	5.0	5.0	5.0	5.0	5.0	4.5
802.11n	QPSK	40.5 / 45.0	5.0	5.0	5.0	5.0	5.0	4.5
802.11n	16QAM	54.0 / 60.0	4.0	4.0	4.0	4.0	4.0	3.5
802.11n	16QAM	81.0 / 90.0	4.0	4.0	4.0	4.0	4.0	3.5
802.11n	64QAM	108.0 / 120.0	4.0	4.0	4.0	4.0	4.0	3.5
802.11n	64QAM	121.5 / 135.0	2.0	2.0	2.0	2.0	2.0	1.5
802.11n	64QAM	135.0 / 150.0	1.5	1.5	1.5	1.5	1.5	1.0
802.11ac	256QAM	162.0 / 180.0	-	-	-	-	-	-
802.11ac	256QAM	180.0 / 200.0	-	-	-	-	-	-
802.11n	BPSK	27.0 / 30.0	7.0	7.0	7.0	7.0	7.0	6.5
802.11n	QPSK	54.0 / 60.0	5.0	5.0	5.0	5.0	5.0	4.5
802.11n	QPSK	81.0 / 90.0	5.0	5.0	5.0	5.0	5.0	4.5
802.11n	16QAM	108.0 / 120.0	4.0	4.0	4.0	4.0	4.0	3.5
802.11n	16QAM	162.0 / 180.0	4.0	4.0	4.0	4.0	4.0	3.5
802.11n	64QAM	216.0 / 240.0	4.0	4.0	4.0	4.0	4.0	3.5
802.11n	64QAM	243.0 / 270.0	2.0	2.0	2.0	2.0	2.0	1.5
802.11n	64QAM	270.0 / 300.0	1.5	1.5	1.5	1.5	1.5	1.0

(Tables continues)

(Tables continues)

Standard	Modulation	Data speed [MBPS]	RLAN 5 GHz / 20 MHz Tuning Targets					
			116	120	124	128	132	136
802.11a	BPSK	6	7.5	6.5	6.5	6.5	6.5	6.5
802.11a	BPSK	9	6.5	6.0	6.0	6.0	6.0	6.0
802.11a	QPSK	12	6.5	6.0	6.0	6.0	6.0	6.0
802.11a	QPSK	18	6.5	6.0	6.0	6.0	6.0	6.0
802.11a	16QAM	24	6.5	6.0	6.0	6.0	6.0	6.0
802.11a	16QAM	36	6.5	6.0	6.0	6.0	6.0	6.0
802.11a	64QAM	48	6.0	5.0	5.0	5.0	5.0	5.0
802.11a	64QAM	54	6.0	5.0	5.0	5.0	5.0	5.0
802.11n	BPSK	6.5 / 7.25	7.5	6.5	6.5	6.5	6.5	6.5
802.11n	QPSK	13.0 / 14.4	6.5	6.0	6.0	6.0	6.0	6.0
802.11n	QPSK	19.5 / 21.7	6.5	6.0	6.0	6.0	6.0	6.0
802.11n	16QAM	26.0 / 28.9	6.5	6.0	6.0	6.0	6.0	6.0
802.11n	16QAM	39.0 / 43.3	6.5	6.0	6.0	6.0	6.0	6.0
802.11n	64QAM	52.0 / 57.8	6.5	6.0	6.0	6.0	6.0	6.0
802.11n	64QAM	58.5 / 65.0	6.0	5.0	5.0	5.0	5.0	5.0
802.11n	64QAM	65.0 / 72.2	6.0	5.0	5.0	5.0	5.0	5.0
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	7.5	6.5	6.5	6.5	6.5	6.5
802.11n	QPSK	26.0 / 28.9	6.5	6.0	6.0	6.0	6.0	6.0
802.11n	QPSK	39.0 / 43.3	6.5	6.0	6.0	6.0	6.0	6.0
802.11n	16QAM	52.0 / 57.8	6.5	6.0	6.0	6.0	6.0	6.0
802.11n	16QAM	78.0 / 86.7	6.5	6.0	6.0	6.0	6.0	6.0
802.11n	64QAM	104.0 / 115.6	6.5	6.0	6.0	6.0	6.0	6.0
802.11n	64QAM	117.0 / 130.0	6.0	5.0	5.0	5.0	5.0	5.0
802.11n	64QAM	130.0 / 144.4	6.0	5.0	5.0	5.0	5.0	5.0

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 40 MHz Tuning Targets			
			126 (124+128)	130 (128+132)	134 (132+136)	138 (136+140)
802.11n	BPSK	13.5 / 15.0	6.5	6.5	7.0	7.0
802.11n	QPSK	27.0 / 30.0	4.5	4.5	5.0	5.0
802.11n	QPSK	40.5 / 45.0	4.5	4.5	5.0	5.0
802.11n	16QAM	54.0 / 60.0	3.5	3.5	4.0	4.0
802.11n	16QAM	81.0 / 90.0	3.5	3.5	4.0	4.0
802.11n	64QAM	108.0 / 120.0	3.5	3.5	4.0	4.0
802.11n	64QAM	121.5 / 135.0	1.5	1.5	2.0	2.0
802.11n	64QAM	135.0 / 150.0	1.0	1.0	1.5	1.5
802.11ac	256QAM	162.0 / 180.0	-	-	-	-
802.11ac	256QAM	180.0 / 200.0	-	-	-	-
802.11n	BPSK	27.0 / 30.0	6.5	6.5	7.0	7.0
802.11n	QPSK	54.0 / 60.0	4.5	4.5	5.0	5.0
802.11n	QPSK	81.0 / 90.0	4.5	4.5	5.0	5.0
802.11n	16QAM	108.0 / 120.0	3.5	3.5	4.0	4.0
802.11n	16QAM	162.0 / 180.0	3.5	3.5	4.0	4.0
802.11n	64QAM	216.0 / 240.0	3.5	3.5	4.0	4.0
802.11n	64QAM	243.0 / 270.0	1.5	1.5	2.0	2.0
802.11n	64QAM	270.0 / 300.0	1.0	1.0	1.5	1.5

(Tables continues)

(Tables continues)

Standard	Modulation	Data speed [MBPS]	RLAN 5 GHz / 20 MHz Tuning Targets					
			140	149	153	157	161	165
802.11a	BPSK	6	6.5	7.5	7.5	7.5	7.5	7.5
802.11a	BPSK	9	6.0	7.0	7.0	7.0	7.0	7.0
802.11a	QPSK	12	6.0	7.0	7.0	7.0	7.0	7.0
802.11a	QPSK	18	6.0	7.0	7.0	7.0	7.0	7.0
802.11a	16QAM	24	6.0	7.0	7.0	7.0	7.0	7.0
802.11a	16QAM	36	6.0	7.0	7.0	7.0	7.0	7.0
802.11a	64QAM	48	5.0	6.0	6.0	6.0	6.0	6.0
802.11a	64QAM	54	5.0	6.0	6.0	6.0	6.0	6.0
802.11n	BPSK	6.5 / 7.25	6.5	7.5	7.5	7.5	7.5	7.5
802.11n	QPSK	13.0 / 14.4	6.0	7.0	7.0	7.0	7.0	7.0
802.11n	QPSK	19.5 / 21.7	6.0	7.0	7.0	7.0	7.0	7.0
802.11n	16QAM	26.0 / 28.9	6.0	7.0	7.0	7.0	7.0	7.0
802.11n	16QAM	39.0 / 43.3	6.0	7.0	7.0	7.0	7.0	7.0
802.11n	64QAM	52.0 / 57.8	6.0	7.0	7.0	7.0	7.0	7.0
802.11n	64QAM	58.5 / 65.0	5.0	6.0	6.0	6.0	6.0	6.0
802.11n	64QAM	65.0 / 72.2	5.0	6.0	6.0	6.0	6.0	6.0
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	6.5	7.5	7.5	7.5	7.5	7.5
802.11n	QPSK	26.0 / 28.9	6.0	7.0	7.0	7.0	7.0	7.0
802.11n	QPSK	39.0 / 43.3	6.0	7.0	7.0	7.0	7.0	7.0
802.11n	16QAM	52.0 / 57.8	6.0	7.0	7.0	7.0	7.0	7.0
802.11n	16QAM	78.0 / 86.7	6.0	7.0	7.0	7.0	7.0	7.0
802.11n	64QAM	104.0 / 115.6	6.0	7.0	7.0	7.0	7.0	7.0
802.11n	64QAM	117.0 / 130.0	5.0	6.0	6.0	6.0	6.0	6.0
802.11n	64QAM	130.0 / 144.4	5.0	6.0	6.0	6.0	6.0	6.0

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 40 MHz Tuning Targets			
			151 (149+153)	155 (153+157)	159 (157+161)	163 (161+165)
802.11n	BPSK	13.5 / 15.0	8.0	8.0	8.0	8.0
802.11n	QPSK	27.0 / 30.0	6.0	6.0	6.0	6.0
802.11n	QPSK	40.5 / 45.0	6.0	6.0	6.0	6.0
802.11n	16QAM	54.0 / 60.0	5.0	5.0	5.0	5.0
802.11n	16QAM	81.0 / 90.0	5.0	5.0	5.0	5.0
802.11n	64QAM	108.0 / 120.0	5.0	5.0	5.0	5.0
802.11n	64QAM	121.5 / 135.0	3.0	3.0	3.0	3.0
802.11n	64QAM	135.0 / 150.0	2.5	2.5	2.5	2.5
802.11ac	256QAM	162.0 / 180.0	-	-	-	-
802.11ac	256QAM	180.0 / 200.0	-	-	-	-
802.11n	BPSK	27.0 / 30.0	8.0	8.0	8.0	8.0
802.11n	QPSK	54.0 / 60.0	6.0	6.0	6.0	6.0
802.11n	QPSK	81.0 / 90.0	6.0	6.0	6.0	6.0
802.11n	16QAM	108.0 / 120.0	5.0	5.0	5.0	5.0
802.11n	16QAM	162.0 / 180.0	5.0	5.0	5.0	5.0
802.11n	64QAM	216.0 / 240.0	5.0	5.0	5.0	5.0
802.11n	64QAM	243.0 / 270.0	3.0	3.0	3.0	3.0
802.11n	64QAM	270.0 / 300.0	2.5	2.5	2.5	2.5

I.4 Power Tuning Targets Body Measurements - WLAN5000 - AUX Antenna

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 20 MHz Tuning Targets					
			36	40	44	48	52	56
802.11a	BPSK	6	9.5	9.5	9.5	9.5	8.5	8.5
802.11a	BPSK	9	8.5	8.5	8.5	8.5	7.5	7.5
802.11a	QPSK	12	8.5	8.5	8.5	8.5	7.5	7.5
802.11a	QPSK	18	8.5	8.5	8.5	8.5	7.5	7.5
802.11a	16QAM	24	8.5	8.5	8.5	8.5	7.5	7.5
802.11a	16QAM	36	8.5	8.5	8.5	8.5	7.5	7.5
802.11a	64QAM	48	8.5	8.5	8.5	8.5	7.5	7.5
802.11a	64QAM	54	8.5	8.5	8.5	8.5	7.5	7.5
802.11n	BPSK	6.5 / 7.25	9.5	9.5	9.5	9.5	8.5	8.5
802.11n	QPSK	13.0 / 14.4	8.5	8.5	8.5	8.5	7.5	7.5
802.11n	QPSK	19.5 / 21.7	8.5	8.5	8.5	8.5	7.5	7.5
802.11n	16QAM	26.0 / 28.9	8.5	8.5	8.5	8.5	7.5	7.5
802.11n	16QAM	39.0 / 43.3	8.5	8.5	8.5	8.5	7.5	7.5
802.11n	64QAM	52.0 / 57.8	8.5	8.5	8.5	8.5	7.5	7.5
802.11n	64QAM	58.5 / 65.0	8.5	8.5	8.5	8.5	7.5	7.5
802.11n	64QAM	65.0 / 72.2	8.5	8.5	8.5	8.5	7.5	7.5
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	9.5	9.5	9.5	9.5	8.5	8.5
802.11n	QPSK	26.0 / 28.9	8.5	8.5	8.5	8.5	7.5	7.5
802.11n	QPSK	39.0 / 43.3	8.5	8.5	8.5	8.5	7.5	7.5
802.11n	16QAM	52.0 / 57.8	8.5	8.5	8.5	8.5	7.5	7.5
802.11n	16QAM	78.0 / 86.7	8.5	8.5	8.5	8.5	7.5	7.5
802.11n	64QAM	104.0 / 115.6	8.5	8.5	8.5	8.5	7.5	7.5
802.11n	64QAM	117.0 / 130.0	8.5	8.5	8.5	8.5	7.5	7.5
802.11n	64QAM	130.0 / 144.4	8.5	8.5	8.5	8.5	7.5	7.5

Standard	Modulation	Data speed [MBPS]	RLAN 5 GHz / 40 MHz Tuning Targets						
			38 (36+40)	42 (40+44)	46 (44+48)	50 (48+52)	54 (52+56)	58 (56+60)	62 (60+64)
802.11n	BPSK	13.5 / 15.0	8.5	8.5	8.5	8.0	8.0	8.0	8.0
802.11n	QPSK	27.0 / 30.0	6.5	6.5	6.5	6.0	6.0	6.0	6.0
802.11n	QPSK	40.5 / 45.0	6.5	6.5	6.5	6.0	6.0	6.0	6.0
802.11n	16QAM	54.0 / 60.0	6.0	6.0	6.0	5.5	5.5	5.5	5.5
802.11n	16QAM	81.0 / 90.0	6.0	6.0	6.0	5.5	5.5	5.5	5.5
802.11n	64QAM	108.0 / 120.0	6.0	6.0	6.0	5.5	5.5	5.5	5.5
802.11n	64QAM	121.5 / 135.0	4.5	4.5	4.5	4.0	4.0	4.0	4.0
802.11n	64QAM	135.0 / 150.0	3.5	3.5	3.5	3.0	3.0	3.0	3.0
802.11ac	256QAM	162.0 / 180.0	-	-	-	-	-	-	-
802.11ac	256QAM	180.0 / 200.0	-	-	-	-	-	-	-
802.11n	BPSK	27.0 / 30.0	8.5	8.5	8.5	8.0	8.0	8.0	8.0
802.11n	QPSK	54.0 / 60.0	6.5	6.5	6.5	6.0	6.0	6.0	6.0
802.11n	QPSK	81.0 / 90.0	6.5	6.5	6.5	6.0	6.0	6.0	6.0
802.11n	16QAM	108.0 / 120.0	6.0	6.0	6.0	5.5	5.5	5.5	5.5
802.11n	16QAM	162.0 / 180.0	6.0	6.0	6.0	5.5	5.5	5.5	5.5
802.11n	64QAM	216.0 / 240.0	6.0	6.0	6.0	5.5	5.5	5.5	5.5
802.11n	64QAM	243.0 / 270.0	4.5	4.5	4.5	4.0	4.0	4.0	4.0
802.11n	64QAM	270.0 / 300.0	3.5	3.5	3.5	3.0	3.0	3.0	3.0

(Tables continues)

(Tables continues)

Standard	Modulation	Data speed [MBPS]	RLAN 5 GHz / 20 MHz Tuning Targets					
			60	64	100	104	108	112
802.11a	BPSK	6	8.5	8.5	8.5	8.5	8.5	8.5
802.11a	BPSK	9	7.5	7.5	7.5	7.5	7.5	7.5
802.11a	QPSK	12	7.5	7.5	7.5	7.5	7.5	7.5
802.11a	QPSK	18	7.5	7.5	7.5	7.5	7.5	7.5
802.11a	16QAM	24	7.5	7.5	7.5	7.5	7.5	7.5
802.11a	16QAM	36	7.5	7.5	7.5	7.5	7.5	7.5
802.11a	64QAM	48	7.5	7.5	7.5	7.5	7.5	7.5
802.11a	64QAM	54	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	BPSK	6.5 / 7.25	8.5	8.5	8.5	8.5	8.5	8.5
802.11n	QPSK	13.0 / 14.4	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	QPSK	19.5 / 21.7	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	16QAM	26.0 / 28.9	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	16QAM	39.0 / 43.3	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	64QAM	52.0 / 57.8	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	64QAM	58.5 / 65.0	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	64QAM	65.0 / 72.2	7.5	7.5	7.5	7.5	7.5	7.5
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	8.5	8.5	8.5	8.5	8.5	8.5
802.11n	QPSK	26.0 / 28.9	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	QPSK	39.0 / 43.3	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	16QAM	52.0 / 57.8	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	16QAM	78.0 / 86.7	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	64QAM	104.0 / 115.6	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	64QAM	117.0 / 130.0	7.5	7.5	7.5	7.5	7.5	7.5
802.11n	64QAM	130.0 / 144.4	7.5	7.5	7.5	7.5	7.5	7.5

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 40 MHz Tuning Targets					
			102 (100+104)	106 (104+108)	110 (108+112)	114 (112+116)	118 (116+120)	122 (120+124)
802.11n	BPSK	13.5 / 15.0	8.0	8.0	8.0	8.0	8.0	9.0
802.11n	QPSK	27.0 / 30.0	6.0	6.0	6.0	6.0	6.0	7.5
802.11n	QPSK	40.5 / 45.0	6.0	6.0	6.0	6.0	6.0	7.5
802.11n	16QAM	54.0 / 60.0	5.5	5.5	5.5	5.5	5.5	6.5
802.11n	16QAM	81.0 / 90.0	5.5	5.5	5.5	5.5	5.5	6.5
802.11n	64QAM	108.0 / 120.0	5.5	5.5	5.5	5.5	5.5	6.5
802.11n	64QAM	121.5 / 135.0	4.0	4.0	4.0	4.0	4.0	4.5
802.11n	64QAM	135.0 / 150.0	3.0	3.0	3.0	3.0	3.0	3.5
802.11ac	256QAM	162.0 / 180.0	-	-	-	-	-	-
802.11ac	256QAM	180.0 / 200.0	-	-	-	-	-	-
802.11n	BPSK	27.0 / 30.0	8.0	8.0	8.0	8.0	8.0	9.0
802.11n	QPSK	54.0 / 60.0	6.0	6.0	6.0	6.0	6.0	7.5
802.11n	QPSK	81.0 / 90.0	6.0	6.0	6.0	6.0	6.0	7.5
802.11n	16QAM	108.0 / 120.0	5.5	5.5	5.5	5.5	5.5	6.5
802.11n	16QAM	162.0 / 180.0	5.5	5.5	5.5	5.5	5.5	6.5
802.11n	64QAM	216.0 / 240.0	5.5	5.5	5.5	5.5	5.5	6.5
802.11n	64QAM	243.0 / 270.0	4.0	4.0	4.0	4.0	4.0	4.5
802.11n	64QAM	270.0 / 300.0	3.0	3.0	3.0	3.0	3.0	3.5

(Tables continues)

(Tables continues)

Standard	Modulation	Data speed [MBPS]	RLAN 5 GHz / 20 MHz Tuning Targets					
			116	120	124	128	132	136
802.11a	BPSK	6	8.5	9.5	9.5	9.5	9.5	9.5
802.11a	BPSK	9	7.5	8.5	8.5	8.5	8.5	8.5
802.11a	QPSK	12	7.5	8.5	8.5	8.5	8.5	8.5
802.11a	QPSK	18	7.5	8.5	8.5	8.5	8.5	8.5
802.11a	16QAM	24	7.5	8.5	8.5	8.5	8.5	8.5
802.11a	16QAM	36	7.5	8.5	8.5	8.5	8.5	8.5
802.11a	64QAM	48	7.5	8.5	8.5	8.5	8.5	8.5
802.11a	64QAM	54	7.5	8.5	8.5	8.5	8.5	8.5
802.11n	BPSK	6.5 / 7.25	8.5	9.5	9.5	9.5	9.5	9.5
802.11n	QPSK	13.0 / 14.4	7.5	8.5	8.5	8.5	8.5	8.5
802.11n	QPSK	19.5 / 21.7	7.5	8.5	8.5	8.5	8.5	8.5
802.11n	16QAM	26.0 / 28.9	7.5	8.5	8.5	8.5	8.5	8.5
802.11n	16QAM	39.0 / 43.3	7.5	8.5	8.5	8.5	8.5	8.5
802.11n	64QAM	52.0 / 57.8	7.5	8.5	8.5	8.5	8.5	8.5
802.11n	64QAM	58.5 / 65.0	7.5	8.5	8.5	8.5	8.5	8.5
802.11n	64QAM	65.0 / 72.2	7.5	8.5	8.5	8.5	8.5	8.5
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	8.5	9.5	9.5	9.5	9.5	9.5
802.11n	QPSK	26.0 / 28.9	7.5	8.5	8.5	8.5	8.5	8.5
802.11n	QPSK	39.0 / 43.3	7.5	8.5	8.5	8.5	8.5	8.5
802.11n	16QAM	52.0 / 57.8	7.5	8.5	8.5	8.5	8.5	8.5
802.11n	16QAM	78.0 / 86.7	7.5	8.5	8.5	8.5	8.5	8.5
802.11n	64QAM	104.0 / 115.6	7.5	8.5	8.5	8.5	8.5	8.5
802.11n	64QAM	117.0 / 130.0	7.5	8.5	8.5	8.5	8.5	8.5
802.11n	64QAM	130.0 / 144.4	7.5	8.5	8.5	8.5	8.5	8.5

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 40 MHz Tuning Targets			
			126 (124+128)	130 (128+132)	134 (132+136)	138 (136+140)
802.11n	BPSK	13.5 / 15.0	9.0	9.0	8.5	8.5
802.11n	QPSK	27.0 / 30.0	7.5	7.5	6.5	6.5
802.11n	QPSK	40.5 / 45.0	7.5	7.5	6.5	6.5
802.11n	16QAM	54.0 / 60.0	6.5	6.5	6.0	6.0
802.11n	16QAM	81.0 / 90.0	6.5	6.5	6.0	6.0
802.11n	64QAM	108.0 / 120.0	6.5	6.5	6.0	6.0
802.11n	64QAM	121.5 / 135.0	4.5	4.5	4.5	4.5
802.11n	64QAM	135.0 / 150.0	3.5	3.5	3.5	3.5
802.11ac	256QAM	162.0 / 180.0	-	-	-	-
802.11ac	256QAM	180.0 / 200.0	-	-	-	-
802.11n	BPSK	27.0 / 30.0	9.0	9.0	8.5	8.5
802.11n	QPSK	54.0 / 60.0	7.5	7.5	6.5	6.5
802.11n	QPSK	81.0 / 90.0	7.5	7.5	6.5	6.5
802.11n	16QAM	108.0 / 120.0	6.5	6.5	6.0	6.0
802.11n	16QAM	162.0 / 180.0	6.5	6.5	6.0	6.0
802.11n	64QAM	216.0 / 240.0	6.5	6.5	6.0	6.0
802.11n	64QAM	243.0 / 270.0	4.5	4.5	4.5	4.5
802.11n	64QAM	270.0 / 300.0	3.5	3.5	3.5	3.5

(Tables continues)

(Tables continues)

Standard	Modulation	Data speed [MBPS]	RLAN 5 GHz / 20 MHz Tuning Targets					
			140	149	153	157	161	165
802.11a	BPSK	6	9.5	8.5	8.5	8.5	8.5	8.5
802.11a	BPSK	9	8.5	7.5	7.5	7.5	7.5	7.5
802.11a	QPSK	12	8.5	7.5	7.5	7.5	7.5	7.5
802.11a	QPSK	18	8.5	7.5	7.5	7.5	7.5	7.5
802.11a	16QAM	24	8.5	7.5	7.5	7.5	7.5	7.5
802.11a	16QAM	36	8.5	7.5	7.5	7.5	7.5	7.5
802.11a	64QAM	48	8.5	7.5	7.5	7.5	7.5	7.5
802.11a	64QAM	54	8.5	7.5	7.5	7.5	7.5	7.5
802.11n	BPSK	6.5 / 7.25	9.5	8.5	8.5	8.5	8.5	8.5
802.11n	QPSK	13.0 / 14.4	8.5	7.5	7.5	7.5	7.5	7.5
802.11n	QPSK	19.5 / 21.7	8.5	7.5	7.5	7.5	7.5	7.5
802.11n	16QAM	26.0 / 28.9	8.5	7.5	7.5	7.5	7.5	7.5
802.11n	16QAM	39.0 / 43.3	8.5	7.5	7.5	7.5	7.5	7.5
802.11n	64QAM	52.0 / 57.8	8.5	7.5	7.5	7.5	7.5	7.5
802.11n	64QAM	58.5 / 65.0	8.5	7.5	7.5	7.5	7.5	7.5
802.11n	64QAM	65.0 / 72.2	8.5	7.5	7.5	7.5	7.5	7.5
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	9.5	8.5	8.5	8.5	8.5	8.5
802.11n	QPSK	26.0 / 28.9	8.5	7.5	7.5	7.5	7.5	7.5
802.11n	QPSK	39.0 / 43.3	8.5	7.5	7.5	7.5	7.5	7.5
802.11n	16QAM	52.0 / 57.8	8.5	7.5	7.5	7.5	7.5	7.5
802.11n	16QAM	78.0 / 86.7	8.5	7.5	7.5	7.5	7.5	7.5
802.11n	64QAM	104.0 / 115.6	8.5	7.5	7.5	7.5	7.5	7.5
802.11n	64QAM	117.0 / 130.0	8.5	7.5	7.5	7.5	7.5	7.5
802.11n	64QAM	130.0 / 144.4	8.5	7.5	7.5	7.5	7.5	7.5

Standard	Modulation	Data speed [MBPS]	RLAN 5 GHz / 40 MHz Tuning Targets			
			151 (149+153)	155 (153+157)	159 (157+161)	163 (161+165)
802.11n	BPSK	13.5 / 15.0	8.0	8.0	8.0	8.0
802.11n	QPSK	27.0 / 30.0	6.0	6.0	6.0	6.0
802.11n	QPSK	40.5 / 45.0	6.0	6.0	6.0	6.0
802.11n	16QAM	54.0 / 60.0	5.5	5.5	5.5	5.5
802.11n	16QAM	81.0 / 90.0	5.5	5.5	5.5	5.5
802.11n	64QAM	108.0 / 120.0	5.5	5.5	5.5	5.5
802.11n	64QAM	121.5 / 135.0	4.0	4.0	4.0	4.0
802.11n	64QAM	135.0 / 150.0	3.0	3.0	3.0	3.0
802.11ac	256QAM	162.0 / 180.0	-	-	-	-
802.11ac	256QAM	180.0 / 200.0	-	-	-	-
802.11n	BPSK	27.0 / 30.0	8.0	8.0	8.0	8.0
802.11n	QPSK	54.0 / 60.0	6.0	6.0	6.0	6.0
802.11n	QPSK	81.0 / 90.0	6.0	6.0	6.0	6.0
802.11n	16QAM	108.0 / 120.0	5.5	5.5	5.5	5.5
802.11n	16QAM	162.0 / 180.0	5.5	5.5	5.5	5.5
802.11n	64QAM	216.0 / 240.0	5.5	5.5	5.5	5.5
802.11n	64QAM	243.0 / 270.0	4.0	4.0	4.0	4.0
802.11n	64QAM	270.0 / 300.0	3.0	3.0	3.0	3.0

I.5 Conducted Power from the Sample used in the WLAN2450 Main Antenna Testing

Type: RX-113; Serial number: 004402/47/357461/8 used for WLAN2450 Body Main Antenna Testing

WLAN 2.4 GHz Conducted Power Measurements – 20 MHz channel bandwidth					
Mode	CH 1	-	CH 6	-	CH 11
b-mode WLAN DSSS 1 Mbps	12.53	-	14.61	-	13.44
b-mode WLAN DSSS 2 Mbps	12.65	-	14.68	-	13.46
b-mode WLAN DSSS 5.5 Mbps	12.83	-	14.86	-	13.45
b-mode WLAN DSSS 11 Mbps	12.77	-	14.81	-	13.43
g-mode WLAN OFDM 6 Mbps	9.49	-	11.35	-	10.36
g-mode WLAN OFDM 9 Mbps	9.50	-	11.42	-	10.39
g-mode WLAN OFDM 12 Mbps	9.58	-	11.38	-	10.41
g-mode WLAN OFDM 18 Mbps	9.61	-	11.46	-	10.44
g-mode WLAN OFDM 24 Mbps	10.57	-	12.36	-	11.40
g-mode WLAN OFDM 36 Mbps	10.86	-	12.62	-	11.69
g-mode WLAN OFDM 48 Mbps	10.89	-	12.81	-	11.90
g-mode WLAN OFDM 54 Mbps	10.54	-	12.23	-	11.31
n-mode MCS 0: OFDM 6.5 / 7.25 Mbps	8.30	-	10.15	-	9.17
n-mode MCS 1: OFDM 13.0 / 14.4 Mbps	6.96	-	8.83	-	7.83
n-mode MCS 2: OFDM 19.5 / 21.7 Mbps	7.00	-	8.88	-	7.88
n-mode MCS 3: OFDM 26.0 / 28.9 Mbps	8.24	-	9.95	-	9.01
n-mode MCS 4: OFDM 39.0 / 43.3 Mbps	8.23	-	10.09	-	9.07
n-mode MCS 5: OFDM 52.0 / 57.8 Mbps	8.36	-	10.12	-	9.13
n-mode MCS 6: OFDM 58.5 / 65.0 Mbps	8.34	-	10.13	-	9.17
n-mode MCS 7: OFDM 65.0 / 72.2 Mbps	5.57	-	7.42	-	6.45
n-mode MCS 8: OFDM 13.0 / 14.5 Mbps	8.30	-	10.15	-	9.17
n-mode MCS 9: OFDM 26.0 / 28.8 Mbps	6.96	-	8.83	-	7.83
n-mode MCS 10: OFDM 39.0 / 43.3 Mbps	7.00	-	8.88	-	7.88
n-mode MCS 11: OFDM 52.0 / 57.7 Mbps	8.24	-	9.95	-	9.01
n-mode MCS 12: OFDM 78.0 / 86.6 Mbps	8.23	-	10.09	-	9.07
n-mode MCS 13: OFDM 104.0 / 115.5 Mbps	8.36	-	10.12	-	9.13
n-mode MCS 14: OFDM 117.0 / 130.0 Mbps	8.34	-	10.13	-	9.17
n-mode MCS 15: OFDM 130.0 / 144.4 Mbps	5.57	-	7.42	-	6.45

(Tables continues)

(Tables continues)

WLAN 2.4 GHz Conducted Power Measurements – 40 MHz channel bandwidth					
Mode	CH 3 (1...5)	CH 4 (2...6)	CH 6 (4...8)	CH 8 (6...10)	CH 9 (7...11)
n-mode MCS 0: OFDM 13.5 / 15.0 Mbps	8.22	-	9.24	-	9.17
n-mode MCS 1: OFDM 27.0 / 30.0 Mbps	6.91	-	7.89	-	7.84
n-mode MCS 2: OFDM 40.5 / 45.0 Mbps	6.86	-	7.93	-	7.89
n-mode MCS 3: OFDM 54.0 / 60.0 Mbps	5.86	-	6.73	-	6.88
n-mode MCS 4: OFDM 81.0 / 90.0 Mbps	5.89	-	6.87	-	6.93
n-mode MCS 5: OFDM 108.0 / 120.0 Mbps	6.00	-	6.78	-	7.01
n-mode MCS 6: OFDM 121.5 / 135.0 Mbps	6.08	-	6.80	-	6.97
n-mode MCS 7: OFDM 135.0 / 150.0 Mbps	4.07	-	4.96	-	5.13
n-mode MCS 8: OFDM 27.0 / 30.0 Mbps	8.22	-	9.24	-	9.17
n-mode MCS 9: OFDM 54.0 / 60.0 Mbps	6.91	-	7.89	-	7.84
n-mode MCS 10: OFDM 81.0 / 90.0 Mbps	6.86	-	7.93	-	7.89
n-mode MCS 11: OFDM 108.0 / 120.0 Mbps	5.86	-	6.73	-	6.88
n-mode MCS 12: OFDM 162.0 / 180.0 Mbps	5.89	-	6.87	-	6.93
n-mode MCS 13: OFDM 216.0 / 240.0 Mbps	6.00	-	6.78	-	7.01
n-mode MCS 14: OFDM 243.0 / 270.0 Mbps	6.08	-	6.80	-	6.97
n-mode MCS 15: OFDM 270.0 / 300.0 Mbps	4.07	-	4.96	-	5.13

I.6 Conducted Power from the Sample used in the WLAN2450 AUX Antenna Testing

Type: RX-113; Serial number: 004402/47/357461/8 used for WLAN2450 Body AUX Antenna Testing

WLAN 2.4 GHz Conducted Power Measurements – 20 MHz channel bandwidth					
Mode	CH 1	-	CH 6	-	CH 11
b-mode WLAN DSSS 1 Mbps	12.82	-	14.25	-	12.11
b-mode WLAN DSSS 2 Mbps	13.51	-	14.28	-	12.14
b-mode WLAN DSSS 5.5 Mbps	13.66	-	14.43	-	12.23
b-mode WLAN DSSS 11 Mbps	13.65	-	14.41	-	12.24
g-mode WLAN OFDM 6 Mbps	10.94	-	11.83	-	10.18
g-mode WLAN OFDM 9 Mbps	10.95	-	11.90	-	10.22
g-mode WLAN OFDM 12 Mbps	11.01	-	11.88	-	10.22
g-mode WLAN OFDM 18 Mbps	11.02	-	11.93	-	10.30
g-mode WLAN OFDM 24 Mbps	11.31	-	12.19	-	10.52
g-mode WLAN OFDM 36 Mbps	11.42	-	12.34	-	10.50
g-mode WLAN OFDM 48 Mbps	11.34	-	12.32	-	10.64
g-mode WLAN OFDM 54 Mbps	10.94	-	11.81	-	10.13
n-mode MCS 0: OFDM 6.5 / 7.25 Mbps	9.83	-	10.76	-	9.06
n-mode MCS 1: OFDM 13.0 / 14.4 Mbps	8.49	-	9.33	-	7.65
n-mode MCS 2: OFDM 19.5 / 21.7 Mbps	8.50	-	9.39	-	7.73
n-mode MCS 3: OFDM 26.0 / 28.9 Mbps	8.93	-	9.76	-	8.13
n-mode MCS 4: OFDM 39.0 / 43.3 Mbps	8.91	-	9.92	-	8.06
n-mode MCS 5: OFDM 52.0 / 57.8 Mbps	9.04	-	9.91	-	8.17
n-mode MCS 6: OFDM 58.5 / 65.0 Mbps	8.96	-	9.95	-	8.19
n-mode MCS 7: OFDM 65.0 / 72.2 Mbps	7.16	-	8.02	-	6.28
n-mode MCS 8: OFDM 13.0 / 14.5 Mbps	9.83	-	10.76	-	9.06
n-mode MCS 9: OFDM 26.0 / 28.8 Mbps	8.49	-	9.33	-	7.65
n-mode MCS 10: OFDM 39.0 / 43.3 Mbps	8.50	-	9.39	-	7.73
n-mode MCS 11: OFDM 52.0 / 57.7 Mbps	8.93	-	9.76	-	8.13
n-mode MCS 12: OFDM 78.0 / 86.6 Mbps	8.91	-	9.92	-	8.06
n-mode MCS 13: OFDM 104.0 / 115.5 Mbps	9.04	-	9.91	-	8.17
n-mode MCS 14: OFDM 117.0 / 130.0 Mbps	8.96	-	9.95	-	8.19
n-mode MCS 15: OFDM 130.0 / 144.4 Mbps	7.16	-	8.02	-	6.28

(Tables continues)

(Tables continues)

WLAN 2.4 GHz Conducted Power Measurements – 40 MHz channel bandwidth					
Mode	CH 3 (1...5)	CH 4 (2...6)	CH 6 (4...8)	CH 8 (6...10)	CH 9 (7...11)
n-mode MCS 0: OFDM 13.5 / 15.0 Mbps	9.47	-	9.60	-	9.42
n-mode MCS 1: OFDM 27.0 / 30.0 Mbps	8.07	-	8.25	-	8.10
n-mode MCS 2: OFDM 40.5 / 45.0 Mbps	8.14	-	8.24	-	8.15
n-mode MCS 3: OFDM 54.0 / 60.0 Mbps	7.23	-	7.22	-	7.33
n-mode MCS 4: OFDM 81.0 / 90.0 Mbps	7.33	-	7.24	-	7.39
n-mode MCS 5: OFDM 108.0 / 120.0 Mbps	7.33	-	7.27	-	7.35
n-mode MCS 6: OFDM 121.5 / 135.0 Mbps	7.31	-	7.35	-	7.46
n-mode MCS 7: OFDM 135.0 / 150.0 Mbps	5.36	-	5.31	-	5.40
n-mode MCS 8: OFDM 27.0 / 30.0 Mbps	9.47	-	9.60	-	9.42
n-mode MCS 9: OFDM 54.0 / 60.0 Mbps	8.07	-	8.25	-	8.10
n-mode MCS 10: OFDM 81.0 / 90.0 Mbps	8.14	-	8.24	-	8.15
n-mode MCS 11: OFDM 108.0 / 120.0 Mbps	7.23	-	7.22	-	7.33
n-mode MCS 12: OFDM 162.0 / 180.0 Mbps	7.33	-	7.24	-	7.39
n-mode MCS 13: OFDM 216.0 / 240.0 Mbps	7.33	-	7.27	-	7.35
n-mode MCS 14: OFDM 243.0 / 270.0 Mbps	7.31	-	7.35	-	7.46
n-mode MCS 15: OFDM 270.0 / 300.0 Mbps	5.36	-	5.31	-	5.40

I.7 Conducted Power from the Sample used in the WLAN5000 Main Antenna Testing

Type: RX-113; Serial number: 004402/47/357461/8 used for WLAN5000 Body Main Antenna Testing

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 20 MHz channel bandwidth: Measured values					
			36	40	44	48	52	56
802.11a	BPSK	6	8.32	8.36	8.51	7.97	8.05	8.23
802.11a	BPSK	9	7.02	7.27	7.95	7.02	7.14	7.22
802.11a	QPSK	12	6.98	7.29	7.53	7.07	7.17	7.21
802.11a	QPSK	18	7.08	7.42	7.60	7.10	7.29	7.35
802.11a	16QAM	24	7.23	7.96	7.82	7.36	7.48	7.54
802.11a	16QAM	36	7.51	7.77	8.07	7.74	7.96	8.15
802.11a	64QAM	48	6.87	7.25	7.67	6.91	7.24	7.27
802.11a	64QAM	54	6.89	7.03	7.26	7.04	7.11	7.24
802.11n	BPSK	6.5 / 7.25	7.71	8.32	8.50	7.69	7.83	7.86
802.11n	QPSK	13.0 / 14.4	7.28	7.62	7.77	6.86	7.06	7.56
802.11n	QPSK	19.5 / 21.7	6.87	7.64	7.86	6.99	7.09	7.12
802.11n	16QAM	26.0 / 28.9	7.06	7.42	7.70	7.28	7.36	7.60
802.11n	16QAM	39.0 / 43.3	7.23	7.60	7.73	7.42	7.49	7.61
802.11n	64QAM	52.0 / 57.8	7.46	7.83	8.31	7.77	7.88	8.16
802.11n	64QAM	58.5 / 65.0	6.77	7.05	7.69	7.01	7.06	7.20
802.11n	64QAM	65.0 / 72.2	6.95	7.22	7.51	7.00	7.07	7.15
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	7.71	8.32	8.50	7.69	7.83	7.86
802.11n	QPSK	26.0 / 28.9	7.28	7.62	7.77	6.86	7.06	7.56
802.11n	QPSK	39.0 / 43.3	6.87	7.64	7.86	6.99	7.09	7.12
802.11n	16QAM	52.0 / 57.8	7.06	7.42	7.70	7.28	7.36	7.60
802.11n	16QAM	78.0 / 86.7	7.23	7.60	7.73	7.42	7.49	7.61
802.11n	64QAM	104.0 / 115.6	7.46	7.83	8.31	7.77	7.88	8.16
802.11n	64QAM	117.0 / 130.0	6.77	7.05	7.69	7.01	7.06	7.20
802.11n	64QAM	130.0 / 144.4	6.95	7.22	7.51	7.00	7.07	7.15

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 40 MHz channel bandwidth: Measured values						
			38 (36+40)	42 (40+44)	46 (44+48)	50 (48+52)	54 (52+56)	58 (56+60)	62 (60+64)
802.11n	BPSK	13.5 / 15.0	7.31	8.00	7.74	7.75	7.91	7.83	8.20
802.11n	QPSK	27.0 / 30.0	5.98	5.80	5.91	5.98	6.13	6.08	6.00
802.11n	QPSK	40.5 / 45.0	5.54	5.86	5.98	6.09	6.25	6.19	6.55
802.11n	16QAM	54.0 / 60.0	4.59	4.92	5.08	5.16	5.38	5.32	5.17
802.11n	16QAM	81.0 / 90.0	4.77	5.03	5.20	5.23	4.96	5.40	5.30
802.11n	64QAM	108.0 / 120.0	4.39	5.14	5.41	5.38	5.67	5.51	5.43
802.11n	64QAM	121.5 / 135.0	2.94	3.30	2.98	3.54	3.69	3.66	3.56
802.11n	64QAM	135.0 / 150.0	1.58	2.37	2.10	2.19	2.34	2.29	2.70
802.11ac	256QAM	351 / 390	-	-	-	-	-	-	-
802.11ac	256QAM	390 / 433.3	-	-	-	-	-	-	-
802.11n	BPSK	27.0 / 30.0	7.31	8.00	7.74	7.75	7.91	7.83	8.20
802.11n	QPSK	54.0 / 60.0	5.98	5.80	5.91	5.98	6.13	6.08	6.00
802.11n	QPSK	81.0 / 90.0	5.54	5.86	5.98	6.09	6.25	6.19	6.55
802.11n	16QAM	108.0 / 120.0	4.59	4.92	5.08	5.16	5.38	5.32	5.17
802.11n	16QAM	162.0 / 180.0	4.77	5.03	5.20	5.23	4.96	5.40	5.30
802.11n	64QAM	216.0 / 240.0	4.39	5.14	5.41	5.38	5.67	5.51	5.43
802.11n	64QAM	243.0 / 270.0	2.94	3.30	2.98	3.54	3.69	3.66	3.56
802.11n	64QAM	270.0 / 300.0	1.58	2.37	2.10	2.19	2.34	2.29	2.70

(Tables continues)

(Tables continues)

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 20 MHz channel bandwidth: Measured values					
			60	64	100	104	108	112
802.11a	BPSK	6	8.44	8.16	7.81	7.95	7.87	7.51
802.11a	BPSK	9	7.11	7.03	7.33	7.02	6.93	6.48
802.11a	QPSK	12	7.16	7.12	7.34	7.04	6.98	6.55
802.11a	QPSK	18	7.25	7.21	6.90	7.14	6.61	6.56
802.11a	16QAM	24	7.51	7.47	7.18	7.37	7.30	6.73
802.11a	16QAM	36	7.84	7.79	7.50	7.25	7.14	6.67
802.11a	64QAM	48	6.91	6.97	6.65	6.58	6.37	5.99
802.11a	64QAM	54	7.00	6.87	6.57	6.48	6.52	5.96
802.11n	BPSK	6.5 / 7.25	8.26	8.07	7.76	7.74	7.65	7.34
802.11n	QPSK	13.0 / 14.4	7.40	7.41	6.64	6.90	6.81	6.51
802.11n	QPSK	19.5 / 21.7	7.03	6.97	7.28	6.93	6.85	6.60
802.11n	16QAM	26.0 / 28.9	7.39	7.26	7.59	6.91	7.22	6.46
802.11n	16QAM	39.0 / 43.3	7.52	7.48	7.22	6.93	7.35	6.51
802.11n	64QAM	52.0 / 57.8	7.82	7.82	7.67	7.32	7.29	6.62
802.11n	64QAM	58.5 / 65.0	6.97	6.93	6.70	6.43	6.40	5.99
802.11n	64QAM	65.0 / 72.2	6.96	6.90	6.56	6.50	6.54	6.00
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	8.26	8.07	7.76	7.74	7.65	7.34
802.11n	QPSK	26.0 / 28.9	7.40	7.41	6.64	6.90	6.81	6.51
802.11n	QPSK	39.0 / 43.3	7.03	6.97	7.28	6.93	6.85	6.60
802.11n	16QAM	52.0 / 57.8	7.39	7.26	7.59	6.91	7.22	6.46
802.11n	16QAM	78.0 / 86.7	7.52	7.48	7.22	6.93	7.35	6.51
802.11n	64QAM	104.0 / 115.6	7.82	7.82	7.67	7.32	7.29	6.62
802.11n	64QAM	117.0 / 130.0	6.97	6.93	6.70	6.43	6.40	5.99
802.11n	64QAM	130.0 / 144.4	6.96	6.90	6.56	6.50	6.54	6.00

Standard	Modulation	Data speed [MBPS]	RLAN 5 GHz / 40 MHz channel bandwidth: Measured values					
			102 (100+104)	106 (104+108)	110 (108+112)	114 (112+116)	118 (116+120)	122 (120+124)
802.11n	BPSK	13.5 / 15.0	6.95	6.80	6.63	6.99	6.06	6.08
802.11n	QPSK	27.0 / 30.0	5.16	5.00	4.91	5.29	4.27	4.27
802.11n	QPSK	40.5 / 45.0	5.27	5.06	5.00	4.92	4.37	4.34
802.11n	16QAM	54.0 / 60.0	4.29	4.23	4.18	4.08	3.51	3.43
802.11n	16QAM	81.0 / 90.0	4.45	4.30	4.29	4.12	3.59	3.50
802.11n	64QAM	108.0 / 120.0	4.61	4.52	4.44	4.36	3.85	3.86
802.11n	64QAM	121.5 / 135.0	2.75	2.65	2.48	2.49	1.90	1.41
802.11n	64QAM	135.0 / 150.0	1.20	1.03	1.67	1.09	0.98	0.40
802.11ac	256QAM	351 / 390	-	-	-	-	-	-
802.11ac	256QAM	390 / 433.3	-	-	-	-	-	-
802.11n	BPSK	27.0 / 30.0	6.95	6.80	6.63	6.99	6.06	6.08
802.11n	QPSK	54.0 / 60.0	5.16	5.00	4.91	5.29	4.27	4.27
802.11n	QPSK	81.0 / 90.0	5.27	5.06	5.00	4.92	4.37	4.34
802.11n	16QAM	108.0 / 120.0	4.29	4.23	4.18	4.08	3.51	3.43
802.11n	16QAM	162.0 / 180.0	4.45	4.30	4.29	4.12	3.59	3.50
802.11n	64QAM	216.0 / 240.0	4.61	4.52	4.44	4.36	3.85	3.86
802.11n	64QAM	243.0 / 270.0	2.75	2.65	2.48	2.49	1.90	1.41
802.11n	64QAM	270.0 / 300.0	1.20	1.03	1.67	1.09	0.98	0.40

(Tables continues)

(Tables continues)

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 20 MHz channel bandwidth: Measured values					
			116	120	124	128	132	136
802.11a	BPSK	6	7.50	6.81	6.76	7.08	7.10	7.41
802.11a	BPSK	9	6.49	5.99	6.01	6.20	6.23	6.60
802.11a	QPSK	12	6.46	5.99	6.05	6.25	6.25	6.66
802.11a	QPSK	18	6.54	6.00	5.96	6.37	6.36	6.72
802.11a	16QAM	24	6.80	6.00	6.13	6.01	6.08	6.78
802.11a	16QAM	36	7.02	6.04	6.06	6.20	6.45	6.54
802.11a	64QAM	48	5.96	5.36	5.39	5.61	5.49	5.92
802.11a	64QAM	54	5.99	5.32	5.72	5.77	5.65	6.04
802.11n	BPSK	6.5 / 7.25	7.11	6.61	6.52	6.91	6.94	7.24
802.11n	QPSK	13.0 / 14.4	6.25	5.95	5.90	6.13	6.09	6.53
802.11n	QPSK	19.5 / 21.7	6.35	5.95	5.99	6.22	6.19	6.08
802.11n	16QAM	26.0 / 28.9	6.23	5.95	6.14	6.37	6.51	6.80
802.11n	16QAM	39.0 / 43.3	6.31	5.93	6.13	6.14	6.06	6.44
802.11n	64QAM	52.0 / 57.8	6.72	6.15	6.09	6.24	6.37	6.63
802.11n	64QAM	58.5 / 65.0	5.81	5.40	5.32	5.58	5.49	5.88
802.11n	64QAM	65.0 / 72.2	5.73	5.54	5.38	5.71	5.61	5.87
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	7.11	6.61	6.52	6.91	6.94	7.24
802.11n	QPSK	26.0 / 28.9	6.25	5.95	5.90	6.13	6.09	6.53
802.11n	QPSK	39.0 / 43.3	6.35	5.95	5.99	6.22	6.19	6.08
802.11n	16QAM	52.0 / 57.8	6.23	5.95	6.14	6.37	6.51	6.80
802.11n	16QAM	78.0 / 86.7	6.31	5.93	6.13	6.14	6.06	6.44
802.11n	64QAM	104.0 / 115.6	6.72	6.15	6.09	6.24	6.37	6.63
802.11n	64QAM	117.0 / 130.0	5.81	5.40	5.32	5.58	5.49	5.88
802.11n	64QAM	130.0 / 144.4	5.73	5.54	5.38	5.71	5.61	5.87

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 40 MHz channel bandwidth: Measured values			
			126 (124+128)	130 (128+132)	134 (132+136)	138 (136+140)
802.11n	BPSK	13.5 / 15.0	6.37	6.75	6.77	6.71
802.11n	QPSK	27.0 / 30.0	4.19	4.62	5.10	4.53
802.11n	QPSK	40.5 / 45.0	4.32	4.72	5.21	4.65
802.11n	16QAM	54.0 / 60.0	3.41	3.78	3.80	3.65
802.11n	16QAM	81.0 / 90.0	3.55	3.89	3.92	3.76
802.11n	64QAM	108.0 / 120.0	3.59	4.01	4.04	3.98
802.11n	64QAM	121.5 / 135.0	1.86	1.72	1.65	1.56
802.11n	64QAM	135.0 / 150.0	0.31	0.91	0.75	0.71
802.11ac	256QAM	351 / 390	-	-	-	-
802.11ac	256QAM	390 / 433.3	-	-	-	-
802.11n	BPSK	27.0 / 30.0	6.37	6.75	6.77	6.71
802.11n	QPSK	54.0 / 60.0	4.19	4.62	5.10	4.53
802.11n	QPSK	81.0 / 90.0	4.32	4.72	5.21	4.65
802.11n	16QAM	108.0 / 120.0	3.41	3.78	3.80	3.65
802.11n	16QAM	162.0 / 180.0	3.55	3.89	3.92	3.76
802.11n	64QAM	216.0 / 240.0	3.59	4.01	4.04	3.98
802.11n	64QAM	243.0 / 270.0	1.86	1.72	1.65	1.56
802.11n	64QAM	270.0 / 300.0	0.31	0.91	0.75	0.71

(Tables continues)

(Tables continues)

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 20 MHz channel bandwidth: Measured values					
			140	149	153	157	161	165
802.11a	BPSK	6	7.35	6.90	7.49	8.00	8.52	8.46
802.11a	BPSK	9	6.46	6.12	6.55	7.21	7.68	7.71
802.11a	QPSK	12	6.48	6.10	6.61	7.23	8.19	7.68
802.11a	QPSK	18	6.55	5.65	6.63	7.35	7.78	7.36
802.11a	16QAM	24	6.30	5.91	6.87	7.50	7.97	8.00
802.11a	16QAM	36	6.95	6.14	6.48	7.82	7.68	8.06
802.11a	64QAM	48	5.91	5.40	5.98	6.53	7.00	7.06
802.11a	64QAM	54	5.97	5.37	5.93	6.65	7.11	7.50
802.11n	BPSK	6.5 / 7.25	7.21	6.71	7.27	7.81	8.36	8.33
802.11n	QPSK	13.0 / 14.4	6.35	5.96	6.46	7.12	7.56	7.57
802.11n	QPSK	19.5 / 21.7	6.41	6.04	6.49	7.18	7.61	7.65
802.11n	16QAM	26.0 / 28.9	6.21	6.34	6.76	7.39	7.97	7.90
802.11n	16QAM	39.0 / 43.3	6.33	5.90	6.48	7.01	7.56	7.56
802.11n	64QAM	52.0 / 57.8	6.44	6.12	6.58	7.30	8.21	8.13
802.11n	64QAM	58.5 / 65.0	5.82	5.39	5.84	6.48	7.04	7.32
802.11n	64QAM	65.0 / 72.2	5.96	5.23	5.87	6.55	7.18	7.35
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	7.21	6.71	7.27	7.81	8.36	8.33
802.11n	QPSK	26.0 / 28.9	6.35	5.96	6.46	7.12	7.56	7.57
802.11n	QPSK	39.0 / 43.3	6.41	6.04	6.49	7.18	7.61	7.65
802.11n	16QAM	52.0 / 57.8	6.21	6.34	6.76	7.39	7.97	7.90
802.11n	16QAM	78.0 / 86.7	6.33	5.90	6.48	7.01	7.56	7.56
802.11n	64QAM	104.0 / 115.6	6.44	6.12	6.58	7.30	8.21	8.13
802.11n	64QAM	117.0 / 130.0	5.82	5.39	5.84	6.48	7.04	7.32
802.11n	64QAM	130.0 / 144.4	5.96	5.23	5.87	6.55	7.18	7.35

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 40 MHz channel bandwidth: Measured values			
			151 (149+153)	155 (153+157)	159 (157+161)	163 (161+165)
802.11n	BPSK	13.5 / 15.0	6.64	7.18	7.81	8.24
802.11n	QPSK	27.0 / 30.0	4.59	5.19	5.76	6.21
802.11n	QPSK	40.5 / 45.0	4.64	5.29	5.88	6.36
802.11n	16QAM	54.0 / 60.0	3.58	4.31	4.82	5.29
802.11n	16QAM	81.0 / 90.0	3.70	4.37	4.90	5.43
802.11n	64QAM	108.0 / 120.0	3.31	4.45	4.92	5.42
802.11n	64QAM	121.5 / 135.0	1.68	2.23	2.72	3.28
802.11n	64QAM	135.0 / 150.0	0.71	1.31	1.92	2.44
802.11ac	256QAM	351 / 390	-	-	-	-
802.11ac	256QAM	390 / 433.3	-	-	-	-
802.11n	BPSK	27.0 / 30.0	6.64	7.18	7.81	8.24
802.11n	QPSK	54.0 / 60.0	4.59	5.19	5.76	6.21
802.11n	QPSK	81.0 / 90.0	4.64	5.29	5.88	6.36
802.11n	16QAM	108.0 / 120.0	3.58	4.31	4.82	5.29
802.11n	16QAM	162.0 / 180.0	3.70	4.37	4.90	5.43
802.11n	64QAM	216.0 / 240.0	3.31	4.45	4.92	5.42
802.11n	64QAM	243.0 / 270.0	1.68	2.23	2.72	3.28
802.11n	64QAM	270.0 / 300.0	0.71	1.31	1.92	2.44

I.8 Conducted Power from the Sample used in the WLAN5000 AUX Antenna Testing

Type: RX-113; Serial number: 004402/47/357461/8 used for WLAN5000 Body AUX Antenna Testing

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 20 MHz channel bandwidth: Measured values					
			36	40	44	48	52	56
802.11a	BPSK	6	10.14	9.52	9.82	9.05	8.48	8.33
802.11a	BPSK	9	9.20	8.93	8.65	8.21	7.40	7.33
802.11a	QPSK	12	9.18	8.95	8.69	8.57	7.56	7.45
802.11a	QPSK	18	9.30	9.08	8.65	8.62	7.61	7.49
802.11a	16QAM	24	9.69	9.42	9.10	8.51	7.64	7.68
802.11a	16QAM	36	9.47	9.04	9.38	8.57	7.95	7.69
802.11a	64QAM	48	8.49	8.78	8.45	7.62	7.05	6.79
802.11a	64QAM	54	8.50	8.51	8.47	7.75	6.97	6.82
802.11n	BPSK	6.5 / 7.25	9.72	9.47	9.65	8.59	7.72	8.17
802.11n	QPSK	13.0 / 14.4	8.90	8.75	8.54	7.81	6.92	7.20
802.11n	QPSK	19.5 / 21.7	9.00	9.22	8.57	7.90	7.11	7.25
802.11n	16QAM	26.0 / 28.9	9.49	9.23	8.99	8.33	7.51	7.35
802.11n	16QAM	39.0 / 43.3	9.56	9.35	9.17	8.51	7.65	7.69
802.11n	64QAM	52.0 / 57.8	9.80	9.27	8.83	8.22	7.34	7.65
802.11n	64QAM	58.5 / 65.0	8.73	8.62	8.43	7.79	7.08	6.68
802.11n	64QAM	65.0 / 72.2	8.82	8.66	8.43	7.32	7.07	6.80
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	9.72	9.47	9.65	8.59	7.72	8.17
802.11n	QPSK	26.0 / 28.9	8.90	8.75	8.54	7.81	6.92	7.20
802.11n	QPSK	39.0 / 43.3	9.00	9.22	8.57	7.90	7.11	7.25
802.11n	16QAM	52.0 / 57.8	9.49	9.23	8.99	8.33	7.51	7.35
802.11n	16QAM	78.0 / 86.7	9.56	9.35	9.17	8.51	7.65	7.69
802.11n	64QAM	104.0 / 115.6	9.80	9.27	8.83	8.22	7.34	7.65
802.11n	64QAM	117.0 / 130.0	8.73	8.62	8.43	7.79	7.08	6.68
802.11n	64QAM	130.0 / 144.4	8.82	8.66	8.43	7.32	7.07	6.80

Standard	Modulation	Data speed [MBPS]	RLAN 5 GHz / 40 MHz channel bandwidth: Measured values						
			38 (36+40)	42 (40+44)	46 (44+48)	50 (48+52)	54 (52+56)	58 (56+60)	62 (60+64)
802.11n	BPSK	13.5 / 15.0	9.65	9.52	9.03	8.37	7.92	7.32	6.66
802.11n	QPSK	27.0 / 30.0	7.83	7.30	7.31	6.43	6.13	6.08	6.00
802.11n	QPSK	40.5 / 45.0	7.86	6.86	6.98	6.39	6.25	6.19	6.55
802.11n	16QAM	54.0 / 60.0	6.58	6.52	6.58	5.66	5.58	5.32	5.17
802.11n	16QAM	81.0 / 90.0	6.77	6.53	6.40	5.63	5.26	5.40	5.30
802.11n	64QAM	108.0 / 120.0	6.92	6.64	6.91	5.68	5.67	5.51	5.43
802.11n	64QAM	121.5 / 135.0	5.04	4.80	4.58	3.74	3.89	3.66	3.56
802.11n	64QAM	135.0 / 150.0	4.21	4.04	3.58	2.79	2.54	2.29	2.70
802.11ac	256QAM	351 / 390	-	-	-	-	-	-	-
802.11ac	256QAM	390 / 433.3	-	-	-	-	-	-	-
802.11n	BPSK	27.0 / 30.0	9.65	9.52	9.03	8.37	7.92	7.32	6.66
802.11n	QPSK	54.0 / 60.0	7.83	7.30	7.31	6.43	6.13	6.08	6.00
802.11n	QPSK	81.0 / 90.0	7.86	6.86	6.98	6.39	6.25	6.19	6.55
802.11n	16QAM	108.0 / 120.0	6.58	6.52	6.58	5.66	5.58	5.32	5.17
802.11n	16QAM	162.0 / 180.0	6.77	6.53	6.40	5.63	5.26	5.40	5.30
802.11n	64QAM	216.0 / 240.0	6.92	6.64	6.91	5.68	5.67	5.51	5.43
802.11n	64QAM	243.0 / 270.0	5.04	4.80	4.58	3.74	3.89	3.66	3.56
802.11n	64QAM	270.0 / 300.0	4.21	4.04	3.58	2.79	2.54	2.29	2.70

(Tables continues)

(Tables continues)

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 20 MHz channel bandwidth: Measured values					
			60	64	100	104	108	112
802.11a	BPSK	6	7.77	6.80	8.69	8.80	9.09	9.33
802.11a	BPSK	9	6.78	5.74	7.77	8.36	8.17	8.43
802.11a	QPSK	12	6.93	5.86	7.77	8.39	8.22	8.44
802.11a	QPSK	18	6.99	5.99	7.90	8.06	8.32	8.53
802.11a	16QAM	24	7.45	6.50	8.31	8.38	8.60	8.90
802.11a	16QAM	36	7.12	6.49	8.48	8.49	8.99	9.01
802.11a	64QAM	48	6.26	5.67	7.68	7.37	8.12	8.10
802.11a	64QAM	54	6.47	5.59	7.74	7.78	7.59	8.08
802.11n	BPSK	6.5 / 7.25	7.54	6.69	8.53	8.64	8.96	9.18
802.11n	QPSK	13.0 / 14.4	6.46	5.67	7.69	7.82	8.07	8.34
802.11n	QPSK	19.5 / 21.7	6.43	5.68	7.76	7.95	8.21	8.41
802.11n	16QAM	26.0 / 28.9	7.00	6.22	8.27	8.23	8.59	8.85
802.11n	16QAM	39.0 / 43.3	7.19	5.93	8.37	8.39	8.78	8.99
802.11n	64QAM	52.0 / 57.8	6.84	6.18	8.53	8.54	8.95	9.00
802.11n	64QAM	58.5 / 65.0	5.86	5.30	7.59	7.76	8.25	7.87
802.11n	64QAM	65.0 / 72.2	5.91	5.34	7.65	7.90	8.17	8.35
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	7.54	6.69	8.53	8.64	8.96	9.18
802.11n	QPSK	26.0 / 28.9	6.46	5.67	7.69	7.82	8.07	8.34
802.11n	QPSK	39.0 / 43.3	6.43	5.68	7.76	7.95	8.21	8.41
802.11n	16QAM	52.0 / 57.8	7.00	6.22	8.27	8.23	8.59	8.85
802.11n	16QAM	78.0 / 86.7	7.19	5.93	8.37	8.39	8.78	8.99
802.11n	64QAM	104.0 / 115.6	6.84	6.18	8.53	8.54	8.95	9.00
802.11n	64QAM	117.0 / 130.0	5.86	5.30	7.59	7.76	8.25	7.87
802.11n	64QAM	130.0 / 144.4	5.91	5.34	7.65	7.90	8.17	8.35

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 40 MHz channel bandwidth: Measured values					
			102 (100+104)	106 (104+108)	110 (108+112)	114 (112+116)	118 (116+120)	122 (120+124)
802.11n	BPSK	13.5 / 15.0	8.75	8.95	9.22	9.39	9.63	8.99
802.11n	QPSK	27.0 / 30.0	6.91	7.18	7.39	7.12	7.85	7.53
802.11n	QPSK	40.5 / 45.0	6.95	7.25	7.03	7.74	7.57	7.62
802.11n	16QAM	54.0 / 60.0	6.15	6.40	6.20	6.34	7.04	6.51
802.11n	16QAM	81.0 / 90.0	5.84	6.52	6.24	6.40	6.77	6.54
802.11n	64QAM	108.0 / 120.0	5.90	6.12	6.41	6.64	7.00	6.76
802.11n	64QAM	121.5 / 135.0	4.06	4.39	4.45	4.88	5.04	4.86
802.11n	64QAM	135.0 / 150.0	3.10	3.38	3.65	3.79	4.10	3.85
802.11ac	256QAM	351 / 390	-	-	-	-	-	-
802.11ac	256QAM	390 / 433.3	-	-	-	-	-	-
802.11n	BPSK	27.0 / 30.0	8.75	8.95	9.22	9.39	9.63	8.99
802.11n	QPSK	54.0 / 60.0	6.91	7.18	7.39	7.12	7.85	7.53
802.11n	QPSK	81.0 / 90.0	6.95	7.25	7.03	7.74	7.57	7.62
802.11n	16QAM	108.0 / 120.0	6.15	6.40	6.20	6.34	7.04	6.51
802.11n	16QAM	162.0 / 180.0	5.84	6.52	6.24	6.40	6.77	6.54
802.11n	64QAM	216.0 / 240.0	5.90	6.12	6.41	6.64	7.00	6.76
802.11n	64QAM	243.0 / 270.0	4.06	4.39	4.45	4.88	5.04	4.86
802.11n	64QAM	270.0 / 300.0	3.10	3.38	3.65	3.79	4.10	3.85

(Tables continues)

(Tables continues)

Standard	Modulation	Data speed [MBPS]	RLAN 5 GHz / 20 MHz channel bandwidth: Measured values					
			116	120	124	128	132	136
802.11a	BPSK	6	9.57	9.82	10.00	9.99	9.63	9.63
802.11a	BPSK	9	8.68	8.94	9.07	9.14	8.26	8.77
802.11a	QPSK	12	8.74	9.00	9.16	9.16	8.79	8.80
802.11a	QPSK	18	8.77	9.07	9.24	9.27	8.49	8.84
802.11a	16QAM	24	9.01	9.26	9.42	9.52	9.05	8.56
802.11a	16QAM	36	9.53	9.49	9.60	9.91	8.75	8.91
802.11a	64QAM	48	8.66	8.51	9.00	8.61	8.30	8.25
802.11a	64QAM	54	8.97	8.53	8.50	8.72	8.32	8.29
802.11n	BPSK	6.5 / 7.25	9.40	9.64	9.82	9.87	9.04	8.98
802.11n	QPSK	13.0 / 14.4	8.59	8.86	9.00	9.06	8.21	8.17
802.11n	QPSK	19.5 / 21.7	8.70	8.90	9.12	9.17	8.82	8.77
802.11n	16QAM	26.0 / 28.9	9.00	9.34	9.35	9.47	8.62	9.03
802.11n	16QAM	39.0 / 43.3	9.00	9.39	9.56	9.61	8.69	8.68
802.11n	64QAM	52.0 / 57.8	9.01	9.34	9.63	9.75	8.78	8.93
802.11n	64QAM	58.5 / 65.0	8.32	8.53	8.46	8.52	8.18	8.10
802.11n	64QAM	65.0 / 72.2	8.34	8.58	8.59	8.62	8.27	8.18
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	9.40	9.64	9.82	9.87	9.04	8.98
802.11n	QPSK	26.0 / 28.9	8.59	8.86	9.00	9.06	8.21	8.17
802.11n	QPSK	39.0 / 43.3	8.70	8.90	9.12	9.17	8.82	8.77
802.11n	16QAM	52.0 / 57.8	9.00	9.34	9.35	9.47	8.62	9.03
802.11n	16QAM	78.0 / 86.7	9.00	9.39	9.56	9.61	8.69	8.68
802.11n	64QAM	104.0 / 115.6	9.01	9.34	9.63	9.75	8.78	8.93
802.11n	64QAM	117.0 / 130.0	8.32	8.53	8.46	8.52	8.18	8.10
802.11n	64QAM	130.0 / 144.4	8.34	8.58	8.59	8.62	8.27	8.18

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 40 MHz channel bandwidth: Measured values			
			126 (124+128)	130 (128+132)	134 (132+136)	138 (136+140)
802.11n	BPSK	13.5 / 15.0	9.54	9.55	9.14	9.10
802.11n	QPSK	27.0 / 30.0	7.57	7.59	7.42	7.32
802.11n	QPSK	40.5 / 45.0	7.70	7.62	7.49	7.43
802.11n	16QAM	54.0 / 60.0	6.48	6.50	6.51	6.54
802.11n	16QAM	81.0 / 90.0	6.65	6.72	6.71	6.61
802.11n	64QAM	108.0 / 120.0	6.87	6.78	6.86	6.76
802.11n	64QAM	121.5 / 135.0	4.94	5.00	4.96	4.95
802.11n	64QAM	135.0 / 150.0	3.91	4.00	4.08	4.03
802.11ac	256QAM	351 / 390	-	-	-	-
802.11ac	256QAM	390 / 433.3	-	-	-	-
802.11n	BPSK	27.0 / 30.0	9.54	9.55	9.14	9.10
802.11n	QPSK	54.0 / 60.0	7.57	7.59	7.42	7.32
802.11n	QPSK	81.0 / 90.0	7.70	7.62	7.49	7.43
802.11n	16QAM	108.0 / 120.0	6.48	6.50	6.51	6.54
802.11n	16QAM	162.0 / 180.0	6.65	6.72	6.71	6.61
802.11n	64QAM	216.0 / 240.0	6.87	6.78	6.86	6.76
802.11n	64QAM	243.0 / 270.0	4.94	5.00	4.96	4.95
802.11n	64QAM	270.0 / 300.0	3.91	4.00	4.08	4.03

(Tables continues)

(Tables continues)

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 20 MHz channel bandwidth: Measured values					
			140	149	153	157	161	165
802.11a	BPSK	6	9.47	9.13	8.98	9.31	9.29	8.72
802.11a	BPSK	9	8.62	8.34	8.11	8.43	8.24	7.70
802.11a	QPSK	12	8.62	8.33	8.17	8.44	8.31	7.62
802.11a	QPSK	18	8.28	8.39	8.24	8.49	8.37	7.61
802.11a	16QAM	24	8.53	8.63	8.44	8.72	8.60	7.84
802.11a	16QAM	36	8.88	8.94	8.95	9.14	8.94	8.32
802.11a	64QAM	48	8.12	7.90	7.55	8.43	8.26	7.45
802.11a	64QAM	54	8.09	7.90	7.53	8.73	8.15	7.22
802.11n	BPSK	6.5 / 7.25	9.31	8.94	8.78	9.14	8.91	8.18
802.11n	QPSK	13.0 / 14.4	8.10	8.24	8.02	8.29	8.14	7.40
802.11n	QPSK	19.5 / 21.7	8.18	7.87	8.09	8.37	8.25	7.51
802.11n	16QAM	26.0 / 28.9	8.86	8.51	8.28	8.69	8.49	7.77
802.11n	16QAM	39.0 / 43.3	8.60	8.59	8.47	8.83	8.67	7.89
802.11n	64QAM	52.0 / 57.8	8.93	8.97	8.90	8.67	9.10	8.32
802.11n	64QAM	58.5 / 65.0	7.98	7.88	7.48	7.93	7.96	7.11
802.11n	64QAM	65.0 / 72.2	7.99	7.89	7.85	7.83	8.05	7.14
802.11ac	256QAM	78.0 / 86.7	-	-	-	-	-	-
802.11n	BPSK	13.0 / 14.4	9.31	8.94	8.78	9.14	8.91	8.18
802.11n	QPSK	26.0 / 28.9	8.10	8.24	8.02	8.29	8.14	7.40
802.11n	QPSK	39.0 / 43.3	8.18	7.87	8.09	8.37	8.25	7.51
802.11n	16QAM	52.0 / 57.8	8.86	8.51	8.28	8.69	8.49	7.77
802.11n	16QAM	78.0 / 86.7	8.60	8.59	8.47	8.83	8.67	7.89
802.11n	64QAM	104.0 / 115.6	8.93	8.97	8.90	8.67	9.10	8.32
802.11n	64QAM	117.0 / 130.0	7.98	7.88	7.48	7.93	7.96	7.11
802.11n	64QAM	130.0 / 144.4	7.99	7.89	7.85	7.83	8.05	7.14

Standard	Modulation	Data speed [Mbps]	RLAN 5 GHz / 40 MHz channel bandwidth: Measured values			
			151 (149+153)	155 (153+157)	159 (157+161)	163 (161+165)
802.11n	BPSK	13.5 / 15.0	9.10	8.90	8.81	8.46
802.11n	QPSK	27.0 / 30.0	6.85	7.14	7.07	6.81
802.11n	QPSK	40.5 / 45.0	6.97	7.24	6.63	6.86
802.11n	16QAM	54.0 / 60.0	5.88	5.73	5.61	5.45
802.11n	16QAM	81.0 / 90.0	6.04	5.86	5.81	5.56
802.11n	64QAM	108.0 / 120.0	6.16	6.03	5.79	5.73
802.11n	64QAM	121.5 / 135.0	4.38	4.40	4.20	4.11
802.11n	64QAM	135.0 / 150.0	3.45	3.45	3.32	3.10
802.11ac	256QAM	351 / 390	-	-	-	-
802.11ac	256QAM	390 / 433.3	-	-	-	-
802.11n	BPSK	27.0 / 30.0	9.10	8.90	8.81	8.46
802.11n	QPSK	54.0 / 60.0	6.85	7.14	7.07	6.81
802.11n	QPSK	81.0 / 90.0	6.97	7.24	6.63	6.86
802.11n	16QAM	108.0 / 120.0	5.88	5.73	5.61	5.45
802.11n	16QAM	162.0 / 180.0	6.04	5.86	5.81	5.56
802.11n	64QAM	216.0 / 240.0	6.16	6.03	5.79	5.73
802.11n	64QAM	243.0 / 270.0	4.38	4.40	4.20	4.11
802.11n	64QAM	270.0 / 300.0	3.45	3.45	3.32	3.10

APPENDIX J: SAR EXCLUSION THRESHOLD CALCULATIONS

- 2) At 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following, and as illustrated in Appendix B:²⁶
- a) [Power allowed at numeric threshold for 50 mm in step 1) + (test separation distance - 50 mm) · ($f_{\text{MHz}}/150$)] mW, at 100 MHz to 1500 MHz
 - b) [Power allowed at numeric threshold for 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

108.5
108.6
113.3
163.0
108.8
113.6
163.3
169.6
177.9

WLAN		WiFi Power Setting						aux to right edge		Tx powr > Threshold - SAR			
	Band	Target	Upper limit of tuning tolerance (+1.5 dB)		mW conv	time-averaged	Low Ch Tx freq Mhz	Separation distance mm	Threshold at 50mm	Distance - 50mm	Exclusion threshold [mW]	Power - Threshold	SAR test
802.11	2.4GHz	13	14.5		28.2	28.2	2412	174.2	95.6	124.2	1337.6	-1309.4	NO
	5GHz	11.5	13		20.0	20.0	5200	174.2	62.3	124.2	1304.3	-1284.3	NO

APPENDIX K: PROXIMITY SENSOR TEST RESULTS

P-sensor on	P-Sensor Off	
1a	Centre line Top Flat bottom surface of flat phantom Cellular Main Antenna TABLET	Centre line Flat phantom Tablet Bottom Flat bottom surface of flat phantom – must be parallel to the Bottom of the Tablet Tablet Display side Flat bottom surface of flat phantom – must be parallel to the Bottom of the Tablet D2
Frequency (MHz)	X1 (mm)	
850	-20 -19 -18 -17 -16 -15 -14 -13 -12 -11 -10 -9 -8 -7 -6 -5 -4 -3 -2 -1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 0	

☐ P-sensor on
☒ P-Sensor Off

1b

Frequency (MHz)	X1 (mm)																																												
850	-20	-19	-18	-17	-16	-15	-14	-13	-12	-11	-10	-9	-8	-7	-6	-5	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	-11	-12	-13	-14	-15	-16	-17	-18	-19	-20				
1900	X	X	X	X	X	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	-20	-19	-18	-17	-16	-15	-14	-13	-12	-11	-10	-9	-8	-7	-6	-5	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	-11	-12	-13	-14	-15				
	X	X	X	X	X	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

● P-sensor on

✗ P-Sensor Off

Test Condition

2a

Flat bottom surface of flat phantom

TABLET

Cellular Main Antenna

Flat phantom

Vertical side of flat phantom

Flat bottom surface of flat phantom – must be parallel to the Bottom of the Tablet

Tablet Bottom

Tablet Display side

[illegible]

[illegible][illegible]

P-sensor on

P-Sensor Off

4b

Test Condition

P-sensor on P-Sensor Off		Test Condition																	
5 +/- 45 degree																			
Frequency (MHz)		X (mm) [D1=Xmin-2]																	
			-45	-40	-30	-20	-10	0	10	20	30	40	45						
		18mm	o	o	o	o	o	o	o	o	o	o	o						
		19mm	o	o	o	o	o	o	o	o	o	o	o						
		20mm	o	o	o	o	o	o	o	o	o	o	o						
		21mm	o	o	o	o	o	o	o	o	o	o	o						
		22mm	o	o	o	o	o	o	o	o	o	o	o						
		23mm	x	o	o	o	o	o	o	o	o	o	x						