

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CBT_RM-927_01.docx	Date of Report:	30-Aug-2013
Number of pages:	26	Customer's Contact person:	Victoria Abadilla
Testing laboratory:	TCC Nokia San Diego Laboratory 16620 West Bernardo Drive San Diego, CA 92127 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500	Customer:	Nokia, Inc. 16620 West Bernardo Drive San Diego, CA 92127 USA Tel. +1 858 831 5000 Fax. +1 858 385 1598
FCC listing no.:	586140		
IC recognition no.:	10162A-1		
Tested devices/ accessories:	Phone RM-927 / Dummy Battery SD-217R		
FCC ID:	QMND	IC:	661X-D
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Tyrone Hawes, Specialist

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	20-Jul-2013
Testing completed	28-Aug-2013
The customer's contact person	Victoria Abadilla
Test Plan referred to	T:\Projects\RM-927\TestPlan\RS_testplan_RM-927.xlsm
Notes	-
Document name	T:\Projects\RM-927\EMC\FCC15CBT_RM-927_01.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/CDMA/WCDMA/LTE/WLAN/Bluetooth

The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-927	355906050012748	0161	-	1028.0305.1329.2000	30738
Dummy Battery	SD-217R	50346	0.3	-	-	30742

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8(0.4(2))	Conducted peak output power	PASSED
15.247(d), 15.205(b)	A8(0.5)	Band edge compliance of RF emissions	NP
15.247(d)	A8(0.5)	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8(0.5)	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8(0.1(1))	20dB(bandwidth)	PASSED
15.247(a)(1)	A8(0.1(2))	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8(0.1(4))	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8(0.1(4))	Time of occupancy	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (2))	4
2.1. Test Setup.....	4
2.2. Test method and limit.....	4
2.3. Bluetooth Test results	5
3. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5).....	8
3.1. Test Setup.....	8
3.2. Test method and limit.....	8
3.3. Bluetooth Test results	9
4. 20 dB bandwidth 15.247(a)(1), A8.1 (a).....	12
4.1. Test Setup.....	12
4.2. Test method and limit.....	12
4.3. Bluetooth Test results	13
5. Carrier frequency separation 15.247(a)(1), A8.1 (b)	16
5.1. Test Setup.....	16
5.2. Test method and limit.....	16
5.3. Bluetooth Test results	17
6. Number of hopping frequencies 15.247(a)(1)(iii), A8.1 (d)	19
6.1. Test Setup.....	19
6.2. Test method and limit.....	19
6.3. Bluetooth Test results	20
7. Time of occupancy 15.247(a)(1)(iii), A8.1 (d)	22
7.1. Test Setup.....	22
7.2. Test method and limit.....	22
7.3. Bluetooth Test results	23
8. Test Equipment.....	25
8.1. Conducted measurements	25
8.2. Radiated measurements	25

2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-927, DUT 30738
Accessories with DUT numbers	SD-217R, DUT 30742
Operation Voltage [V] / [Hz]	3.8V DC
Results	PASSED
Remarks	
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21.7 / 48.4 / 1050
Date of measurements	28-Aug-2013
Measured by	Tyrone Hawes

2.1. Test Setup

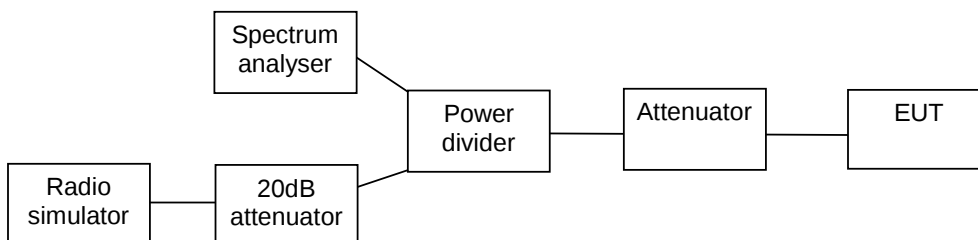

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5 5725 - 5850	≤ 1	≤ 30

2.3. Bluetooth Test results


2.3.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	8.29	6.745	PASSED
40 / 2442	8.79	7.568	PASSED
78 / 2480	6.25	4.217	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

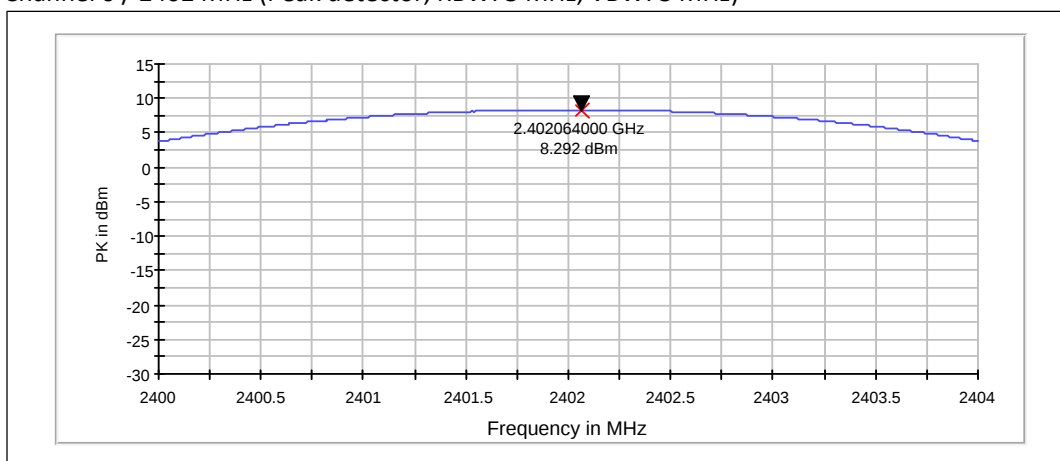

Channel 40 / 2442 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

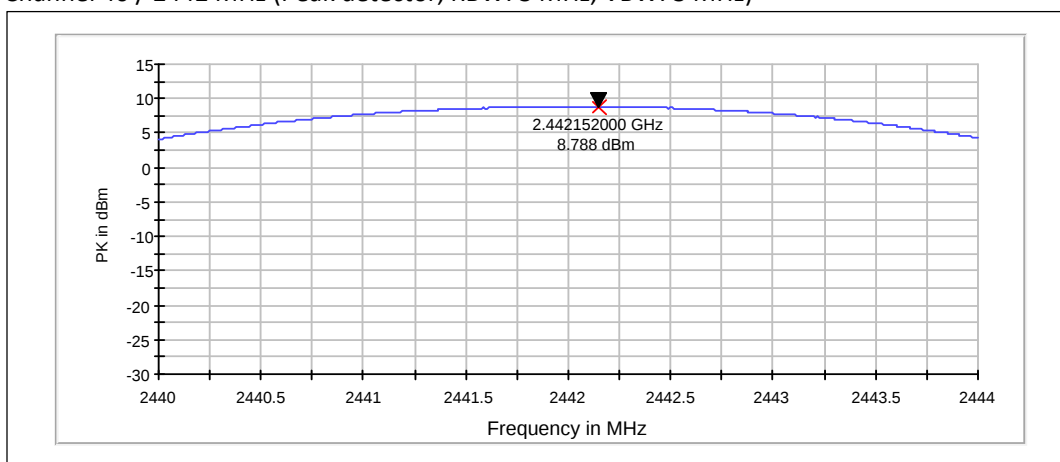


Channel 78 / 2480 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

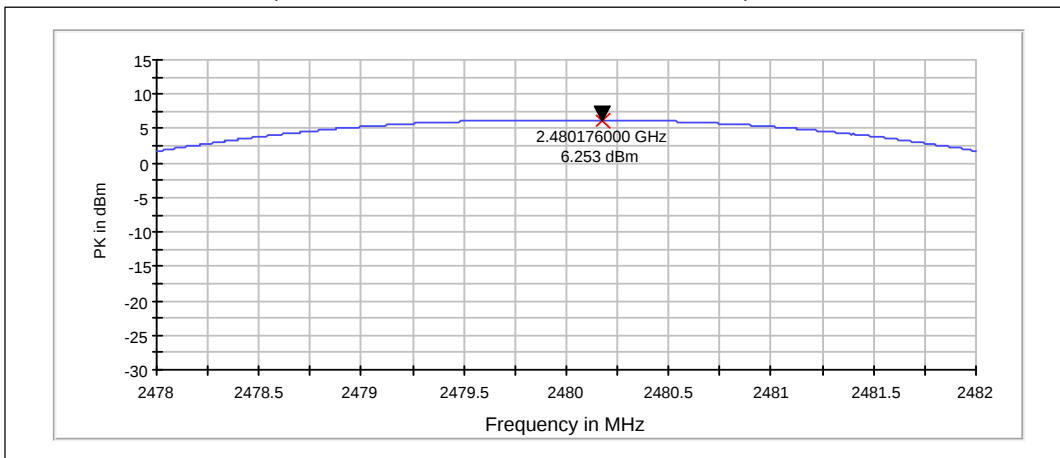


2.3.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	9.59	9.099	PASSED
40 / 2442	10	10	PASSED
78 / 2480	7.54	5.675	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

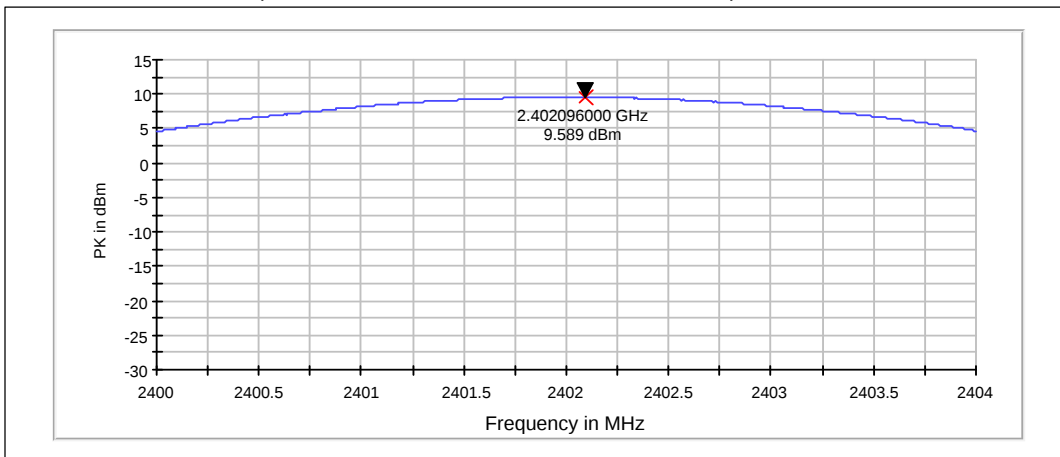

Channel 40 / 2442 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

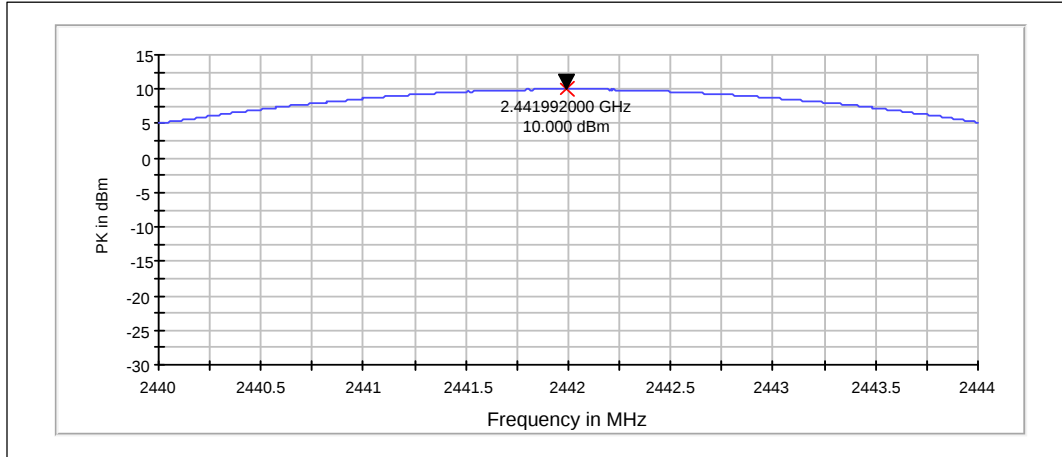


Channel 78 / 2480 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

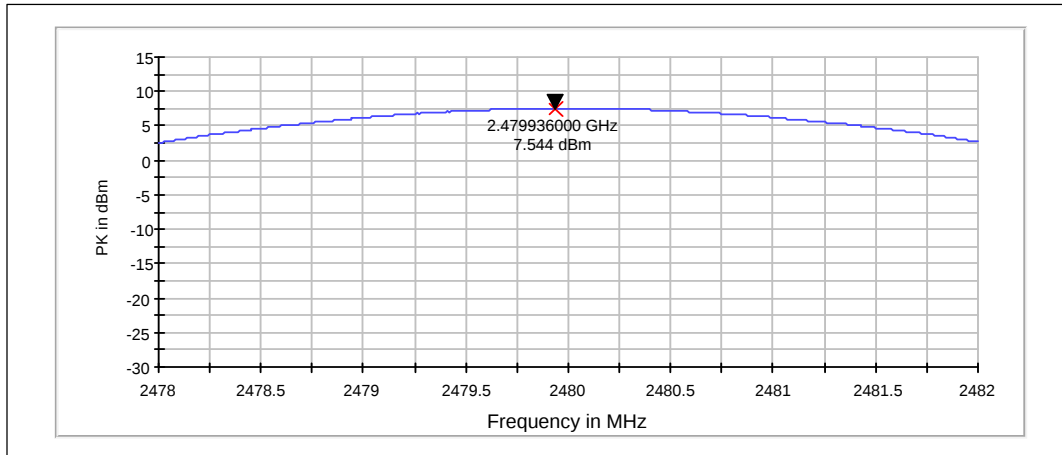

3. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-927, DUT 30738
Accessories with DUT numbers	SD-217R, DUT 30742
Operation Voltage [V] / [Hz]	3.8V DC
Results	PASSED
Remarks	
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21.7 / 48.4 / 1050
Date of measurements	24-Jul-2013
Measured by	Feng You

3.1. Test Setup

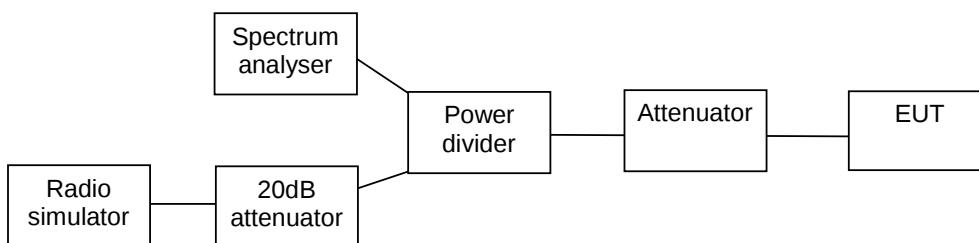

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	<= -20

3.3. Bluetooth Test results

3.3.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

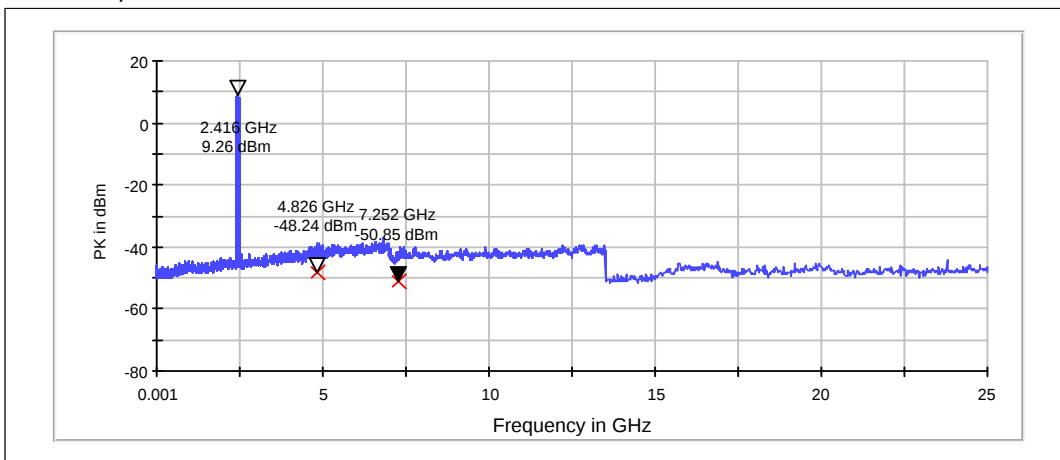

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4825.600	-48.24	PASSED
7252.200	-50.85	PASSED


Channel 40 / 2442 MHz

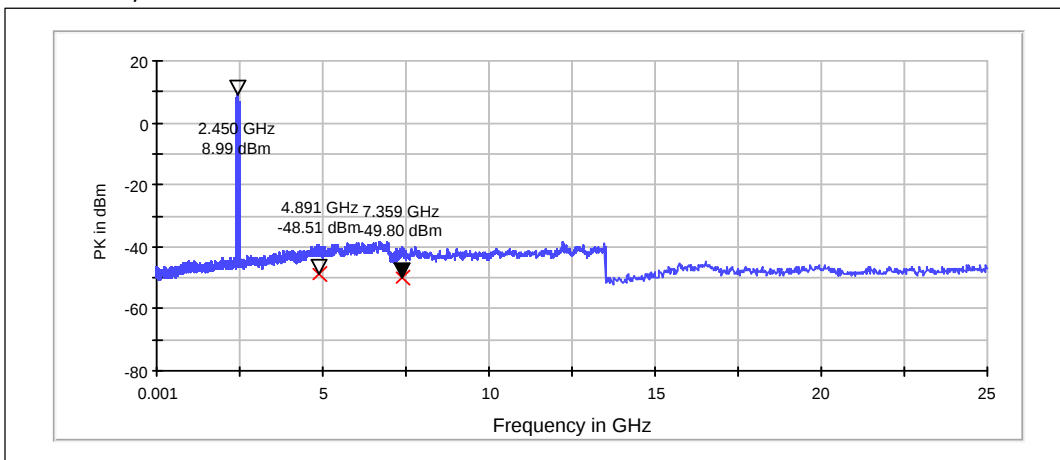

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4891.200	-48.51	PASSED
7359.000	-49.80	PASSED

Channel 78 / 2480 MHz

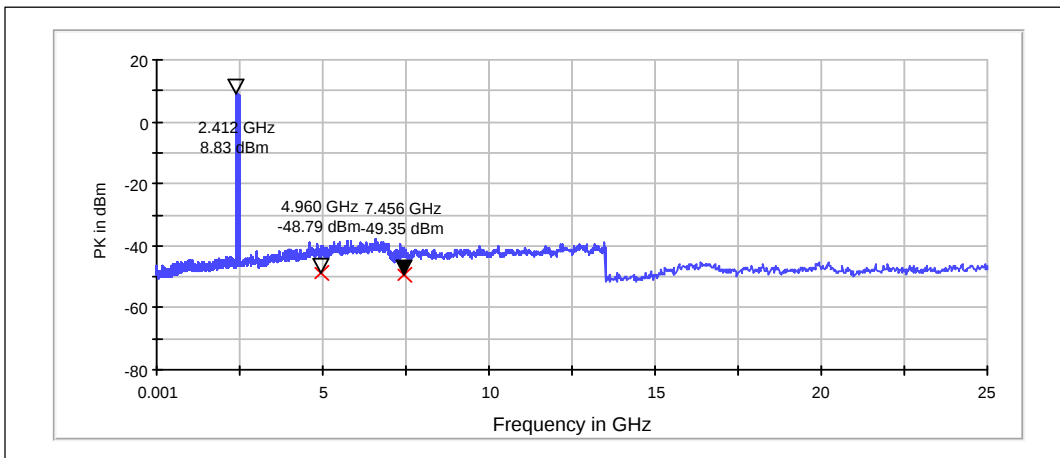


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4960.400	-48.79	PASSED
7455.600	-49.35	PASSED

3.3.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

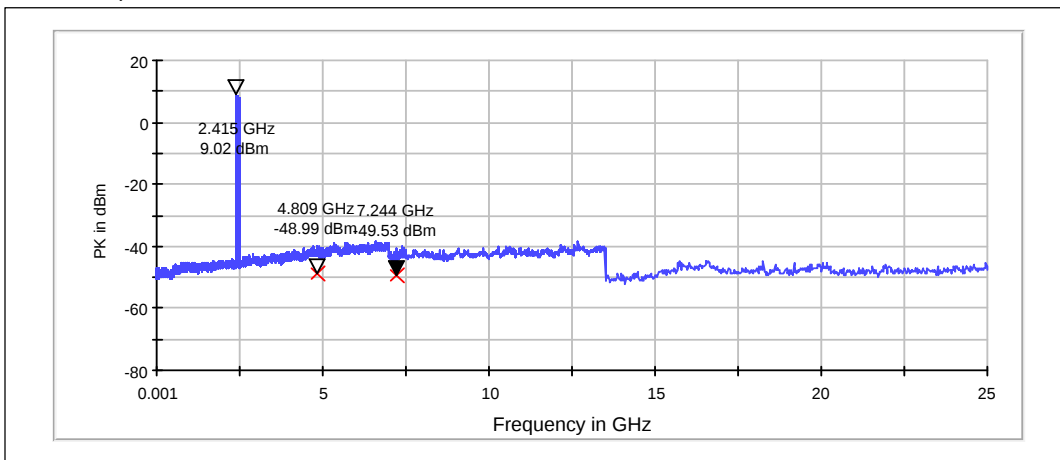

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4809.200	-48.99	PASSED
7244.400	-49.53	PASSED


Channel 40 / 2442 MHz

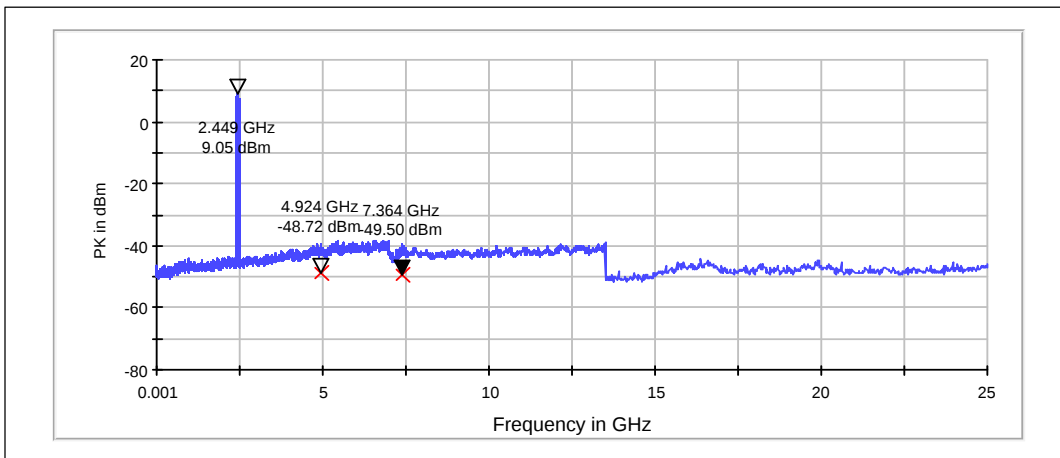

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4924.000	-48.72	PASSED
7364.400	-49.50	PASSED

Channel 78 / 2480 MHz

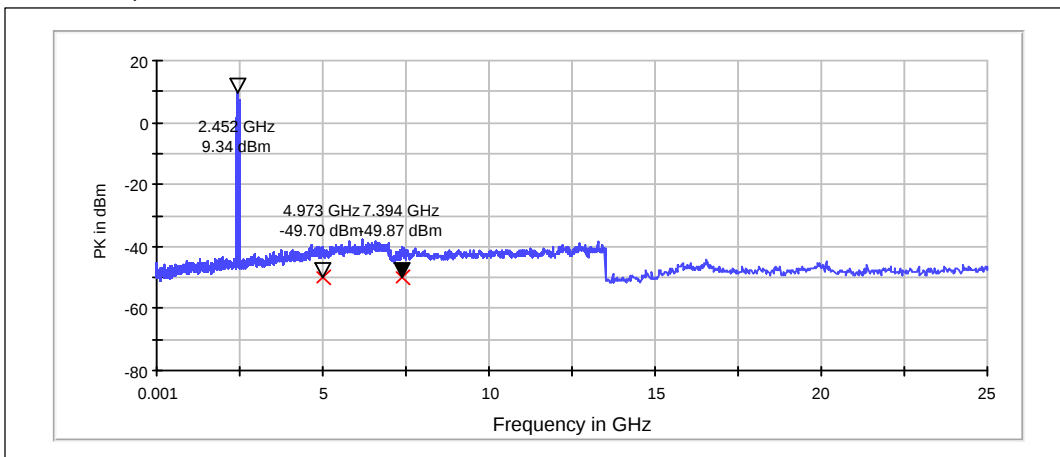


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4972.800	-49.70	PASSED
7394.400	-49.87	PASSED

4. 20 dB bandwidth 15.247(a)(1), A8.1 (a)

EUT with DUT number	RM-927, DUT 30738
Accessories with DUT numbers	SD-217R, DUT 30742
Operation Voltage [V] / [Hz]	3.8V DC
Results	PASSED
Remarks	
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21.7 / 48.4 / 1050
Date of measurements	28-Aug-2013
Measured by	Tyrone Hawes

4.1. Test Setup

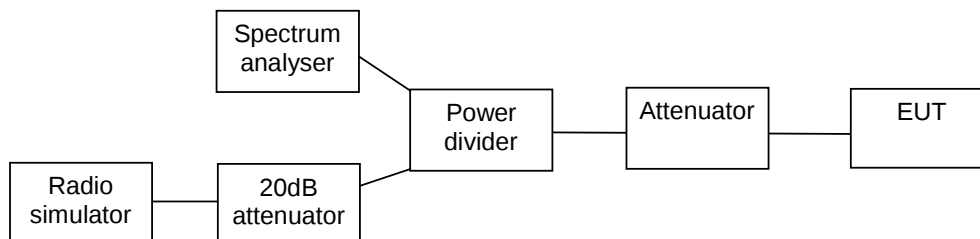

4.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

4.3. Bluetooth Test results


4.3.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]
0 / 2402	846.3
40 / 2442	842.3
78 / 2480	842.3


0 / 2402

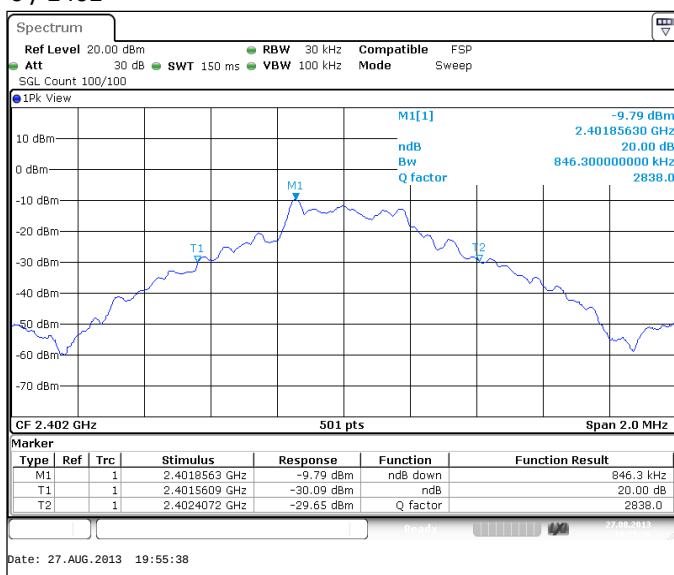

40 / 2442

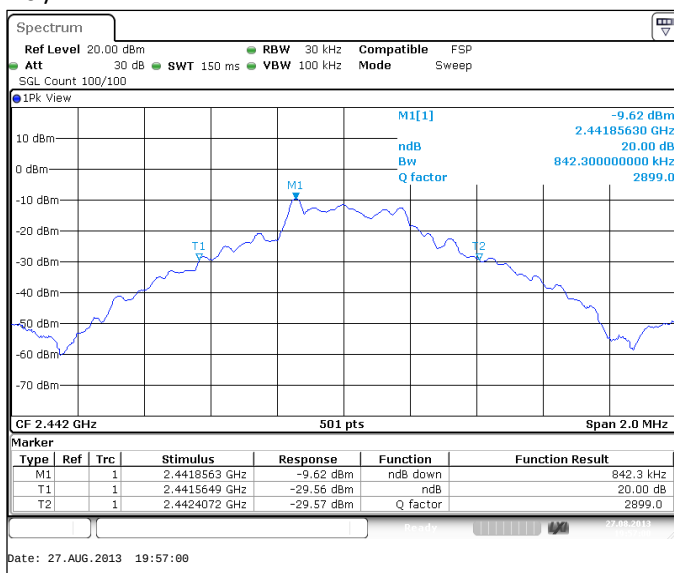


78 / 2480

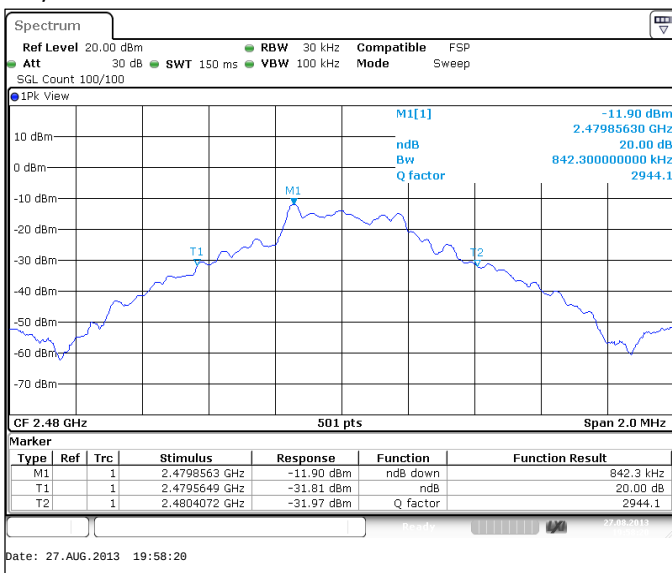


4.3.2 8DPSK modulation, PRBS packet type

Channel / f _c [MHz]	20 dB bandwidth [kHz]
0 / 2402	1297.4
40 / 2442	1297.4
78 / 2480	1301.4


0 / 2402

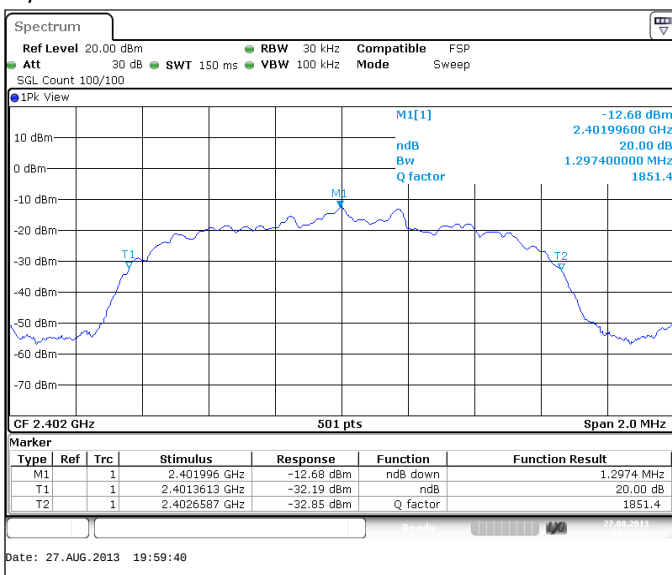

40 / 2442

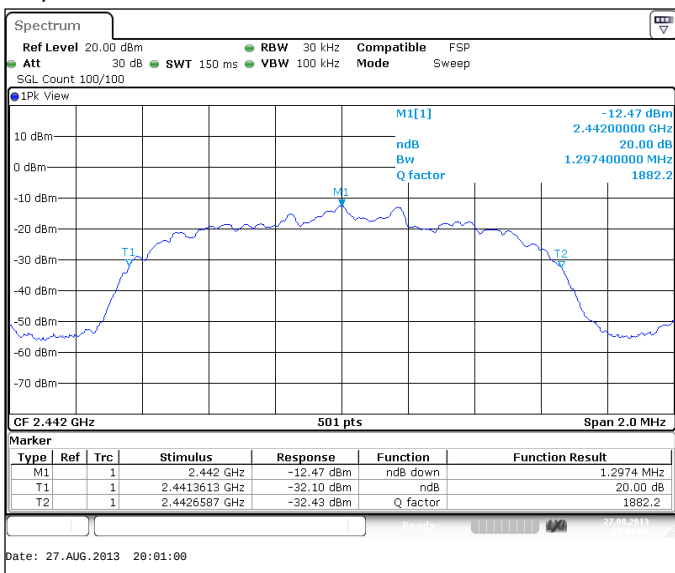

78 / 2480

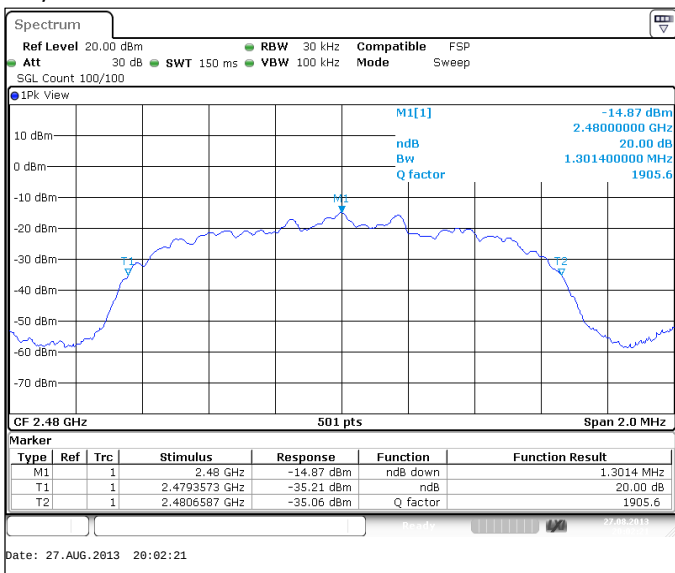


5. Carrier frequency separation

15.247(a)(1), A8.1 (b)

EUT with DUT number	RM-927, DUT 30738
Accessories with DUT numbers	SD-217R, DUT 30742
Operation Voltage [V] / [Hz]	3.8V DC
Results	PASSED
Remarks	
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21.7 / 48.4 / 1050
Date of measurements	24-Jul-2013
Measured by	Feng You

5.1. Test Setup

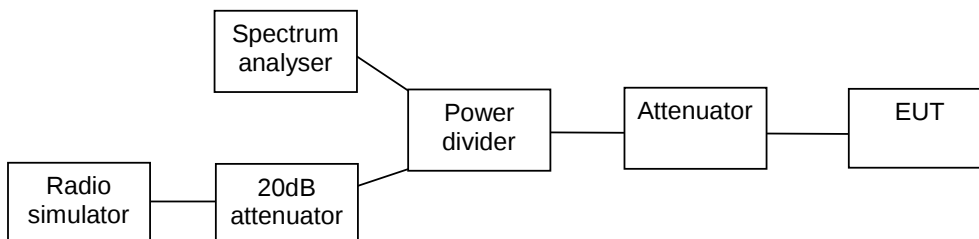

5.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

5.3. Bluetooth Test results

5.3.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
998	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

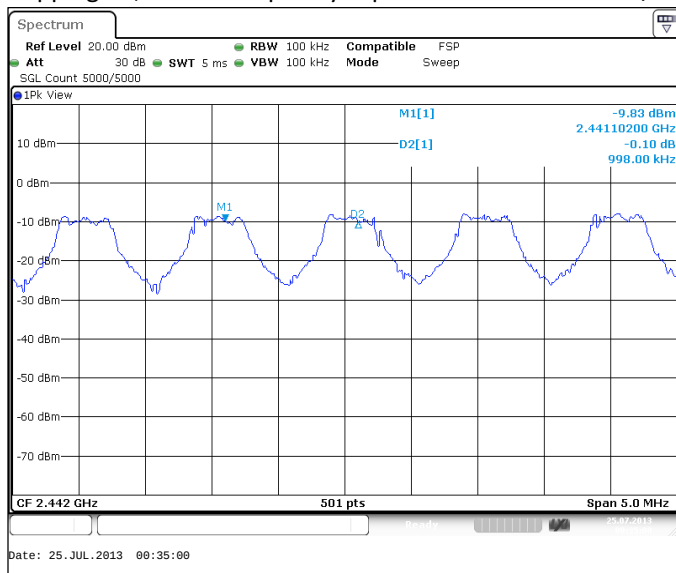

5.3.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
998	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

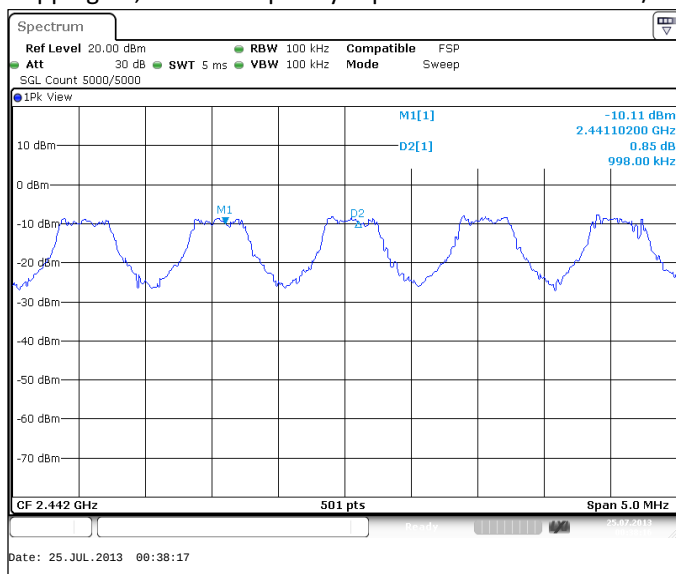


6. Number of hopping frequencies

15.247(a)(1)(iii), A8.1 (d)

EUT with DUT number	RM-927, DUT 30738
Accessories with DUT numbers	SD-217R, DUT 30742
Operation Voltage [V] / [Hz]	3.8V DC
Results	PASSED
Remarks	
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21.7 / 48.4 / 1050
Date of measurements	24-Jul-2013
Measured by	Feng You

6.1. Test Setup

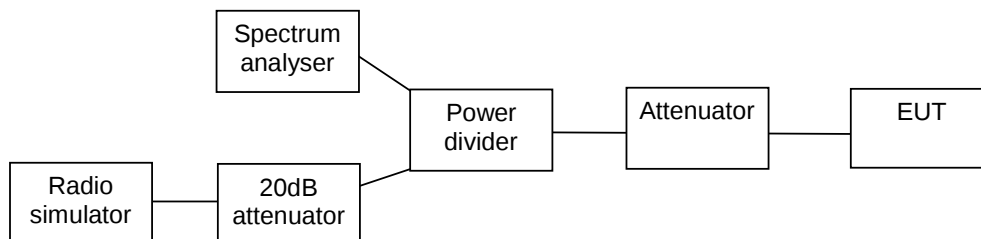

6.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
>= 15

6.3. Bluetooth Test results

6.3.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED


Hopping on, number of hopping frequencies

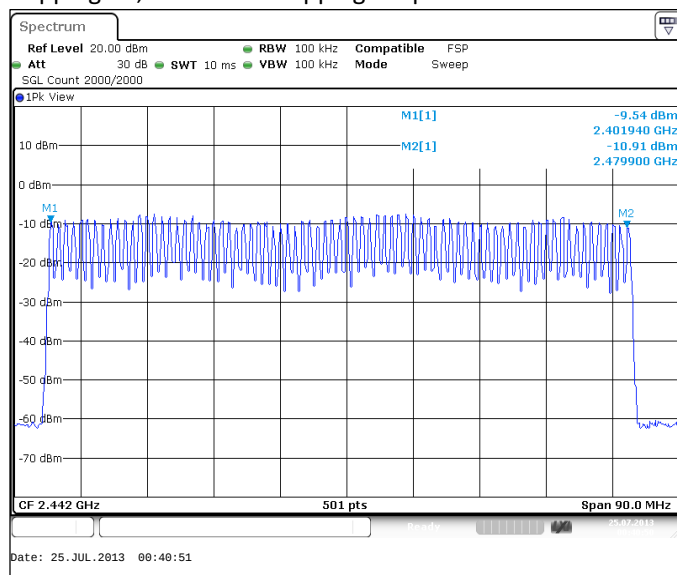

6.3.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED


Hopping on, number of hopping frequencies

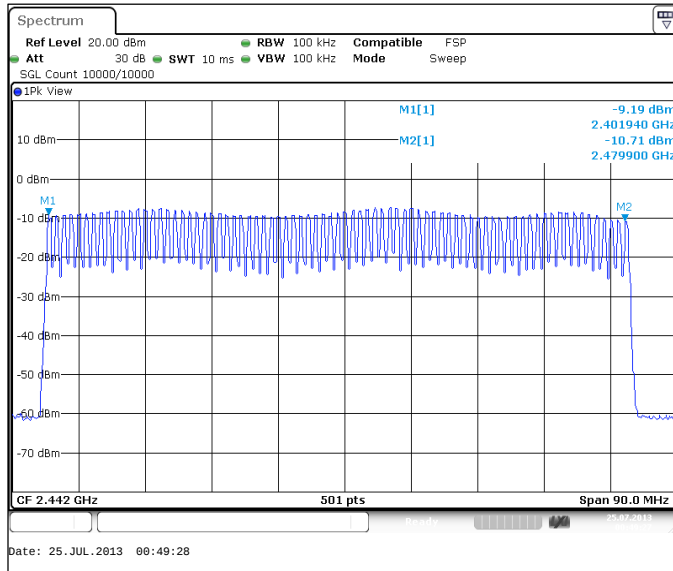

7. Time of occupancy 15.247(a)(1)(iii), A8.1 (d)

EUT with DUT number	RM-927, DUT 30738
Accessories with DUT numbers	SD-217R, DUT 30742
Operation Voltage [V] / [Hz]	3.8V DC
Results	PASSED
Remarks	
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 1050
Date of measurements	28-Aug-2013
Measured by	Tyrone Hawes

7.1. Test Setup

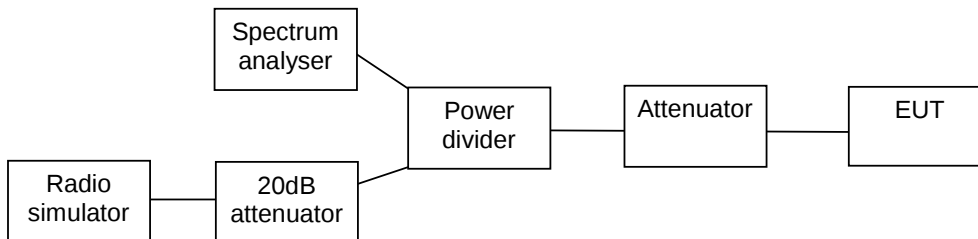

7.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
<= 0.4

7.3. Bluetooth Test results


7.3.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [ms]	Time of occupancy [s]	Result
88	2.904	0.256	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

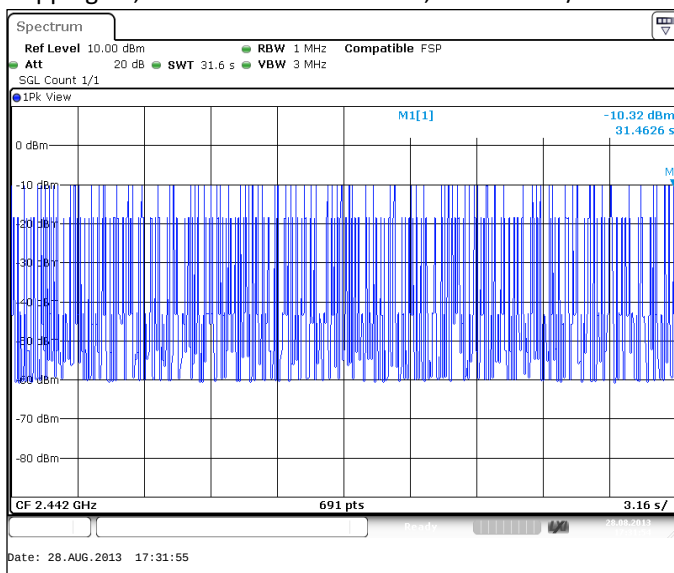


Hopping on, duration of one transmission, channel 40 / 2442 MHz

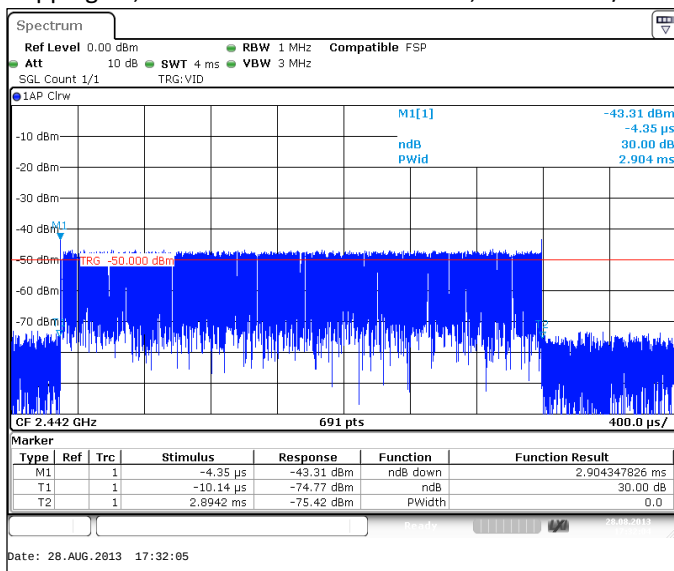


7.3.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [ms]	Time of occupancy [s]	Result
81	0.157	0.013	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

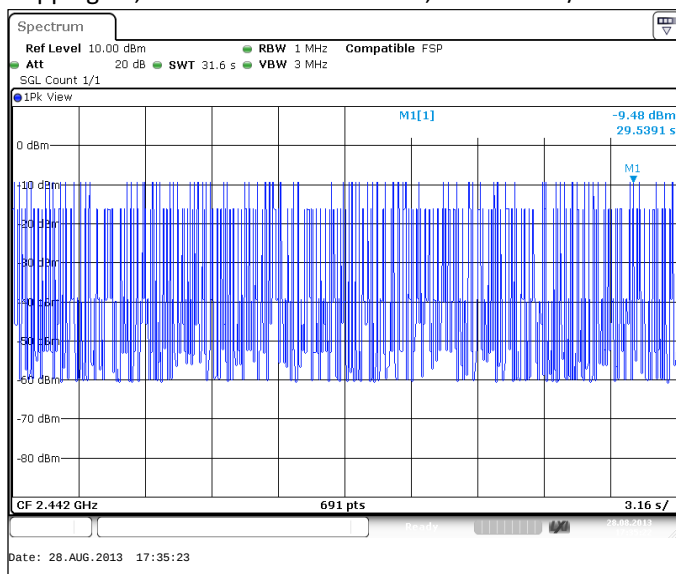

Hopping on, duration of one transmission, channel 40 / 2442 MHz

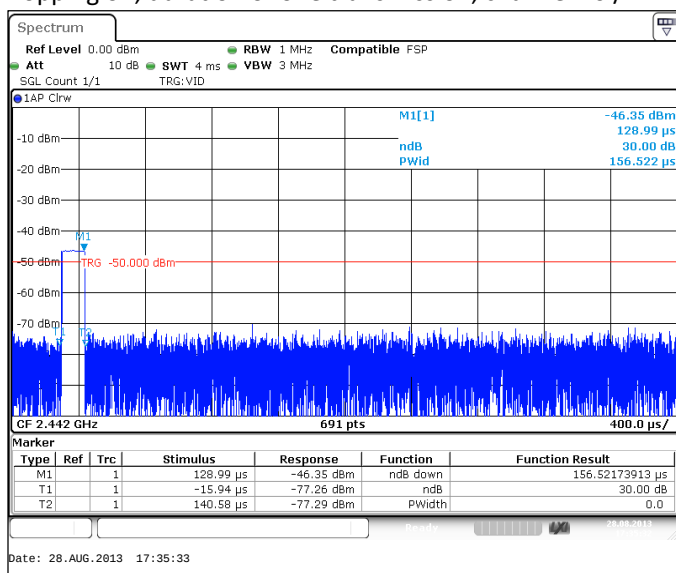

8. Test Equipment

8.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
4406	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
7602	Communication Tester	CMW500	R&S	22/24/27, 15C, 15B
7151	Bluetooth Tester	CBT	R&S	15B
-	GPS RX Antenna w/AMP	L1A-PM-NF	GPS Source	15C
-	GPS Inline amplifier	A11M-V-NF-NM	GPS Source	15C
-	GPS signal Splitter	S12-P110/5-NF	GPS Source	15C
-	GPS TX Antenna	L1P-PV-NF	GPS Source	15C
7912	Spectrum Analyzer	FSV-30	R&S	22/24/27, 15C
-	Thermal Chamber	VT-4002	Vötsch	22/24/27, 15C
-	Power splitter	11667B	Agilent	22/24/27, 15C
3396	EMC Analyzer	E7405A	HP	-
7451	EMI Receiver	ESU-26	R&S	22/24/27, 15C, 15B
4188	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
6981	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
-	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
7582	Signal Generator	SMB100A	R&S	15C, 15B

8.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
7591	Antenna	HL562	R&S	22/24/27, 15C, 15B
7572	Double Ridge Horn Antenna	3117	ETS-Lindgren	22/24/27, 15C
7607	Standard Gain HornAntenna	SAS 586	A.H. System	22/24/27, 15C
7624	Standard Gain HornAntenna	SAS 587	A.H. System	22/24/27, 15C
7561	Antenna	HFH2-Z2	R&S	15C, 15B
5715	Antenna	MBA-3030	EMC Automation	22/24/27, 15C
5712	Antenna	PLP3003	EMC Automation	22/24/27, 15C
7457	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
7459	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
5729	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
5728	EMI Receiver	ESIB26	R&S	22/24/27, 15C, 15B
4406	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
7602	Communication Tester	CMW500	R&S	22/24/27, 15C, 15B
7151	Bluetooth Tester	CBT	R&S	15B
3406	Controller	Sc99V	Sunol	22/24/27, 15C, 15B
-	Controller	G-1000DXC	Yaesu	22/24/27, 15C, 15B
-	Computer Controller	GS-232B	Yaesu	22/24/27, 15C, 15B
7040	Preamplifier	TS-PR3	R&S	22/24/27, 15C, 15B
-	Preamplifier	AMF-6D-020180-29-20P	Miteq	22/24/27, 15C, 15B
-	Preamplifier	AMF-4D-01000800-30-29P	Miteq	22/24/27, 15C, 15B
-	Preamplifier	AMF-5F-18002650-25-10P	Miteq	22/24/27, 15C, 15B
-	High Pass Filter	4HC1700-1-KK	R&S	22
-	High Pass Filter	F-15041	RLC	22/24/27, 15C
-	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22
-	Band Reject Filter	WRCC1800/2000-0.2-10SS	Wainwright	24
-	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	15C
-	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22
-	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27

Eq. No	Equipment	Type	Manufacturer	Used in
-	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
-	Notch Filter	WRCD1880-1.1.25/50-10SS	Wainwright	22/24/27
-	Notch Filter	WRCT902.4-0.4/40-8SS	Wainwright	-
Planned	Notch Filter	WRCJV2531/2539-2523/2547-60/12SS	Wainwright	22/24/27
-	GPS RX Antenna w/AMP	L1A-PM-NF	GPS Source	15C
-	GPS Inline amplifier	A11M-V-NF-NM	GPS Source	15C
-	GPS signal Splitter	S12-P110/5-NF	GPS Source	15C
-	GPS TX Antenna	L1P-PV-NF	GPS Source	15C