

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CBT_RM-927_03.docx	Date of Report:	20-Aug-13
Number of pages:	18	Customer's Contact person:	Victoria Abadilla
Testing laboratory:	TCC Nokia San Diego Laboratory 16620 West Bernardo Drive San Diego, CA 92127 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500	Customer:	Nokia, Inc. 16620 West Bernardo Drive San Diego, CA 92127 USA Tel. +1 858 831 5000 Fax. +1 858 385 1598
FCC listing no.:	586140		
IC recognition no.:	10162A-1		
Tested devices/ accessories:	Phone RM-927 / Salcomp AC Charger AC-60 / Cable CA-190 / Headset WH-902		
FCC ID:	QMND	IC:	661X-D
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Feng You, Senior Specialist

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	20-Jul-2013
Testing completed	20-Aug-13
The customer's contact person	Victoria Abadilla
Test Plan referred to	T:\Projects\RM-927\TestPlan\RS_testplan_RM-927.xlsm
Notes	-
Document name	T:\Projects\RM-927\EMC\FCC15CBT_RM-927_03.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:
GSM/CDMA/WCDMA/LTE/WLAN/Bluetooth
The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-927	355906050012284	0160	-	1028.0305.1329.2000	30743
Salcomp AC Charger	AC-60	4090493152610300459	-	-	-	30744
Cable	CA-190	-	-	-	-	30745
Headset	WH-902	-	-	-	-	30746

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8(0.4(2))	Conducted peak output power	NP
15.247(d), 15.205(b)	A8(0.5)	Band edge compliance of RF emissions	PASSED
15.247(d)	A8(0.5)	Spurious RF conducted emissions	NP
15.247(d), 15.209	A8(0.5)	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8(0.1(1))	20dB(bandwidth)	NP
15.247(a)(1)	A8(0.1(2))	Carrier frequency separation	NP
15.247(a)(1)(iii)	A8(0.1(4))	Number of hopping frequencies	NP
15.247(a)(1)(iii)	A8(0.1(4))	Time of occupancy	NP

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5).....	4
2.2. Test method and limit.....	4
2.3. Bluetooth test results.....	5
3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)	13
3.2. Test method and limit.....	13
3.3. Bluetooth test results.....	15
4. Test Equipment.....	17
4.1. Conducted measurements	17
4.2. Radiated measurements	17

2. Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5)

EUT with DUT number	RM-927, DUT 30743
Accessories with DUT numbers	AC-60, DUT 30744 ; CA-190, DUT 30745 ; WH-902, DUT 30746
Operation Voltage [V] / [Hz]	115V / 60Hz
Results	PASSED
Remarks	
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	16.8 / 47.0 / 1050
Date of measurements	25-Jul-2013
Measured by	Tyrone Hawes

2.1.1 Test setup

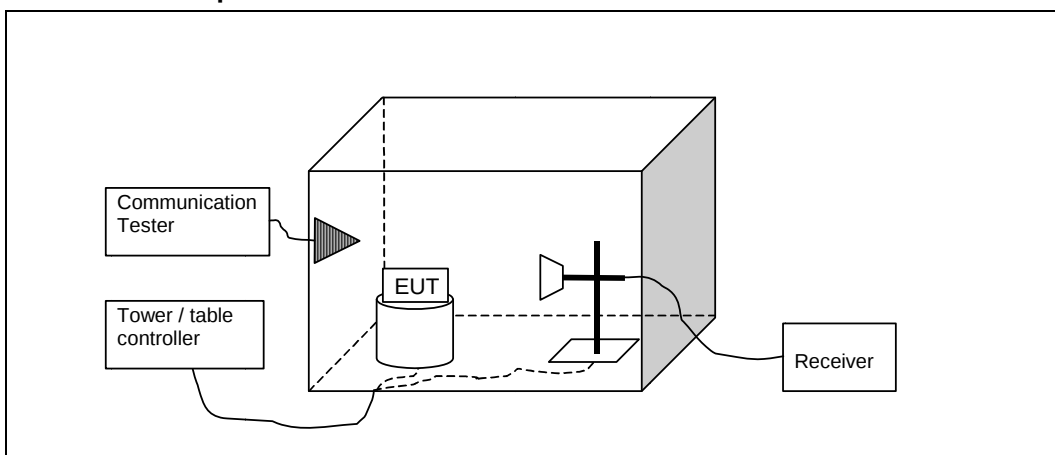

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit
Below 2390 and above 2483.5	54 dBuV/m (avg) and 74 dBuV/m (pk)

2.3. Bluetooth test results

2.3.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

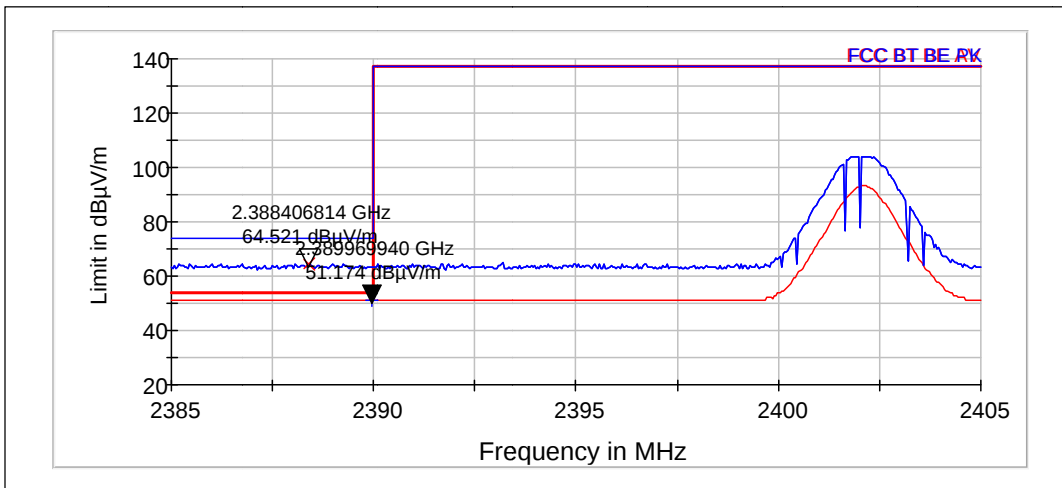


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2388	64.52	1682.868	56.06	8.46	8.464	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2390	51.17	361.993	42.71	8.46	8.464	PASSED

Hopping on. Low end.

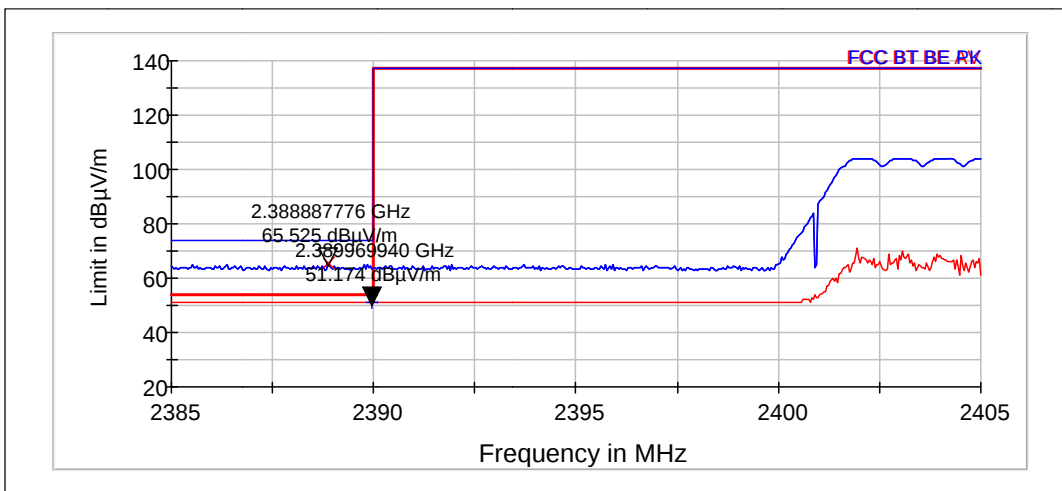


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2389	65.53	1889.078	57.07	8.46	8.464	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2390	51.17	361.993	42.71	8.46	8.464	PASSED

Channel 78 / 2480 MHz

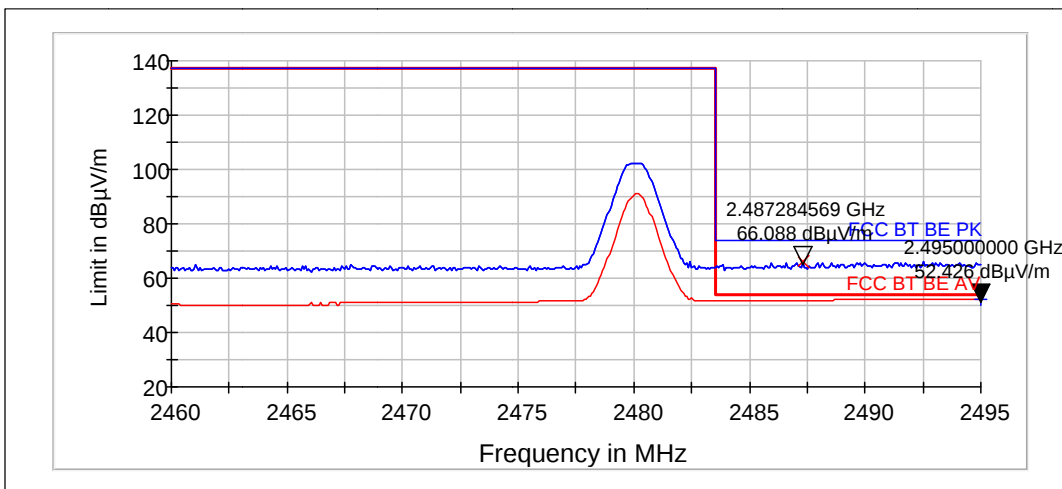


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2487	66.09	2015.58	57.13	8.96	8.96	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2495	52.43	418.119	43.47	8.96	8.96	PASSED

Hopping on. High end.

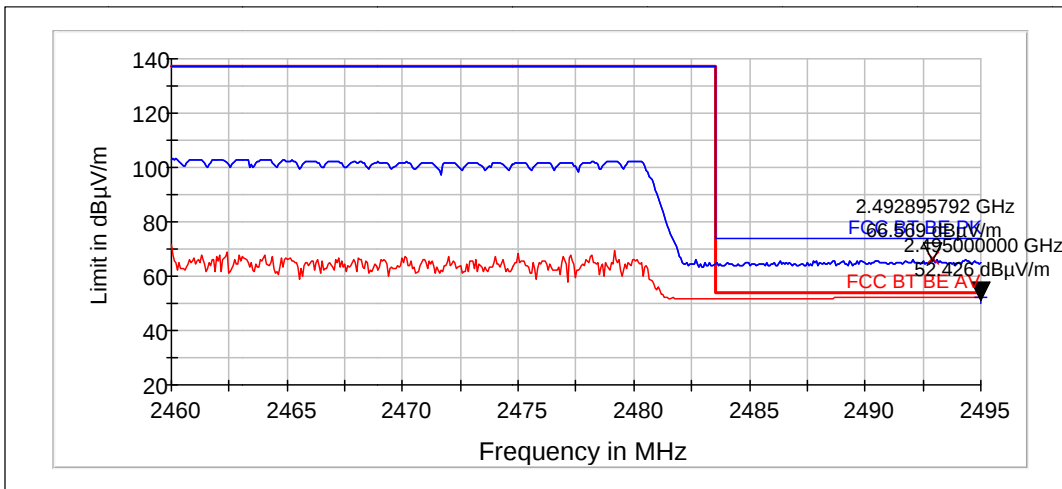

Peak (RBW: 1 MHz, VBW: 1 MHz)


Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2493	66.57	2130.345	57.61	8.96	8.96	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2495	52.43	418.119	43.47	8.96	8.96	PASSED

2.3.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

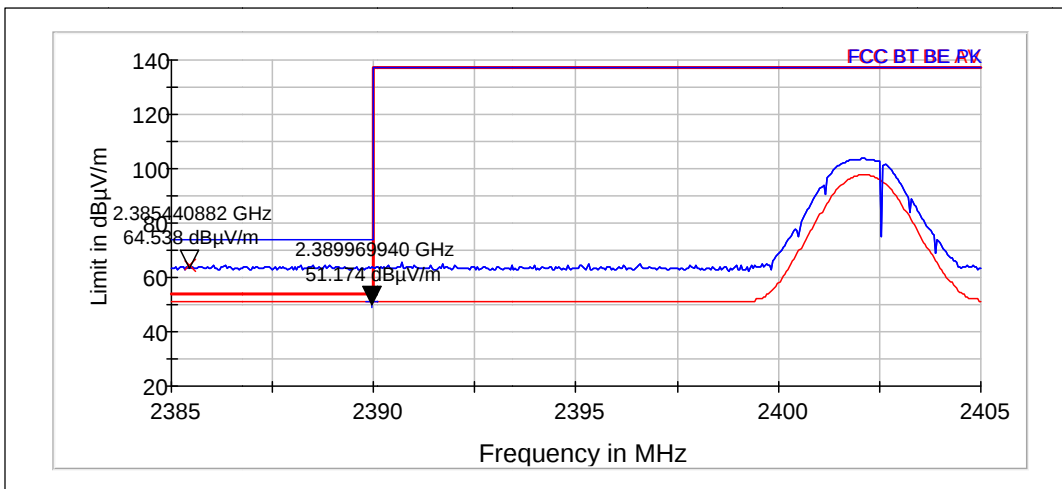


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2385	64.54	1686.165	56.08	8.46	8.464	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2390	51.17	361.993	42.71	8.46	8.464	PASSED

Hopping on. Low end.

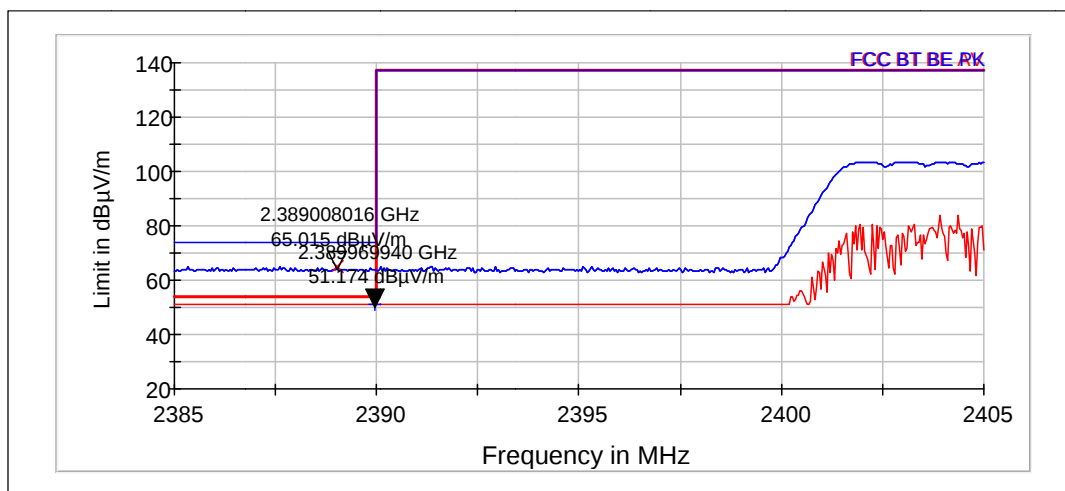


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2389	65.02	1781.353	56.56	8.46	8.464	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2390	51.17	361.993	42.71	8.46	8.464	PASSED

Channel 78 / 2480 MHz

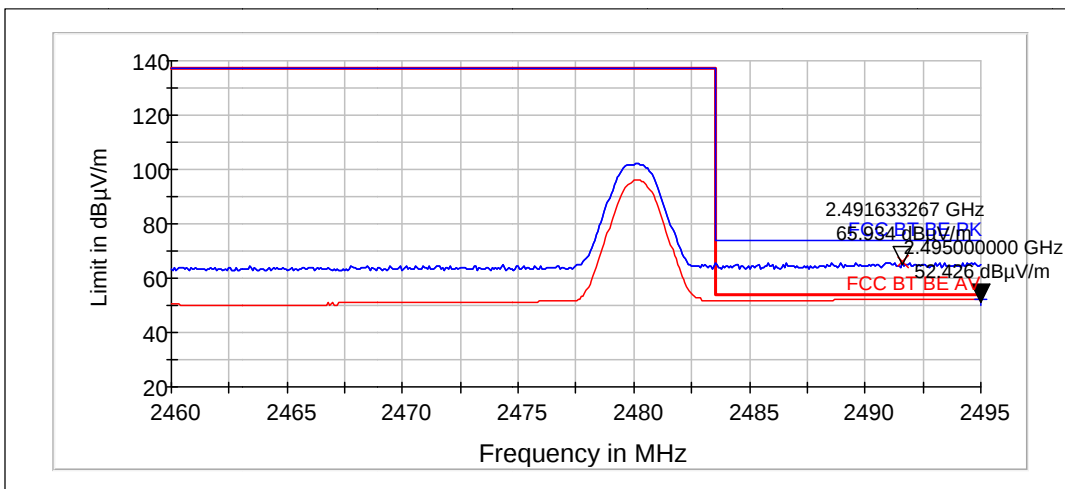


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2492	65.93	1980.159	56.97	8.96	8.96	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2495	52.43	418.119	43.47	8.96	8.96	PASSED

Hopping on. High end.

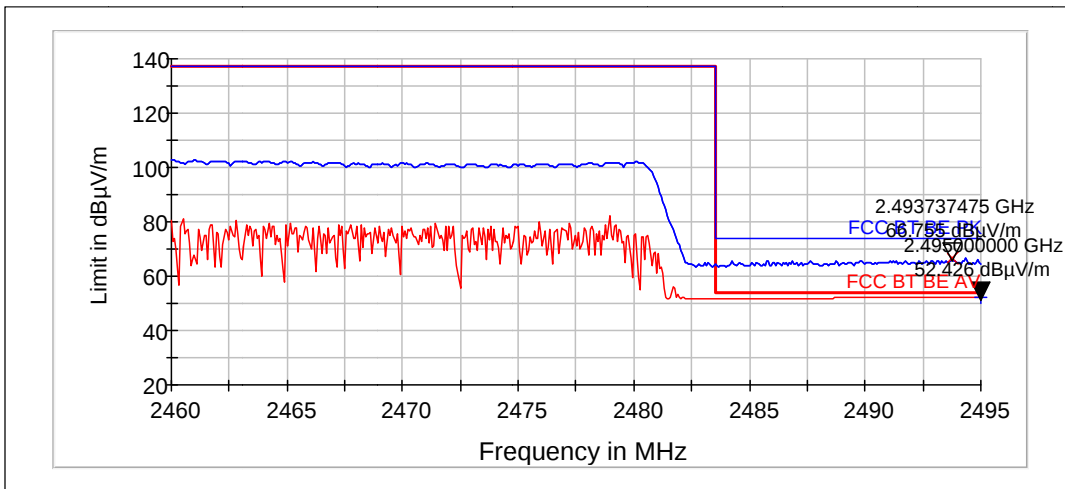

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2494	66.76	2176.457	57.8	8.96	8.96	PASSED


Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2495	52.43	418.119	43.47	8.96	8.96	PASSED

3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-927, DUT 30743
Accessories with DUT numbers	AC-60, DUT 30744 ; CA-190, DUT 30745 ; WH-902, DUT 30746
Operation Voltage [V] / [Hz]	115V / 60Hz
Results	PASSED
Remarks	
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	16.8 / 47.0 / 1050
Date of measurements	25-Jul-2013
Measured by	Tyrone Hawes

3.1.1 Test setup

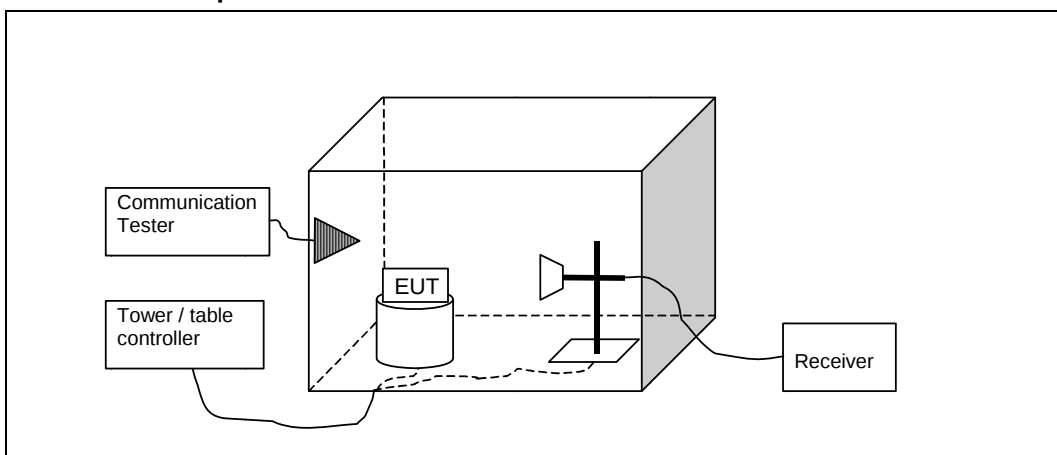

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:
The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [$dB\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

3.3. Bluetooth test results

3.3.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
30.06	21.62	12.05	25.57	-3.95	18.4	40	PASSED
33.9	23.09	14.277	28.99	-5.9	16.9	40	PASSED
34.372	22.16	12.826	28.3	-6.14	17.8	40	PASSED
34.558	23.78	15.445	30.01	-6.23	16.2	40	PASSED
35.776	18.69	8.596	25.58	-6.89	21.3	40	PASSED
39.039	20.18	10.213	28.73	-8.55	19.8	40	PASSED
926.676	26.09	20.151	22.5	3.59	19.9	46	PASSED
937.242	25.94	19.82	22.28	3.67	20.1	46	PASSED
940.553	25.93	19.786	22.28	3.65	20.1	46	PASSED
957.868	25.92	19.767	22.5	3.42	20.1	46	PASSED

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4805.8	53.23	458.722	51.62	1.61	20.7	74	PASSED
7205.8	50.06	318.42	44.08	5.98	23.94	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4805.8	32.97	44.519	31.36	1.61	21	54	PASSED
7205.8	36.45	66.435	30.47	5.98	17.55	54	PASSED

3.3.2 8DPSK modulation, PRBS packet type

Channel 40 / 2442 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
11993.99	53.69	483.393	41.56	12.13	20.3	74	PASSED
12577.358	53.56	476.212	41.07	12.49	20.4	74	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
30.03	19.78	9.747	23.71	-3.93	20.2	40	PASSED
31.77	19.49	9.43	24.52	-5.03	20.5	40	PASSED
34.312	21.19	11.471	27.29	-6.1	18.8	40	PASSED
34.888	19.82	9.799	26.23	-6.41	20.2	40	PASSED
35.836	18.02	7.963	24.94	-6.92	22	40	PASSED
39.069	17.88	7.832	26.45	-8.57	22.1	40	PASSED
941.423	25.94	19.808	22.28	3.66	20.1	46	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
11993.99	41.13	113.854	29	12.13	12.9	54	PASSED
12577.358	41.07	113.136	28.58	12.49	12.9	54	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
4406	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
7602	Communication Tester	CMW500	R&S	22/24/27, 15C, 15B
7151	Bluetooth Tester	CBT	R&S	15B
-	GPS RX Antenna w/AMP	L1A-PM-NF	GPS Source	15C
-	GPS Inline amplifier	A11M-V-NF-NM	GPS Source	15C
-	GPS signal Splitter	S12-P110/5-NF	GPS Source	15C
-	GPS TX Antenna	L1P-PV-NF	GPS Source	15C
7912	Spectrum Analyzer	FSV-30	R&S	22/24/27, 15C
-	Thermal Chamber	VT-4002	Vötsch	22/24/27, 15C
-	Power splitter	11667B	Agilent	22/24/27, 15C
3396	EMC Analyzer	E7405A	HP	-
7451	EMI Receiver	ESU-26	R&S	22/24/27, 15C, 15B
4188	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
6981	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
-	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
7582	Signal Generator	SMB100A	R&S	15C, 15B

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
7591	Antenna	HL562	R&S	22/24/27, 15C, 15B
7572	Double Ridge Horn Antenna	3117	ETS-Lindgren	22/24/27, 15C
7607	Standard Gain Horn Antenna	SAS 586	A.H. System	22/24/27, 15C
7624	Standard Gain Horn Antenna	SAS 587	A.H. System	22/24/27, 15C
7561	Antenna	HFH2-Z2	R&S	15C, 15B
5715	Antenna	MBA-3030	EMC Automation	22/24/27, 15C
5712	Antenna	PLP3003	EMC Automation	22/24/27, 15C
7457	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
7459	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
5729	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
5728	EMI Receiver	ESIB26	R&S	22/24/27, 15C, 15B
4406	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
7602	Communication Tester	CMW500	R&S	22/24/27, 15C, 15B
7151	Bluetooth Tester	CBT	R&S	15B
3406	Controller	Sc99V	Sunol	22/24/27, 15C, 15B
-	Controller	G-1000DXC	Yaesu	22/24/27, 15C, 15B
-	Computer Controller	GS-232B	Yaesu	22/24/27, 15C, 15B
7040	Preamplifier	TS-PR3	R&S	22/24/27, 15C, 15B
-	Preamplifier	AMF-6D-020180-29-20P	Miteq	22/24/27, 15C, 15B
-	Preamplifier	AMF-4D-01000800-30-29P	Miteq	22/24/27, 15C, 15B
-	Preamplifier	AMF-5F-18002650-25-10P	Miteq	22/24/27, 15C, 15B
-	High Pass Filter	4HC1700-1-KK	R&S	22
-	High Pass Filter	F-15041	RLC	22/24/27, 15C
-	Band Reject Filter	WRCA824/849-0.2-6SS	Wainwright	22
-	Band Reject Filter	WRCC1800/2000-0.2-10SS	Wainwright	24
-	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	15C
-	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22
-	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27

Eq. No	Equipment	Type	Manufacturer	Used in
-	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
-	Notch Filter	WRCD1880-1.1.25/50-10SS	Wainwright	22/24/27
-	Notch Filter	WRCT902.4-0.4/40-8SS	Wainwright	-
Planned	Notch Filter	WRCJV2531/2539-2523/2547-60/12SS	Wainwright	22/24/27
-	GPS RX Antenna w/AMP	L1A-PM-NF	GPS Source	15C
-	GPS Inline amplifier	A11M-V-NF-NM	GPS Source	15C
-	GPS signal Splitter	S12-P110/5-NF	GPS Source	15C
-	GPS TX Antenna	L1P-PV-NF	GPS Source	15C